



FCC ID: 2AWUU6058001
Report No.: TMTN2111000549NR

Page: 1 / 54
Rev.: 02

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2013

TEST REPORT

For

BR33 Wireless Panic Button

Model: BR33-HW



Brand:

Verkada

Issued for

Verkada Inc

405 E. 4th Ave., San Mateo, California, United States, 94401

Issued by

Compliance Certification Services Inc.

Tainan Lab.

**No.8, Jiucengling, Xinhua Dist.,
Tainan City, Taiwan**

Issued Date: December 15, 2021

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMTN2111000549NR

Page: 2 / 54
Rev.: 02

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 22, 2021	Initial Issue	ALL	Gina Lin
01	December 01, 2021	See the following note rev.01	ALL	Gina Lin
02	December 15, 2021	See the following note rev.02	Page 22	Gina Lin

Note:

- ✧ Rev.01 Issue Date: December 01, 2021
Revise Typo.
Update Test Data of Conducted Spurious Emission.
- ✧ Rev.02 Issue Date: December 15, 2021
Update Calculation formula of Duty Factor.



Report No.: TMTN2111000549NR

Page: 3 / 54
Rev.: 02

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES.....	8
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS LISTINGS	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
5.5 MEASUREMENT EQUIPMENT USED.....	10
6. CALIBRATION AND UNCERTAINTY.....	11
6.1 MEASURING INSTRUMENT CALIBRATION.....	11
6.2 MEASUREMENT UNCERTAINTY	11
7. SETUP OF EQUIPMENT UNDER TEST	12
7.1 SETUP CONFIGURATION OF EUT.....	12
7.2 SUPPORT EQUIPMENT	12
7.3 EUT OPERATING CONDITION	12
8. APPLICABLE LIMITS AND TEST RESULTS.....	13
8.1 6dB BANDWIDTH.....	13
8.2 MAXIMUM PEAK OUTPUT POWER.....	17
8.3 DUTY CYCLE	21
8.4 POWER SPECTRAL DENSITY	25
8.5 CONDUCTED SPURIOUS EMISSION.....	29
8.6 RADIATED EMISSIONS	36
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS.....	36
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ	40
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ	42
8.7 POWERLINE CONDUCTED EMISSIONS	48
9. ANTENNA REQUIREMENT	50
9.1 STANDARD APPLICABLE	50
9.2 ANTENNA CONNECTED CONSTRUCTION	50
APPENDIX I SETUP PHOTOS	51

1. TEST REPORT CERTIFICATION

Applicant : Verkada Inc
405 E. 4th Ave., San Mateo, California, United States,
94401

Manufacturer : Vision Automobile Electronics Industrial Co Ltd.
No.78, Gongye 3rd Rd., Technology Industrial Park,
Tainan , Taiwan , 70955

Equipment Under Test : BR33 Wireless Panic Button
Model : BR33-HW
Brand : 

Date of Test : November 08, 2021

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.10: 2013	No non-compliance noted

Statements of Conformity
Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

FCC Standard Section	Report Section	Test Item	Result
15.247(a)	8.1	6dB BANDWIDTH	Pass
15.247(b)	8.2	MAXIMUM PEAK OUTPUT POWER	Pass
-	8.3	DUTY CYCLE	-
15.247(e)	8.4	POWER SPECTRAL DENSITY	Pass
15.247(d)	8.5	CONDUCTED SPURIOUS EMISSION	Pass
15.205(a)	8.6	RADIATED EMISSIONS	Pass
15.207(a)	8.7	POWERLINE CONDUCTED EMISSIONS	N/A

Approved by:



Eric Huang
Section Manager

2. EUT DESCRIPTION

Product Name	BR33 Wireless Panic Button
Model	BR33-HW
Brand	 Verkada
Received Date	November 05, 2021
Frequency Range	915.0MHz ~915.7MHz
Transmit Power	9.41dBm (8.736mW)
Channel Spacing	0.35 MHz
Channel Number	3 Channels
Transmit Data Rate	80k bps
Type of Modulation	OQPSK
Antenna Type	Type: Chip Antenna Model: BR33 Manufacturer: YAGEO Gain: 1.59 dBi
Power Rating	3Vdc (Powered from battery)
MCU CHIP Brand /Model	N/A
RF Module Brand /Model	EFR32MG13/ Silicon Labs
Software Version	Rev.0
Firmware Version	1.100
Temperature Range	-20°C ~ +60°C
Reported Date	November 15, 2021

REMARK:

1. The sample (**BR33-HW**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **2AWUU6058001**, filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.

3. DESCRIPTION OF TEST MODES

The EUT is a BR33 Wireless Panic Button.

The RF chipset is manufactured by Silicon Labs.

The antenna peak gain 1.59 dBi (highest gain) were chosen for full testing.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	915
Middle	915.35
High	915.7

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, Mid, High	OFDM	OQPSK

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, Mid, High	OFDM	OQPSK

Bandedge Measurement :

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, Mid, High	OFDM	OQPSK

Antenna Port Conducted Measurement :

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type
Low, Mid, High	OFDM	OQPSK



Report No.: TMTN2111000549NR

Page: 8 / 54
Rev.: 02

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).



Report No.: TMTN2111000549NR

Page: 9 / 54
Rev.: 02

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada (TW1109)
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

5.5 MEASUREMENT EQUIPMENT USED**For §8.6**

Chamber 966 Room (Radiation Test)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	09/06/2021	09/05/2023
Bilog Antenna With 6dB Attenuator	SUNOL SCIENCES & EMCI	JB1 & N-6-06	A070506-1 & AT-N0681	10/07/2021	10/06/2022
Cable	Suhner	SUCOFLEX104PEA	20520/4PEA&O6	01/29/2021	01/28/2022
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/30/2021	03/29/2022
EMI Test Receiver	R&S	ESCI	100960	02/05/2021	02/04/2022
Horn Antenna	Com-Power	AH-118	071032	05/04/2021	05/03/2022
MXA Signal Analyzer	KEYSIGHT	N9020A	MY56060171	08/23/2021	08/22/2022
Pre-Amplifier	EMCI	EMC012645	980098	01/29/2021	01/28/2022
Pre-Amplifier	HP	8447F	2443A01683	01/19/2021	01/18/2022
Pre-Amplifier	Com-Power	PAM-840A	461378	07/05/2021	07/04/2022
Type N coaxial cable	Suhner	CHA9513	6	01/19/2021	01/18/2022
Notch Filter	MICRO-TRONICS	BRM50702-01	018	N.C.R	N.C.R
Software	Excel(ccs-o6-2020 v1.1) , e3(v6.101222)				

For §8.1~8.5

Chamber 966 Room (Conducted Test)					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9020A	MY56060171	08/23/2021	08/22/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2023
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2023
SMA Cable + 10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/29/2021	01/28/2022
Software	Excel(ccs-o6-2020 v1.1)				

For §8.7

Conducted Emission room #1					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
-	-	-	-	-	
-	-	-	-	-	
-	-	-	-	-	
Test S/W	-				

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:


PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	$\pm 3.3456\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	$\pm 2.6828\text{dB}$
Radiated Emission, 1 to 8 GHz	$\pm 2.6485\text{dB}$
Radiated Emission, 8 to 18 GHz	$\pm 2.6852\text{dB}$
Radiated Emission, 18 to 26.5 GHz	$\pm 2.6485\text{dB}$
Radiated Emission, 26 to 40 GHz	$\pm 3.0295\text{dB}$
Power Line Conducted Emission	$\pm 1.91\text{dB}$
Band Width	136.49kHz
Peak Output Power MU	$\pm 1.904\text{dB}$
Band Edge MU	$\pm 0.302\text{dBuV}$
Channel Separation MU	361.69Hz
Duty Cycle MU	0.064ms
Frequency Stability MU	0.223kHz

Uncertainty figures are valid to a confidence level of 95%, K=2

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

FOR RF TEST



7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A	N/A	N/A	N/A	N/A

No.	Signal cable description	
A	N/A	N/A

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7.3 EUT OPERATING CONDITION

RF Setup

1. Set up a whole system as the setup diagram.
2. Turn on power.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6dB BANDWIDTH

LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST SETUP



TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Report No.: TMTN2111000549NR

Page: 14 / 54
Rev.: 02

TEST RESULTS

No non-compliance noted.

Model Name	BR33-HW	Test By	Ted Huang
Temp & Humidity	26.2°C, 50%	Test Date	2021/11/08

TX mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	915	506	500	PASS
Middle	915.35	513	500	PASS
High	915.7	514	500	PASS

NOTE :


1. At final test to get the worst-case emission at 80kbps long.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



Report No.: TMTN2111000549NR

Page: 15 / 54
Rev.: 02


6dB BANDWIDTH

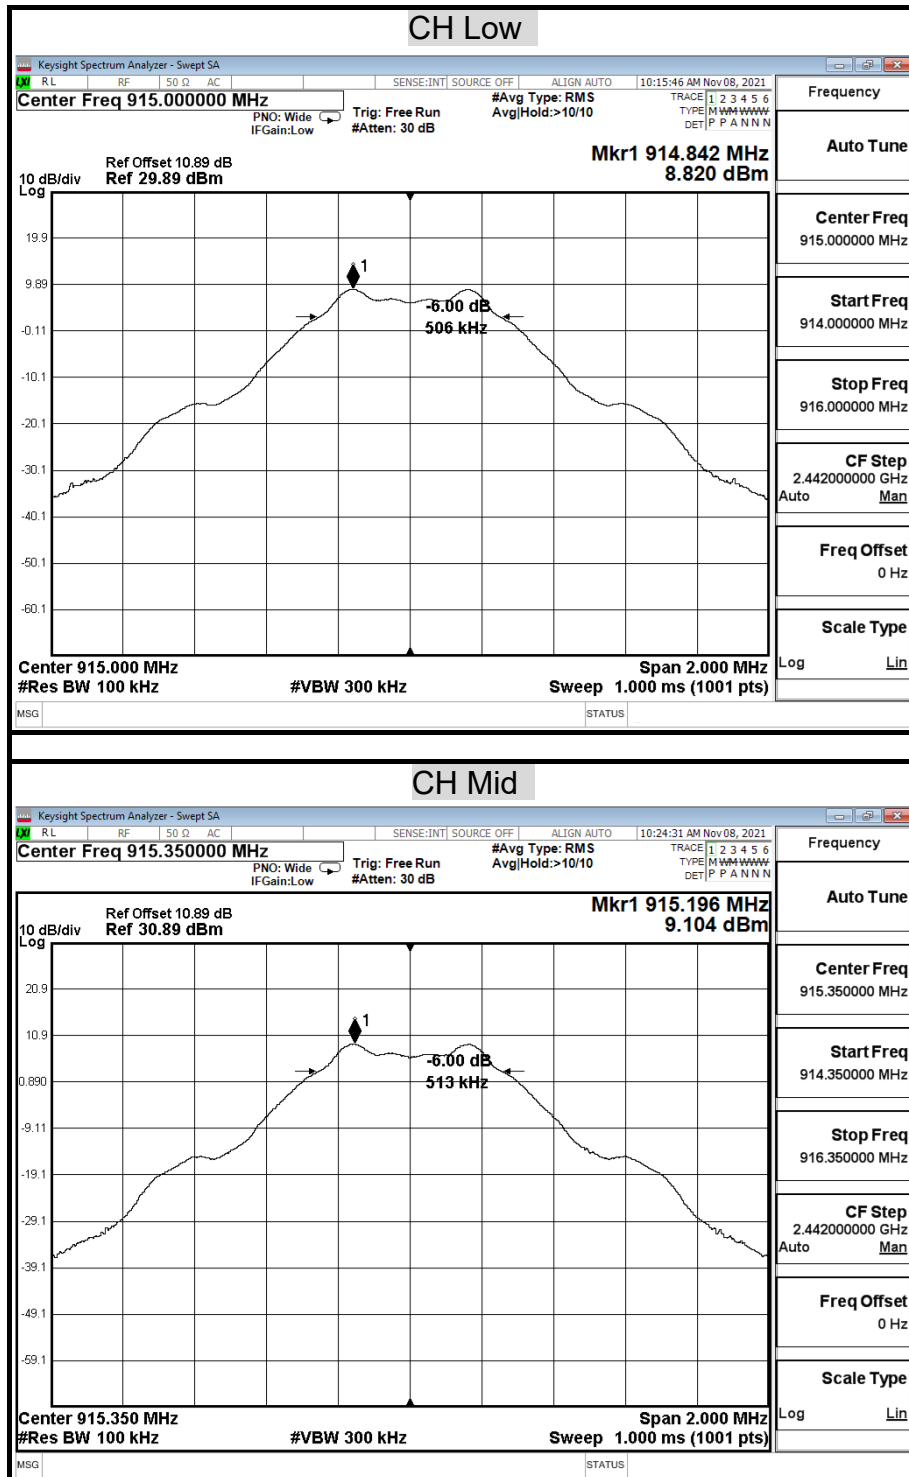



Report No.: TMTN2111000549NR

Page: 16 / 54
Rev.: 02

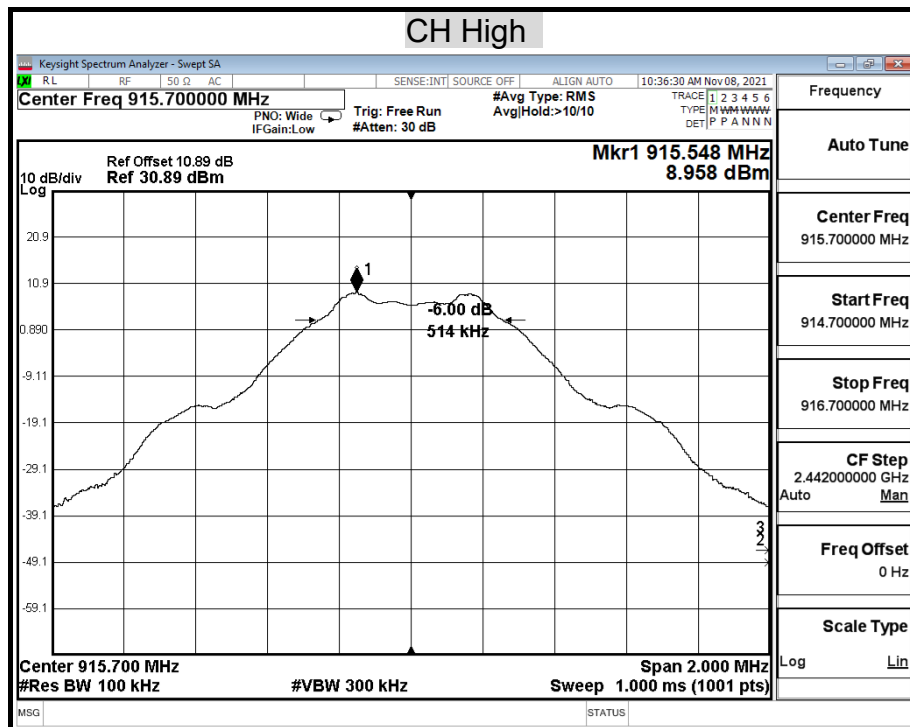

8.2 MAXIMUM PEAK OUTPUT POWER


LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.2.1.2 and 5.2.2.1.

5.2.1.2 Measurement Procedure PK2:

1. Set the RBW = 1 MHz.
2. Set the VBW ≥ 3 RBW
3. Set the span $\geq 1.5 \times$ DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function,
9. Sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

TEST RESULTS

No non-compliance noted

Model Name	BR33-HW	Test By	Ted Huang
Temp & Humidity	26.2°C, 50%	Test Date	2021/11/08

TX mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	915	9.10	30.00	PASS
Middle	915.35	9.41	30.00	PASS
High	915.7	9.22	30.00	PASS


- NOTE :**
1. At final test to get the worst-case emission at 80kbps long.
 2. The cable assembly insertion loss of 10.89dB (including 10 dB pad and 0.89 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Average Power Data

TX mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	915	8.50
Middle	915.35	9.05
High	915.7	8.88


MAXIMUM PEAK OUTPUT POWER

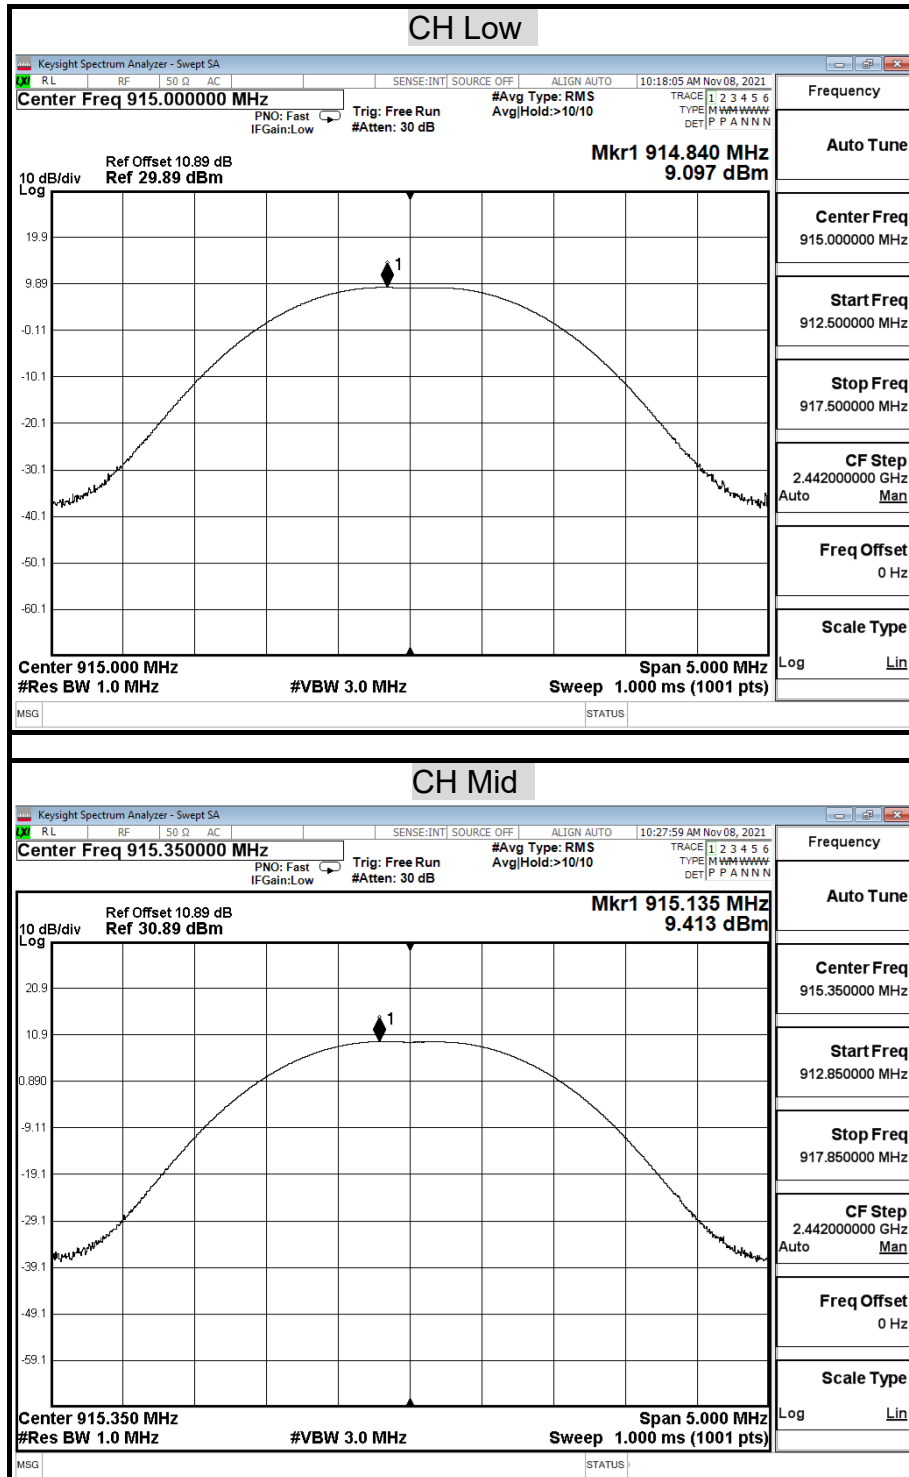



Report No.: TMTN2111000549NR

Page: 20 / 54
Rev.: 02

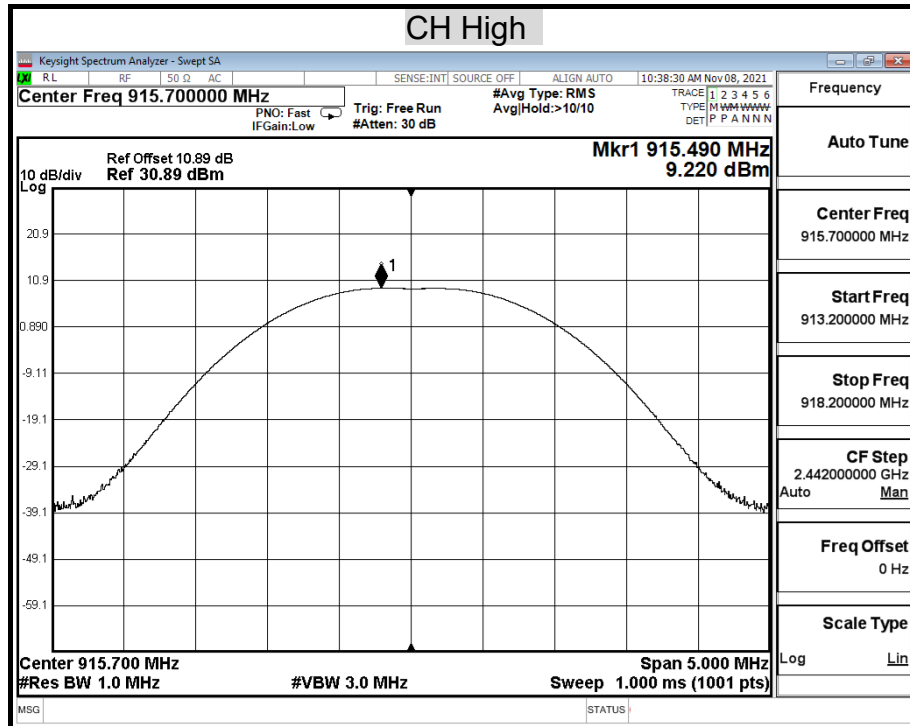

8.3 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENTS

TEST SETUP



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)



Report No.: TMTN2111000549NR

Page: 22 / 54
Rev.: 02

TEST RESULTS

No non-compliance noted.

TEST DATA

Model Name	BR33-HW	Test By	Ted Huang
Temp & Humidity	26.2°C, 50%	Test Date	2021/11/08

	us	Times	Ton	Total Ton time(ms)
Ton1	5800	1	5800	
Ton2		0	0	
Ton3			0	5.8
Tp				100

Ton	5.8
Tp(Ton+Toff)	100
Duty Cycle	0.058
Duty Factor	-24.73

Duty Factor = $20\log(\text{Duty Cycle})$





Report No.: TMTN2111000549NR

Page: 23 / 54
Rev.: 02

TEST PLOT


Plot

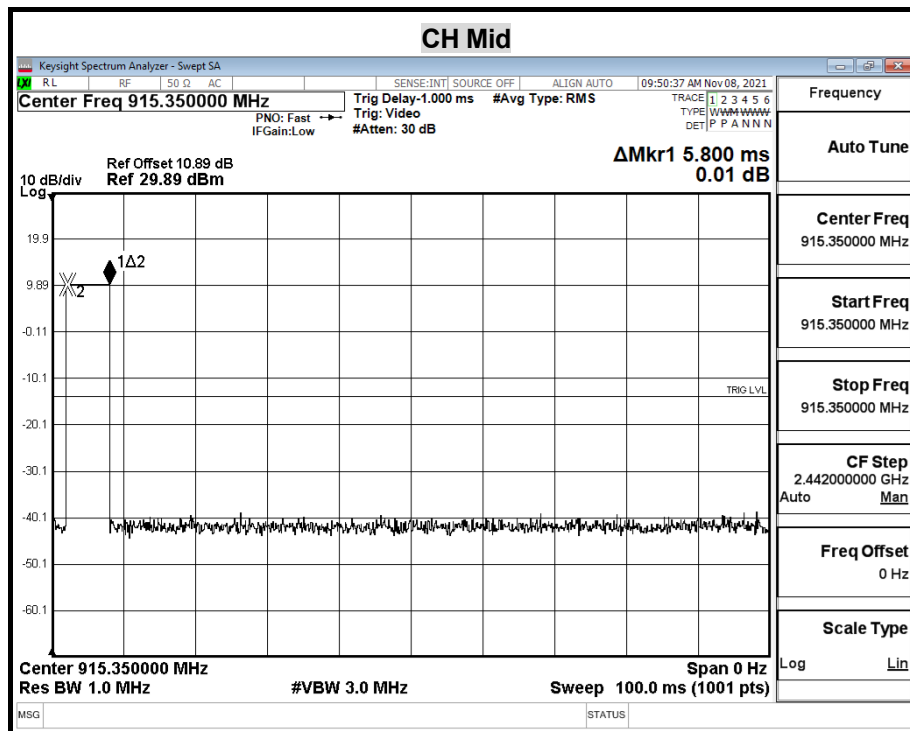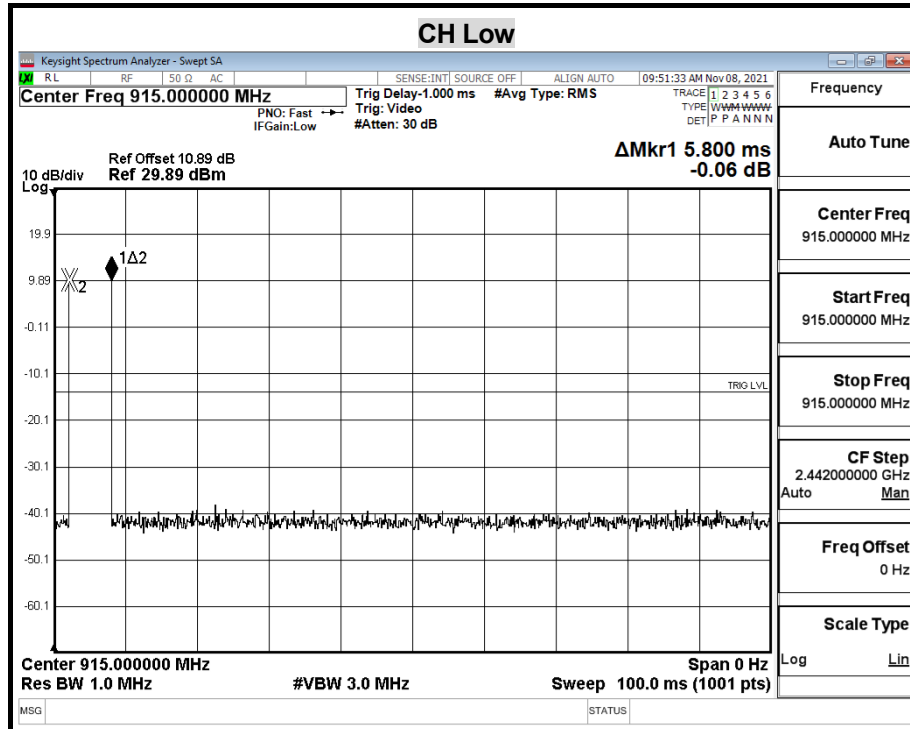



Report No.: TMTN2111000549NR

Page: 24 / 54
Rev.: 02

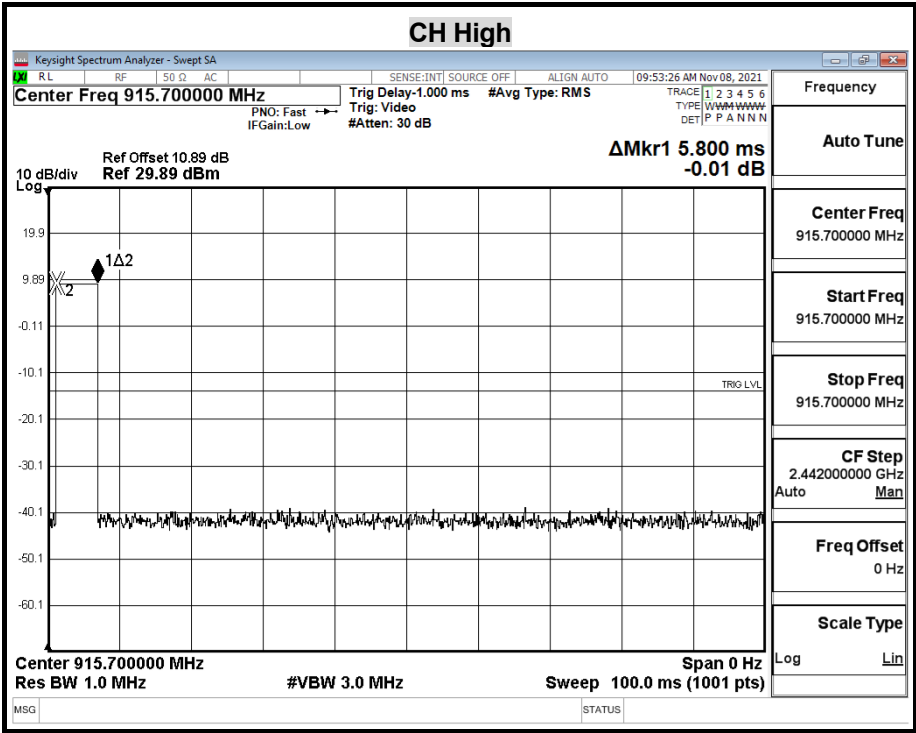

8.4 POWER SPECTRAL DENSITY

LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.3.1.

5.3.1 Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Model Name	BR33-HW	Test By	Ted Huang
Temp & Humidity	26.2°C , 50%	Test Date	2021/11/08


TX mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	915	-2.62	8.00	-10.62	PASS
Middle	915.35	-2.24	8.00	-10.24	PASS
High	915.7	-2.59	8.00	-10.59	PASS

NOTE :

1. At final test to get the worst-case emission at 80kbps long.
2. The cable assembly insertion loss of 10.89dB (including 10 dB pad and 0.89 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


POWER SPECTRAL DENSITY (TX MODE)

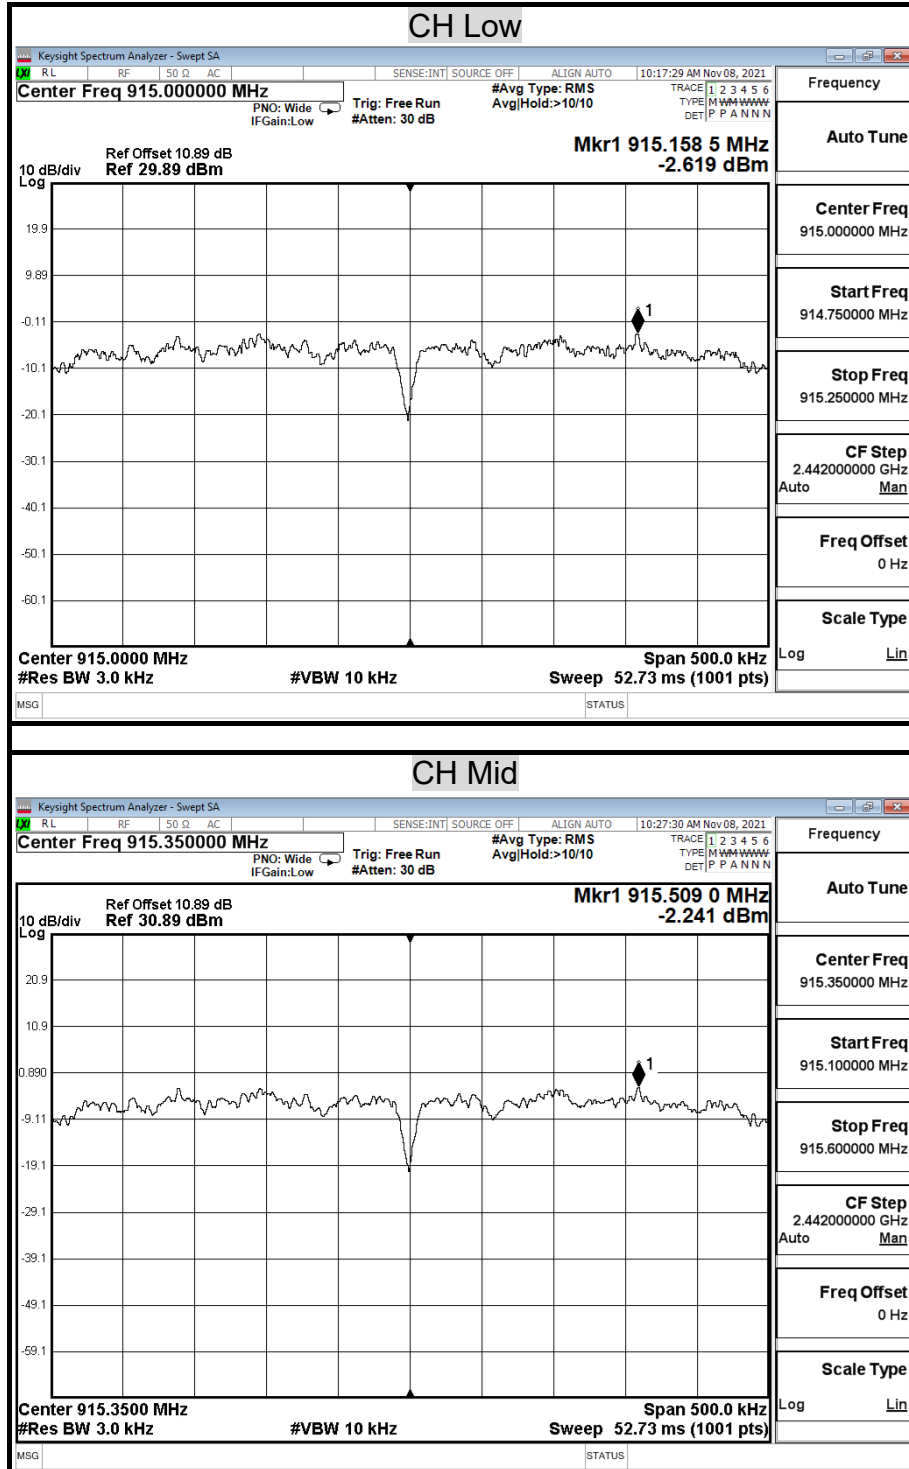



Report No.: TMTN2111000549NR

Page: 28 / 54
Rev.: 02

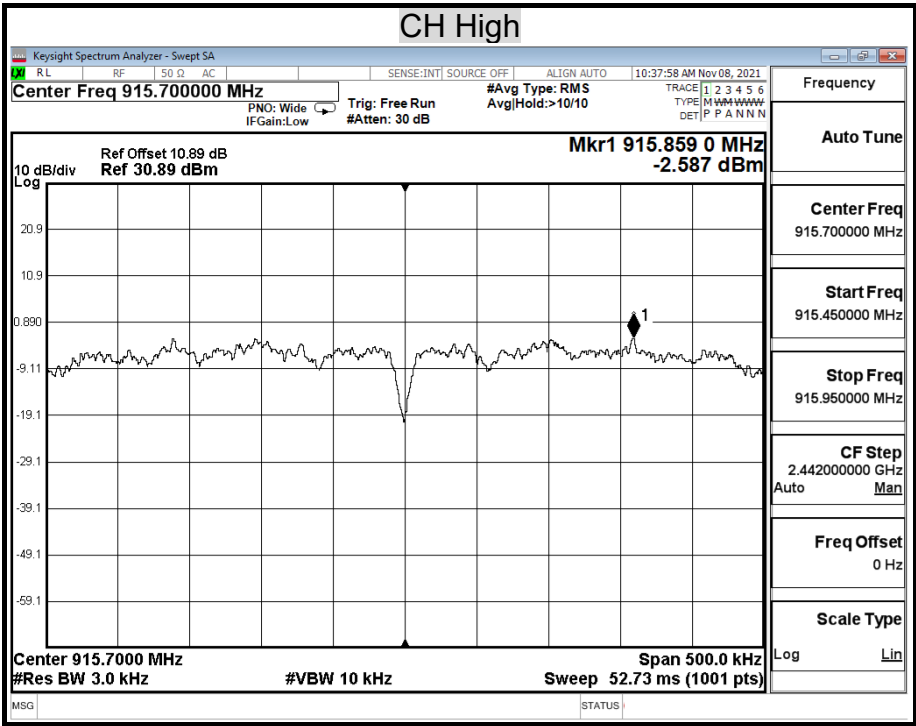


8.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 10 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 900MHz band.

Report No.: TMTN2111000549NR
TEST RESULTS

Page: 30 / 54
 Rev.: 02

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


Model Name	BR33-HW	Test By	Ted Huang
Temp & Humidity	26.2°C, 50%	Test Date	2021/11/08

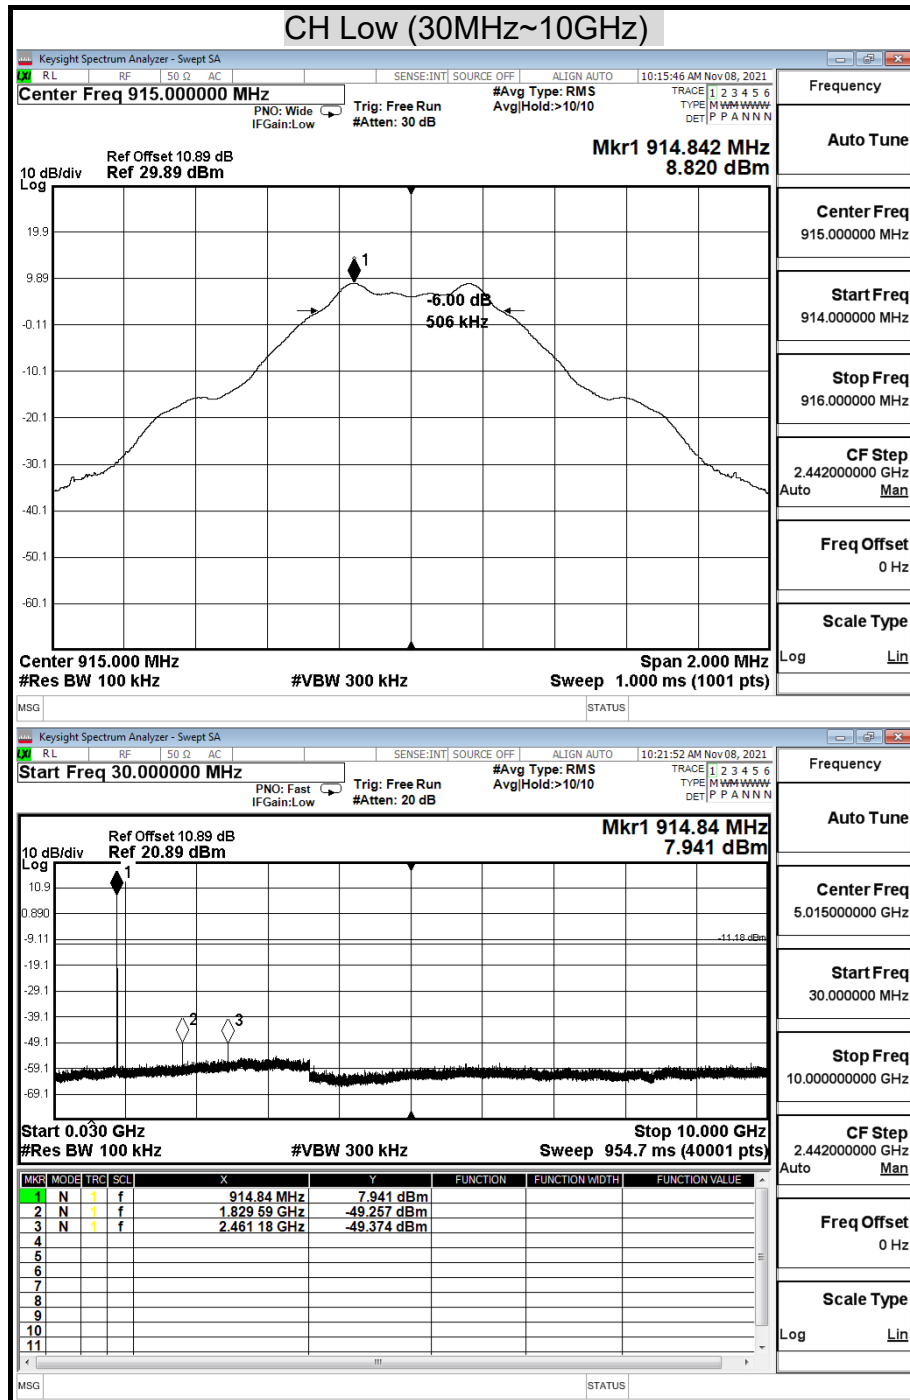




Report No.: TMTN2111000549NR

Page: 31 / 54
Rev.: 02

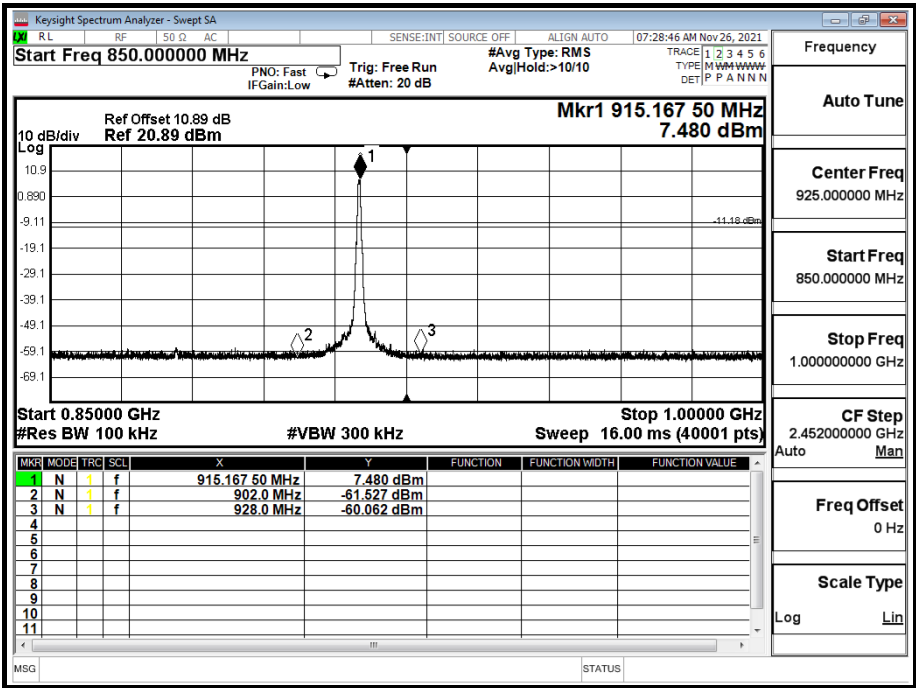


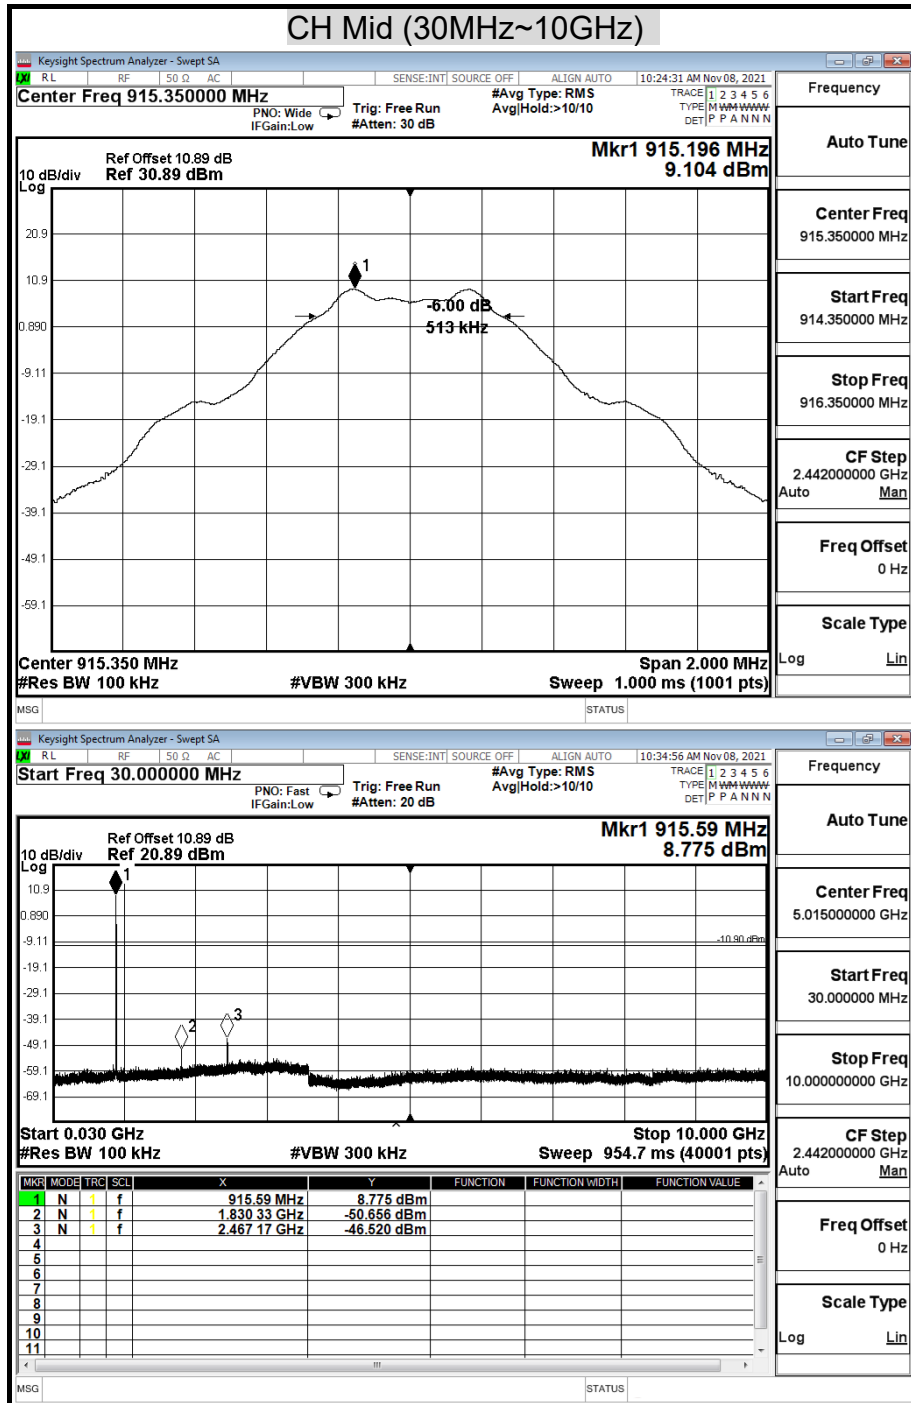




Report No.: TMTN2111000549NR

Page: 33 / 54
Rev.: 02

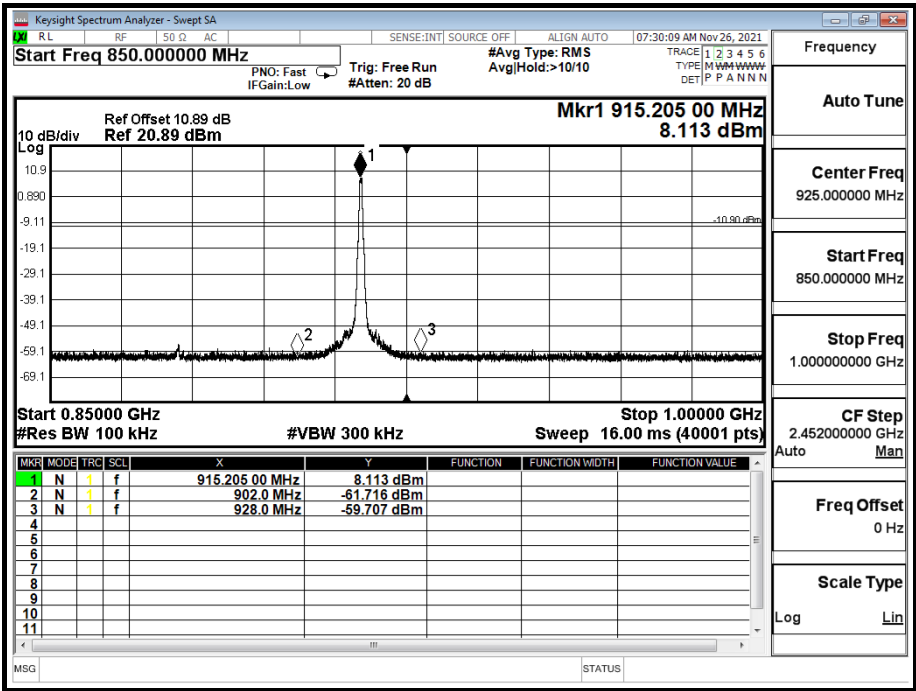


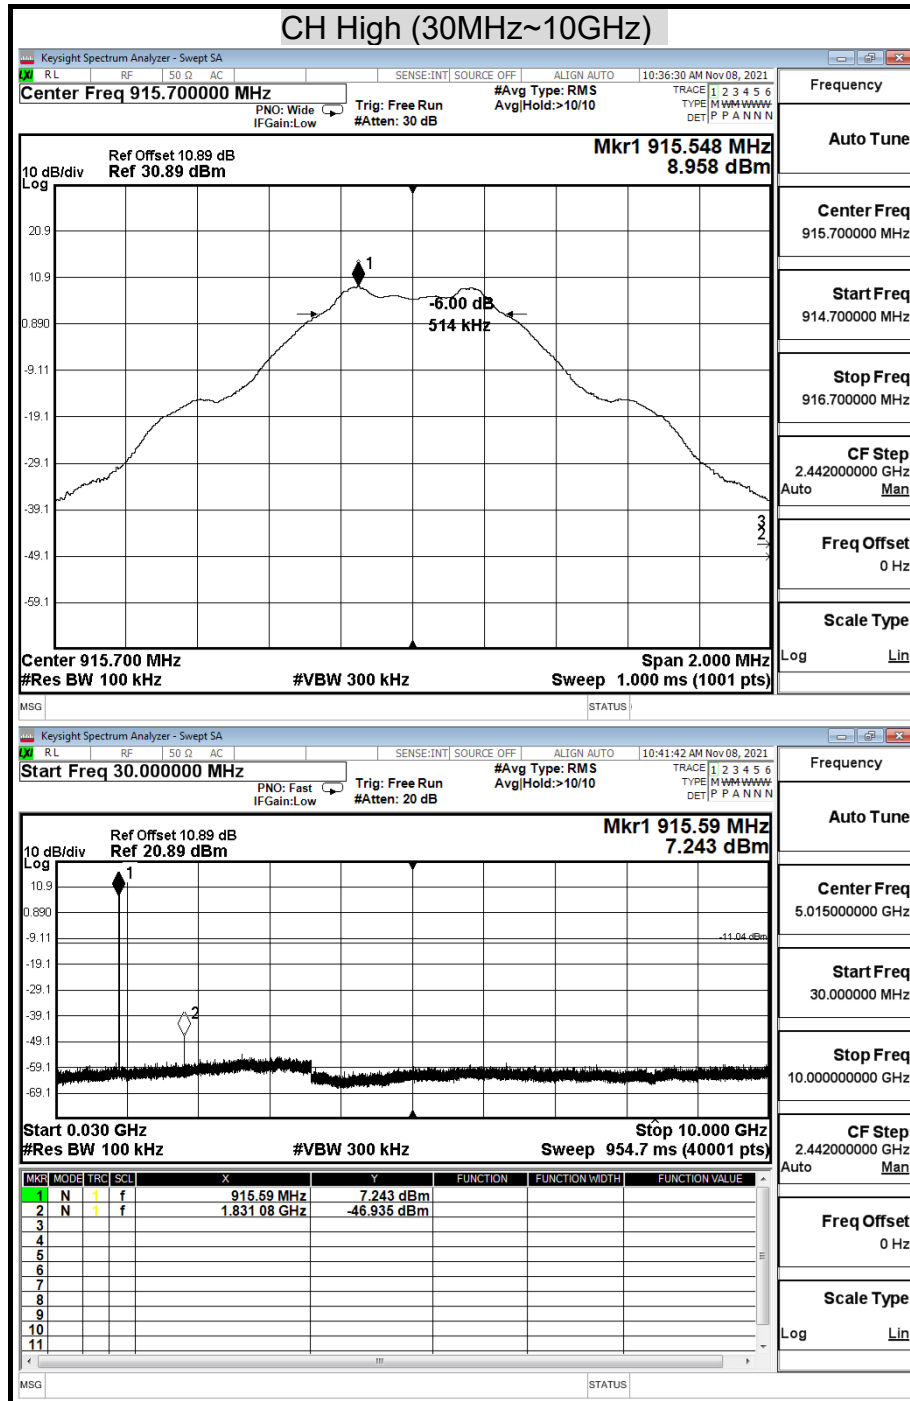



Report No.: TMTN2111000549NR

Page: 35 / 54
Rev.: 02

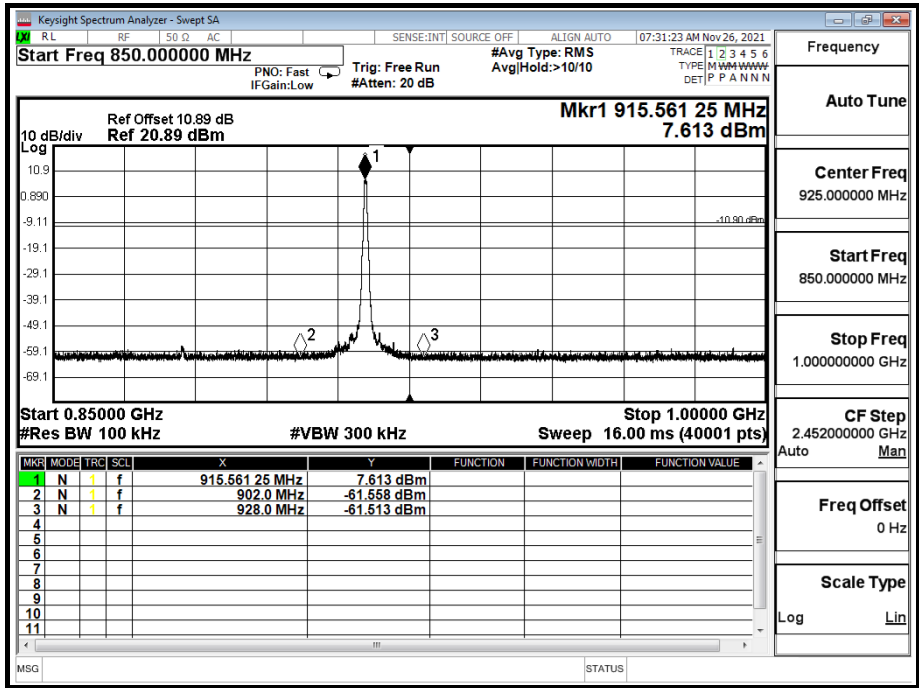

8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Report No.: TMTN2111000549NR

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.


§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

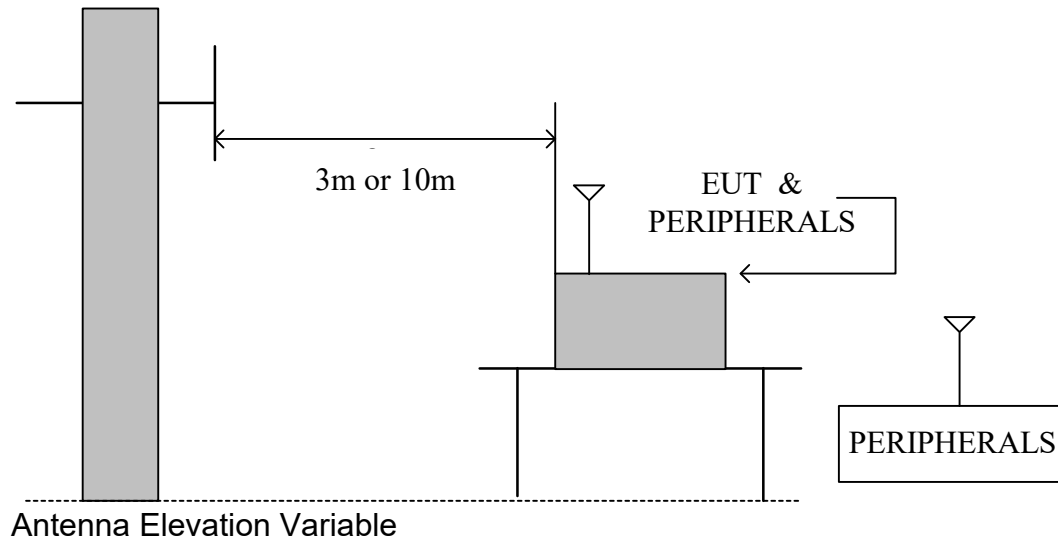

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

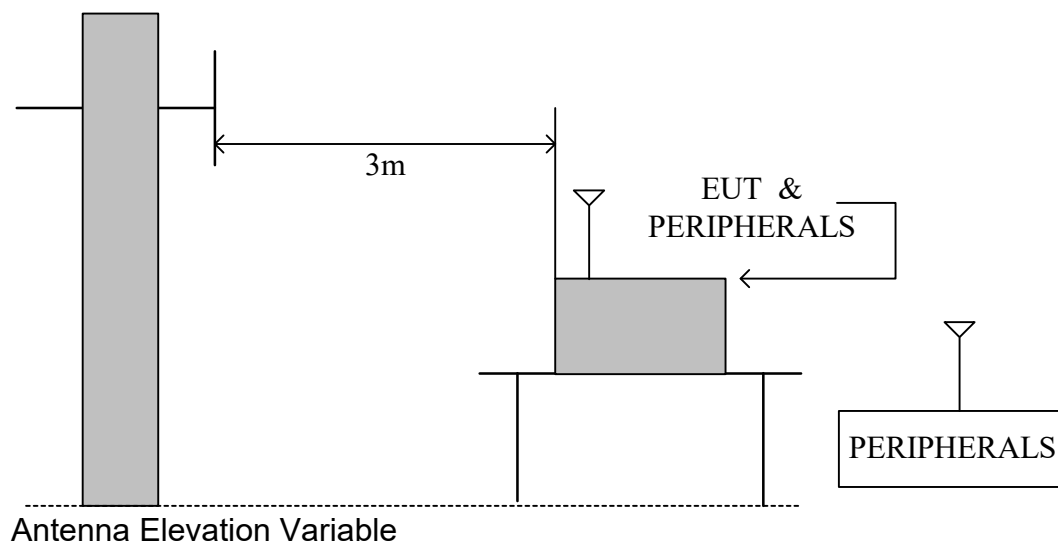

TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with KDB 558074 D01 v05r02.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. Average value=Peak value + Duty factor
4. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)

TEST RESULTS


No non-compliance noted.

8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	BR33 Wireless Panic Button	Test Date	2021/11/08
Model	BR33-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	26°C/50%

Horizontal

(The chart below shows the highest readings taken from the final data.)

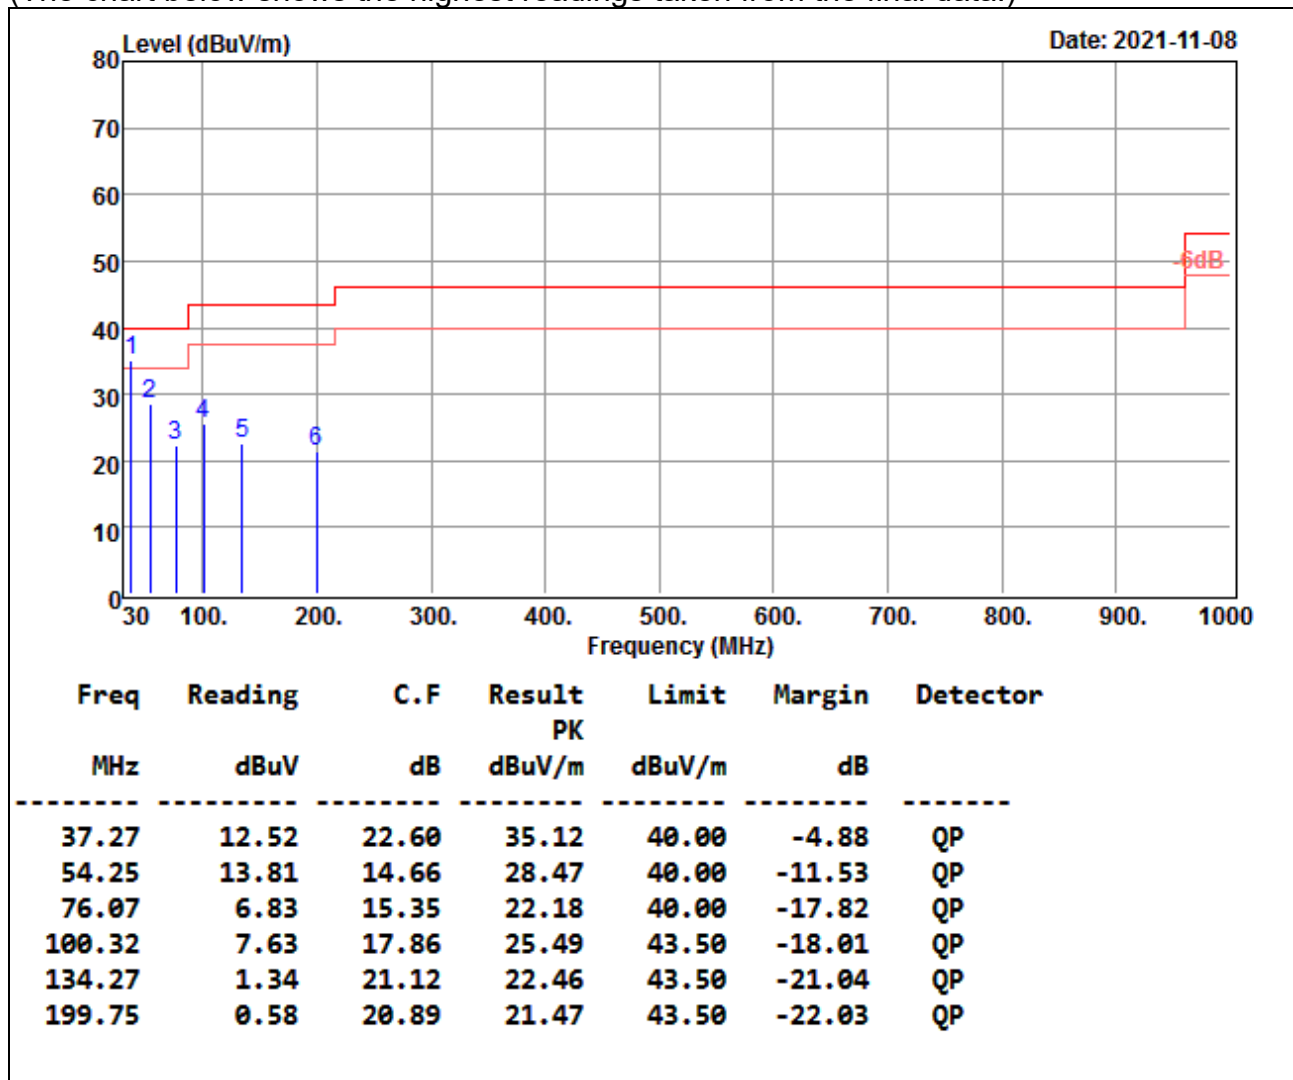
**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Emission at 3m Level=Meter Reading +Antenna Factor +Cable Loss
Margin= Emission at 3m Level -Limits
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Product Name	BR33 Wireless Panic Button	Test Date	2021/11/08
Model	BR33-HW	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	26°C/50%

Vertical

(The chart below shows the highest readings taken from the final data.)

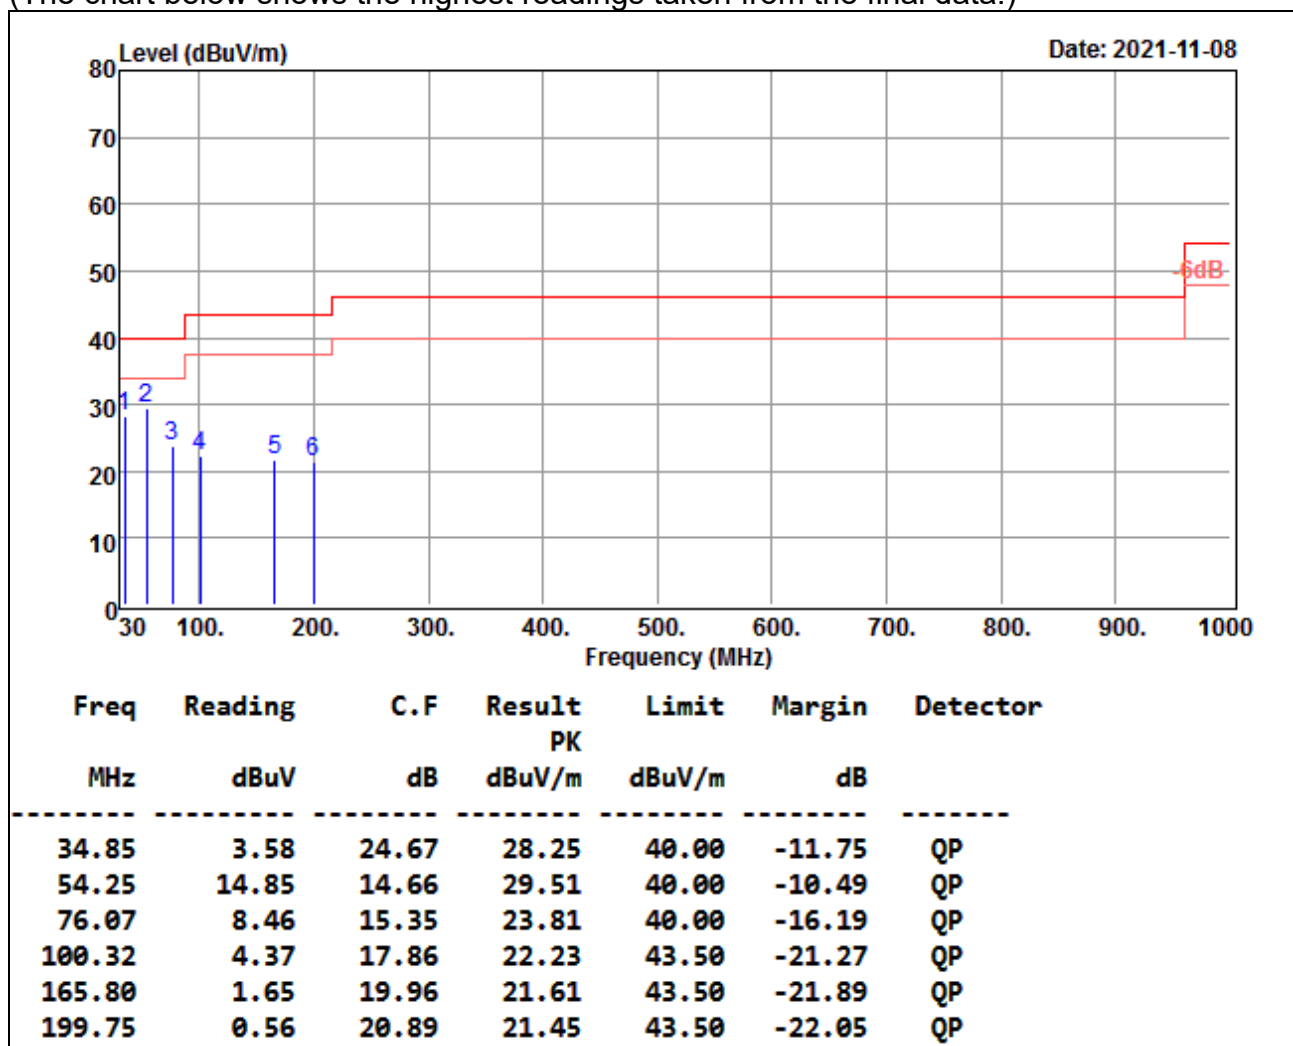**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Emission at 3m Level=Meter Reading +Antenna Factor +Cable Loss
Margin= Emission at 3m Level -Limits
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	BR33 Wireless Panic Button	Test Date	2021/11/08
Model	BR33-HW	Test By	Ted Huang
Test Mode	TX (CH Low)	TEMP& Humidity	26.2°C, 50%

TX mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
915.00	93.08	29.68	6.01	25.64	0.00	103.13	Fundamental Frequency		P
915.00	0.00	29.68	6.01	25.64	0.00	10.05			A
1830.31	72.34	29.24	3.50	44.29	0.80	61.60	83.13	-21.53	P
1830.31	-	-	-	-	-	36.87	63.13	-26.26	A
* 2745.46	59.79	30.15	4.12	43.49	0.87	51.43	74.00	-22.57	P
* 2745.46	-	-	-	-	-	26.70	54.00	-27.30	A
* 3659.38	67.44	30.59	4.67	42.89	0.27	60.08	74.00	-13.92	P
* 3659.38	-	-	-	-	-	35.35	54.00	-18.65	A
* 4575.19	54.56	32.34	5.29	42.63	0.20	49.75	74.00	-24.25	P
* 4575.19	-	-	-	-	-	25.02	54.00	-28.98	A
5490.37	54.21	33.90	5.86	42.67	0.40	51.70	83.13	-31.43	P
5490.37	-	-	-	-	-	26.97	63.13	-36.16	A
6405.87	53.30	35.31	6.19	42.73	0.24	52.31	83.13	-30.82	P
6405.87	-	-	-	-	-	27.57	63.13	-35.55	A

TX mode / CH Low				Measurement Distance at 3m			Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
915.00	83.72	29.68	6.01	25.64	0.00	93.77	Fundamental Frequency		P
915.00	0.00	29.68	6.01	25.64	0.00	10.05			A
1829.60	71.96	29.24	3.50	44.29	0.80	61.21	74.00	-12.79	P
1829.60	-	-	-	-	-	36.48	54.00	-17.52	A
* 2745.52	58.26	30.15	4.12	43.49	0.87	49.90	74.00	-24.10	P
* 2745.52	-	-	-	-	-	25.17	54.00	-28.83	A
* 3659.31	64.99	30.59	4.67	42.89	0.27	57.63	74.00	-16.37	P
* 3659.31	-	-	-	-	-	32.90	54.00	-21.10	A
* 4574.42	54.24	32.34	5.29	42.63	0.20	49.43	74.00	-24.57	P
* 4574.42	-	-	-	-	-	24.70	54.00	-29.30	A
5490.85	56.25	33.90	5.87	42.67	0.40	53.74	74.00	-20.26	P
5490.85	-	-	-	-	-	29.01	54.00	-24.99	A
6404.55	53.29	35.31	6.19	42.73	0.24	52.29	74.00	-21.71	P
6408.23	-	-	-	-	-	31.78	63.57	-31.80	A

Report No.: TMTN2111000549NR**REMARK:**

1. *AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.*
2. *Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.*
3. *Average level=Peak level + Duty factor*
4. *The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit*
5. *The other emission levels were 20dB below the limit*
6. *The test limit distance is 3m limit.*
7. **=Restricted bands of operation*

Product Name	BR33 Wireless Panic Button	Test Date	2021/11/08
Model	BR33-HW	Test By	Ted Huang
Test Mode	TX (CH Middle)	TEMP& Humidity	26.2°C, 50%

TX mode / CH Middle				Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
915.35	93.52	29.68	6.01	25.64	0.00	103.57	Fundamental Frequency		P
915.35	0.00	29.68	6.01	25.64	0.00	10.05			A
1830.37	65.89	29.24	3.50	44.29	0.80	55.15	83.57	-28.43	P
1830.37	-	-	-	-	-	30.41	63.57	-33.16	A
* 2746.61	60.08	30.15	4.12	43.49	0.87	51.72	74.00	-22.28	P
* 2746.61	-	-	-	-	-	26.99	54.00	-27.01	A
* 3660.72	64.00	30.59	4.67	42.89	0.27	56.65	74.00	-17.35	P
* 3660.72	-	-	-	-	-	31.91	54.00	-22.09	A
* 4577.66	58.60	32.35	5.29	42.63	0.20	53.80	74.00	-20.20	P
* 4577.66	-	-	-	-	-	29.07	54.00	-24.93	A
5492.80	58.80	33.90	5.87	42.67	0.40	56.29	83.57	-27.29	P
5492.80	-	-	-	-	-	31.56	63.57	-32.02	A
6408.23	57.50	35.32	6.19	42.73	0.24	56.51	83.57	-27.07	P
6408.23	-	-	-	-	-	31.78	63.57	-31.80	A

TX mode / CH Middle				Measurement Distance at 3m			Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
915.35	84.18	29.68	6.01	25.64	0.00	94.23	Fundamental Frequency		P
915.35	0.00	29.68	6.01	25.64	0.00	10.05			A
1830.53	71.42	29.24	3.50	44.29	0.80	60.68	74.23	-13.56	P
1830.53	-	-	-	-	-	35.94	54.23	-18.29	A
* 2746.55	62.18	30.15	4.12	43.49	0.87	53.82	74.00	-20.18	P
* 2746.55	-	-	-	-	-	29.09	54.00	-24.91	A
* 3660.65	62.85	30.59	4.67	42.89	0.27	55.49	74.00	-18.51	P
* 3660.65	-	-	-	-	-	30.76	54.00	-23.24	A
* 4577.45	59.29	32.35	5.29	42.63	0.20	54.49	74.00	-19.51	P
* 4577.45	-	-	-	-	-	29.76	54.00	-24.24	A
5491.05	59.98	33.90	5.87	42.67	0.40	57.47	74.23	-16.77	P
5491.05	-	-	-	-	-	32.73	54.23	-21.50	A
6408.07	57.49	35.32	6.19	42.73	0.24	56.50	74.23	-17.73	P
6408.07	-	-	-	-	-	31.77	54.23	-22.47	A

Report No.: TMTN2111000549NR**REMARK:**

1. *AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.*
2. *Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.*
3. *Average level=Peak level + Duty factor*
4. *The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit*
5. *The other emission levels were 20dB below the limit*
6. *The test limit distance is 3m limit.*
7. **=Restricted bands of operation*

Product Name	BR33 Wireless Panic Button	Test Date	2021/11/08
Model	BR33-HW	Test By	Ted Huang
Test Mode	TX (CH High)	TEMP& Humidity	26.2°C, 50%

TX mode / CH High				Measurement Distance at 3m			Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
915.70	95.05	29.69	6.01	25.64	0.00	105.11	Fundamental Frequency		P
915.70	0.00	29.69	6.01	25.64	0.00	10.06			A
1831.80	75.85	29.25	3.50	44.29	0.81	65.13	85.11	-19.98	P
1831.80	-	-	-	-	-	40.40	65.11	-24.71	A
* 2747.47	62.03	30.15	4.12	43.49	0.87	53.67	74.00	-20.33	P
* 2747.47	-	-	-	-	-	28.94	54.00	-25.06	A
* 3662.14	69.06	30.59	4.67	42.89	0.27	61.71	74.00	-12.29	P
* 3662.14	-	-	-	-	-	36.98	54.00	-17.02	A
* 4577.96	56.63	32.35	5.29	42.63	0.20	51.83	74.00	-22.17	P
* 4577.96	-	-	-	-	-	27.10	54.00	-26.90	A
5493.11	58.87	33.90	5.87	42.67	0.40	56.36	85.11	-28.75	P
5493.11	-	-	-	-	-	31.63	65.11	-33.48	A
6410.45	57.70	35.32	6.19	42.73	0.24	56.72	85.11	-28.39	P
6410.45	-	-	-	-	-	31.99	65.11	-33.12	A

TX mode / CH High				Measurement Distance at 3m			Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
915.70	85.57	29.69	6.01	25.64	0.00	95.62	Fundamental Frequency		P
915.70	0.00	29.69	6.01	25.64	0.00	10.06			A
1831.71	76.95	29.25	3.50	44.29	0.81	66.22	75.62	-9.40	P
1831.71	-	-	-	-	-	41.49	55.62	-14.13	A
* 2747.68	61.37	30.15	4.12	43.49	0.87	53.01	74.00	-20.99	P
* 2747.68	-	-	-	-	-	28.28	54.00	-25.72	A
* 3662.20	67.48	30.59	4.67	42.89	0.27	60.13	74.00	-13.87	P
* 3662.20	-	-	-	-	-	35.39	54.00	-18.61	A
* 4579.48	56.80	32.35	5.29	42.63	0.20	52.01	74.00	-21.99	P
* 4579.48	-	-	-	-	-	27.28	54.00	-26.72	A
5495.19	58.21	33.90	5.87	42.67	0.40	55.70	75.62	-19.92	P
5495.19	-	-	-	-	-	30.97	55.62	-24.65	A
6410.14	57.02	35.32	6.19	42.73	0.24	56.04	75.62	-19.59	P
6410.14	-	-	-	-	-	31.31	55.62	-24.32	A

Report No.: TMTN2111000549NR**REMARK:**

1. *AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High pass-1G Filter Insertion Loss.*
2. *Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=3MHz.*
3. *Average level=Peak level + Duty factor*
4. *The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit*
5. *The other emission levels were 20dB below the limit*
6. *The test limit distance is 3m limit.*
7. **=Restricted bands of operation*


8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

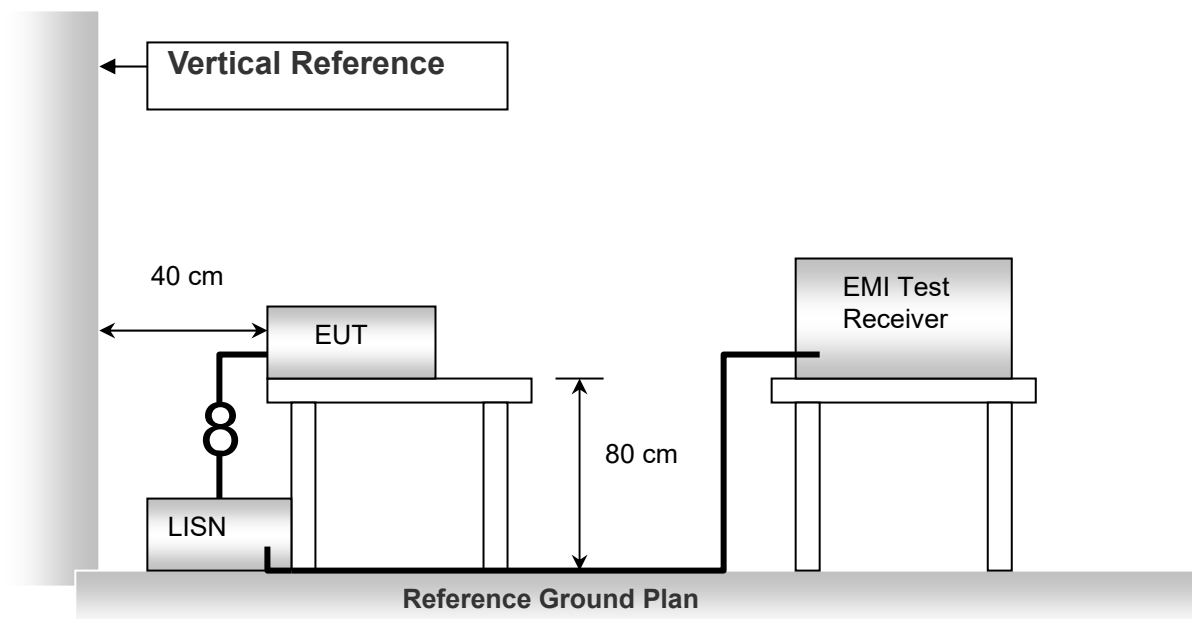TEST SETUP**TEST PROCEDURE**

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS

No non-compliance noted.

※ This EUT is not connected to AC Source directly. Not applicable for this test.



Report No.: TMTN2111000549NR

Page: 50 / 54
Rev.: 02

9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Type: Chip Antenna
Model: BR33
Manufacturer: YAGEO
Gain: 1.59 dBi

=== END of Report ===