



Valued Quality. Delivered.

## **Uniden America Corporation**

Application  
For  
FCC Part 95 - Certification

462MHz FRS/GMRS Walkie-talkie

**(FCC ID: AMWSX377)**

17020559HKG-001

MN/ cl

May 19, 2017

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

### **Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)

## INTERTEK TESTING SERVICES

### MEASUREMENT/TECHNICAL REPORT

**Applicant** : Uniden America Corporation  
**Trade Name/Model No** : Uniden / SX377-2CKHS  
SX377-2CKHSM  
**Date** : May 19, 2017

This report concerns (check one:) Original Grant ☒ Class II Change ☐

Equipment Type: FRF – Part 95 Family Radio Face Held Transmitter  
CXX - Communications Rcvr for use w/ licensed Tx and CBs

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until:   
date

Company Name agrees to notify the Commission by:   
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Nip Ming Fung, Melvin  
Intertek Testing Services Hong Kong Ltd.  
2/F., Garment Centre,  
576 Castle Peak Road,  
Kowloon, Hong Kong.  
Phone: 852-2173-8535  
Fax: 852-2741-1693

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

|                                                                                      |           |
|--------------------------------------------------------------------------------------|-----------|
| <b>1.0 General Description .....</b>                                                 | <b>4</b>  |
| 1.1 Product Description .....                                                        | 4         |
| 1.2 Related Submittal(s) Grants .....                                                | 5         |
| 1.3 Test Methodology .....                                                           | 5         |
| 1.4 Test Facility .....                                                              | 5         |
| <b>2.0 System Test Configuration .....</b>                                           | <b>7</b>  |
| 2.1 Justification .....                                                              | 7         |
| 2.2 EUT Exercising Software .....                                                    | 8         |
| 2.3 Special Accessories .....                                                        | 8         |
| 2.4 Measurement Uncertainty .....                                                    | 8         |
| 2.5 Equipment Modification .....                                                     | 8         |
| 2.6 Support Equipment .....                                                          | 8         |
| <b>3.0 RF Power Output (Section 2.1046(a), 95.639(d)) .....</b>                      | <b>11</b> |
| <b>4.0 Modulation Characteristics (Section 2.1047(a)(b), 95.637(a)) .....</b>        | <b>15</b> |
| 4.1 Modulation Frequency Response .....                                              | 16        |
| 4.2 Modulation Limiting Characteristics .....                                        | 19        |
| 4.3 Audio Low Pass Filter Response .....                                             | 22        |
| <b>5.0 Occupied Bandwidth (Section 95.633(c)) .....</b>                              | <b>26</b> |
| <b>6.0 Spurious Emission .....</b>                                                   | <b>30</b> |
| 6.1 Power of Spurious Radiation (Section 2.1053, 95.635(b)) .....                    | 31        |
| 6.2 Field Strength of Radiation Emission (Section 15.109) .....                      | 36        |
| <b>7.0 Frequency Stability (Section 2.1055(a)(b)(d), 95.621(b), 95.626(b)) .....</b> | <b>47</b> |
| 7.1 Frequency Tolerance .....                                                        | 48        |
| 7.2 Temperature Extreme Condition .....                                              | 50        |
| 7.3 Voltage Extreme Condition .....                                                  | 52        |
| <b>8.0 Equipment List .....</b>                                                      | <b>55</b> |

# **INTERTEK TESTING SERVICES**

---

## **EXHIBIT 1**

### **GENERAL DESCRIPTION**

## INTERTEK TESTING SERVICES

### 1.0 General Description

#### 1.1 Product Description

The Equipment Under Test (EUT) is a Two Ways Radio with GMRS and FRS. Weather Band, GMRS and FRS operate between 462.5500MHz and 467.7250MHz. Weather band receiver operates between 162.400MHz and 162.550MHz.

The Channel 1 - 7 are shared channels for GMRS and FRS. Channel 4 is the representable channel to the test.

The EUT is powered by 4.5V (3 x 1.5VDC AA size alkaline batteries) or 3.6V (3 x 1.2 AA rechargeable Ni-MH batteries).

#### Transmitter Portion

- (i) Type of Emission : GMRS: 5K56F3E with filtering; FRS: 5K52F3E with filtering
- (ii) Frequency Range : GMRS/FRS: 462.5625MHz to 462.7125MHz  
FRS: 467.5625MHz to 467.7125MHz  
GMRS: 462.5500MHz to 462.7250MHz  
Channel 1,2,3,4,5,6&7 are common channels for GMRS&FRS
- (iii) Maximum Power Rating : GMRS: 1.59W ERP; FRS: 0.45W ERP
- (iv) Antenna Type : Integral, vertically polarized with 2.15dBi antenna gain
- (iv) dc voltage of radio frequency amplifying device: 4.5V  
dc current of radio frequency amplifying device : 800mA

The Model: SX377-2CKHSM is the same as the Model: SX377-2CKHS in electrical designs, including software & firmware, PCB layout, Construction design/ Physical design/Enclosure. The only differences between these models are color and model number to be sold for marketing purpose. Suffix "2CKHS, 2CKHSM" represents color code and packing configuration.

| Channel | Frequency    | Description | Channel | Frequency    | Description |
|---------|--------------|-------------|---------|--------------|-------------|
| 1       | 462.5625 MHz | GMRS/FRS    | 12      | 467.6625 MHz | FRS         |
| 2       | 462.5875 MHz | GMRS/FRS    | 13      | 467.6875 MHz | FRS         |
| 3       | 462.6125 MHz | GMRS/FRS    | 14      | 467.7125 MHz | FRS         |
| 4       | 462.6375 MHz | GMRS/FRS    | 15      | 462.5500 MHz | GMRS        |
| 5       | 462.6625 MHz | GMRS/FRS    | 16      | 462.5750 MHz | GMRS        |
| 6       | 462.6875 MHz | GMRS/FRS    | 17      | 462.6000 MHz | GMRS        |
| 7       | 462.7125 MHz | GMRS/FRS    | 18      | 462.6250 MHz | GMRS        |
| 8       | 467.5625 MHz | FRS         | 19      | 462.6500 MHz | GMRS        |
| 9       | 467.5875 MHz | FRS         | 20      | 462.6750 MHz | GMRS        |
| 10      | 467.6125 MHz | FRS         | 21      | 462.7000 MHz | GMRS        |
| 11      | 467.6375 MHz | FRS         | 22      | 462.7250 MHz | GMRS        |

## INTERTEK TESTING SERVICES

---

### 1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a GMRS + FRS Transceiver. The receiver section of this Transceiver and digital device portion is subject to verification process.

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014) and ANSI/TIA-603-C-2004. Conducted emission measurement were performed according to the procedures in ANSI C63.4 (2014). All radiated measurement were performed in 3m Chamber. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

### 1.4 Test Facility

The 3m Chamber (FCC Site registration number : 435539) and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 2**

### **SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. The device has been tested with headset and without headset when the radiated emissions are measured.

The device was powered by 4.5V (3 x 1.5VDC AA size alkaline batteries) or 3.6V (3 x 1.2 AA rechargeable Ni-MH batteries).

The frequency range of transmitter from 30MHz to 10<sup>th</sup> harmonics was searched for spurious emissions from the device. The frequency range of weather band receiver from 30MHz to 2GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

For transmitter radiated spurious measurement, the spectrum analyzer resolution bandwidth was 10kHz for emissions below 1GHz, and 1MHz for emissions above 1GHz. Video bandwidth was 300kHz for emissions below 1GHz, and 3MHz for emissions above 1GHz. For receiver radiated spurious measurement, the spectrum analyzer resolution bandwidth was 100kHz for emission below 1GHz, and 1MHz for emissions above 1GHz. Video bandwidth was 3 times greater than resolution bandwidth.

All power-up methods were tested and the worst-case data were reported.

The following are all the test modes (only the worst-case was reported):

GMRS, Tx without headset

GMRS, Tx with headset

FRS (same as the all above cases)

Weather band receiver, without headset

Weather band receiver, with headset

## INTERTEK TESTING SERVICES

---

### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the PTT button was pushed, a signal was transmitted.

### 2.3 Special Accessories

No special accessory is needed for compliance of this device.

### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered. The values of the Measurement uncertainty for radiated emission test, AC line conducted emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$ ,  $\pm 4.2\text{dB}$  and  $\pm 1\text{dB}$  respectively.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

### 2.5 Equipment Modification

No modifications by Uniden America Corporation will be incorporated in each production model sold/leased in the United States.

### 2.6 Support Equipment

A headset with 1.2m unshielded cable.

## INTERTEK TESTING SERVICES

---

*The EUT has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report. All instrumentations and accessories used to verify the EUT for compliance to the indicated standards are calibrated in accordance with ISO 17025:2005 requirements.*

*Testing was performed at Intertek Testing Services Hong Kong Ltd. Where meets the FCC listed site for certification application requirements stated in FCC Part 2 Section 2.948.*

*I attest that the necessary measurements were made under my supervision.*

*Attested by*

*Intertek Testing Services Hong Kong Ltd.  
Agent for Uniden America Corporation*

*Tested and Prepared by:*

 Digitally signed  
by Koo Wai Ip  
Location: Intertek  
Testing Services  
Hong Kong Ltd.

---

*Koo Wai Ip  
Technical Supervisor*

*Approved by:*

 Digitally signed by  
Nip Ming Fung,  
Melvin  
Location: Intertek  
Testing Services  
Hong Kong Limited

---

*Nip Ming Fung, Melvin  
Manager  
Email: melvin.mf.nip@intertek.com*

May 19, 2017 *Date*

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 3**

### **RF POWER OUTPUT**

## INTERTEK TESTING SERVICES

---

### 3.0 **RF Power Output (Section 2.1046(a), 95.639(a), 95.639(d))**

#### Testing Procedure

1. On a test site, the EUT shall be placed at 0.8m height on a wooden turntable, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

## INTERTEK TESTING SERVICES

---

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

---

## INTERTEK TESTING SERVICES

---

**Table 1**

**Uniden America Corporation  
SX377-2CKHS**

**Transmission Power**

| Channel | Frequency<br>(MHz) | Effective Radiated Power |      | FCC 95.639<br>Limit<br>(W) | Margin<br>(W) |
|---------|--------------------|--------------------------|------|----------------------------|---------------|
|         |                    | (dBm)                    | (W)  |                            |               |
| 1       | 462.5625           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 2       | 462.5875           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 3       | 462.6125           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 4       | 462.6375           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 5       | 462.6625           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 6       | 462.6875           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 7       | 462.7125           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 8       | 467.5625           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 9       | 467.5875           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 10      | 467.6125           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 11      | 467.6375           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 12      | 467.6625           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 13      | 467.6875           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 14      | 467.7125           | 26.5                     | 0.45 | 0.50                       | -0.05         |
| 15      | 462.5500           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 16      | 462.5750           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 17      | 462.6000           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 18      | 462.6250           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 19      | 462.6500           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 20      | 462.6750           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 21      | 462.7000           | 32.0                     | 1.59 | 5.00                       | -3.41         |
| 22      | 462.7250           | 32.0                     | 1.59 | 5.00                       | -3.41         |

- Notes: 1) Negative sign in the margin column shows the value below limits.  
2) Channel 1 - 7 are the shared channels for GMRS and FRS, data shown above is for GMRS. FRS data of Channel 1-7 are same as Channel 8-14.  
3) FRS channels meet the power requirement of 0.5W ERP.

Verdict: Pass

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 4**

### **MODULATION CHARACTERISTICS**

## INTERTEK TESTING SERVICES

---

### 4.0 **Modulation Characteristics (Section 2.1047(a)(b), 95.637(a))**

In order to satisfy the 95.637(a) and 2.1047(b) requirements, Modulation Frequency Response and Modulation Limiting Characteristics are attached in Exhibit 4.1 & 4.2.

In order to satisfy the 2.1047(a) requirement, Audio Low Pass Filter Response is attached in Exhibit 4.3.

The modulation frequency response curve and modulation limiting characteristic curve are saving in following page.

The audio low pass frequency response curve is saving in following page.


## INTERTEK TESTING SERVICES

---

### 4.1 Modulation Frequency Response (Section 2.1047(a), 95.637(a))

#### Testing Procedure

- 1) Set-up the test equipment in the following configuration:

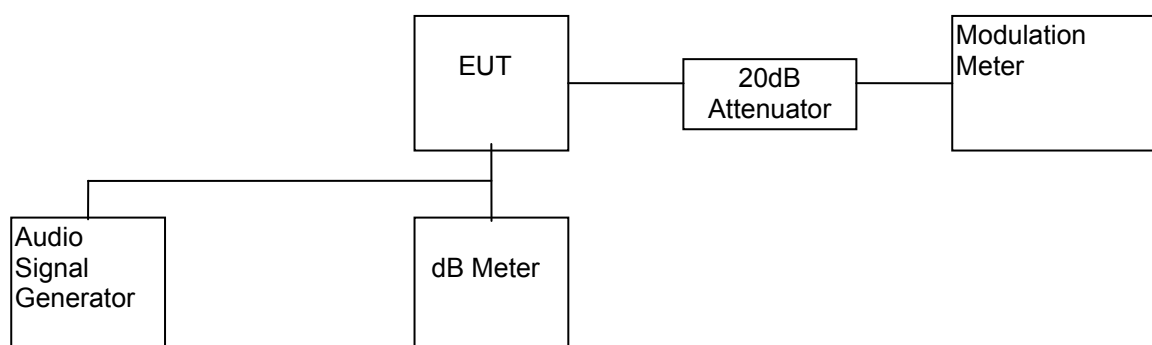

- 2) Set the audio signal generator frequency to the sound pressure level 127.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 100Hz to 5kHz.
- 4) Record the frequency deviation.
- 5) The peak frequency deviation must not exceed:

GMRS + FRS :  $\pm 2.5\text{kHz}$

- 6) Calculate the audio frequency response at each frequency as:

$$\text{response} = 20 \log_{10}(\text{DEV}_{\text{FREQ}} / \text{DEV}_{\text{REF}});$$

$\text{DEV}_{\text{REF}}$  = Frequency deviation at 1000Hz ;

$\text{DEV}_{\text{FREQ}}$  = Frequency deviation at 100 - 5000Hz ;

- 7) From the plot, audio frequency response rolls off before 2.750kHz.

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

Table 2

Uniden America Corporation  
SX377-2CKHS

#### Modulation Frequency Response

Test Channel : 4  
Input level = 137dBSPL


| Modulation Frequency(Hz) | Frequency Deviation(kHz) | Audio Frequency Response (dB) |
|--------------------------|--------------------------|-------------------------------|
| 100                      | 0.757                    | -7.54                         |
| 200                      | 2.017                    | 0.97                          |
| 300                      | 2.060                    | 1.15                          |
| 400                      | 1.827                    | 0.11                          |
| 500                      | 2.116                    | 1.39                          |
| 600                      | 1.887                    | 0.39                          |
| 700                      | 1.973                    | 0.78                          |
| 800                      | 1.976                    | 0.79                          |
| 900                      | 1.903                    | 0.46                          |
| 1000                     | 1.804                    | 0.00                          |
| 1250                     | 2.083                    | 1.25                          |
| 1500                     | 2.050                    | 1.11                          |
| 1750                     | 2.020                    | 0.98                          |
| 2000                     | 1.957                    | 0.71                          |
| 2250                     | 1.953                    | 0.69                          |
| 2500                     | 1.864                    | 0.28                          |
| 2750                     | 1.880                    | 0.36                          |
| 3000                     | 1.727                    | -0.38                         |
| 3125                     | 1.301                    | -2.84                         |
| 3250                     | 0.124                    | -23.26                        |
| 3500                     | 0.083                    | -26.74                        |
| 4000                     | 0.039                    | -33.30                        |
| 5000                     | 0.038                    | -33.53                        |

Verdict: Pass

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

INTERTEK TESTING SERVICES

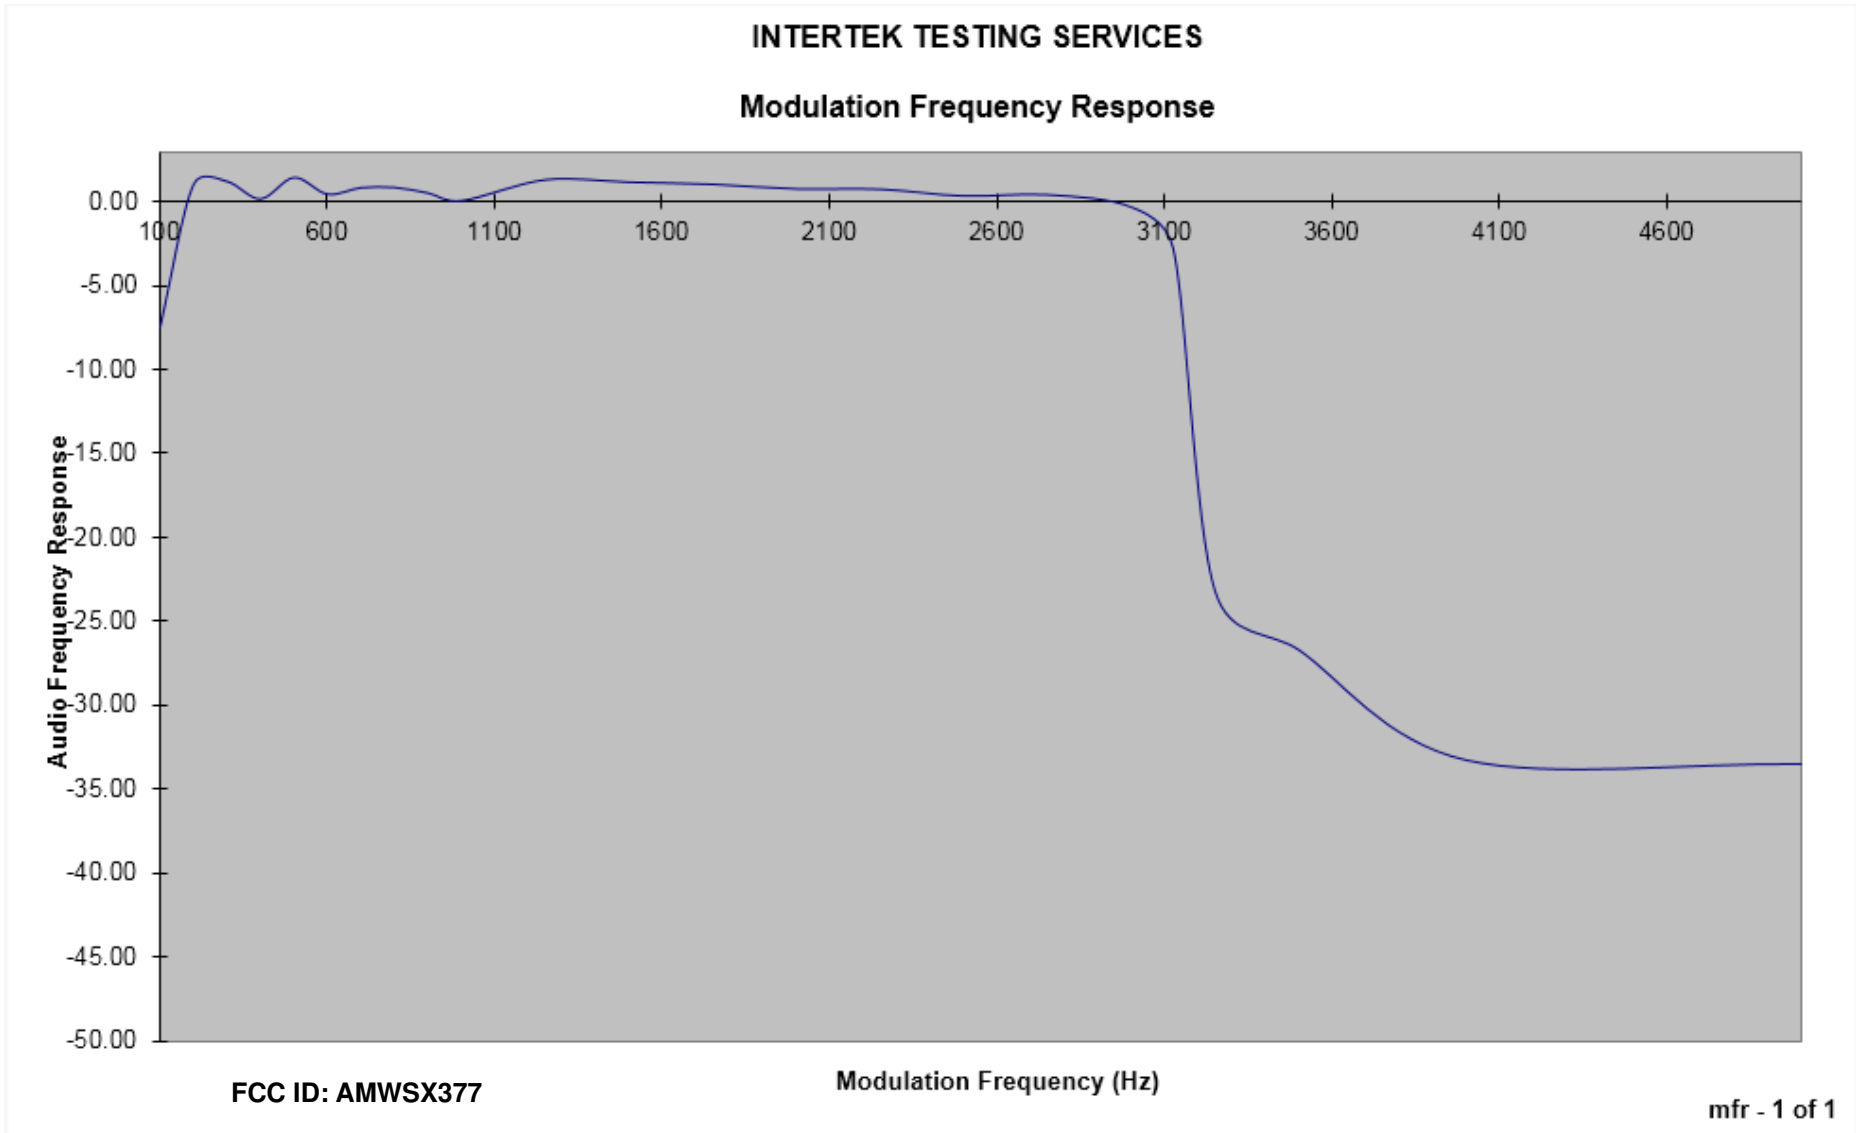


## INTERTEK TESTING SERVICES

---

### 4.2 Modulation Limiting Characteristics (Section 2.1047(b), 95.637(a))

#### Testing Procedure

- 1) Set-up the test equipment in the following configuration:

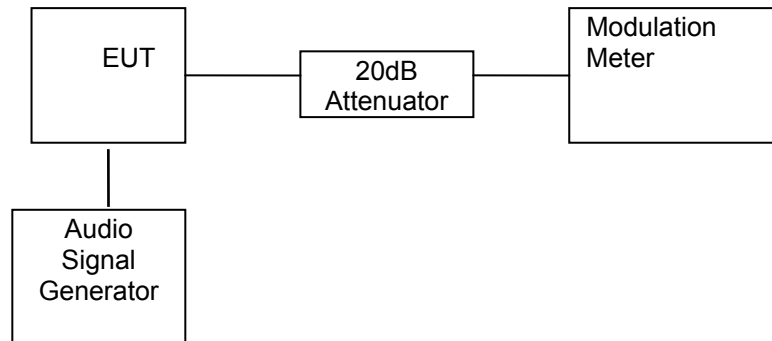

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dBSPL to 137dBSPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.
- 5) The peak frequency deviation must not exceed:

GMRS + FRS :  $\pm 2.5\text{kHz}$

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

**Table 3**

**Uniden America Corporation  
SX377-2CKHS**

### **Modulation Limiting Characteristics**

Test Channel : 4

| Modulation<br>Input<br>(dB SPL) | Peak Frequency<br>Deviation (kHz) at<br>500Hz | Peak Frequency<br>Deviation (kHz) at<br>1000Hz | Peak Frequency<br>Deviation (kHz)<br>at 2500Hz | Peak Frequency<br>Deviation (kHz) at<br>3125Hz |
|---------------------------------|-----------------------------------------------|------------------------------------------------|------------------------------------------------|------------------------------------------------|
| 47                              | 0.031                                         | 0.030                                          | 0.061                                          | 0.031                                          |
| 57                              | 0.029                                         | 0.040                                          | 0.107                                          | 0.051                                          |
| 67                              | 0.030                                         | 0.080                                          | 0.803                                          | 0.135                                          |
| 77                              | 0.030                                         | 0.404                                          | 1.919                                          | 0.675                                          |
| 87                              | 0.065                                         | 1.259                                          | 1.902                                          | 1.370                                          |
| 97                              | 0.502                                         | 1.904                                          | 1.902                                          | 1.342                                          |
| 107                             | 1.202                                         | 1.904                                          | 1.898                                          | 1.349                                          |
| 117                             | 2.224                                         | 1.814                                          | 1.886                                          | 1.335                                          |
| 127                             | 2.134                                         | 1.813                                          | 1.876                                          | 1.334                                          |
| 137                             | 2.116                                         | 1.804                                          | 1.864                                          | 1.301                                          |


Verdict: Pass

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

## INTERTEK TESTING SERVICES

### INTERTEK TESTING SERVICES Modulation Limiting Characteristic

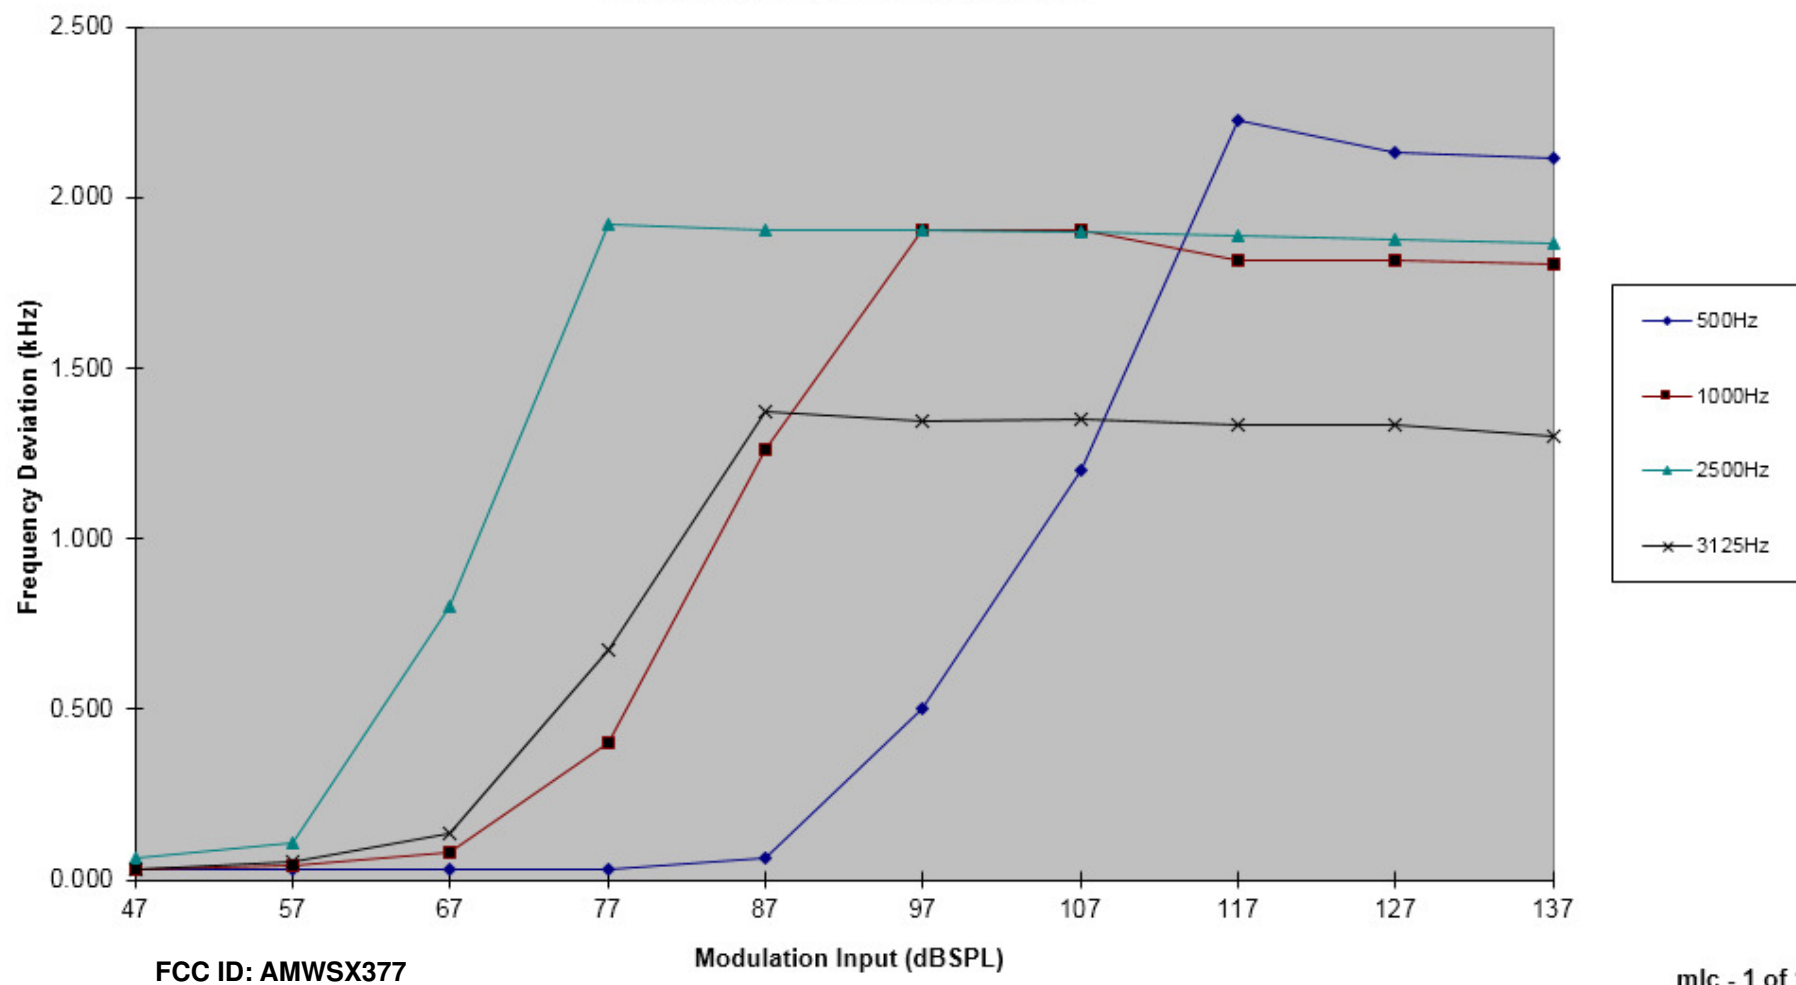

## INTERTEK TESTING SERVICES

---

### 4.3 Audio Low Pass Filter Response (Section 2.1047(a), 95.637(b))

#### Testing Procedure

- 1) Connect the audio signal generator to the input of the post limiter low pass filter and the dB meter to the output of the post limiter low pass filter.
- 2) Apply a 1000 Hz tone from the audio signal generator and adjust the level per manufacturer's specifications. Record the dB level of the 1000 Hz tone as  $LEV_{REF}$ .
- 3) Set the audio signal generator to the desired test frequency between 3000 Hz and the upper low pass filter limit. Record the dB level at the test frequency as  $LEV_{FREQ}$ .
- 4) Calculate the audio frequency response at the test frequency as:

$$\text{low pass filter response} = LEV_{FREQ} - LEV_{REF}$$

- 5) Repeat the above procedure for all the desired test frequencies.

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

**Table 4**

**Uniden America Corporation  
SX377-2CKHS**

#### **Low-Pass Filter Response**

Test Channel : 4

Audio Input Strength = 2000mVrms

| Frequency (kHz) | dB relative to 1 kHz | Part 95.637(b) |
|-----------------|----------------------|----------------|
| 1               | 0.0                  | 0.0            |
| 3               | -10.0                | 0.0            |
| 4               | -26.0                | -7.5           |
| 5               | -49.0                | -13.3          |
| 6               | -55.0                | -18.1          |
| 8               | -55.0                | -25.6          |
| 10              | -55.0                | -31.4          |
| 15              | -55.0                | -41.9          |
| 20              | -55.0                | -50.0          |
| 30              | -55.0                | -50.0          |
| 40              | -55.0                | -50.0          |
| 50              | -55.0                | -50.0          |
| 60              | -55.0                | -50.0          |
| 70              | -55.0                | -50.0          |
| 80              | -55.0                | -50.0          |
| 90              | -55.0                | -50.0          |
| 100             | -55.0                | -50.0          |

Audio Output at 1kHz: 10.0dBV

Verdict: Pass


Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

# INTERTEK TESTING SERVICES

## INTERTEK TESTING SERVICES

### Audio Low Pass Filter Response

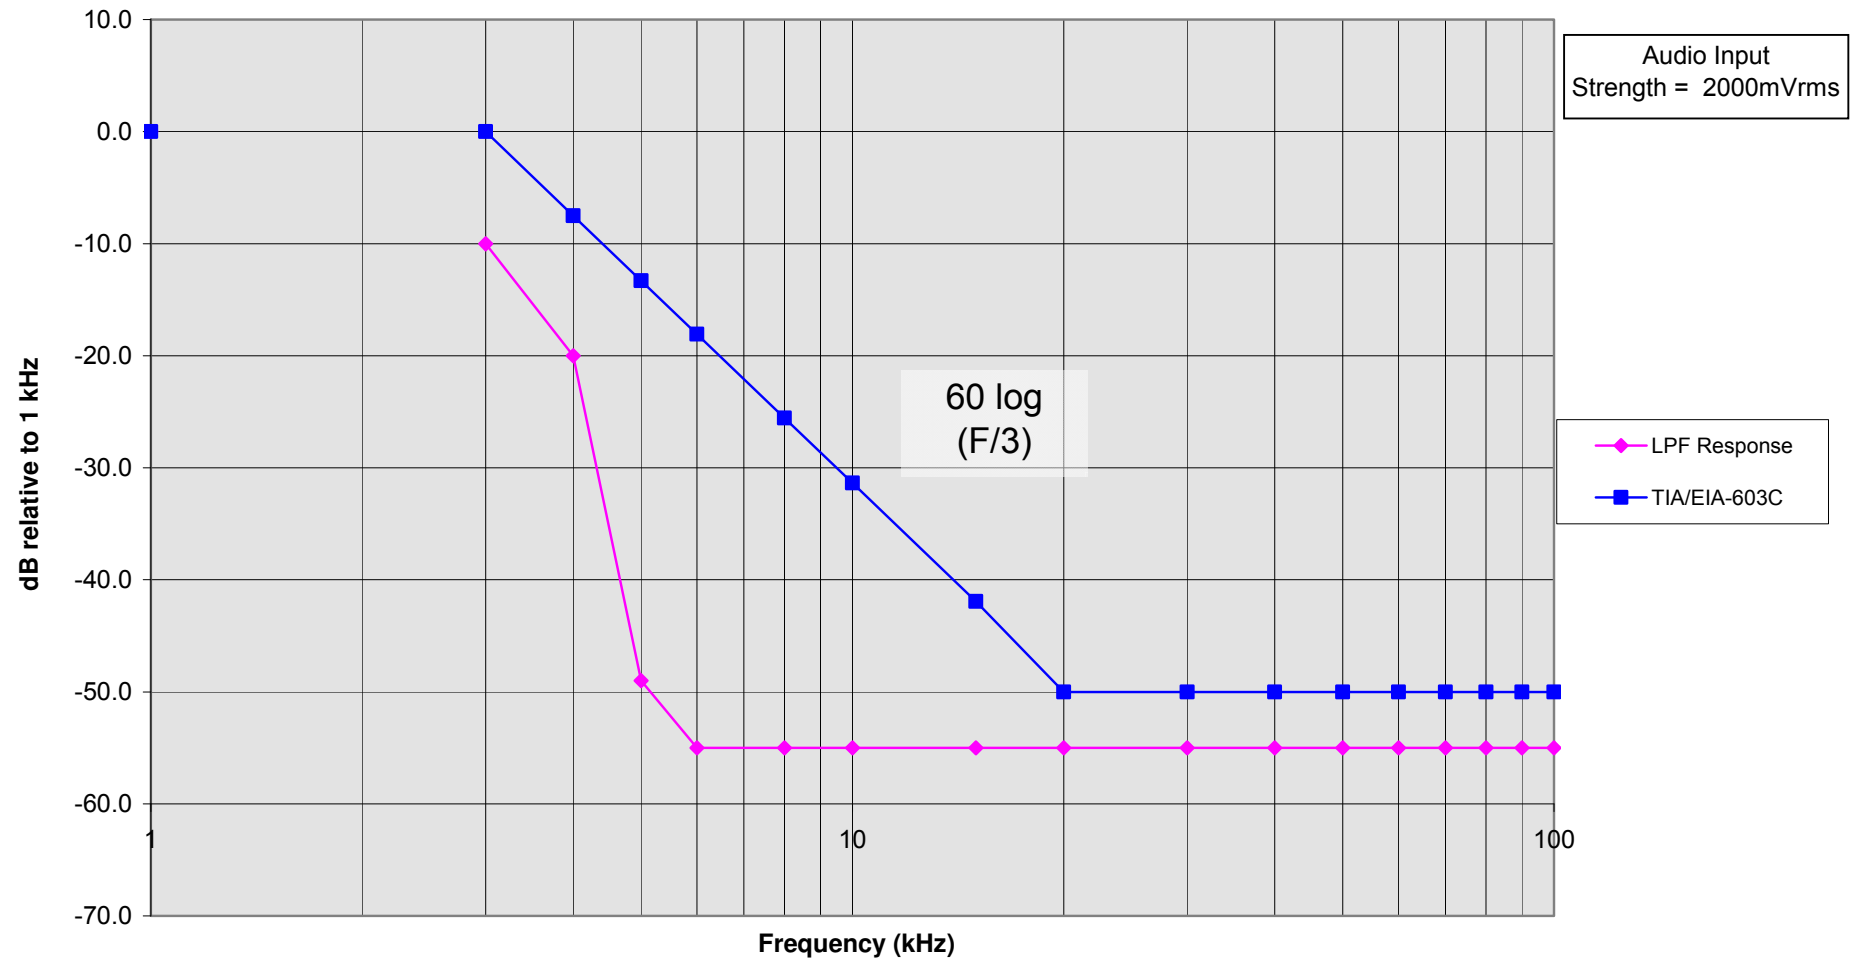

FCC ID: AMWSX377

lpf - 1 of 1

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 5**

### **OCCUPIED BANDWIDTH**


## INTERTEK TESTING SERVICES

---

### 5.0 Occupied Bandwidth (Section 2.1049, 95.633(c))

#### Testing Procedure

- 1) Set-up the test equipment in the following configuration:

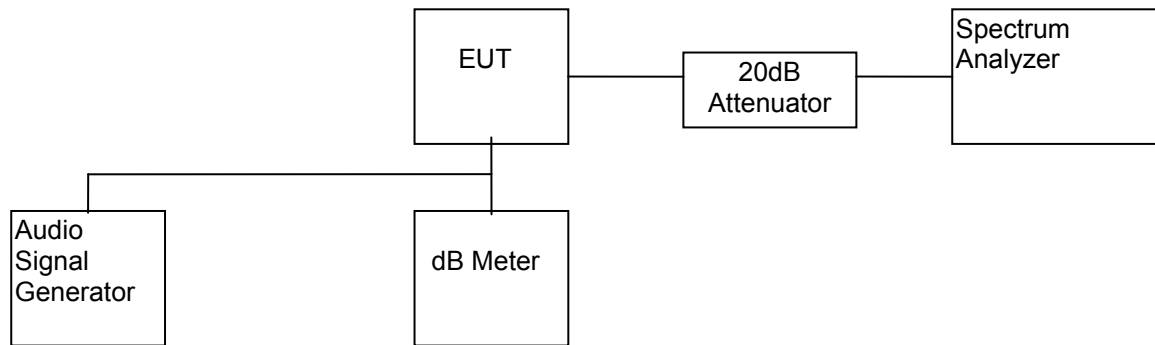

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 2kHz/div scan and 10dB/div.

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

**Table 5**

**Uniden America Corporation  
SX377-2CKHS**

| <b>System</b> | <b>Channel</b> | <b>Measured<br/>Bandwidth (kHz)</b> | <b>Limit (kHz)</b> |
|---------------|----------------|-------------------------------------|--------------------|
| GMRS          | 4              | 5.56                                | $\leq 20$          |
| FRS           | 11             | 5.52                                | $\leq 12.5$        |

Verdict: Pass

The bandwidth plot is saving in following page.


Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017


# INTERTEK TESTING SERVICES

## Occupied Bandwidth Plots

### Plot CH4

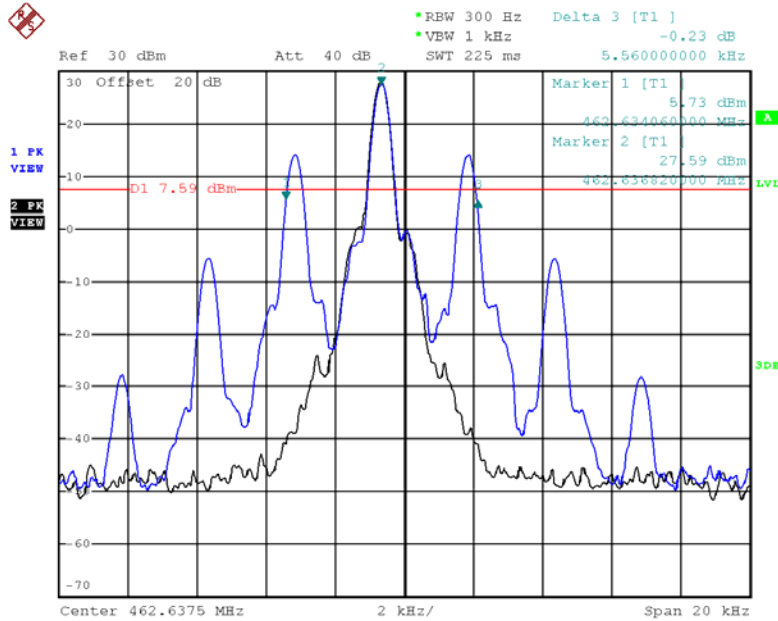

### Plot CH11

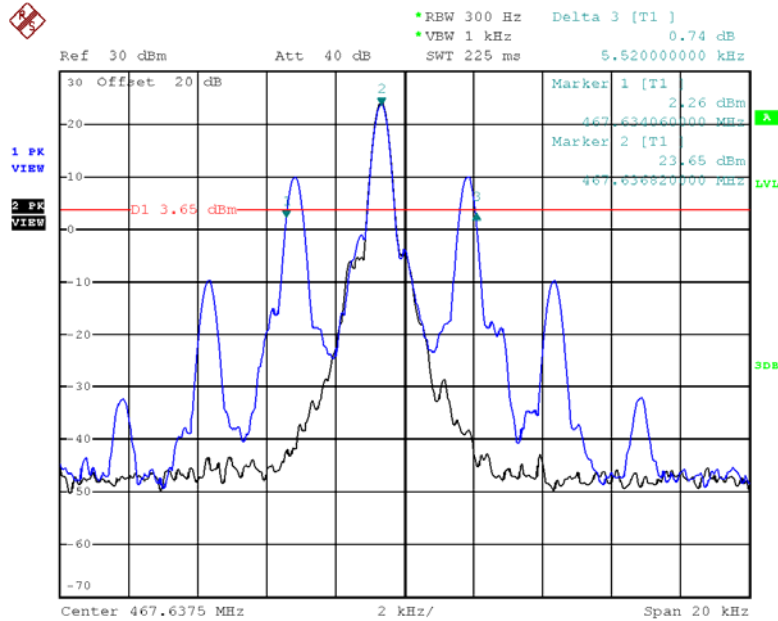

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 6**

### **SPURIOUS EMISSION**

## INTERTEK TESTING SERVICES

---

### 6.0 **Spurious Emission**

In order to satisfy the 95.635(b) requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

## INTERTEK TESTING SERVICES

---

### 6.1 **Power of Spurious Radiation (Section 2.1053, 95.635(b))**

#### **Testing Procedure**

Radiated emission measurements were performed according to the procedures in ANSI/TIA-603-C-2004. All measurements were performed at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

#### Uniden America Corporation SX377-2CKHS

**Table 6(a)**


1) Unwanted emission from CARRIER  $\pm 6.25\text{kHz}$  to CARRIER  $\pm 31.25\text{kHz}$

| Region                                                | Unwanted emission |            |
|-------------------------------------------------------|-------------------|------------|
|                                                       | Channel 4         | Channel 11 |
| CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$  | <25dB             | <25dB      |
| CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$ | <35dB             | <35dB      |


# INTERTEK TESTING SERVICES

## Spurious Emission Plots

Plot CH4

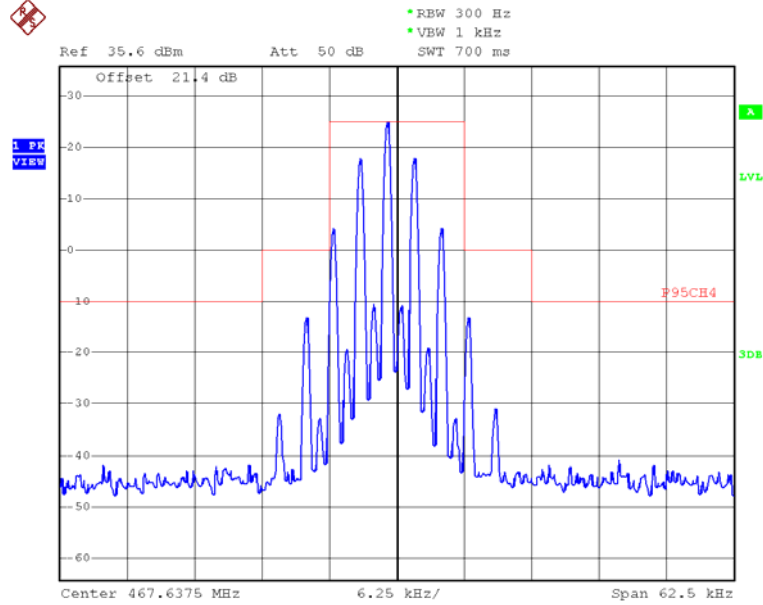

Plot CH11

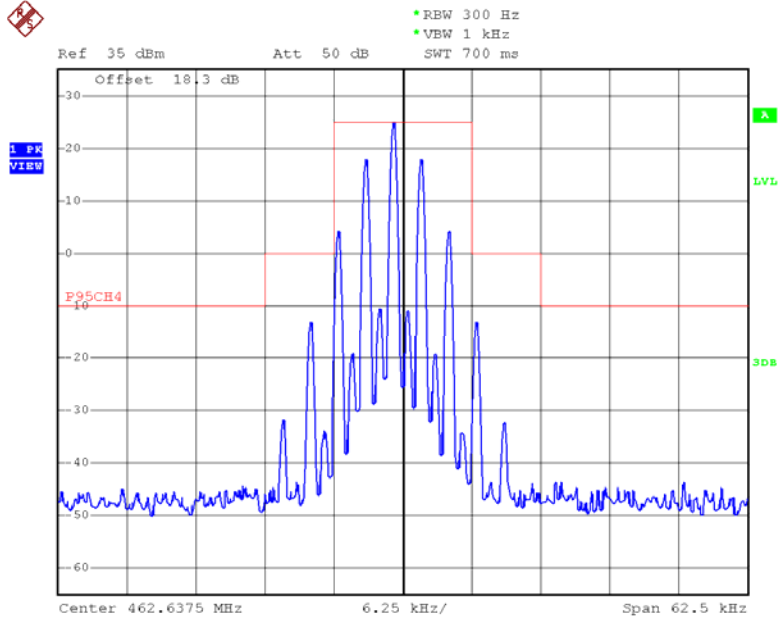

---

## INTERTEK TESTING SERVICES

---

**Table 6(b): Channel 4**

| Frequency<br>(MHz) | Effective<br>Radiated<br>Power<br>(dBm) | Transmission<br>Power<br>(dBm) | Attenuation<br>(dBc) | Limit<br>(dBc) | Margin<br>(dB) |
|--------------------|-----------------------------------------|--------------------------------|----------------------|----------------|----------------|
| 925.275            | -29.1                                   | 32.0                           | 61.1                 | 45.0           | -16.1          |
| 1387.912           | -49.4                                   | 32.0                           | 81.5                 | 45.0           | -36.4          |
| 1850.550           | -36.0                                   | 32.0                           | 68.1                 | 45.0           | -23.0          |
| 2313.187           | -42.0                                   | 32.0                           | 74.1                 | 45.0           | -29.0          |
| 2775.825           | -41.9                                   | 32.0                           | 74.0                 | 45.0           | -28.9          |
| 3238.462           | -30.6                                   | 32.0                           | 62.7                 | 45.0           | -17.6          |
| 3701.100           | -49.4                                   | 32.0                           | 81.5                 | 45.0           | -36.4          |
| 4163.737           | -47.7                                   | 32.0                           | 79.8                 | 45.0           | -34.7          |
| 4626.375           | -37.8                                   | 32.0                           | 69.9                 | 45.0           | -24.8          |

- Remark: 1. Transmission power is 32.0 dBm or 2.0 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least  $43 + 10 \log_{10} (TP)$  dB or 45.0 dB.
3. The test is performed according to ANSI/TIA-603-C-2004.
4. For emission <1000MHz, RBW = 100kHz, VBW >=RBW  
For emission >1000MHz, RBW = 1MHz, VBW >=RBW

Verdict: Pass

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

---

## INTERTEK TESTING SERVICES

---

**Table 6(c): Channel 11**

| Frequency<br>(MHz) | Effective<br>Radiated<br>Power<br>(dBm) | Transmission<br>Power<br>(dBm) | Attenuation<br>(dBc) | Limit<br>(dB) | Margin<br>(dB) |
|--------------------|-----------------------------------------|--------------------------------|----------------------|---------------|----------------|
| 935.275            | -34.0                                   | 26.5                           | 60.5                 | 39.5          | -21.0          |
| 1402.912           | -53.3                                   | 26.5                           | 79.9                 | 39.5          | -40.3          |
| 1870.550           | -36.0                                   | 26.5                           | 62.6                 | 39.5          | -23.0          |
| 2338.187           | -41.3                                   | 26.5                           | 67.9                 | 39.5          | -28.3          |
| 2805.825           | -47.4                                   | 26.5                           | 74.0                 | 39.5          | -34.4          |
| 3273.462           | -45.3                                   | 26.5                           | 71.9                 | 39.5          | -32.3          |
| 3741.100           | -52.6                                   | 26.5                           | 79.2                 | 39.5          | -39.6          |
| 4208.737           | -46.6                                   | 26.5                           | 73.2                 | 39.5          | -33.6          |
| 4676.375           | -50.6                                   | 26.5                           | 77.2                 | 39.5          | -37.6          |

- Remark: 1. Transmission power is 26.5 dBm or -3.5 dB(W).
2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least  $43 + 10 \log_{10} (TP)$  dB or 39.5 dB.
3. The test is performed according to ANSI/TIA-603-C-2004.
4. For emission <1000MHz, RBW = 100kHz, VBW >=RBW  
For emission >1000MHz, RBW = 1MHz, VBW >=RBW

Verdict: Pass

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

## INTERTEK TESTING SERVICES

---

### 6.2 Field Strength of Radiation Emission and AC line Conducted Emission (Section 15.109 & 15.107)

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation and data tables of the emissions are included.

## INTERTEK TESTING SERVICES

---

### A. Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

## INTERTEK TESTING SERVICES

---

### A. Field Strength Calculation (cont'd)

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

### **B. Radiated Emission Data - Weather Band Receiver**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 15.8 dB margin

## INTERTEK TESTING SERVICES

Company: Uniden America Corporation  
Model: SX377-2CKHS  
Mode: Weather Band Receiver

Date of Test: March 01, 2017

Table 6(d)

### Radiated Emissions

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|-------------|
| V            | 233.500         | 22.8                 | 16           | 19.0                | 25.8                     | 46.0                       | -20.2       |
| V            | 467.000         | 18.5                 | 16           | 26.0                | 28.5                     | 46.0                       | -17.5       |
| V            | 700.500         | 12.9                 | 16           | 30.0                | 26.9                     | 46.0                       | -19.1       |
| V            | 934.000         | 13.2                 | 16           | 33.0                | 30.2                     | 46.0                       | -15.8       |
| V            | 1401.000        | 39.3                 | 33           | 26.1                | 32.4                     | 54.0                       | -21.6       |
| V            | 1868.000        | 41.0                 | 33           | 27.2                | 35.2                     | 54.0                       | -18.8       |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.

Test Engineer: Koo Wai Ip

## INTERTEK TESTING SERVICES

---

### C. AC Line Conducted Emission Data

Judgement:


GMRS/ FRS/ Tx: Passed by 15.04 dB margin

Weather band receiver: Passed by 18.75 dB margin

The conducted emission test result is saving in the following page.

INTERTEK TESTING SERVICES

Mode: Charging

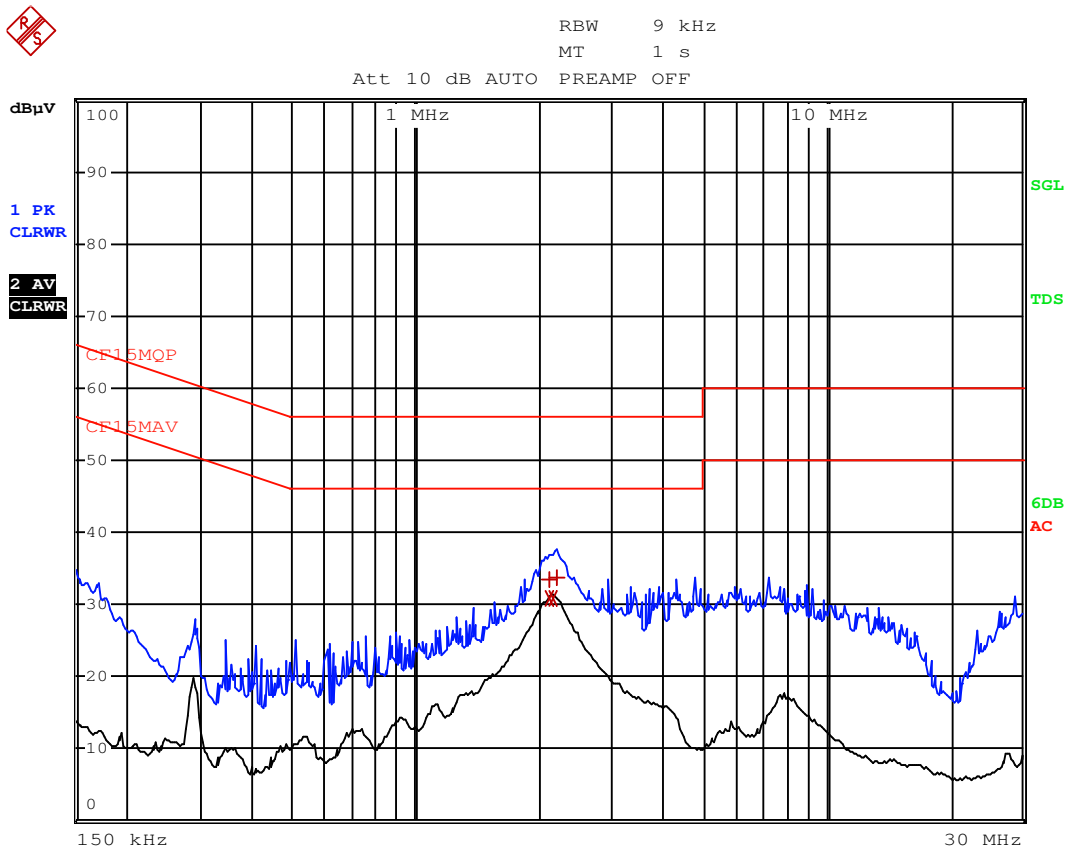

# INTERTEK TESTING SERVICES

Mode: Charging

| EDIT PEAK LIST (Final Measurement Results) |            |            |    |                |
|--------------------------------------------|------------|------------|----|----------------|
| Trace1:                                    | CF15MQP    |            |    |                |
| Trace2:                                    | CF15MAV    |            |    |                |
| Trace3:                                    | ---        |            |    |                |
| TRACE                                      | FREQUENCY  | LEVEL dBµV |    | DELTA LIMIT dB |
| 1 Quasi Peak                               | 2.121 MHz  | 33.58      | N  | -22.41         |
| 2 CISPR Average                            | 2.121 MHz  | 30.95      | L1 | -15.04         |
| 2 CISPR Average                            | 2.1615 MHz | 30.93      | L1 | -15.06         |
| 1 Quasi Peak                               | 2.1975 MHz | 33.81      | N  | -22.18         |


# INTERTEK TESTING SERVICES

Mode: Weather Band Receiver



RBW 9 kHz  
MT 1 s

Att 10 dB AUTO PREAMP OFF

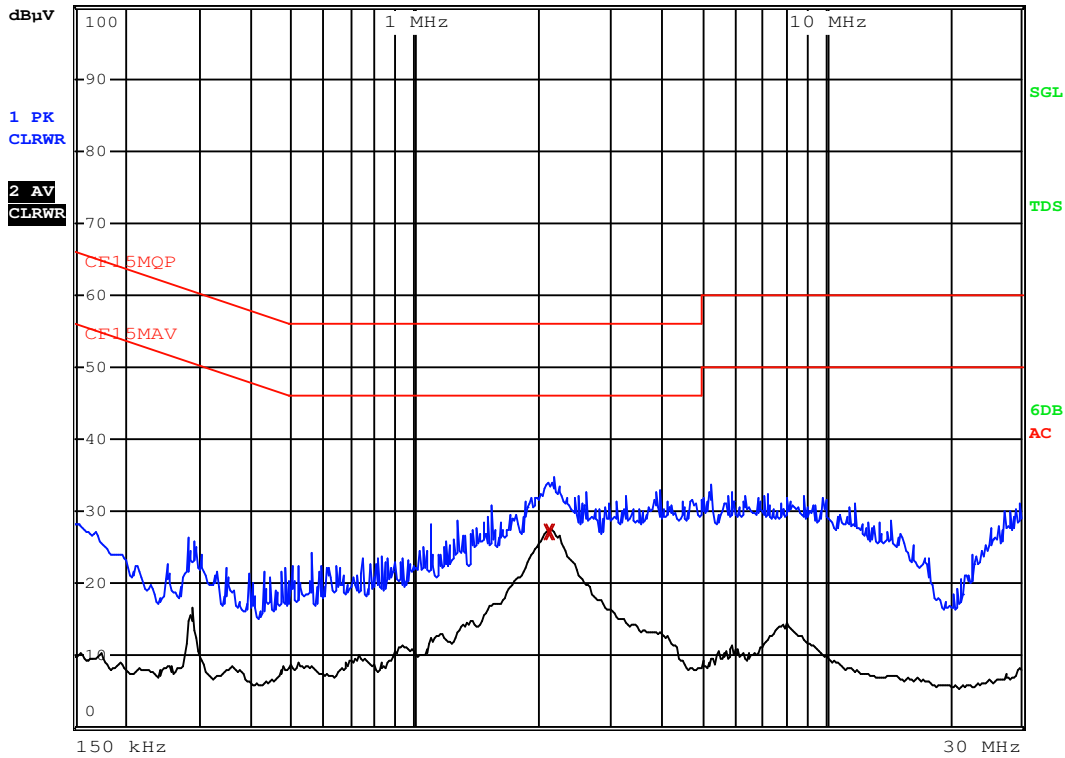

# INTERTEK TESTING SERVICES

Mode: Weather Band Receiver

| EDIT PEAK LIST (Final Measurement Results) |            |            |  |                |
|--------------------------------------------|------------|------------|--|----------------|
| Trace1:                                    | CF15MQP    |            |  |                |
| Trace2:                                    | CF15MAV    |            |  |                |
| Trace3:                                    | ---        |            |  |                |
| TRACE                                      | FREQUENCY  | LEVEL dBμV |  | DELTA LIMIT dB |
| 2 CISPR Average                            | 2.1075 MHz | 27.23 L1   |  | -18.76         |
| 2 CISPR Average                            | 2.148 MHz  | 27.24 L1   |  | -18.75         |

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 7**

### **FREQUENCY STABILITY**

## INTERTEK TESTING SERVICES

---

### 7.0 **Frequency Stability (Section 2.1055(a)(b)(d), 95.626(b) for FRS, 95.621(b) for GMRS)**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.


## INTERTEK TESTING SERVICES

---

### 7.1 Frequency Tolerance (Section 95.626(b) for FRS, 95.621(b) for GMRS)

#### Testing Procedure

- 1) Set-up the test equipment in the following configuration:



- 2) Measure all transmit channel frequencies in MHz.

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

**Table 7**

**Uniden America Corporation  
SX377-2CKHS**

**Frequency Tolerance**

| Channel | Frequency (MHz) | Measured Frequency (MHz) | Frequency Tolerance (%) |
|---------|-----------------|--------------------------|-------------------------|
| 1       | 462.5625        | 462.56231                | -0.000041               |
| 2       | 462.5875        | 462.58728                | -0.000048               |
| 3       | 462.6125        | 462.61227                | -0.000050               |
| 4       | 462.6375        | 462.63726                | -0.000052               |
| 5       | 462.6625        | 462.66226                | -0.000052               |
| 6       | 462.6875        | 462.68725                | -0.000054               |
| 7       | 462.7125        | 462.71223                | -0.000058               |
| 8       | 467.5625        | 467.56222                | -0.000060               |
| 9       | 467.5875        | 467.58732                | -0.000038               |
| 10      | 467.6125        | 467.61221                | -0.000062               |
| 11      | 467.6375        | 467.63725                | -0.000053               |
| 12      | 467.6625        | 467.66223                | -0.000058               |
| 13      | 467.6875        | 467.68724                | -0.000056               |
| 14      | 467.7125        | 467.71223                | -0.000058               |
| 15      | 462.5500        | 462.54972                | -0.000061               |
| 16      | 462.5750        | 462.57472                | -0.000061               |
| 17      | 462.6000        | 462.59974                | -0.000056               |
| 18      | 462.6250        | 462.62471                | -0.000063               |
| 19      | 462.6500        | 462.64971                | -0.000063               |
| 20      | 462.6750        | 462.67470                | -0.000065               |
| 21      | 462.7000        | 462.69970                | -0.000065               |
| 22      | 462.7250        | 462.72469                | -0.000067               |

FCC Limit for FRS (95.626(b)):  $\leq \pm 0.00025\%$

FCC Limit for GMRS (95.621(b)):  $\leq \pm 0.0005\%$

Verdict: Passed

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

## INTERTEK TESTING SERVICES


---

### 7.2 Frequency Stability - Temperature (Section 2.1055(a)(b), 95.626(b) for FRS, 95.621(b) for GMRS)

#### Testing Procedure

- 1) Set-up the test equipment in the following configuration:

Temperature Chamber

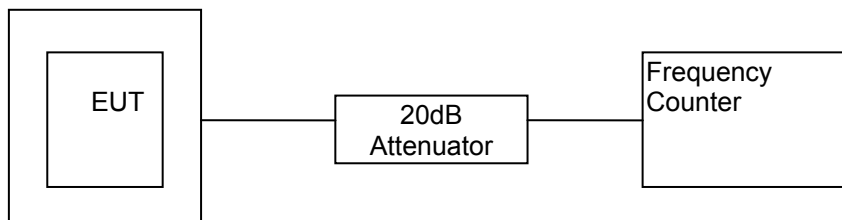

- 2) Set the Temperature Chamber to 20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4 in MHz.
- 4) Turn the EUT OFF.
- 5) Repeat the above procedure from -30°C to 50°C with 10°C increment for GMRS.
- 6) Repeat the above procedure from -20°C to 50°C with 10°C increment for FRS.

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

Table 8(a)

Uniden America Corporation  
SX377-2CKHS

#### Frequency Tolerance with Temperature Variation

Channel : 4

| Temperature<br>(°C) | Frequency<br>(MHz) | Measured<br>Frequency<br>(MHz) | Frequency<br>Deviation<br>(%) | Frequency<br>Tolerance<br>w.r.t +20°C (ppm) |
|---------------------|--------------------|--------------------------------|-------------------------------|---------------------------------------------|
| -30                 | 462.63750          | 462.63738                      | -0.000026                     | #0.3                                        |
| -20                 | 462.63750          | 462.63760                      | 0.000022                      | 0.7                                         |
| -10                 | 462.63750          | 462.63814                      | 0.000138                      | 1.9                                         |
| 0                   | 462.63750          | 462.63805                      | 0.000119                      | 1.7                                         |
| 10                  | 462.63750          | 462.63808                      | 0.000125                      | 1.8                                         |
| 20                  | 462.63750          | 462.63726                      | -0.000052                     | 0.0                                         |
| 30                  | 462.63750          | 462.63741                      | -0.000019                     | 0.3                                         |
| 40                  | 462.63750          | 462.63774                      | 0.000052                      | 1.0                                         |
| 50                  | 462.63750          | 462.63773                      | 0.000050                      | 1.0                                         |

Remark: 1) For GMRS, frequency tolerance must be maintained within a frequency tolerance of 0.0005%.  
2) #Data is for GMRS compliance, not for FRS.

Verdict: Passed

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017


## INTERTEK TESTING SERVICES

---

### 7.3 Frequency Stability - Voltage (Section 2.1055(d), 95.626(b) for FRS, 95.621(b) for GMRS)

#### Testing Procedure

- 1) Set-up the test equipment in the following configuration:

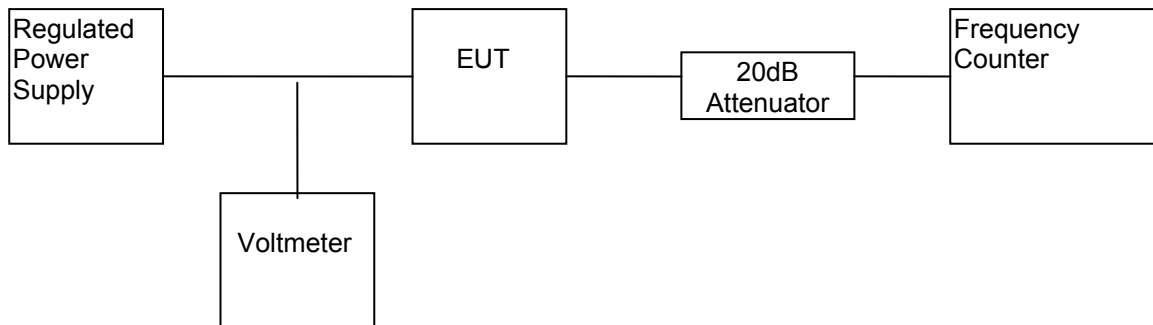

- 2) Vary the level of regulated power supply to the manufacturer specified battery end point of the EUT.
- 3) Measure the channel frequency of channel 4 in MHz.

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

**Table 9**

**Uniden America Corporation  
SX377-2CKHS**

#### **Frequency Deviation with Voltage Variation**

The manufacturer specified battery end point 3.1V

| Channel | Frequency<br>(MHz) | Measured<br>Frequency (MHz) | Tolerance<br>(%) |
|---------|--------------------|-----------------------------|------------------|
| 4       | 462.63750          | 462.63711                   | -0.000084        |

Remark: 1) For FRS, frequency tolerance must be maintained within a frequency tolerance of 0.00025%.  
2) For GMRS mobile station, frequency tolerance must be maintained within a frequency tolerance of 0.0005%.  
3) The test voltage is from primary supply voltage to 3.1V

Test Engineer: Koo Wai Ip

Date of Test: March 01, 2017

---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 8**

### **EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

### 8.0 Equipment List

#### 1) Radiated Emissions Test

|                      |                   |                      |                   |
|----------------------|-------------------|----------------------|-------------------|
| Equipment            | Biconical Antenna | Log Periodic Antenna | EMI Test Receiver |
| Registration No.     | EW-0571           | EW-0447              | EW-3156           |
| Manufacturer         | EMCO              | EMCO                 | ROHDESCHWARZ      |
| Model No.            | 3104C             | 3146                 | ESR26             |
| Calibration Date     | May 18, 2016      | May 18, 2016         | Dec. 06, 2016     |
| Calibration Due Date | Nov. 18, 2017     | Nov. 18, 2017        | Dec. 06, 2017     |

|                      |                   |                   |
|----------------------|-------------------|-------------------|
| Equipment            | Spectrum Analyzer | BiConiLog Antenna |
| Registration No.     | EW-2253           | EW-3061           |
| Manufacturer         | R&S               | EMCO              |
| Model No.            | FSP40             | 3142E             |
| Calibration Date     | Jun. 15, 2016     | Sep. 23, 2016     |
| Calibration Due Date | Jun. 15, 2017     | Sep. 23, 2017     |

#### 2) Conducted Emissions Test

|                      |                   |               |               |
|----------------------|-------------------|---------------|---------------|
| Equipment            | EMI Test Receiver | LISN          | Pulse Limiter |
| Registration No.     | EW-2666           | EW-0192       | EW-3248       |
| Manufacturer         | R&S               | R&S           | R&S           |
| Model No.            | ESCI7             | ESH3-Z5       | ESH3-Z2       |
| Calibration Date     | Jun. 17, 2016     | Aug. 26, 2016 | Oct. 12, 2016 |
| Calibration Due Date | Jun. 17, 2017     | Aug. 26, 2017 | Oct. 12, 2017 |

#### 3) Modulation Characteristics

|                      |                               |                                |
|----------------------|-------------------------------|--------------------------------|
| Equipment            | Communication Service Monitor | Temperature & Humidity Chamber |
| Registration No.     | EW-1775                       | EW-2134                        |
| Manufacturer         | R&S                           | GIANT FORCE                    |
| Model No.            | CMS54                         | GTH-750-40-CP-SD               |
| Calibration Date     | Nov. 18, 2016                 | Sep. 26, 2016                  |
| Calibration Due Date | Nov. 18, 2017                 | Sep. 4, 2017                   |