

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 adapter card
Brand Name	Intel® Wi-Fi 6 AX203
Model Name	AX203D2W
FCC ID	PD9AX203D2
Date of Test Start/End	2022-06-26 / 2022-09-07
Features	802.11ax, Dual Band, 2x2 Wi-Fi + Bluetooth® 5.1 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E (see section 1)
---------------------	---

Test Report identification	210209-01.TR46
Revision Control	Rev. 01 This test report revision replaces any previous test report revision (see section 0)

The test results relate only to the samples tested.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by _____ Reviewed by _____

Cedric REQUIN
(Test Engineer Lead)

Ines KHARRAT
(Technical Officer)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	5
6. Remarks and comments	6
7. Test Verdicts summary	6
7.1. 802.11 A/N/AC/AX – U-NII- 4	6
8. Document Revision History	6
A.1 MEASUREMENT SYSTEM	7
A.2 TEST EQUIPMENT LIST	9
A.3 MEASUREMENT UNCERTAINTY EVALUATION	11
B.1 TEST CONDITIONS	12
B.2 TEST RESULTS TABLES	13
B.2.1 6dB & 99% BANDWIDTH	13
B.2.2 MAXIMUM OUTPUT POWER & MAXIMUM POWER SPECTRAL DENSITY	15
B.2.3 UNDESIRABLE EMISSION LIMITS : OUT OF BAND (CONDUCTED)	21
B.2.4 RADIATED SPURIOUS EMISSION	22
B.3 TEST RESULT SCREENSHOTS	39
B.3.1 6dB BANDWIDTH	39
B.3.2 99% BANDWIDTH	43
B.3.3 MAXIMUM OUTPUT POWER	47
B.3.4 MAXIMUM POWER SPECTRAL DENSITY (PSD)	51
B.3.5 UNDESIRABLE EMISSION LIMITS : OUT OF BAND (CONDUCTED)	55
B.3.6 UNDESIRABLE EMISSION LIMITS : OUT OF BAND PEAK (CONDUCTED)	65
C.1 TEST SETUP	73
C.2 TEST SAMPLE	75

1. Standards, reference documents and applicable test methods

FCC	1.	FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2021-05-03 online Edition
	2.	FCC Title 47 CFR part 15 – Subpart C – §15.209 Radiated emission limits; general requirements. 2020-10-01 Edition
	3.	FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
	4.	FCC OET KDB 789033 D02 v02r01 - Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) devices part 15, subpart E
	5.	ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
	6.	FCC OET KDB 291074 D01 v01 - General Requirements
	7.	FCC OET KDB 291074 D02 v01 - EMC Measurement
	8.	FCC OET KDB 291074 D03 v01 - QA General Questions and Answers
	9.	FCC OET KDB 291074 D04 v01 – UN5GHz Checklist v01

2. General conditions, competences and guarantees

- ✓ Tests performed under FCC standards identified in section 1 are covered by A2LA accreditation.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	23.2°C ± 1.9°C
Humidity	40.1% ± 16.0%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#01	200928-02.S02	WiFi 6 Module	AX203D2W	WFM:90CCDF735F82	2020-10-22	Used for 1-18 GHz Radiation Spurious Emission tests
	200928-02.S11	Adaptor	HrP M2 Adaptor JnP 1216	6961919-172	2020-10-27	
	180000-01.S05	Socket	Adapter 1216SD to M.2	-	2017-08-09	
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	220225-03.S23	Extender	ADEXELEC	-	2022-03-14	
	170000-01.S13	Laptop	Latitude 5470	FT6LMC2	2017-05-30	
	200611-03.S24	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
	200611-03.S25	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
#02	200928-02.S02	WiFi 6 Module	AX203D2W	WFM:90CCDF735F82	2020-10-22	Used for 30MHz-1 GHz and 18 GHz-40 GHz Radiation Spurious Emission tests
	200928-03.S01	Adaptor	HrP M2 Adaptor JnP 1216	6961919-280	2022-06-16	
	180001-01.S21	Socket	WsP/ThP /GfP/HrP	-	2021-06-07	
	220225-03.S07	Microwave Absorber	Eccosorb BSR-1	-	2022-03-14	
	200611-03.S31	Extender	ADEXELEC	-	2020-08-19	
	200504-04.S07	Laptop	Latitude 5401	BVHLK13	2020-06-02	
	200611-03.S22	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
	200611-03.S23	Antenna 6-7 GHz	WRF-BR-PIFA-V3.2	-	2020-07-20	
#03	200928-02.S06	WiFi Module	AX203D2W	90CCDF6D03B2	2020-10-22	RF Conducted
	210903-02.S53	Laptop	Latitude E5450	J71V562	2021-10-06	
	180717-03.S16	Extender	EXTENDER QNJ A1	6510818-183	2018-08-21	

5. EUT Features

The herein information is provided by the customer.

Intel WRF Lab declines any responsibility for the accuracy of the stated customer provided information, especially if it has any impact on the correctness of test results presented in this report.

Brand Name	Intel® Wi-Fi 6 AX203		
Model Name	AX203D2W		
Software Version	DRTU_02227_99.0.73		
Driver Version	99.0.73.4		
Prototype / Production	Production		
Supported Radios	802.11b/g/n/ax	2.4 GHz (2400.0 – 2483.5 MHz)	
	802.11a/n/ac/ax	5.2 GHz (5150.0 – 5350.0 MHz)	
		5.6 GHz (5470.0 – 5725.0 MHz)	
		5.8 GHz (5725.0 – 5895.0 MHz)	
	Bluetooth 5.1	2.4 GHz (2400.0 – 2483.5 MHz)	
Antenna Information	Transmitter	Chain 1 (A) / Aux	Chain 2 (B) / Main
	Manufacturer	Intel	Intel
	Antenna type	PIFA antenna	PIFA antenna
	Part number	WRF-BR-PIFA-V3.2	WRF-BR-PIFA-V3.2
	Declared antenna gain (dBi)	+5	+5

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report
2. Only the worst-case plot per 802.11 mode and test case measurements have been reported excepted for band edge measurements where all plots are reported.

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII- 4

FCC part	Test name	Verdict
15.407 (a) (3)	Maximum output power	P
14.407 (e)	6dB Emission Bandwidth	P
15.407 (a) (3)	Power spectral density	P
15.407 (b) (5)	Undesirable emissions limits: out of band (conducted)	P
15.407 (b) (3) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

8. Document Revision History


Revision #	Modified by	Revision Details
Rev. 00	K.Khatib, V.Kaculini	First Issue
Rev. 01	K.Khatib, V.Kaculini	Update radiated spurious emission test results with WRF-BR-PIFA-V3.2 antenna Added conducted band-edge emissions peak measurements plots in section B.3.6

Annex A. Test & System Description

A.1 Measurement System


Measurements were performed using the following setups, made in accordance to the general provisions of ANSI C63.10 2013.

The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

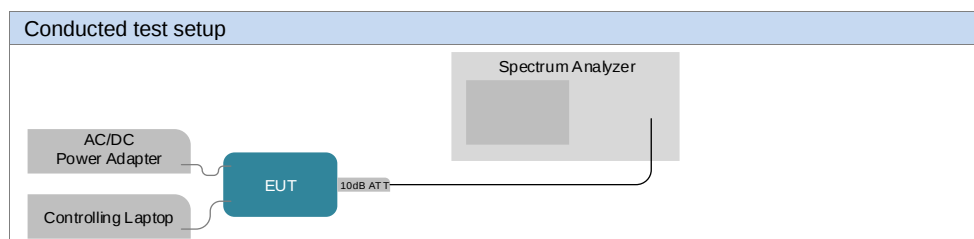


Radiated test setup


Radiated Setup 30 MHz - 1 GHz

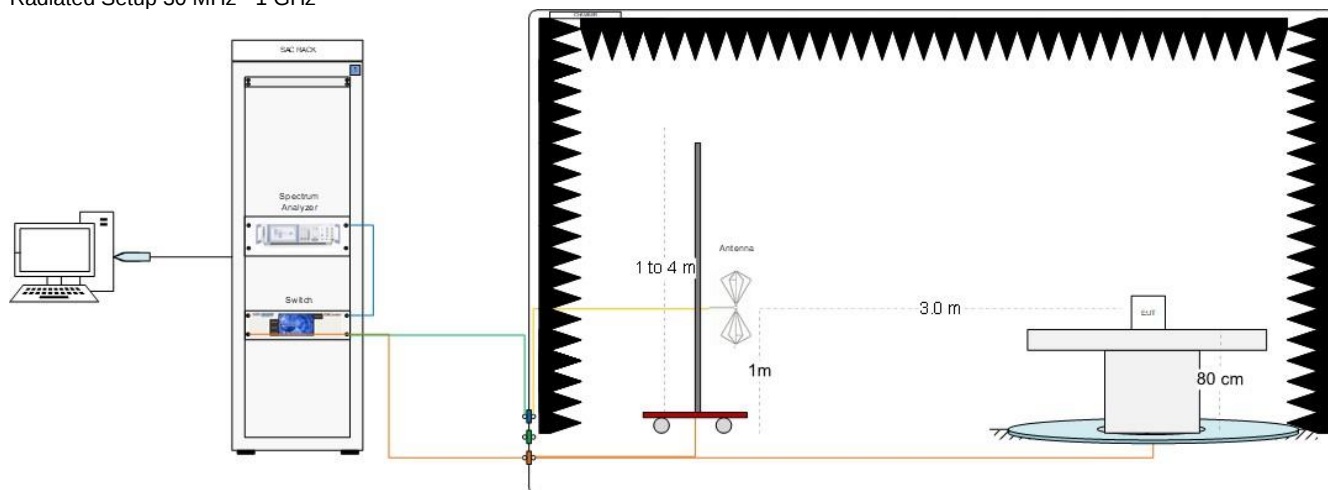


Radiated Setup 1 GHz – 9.5 GHz

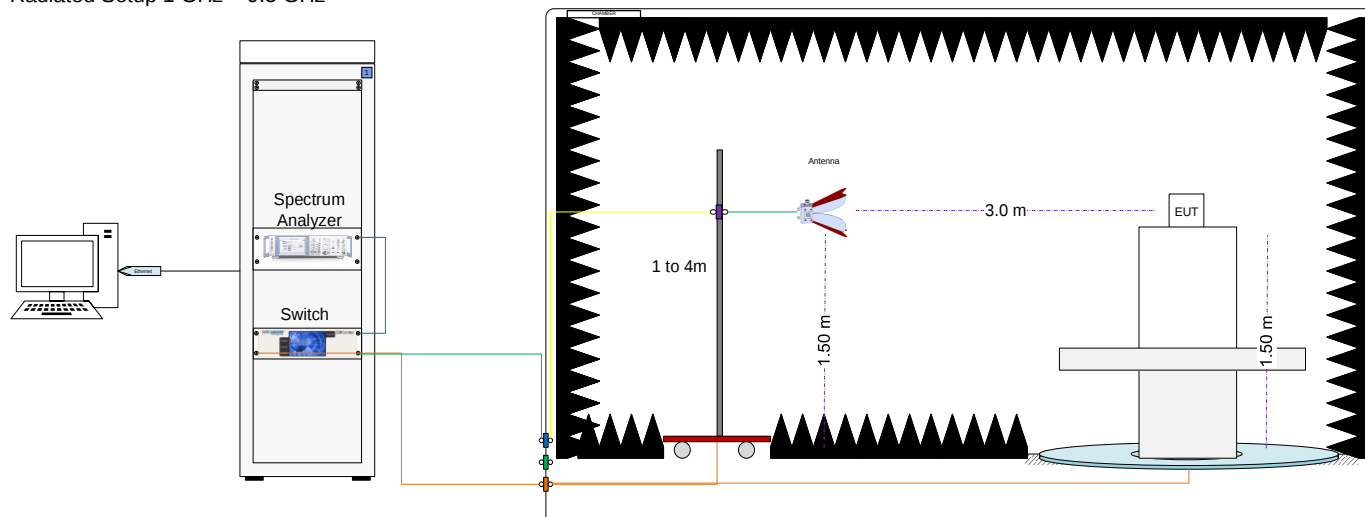

Radiated Setup 9.5 GHz - 18 GHz

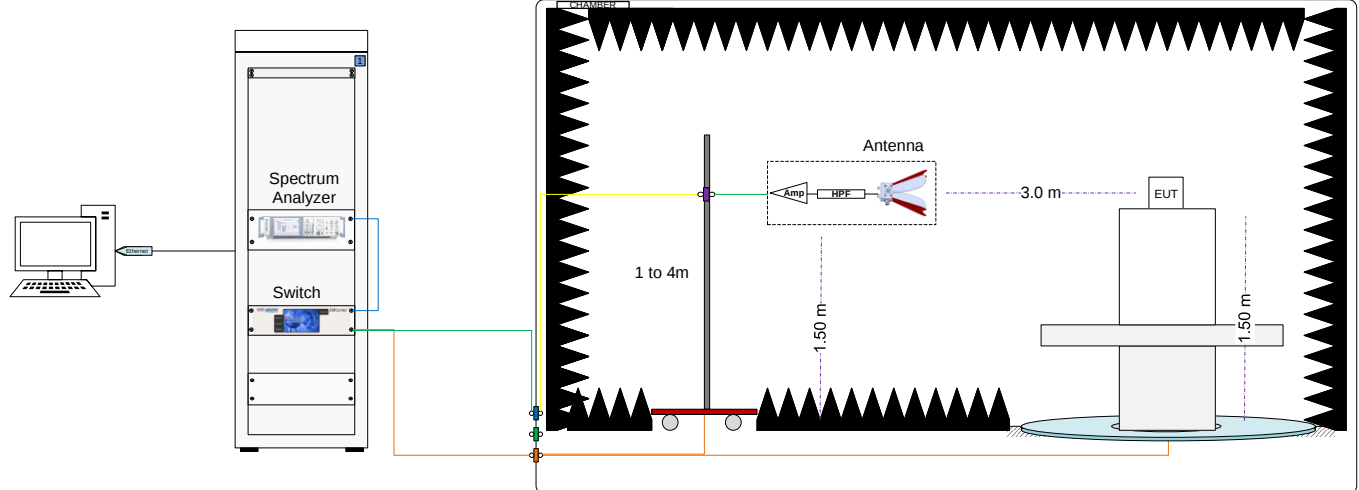

Radiated Setup 18 GHz – 40 GHz

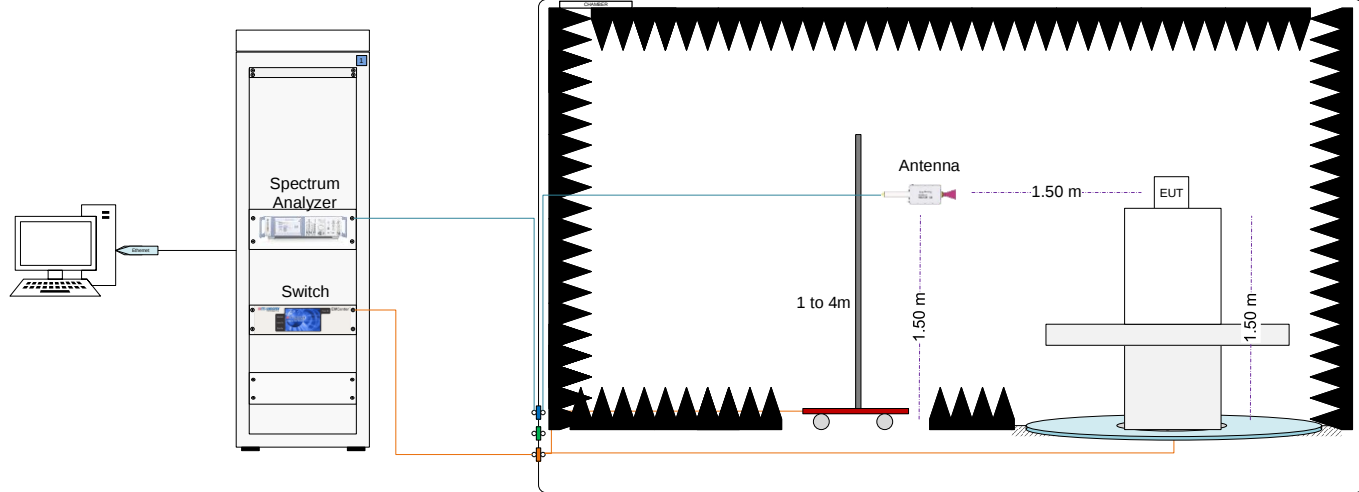

Sample Calculation

The spurious received voltage $V(\text{dB}\mu\text{V})$ in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F(\text{dB/m}) = \text{Rx Antenna Factor}(\text{dB/m}) + \text{Cable losses}(\text{dB}) - \text{Amplifiers Gain}(\text{dBi})$$

$$E(\text{dB}\mu\text{V/m}) = V(\text{dB}\mu\text{V}) + F(\text{dB/m})$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in $\text{dB}\mu\text{V/m}$

E_{Meas} is the field strength of the emission at the measurement distance, in $\text{dB}\mu\text{V/m}$

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
265-000	Spectrum Analyzer	FSV30	101318	Rohde & Schwarz	2022-06-22	2024-06-22
019-000	RF cable 100cm	PE360-100CM	N/A	PASTERNAK	2022-02-04	2022-09-04
019-002	10dB Attenuator + MH4	N/A	N/A	N/A	2022-02-04	2022-09-04
322-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B89702	AVTECH	2021-09-02	2023-09-02
413-000	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
006-000	Anechoic chamber	FACT 3	5720	ETS Lindgren	2022-01-12	2024-01-12
006-001	Turntable	-	-	ETS Lindgren	N/A	N/A
006-008	Measurement Software v11.30.00	EMC32	100623	Rohde & Schwarz	N/A	N/A
147-000	Spectrum analyzer	FSW43	101847	Rohde & Schwarz	2020-11-02	2022-11-02
006-002	Switch & Positioning	EMC center	00159757	ETS Lindgren	N/A	N/A
006-011	Boresight antenna mast	BAM4.0-P	P/278/2890.01	Maturo	N/A	N/A
006-019	Biconical antenna 30 MHz – 1 GHz	UBAA9115 + BBVU9135 + DGA9552N	0286 + CH 9044	Schwarzbeck	2022-02-01	2024-02-01
056-000	Horn Antenna 3117 + Amplifier + HPF6	3117	00157736 + 00157993	ETS-Lindgren	2022-04-25	2024-04-25
007-008	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2021-08-05	2023-08-05
059-000	Double ridged horn antenna	3117-PA	00201542	ETS-Lindgren	2021-08-05	2023-08-05
006-059	RF Cable 7.0m	R286304174	20.46.369	Radiall	2022-09-05	2023-03-05
006-051	RF Cable 1.0m	CBL-1.5M-SMSM+	202879	Mini-Circuits	2022-09-05	2023-03-05
006-030	RF Cable 1.2m	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	2022-09-05	2023-03-05
006-034	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utilflex	2022-09-05	2023-03-05
026-018	RF Cable 1.2m	0500990991200KE	18.23.179	Radiall	2022-09-05	2023-03-05
006-039	RF Cable 2.5m	0500990992500KE	19.23.395	Radiall	2022-09-05	2023-03-05
365-000	Temperature & Humidity logger	RA12E-TH1-RAS	00-80-A3-E1-6E-55	Avtech	2021-03-08	2023-03-08

N/A: Not Applicable

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
007-000	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2021-09-14	2023-09-14
007-002	Turntable	-	-	ETS Lindgren	N/A	N/A
007-003	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
007-006	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
007-005	Measurement SW, V11.20.00	EMC32	100401	Rohde & Schwarz	N/A	N/A
127-000	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2021-01-15	2023-01-15
007-007	Double Ridge Horn (1-18GHz)	3117	00152266	ETS Lindgren	2022-03-29	2024-03-29
066-000	Horn Antenna 3117 + Amplifier + HPF9	3117	00169546 ID 264-000 + SN 1	ETS-Lindgren	2022-07-14	2024-07-14
007-008	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2021-08-05	2023-08-05
059-000	Double ridged horn antenna	3117-PA	00201542	ETS-Lindgren	2021-08-05	2023-08-05
007-022*	RF Cable 1-18GHz, 1.5m	0501050991200GX	19.23.493	Radiall	2022-09-05	2023-03-05
007-020*	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	2022-09-05	2023-03-05
007-011*	RF Cable 1-18GHz – 6.5m	140-8500-11-51	001	Spectrum	2022-09-05	2023-03-05
007-015*	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	2022-09-05	2023-03-05
007-014*	RF Cable 18-40 GHz 6m	R286304009	1747364	Radiall	2022-09-05	2023-03-05
007-023*	RF Cable 1m DC-40GHz	PE360-100CM	-	Pasternack	2022-09-05	2023-03-05
007-018*	RF Cable 1-9.5GHz 1.2m	0500990991200KE	-	Radiall	2022-09-05	2023-03-05
325-000	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9B7C6	Avtech	2022-01-17	2024-01-17

N/A: Not Applicable

*The equipment was not used during out of calibration period

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
412-000	DRTU Power finder V2.0	-	-	Intel	NA	NA
139-000	Power Sensor	NRP-Z81	104383	Rohde & Schwarz	2021-04-07	2023-04-07
140-000	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2022-03-25	2024-03-25

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Conducted Spurious Emission <7 GHz	± 1.67	dB
Radiated tests <1GHz	± 6.24	dB
Radiated tests 1GHz – 40 GHz	± 6.04	dB

Annex B. Test Results U-NII-4

The herein test results were performed by:

Test case measurement	Test Personnel
6dB and 99% Bandwidth	V.Kaculini
Maximum output power & Maximum PSD	V.Kaculini
Undesirable emission limits: out of band	V.Kaculini
Radiated spurious emissions	K.Khatib, R.Simonini, F.Merzaki

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax20 (20 MHz channel bandwidth), 802.11n40 and 802.11ax40 (40MHz channel bandwidth) 802.11ac80 & 802.11ax80 (80MHz channel bandwidth), modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
	802.11ax	20/40/80	HE0
MIMO	802.11n	20/40	HT8
	802.11ac	80	VHT0
	802.11ax	20/40/80	HE0

B.2 Test Results Tables

B.2.1 6dB & 99% Bandwidth

Test limits

FCC part	Limits
15.407 (e)	For equipment operating in the band 5725-5895 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 6dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO A	169	5845	15.13	16.60
			173	5865	14.96	16.68
			177	5885	15.09	16.72
		SISO B	169	5845	14.99	16.60
			173	5865	15.08	16.64
			177	5885	15.05	16.64
802.11n20	HT0	SISO A	169	5845	15.08	17.72
			173	5865	15.00	17.76
			177	5885	14.40	17.80
		SISO B	169	5845	15.05	17.68
			173	5865	14.41	17.72
			177	5885	14.99	17.80
	HT8	MIMO A	169	5845	15.31	17.76
			173	5865	13.81	17.68
			177	5885	13.86	17.68
		MIMO B	169	5845	15.71	17.72
			173	5865	16.25	17.72
			177	5885	15.64	17.72
802.11n40	HT0	SISO A	167	5835	35.07	36.48
			175	5875	32.90	36.16
		SISO B	167	5835	32.62	36.40
			175	5875	35.00	36.00
	HT8	MIMO A	167	5835	35.10	36.16
			175	5875	33.84	36.16
		MIMO B	167	5835	35.05	36.08
			175	5875	35.01	36.00
802.11ac80	VHT0	SISO A	171	5855	63.92	75.04
		SISO B			71.40	75.04
		MIMO A			72.68	75.04
		MIMO B			73.88	75.04

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	6dB BW [MHz]	99% BW [MHz]
802.11ax20	HE0	SISO A	169	5845	16.22	18.92
			173	5865	13.83	18.88
			177	5885	17.35	18.96
		SISO B	169	5845	15.97	18.88
			173	5865	16.55	18.92
			177	5885	17.30	18.88
		MIMO A	169	5845	17.30	18.92
			173	5865	13.88	18.92
			177	5885	17.19	18.88
		MIMO B	169	5845	15.95	18.84
			173	5865	15.69	18.88
			177	5885	14.35	18.92
802.11ax40	HE0	SISO A	167	5835	33.83	37.84
			175	5875	34.23	37.60
		SISO B	167	5835	34.18	37.76
			175	5875	35.07	37.60
		MIMO A	167	5835	35.29	37.60
			175	5875	35.40	37.60
		MIMO B	167	5835	33.86	37.52
			175	5875	32.54	37.60
802.11ax80	HE0	SISO A	171	5855	73.84	76.80
		SISO B			70.20	76.64
		MIMO A			75.08	76.64
		MIMO B			75.08	76.96

Max Value

See Section B.3.1, B.3.2 for the screenshot results.

B.2.2 Maximum output power & Maximum power spectral Density

Test limits

FCC part	Limits
15.407 (a) (3) (iii)	For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.
15.407 (a) (12)	Power spectral density measurement: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. Measurements in the 5.725-5.895 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method over the entire 99% occupied bandwidth according to section E) 2) d) (Method SA-2) of KDB 789033

The maximum power spectral density (PSD) was measured using the method according to section F) of KDB 789033.

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

Results tables

Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	97.4
		SISO B	97.4
802.11n20	HT0	SISO A	98.7
		SISO B	98.7
	HT8	MIMO A	98.7
		MIMO B	98.7
802.11ax20	HE0	SISO A	98.7
		SISO B	98.7
		MIMO A	98.7
		MIMO B	98.7
802.11n40	HT0	SISO A	98.7
		SISO B	98.7
	HT8	MIMO A	98.7
		MIMO B	98.7
802.11ax40	HE0	SISO A	98.9
		SISO B	98.9
		MIMO A	98.7
		MIMO B	98.7
802.11ac80	VHT0	SISO A	98.7
		SISO B	98.7
		MIMO A	98.6
		MIMO B	98.6
802.11ax80	HE0	SISO A	98.7
		SISO B	98.7
		MIMO A	98.7
		MIMO B	98.7

Maximum output power – U-NII-4 Channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Output Power [mW]
802.11a	6Mbps	169	5845	SISO A	19.24	19.33	24.33	85.75
				SISO B	19.24	19.33	24.33	85.75
		173	5865	SISO A	19.19	19.28	24.28	84.77
				SISO B	19.10	19.19	24.19	83.03
		177	5885	SISO A	19.18	19.27	24.27	84.57
				SISO B	19.15	19.24	24.24	83.99
802.11n20	HT0	169	5845	SISO A	19.36	19.36	24.36	86.30
				SISO B	19.48	19.48	24.48	88.72
		173	5865	SISO A	19.65	19.65	24.65	92.26
				SISO B	19.22	19.22	24.22	83.56
		177	5885	SISO A	19.35	19.35	24.35	86.10
				SISO B	19.50	19.50	24.50	89.13
	HT8	169	5845	MIMO A	16.27	16.27	21.27	42.36
				MIMO B	16.55	16.55	21.55	45.19
				Combined A+B	19.42	19.42	24.42	87.55
		173	5865	MIMO A	16.34	16.34	21.34	43.05
				MIMO B	16.48	16.48	21.48	44.46
				Combined A+B	19.42	19.42	24.42	87.52
		177	5885	MIMO A	16.34	16.34	21.34	43.05
				MIMO B	16.33	16.33	21.33	42.95
				Combined A+B	19.35	19.35	24.35	86.01
802.11n40	HT0	167	5835	SISO A	20.97	20.97	25.97	125.03
				SISO B	20.95	20.95	25.95	124.45
		175	5875	SISO A	19.88	19.88	24.88	97.27
				SISO B	20.01	20.01	25.01	100.23
	HT8	167	5835	MIMO A	19.78	19.78	24.78	95.06
				MIMO B	19.76	19.76	24.76	94.62
				Combined A+B	22.78	22.78	27.78	189.68
		175	5875	MIMO A	18.35	18.35	23.35	68.39
				MIMO B	19.03	19.03	24.03	79.98
				Combined A+B	21.71	21.71	26.71	148.37
802.11ac80	VHT0	171	5855	SISO A	19.49	19.49	24.49	88.92
				SISO B	19.38	19.38	24.38	86.70
				MIMO A	18.58	18.58	23.58	72.11
				MIMO B	18.56	18.56	23.56	71.78
				Combined A+B	21.58	21.58	26.58	143.89

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Ouput Power [dBm]	Avg Max* Conducted Ouput Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Ouput Power [mW]
802.11ax20	HE0	169	5845	SISO A	19.44	19.44	24.44	87.90
				SISO B	19.77	19.77	24.77	94.84
				MIMO A	16.44	16.44	21.44	44.06
				MIMO B	16.58	16.58	21.58	45.50
				Combined A+B	19.52	19.52	24.52	89.55
		173	5865	SISO A	19.46	19.46	24.46	88.31
				SISO B	19.61	19.61	24.61	91.41
				MIMO A	16.45	16.45	21.45	44.16
				MIMO B	16.49	16.49	21.49	44.57
				Combined A+B	19.48	19.48	24.48	88.72
		177	5885	SISO A	19.41	19.41	24.41	87.30
				SISO B	19.12	19.12	24.12	81.66
				MIMO A	16.32	16.32	21.32	42.85
				MIMO B	16.37	16.37	21.37	43.35
				Combined A+B	19.36	19.36	24.36	86.21
802.11ax40	HE0	167	5835	SISO A	20.94	20.94	25.94	124.17
				SISO B	21.01	21.01	26.01	126.18
				MIMO A	19.94	19.94	24.94	98.63
				MIMO B	20.04	20.04	25.04	100.93
				Combined A+B	23.00	23.00	28.00	199.55
		175	5875	SISO A	19.86	19.86	24.86	96.83
				SISO B	19.77	19.77	24.77	94.84
				MIMO A	18.38	18.38	23.38	68.87
				MIMO B	18.97	18.97	23.97	78.89
802.1ax80	HE0	171	5855	Combined A+B	21.70	21.70	26.70	147.75
				SISO A	19.54	19.54	24.54	89.95
				SISO B	19.32	19.32	24.32	85.51
				MIMO A	19.04	19.04	24.04	80.17
				MIMO B	18.46	18.46	23.46	70.15
				Combined A+B	21.77	21.77	26.77	150.31

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

See Section B.3.3 for the screenshot results

Maximum Power Spectral Density (PSD) – U-NII-4 channels

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/MHz]	EIRP PSD [dBm/MHz]
802.11a	6Mbps	169	5845	SISO A	5.43	5.52	8.53	13.53
				SISO B	5.45	5.54	8.55	13.55
		173	5865	SISO A	5.44	5.53	8.54	13.54
				SISO B	5.30	5.39	8.40	13.40
		177	5885	SISO A	5.35	5.44	8.45	13.45
				SISO B	5.34	5.43	8.44	13.44
802.11n20	HT0	169	5845	SISO A	5.46	5.46	8.47	13.47
				SISO B	5.49	5.49	8.50	13.50
		173	5865	SISO A	5.67	5.67	8.68	13.68
				SISO B	5.32	5.32	8.33	13.33
		177	5885	SISO A	5.40	5.40	8.41	13.41
				SISO B	5.57	5.57	8.58	13.58
	HT8	169	5845	MIMO A	2.33	2.33	5.34	10.34
				MIMO B	2.55	2.55	5.56	10.56
				Combined A+B	5.45	5.45	8.46	13.46
		173	5865	MIMO A	2.33	2.33	5.34	10.34
				MIMO B	2.46	2.46	5.47	10.47
				Combined A+B	5.41	5.41	8.42	13.42
		177	5885	MIMO A	2.33	2.33	5.34	10.34
				MIMO B	2.43	2.43	5.44	10.44
				Combined A+B	5.39	5.39	8.40	13.40
802.11n40	HT0	167	5835	SISO A	3.57	3.57	6.58	11.58
				SISO B	3.67	3.67	6.68	11.68
		175	5875	SISO A	2.54	2.54	5.55	10.55
				SISO B	2.65	2.65	5.66	10.66
	HT8	167	5835	MIMO A	2.42	2.42	5.43	10.43
				MIMO B	2.31	2.31	5.32	10.32
				Combined A+B	5.38	5.38	8.39	13.39
		175	5875	MIMO A	1.00	1.00	4.01	9.01
				MIMO B	1.68	1.68	4.69	9.69
				Combined A+B	4.36	4.36	7.37	12.37
802.11ac80	VHT0	171	5855	SISO A	-0.98	-0.98	2.03	7.03
				SISO B	-1.10	-1.10	1.91	6.91
				MIMO A	-1.86	-1.86	1.15	6.15
				MIMO B	-1.91	-1.91	1.10	6.10
				Combined A+B	1.13	1.13	4.14	9.14

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/500kHz]	Max.* conducted PSD [dBm/MHz]	EIRP PSD [dBm/MHz]
802.11ax20	HE0	169	5845	SISO A	5.25	5.25	8.26	13.26
				SISO B	5.59	5.59	8.60	13.60
				MIMO A	2.23	2.23	5.24	10.24
				MIMO B	2.40	2.40	5.41	10.41
				Combined A+B	5.33	5.33	8.34	13.34
		173	5865	SISO A	5.28	5.28	8.29	13.29
				SISO B	5.40	5.40	8.41	13.41
				MIMO A	2.25	2.25	5.26	10.26
				MIMO B	2.29	2.29	5.30	10.30
				Combined A+B	5.28	5.28	8.29	13.29
		177	5885	SISO A	5.23	5.23	8.24	13.24
				SISO B	4.99	4.99	8.00	13.00
				MIMO A	2.20	2.20	5.21	10.21
				MIMO B	2.28	2.28	5.29	10.29
				Combined A+B	5.25	5.25	8.26	13.26
802.11ax40	HE0	167	5835	SISO A	3.39	3.39	6.40	11.40
				SISO B	3.44	3.44	6.45	11.45
				MIMO A	2.37	2.37	5.38	10.38
				MIMO B	2.50	2.50	5.51	10.51
				Combined A+B	5.45	5.45	8.46	13.46
		175	5875	SISO A	2.32	2.32	5.33	10.33
				SISO B	2.21	2.21	5.22	10.22
				MIMO A	0.85	0.85	3.86	8.86
				MIMO B	1.34	1.34	4.35	9.35
				Combined A+B	4.11	4.11	7.12	12.12
802.1ax80	HE0	171	5855	SISO A	-1.07	-1.07	1.94	6.94
				SISO B	-1.16	-1.16	1.85	6.85
				MIMO A	-1.49	-1.49	1.52	6.52
				MIMO B	-2.08	-2.08	0.93	5.93
				Combined A+B	1.24	1.24	4.25	9.25

* Maximum values are the duty cycle compensated values calculated from the average (measured)

Max Value

Min Value

Note :PSD [dBm/500KHz] is the actual measurement done using RBW = 500KHz. To obtain the PSD [dBm/1MHz] a correction factor is applied: $10\log\left(\frac{1MHz}{500kHz}\right) = +3.01dB$

See Section B.3.4. for the screenshot results

B.2.3 Undesirable emission limits : out of band (Conducted)

Test limits

FCC part	Limits
15.407 (b) (4)	All emissions below 5.725 GHz shall not exceed an e.i.r.p of -27 dBm/MHz at 5.65GHz increasing linearly to 10dBm/MHz at 5.7 GHz, and from 5.7GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72GHz, and from 5.72 GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.
15.407 (b) (5) (ii)	All emissions at or above 5.895GHz shall not exceed an e.i.r.p of -5dBm/MHz and shall decrease linearly to an e.i.r.p of -27dBm/MHz at or above 5.925GHz.
15.35 (b)	Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

For lower OOB, Peak detector is used according to FCC OET KDB 789033 D02 v02r01.

For upper OOB, RMS detector is used according to FCC OET KDB 291074 D02 v01 - EMC Measurement.

Integration method as described in KDB Publication 789033.3.d)(ii) can be used in order to optimize the power. In this report, the integration method is applied in the band 5895 - 5896MHz and compared with interpolation limit of curve (-5.367dBm/MHz EIRP) at 5895.5MHz.

The RBW is set to 100KHz according to the integration method, the applicable limit is updated accordingly (Shifted by 10dB)

Band Edge measurements above 5895 MHz should also include Peak plots to show compliance with 15.35(b) where the peak emissions must be limited to no more than 20 dB above the average limit.

See Section B.3.5. and B.3.6. for the screenshot results.

B.2.4 Radiated spurious emission

Standard references

FCC part	Limits
15.407 (b) (5) (ii)	For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz: For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of −5 dBm/MHz and shall decrease linearly to an e.i.r.p. of −27 dBm/MHz at or above 5.925 GHz.
15.407 (b) (5) (iii)	For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of −27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.
15.209	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a):

Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions.

Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the chapter Annex B and using the low, middle and high channels.

Test Results

30 MHz – 1 GHz, Radiated spurious emissions

Radiated Spurious – All modes

Frequency	QuasiPeak	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	---
227.5	31.6	46.0	14.4	H
234.5	30.8	46.0	15.2	H

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

Radiated spurious – 1 GHz to 40 GHz

802.11a

802.11a, 6Mbps, Chain A

CH169

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1640.3	44.4	Peak	88.2	43.9	V
1640.3	32.4	RMS	68.2	35.8	V
11690.2	45.9	Average	54.0	8.1	V
11690.6	54.8	Peak	74.0	19.2	V
23379.7	41.4	RMS	68.2	26.8	V
23385.1	50.3	Peak	88.2	37.9	H

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9370.1	44.2	Average	54.0	9.8	H
9370.1	56.4	Peak	74.0	17.6	V
11722.3	53.7	Peak	74.0	20.3	H
11728.9	43.1	Average	54.0	10.8	V
23454.5	50.9	Peak	88.2	37.3	H
23458.9	41.0	RMS	68.2	27.2	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1680.9	33.1	Average	54.0	20.9	V
1681.4	43.3	Peak	74.0	30.7	V
11768.1	54.2	Peak	74.0	19.8	V
11768.1	42.9	Average	54.0	11.1	V
23539.1	49.7	Peak	88.2	38.5	H
23539.6	41.9	RMS	68.2	26.3	V

802.11a, 6Mbps, Chain B**CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9350.8	56.8	Peak	74.0	17.2	V
9352.7	44.4	Average	54.0	9.6	H
11688.3	53.3	Peak	74.0	20.7	V
11690.6	44.2	Average	54.0	9.8	V
23376.3	51.6	Peak	88.2	36.6	V
23379.7	41.7	RMS	68.2	26.5	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9368.7	56.5	Peak	74.0	17.5	H
9369.2	44.5	Average	54.0	9.5	H
11727.9	44.1	Average	54.0	9.9	V
11730.8	54.1	Peak	74.0	19.9	V
23450.6	49.4	Peak	88.2	38.8	V
23459.9	40.1	RMS	68.2	28.1	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9342.8	44.4	Average	54.0	9.7	V
9342.8	56.0	Peak	74.0	18.0	H
11771.4	55.4	Peak	74.0	18.6	H
11773.8	44.1	Average	54.0	9.9	V
23539.6	40.7	RMS	68.2	27.5	V
23541.1	48.7	Peak	88.2	39.5	H

802.11n**802.11n20, HT0, Chain A****CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9278.5	44.7	RMS	68.2	23.5	H
9278.5	56.9	Peak	88.2	31.3	V
11688.3	45.6	Average	54.0	8.4	V
11691.6	56.6	Peak	74.0	17.4	V
23379.7	41.3	RMS	68.2	26.9	V
23383.6	50.3	Peak	88.2	37.9	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1658.8	42.3	Peak	88.2	45.9	V
1659.7	32.9	RMS	68.2	35.3	V
2127.2	47.1	Peak	88.2	41.1	H
2130.0	35.7	RMS	68.2	32.5	H
11726.1	43.9	Average	54.0	10.1	V
11727.0	54.9	Peak	74.0	19.1	V
23457.0	40.6	RMS	68.2	27.6	V
23463.8	49.8	Peak	88.2	38.4	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1680.0	32.9	Average	54.0	21.1	V
1680.5	42.2	Peak	74.0	31.8	V
11769.5	54.4	Peak	74.0	19.6	H
11770.0	43.6	Average	54.0	10.4	H
23539.6	49.6	Peak	88.2	38.6	V
23539.6	42.6	RMS	68.2	25.6	V

802.11n20, HT0, Chain B**CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
9284.7	45.0	RMS	68.2	23.2	V
9284.7	55.0	Peak	88.2	33.2	V
11689.7	54.9	Peak	74.0	19.1	H
11690.2	43.9	Average	54.0	10.1	V
23378.8	49.1	Peak	88.2	39.1	H
23379.7	41.9	RMS	68.2	26.3	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
2129.1	35.0	RMS	68.2	33.2	H
2129.1	48.5	Peak	88.2	39.7	H
11726.1	53.6	Peak	74.0	20.4	H
11730.3	43.4	Average	54.0	10.6	H
23459.9	49.4	Peak	88.2	38.8	V
23459.9	41.9	RMS	68.2	26.3	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9269.1	44.3	RMS	68.2	23.9	H
9269.1	56.0	Peak	88.2	32.2	V
11762.9	54.3	Peak	74.0	19.7	V
11769.0	45.3	Average	54.0	8.7	V
23540.1	41.4	RMS	68.2	26.8	V
23541.1	48.4	Peak	88.2	39.8	H

802.11n20, HT8, Chain A+B**CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1639.9	36.1	RMS	68.2	32.1	V
1640.3	46.1	Peak	88.2	42.1	V
11691.1	58.2	Peak	74.0	15.8	V
11691.1	49.1	Average	54.0	4.9	V
23377.8	42.6	RMS	68.2	25.6	V
23378.3	52.5	Peak	88.2	35.7	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1660.2	37.0	Average	54.0	17.0	V
1661.6	46.5	Peak	74.0	27.4	V
11730.8	56.0	Peak	74.0	18.0	H
11731.2	45.6	Average	54.0	8.4	V
23459.4	51.3	Peak	88.2	36.9	H
23459.9	41.9	RMS	68.2	26.3	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1679.5	46.7	Peak	74.0	27.3	V
1679.5	37.6	Average	54.0	16.4	V
11768.6	54.0	Peak	74.0	19.9	V
11769.0	46.0	Average	54.0	8.0	V
23541.6	40.4	RMS	68.2	27.8	H
23542.5	49.3	Peak	88.2	38.9	H

802.11n40, HT0, Chain A**CH167**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
2129.1	35.5	RMS	68.2	32.7	H
2129.1	48.1	Peak	88.2	40.1	H
11648.1	57.1	Peak	74.0	16.9	H
11668.4	47.2	Average	54.0	6.8	H
23337.2	49.2	Peak	88.2	39.0	V
23338.7	39.6	RMS	68.2	28.6	H

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9293.6	44.5	RMS	68.2	23.8	H
9293.6	55.8	Peak	88.2	32.4	V
11753.9	51.5	Peak	74.0	22.5	H
11753.9	41.5	Average	54.0	12.5	V
23500.0	40.9	RMS	68.2	27.3	V
23503.4	48.6	Peak	88.2	39.6	H

802.11n40, HT0, Chain B**CH167**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9287.0	44.7	RMS	68.2	23.5	V
9287.0	55.6	Peak	88.2	32.5	H
11668.0	41.5	Average	54.0	12.5	V
11668.4	50.9	Peak	74.0	23.1	V
23339.2	49.2	Peak	88.2	39.0	V
23339.6	41.7	RMS	68.2	26.5	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9278.1	44.8	RMS	68.2	23.4	V
9278.1	56.1	Peak	88.2	32.1	H
11750.6	51.4	Peak	74.0	22.6	V
11752.0	41.4	Average	54.0	12.6	V
39646.5	44.8	Average	54.0	9.2	V
39647.0	53.3	Peak	74.0	20.7	V

802.11n40, HT8, Chain A+B**CH167**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
2132.9	35.4	RMS	68.2	32.8	H
2132.9	49.3	Peak	88.2	38.9	H
11666.6	56.0	Peak	74.0	18.0	H
11671.8	46.7	Average	54.0	7.3	H
23328.9	50.9	Peak	88.2	37.3	V
23339.6	41.8	RMS	68.2	26.4	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1669.6	43.7	Peak	74.0	30.3	V
1669.6	35.0	Average	54.0	19.0	V
11751.6	52.5	Peak	74.0	21.5	V
11751.6	44.3	Average	54.0	9.7	V
23497.6	48.3	Peak	88.2	39.9	V
23500.0	40.7	RMS	68.2	27.5	V

[802.11ax](#)**802.11ax20, HE0, Chain A****CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1631.4	44.6	Peak	88.2	43.6	V
1631.4	35.6	RMS	68.2	32.6	V
17802.6	51.1	Peak	74.0	22.9	V
17803.1	40.0	Average	54.0	14.0	V
23345.5	57.5	Peak	88.2	30.7	H
23346.0	46.4	RMS	68.2	21.8	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1651.7	45.6	Peak	88.2	42.6	V
1651.7	36.5	RMS	68.2	31.7	V
17798.8	40.1	Average	54.0	13.9	V
17798.8	51.2	Peak	74.0	22.8	V
23425.2	55.7	Peak	88.2	32.5	H
23425.2	45.4	RMS	68.2	22.8	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1671.0	46.3	Peak	74.0	27.7	V
1671.5	37.0	Average	54.0	17.0	V
11753.0	51.5	Average	54.0	2.5	V
11753.4	60.2	Peak	74.0	13.8	V
23506.4	45.8	RMS	68.2	22.4	V
23506.8	55.6	Peak	88.2	32.6	V

802.11ax20, HE0, Chain B**CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
1631.4	44.5	Peak	88.2	43.7	V
1631.4	36.0	RMS	68.2	32.2	V
11672.7	51.9	Average	54.0	2.1	V
11673.6	60.4	Peak	74.0	13.6	V
23345.5	55.2	Peak	88.2	33.0	H
23346.0	48.3	RMS	68.2	19.9	V

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1651.2	36.3	RMS	68.2	31.9	V
1651.7	44.2	Peak	88.2	44.0	V
11712.8	50.0	Average	54.0	4.0	V
11713.3	58.2	Peak	74.0	15.8	V
23425.7	56.2	Peak	88.2	32.0	V
23425.7	47.6	RMS	68.2	20.6	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1671.0	44.5	Peak	74.0	29.5	V
1671.5	36.5	Average	54.0	17.5	V
11752.0	60.2	Peak	74.0	13.8	V
11753.4	51.6	Average	54.0	2.4	V
23506.4	51.6	Peak	88.2	36.6	H
23506.4	44.9	RMS	68.2	23.3	V

802.11ax20, HE0, Chain A+B**CH169**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1631.4	41.8	RMS	68.2	26.4	V
1631.8	52.8	Peak	88.2	35.4	V
2131.0	50.6	Peak	88.2	37.5	H
2131.0	36.0	RMS	68.2	32.2	H
11672.7	49.9	Peak	74.0	24.1	H
11673.2	39.9	Average	54.0	14.2	V
23345.5	49.2	RMS	68.2	19.0	H
23346.5	58.6	Peak	88.2	29.6	H

CH173

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1651.2	52.3	Peak	88.2	35.9	V
1651.2	41.7	RMS	68.2	26.5	V
11712.4	50.8	Peak	74.0	23.2	V
11712.8	40.4	Average	54.0	13.6	V
23425.7	48.3	RMS	68.2	19.9	V
23427.2	58.0	Peak	88.2	30.2	V

CH177

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1671.5	54.4	Peak	74.0	19.6	V
1671.5	43.6	Average	54.0	10.3	V
11753.0	41.4	Average	54.0	12.6	V
11753.4	51.6	Peak	74.0	22.4	V
23506.4	56.9	Peak	88.2	31.3	H
23506.4	48.4	RMS	68.2	19.9	H

802.11ax40, HE0, Chain A**CH167**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1619.6	45.6	Peak	74.0	28.4	V
1620.5	35.7	Average	54.0	18.3	V
17845.1	39.4	Average	54.0	14.7	V
17845.1	50.9	Peak	74.0	23.1	H
23299.6	57.8	Peak	88.2	30.4	H
23301.0	47.7	RMS	68.2	20.5	H

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1659.2	45.2	Peak	88.2	43.0	V
1660.2	38.2	Average	54.0	15.8	V
11730.3	61.0	Peak	74.0	13.0	H
11730.3	52.5	Average	54.0	1.5	V
23459.9	55.8	Peak	88.2	32.4	H
23461.4	45.5	RMS	68.2	22.7	H

802.11ax40, HE0, Chain B**CH167**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1619.6	44.6	Peak	74.0	29.4	V
1620.0	36.7	Average	54.0	17.3	V
11650.5	48.9	Peak	74.0	25.1	V
11650.5	38.9	Average	54.0	15.1	V
23302.0	55.5	Peak	88.2	32.7	V
23302.0	45.4	RMS	68.2	22.8	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1659.7	44.7	Peak	88.2	43.5	V
1660.2	35.8	Average	54.0	18.2	H
11730.3	51.7	Average	54.0	2.3	V
11731.2	59.6	Peak	74.0	14.4	V
23460.4	45.4	RMS	68.2	22.8	V
23462.4	52.9	Peak	88.2	35.3	V

802.11ax40, HE0, Chain A+B**CH167**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1620.0	41.7	Average	54.0	12.3	V
1620.5	51.9	Peak	74.0	22.1	V
11649.1	51.6	Peak	74.0	22.4	H
11650.0	40.8	Average	54.0	13.2	V
23301.0	50.0	RMS	68.2	18.2	V
23302.5	61.1	Peak	88.2	27.1	V

CH175

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1660.2	44.0	Average	54.0	10.0	V
1660.6	52.7	Peak	74.0	21.3	V
11730.3	52.3	Average	54.0	1.7	V
11730.8	61.3	Peak	74.0	12.7	V
23460.4	58.2	Peak	88.2	30.0	V
23461.9	48.1	RMS	68.2	20.1	V

802.11ax80, HE0, Chain A**CH171**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1628.5	43.5	Peak	88.2	44.7	V
1628.5	35.7	RMS	68.2	32.5	V
17804.0	51.2	Peak	74.0	22.8	V
17804.5	40.0	Average	54.0	14.1	H
23334.3	57.0	Peak	88.2	31.2	V
23334.8	45.9	RMS	68.2	22.4	H

802.11ax80, HE0, Chain B**CH171**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1628.1	34.4	RMS	68.2	33.8	V
1628.5	44.5	Peak	88.2	43.7	V
11666.1	59.9	Peak	74.0	14.2	V
11667.0	51.7	Average	54.0	2.3	V
23333.3	54.0	Peak	88.2	34.2	V
23334.3	44.5	RMS	68.2	23.7	H

802.11ax80, HE0, Chain A+B**CH171**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
1628.5	52.1	Peak	88.2	36.1	V
1628.5	41.9	RMS	68.2	26.3	V
11666.1	49.6	Peak	74.0	24.4	V
11667.5	39.6	Average	54.0	14.4	V
23334.3	47.7	RMS	68.2	20.5	H
23334.8	57.2	Peak	88.2	31.0	V

[802.11ac](#)**802.11ac80, VHT0, Chain A****CH171**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9285.6	44.7	RMS	68.2	23.5	V
9285.6	56.0	Peak	88.2	32.1	V
11678.8	53.2	Peak	74.0	20.8	V
11687.8	42.3	Average	54.0	11.7	V
39670.5	44.3	Average	54.0	9.7	V
39670.5	54.4	Peak	74.0	19.6	H

802.11ac80, VHT0, Chain B**CH171**

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBμV/m	---	dBμV/m	dB	---
9279.5	44.4	RMS	68.2	23.8	V
9279.5	56.2	Peak	88.2	32.0	V
11705.8	38.2	Average	54.0	15.8	V
11706.7	49.6	Peak	74.0	24.4	H
39671.0	44.6	Average	54.0	9.4	V
39671.0	55.0	Peak	74.0	19.0	V

802.11ac80, VHT0, Chain A+B


CH171

Frequency	Level	Detector	Limit	Margin	Polar
MHz	dBµV/m	---	dBµV/m	dB	---
9334.2	44.5	Average	54.0	9.5	H
9334.2	56.0	Peak	74.0	18.0	V
11689.2	53.2	Peak	74.0	20.8	V
11692.1	41.5	Average	54.0	12.5	V
23419.8	48.7	Peak	88.2	39.5	V
23419.8	41.1	RMS	68.2	27.1	V

B.3 Test Result Screenshots


B.3.1 6dB Bandwidth

SISO-A, 802.11a, 6Mbps-CH169

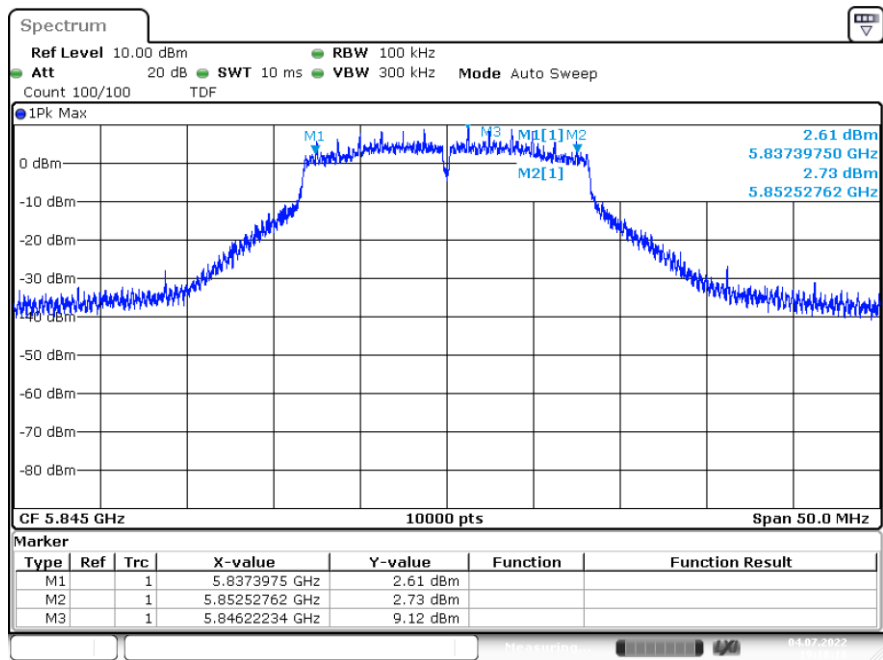


Date: 4.JUL.2022 19:18:18

MIMO-B, 802.11n20, HT8-CH173

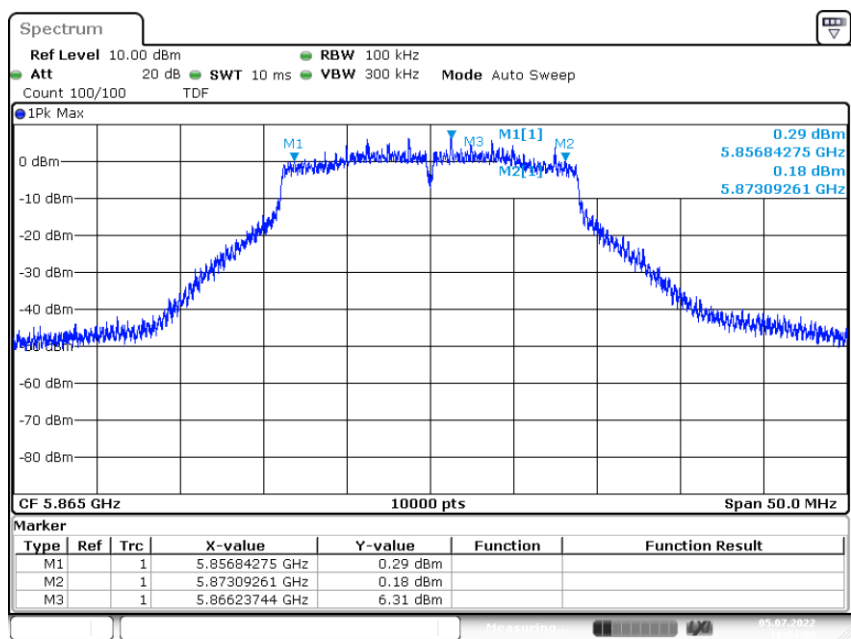


Date: 5.JUL.2022 11:24:02

MIMO-A, 802.11n40, HT8-CH167

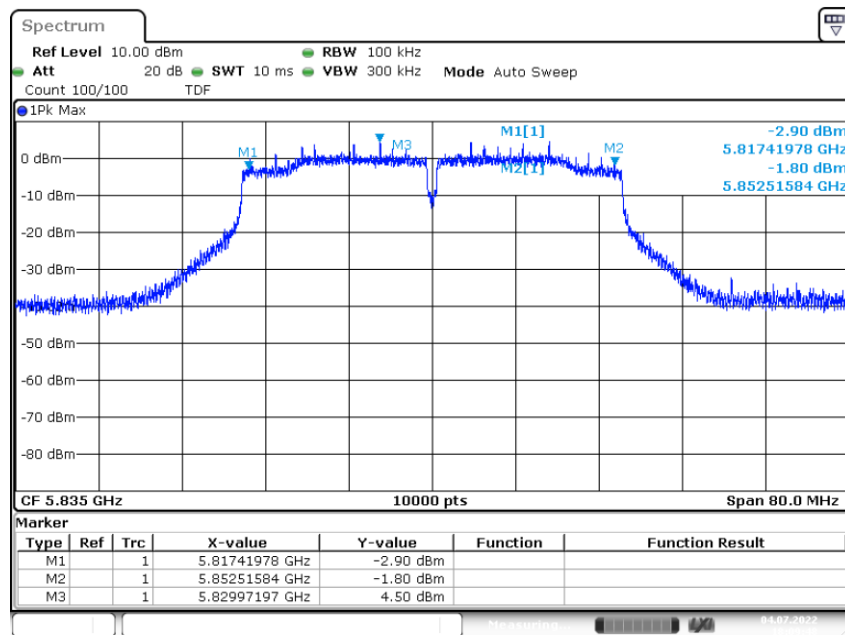


Date: 4 JUL 2022 18:09:48

MIMO-B, 802.11ac80, VHT0-CH171

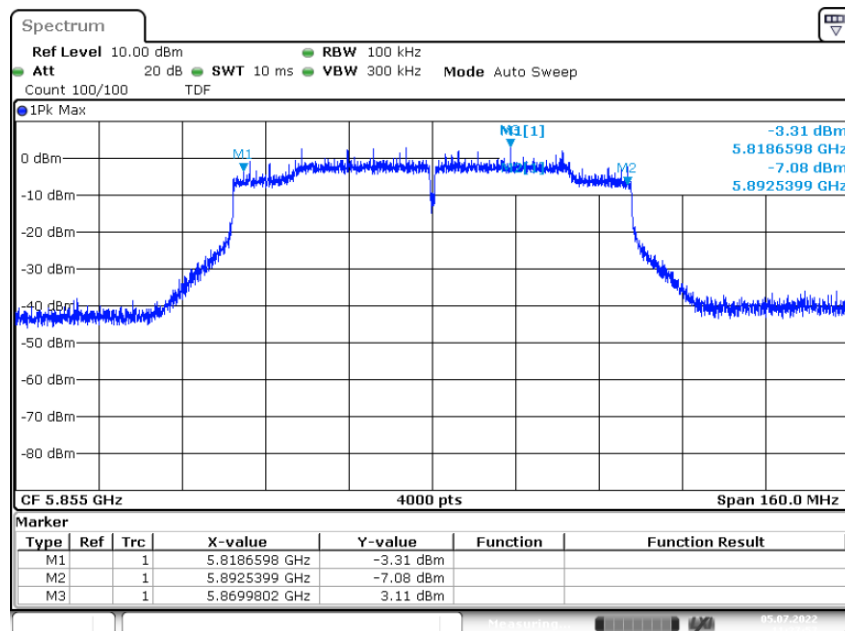


Date: 5 JUL 2022 11:27:57


SISO-A, 802.11ax20, HE0-CH177

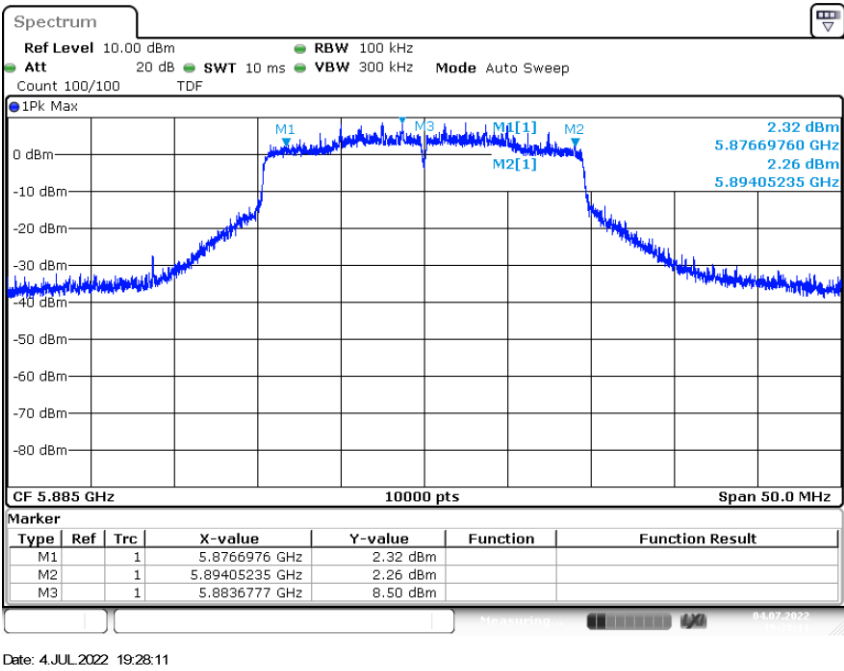

MIMO-A, 802.11ax40, HE0-CH175

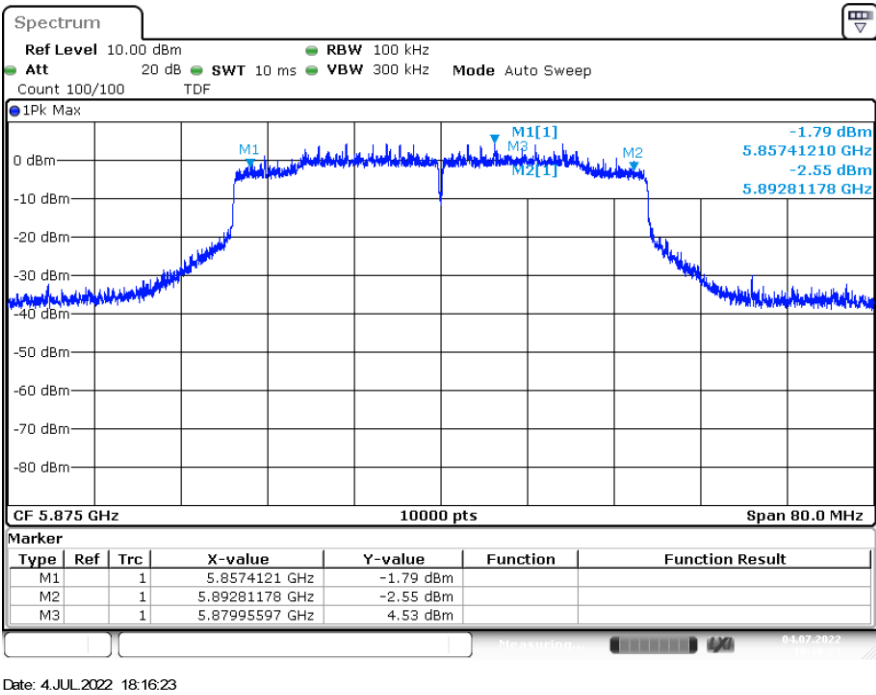


MIMO-B, 802.11ax80, HE0-CH171

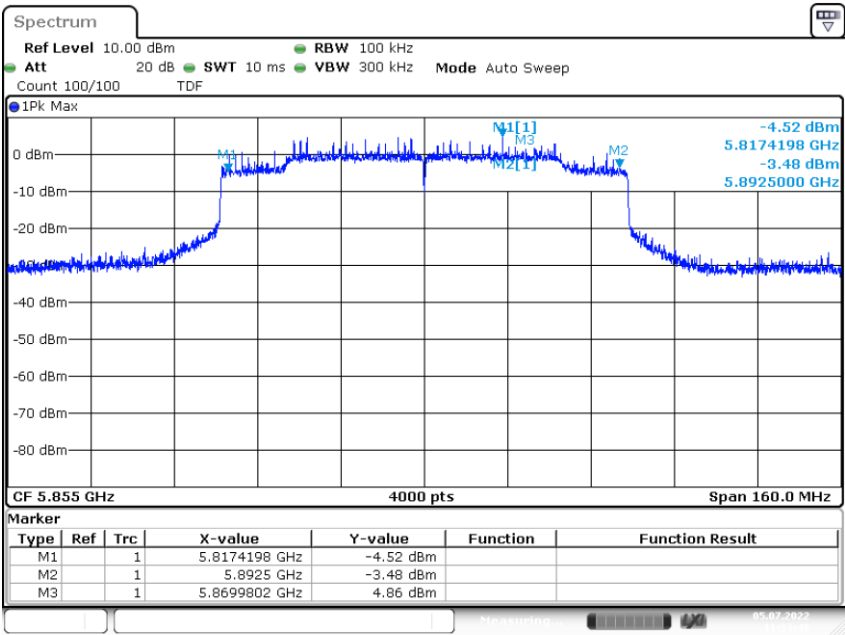


Date: 5 JUL 2022 11:33:48


B.3.2 99% Bandwidth

SISO-A, 802.11a, 6Mbps-CH177

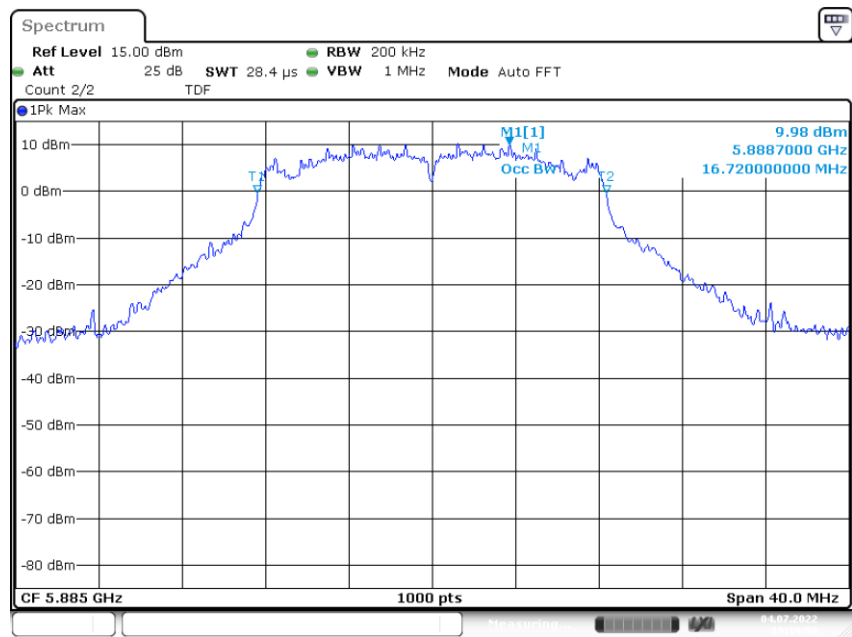


SISO-B, 802.11n20, HT0-CH177

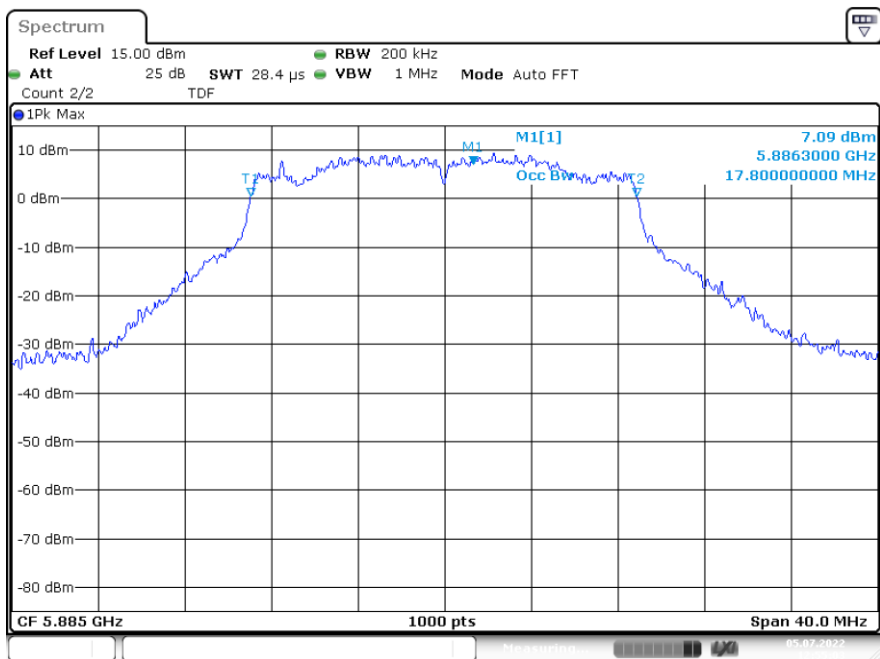

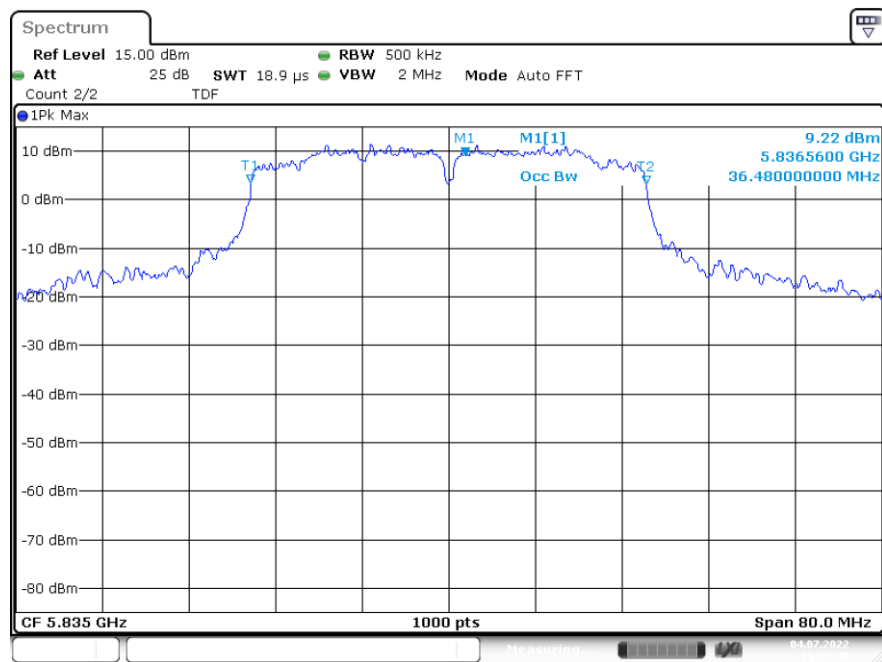
SISO-A, 802.11n40, HT0-CH167

Date: 4.JUL.2022 19:23:40

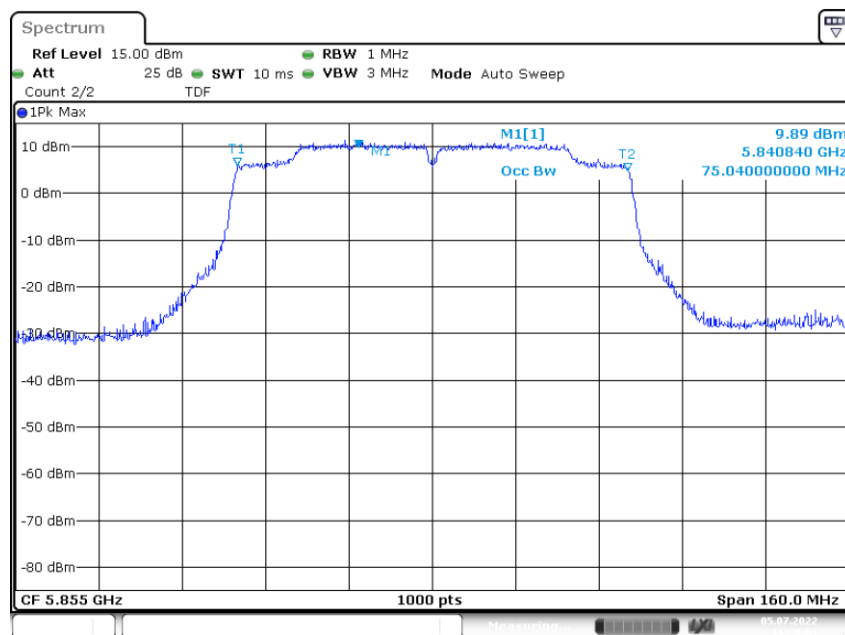MIMO-B, 802.11ac80, VHT0-CH171


Date: 5.JUL.2022 11:28:01

SISO-A, 802.11ax20, HE0-CH177

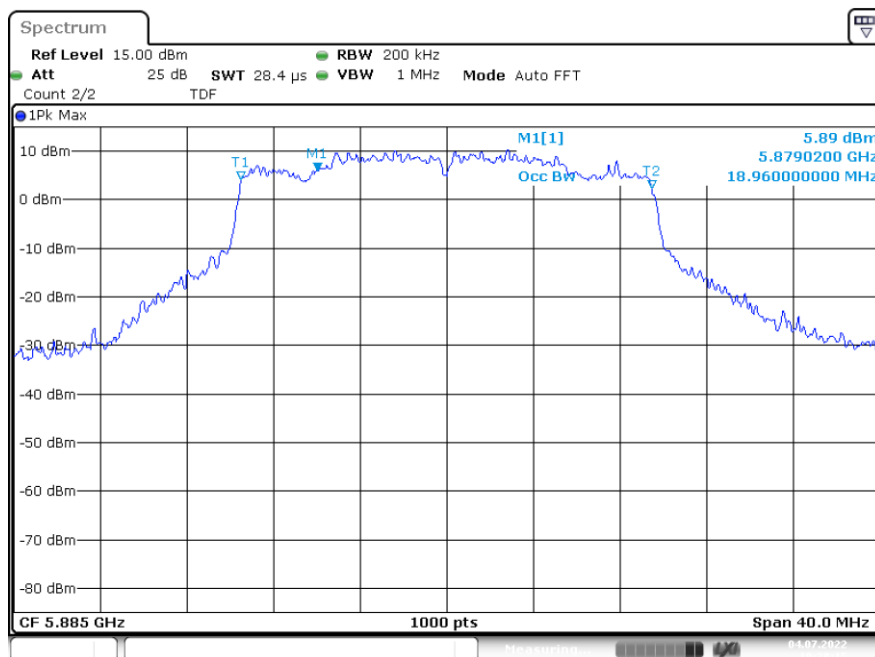


Date: 4.JUL.2022 19:28:15

SISO-A, 802.11ax40, HE0-CH167

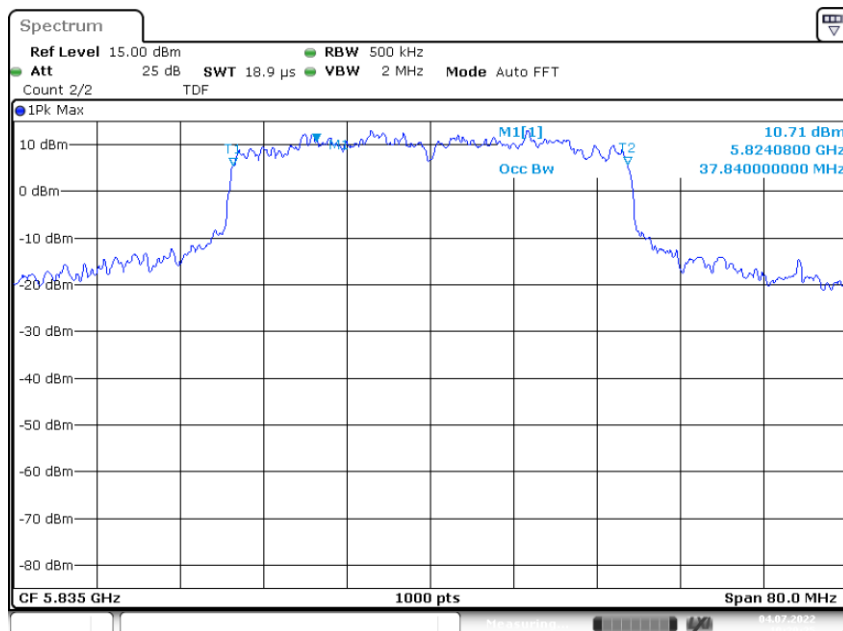

Date: 4.JUL.2022 19:29:25


MIMO-B, 802.11ax80, HE0-CH171

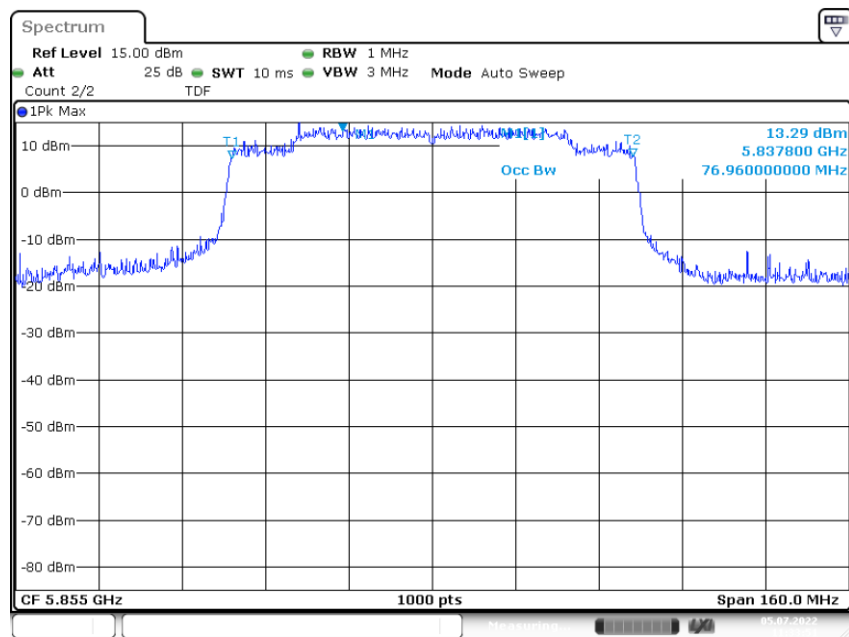


Date: 5 JUL 2022 11:33:52

B.3.3 Maximum output power

SISO-B, 802.11a, 6Mbps-CH169


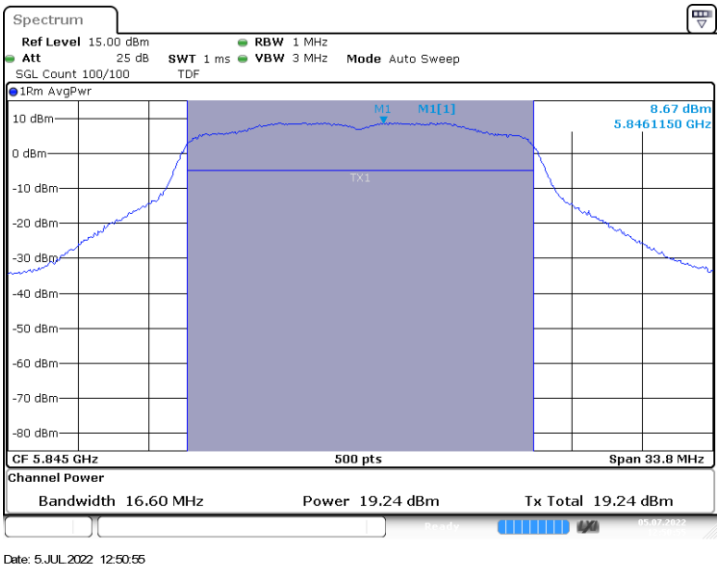


SISO-A, 802.11n20, HT0-CH173

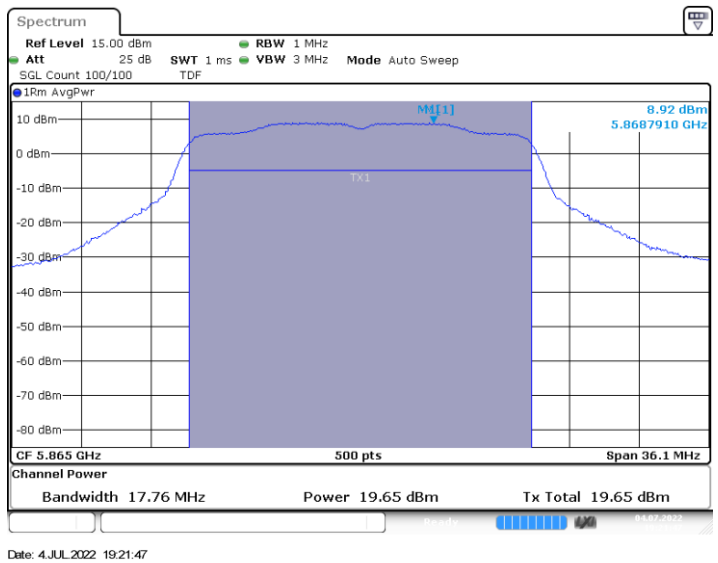



MIMO-A, 802.11n40, HT8-CH167

MIMO-B, 802.11n40, HT8-CH167

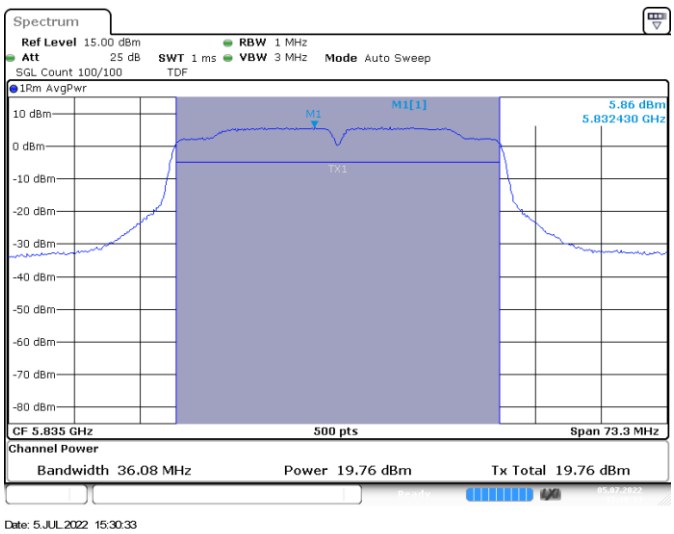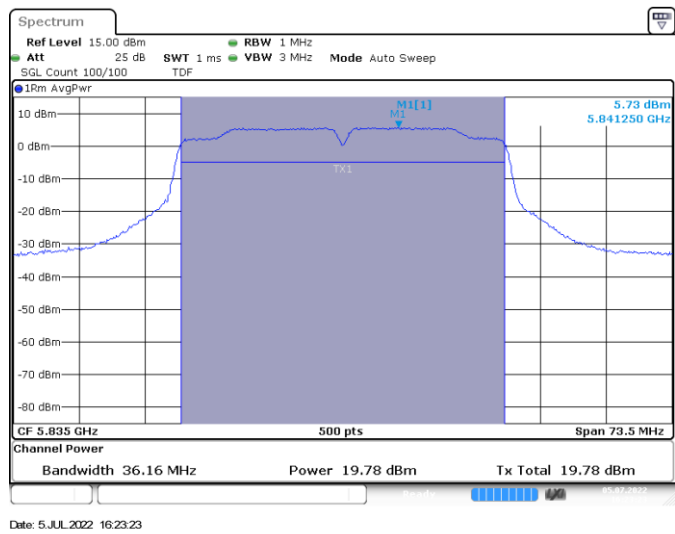


MIMO-A,802.11ac80, VHT0-CH171


MIMO-B,802.11ac80, VHT0-CH171

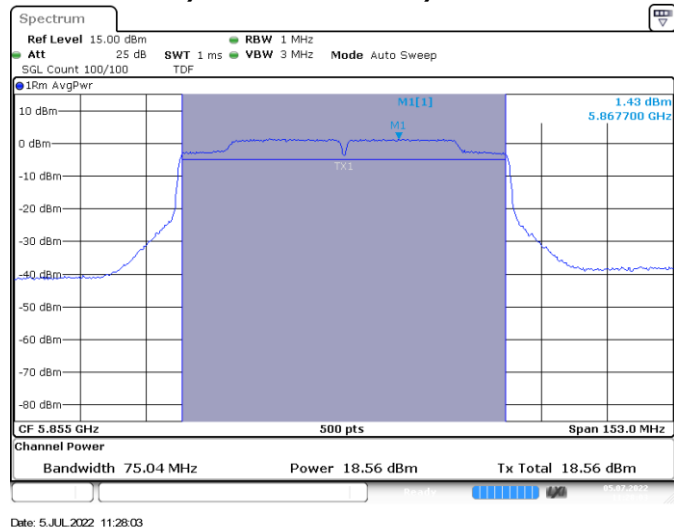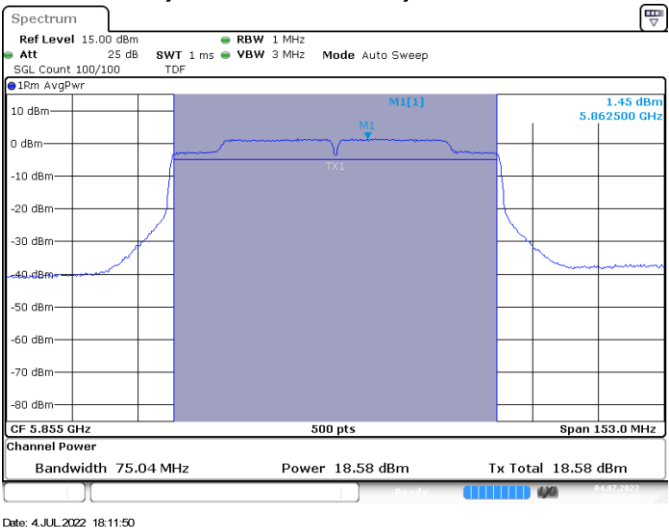


SISO-B, 802.11ax20, HE0-CH169

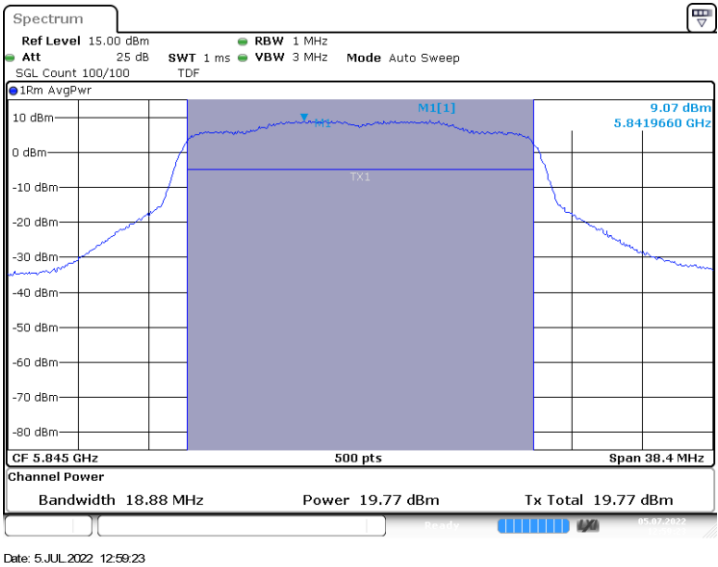

MIMO-A, 802.11ax40, HE0-CH167


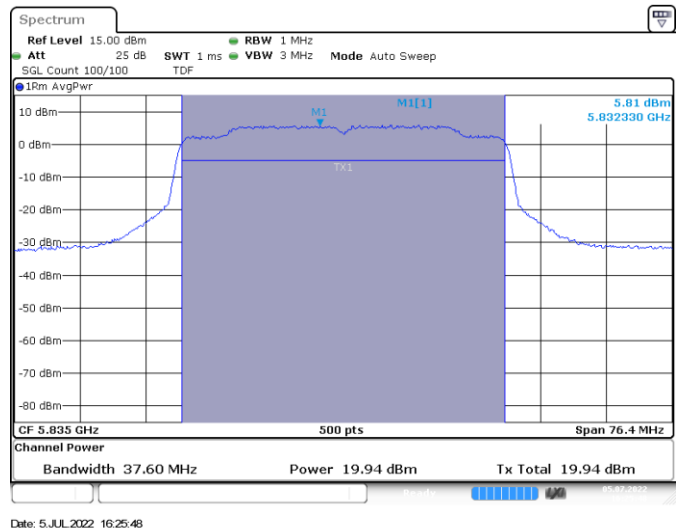


MIMO-B, 802.11ax40, HE0-CH167

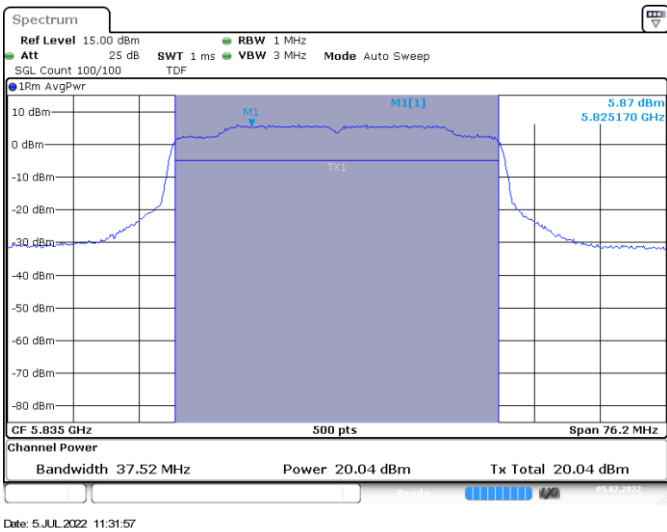


MIMO-A,802.11ax80,HE0-CH171

MIMO-B,802.11ax80,HE0-CH171

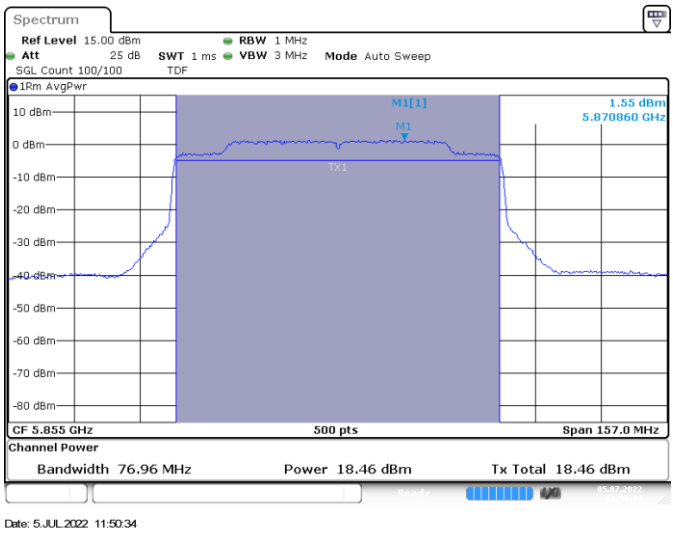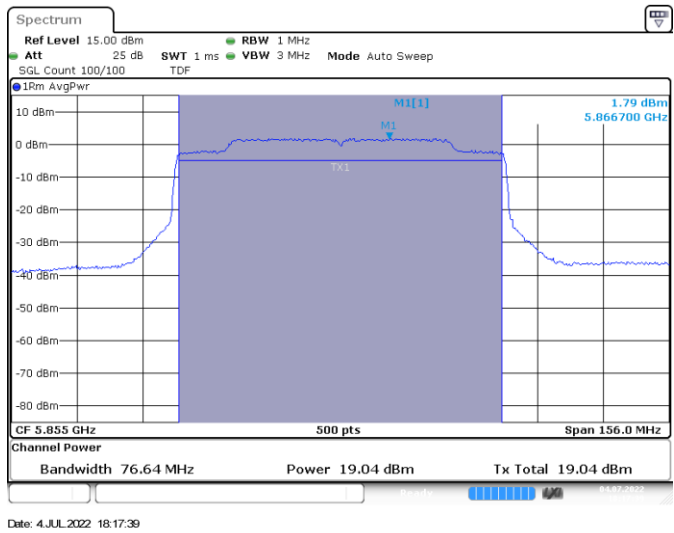


B.3.4 Maximum Power Spectral Density (PSD)

SISO-B, 802.11a, 6Mbps-CH169

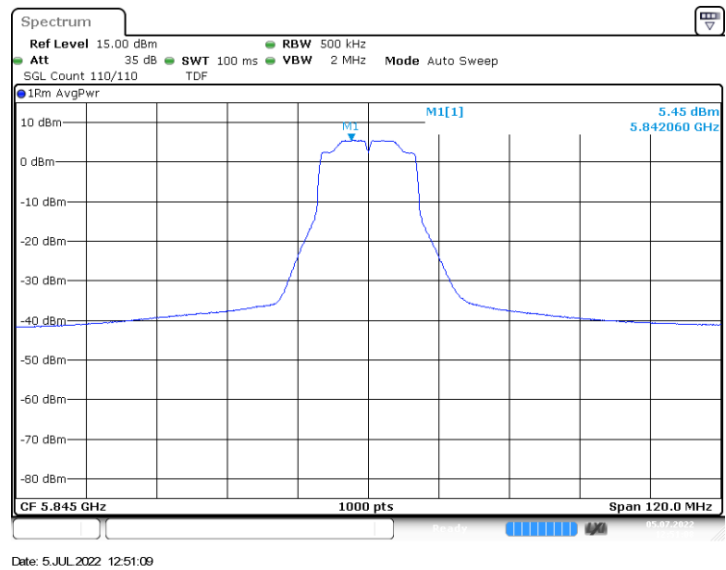


SISO-B, 802.11n20, HT0-CH177

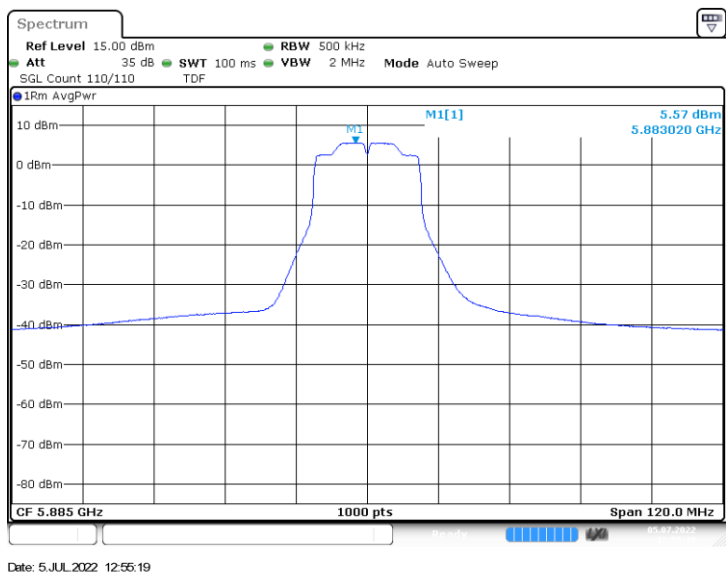


MIMO-A, 802.11n40, HT8-CH167

MIMO-B, 802.11n40, HT8-CH167

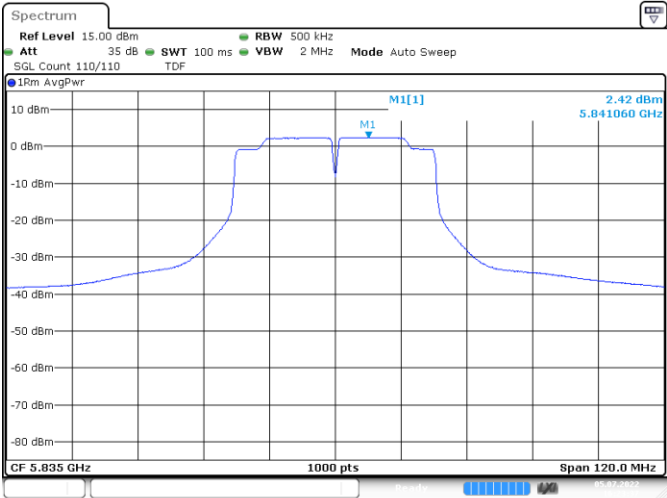


Date: 5.JUL.2022 16:23:37

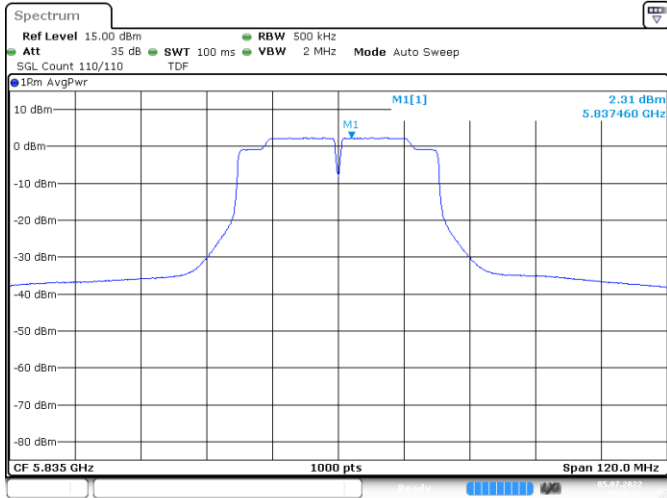


Date: 5.JUL.2022 15:30:47

MIMO-A,802.11ac80, VHT0-CH171

MIMO-B,802.11ac80, VHT0-CH171

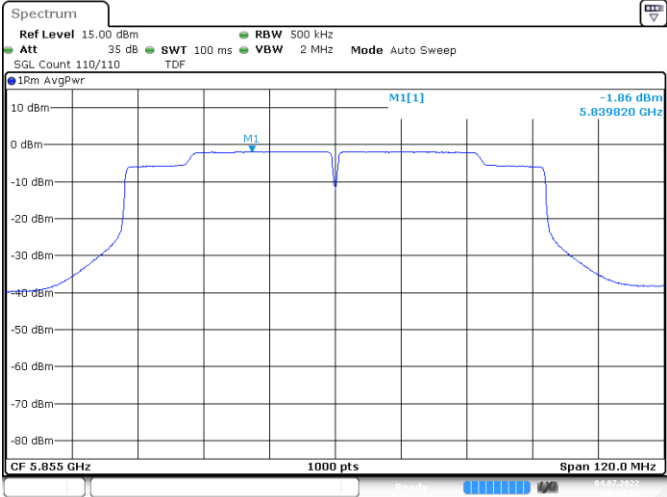


Date: 4.JUL.2022 18:12:04


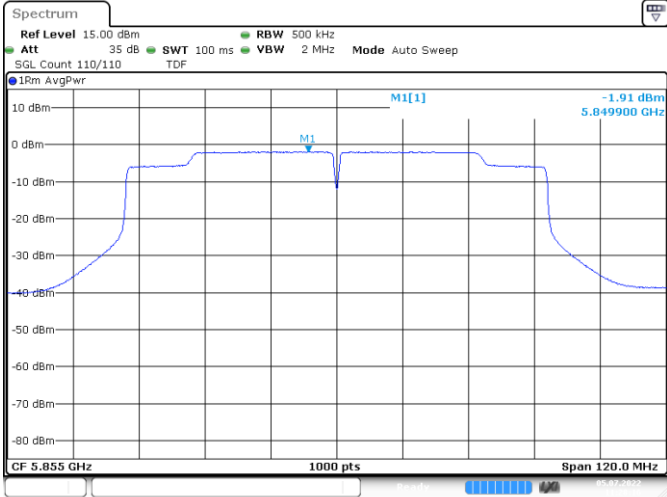


Date: 5.JUL.2022 11:28:16

SISO-B, 802.11ax20, HE0-CH169

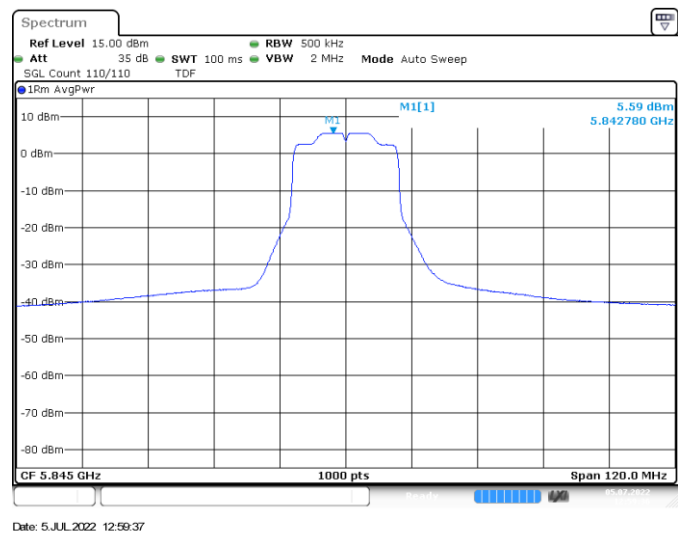


MIMO-A, 802.11ax40, HE0-CH167 MIMO-B, 802.11ax40, HE0-CH167

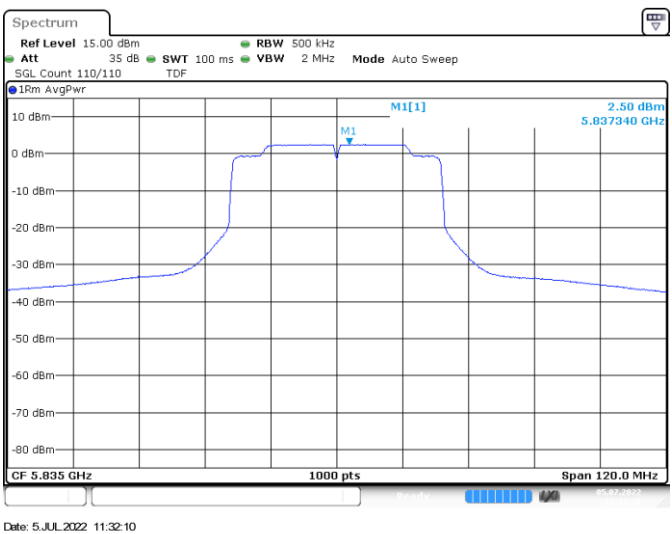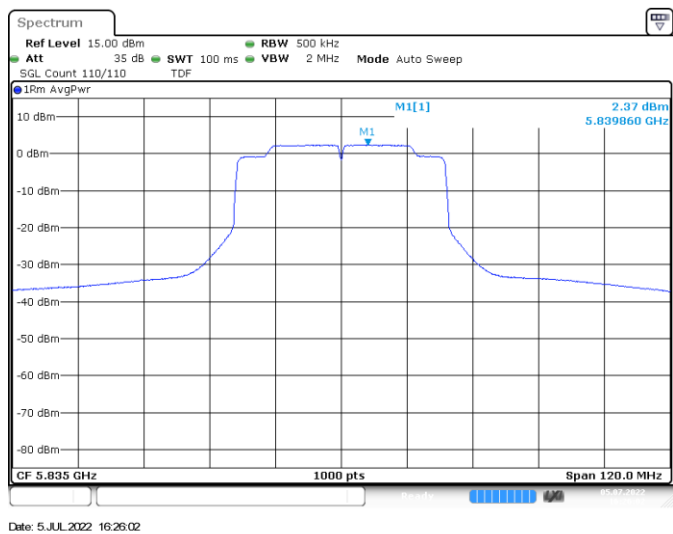


MIMO-A,802.11ax80,HE0-CH171

MIMO-B,802.11ax80,HE0-CH171

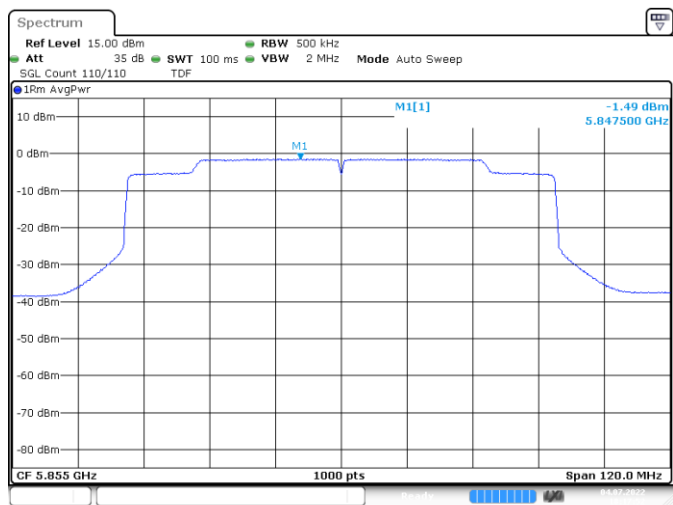


Date: 4.JUL.2022 18:17:52

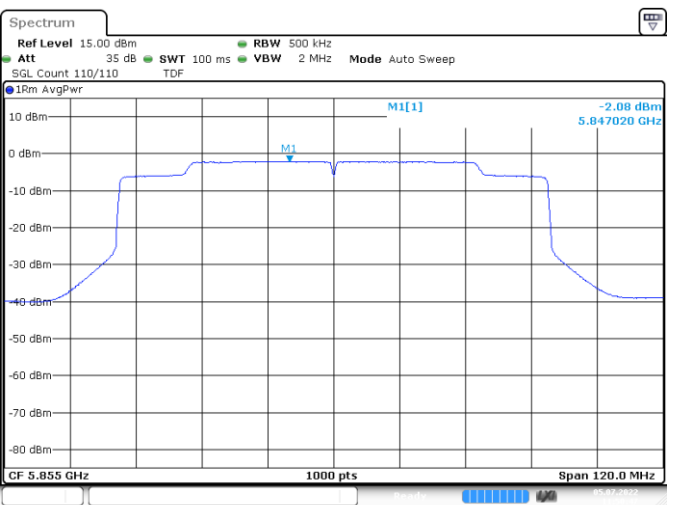


Date: 5.JUL.2022 11:50:48

B.3.5 Undesirable emission limits : out of band (Conducted)

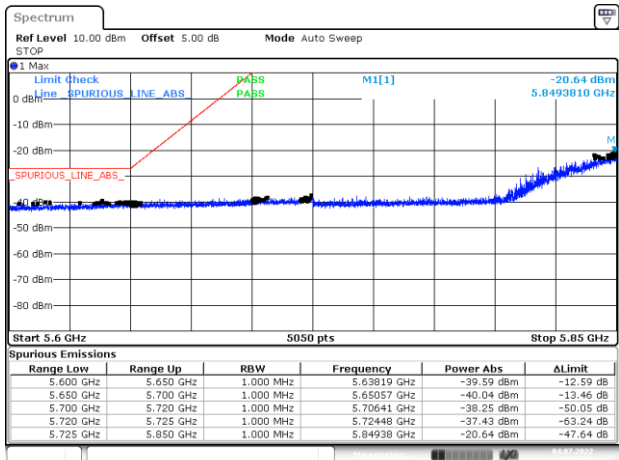


Date: 4.JUL.2022 19:20:18

BE-NR-LOW, SISO-A, 802.11a20-6Mbps, Ch177

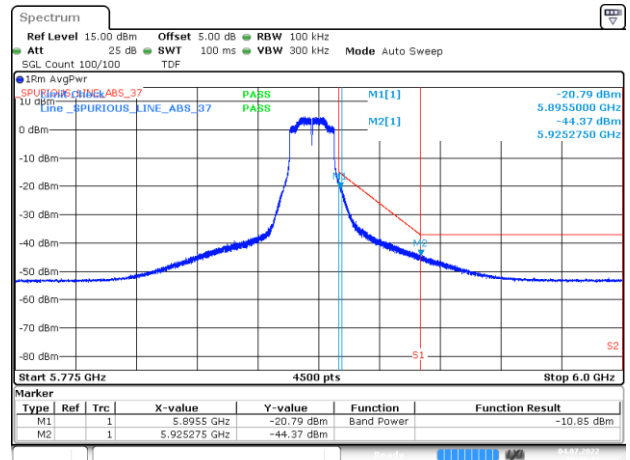


Date: 4.JUL.2022 19:20:32

BE-NR-HIGH, SISO-A, 802.11a20-6Mbps, Ch177

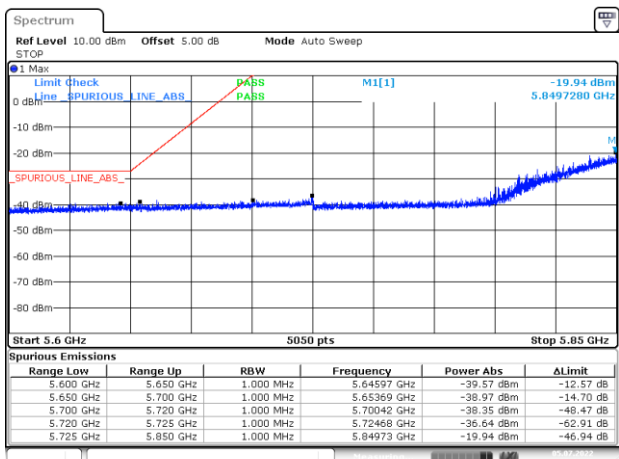


Date: 5.JUL.2022 16:11:46

BE-NR-LOW, SISO-A, 802.11n20-HT0, Ch177

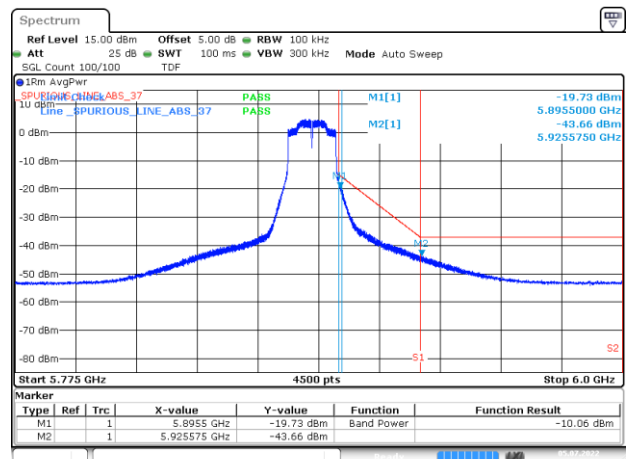


Date: 5.JUL.2022 16:11:59

BE-NR-HIGH, SISO-A, 802.11n20-HT0, Ch177

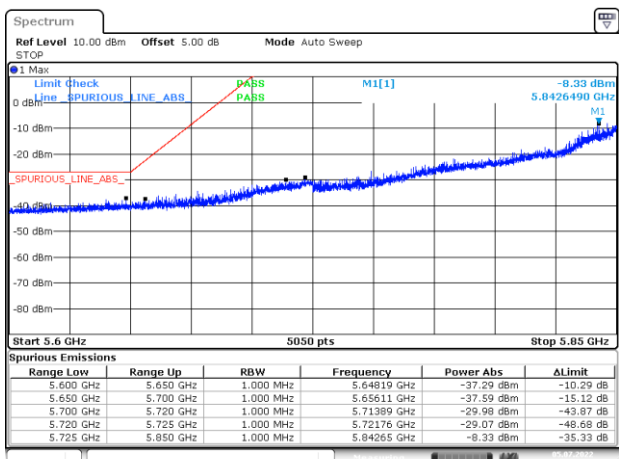


Date: 5.JUL.2022 16:05:50

BE-NR-LOW, SISO-A, 802.11n40-HT0, Ch175

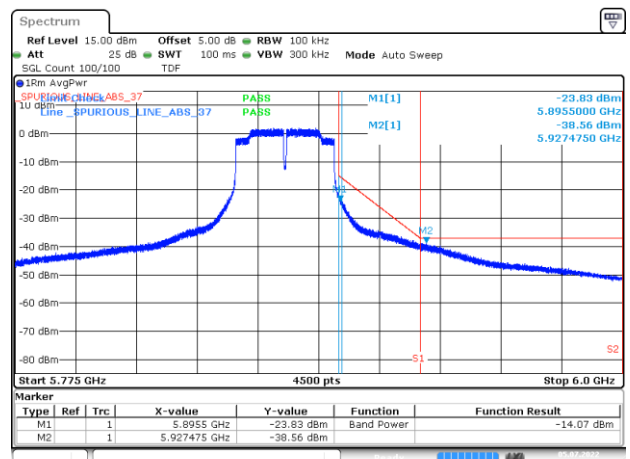


Date: 5.JUL.2022 16:06:03

BE-NR-HIGH, SISO-A, 802.11n40-HT0, Ch175

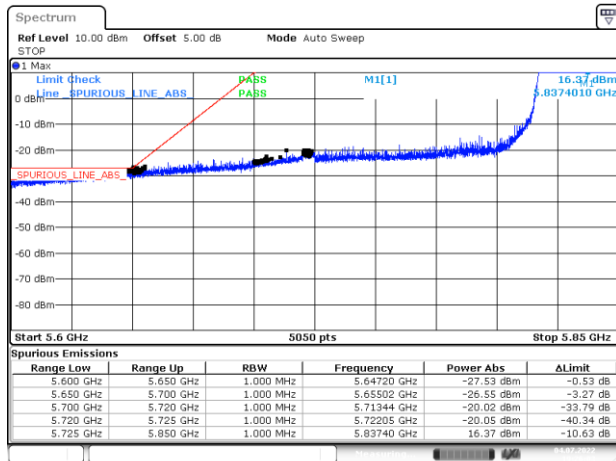


Date: 4 JUL 2022 19:26:03

BE-NR-LOW, SISO-A, 802.11ac80-VHT0, Ch171

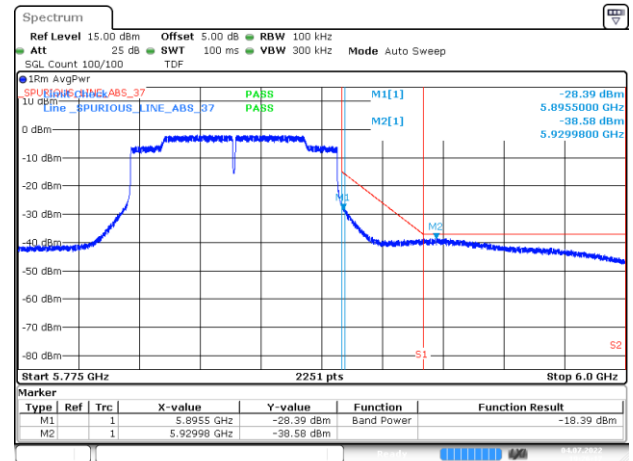


Date: 4 JUL 2022 19:26:17

BE-NR-HIGH, SISO-A, 802.11ac80-VHT0, Ch171

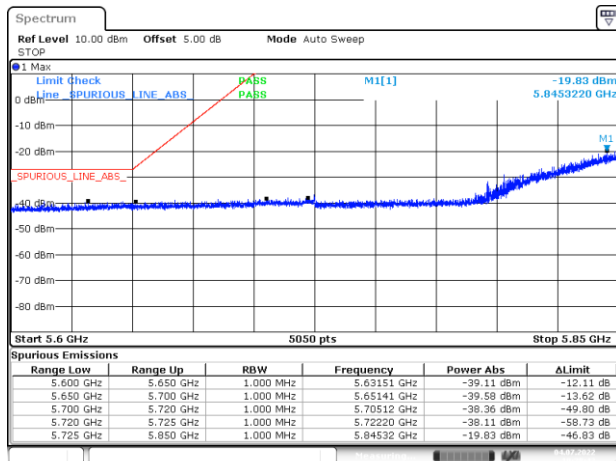


Date: 4 JUL 2022 19:28:42

BE-NR-LOW, SISO-A, 802.11ax20-HE0, Ch177

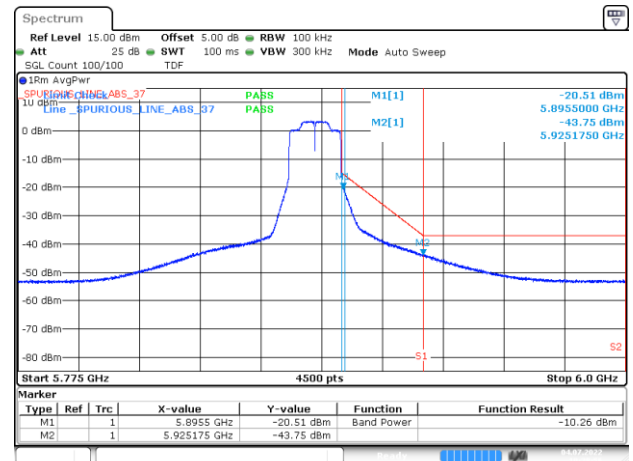


Date: 4 JUL 2022 19:28:56

BE-NR-HIGH, SISO-A, 802.11ax20-HE0, Ch177

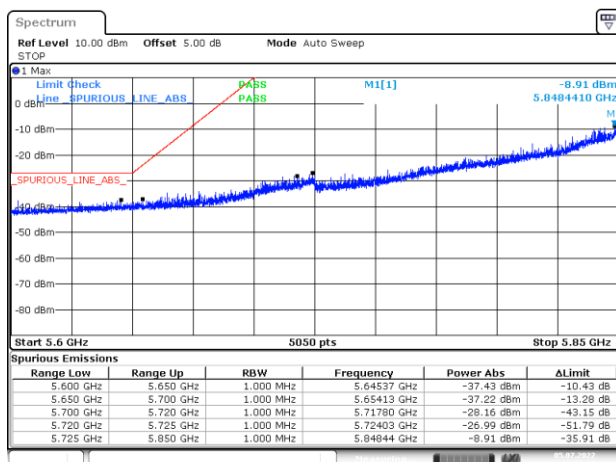


Date: 5 JUL 2022 16:01:01

BE-NR-LOW, SISO-A, 802.11ax40-HE0, Ch175

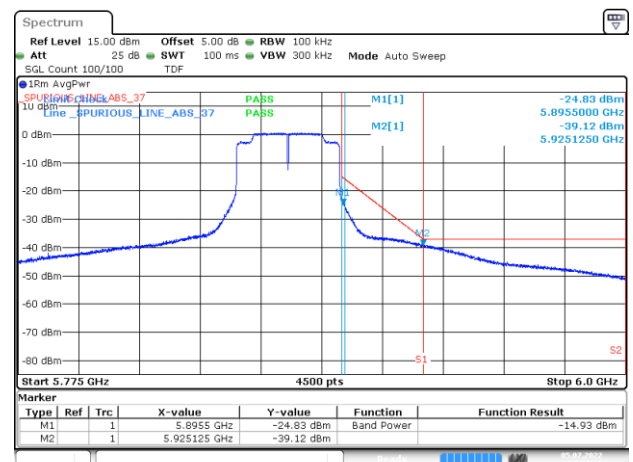


Date: 5 JUL 2022 16:01:42


BE-NR-HIGH, SISO-A, 802.11ax40-HE0, Ch175

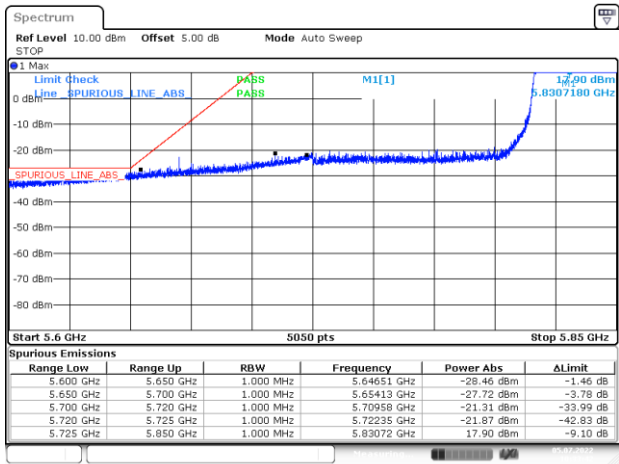

BE-NR-LOW, SISO-A, 802.11ax80-HE0, Ch171

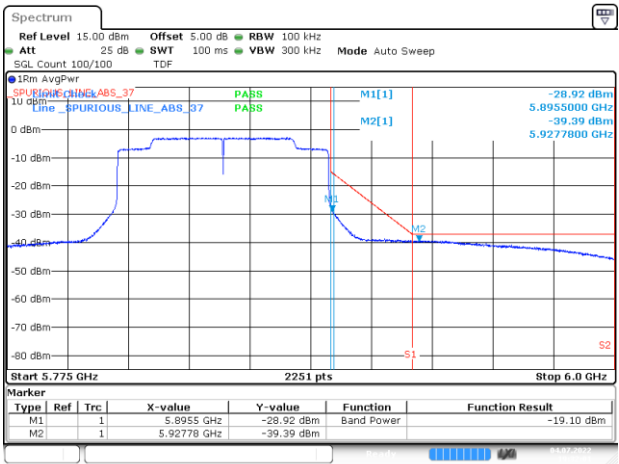


BE-NR-HIGH, SISO-A, 802.11ax80-HE0, Ch171

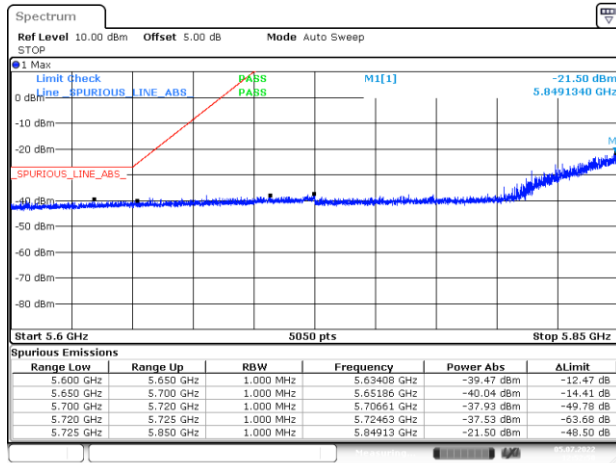


Date: 5 JUL 2022 12:52:50

BE-NR-LOW, SISO-B, 802.11a20-6Mbps, Ch177

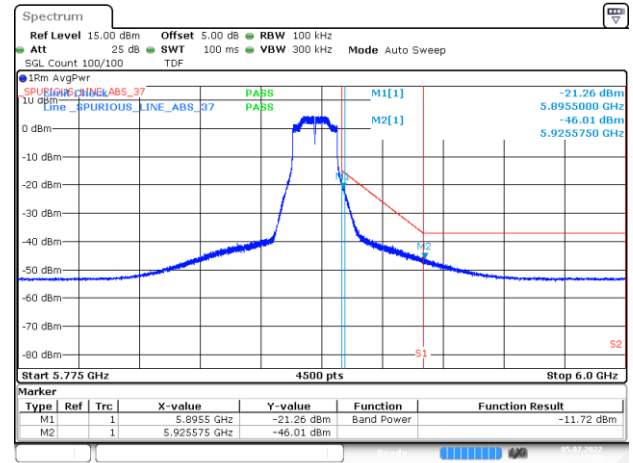


Date: 5 JUL 2022 12:53:03

BE-NR-HIGH, SISO-B, 802.11a20-6Mbps, Ch177

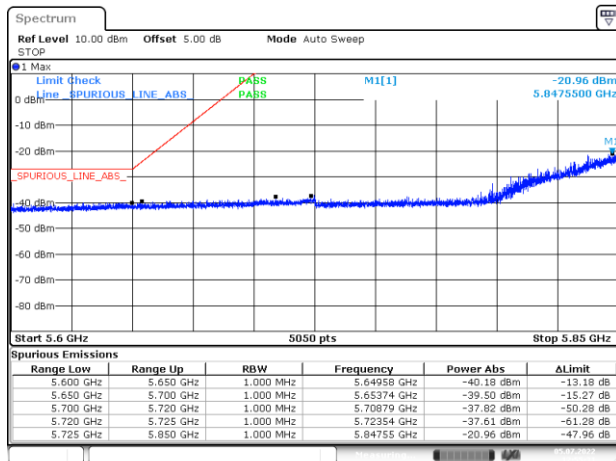


Date: 5 JUL 2022 12:55:31

BE-NR-LOW, SISO-B, 802.11n20-HT0, Ch177

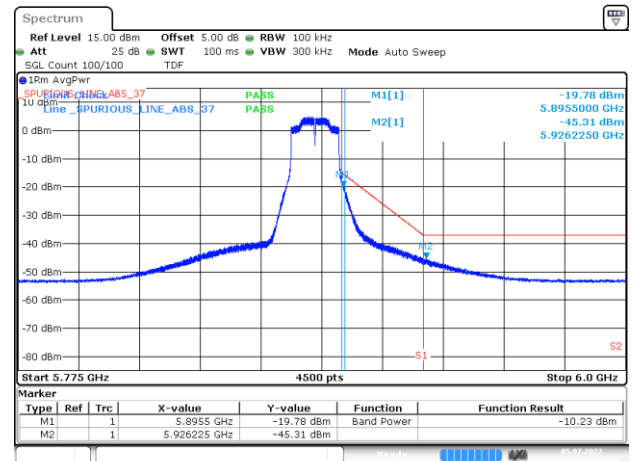


Date: 5 JUL 2022 12:55:44

BE-NR-HIGH, SISO-B, 802.11n20-HT0, Ch177

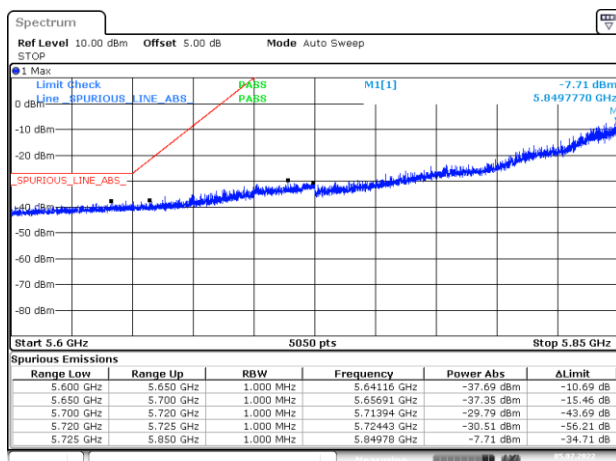


Date: 5 JUL 2022 15:11:25

BE-NR-LOW, SISO-B, 802.11n40-HT0, Ch175

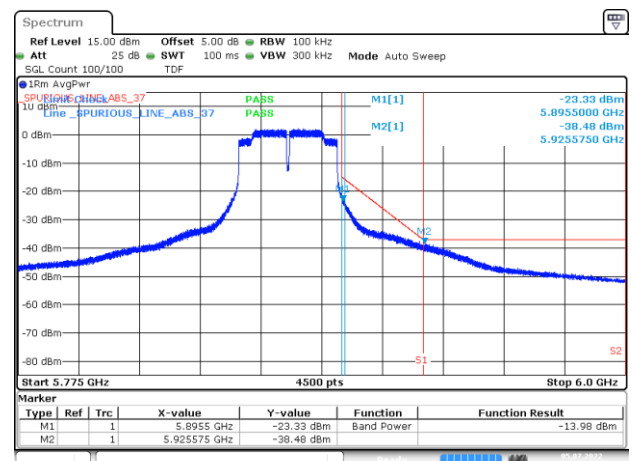


Date: 5 JUL 2022 15:11:38

BE-NR-HIGH, SISO-B, 802.11n20-HT0, Ch177

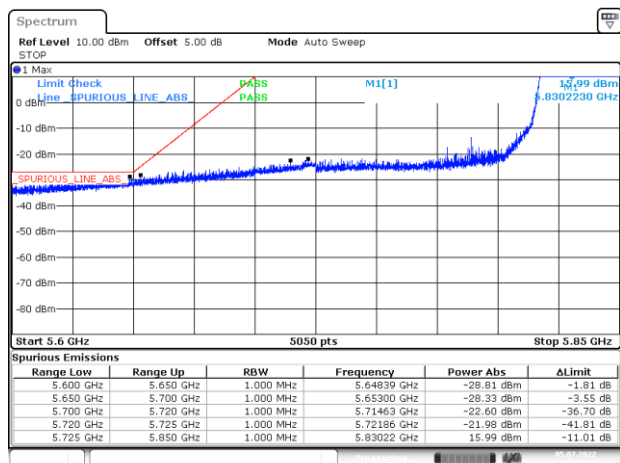


Date: 5 JUL 2022 12:58:38

BE-NR-LOW, SISO-B, 802.11ac80-VHT0, Ch171

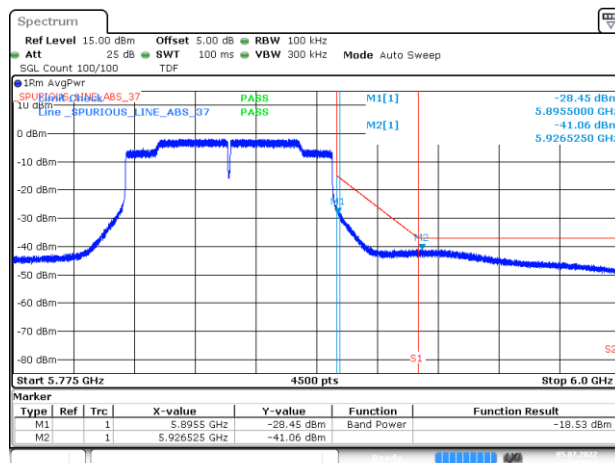


Date: 5 JUL 2022 12:58:52

BE-NR-HIGH, SISO-B, 802.11ac80-VHT0, Ch171

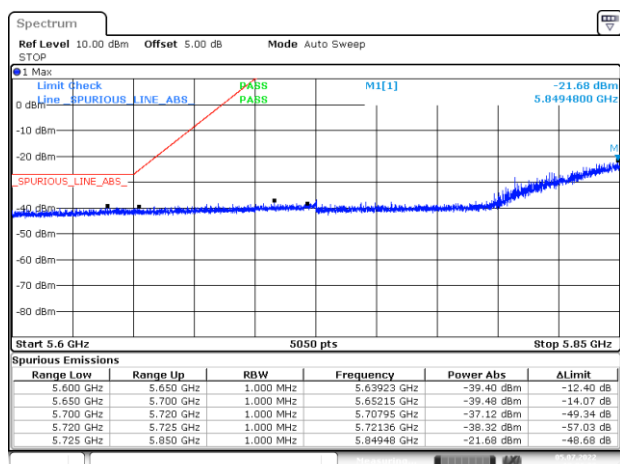


Date: 5 JUL 2022 13:01:23

BE-NR-LOW, SISO-B, 802.11ax20-HE0, Ch177

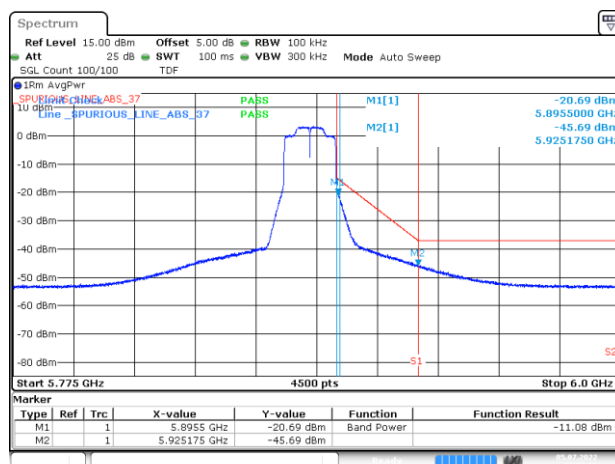


Date: 5 JUL 2022 13:01:37

BE-NR-HIGH, SISO-B, 802.11ax20-HE0, Ch177

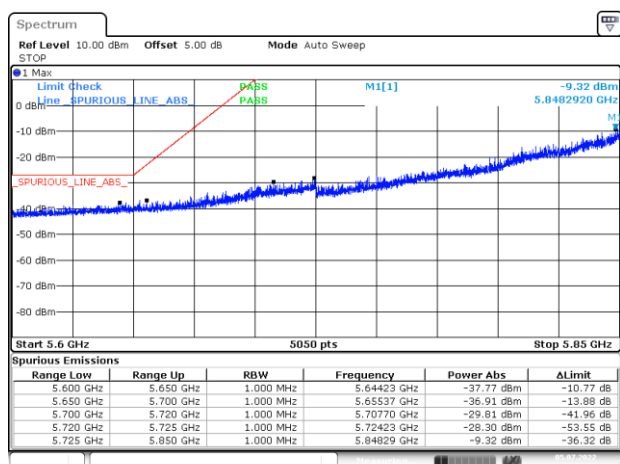


Date: 5 JUL 2022 13:03:21

BE-NR-LOW, SISO-B, 802.11ax40-HE0, Ch175

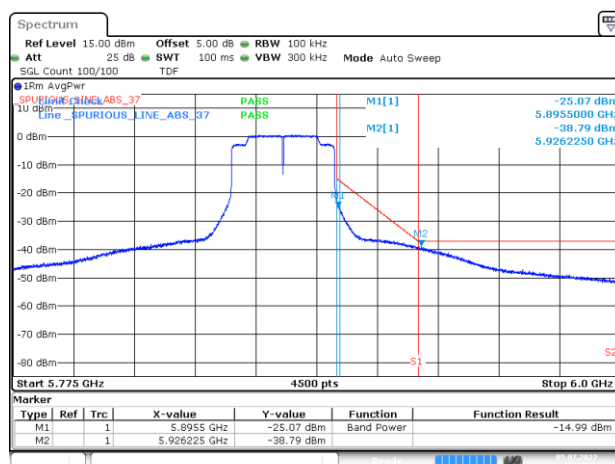


Date: 5 JUL 2022 13:03:34

BE-NR-HIGH, SISO-B, 802.11ax40-HE0, Ch175

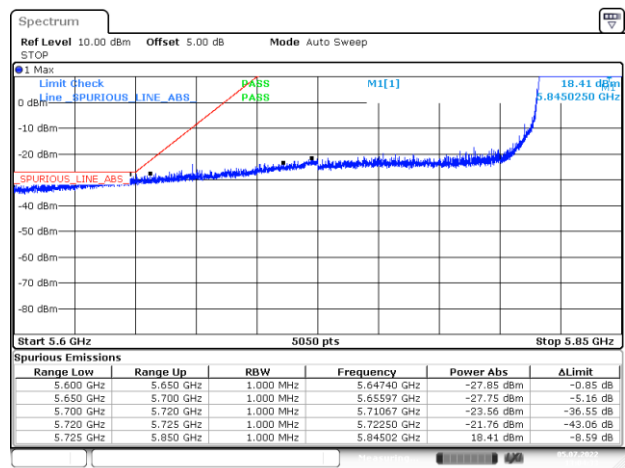

BE-NR-LOW, SISO-B, 802.11ax80-HE0, Ch171

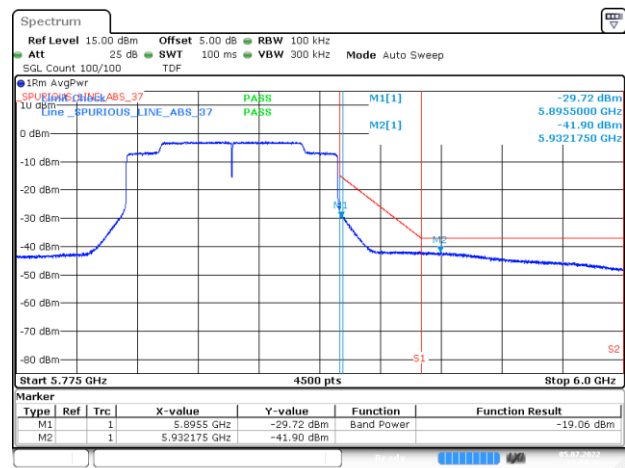

BE-NR-HIGH, SISO-B, 802.11ax80-HE0, Ch171