


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	51%
Test Engineer	Mars Lin	Configurations	2.4GHz WLAN function + Bluetooth function
Test Mode	Mode 1		

Horizontal

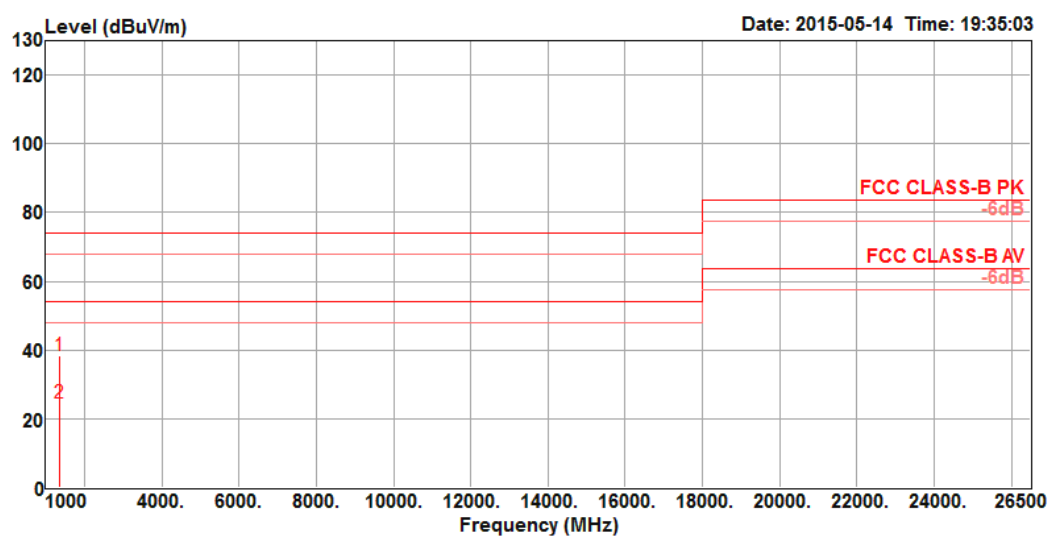

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	1355.50	38.36	74.00	-35.64	46.20	3.66	36.55	25.05	HORIZONTAL	30	100	Peak
2	1355.54	24.58	54.00	-29.42	32.42	3.66	36.55	25.05	HORIZONTAL	30	100	Average


Vertical

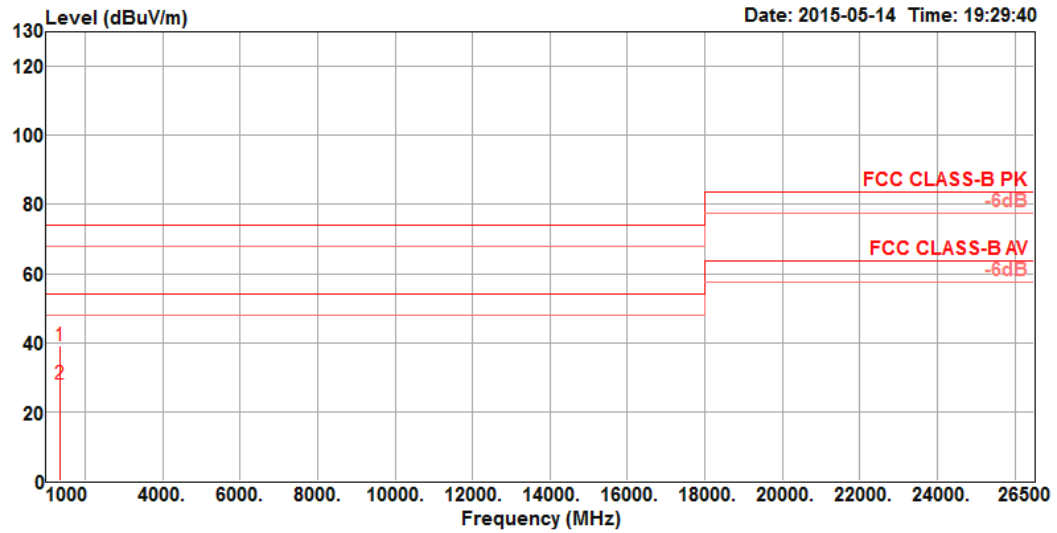

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	1349.68	38.97	74.00	-35.03	46.85	3.65	36.57	25.04	VERTICAL	7	102	Peak
2	1349.93	27.92	54.00	-26.08	35.80	3.65	36.57	25.04	VERTICAL	7	102	Average


Temperature	26°C	Humidity	51%
Test Engineer	Mars Lin	Configurations	5GHz WLAN function + Bluetooth function
Test Mode	Mode 2		

Horizontal

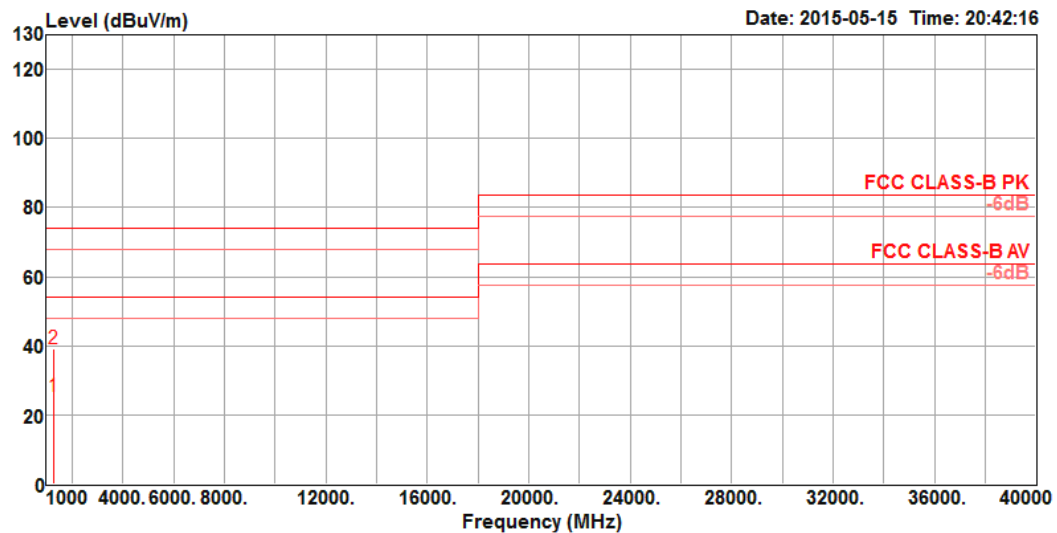

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	1285.54	25.14	54.00	-28.86	33.43	3.56	36.77	24.92	HORIZONTAL	11	100	Average
2	1285.54	39.03	74.00	-34.97	47.32	3.56	36.77	24.92	HORIZONTAL	11	100	Peak

Vertical

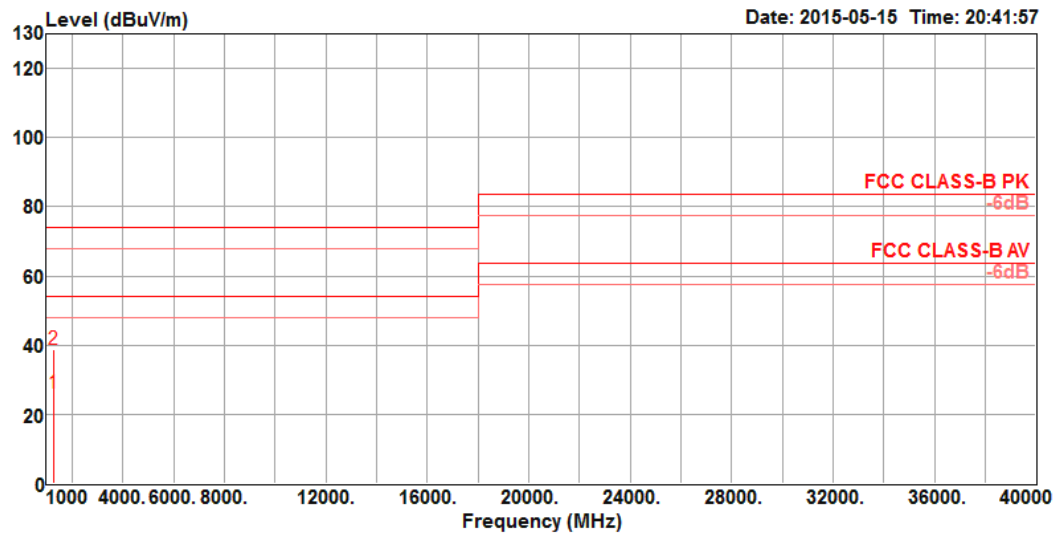

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	1285.54	25.92	54.00	-28.08	34.21	3.56	36.77	24.92	VERTICAL	7	102	Average
2	1285.54	38.57	74.00	-35.43	46.86	3.56	36.77	24.92	VERTICAL	7	102	Peak