

EMI Test Report

Tested in accordance with
Federal Communications Commission (FCC)
Personal Communications Services
CFR 47, Parts 2, 22 and 24

RIM Testing Services (RTS)

REPORT NO.: RTS-0101-0508-08

REPORT NO.: RAT40GW
TYPE NAME: BlackBerry Wireless Handheld
FCC ID: L6ARAT40GW
IC: 2503A-RAT40GW

Date: _____28 September 2005_____

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Declaration

Statement of Performance:

The BlackBerry Wireless Handheld, model RAT40GW ASY-08757-001 when configured and operated per RIM's operation instructions, performs within the requirements of the test standards.

Declaration:

We hereby certify that:

The test data reported herein is an accurate record of the performance of the sample(s) tested.

The test results are valid for the tested unit (s) only.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Tested by:



Maurice Battler.
Certification Specialist

Date: September 28, 2005


Reviewed by:



Masud S Attayi, P.Eng.
Senior Compliance Engineer

Date: September 28, 2005

Reviewed and Approved by:



Paul G. Cardinal, Ph.D.
Manager

Date: September 30, 2005

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Table of Contents

A) Scope	Pg. 4
B) Associated Document	Pg. 4
C) Product Identification	Pg. 4
D) Support Equipment Used for Testing of the EUT	Pg. 5
E) Test Voltage	Pg. 5
F) Test Results Chart	Pg. 5
G) Modifications to EUT	Pg. 5
H) Summary of Results	Pg. 6
I) Compliance Test Equipment Used	Pg. 9
 Appendix 1 RF Conducted Emissions Test Data/Plots	 Pg. 10
Appendix 2 Conducted RF Output Power Test Data	Pg. 27
Appendix 3 Frequency Stability Test Data	Pg. 29
Appendix 4 Radiated Emissions Test Data	Pg. 41

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

A) Scope

This report details the results of compliance tests which were performed in accordance to the requirements of:

FCC CFR 47 Part 2, Oct. 1, 2000

FCC CFR 47 Part 22, Subpart H, Cellular Radiotelephone Services, Oct. 1, 2000

FCC CFR 47 Part 24 Subpart E, Broadband PCS, Oct 1. 2000

Industry Canada, RSS-132 Issue 1, August 2002, 800 MHz Cellular Telephones Employing New Technologies

Industry Canada, RSS-133 Issue 3, June 2005, 2 GHz Personal Communications Services

B) Associated Document

1. Document number RTS-0101- RAT40GW -01

C) Product Identification

The equipment under test (EUT) was tested at the RIM Testing Services (RTS) EMI test facility, located at:

305 Phillip Street

Waterloo, Ontario

Canada, N2L 3W8

Phone: 519 888 7465

Fax: 519 888 6906

The testing began on August 30, 2005 and completed on September 21, 2004. The sample equipment under test (EUT) included:

- 1a. BlackBerry Wireless Handheld, model number RAT40GW, ASY-08757-001 Rev. R, POP-10133-003 Rev. E, PIN 2035B59C, FCC ID L6ARAT40GW, IC: 2503A-RAT40GW.
- 1b. BlackBerry Wireless Handheld, model number RAT40GW, ASY-08757-001 Rev. Q, POP-10133-002 Rev. E, PIN 20331B98, FCC ID L6ARAT40GW, IC: 2503A-RAT40GW.
- 1c. BlackBerry Wireless Handheld, model number RAT40GW, ASY-08757-001 Rev. R, POP-10133-003 Rev. E, PIN 2035B4FE, FCC ID L6ARAT40GW, IC: 2503A-RAT40GW.

To view the differences between ASY-08757-001 Rev. R and ASY-08757-001 Rev. Q see document number RTS-0101- RAT40GW -01.

Only the measurements that maybe impacted by the changes from ASY-08757-001 Rev. Q to ASY-08757-001 Rev. R were remeasured.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

The transmit frequency ranges for the BlackBerry Wireless Handheld model number RAT40GW are: GSM850 824 to 849 MHz, GSM 880 to 915 MHz, DCS 1710 to 1785 MHz, PCS 1850 to 1910 MHz, Bluetooth 2402 to 2480 MHz.

D) Support Equipment Used for the Testing of the EUT

- 1) Communication Tester, Rohde & Schwarz, model CMU 200, serial number 100251
- 2) Communication Tester, Rohde & Schwarz, model CMU 200, serial number 837/493/073
- 3) DC Power Supply, H/P, model 6632B, serial number US37472178

E) Test Voltage

The ac input voltage was 120 volts, 60 Hz where applicable. This configuration was per RIM's specifications.

F) Test Results Chart

SPECIFICATION	Test Type	MEETS REQUIREMENT S	Performed By
FCC CFR 47 Part 22, Subpart H IC RSS-132	Radiated Spurious/harmonic Emissions, ERP, LO	Yes	Masud Attayi
FCC CFR 47 Part 2, Subpart J, Part 22, Subpart H IC RSS-132	Conducted Output Power Conducted Emissions, Occupied Bandwidth, Frequency Stability	Yes	Maurice Battler
FCC CFR 47 Part 24, Subpart E IC RSS-133	Radiated Spurious/harmonic Emissions, EIRP, LO	Yes	Masud Attayi
FCC CFR 47 Part 24, Subpart E IC RSS-133	Conducted Emissions, Occupied Bandwidth, Frequency Stability	Yes	Maurice Battler

G) Modifications to EUT

No modifications were required to the EUT.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

H) Summary of Results

- 1) The EUT met the requirements of the Conducted Spurious Emissions requirements in the GSM850 band as per 47 CFR 2.1051, CFR 22.917, CFR 22.901(d) and RSS-132. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 10 MHz to 10 GHz.
See APPENDIX 1 for the test data.
- 2) The EUT met the requirements of the Conducted Spurious Emissions requirements in the PCS band as per 47 CFR 2.1051, CFR 24.238(a) and RSS-133. The EUT was measured on the low, middle and high channels. The frequency range investigated was from 10 MHz to 20 GHz.
See APPENDIX 1 for the test data.
- 3) The EUT met the requirements of the Occupied Bandwidth and channel mask requirements in the GSM850 band as per 47 CFR 2.202, CFR 22.917 and RSS-132. The EUT was measured on the low, middle and high channels.
See APPENDIX 1 for the test data.
- 4) The EUT met the requirements of the Occupied Bandwidth and channel mask requirements in the PCS band as per 47 CFR 2.202, CFR 24.238 and RSS-133. The EUT was measured on the low, middle and high channels.
See APPENDIX 1 for the test data.
- 5) The EUT met the requirements of the Conducted RF Output Power requirements for both the GSM850 and PCS bands as per 47 CFR 2.1046(a). The EUT was measured on the low, middle and high channels.
See APPENDIX 2 for the test data.
- 6) The EUT met the requirements of the Frequency Stability vs. Temperature and Voltage requirements for GSM850 band as per 47 CFR 2.1055(a), 2.1055(d), CFR 22.917 and RSS-132.
The maximum frequency error measured was less than 0.1 ppm.
The temperature range was from -30°C to +60°C in 10° temperature steps. The EUT was measured on low, middle and high channels at each temperature step. The EUT was measured at low (3.5 volts), nominal (3.8 volts) and high (4.1 volts) dc input voltage at each temperature step and channel at maximum output power.
See APPENDIX 3 for the test data.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

- 7) The EUT met the requirements of the Frequency Stability vs. Temperature and Voltage requirements for the PCS band as per 47 CFR 2.1055(a), 2.1055(d), 24.235 and RSS-133. The maximum frequency error measured was less than 0.1 ppm.
The temperature range was from -30°C to +60°C in 10 degree temperature steps. The EUT was measured on low, middle and high channels at each temperature step. The EUT was measured at low (3.5 volts), nominal (3.8 volts) and high (4.1 volts) dc input voltage at each temperature step and channel at maximum output power.
See APPENDIX 3 for the test data.

- 8) The radiated spurious emissions/harmonics and ERP/EIRP were measured for both GSM850 and PCS bands. The results are within the limits. The EUT was placed on a nonconductive styrofoam table, 100 cm high that was positioned on a remotely controlled turntable. The EUT height of one metre was set in order to align it with the lowest height of the receiving antenna. The test distance used between the EUT and the receiving antenna was three metres. Then the emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The turntable was rotated to determine the azimuth of the peak emissions. The maximum emissions level was recorded. Both the horizontal and vertical polarisations of the emissions were measured.
The maximum emissions level was recorded. The EUT was then substituted with a substitution antenna placed in the same location as the EUT. A Dipole antenna was used for the ERP measurements and a Horn antenna was used for EIRP measurements. After the final maximum reading was obtained the Handheld was substituted with a dipole or horn antenna, which was placed in the same location as the Handheld. The substitution antenna was connected into a signal generator that was set to the test frequency. The emissions were maximized by elevating the antenna in the range of 1 to 4 metres. The signal generator output was then adjusted to match the Handheld output reading. The signal generator output was recorded. Both the horizontal and vertical polarisations of the emissions were measured.
The measurements were performed in a semi-anechoic chamber. The semi-anechoic chamber FCC registration number is **778487** and the Industry Canada file number is **IC4240**. The EUT was measured on the low, middle and high channels.

The highest ERP in the GSM850 band measured was 30.25 dBm at 837.6 MHz (channel 195).

The highest EIRP in the PCS band measured was 29.7 dBm at 1880 MHz (channel 661).

The radiated carrier harmonics were measured up to the 10th harmonic for low, middle and high channels in the GSM850 band and PCS band.

The worst test margin for GSM850 band harmonic emissions measured was 22.2 dB below the limit at 3395.2 MHz.

The worst test margin for PCS band harmonic emissions measured was 15.4 dB below the limit at 5729.4 MHz.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

The EUT's RF local oscillator (LO) emissions were measured in the GSM850 band and PCS band in the standalone configuration in the vertical position on the low and high channels. Both the horizontal and vertical polarizations were measured. The RF LO emissions were in the NF.

The radiated carrier harmonics were measured up to the 10th harmonic for low, middle and high channels for simultaneous transmission in GSM850 and Bluetooth and in PCS and Bluetooth. Both the horizontal and vertical polarizations were measured. The harmonics emissions above the 4th harmonics were in the NF for the GSM850 band and above the 3rd harmonics for the PCS band.

The worst test margin for GSM850 band measured was 20.9 dB below the limit at 3395.2 MHz.

The worst test margin for PCS band measured was 16.5 dB below the limit at 5729.4 MHz.

Sample Calculation:

Field Strength (dB μ V/M) is calculated as follows:

FS = Measured Level (dB μ V) + A.F. (dB/m) + Cable Loss (dB) - Preamp (dB) + Filter Loss (dB)

Measurement Uncertainty ± 4.0 dB

To view the test data see APPENDIX 4.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

I) Compliance Test Equipment Used

<u>UNIT</u>	<u>MANUFACTURER</u>	<u>MODEL</u>	<u>SERIAL NUMBER</u>	<u>CAL DUE DATE</u> (YY MM DD)	<u>USE</u>
Preamplifier	Sonoma	310N/11909A	185831	05-11-26	Radiated Emissions
Preamplifier system	TDK RF Solutions	PA-02	080010	06-01-13	Radiated Emissions
EMI Receiver	Rohde & Schwarz	ESIB-40	100255	06-06-20	Radiated Emissions
Hybrid Log Antenna	TDK	HLP-3003C	130092	06-09-24	Radiated Emissions
Horn Antenna	TDK	HRN-0118	130092	06-09-24	Radiated Emissions
Horn Antenna	TDK	HRN-0118	30201	07-01-07	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	1018	07-02-05	Radiated Emissions
Dipole Antenna	Schwarzbeck	UHAP	974	06-09-21	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	837/493/073	06-02-26	Radiated Emissions
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	100251	06-05-19	Conducted Emissions
Spectrum Analyzer	HP	8563E	3745A08112	06-09-10	Conducted Emissions
DC Power Supply	HP	6632B	US37472178	07-09-14	Conducted Emissions
Power Sensor	Giga-tronics	80401A	1835838	05-12-03	Frequency Stability
Power Meter	Giga-tronics	8541C	1837762	05-12-03	Frequency Stability
Signal Generator	Agilent	8648C	4037U03155	07-09-13	Frequency Stability
Temperature Probe	Control Company	15-077-21	51129471	07-05-20	Frequency Stability
Environmental Chamber	ESPEC Corp.	SH-240S1	91005607	N/R	Frequency Stability

APPENDIX 1


RF CONDUCTED EMISSIONS TEST DATA/PLOTS

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

This appendix contains measurement data pertaining to conducted spurious emissions, –26 dBc bandwidth, 99% power bandwidth and the channel mask.

Test Setup Diagram

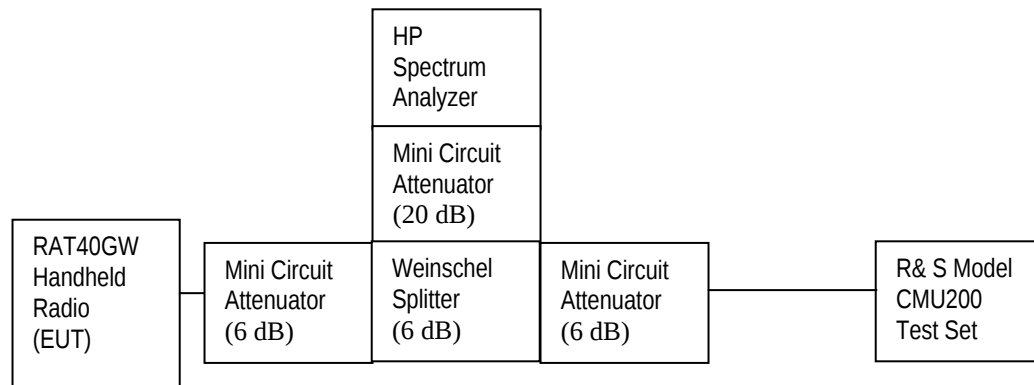

Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	HP	8563E	3745A08112	30 Hz – 26.5 GHz
Splitter	Weinschel	1515	ME092	DC – 18 GHz
Attenuator	Mini Circuit	MCL BW-S20W2	--	DC – 18 GHz
Attenuator	Mini Circuit	MCL BW-S6W2	--	DC – 18 GHz
Attenuator	Mini Circuit	MCL BW-S6W2	--	DC – 18 GHz
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	100251	--

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

The conducted spurious emissions – As per 47 CFR 2.1051, CFR 24.238(a), RSS-133, CFR 22 Subpart H and RSS-132 were measured from 10 MHz to 20 GHz. The EUT emissions were in the noise floor.

See figures 1 to 12 for the plots of the conducted spurious emissions.

–26 dBc Bandwidth and Occupied Bandwidth (99%)

For each carrier frequency of low, middle and high, the modulation spectrum was measured by both methods of 99% power bandwidth and –26 dBc bandwidth.

The resolution bandwidth required for out-of-band emissions in the 1 MHz bands immediately outside and adjacent to the frequency block, was determined to be at least 1% of the emission bandwidth.

The worst case –26dBc bandwidth for the three GSM850 channels was measured to be 277 kHz, and for the three PCS channels was measured to be 270 kHz as shown below. This results in a 3.0 kHz resolution bandwidth.

On any frequency outside the frequency block and outside the adjacent 1 MHz bands, a resolution bandwidth of at least 1 MHz was employed.

Test Data for GSM850 and PCS selected Frequencies

GSM850 Frequency (MHz)	-26dBc Bandwidth (kHz)	-99% Occupied Bandwidth (kHz)
824.2	277	245
837.6	270	245
848.8	273	245

PCS Frequency (MHz)	-26dBc Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
1850.2	270	243
1880.0	263	243
1909.8	270	245

Measurement Plots for GSM850 and PCS

Refer to the following measurement plots for more detail.

See Figures 13 to 24 for the plots of the –26dBc Bandwidth and 99% Occupied Bandwidth.

See Figures 25 to 28 for plots of the channel mask results.

The RF power output was at maximum for all the recorded measurements shown below.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 1: GSM 850, Spurious Conducted Emissions, Low channel


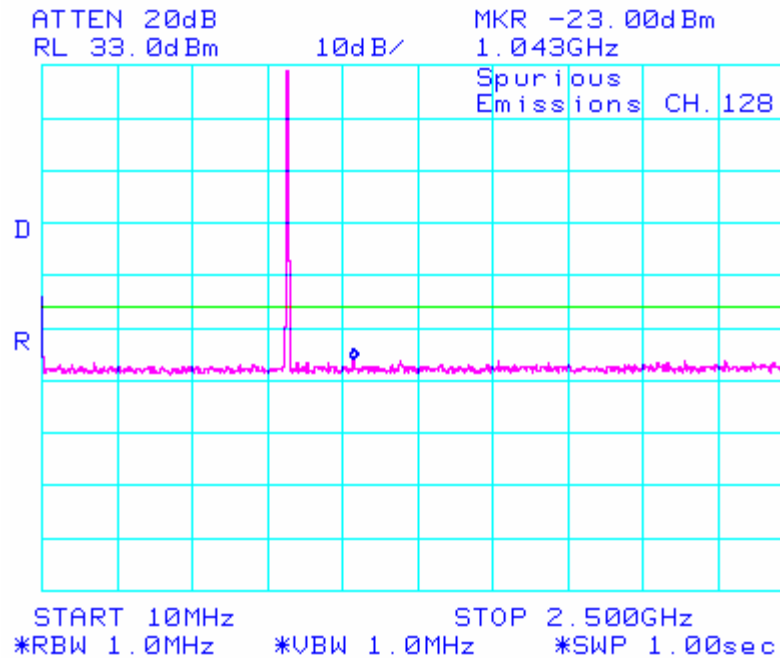


Figure 2: GSM 850, Spurious Conducted Emissions, Low channel

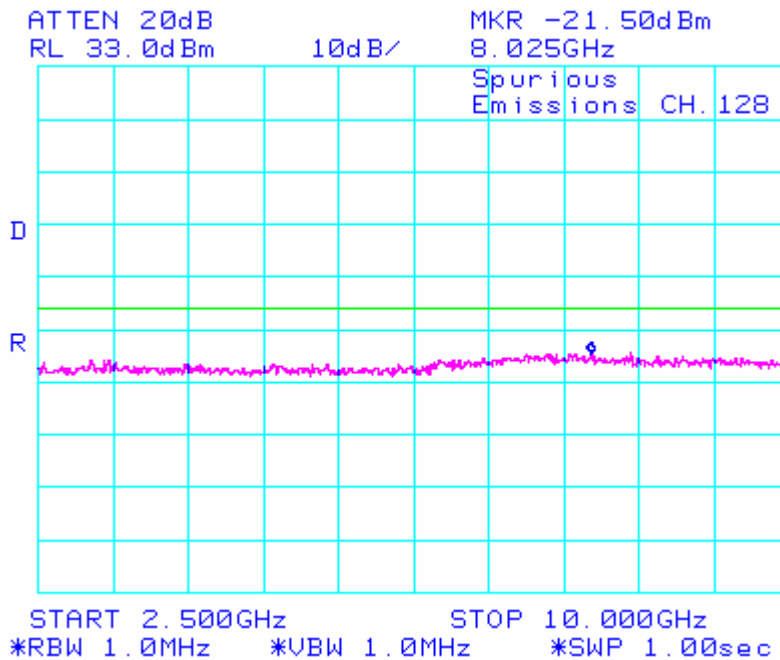

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 3: GSM 850, Spurious Conducted Emissions, Middle Channel


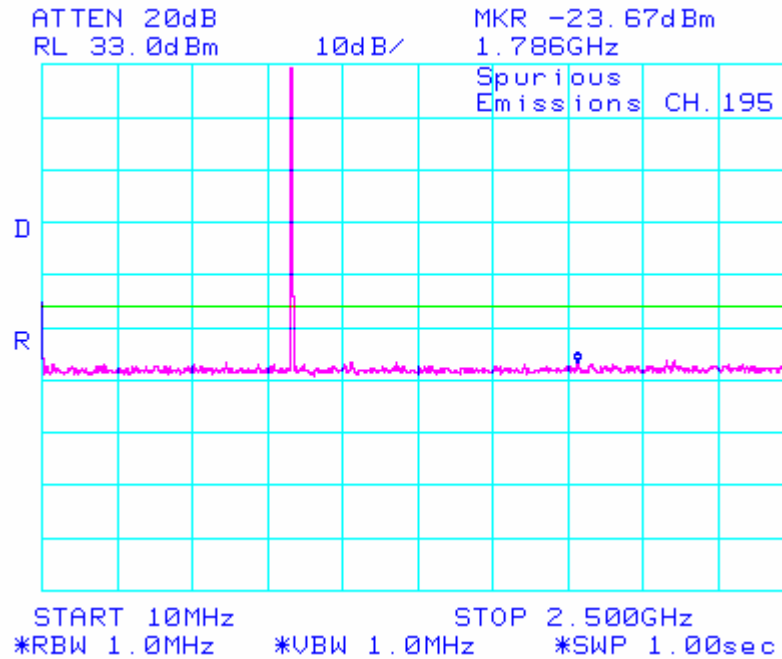


Figure 4: GSM 850, Spurious Conducted Emissions, Middle Channel

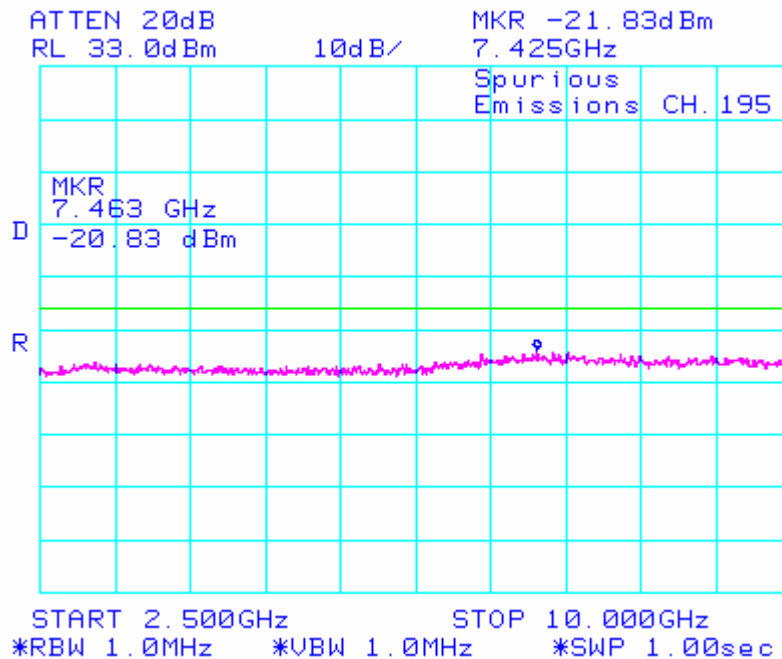

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 5: GSM 850, Spurious Conducted Emissions, High Channel


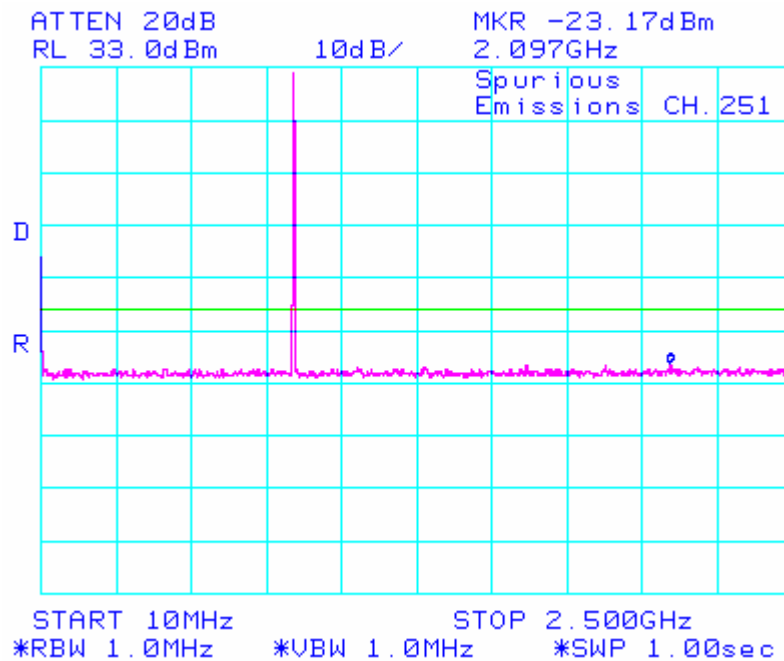


Figure 6: GSM 850, Spurious Conducted Emissions, High Channel

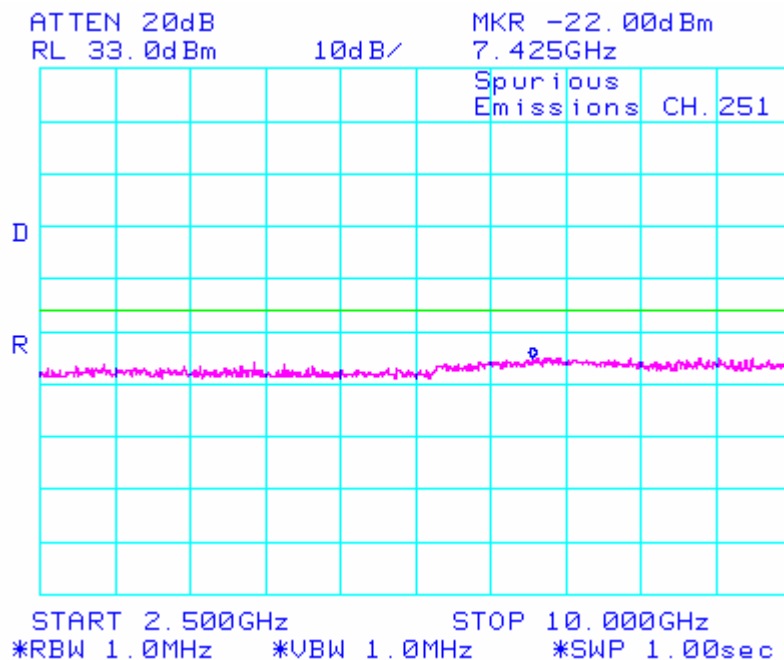

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 7: PCS, Spurious Conducted Emissions, Low Channel


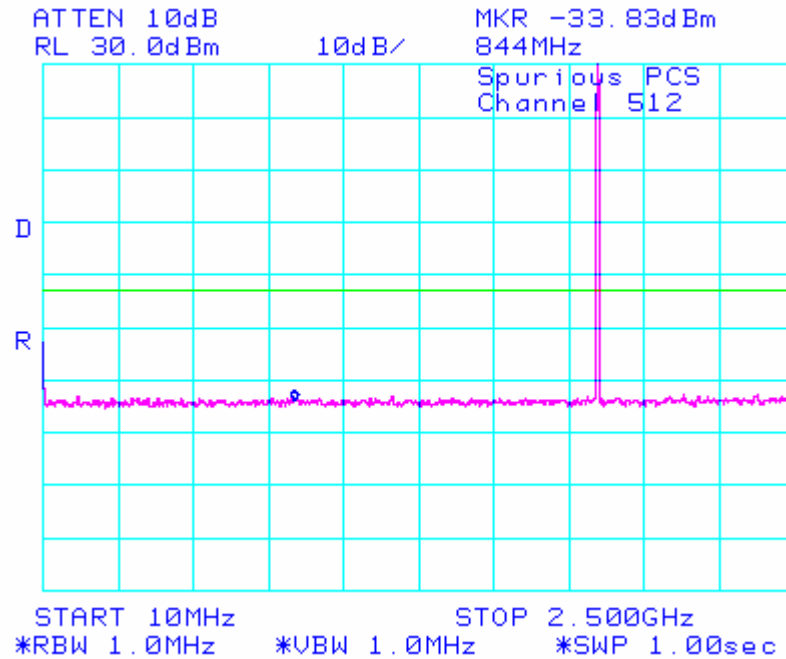


Figure 8: PCS, Spurious Conducted Emissions, Low Channel

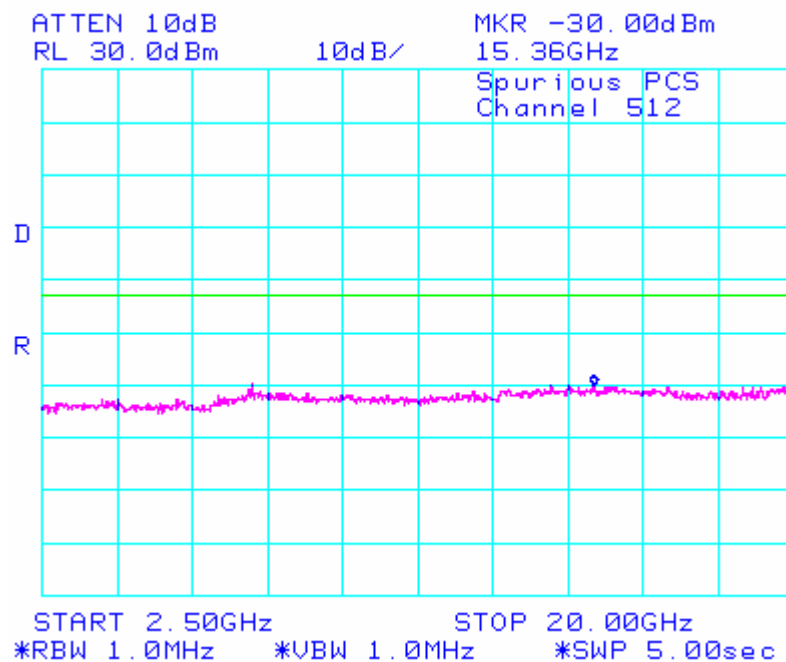

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 9: PCS, Spurious Conducted Emissions, Middle Channel


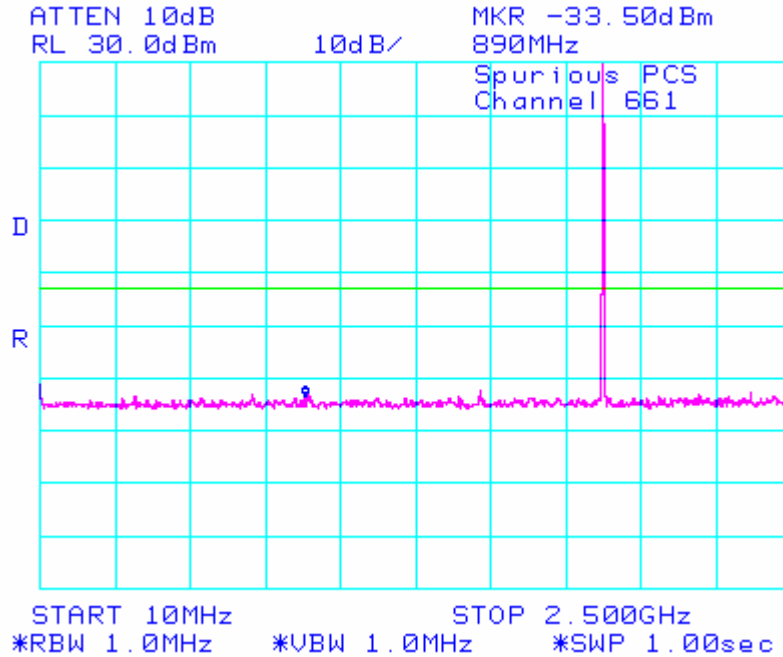


Figure 10: PCS, Spurious Conducted Emissions, Middle Channel

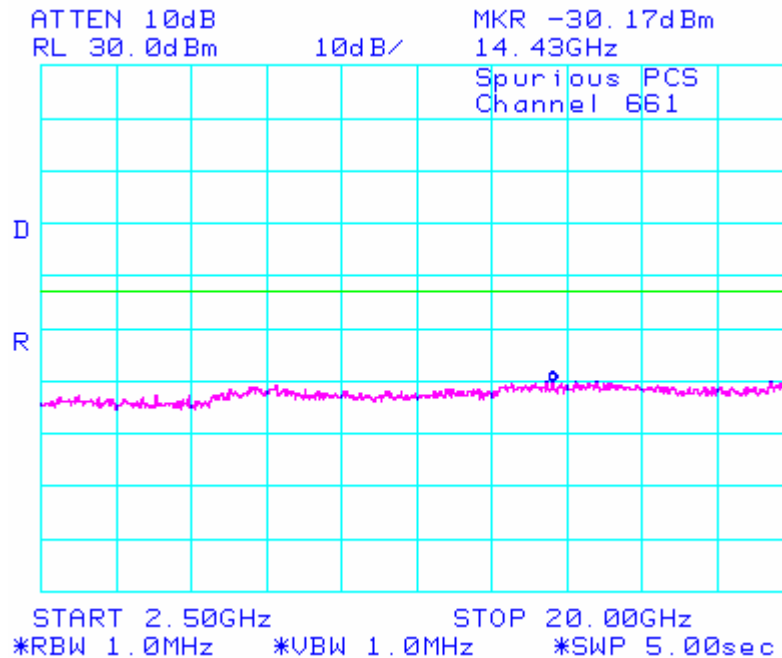

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 11: PCS, Spurious Conducted Emissions, High Channel


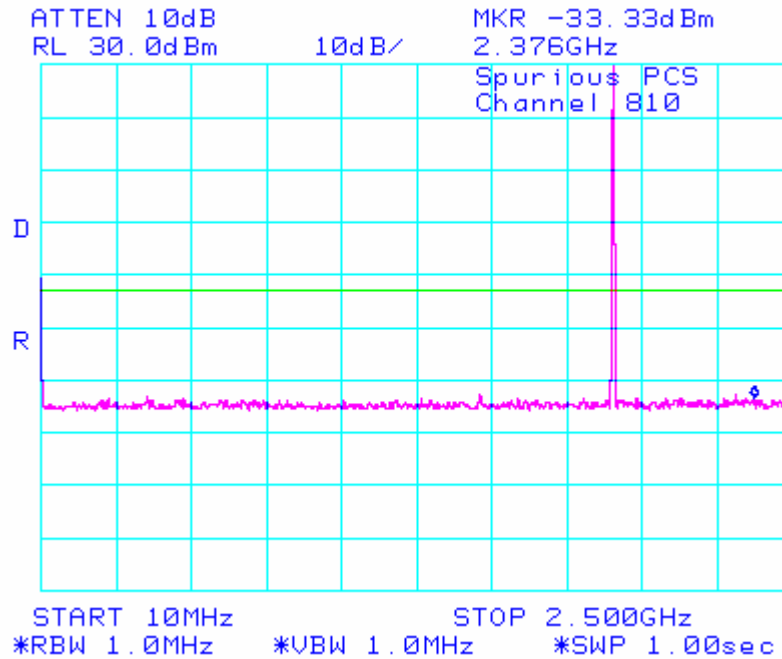


Figure 12: PCS, Spurious Conducted Emissions, High Channel

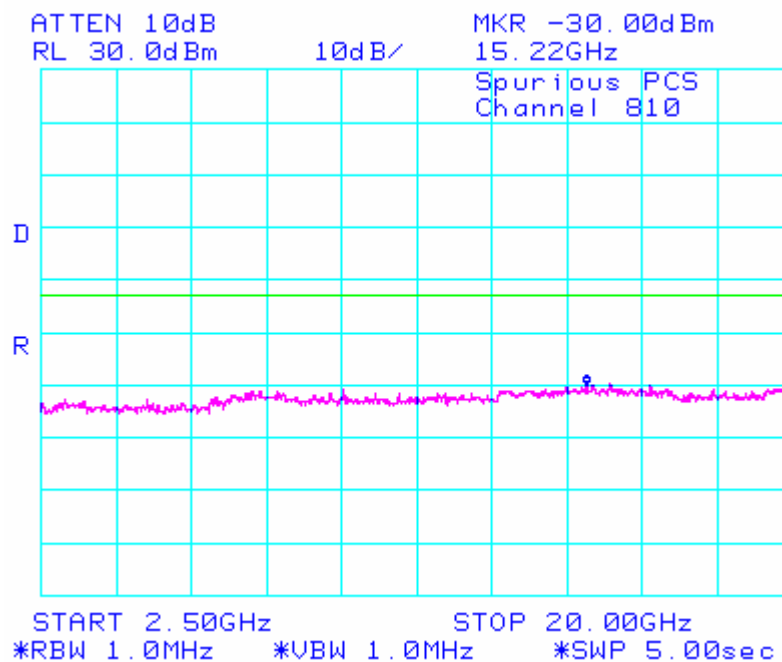

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 13: -26dBc bandwidth, GSM 850 Low Channel


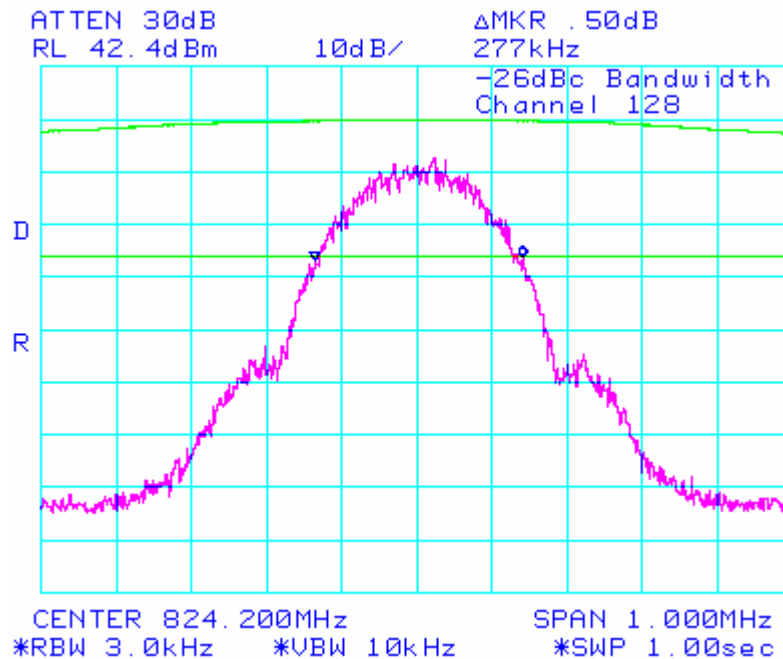


Figure 14: Occupied Bandwidth, GSM 850 Low Channel

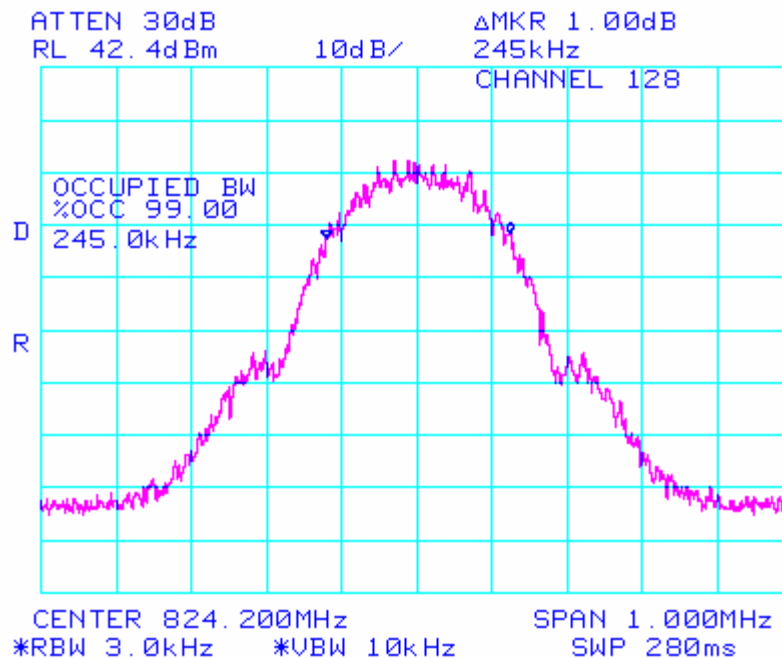

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 15: -26dBc bandwidth, GSM 850 Middle Channel


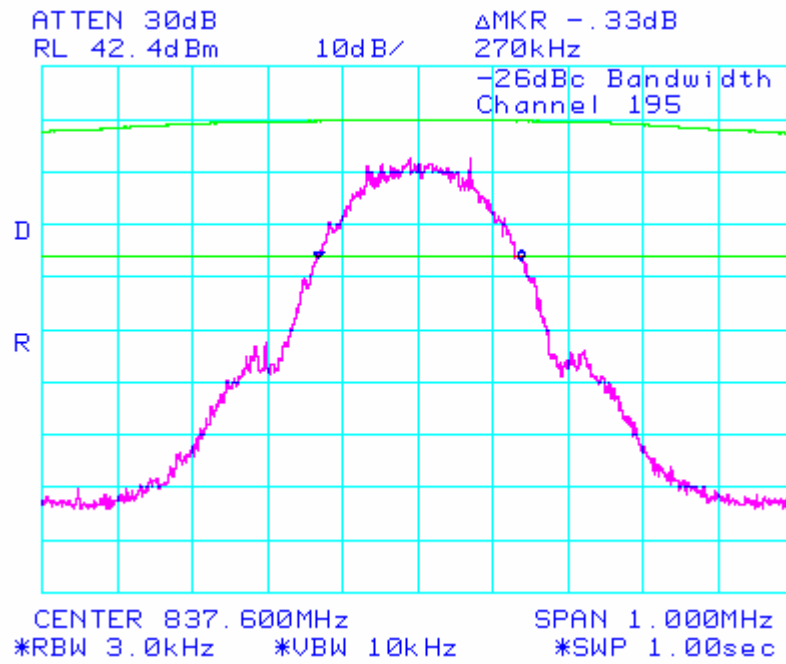


Figure 16: Occupied Bandwidth, GSM 850 Middle Channel

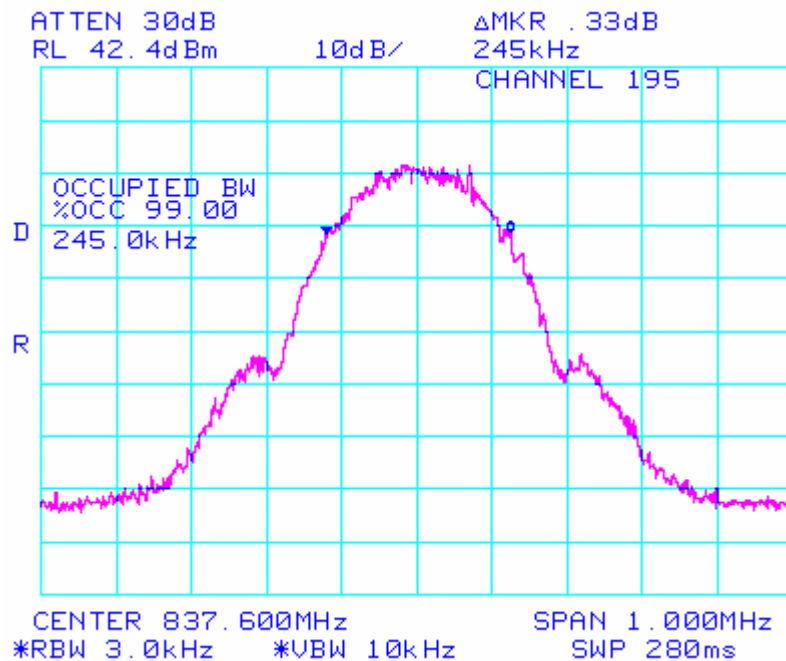

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 17: -26dBc bandwidth, GSM 850 High Channel


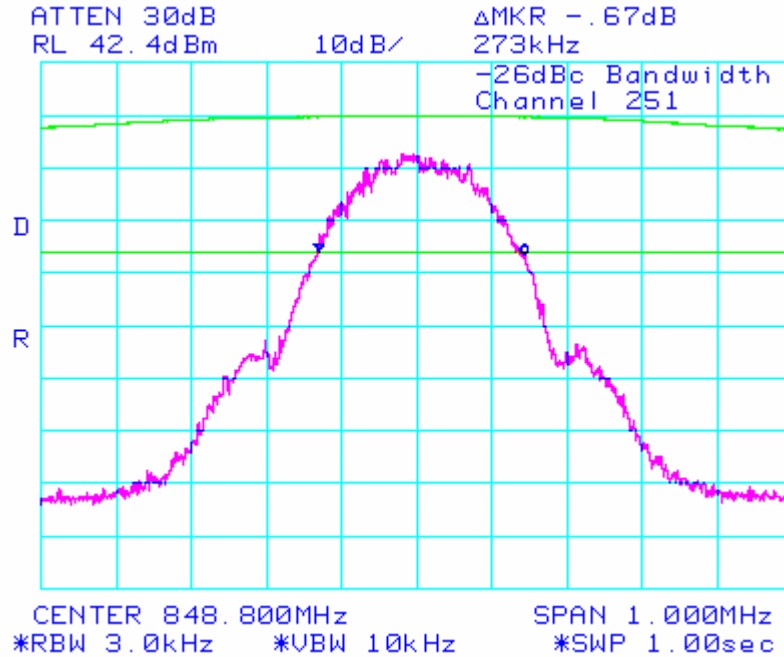


Figure 18: Occupied Bandwidth, GSM 850 High Channel

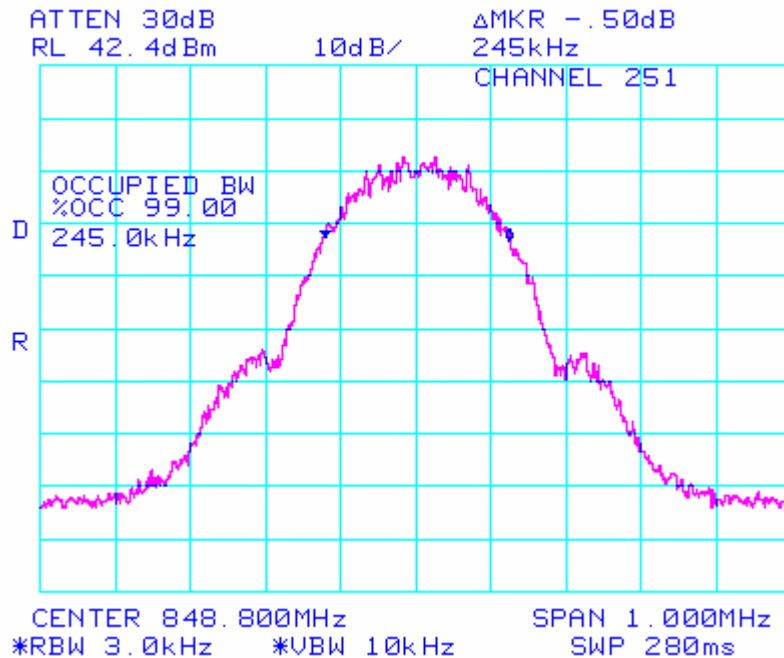

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 19: -26dBc bandwidth, PCS Low Channel


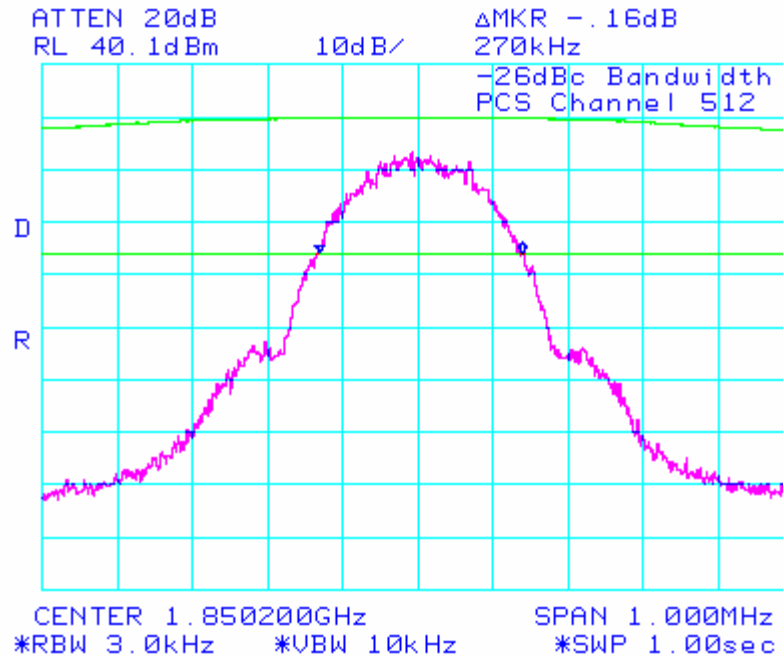


Figure 20: Occupied Bandwidth, PCS Low Channel

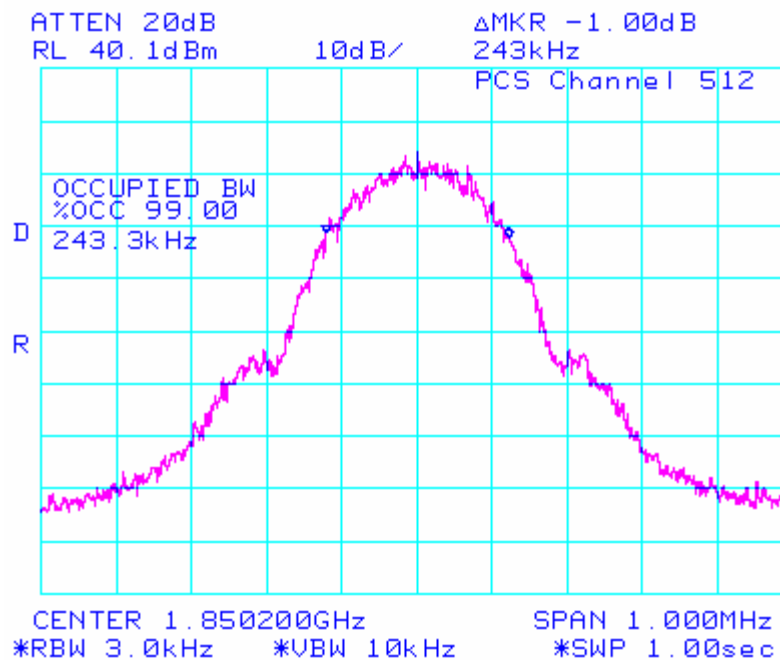

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 21: -26dBc bandwidth, PCS Middle Channel


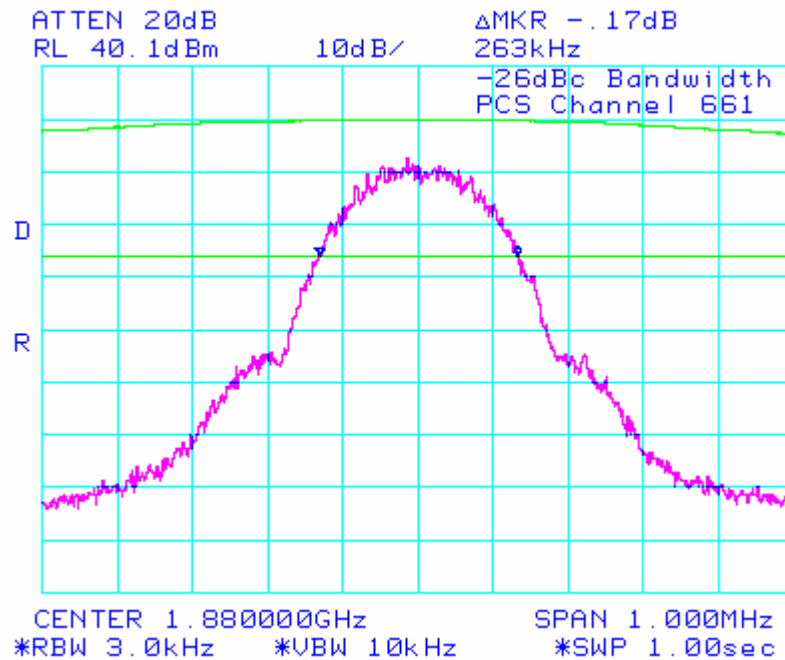


Figure 22: Occupied Bandwidth, PCS Middle Channel

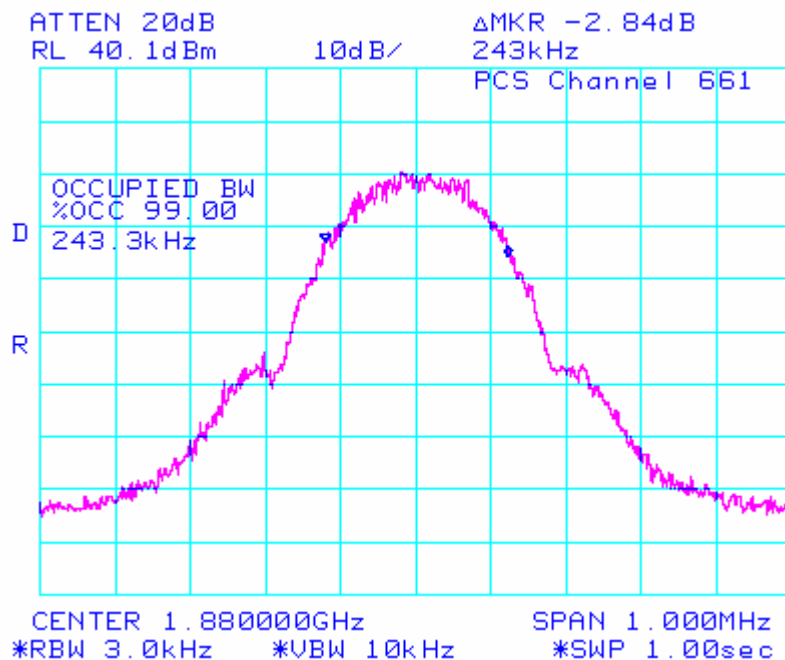

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 23: -26dBc bandwidth, PCS High Channel


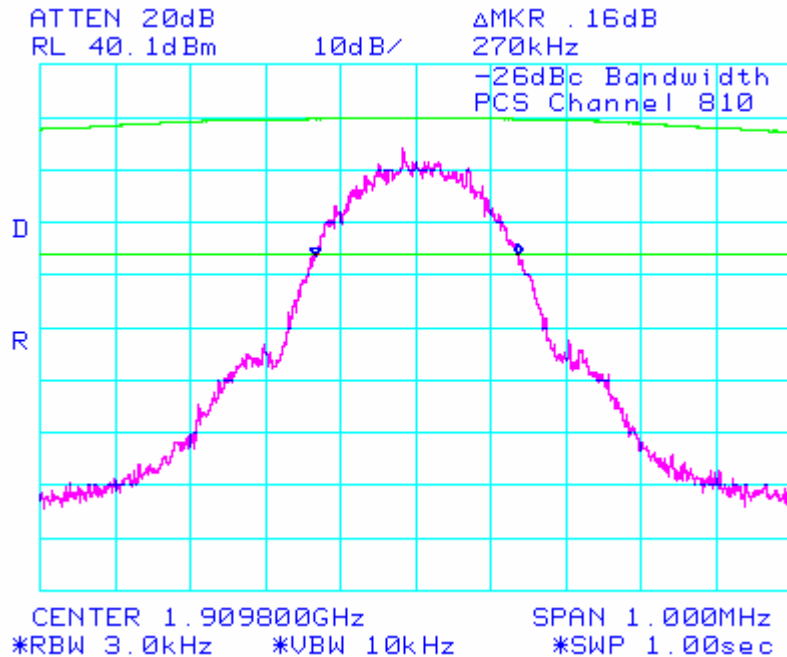


Figure 24: Occupied Bandwidth, PCS High Channel

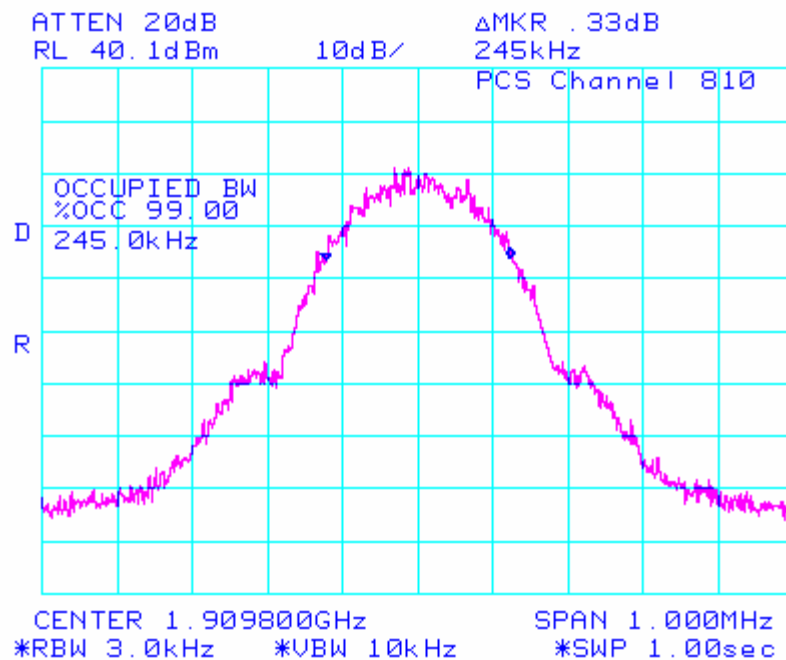

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure 25: GSM 850, Low Channel Mask


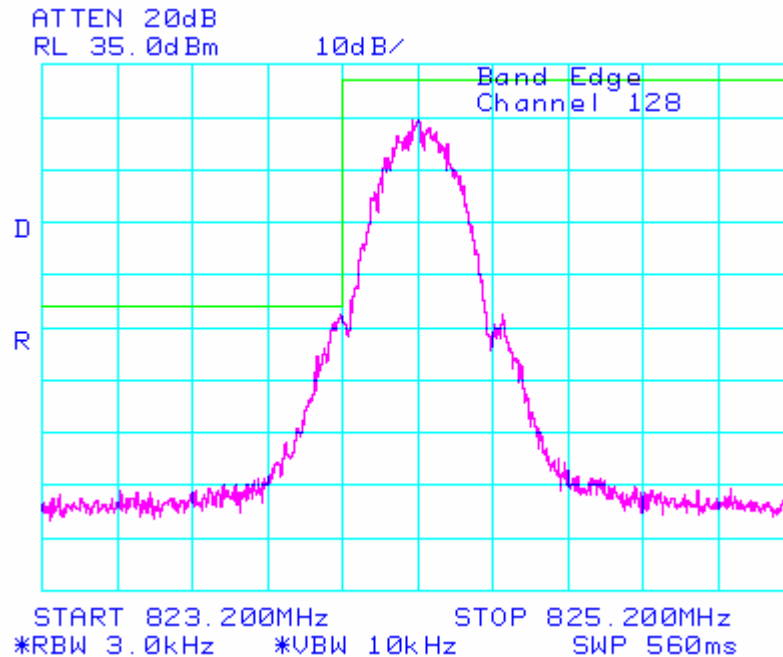


Figure 26: GSM 850 High Channel Mask

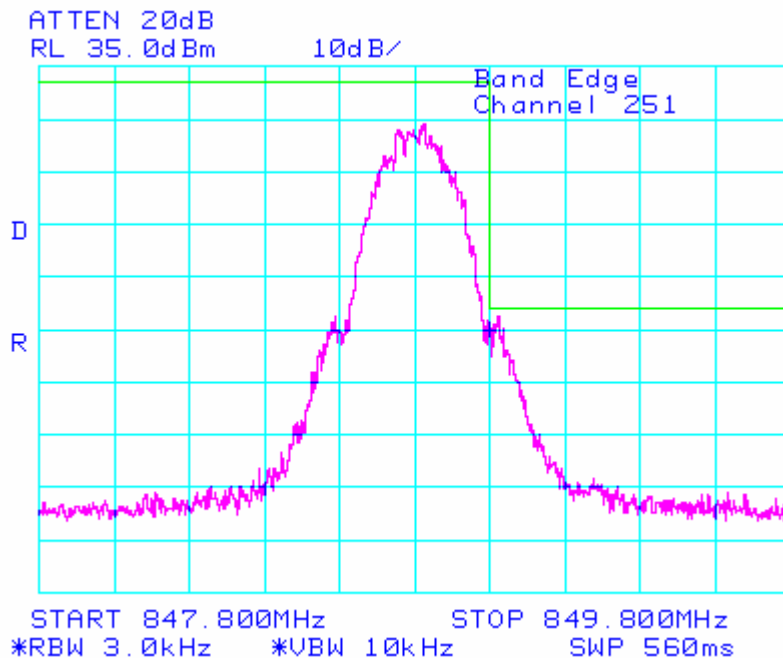

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 1	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

RF Conducted Emission Test Data cont'd

Figure27: PCS, Low Channel Mask


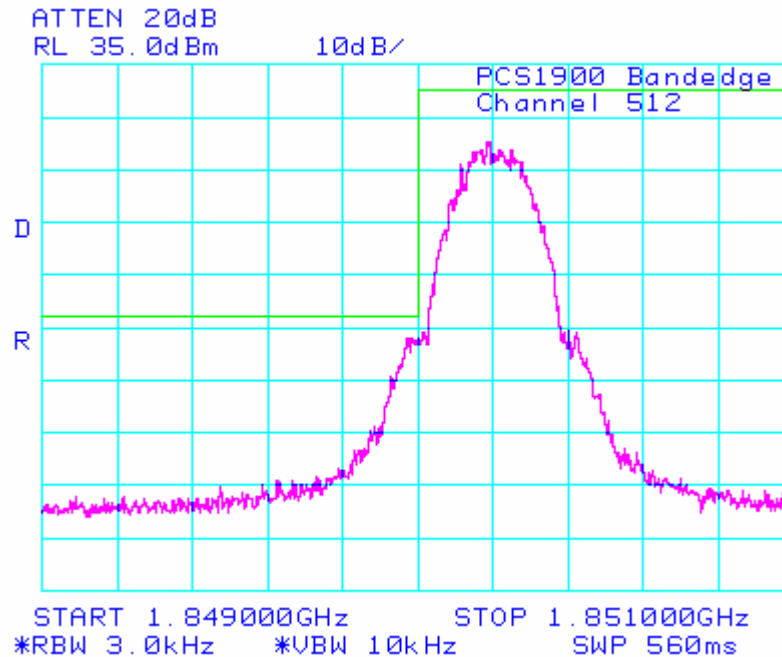


Figure28: PCS, High Channel Mask

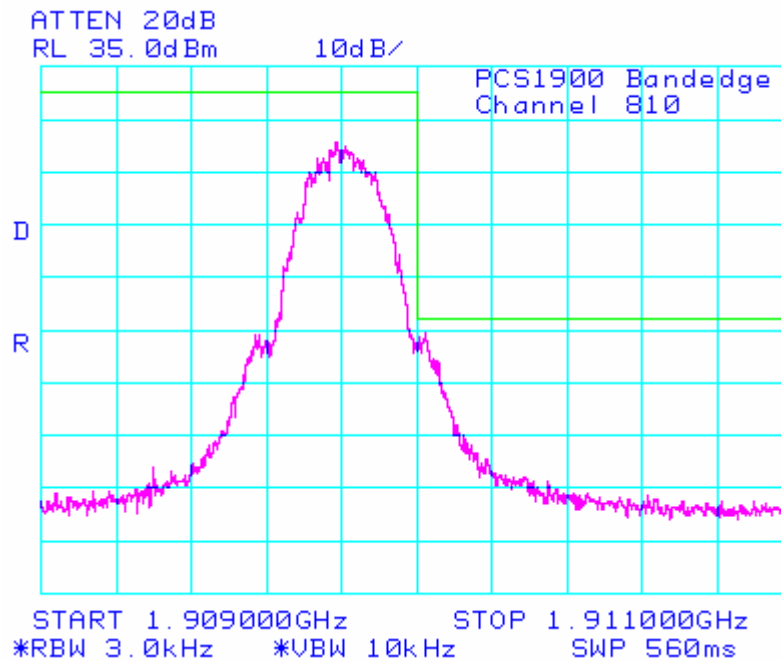

APPENDIX 2

CONDUCTED RF OUTPUT POWER TEST DATA

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 2	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Conducted RF Output Power Test Data

The conducted RF output power was measured using the Communication Tester, Rohde & Schwarz, model CMU 200. The low, middle and high channels were measured at maximum radio output power. The insertion loss of the coaxial cable from the CMU 200 to the Handheld was compensated for in the measurements.

Peak nominal output power is 32.5 dBm $\pm$ 0.3 dB for GSM850 and 29.3 dBm $\pm$ 0.5 dB for PCS.

Test Results


Channel	Frequency (MHz)	Maximum Output Power (dBm)
<u>GSM850</u>		
128	824.20	32.68
189	837.60	32.65
251	848.80	32.70
<u>PCS</u>		
512	1850.2	29.59
661	1880.0	29.50
810	1909.8	29.56

APPENDIX 3

FREQUENCY STABILITY TEST DATA

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Frequency Stability Test Data

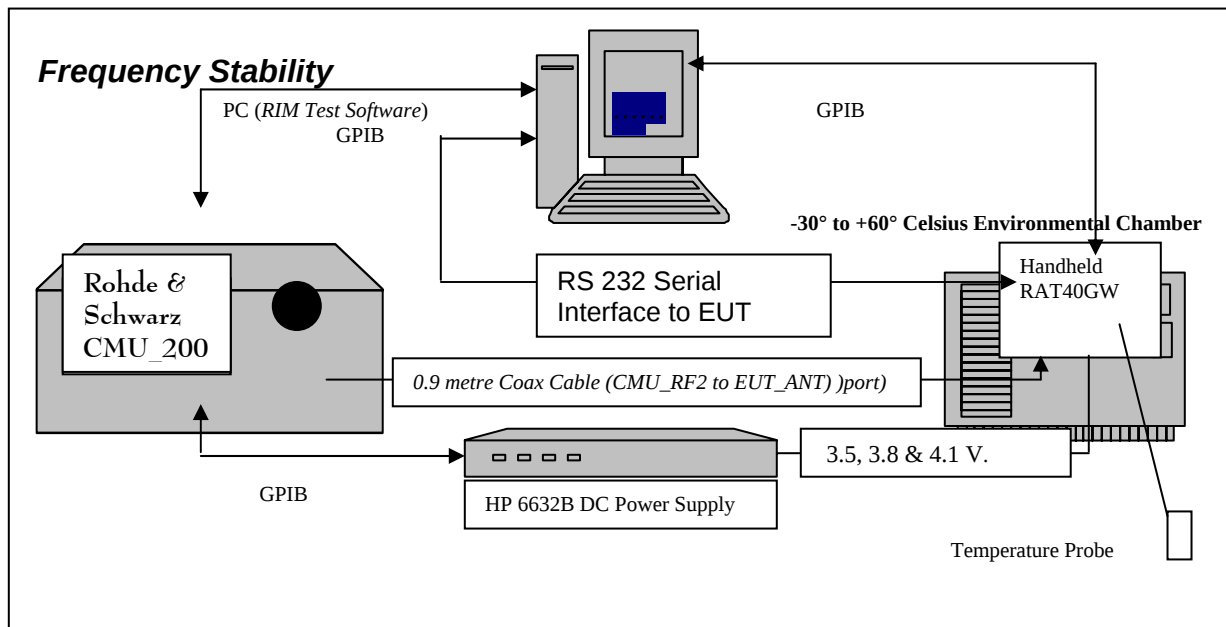

SYSTEM	Model	Serial Number	Calibration Due Date.
R & S Universal Radio Communication Test Set	CMU200	100251	19-May-06
HP System DC Power Supply	6632B	US37472178	12-July-2007
Agilent Signal Generator	8648C	4037U03155	13-Sept.-2007
Giga-tronics Power Meter	8541C	1837762	03 Dec.-2005
Giga-tranics Power Sensor	80401A	1835838	03 Dec.-2005
Espec Environmental Chamber	SH240S1	91004919	N/A
Control Company Temperature Probe	15-077-21	51129471	20-May-2007

CFR 47 Chapter 1 - Federal Communications Commission Rules

Part 2 Required Measurements

2.995 Frequency Stability - Procedures

- (a,b) Frequency Stability - Temperature Variation
- (d) Frequency Stability - Voltage Variation

24.235 Frequency Stability.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The RAT40GW handheld, (referred as EUT herein and after) transmitted frequencies are less than 0.1 ppm of the received frequency from the Rhode & Schwarz CMU 200 Universal Radio Communication Test Set.

The EUT meets the requirements as stated in CFR 47 chapter 1, Section 24.235, RSS-133, CFR 47 chapter 1, Section 22.917 and RSS-132 Frequency Stability.

This report shall NOT be reproduced except in full without the written consent of RIM Testing Services (RTS)

A division of Research in Motion Limited.

Copyright 2004-2005

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Frequency Stability measurement devices were configured as presented in the block diagram recording frequency, power, data, temperatures, and stepped voltages controlled via a GPIB interface linked to the Environmental chamber, a DC power supply, and the Communications Test Set. A 0.9-meter coax cable was calibrated to characterize the insertion loss for the transmitted frequencies between the RF input/output of the CMU 200 and the EUT antenna port; located inside the environmental chamber.

Calibration for the Cable Loss was performed in the RF Laboratory on 09 August 2005 using the Giga-tronics power meter and Agilent Signal Generator.

The cable assembly from the RF input to the RF output was measured at the following Frequencies:

PCS Frequency (MHz)	Cable loss (dB)	GSM 850 Frequency (MHz)	Cable loss (dB)
1850.2	1.10	824.2	0.71
1880.0	1.10	836.4	0.71
1909.8	1.10	848.6	0.71

Procedure:

The EUT was placed in the Temperature chamber and connected to CMU 200 outside as shown in the figure above. Dry air was pumped inside the temperature chamber to maintain a backpressure during the test. The EUT was kept in the off condition at all times except when the measurements were to be made.

The chamber was switched on and the temperature was set to -30°C.

After the chamber stabilized at -30 °C there was a soak period of one hour to alleviate moisture in the chamber, the EUT voltage was enabled.

The system software recorded the frequency, power, and associated measurements.

A Computer system controlled the automated software. This application was given the command of activating all machines intrinsic to the temperature and voltage tests controlling the CMU 200 via the GPIB Bus. The Environmental Chamber was instructed through an RS-232 serial line. The EUT dialogue was passed through a serial connection.

The EUT repetitively transmitted 100 bursts for each set of programmed parameters recording temperature, voltage settings, and systematically selected frequencies. The power supply was cycled from minimum voltage 3.5 volts, to 3.8 volts to 4.1 volts nominal voltage.

The frequency error was measured at a maximum output power and recorded by the automated system test software.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

The EUT output power and frequency was measured at 3.5 volts, 3.8 volts and 4.1 volts. The transmit frequency was varied in 3 steps consisting of 824.2, 836.4, and 848.6 MHz for the GSM850 band and 1850.2, 1880.0 and 1909.8 MHz for the PCS band. This frequency was recorded in MHz and deviation from nominal, in Parts Per Million.

After the initial one-hour soak at the beginning of the tests, a period of thirty minutes soak was initialized between each ascending temperature step, before proceeding to the next measurement test cycle.

PROCEDURE:

The test system software for commencing the Frequency Stability Tests carried through the following cycle.

1. Switch on the HP 6632B power supply; CMU 200 Communications test Set, and Environmental Chamber.
2. Start test program
3. Set the Temperature to -30°C and maintain a period of one- hour soak time, with the EUT supply voltage disabled.
4. Set power supply voltage to 3.5 Volts.
5. Set up CMU 200 Radio Communication Tester.
6. Command the CMU 200 to switch to the low channel.
7. Enable the voltage to the EUT, and connect a link to the CMU 200 test set.
8. EUT is commanded to Transmit 100 Bursts.
9. Software logs the following data from the CMU 200, power supply and temperature chamber: Traffic Channel Number, Traffic Channel Frequency, Power Level, Chamber Temperature, Supply Voltage, Power, Frequency Error.
10. The CMU 200 commands the EUT to change frequency to the middle channel and high channel and repeats steps 7 to 9.
11. Repeat steps 5 to 10 changing the supply voltage to 3.8 Volts
12. Increase temperature by 10°C and soak for 1/2 hour.
13. Repeat steps 4 - 12 for temperatures -30°C to 60°C .
14. Repeat steps 5 to 10 changing the supply voltage to 4.1 Volts

Procedure 5 to 10 was repeated at room temperature (20°C) with the power supply voltage set to 3.5, 3.8 and 4.1 Volts.

The maximum frequency error in the GSM850 band measured was -0.0464 PPM.

The maximum frequency error in the PCS band measured was -0.0377 PPM.

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

GSM850 Channel results: channels 128, 189 and 250 @ 20°C maximum transmitted power

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.5	20	17.89	0.0217
189	836.4	3.5	20	29.38	0.0351
250	848.6	3.5	20	27.31	0.0322

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.8	20	19.76	0.0240
189	836.4	3.8	20	25.63	0.0306
250	848.6	3.8	20	22.15	0.0261

Traffic Channel Number	GSM850 Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	4.1	20	15.30	0.0186
189	836.4	4.1	20	-20.15	-0.0241
250	848.6	4.1	20	-27.06	-0.0319

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

GSM850 Results: channel 128 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.5	-30	20.08	0.0244
128	824.2	3.5	-20	27.12	0.0329
128	824.2	3.5	-10	26.60	0.0323
128	824.2	3.5	0	30.48	0.0370
128	824.2	3.5	10	-30.41	-0.0369
128	824.2	3.5	20	17.89	0.0217
128	824.2	3.5	30	-17.18	-0.0208
128	824.2	3.5	40	-32.35	-0.0393
128	824.2	3.5	50	-21.24	-0.0258
128	824.2	3.5	60	17.31	0.0210

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	3.8	-30	-28.99	-0.0352
128	824.2	3.8	-20	-25.57	-0.0310
128	824.2	3.8	-10	21.11	0.0256
128	824.2	3.8	0	25.96	0.0315
128	824.2	3.8	10	25.70	0.0312
128	824.2	3.8	20	19.76	0.0240
128	824.2	3.8	30	-23.25	-0.0282
128	824.2	3.8	40	-33.38	-0.0405
128	824.2	3.8	50	-19.57	-0.0237
128	824.2	3.8	60	-20.40	-0.0248

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
128	824.2	4.1	-30	-38.16	-0.0463
128	824.2	4.1	-20	-16.21	-0.0197
128	824.2	4.1	-10	17.50	0.0212
128	824.2	4.1	0	22.86	0.0277
128	824.2	4.1	10	25.31	0.0307
128	824.2	4.1	20	15.30	0.0186
128	824.2	4.1	30	-23.83	-0.0289
128	824.2	4.1	40	20.28	0.0246
128	824.2	4.1	50	-30.03	-0.0364
128	824.2	4.1	60	-25.83	-0.0313

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

GSM850 Results: channel 189 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.4	3.5	-30	-25.96	-0.0310
189	836.4	3.5	-20	16.14	0.0193
189	836.4	3.5	-10	30.48	0.0364
189	836.4	3.5	0	31.90	0.0381
189	836.4	3.5	10	28.93	0.0346
189	836.4	3.5	20	29.38	0.0351
189	836.4	3.5	30	-27.83	-0.0333
189	836.4	3.5	40	-32.80	-0.0392
189	836.4	3.5	50	-17.63	-0.0211
189	836.4	3.5	60	-21.05	-0.0252

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.4	3.8	-30	-38.36	-0.0459
189	836.4	3.8	-20	14.72	0.0176
189	836.4	3.8	-10	21.44	0.0256
189	836.4	3.8	0	23.50	0.0281
189	836.4	3.8	10	28.99	0.0347
189	836.4	3.8	20	25.63	0.0306
189	836.4	3.8	30	-29.83	-0.0357
189	836.4	3.8	40	-38.81	-0.0464
189	836.4	3.8	50	-25.83	-0.0309
189	836.4	3.8	60	-20.28	-0.0242

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
189	836.4	4.1	-30	-34.68	-0.0415
189	836.4	4.1	-20	16.40	0.0196
189	836.4	4.1	-10	19.37	0.0232
189	836.4	4.1	0	20.92	0.0250
189	836.4	4.1	10	29.83	0.0357
189	836.4	4.1	20	-20.15	-0.0241
189	836.4	4.1	30	-26.15	-0.0313
189	836.4	4.1	40	15.88	0.0190
189	836.4	4.1	50	-29.25	-0.0350
189	836.4	4.1	60	16.72	0.0200

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

GSM850 Results: channel 250 @ maximum transmitted power

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
250	848.6	3.5	-30	-28.61	-0.0337
250	848.6	3.5	-20	-18.21	-0.0215
250	848.6	3.5	-10	22.28	0.0263
250	848.6	3.5	0	25.76	0.0304
250	848.6	3.5	10	24.67	0.0291
250	848.6	3.5	20	27.31	0.0322
250	848.6	3.5	30	-27.77	-0.0327
250	848.6	3.5	40	-36.22	-0.0427
250	848.6	3.5	50	14.66	0.0173
250	848.6	3.5	60	-28.15	-0.0332

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
250	848.6	3.8	-30	-34.74	-0.0409
250	848.6	3.8	-20	-21.83	-0.0257
250	848.6	3.8	-10	16.66	0.0196
250	848.6	3.8	0	27.44	0.0323
250	848.6	3.8	10	29.32	0.0346
250	848.6	3.8	20	22.15	0.0261
250	848.6	3.8	30	-18.92	-0.0223
250	848.6	3.8	40	-36.35	-0.0428
250	848.6	3.8	50	-26.67	-0.0314
250	848.6	3.8	60	-20.79	-0.0245

Traffic Channel Number	Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
250	848.6	4.1	-30	-35.06	-0.0413
250	848.6	4.1	-20	21.50	0.0253
250	848.6	4.1	-10	18.27	0.0215
250	848.6	4.1	0	18.34	0.0216
250	848.6	4.1	10	30.87	0.0364
250	848.6	4.1	20	-27.06	-0.0319
250	848.6	4.1	30	-19.63	-0.0231
250	848.6	4.1	40	22.86	0.0269
250	848.6	4.1	50	-27.38	-0.0323
250	848.6	4.1	60	19.24	0.0227

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

PCS Channel results: channels 512, 661, & 810 @ 20°C maximum transmitted power

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.2	3.5	20	-30.15	-0.0163
661	1880.0	3.5	20	-22.28	-0.0119
810	1909.8	3.5	20	32.80	0.0172

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.2	3.8	20	24.86	0.0134
661	1880.0	3.8	20	31.83	0.0169
810	1909.8	3.8	20	35.06	0.0184

Traffic Channel Number	PCS Frequency (MHz)	Voltage (Volts)	Temperature (Celsius)	Frequency Error (Hz)	PPM
512	1850.2	4.1	20	-23.83	-0.0129
661	1880.0	4.1	20	31.90	0.0170
810	1909.8	4.1	20	-22.08	-0.0116

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

PCS 1900 Results: channel 512 @ maximum transmitted power

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	3.5	-30	-32.16	-0.0174
512	1850.2	3.5	-20	35.45	0.0192
512	1850.2	3.5	-10	-25.63	-0.0139
512	1850.2	3.5	0	23.25	0.0126
512	1850.2	3.5	10	35.19	0.0190
512	1850.2	3.5	20	-30.15	-0.0163
512	1850.2	3.5	30	22.47	0.0121
512	1850.2	3.5	40	-26.54	-0.0143
512	1850.2	3.5	50	-40.74	-0.0220
512	1850.2	3.5	60	-51.79	-0.0280

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	3.8	-30	-36.48	-0.0197
512	1850.2	3.8	-20	28.41	0.0154
512	1850.2	3.8	-10	40.23	0.0217
512	1850.2	3.8	0	-34.29	-0.0185
512	1850.2	3.8	10	25.18	0.0136
512	1850.2	3.8	20	24.86	0.0134
512	1850.2	3.8	30	20.79	0.0112
512	1850.2	3.8	40	29.25	0.0158
512	1850.2	3.8	50	-63.86	-0.0345
512	1850.2	3.8	60	-47.85	-0.0259

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
512	1850.2	4.1	-30	-31.12	-0.0168
512	1850.2	4.1	-20	34.16	0.0185
512	1850.2	4.1	-10	23.89	0.0129
512	1850.2	4.1	0	32.35	0.0175
512	1850.2	4.1	10	25.57	0.0138
512	1850.2	4.1	20	-23.83	-0.0129
512	1850.2	4.1	30	-27.89	-0.0151
512	1850.2	4.1	40	-37.19	-0.0201
512	1850.2	4.1	50	-52.24	-0.0282
512	1850.2	4.1	60	-52.88	-0.0286

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

PCS 1900 Results: channel 661 @ maximum transmitted power

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
661	1880.0	3.5	-30	23.57	0.0125
661	1880.0	3.5	-20	47.85	0.0255
661	1880.0	3.5	-10	28.15	0.0150
661	1880.0	3.5	0	21.05	0.0112
661	1880.0	3.5	10	37.97	0.0202
661	1880.0	3.5	20	-22.28	-0.0119
661	1880.0	3.5	30	-32.67	-0.0174
661	1880.0	3.5	40	-46.30	-0.0246
661	1880.0	3.5	50	-43.46	-0.0231
661	1880.0	3.5	60	-53.08	-0.0282

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
661	1880.0	3.8	-30	35.32	0.0188
661	1880.0	3.8	-20	36.81	0.0196
661	1880.0	3.8	-10	40.94	0.0218
661	1880.0	3.8	0	-25.38	-0.0135
661	1880.0	3.8	10	31.83	0.0169
661	1880.0	3.8	20	31.83	0.0169
661	1880.0	3.8	30	-29.70	-0.0158
661	1880.0	3.8	40	-44.10	-0.0235
661	1880.0	3.8	50	-31.45	-0.0167
661	1880.0	3.8	60	-58.89	-0.0313

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
661	1880.0	4.1	-30	-21.31	-0.0113
661	1880.0	4.1	-20	43.39	0.0231
661	1880.0	4.1	-10	-27.83	-0.0148
661	1880.0	4.1	0	26.28	0.0140
661	1880.0	4.1	10	29.96	0.0159
661	1880.0	4.1	20	31.90	0.0170
661	1880.0	4.1	30	-29.70	-0.0158
661	1880.0	4.1	40	-45.85	-0.0244
661	1880.0	4.1	50	-62.76	-0.0334
661	1880.0	4.1	60	-64.51	-0.0343

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 3	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

PCS 1900 Results: channel 810 @ maximum transmitted power

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
810	1909.8	3.5	-30	37.90	0.0198
810	1909.8	3.5	-20	39.45	0.0207
810	1909.8	3.5	-10	25.38	0.0133
810	1909.8	3.5	0	53.79	0.0282
810	1909.8	3.5	10	43.65	0.0229
810	1909.8	3.5	20	32.80	0.0172
810	1909.8	3.5	30	-26.67	-0.0140
810	1909.8	3.5	40	-35.45	-0.0186
810	1909.8	3.5	50	-64.96	-0.0340
810	1909.8	3.5	60	-72.00	-0.0377

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
810	1909.8	3.8	-30	-31.38	-0.0164
810	1909.8	3.8	-20	46.17	0.0242
810	1909.8	3.8	-10	39.91	0.0209
810	1909.8	3.8	0	60.70	0.0318
810	1909.8	3.8	10	30.28	0.0159
810	1909.8	3.8	20	35.06	0.0184
810	1909.8	3.8	30	-40.74	-0.0213
810	1909.8	3.8	40	-47.78	-0.0250
810	1909.8	3.8	50	-57.02	-0.0299
810	1909.8	3.8	60	-58.89	-0.0308

<i>Traffic Channel Number</i>	<i>Frequency (MHz)</i>	<i>Voltage (Volts)</i>	<i>Temperature (Celsius)</i>	<i>Frequency Error (Hz)</i>	<i>PPM</i>
810	1909.8	4.1	-30	70.45	0.0369
810	1909.8	4.1	-20	48.88	0.0256
810	1909.8	4.1	-10	50.62	0.0265
810	1909.8	4.1	0	52.30	0.0274
810	1909.8	4.1	10	45.85	0.0240
810	1909.8	4.1	20	-22.08	-0.0116
810	1909.8	4.1	30	-39.84	-0.0209
810	1909.8	4.1	40	-69.74	-0.0365
810	1909.8	4.1	50	-55.66	-0.0291
810	1909.8	4.1	60	-57.15	-0.0299

APPENDIX 4

RADIATED EMISSIONS TEST DATA

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results

Test distance is 3.0 metres

August 30, 2005

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
								Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Dipole)	Limit (dBm)	Diff. To Limit (dB)
GSM850 Band (ERP)												
Handheld Standalone, on its side												
F0	128	824.20	850	Dipole	V	77.2	86.6	V V	13.6	29.85	38.50	-8.65
F0	128	824.20	850	Dipole	H	88.6		H H	12.4			
F0	195	837.60	850	Dipole	V	76.1	87.0	V V	14.0	30.25	38.50	-8.25
F0	195	837.60	850	Dipole	H	87.0		H H	11.9			
F0	251	848.80	850	Dipole	V	76.7	88.6	V V	13.6	29.85	38.50	-8.65
F0	251	848.80	850	Dipole	H	86.8		H H	11.6			

ERP = Tracking Generator Level + Antenna Gain – Cable Loss + Preamp

Example: 824.20 MHz = 13.6 (Tracking Generator Level) – 7.8 (Antenna Loss) – 2.15 (Dipole Factor) – 3.8 (Cable Loss) + 30.0 (Preamp Gain) = 29.85 dBm (Reading Relative to Dipole)

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

August 30, 2005

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
						Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit (dBm)	Diff to Limit (dB)
GSM850 Band (Harmonics)												
Handheld Standalone, vertical position												
Low Channel – 824.2 MHz												
2 nd	128	1648.40	850	Horn	V	55.0	55.0	V-V	-48.3	-44.4	-13	-31.4
2 nd	128	1648.40	850	Horn	H	49.9		H-H	-47.8			
3 rd	128	2472.60	850	Horn	V	42.0	51.2	V-V	-43.1	-39.6	-13	-26.6
3 rd	128	2472.60	850	Horn	H	51.2		H-H	-43.5			
4 th	128	3296.80	850	Horn	V	43.8	46.7	V-V	-45.3	-41.4	-13	-28.4
4 th	128	3296.80	850	Horn	H	46.7		H-H	-45.6			
The harmonics were investigated up to the 10 th harmonic. Emissions above the 4 th harmonic were in the noise floor (NF)												
Middle Channel – 837.6 MHz												
2 nd	195	1675.20	850	Horn	V	53.9	53.9	V-V	-49.5	-45.7	-13	-32.7
2 nd	195	1675.20	850	Horn	H	50.7		H-H	-49.1			
3 rd	195	2512.80	850	Horn	V	42.3	49.9	V-V	-44.7	-41.2	-13	-28.2
3 rd	195	2512.80	850	Horn	H	49.9		H-H	-45.3			
4 th	195	3350.40	850	Horn	V	45.9	49.4	V-V	-41.6	-37.7	-13	-24.7
4 th	195	3350.40	850	Horn	V	49.4		H-H	-42.3			
The harmonics were investigated up to the 10 th harmonic. Emissions above the 4 th harmonic were in the NF												

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

August 30, 2005

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
						Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit (dBm)	Diff to Limit (dB)
High Channel – 848.8 MHz												
2 nd	251	1697.60	850	Horn	V	54.1	54.1	V-V	-49.0	-45.4	-13	-32.4
2 nd	251	1697.60	850	Horn	H	51.6		H-H	-48.8			
3 rd	251	2546.40	850	Horn	V	42.4	48.5	V-V	-45.7	-42.2	-13	-29.2
3 rd	251	2546.40	850	Horn	H	48.5		H-H	-45.9			
4 th	251	3395.20	850	Horn	V	47.6	50.4	V-V	-39.1	-35.2	-13	-22.2
4 th	251	3395.20	850	Horn	H	50.4		H-H	-40.2			
The harmonics were investigated up to the 10 th harmonic. Emissions above the 4 th harmonic were in the NF.												

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4		
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler	

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

August 30, 2005

EUT				Rx Antenna		Spectrum Analyzer			Substitution Method				
									Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Corrected Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole) (dBm)	Limit (dBm)	Diff to Limit (dB)
GSM BAND													
RF Local Oscillator (LO ₁)													
Low Channel (824.2 MHz)													
F0	128	1648.40	850	Horn	V	NF	NF		V-V			-13	
F0	128	1648.40	850	Horn	H	NF			H-H				
Emissions were in the NF.													
High Channel (848.8 MHz)													
F0	251	1697.60	850	Horn	V	NF	NF		V-V			-13	
F0	251	1697.60	850	Horn	H	NF			H-H				
Emissions were in the NF.													
RF LO ₂													
Low Channel (824.2 MHz)													
F0	128	3476.80	850	Horn	V	NF	NF		V-V			-13	
F0	128	3476.80	850	Horn	H	NF			H-H				
Emissions were in the NF.													
High Channel (848.8 MHz)													
F0	251	3575.20	850	Horn	V	NF	NF		V-V			-13	
F0	251	3575.20	850	Horn	H	NF			H-H				
Emissions were in the NF.													

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

September 12, 2005

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
						Spectrum Analyzer		Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit (dBm)	Diff to Limit (dB)
GSM850 and Bluetooth transmitting in frequency hopping mode												
Handheld Standalone, vertical position												
Low Channel – 824.2 MHz												
2 nd	128	1648.40	850	Horn	V	55.0	55.0	V-V	-48.3	-44.4	-13	-31.4
2 nd	128	1648.40	850	Horn	H	50.4		H-H	-47.8			
3 rd	128	2472.60	850	Horn	V	41.7	51.1	V-V	-43.1	-39.6	-13	-26.6
3 rd	128	2472.60	850	Horn	H	51.1		H-H	-43.5			
4 th	128	3296.80	850	Horn	V	44.1	47.6	V-V	-44.7	-40.7	-13	-27.7
4 th	128	3296.80	850	Horn	H	47.6		H-H	-44.6			
The harmonics were investigated up to the 10 th harmonic. Emissions above the 4 th harmonic were in the NF.												
Middle Channel – 837.6 MHz												
2 nd	195	1675.20	850	Horn	V	54.9	54.9	V-V	-48.2	-44.8	-13	-31.8
2 nd	195	1675.20	850	Horn	H	51.2		H-H	-49.1			
3 rd	195	2512.80	850	Horn	V	43.0	50.1	V-V	-44.5	-41.0	-13	-28.0
3 rd	195	2512.80	850	Horn	H	50.1		H-H	-45.3			
4 th	195	3350.40	850	Horn	V	46.6	49.6	V-V	-41.6	-37.7	-13	-24.7
4 th	195	3350.40	850	Horn	V	49.6		H-H	-42.3			
The harmonics were investigated up to the 10 th harmonic. Emissions above the 4 th harmonic were in the NF												

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results cont'd

Test distance is 3.0 metres

September 12, 2005

EUT				Rx Antenna		Spectrum Analyzer		Substitution Method				
						Tracking Generator						
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to dipole)	Limit (dBm)	Diff to Limit (dB)
High Channel – 848.8 MHz												
2 nd	251	1697.60	850	Horn	V	54.5	54.5	V-V	-48.5	-45.0	-13	-32.0
2 nd	251	1697.60	850	Horn	H	51.4		H-H	-48.4			
3 rd	251	2546.40	850	Horn	V	43.9	49.4	V-V	-44.8	-41.3	-13	-28.3
3 rd	251	2546.40	850	Horn	H	49.4		H-H	-45.1			
4 th	251	3395.20	850	Horn	V	49.1	51.6	V-V	-37.8	-33.9	-13	-20.9
4 th	251	3395.20	850	Horn	H	51.6		H-H	-38.8			
The harmonics were investigated up to the 10 th harmonic. Emissions above the 4 th harmonic were in the NF.												

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results cont'd

Test Distance was 3.0 metres.

PCS Band

August 30, 2005

								Substitution Method				
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Max (V,H) dBuV	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm)	Limit (dBm)	Diff to Limit (dB)
PCS BAND (EIRP)												
Handheld Standalone												
F0	512	1850.20	1900	Horn	V	85.5	91.9	V-V	-8.5	28.1	33	-4.9
F0	512	1850.20	1900	Horn	H	91.9		H-H	-7.5			
F0	661	1880.00	1900	Horn	V	80.3	92.5	V-V	-7.3	29.7	33	-3.3
F0	661	1880.00	1900	Horn	H	92.5		H-H	-5.9			
F0	810	1909.80	1900	Horn	V	80.0	91.6	V-V	-7.5	29.0	33	-4.0
F0	810	1909.80	1900	Horn	H	91.6		H-H	-6.6			

EIRP = Tracking Generator Level + Antenna Factor – Cable Loss + Preamp Gain

Example: 1850.20 MHz = -7.5 (Tracking Generator Level) + 8.2 (Antenna Factor) – 5.6 (Cable Loss) + 33.0 (Preamp Gain) = 28.1 dBm (Reading Relative to Isotropic Radiator)

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Data Results cont'd

Test Distance was 3.0 metres.

PCS Band

August 30, 2005

								Substitution Method				
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Pol. Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm)	Limit (dBm)	Diff to Limit (dB)
PCS BAND (Harmonics) Handheld Standalone, on it's side												
Low Channel 1850.20 MHz												
2 nd	512	3700.40	1900	Horn	V	46.9	46.9	V-V	-39.2	-33.8	-13	-20.8
2 nd	512	3700.40	1900	Horn	H	43.2		H-H	-37.2			
3 rd	512	5550.60	1900	Horn	V	42.6	42.6	V-V	-35.9	-33.5	-13	-20.5
3 rd	512	5550.60	1900	Horn	H	42.4		H-H	-35.1			
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 rd harmonic were in the NF												
Middle Channel 1880.00 MHz												
2 nd	661	3760.00	1900	Horn	V	45.1	45.1	V-V	-40.4	-36.8	-13	-23.8
2 nd	661	3760.00	1900	Horn	H	42.1		H-H	-40.2			
3 rd	661	5640.00	1900	Horn	V	45.1	45.1	V-V	-33.4	-30.8	-13	-17.8
3 rd	661	5640.00	1900	Horn	H	43.3		H-H	-32.4			
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 rd harmonic were in the NF												
High Channel 1909.8 MHz												
2 nd	810	3819.60	1900	Horn	V	47.0	47.0	V-V	-39.2	-35.4	-13	-22.4
2 nd	810	3819.60	1900	Horn	H	42.3		H-H	-38.8			
3 rd	810	5729.40	1900	Horn	V	45.9	45.9	V-V	-30.0	-28.4	-13	-15.4
3 rd	810	5729.40	1900	Horn	H	44.0		H-H	-32.0			
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 rd harmonic were in the NF												

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Results cont'd

Test Distance was 3.0 metres. PCS Band August 30, 2005
The measurements were performed in transmit mode with the handheld in standalone vertical position.

EUT				Rx Antenna		Spectrum Analyzer			Substitution Method				
Type	Ch	Frequency (MHz)	Band	Type	Pol.	Reading (dBuV)	Corrected Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx- Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm)	Limit (dBm)	Diff to Limit (dB)
RF LO₁													
<u>Low Channel</u>													
F0	512	1423.20	1900	Horn	V	NF	NF		V-V			-13	
F0	512	1423.20	1900	Horn	H	NF			H-H				
Emissions were in the NF.													
<u>High Channel</u>													
F0	810	1482.80	1900	Horn	V	NF	NF		V-V			-13	
F0	810	1482.80	1900	Horn	H	NF			H-H				
Emissions were in the NF.													
RF LO₂													
<u>Low Channel</u>													
F0	512	1930.10	1900	Horn	V	NF	NF		V-V			-13	
F0	512	1930.10	1900	Horn	H	NF			H-H				
Emissions were in the NF.													
<u>High Channel</u>													
F0	810	1989.70	1900	Horn	V	NF	NF		V-V			-13	
F0	810	1989.70	1900	Horn	H	NF			H-H				
Emissions were in the NF.													

RTS RIM Testing Services	EMI Test Report for the BlackBerry Wireless Handheld Model RAT40GW APPENDIX 4	
Test Report No. RTS-0101-0508-08	Dates of Test August 30- September 21, 2005	Author Data M. Battler

Radiated Emissions Test Results cont'd

Test Distance was 3.0 metres.

August 30, 2005

								Substitution Method				
EUT				Receive Antenna		Spectrum Analyzer		Tracking Generator				
Type	Ch	Frequency (MHz)	Band	Pol. Type	Pol.	Reading (dBuV)	Max (V,H) (dBuV)	Pol. Tx-Rx	Reading (dBm)	Corrected Reading (relative to Isotropic Radiator) (dBm)	Limit (dBm)	Diff to Limit (dB)
PCS and Bluetooth transmitting in frequency hopping mode												
Handheld Standalone, vertical position												
Low Channel 1850.20 MHz												
2 nd	512	3700.40	1900	Horn	V	46.1	46.1	V-V	-39.8	-35.2	-13	-22.2
2 nd	512	3700.40	1900	Horn	H	42.5		H-H	-38.6			
3 rd	512	5550.6	1900	Horn	V	42.2	42.2	V-V	-36.0	-33.6	-13	-20.6
3 rd	512	5550.6	1900	Horn	H	41.0		H-H	-35.2			
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 rd harmonic were in the NF												
Middle Channel 1880.00 MHz												
2 nd	661	3760.00	1900	Horn	V	45.1	45.1	V-V	-40.4	36.8	-13	-23.8
2 nd	661	3760.00	1900	Horn	H	41.8		H-H	-40.2			
3 rd	661	5640.00	1900	Horn	V	43.1	43.3	V-V	-36.5	-33.2	-13	-20.2
3 rd	661	5640.00	1900	Horn	H	43.3		H-H	-34.8			
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 rd harmonic were in the NF												
High Channel 1909.8 MHz												
2 nd	810	3819.60	1900	Horn	V	46.6	46.6	V-V	-39.4	-35.9	-13	-22.9
2 nd	810	3819.60	1900	Horn	H	42.8		H-H	-39.3			
3 rd	810	5729.40	1900	Horn	V	45.2	45.2	V-V	-32.7	-29.5	-13	-16.5
3 rd	810	5729.40	1900	Horn	H	43.8		H-H	-31.1			
The harmonics were investigated up to the 10th harmonic. Emissions above the 3 rd harmonic were in the NF												