

**FCC - TEST REPORT**

Report Number : **68.950.21.0628.01** Date of Issue: November 02, 2021

Model : SBKG 40 A1

Product Type : Headphones Bluetooth On Ear

Applicant : Lidl US, LLC

Address : 3500 S. Clark Street Arlington Virginia United States 22202

Factory : Huizhou Haomuk Technology Co., LTD.

Address : Haomuk Technology Park, Gaotou, Yuanzhou, Boluo 516123 Huizhou,  
: GuangDong PEOPLE'S REPUBLIC OF CHINA

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including  
Appendices : 67

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

## 1 Table of Contents

1	Table of Contents .....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results .....	6
6	General Remarks .....	7
7	Test Setups.....	8
8	Systems test configuration .....	9
9	Technical Requirement .....	10
9.1	Conducted Emission.....	10
9.2	Conducted peak output power and e.i.r.p.....	13
9.3	20 dB bandwidth and 99% Occupied Bandwidth.....	20
9.4	Carrier Frequency Separation .....	30
9.5	Number of hopping frequencies.....	33
9.6	Dwell Time .....	35
9.7	Spurious RF conducted emissions.....	40
9.8	Band edge testing .....	51
9.9	Spurious radiated emissions for transmitter .....	56
10	Test Equipment List.....	66
11	System Measurement Uncertainty .....	67



## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,  
Nantou, Nanshan District  
Shenzhen 518052  
P.R. China  
Telephone: 86 755 8828 6998  
Fax: 86 755 8288 5299  
FCC Registration No.: 514049

### 3 Description of the Equipment Under Test

Product:	Headphones Bluetooth On Ear
Model no:	SBKG 40 A1
FCC ID	2AJ9O-SBKG40A1
Options and accessories:	Type-C Cable, Aux in Cable
Rating:	5VDC, 500mA (Supplied by USB Port) 3.7VDC, 300mAh (Supplied by Rechargeable Li-ion battery)
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	PCB antenna
Antenna Gain:	3.3dBi
Description of the EUT:	The Equipment Under Test (EUT) is Headphones Bluetooth On Ear support Bluetooth function.

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2020 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure, KDB558074 D01 v05r02 and ANSI C63.10-2013.

## 5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Test Site	Test Result
§15.207	Conducted emission AC power port	Site 1	PASS
§15.247(b)(1)	Conducted peak output power and e.i.r.p.	Site 1	PASS
§15.247(e)	Power spectral density*	--	N/A
§15.247(a)(2)	6dB bandwidth	--	N/A
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	Site 1	PASS
§15.247(a)(1)	Carrier frequency separation	Site 1	PASS
§15.247(a)(1)(iii)	Number of hopping frequencies	Site 1	PASS
§15.247(a)(1)(iii)	Dwell Time	Site 1	PASS
§15.247(d)	Spurious RF conducted emissions	Site 1	PASS
§15.247(d)	Band edge	Site 1	PASS
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter and receiver	Site 1	PASS
§15.203	Antenna requirement	See note 2	PASS

Note 1: N/A=Not Applicable.

Note 2: The EUT uses PCB antenna, which gain is 3.3dBi. In accordance to §15.203 and RSS-GEN 6.8, it is considered sufficiently to comply with the provisions of this section.



## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AJ9O-SBKG40A1, complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart and RSS-247 issue 2.

Note: The report is for BDR+EDR only.

### SUMMARY:

All tests according to the regulations cited on page 6 were

n - Performed

o - **Not** Performed

The Equipment Under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date: September 3, 2021

Testing Start Date: September 3, 2021

Testing End Date: September 29, 2021

Reviewed by:

Prepared by:

Tested by:

John Zhi  
EMC Project Manager

Mark Chen  
EMC Project Engineer




Carry Cai  
EMC Test Engineer


## 7 Test Setups

### 7.1 Radiated test setups


Below 1GHz

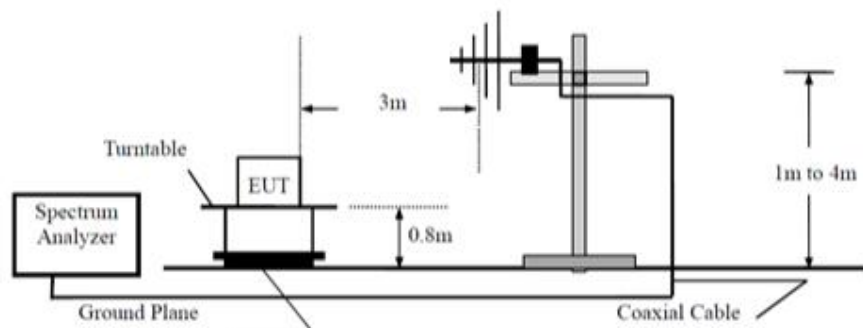


Above 1GHz

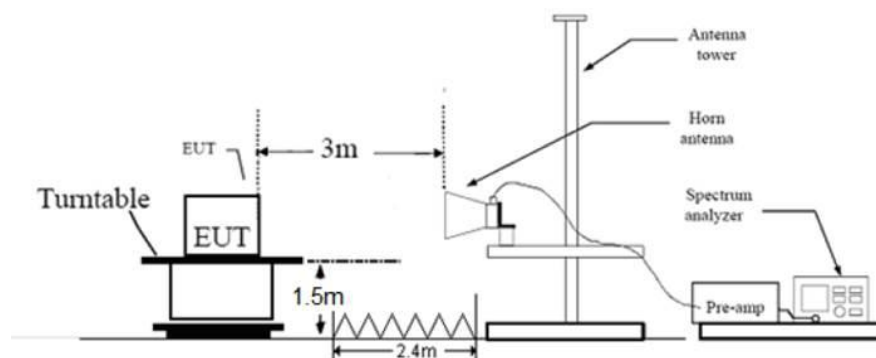

### 7.2 Conducted RF test setups



### 7.3 AC Power Line Conducted Emission test setups

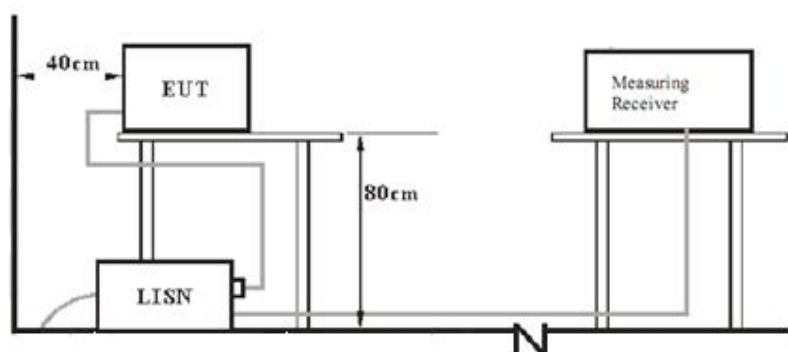



## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Notebook	Lenovo	X220	---

Test software: FCC\_assist\_1.0.2.2.exe, which used to control the EUT in continues transmitting mode.

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

\*Decreasing linearly with logarithm of the frequency.

## Conducted Emission Test 0.15MHz – 30MHz

EUT: Headphones Bluetooth On Ear  
M/N: SBKG 40 A1  
Operating Condition: TX  
Test Specification: Power Line, Live  
Comment: 5VDC (Supplied by USB Port)

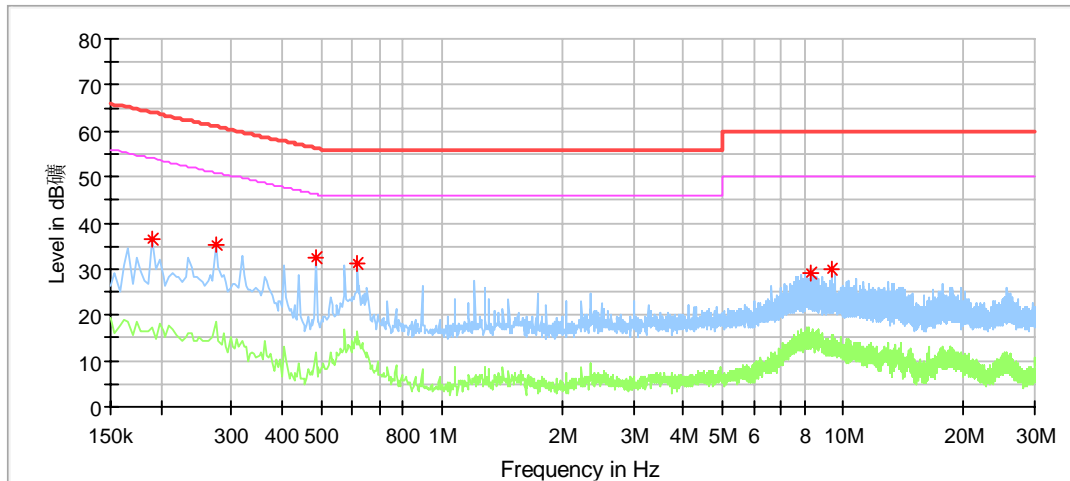

### Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB/m)
0.190000	36.46	---	64.04	27.57	L1	9.24
0.274000	35.48	---	61.00	25.51	L1	9.22
0.486000	32.61	---	56.24	23.63	L1	9.20
0.618000	31.16	---	56.00	24.84	L1	9.20
8.334000	29.03	---	60.00	30.97	L1	9.38
9.362000	29.95	---	60.00	30.05	L1	9.39

Remark:


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission Test 0.15MHz – 30MHz

EUT: Headphones Bluetooth On Ear  
M/N: SBKG 40 A1  
Operating Condition: TX  
Test Specification: Power Line, Neutral  
Comment: 5VDC (Supplied by USB Port)

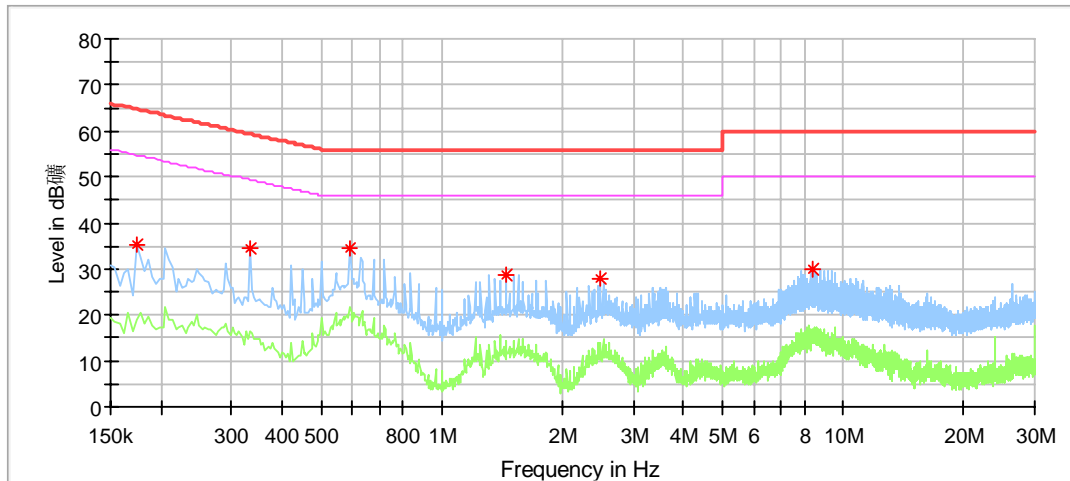

### Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB/m)
0.174000	35.12	---	64.77	29.65	N	9.40
0.334000	34.40	---	59.35	24.95	N	9.39
0.590000	34.31	---	56.00	21.69	N	9.39
1.446000	28.79	---	56.00	27.21	N	9.41
2.478000	27.84	---	56.00	28.16	N	9.43
8.354000	30.12	---	60.00	29.88	N	9.59

Remark:

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## 9.1 Conducted peak output power and e.i.r.p.

### Test Method

1. Use the following spectrum analyzer settings:  
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel  
RBW > the 20dB bandwidth of the emission being measured, VBW $\geq$ RBW,  
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

### Limits

#### Conducted Peak Output Power:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	$\leq 1$	$\leq 30$




Conducted peak output power

Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	-6.61	Pass
Middle channel 2441MHz	-6.78	Pass
High channel 2480MHz	-7.1	Pass


Low channel 2402MHz

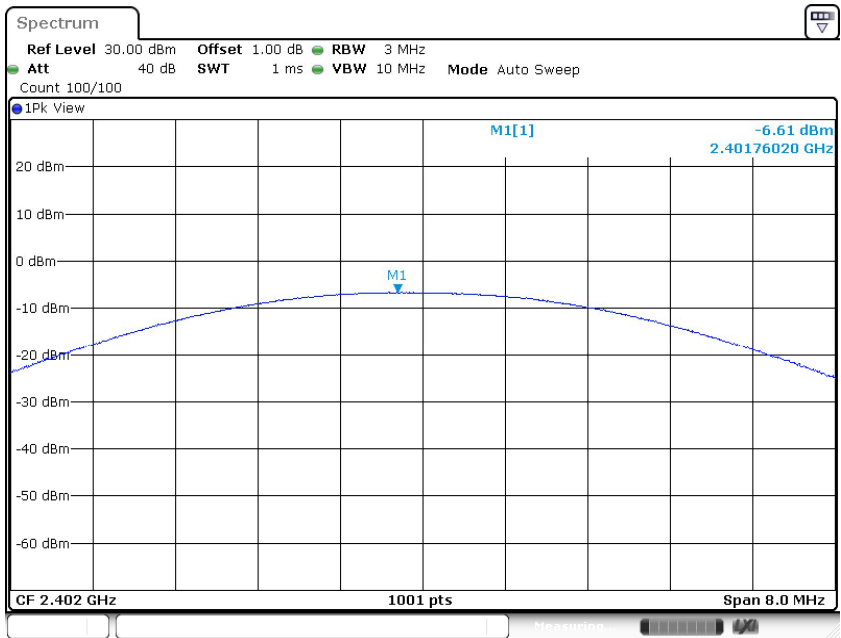

Date: 19.SEP.2021 11:43:00




Middle channel 2441MHz

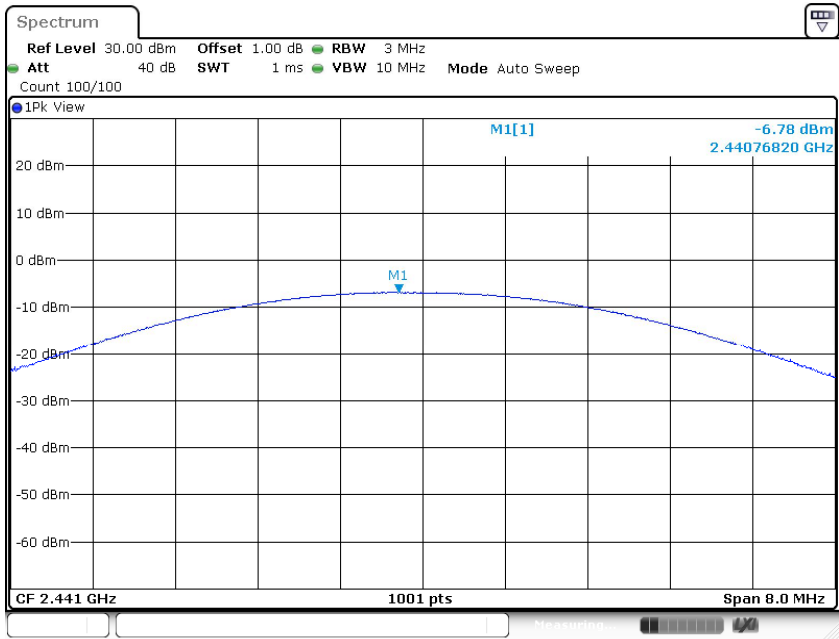

Date: 19.SEP.2021 11:43:16

High channel 2480MHz

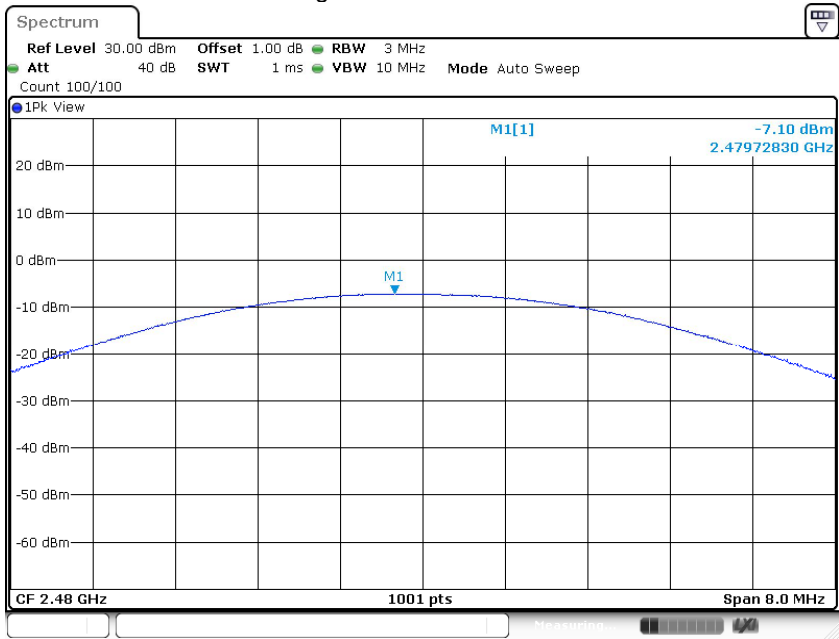


Date: 19.SEP.2021 11:46:40



Bluetooth Mode  $\pi/4$ -DQPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	-5.83	Pass
Middle channel 2441MHz	-6.05	Pass
High channel 2480MHz	-6.38	Pass

Low channel 2402MHz

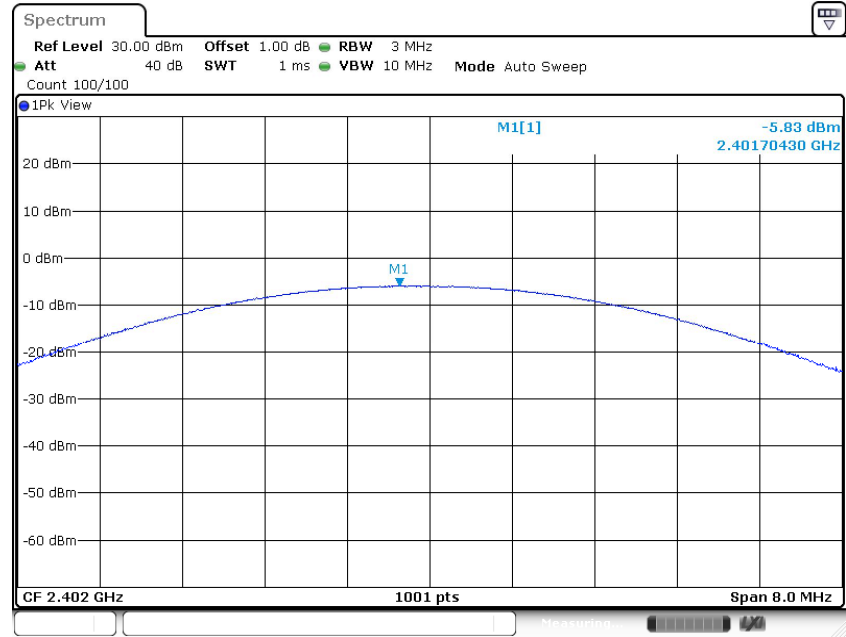


Date: 19.SEP.2021 11:47:11






Middle channel 2441MHz

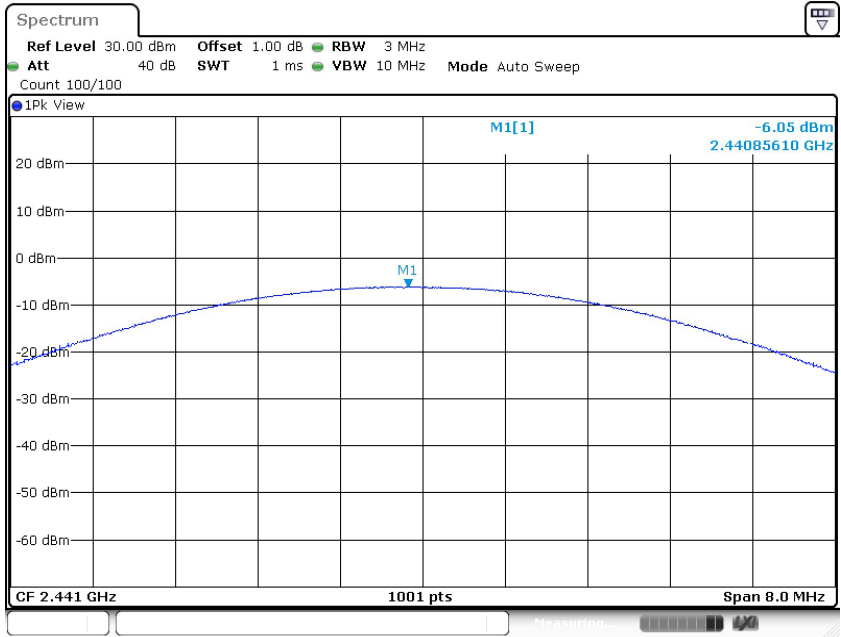

Date: 19.SEP.2021 11:47:19

High channel 2480MHz

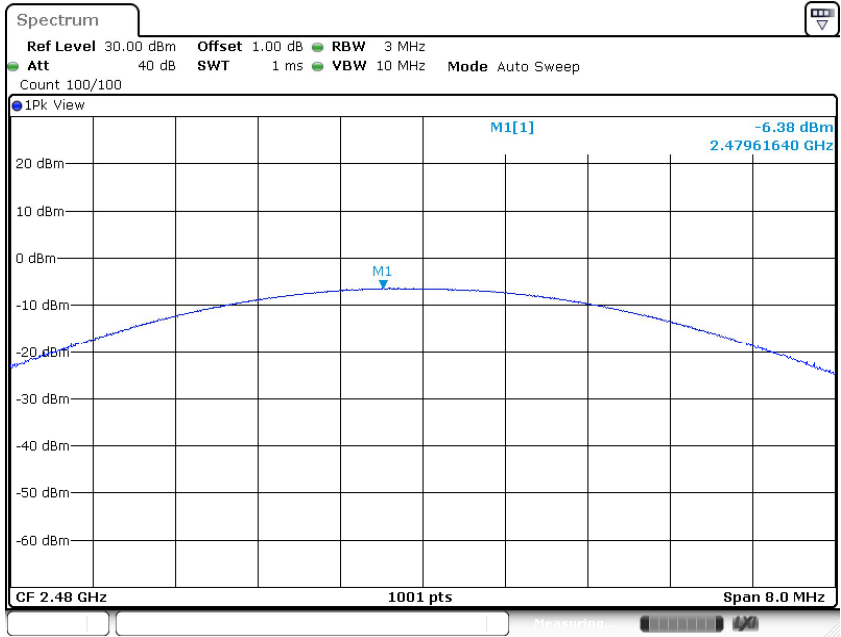


Date: 19.SEP.2021 11:47:27



Bluetooth Mode 8DPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	-5.47	Pass
Middle channel 2441MHz	-5.67	Pass
High channel 2480MHz	-5.98	Pass


Low channel 2402MHz

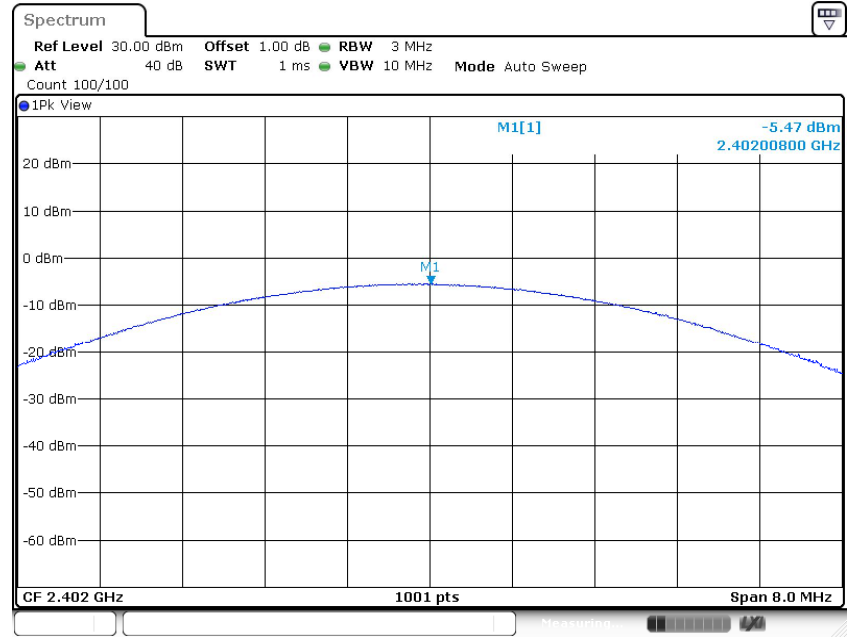

Date: 19.SEP.2021 11:47:36




Middle channel 2441MHz

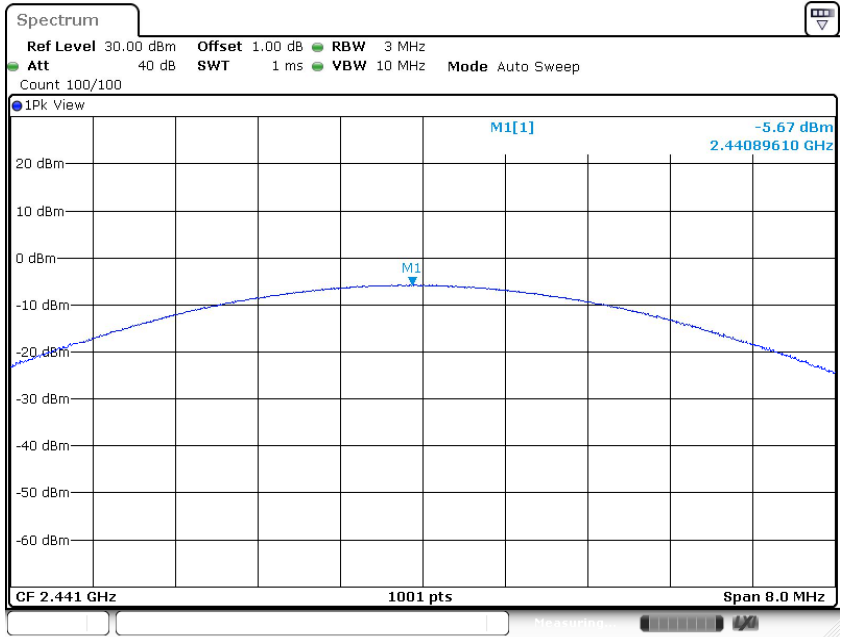

Date: 19.SEP.2021 11:47:45

High channel 2480MHz

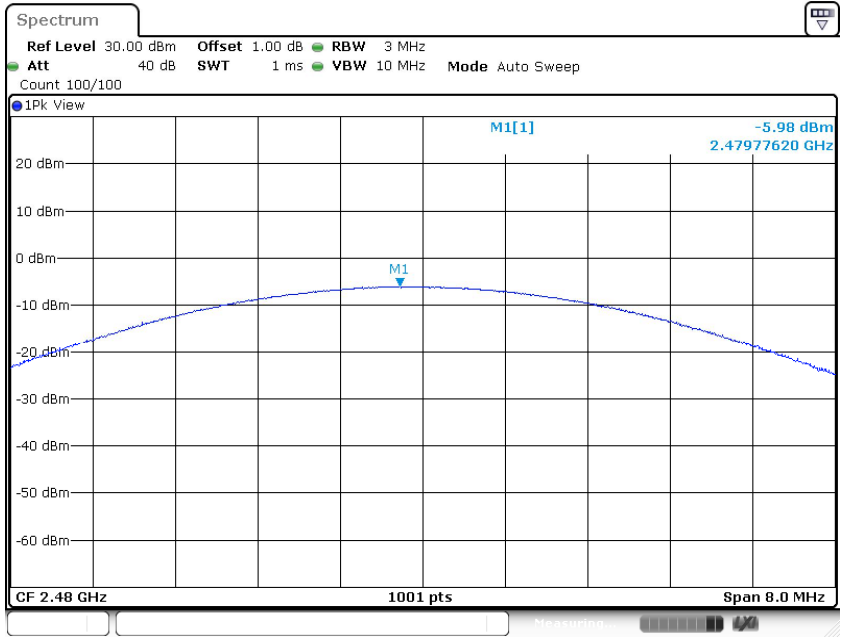

Date: 19.SEP.2021 11:47:54

## 9.2 20 dB bandwidth and 99% Occupied Bandwidth

### Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Limit

Limit [kHz]

---


N/A

## 20 dB bandwidth and 99% Occupied Bandwidth


### Bluetooth Mode GFSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1110	845	--	Pass
2441	1107	848	--	Pass
2480	1113	845	--	Pass

Low channel 2402MHz

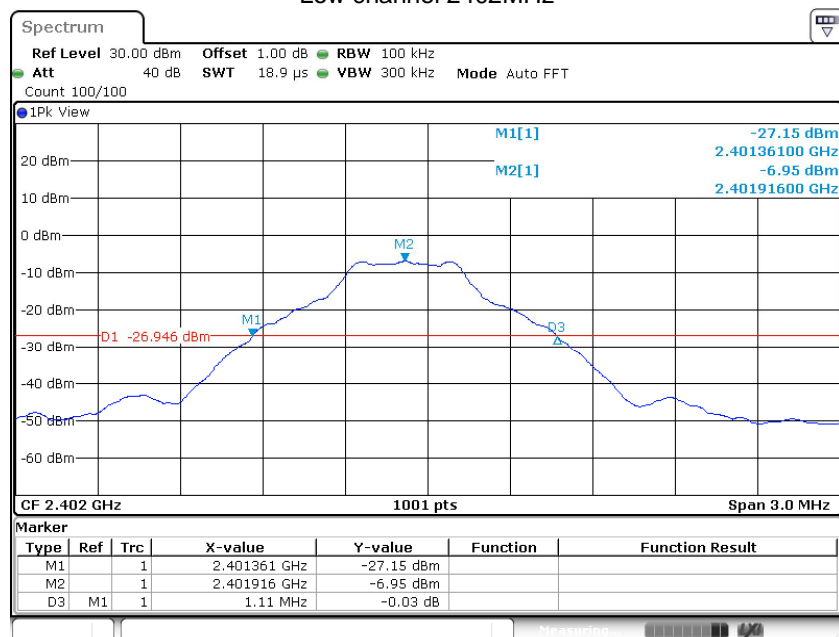


Date: 19.SEP.2021 11:20:05

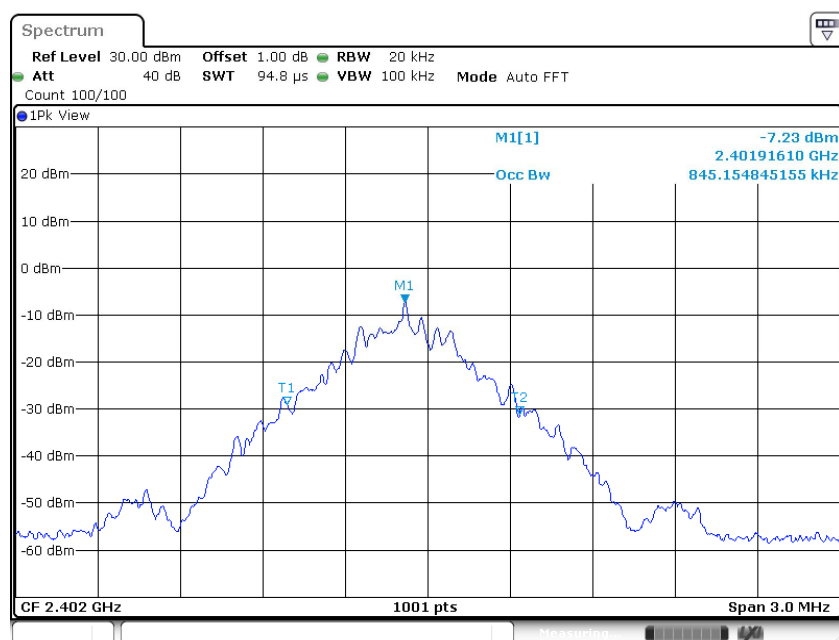


Date: 19.SEP.2021 11:20:15



Middle channel 2441MHz

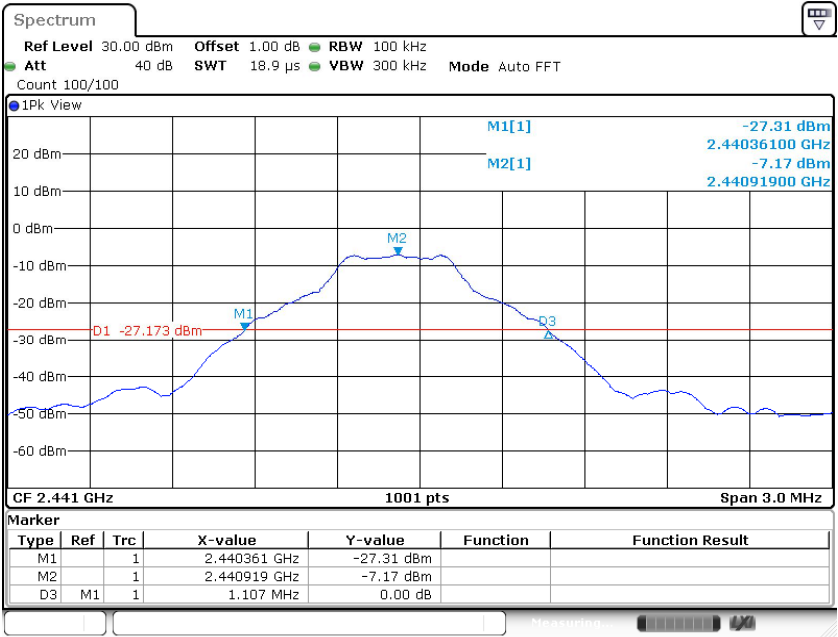


Date: 19.SEP.2021 11:21:48

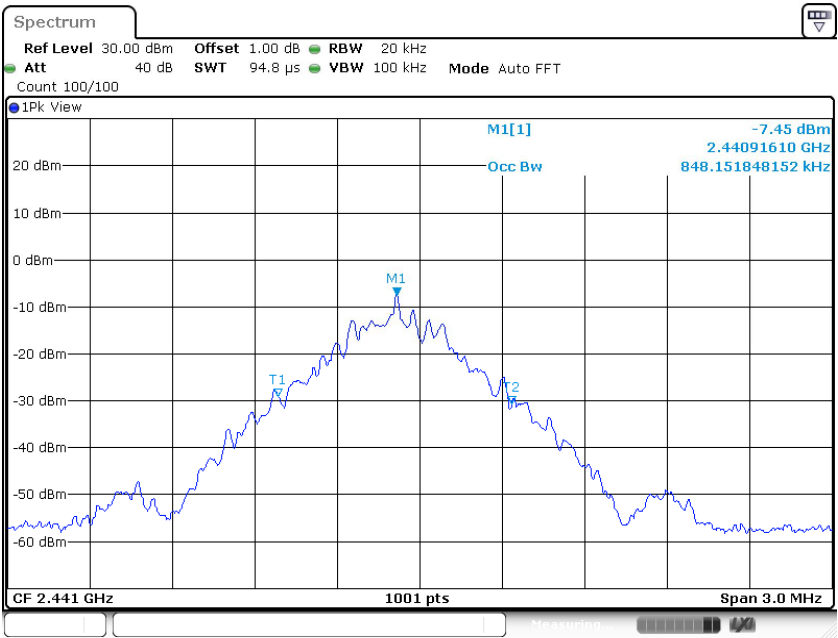


Date: 19.SEP.2021 11:21:58



High channel 2480MHz

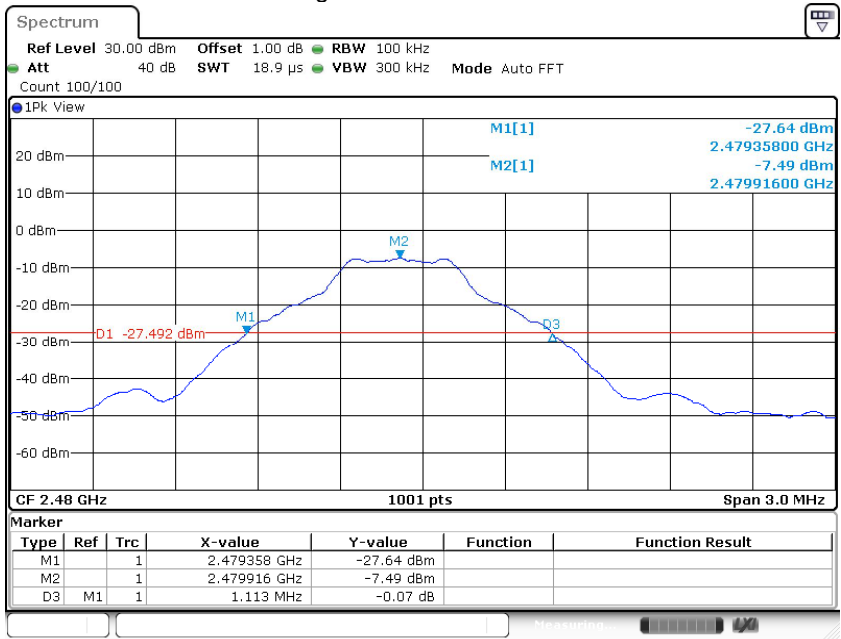

Date: 19.SEP.2021 11:23:09

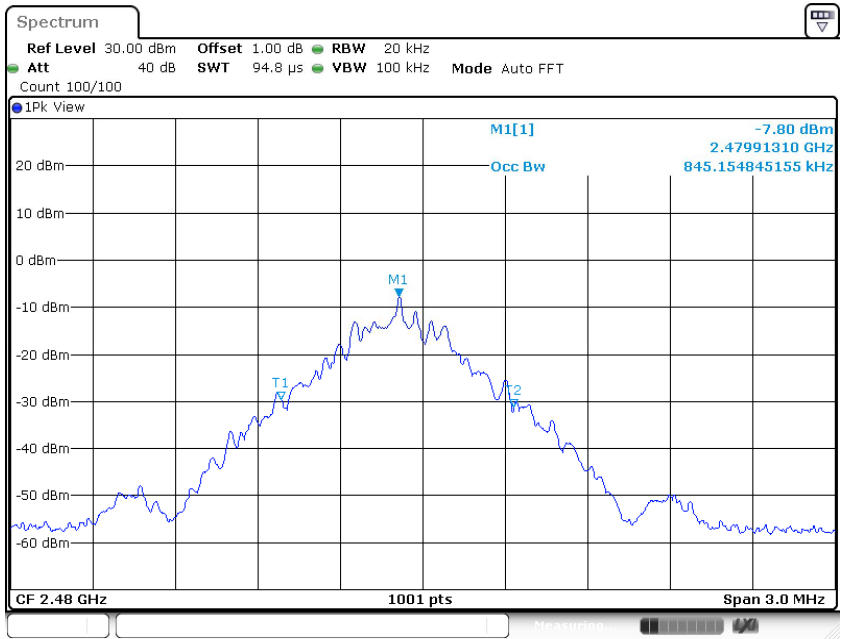


Date: 19.SEP.2021 11:23:20

## 20 dB bandwidth and 99% Occupied Bandwidth

### Bluetooth Mode $\pi/4$ -DQPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1374	1169	--	Pass
2441	1380	1172	--	Pass
2480	1383	1172	--	Pass

Low channel 2402MHz

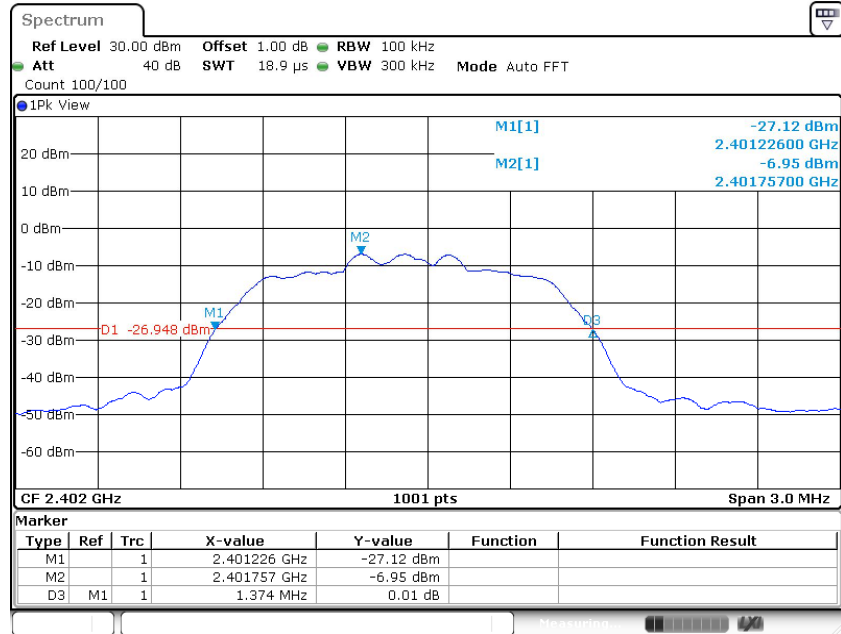

Date: 19.SEP.2021 11:24:40




Date: 19.SEP.2021 11:24:51





Middle channel 2441MHz

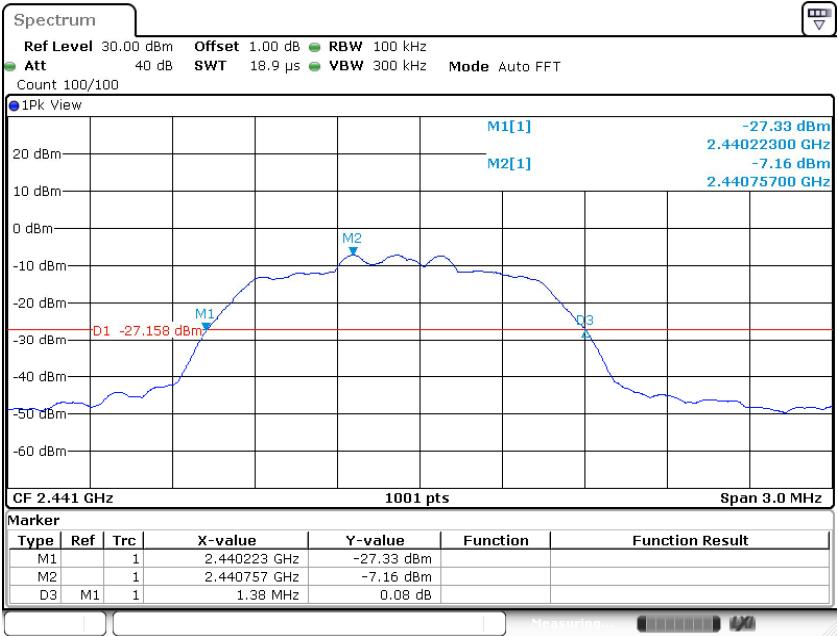


Date: 19.SEP.2021 11:26:09




Date: 19.SEP.2021 11:26:19



High channel 2480MHz

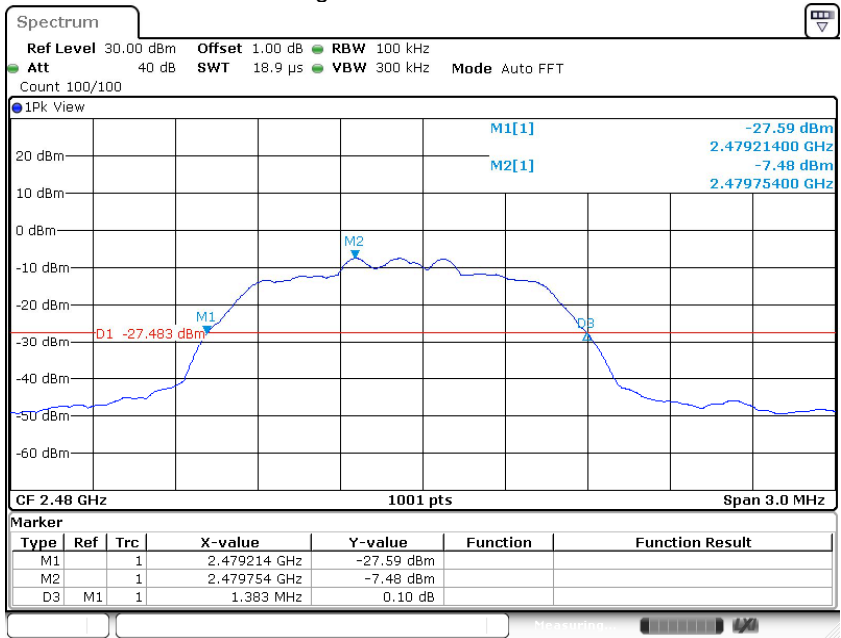

Date: 19.SEP.2021 11:27:29

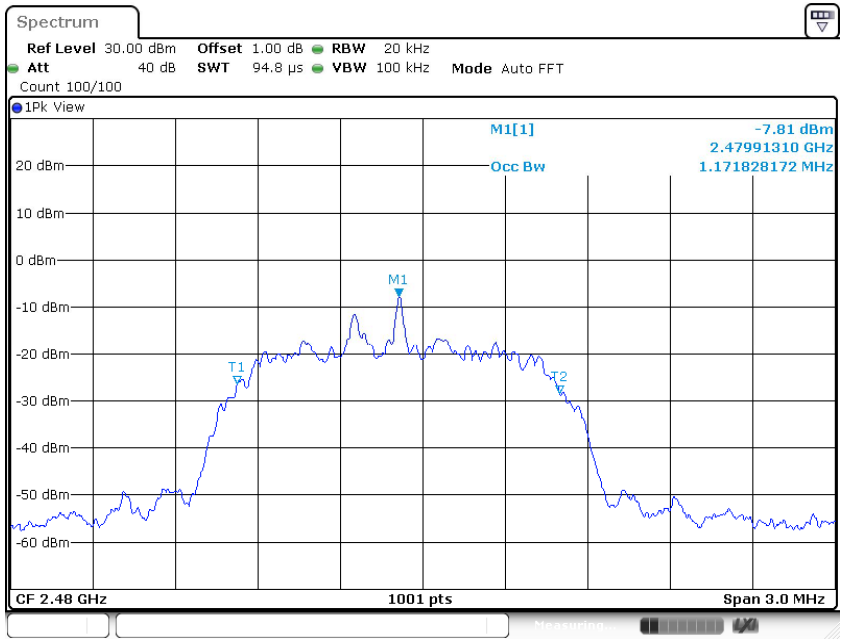


Date: 19.SEP.2021 11:27:39

## 20 dB bandwidth and 99% Occupied Bandwidth

### Bluetooth Mode 8DPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz	Result
2402	1377	1175	--	Pass
2441	1383	1175	--	Pass
2480	1383	1175	--	Pass

Low channel 2402MHz

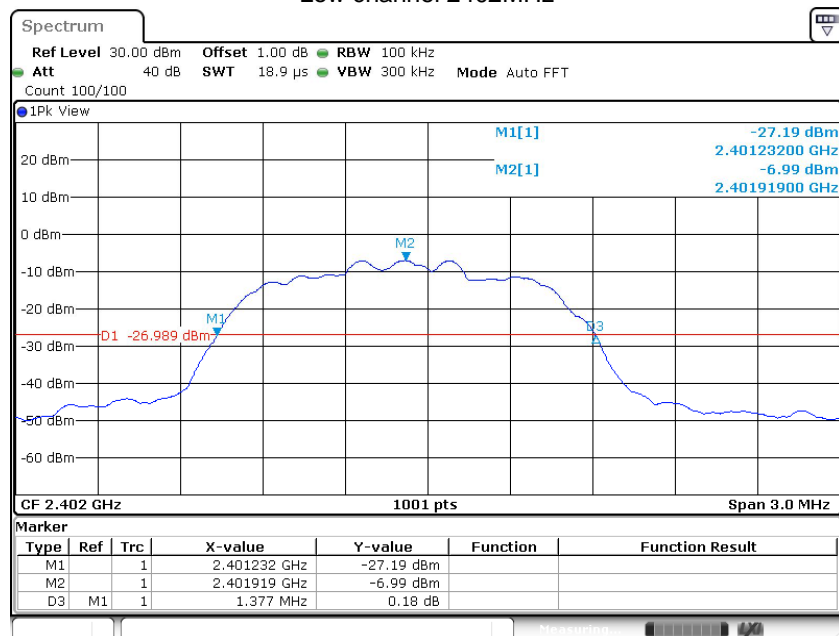


Date: 19.SEP.2021 11:29:00




Date: 19.SEP.2021 11:29:11



Middle channel 2441MHz

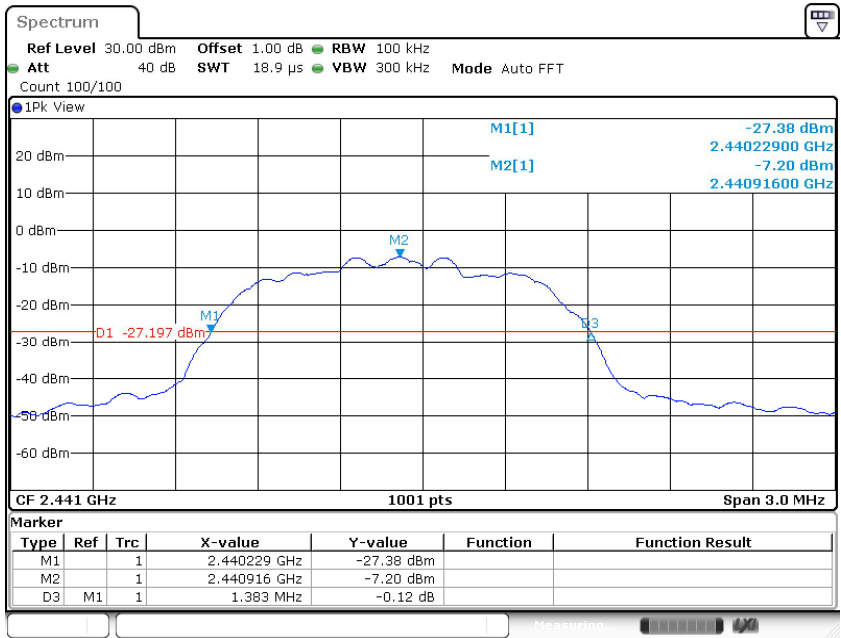


Date: 19.SEP.2021 11:31:30

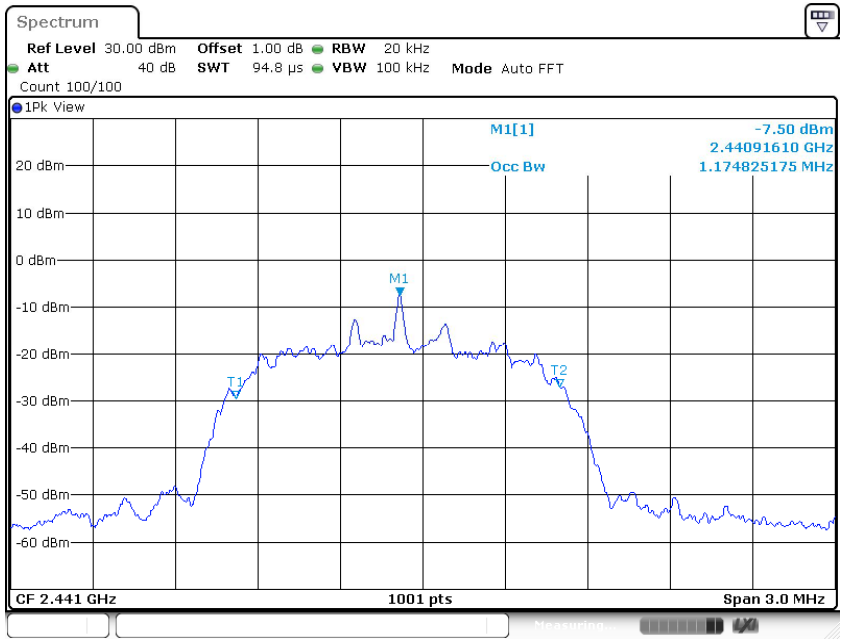


Date: 19.SEP.2021 11:31:41



High channel 2480MHz

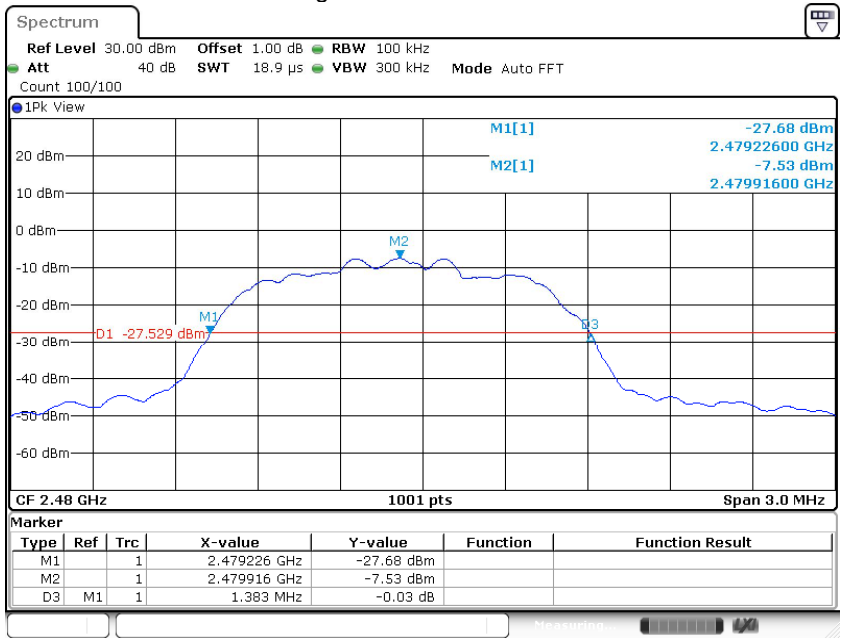

Date: 19.SEP.2021 11:32:49

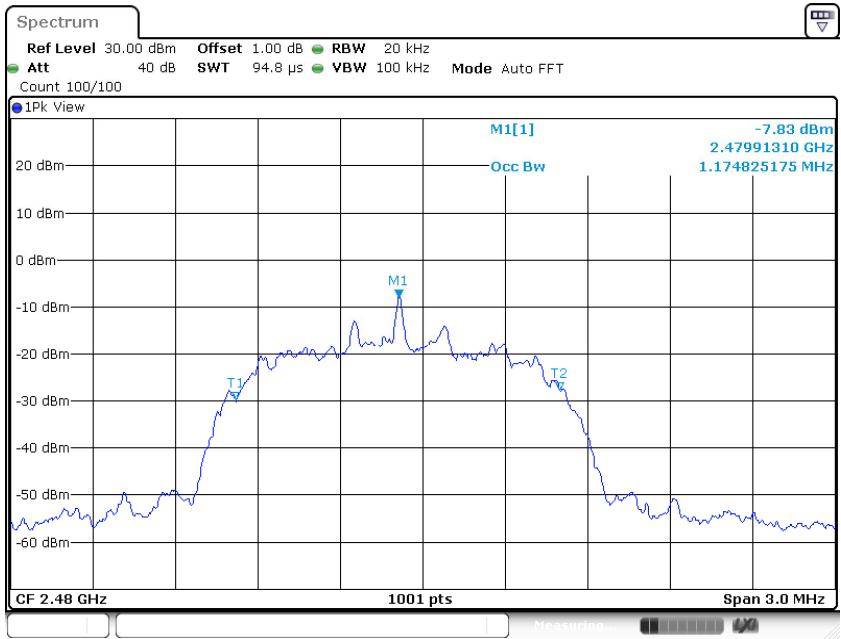

Date: 19.SEP.2021 11:32:59

### 9.3 Carrier Frequency Separation

#### Test Method

1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels, RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.

#### Limit

Limit kHz	
$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater	
GFSK Modulation Limit	
Test Mode	2/3 of 20 dB Bandwidth kHz
DH5	742
2DH5	922
3DH5	922




Carrier Frequency Separation

Test result: The measurement was performed with the typical configuration (normal hopping status), here GFSK modulation mode was used to show compliance.

GFSK Modulation test result

Test Mode	Carrier Frequency Separation	Result
	kHz	
DH5	1003	Pass
2DH5	1003	Pass
3DH5	1003	Pass


DH5

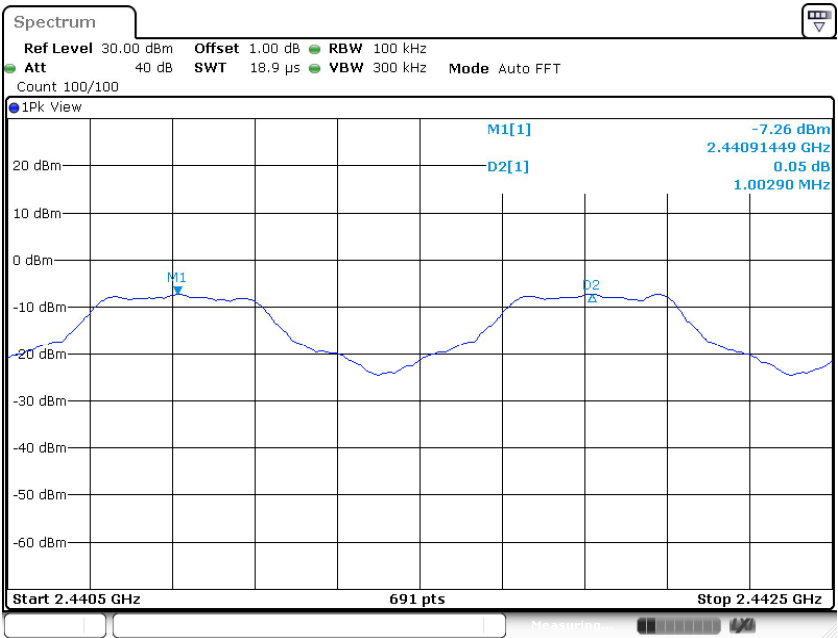

Date: 19.SEP.2021 11:34:18




2DH5

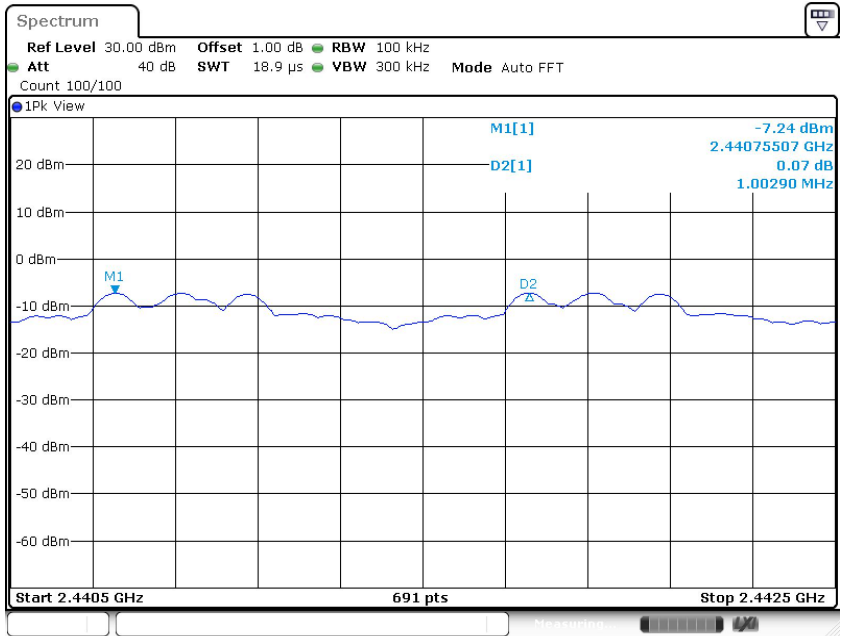

Date: 19.SEP.2021 11:39:24

3DH5

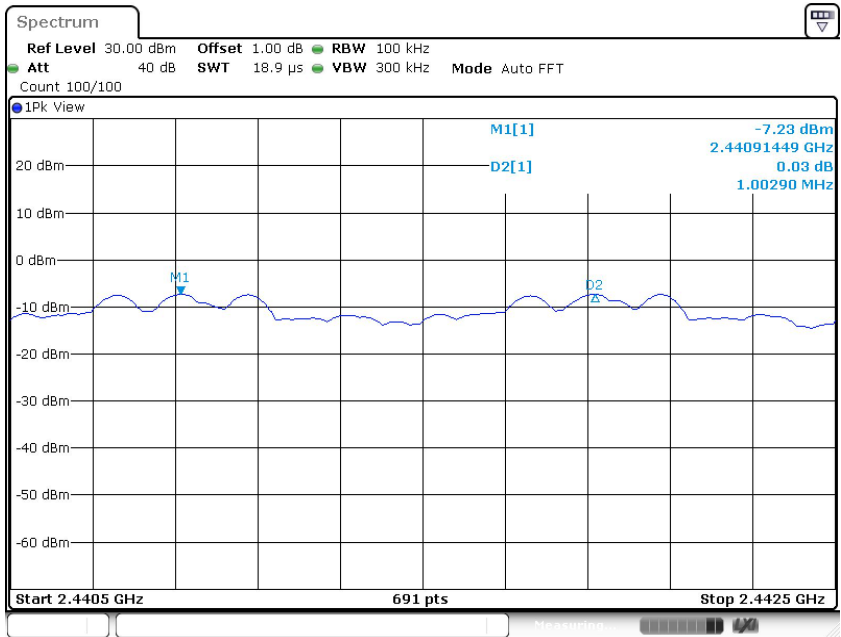

Date: 19.SEP.2021 11:40:37



## 9.4 Number of hopping frequencies

### Test Method

1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels,  $RBW \geq 1\%$  of the span,  $VBW \geq RBW$ , Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.

### Limit

Limit  
number

---

$\geq 15$



## 9.5 Dwell Time

### Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.  
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

### Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

## Dwell Time

### Dwell time

The maximum dwell time shall be 0.4 s.

According to the Bluetooth Core Specification, the worse result (DH5 mode) was reported to show compliance.


The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$ ;


Test Result

TestMode	Channel	BurstWidth	TotalHops	Result	Limit	Verdict
DH5	Hop	2.91	110	0.32	$\leq 0.4$	PASS
2DH5	Hop	2.91	110	0.349	$\leq 0.4$	PASS
3DH5	Hop	2.91	110	0.379	$\leq 0.4$	PASS

### GFSK Modulation

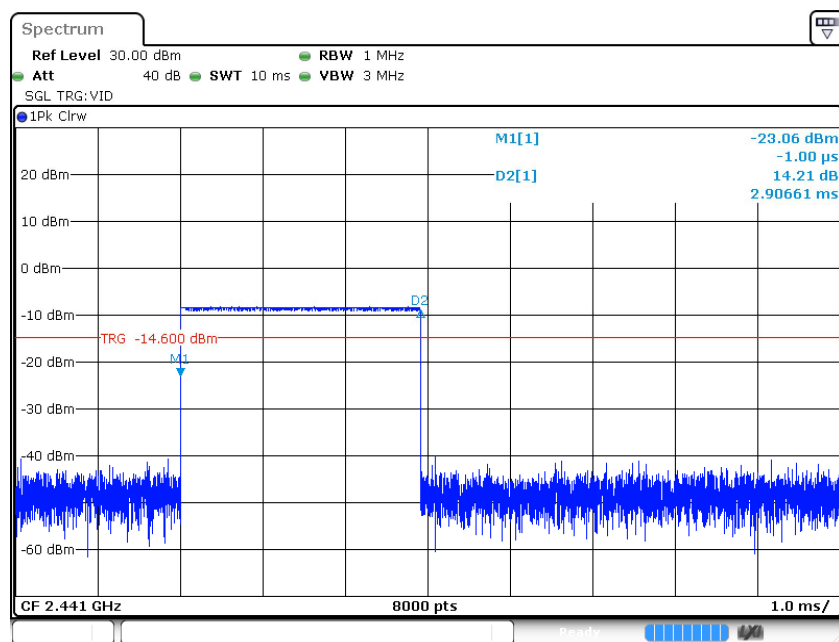


Date: 19.SEP.2021 11:34:37

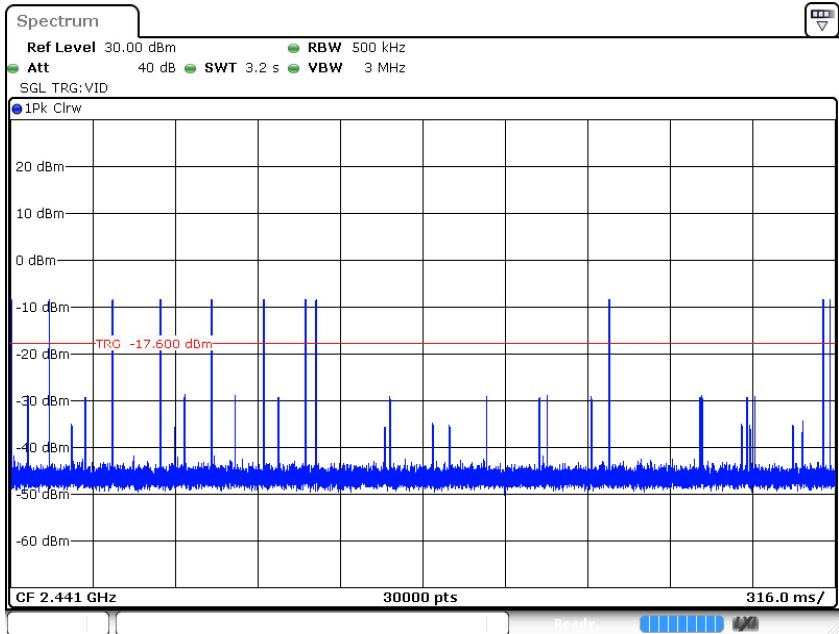


Date: 19.SEP.2021 11:34:42

DH5

$\pi/4$ -DQPSK Modulation

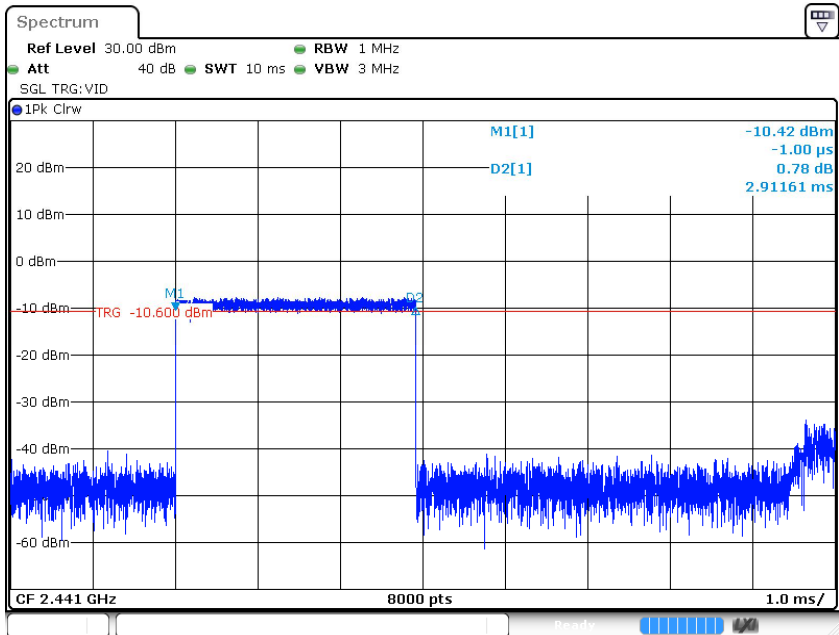


Date: 19.SEP.2021 11:37:05

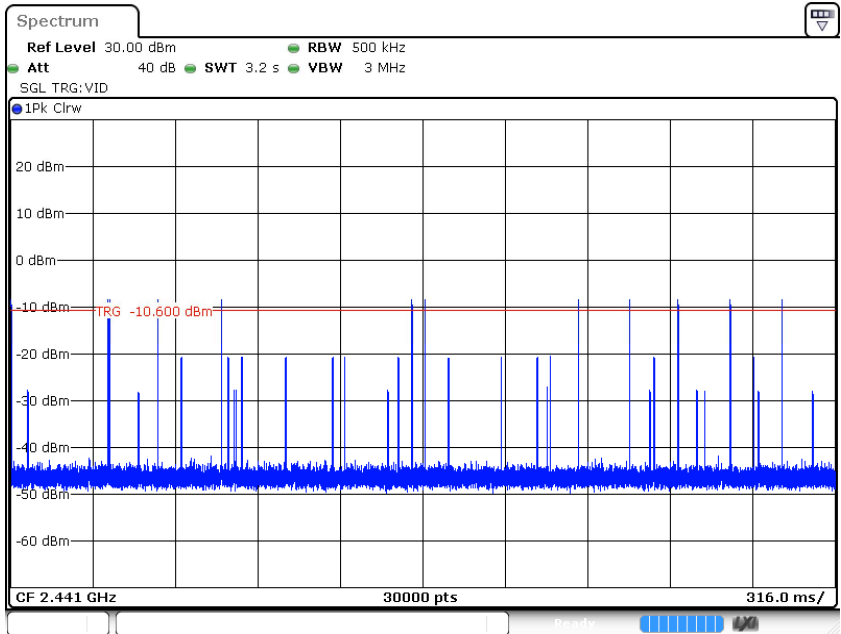


Date: 19.SEP.2021 11:37:10

2DH5

8-DPSK Modulation

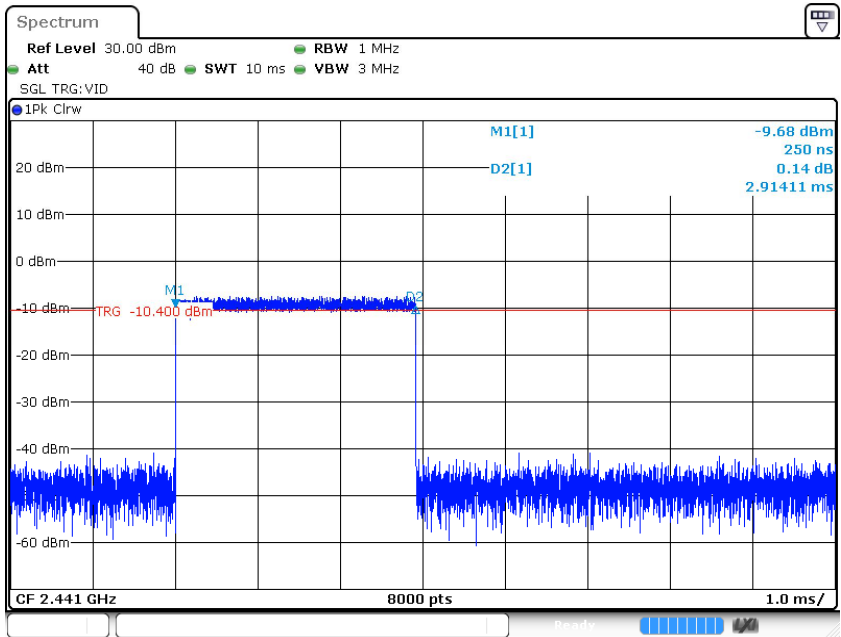

Date: 19.SEP.2021 11:42:18

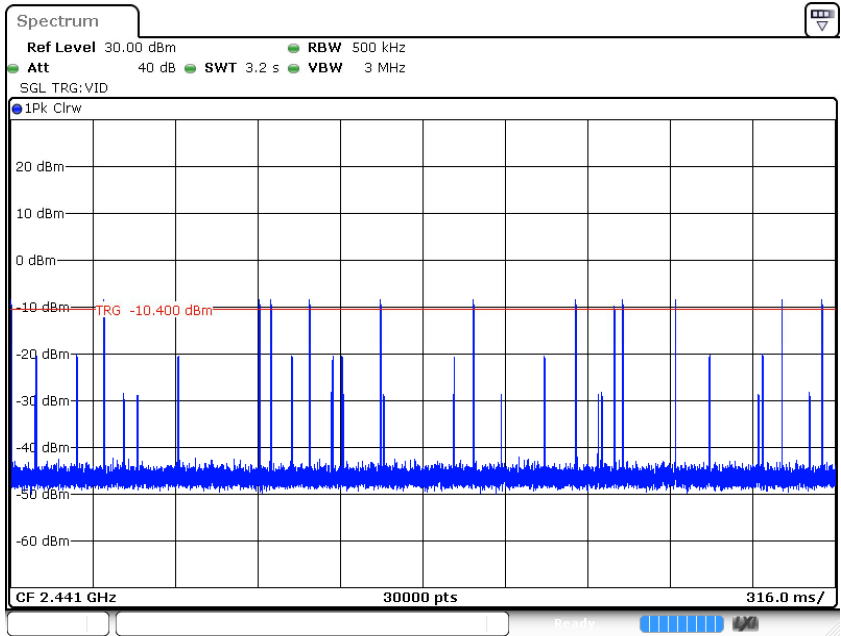

Date: 19.SEP.2021 11:42:23

3DH5

## 9.6 Spurious RF conducted emissions

### Test Method

1. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.


### Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20




## Spurious RF conducted emissions


TestMode	Antenna	Channel	FreqRange	RefLevel	Result	Limit	Verdict
DH5	Ant1	2402	Reference	-7.01	-7.01	---	PASS
			30~1000	30~1000	-67.04	<=-27.01	PASS
			1000~26500	1000~26500	-52.4	<=-27.01	PASS
		2441	Reference	-7.13	-7.13	---	PASS
			30~1000	30~1000	-67.39	<=-27.13	PASS
			1000~26500	1000~26500	-50.41	<=-27.13	PASS
		2480	Reference	-7.58	-7.58	---	PASS
			30~1000	30~1000	-67.72	<=-27.58	PASS
			1000~26500	1000~26500	-50.57	<=-27.58	PASS
2DH5	Ant1	2402	Reference	-7.00	-7.00	---	PASS
			30~1000	30~1000	-68.22	<=-27	PASS
			1000~26500	1000~26500	-52.23	<=-27	PASS
		2441	Reference	-7.11	-7.11	---	PASS
			30~1000	30~1000	-68.02	<=-27.11	PASS
			1000~26500	1000~26500	-50.91	<=-27.11	PASS
		2480	Reference	-7.58	-7.58	---	PASS
			30~1000	30~1000	-68.6	<=-27.58	PASS
			1000~26500	1000~26500	-50.47	<=-27.58	PASS
3DH5	Ant1	2402	Reference	-7.06	-7.06	---	PASS
			30~1000	30~1000	-67.58	<=-27.06	PASS
			1000~26500	1000~26500	-51.9	<=-27.06	PASS
		2441	Reference	-7.16	-7.16	---	PASS
			30~1000	30~1000	-67.49	<=-27.16	PASS
			1000~26500	1000~26500	-51.81	<=-27.16	PASS
		2480	Reference	-7.61	-7.61	---	PASS
			30~1000	30~1000	-67.43	<=-27.61	PASS
			1000~26500	1000~26500	-51.41	<=-27.61	PASS

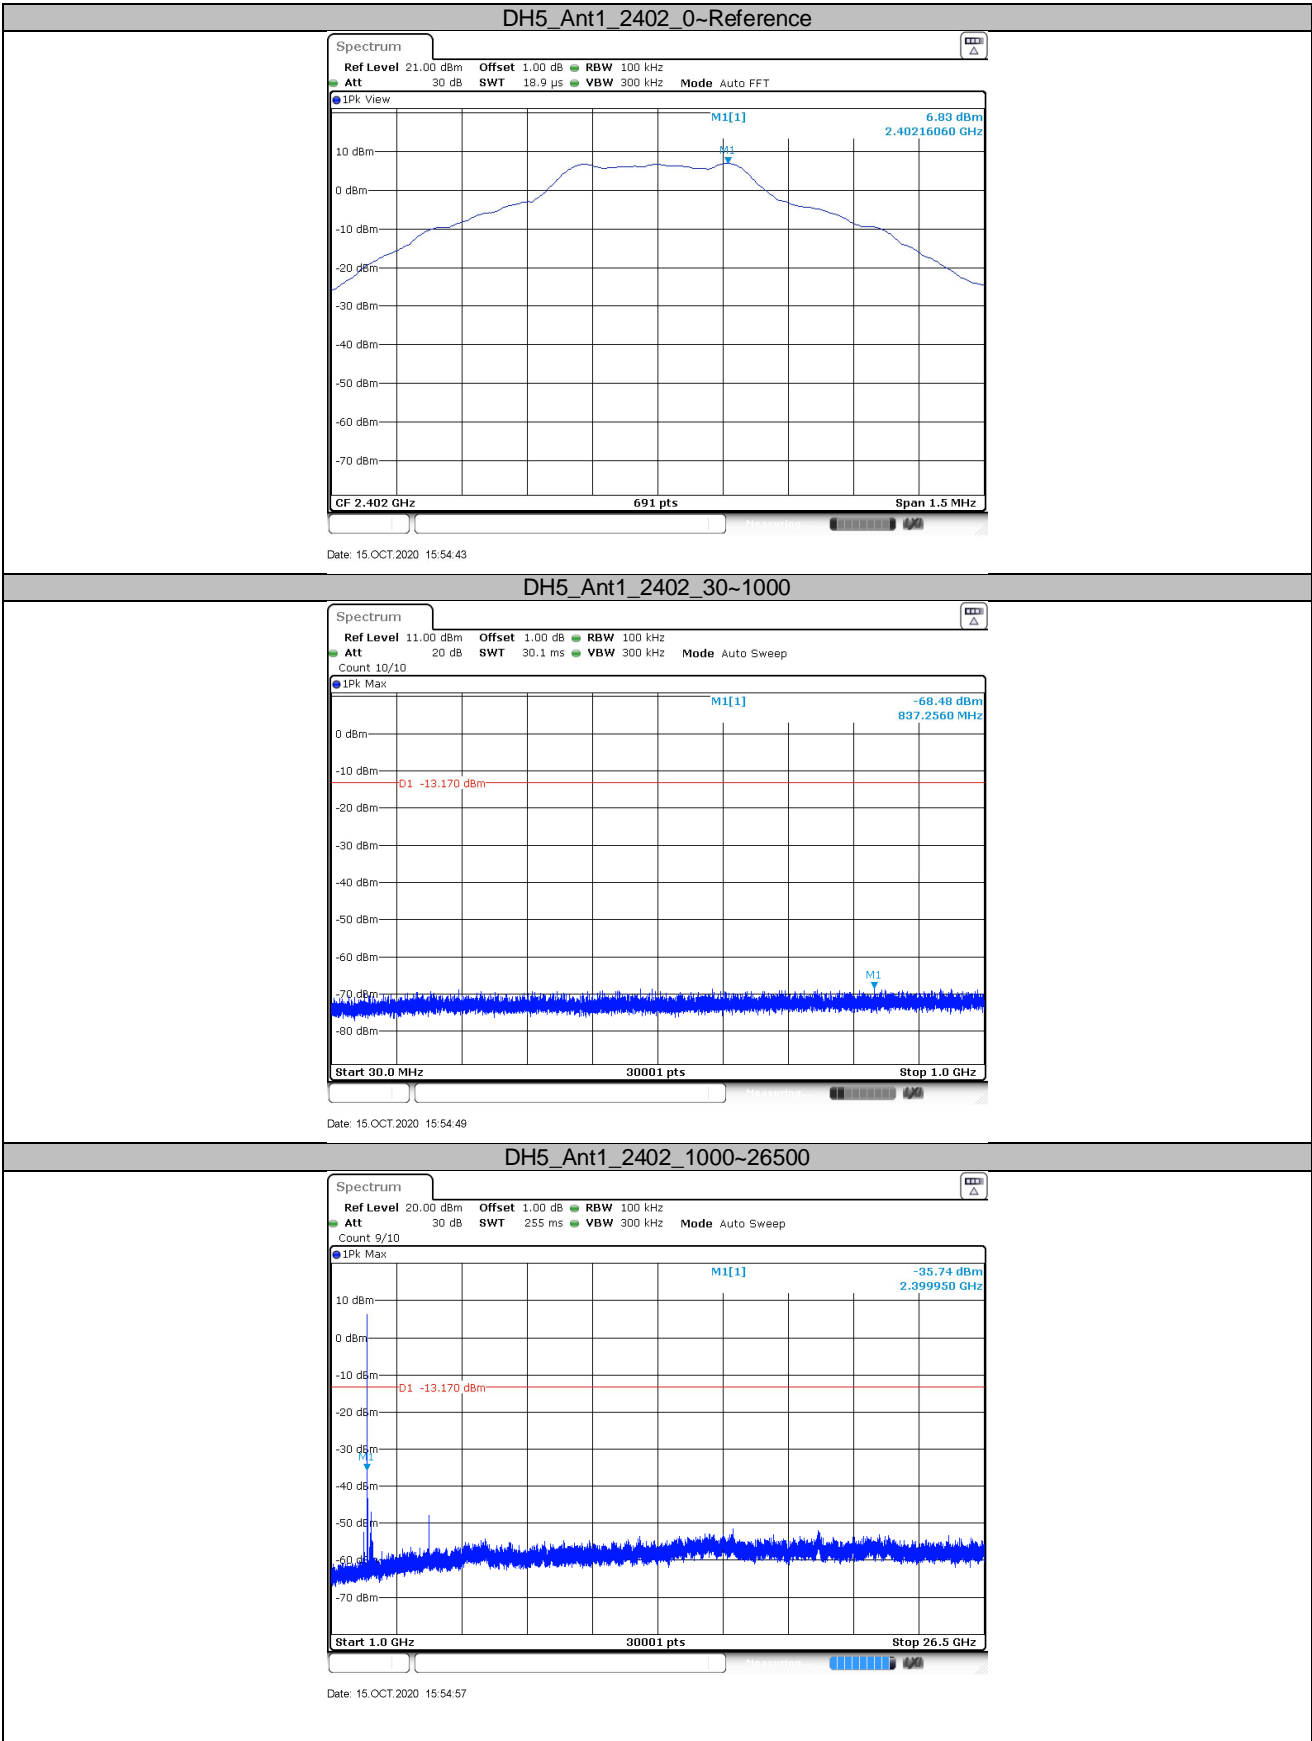

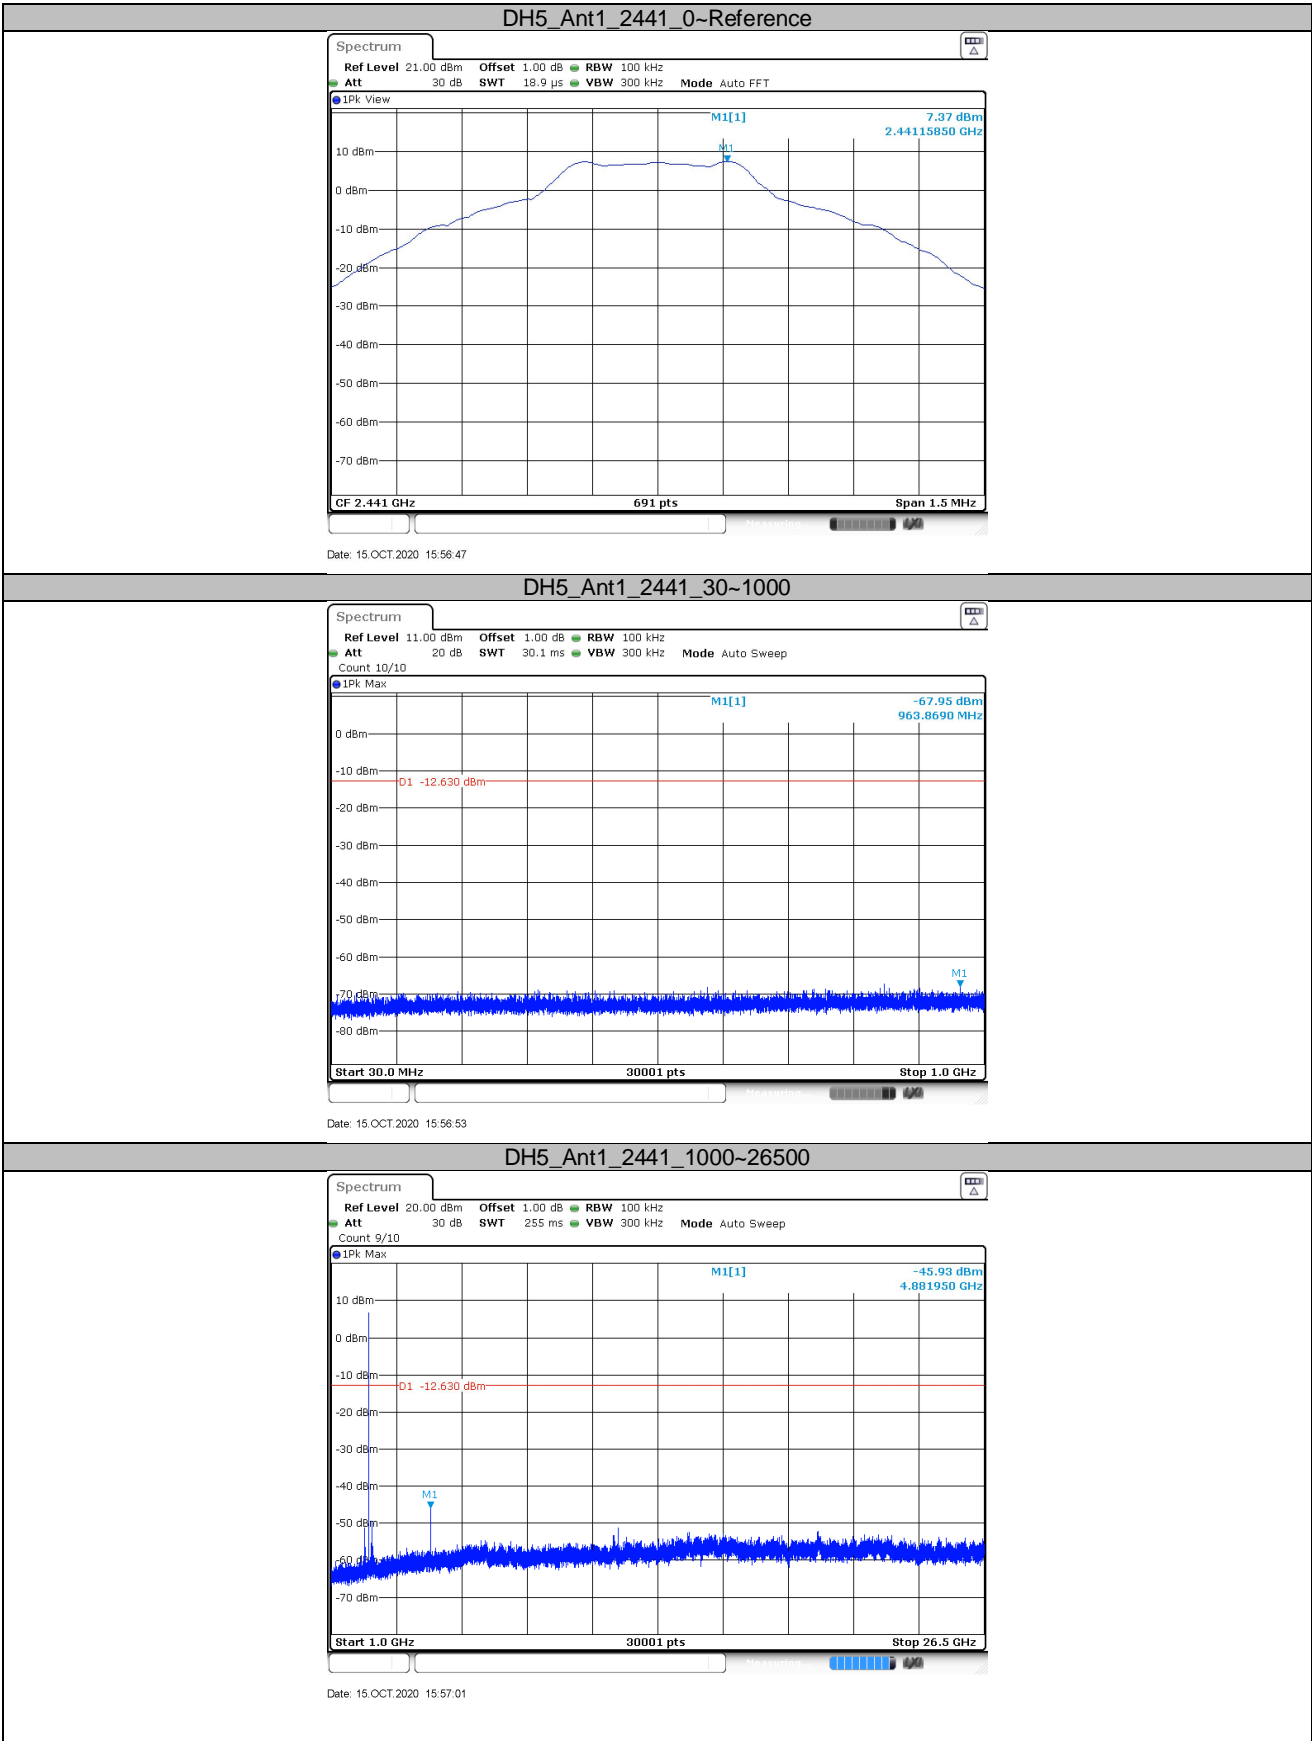

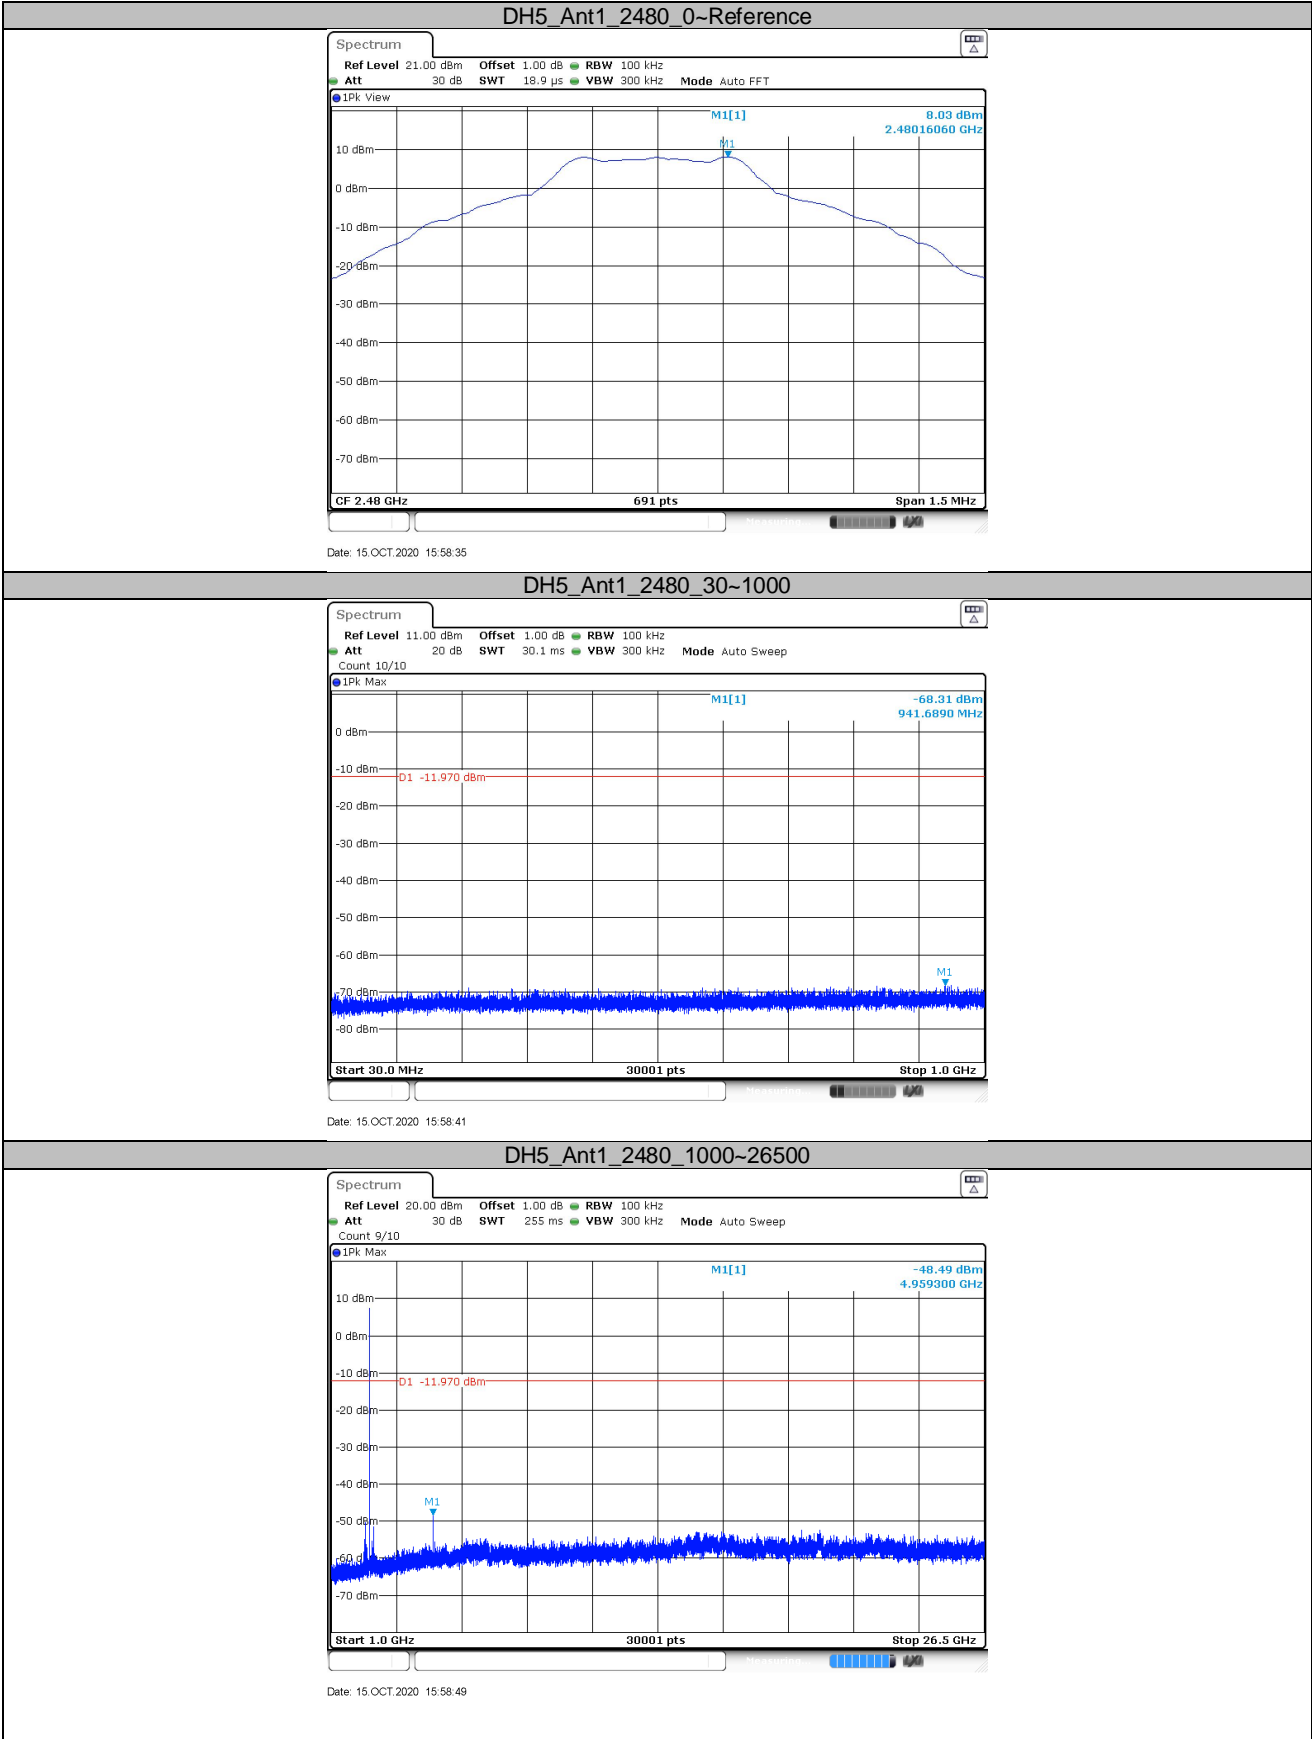


## 2DH5\_Ant1\_2402\_0~Reference

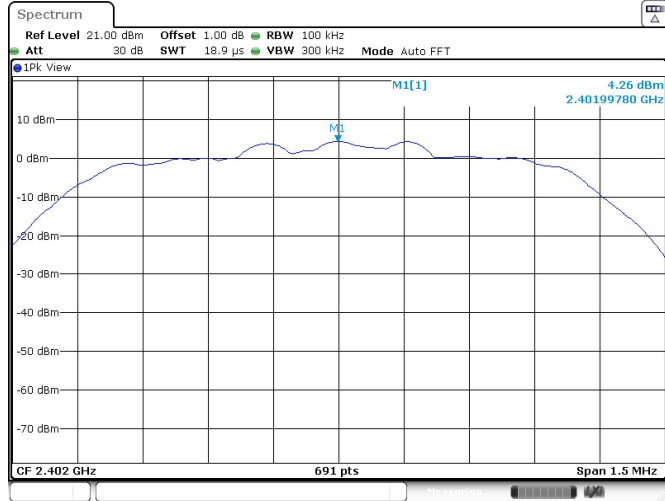


Date: 15 OCT.2020 16:00:26

## 2DH5\_Ant1\_2402\_30~1000



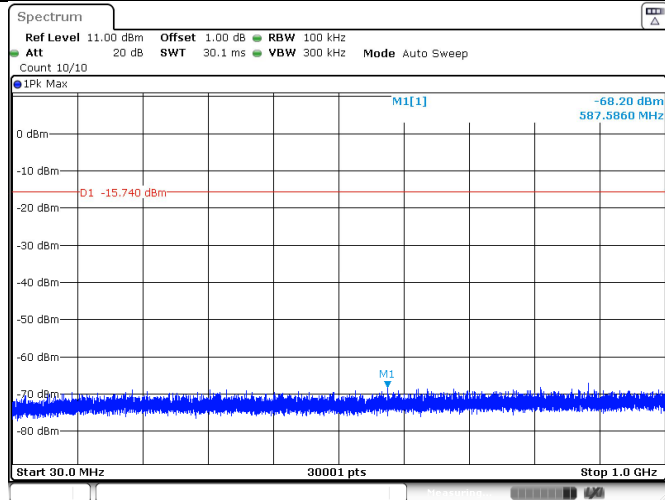



Date: 15 OCT.2020 16:00:32


## 2DH5\_Ant1\_2402\_1000~26500

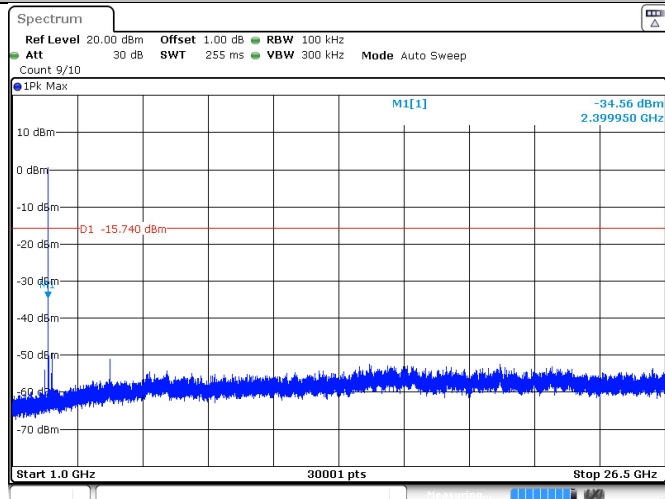


Date: 15 OCT.2020 16:00:40

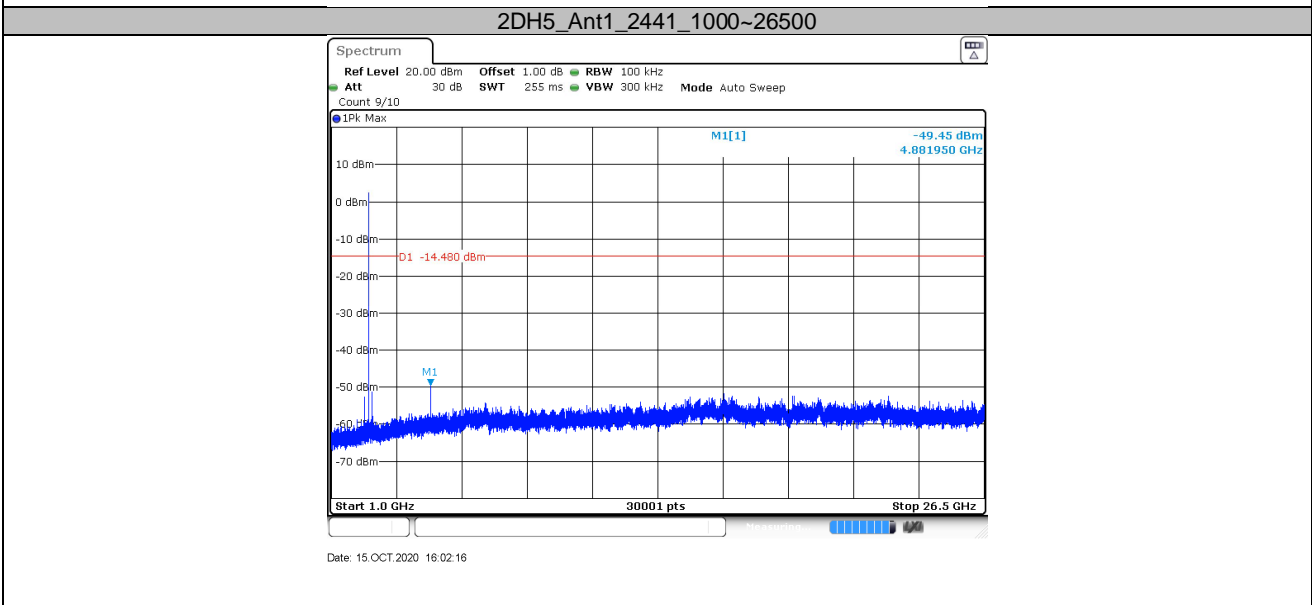
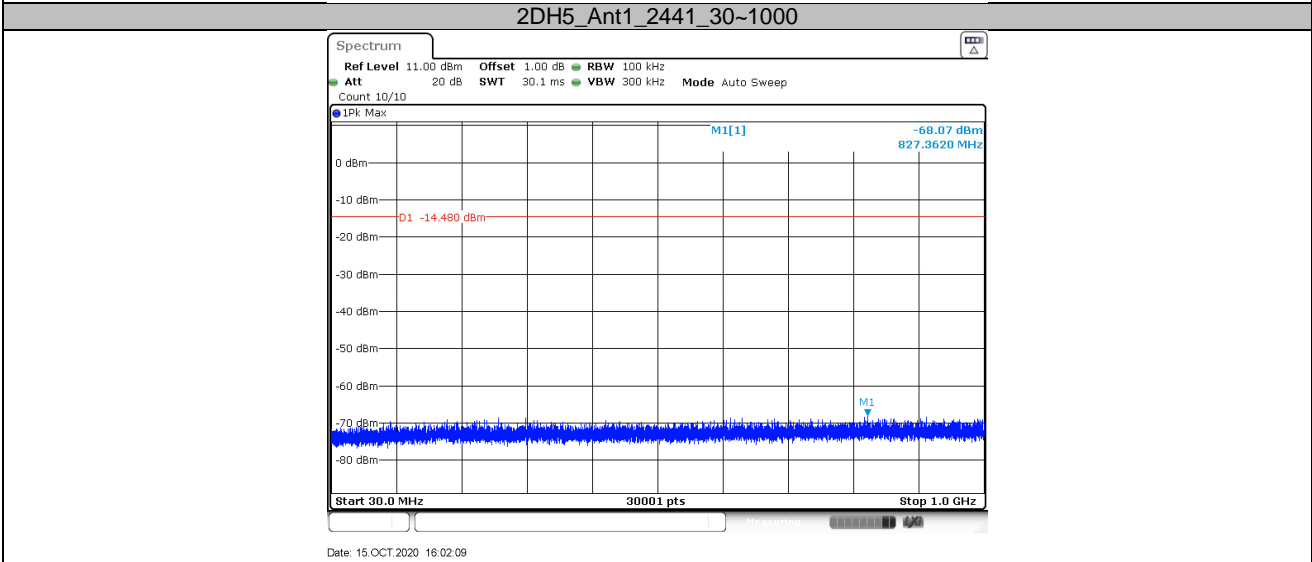
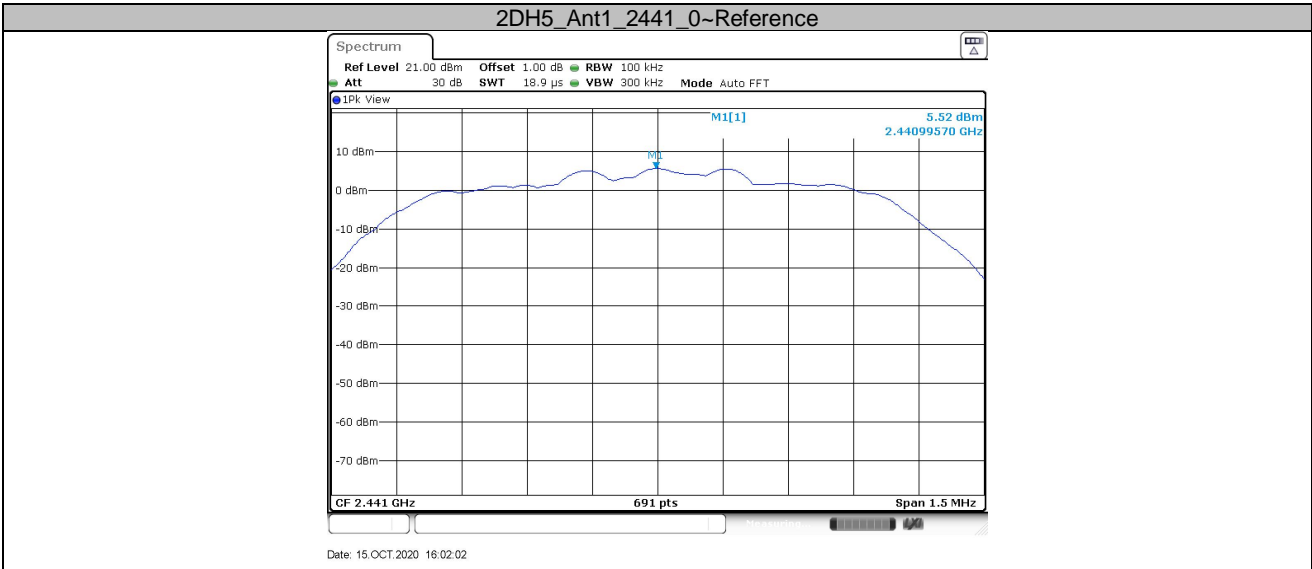


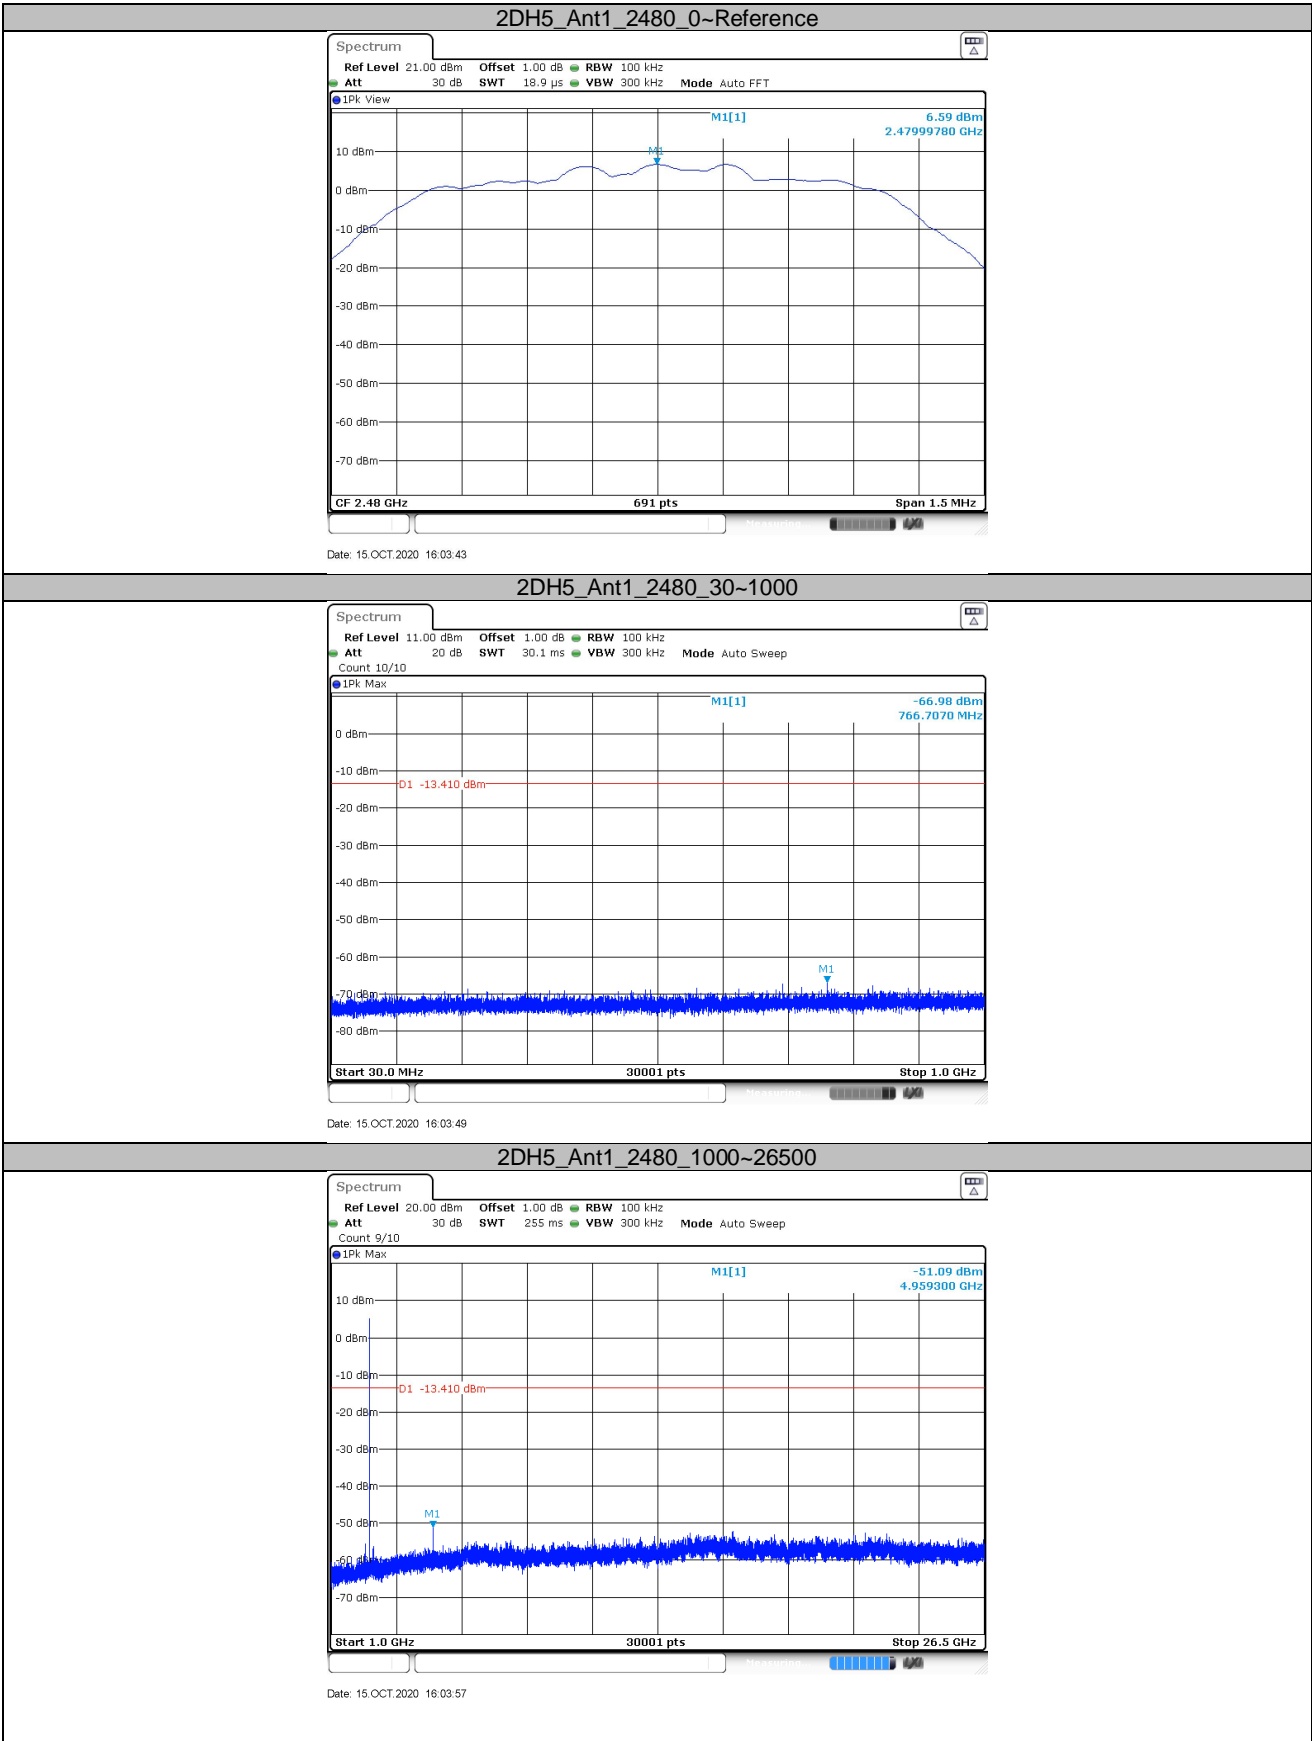

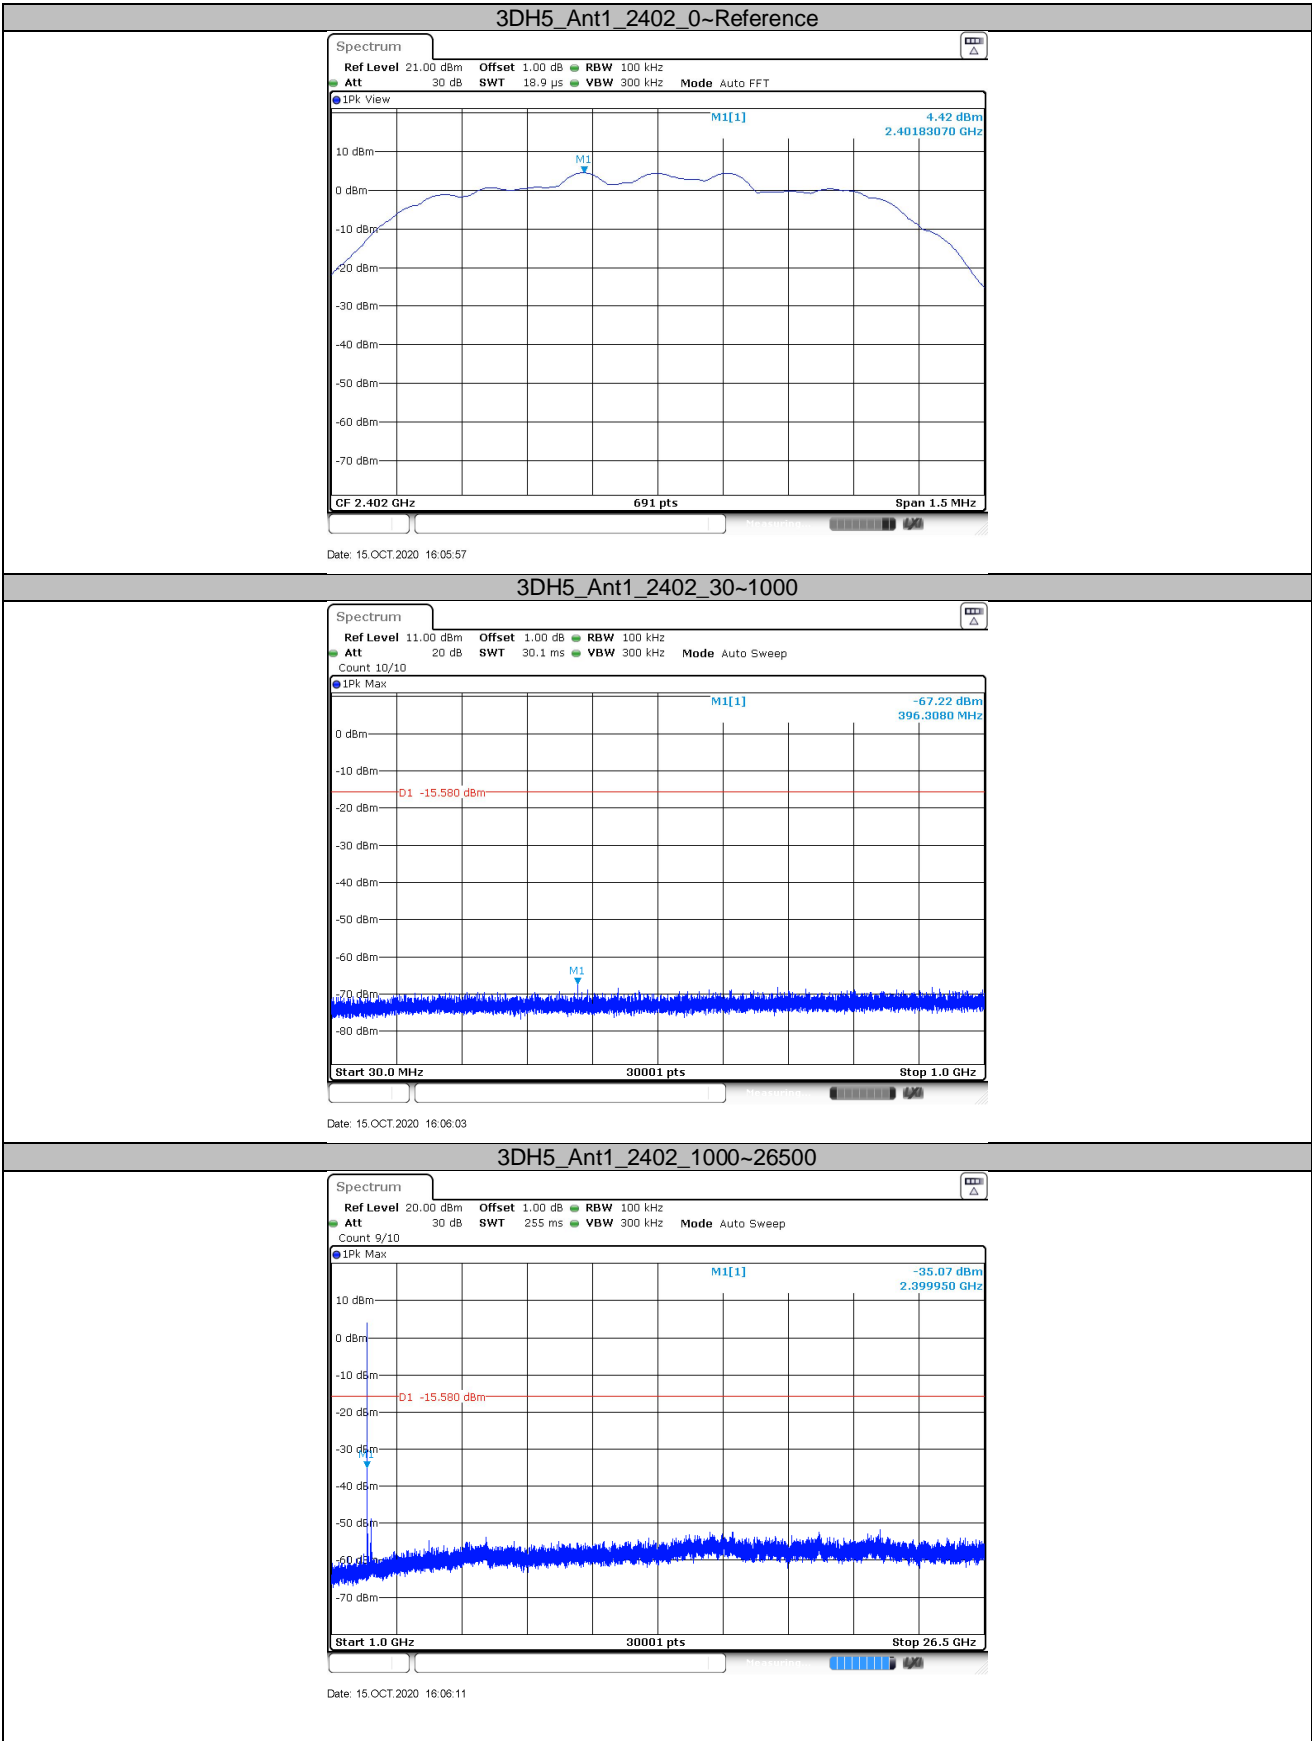



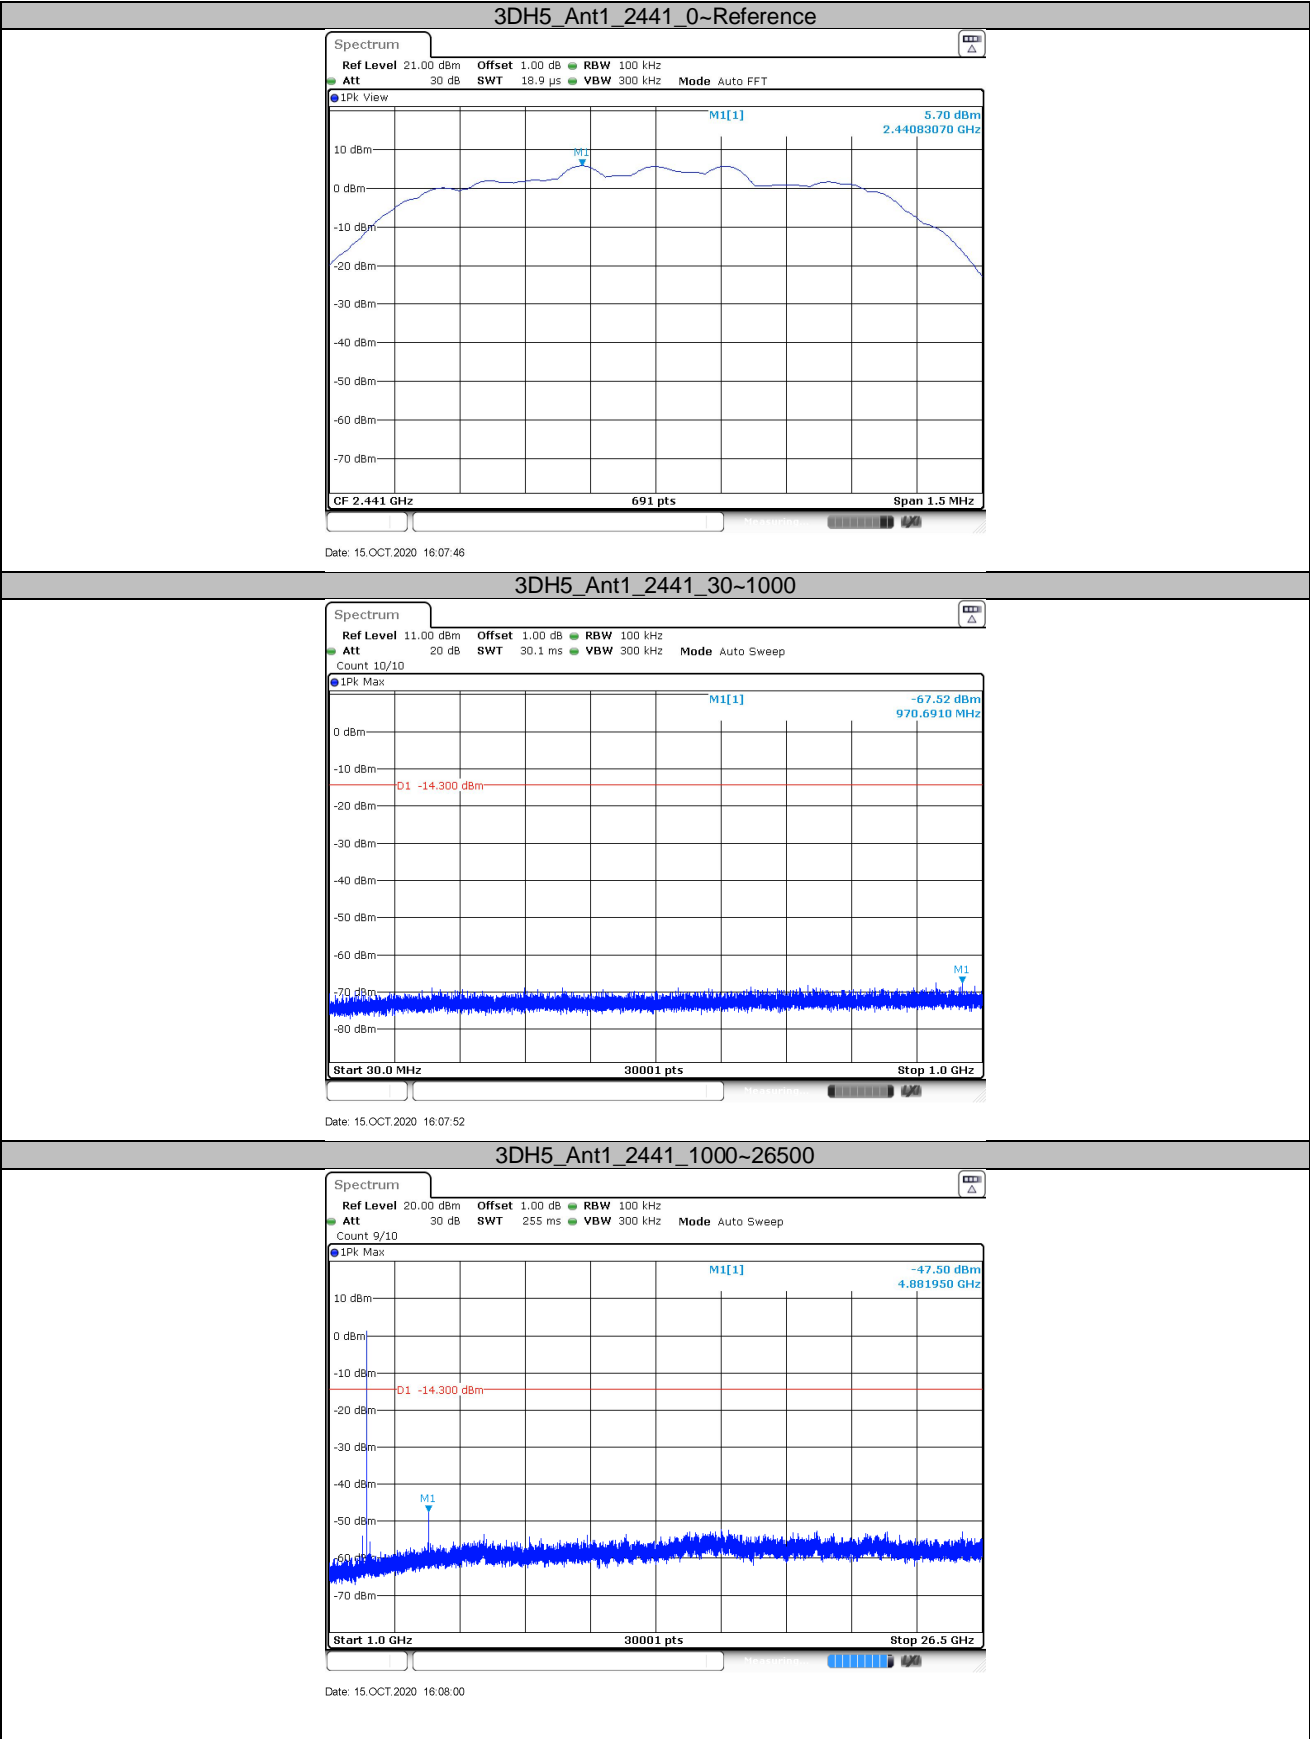

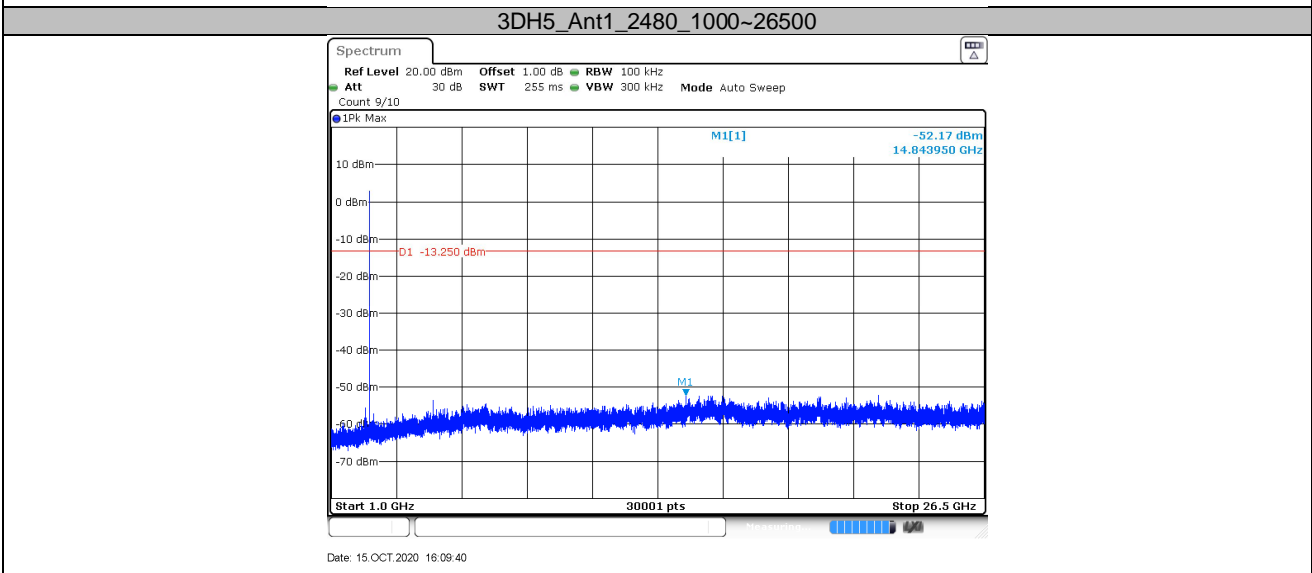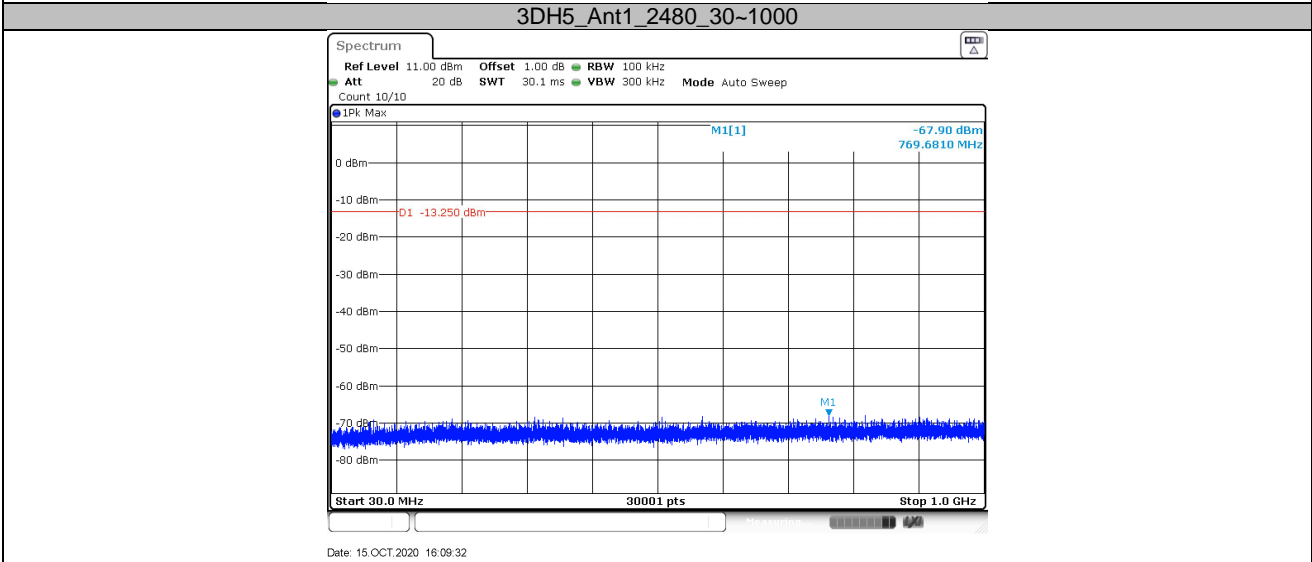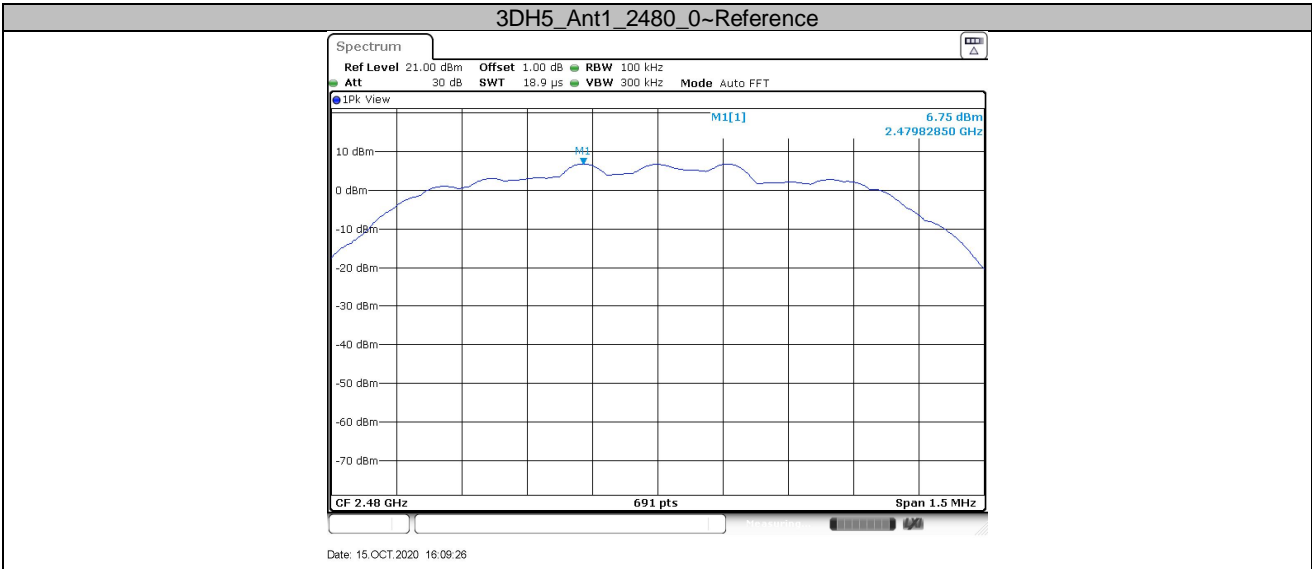

## 9.7 Band edge testing

### Test Method


- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section. .
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.

### Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.



GFSK mode: Hopping off

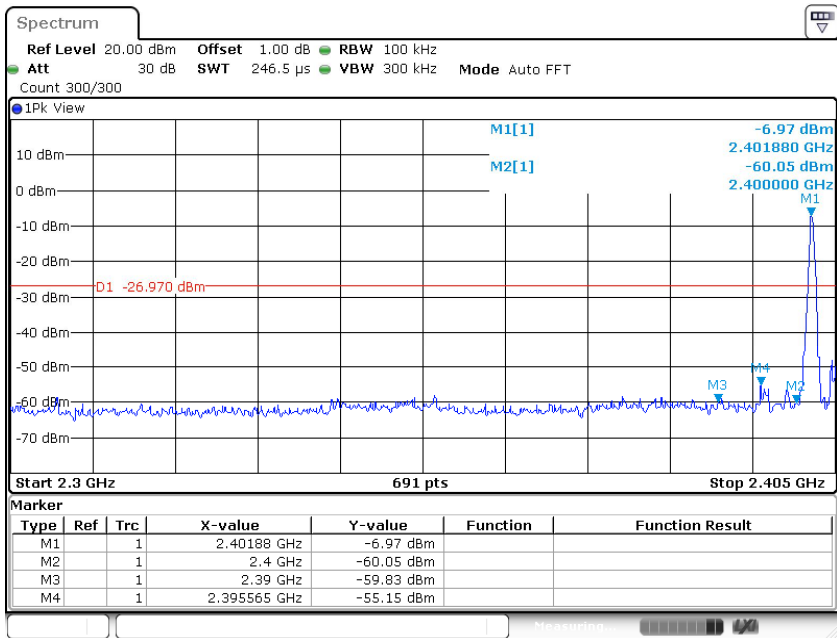



Date: 19.SEP.2021 11:20:25

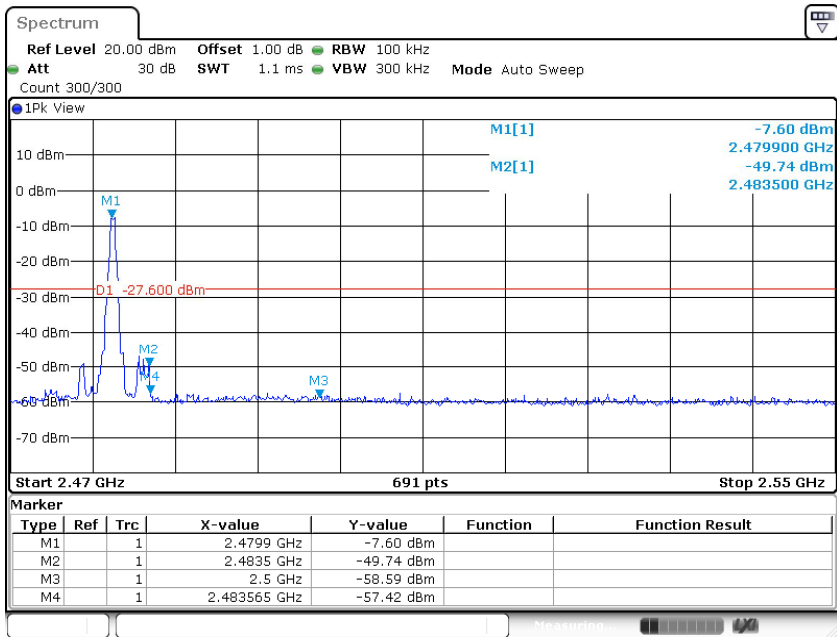

Date: 19.SEP.2021 11:23:28




GFSK mode: Hopping on

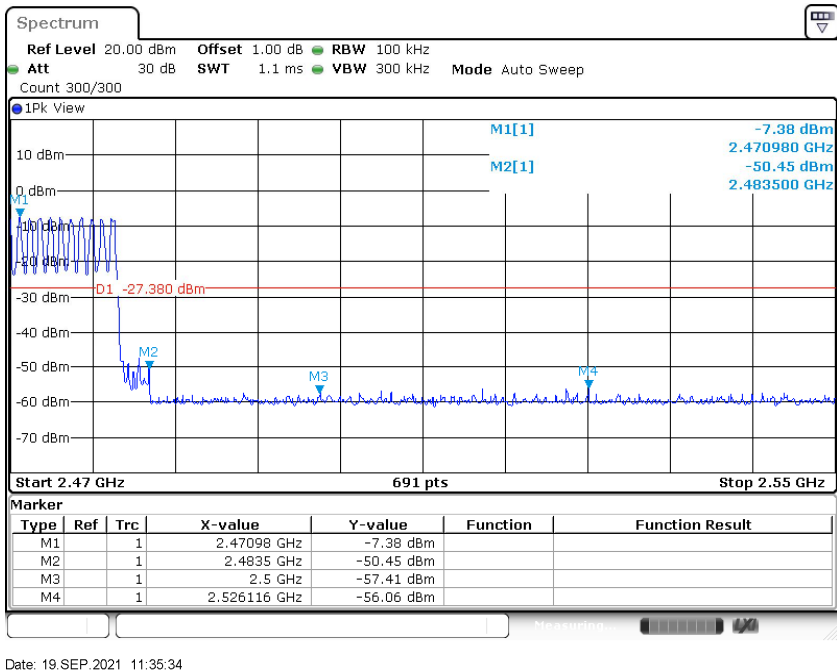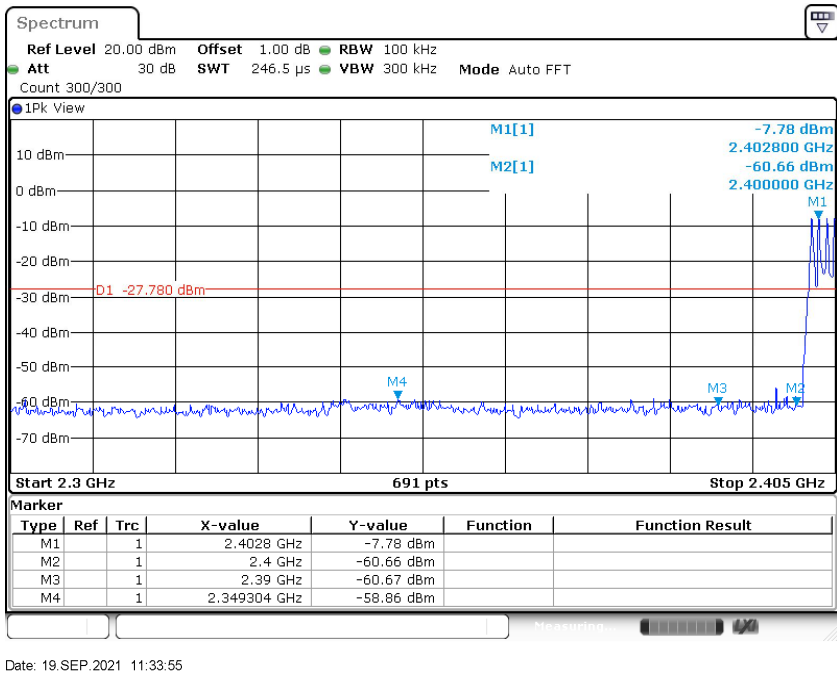




8DPSK mode: Hopping off

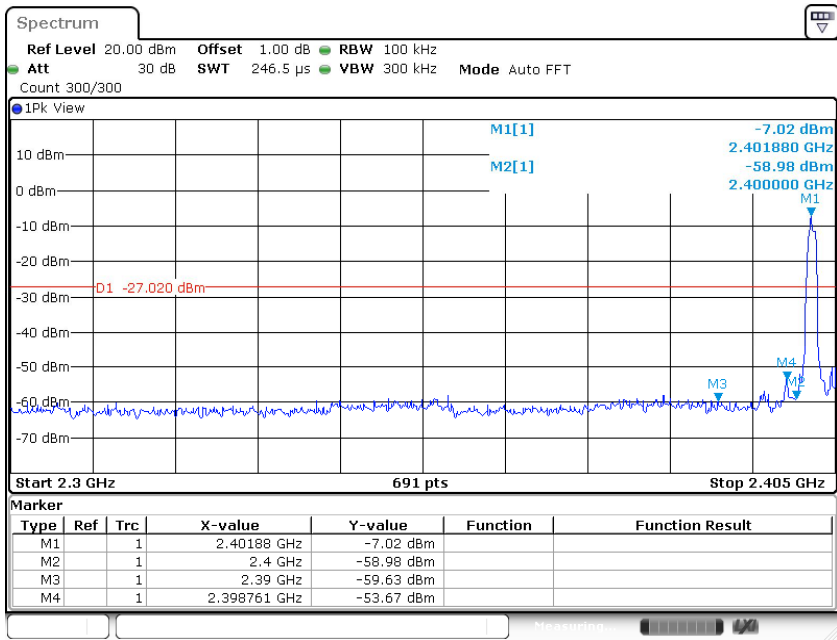



Date: 19.SEP.2021 11:29:20

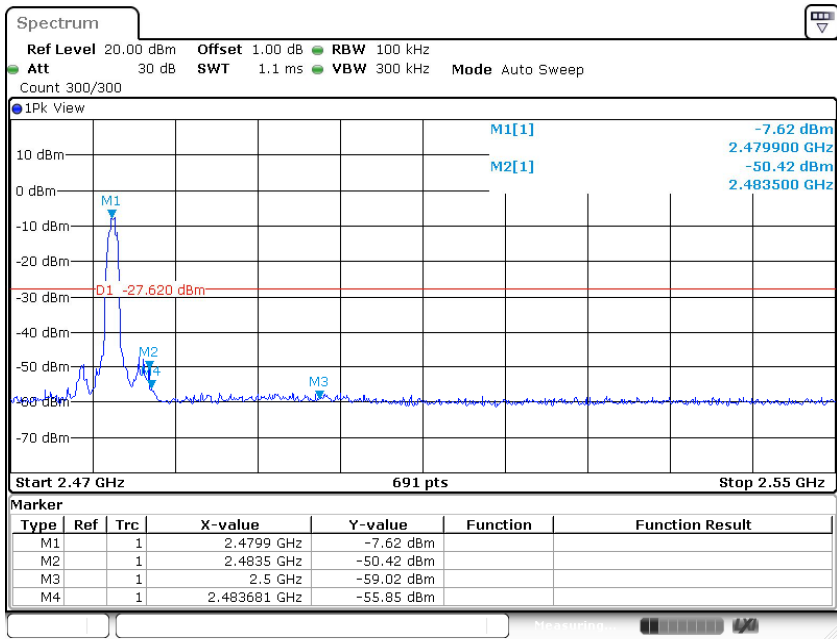

Date: 19.SEP.2021 11:33:08



8DPSK mode: Hopping on

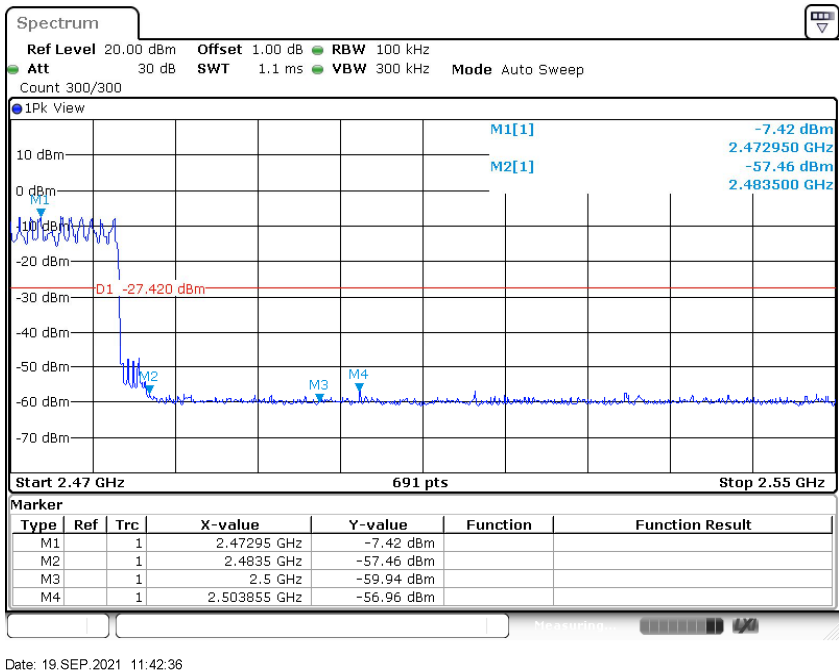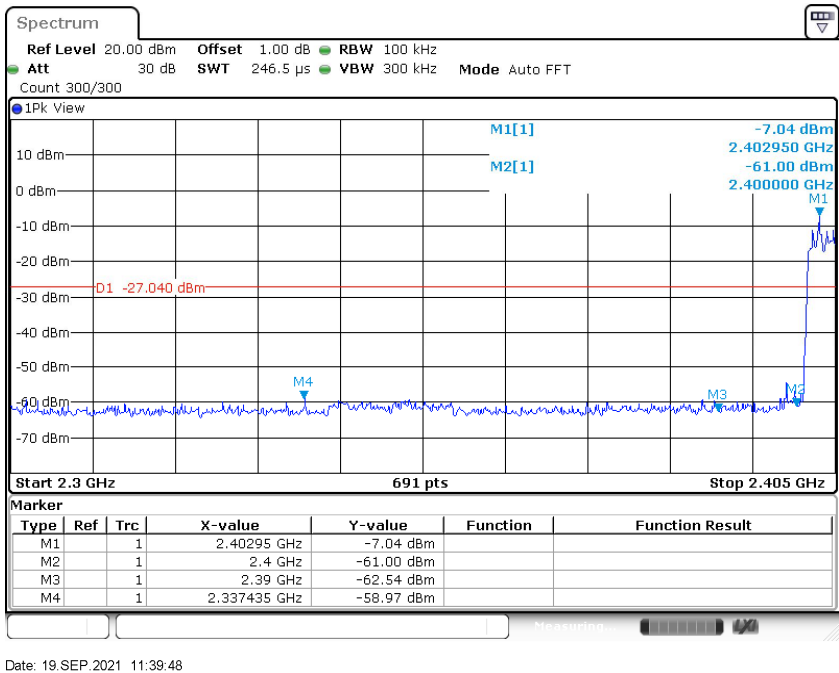

## 9.8 Spurious radiated emissions for transmitter

### Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:  
For Below 1GHz  
Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 KHz to 120KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto,  
Detector function = peak, Trace = max hold.  
For Peak unwanted emissions Above 1GHz:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW $\geq$ RBW for peak measurement, Sweep = auto,  
Detector function = peak, Trace = max hold.  
Procedures for average unwanted emissions measurements above 1000 MHz:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW=10Hz, Sweep = auto, Detector function = peak, Trace = max hold.  
If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.  
If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.  
The setting method can refer to DA00-705.



## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency MHz	Field Strength uV/m	Field Strength dBµV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

## Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.


The only worse case (which is subject to the maximum EIRP, GFSK mode) test result is listed in the report.

### Transmitting spurious emission test result as below:

EUT: Headphones Bluetooth On Ear

M/N: SBKG 40 A1

Operating Condition: Tx 2402MHz, lowest Channel

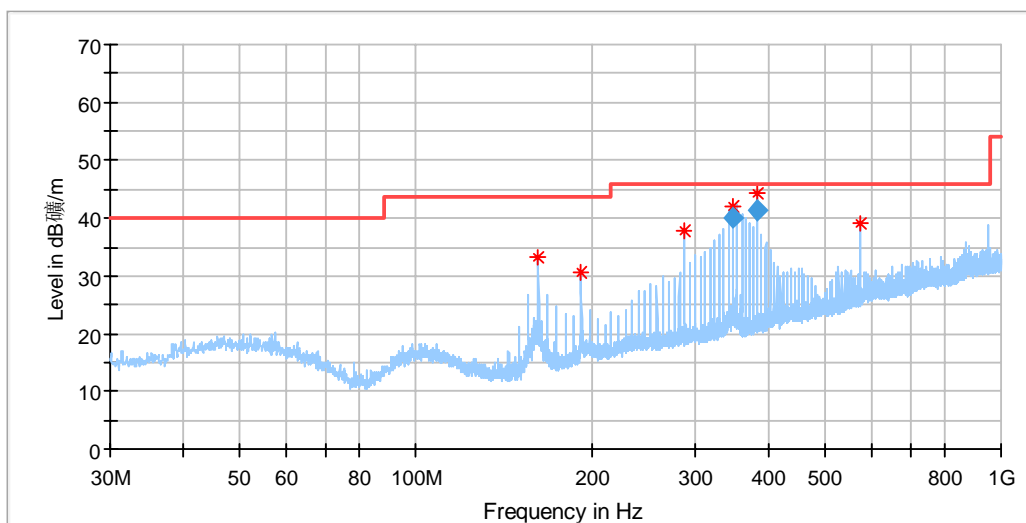


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
161.980625	33.15	43.50	10.35	200.0	H	0.0	16.27
191.990000	30.59	43.50	12.91	100.0	H	353.0	18.56
287.959375	37.82	46.00	8.18	100.0	H	278.0	21.44
347.978125	42.15	46.00	3.85	100.0	H	95.0	23.41
383.989375	44.34	46.00	1.66	100.0	H	113.0	23.58
575.988750	39.10	46.00	6.90	200.0	H	331.0	27.40

### Final\_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
347.978125	40.15	46.00	5.85	100.0	H	95.0	23.41
383.989375	41.34	46.00	4.66	100.0	H	113.0	23.58

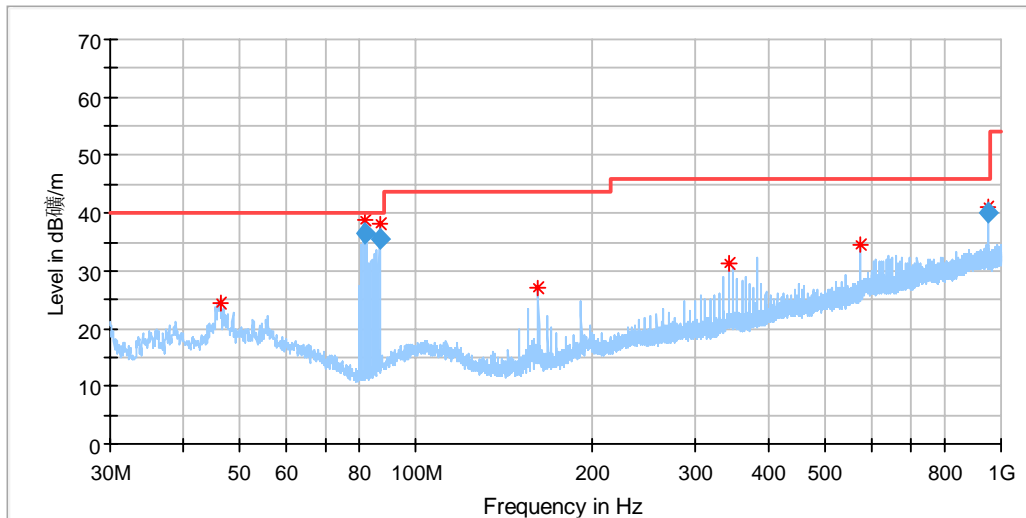


### Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.247500	24.57	40.00	15.43	100.0	V	39.0	20.86
81.591875	38.59	40.00	1.41	200.0	V	208.0	14.36
86.623750	38.24	40.00	1.76	100.0	V	0.0	15.68
161.980625	27.17	43.50	16.33	200.0	V	70.0	16.27
341.976250	31.29	46.00	14.71	100.0	V	215.0	23.19
575.988750	34.64	46.00	11.36	100.0	V	233.0	27.40
948.590000	41.00	46.00	5.00	200.0	V	321.0	32.69


### Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
81.591875	36.59	40.00	3.41	200.0	V	208.0	14.36
86.623750	35.43	40.00	4.57	100.0	V	0.0	15.68
948.590000	40.00	46.00	6.00	200.0	V	321.0	32.69

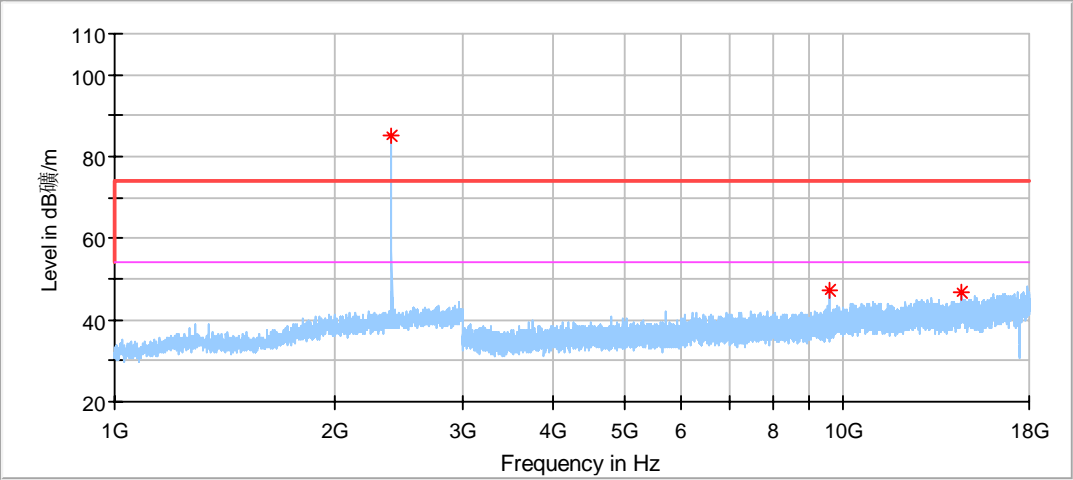

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.380952	84.89	74.00	-10.89	150.0	H	327.0	-3.08
9602.000000	47.28	74.00	26.72	150.0	H	329.0	9.32
14568.500000	46.66	74.00	27.34	150.0	H	212.0	12.97

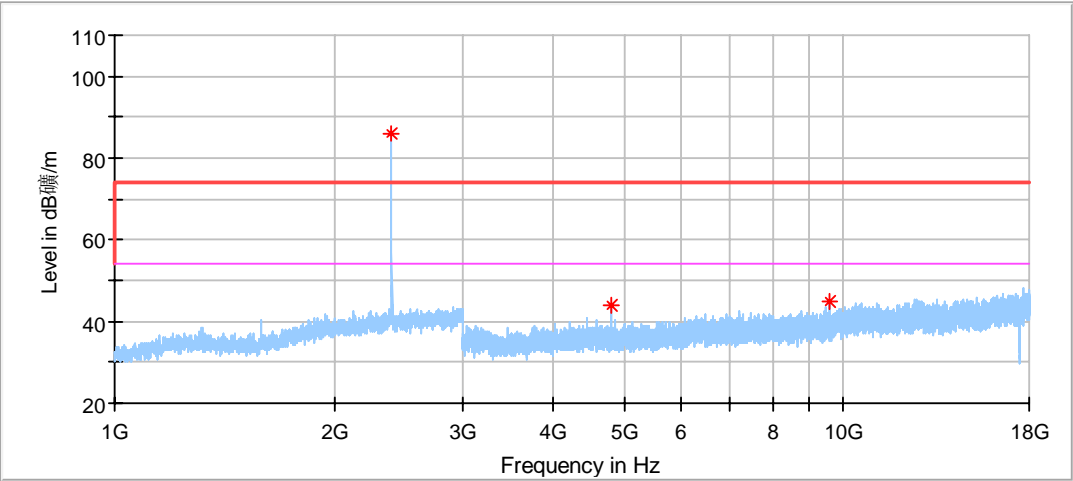


Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.380952	85.92	74.00	-11.92	150.0	V	16.0	-3.08
4800.500000	44.00	74.00	30.00	150.0	V	243.0	3.48
9602.000000	45.14	74.00	28.86	150.0	V	299.0	9.32




EUT: Headphones Bluetooth On Ear Good  
M/N: SBKG 40 A1  
Operating Condition: Tx 2441MHz, Middle Channel

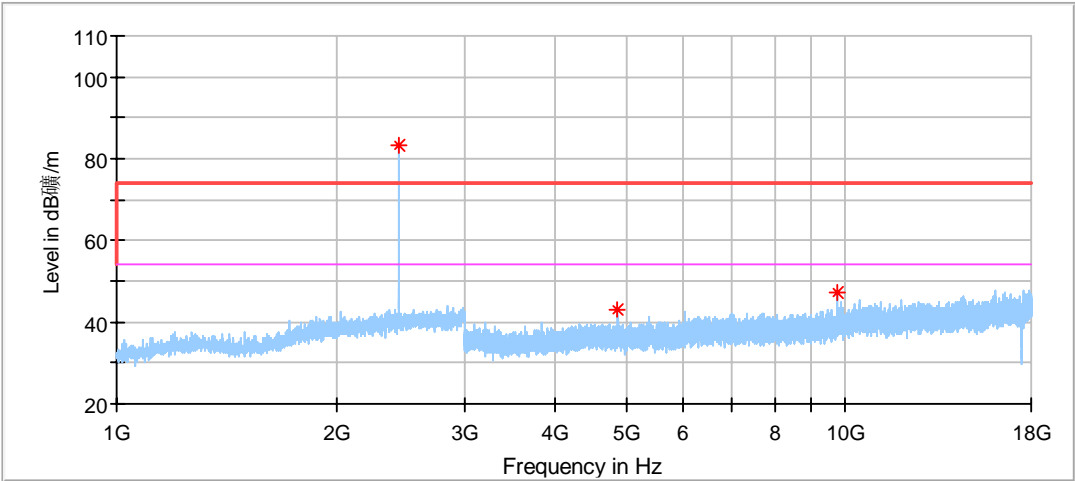

Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2441.428571	83.32	74.00	-9.32	150.0	H	334.0	-2.95
4879.000000	43.10	74.00	30.90	150.0	H	263.0	3.62
9758.000000	47.30	74.00	26.70	150.0	H	61.0	9.56

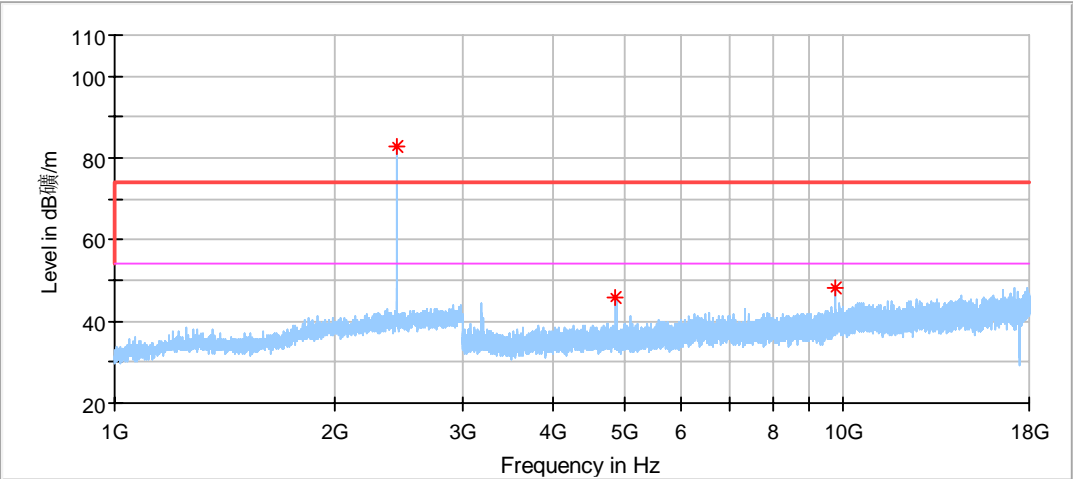


Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2441.428571	82.59	74.00	-8.59	150.0	V	18.0	-2.95
4879.000000	45.87	74.00	28.13	150.0	V	261.0	3.62
9757.500000	48.15	74.00	25.85	150.0	V	356.0	9.55




EUT: Headphones Bluetooth On Ear Good  
M/N: SBKG 40 A1  
Operating Condition: Tx 2480MHz, High Channel)

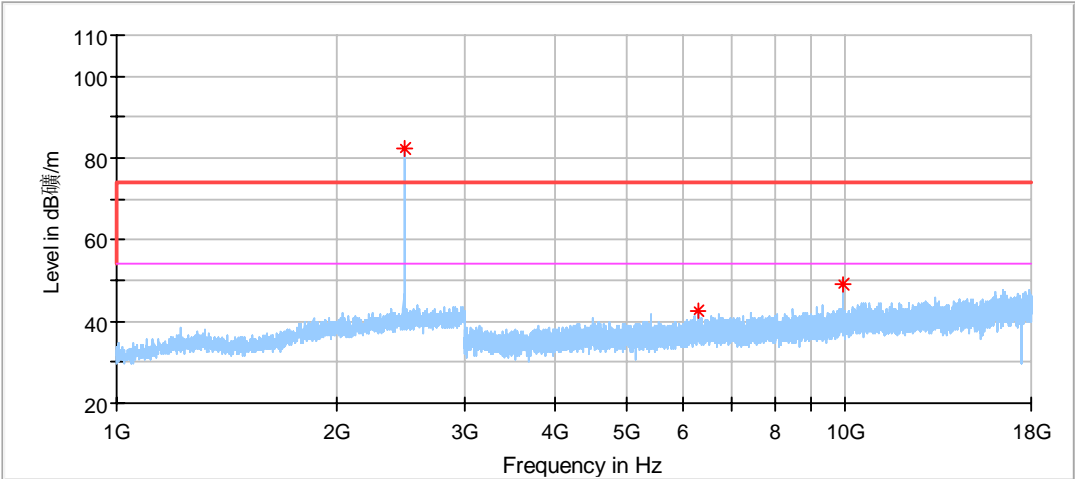

Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.476191	82.34	74.00	-8.34	150.0	H	335.0	-2.70
6271.500000	42.79	74.00	31.21	150.0	H	32.0	6.81
9914.000000	48.98	74.00	25.02	150.0	H	327.0	10.32



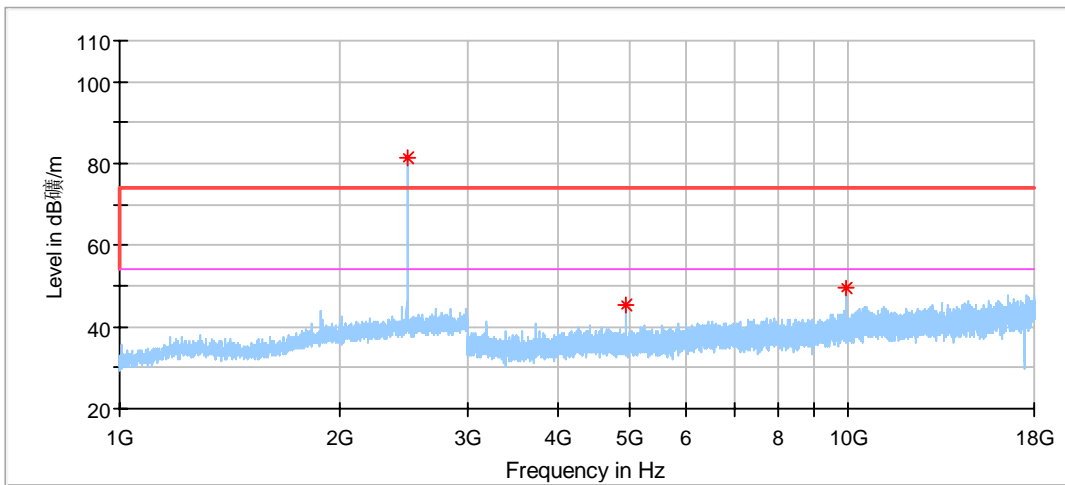

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.000000	81.60	74.00	-7.60	150.0	V	19.0	-2.70
4957.000000	45.27	74.00	28.73	150.0	V	270.0	3.71
9913.500000	49.36	74.00	24.64	150.0	V	270.0	10.33

#### Remark:

- (1) Data of measurement within frequency range 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.
- (2) Level=Reading Level + Correction Factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss  
 (The Reading Level is recorded by software which is not shown in the sheet)

## 10 Test Equipment List

### List of Test Instruments

#### Radiated Emission Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Calibration interval (year)	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2022-6-4
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2022-2-2
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2022-5-24
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2021-10-25
Pre-amplifier	Rohde & Schwarz	SCU 08F2	68-4-29-19-004	08400018	1	2021-10-25
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2022-7-21
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2022-7-27
3m Semi-anechoic chamber	TDK	9X6X6	68-4-90-19-006	----	3	2022-12-29
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.3 5.02	N/A	N/A

#### RF Conducted Test

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Calibration interval (year)	cal. due date
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2022-6-3

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Radiated Spurious Emission 30MHz-1000MHz	Horizontal: 4.70dB; Vertical: 4.67dB;
Radiated Spurious Emission 1000MHz-18000MHz	Horizontal: 4.65dB; Vertical: 4.63dB;
Conducted RF test with TS 8997	RF Power Conducted: 1.31dB Frequency test involved: $0.6 \times 10^{-7}$ or 1%