

Test Report

Verified code: 622729

Report No.: E20241111636501-9EN

Customer: Lumi United Technology Co., Ltd

Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District,
Nanshan District, Shenzhen

Sample Name: Climate Sensor W100

Sample Model: TH-S04E

Receive Sample Date: Nov.12,2024

Test Date: Nov.15,2024 ~ Nov.29,2024

Reference Document: 47 CFR Part 15 Subpart C Intentional Radiators

Test Result: Pass

Prepared by: Huang Lifang Reviewed by: Jiang Tao Approved by: Xiao Liang
Huang Lifang Jiang Tao Xiao Liang

GRG METROLOGY & TEST GROUP CO., LTD

Issued Date: 2024-12-16

GRG METROLOGY & TEST GROUP CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. This testing report is only for scientific research, teaching, internal quality control, etc.

——Blank space below this page——

TABLE OF CONTENTS

1.	TEST RESULT SUMMARY	6
2.	GENERAL DESCRIPTION OF EUT.....	7
2.1	APPLICANT	7
2.2	MANUFACTURER	7
2.3	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	7
2.4	CHANNELLIST	8
2.5	TEST OPERATION MODE	8
2.6	LOCAL SUPPORTIVE	8
2.7	CONFIGURATION OF SYSTEM UNDER TEST	9
2.8	DUTY CYCLE.....	10
3.	LABORATORY AND ACCREDITATIONS	11
3.1	LABORATORY	11
3.2	ACCREDITATIONS	11
4.	MEASUREMENT UNCERTAINTY	12
5.	LIST OF USED TEST EQUIPMENT AT GRGT	13
6.	RADIATED SPURIOUS EMISSIONS	14
6.1	LIMITS.....	14
6.2	TEST PROCEDURES	14
6.3	TEST SETUP	17
6.4	DATA SAMPLE	18
6.5	TEST RESULTS	20
7.	6dB BANDWIDTH.....	30
7.1	LIMITS.....	30
7.2	TEST PROCEDURES	30
7.3	TEST SETUP	30
7.4	TEST RESULTS	30
8.	MAXIMUM PEAK OUTPUT POWER	34
8.1	LIMITS.....	34
8.2	TEST PROCEDURES	34
8.3	TEST SETUP	34
8.4	TEST RESULTS	34
9.	POWER SPECTRAL DENSITY	35
9.1	LIMITS.....	35
9.2	TEST PROCEDURES	35
9.3	TEST SETUP	35
9.4	TEST RESULTS	36
10.	CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS	40
10.1	LIMITS.....	40
10.2	TEST PROCEDURES	40
10.3	TEST SETUP	40
10.4	TEST RESULTS	41

11. RESTRICTED BANDS OF OPERATION..... 53

11.1 LIMITS..... 53

11.2 TEST PROCEDURES 54

11.3 TEST SETUP 54

11.4 TEST RESULTS..... 55

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM 64

APPENDIX B. PHOTOGRAPH OF THE EUT 64

—Blank space below this page—

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E20241111636501-9EN	Original Issue	2024-12-06

Blank space below this page

1. TEST RESULT SUMMARY

Technical Requirements		
47 CFR Part 15 Subpart C 15.247 ANSI C63.10-2020 KDB 558074 D01 15.247 measurement guidance v05r02		
Limit / Severity	Item	Result
§15.203	Antenna Requirement	Pass ¹⁾
§15.207(a)	Conducted Emission	Not Applicable ²⁾
§15.247(d)&15.205& 15.209	Radiated Spurious Emission	Pass
§15.247(b)(3)	Maximum Peak Output Power	Pass
§15.247(e)	Power Spectral Density	Pass
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(d)	Conducted band edges and Spurious Emission	Pass
§15.247(d)&15.205& 15.209	Restricted bands of operation	Pass

Note:

¹⁾ The antenna is PCB antenna. The max gain of antenna is 1dBi, which accordance 15.203, is considered sufficient to comply with the provisions of this section.

²⁾ Test is not applicable to this Equipment. This EUT is no AC mains power ports.

——Blank space below this page——

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name: Lumi United Technology Co., Ltd
Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen

2.2 MANUFACTURER

Name: Lumi United Technology Co., Ltd
Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen

2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment: Climate Sensor W100
Model No.: TH-S04E
Adding Model: TH-S04D
Models Difference: The model No.TH-S04E & TH-S04D have the same technical construction including circuitdiagram,PCB LAYOUT, hardware version and software version identical, except sales area and packaging are different.
Trade Name: Aqara
FCC ID: 2AKIT-THS04
Power supply: DC 3V
Battery: Button batteries;
Specification: Model: CR2450;
Nominal Voltage: 3V.
Frequency Band: 2402MHz-2480MHz
Transmit Power: GFSK for 1Mbps:7.37dBm
GFSK for 2Mbps:7.36dBm
Modulation type: GFSK for 1Mbps & 2Mbps
Channel space: 2MHz
Antenna Specification: PCB antenna with 1dBi gain (Max.)
Temperature Range: -20℃ ~ +60℃
Hardware Version: V12
Software Version: V0.0.2.0

Sample No: E20241111636501-0002, E20241111636501-0004

Note:

1. The EUT antenna gain is provided by the applicant. This report is made solely on the basis of such data and/or information. We accept no responsibility for the authenticity and completeness of the above data and information and the validity of the results and/or conclusions.
2. Based on the differences in models, the model TH-S04E was tested and recorded in this report.

2.4 CHANNELLIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	*19	2440	29	2460	*39	2480

* is the test frequency

2.5 TEST OPERATION MODE

Mode No.	Description of the modes
1	Bluetooth (BLE) fixed frequency transmitting


2.6 LOCAL SUPPORTIVE

No.	Name of equipment	Manufacturer	Model	Serial number	Note
A	Notebook	DELL	Latitude3300	2C6CFW2	/
B	Test board	/	/	/	/

No.	Cable Type	Qty.	Shielded Type	Ferrite Core(Qty.)	Length
1	Serial cable	1	No	0	0.2m
2	USB cable	1	No	0	0.5m

2.7 CONFIGURATION OF SYSTEM UNDER TEST

For 6dB bandwidth, Maximum Peak Output Power, Power Spectral Density, Conducted band edges and Spurious Emission



For Radiated Spurious Emission, Restricted bands of operation



Test software:

Software version	Test level
QCOM_V1.0	60

—Blank space below this page—

2.8 DUTY CYCLE

Environment: 24.3℃/47%RH/101.0kPa


Voltage: DC 3V

Tested By: Qin Tingting


Date: 2024-11-15

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	DC [%]
BLE_1M	Ant1	2440	19	19	100
BLE_2M	Ant1	2440	20	20	100

BLE_1M_2440MHz

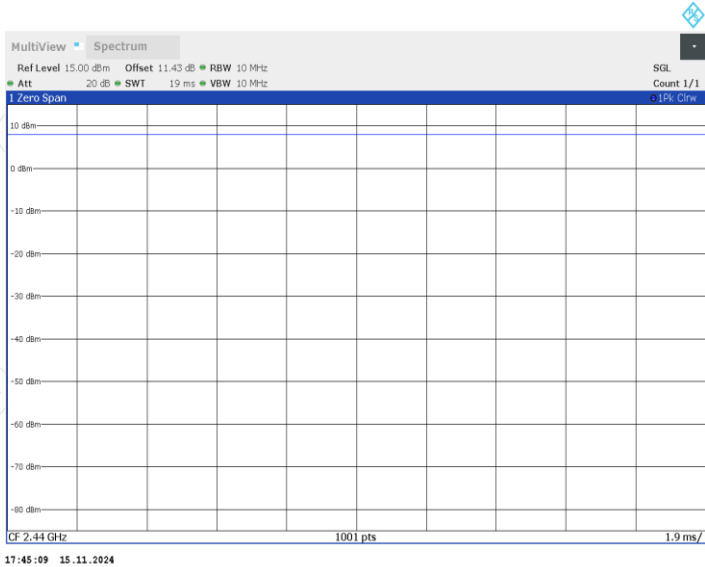

BLE_2M_2440MHz

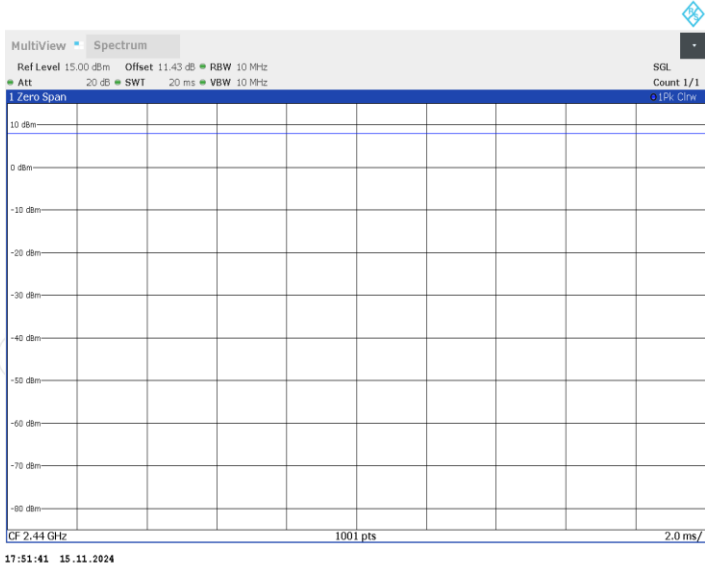

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of GRG METROLOGY & TEST GROUP CO., LTD.

Add : No.1301 Guangang Road Xinlan Community, Guanlan Street, Longhua District
Shenzhen, 518110, People's Republic of China

P.C. : 518110

Tel : 0755-61180008

Fax : 0755-61180008

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to GB/T 27025(ISO/IEC 17025:2017)

USA A2LA(Certificate #2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

——Blank space below this page——

4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	X	9kHz~30MHz	4.4dB ¹⁾
	Y	9kHz~30MHz	4.4dB ¹⁾
	Z	9kHz~30MHz	4.4dB ¹⁾
	Horizontal	30MHz~200MHz	4.6dB ¹⁾
		200MHz~1000MHz	4.8dB ¹⁾
		1GHz~18GHz	5.0dB ¹⁾
		18GHz~26.5GHz	5.2dB ¹⁾
	Vertical	30MHz~200MHz	4.7dB ¹⁾
		200MHz~1000MHz	4.7dB ¹⁾
		1GHz~18GHz	5.1dB ¹⁾
		18GHz~26.5GHz	5.4dB ¹⁾

Measurement	Uncertainty
RF frequency	6.0×10 ⁻⁶
RF power conducted	0.80dB
Power spectral density conducted	0.80dB
Occupied channel bandwidth	0.40dB
Unwanted emission, conducted	0.70dB
Humidity	6.0%
Temperature	2.0°C

Note:
¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95%.
This uncertainty represents an expanded uncertainty factor of k=2.

5. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Radiated Spurious Emission&Restricted bands of operation				
Test Receiver	R&S	ESR26	101758	2025-09-10
Test S/W	FARAD	EZ_EMC	CCS-03A1	/
Bi-log Antenna	Schwarzbeck	VULB 9160	VULB9160-3402	2025-09-11
Loop Antenna	Schwarzbeck	FMZB 1513-60	1513-60-56	2025-05-07
Preamplifier	EMEC	EM330	060662	2025-06-14
Horn antenna	Schwarzbeck	BBHA 9120D	02143	2025-09-07
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	2025-08-30
Amplifier	Tonscend	TAP01018048	AP20E8060075	2025-03-01
Amplifier	Tonscend	TAP184050	AP20E806071	2025-03-01
Preamplifier	SHIRONG ELECTRONIC	DLNA-1G18G-G40	20200928005	2025-07-19
Test S/W	Tonscend	JS32-RE/5.0.0		
6dB Bandwidth&Conducted band edges and Spurious Emission&Power Spectral Density				
Spectrum Analyzer	R&S	FSW43	102072	2025-06-14
Automatic power measuring unit	TONSCEND	JS0806-2	21B8060365	2024-12-28
BT/WIFI System	Tonscend	JS1120-3		
Maximum Peak Output Power				
Pulse power sensor	Anritsu	MA2411B	1126150	2025-01-11
Power meter	Anritsu	ML2495A	1204003	2025-01-11

Note: The calibration cycle of the above instruments is 12 months.

6. RADIATED SPURIOUS EMISSIONS

6.1 LIMITS

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak($\mu\text{V/m}$)	Measurement distance(m)	Quasi-peak(dB $\mu\text{V/m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE:

- (1) The emission limits for the ranges 9-90kHz and 110-490kHz are based on measurements employing a linear average detector.
- (2) The lower limit shall apply at the transition frequencies.
- (3) Above 18GHz test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dB $\mu\text{V/m}$).
The Avg Limit=54+20*log(3/1)=63.54 (dB $\mu\text{V/m}$).

6.2 TEST PROCEDURES

1) Sequence of testing 9kHz to 30MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 °to 360 °.
- The antenna height is 1.0 meter.
- The antenna is polarized X,Y and Z.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the pre measurement the software maximizes by rotating the turntable

position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30MHz to 1GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0 ° to 360 °.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 4 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1GHz to 18GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18GHz**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:



- The turntable rotates from 0 ° to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

NOTE:

- (a).The frequency from 9kHz to 150kHz, Set RBW=300Hz(for Peak&AVG), VBW=300Hz(for Peak&AVG). The frequency from 150kHz to 30MHz, Set RBW=9kHz, VBW=9kHz, (for QP Detector).
- (b).The frequency from 30MHz to 1GHz, Set RBW=120kHz, VBW=300kHz, (for QP Detector).
- (c).The frequency above 1GHz, for Peak detector: Set RBW=1MHz,VBW=3MHz.
- (d). The frequency above 1GHz, for Avg detector: Set RBW=1MHz,if the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e.,10kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.8.

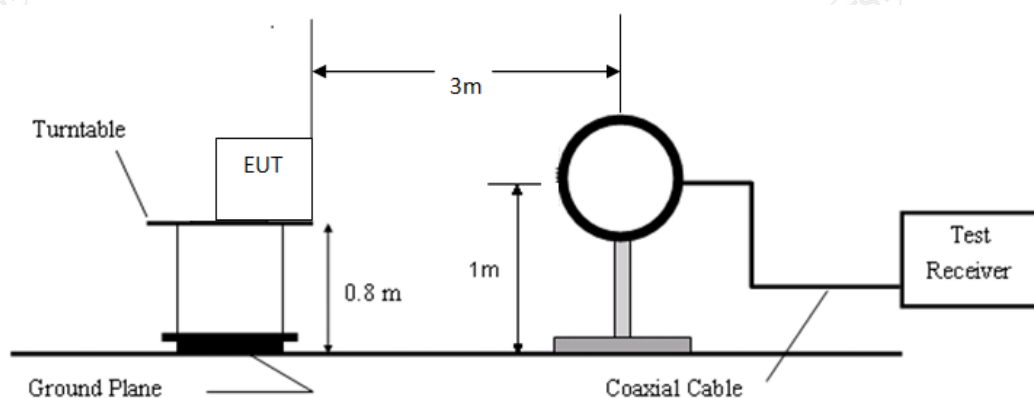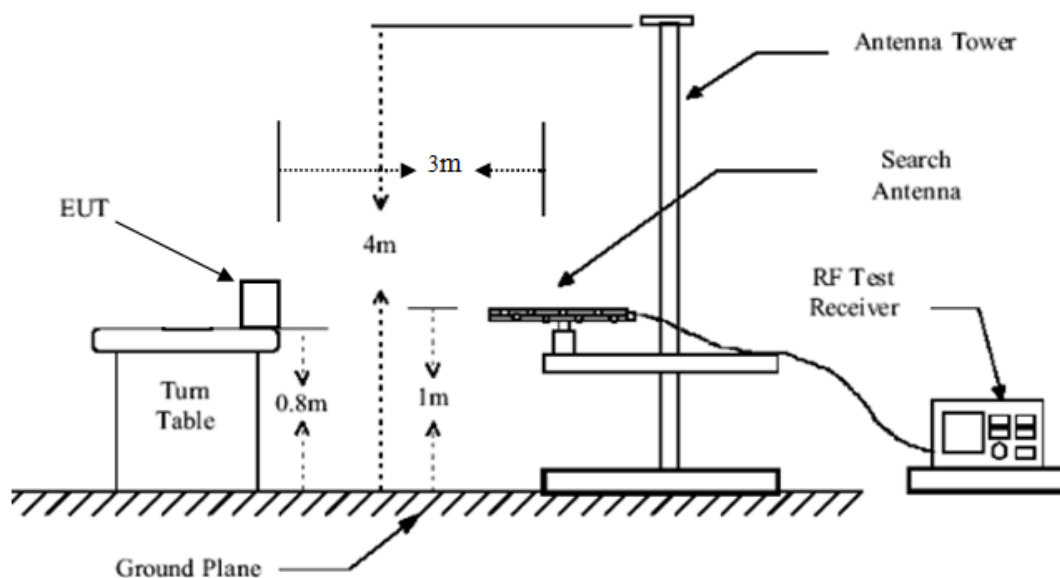6.3 TEST SETUP**Figure 1. 9kHz to 30MHz radiated emissions test configuration****Figure 2. 30MHz to 1GHz radiated emissions test configuration**

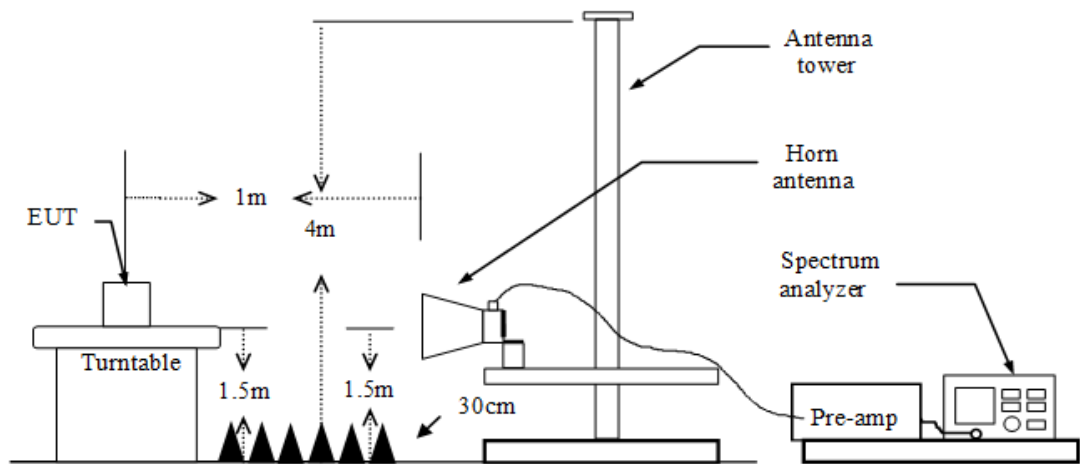


Figure 3. 1GHz to 18GHz radiated emissions test configuration

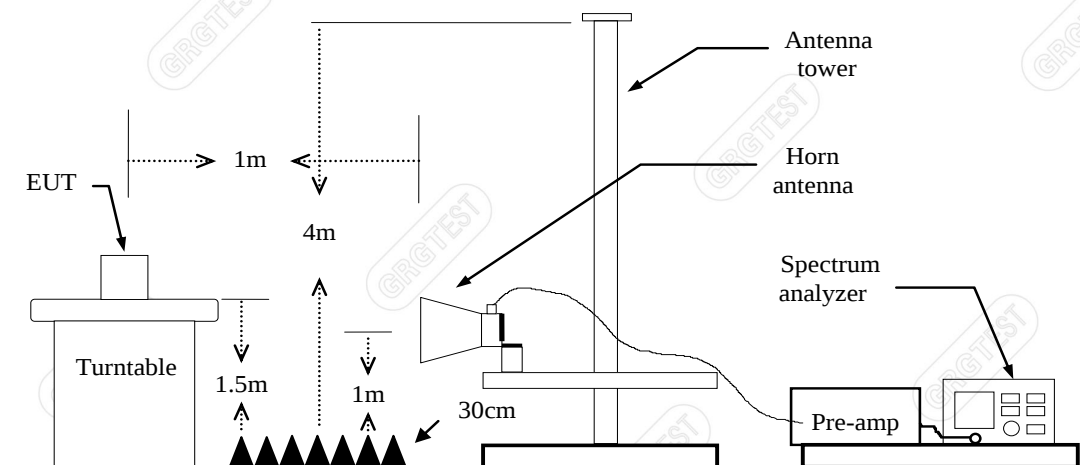


Figure 4. 18GHz to 26.5GHz radiated emissions test configuration

6.4 DATA SAMPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Detector type
XXXX	63.53	-27.15	36.38	43.50	-7.12	0	100	QP

- Frequency (MHz)
- = Emission frequency in MHz
- Reading (dBuV)
- = Uncorrected Analyzer / Receiver reading
- Result (dBuV/m)
- = Reading (dBuV) + Corr. Factor (dB/m)
- Limit (dBuV/m)
- = Limit stated in standard
- Margin (dB)
- = Result (dBuV/m) – Limit(dBuV/m)
- QP
- = Quasi-peak Reading

1GHz-18GHz

No.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
xxx	xxxx	78.01	55.30	-22.71	74.00	18.70	100	50	Horizontal	Peak
xxx	xxxx	66.37	43.66	-22.71	54.00	10.34	100	50	Horizontal	AVG

Above 18GHz

No.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
xxx	xxxx	54.49	42.38	-12.11	83.54	41.16	100	211	Vertical	Peak
xxx	xxxx	43.99	31.88	-12.11	63.54	31.66	100	211	Vertical	AVG

Frequency (MHz)	= Emission frequency in MHz
Reading (dBμV/m)	= Uncorrected Analyzer / Receiver reading
Factor (dB)	= Antenna factor + Cable loss – Amplifier gain
Level (dBμV/m)	= Reading (dBμV/m) + Factor (dB)
Limit (dBμV/m)	= Limit stated in standard
Margin (dB)	= Limit (dBμV/m) – Level (dBμV/m)
Polarity	= Antenna polarization
Peak	= Peak Reading
AVG	= Average Reading

—Blank space below this page—

6.5 TEST RESULTS


Below 1GHz

The chart below shows the highest readings taken from the final data.

Mode: Mode 1
Highest Frequency (2480MHz)
Environment: 25.1°C/55%RH 101.0kPa
Test Engineer: Qin Tingting

Date: 2024-11-28
Test Voltage: DC 3V
Probe : Horizontal


Test Graph

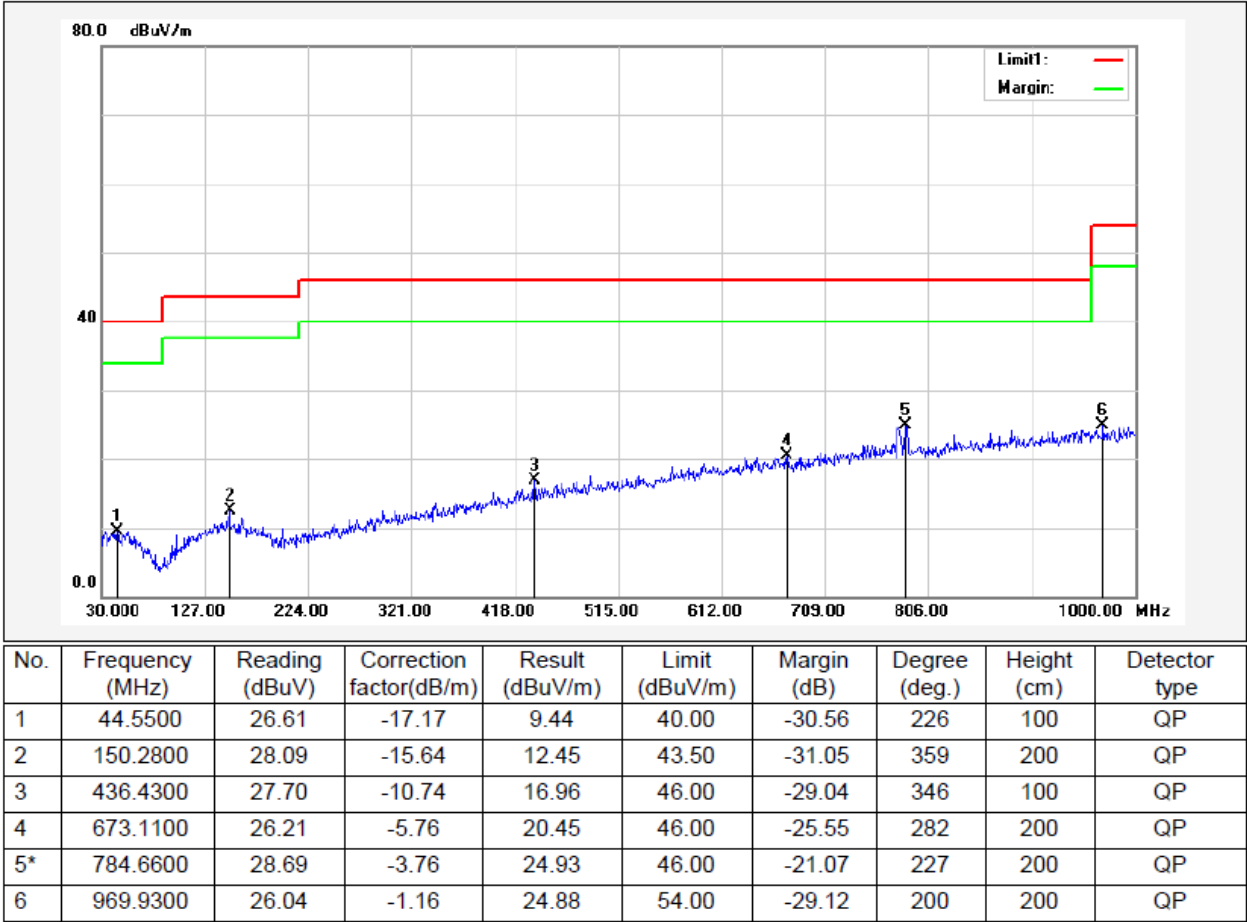

Mode: Mode 1
Highest Frequency (2480MHz)
Environment: 25.1°C/55%RH 101.0kPa
Test Engineer: Qin Tingting

Date: 2024-11-28
Test Voltage: DC 3V
Probe : Vertical

Test Graph

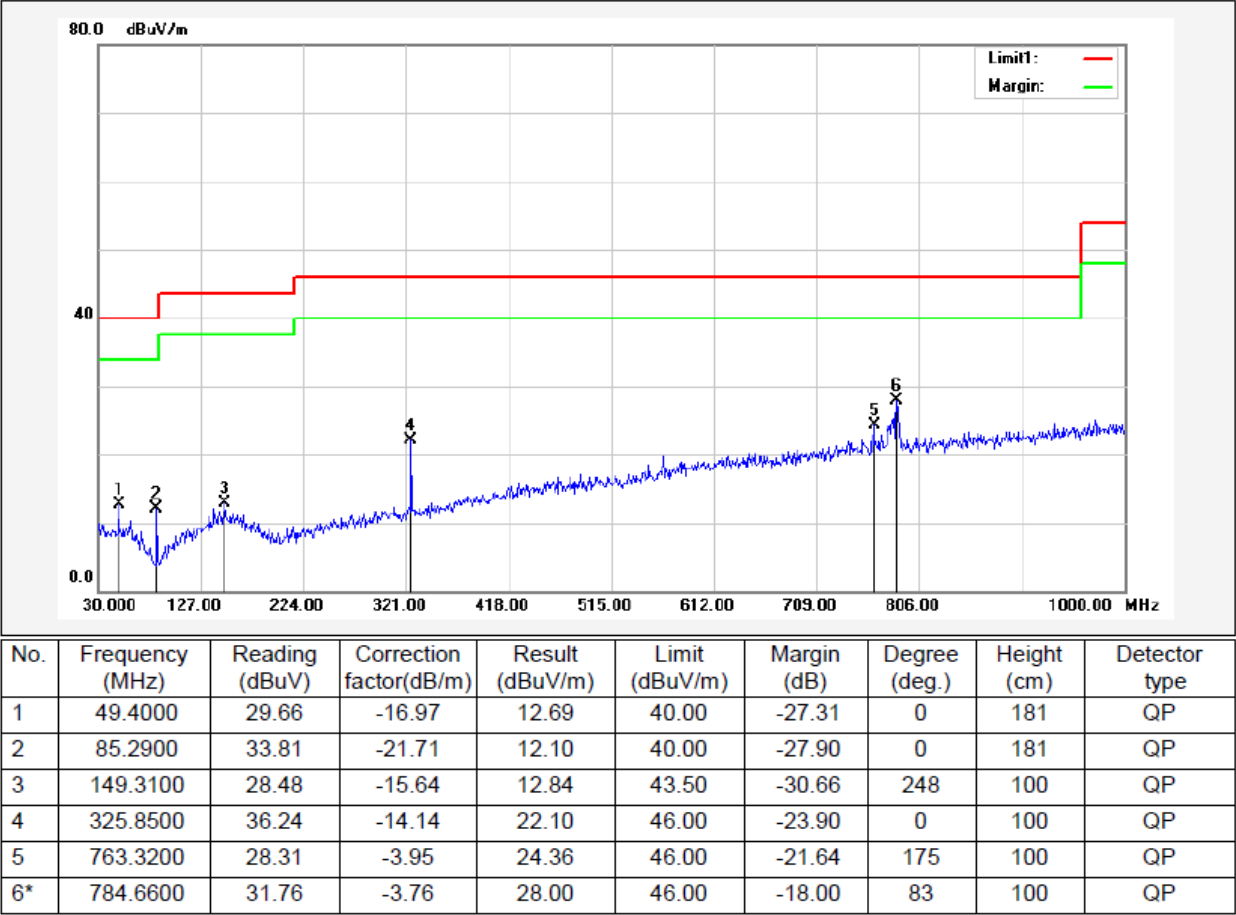

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Pre-scan all mode and recorded the worst case results in this report (TX- Highest Channel(BLE-1M))
- 3 Measuring frequencies from 9kHz to the 1GHz.
- 4 Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- 5 Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 6 The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
- 7 If the margin of the pre-test results is greater than 6dB, it meets the requirements of quasi peak value, and final testing is no longer required.

1GHz-18GHz:

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

BLE-1M

Mode: Mode 1
Lowest Frequency (2402MHz)
Environment: 23.1℃/48%RH/101.0kPa
Tested By:Qin Tingting

Voltage: DC 3V
Date: 2024-11-18

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1119.4000	52.23	41.47	-10.76	74.00	32.53	200	36	Horizontal
2	1881.4000	48.32	43.72	-4.60	74.00	30.28	100	168	Horizontal
3	2363.6000	55.15	51.14	-4.01	74.00	22.86	100	327	Horizontal
4	4803.0000	59.14	51.60	-7.54	74.00	22.40	100	84	Horizontal
5	7204.5000	46.48	47.39	0.91	74.00	26.61	100	298	Horizontal
6	13123.5000	35.39	50.90	15.51	74.00	23.10	100	360	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2363.6340	-4.01	52.03	48.02	54.00	5.98	100	316.1	Horizontal
2	4803.4870	-7.54	54.29	46.75	54.00	7.25	100	92.1	Horizontal
3	13123.5000	15.51	26.32	41.83	54.00	12.17	100	360	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1118.6000	53.60	42.29	-11.31	74.00	31.71	100	155	Vertical
2	1670.0000	51.73	44.09	-7.64	74.00	29.91	100	50	Vertical
3	4803.0000	53.93	46.89	-7.04	74.00	27.11	100	99	Vertical
4	7206.0000	49.98	50.55	0.57	74.00	23.45	100	49	Vertical
5	9828.0000	41.10	50.11	9.01	74.00	23.89	100	324	Vertical
6	14700.0000	35.90	54.25	18.35	74.00	19.75	200	230	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7206.5200	0.57	42.99	43.56	54.00	10.44	100	43	Vertical
2	9829.1400	9.01	28.65	37.66	54.00	16.34	100	332.8	Vertical
3	14700.0000	18.35	26.37	44.72	54.00	9.28	200	230	Vertical

Mode: Mode 1
Middle Frequency (2440MHz)
Environment: 23.1℃/48%RH/101.0kPa
Tested By:Qin Tingting

Voltage: DC 3V
Date: 2024-11-18

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1115.2000	52.35	41.58	-10.77	74.00	32.42	100	340	Horizontal
2	1881.2000	48.74	44.13	-4.61	74.00	29.87	100	83	Horizontal
3	2781.8000	48.89	47.41	-1.48	74.00	26.59	200	275	Horizontal
4	4879.5000	54.83	47.60	-7.23	74.00	26.40	200	129	Horizontal
5	7320.0000	46.24	47.39	1.15	74.00	26.61	100	125	Horizontal
6	14698.5000	36.42	51.20	14.78	74.00	22.80	200	129	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	14698.5000	14.78	26.21	40.99	54.00	13.01	200	129	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1123.2000	53.85	42.73	-11.12	74.00	31.27	100	126	Vertical
2	1797.6000	51.34	45.32	-6.02	74.00	28.68	100	114	Vertical
3	4251.0000	51.99	42.67	-9.32	74.00	31.33	100	276	Vertical
4	4879.5000	53.61	46.54	-7.07	74.00	27.46	100	196	Vertical
5	7318.5000	49.61	51.17	1.56	74.00	22.83	100	49	Vertical
6	14701.5000	35.34	53.62	18.28	74.00	20.38	200	21	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7319.5575	1.56	43.39	44.95	54.00	9.05	100	73.4	Vertical
2	14701.5000	18.28	25.71	43.99	54.00	10.01	200	21	Vertical

Mode: Mode 1
Highest Frequency (2480MHz)
Environment: 23.1℃/48%RH/101.0kPa
Tested By:Qin Tingting

Voltage: DC 3V
Date: 2024-11-18

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1117.2000	51.26	40.50	-10.76	74.00	33.50	200	100	Horizontal
2	1964.2000	48.74	44.04	-4.70	74.00	29.96	200	166	Horizontal
3	2518.2000	53.70	52.59	-1.11	74.00	21.41	200	311	Horizontal
4	4959.0000	53.79	47.03	-6.76	74.00	26.97	100	142	Horizontal
5	7440.0000	45.29	46.72	1.43	74.00	27.28	200	129	Horizontal
6	13099.5000	35.16	51.37	16.21	74.00	22.63	200	166	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2518.5280	-1.11	50.90	49.79	54.00	4.21	200	317.3	Horizontal
2	13099.5000	16.21	26.56	42.77	54.00	11.23	200	166	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1671.0000	51.53	43.91	-7.62	74.00	30.09	100	271	Vertical
2	2525.0000	48.59	47.08	-1.51	74.00	26.92	100	297	Vertical
3	2797.4000	49.34	47.60	-1.74	74.00	26.40	100	297	Vertical
4	4960.5000	51.85	44.87	-6.98	74.00	29.13	100	179	Vertical
5	7440.0000	49.50	50.75	1.25	74.00	23.25	100	73	Vertical
6	14712.0000	35.96	53.77	17.81	74.00	20.23	200	1	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7439.5700	1.25	44.78	46.03	54.00	7.97	100	41.7	Vertical
2	14699.2300	17.81	25.73	43.54	54.00	10.46	200	145.3	Vertical

BLE-2M

Mode: Mode 1
Lowest Frequency (2402MHz)
Environment: 23.1℃/48%RH/101.0kPa
Tested By:Qin Tingting

Voltage: DC 3V
Date: 2024-11-18

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1117.2000	51.72	40.96	-10.76	74.00	33.04	200	81	Horizontal
2	1922.0000	47.78	43.48	-4.30	74.00	30.52	200	37	Horizontal
3	2363.6000	54.61	50.60	-4.01	74.00	23.40	100	311	Horizontal
4	3237.0000	52.79	40.28	-12.51	74.00	33.72	200	341	Horizontal
5	4803.0000	58.69	51.15	-7.54	74.00	22.85	100	183	Horizontal
6	13129.5000	36.16	51.50	15.34	74.00	22.50	200	42	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2363.6000	-4.01	48.92	44.91	54.00	9.09	100	52	Horizontal
2	4803.9730	-7.54	48.45	40.91	54.00	13.09	100	311.8	Horizontal
3	13129.5000	15.34	25.75	41.09	54.00	12.91	200	42	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1118.0000	54.59	43.25	-11.34	74.00	30.75	100	124	Vertical
2	1678.4000	52.18	44.64	-7.54	74.00	29.36	100	229	Vertical
3	2505.4000	48.67	47.97	-0.70	74.00	26.03	100	138	Vertical
4	4804.5000	54.40	47.36	-7.04	74.00	26.64	100	170	Vertical
5	7204.5000	49.13	49.69	0.56	74.00	24.31	100	39	Vertical
6	14704.5000	35.61	53.76	18.15	74.00	20.24	100	92	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7233.6975	0.56	32.13	32.69	54.00	21.31	100	23.3	Vertical
2	14704.5000	18.15	25.43	43.58	54.00	10.42	100	92	Vertical

Mode: Mode 1
Middle Frequency (2440MHz)
Environment: 23.1℃/48%RH/101.0kPa
Tested By:Qin Tingting

Voltage: DC 3V
Date: 2024-11-18

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1113.6000	50.75	39.98	-10.77	74.00	34.02	200	90	Horizontal
2	1909.2000	48.69	44.51	-4.18	74.00	29.49	200	77	Horizontal
3	2504.8000	48.09	47.67	-0.42	74.00	26.33	100	73	Horizontal
4	4881.0000	54.37	47.14	-7.23	74.00	26.86	100	126	Horizontal
5	7318.5000	45.79	46.91	1.12	74.00	27.09	200	126	Horizontal
6	13099.5000	34.94	51.15	16.21	74.00	22.85	100	338	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	13099.5000	16.21	25.83	42.04	54.00	11.96	100	338	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1234.0000	51.60	42.90	-8.70	74.00	31.10	200	326	Vertical
2	1675.6000	51.12	43.54	-7.58	74.00	30.46	100	211	Vertical
3	2660.8000	49.96	47.61	-2.35	74.00	26.39	200	207	Vertical
4	4878.0000	52.82	45.75	-7.07	74.00	28.25	100	211	Vertical
5	7318.5000	49.12	50.68	1.56	74.00	23.32	100	43	Vertical
6	14710.5000	35.59	53.47	17.88	74.00	20.53	100	173	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7318.9275	1.56	38.18	39.74	54.00	14.26	100	24	Vertical
2	14710.5000	17.88	25.56	43.44	54.00	10.56	100	173	Vertical

Mode: Mode 1
Highest Frequency (2480MHz)
Environment: 23.1℃/48%RH/101.0kPa
Tested By:Qin Tingting

Voltage: DC 3V
Date: 2024-11-18

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1245.0000	53.11	43.85	-9.26	74.00	30.15	200	324	Horizontal
2	1898.4000	48.22	44.09	-4.13	74.00	29.91	100	353	Horizontal
3	2518.8000	53.49	52.35	-1.14	74.00	21.65	200	311	Horizontal
4	4960.5000	53.34	46.58	-6.76	74.00	27.42	100	143	Horizontal
5	6640.5000	46.83	45.92	-0.91	74.00	28.08	100	0	Horizontal
6	13099.5000	35.34	51.55	16.21	74.00	22.45	200	222	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2518.3990	-1.14	48.00	46.86	54.00	7.14	200	329.7	Horizontal
2	13099.5000	16.21	25.46	41.67	54.00	12.33	200	222	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1118.8000	57.44	46.13	-11.31	74.00	27.87	100	126	Vertical
2	1679.6000	52.62	45.10	-7.52	74.00	28.90	100	181	Vertical
3	2518.8000	48.92	47.67	-1.25	74.00	26.33	200	35	Vertical
4	4959.0000	51.45	44.47	-6.98	74.00	29.53	100	197	Vertical
5	7441.5000	49.63	50.86	1.23	74.00	23.14	100	94	Vertical
6	14713.5000	35.66	53.40	17.74	74.00	20.60	200	30	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	7457.6525	1.23	30.40	31.63	54.00	22.37	100	337.7	Vertical
2	14713.5000	17.74	25.32	43.06	54.00	10.94	200	30	Vertical

Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3 Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

——Blank space below this page——

18GHz to 26.5GHz

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Only the worst mode and channel were recorded in this report. (BLE_1M 2402MHz)

Mode: Mode 1

Highest Frequency (2402MHz)

Environment: 25.6°C/53%RH/101.0kPa

Tested By: Qin Tingting

Voltage: DC 3V

Date: 2024-11-29

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level for 1m [dBμV/m]	Level for 3m [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19039.1250	46.76	49.77	40.23	3.01	74	33.77	100	123	Horizontal
2	20162.8250	45.48	49.30	39.76	3.82	74	34.24	100	340	Horizontal
3	21289.0750	44.41	48.46	38.92	4.05	74	35.08	100	183	Horizontal
4	23639.3250	42.44	47.11	37.57	4.67	74	36.43	100	123	Horizontal
5	24809.7750	41.67	47.19	37.65	5.52	74	36.35	200	144	Horizontal
6	26112.4000	41.95	47.14	37.60	5.19	74	36.40	100	242	Horizontal

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level for 1m [dBμV/m]	Level for 3m [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18473.4500	46.83	49.59	40.05	2.76	74	33.95	100	299	Vertical
2	19392.7250	46.70	50.38	40.84	3.68	74	33.16	100	180	Vertical
3	20066.7750	45.81	50.10	40.56	4.29	74	33.44	100	280	Vertical
4	21191.3250	44.41	48.76	39.22	4.35	74	34.78	200	299	Vertical
5	23825.0500	43.15	48.45	38.91	5.30	74	35.09	100	318	Vertical
6	25648.3000	42.12	48.17	38.63	6.05	74	35.37	100	280	Vertical

Remark:

- 1 Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2 Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Above 18G test distance is 1m, so the Level for 3m= Level for 1m + 20*log(1/3)

7. 6dB BANDWIDTH


7.1 LIMITS

Systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

7.2 TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Set resolution bandwidth (RBW) = 100kHz.Set the video bandwidth (VBW) ≥ 3 x RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- 3) Repeat above procedures until all frequencies measured were complete.

7.3 TEST SETUP

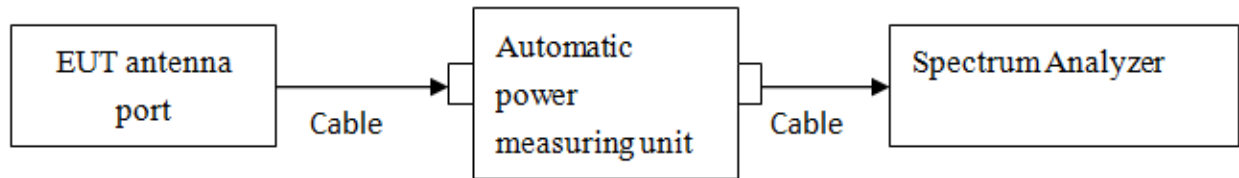

7.4 TEST RESULTS

Environment: 24.3°C/47%RH/101.0kPa
Tested By: Qin Tingting

Voltage: DC 3V
Date: 2024-11-15

BLE_1M


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Lowest	2402	692	≥500	PASS
Middle	2440	736		PASS
Highest	2480	692		PASS

BLE_2M


Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Lowest	2402	1352	≥500	PASS
Middle	2440	1352		PASS
Highest	2480	1344		PASS

BLE_1M


Lowest Frequency (2402MHz)

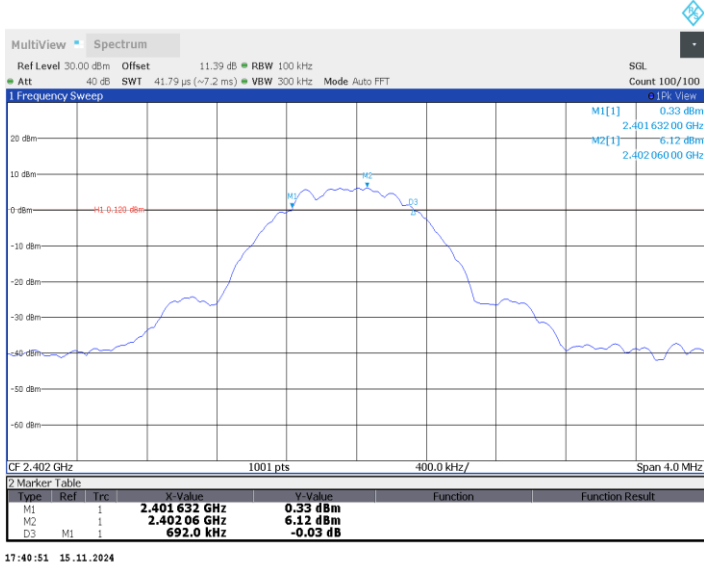

Middle Frequency (2440 MHz)

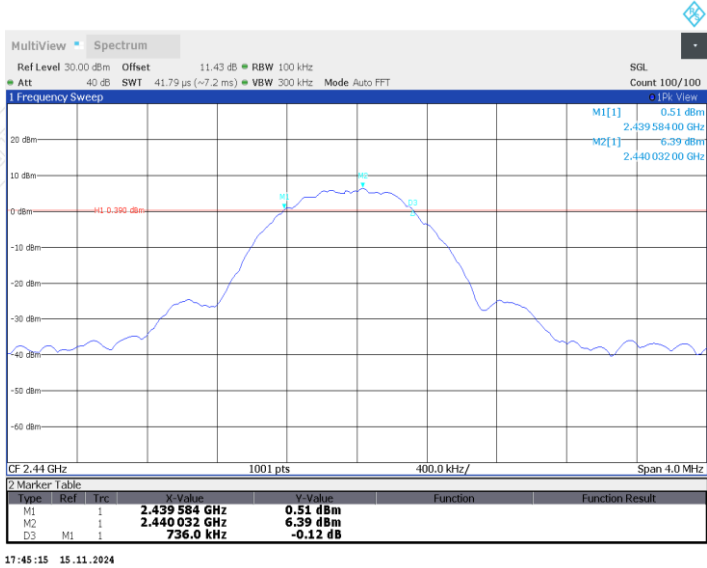


Highest Frequency (2480MHz)

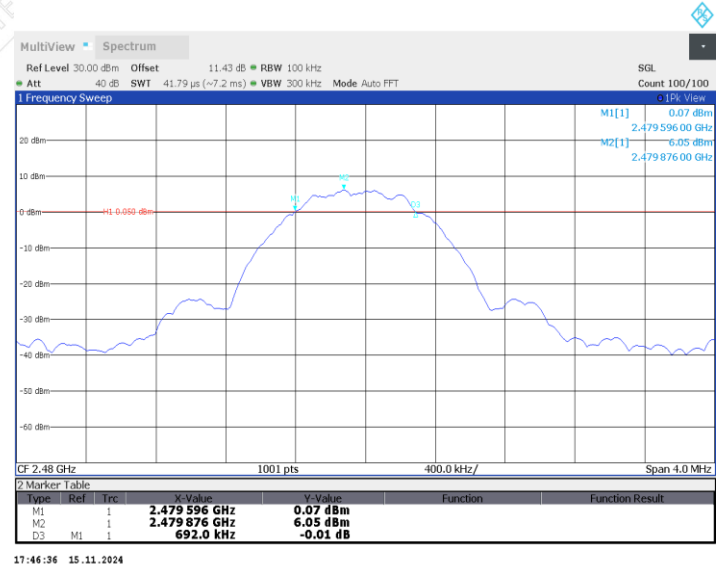


BLE_2M


Lowest Frequency (2402MHz)

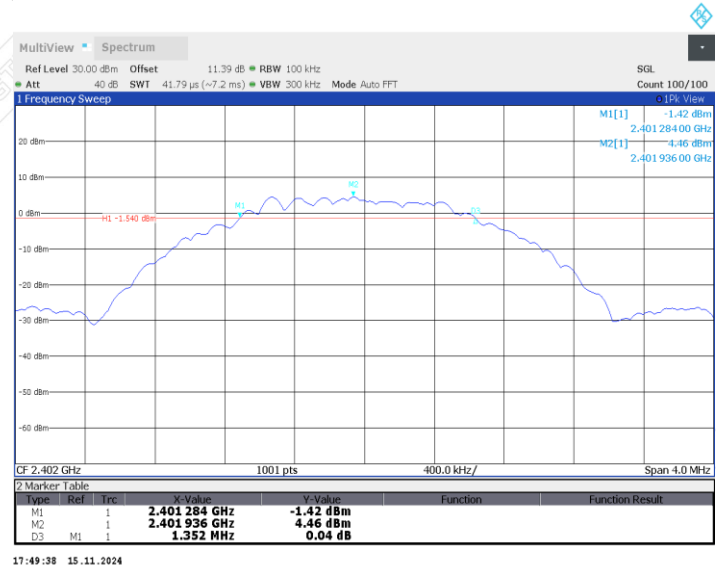

Middle Frequency (2440 MHz)

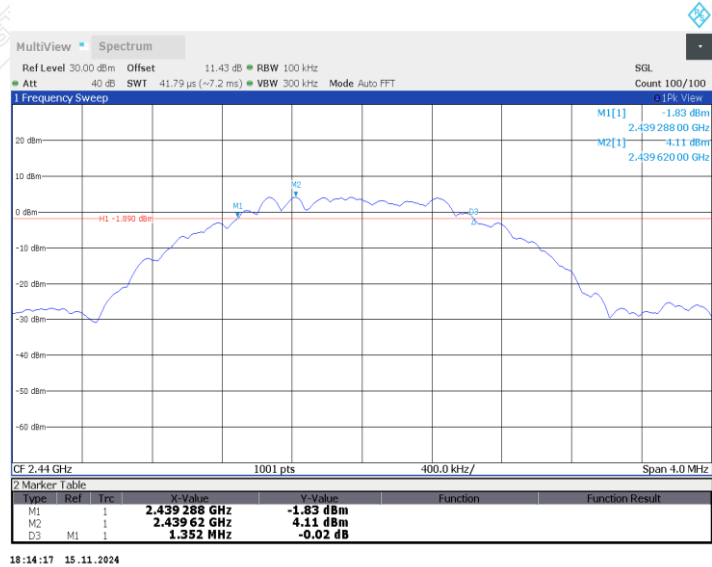

Highest Frequency (2480MHz)

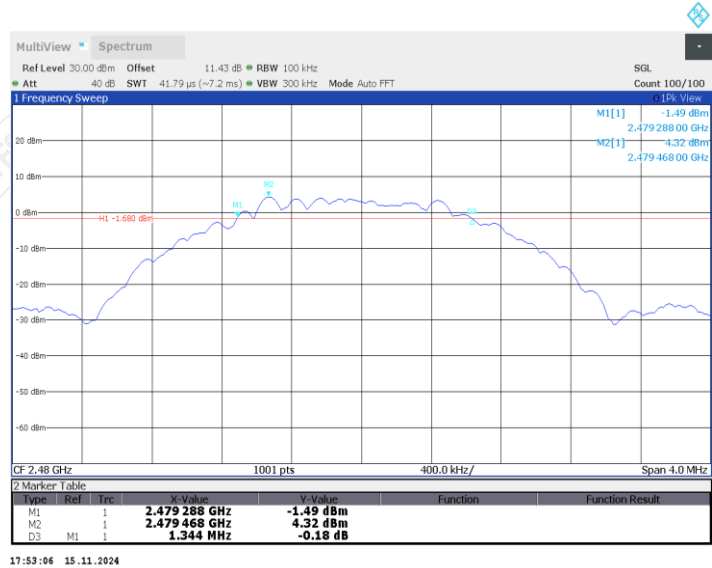

8. MAXIMUM PEAK OUTPUT POWER


8.1 LIMITS

The maximum Peak output power measurement is 1W

8.2 TEST PROCEDURES

- 1) RF output of EUT was connected to the broadband peak RF power meter by RF cable. The path loss was compensated to the results for each measurement.
- 2) Set to the maximum power setting and enable the EUT transmit continuously.
- 3) Measure the conducted output power and record the results in the test report.

8.3 TEST SETUP

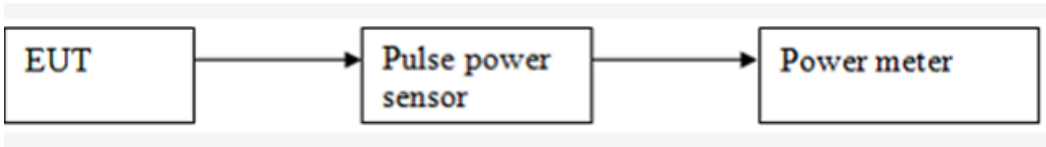

8.4 TEST RESULTS

Environment: 23.2°C/51%RH/101.0kPa
Tested By: Qin Tingting

Voltage: DC 3V
Date: 2024-11-21

BLE_1M

Channel	Frequency (MHz)	Measured Channel Power (dBm)	Limit	Peak/ Average	Result
Lowest	2402	7.20	1W (30dBm)	Peak	Pass
Middle	2440	7.27			Pass
Highest	2480	7.37			Pass

BLE_2M

Channel	Frequency (MHz)	Measured Channel Power (dBm)	Limit	Peak/ Average	Result
Lowest	2402	7.21	1W (30dBm)	Peak	Pass
Middle	2440	7.26			Pass
Highest	2480	7.36			Pass

9. POWER SPECTRAL DENSITY


9.1 LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2 TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) Set the analyzer span to 1.5 times the DTS bandwidth. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. Set the VBW $\geq [3 \times \text{RBW}]$. Detector = peak. Sweep time = auto couple. Trace mode = max hold. Allow trace to fully stabilize. Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds requirement, then reduce RBW (but no less than 3kHz) and repeat.
- 4) Repeat above procedures until all frequencies measured were complete.

9.3 TEST SETUP

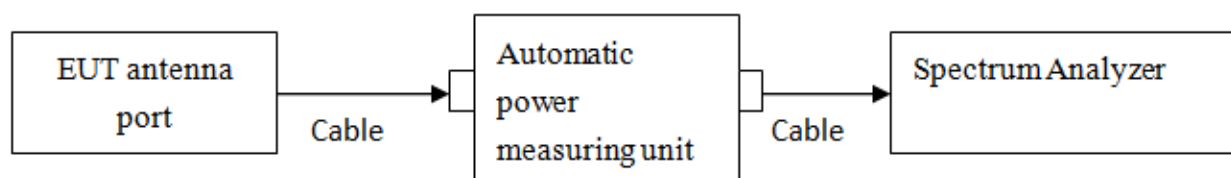

—Blank space below this page—

9.4 TEST RESULTS

Environment: 23.2℃/51%RH/101.0kPa
Tested By: Qin Tingting

Voltage: DC 3V
Date: 2024-11-21

BLE_1M

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
Lowest	2402	-9.71	8.00	PASS
Middle	2440	-9.60		PASS
Highest	2480	-9.88		PASS


BLE_1M

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
Lowest	2402	-10.47	8.00	PASS
Middle	2440	-10.40		PASS
Highest	2480	-10.71		PASS


Blank space below this page

BLE_1M


Lowest Frequency (2402MHz)

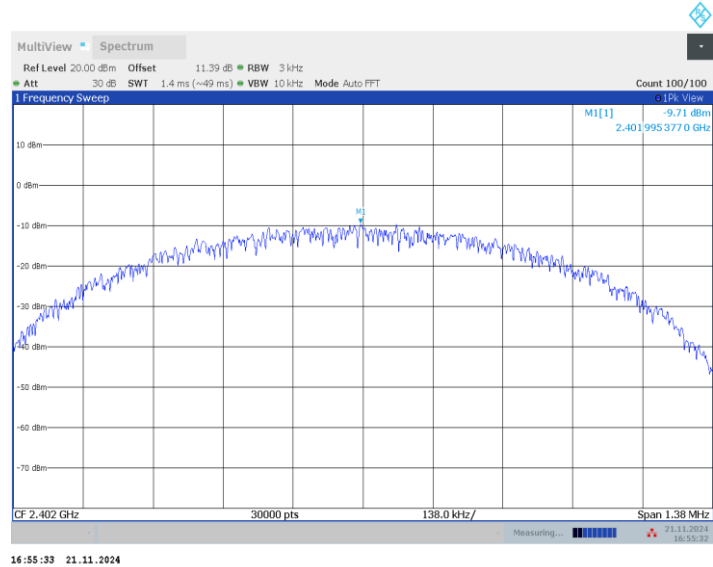

Middle Frequency (2440 MHz)

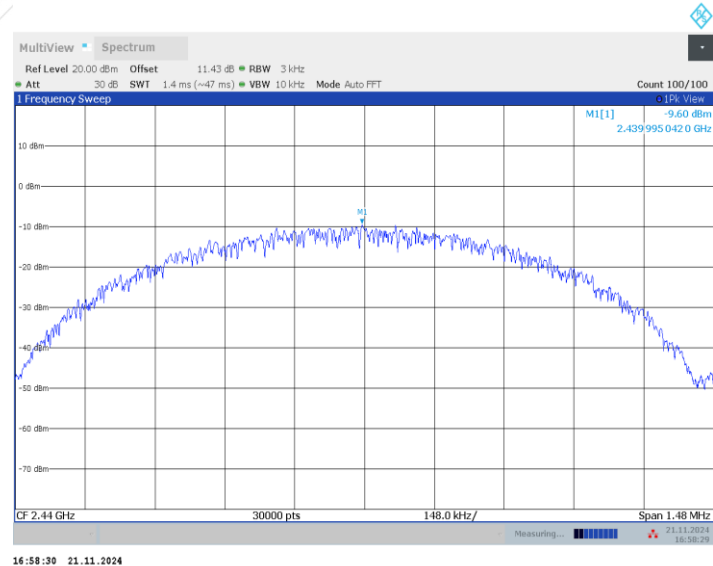


Highest Frequency (2480MHz)

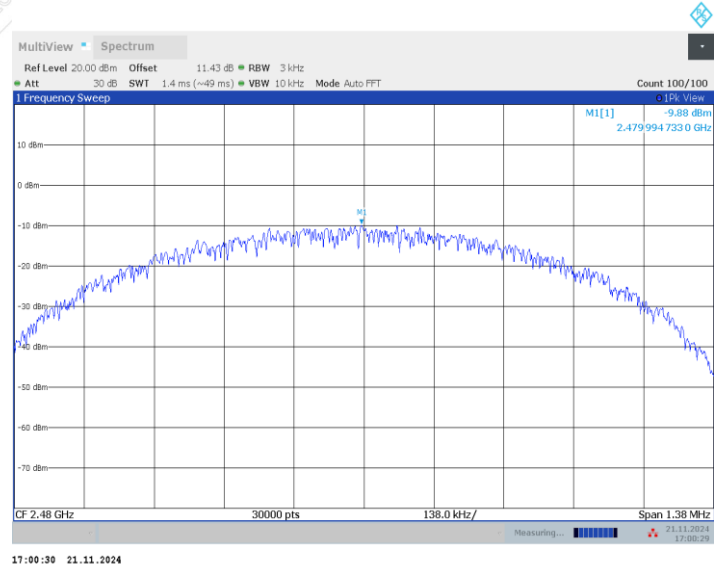


BLE_2M


Lowest Frequency (2402MHz)

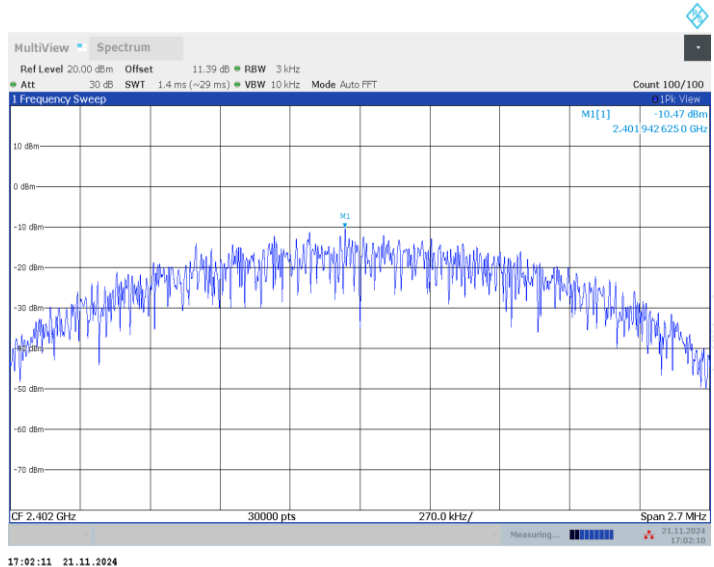

Middle Frequency (2440 MHz)

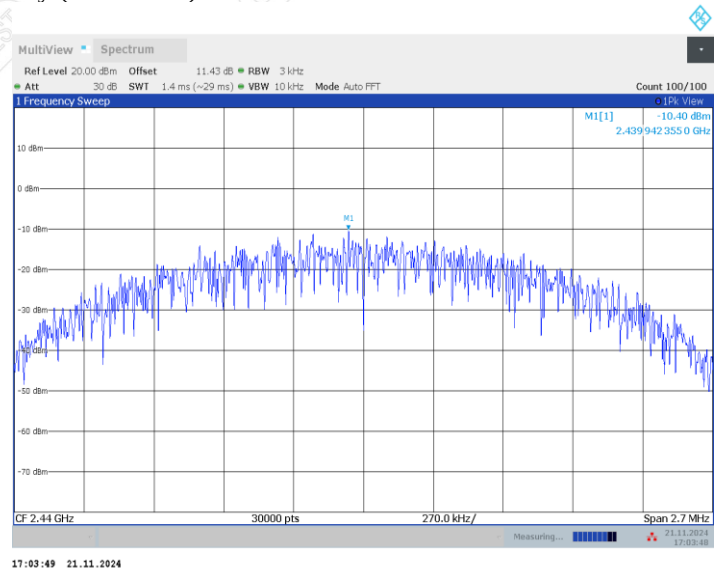

Highest Frequency (2480MHz)

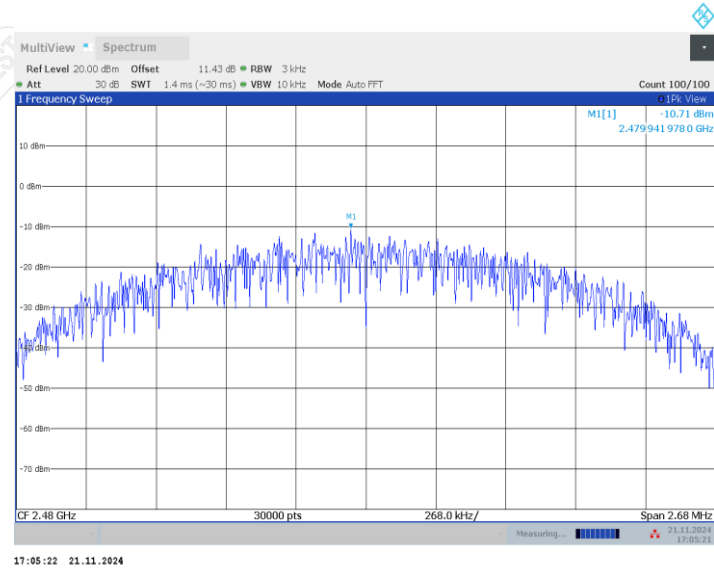

10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

10.1 LIMITS

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.


10.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 Measurement Guidance v05r02.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.

- 1) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW =100kHz; VBW =300kHz, Frequency range = 30MHz to 26.5GHz; Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- 3) Measure and record the results in the test report.
- 4) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

10.3 TEST SETUP

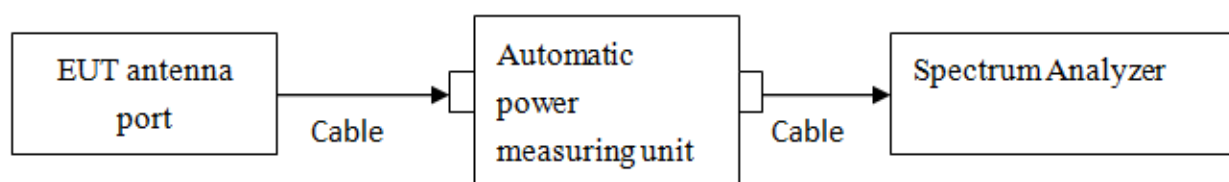

10.4 TEST RESULTS


Tested By: Qin Tingting
Environment: 24.3°C/47%RH/101.0kPa
Environment: 23.2°C/51%RH/101.0kPa

Voltage: DC 3V
Date: 2024-11-15
Date: 2024-11-21

Band edge measurements


BLE_1M

Lowest Frequency (2402MHz)
2.35GHz-2.405GHz

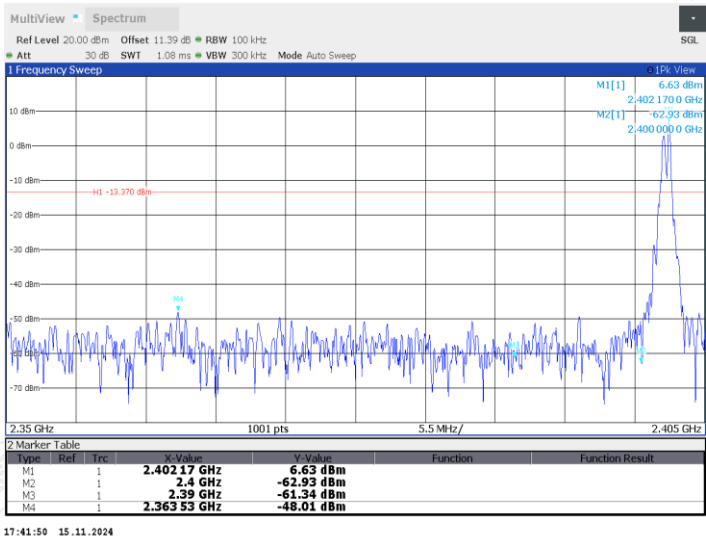


Blank space below this page

Highest Frequency (2480MHz)
2.47GHz-2.55GHz

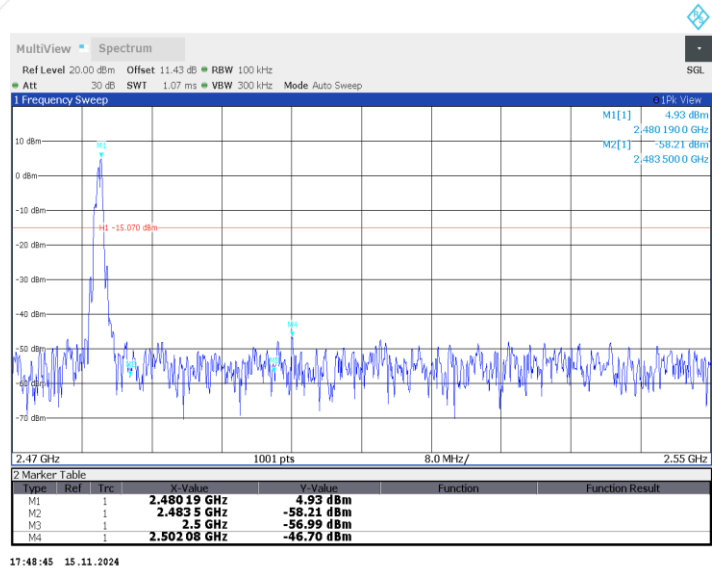


BLE_2M

Lowest Frequency (2402MHz)
2.35GHz-2.405GHz

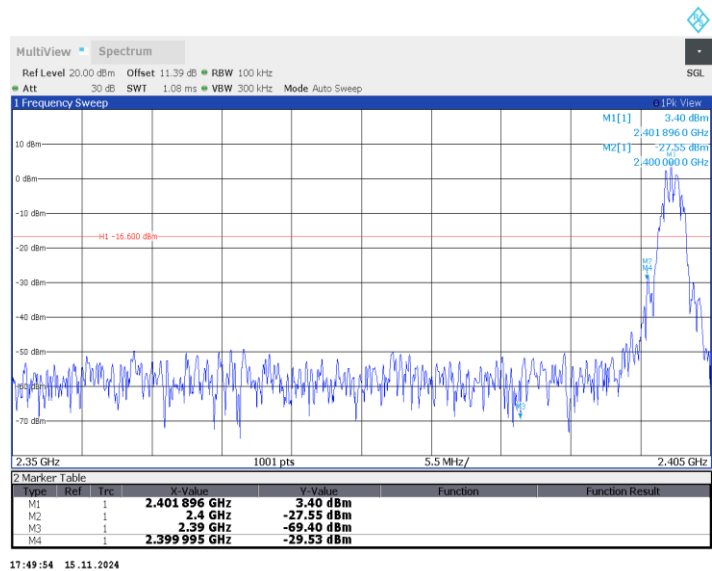



Highest Frequency (2480MHz)
2.47GHz-2.55GHz

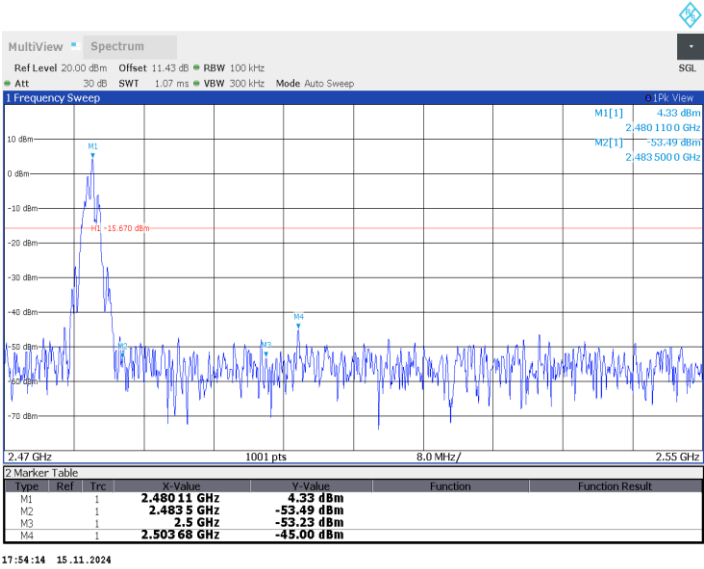


Blank space below this page


Conducted Spurious Emission
BLE_1M



Lowest Frequency (2402MHz)

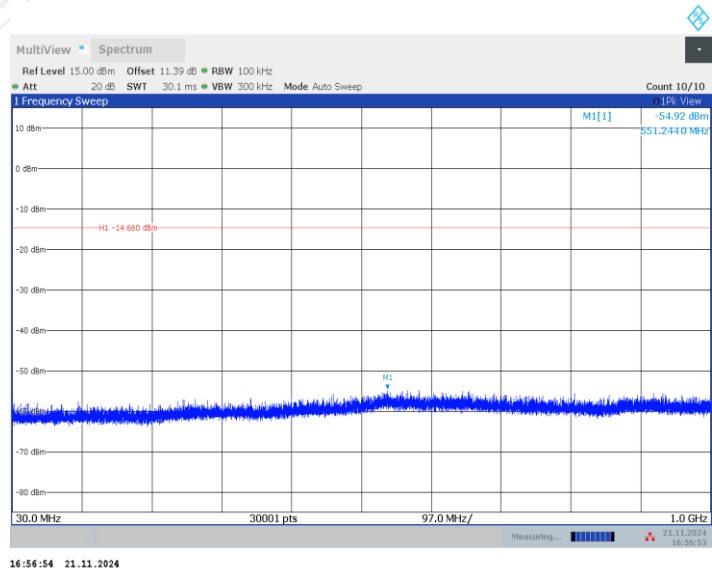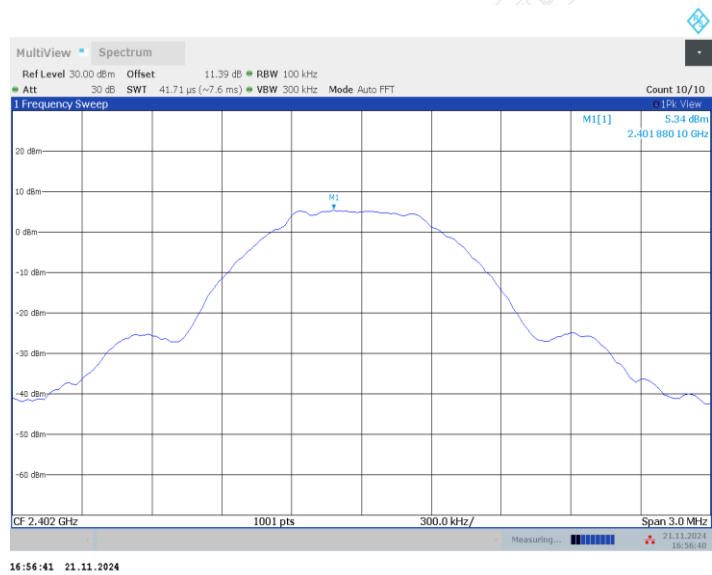


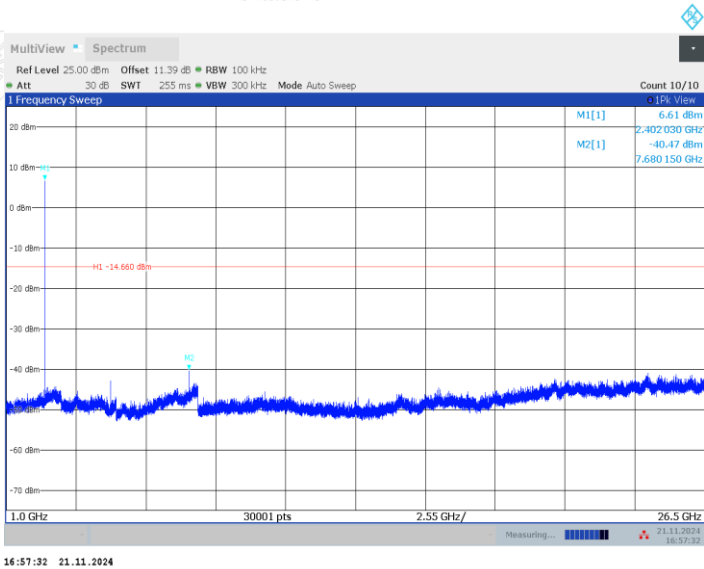



Middle Frequency (2440MHz)

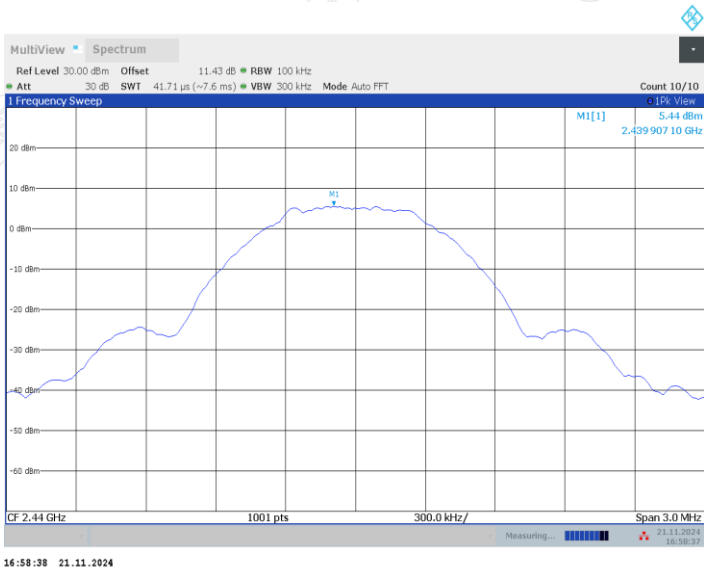

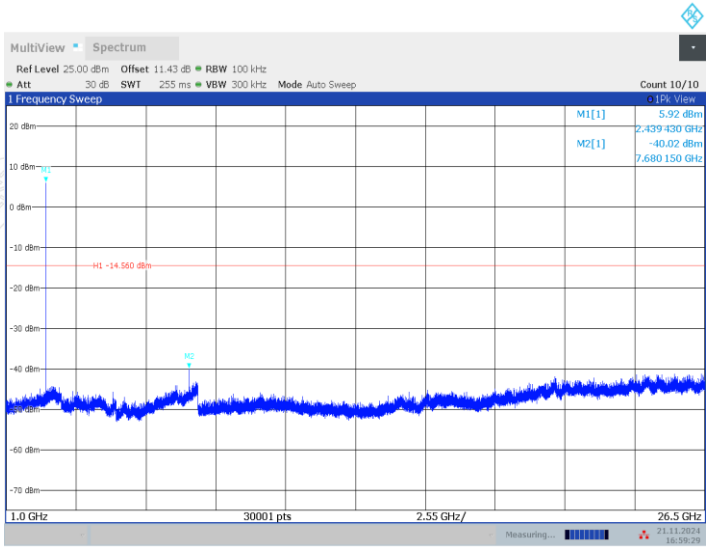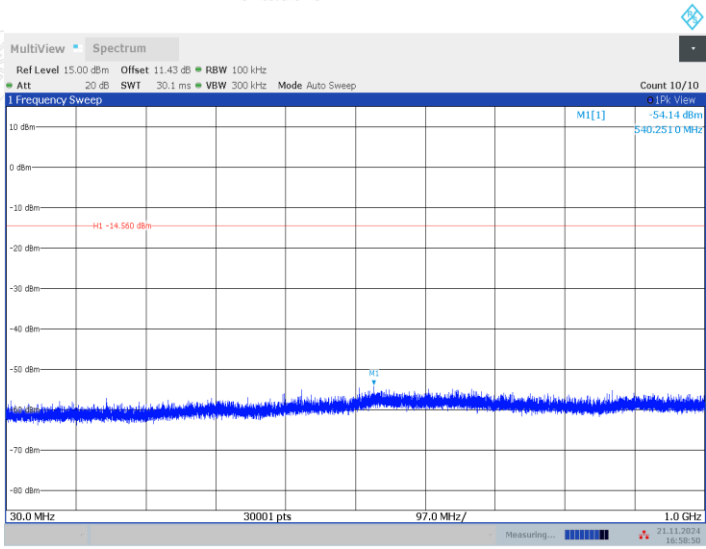


Highest Frequency (2480MHz)

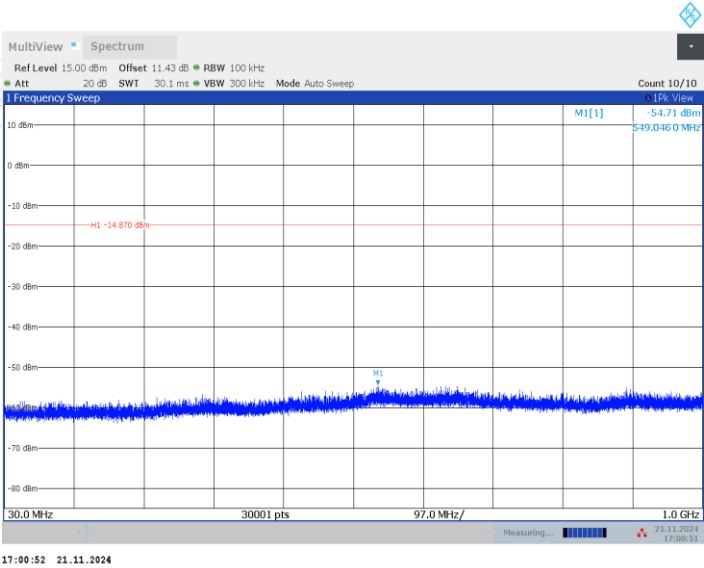
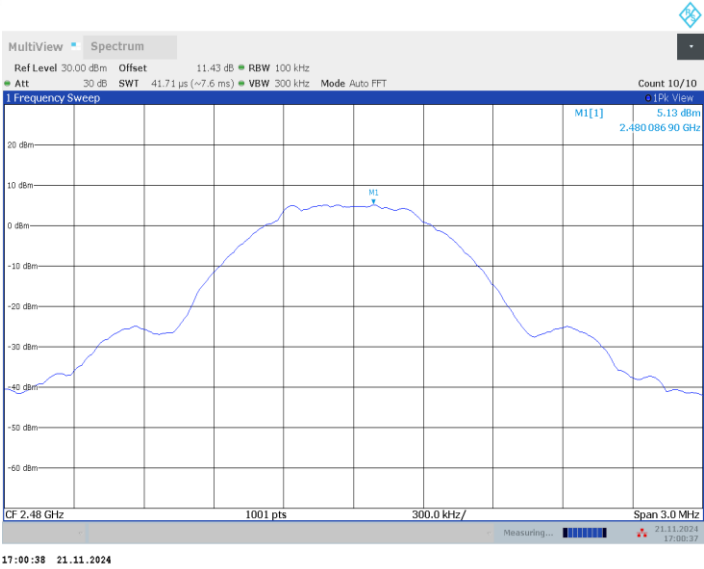


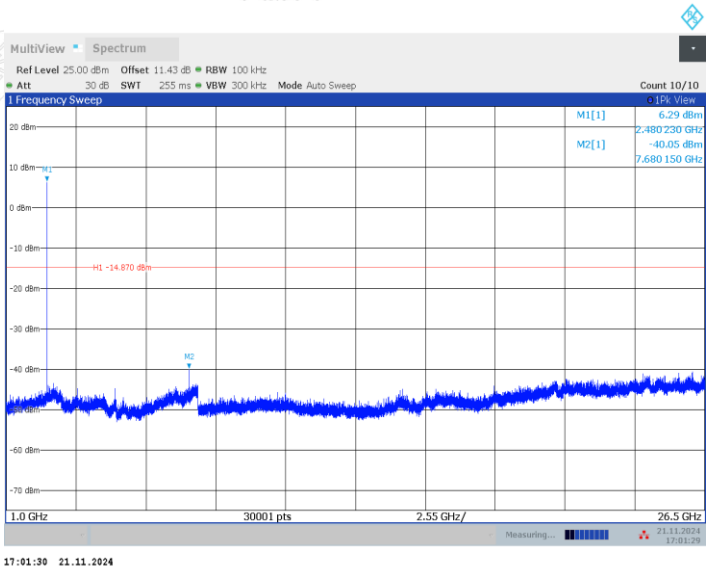



BLE_2M


Lowest Frequency (2402MHz)

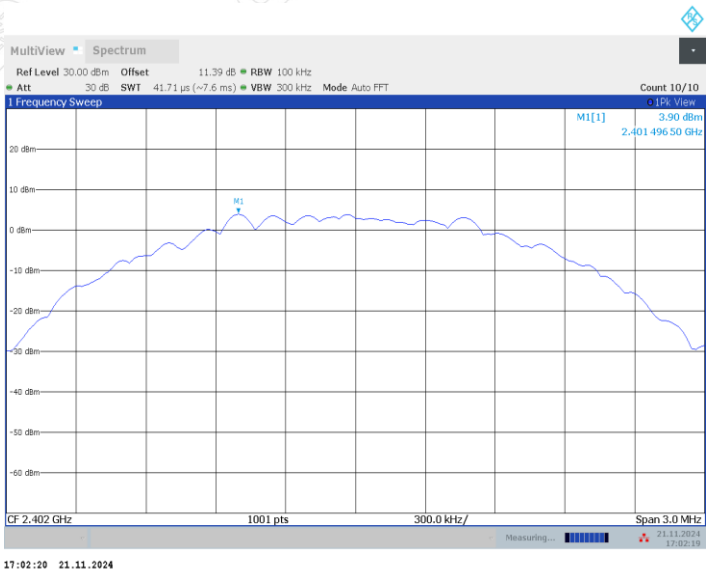

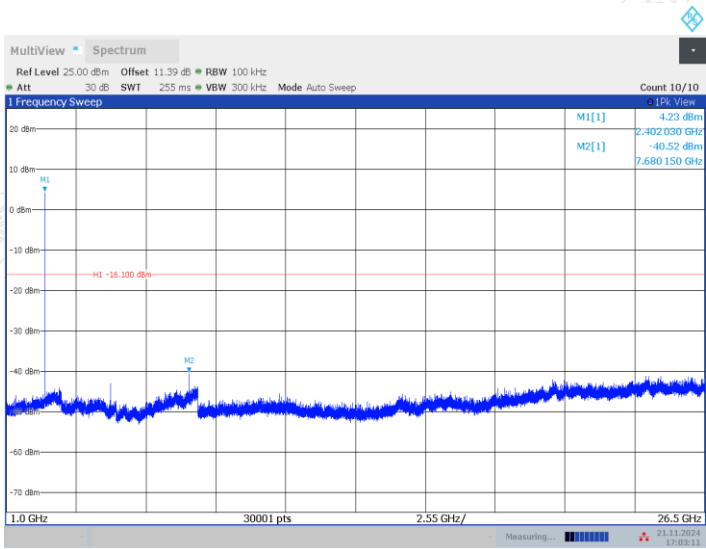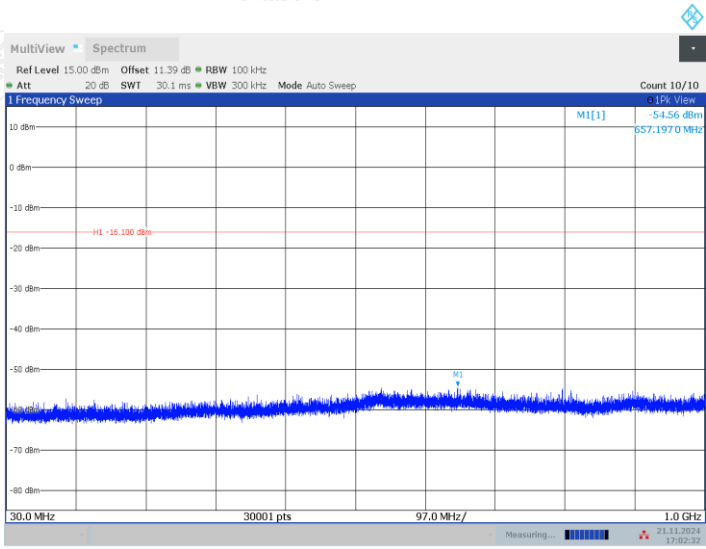




Middle Frequency (2440MHz)

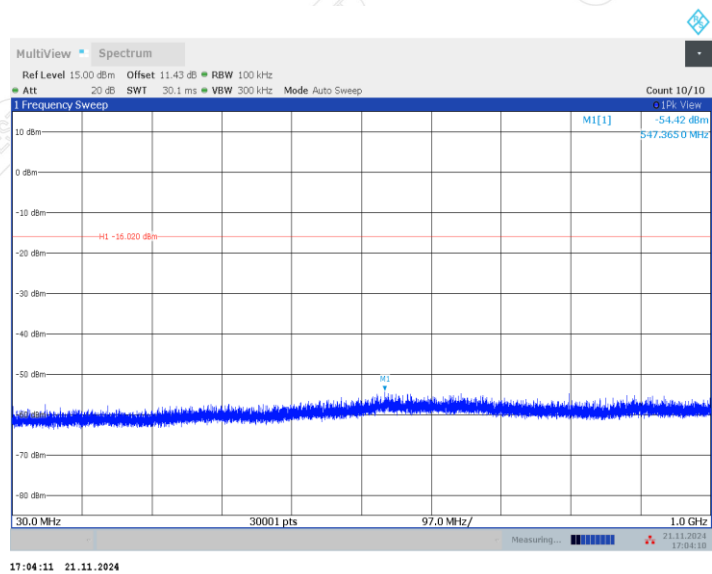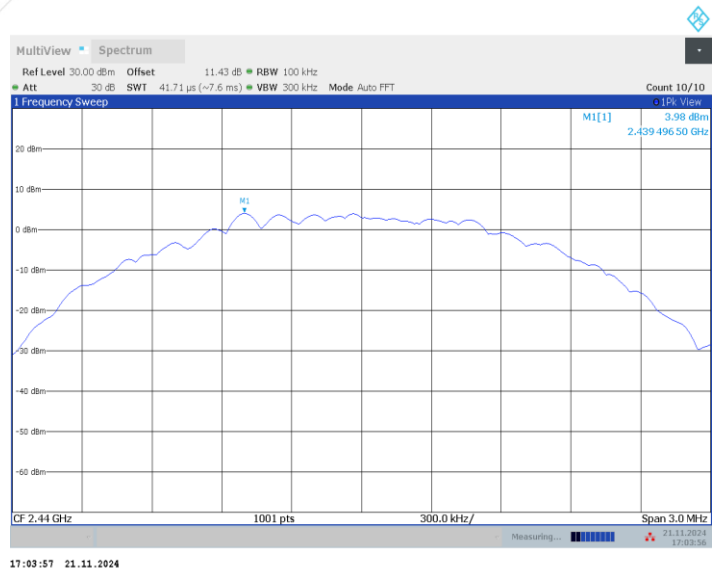

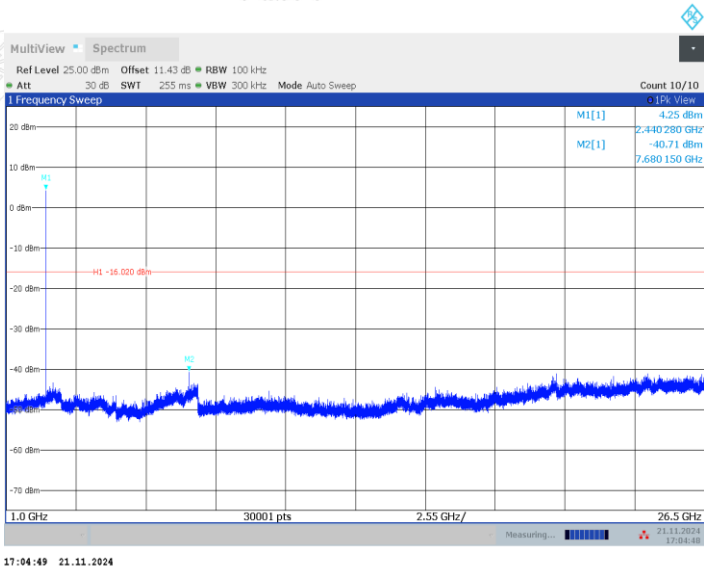

Highest Frequency (2480MHz)

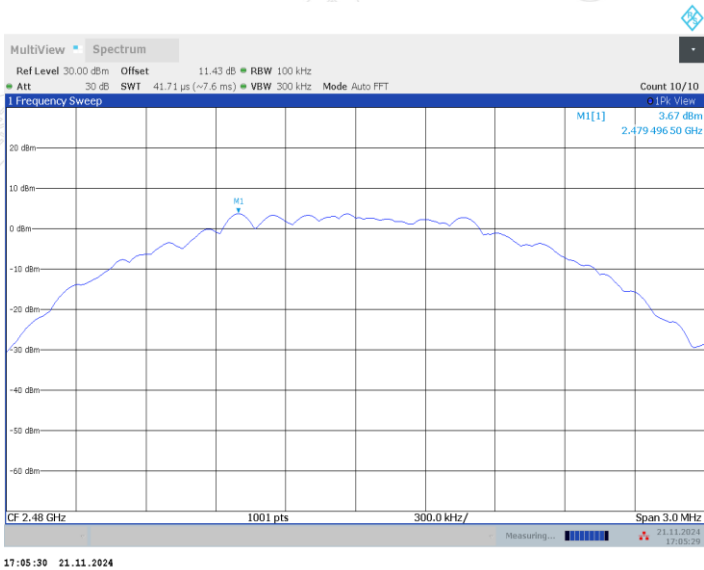

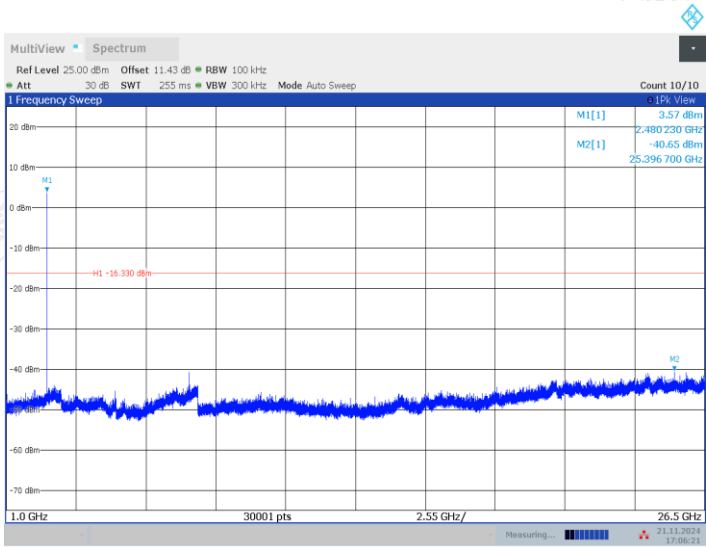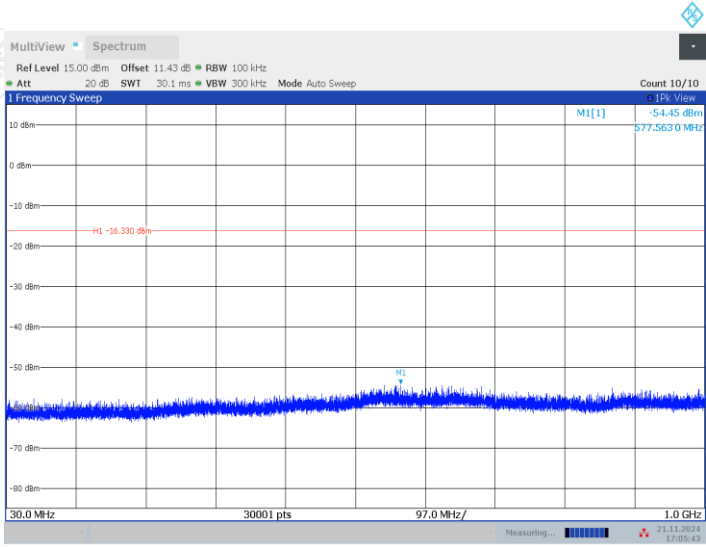

11. RESTRICTED BANDS OF OPERATION

11.1 LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

Frequency (MHz)	Quasi-peak($\mu\text{V/m}$)	Measurement distance(m)	Quasi-peak(dB $\mu\text{V/m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54


11.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 Meas Guidance v05r02.

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO.
 - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO.

If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.8.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

11.3 TEST SETUP

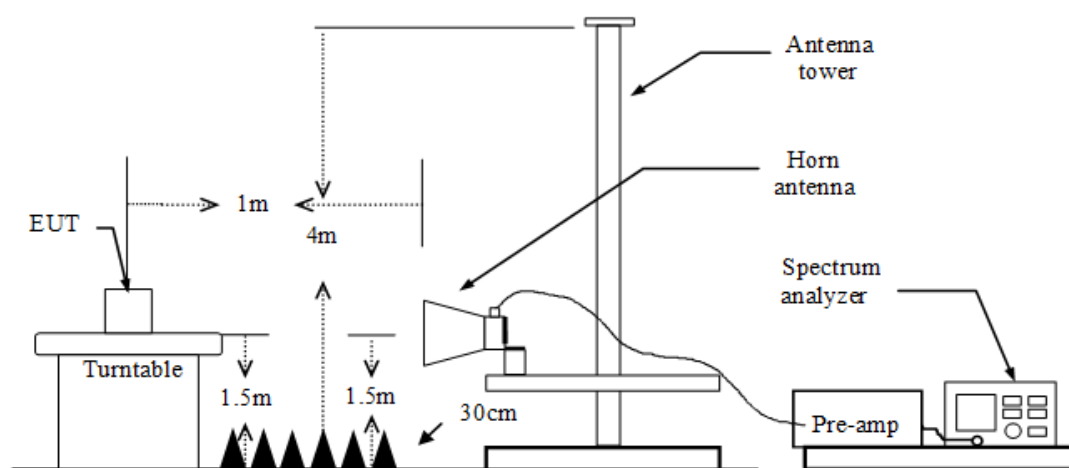


Blank space below this page

11.4 TEST RESULTS

Equipment:	Climate Sensor W100	Test Date	2024-11-28
Model No.:	TH-S04E	Test Engineer:	Qin Tingting
Test Voltage:	DC 3V	Environmental Conditions	25.1℃/55%RH/101.0kPa


BLE 1M
Lowest Frequency
Frequency 2402MHz
Detector mode: Peak

Polarity: Horizontal

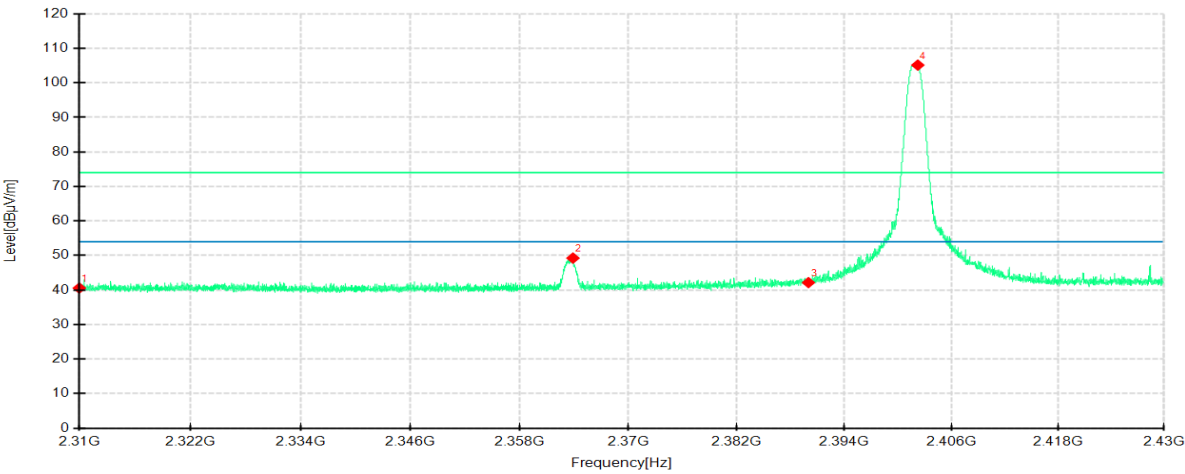

Detector mode: Peak

Polarity: Vertical

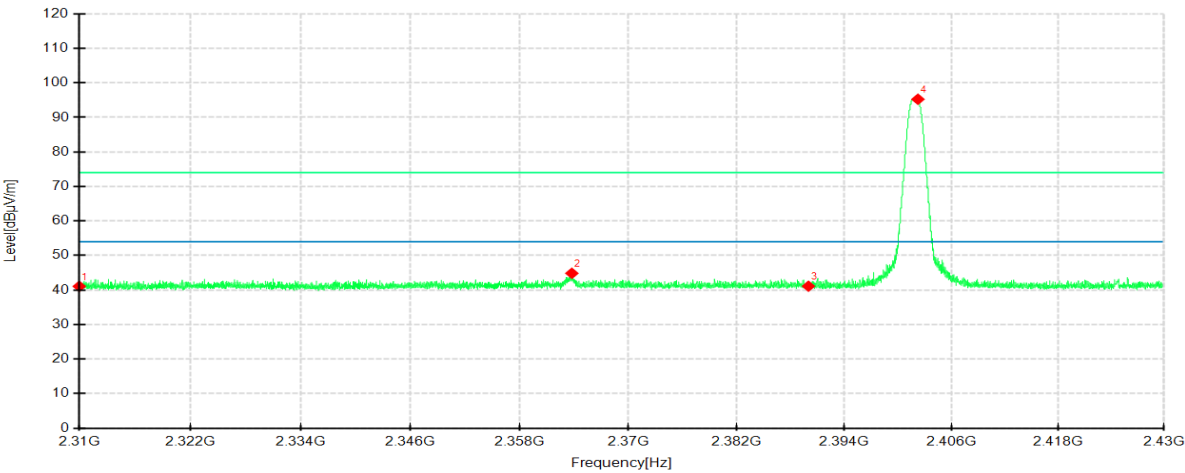

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	46.46	40.56	-5.90	74.00	33.44	200	234	Horizontal	/
2	2363.8650	55.40	49.25	-6.15	74.00	24.75	100	326	Horizontal	/
3	2390.0000	47.87	42.14	-5.73	74.00	31.86	100	39	Horizontal	/
4	2402.2350	110.68	105.16	-5.52	74.00	-31.16	100	236	Horizontal	No limit
1	2310.0000	46.36	41.06	-5.30	74.00	32.94	100	235	Vertical	/
2	2363.7450	50.24	44.84	-5.40	74.00	29.16	100	212	Vertical	/
3	2390.0000	46.56	41.11	-5.45	74.00	32.89	200	223	Vertical	/
4	2402.2500	100.73	95.27	-5.46	74.00	-21.27	100	212	Vertical	No limit


——Blank space below this page——

Lowest Frequency

Frequency 2402MHz


Detector mode: Average

Polarity: Horizontal

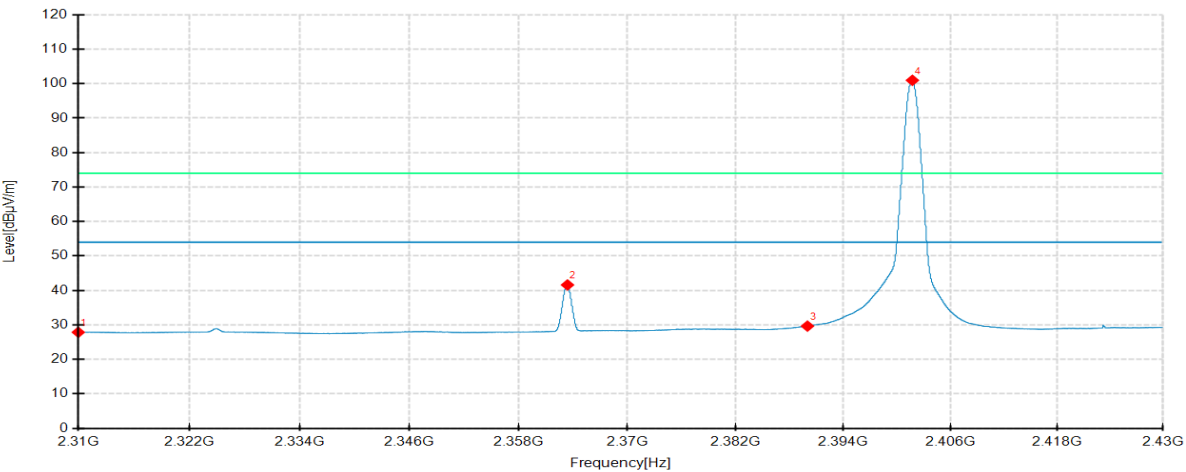

Detector mode: Average


Polarity: Vertical

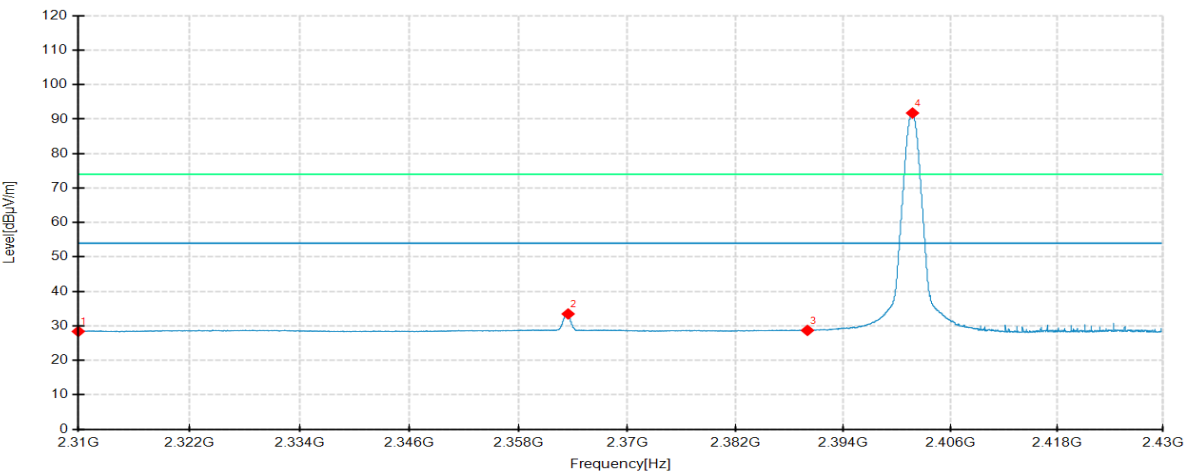

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	33.75	27.85	-5.90	54.00	26.15	100	340	Horizontal	/
2	2363.3700	47.76	41.60	-6.16	54.00	12.40	200	187	Horizontal	/
3	2390.0000	35.37	29.64	-5.73	54.00	24.36	100	73	Horizontal	/
4	2401.7400	106.54	101.00	-5.54	54.00	-47.00	200	341	Horizontal	No limit
1	2310.0000	33.69	28.39	-5.30	54.00	25.61	100	140	Vertical	/
2	2363.4450	38.87	33.47	-5.40	54.00	20.53	100	0	Vertical	/
3	2390.0000	34.13	28.68	-5.45	54.00	25.32	100	65	Vertical	/
4	2401.7550	97.26	91.79	-5.47	54.00	-37.79	100	16	Vertical	No limit


Highest Frequency
Frequency 2480MHz
Detector mode: Peak

Polarity: Horizontal

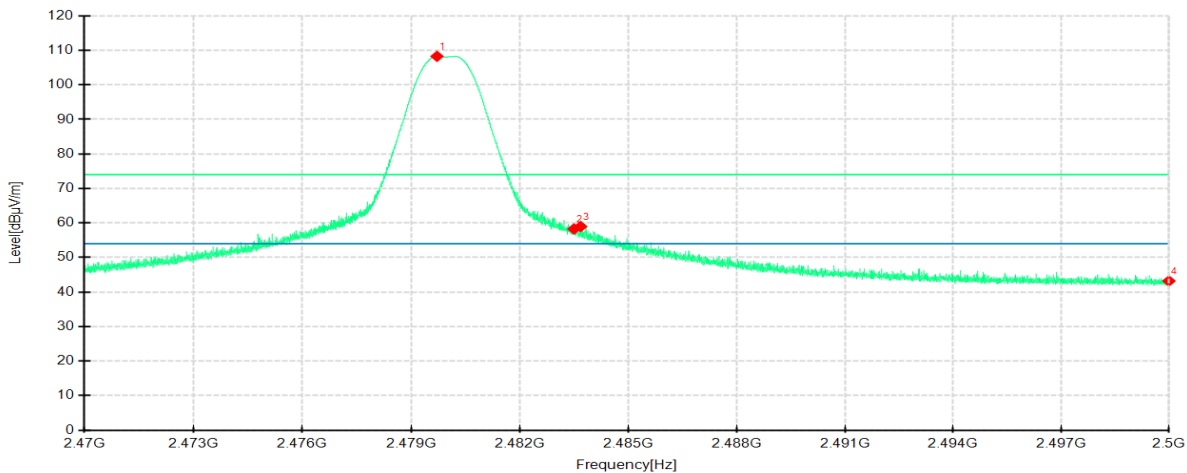

Detector mode: Peak


Polarity: Vertical

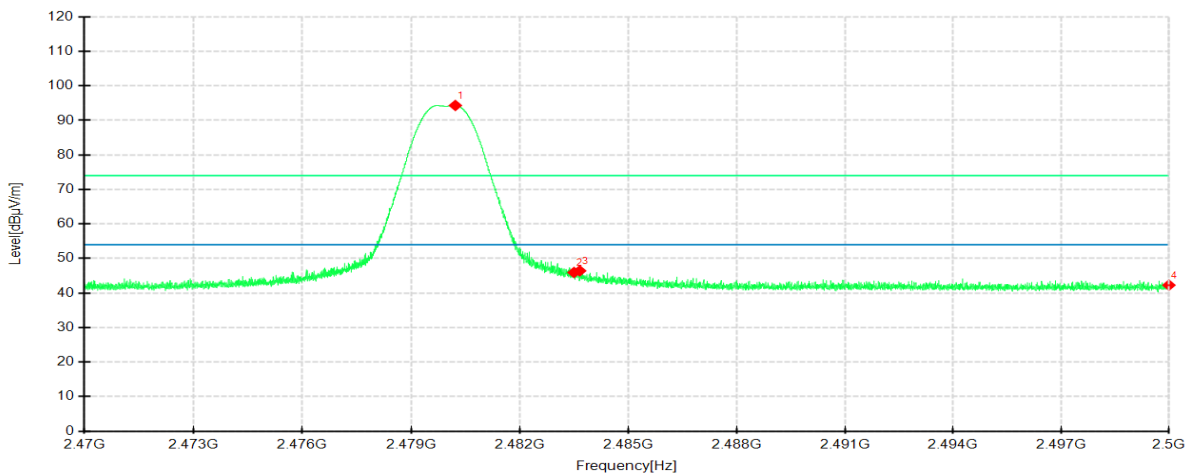

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.7163	112.93	108.28	-4.65	74.00	-34.28	100	233	Horizontal	No limit
2	2483.5000	62.95	58.28	-4.67	74.00	15.72	200	138	Horizontal	/
3	2483.6838	63.65	58.98	-4.67	74.00	15.02	100	40	Horizontal	/
4	2500.0000	47.99	43.20	-4.79	74.00	30.80	100	181	Horizontal	/
1	2480.2225	99.49	94.34	-5.15	74.00	-20.34	100	76	Vertical	No limit
2	2483.5000	51.09	45.96	-5.13	74.00	28.04	100	350	Vertical	/
3	2483.6575	51.55	46.42	-5.13	74.00	27.58	100	76	Vertical	/
4	2500.0000	47.36	42.27	-5.09	74.00	31.73	100	224	Vertical	/


Highest Frequency
Frequency 2480MHz
Detector mode: Average

Polarity: Horizontal

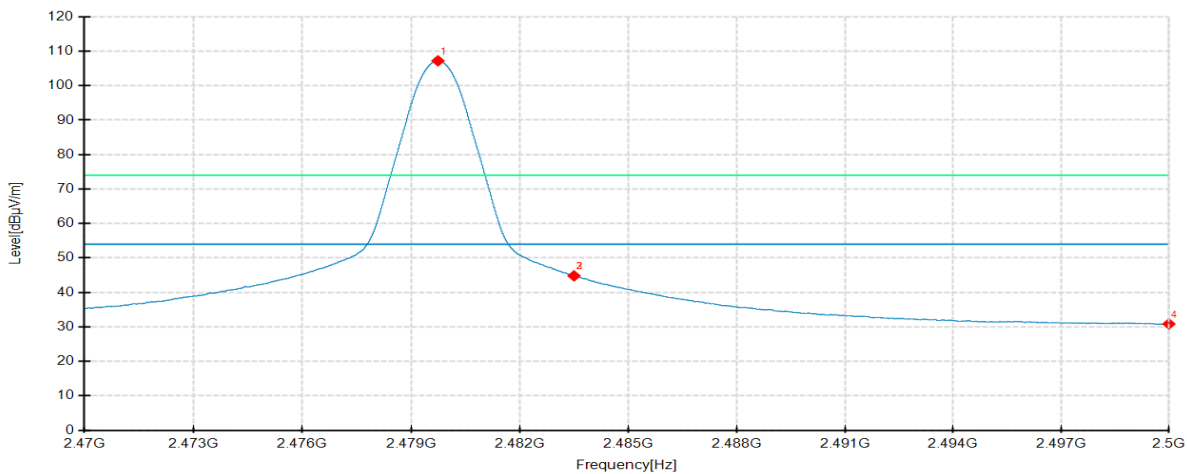

Detector mode: Average


Polarity: Vertical

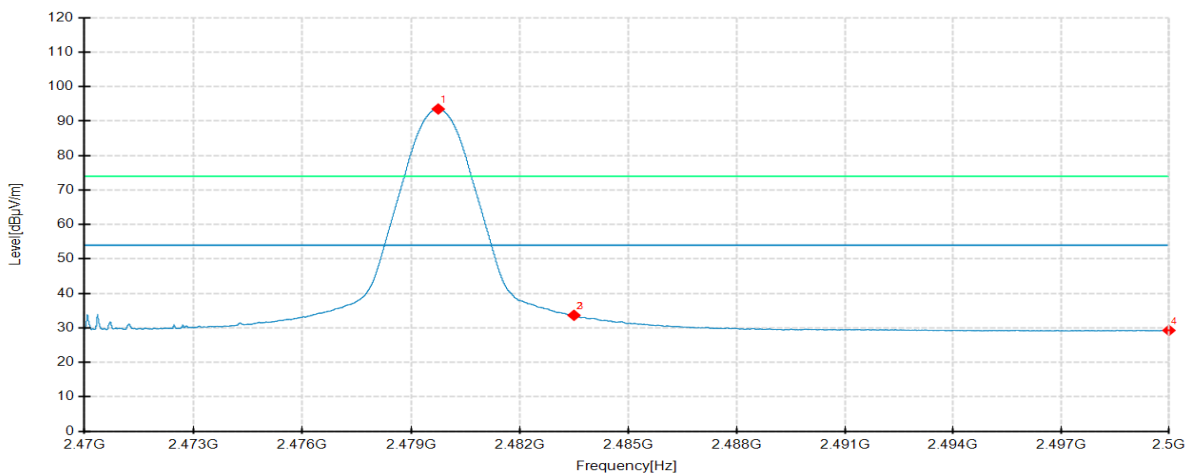

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.7425	111.88	107.23	-4.65	54.00	-53.23	100	236	Horizontal	No limit
2	2483.5000	49.48	44.81	-4.67	54.00	9.19	100	247	Horizontal	/
3	2483.5113	49.51	44.84	-4.67	54.00	9.16	100	247	Horizontal	/
4	2500.0000	35.63	30.84	-4.79	54.00	23.16	100	322	Horizontal	/
1	2479.7500	98.68	93.53	-5.15	54.00	-39.53	100	335	Vertical	No limit
2	2483.5000	38.78	33.65	-5.13	54.00	20.35	100	335	Vertical	/
3	2483.5338	38.68	33.55	-5.13	54.00	20.45	100	335	Vertical	/
4	2500.0000	34.35	29.26	-5.09	54.00	24.74	100	22	Vertical	/


BLE 2M
Lowest Frequency
Frequency 2402MHz
Detector mode: Peak

Polarity: Horizontal

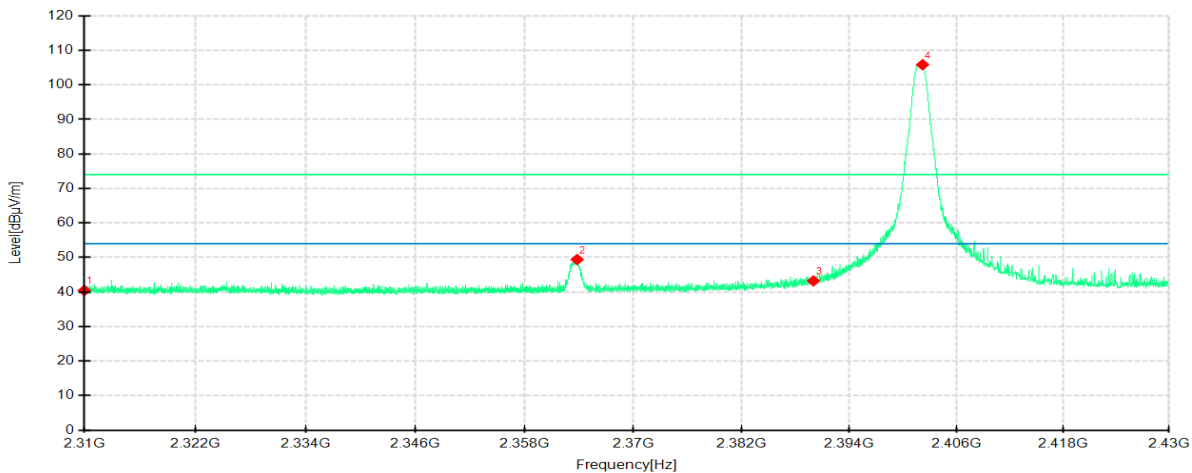

Detector mode: Peak

Polarity: Vertical

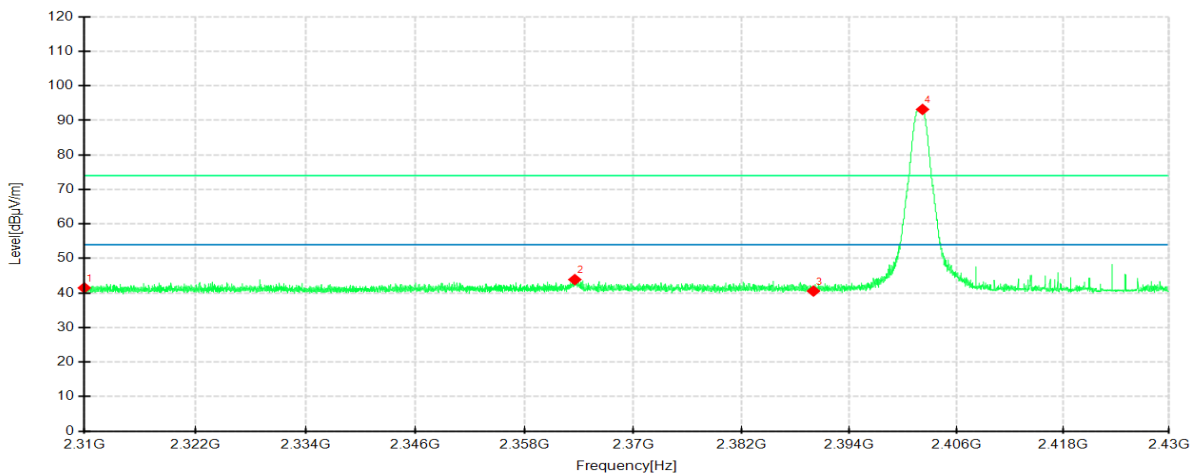


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	46.34	40.44	-5.90	74.00	33.56	200	350	Horizontal	/
2	2363.7750	55.56	49.41	-6.15	74.00	24.59	100	234	Horizontal	/
3	2390.0000	48.94	43.21	-5.73	74.00	30.79	200	24	Horizontal	/
4	2402.2050	111.38	105.86	-5.52	74.00	-31.86	100	58	Horizontal	No limit
1	2310.0000	46.79	41.49	-5.30	74.00	32.51	100	100	Vertical	/
2	2363.5200	49.28	43.88	-5.40	74.00	30.12	200	185	Vertical	/
3	2390.0000	46.02	40.57	-5.45	74.00	33.43	100	87	Vertical	/
4	2402.2050	98.65	93.19	-5.46	74.00	-19.19	100	351	Vertical	No limit

Lowest Frequency

Frequency 2402MHz


Detector mode: Average

Polarity: Horizontal

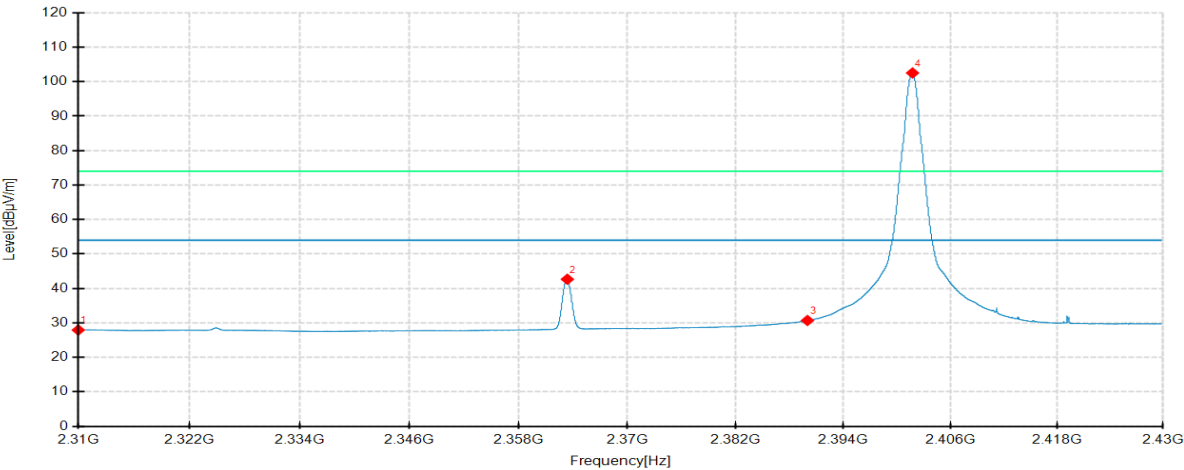

Detector mode: Average


Polarity: Vertical

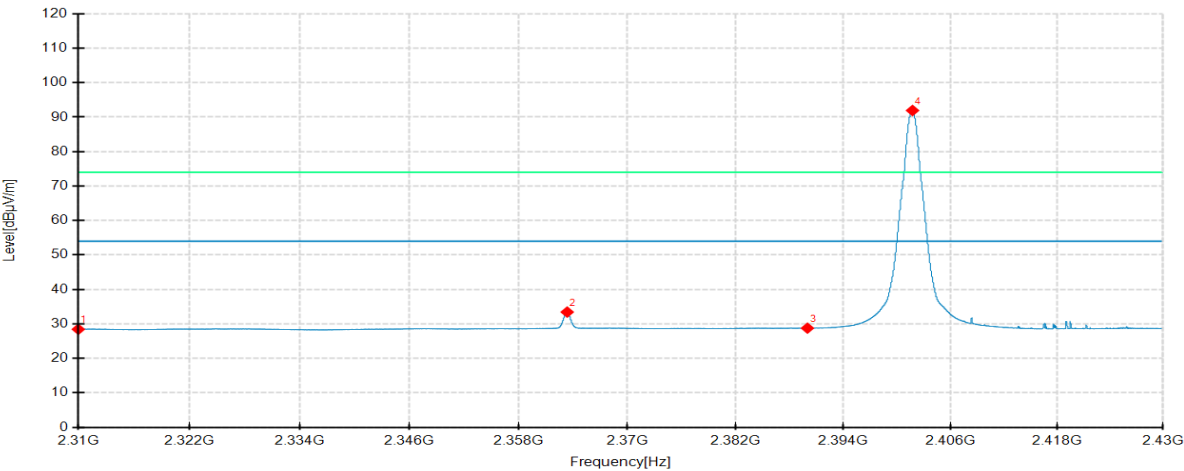

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	33.82	27.92	-5.90	54.00	26.08	100	180	Horizontal	/
2	2363.3550	48.82	42.66	-6.16	54.00	11.34	100	180	Horizontal	/
3	2390.0000	36.42	30.69	-5.73	54.00	23.31	100	180	Horizontal	/
4	2401.7550	108.08	102.55	-5.53	54.00	-48.55	100	180	Horizontal	No limit
1	2310.0000	33.73	28.43	-5.30	54.00	25.57	200	180	Vertical	/
2	2363.3400	38.82	33.42	-5.40	54.00	20.58	200	90	Vertical	/
3	2390.0000	34.21	28.76	-5.45	54.00	25.24	100	0	Vertical	/
4	2401.7550	97.41	91.94	-5.47	54.00	-37.94	100	360	Vertical	No limit


Highest Frequency
Frequency 2480MHz
Detector mode: Peak

Polarity: Horizontal

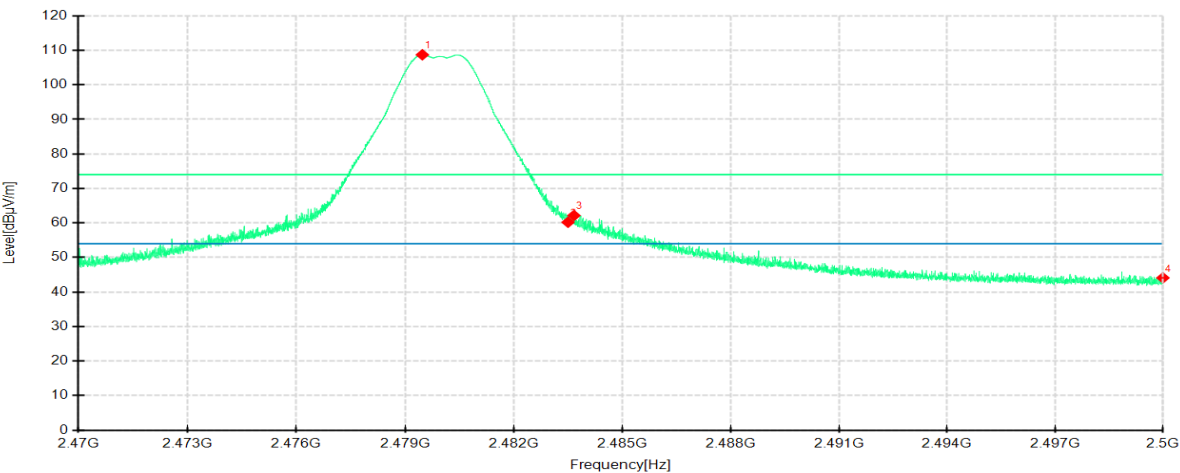

Detector mode: Peak


Polarity: Vertical

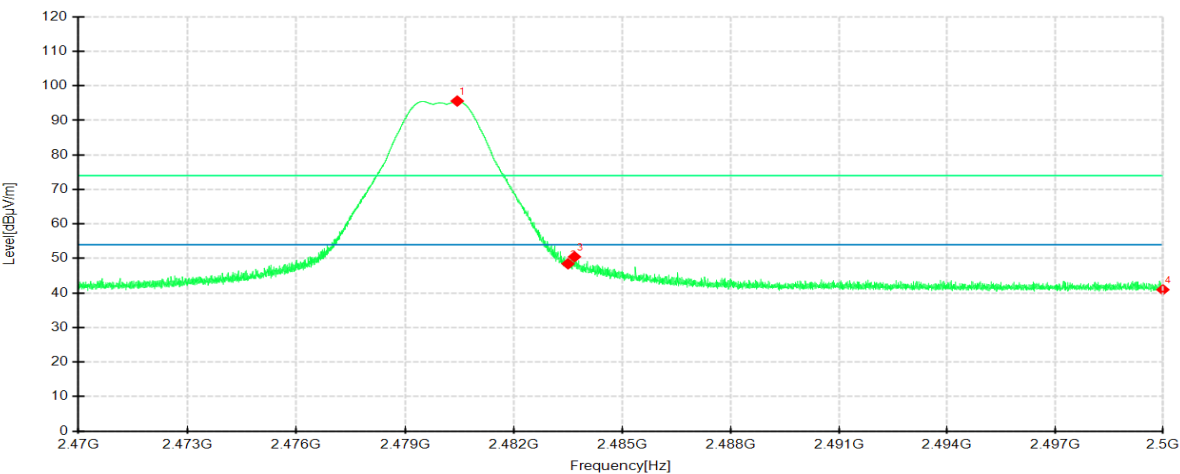

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.4763	113.38	108.73	-4.65	74.00	-34.73	100	234	Horizontal	No limit
2	2483.5000	64.87	60.20	-4.67	74.00	13.80	100	234	Horizontal	/
3	2483.6650	66.83	62.16	-4.67	74.00	11.84	100	234	Horizontal	/
4	2500.0000	48.88	44.09	-4.79	74.00	29.91	100	21	Horizontal	/
1	2480.4400	100.77	95.62	-5.15	74.00	-21.62	100	22	Vertical	No limit
2	2483.5000	53.59	48.46	-5.13	74.00	25.54	100	10	Vertical	/
3	2483.6800	55.62	50.49	-5.13	74.00	23.51	100	338	Vertical	/
4	2500.0000	46.05	40.96	-5.09	74.00	33.04	100	310	Vertical	/


Highest Frequency
Frequency 2480MHz
Detector mode: Average

Polarity: Horizontal

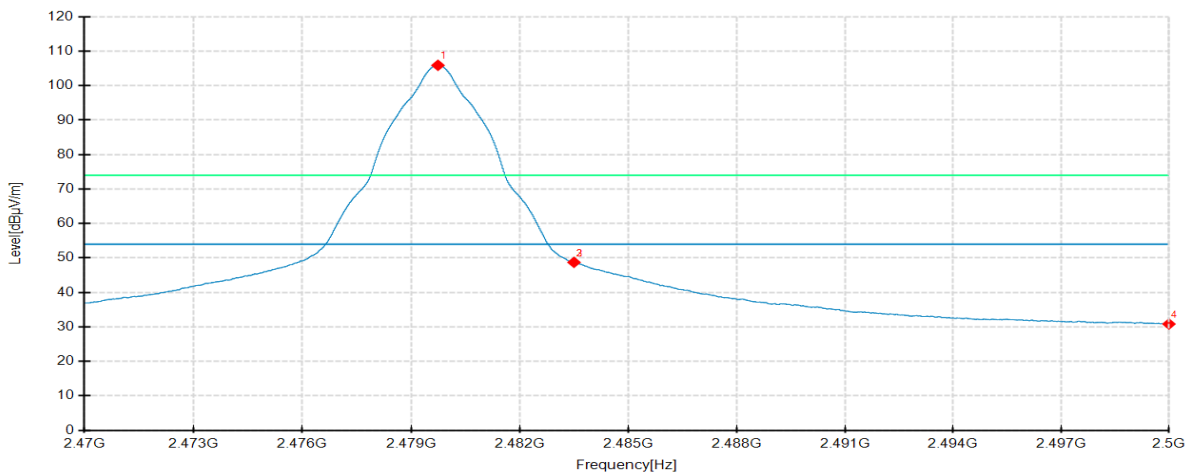

Detector mode: Average

Polarity: Vertical

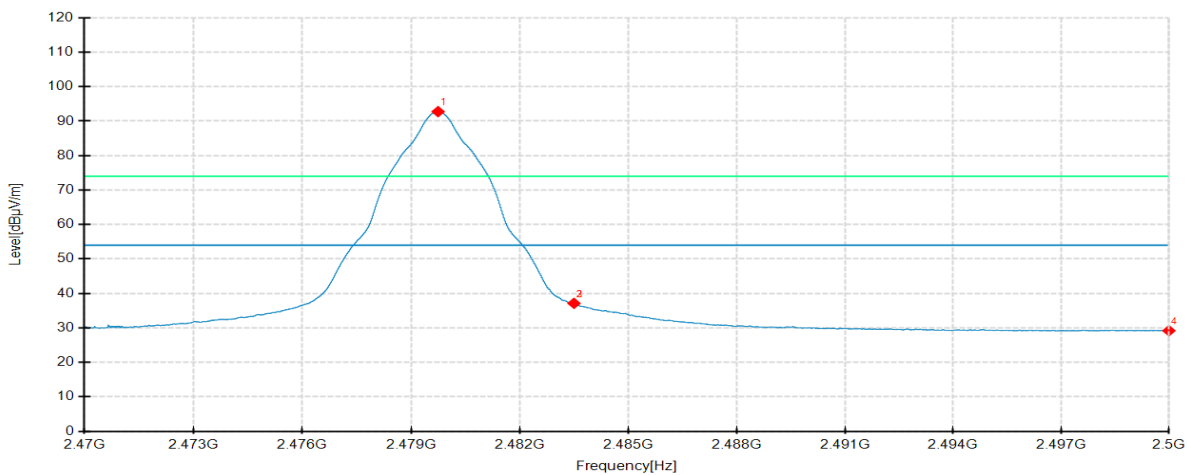

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.7425	110.57	105.92	-4.65	54.00	-51.92	100	227	Horizontal	No limit
2	2483.5000	53.40	48.73	-4.67	54.00	5.27	100	227	Horizontal	/
3	2483.5038	53.40	48.73	-4.67	54.00	5.27	100	227	Horizontal	/
4	2500.0000	35.61	30.82	-4.79	54.00	23.18	100	241	Horizontal	/
1	2479.7463	97.92	92.77	-5.15	54.00	-38.77	100	19	Vertical	No limit
2	2483.5000	42.25	37.12	-5.13	54.00	16.88	100	19	Vertical	/
3	2483.5038	42.20	37.07	-5.13	54.00	16.93	100	19	Vertical	/
4	2500.0000	34.27	29.18	-5.09	54.00	24.82	100	339	Vertical	/

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E20241111636501-Test Photo.

APPENDIX B. PHOTOGRAPH OF THE EUT

Please refer to the attached document E20241111636501-EUT Photo.

----- End of Report -----