



Unwanted Emissions (Below 1GHz)


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):23 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>40.41</td><td>25.83</td><td>40.00</td><td>-14.17</td><td>34.60</td><td>-8.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>106.56</td><td>29.15</td><td>43.50</td><td>-14.35</td><td>41.42</td><td>-12.27</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>150.28</td><td>28.91</td><td>43.50</td><td>-14.59</td><td>37.67</td><td>-8.76</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>190.27</td><td>29.64</td><td>43.50</td><td>-13.86</td><td>41.00</td><td>-11.36</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>250.57</td><td>32.48</td><td>46.00</td><td>-13.52</td><td>42.48</td><td>-10.00</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>500.21</td><td>36.42</td><td>46.00</td><td>-9.58</td><td>39.62</td><td>-3.20</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	40.41	25.83	40.00	-14.17	34.60	-8.77	Peak	---	---	2	106.56	29.15	43.50	-14.35	41.42	-12.27	Peak	---	---	3	150.28	28.91	43.50	-14.59	37.67	-8.76	Peak	---	---	4	190.27	29.64	43.50	-13.86	41.00	-11.36	Peak	---	---	5	250.57	32.48	46.00	-13.52	42.48	-10.00	Peak	---	---	6	500.21	36.42	46.00	-9.58	39.62	-3.20	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	40.41	25.83	40.00	-14.17	34.60	-8.77	Peak	---	---																																																																
2	106.56	29.15	43.50	-14.35	41.42	-12.27	Peak	---	---																																																																
3	150.28	28.91	43.50	-14.59	37.67	-8.76	Peak	---	---																																																																
4	190.27	29.64	43.50	-13.86	41.00	-11.36	Peak	---	---																																																																
5	250.57	32.48	46.00	-13.52	42.48	-10.00	Peak	---	---																																																																
6	500.21	36.42	46.00	-9.58	39.62	-3.20	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):64			
Level (dBUV/m)			




Unwanted Emissions (Above 1GHz) for 11a

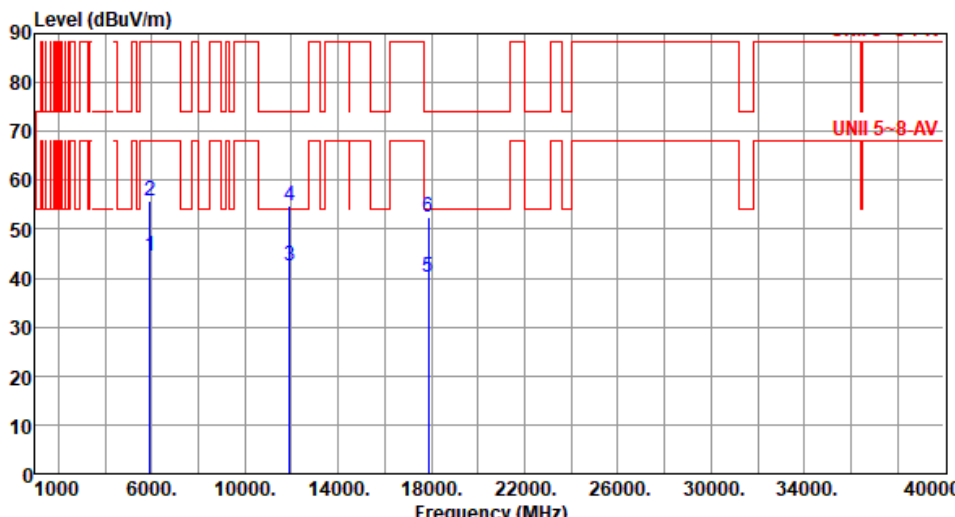Modulation	11a	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.54</td><td>68.20</td><td>-23.66</td><td>43.35</td><td>1.19</td><td>Average</td><td>257</td><td>275</td></tr><tr><td>2</td><td>5925.00</td><td>55.75</td><td>88.20</td><td>-32.45</td><td>54.56</td><td>1.19</td><td>Peak</td><td>257</td><td>275</td></tr><tr><td>3</td><td>11910.00</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>36.32</td><td>6.11</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>11910.00</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>48.56</td><td>6.11</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>17865.00</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>30.65</td><td>9.61</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>17865.00</td><td>52.37</td><td>74.00</td><td>-21.63</td><td>42.76</td><td>9.61</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.54	68.20	-23.66	43.35	1.19	Average	257	275	2	5925.00	55.75	88.20	-32.45	54.56	1.19	Peak	257	275	3	11910.00	42.43	54.00	-11.57	36.32	6.11	Average	100	80	4	11910.00	54.67	74.00	-19.33	48.56	6.11	Peak	100	80	5	17865.00	40.26	54.00	-13.74	30.65	9.61	Average	100	65	6	17865.00	52.37	74.00	-21.63	42.76	9.61	Peak	100	65
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.54	68.20	-23.66	43.35	1.19	Average	257	275																																																																
2	5925.00	55.75	88.20	-32.45	54.56	1.19	Peak	257	275																																																																
3	11910.00	42.43	54.00	-11.57	36.32	6.11	Average	100	80																																																																
4	11910.00	54.67	74.00	-19.33	48.56	6.11	Peak	100	80																																																																
5	17865.00	40.26	54.00	-13.74	30.65	9.61	Average	100	65																																																																
6	17865.00	52.37	74.00	-21.63	42.76	9.61	Peak	100	65																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	5955																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																															
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBuV/m dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>5925.00</td><td>44.04</td><td>68.20</td><td>-24.16</td><td>42.85</td><td>1.19</td><td>Average</td><td>122</td><td>210</td></tr><tr><td>2</td><td>5925.00</td><td>55.45</td><td>88.20</td><td>-32.75</td><td>54.26</td><td>1.19</td><td>Peak</td><td>122</td><td>210</td></tr><tr><td>3</td><td>11910.00</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>36.45</td><td>6.11</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>11910.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>49.42</td><td>6.11</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>17865.00</td><td>39.92</td><td>54.00</td><td>-14.08</td><td>30.31</td><td>9.61</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>17865.00</td><td>52.17</td><td>74.00</td><td>-21.83</td><td>42.56</td><td>9.61</td><td>Peak</td><td>100</td><td>20</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	5925.00	44.04	68.20	-24.16	42.85	1.19	Average	122	210	2	5925.00	55.45	88.20	-32.75	54.26	1.19	Peak	122	210	3	11910.00	42.56	54.00	-11.44	36.45	6.11	Average	100	90	4	11910.00	55.53	74.00	-18.47	49.42	6.11	Peak	100	90	5	17865.00	39.92	54.00	-14.08	30.31	9.61	Average	100	20	6	17865.00	52.17	74.00	-21.83	42.56	9.61	Peak	100	20
1	5925.00	44.04	68.20	-24.16	42.85	1.19	Average	122	210																																																						
2	5925.00	55.45	88.20	-32.75	54.26	1.19	Peak	122	210																																																						
3	11910.00	42.56	54.00	-11.44	36.45	6.11	Average	100	90																																																						
4	11910.00	55.53	74.00	-18.47	49.42	6.11	Peak	100	90																																																						
5	17865.00	39.92	54.00	-14.08	30.31	9.61	Average	100	20																																																						
6	17865.00	52.17	74.00	-21.83	42.56	9.61	Peak	100	20																																																						

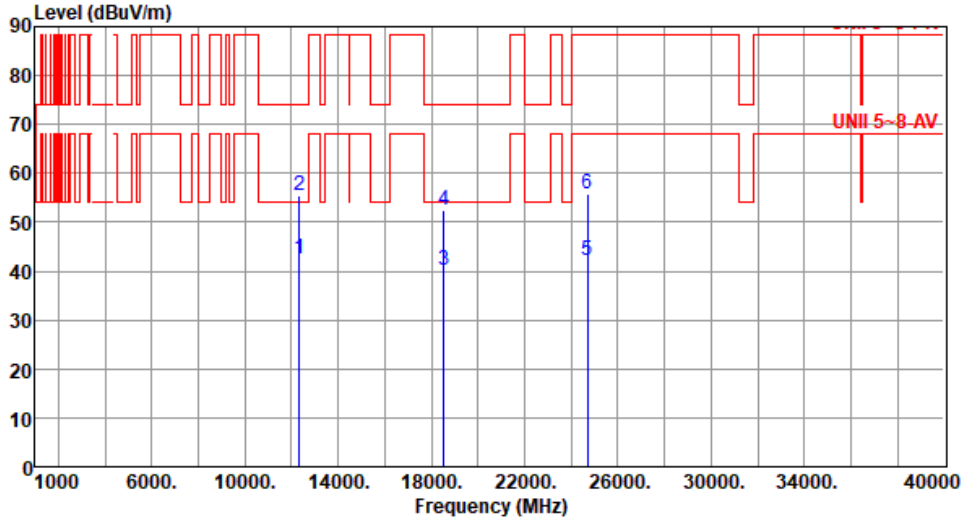


Modulation	11a	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>36.42</td><td>6.18</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>12350.00</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>49.25</td><td>6.18</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>18525.00</td><td>40.11</td><td>54.00</td><td>-13.89</td><td>39.51</td><td>0.60</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>18525.00</td><td>52.48</td><td>74.00</td><td>-21.52</td><td>51.88</td><td>0.60</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>24700.00</td><td>42.19</td><td>68.20</td><td>-26.01</td><td>34.62</td><td>7.57</td><td>Average</td><td>100</td><td>165</td></tr><tr><td>6</td><td>24700.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>48.12</td><td>7.57</td><td>Peak</td><td>100</td><td>165</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	42.60	54.00	-11.40	36.42	6.18	Average	100	50	2	12350.00	55.43	74.00	-18.57	49.25	6.18	Peak	100	50	3	18525.00	40.11	54.00	-13.89	39.51	0.60	Average	100	60	4	18525.00	52.48	74.00	-21.52	51.88	0.60	Peak	100	60	5	24700.00	42.19	68.20	-26.01	34.62	7.57	Average	100	165	6	24700.00	55.69	88.20	-32.51	48.12	7.57	Peak	100	165
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	42.60	54.00	-11.40	36.42	6.18	Average	100	50																																																																
2	12350.00	55.43	74.00	-18.57	49.25	6.18	Peak	100	50																																																																
3	18525.00	40.11	54.00	-13.89	39.51	0.60	Average	100	60																																																																
4	18525.00	52.48	74.00	-21.52	51.88	0.60	Peak	100	60																																																																
5	24700.00	42.19	68.20	-26.01	34.62	7.57	Average	100	165																																																																
6	24700.00	55.69	88.20	-32.51	48.12	7.57	Peak	100	165																																																																

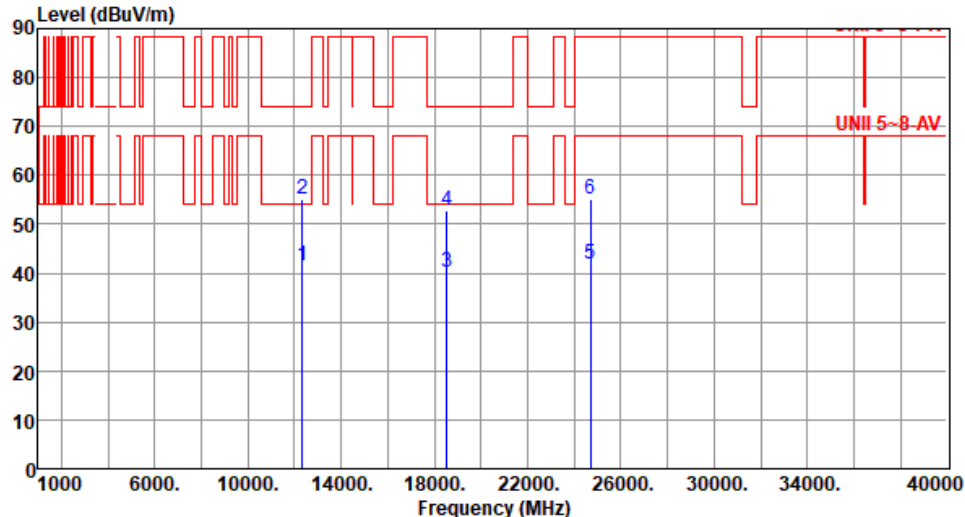


Modulation	11a	Test Freq. (MHz)	6175																																																																																											
Polarization	Vertical																																																																																													
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																																														
																																																																																														
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12350.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>35.46</td><td>6.18</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>2</td><td>12350.00</td><td>55.15</td><td>74.00</td><td>-18.85</td><td>48.97</td><td>6.18</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>3</td><td>18525.00</td><td>40.14</td><td>54.00</td><td>-13.86</td><td>39.54</td><td>0.60</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>18525.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>52.26</td><td>0.60</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>24700.00</td><td>41.99</td><td>68.20</td><td>-26.21</td><td>34.42</td><td>7.57</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>24700.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>47.67</td><td>7.57</td><td>Peak</td><td>100</td><td>40</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12350.00	41.64	54.00	-12.36	35.46	6.18	Average	100	70	2	12350.00	55.15	74.00	-18.85	48.97	6.18	Peak	100	70	3	18525.00	40.14	54.00	-13.86	39.54	0.60	Average	100	55	4	18525.00	52.86	74.00	-21.14	52.26	0.60	Peak	100	55	5	24700.00	41.99	68.20	-26.21	34.42	7.57	Average	100	40	6	24700.00	55.24	88.20	-32.96	47.67	7.57	Peak	100	40			
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																					
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																					
		dBuV/m			dBuV			cm	deg																																																																																					
1	12350.00	41.64	54.00	-12.36	35.46	6.18	Average	100	70																																																																																					
2	12350.00	55.15	74.00	-18.85	48.97	6.18	Peak	100	70																																																																																					
3	18525.00	40.14	54.00	-13.86	39.54	0.60	Average	100	55																																																																																					
4	18525.00	52.86	74.00	-21.14	52.26	0.60	Peak	100	55																																																																																					
5	24700.00	41.99	68.20	-26.21	34.42	7.57	Average	100	40																																																																																					
6	24700.00	55.24	88.20	-32.96	47.67	7.57	Peak	100	40																																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																														

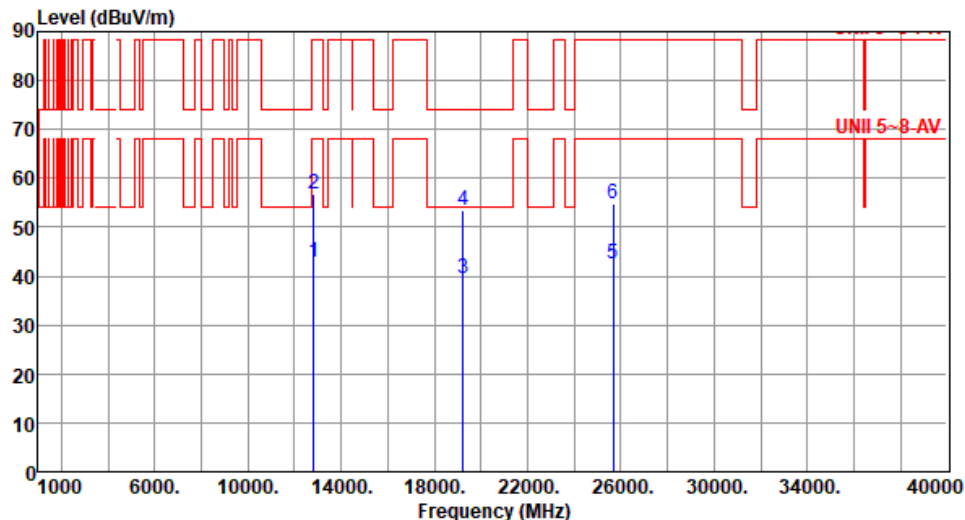


Modulation	11a	Test Freq. (MHz)	6415						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.98	68.20	-25.22	36.65	6.33	Average	100	80
2	12830.00	56.75	88.20	-31.45	50.42	6.33	Peak	100	80
3	19245.00	39.52	54.00	-14.48	38.66	0.86	Average	100	70
4	19245.00	53.33	74.00	-20.67	52.47	0.86	Peak	100	70
5	25660.00	42.55	68.20	-25.65	35.14	7.41	Average	100	200
6	25660.00	54.68	88.20	-33.52	47.27	7.41	Peak	100	200
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

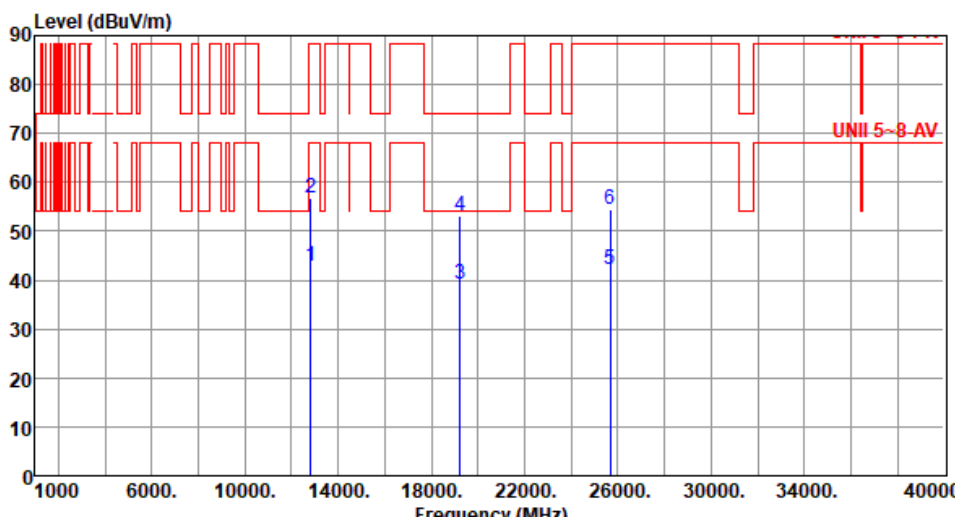

Modulation	11a	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12830.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>36.42</td><td>6.33</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>2</td><td>12830.00</td><td>56.78</td><td>88.20</td><td>-31.42</td><td>50.45</td><td>6.33</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>3</td><td>19245.00</td><td>39.23</td><td>54.00</td><td>-14.77</td><td>38.37</td><td>0.86</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>19245.00</td><td>52.98</td><td>74.00</td><td>-21.02</td><td>52.12</td><td>0.86</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>25660.00</td><td>42.09</td><td>68.20</td><td>-26.11</td><td>34.68</td><td>7.41</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>25660.00</td><td>54.51</td><td>88.20</td><td>-33.69</td><td>47.10</td><td>7.41</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	42.75	68.20	-25.45	36.42	6.33	Average	100	100	2	12830.00	56.78	88.20	-31.42	50.45	6.33	Peak	100	100	3	19245.00	39.23	54.00	-14.77	38.37	0.86	Average	100	105	4	19245.00	52.98	74.00	-21.02	52.12	0.86	Peak	100	105	5	25660.00	42.09	68.20	-26.11	34.68	7.41	Average	100	30	6	25660.00	54.51	88.20	-33.69	47.10	7.41	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	42.75	68.20	-25.45	36.42	6.33	Average	100	100																																																																
2	12830.00	56.78	88.20	-31.42	50.45	6.33	Peak	100	100																																																																
3	19245.00	39.23	54.00	-14.77	38.37	0.86	Average	100	105																																																																
4	19245.00	52.98	74.00	-21.02	52.12	0.86	Peak	100	105																																																																
5	25660.00	42.09	68.20	-26.11	34.68	7.41	Average	100	30																																																																
6	25660.00	54.51	88.20	-33.69	47.10	7.41	Peak	100	30																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

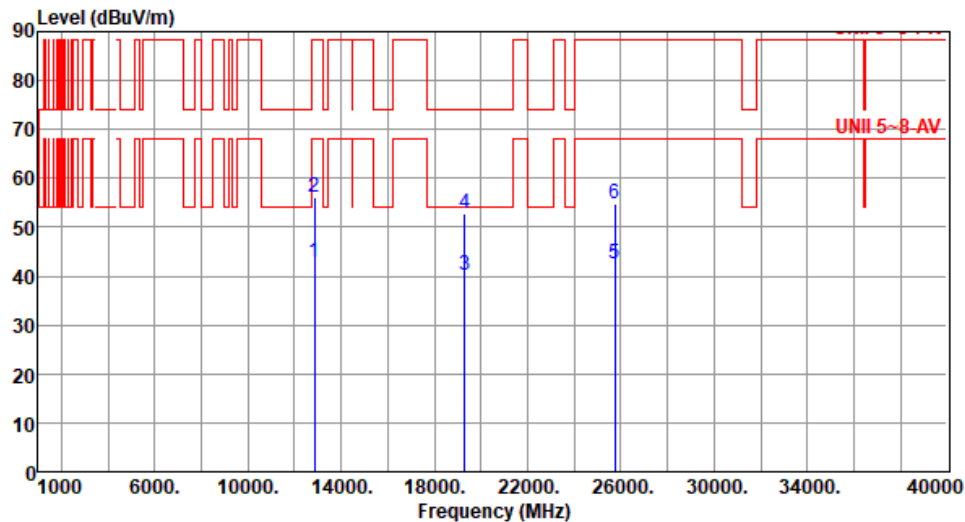


Modulation	11a	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	42.77	68.20	-25.43	36.38	6.39	Average	100	60
2	12870.00	56.26	88.20	-31.94	49.87	6.39	Peak	100	60
3	19305.00	40.17	54.00	-13.83	39.25	0.92	Average	100	30
4	19305.00	52.81	74.00	-21.19	51.89	0.92	Peak	100	30
5	25740.00	42.61	68.20	-25.59	35.22	7.39	Average	100	90
6	25740.00	54.84	88.20	-33.36	47.45	7.39	Peak	100	90
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	11a	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12870.00</td><td>42.87</td><td>68.20</td><td>-25.33</td><td>36.48</td><td>6.39</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>2</td><td>12870.00</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>49.65</td><td>6.39</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>3</td><td>19305.00</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>39.42</td><td>0.92</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>19305.00</td><td>53.26</td><td>74.00</td><td>-20.74</td><td>52.34</td><td>0.92</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>25740.00</td><td>42.27</td><td>68.20</td><td>-25.93</td><td>34.88</td><td>7.39</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>25740.00</td><td>54.88</td><td>88.20</td><td>-33.32</td><td>47.49</td><td>7.39</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.87	68.20	-25.33	36.48	6.39	Average	100	110	2	12870.00	56.04	88.20	-32.16	49.65	6.39	Peak	100	110	3	19305.00	40.34	54.00	-13.66	39.42	0.92	Average	100	20	4	19305.00	53.26	74.00	-20.74	52.34	0.92	Peak	100	20	5	25740.00	42.27	68.20	-25.93	34.88	7.39	Average	100	30	6	25740.00	54.88	88.20	-33.32	47.49	7.39	Peak	100	30
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.87	68.20	-25.33	36.48	6.39	Average	100	110																																																																
2	12870.00	56.04	88.20	-32.16	49.65	6.39	Peak	100	110																																																																
3	19305.00	40.34	54.00	-13.66	39.42	0.92	Average	100	20																																																																
4	19305.00	53.26	74.00	-20.74	52.34	0.92	Peak	100	20																																																																
5	25740.00	42.27	68.20	-25.93	34.88	7.39	Average	100	30																																																																
6	25740.00	54.88	88.20	-33.32	47.49	7.39	Peak	100	30																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

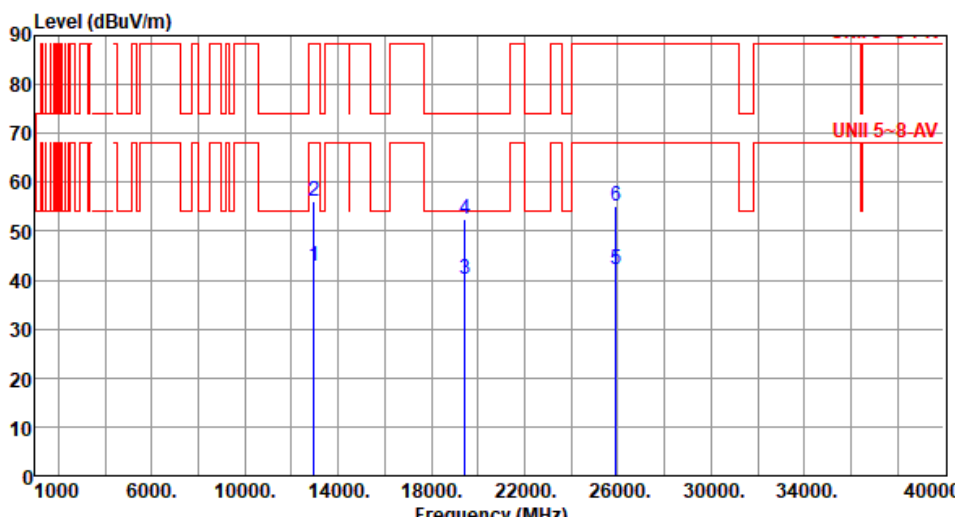

Modulation	11a	Test Freq. (MHz)	6475						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBUV/m) 									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.74	68.20	-25.46	36.28	6.46	Average	100	30
2	12950.00	56.02	88.20	-32.18	49.56	6.46	Peak	100	30
3	19425.00	40.22	54.00	-13.78	39.18	1.04	Average	100	60
4	19425.00	52.62	74.00	-21.38	51.58	1.04	Peak	100	60
5	25900.00	42.32	68.20	-25.88	34.90	7.42	Average	100	50
6	25900.00	55.05	88.20	-33.15	47.63	7.42	Peak	100	50
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

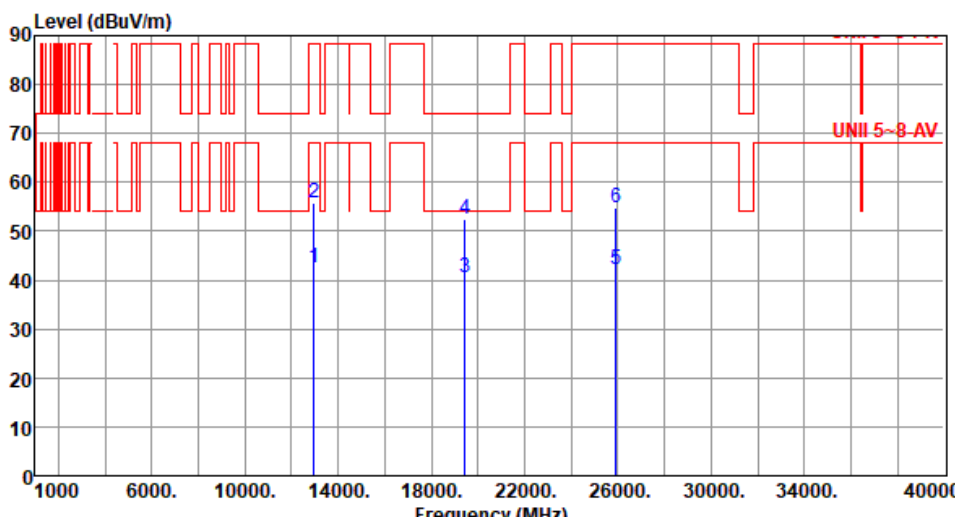

Modulation	11a	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12950.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>36.21</td><td>6.46</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>12950.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>49.38</td><td>6.46</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>19425.00</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>39.48</td><td>1.04</td><td>Average</td><td>100</td><td>2</td></tr><tr><td>4</td><td>19425.00</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>51.56</td><td>1.04</td><td>Peak</td><td>100</td><td>2</td></tr><tr><td>5</td><td>25900.00</td><td>42.08</td><td>68.20</td><td>-26.12</td><td>34.66</td><td>7.42</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>25900.00</td><td>54.72</td><td>88.20</td><td>-33.48</td><td>47.30</td><td>7.42</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12950.00	42.67	68.20	-25.53	36.21	6.46	Average	100	50	2	12950.00	55.84	88.20	-32.36	49.38	6.46	Peak	100	50	3	19425.00	40.52	54.00	-13.48	39.48	1.04	Average	100	2	4	19425.00	52.60	74.00	-21.40	51.56	1.04	Peak	100	2	5	25900.00	42.08	68.20	-26.12	34.66	7.42	Average	100	80	6	25900.00	54.72	88.20	-33.48	47.30	7.42	Peak	100	80
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12950.00	42.67	68.20	-25.53	36.21	6.46	Average	100	50																																																																
2	12950.00	55.84	88.20	-32.36	49.38	6.46	Peak	100	50																																																																
3	19425.00	40.52	54.00	-13.48	39.48	1.04	Average	100	2																																																																
4	19425.00	52.60	74.00	-21.40	51.56	1.04	Peak	100	2																																																																
5	25900.00	42.08	68.20	-26.12	34.66	7.42	Average	100	80																																																																
6	25900.00	54.72	88.20	-33.48	47.30	7.42	Peak	100	80																																																																



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13030.00</td><td>42.78</td><td>68.20</td><td>-25.42</td><td>36.45</td><td>6.33</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>2</td><td>13030.00</td><td>56.01</td><td>88.20</td><td>-32.19</td><td>49.68</td><td>6.33</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>3</td><td>19545.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>39.22</td><td>1.13</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>19545.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>52.42</td><td>1.13</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>26060.00</td><td>42.64</td><td>68.20</td><td>-25.56</td><td>35.15</td><td>7.49</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>26060.00</td><td>55.05</td><td>88.20</td><td>-33.15</td><td>47.56</td><td>7.49</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.78	68.20	-25.42	36.45	6.33	Average	100	56	2	13030.00	56.01	88.20	-32.19	49.68	6.33	Peak	100	56	3	19545.00	40.35	54.00	-13.65	39.22	1.13	Average	100	80	4	19545.00	53.55	74.00	-20.45	52.42	1.13	Peak	100	80	5	26060.00	42.64	68.20	-25.56	35.15	7.49	Average	100	60	6	26060.00	55.05	88.20	-33.15	47.56	7.49	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.78	68.20	-25.42	36.45	6.33	Average	100	56																																																																
2	13030.00	56.01	88.20	-32.19	49.68	6.33	Peak	100	56																																																																
3	19545.00	40.35	54.00	-13.65	39.22	1.13	Average	100	80																																																																
4	19545.00	53.55	74.00	-20.45	52.42	1.13	Peak	100	80																																																																
5	26060.00	42.64	68.20	-25.56	35.15	7.49	Average	100	60																																																																
6	26060.00	55.05	88.20	-33.15	47.56	7.49	Peak	100	60																																																																




Modulation	11a	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13070.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>36.51</td><td>6.12</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>13070.00</td><td>56.41</td><td>88.20</td><td>-31.79</td><td>50.29</td><td>6.12</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>19605.00</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>38.55</td><td>1.15</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>19605.00</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>52.48</td><td>1.15</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>26140.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>35.26</td><td>7.55</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>26140.00</td><td>55.22</td><td>88.20</td><td>-32.98</td><td>47.67</td><td>7.55</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13070.00	42.63	68.20	-25.57	36.51	6.12	Average	100	30	2	13070.00	56.41	88.20	-31.79	50.29	6.12	Peak	100	30	3	19605.00	39.70	54.00	-14.30	38.55	1.15	Average	100	40	4	19605.00	53.63	74.00	-20.37	52.48	1.15	Peak	100	40	5	26140.00	42.81	68.20	-25.39	35.26	7.55	Average	100	20	6	26140.00	55.22	88.20	-32.98	47.67	7.55	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13070.00	42.63	68.20	-25.57	36.51	6.12	Average	100	30																																																																
2	13070.00	56.41	88.20	-31.79	50.29	6.12	Peak	100	30																																																																
3	19605.00	39.70	54.00	-14.30	38.55	1.15	Average	100	40																																																																
4	19605.00	53.63	74.00	-20.37	52.48	1.15	Peak	100	40																																																																
5	26140.00	42.81	68.20	-25.39	35.26	7.55	Average	100	20																																																																
6	26140.00	55.22	88.20	-32.98	47.67	7.55	Peak	100	20																																																																



Modulation	11a	Test Freq. (MHz)	6535																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13070.00</td><td>42.60</td><td>68.20</td><td>-25.60</td><td>36.48</td><td>6.12</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>2</td><td>13070.00</td><td>56.71</td><td>88.20</td><td>-31.49</td><td>50.59</td><td>6.12</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>3</td><td>19605.00</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>38.66</td><td>1.15</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>19605.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>52.40</td><td>1.15</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>26140.00</td><td>42.93</td><td>68.20</td><td>-25.27</td><td>35.38</td><td>7.55</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>26140.00</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>47.69</td><td>7.55</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13070.00	42.60	68.20	-25.60	36.48	6.12	Average	100	100	2	13070.00	56.71	88.20	-31.49	50.59	6.12	Peak	100	100	3	19605.00	39.81	54.00	-14.19	38.66	1.15	Average	100	50	4	19605.00	53.55	74.00	-20.45	52.40	1.15	Peak	100	50	5	26140.00	42.93	68.20	-25.27	35.38	7.55	Average	100	80	6	26140.00	55.24	88.20	-32.96	47.69	7.55	Peak	100	80
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13070.00	42.60	68.20	-25.60	36.48	6.12	Average	100	100																																																																
2	13070.00	56.71	88.20	-31.49	50.59	6.12	Peak	100	100																																																																
3	19605.00	39.81	54.00	-14.19	38.66	1.15	Average	100	50																																																																
4	19605.00	53.55	74.00	-20.45	52.40	1.15	Peak	100	50																																																																
5	26140.00	42.93	68.20	-25.27	35.38	7.55	Average	100	80																																																																
6	26140.00	55.24	88.20	-32.96	47.69	7.55	Peak	100	80																																																																

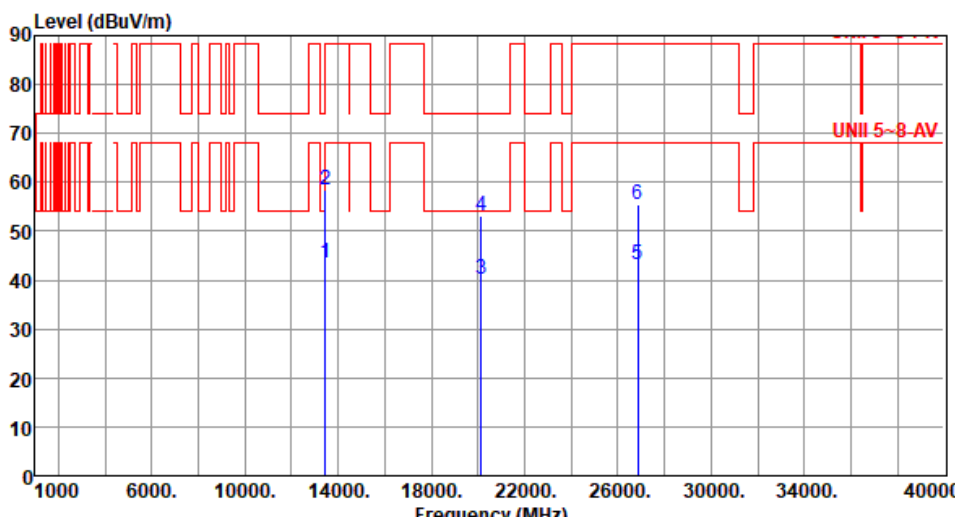

Modulation	11a	Test Freq. (MHz)	6715						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.63	68.20	-24.57	37.42	6.21	Average	100	20
2	13430.00	58.47	88.20	-29.73	52.26	6.21	Peak	100	20
3	20145.00	40.03	54.00	-13.97	38.53	1.50	Average	100	70
4	20145.00	53.15	74.00	-20.85	51.65	1.50	Peak	100	70
5	26860.00	43.06	68.20	-25.14	34.98	8.08	Average	100	30
6	26860.00	55.53	88.20	-32.67	47.45	8.08	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13430.00</td><td>43.76</td><td>68.20</td><td>-24.44</td><td>37.55</td><td>6.21</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>13430.00</td><td>58.50</td><td>88.20</td><td>-29.70</td><td>52.29</td><td>6.21</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>20145.00</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>38.54</td><td>1.50</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>20145.00</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>51.46</td><td>1.50</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>26860.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>34.55</td><td>8.08</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>6</td><td>26860.00</td><td>55.54</td><td>88.20</td><td>-32.66</td><td>47.46</td><td>8.08</td><td>Peak</td><td>100</td><td>150</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	43.76	68.20	-24.44	37.55	6.21	Average	100	50	2	13430.00	58.50	88.20	-29.70	52.29	6.21	Peak	100	50	3	20145.00	40.04	54.00	-13.96	38.54	1.50	Average	100	80	4	20145.00	52.96	74.00	-21.04	51.46	1.50	Peak	100	80	5	26860.00	42.63	68.20	-25.57	34.55	8.08	Average	100	150	6	26860.00	55.54	88.20	-32.66	47.46	8.08	Peak	100	150
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	43.76	68.20	-24.44	37.55	6.21	Average	100	50																																																																
2	13430.00	58.50	88.20	-29.70	52.29	6.21	Peak	100	50																																																																
3	20145.00	40.04	54.00	-13.96	38.54	1.50	Average	100	80																																																																
4	20145.00	52.96	74.00	-21.04	51.46	1.50	Peak	100	80																																																																
5	26860.00	42.63	68.20	-25.57	34.55	8.08	Average	100	150																																																																
6	26860.00	55.54	88.20	-32.66	47.46	8.08	Peak	100	150																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6855																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13710.00</td><td>43.90</td><td>68.20</td><td>-24.30</td><td>37.65</td><td>6.25</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>13710.00</td><td>57.84</td><td>88.20</td><td>-30.36</td><td>51.59</td><td>6.25</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>20565.00</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>38.28</td><td>2.06</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>20565.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>50.67</td><td>2.06</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>27420.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>35.12</td><td>7.94</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>27420.00</td><td>57.06</td><td>88.20</td><td>-31.14</td><td>49.12</td><td>7.94</td><td>Peak</td><td>100</td><td>30</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13710.00	43.90	68.20	-24.30	37.65	6.25	Average	100	20	2	13710.00	57.84	88.20	-30.36	51.59	6.25	Peak	100	20	3	20565.00	40.34	54.00	-13.66	38.28	2.06	Average	100	40	4	20565.00	52.73	74.00	-21.27	50.67	2.06	Peak	100	40	5	27420.00	43.06	68.20	-25.14	35.12	7.94	Average	100	30	6	27420.00	57.06	88.20	-31.14	49.12	7.94	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13710.00	43.90	68.20	-24.30	37.65	6.25	Average	100	20																																																																																				
2	13710.00	57.84	88.20	-30.36	51.59	6.25	Peak	100	20																																																																																				
3	20565.00	40.34	54.00	-13.66	38.28	2.06	Average	100	40																																																																																				
4	20565.00	52.73	74.00	-21.27	50.67	2.06	Peak	100	40																																																																																				
5	27420.00	43.06	68.20	-25.14	35.12	7.94	Average	100	30																																																																																				
6	27420.00	57.06	88.20	-31.14	49.12	7.94	Peak	100	30																																																																																				

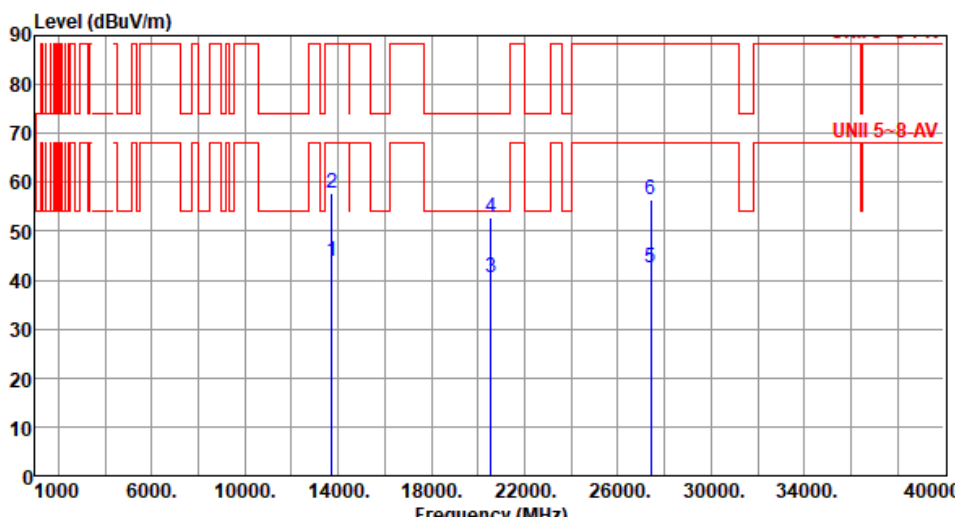


Modulation	11a	Test Freq. (MHz)	6855																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13710.00</td><td>43.83</td><td>68.20</td><td>-24.37</td><td>37.58</td><td>6.25</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>2</td><td>13710.00</td><td>57.84</td><td>88.20</td><td>-30.36</td><td>51.59</td><td>6.25</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>3</td><td>20565.00</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>38.48</td><td>2.06</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>20565.00</td><td>52.72</td><td>74.00</td><td>-21.28</td><td>50.66</td><td>2.06</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>27420.00</td><td>42.62</td><td>68.20</td><td>-25.58</td><td>34.68</td><td>7.94</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>27420.00</td><td>56.61</td><td>88.20</td><td>-31.59</td><td>48.67</td><td>7.94</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13710.00	43.83	68.20	-24.37	37.58	6.25	Average	100	90	2	13710.00	57.84	88.20	-30.36	51.59	6.25	Peak	100	90	3	20565.00	40.54	54.00	-13.46	38.48	2.06	Average	100	30	4	20565.00	52.72	74.00	-21.28	50.66	2.06	Peak	100	30	5	27420.00	42.62	68.20	-25.58	34.68	7.94	Average	100	50	6	27420.00	56.61	88.20	-31.59	48.67	7.94	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13710.00	43.83	68.20	-24.37	37.58	6.25	Average	100	90																																																																
2	13710.00	57.84	88.20	-30.36	51.59	6.25	Peak	100	90																																																																
3	20565.00	40.54	54.00	-13.46	38.48	2.06	Average	100	30																																																																
4	20565.00	52.72	74.00	-21.28	50.66	2.06	Peak	100	30																																																																
5	27420.00	42.62	68.20	-25.58	34.68	7.94	Average	100	50																																																																
6	27420.00	56.61	88.20	-31.59	48.67	7.94	Peak	100	50																																																																

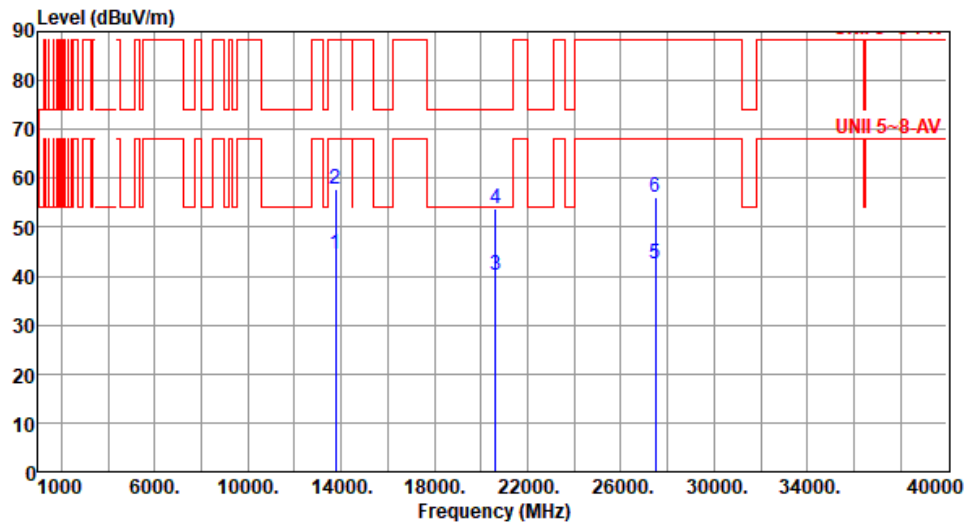

Modulation	11a	Test Freq. (MHz)	6875						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.47	68.20	-23.73	38.21	6.26	Average	100	100
2	13750.00	57.81	88.20	-30.39	51.55	6.26	Peak	100	100
3	20625.00	40.32	54.00	-13.68	38.18	2.14	Average	100	60
4	20625.00	53.73	74.00	-20.27	51.59	2.14	Peak	100	60
5	27500.00	42.60	68.20	-25.60	34.67	7.93	Average	100	200
6	27500.00	56.04	88.20	-32.16	48.11	7.93	Peak	100	200
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

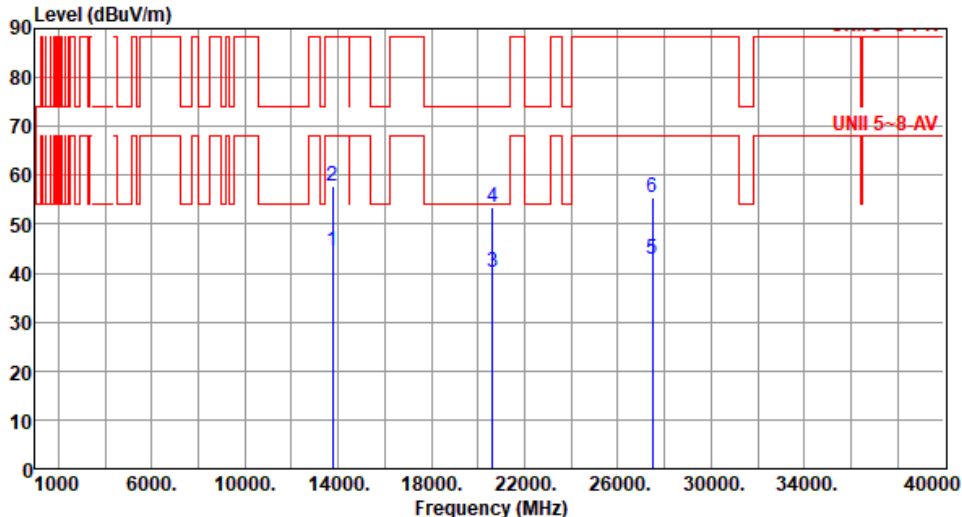


Modulation	11a	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.37	68.20	-23.83	38.11	6.26	Average	100	20
2	13750.00	57.71	88.20	-30.49	51.45	6.26	Peak	100	20
3	20625.00	40.16	54.00	-13.84	38.02	2.14	Average	100	60
4	20625.00	53.36	74.00	-20.64	51.22	2.14	Peak	100	60
5	27500.00	42.72	68.20	-25.48	34.79	7.93	Average	100	30
6	27500.00	55.49	88.20	-32.71	47.56	7.93	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	11a	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) UNI 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13790.00</td><td>44.61</td><td>68.20</td><td>-23.59</td><td>38.34</td><td>6.27</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>13790.00</td><td>58.16</td><td>88.20</td><td>-30.04</td><td>51.89</td><td>6.27</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>20685.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>38.29</td><td>2.22</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>20685.00</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>50.45</td><td>2.22</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>27580.00</td><td>42.58</td><td>68.20</td><td>-25.62</td><td>34.55</td><td>8.03</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>27580.00</td><td>56.57</td><td>88.20</td><td>-31.63</td><td>48.54</td><td>8.03</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13790.00	44.61	68.20	-23.59	38.34	6.27	Average	100	60	2	13790.00	58.16	88.20	-30.04	51.89	6.27	Peak	100	60	3	20685.00	40.51	54.00	-13.49	38.29	2.22	Average	100	20	4	20685.00	52.67	74.00	-21.33	50.45	2.22	Peak	100	20	5	27580.00	42.58	68.20	-25.62	34.55	8.03	Average	100	55	6	27580.00	56.57	88.20	-31.63	48.54	8.03	Peak	100	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13790.00	44.61	68.20	-23.59	38.34	6.27	Average	100	60																																																																
2	13790.00	58.16	88.20	-30.04	51.89	6.27	Peak	100	60																																																																
3	20685.00	40.51	54.00	-13.49	38.29	2.22	Average	100	20																																																																
4	20685.00	52.67	74.00	-21.33	50.45	2.22	Peak	100	20																																																																
5	27580.00	42.58	68.20	-25.62	34.55	8.03	Average	100	55																																																																
6	27580.00	56.57	88.20	-31.63	48.54	8.03	Peak	100	55																																																																

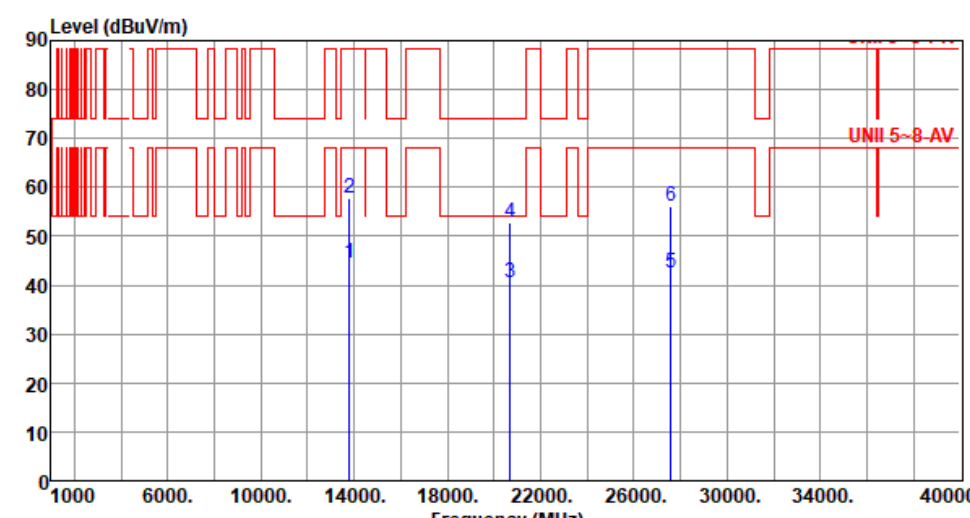

Modulation	11a	Test Freq. (MHz)	6895																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13790.00</td><td>44.42</td><td>68.20</td><td>-23.78</td><td>38.15</td><td>6.27</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>13790.00</td><td>57.94</td><td>88.20</td><td>-30.26</td><td>51.67</td><td>6.27</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>20685.00</td><td>40.56</td><td>54.00</td><td>-13.44</td><td>38.34</td><td>2.22</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>20685.00</td><td>52.81</td><td>74.00</td><td>-21.19</td><td>50.59</td><td>2.22</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>27580.00</td><td>42.48</td><td>68.20</td><td>-25.72</td><td>34.45</td><td>8.03</td><td>Average</td><td>100</td><td>140</td></tr><tr><td>6</td><td>27580.00</td><td>56.21</td><td>88.20</td><td>-31.99</td><td>48.18</td><td>8.03</td><td>Peak</td><td>100</td><td>140</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13790.00	44.42	68.20	-23.78	38.15	6.27	Average	100	60	2	13790.00	57.94	88.20	-30.26	51.67	6.27	Peak	100	60	3	20685.00	40.56	54.00	-13.44	38.34	2.22	Average	100	66	4	20685.00	52.81	74.00	-21.19	50.59	2.22	Peak	100	66	5	27580.00	42.48	68.20	-25.72	34.45	8.03	Average	100	140	6	27580.00	56.21	88.20	-31.99	48.18	8.03	Peak	100	140
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13790.00	44.42	68.20	-23.78	38.15	6.27	Average	100	60																																																																
2	13790.00	57.94	88.20	-30.26	51.67	6.27	Peak	100	60																																																																
3	20685.00	40.56	54.00	-13.44	38.34	2.22	Average	100	66																																																																
4	20685.00	52.81	74.00	-21.19	50.59	2.22	Peak	100	66																																																																
5	27580.00	42.48	68.20	-25.72	34.45	8.03	Average	100	140																																																																
6	27580.00	56.21	88.20	-31.99	48.18	8.03	Peak	100	140																																																																




Modulation	11a	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14030.00</td><td>45.39</td><td>68.20</td><td>-22.81</td><td>38.59</td><td>6.80</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>2</td><td>14030.00</td><td>57.95</td><td>88.20</td><td>-30.25</td><td>51.15</td><td>6.80</td><td>Peak</td><td>100</td><td>160</td></tr><tr><td>3</td><td>21045.00</td><td>40.61</td><td>54.00</td><td>-13.39</td><td>37.59</td><td>3.02</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>21045.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>50.50</td><td>3.02</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>28060.00</td><td>44.15</td><td>68.20</td><td>-24.05</td><td>35.59</td><td>8.56</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>6</td><td>28060.00</td><td>58.01</td><td>88.20</td><td>-30.19</td><td>49.45</td><td>8.56</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14030.00	45.39	68.20	-22.81	38.59	6.80	Average	100	160	2	14030.00	57.95	88.20	-30.25	51.15	6.80	Peak	100	160	3	21045.00	40.61	54.00	-13.39	37.59	3.02	Average	100	30	4	21045.00	53.52	74.00	-20.48	50.50	3.02	Peak	100	30	5	28060.00	44.15	68.20	-24.05	35.59	8.56	Average	100	70	6	28060.00	58.01	88.20	-30.19	49.45	8.56	Peak	100	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14030.00	45.39	68.20	-22.81	38.59	6.80	Average	100	160																																																																
2	14030.00	57.95	88.20	-30.25	51.15	6.80	Peak	100	160																																																																
3	21045.00	40.61	54.00	-13.39	37.59	3.02	Average	100	30																																																																
4	21045.00	53.52	74.00	-20.48	50.50	3.02	Peak	100	30																																																																
5	28060.00	44.15	68.20	-24.05	35.59	8.56	Average	100	70																																																																
6	28060.00	58.01	88.20	-30.19	49.45	8.56	Peak	100	70																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	7015						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
The graph displays the emission level in dBuV/m across a frequency range from 1000 to 40000 MHz. A red line represents the UNII 5-8 AV limit, which is constant at 70 dBuV/m. Six blue vertical lines indicate measurement points: 1 at 14030 MHz, 2 at 14030 MHz, 3 at 21045 MHz, 4 at 21045 MHz, 5 at 28060 MHz, and 6 at 28060 MHz. The emission levels at these points are 45.23, 58.03, 40.18, 53.61, 44.20, and 58.34 dBuV/m respectively.									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.23	68.20	-22.97	38.43	6.80	Average	100	20
2	14030.00	58.03	88.20	-30.17	51.23	6.80	Peak	100	20
3	21045.00	40.18	54.00	-13.82	37.16	3.02	Average	100	60
4	21045.00	53.61	74.00	-20.39	50.59	3.02	Peak	100	60
5	28060.00	44.20	68.20	-24.00	35.64	8.56	Average	100	30
6	28060.00	58.34	88.20	-29.86	49.78	8.56	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

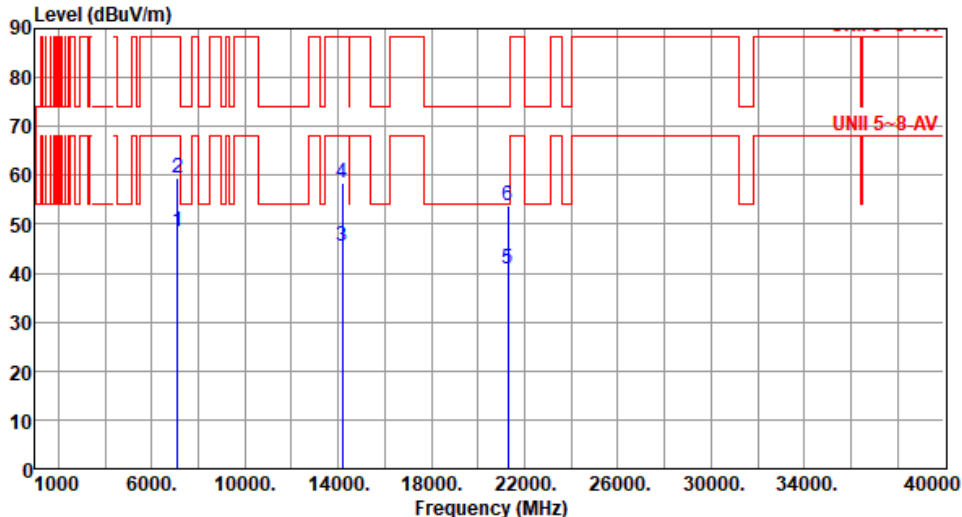

Modulation	11a	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.43</td><td>68.20</td><td>-19.77</td><td>43.65</td><td>4.78</td><td>Average</td><td>105</td><td>315</td></tr><tr><td>2</td><td>7125.00</td><td>59.57</td><td>88.20</td><td>-28.63</td><td>54.79</td><td>4.78</td><td>Peak</td><td>105</td><td>315</td></tr><tr><td>3</td><td>14190.00</td><td>45.61</td><td>68.20</td><td>-22.59</td><td>38.46</td><td>7.15</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>14190.00</td><td>58.41</td><td>88.20</td><td>-29.79</td><td>51.26</td><td>7.15</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>21285.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>37.45</td><td>3.33</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>21285.00</td><td>53.79</td><td>74.00</td><td>-20.21</td><td>50.46</td><td>3.33</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.43	68.20	-19.77	43.65	4.78	Average	105	315	2	7125.00	59.57	88.20	-28.63	54.79	4.78	Peak	105	315	3	14190.00	45.61	68.20	-22.59	38.46	7.15	Average	100	30	4	14190.00	58.41	88.20	-29.79	51.26	7.15	Peak	100	30	5	21285.00	40.78	54.00	-13.22	37.45	3.33	Average	100	60	6	21285.00	53.79	74.00	-20.21	50.46	3.33	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.43	68.20	-19.77	43.65	4.78	Average	105	315																																																																
2	7125.00	59.57	88.20	-28.63	54.79	4.78	Peak	105	315																																																																
3	14190.00	45.61	68.20	-22.59	38.46	7.15	Average	100	30																																																																
4	14190.00	58.41	88.20	-29.79	51.26	7.15	Peak	100	30																																																																
5	21285.00	40.78	54.00	-13.22	37.45	3.33	Average	100	60																																																																
6	21285.00	53.79	74.00	-20.21	50.46	3.33	Peak	100	60																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.22</td><td>68.20</td><td>-19.98</td><td>43.44</td><td>4.78</td><td>Average</td><td>107</td><td>331</td></tr><tr><td>2</td><td>7125.00</td><td>59.30</td><td>88.20</td><td>-28.90</td><td>54.52</td><td>4.78</td><td>Peak</td><td>107</td><td>331</td></tr><tr><td>3</td><td>14190.00</td><td>45.37</td><td>68.20</td><td>-22.83</td><td>38.22</td><td>7.15</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>14190.00</td><td>58.44</td><td>88.20</td><td>-29.76</td><td>51.29</td><td>7.15</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>21285.00</td><td>40.79</td><td>54.00</td><td>-13.21</td><td>37.46</td><td>3.33</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>21285.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>50.43</td><td>3.33</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.22	68.20	-19.98	43.44	4.78	Average	107	331	2	7125.00	59.30	88.20	-28.90	54.52	4.78	Peak	107	331	3	14190.00	45.37	68.20	-22.83	38.22	7.15	Average	100	60	4	14190.00	58.44	88.20	-29.76	51.29	7.15	Peak	100	60	5	21285.00	40.79	54.00	-13.21	37.46	3.33	Average	100	40	6	21285.00	53.76	74.00	-20.24	50.43	3.33	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.22	68.20	-19.98	43.44	4.78	Average	107	331																																																																
2	7125.00	59.30	88.20	-28.90	54.52	4.78	Peak	107	331																																																																
3	14190.00	45.37	68.20	-22.83	38.22	7.15	Average	100	60																																																																
4	14190.00	58.44	88.20	-29.76	51.29	7.15	Peak	100	60																																																																
5	21285.00	40.79	54.00	-13.21	37.46	3.33	Average	100	40																																																																
6	21285.00	53.76	74.00	-20.24	50.43	3.33	Peak	100	40																																																																




Modulation	11a	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	52.72	68.20	-15.48	47.94	4.78	Average	101	318
2	7125.00	70.83	88.20	-17.37	66.05	4.78	Peak	101	318
3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	60
4	14230.00	60.64	88.20	-27.56	53.46	7.18	Peak	100	60
5	21345.00	40.82	54.00	-13.18	37.42	3.40	Average	100	55
6	21345.00	53.69	74.00	-20.31	50.29	3.40	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

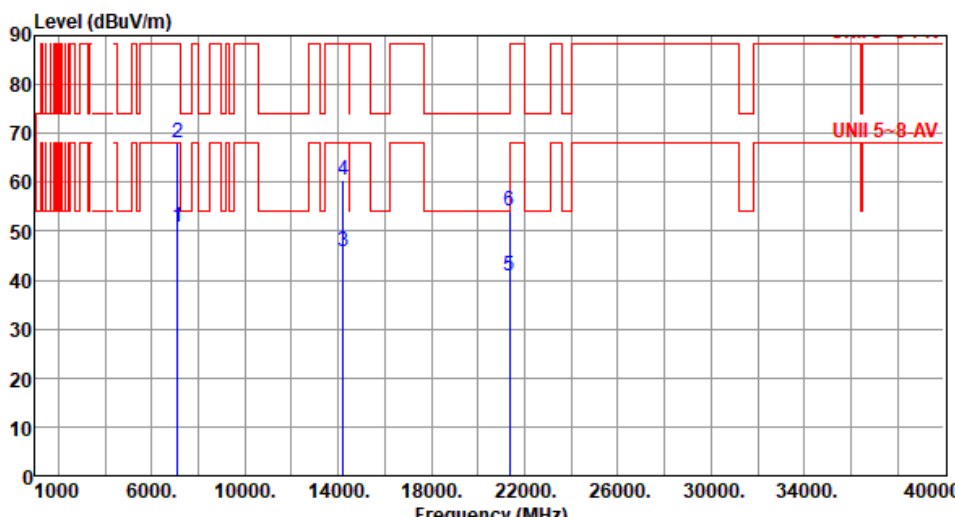

Modulation	11a	Test Freq. (MHz)	7115						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.66	68.20	-17.54	45.88	4.78	Average	105	336
2	7125.00	68.19	88.20	-20.01	63.41	4.78	Peak	105	336
3	14230.00	45.74	68.20	-22.46	38.56	7.18	Average	100	20
4	14230.00	60.35	88.20	-27.85	53.17	7.18	Peak	100	20
5	21345.00	40.86	54.00	-13.14	37.46	3.40	Average	100	65
6	21345.00	53.99	74.00	-20.01	50.59	3.40	Peak	100	65
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									


Unwanted Emissions (Above 1GHz) for be EHT20-OFDMA

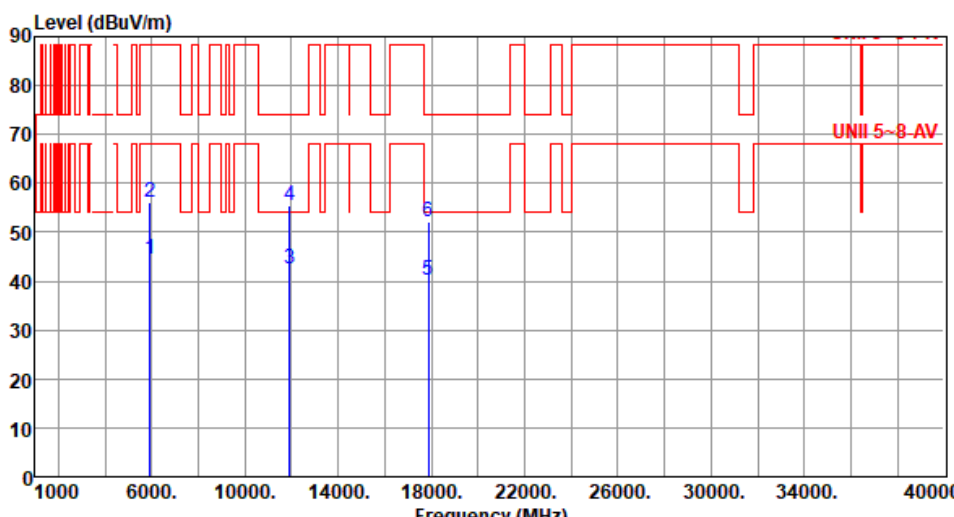Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>44.34</td><td>68.20</td><td>-23.86</td><td>43.15</td><td>1.19</td><td>Average</td><td>134</td><td>274</td></tr><tr><td>2</td><td>5925.00</td><td>56.28</td><td>88.20</td><td>-31.92</td><td>55.09</td><td>1.19</td><td>Peak</td><td>134</td><td>274</td></tr><tr><td>3</td><td>11910.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>36.25</td><td>6.11</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>11910.00</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>49.43</td><td>6.11</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>17865.00</td><td>40.03</td><td>54.00</td><td>-13.97</td><td>30.42</td><td>9.61</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>17865.00</td><td>52.26</td><td>74.00</td><td>-21.74</td><td>42.65</td><td>9.61</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.34	68.20	-23.86	43.15	1.19	Average	134	274	2	5925.00	56.28	88.20	-31.92	55.09	1.19	Peak	134	274	3	11910.00	42.36	54.00	-11.64	36.25	6.11	Average	100	40	4	11910.00	55.54	74.00	-18.46	49.43	6.11	Peak	100	40	5	17865.00	40.03	54.00	-13.97	30.42	9.61	Average	100	30	6	17865.00	52.26	74.00	-21.74	42.65	9.61	Peak	100	30
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.34	68.20	-23.86	43.15	1.19	Average	134	274																																																																
2	5925.00	56.28	88.20	-31.92	55.09	1.19	Peak	134	274																																																																
3	11910.00	42.36	54.00	-11.64	36.25	6.11	Average	100	40																																																																
4	11910.00	55.54	74.00	-18.46	49.43	6.11	Peak	100	40																																																																
5	17865.00	40.03	54.00	-13.97	30.42	9.61	Average	100	30																																																																
6	17865.00	52.26	74.00	-21.74	42.65	9.61	Peak	100	30																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>42.65</td><td>1.19</td><td>Average</td><td>125</td><td>216</td></tr><tr><td>2</td><td>5925.00</td><td>55.74</td><td>88.20</td><td>-32.46</td><td>54.55</td><td>1.19</td><td>Peak</td><td>125</td><td>216</td></tr><tr><td>3</td><td>11910.00</td><td>42.45</td><td>54.00</td><td>-11.55</td><td>36.34</td><td>6.11</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>11910.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>49.42</td><td>6.11</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>17865.00</td><td>39.91</td><td>54.00</td><td>-14.09</td><td>30.30</td><td>9.61</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>17865.00</td><td>52.29</td><td>74.00</td><td>-21.71</td><td>42.68</td><td>9.61</td><td>Peak</td><td>100</td><td>90</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.84	68.20	-24.36	42.65	1.19	Average	125	216	2	5925.00	55.74	88.20	-32.46	54.55	1.19	Peak	125	216	3	11910.00	42.45	54.00	-11.55	36.34	6.11	Average	100	80	4	11910.00	55.53	74.00	-18.47	49.42	6.11	Peak	100	80	5	17865.00	39.91	54.00	-14.09	30.30	9.61	Average	100	90	6	17865.00	52.29	74.00	-21.71	42.68	9.61	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.84	68.20	-24.36	42.65	1.19	Average	125	216																																																																
2	5925.00	55.74	88.20	-32.46	54.55	1.19	Peak	125	216																																																																
3	11910.00	42.45	54.00	-11.55	36.34	6.11	Average	100	80																																																																
4	11910.00	55.53	74.00	-18.47	49.42	6.11	Peak	100	80																																																																
5	17865.00	39.91	54.00	-14.09	30.30	9.61	Average	100	90																																																																
6	17865.00	52.29	74.00	-21.71	42.68	9.61	Peak	100	90																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

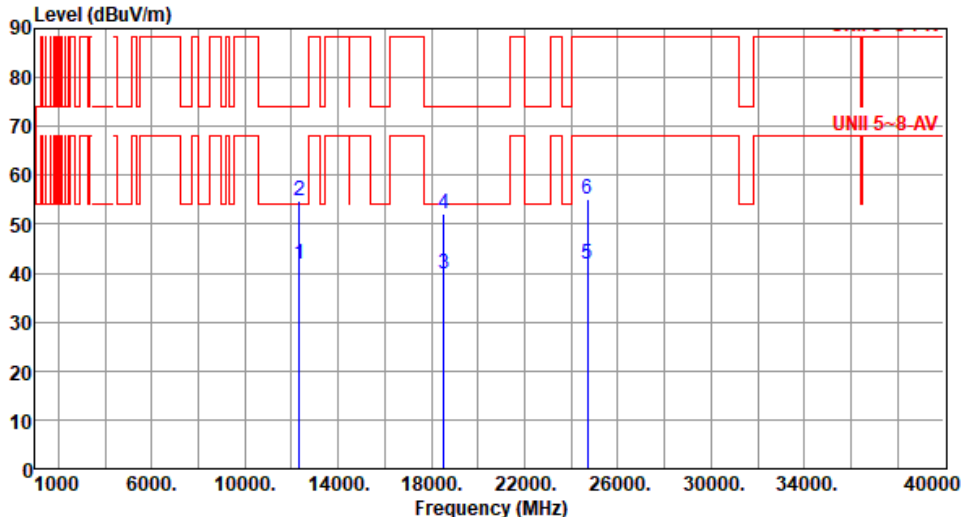


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>35.66</td><td>6.18</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>12350.00</td><td>54.74</td><td>74.00</td><td>-19.26</td><td>48.56</td><td>6.18</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>18525.00</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>39.41</td><td>0.60</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>18525.00</td><td>52.15</td><td>74.00</td><td>-21.85</td><td>51.55</td><td>0.60</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>24700.00</td><td>41.86</td><td>68.20</td><td>-26.34</td><td>34.29</td><td>7.57</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>24700.00</td><td>55.13</td><td>88.20</td><td>-33.07</td><td>47.56</td><td>7.57</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	41.84	54.00	-12.16	35.66	6.18	Average	100	20	2	12350.00	54.74	74.00	-19.26	48.56	6.18	Peak	100	20	3	18525.00	40.01	54.00	-13.99	39.41	0.60	Average	100	60	4	18525.00	52.15	74.00	-21.85	51.55	0.60	Peak	100	60	5	24700.00	41.86	68.20	-26.34	34.29	7.57	Average	100	90	6	24700.00	55.13	88.20	-33.07	47.56	7.57	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	41.84	54.00	-12.16	35.66	6.18	Average	100	20																																																																
2	12350.00	54.74	74.00	-19.26	48.56	6.18	Peak	100	20																																																																
3	18525.00	40.01	54.00	-13.99	39.41	0.60	Average	100	60																																																																
4	18525.00	52.15	74.00	-21.85	51.55	0.60	Peak	100	60																																																																
5	24700.00	41.86	68.20	-26.34	34.29	7.57	Average	100	90																																																																
6	24700.00	55.13	88.20	-33.07	47.56	7.57	Peak	100	90																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

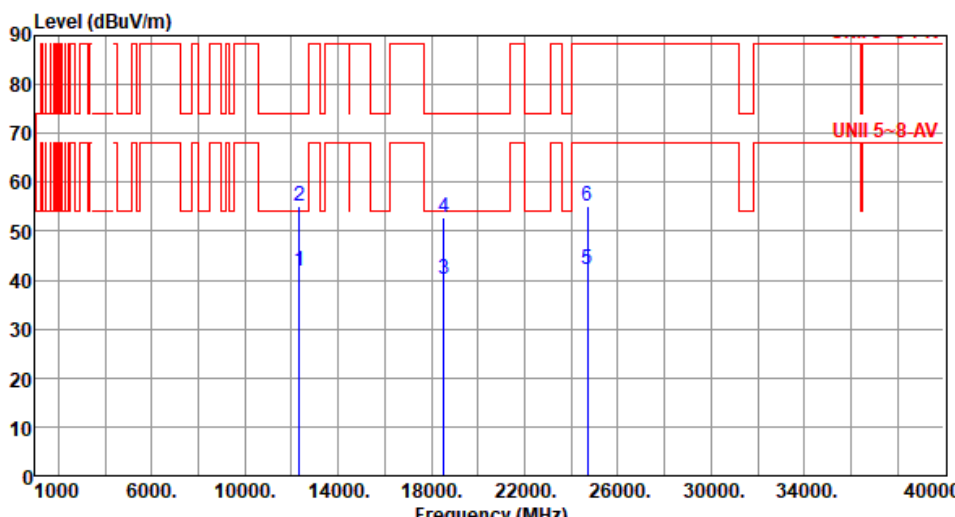


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>35.79</td><td>6.18</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>2</td><td>12350.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>48.95</td><td>6.18</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>3</td><td>18525.00</td><td>40.07</td><td>54.00</td><td>-13.93</td><td>39.47</td><td>0.60</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>4</td><td>18525.00</td><td>52.75</td><td>74.00</td><td>-21.25</td><td>52.15</td><td>0.60</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>5</td><td>24700.00</td><td>42.17</td><td>68.20</td><td>-26.03</td><td>34.60</td><td>7.57</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>24700.00</td><td>55.01</td><td>88.20</td><td>-33.19</td><td>47.44</td><td>7.57</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	41.97	54.00	-12.03	35.79	6.18	Average	100	90	2	12350.00	55.13	74.00	-18.87	48.95	6.18	Peak	100	90	3	18525.00	40.07	54.00	-13.93	39.47	0.60	Average	100	100	4	18525.00	52.75	74.00	-21.25	52.15	0.60	Peak	100	100	5	24700.00	42.17	68.20	-26.03	34.60	7.57	Average	100	80	6	24700.00	55.01	88.20	-33.19	47.44	7.57	Peak	100	80
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	41.97	54.00	-12.03	35.79	6.18	Average	100	90																																																																
2	12350.00	55.13	74.00	-18.87	48.95	6.18	Peak	100	90																																																																
3	18525.00	40.07	54.00	-13.93	39.47	0.60	Average	100	100																																																																
4	18525.00	52.75	74.00	-21.25	52.15	0.60	Peak	100	100																																																																
5	24700.00	42.17	68.20	-26.03	34.60	7.57	Average	100	80																																																																
6	24700.00	55.01	88.20	-33.19	47.44	7.57	Peak	100	80																																																																

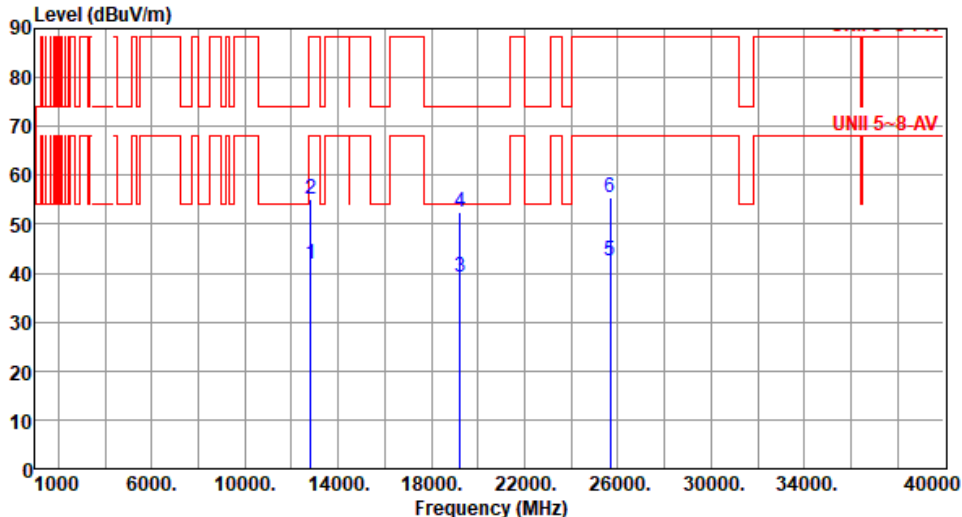

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12830.00</td><td>42.00</td><td>68.20</td><td>-26.20</td><td>35.67</td><td>6.33</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>12830.00</td><td>55.21</td><td>88.20</td><td>-32.99</td><td>48.88</td><td>6.33</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>19245.00</td><td>39.29</td><td>54.00</td><td>-14.71</td><td>38.43</td><td>0.86</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>19245.00</td><td>52.33</td><td>74.00</td><td>-21.67</td><td>51.47</td><td>0.86</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>25660.00</td><td>42.55</td><td>68.20</td><td>-25.65</td><td>35.14</td><td>7.41</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>25660.00</td><td>55.35</td><td>88.20</td><td>-32.85</td><td>47.94</td><td>7.41</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	42.00	68.20	-26.20	35.67	6.33	Average	100	60	2	12830.00	55.21	88.20	-32.99	48.88	6.33	Peak	100	60	3	19245.00	39.29	54.00	-14.71	38.43	0.86	Average	100	40	4	19245.00	52.33	74.00	-21.67	51.47	0.86	Peak	100	40	5	25660.00	42.55	68.20	-25.65	35.14	7.41	Average	100	30	6	25660.00	55.35	88.20	-32.85	47.94	7.41	Peak	100	30
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	42.00	68.20	-26.20	35.67	6.33	Average	100	60																																																																
2	12830.00	55.21	88.20	-32.99	48.88	6.33	Peak	100	60																																																																
3	19245.00	39.29	54.00	-14.71	38.43	0.86	Average	100	40																																																																
4	19245.00	52.33	74.00	-21.67	51.47	0.86	Peak	100	40																																																																
5	25660.00	42.55	68.20	-25.65	35.14	7.41	Average	100	30																																																																
6	25660.00	55.35	88.20	-32.85	47.94	7.41	Peak	100	30																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

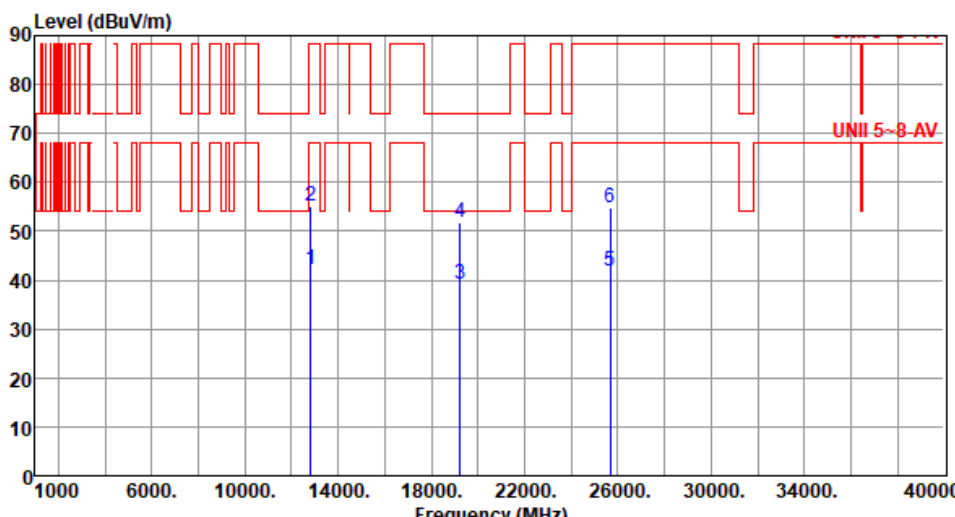


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12830.00</td><td>42.10</td><td>68.20</td><td>-26.10</td><td>35.77</td><td>6.33</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>12830.00</td><td>54.97</td><td>88.20</td><td>-33.23</td><td>48.64</td><td>6.33</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>19245.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>38.47</td><td>0.86</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>19245.00</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>51.07</td><td>0.86</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>25660.00</td><td>41.96</td><td>68.20</td><td>-26.24</td><td>34.55</td><td>7.41</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>6</td><td>25660.00</td><td>54.86</td><td>88.20</td><td>-33.34</td><td>47.45</td><td>7.41</td><td>Peak</td><td>100</td><td>15</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	42.10	68.20	-26.10	35.77	6.33	Average	100	55	2	12830.00	54.97	88.20	-33.23	48.64	6.33	Peak	100	55	3	19245.00	39.33	54.00	-14.67	38.47	0.86	Average	100	30	4	19245.00	51.93	74.00	-22.07	51.07	0.86	Peak	100	30	5	25660.00	41.96	68.20	-26.24	34.55	7.41	Average	100	15	6	25660.00	54.86	88.20	-33.34	47.45	7.41	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	42.10	68.20	-26.10	35.77	6.33	Average	100	55																																																																
2	12830.00	54.97	88.20	-33.23	48.64	6.33	Peak	100	55																																																																
3	19245.00	39.33	54.00	-14.67	38.47	0.86	Average	100	30																																																																
4	19245.00	51.93	74.00	-22.07	51.07	0.86	Peak	100	30																																																																
5	25660.00	41.96	68.20	-26.24	34.55	7.41	Average	100	15																																																																
6	25660.00	54.86	88.20	-33.34	47.45	7.41	Peak	100	15																																																																




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) UNII 5-8-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 1 12870.00 42.64 68.20 -25.56 36.25 6.39 Average 100 30 2 12870.00 54.95 88.20 -33.25 48.56 6.39 Peak 100 30 3 19305.00 39.40 54.00 -14.60 38.48 0.92 Average 100 20 4 19305.00 52.56 74.00 -21.44 51.64 0.92 Peak 100 20 5 25740.00 43.03 68.20 -25.17 35.64 7.39 Average 100 50 6 25740.00 55.37 88.20 -32.83 47.98 7.39 Peak 100 50 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

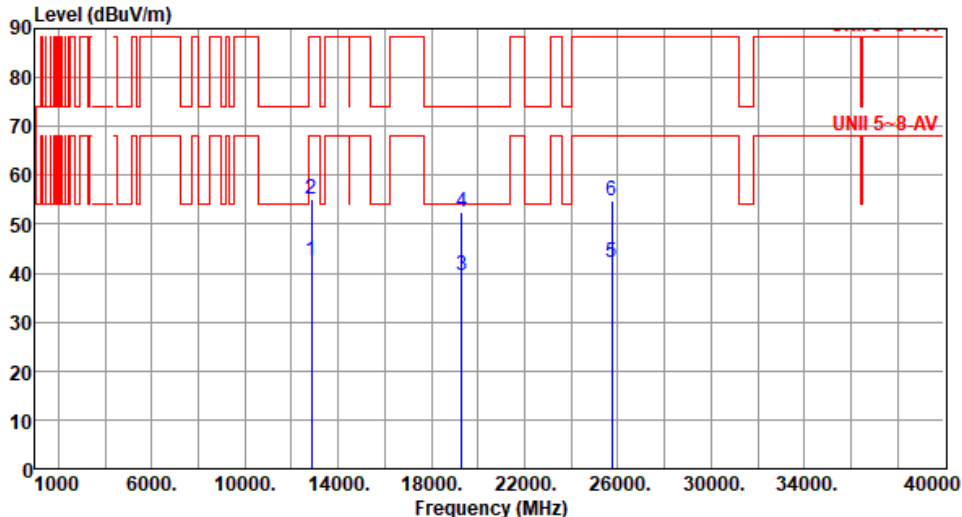


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.59</td><td>68.20</td><td>-25.61</td><td>36.20</td><td>6.39</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>12870.00</td><td>55.05</td><td>88.20</td><td>-33.15</td><td>48.66</td><td>6.39</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>19305.00</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>38.64</td><td>0.92</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>19305.00</td><td>52.38</td><td>74.00</td><td>-21.62</td><td>51.46</td><td>0.92</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>25740.00</td><td>42.08</td><td>68.20</td><td>-26.12</td><td>34.69</td><td>7.39</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>6</td><td>25740.00</td><td>54.85</td><td>88.20</td><td>-33.35</td><td>47.46</td><td>7.39</td><td>Peak</td><td>100</td><td>100</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.59	68.20	-25.61	36.20	6.39	Average	100	20	2	12870.00	55.05	88.20	-33.15	48.66	6.39	Peak	100	20	3	19305.00	39.56	54.00	-14.44	38.64	0.92	Average	100	40	4	19305.00	52.38	74.00	-21.62	51.46	0.92	Peak	100	40	5	25740.00	42.08	68.20	-26.12	34.69	7.39	Average	100	100	6	25740.00	54.85	88.20	-33.35	47.46	7.39	Peak	100	100
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.59	68.20	-25.61	36.20	6.39	Average	100	20																																																																
2	12870.00	55.05	88.20	-33.15	48.66	6.39	Peak	100	20																																																																
3	19305.00	39.56	54.00	-14.44	38.64	0.92	Average	100	40																																																																
4	19305.00	52.38	74.00	-21.62	51.46	0.92	Peak	100	40																																																																
5	25740.00	42.08	68.20	-26.12	34.69	7.39	Average	100	100																																																																
6	25740.00	54.85	88.20	-33.35	47.46	7.39	Peak	100	100																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

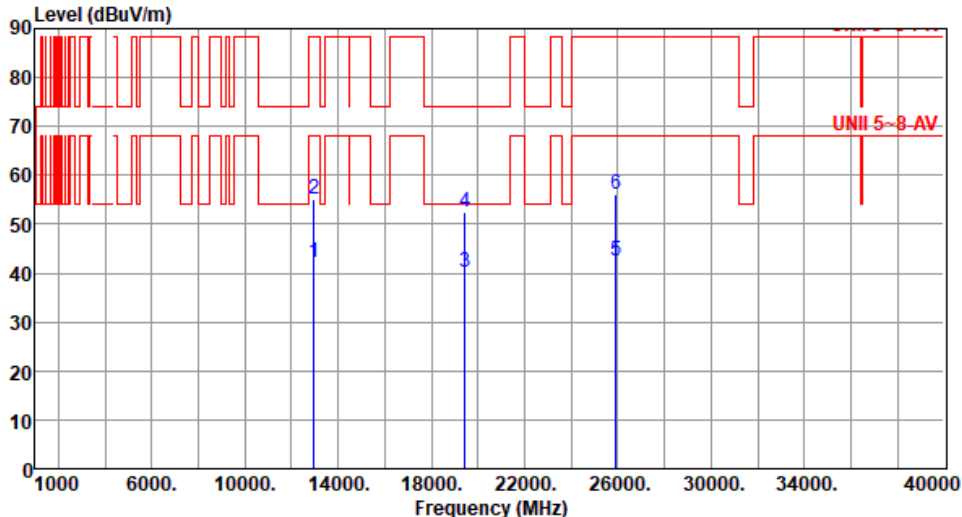


Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6475																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12950.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>35.85</td><td>6.46</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>2</td><td>12950.00</td><td>55.15</td><td>88.20</td><td>-33.05</td><td>48.69</td><td>6.46</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>3</td><td>19425.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>39.31</td><td>1.04</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>19425.00</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>51.55</td><td>1.04</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>25900.00</td><td>42.62</td><td>68.20</td><td>-25.58</td><td>35.20</td><td>7.42</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>6</td><td>25900.00</td><td>56.28</td><td>88.20</td><td>-31.92</td><td>48.86</td><td>7.42</td><td>Peak</td><td>100</td><td>70</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12950.00	42.31	68.20	-25.89	35.85	6.46	Average	100	90	2	12950.00	55.15	88.20	-33.05	48.69	6.46	Peak	100	90	3	19425.00	40.35	54.00	-13.65	39.31	1.04	Average	100	50	4	19425.00	52.59	74.00	-21.41	51.55	1.04	Peak	100	50	5	25900.00	42.62	68.20	-25.58	35.20	7.42	Average	100	70	6	25900.00	56.28	88.20	-31.92	48.86	7.42	Peak	100	70
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12950.00	42.31	68.20	-25.89	35.85	6.46	Average	100	90																																																																																										
2	12950.00	55.15	88.20	-33.05	48.69	6.46	Peak	100	90																																																																																										
3	19425.00	40.35	54.00	-13.65	39.31	1.04	Average	100	50																																																																																										
4	19425.00	52.59	74.00	-21.41	51.55	1.04	Peak	100	50																																																																																										
5	25900.00	42.62	68.20	-25.58	35.20	7.42	Average	100	70																																																																																										
6	25900.00	56.28	88.20	-31.92	48.86	7.42	Peak	100	70																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

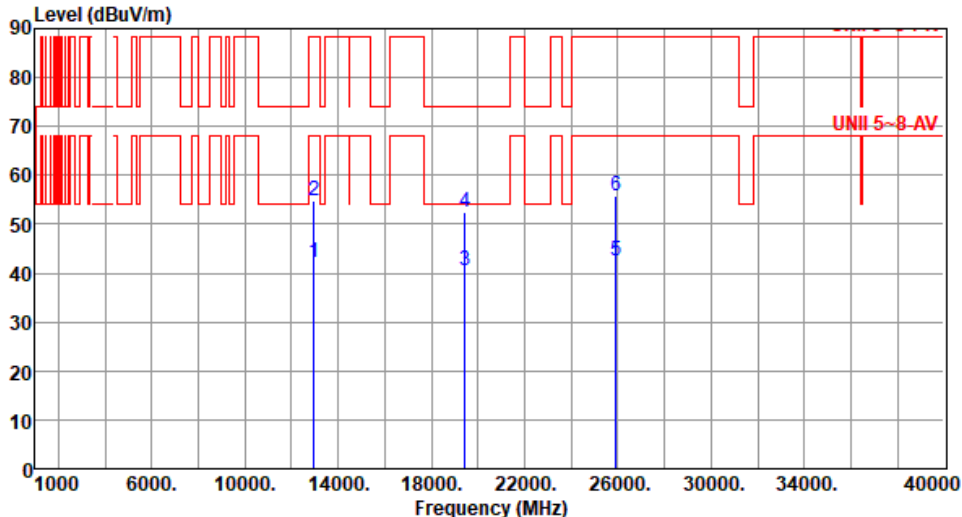


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12950.00</td><td>42.11</td><td>68.20</td><td>-26.09</td><td>35.65</td><td>6.46</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>12950.00</td><td>54.91</td><td>88.20</td><td>-33.29</td><td>48.45</td><td>6.46</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>19425.00</td><td>40.42</td><td>54.00</td><td>-13.58</td><td>39.38</td><td>1.04</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>4</td><td>19425.00</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>51.56</td><td>1.04</td><td>Peak</td><td>100</td><td>150</td></tr><tr><td>5</td><td>25900.00</td><td>42.55</td><td>68.20</td><td>-25.65</td><td>35.13</td><td>7.42</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>25900.00</td><td>55.96</td><td>88.20</td><td>-32.24</td><td>48.54</td><td>7.42</td><td>Peak</td><td>100</td><td>45</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	12950.00	42.11	68.20	-26.09	35.65	6.46	Average	100	30	2	12950.00	54.91	88.20	-33.29	48.45	6.46	Peak	100	30	3	19425.00	40.42	54.00	-13.58	39.38	1.04	Average	100	150	4	19425.00	52.60	74.00	-21.40	51.56	1.04	Peak	100	150	5	25900.00	42.55	68.20	-25.65	35.13	7.42	Average	100	45	6	25900.00	55.96	88.20	-32.24	48.54	7.42	Peak	100	45
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																				
		dBUV/m			dBUV			cm	deg																																																																																				
1	12950.00	42.11	68.20	-26.09	35.65	6.46	Average	100	30																																																																																				
2	12950.00	54.91	88.20	-33.29	48.45	6.46	Peak	100	30																																																																																				
3	19425.00	40.42	54.00	-13.58	39.38	1.04	Average	100	150																																																																																				
4	19425.00	52.60	74.00	-21.40	51.56	1.04	Peak	100	150																																																																																				
5	25900.00	42.55	68.20	-25.65	35.13	7.42	Average	100	45																																																																																				
6	25900.00	55.96	88.20	-32.24	48.54	7.42	Peak	100	45																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

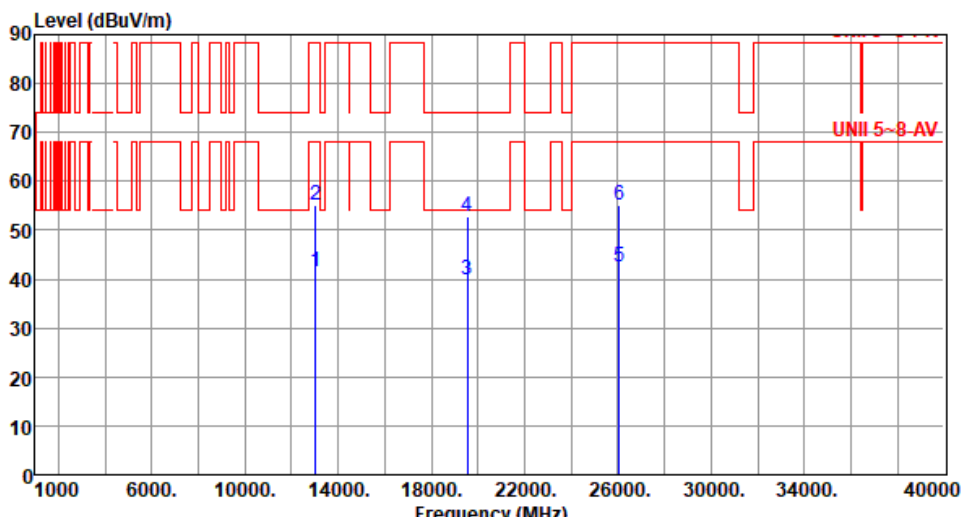

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13030.00</td><td>41.48</td><td>68.20</td><td>-26.72</td><td>35.15</td><td>6.33</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>13030.00</td><td>54.98</td><td>88.20</td><td>-33.22</td><td>48.65</td><td>6.33</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>19545.00</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>38.66</td><td>1.13</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>19545.00</td><td>52.72</td><td>74.00</td><td>-21.28</td><td>51.59</td><td>1.13</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>26060.00</td><td>42.37</td><td>68.20</td><td>-25.83</td><td>34.88</td><td>7.49</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>6</td><td>26060.00</td><td>55.05</td><td>88.20</td><td>-33.15</td><td>47.56</td><td>7.49</td><td>Peak</td><td>100</td><td>100</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	13030.00	41.48	68.20	-26.72	35.15	6.33	Average	100	20	2	13030.00	54.98	88.20	-33.22	48.65	6.33	Peak	100	20	3	19545.00	39.79	54.00	-14.21	38.66	1.13	Average	100	50	4	19545.00	52.72	74.00	-21.28	51.59	1.13	Peak	100	50	5	26060.00	42.37	68.20	-25.83	34.88	7.49	Average	100	100	6	26060.00	55.05	88.20	-33.15	47.56	7.49	Peak	100	100
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																				
		dBUV/m			dBUV			cm	deg																																																																																				
1	13030.00	41.48	68.20	-26.72	35.15	6.33	Average	100	20																																																																																				
2	13030.00	54.98	88.20	-33.22	48.65	6.33	Peak	100	20																																																																																				
3	19545.00	39.79	54.00	-14.21	38.66	1.13	Average	100	50																																																																																				
4	19545.00	52.72	74.00	-21.28	51.59	1.13	Peak	100	50																																																																																				
5	26060.00	42.37	68.20	-25.83	34.88	7.49	Average	100	100																																																																																				
6	26060.00	55.05	88.20	-33.15	47.56	7.49	Peak	100	100																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

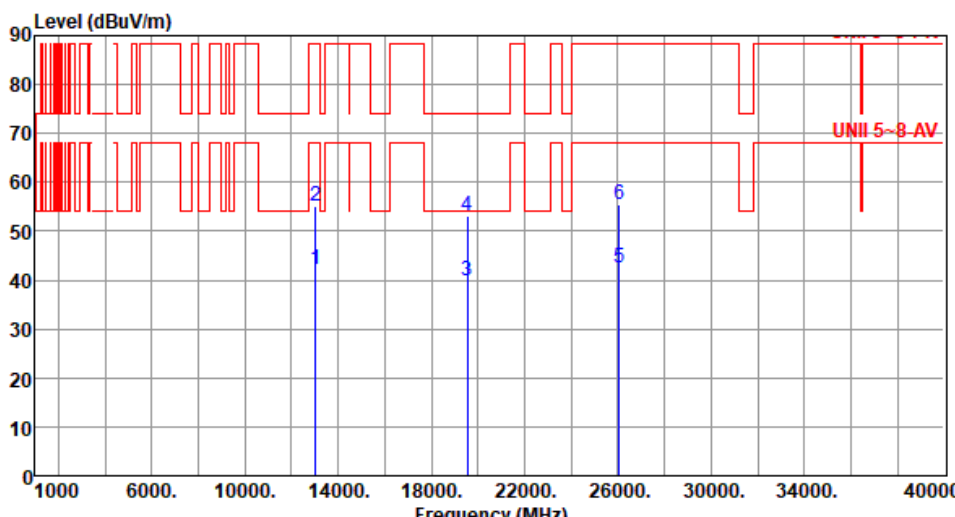


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13030.00</td><td>42.08</td><td>68.20</td><td>-26.12</td><td>35.75</td><td>6.33</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>2</td><td>13030.00</td><td>55.17</td><td>88.20</td><td>-33.03</td><td>48.84</td><td>6.33</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>3</td><td>19545.00</td><td>39.91</td><td>54.00</td><td>-14.09</td><td>38.78</td><td>1.13</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>19545.00</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>51.89</td><td>1.13</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>26060.00</td><td>42.36</td><td>68.20</td><td>-25.84</td><td>34.87</td><td>7.49</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>26060.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>47.88</td><td>7.49</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.08	68.20	-26.12	35.75	6.33	Average	100	90	2	13030.00	55.17	88.20	-33.03	48.84	6.33	Peak	100	90	3	19545.00	39.91	54.00	-14.09	38.78	1.13	Average	100	60	4	19545.00	53.02	74.00	-20.98	51.89	1.13	Peak	100	60	5	26060.00	42.36	68.20	-25.84	34.87	7.49	Average	100	20	6	26060.00	55.37	88.20	-32.83	47.88	7.49	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.08	68.20	-26.12	35.75	6.33	Average	100	90																																																																
2	13030.00	55.17	88.20	-33.03	48.84	6.33	Peak	100	90																																																																
3	19545.00	39.91	54.00	-14.09	38.78	1.13	Average	100	60																																																																
4	19545.00	53.02	74.00	-20.98	51.89	1.13	Peak	100	60																																																																
5	26060.00	42.36	68.20	-25.84	34.87	7.49	Average	100	20																																																																
6	26060.00	55.37	88.20	-32.83	47.88	7.49	Peak	100	20																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m)			

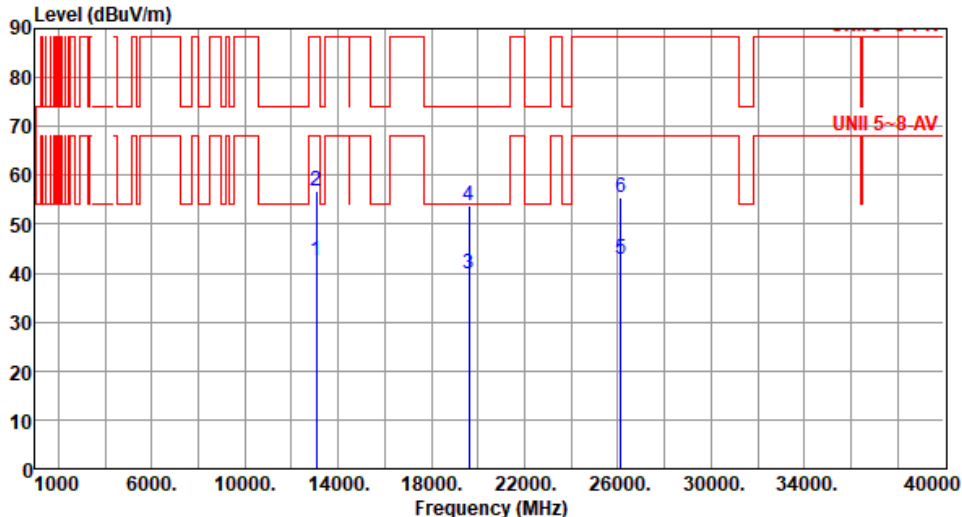


Modulation	be EHT20-OFDMA		Test Freq. (MHz)		6535																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13070.00</td><td>42.51</td><td>68.20</td><td>-25.69</td><td>36.39</td><td>6.12</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>2</td><td>13070.00</td><td>56.77</td><td>88.20</td><td>-31.43</td><td>50.65</td><td>6.12</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>3</td><td>19605.00</td><td>39.76</td><td>54.00</td><td>-14.24</td><td>38.61</td><td>1.15</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>19605.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>52.49</td><td>1.15</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5</td><td>26140.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>35.43</td><td>7.55</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>26140.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>47.82</td><td>7.55</td><td>Peak</td><td>100</td><td>85</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13070.00	42.51	68.20	-25.69	36.39	6.12	Average	100	121	2	13070.00	56.77	88.20	-31.43	50.65	6.12	Peak	100	121	3	19605.00	39.76	54.00	-14.24	38.61	1.15	Average	100	47	4	19605.00	53.64	74.00	-20.36	52.49	1.15	Peak	100	47	5	26140.00	42.98	68.20	-25.22	35.43	7.55	Average	100	85	6	26140.00	55.37	88.20	-32.83	47.82	7.55	Peak	100	85
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13070.00	42.51	68.20	-25.69	36.39	6.12	Average	100	121																																																																						
2	13070.00	56.77	88.20	-31.43	50.65	6.12	Peak	100	121																																																																						
3	19605.00	39.76	54.00	-14.24	38.61	1.15	Average	100	47																																																																						
4	19605.00	53.64	74.00	-20.36	52.49	1.15	Peak	100	47																																																																						
5	26140.00	42.98	68.20	-25.22	35.43	7.55	Average	100	85																																																																						
6	26140.00	55.37	88.20	-32.83	47.82	7.55	Peak	100	85																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

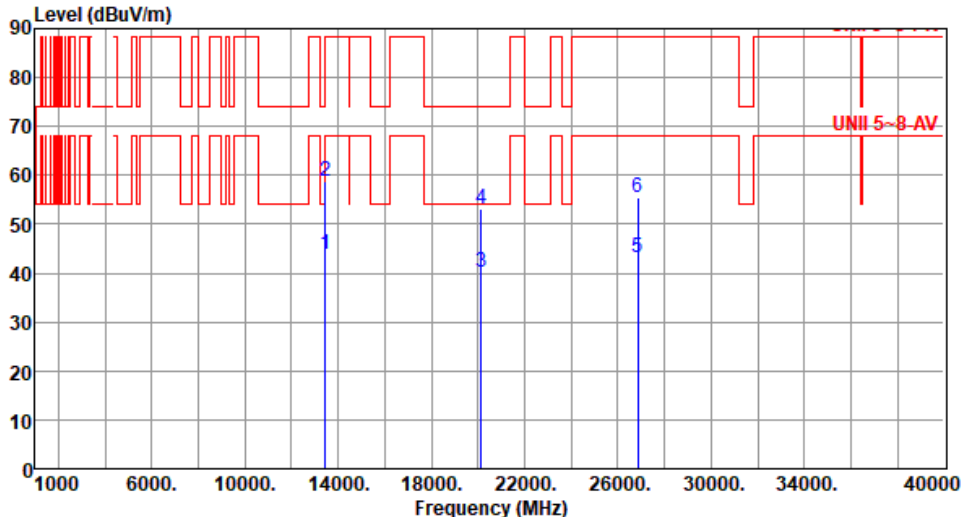


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.72	68.20	-24.48	37.51	6.21	Average	100	25
2	13430.00	58.66	88.20	-29.54	52.45	6.21	Peak	100	25
3	20145.00	40.21	54.00	-13.79	38.71	1.50	Average	100	74
4	20145.00	53.27	74.00	-20.73	51.77	1.50	Peak	100	74
5	26860.00	43.13	68.20	-25.07	35.05	8.08	Average	100	37
6	26860.00	55.62	88.20	-32.58	47.54	8.08	Peak	100	37
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

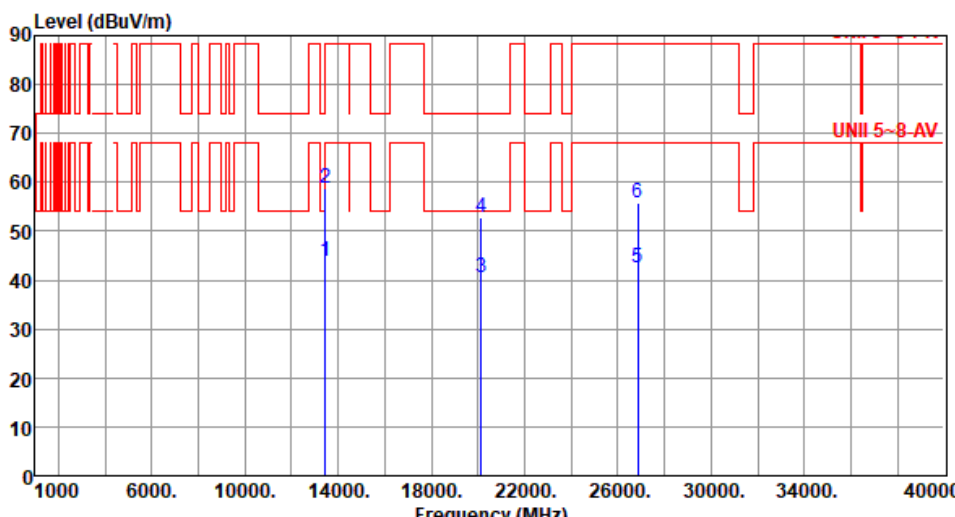


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.82	68.20	-24.38	37.61	6.21	Average	100	41
2	13430.00	58.66	88.20	-29.54	52.45	6.21	Peak	100	41
3	20145.00	40.47	54.00	-13.53	38.97	1.50	Average	100	120
4	20145.00	52.94	74.00	-21.06	51.44	1.50	Peak	100	120
5	26860.00	42.47	68.20	-25.73	34.39	8.08	Average	100	115
6	26860.00	55.68	88.20	-32.52	47.60	8.08	Peak	100	115
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

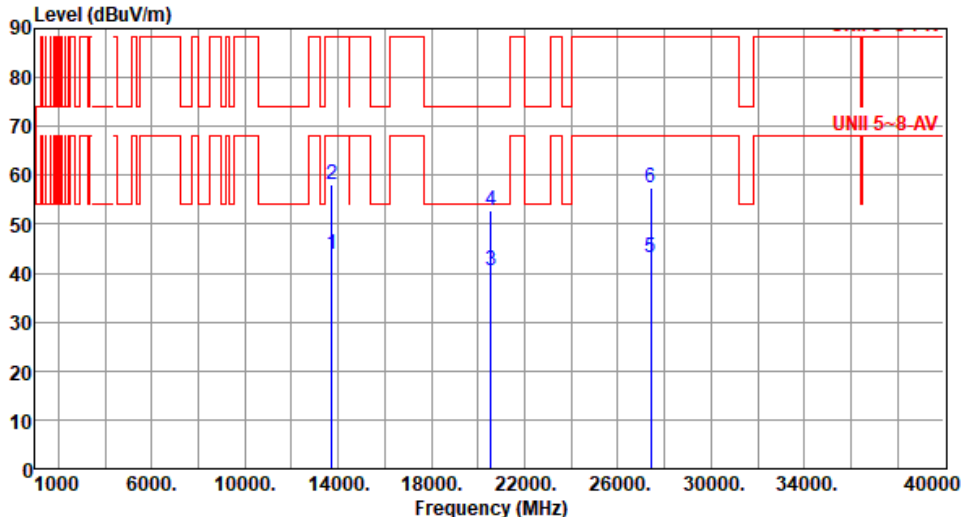


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13710.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>37.69</td><td>6.25</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>13710.00</td><td>57.98</td><td>88.20</td><td>-30.22</td><td>51.73</td><td>6.25</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>20565.00</td><td>40.38</td><td>54.00</td><td>-13.62</td><td>38.32</td><td>2.06</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>4</td><td>20565.00</td><td>52.91</td><td>74.00</td><td>-21.09</td><td>50.85</td><td>2.06</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>5</td><td>27420.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>35.33</td><td>7.94</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td>27420.00</td><td>57.38</td><td>88.20</td><td>-30.82</td><td>49.44</td><td>7.94</td><td>Peak</td><td>100</td><td>38</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13710.00	43.94	68.20	-24.26	37.69	6.25	Average	100	27	2	13710.00	57.98	88.20	-30.22	51.73	6.25	Peak	100	27	3	20565.00	40.38	54.00	-13.62	38.32	2.06	Average	100	56	4	20565.00	52.91	74.00	-21.09	50.85	2.06	Peak	100	56	5	27420.00	43.27	68.20	-24.93	35.33	7.94	Average	100	38	6	27420.00	57.38	88.20	-30.82	49.44	7.94	Peak	100	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13710.00	43.94	68.20	-24.26	37.69	6.25	Average	100	27																																																																
2	13710.00	57.98	88.20	-30.22	51.73	6.25	Peak	100	27																																																																
3	20565.00	40.38	54.00	-13.62	38.32	2.06	Average	100	56																																																																
4	20565.00	52.91	74.00	-21.09	50.85	2.06	Peak	100	56																																																																
5	27420.00	43.27	68.20	-24.93	35.33	7.94	Average	100	38																																																																
6	27420.00	57.38	88.20	-30.82	49.44	7.94	Peak	100	38																																																																

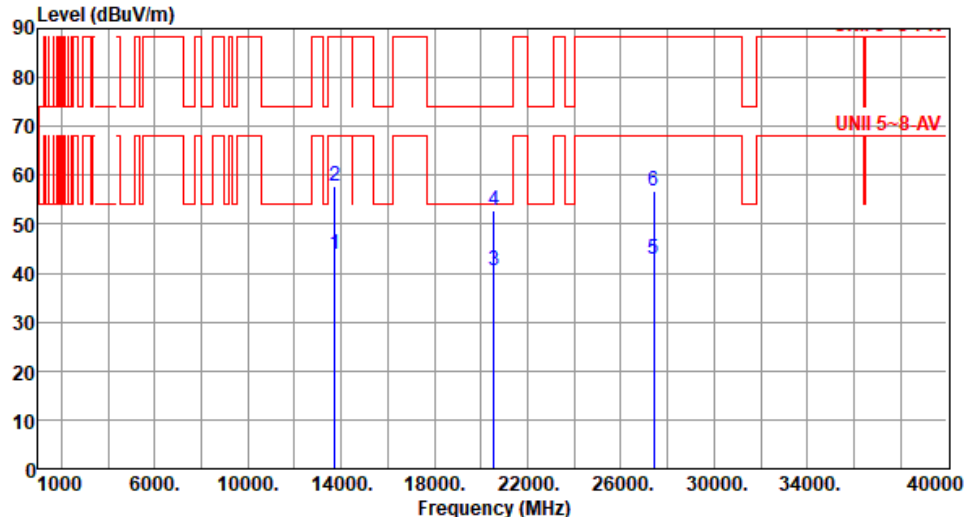

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 113710.0043.7768.20-24.4337.526.25Average10094 213710.0057.8688.20-30.3451.616.25Peak10094 320565.0040.6254.00-13.3838.562.06Average10030 420565.0052.8874.00-21.1250.822.06Peak10030 527420.0042.7968.20-25.4134.857.94Average10057 627420.0056.8388.20-31.3748.897.94Peak10057 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

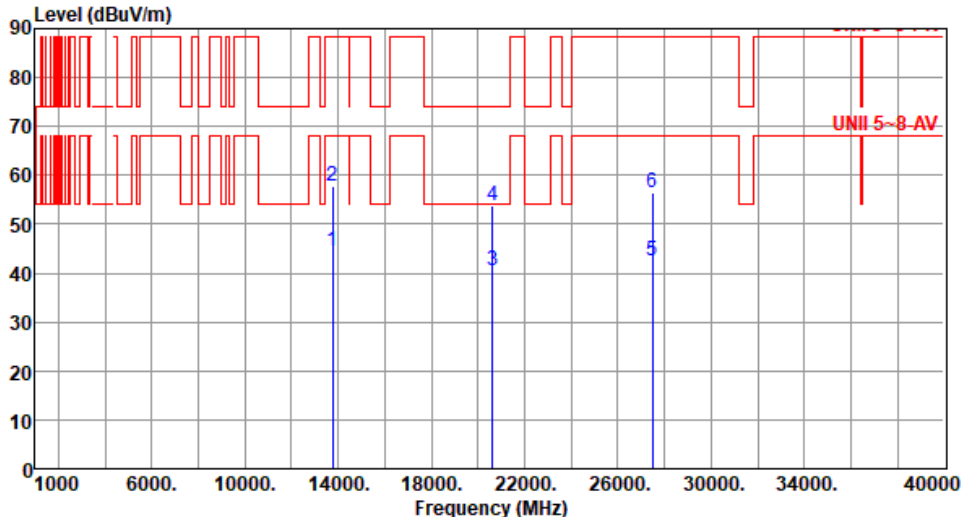


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBuV/m dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>13750.00</td><td>44.63</td><td>68.20</td><td>-23.57</td><td>38.37</td><td>6.26</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>13750.00</td><td>57.94</td><td>88.20</td><td>-30.26</td><td>51.68</td><td>6.26</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>20625.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>38.23</td><td>2.14</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>4</td><td>20625.00</td><td>53.82</td><td>74.00</td><td>-20.18</td><td>51.68</td><td>2.14</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>5</td><td>27500.00</td><td>42.57</td><td>68.20</td><td>-25.63</td><td>34.64</td><td>7.93</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>6</td><td>27500.00</td><td>56.34</td><td>88.20</td><td>-31.86</td><td>48.41</td><td>7.93</td><td>Peak</td><td>100</td><td>210</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	13750.00	44.63	68.20	-23.57	38.37	6.26	Average	100	115	2	13750.00	57.94	88.20	-30.26	51.68	6.26	Peak	100	115	3	20625.00	40.37	54.00	-13.63	38.23	2.14	Average	100	68	4	20625.00	53.82	74.00	-20.18	51.68	2.14	Peak	100	68	5	27500.00	42.57	68.20	-25.63	34.64	7.93	Average	100	210	6	27500.00	56.34	88.20	-31.86	48.41	7.93	Peak	100	210
1	13750.00	44.63	68.20	-23.57	38.37	6.26	Average	100	115																																																						
2	13750.00	57.94	88.20	-30.26	51.68	6.26	Peak	100	115																																																						
3	20625.00	40.37	54.00	-13.63	38.23	2.14	Average	100	68																																																						
4	20625.00	53.82	74.00	-20.18	51.68	2.14	Peak	100	68																																																						
5	27500.00	42.57	68.20	-25.63	34.64	7.93	Average	100	210																																																						
6	27500.00	56.34	88.20	-31.86	48.41	7.93	Peak	100	210																																																						




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) </			

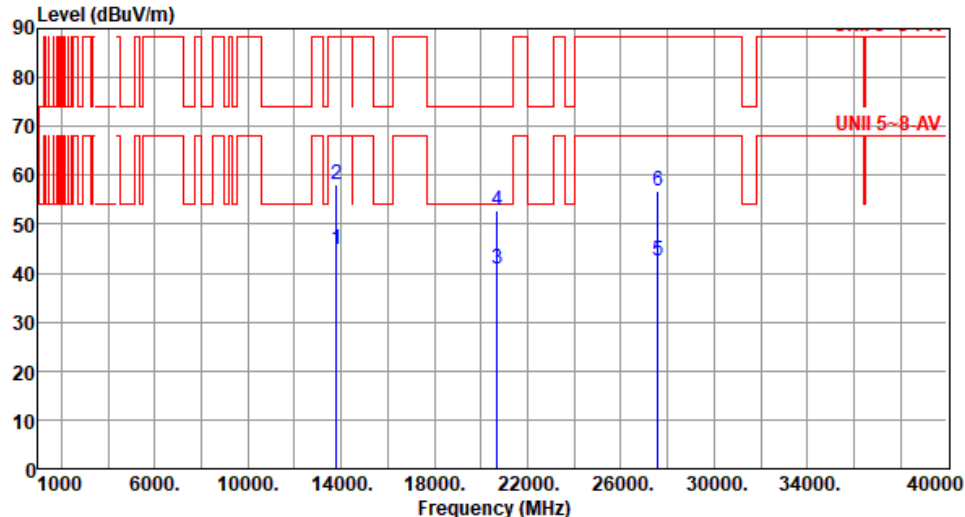

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.76	68.20	-23.44	38.49	6.27	Average	100	59
2	13790.00	58.27	88.20	-29.93	52.00	6.27	Peak	100	59
3	20685.00	40.72	54.00	-13.28	38.50	2.22	Average	100	25
4	20685.00	52.83	74.00	-21.17	50.61	2.22	Peak	100	25
5	27580.00	42.66	68.20	-25.54	34.63	8.03	Average	100	48
6	27580.00	56.73	88.20	-31.47	48.70	8.03	Peak	100	48
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

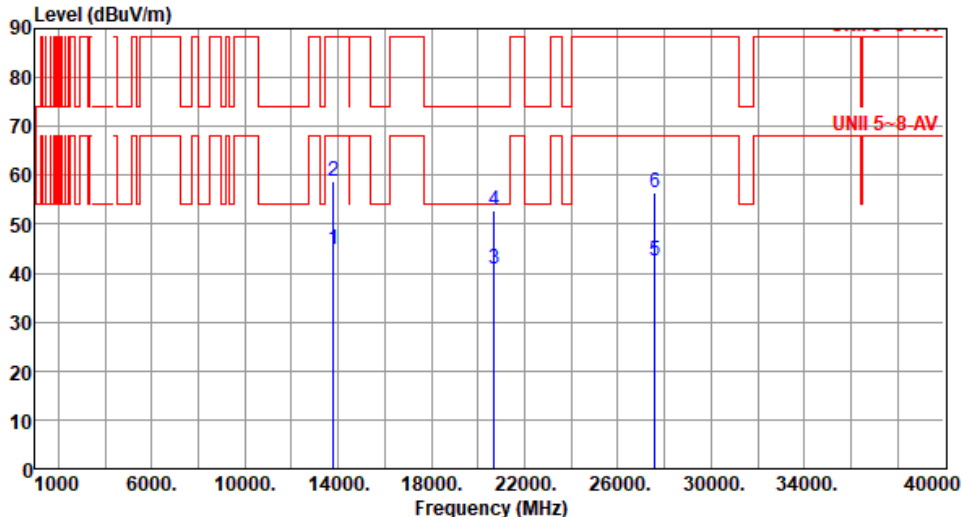

Modulation	be EHT20-OFDMA		Test Freq. (MHz)	6895					
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	13790.00	44.76	68.20	-23.44	38.49	6.27	Average	100	55
2	13790.00	58.62	88.20	-29.58	52.35	6.27	Peak	100	55
3	20685.00	40.83	54.00	-13.17	38.61	2.22	Average	100	69
4	20685.00	52.76	74.00	-21.24	50.54	2.22	Peak	100	69
5	27580.00	42.57	68.20	-25.63	34.54	8.03	Average	100	153
6	27580.00	56.38	88.20	-31.82	48.35	8.03	Peak	100	153

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) </			




Modulation	be EHT20-OFDMA		Test Freq. (MHz)		7015																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14030.00</td><td>45.66</td><td>68.20</td><td>-22.54</td><td>38.86</td><td>6.80</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>2</td><td>14030.00</td><td>58.62</td><td>88.20</td><td>-29.58</td><td>51.82</td><td>6.80</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>3</td><td>21045.00</td><td>40.38</td><td>54.00</td><td>-13.62</td><td>37.36</td><td>3.02</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>4</td><td>21045.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>50.74</td><td>3.02</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>5</td><td>28060.00</td><td>44.46</td><td>68.20</td><td>-23.74</td><td>35.90</td><td>8.56</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>6</td><td>28060.00</td><td>58.62</td><td>88.20</td><td>-29.58</td><td>50.06</td><td>8.56</td><td>Peak</td><td>100</td><td>33</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	14030.00	45.66	68.20	-22.54	38.86	6.80	Average	100	27	2	14030.00	58.62	88.20	-29.58	51.82	6.80	Peak	100	27	3	21045.00	40.38	54.00	-13.62	37.36	3.02	Average	100	51	4	21045.00	53.76	74.00	-20.24	50.74	3.02	Peak	100	51	5	28060.00	44.46	68.20	-23.74	35.90	8.56	Average	100	33	6	28060.00	58.62	88.20	-29.58	50.06	8.56	Peak	100	33
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	14030.00	45.66	68.20	-22.54	38.86	6.80	Average	100	27																																																																																										
2	14030.00	58.62	88.20	-29.58	51.82	6.80	Peak	100	27																																																																																										
3	21045.00	40.38	54.00	-13.62	37.36	3.02	Average	100	51																																																																																										
4	21045.00	53.76	74.00	-20.24	50.74	3.02	Peak	100	51																																																																																										
5	28060.00	44.46	68.20	-23.74	35.90	8.56	Average	100	33																																																																																										
6	28060.00	58.62	88.20	-29.58	50.06	8.56	Peak	100	33																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.49</td><td>68.20</td><td>-19.71</td><td>43.71</td><td>4.78</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>2</td><td>7125.00</td><td>59.37</td><td>88.20</td><td>-28.83</td><td>54.59</td><td>4.78</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>3</td><td>14190.00</td><td>45.43</td><td>68.20</td><td>-22.77</td><td>38.28</td><td>7.15</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>14190.00</td><td>58.71</td><td>88.20</td><td>-29.49</td><td>51.56</td><td>7.15</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>21285.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>37.49</td><td>3.33</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>21285.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>50.45</td><td>3.33</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.49	68.20	-19.71	43.71	4.78	Average	100	318	2	7125.00	59.37	88.20	-28.83	54.59	4.78	Peak	100	318	3	14190.00	45.43	68.20	-22.77	38.28	7.15	Average	100	60	4	14190.00	58.71	88.20	-29.49	51.56	7.15	Peak	100	60	5	21285.00	40.82	54.00	-13.18	37.49	3.33	Average	100	90	6	21285.00	53.78	74.00	-20.22	50.45	3.33	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.49	68.20	-19.71	43.71	4.78	Average	100	318																																																																
2	7125.00	59.37	88.20	-28.83	54.59	4.78	Peak	100	318																																																																
3	14190.00	45.43	68.20	-22.77	38.28	7.15	Average	100	60																																																																
4	14190.00	58.71	88.20	-29.49	51.56	7.15	Peak	100	60																																																																
5	21285.00	40.82	54.00	-13.18	37.49	3.33	Average	100	90																																																																
6	21285.00	53.78	74.00	-20.22	50.45	3.33	Peak	100	90																																																																

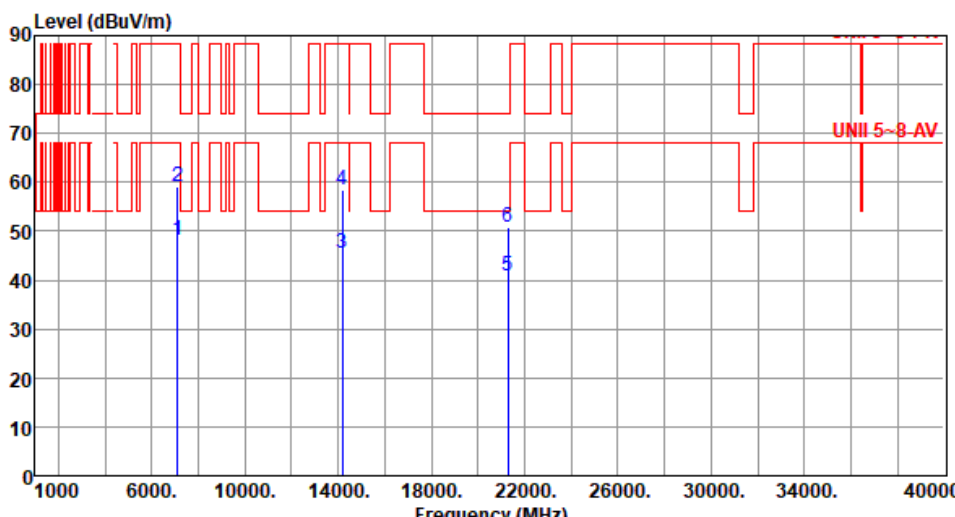

Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.23</td><td>68.20</td><td>-19.97</td><td>43.45</td><td>4.78</td><td>Average</td><td>102</td><td>333</td></tr><tr><td>2</td><td>7125.00</td><td>59.11</td><td>88.20</td><td>-29.09</td><td>54.33</td><td>4.78</td><td>Peak</td><td>102</td><td>333</td></tr><tr><td>3</td><td>14190.00</td><td>45.43</td><td>68.20</td><td>-22.77</td><td>38.28</td><td>7.15</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>14190.00</td><td>58.37</td><td>88.20</td><td>-29.83</td><td>51.22</td><td>7.15</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>21285.00</td><td>40.79</td><td>54.00</td><td>-13.21</td><td>37.46</td><td>3.33</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>6</td><td>21285.00</td><td>50.83</td><td>74.00</td><td>-23.17</td><td>47.50</td><td>3.33</td><td>Peak</td><td>100</td><td>100</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.23	68.20	-19.97	43.45	4.78	Average	102	333	2	7125.00	59.11	88.20	-29.09	54.33	4.78	Peak	102	333	3	14190.00	45.43	68.20	-22.77	38.28	7.15	Average	100	20	4	14190.00	58.37	88.20	-29.83	51.22	7.15	Peak	100	20	5	21285.00	40.79	54.00	-13.21	37.46	3.33	Average	100	100	6	21285.00	50.83	74.00	-23.17	47.50	3.33	Peak	100	100
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.23	68.20	-19.97	43.45	4.78	Average	102	333																																																																
2	7125.00	59.11	88.20	-29.09	54.33	4.78	Peak	102	333																																																																
3	14190.00	45.43	68.20	-22.77	38.28	7.15	Average	100	20																																																																
4	14190.00	58.37	88.20	-29.83	51.22	7.15	Peak	100	20																																																																
5	21285.00	40.79	54.00	-13.21	37.46	3.33	Average	100	100																																																																
6	21285.00	50.83	74.00	-23.17	47.50	3.33	Peak	100	100																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>57.74</td><td>68.20</td><td>-10.46</td><td>52.96</td><td>4.78</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>2</td><td>7125.00</td><td>63.64</td><td>88.20</td><td>-24.56</td><td>58.86</td><td>4.78</td><td>Peak</td><td>100</td><td>306</td></tr><tr><td>3</td><td>14230.00</td><td>45.53</td><td>68.20</td><td>-22.67</td><td>38.35</td><td>7.18</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>14230.00</td><td>60.34</td><td>88.20</td><td>-27.86</td><td>53.16</td><td>7.18</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>21345.00</td><td>40.85</td><td>54.00</td><td>-13.15</td><td>37.45</td><td>3.40</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>21345.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>50.29</td><td>3.40</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	57.74	68.20	-10.46	52.96	4.78	Average	100	306	2	7125.00	63.64	88.20	-24.56	58.86	4.78	Peak	100	306	3	14230.00	45.53	68.20	-22.67	38.35	7.18	Average	100	80	4	14230.00	60.34	88.20	-27.86	53.16	7.18	Peak	100	80	5	21345.00	40.85	54.00	-13.15	37.45	3.40	Average	100	30	6	21345.00	53.69	74.00	-20.31	50.29	3.40	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	57.74	68.20	-10.46	52.96	4.78	Average	100	306																																																																
2	7125.00	63.64	88.20	-24.56	58.86	4.78	Peak	100	306																																																																
3	14230.00	45.53	68.20	-22.67	38.35	7.18	Average	100	80																																																																
4	14230.00	60.34	88.20	-27.86	53.16	7.18	Peak	100	80																																																																
5	21345.00	40.85	54.00	-13.15	37.45	3.40	Average	100	30																																																																
6	21345.00	53.69	74.00	-20.31	50.29	3.40	Peak	100	30																																																																



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>53.14</td><td>68.20</td><td>-15.06</td><td>48.36</td><td>4.78</td><td>Average</td><td>105</td><td>335</td></tr><tr><td>2</td><td>7125.00</td><td>62.46</td><td>88.20</td><td>-25.74</td><td>57.68</td><td>4.78</td><td>Peak</td><td>105</td><td>335</td></tr><tr><td>3</td><td>14230.00</td><td>45.75</td><td>68.20</td><td>-22.45</td><td>38.57</td><td>7.18</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>14230.00</td><td>60.67</td><td>88.20</td><td>-27.53</td><td>53.49</td><td>7.18</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>21345.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>37.58</td><td>3.40</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>21345.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>50.28</td><td>3.40</td><td>Peak</td><td>100</td><td>90</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	53.14	68.20	-15.06	48.36	4.78	Average	105	335	2	7125.00	62.46	88.20	-25.74	57.68	4.78	Peak	105	335	3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	60	4	14230.00	60.67	88.20	-27.53	53.49	7.18	Peak	100	60	5	21345.00	40.98	54.00	-13.02	37.58	3.40	Average	100	90	6	21345.00	53.68	74.00	-20.32	50.28	3.40	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	53.14	68.20	-15.06	48.36	4.78	Average	105	335																																																																
2	7125.00	62.46	88.20	-25.74	57.68	4.78	Peak	105	335																																																																
3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	60																																																																
4	14230.00	60.67	88.20	-27.53	53.49	7.18	Peak	100	60																																																																
5	21345.00	40.98	54.00	-13.02	37.58	3.40	Average	100	90																																																																
6	21345.00	53.68	74.00	-20.32	50.28	3.40	Peak	100	90																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Unwanted Emissions (Above 1GHz) for be EHT40-OFDMA

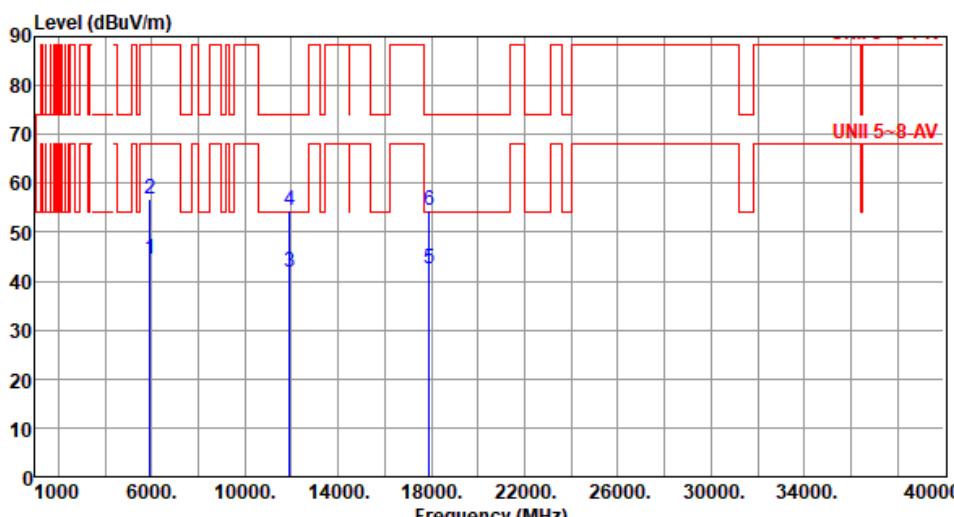Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 1 5925.00 44.60 68.20 -23.60 43.41 1.19 Average 120 294 2 5925.00 56.82 88.20 -31.38 55.63 1.19 Peak 120 294 3 11930.00 41.68 54.00 -12.32 35.56 6.12 Average 100 50 4 11930.00 54.57 74.00 -19.43 48.45 6.12 Peak 100 50 5 17895.00 42.52 54.00 -11.48 32.45 10.07 Average 100 85 6 17895.00 54.35 74.00 -19.65 44.28 10.07 Peak 100 85 Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.41</td><td>68.20</td><td>-23.79</td><td>43.22</td><td>1.19</td><td>Average</td><td>126</td><td>214</td></tr><tr><td>2</td><td>5925.00</td><td>55.95</td><td>88.20</td><td>-32.25</td><td>54.76</td><td>1.19</td><td>Peak</td><td>126</td><td>214</td></tr><tr><td>3</td><td>11930.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>35.54</td><td>6.12</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>4</td><td>11930.00</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>48.55</td><td>6.12</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>5</td><td>17895.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>32.42</td><td>10.07</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>17895.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>44.28</td><td>10.07</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.41	68.20	-23.79	43.22	1.19	Average	126	214	2	5925.00	55.95	88.20	-32.25	54.76	1.19	Peak	126	214	3	11930.00	41.66	54.00	-12.34	35.54	6.12	Average	100	70	4	11930.00	54.67	74.00	-19.33	48.55	6.12	Peak	100	70	5	17895.00	42.49	54.00	-11.51	32.42	10.07	Average	100	30	6	17895.00	54.35	74.00	-19.65	44.28	10.07	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.41	68.20	-23.79	43.22	1.19	Average	126	214																																																																
2	5925.00	55.95	88.20	-32.25	54.76	1.19	Peak	126	214																																																																
3	11930.00	41.66	54.00	-12.34	35.54	6.12	Average	100	70																																																																
4	11930.00	54.67	74.00	-19.33	48.55	6.12	Peak	100	70																																																																
5	17895.00	42.49	54.00	-11.51	32.42	10.07	Average	100	30																																																																
6	17895.00	54.35	74.00	-19.65	44.28	10.07	Peak	100	30																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12330.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>36.72</td><td>6.19</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>2</td><td>12330.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>49.34</td><td>6.19</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>3</td><td>18495.00</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>39.64</td><td>0.58</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>4</td><td>18495.00</td><td>52.46</td><td>74.00</td><td>-21.54</td><td>51.88</td><td>0.58</td><td>Peak</td><td>100</td><td>57</td></tr><tr><td>5</td><td>24660.00</td><td>42.33</td><td>68.20</td><td>-25.87</td><td>34.79</td><td>7.54</td><td>Average</td><td>100</td><td>98</td></tr><tr><td>6</td><td>24660.00</td><td>56.18</td><td>88.20</td><td>-32.02</td><td>48.64</td><td>7.54</td><td>Peak</td><td>100</td><td>98</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12330.00	42.91	54.00	-11.09	36.72	6.19	Average	100	178	2	12330.00	55.53	74.00	-18.47	49.34	6.19	Peak	100	178	3	18495.00	40.22	54.00	-13.78	39.64	0.58	Average	100	57	4	18495.00	52.46	74.00	-21.54	51.88	0.58	Peak	100	57	5	24660.00	42.33	68.20	-25.87	34.79	7.54	Average	100	98	6	24660.00	56.18	88.20	-32.02	48.64	7.54	Peak	100	98
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12330.00	42.91	54.00	-11.09	36.72	6.19	Average	100	178																																																																
2	12330.00	55.53	74.00	-18.47	49.34	6.19	Peak	100	178																																																																
3	18495.00	40.22	54.00	-13.78	39.64	0.58	Average	100	57																																																																
4	18495.00	52.46	74.00	-21.54	51.88	0.58	Peak	100	57																																																																
5	24660.00	42.33	68.20	-25.87	34.79	7.54	Average	100	98																																																																
6	24660.00	56.18	88.20	-32.02	48.64	7.54	Peak	100	98																																																																




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12330.00</td><td>42.11</td><td>54.00</td><td>-11.89</td><td>35.92</td><td>6.19</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>2</td><td>12330.00</td><td>55.67</td><td>74.00</td><td>-18.33</td><td>49.48</td><td>6.19</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>3</td><td>18495.00</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>39.64</td><td>0.58</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>18495.00</td><td>52.78</td><td>74.00</td><td>-21.22</td><td>52.20</td><td>0.58</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>24660.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>34.77</td><td>7.54</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>6</td><td>24660.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>47.73</td><td>7.54</td><td>Peak</td><td>100</td><td>111</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12330.00	42.11	54.00	-11.89	35.92	6.19	Average	100	142	2	12330.00	55.67	74.00	-18.33	49.48	6.19	Peak	100	142	3	18495.00	40.22	54.00	-13.78	39.64	0.58	Average	100	102	4	18495.00	52.78	74.00	-21.22	52.20	0.58	Peak	100	102	5	24660.00	42.31	68.20	-25.89	34.77	7.54	Average	100	111	6	24660.00	55.27	88.20	-32.93	47.73	7.54	Peak	100	111
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12330.00	42.11	54.00	-11.89	35.92	6.19	Average	100	142																																																																
2	12330.00	55.67	74.00	-18.33	49.48	6.19	Peak	100	142																																																																
3	18495.00	40.22	54.00	-13.78	39.64	0.58	Average	100	102																																																																
4	18495.00	52.78	74.00	-21.22	52.20	0.58	Peak	100	102																																																																
5	24660.00	42.31	68.20	-25.89	34.77	7.54	Average	100	111																																																																
6	24660.00	55.27	88.20	-32.93	47.73	7.54	Peak	100	111																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

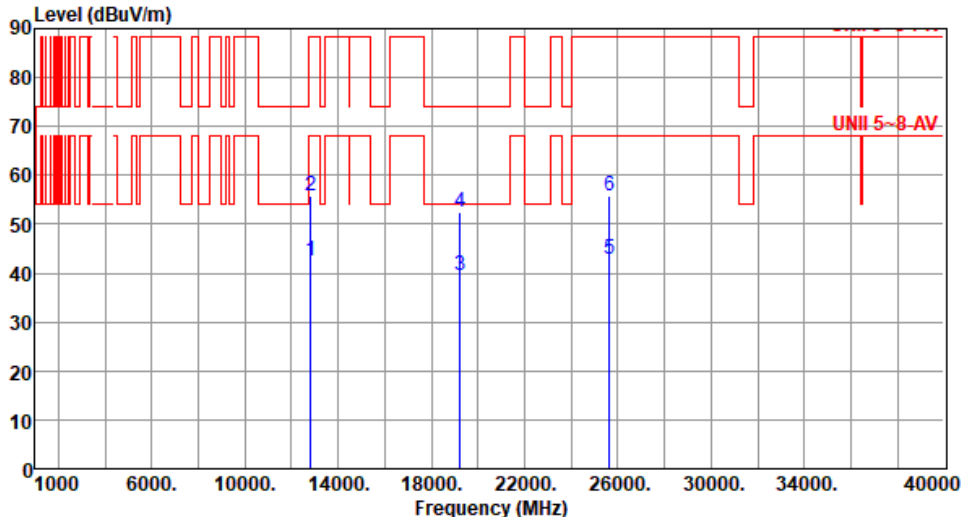

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>12810.00</td><td>42.48</td><td>68.20</td><td>-25.72</td><td>36.18</td><td>6.30</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>2</td><td>12810.00</td><td>55.76</td><td>88.20</td><td>-32.44</td><td>49.46</td><td>6.30</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>3</td><td>19215.00</td><td>39.43</td><td>54.00</td><td>-14.57</td><td>38.55</td><td>0.88</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>4</td><td>19215.00</td><td>52.48</td><td>74.00</td><td>-21.52</td><td>51.60</td><td>0.88</td><td>Peak</td><td>100</td><td>151</td></tr><tr><td>5</td><td>25620.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>35.30</td><td>7.41</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>6</td><td>25620.00</td><td>55.76</td><td>88.20</td><td>-32.44</td><td>48.35</td><td>7.41</td><td>Peak</td><td>100</td><td>51</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	12810.00	42.48	68.20	-25.72	36.18	6.30	Average	100	162	2	12810.00	55.76	88.20	-32.44	49.46	6.30	Peak	100	162	3	19215.00	39.43	54.00	-14.57	38.55	0.88	Average	100	151	4	19215.00	52.48	74.00	-21.52	51.60	0.88	Peak	100	151	5	25620.00	42.71	68.20	-25.49	35.30	7.41	Average	100	51	6	25620.00	55.76	88.20	-32.44	48.35	7.41	Peak	100	51
1	12810.00	42.48	68.20	-25.72	36.18	6.30	Average	100	162																																																						
2	12810.00	55.76	88.20	-32.44	49.46	6.30	Peak	100	162																																																						
3	19215.00	39.43	54.00	-14.57	38.55	0.88	Average	100	151																																																						
4	19215.00	52.48	74.00	-21.52	51.60	0.88	Peak	100	151																																																						
5	25620.00	42.71	68.20	-25.49	35.30	7.41	Average	100	51																																																						
6	25620.00	55.76	88.20	-32.44	48.35	7.41	Peak	100	51																																																						

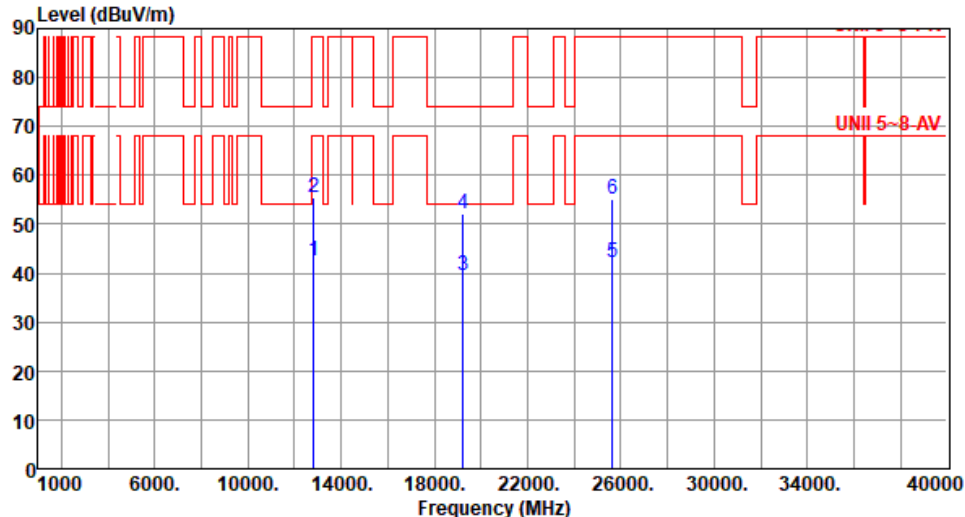


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12810.00	42.55	68.20	-25.65	36.25	6.30	Average	100	67
2	12810.00	55.37	88.20	-32.83	49.07	6.30	Peak	100	55
3	19215.00	39.48	54.00	-14.52	38.60	0.88	Average	100	54
4	19215.00	52.13	74.00	-21.87	51.25	0.88	Peak	100	54
5	25620.00	42.31	68.20	-25.89	34.90	7.41	Average	100	27
6	25620.00	55.13	88.20	-33.07	47.72	7.41	Peak	100	27
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			

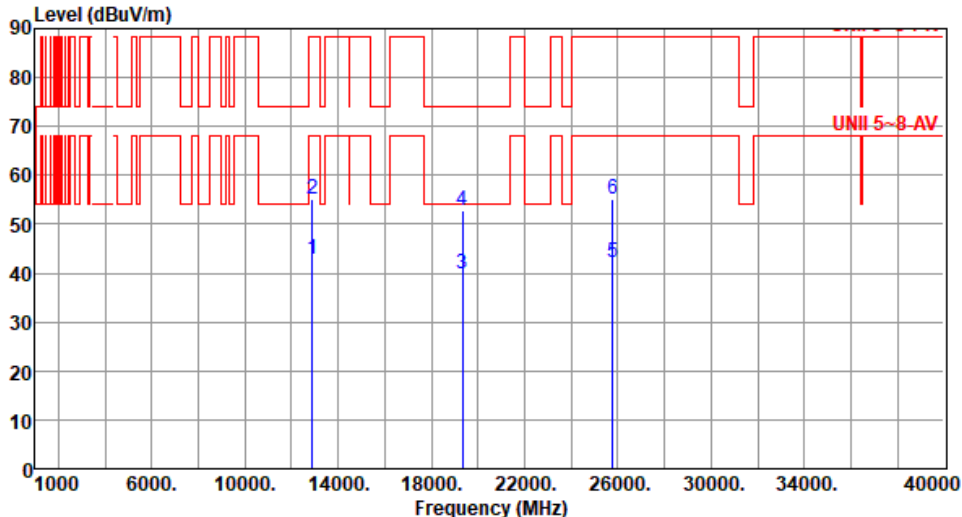

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg <table><tr><td>1</td><td>12890.00</td><td>43.00</td><td>68.20</td><td>-25.20</td><td>36.58</td><td>6.42</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>2</td><td>12890.00</td><td>55.26</td><td>88.20</td><td>-32.94</td><td>48.84</td><td>6.42</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>3</td><td>19335.00</td><td>39.71</td><td>54.00</td><td>-14.29</td><td>38.77</td><td>0.94</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>4</td><td>19335.00</td><td>52.88</td><td>74.00</td><td>-21.12</td><td>51.94</td><td>0.94</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>5</td><td>25780.00</td><td>42.33</td><td>68.20</td><td>-25.87</td><td>34.94</td><td>7.39</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>25780.00</td><td>55.16</td><td>88.20</td><td>-33.04</td><td>47.77</td><td>7.39</td><td>Peak</td><td>100</td><td>120</td></tr></table>				1	12890.00	43.00	68.20	-25.20	36.58	6.42	Average	100	155	2	12890.00	55.26	88.20	-32.94	48.84	6.42	Peak	100	155	3	19335.00	39.71	54.00	-14.29	38.77	0.94	Average	100	147	4	19335.00	52.88	74.00	-21.12	51.94	0.94	Peak	100	147	5	25780.00	42.33	68.20	-25.87	34.94	7.39	Average	100	120	6	25780.00	55.16	88.20	-33.04	47.77	7.39	Peak	100	120
1	12890.00	43.00	68.20	-25.20	36.58	6.42	Average	100	155																																																						
2	12890.00	55.26	88.20	-32.94	48.84	6.42	Peak	100	155																																																						
3	19335.00	39.71	54.00	-14.29	38.77	0.94	Average	100	147																																																						
4	19335.00	52.88	74.00	-21.12	51.94	0.94	Peak	100	147																																																						
5	25780.00	42.33	68.20	-25.87	34.94	7.39	Average	100	120																																																						
6	25780.00	55.16	88.20	-33.04	47.77	7.39	Peak	100	120																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			

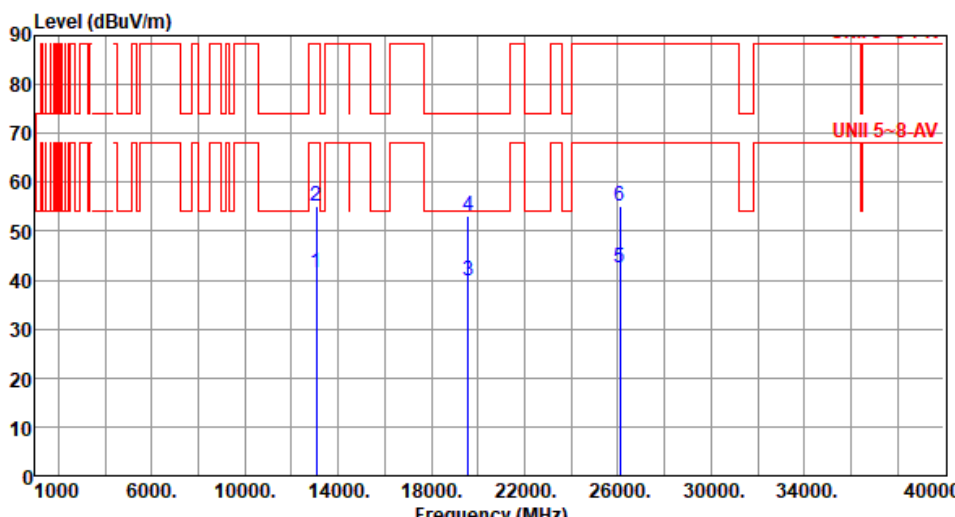


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13050.00	41.61	68.20	-26.59	35.39	6.22	Average	100	27
2	13050.00	55.23	88.20	-32.97	49.01	6.22	Peak	100	27
3	19575.00	39.91	54.00	-14.09	38.78	1.13	Average	100	42
4	19575.00	52.99	74.00	-21.01	51.86	1.13	Peak	100	42
5	26100.00	42.48	68.20	-25.72	34.95	7.53	Average	100	118
6	26100.00	55.23	88.20	-32.97	47.70	7.53	Peak	100	118
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13050.00</td><td>42.28</td><td>68.20</td><td>-25.92</td><td>36.06</td><td>6.22</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>2</td><td>13050.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>49.15</td><td>6.22</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>3</td><td>19575.00</td><td>40.18</td><td>54.00</td><td>-13.82</td><td>39.05</td><td>1.13</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>4</td><td>19575.00</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>52.08</td><td>1.13</td><td>Peak</td><td>100</td><td>74</td></tr><tr><td>5</td><td>26100.00</td><td>42.45</td><td>68.20</td><td>-25.75</td><td>34.92</td><td>7.53</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>26100.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>48.11</td><td>7.53</td><td>Peak</td><td>100</td><td>57</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	42.28	68.20	-25.92	36.06	6.22	Average	100	104	2	13050.00	55.37	88.20	-32.83	49.15	6.22	Peak	100	104	3	19575.00	40.18	54.00	-13.82	39.05	1.13	Average	100	74	4	19575.00	53.21	74.00	-20.79	52.08	1.13	Peak	100	74	5	26100.00	42.45	68.20	-25.75	34.92	7.53	Average	100	57	6	26100.00	55.64	88.20	-32.56	48.11	7.53	Peak	100	57
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13050.00	42.28	68.20	-25.92	36.06	6.22	Average	100	104																																																																
2	13050.00	55.37	88.20	-32.83	49.15	6.22	Peak	100	104																																																																
3	19575.00	40.18	54.00	-13.82	39.05	1.13	Average	100	74																																																																
4	19575.00	53.21	74.00	-20.79	52.08	1.13	Peak	100	74																																																																
5	26100.00	42.45	68.20	-25.75	34.92	7.53	Average	100	57																																																																
6	26100.00	55.64	88.20	-32.56	48.11	7.53	Peak	100	57																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

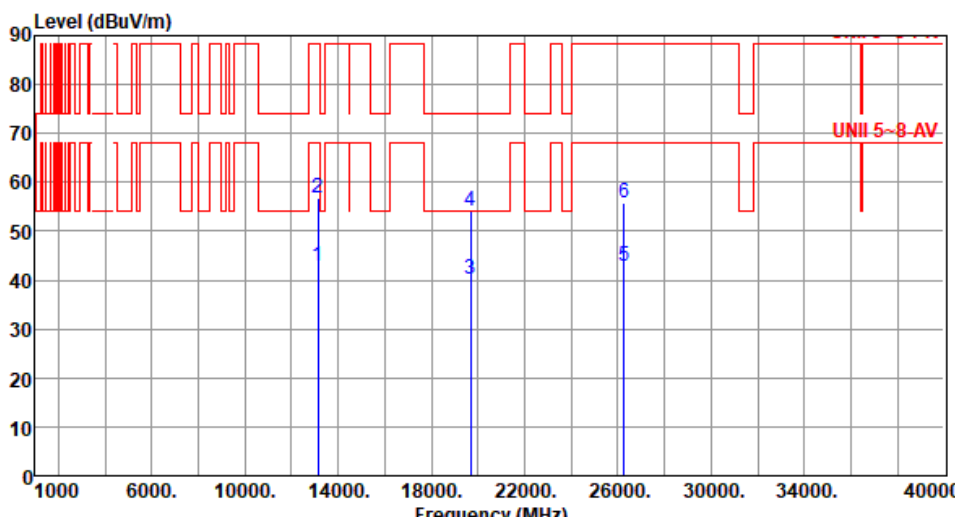


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13130.00</td><td>42.72</td><td>68.20</td><td>-25.48</td><td>36.76</td><td>5.96</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>13130.00</td><td>56.81</td><td>88.20</td><td>-31.39</td><td>50.85</td><td>5.96</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>19695.00</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>39.03</td><td>1.18</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>4</td><td>19695.00</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>53.06</td><td>1.18</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>5</td><td>26260.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>35.33</td><td>7.65</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>6</td><td>26260.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>48.21</td><td>7.65</td><td>Peak</td><td>100</td><td>33</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.72	68.20	-25.48	36.76	5.96	Average	100	105	2	13130.00	56.81	88.20	-31.39	50.85	5.96	Peak	100	105	3	19695.00	40.21	54.00	-13.79	39.03	1.18	Average	100	53	4	19695.00	54.24	74.00	-19.76	53.06	1.18	Peak	100	53	5	26260.00	42.98	68.20	-25.22	35.33	7.65	Average	100	33	6	26260.00	55.86	88.20	-32.34	48.21	7.65	Peak	100	33
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.72	68.20	-25.48	36.76	5.96	Average	100	105																																																																
2	13130.00	56.81	88.20	-31.39	50.85	5.96	Peak	100	105																																																																
3	19695.00	40.21	54.00	-13.79	39.03	1.18	Average	100	53																																																																
4	19695.00	54.24	74.00	-19.76	53.06	1.18	Peak	100	53																																																																
5	26260.00	42.98	68.20	-25.22	35.33	7.65	Average	100	33																																																																
6	26260.00	55.86	88.20	-32.34	48.21	7.65	Peak	100	33																																																																

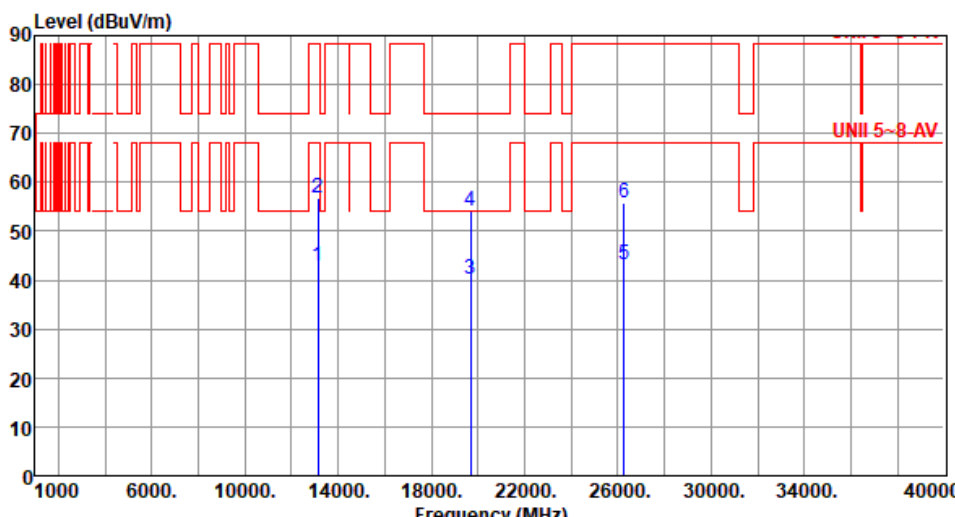


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13130.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>36.90</td><td>5.96</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>2</td><td>13130.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>50.95</td><td>5.96</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>3</td><td>19695.00</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>39.03</td><td>1.18</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>19695.00</td><td>54.12</td><td>74.00</td><td>-19.88</td><td>52.94</td><td>1.18</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>26260.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>35.62</td><td>7.65</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>26260.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>48.04</td><td>7.65</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.86	68.20	-25.34	36.90	5.96	Average	100	145	2	13130.00	56.91	88.20	-31.29	50.95	5.96	Peak	100	145	3	19695.00	40.21	54.00	-13.79	39.03	1.18	Average	100	55	4	19695.00	54.12	74.00	-19.88	52.94	1.18	Peak	100	55	5	26260.00	43.27	68.20	-24.93	35.62	7.65	Average	100	103	6	26260.00	55.69	88.20	-32.51	48.04	7.65	Peak	100	103
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.86	68.20	-25.34	36.90	5.96	Average	100	145																																																																
2	13130.00	56.91	88.20	-31.29	50.95	5.96	Peak	100	145																																																																
3	19695.00	40.21	54.00	-13.79	39.03	1.18	Average	100	55																																																																
4	19695.00	54.12	74.00	-19.88	52.94	1.18	Peak	100	55																																																																
5	26260.00	43.27	68.20	-24.93	35.62	7.65	Average	100	103																																																																
6	26260.00	55.69	88.20	-32.51	48.04	7.65	Peak	100	103																																																																

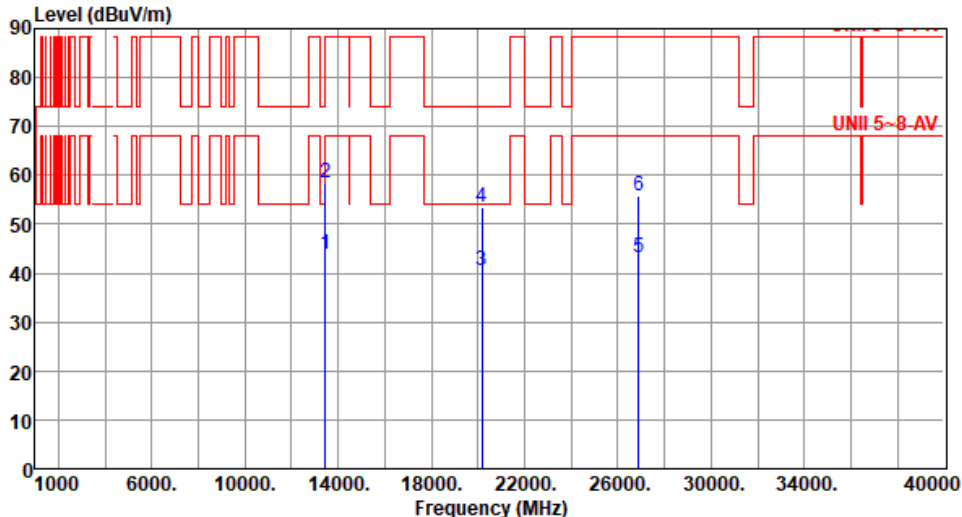


Modulation	be EHT40-OFDMA		Test Freq. (MHz)		6725																																																																										
Polarization	Horizontal																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13450.00</td><td>43.68</td><td>68.20</td><td>-24.52</td><td>37.48</td><td>6.20</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>13450.00</td><td>58.59</td><td>88.20</td><td>-29.61</td><td>52.39</td><td>6.20</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>20175.00</td><td>40.38</td><td>54.00</td><td>-13.62</td><td>38.86</td><td>1.52</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>20175.00</td><td>53.42</td><td>74.00</td><td>-20.58</td><td>51.90</td><td>1.52</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>26900.00</td><td>43.22</td><td>68.20</td><td>-24.98</td><td>35.19</td><td>8.03</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>6</td><td>26900.00</td><td>55.88</td><td>88.20</td><td>-32.32</td><td>47.85</td><td>8.03</td><td>Peak</td><td>100</td><td>51</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	43.68	68.20	-24.52	37.48	6.20	Average	100	37	2	13450.00	58.59	88.20	-29.61	52.39	6.20	Peak	100	37	3	20175.00	40.38	54.00	-13.62	38.86	1.52	Average	100	66	4	20175.00	53.42	74.00	-20.58	51.90	1.52	Peak	100	66	5	26900.00	43.22	68.20	-24.98	35.19	8.03	Average	100	51	6	26900.00	55.88	88.20	-32.32	47.85	8.03	Peak	100	51
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13450.00	43.68	68.20	-24.52	37.48	6.20	Average	100	37																																																																						
2	13450.00	58.59	88.20	-29.61	52.39	6.20	Peak	100	37																																																																						
3	20175.00	40.38	54.00	-13.62	38.86	1.52	Average	100	66																																																																						
4	20175.00	53.42	74.00	-20.58	51.90	1.52	Peak	100	66																																																																						
5	26900.00	43.22	68.20	-24.98	35.19	8.03	Average	100	51																																																																						
6	26900.00	55.88	88.20	-32.32	47.85	8.03	Peak	100	51																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

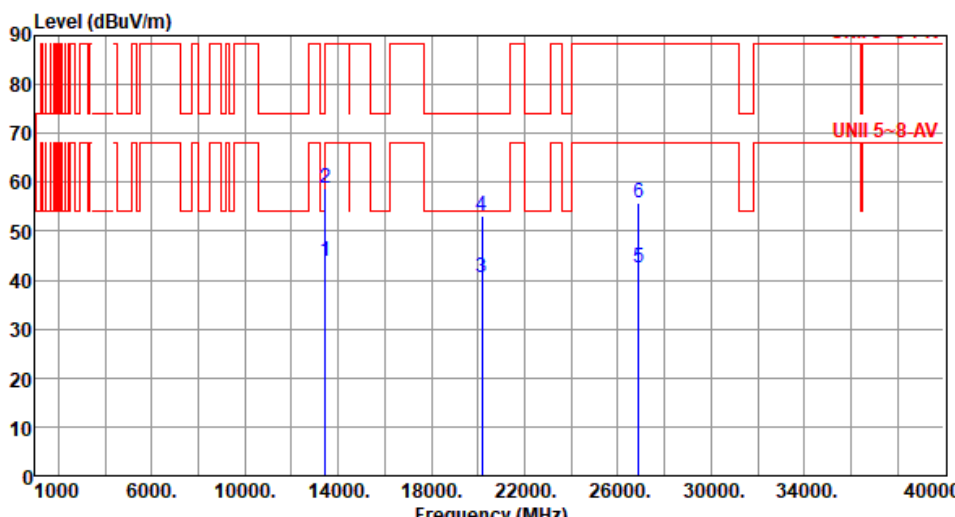


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13450.00</td><td>43.91</td><td>68.20</td><td>-24.29</td><td>37.71</td><td>6.20</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>13450.00</td><td>58.76</td><td>88.20</td><td>-29.44</td><td>52.56</td><td>6.20</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>20175.00</td><td>40.61</td><td>54.00</td><td>-13.39</td><td>39.09</td><td>1.52</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>4</td><td>20175.00</td><td>53.12</td><td>74.00</td><td>-20.88</td><td>51.60</td><td>1.52</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>26900.00</td><td>42.53</td><td>68.20</td><td>-25.67</td><td>34.50</td><td>8.03</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>26900.00</td><td>55.87</td><td>88.20</td><td>-32.33</td><td>47.84</td><td>8.03</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	43.91	68.20	-24.29	37.71	6.20	Average	100	37	2	13450.00	58.76	88.20	-29.44	52.56	6.20	Peak	100	37	3	20175.00	40.61	54.00	-13.39	39.09	1.52	Average	100	186	4	20175.00	53.12	74.00	-20.88	51.60	1.52	Peak	100	186	5	26900.00	42.53	68.20	-25.67	34.50	8.03	Average	100	108	6	26900.00	55.87	88.20	-32.33	47.84	8.03	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	43.91	68.20	-24.29	37.71	6.20	Average	100	37																																																																
2	13450.00	58.76	88.20	-29.44	52.56	6.20	Peak	100	37																																																																
3	20175.00	40.61	54.00	-13.39	39.09	1.52	Average	100	186																																																																
4	20175.00	53.12	74.00	-20.88	51.60	1.52	Peak	100	186																																																																
5	26900.00	42.53	68.20	-25.67	34.50	8.03	Average	100	108																																																																
6	26900.00	55.87	88.20	-32.33	47.84	8.03	Peak	100	108																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

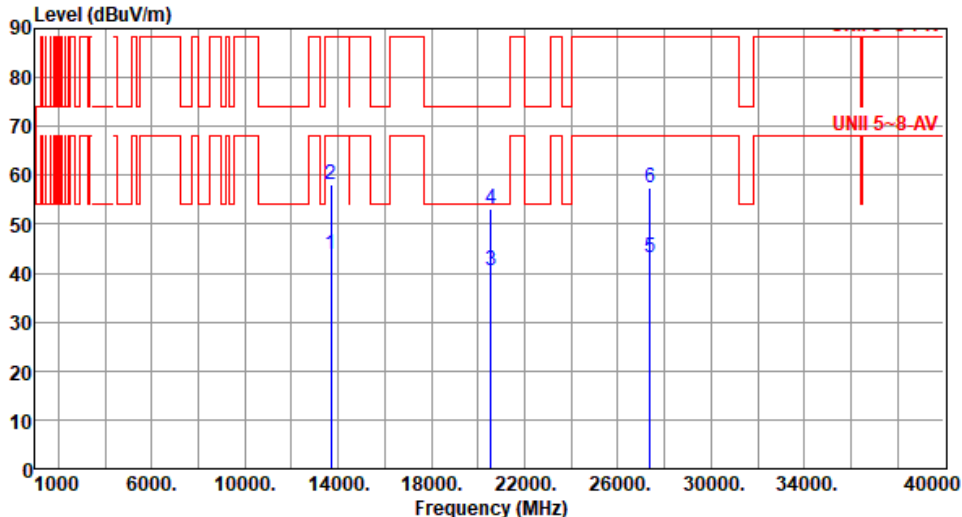

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13690.00</td><td>43.88</td><td>68.20</td><td>-24.32</td><td>37.64</td><td>6.24</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>2</td><td>13690.00</td><td>58.12</td><td>88.20</td><td>-30.08</td><td>51.88</td><td>6.24</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>3</td><td>20535.00</td><td>40.66</td><td>54.00</td><td>-13.34</td><td>38.65</td><td>2.01</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>20535.00</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>51.17</td><td>2.01</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>27380.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>35.21</td><td>7.95</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>27380.00</td><td>57.29</td><td>88.20</td><td>-30.91</td><td>49.34</td><td>7.95</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13690.00	43.88	68.20	-24.32	37.64	6.24	Average	100	54	2	13690.00	58.12	88.20	-30.08	51.88	6.24	Peak	100	54	3	20535.00	40.66	54.00	-13.34	38.65	2.01	Average	100	67	4	20535.00	53.18	74.00	-20.82	51.17	2.01	Peak	100	67	5	27380.00	43.16	68.20	-25.04	35.21	7.95	Average	100	22	6	27380.00	57.29	88.20	-30.91	49.34	7.95	Peak	100	22
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13690.00	43.88	68.20	-24.32	37.64	6.24	Average	100	54																																																																
2	13690.00	58.12	88.20	-30.08	51.88	6.24	Peak	100	54																																																																
3	20535.00	40.66	54.00	-13.34	38.65	2.01	Average	100	67																																																																
4	20535.00	53.18	74.00	-20.82	51.17	2.01	Peak	100	67																																																																
5	27380.00	43.16	68.20	-25.04	35.21	7.95	Average	100	22																																																																
6	27380.00	57.29	88.20	-30.91	49.34	7.95	Peak	100	22																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

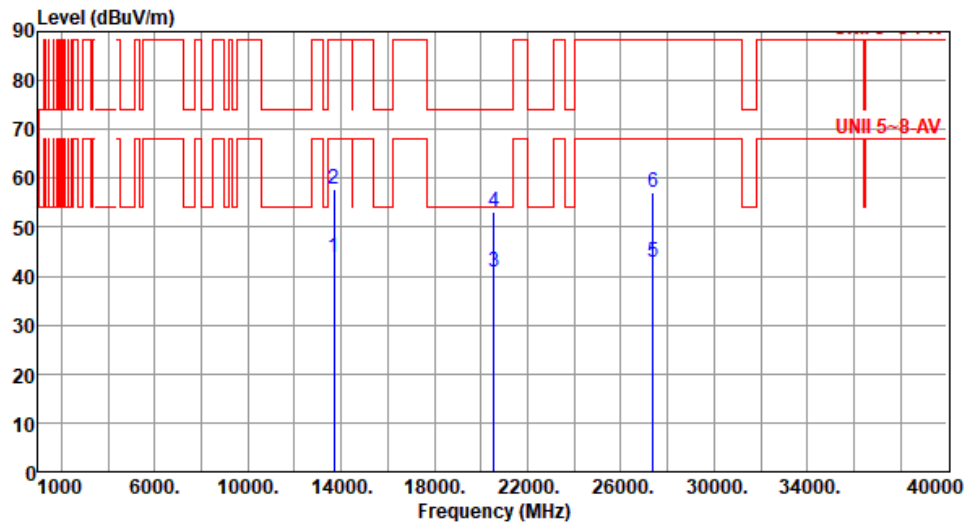


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13690.00	43.81	68.20	-24.39	37.57	6.24	Average	100	105
2	13690.00	57.91	88.20	-30.29	51.67	6.24	Peak	100	105
3	20535.00	40.86	54.00	-13.14	38.85	2.01	Average	100	48
4	20535.00	53.22	74.00	-20.78	51.21	2.01	Peak	100	48
5	27380.00	42.94	68.20	-25.26	34.99	7.95	Average	100	154
6	27380.00	56.99	88.20	-31.21	49.04	7.95	Peak	100	154
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m)			

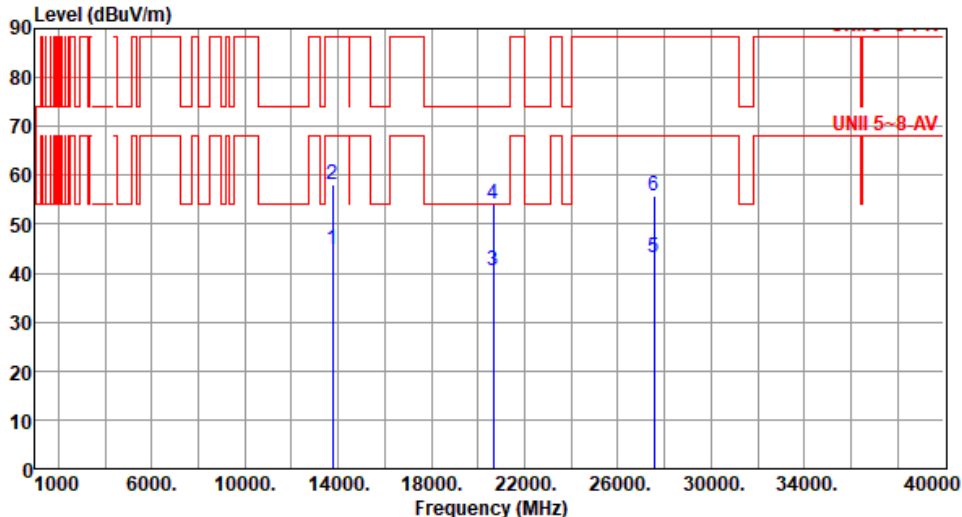


Modulation	be EHT40-OFDMA		Test Freq. (MHz)		6885																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13770.00</td><td>44.91</td><td>68.20</td><td>-23.29</td><td>38.64</td><td>6.27</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>2</td><td>13770.00</td><td>58.12</td><td>88.20</td><td>-30.08</td><td>51.85</td><td>6.27</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>3</td><td>20655.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>38.37</td><td>2.18</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>20655.00</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>51.95</td><td>2.18</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>27540.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>35.28</td><td>7.98</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>6</td><td>27540.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>47.83</td><td>7.98</td><td>Peak</td><td>100</td><td>48</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13770.00	44.91	68.20	-23.29	38.64	6.27	Average	100	43	2	13770.00	58.12	88.20	-30.08	51.85	6.27	Peak	100	43	3	20655.00	40.55	54.00	-13.45	38.37	2.18	Average	100	71	4	20655.00	54.13	74.00	-19.87	51.95	2.18	Peak	100	71	5	27540.00	43.26	68.20	-24.94	35.28	7.98	Average	100	48	6	27540.00	55.81	88.20	-32.39	47.83	7.98	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13770.00	44.91	68.20	-23.29	38.64	6.27	Average	100	43																																																																																										
2	13770.00	58.12	88.20	-30.08	51.85	6.27	Peak	100	43																																																																																										
3	20655.00	40.55	54.00	-13.45	38.37	2.18	Average	100	71																																																																																										
4	20655.00	54.13	74.00	-19.87	51.95	2.18	Peak	100	71																																																																																										
5	27540.00	43.26	68.20	-24.94	35.28	7.98	Average	100	48																																																																																										
6	27540.00	55.81	88.20	-32.39	47.83	7.98	Peak	100	48																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) <			

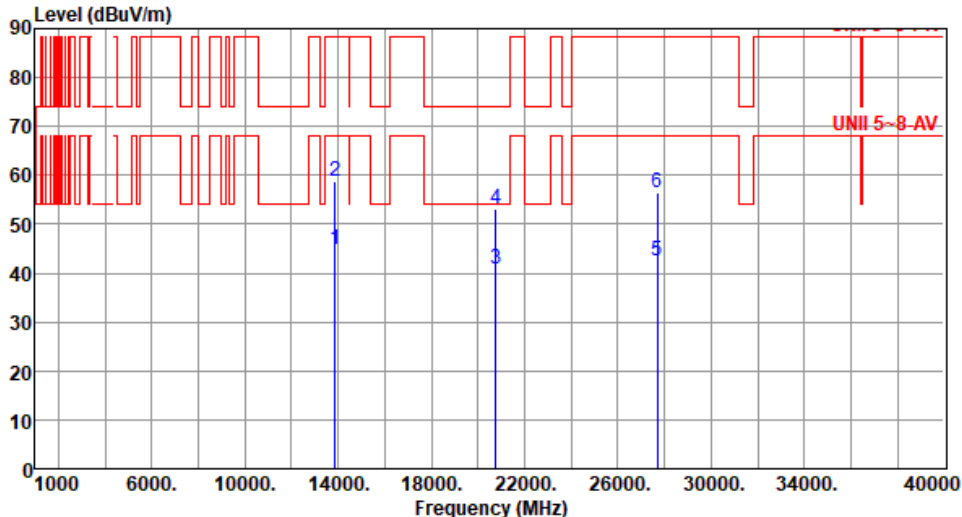

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13850.00</td><td>44.96</td><td>68.20</td><td>-23.24</td><td>38.53</td><td>6.43</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>2</td><td>13850.00</td><td>58.89</td><td>88.20</td><td>-29.31</td><td>52.46</td><td>6.43</td><td>Peak</td><td>100</td><td>81</td></tr><tr><td>3</td><td>20775.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>38.56</td><td>2.38</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>20775.00</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>50.73</td><td>2.38</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>27700.00</td><td>42.63</td><td>68.20</td><td>-25.57</td><td>34.47</td><td>8.16</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>27700.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>48.32</td><td>8.16</td><td>Peak</td><td>100</td><td>162</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	44.96	68.20	-23.24	38.53	6.43	Average	100	81	2	13850.00	58.89	88.20	-29.31	52.46	6.43	Peak	100	81	3	20775.00	40.94	54.00	-13.06	38.56	2.38	Average	100	102	4	20775.00	53.11	74.00	-20.89	50.73	2.38	Peak	100	102	5	27700.00	42.63	68.20	-25.57	34.47	8.16	Average	100	162	6	27700.00	56.48	88.20	-31.72	48.32	8.16	Peak	100	162
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	44.96	68.20	-23.24	38.53	6.43	Average	100	81																																																																
2	13850.00	58.89	88.20	-29.31	52.46	6.43	Peak	100	81																																																																
3	20775.00	40.94	54.00	-13.06	38.56	2.38	Average	100	102																																																																
4	20775.00	53.11	74.00	-20.89	50.73	2.38	Peak	100	102																																																																
5	27700.00	42.63	68.20	-25.57	34.47	8.16	Average	100	162																																																																
6	27700.00	56.48	88.20	-31.72	48.32	8.16	Peak	100	162																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14010.00</td><td>45.81</td><td>68.20</td><td>-22.39</td><td>39.06</td><td>6.75</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>2</td><td>14010.00</td><td>58.48</td><td>88.20</td><td>-29.72</td><td>51.73</td><td>6.75</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>3</td><td>21015.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>37.70</td><td>2.98</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>21015.00</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>51.23</td><td>2.98</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>28020.00</td><td>44.54</td><td>68.20</td><td>-23.66</td><td>36.00</td><td>8.54</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>28020.00</td><td>58.47</td><td>88.20</td><td>-29.73</td><td>49.93</td><td>8.54</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14010.00	45.81	68.20	-22.39	39.06	6.75	Average	100	183	2	14010.00	58.48	88.20	-29.72	51.73	6.75	Peak	100	183	3	21015.00	40.68	54.00	-13.32	37.70	2.98	Average	100	55	4	21015.00	54.21	74.00	-19.79	51.23	2.98	Peak	100	55	5	28020.00	44.54	68.20	-23.66	36.00	8.54	Average	100	60	6	28020.00	58.47	88.20	-29.73	49.93	8.54	Peak	100	60
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14010.00	45.81	68.20	-22.39	39.06	6.75	Average	100	183																																																																
2	14010.00	58.48	88.20	-29.72	51.73	6.75	Peak	100	183																																																																
3	21015.00	40.68	54.00	-13.32	37.70	2.98	Average	100	55																																																																
4	21015.00	54.21	74.00	-19.79	51.23	2.98	Peak	100	55																																																																
5	28020.00	44.54	68.20	-23.66	36.00	8.54	Average	100	60																																																																
6	28020.00	58.47	88.20	-29.73	49.93	8.54	Peak	100	60																																																																



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14010.00</td><td>45.91</td><td>68.20</td><td>-22.29</td><td>39.16</td><td>6.75</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>2</td><td>14010.00</td><td>58.74</td><td>88.20</td><td>-29.46</td><td>51.99</td><td>6.75</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>3</td><td>21015.00</td><td>40.62</td><td>54.00</td><td>-13.38</td><td>37.64</td><td>2.98</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>4</td><td>21015.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>51.29</td><td>2.98</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>5</td><td>28020.00</td><td>44.76</td><td>68.20</td><td>-23.44</td><td>36.22</td><td>8.54</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td>28020.00</td><td>58.84</td><td>88.20</td><td>-29.36</td><td>50.30</td><td>8.54</td><td>Peak</td><td>100</td><td>58</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14010.00	45.91	68.20	-22.29	39.16	6.75	Average	100	41	2	14010.00	58.74	88.20	-29.46	51.99	6.75	Peak	100	41	3	21015.00	40.62	54.00	-13.38	37.64	2.98	Average	100	77	4	21015.00	54.27	74.00	-19.73	51.29	2.98	Peak	100	77	5	28020.00	44.76	68.20	-23.44	36.22	8.54	Average	100	58	6	28020.00	58.84	88.20	-29.36	50.30	8.54	Peak	100	58
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14010.00	45.91	68.20	-22.29	39.16	6.75	Average	100	41																																																																
2	14010.00	58.74	88.20	-29.46	51.99	6.75	Peak	100	41																																																																
3	21015.00	40.62	54.00	-13.38	37.64	2.98	Average	100	77																																																																
4	21015.00	54.27	74.00	-19.73	51.29	2.98	Peak	100	77																																																																
5	28020.00	44.76	68.20	-23.44	36.22	8.54	Average	100	58																																																																
6	28020.00	58.84	88.20	-29.36	50.30	8.54	Peak	100	58																																																																

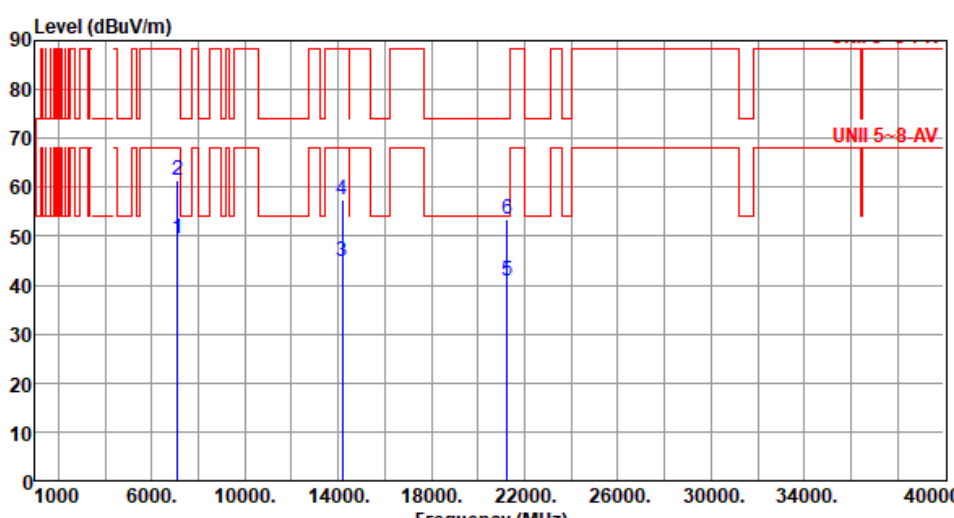


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>49.53</td><td>68.20</td><td>-18.67</td><td>44.75</td><td>4.78</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>2</td><td>7125.00</td><td>61.35</td><td>88.20</td><td>-26.85</td><td>56.57</td><td>4.78</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>3</td><td>14170.00</td><td>44.67</td><td>68.20</td><td>-23.53</td><td>37.56</td><td>7.11</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>14170.00</td><td>57.40</td><td>88.20</td><td>-30.80</td><td>50.29</td><td>7.11</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>21255.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>37.59</td><td>3.29</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>21255.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>50.29</td><td>3.29</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	49.53	68.20	-18.67	44.75	4.78	Average	100	315	2	7125.00	61.35	88.20	-26.85	56.57	4.78	Peak	100	315	3	14170.00	44.67	68.20	-23.53	37.56	7.11	Average	100	55	4	14170.00	57.40	88.20	-30.80	50.29	7.11	Peak	100	55	5	21255.00	40.88	54.00	-13.12	37.59	3.29	Average	100	40	6	21255.00	53.58	74.00	-20.42	50.29	3.29	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	49.53	68.20	-18.67	44.75	4.78	Average	100	315																																																																
2	7125.00	61.35	88.20	-26.85	56.57	4.78	Peak	100	315																																																																
3	14170.00	44.67	68.20	-23.53	37.56	7.11	Average	100	55																																																																
4	14170.00	57.40	88.20	-30.80	50.29	7.11	Peak	100	55																																																																
5	21255.00	40.88	54.00	-13.12	37.59	3.29	Average	100	40																																																																
6	21255.00	53.58	74.00	-20.42	50.29	3.29	Peak	100	40																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			

Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA

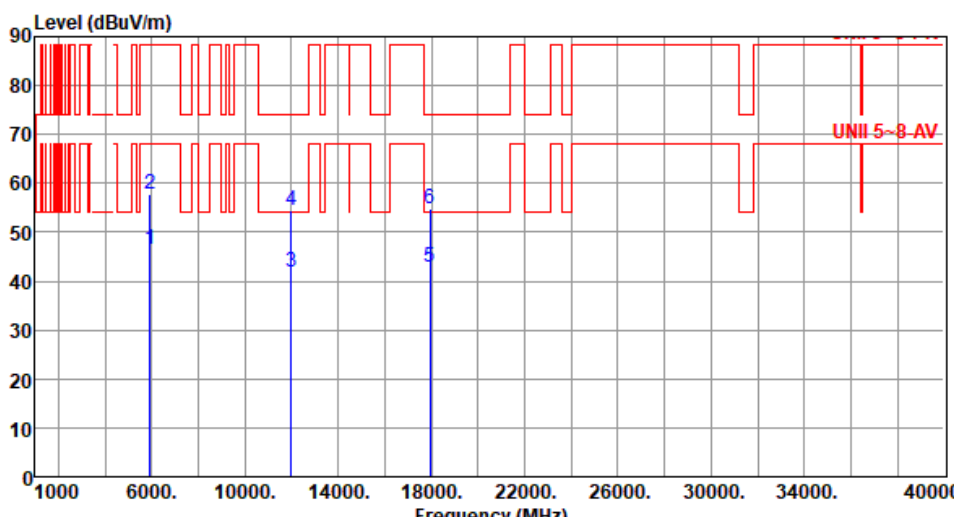
Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	46.58	68.20	-21.62	45.39	1.19	Average	120	291
2	5925.00	57.78	88.20	-30.42	56.59	1.19	Peak	120	291
3	11970.00	41.76	54.00	-12.24	35.61	6.15	Average	100	3
4	11970.00	54.54	74.00	-19.46	48.39	6.15	Peak	100	3
5	17955.00	42.76	54.00	-11.24	31.59	11.17	Average	100	60
6	17955.00	54.75	74.00	-19.25	43.58	11.17	Peak	100	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>42.65</td><td>1.19</td><td>Average</td><td>122</td><td>216</td></tr><tr><td>2</td><td>5925.00</td><td>56.07</td><td>88.20</td><td>-32.13</td><td>54.88</td><td>1.19</td><td>Peak</td><td>122</td><td>216</td></tr><tr><td>3</td><td>11970.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>35.67</td><td>6.15</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>11970.00</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>48.33</td><td>6.15</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>17955.00</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>31.25</td><td>11.17</td><td>Average</td><td>100</td><td>190</td></tr><tr><td>6</td><td>17955.00</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>43.21</td><td>11.17</td><td>Peak</td><td>100</td><td>190</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.84	68.20	-24.36	42.65	1.19	Average	122	216	2	5925.00	56.07	88.20	-32.13	54.88	1.19	Peak	122	216	3	11970.00	41.82	54.00	-12.18	35.67	6.15	Average	100	40	4	11970.00	54.48	74.00	-19.52	48.33	6.15	Peak	100	40	5	17955.00	42.42	54.00	-11.58	31.25	11.17	Average	100	190	6	17955.00	54.38	74.00	-19.62	43.21	11.17	Peak	100	190
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.84	68.20	-24.36	42.65	1.19	Average	122	216																																																																
2	5925.00	56.07	88.20	-32.13	54.88	1.19	Peak	122	216																																																																
3	11970.00	41.82	54.00	-12.18	35.67	6.15	Average	100	40																																																																
4	11970.00	54.48	74.00	-19.52	48.33	6.15	Peak	100	40																																																																
5	17955.00	42.42	54.00	-11.58	31.25	11.17	Average	100	190																																																																
6	17955.00	54.38	74.00	-19.62	43.21	11.17	Peak	100	190																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

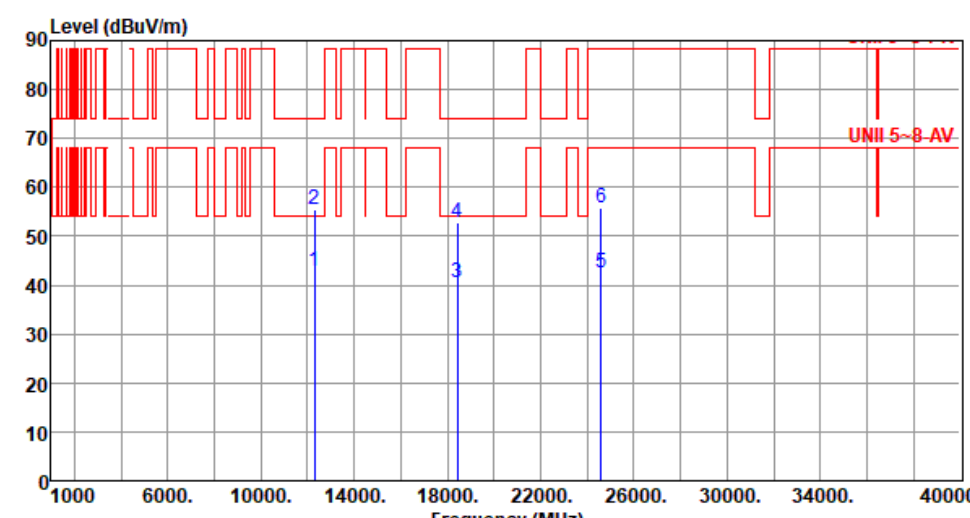


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12290.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>36.56</td><td>6.20</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>2</td><td>12290.00</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>49.28</td><td>6.20</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>3</td><td>18435.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>39.81</td><td>0.56</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>18435.00</td><td>52.64</td><td>74.00</td><td>-21.36</td><td>52.08</td><td>0.56</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>24580.00</td><td>42.38</td><td>68.20</td><td>-25.82</td><td>34.93</td><td>7.45</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>24580.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>48.36</td><td>7.45</td><td>Peak</td><td>100</td><td>177</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	42.76	54.00	-11.24	36.56	6.20	Average	100	53	2	12290.00	55.48	74.00	-18.52	49.28	6.20	Peak	100	53	3	18435.00	40.37	54.00	-13.63	39.81	0.56	Average	100	55	4	18435.00	52.64	74.00	-21.36	52.08	0.56	Peak	100	55	5	24580.00	42.38	68.20	-25.82	34.93	7.45	Average	100	177	6	24580.00	55.81	88.20	-32.39	48.36	7.45	Peak	100	177
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	42.76	54.00	-11.24	36.56	6.20	Average	100	53																																																																
2	12290.00	55.48	74.00	-18.52	49.28	6.20	Peak	100	53																																																																
3	18435.00	40.37	54.00	-13.63	39.81	0.56	Average	100	55																																																																
4	18435.00	52.64	74.00	-21.36	52.08	0.56	Peak	100	55																																																																
5	24580.00	42.38	68.20	-25.82	34.93	7.45	Average	100	177																																																																
6	24580.00	55.81	88.20	-32.39	48.36	7.45	Peak	100	177																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

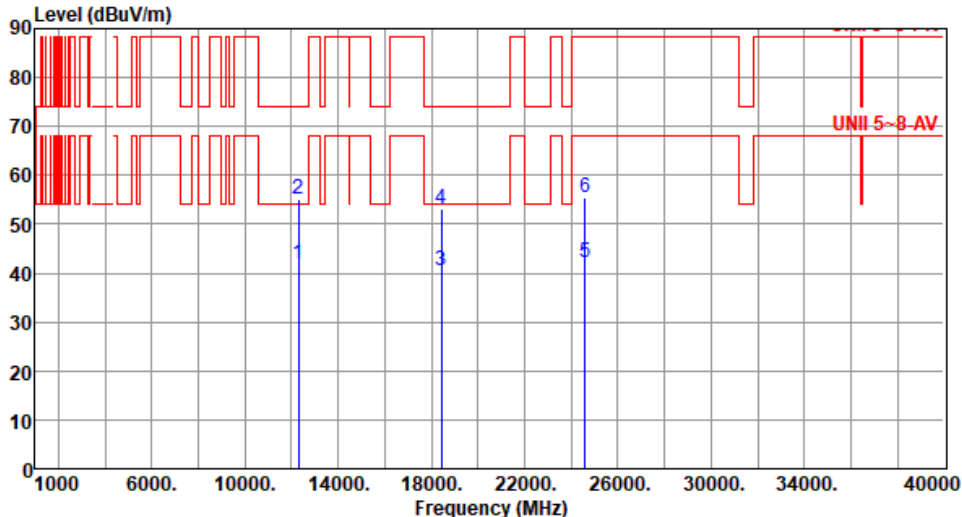


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12290.00</td><td>41.88</td><td>54.00</td><td>-12.12</td><td>35.68</td><td>6.20</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>2</td><td>12290.00</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>49.03</td><td>6.20</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>3</td><td>18435.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>39.91</td><td>0.56</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>4</td><td>18435.00</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>52.46</td><td>0.56</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>5</td><td>24580.00</td><td>42.33</td><td>68.20</td><td>-25.87</td><td>34.88</td><td>7.45</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>24580.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>47.91</td><td>7.45</td><td>Peak</td><td>100</td><td>45</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	41.88	54.00	-12.12	35.68	6.20	Average	100	67	2	12290.00	55.23	74.00	-18.77	49.03	6.20	Peak	100	67	3	18435.00	40.47	54.00	-13.53	39.91	0.56	Average	100	61	4	18435.00	53.02	74.00	-20.98	52.46	0.56	Peak	100	61	5	24580.00	42.33	68.20	-25.87	34.88	7.45	Average	100	45	6	24580.00	55.36	88.20	-32.84	47.91	7.45	Peak	100	45
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	41.88	54.00	-12.12	35.68	6.20	Average	100	67																																																																
2	12290.00	55.23	74.00	-18.77	49.03	6.20	Peak	100	67																																																																
3	18435.00	40.47	54.00	-13.53	39.91	0.56	Average	100	61																																																																
4	18435.00	53.02	74.00	-20.98	52.46	0.56	Peak	100	61																																																																
5	24580.00	42.33	68.20	-25.87	34.88	7.45	Average	100	45																																																																
6	24580.00	55.36	88.20	-32.84	47.91	7.45	Peak	100	45																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

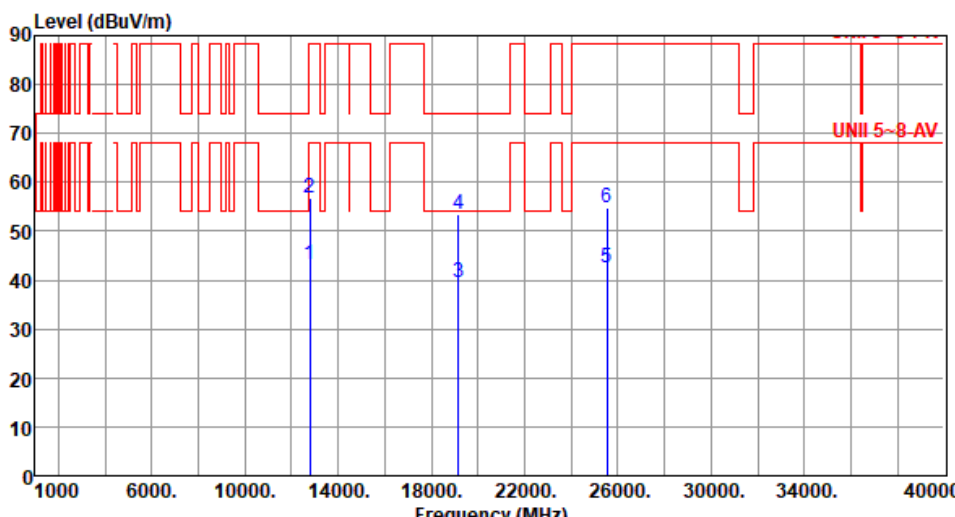

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	43.12	68.20	-25.08	36.87	6.25	Average	100	66
2	12770.00	56.68	88.20	-31.52	50.43	6.25	Peak	100	66
3	19155.00	39.66	54.00	-14.34	38.77	0.89	Average	100	73
4	19155.00	53.42	74.00	-20.58	52.53	0.89	Peak	100	73
5	25540.00	42.47	68.20	-25.73	35.04	7.43	Average	100	186
6	25540.00	54.77	88.20	-33.43	47.34	7.43	Peak	100	186
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

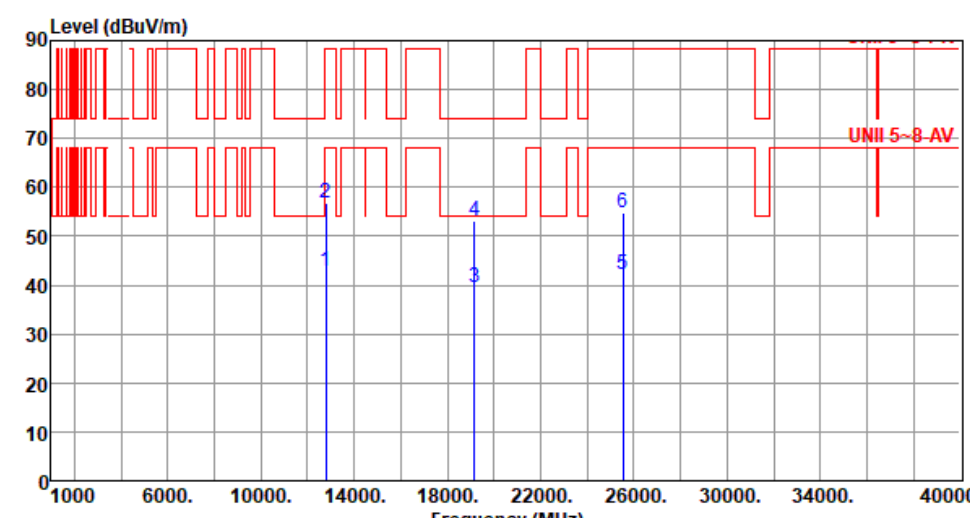


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12770.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>36.61</td><td>6.25</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>2</td><td>12770.00</td><td>56.77</td><td>88.20</td><td>-31.43</td><td>50.52</td><td>6.25</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>3</td><td>19155.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>38.59</td><td>0.89</td><td>Average</td><td>100</td><td>87</td></tr><tr><td>4</td><td>19155.00</td><td>53.26</td><td>74.00</td><td>-20.74</td><td>52.37</td><td>0.89</td><td>Peak</td><td>100</td><td>87</td></tr><tr><td>5</td><td>25540.00</td><td>42.33</td><td>68.20</td><td>-25.87</td><td>34.90</td><td>7.43</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>6</td><td>25540.00</td><td>54.76</td><td>88.20</td><td>-33.44</td><td>47.33</td><td>7.43</td><td>Peak</td><td>100</td><td>35</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12770.00	42.86	68.20	-25.34	36.61	6.25	Average	100	108	2	12770.00	56.77	88.20	-31.43	50.52	6.25	Peak	100	108	3	19155.00	39.48	54.00	-14.52	38.59	0.89	Average	100	87	4	19155.00	53.26	74.00	-20.74	52.37	0.89	Peak	100	87	5	25540.00	42.33	68.20	-25.87	34.90	7.43	Average	100	35	6	25540.00	54.76	88.20	-33.44	47.33	7.43	Peak	100	35
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12770.00	42.86	68.20	-25.34	36.61	6.25	Average	100	108																																																																
2	12770.00	56.77	88.20	-31.43	50.52	6.25	Peak	100	108																																																																
3	19155.00	39.48	54.00	-14.52	38.59	0.89	Average	100	87																																																																
4	19155.00	53.26	74.00	-20.74	52.37	0.89	Peak	100	87																																																																
5	25540.00	42.33	68.20	-25.87	34.90	7.43	Average	100	35																																																																
6	25540.00	54.76	88.20	-33.44	47.33	7.43	Peak	100	35																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			

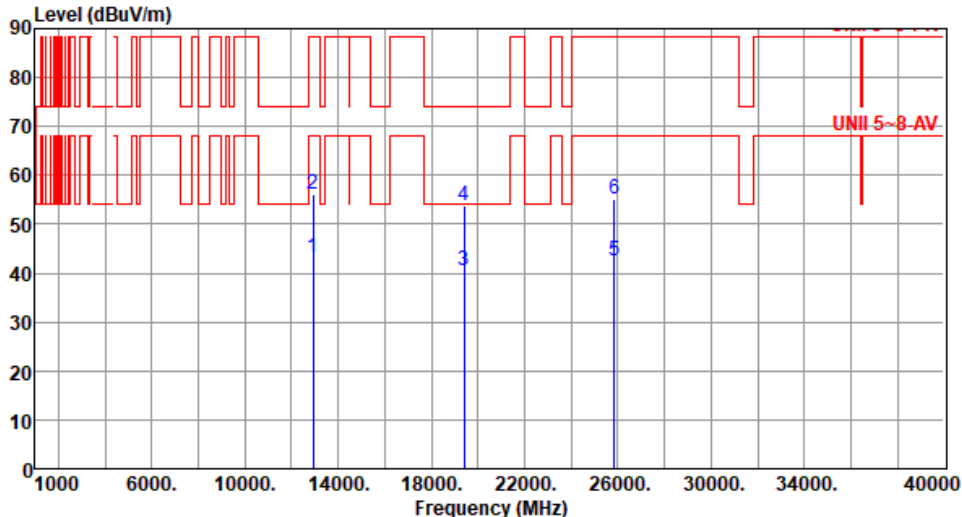


Modulation	be EHT80-OFDMA		Test Freq. (MHz)		6465																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12930.00</td><td>43.10</td><td>68.20</td><td>-25.10</td><td>36.65</td><td>6.45</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>2</td><td>12930.00</td><td>56.18</td><td>88.20</td><td>-32.02</td><td>49.73</td><td>6.45</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>3</td><td>19395.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>39.57</td><td>1.01</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>19395.00</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>52.65</td><td>1.01</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>25860.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>35.26</td><td>7.41</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>6</td><td>25860.00</td><td>55.18</td><td>88.20</td><td>-33.02</td><td>47.77</td><td>7.41</td><td>Peak</td><td>100</td><td>43</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12930.00	43.10	68.20	-25.10	36.65	6.45	Average	100	118	2	12930.00	56.18	88.20	-32.02	49.73	6.45	Peak	100	118	3	19395.00	40.58	54.00	-13.42	39.57	1.01	Average	100	105	4	19395.00	53.66	74.00	-20.34	52.65	1.01	Peak	100	105	5	25860.00	42.67	68.20	-25.53	35.26	7.41	Average	100	43	6	25860.00	55.18	88.20	-33.02	47.77	7.41	Peak	100	43
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12930.00	43.10	68.20	-25.10	36.65	6.45	Average	100	118																																																																																										
2	12930.00	56.18	88.20	-32.02	49.73	6.45	Peak	100	118																																																																																										
3	19395.00	40.58	54.00	-13.42	39.57	1.01	Average	100	105																																																																																										
4	19395.00	53.66	74.00	-20.34	52.65	1.01	Peak	100	105																																																																																										
5	25860.00	42.67	68.20	-25.53	35.26	7.41	Average	100	43																																																																																										
6	25860.00	55.18	88.20	-33.02	47.77	7.41	Peak	100	43																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13090.00</td><td>42.88</td><td>68.20</td><td>-25.32</td><td>36.86</td><td>6.02</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>2</td><td>13090.00</td><td>56.21</td><td>88.20</td><td>-31.99</td><td>50.19</td><td>6.02</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>3</td><td>19635.00</td><td>40.37</td><td>54.00</td><td>-13.63</td><td>39.20</td><td>1.17</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>19635.00</td><td>52.91</td><td>74.00</td><td>-21.09</td><td>51.74</td><td>1.17</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>26180.00</td><td>42.47</td><td>68.20</td><td>-25.73</td><td>34.89</td><td>7.58</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>6</td><td>26180.00</td><td>55.38</td><td>88.20</td><td>-32.82</td><td>47.80</td><td>7.58</td><td>Peak</td><td>100</td><td>147</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13090.00	42.88	68.20	-25.32	36.86	6.02	Average	100	29	2	13090.00	56.21	88.20	-31.99	50.19	6.02	Peak	100	29	3	19635.00	40.37	54.00	-13.63	39.20	1.17	Average	100	112	4	19635.00	52.91	74.00	-21.09	51.74	1.17	Peak	100	112	5	26180.00	42.47	68.20	-25.73	34.89	7.58	Average	100	147	6	26180.00	55.38	88.20	-32.82	47.80	7.58	Peak	100	147
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13090.00	42.88	68.20	-25.32	36.86	6.02	Average	100	29																																																																																				
2	13090.00	56.21	88.20	-31.99	50.19	6.02	Peak	100	29																																																																																				
3	19635.00	40.37	54.00	-13.63	39.20	1.17	Average	100	112																																																																																				
4	19635.00	52.91	74.00	-21.09	51.74	1.17	Peak	100	112																																																																																				
5	26180.00	42.47	68.20	-25.73	34.89	7.58	Average	100	147																																																																																				
6	26180.00	55.38	88.20	-32.82	47.80	7.58	Peak	100	147																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

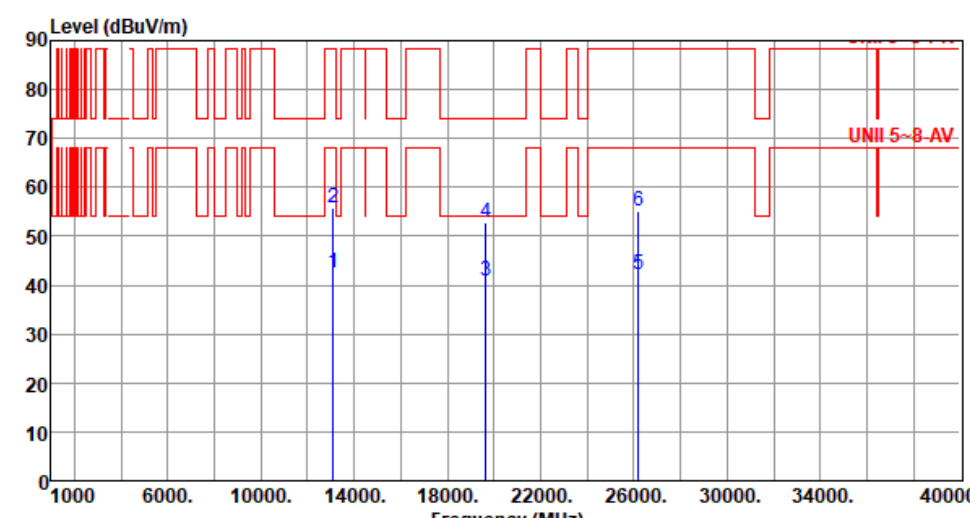


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13090.00</td><td>42.58</td><td>68.20</td><td>-25.62</td><td>36.56</td><td>6.02</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>2</td><td>13090.00</td><td>55.76</td><td>88.20</td><td>-32.44</td><td>49.74</td><td>6.02</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>3</td><td>19635.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>39.71</td><td>1.17</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>4</td><td>19635.00</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>51.66</td><td>1.17</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>5</td><td>26180.00</td><td>42.23</td><td>68.20</td><td>-25.97</td><td>34.65</td><td>7.58</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>6</td><td>26180.00</td><td>55.23</td><td>88.20</td><td>-32.97</td><td>47.65</td><td>7.58</td><td>Peak</td><td>100</td><td>107</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13090.00	42.58	68.20	-25.62	36.56	6.02	Average	100	47	2	13090.00	55.76	88.20	-32.44	49.74	6.02	Peak	100	47	3	19635.00	40.88	54.00	-13.12	39.71	1.17	Average	100	31	4	19635.00	52.83	74.00	-21.17	51.66	1.17	Peak	100	31	5	26180.00	42.23	68.20	-25.97	34.65	7.58	Average	100	107	6	26180.00	55.23	88.20	-32.97	47.65	7.58	Peak	100	107
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13090.00	42.58	68.20	-25.62	36.56	6.02	Average	100	47																																																																
2	13090.00	55.76	88.20	-32.44	49.74	6.02	Peak	100	47																																																																
3	19635.00	40.88	54.00	-13.12	39.71	1.17	Average	100	31																																																																
4	19635.00	52.83	74.00	-21.17	51.66	1.17	Peak	100	31																																																																
5	26180.00	42.23	68.20	-25.97	34.65	7.58	Average	100	107																																																																
6	26180.00	55.23	88.20	-32.97	47.65	7.58	Peak	100	107																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

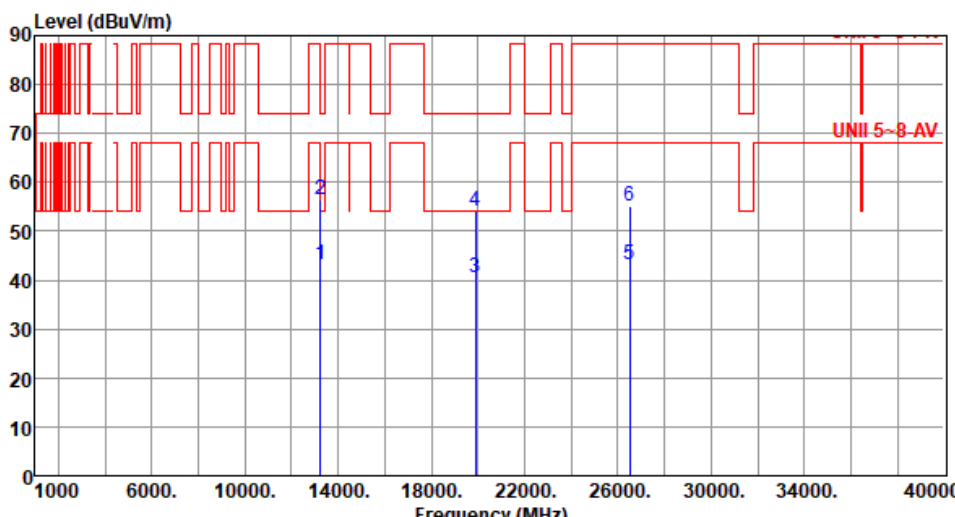

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13250.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>37.28</td><td>5.84</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>2</td><td>13250.00</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>50.63</td><td>5.84</td><td>Peak</td><td>100</td><td>151</td></tr><tr><td>3</td><td>19875.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>39.39</td><td>1.29</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>4</td><td>19875.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>52.87</td><td>1.29</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>5</td><td>26500.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>35.15</td><td>8.11</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>26500.00</td><td>55.18</td><td>88.20</td><td>-33.02</td><td>47.07</td><td>8.11</td><td>Peak</td><td>100</td><td>157</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13250.00	43.12	54.00	-10.88	37.28	5.84	Average	100	151	2	13250.00	56.47	74.00	-17.53	50.63	5.84	Peak	100	151	3	19875.00	40.68	54.00	-13.32	39.39	1.29	Average	100	201	4	19875.00	54.16	74.00	-19.84	52.87	1.29	Peak	100	201	5	26500.00	43.26	68.20	-24.94	35.15	8.11	Average	100	157	6	26500.00	55.18	88.20	-33.02	47.07	8.11	Peak	100	157
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13250.00	43.12	54.00	-10.88	37.28	5.84	Average	100	151																																																																																				
2	13250.00	56.47	74.00	-17.53	50.63	5.84	Peak	100	151																																																																																				
3	19875.00	40.68	54.00	-13.32	39.39	1.29	Average	100	201																																																																																				
4	19875.00	54.16	74.00	-19.84	52.87	1.29	Peak	100	201																																																																																				
5	26500.00	43.26	68.20	-24.94	35.15	8.11	Average	100	157																																																																																				
6	26500.00	55.18	88.20	-33.02	47.07	8.11	Peak	100	157																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

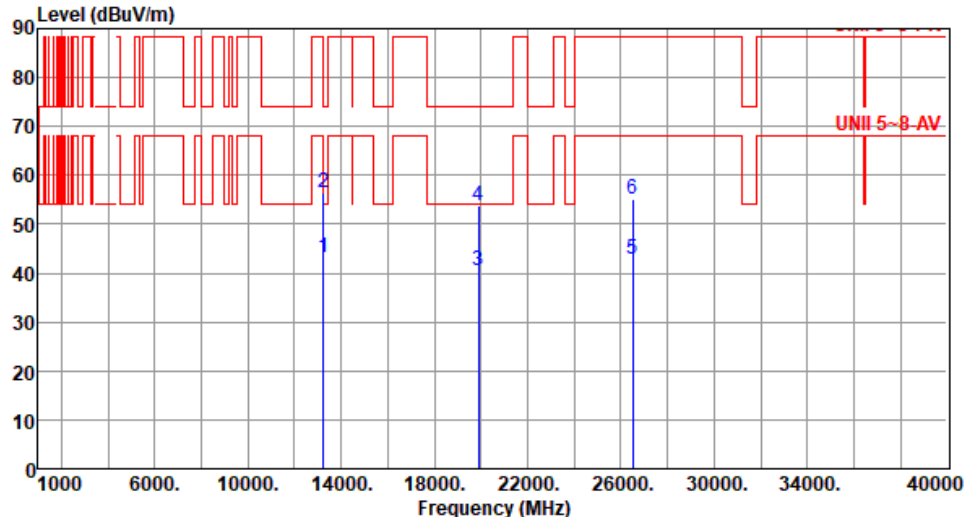

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13250.00</td><td>43.21</td><td>54.00</td><td>-10.79</td><td>37.37</td><td>5.84</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>2</td><td>13250.00</td><td>56.33</td><td>74.00</td><td>-17.67</td><td>50.49</td><td>5.84</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>3</td><td>19875.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>39.39</td><td>1.29</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>19875.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>52.57</td><td>1.29</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>26500.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>34.87</td><td>8.11</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>6</td><td>26500.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>47.16</td><td>8.11</td><td>Peak</td><td>100</td><td>48</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13250.00	43.21	54.00	-10.79	37.37	5.84	Average	100	77	2	13250.00	56.33	74.00	-17.67	50.49	5.84	Peak	100	77	3	19875.00	40.68	54.00	-13.32	39.39	1.29	Average	100	102	4	19875.00	53.86	74.00	-20.14	52.57	1.29	Peak	100	102	5	26500.00	42.98	68.20	-25.22	34.87	8.11	Average	100	48	6	26500.00	55.27	88.20	-32.93	47.16	8.11	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13250.00	43.21	54.00	-10.79	37.37	5.84	Average	100	77																																																																																				
2	13250.00	56.33	74.00	-17.67	50.49	5.84	Peak	100	77																																																																																				
3	19875.00	40.68	54.00	-13.32	39.39	1.29	Average	100	102																																																																																				
4	19875.00	53.86	74.00	-20.14	52.57	1.29	Peak	100	102																																																																																				
5	26500.00	42.98	68.20	-25.22	34.87	8.11	Average	100	48																																																																																				
6	26500.00	55.27	88.20	-32.93	47.16	8.11	Peak	100	48																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) <			



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13410.00</td><td>43.22</td><td>68.20</td><td>-24.98</td><td>37.01</td><td>6.21</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>2</td><td>13410.00</td><td>57.27</td><td>88.20</td><td>-30.93</td><td>51.06</td><td>6.21</td><td>Peak</td><td>100</td><td>89</td></tr><tr><td>3</td><td>20115.00</td><td>40.22</td><td>54.00</td><td>-13.78</td><td>38.75</td><td>1.47</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>20115.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>52.79</td><td>1.47</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>26820.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>35.03</td><td>8.13</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>6</td><td>26820.00</td><td>55.33</td><td>88.20</td><td>-32.87</td><td>47.20</td><td>8.13</td><td>Peak</td><td>100</td><td>116</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	43.22	68.20	-24.98	37.01	6.21	Average	100	89	2	13410.00	57.27	88.20	-30.93	51.06	6.21	Peak	100	89	3	20115.00	40.22	54.00	-13.78	38.75	1.47	Average	100	108	4	20115.00	54.26	74.00	-19.74	52.79	1.47	Peak	100	108	5	26820.00	43.16	68.20	-25.04	35.03	8.13	Average	100	116	6	26820.00	55.33	88.20	-32.87	47.20	8.13	Peak	100	116
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13410.00	43.22	68.20	-24.98	37.01	6.21	Average	100	89																																																																
2	13410.00	57.27	88.20	-30.93	51.06	6.21	Peak	100	89																																																																
3	20115.00	40.22	54.00	-13.78	38.75	1.47	Average	100	108																																																																
4	20115.00	54.26	74.00	-19.74	52.79	1.47	Peak	100	108																																																																
5	26820.00	43.16	68.20	-25.04	35.03	8.13	Average	100	116																																																																
6	26820.00	55.33	88.20	-32.87	47.20	8.13	Peak	100	116																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) <			




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>43.69</td><td>68.20</td><td>-24.51</td><td>37.48</td><td>6.21</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>2</td><td>13570.00</td><td>58.26</td><td>88.20</td><td>-29.94</td><td>52.05</td><td>6.21</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>3</td><td>20355.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>38.74</td><td>1.73</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>20355.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>51.95</td><td>1.73</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>27140.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>34.92</td><td>7.94</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>27140.00</td><td>55.66</td><td>88.20</td><td>-32.54</td><td>47.72</td><td>7.94</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	43.69	68.20	-24.51	37.48	6.21	Average	100	48	2	13570.00	58.26	88.20	-29.94	52.05	6.21	Peak	100	48	3	20355.00	40.47	54.00	-13.53	38.74	1.73	Average	100	80	4	20355.00	53.68	74.00	-20.32	51.95	1.73	Peak	100	80	5	27140.00	42.86	68.20	-25.34	34.92	7.94	Average	100	155	6	27140.00	55.66	88.20	-32.54	47.72	7.94	Peak	100	155
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	43.69	68.20	-24.51	37.48	6.21	Average	100	48																																																																
2	13570.00	58.26	88.20	-29.94	52.05	6.21	Peak	100	48																																																																
3	20355.00	40.47	54.00	-13.53	38.74	1.73	Average	100	80																																																																
4	20355.00	53.68	74.00	-20.32	51.95	1.73	Peak	100	80																																																																
5	27140.00	42.86	68.20	-25.34	34.92	7.94	Average	100	155																																																																
6	27140.00	55.66	88.20	-32.54	47.72	7.94	Peak	100	155																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

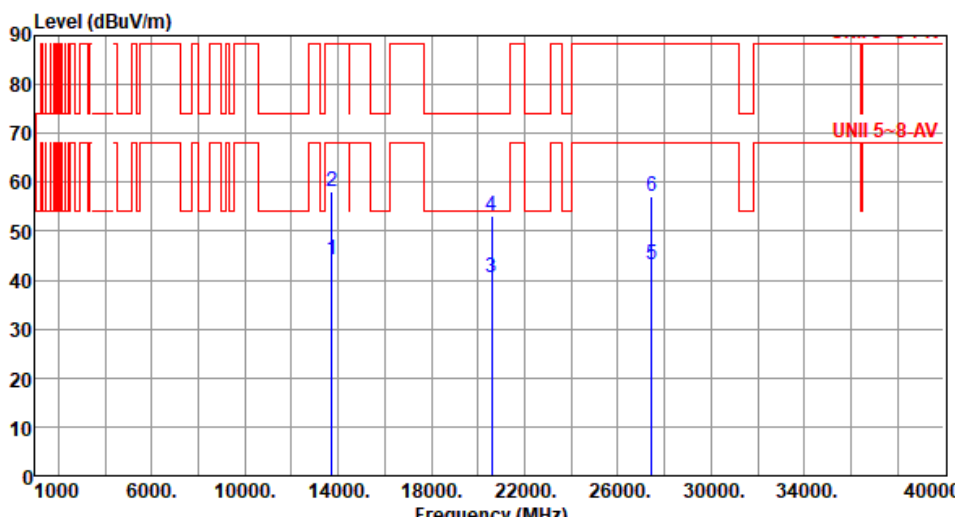

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13730.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>37.77</td><td>6.25</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>2</td><td>13730.00</td><td>58.26</td><td>88.20</td><td>-29.94</td><td>52.01</td><td>6.25</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>3</td><td>20595.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>38.59</td><td>2.09</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>4</td><td>20595.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>51.07</td><td>2.09</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>5</td><td>27460.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>35.32</td><td>7.94</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>27460.00</td><td>57.18</td><td>88.20</td><td>-31.02</td><td>49.24</td><td>7.94</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13730.00	44.02	68.20	-24.18	37.77	6.25	Average	100	155	2	13730.00	58.26	88.20	-29.94	52.01	6.25	Peak	100	155	3	20595.00	40.68	54.00	-13.32	38.59	2.09	Average	100	152	4	20595.00	53.16	74.00	-20.84	51.07	2.09	Peak	100	152	5	27460.00	43.26	68.20	-24.94	35.32	7.94	Average	100	117	6	27460.00	57.18	88.20	-31.02	49.24	7.94	Peak	100	117
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13730.00	44.02	68.20	-24.18	37.77	6.25	Average	100	155																																																																																				
2	13730.00	58.26	88.20	-29.94	52.01	6.25	Peak	100	155																																																																																				
3	20595.00	40.68	54.00	-13.32	38.59	2.09	Average	100	152																																																																																				
4	20595.00	53.16	74.00	-20.84	51.07	2.09	Peak	100	152																																																																																				
5	27460.00	43.26	68.20	-24.94	35.32	7.94	Average	100	117																																																																																				
6	27460.00	57.18	88.20	-31.02	49.24	7.94	Peak	100	117																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

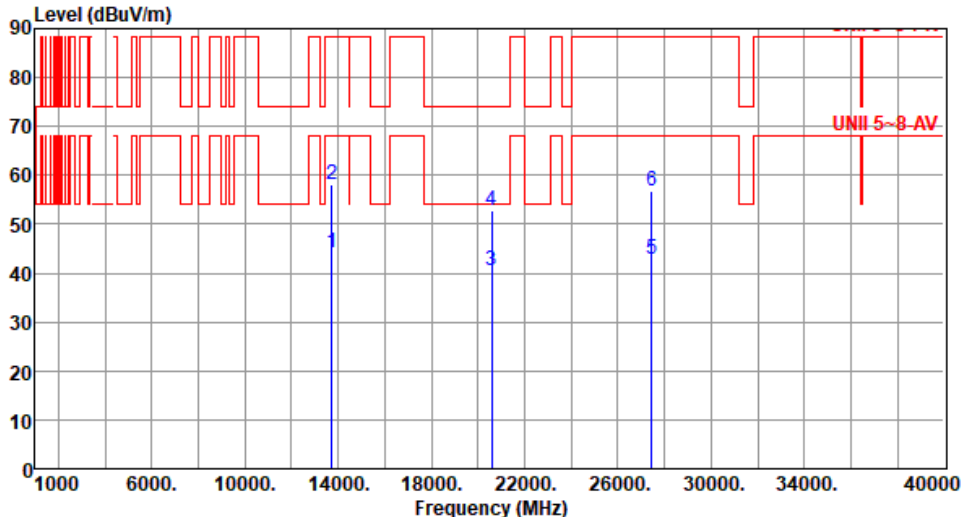

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBuV/m dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>13730.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>37.77</td><td>6.25</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>2</td><td>13730.00</td><td>58.16</td><td>88.20</td><td>-30.04</td><td>51.91</td><td>6.25</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>3</td><td>20595.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>38.58</td><td>2.09</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>4</td><td>20595.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>50.77</td><td>2.09</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>5</td><td>27460.00</td><td>42.83</td><td>68.20</td><td>-25.37</td><td>34.89</td><td>7.94</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>27460.00</td><td>56.81</td><td>88.20</td><td>-31.39</td><td>48.87</td><td>7.94</td><td>Peak</td><td>100</td><td>108</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	13730.00	44.02	68.20	-24.18	37.77	6.25	Average	100	110	2	13730.00	58.16	88.20	-30.04	51.91	6.25	Peak	100	110	3	20595.00	40.67	54.00	-13.33	38.58	2.09	Average	100	115	4	20595.00	52.86	74.00	-21.14	50.77	2.09	Peak	100	115	5	27460.00	42.83	68.20	-25.37	34.89	7.94	Average	100	108	6	27460.00	56.81	88.20	-31.39	48.87	7.94	Peak	100	108
1	13730.00	44.02	68.20	-24.18	37.77	6.25	Average	100	110																																																						
2	13730.00	58.16	88.20	-30.04	51.91	6.25	Peak	100	110																																																						
3	20595.00	40.67	54.00	-13.33	38.58	2.09	Average	100	115																																																						
4	20595.00	52.86	74.00	-21.14	50.77	2.09	Peak	100	115																																																						
5	27460.00	42.83	68.20	-25.37	34.89	7.94	Average	100	108																																																						
6	27460.00	56.81	88.20	-31.39	48.87	7.94	Peak	100	108																																																						



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m)			




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.99</td><td>68.20</td><td>-19.21</td><td>44.21</td><td>4.78</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>2</td><td>7125.00</td><td>61.22</td><td>88.20</td><td>-26.98</td><td>56.44</td><td>4.78</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>3</td><td>14050.00</td><td>44.51</td><td>68.20</td><td>-23.69</td><td>37.65</td><td>6.86</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>14050.00</td><td>57.29</td><td>88.20</td><td>-30.91</td><td>50.43</td><td>6.86</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>21075.00</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>36.58</td><td>3.06</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>21075.00</td><td>53.17</td><td>74.00</td><td>-20.83</td><td>50.11</td><td>3.06</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.99	68.20	-19.21	44.21	4.78	Average	100	315	2	7125.00	61.22	88.20	-26.98	56.44	4.78	Peak	100	315	3	14050.00	44.51	68.20	-23.69	37.65	6.86	Average	100	50	4	14050.00	57.29	88.20	-30.91	50.43	6.86	Peak	100	50	5	21075.00	39.64	54.00	-14.36	36.58	3.06	Average	100	20	6	21075.00	53.17	74.00	-20.83	50.11	3.06	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.99	68.20	-19.21	44.21	4.78	Average	100	315																																																																
2	7125.00	61.22	88.20	-26.98	56.44	4.78	Peak	100	315																																																																
3	14050.00	44.51	68.20	-23.69	37.65	6.86	Average	100	50																																																																
4	14050.00	57.29	88.20	-30.91	50.43	6.86	Peak	100	50																																																																
5	21075.00	39.64	54.00	-14.36	36.58	3.06	Average	100	20																																																																
6	21075.00	53.17	74.00	-20.83	50.11	3.06	Peak	100	20																																																																

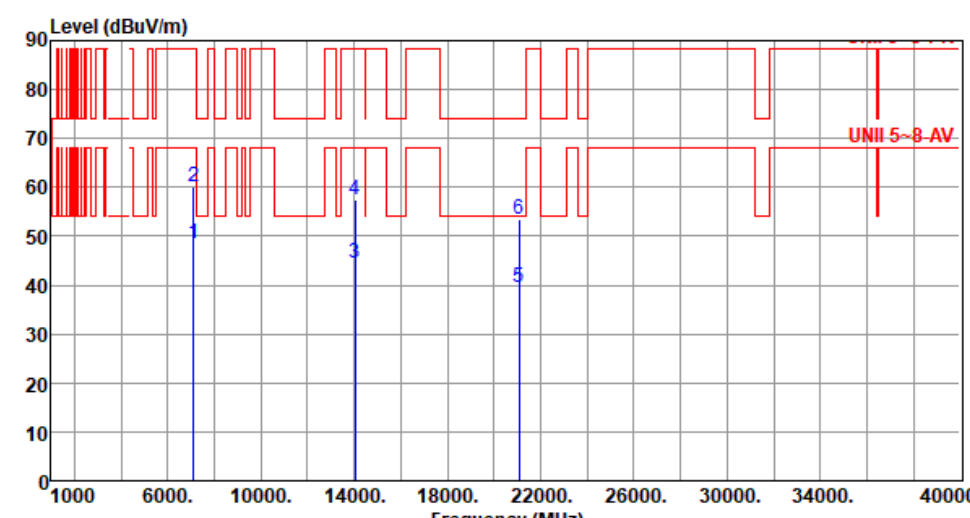


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.33</td><td>68.20</td><td>-19.87</td><td>43.55</td><td>4.78</td><td>Average</td><td>106</td><td>331</td></tr><tr><td>2</td><td>7125.00</td><td>60.12</td><td>88.20</td><td>-28.08</td><td>55.34</td><td>4.78</td><td>Peak</td><td>106</td><td>331</td></tr><tr><td>3</td><td>14050.00</td><td>44.48</td><td>68.20</td><td>-23.72</td><td>37.62</td><td>6.86</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>14050.00</td><td>57.62</td><td>88.20</td><td>-30.58</td><td>50.76</td><td>6.86</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>21075.00</td><td>39.61</td><td>54.00</td><td>-14.39</td><td>36.55</td><td>3.06</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>21075.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>50.46</td><td>3.06</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.33	68.20	-19.87	43.55	4.78	Average	106	331	2	7125.00	60.12	88.20	-28.08	55.34	4.78	Peak	106	331	3	14050.00	44.48	68.20	-23.72	37.62	6.86	Average	100	90	4	14050.00	57.62	88.20	-30.58	50.76	6.86	Peak	100	90	5	21075.00	39.61	54.00	-14.39	36.55	3.06	Average	100	30	6	21075.00	53.52	74.00	-20.48	50.46	3.06	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.33	68.20	-19.87	43.55	4.78	Average	106	331																																																																
2	7125.00	60.12	88.20	-28.08	55.34	4.78	Peak	106	331																																																																
3	14050.00	44.48	68.20	-23.72	37.62	6.86	Average	100	90																																																																
4	14050.00	57.62	88.20	-30.58	50.76	6.86	Peak	100	90																																																																
5	21075.00	39.61	54.00	-14.39	36.55	3.06	Average	100	30																																																																
6	21075.00	53.52	74.00	-20.48	50.46	3.06	Peak	100	30																																																																


Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

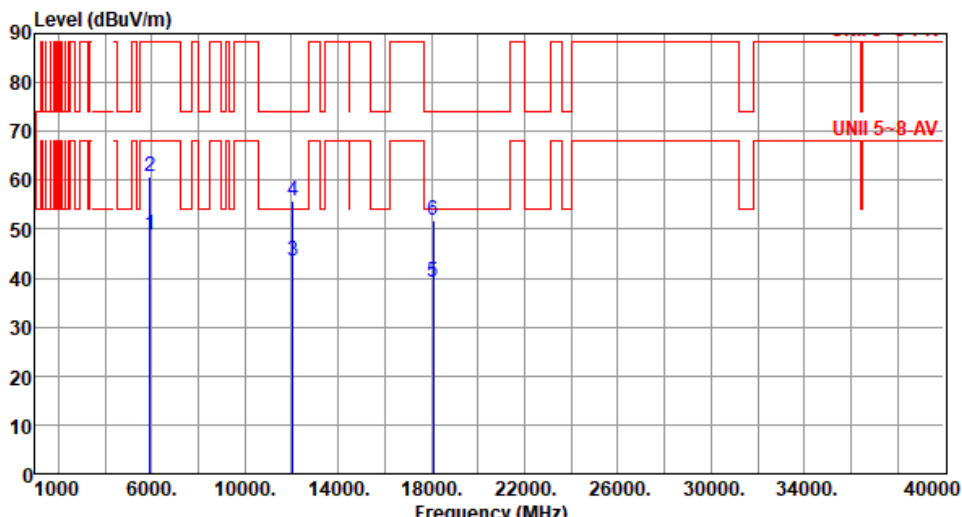Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>48.78</td><td>68.20</td><td>-19.42</td><td>47.59</td><td>1.19</td><td>Average</td><td>233</td><td>310</td></tr><tr><td>2</td><td>5925.00</td><td>60.88</td><td>88.20</td><td>-27.32</td><td>59.69</td><td>1.19</td><td>Peak</td><td>233</td><td>310</td></tr><tr><td>3</td><td>12050.00</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>37.26</td><td>6.40</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>12050.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>49.28</td><td>6.40</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>18075.00</td><td>39.03</td><td>54.00</td><td>-14.97</td><td>38.55</td><td>0.48</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>18075.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>51.46</td><td>0.48</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	48.78	68.20	-19.42	47.59	1.19	Average	233	310	2	5925.00	60.88	88.20	-27.32	59.69	1.19	Peak	233	310	3	12050.00	43.66	54.00	-10.34	37.26	6.40	Average	100	60	4	12050.00	55.68	74.00	-18.32	49.28	6.40	Peak	100	60	5	18075.00	39.03	54.00	-14.97	38.55	0.48	Average	100	20	6	18075.00	51.94	74.00	-22.06	51.46	0.48	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	48.78	68.20	-19.42	47.59	1.19	Average	233	310																																																																
2	5925.00	60.88	88.20	-27.32	59.69	1.19	Peak	233	310																																																																
3	12050.00	43.66	54.00	-10.34	37.26	6.40	Average	100	60																																																																
4	12050.00	55.68	74.00	-18.32	49.28	6.40	Peak	100	60																																																																
5	18075.00	39.03	54.00	-14.97	38.55	0.48	Average	100	20																																																																
6	18075.00	51.94	74.00	-22.06	51.46	0.48	Peak	100	20																																																																

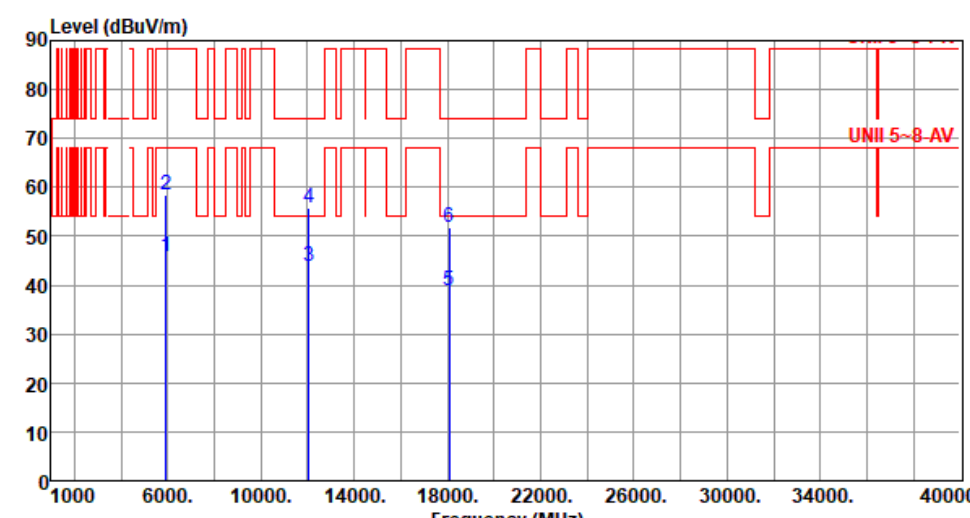

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dB dBuV dB/m cm deg <table><tr><td>1</td><td>5925.00</td><td>45.75</td><td>68.20</td><td>-22.45</td><td>44.56</td><td>1.19</td><td>Average</td><td>125</td><td>211</td></tr><tr><td>2</td><td>5925.00</td><td>58.38</td><td>88.20</td><td>-29.82</td><td>57.19</td><td>1.19</td><td>Peak</td><td>125</td><td>211</td></tr><tr><td>3</td><td>12050.00</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>37.29</td><td>6.40</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>12050.00</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>49.31</td><td>6.40</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>18075.00</td><td>38.80</td><td>54.00</td><td>-15.20</td><td>38.32</td><td>0.48</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>18075.00</td><td>51.85</td><td>74.00</td><td>-22.15</td><td>51.37</td><td>0.48</td><td>Peak</td><td>100</td><td>90</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	5925.00	45.75	68.20	-22.45	44.56	1.19	Average	125	211	2	5925.00	58.38	88.20	-29.82	57.19	1.19	Peak	125	211	3	12050.00	43.69	54.00	-10.31	37.29	6.40	Average	100	40	4	12050.00	55.71	74.00	-18.29	49.31	6.40	Peak	100	40	5	18075.00	38.80	54.00	-15.20	38.32	0.48	Average	100	90	6	18075.00	51.85	74.00	-22.15	51.37	0.48	Peak	100	90
1	5925.00	45.75	68.20	-22.45	44.56	1.19	Average	125	211																																																						
2	5925.00	58.38	88.20	-29.82	57.19	1.19	Peak	125	211																																																						
3	12050.00	43.69	54.00	-10.31	37.29	6.40	Average	100	40																																																						
4	12050.00	55.71	74.00	-18.29	49.31	6.40	Peak	100	40																																																						
5	18075.00	38.80	54.00	-15.20	38.32	0.48	Average	100	90																																																						
6	18075.00	51.85	74.00	-22.15	51.37	0.48	Peak	100	90																																																						

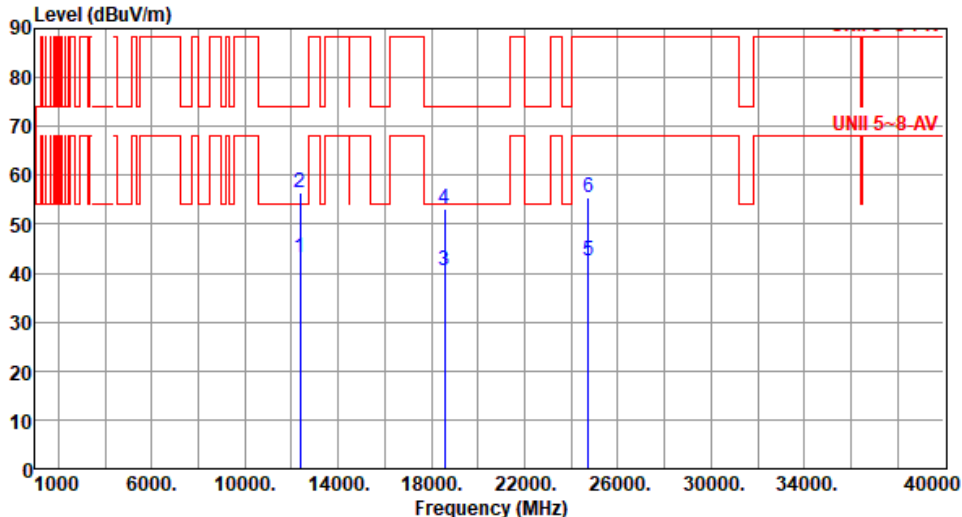


Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6185																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12370.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>36.95</td><td>6.17</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>12370.00</td><td>56.48</td><td>74.00</td><td>-17.52</td><td>50.31</td><td>6.17</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>18555.00</td><td>40.57</td><td>54.00</td><td>-13.43</td><td>39.95</td><td>0.62</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>4</td><td>18555.00</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>52.56</td><td>0.62</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>5</td><td>24740.00</td><td>42.48</td><td>68.20</td><td>-25.72</td><td>34.88</td><td>7.60</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>24740.00</td><td>55.40</td><td>88.20</td><td>-32.80</td><td>47.80</td><td>7.60</td><td>Peak</td><td>100</td><td>251</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12370.00	43.12	54.00	-10.88	36.95	6.17	Average	100	127	2	12370.00	56.48	74.00	-17.52	50.31	6.17	Peak	100	127	3	18555.00	40.57	54.00	-13.43	39.95	0.62	Average	100	126	4	18555.00	53.18	74.00	-20.82	52.56	0.62	Peak	100	126	5	24740.00	42.48	68.20	-25.72	34.88	7.60	Average	100	251	6	24740.00	55.40	88.20	-32.80	47.80	7.60	Peak	100	251
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12370.00	43.12	54.00	-10.88	36.95	6.17	Average	100	127																																																																																										
2	12370.00	56.48	74.00	-17.52	50.31	6.17	Peak	100	127																																																																																										
3	18555.00	40.57	54.00	-13.43	39.95	0.62	Average	100	126																																																																																										
4	18555.00	53.18	74.00	-20.82	52.56	0.62	Peak	100	126																																																																																										
5	24740.00	42.48	68.20	-25.72	34.88	7.60	Average	100	251																																																																																										
6	24740.00	55.40	88.20	-32.80	47.80	7.60	Peak	100	251																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12370.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>36.64</td><td>6.17</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>2</td><td>12370.00</td><td>56.10</td><td>74.00</td><td>-17.90</td><td>49.93</td><td>6.17</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>3</td><td>18555.00</td><td>40.60</td><td>54.00</td><td>-13.40</td><td>39.98</td><td>0.62</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>4</td><td>18555.00</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>53.15</td><td>0.62</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>5</td><td>24740.00</td><td>42.54</td><td>68.20</td><td>-25.66</td><td>34.94</td><td>7.60</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>24740.00</td><td>55.13</td><td>88.20</td><td>-33.07</td><td>47.53</td><td>7.60</td><td>Peak</td><td>100</td><td>221</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	42.81	54.00	-11.19	36.64	6.17	Average	100	147	2	12370.00	56.10	74.00	-17.90	49.93	6.17	Peak	100	147	3	18555.00	40.60	54.00	-13.40	39.98	0.62	Average	100	47	4	18555.00	53.77	74.00	-20.23	53.15	0.62	Peak	100	47	5	24740.00	42.54	68.20	-25.66	34.94	7.60	Average	100	221	6	24740.00	55.13	88.20	-33.07	47.53	7.60	Peak	100	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12370.00	42.81	54.00	-11.19	36.64	6.17	Average	100	147																																																																
2	12370.00	56.10	74.00	-17.90	49.93	6.17	Peak	100	147																																																																
3	18555.00	40.60	54.00	-13.40	39.98	0.62	Average	100	47																																																																
4	18555.00	53.77	74.00	-20.23	53.15	0.62	Peak	100	47																																																																
5	24740.00	42.54	68.20	-25.66	34.94	7.60	Average	100	221																																																																
6	24740.00	55.13	88.20	-33.07	47.53	7.60	Peak	100	221																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

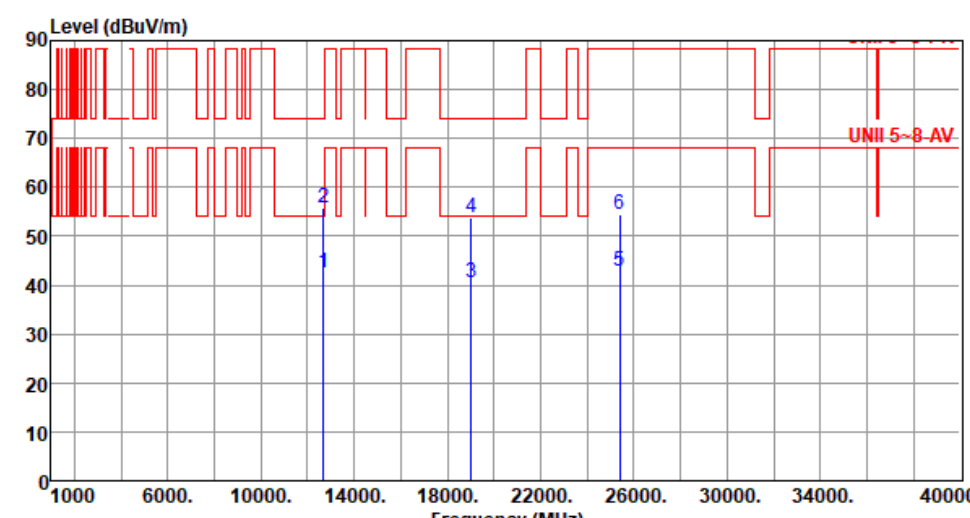

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12690.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>36.53</td><td>6.13</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>12690.00</td><td>55.95</td><td>74.00</td><td>-18.05</td><td>49.82</td><td>6.13</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>19035.00</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>39.50</td><td>0.91</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>19035.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>52.78</td><td>0.91</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>25380.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>35.28</td><td>7.43</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>25380.00</td><td>54.61</td><td>88.20</td><td>-33.59</td><td>47.18</td><td>7.43</td><td>Peak</td><td>100</td><td>20</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	42.66	54.00	-11.34	36.53	6.13	Average	100	50	2	12690.00	55.95	74.00	-18.05	49.82	6.13	Peak	100	50	3	19035.00	40.41	54.00	-13.59	39.50	0.91	Average	100	90	4	19035.00	53.69	74.00	-20.31	52.78	0.91	Peak	100	90	5	25380.00	42.71	68.20	-25.49	35.28	7.43	Average	100	20	6	25380.00	54.61	88.20	-33.59	47.18	7.43	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	42.66	54.00	-11.34	36.53	6.13	Average	100	50																																																																
2	12690.00	55.95	74.00	-18.05	49.82	6.13	Peak	100	50																																																																
3	19035.00	40.41	54.00	-13.59	39.50	0.91	Average	100	90																																																																
4	19035.00	53.69	74.00	-20.31	52.78	0.91	Peak	100	90																																																																
5	25380.00	42.71	68.20	-25.49	35.28	7.43	Average	100	20																																																																
6	25380.00	54.61	88.20	-33.59	47.18	7.43	Peak	100	20																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

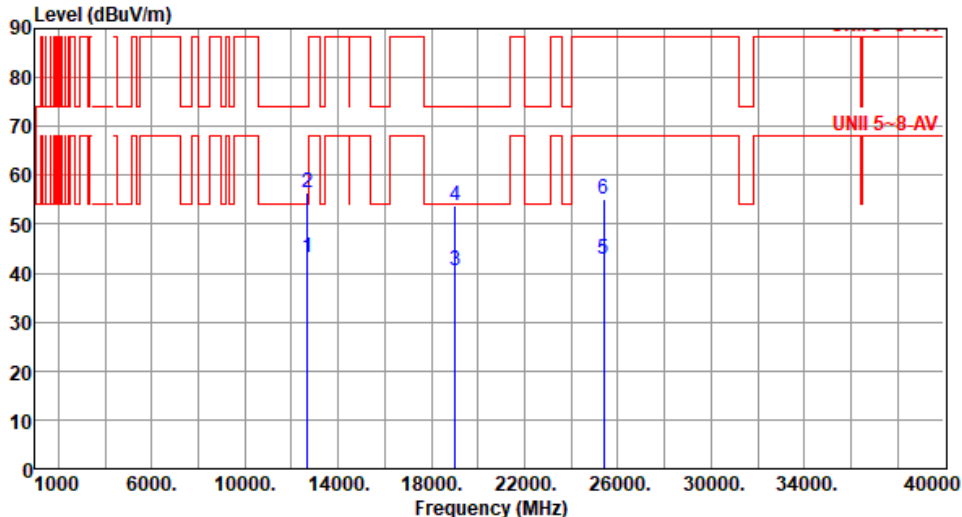


Modulation	be EHT160-OFDMA		Test Freq. (MHz)		6345																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12690.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>37.14</td><td>6.13</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>2</td><td>12690.00</td><td>56.38</td><td>74.00</td><td>-17.62</td><td>50.25</td><td>6.13</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>3</td><td>19035.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>39.76</td><td>0.91</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>19035.00</td><td>53.83</td><td>74.00</td><td>-20.17</td><td>52.92</td><td>0.91</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>25380.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>35.33</td><td>7.43</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>25380.00</td><td>55.25</td><td>88.20</td><td>-32.95</td><td>47.82</td><td>7.43</td><td>Peak</td><td>100</td><td>221</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12690.00	43.27	54.00	-10.73	37.14	6.13	Average	100	108	2	12690.00	56.38	74.00	-17.62	50.25	6.13	Peak	100	108	3	19035.00	40.67	54.00	-13.33	39.76	0.91	Average	100	80	4	19035.00	53.83	74.00	-20.17	52.92	0.91	Peak	100	80	5	25380.00	42.76	68.20	-25.44	35.33	7.43	Average	100	221	6	25380.00	55.25	88.20	-32.95	47.82	7.43	Peak	100	221
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12690.00	43.27	54.00	-10.73	37.14	6.13	Average	100	108																																																																																										
2	12690.00	56.38	74.00	-17.62	50.25	6.13	Peak	100	108																																																																																										
3	19035.00	40.67	54.00	-13.33	39.76	0.91	Average	100	80																																																																																										
4	19035.00	53.83	74.00	-20.17	52.92	0.91	Peak	100	80																																																																																										
5	25380.00	42.76	68.20	-25.44	35.33	7.43	Average	100	221																																																																																										
6	25380.00	55.25	88.20	-32.95	47.82	7.43	Peak	100	221																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13010.00</td><td>42.68</td><td>68.20</td><td>-25.52</td><td>36.25</td><td>6.43</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>2</td><td>13010.00</td><td>56.83</td><td>88.20</td><td>-31.37</td><td>50.40</td><td>6.43</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>3</td><td>19515.00</td><td>40.12</td><td>54.00</td><td>-13.88</td><td>39.01</td><td>1.11</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>4</td><td>19515.00</td><td>54.02</td><td>74.00</td><td>-19.98</td><td>52.91</td><td>1.11</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>5</td><td>26020.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>35.40</td><td>7.46</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>6</td><td>26020.00</td><td>55.34</td><td>88.20</td><td>-32.86</td><td>47.88</td><td>7.46</td><td>Peak</td><td>100</td><td>47</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13010.00	42.68	68.20	-25.52	36.25	6.43	Average	100	108	2	13010.00	56.83	88.20	-31.37	50.40	6.43	Peak	100	108	3	19515.00	40.12	54.00	-13.88	39.01	1.11	Average	100	127	4	19515.00	54.02	74.00	-19.98	52.91	1.11	Peak	100	127	5	26020.00	42.86	68.20	-25.34	35.40	7.46	Average	100	47	6	26020.00	55.34	88.20	-32.86	47.88	7.46	Peak	100	47
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13010.00	42.68	68.20	-25.52	36.25	6.43	Average	100	108																																																																
2	13010.00	56.83	88.20	-31.37	50.40	6.43	Peak	100	108																																																																
3	19515.00	40.12	54.00	-13.88	39.01	1.11	Average	100	127																																																																
4	19515.00	54.02	74.00	-19.98	52.91	1.11	Peak	100	127																																																																
5	26020.00	42.86	68.20	-25.34	35.40	7.46	Average	100	47																																																																
6	26020.00	55.34	88.20	-32.86	47.88	7.46	Peak	100	47																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

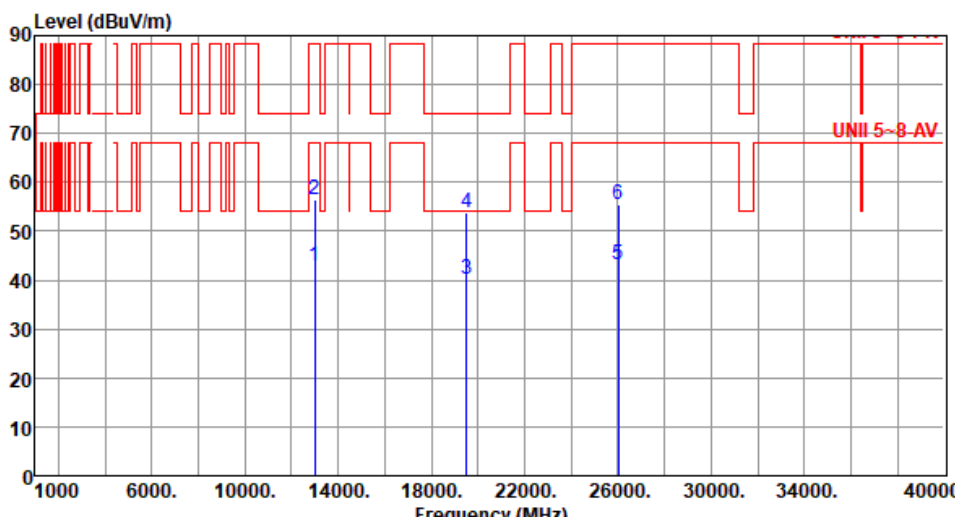


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13010.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>36.28</td><td>6.43</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>2</td><td>13010.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>50.04</td><td>6.43</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>3</td><td>19515.00</td><td>40.11</td><td>54.00</td><td>-13.89</td><td>39.00</td><td>1.11</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>4</td><td>19515.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>52.65</td><td>1.11</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>5</td><td>26020.00</td><td>43.02</td><td>68.20</td><td>-25.18</td><td>35.56</td><td>7.46</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>26020.00</td><td>55.33</td><td>88.20</td><td>-32.87</td><td>47.87</td><td>7.46</td><td>Peak</td><td>100</td><td>108</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13010.00	42.71	68.20	-25.49	36.28	6.43	Average	100	102	2	13010.00	56.47	88.20	-31.73	50.04	6.43	Peak	100	102	3	19515.00	40.11	54.00	-13.89	39.00	1.11	Average	100	215	4	19515.00	53.76	74.00	-20.24	52.65	1.11	Peak	100	215	5	26020.00	43.02	68.20	-25.18	35.56	7.46	Average	100	108	6	26020.00	55.33	88.20	-32.87	47.87	7.46	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13010.00	42.71	68.20	-25.49	36.28	6.43	Average	100	102																																																																
2	13010.00	56.47	88.20	-31.73	50.04	6.43	Peak	100	102																																																																
3	19515.00	40.11	54.00	-13.89	39.00	1.11	Average	100	215																																																																
4	19515.00	53.76	74.00	-20.24	52.65	1.11	Peak	100	215																																																																
5	26020.00	43.02	68.20	-25.18	35.56	7.46	Average	100	108																																																																
6	26020.00	55.33	88.20	-32.87	47.87	7.46	Peak	100	108																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

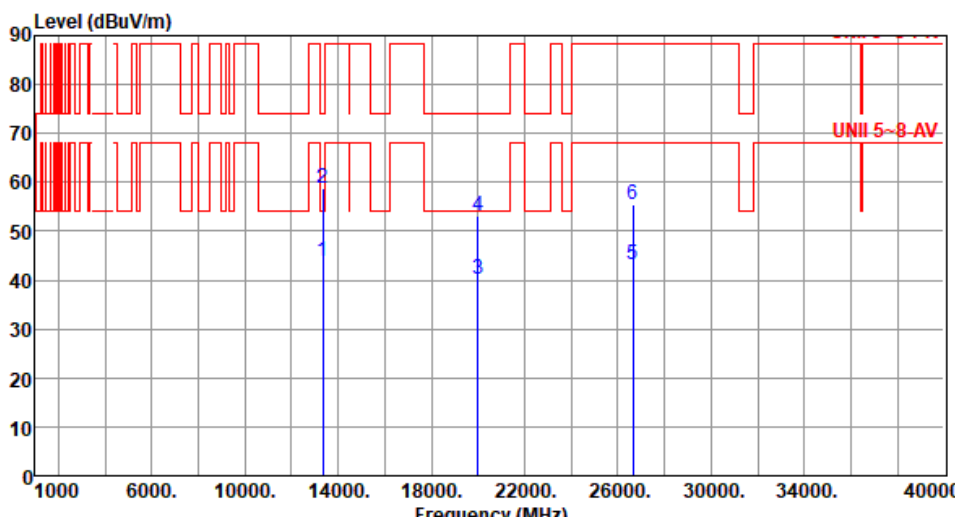


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13330.00</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>37.84</td><td>5.88</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>13330.00</td><td>58.62</td><td>74.00</td><td>-15.38</td><td>52.74</td><td>5.88</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>19995.00</td><td>40.23</td><td>54.00</td><td>-13.77</td><td>38.84</td><td>1.39</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>4</td><td>19995.00</td><td>53.28</td><td>74.00</td><td>-20.72</td><td>51.89</td><td>1.39</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>5</td><td>26660.00</td><td>43.08</td><td>68.20</td><td>-25.12</td><td>34.91</td><td>8.17</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>6</td><td>26660.00</td><td>55.38</td><td>88.20</td><td>-32.82</td><td>47.21</td><td>8.17</td><td>Peak</td><td>100</td><td>104</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13330.00	43.72	54.00	-10.28	37.84	5.88	Average	100	208	2	13330.00	58.62	74.00	-15.38	52.74	5.88	Peak	100	208	3	19995.00	40.23	54.00	-13.77	38.84	1.39	Average	100	116	4	19995.00	53.28	74.00	-20.72	51.89	1.39	Peak	100	116	5	26660.00	43.08	68.20	-25.12	34.91	8.17	Average	100	104	6	26660.00	55.38	88.20	-32.82	47.21	8.17	Peak	100	104
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13330.00	43.72	54.00	-10.28	37.84	5.88	Average	100	208																																																																																				
2	13330.00	58.62	74.00	-15.38	52.74	5.88	Peak	100	208																																																																																				
3	19995.00	40.23	54.00	-13.77	38.84	1.39	Average	100	116																																																																																				
4	19995.00	53.28	74.00	-20.72	51.89	1.39	Peak	100	116																																																																																				
5	26660.00	43.08	68.20	-25.12	34.91	8.17	Average	100	104																																																																																				
6	26660.00	55.38	88.20	-32.82	47.21	8.17	Peak	100	104																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

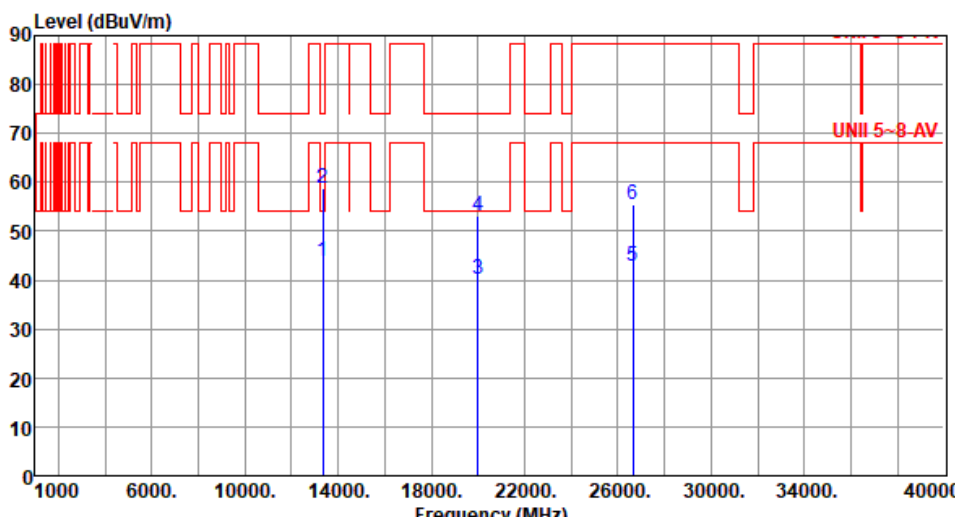

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13330.00	43.91	54.00	-10.09	38.03	5.88	Average	100	144
2	13330.00	58.62	74.00	-15.38	52.74	5.88	Peak	100	144
3	19995.00	40.23	54.00	-13.77	38.84	1.39	Average	100	217
4	19995.00	53.05	74.00	-20.95	51.66	1.39	Peak	100	217
5	26660.00	42.72	68.20	-25.48	34.55	8.17	Average	100	154
6	26660.00	55.54	88.20	-32.66	47.37	8.17	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

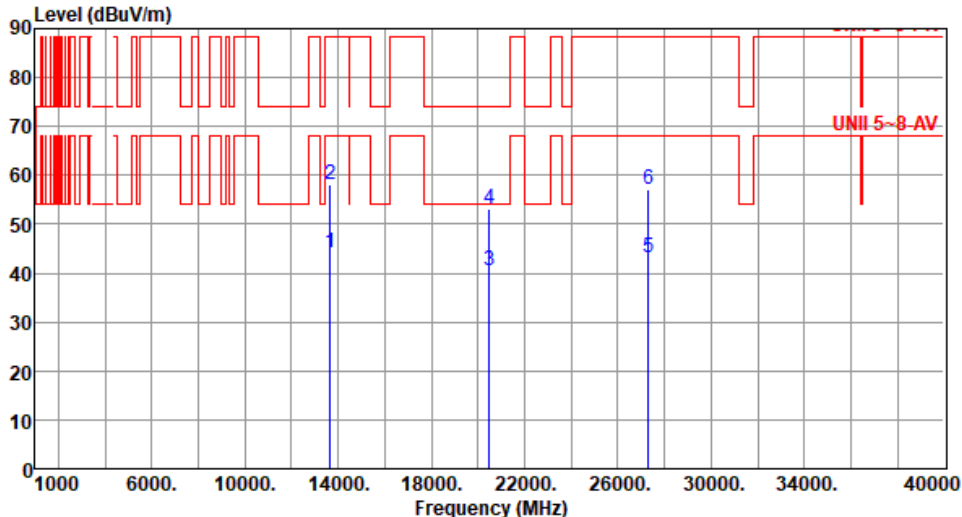


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	44.12	68.20	-24.08	37.88	6.24	Average	100	118
2	13650.00	57.99	88.20	-30.21	51.75	6.24	Peak	100	118
3	20475.00	40.62	54.00	-13.38	38.69	1.93	Average	100	147
4	20475.00	53.18	74.00	-20.82	51.25	1.93	Peak	100	147
5	27300.00	43.21	68.20	-24.99	35.25	7.96	Average	100	54
6	27300.00	57.26	88.20	-30.94	49.30	7.96	Peak	100	54

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m)			

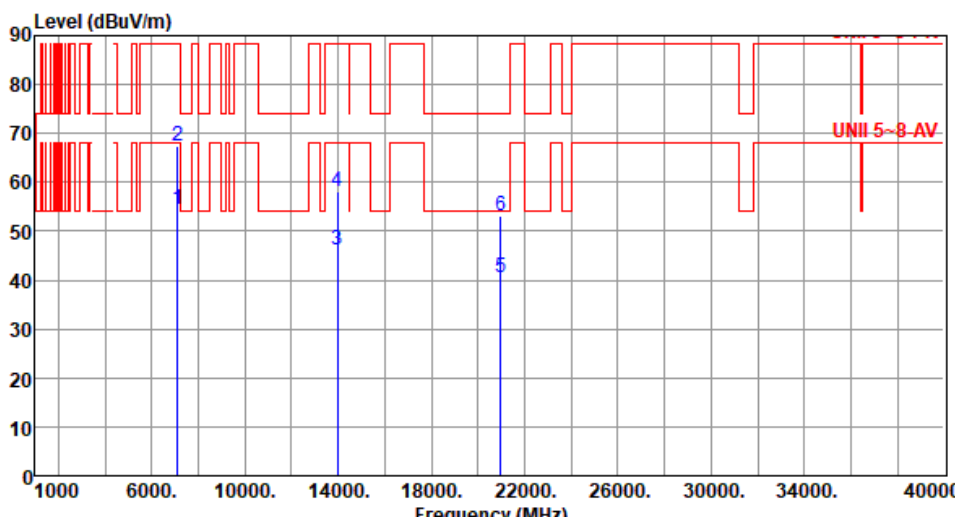


Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>54.51</td><td>68.20</td><td>-13.69</td><td>49.73</td><td>4.78</td><td>Average</td><td>104</td><td>310</td></tr><tr><td>2</td><td>7125.00</td><td>67.38</td><td>88.20</td><td>-20.82</td><td>62.60</td><td>4.78</td><td>Peak</td><td>104</td><td>310</td></tr><tr><td>3</td><td>13970.00</td><td>46.20</td><td>68.20</td><td>-22.00</td><td>39.52</td><td>6.68</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>13970.00</td><td>58.14</td><td>88.20</td><td>-30.06</td><td>51.46</td><td>6.68</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>20955.00</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>37.56</td><td>2.85</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>20955.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>50.34</td><td>2.85</td><td>Peak</td><td>100</td><td>85</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	54.51	68.20	-13.69	49.73	4.78	Average	104	310	2	7125.00	67.38	88.20	-20.82	62.60	4.78	Peak	104	310	3	13970.00	46.20	68.20	-22.00	39.52	6.68	Average	100	55	4	13970.00	58.14	88.20	-30.06	51.46	6.68	Peak	100	55	5	20955.00	40.41	54.00	-13.59	37.56	2.85	Average	100	85	6	20955.00	53.19	74.00	-20.81	50.34	2.85	Peak	100	85
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	54.51	68.20	-13.69	49.73	4.78	Average	104	310																																																																
2	7125.00	67.38	88.20	-20.82	62.60	4.78	Peak	104	310																																																																
3	13970.00	46.20	68.20	-22.00	39.52	6.68	Average	100	55																																																																
4	13970.00	58.14	88.20	-30.06	51.46	6.68	Peak	100	55																																																																
5	20955.00	40.41	54.00	-13.59	37.56	2.85	Average	100	85																																																																
6	20955.00	53.19	74.00	-20.81	50.34	2.85	Peak	100	85																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

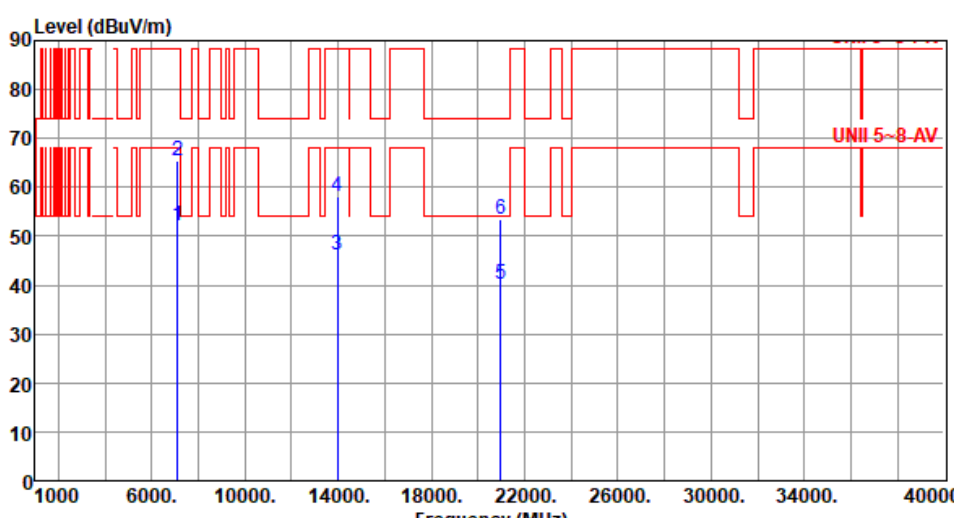

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>52.04</td><td>68.20</td><td>-16.16</td><td>47.26</td><td>4.78</td><td>Average</td><td>108</td><td>331</td></tr><tr><td>2</td><td>7125.00</td><td>65.37</td><td>88.20</td><td>-22.83</td><td>60.59</td><td>4.78</td><td>Peak</td><td>108</td><td>331</td></tr><tr><td>3</td><td>13970.00</td><td>46.16</td><td>68.20</td><td>-22.04</td><td>39.48</td><td>6.68</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>4</td><td>13970.00</td><td>58.11</td><td>88.20</td><td>-30.09</td><td>51.43</td><td>6.68</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>5</td><td>20955.00</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>37.46</td><td>2.85</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>20955.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>50.67</td><td>2.85</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	52.04	68.20	-16.16	47.26	4.78	Average	108	331	2	7125.00	65.37	88.20	-22.83	60.59	4.78	Peak	108	331	3	13970.00	46.16	68.20	-22.04	39.48	6.68	Average	100	70	4	13970.00	58.11	88.20	-30.09	51.43	6.68	Peak	100	70	5	20955.00	40.31	54.00	-13.69	37.46	2.85	Average	100	20	6	20955.00	53.52	74.00	-20.48	50.67	2.85	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	52.04	68.20	-16.16	47.26	4.78	Average	108	331																																																																
2	7125.00	65.37	88.20	-22.83	60.59	4.78	Peak	108	331																																																																
3	13970.00	46.16	68.20	-22.04	39.48	6.68	Average	100	70																																																																
4	13970.00	58.11	88.20	-30.09	51.43	6.68	Peak	100	70																																																																
5	20955.00	40.31	54.00	-13.69	37.46	2.85	Average	100	20																																																																
6	20955.00	53.52	74.00	-20.48	50.67	2.85	Peak	100	20																																																																

Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

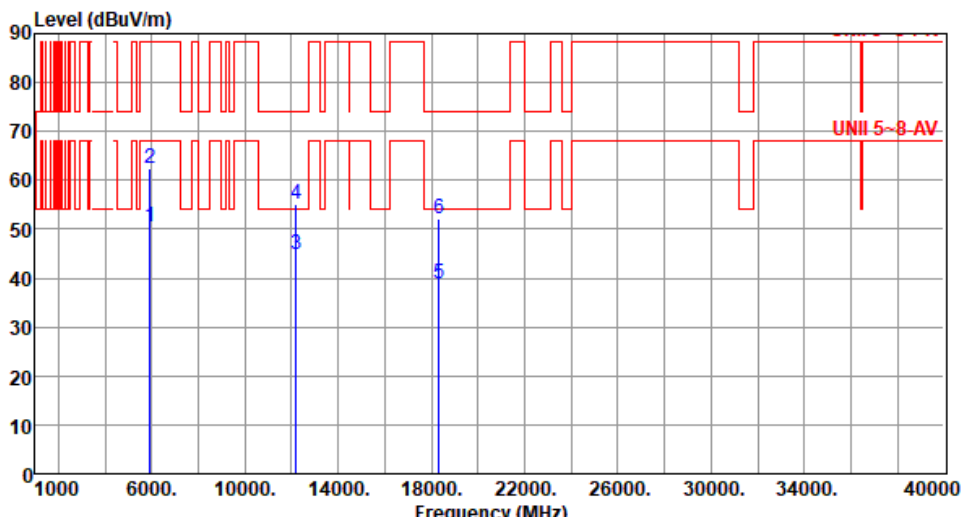
Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	50.58	68.20	-17.62	49.39	1.19	Average	235	322
2	5925.00	62.53	88.20	-25.67	61.34	1.19	Peak	235	322
3	12210.00	44.75	54.00	-9.25	38.44	6.31	Average	100	170
4	12210.00	54.98	74.00	-19.02	48.67	6.31	Peak	100	170
5	18315.00	39.01	54.00	-14.99	38.44	0.57	Average	100	20
6	18315.00	52.09	74.00	-21.91	51.52	0.57	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			

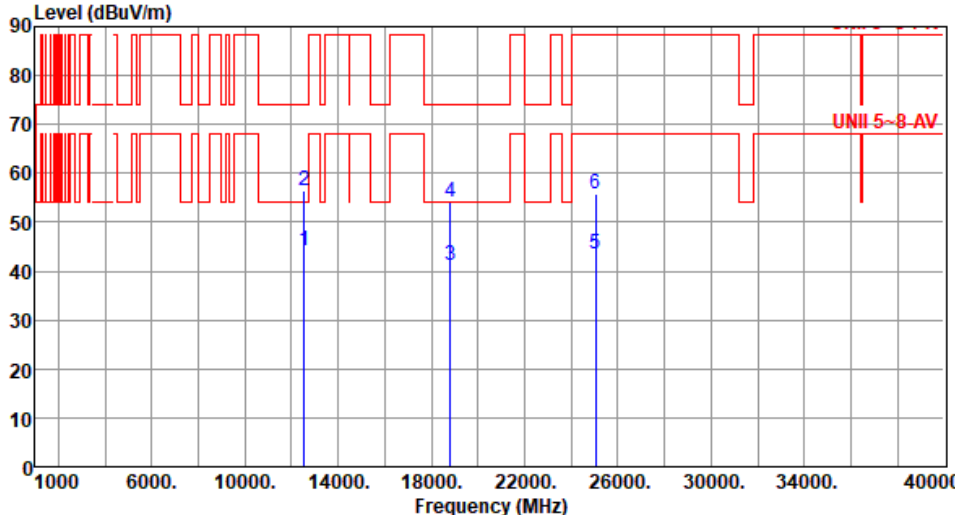


Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6265																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu			Temperature(°C):24			Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12530.00</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>38.42</td><td>5.89</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>12530.00</td><td>56.62</td><td>74.00</td><td>-17.38</td><td>50.73</td><td>5.89</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>18795.00</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>40.45</td><td>0.81</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>4</td><td>18795.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>53.41</td><td>0.81</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>5</td><td>25060.00</td><td>43.64</td><td>68.20</td><td>-24.56</td><td>36.13</td><td>7.51</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>6</td><td>25060.00</td><td>55.82</td><td>88.20</td><td>-32.38</td><td>48.31</td><td>7.51</td><td>Peak</td><td>100</td><td>151</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12530.00	44.31	54.00	-9.69	38.42	5.89	Average	100	211	2	12530.00	56.62	74.00	-17.38	50.73	5.89	Peak	100	211	3	18795.00	41.26	54.00	-12.74	40.45	0.81	Average	100	148	4	18795.00	54.22	74.00	-19.78	53.41	0.81	Peak	100	148	5	25060.00	43.64	68.20	-24.56	36.13	7.51	Average	100	151	6	25060.00	55.82	88.20	-32.38	48.31	7.51	Peak	100	151
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12530.00	44.31	54.00	-9.69	38.42	5.89	Average	100	211																																																																						
2	12530.00	56.62	74.00	-17.38	50.73	5.89	Peak	100	211																																																																						
3	18795.00	41.26	54.00	-12.74	40.45	0.81	Average	100	148																																																																						
4	18795.00	54.22	74.00	-19.78	53.41	0.81	Peak	100	148																																																																						
5	25060.00	43.64	68.20	-24.56	36.13	7.51	Average	100	151																																																																						
6	25060.00	55.82	88.20	-32.38	48.31	7.51	Peak	100	151																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

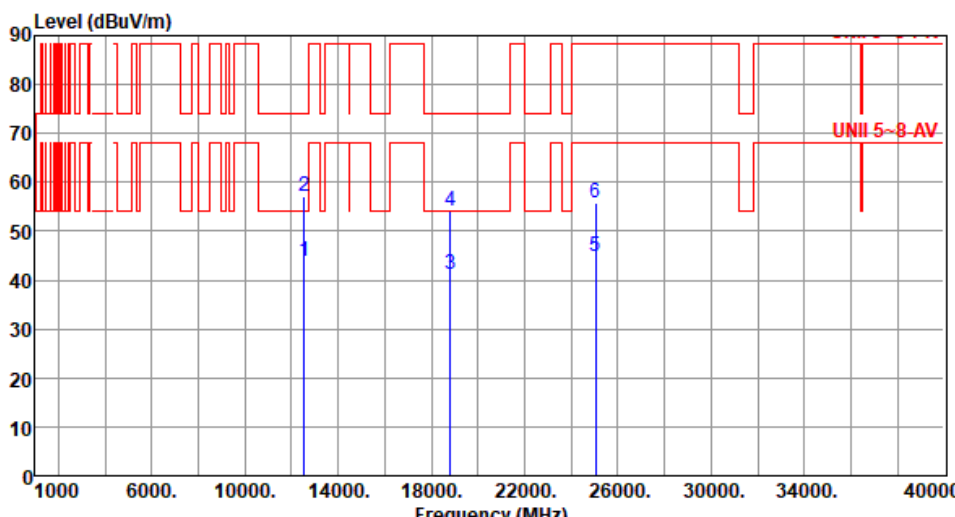


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12530.00</td><td>43.68</td><td>54.00</td><td>-10.32</td><td>37.79</td><td>5.89</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>2</td><td>12530.00</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>51.17</td><td>5.89</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>3</td><td>18795.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>40.44</td><td>0.81</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>18795.00</td><td>54.12</td><td>74.00</td><td>-19.88</td><td>53.31</td><td>0.81</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>25060.00</td><td>44.72</td><td>68.20</td><td>-23.48</td><td>37.21</td><td>7.51</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>25060.00</td><td>55.69</td><td>88.20</td><td>-32.51</td><td>48.18</td><td>7.51</td><td>Peak</td><td>100</td><td>221</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12530.00	43.68	54.00	-10.32	37.79	5.89	Average	100	154	2	12530.00	57.06	74.00	-16.94	51.17	5.89	Peak	100	154	3	18795.00	41.25	54.00	-12.75	40.44	0.81	Average	100	112	4	18795.00	54.12	74.00	-19.88	53.31	0.81	Peak	100	112	5	25060.00	44.72	68.20	-23.48	37.21	7.51	Average	100	221	6	25060.00	55.69	88.20	-32.51	48.18	7.51	Peak	100	221
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12530.00	43.68	54.00	-10.32	37.79	5.89	Average	100	154																																																																
2	12530.00	57.06	74.00	-16.94	51.17	5.89	Peak	100	154																																																																
3	18795.00	41.25	54.00	-12.75	40.44	0.81	Average	100	112																																																																
4	18795.00	54.12	74.00	-19.88	53.31	0.81	Peak	100	112																																																																
5	25060.00	44.72	68.20	-23.48	37.21	7.51	Average	100	221																																																																
6	25060.00	55.69	88.20	-32.51	48.18	7.51	Peak	100	221																																																																

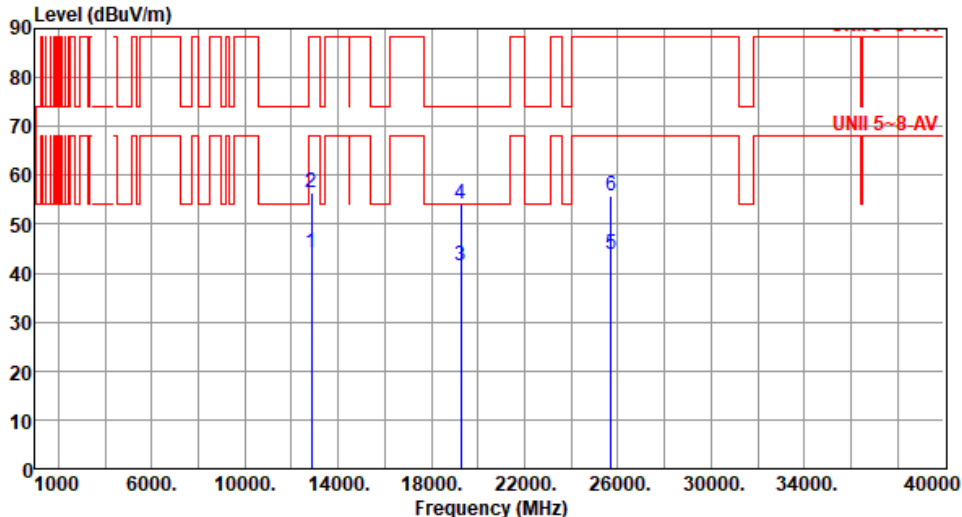


Modulation	be EHT320-OFDMA		Test Freq. (MHz)		6425																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12850.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>37.90</td><td>6.36</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>2</td><td>12850.00</td><td>56.62</td><td>88.20</td><td>-31.58</td><td>50.26</td><td>6.36</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>3</td><td>19275.00</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>40.49</td><td>0.89</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>19275.00</td><td>54.19</td><td>74.00</td><td>-19.81</td><td>53.30</td><td>0.89</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>25700.00</td><td>43.69</td><td>68.20</td><td>-24.51</td><td>36.29</td><td>7.40</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>25700.00</td><td>55.78</td><td>88.20</td><td>-32.42</td><td>48.38</td><td>7.40</td><td>Peak</td><td>100</td><td>145</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	12850.00	44.26	68.20	-23.94	37.90	6.36	Average	100	215	2	12850.00	56.62	88.20	-31.58	50.26	6.36	Peak	100	215	3	19275.00	41.38	54.00	-12.62	40.49	0.89	Average	100	161	4	19275.00	54.19	74.00	-19.81	53.30	0.89	Peak	100	161	5	25700.00	43.69	68.20	-24.51	36.29	7.40	Average	100	145	6	25700.00	55.78	88.20	-32.42	48.38	7.40	Peak	100	145
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level			reading			High	Table																																																																																										
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																										
1	12850.00	44.26	68.20	-23.94	37.90	6.36	Average	100	215																																																																																										
2	12850.00	56.62	88.20	-31.58	50.26	6.36	Peak	100	215																																																																																										
3	19275.00	41.38	54.00	-12.62	40.49	0.89	Average	100	161																																																																																										
4	19275.00	54.19	74.00	-19.81	53.30	0.89	Peak	100	161																																																																																										
5	25700.00	43.69	68.20	-24.51	36.29	7.40	Average	100	145																																																																																										
6	25700.00	55.78	88.20	-32.42	48.38	7.40	Peak	100	145																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

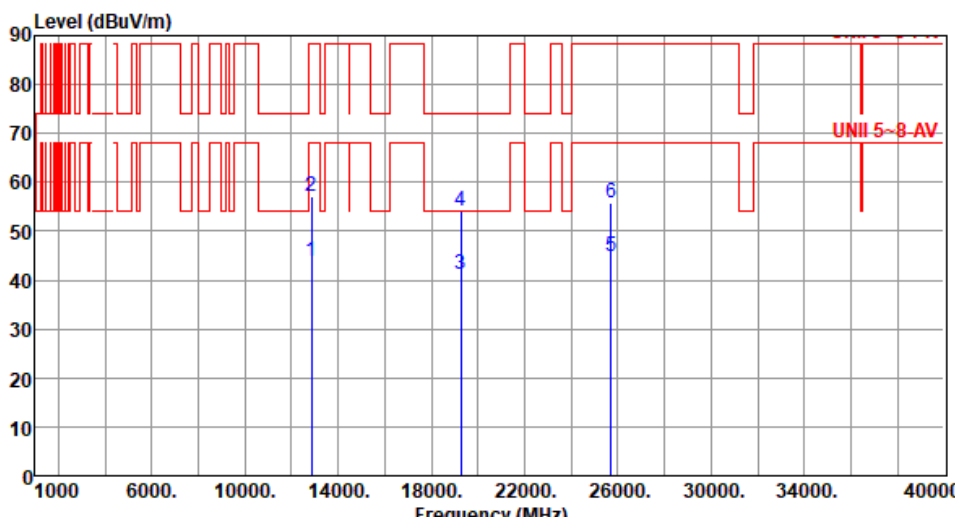


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12850.00	43.81	68.20	-24.39	37.45	6.36	Average	100	162
2	12850.00	57.09	88.20	-31.11	50.73	6.36	Peak	100	162
3	19275.00	41.14	54.00	-12.86	40.25	0.89	Average	100	94
4	19275.00	54.06	74.00	-19.94	53.17	0.89	Peak	100	94
5	25700.00	44.75	68.20	-23.45	37.35	7.40	Average	100	215
6	25700.00	55.78	88.20	-32.42	48.38	7.40	Peak	100	215

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

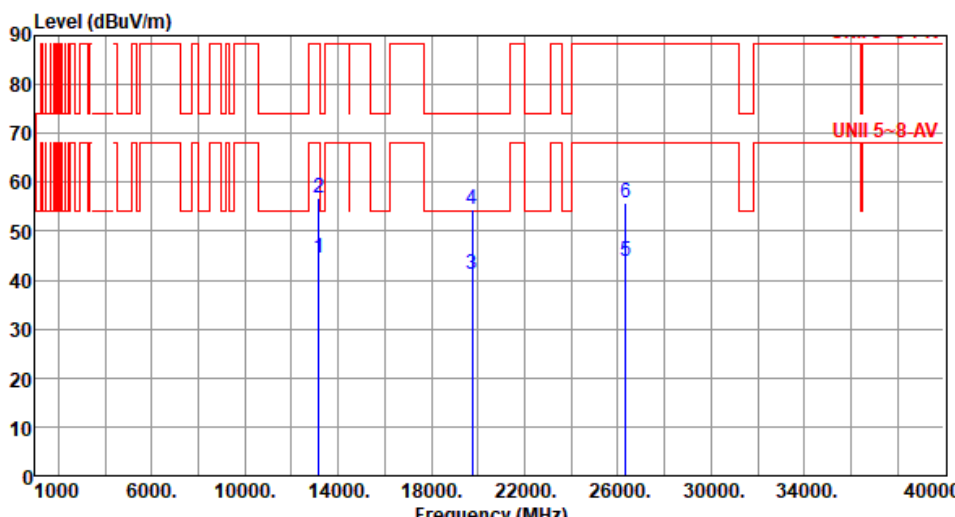

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13170.00</td><td>44.42</td><td>68.20</td><td>-23.78</td><td>38.47</td><td>5.95</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>13170.00</td><td>56.77</td><td>88.20</td><td>-31.43</td><td>50.82</td><td>5.95</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>19755.00</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>40.13</td><td>1.20</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>4</td><td>19755.00</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>53.13</td><td>1.20</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>5</td><td>26340.00</td><td>43.87</td><td>68.20</td><td>-24.33</td><td>36.08</td><td>7.79</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>26340.00</td><td>55.91</td><td>88.20</td><td>-32.29</td><td>48.12</td><td>7.79</td><td>Peak</td><td>100</td><td>162</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13170.00	44.42	68.20	-23.78	38.47	5.95	Average	100	208	2	13170.00	56.77	88.20	-31.43	50.82	5.95	Peak	100	208	3	19755.00	41.33	54.00	-12.67	40.13	1.20	Average	100	158	4	19755.00	54.33	74.00	-19.67	53.13	1.20	Peak	100	158	5	26340.00	43.87	68.20	-24.33	36.08	7.79	Average	100	162	6	26340.00	55.91	88.20	-32.29	48.12	7.79	Peak	100	162
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13170.00	44.42	68.20	-23.78	38.47	5.95	Average	100	208																																																																
2	13170.00	56.77	88.20	-31.43	50.82	5.95	Peak	100	208																																																																
3	19755.00	41.33	54.00	-12.67	40.13	1.20	Average	100	158																																																																
4	19755.00	54.33	74.00	-19.67	53.13	1.20	Peak	100	158																																																																
5	26340.00	43.87	68.20	-24.33	36.08	7.79	Average	100	162																																																																
6	26340.00	55.91	88.20	-32.29	48.12	7.79	Peak	100	162																																																																

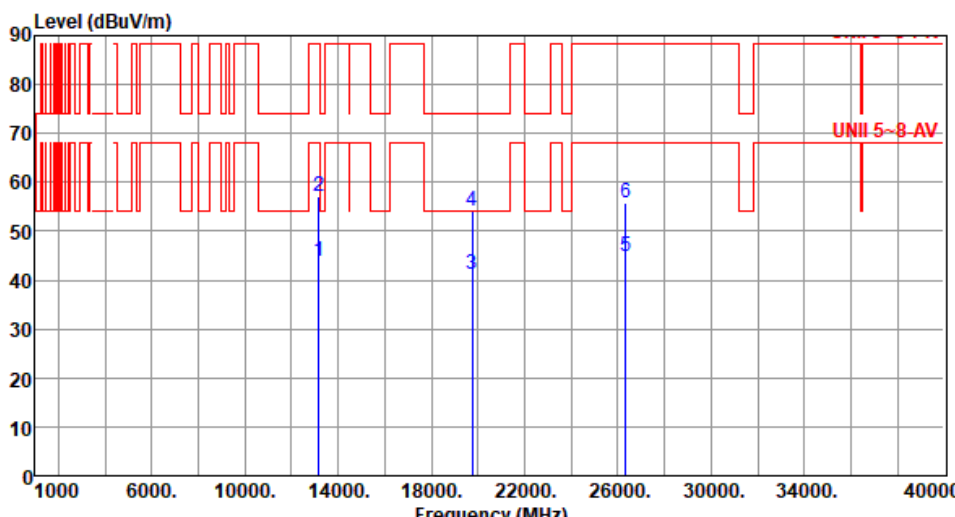


Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dB dB dBuV dB/m cm deg <table><tr><td>1</td><td>13170.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>37.89</td><td>5.95</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>2</td><td>13170.00</td><td>57.21</td><td>88.20</td><td>-30.99</td><td>51.26</td><td>5.95</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>3</td><td>19755.00</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>40.13</td><td>1.20</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>19755.00</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>53.03</td><td>1.20</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>26340.00</td><td>44.81</td><td>68.20</td><td>-23.39</td><td>37.02</td><td>7.79</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>26340.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>48.04</td><td>7.79</td><td>Peak</td><td>100</td><td>221</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	13170.00	43.84	68.20	-24.36	37.89	5.95	Average	100	157	2	13170.00	57.21	88.20	-30.99	51.26	5.95	Peak	100	157	3	19755.00	41.33	54.00	-12.67	40.13	1.20	Average	100	108	4	19755.00	54.23	74.00	-19.77	53.03	1.20	Peak	100	108	5	26340.00	44.81	68.20	-23.39	37.02	7.79	Average	100	221	6	26340.00	55.83	88.20	-32.37	48.04	7.79	Peak	100	221
1	13170.00	43.84	68.20	-24.36	37.89	5.95	Average	100	157																																																						
2	13170.00	57.21	88.20	-30.99	51.26	5.95	Peak	100	157																																																						
3	19755.00	41.33	54.00	-12.67	40.13	1.20	Average	100	108																																																						
4	19755.00	54.23	74.00	-19.77	53.03	1.20	Peak	100	108																																																						
5	26340.00	44.81	68.20	-23.39	37.02	7.79	Average	100	221																																																						
6	26340.00	55.83	88.20	-32.37	48.04	7.79	Peak	100	221																																																						




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13490.00</td><td>44.58</td><td>68.20</td><td>-23.62</td><td>38.38</td><td>6.20</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>2</td><td>13490.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>50.71</td><td>6.20</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>3</td><td>20235.00</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>39.96</td><td>1.57</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>4</td><td>20235.00</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>53.05</td><td>1.57</td><td>Peak</td><td>100</td><td>161</td></tr><tr><td>5</td><td>26980.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>36.09</td><td>7.93</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>6</td><td>26980.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>48.20</td><td>7.93</td><td>Peak</td><td>100</td><td>169</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13490.00	44.58	68.20	-23.62	38.38	6.20	Average	100	214	2	13490.00	56.91	88.20	-31.29	50.71	6.20	Peak	100	214	3	20235.00	41.53	54.00	-12.47	39.96	1.57	Average	100	161	4	20235.00	54.62	74.00	-19.38	53.05	1.57	Peak	100	161	5	26980.00	44.02	68.20	-24.18	36.09	7.93	Average	100	169	6	26980.00	56.13	88.20	-32.07	48.20	7.93	Peak	100	169
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13490.00	44.58	68.20	-23.62	38.38	6.20	Average	100	214																																																																
2	13490.00	56.91	88.20	-31.29	50.71	6.20	Peak	100	214																																																																
3	20235.00	41.53	54.00	-12.47	39.96	1.57	Average	100	161																																																																
4	20235.00	54.62	74.00	-19.38	53.05	1.57	Peak	100	161																																																																
5	26980.00	44.02	68.20	-24.18	36.09	7.93	Average	100	169																																																																
6	26980.00	56.13	88.20	-32.07	48.20	7.93	Peak	100	169																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

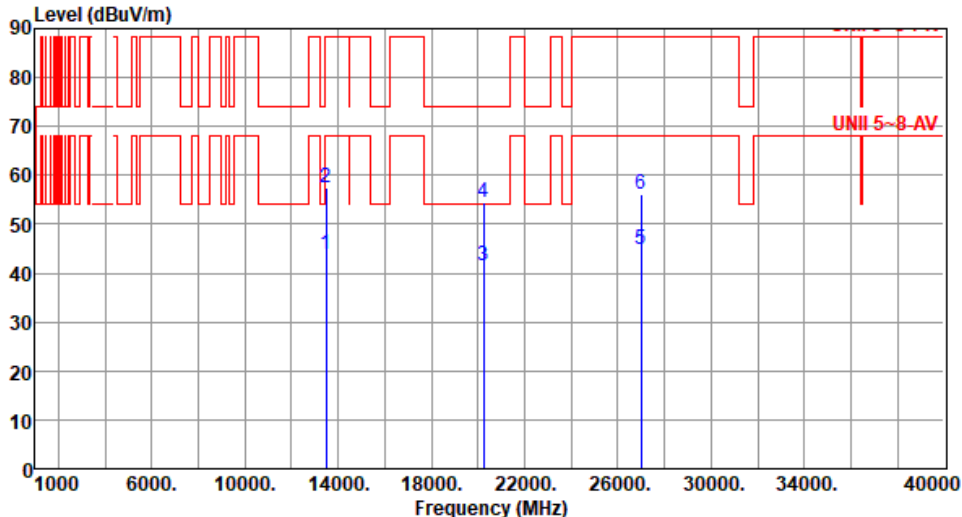

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13490.00	43.95	68.20	-24.25	37.75	6.20	Average	100	162
2	13490.00	57.46	88.20	-30.74	51.26	6.20	Peak	100	162
3	20235.00	41.46	54.00	-12.54	39.89	1.57	Average	100	114
4	20235.00	54.39	74.00	-19.61	52.82	1.57	Peak	100	114
5	26980.00	44.95	68.20	-23.25	37.02	7.93	Average	100	226
6	26980.00	55.98	88.20	-32.22	48.05	7.93	Peak	100	226

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

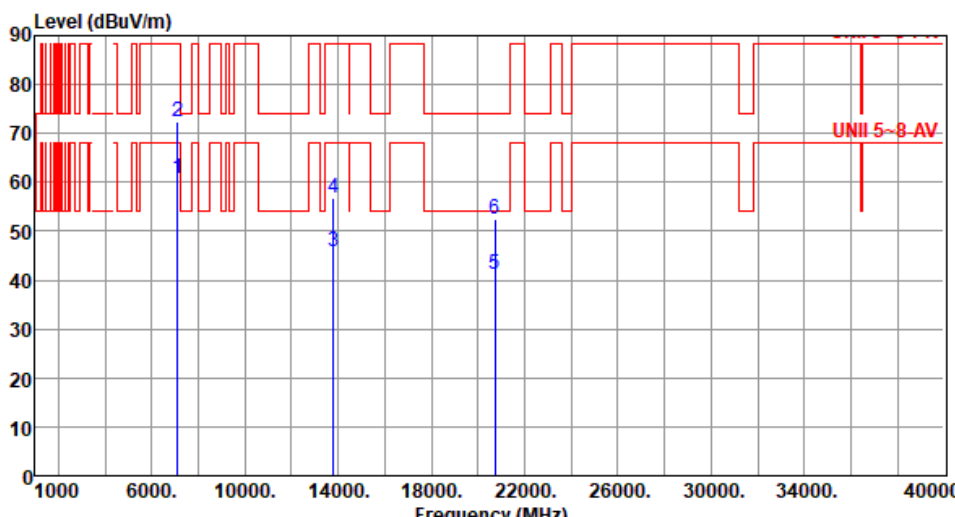

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>60.65</td><td>68.20</td><td>-7.55</td><td>55.87</td><td>4.78</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>2</td><td>7125.00</td><td>72.32</td><td>88.20</td><td>-15.88</td><td>67.54</td><td>4.78</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>3</td><td>13810.00</td><td>45.86</td><td>68.20</td><td>-22.34</td><td>39.55</td><td>6.31</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>13810.00</td><td>56.74</td><td>88.20</td><td>-31.46</td><td>50.43</td><td>6.31</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>20715.00</td><td>41.06</td><td>54.00</td><td>-12.94</td><td>38.80</td><td>2.26</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>20715.00</td><td>52.53</td><td>74.00</td><td>-21.47</td><td>50.27</td><td>2.26</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	60.65	68.20	-7.55	55.87	4.78	Average	100	311	2	7125.00	72.32	88.20	-15.88	67.54	4.78	Peak	100	311	3	13810.00	45.86	68.20	-22.34	39.55	6.31	Average	100	60	4	13810.00	56.74	88.20	-31.46	50.43	6.31	Peak	100	60	5	20715.00	41.06	54.00	-12.94	38.80	2.26	Average	100	50	6	20715.00	52.53	74.00	-21.47	50.27	2.26	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	60.65	68.20	-7.55	55.87	4.78	Average	100	311																																																																
2	7125.00	72.32	88.20	-15.88	67.54	4.78	Peak	100	311																																																																
3	13810.00	45.86	68.20	-22.34	39.55	6.31	Average	100	60																																																																
4	13810.00	56.74	88.20	-31.46	50.43	6.31	Peak	100	60																																																																
5	20715.00	41.06	54.00	-12.94	38.80	2.26	Average	100	50																																																																
6	20715.00	52.53	74.00	-21.47	50.27	2.26	Peak	100	50																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>58.73</td><td>68.20</td><td>-9.47</td><td>53.95</td><td>4.78</td><td>Average</td><td>106</td><td>332</td></tr><tr><td>2</td><td>7125.00</td><td>70.45</td><td>88.20</td><td>-17.75</td><td>65.67</td><td>4.78</td><td>Peak</td><td>106</td><td>332</td></tr><tr><td>3</td><td>13810.00</td><td>45.75</td><td>68.20</td><td>-22.45</td><td>39.44</td><td>6.31</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>13810.00</td><td>56.97</td><td>88.20</td><td>-31.23</td><td>50.66</td><td>6.31</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>20715.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>38.66</td><td>2.26</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>20715.00</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>50.17</td><td>2.26</td><td>Peak</td><td>100</td><td>40</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	58.73	68.20	-9.47	53.95	4.78	Average	106	332	2	7125.00	70.45	88.20	-17.75	65.67	4.78	Peak	106	332	3	13810.00	45.75	68.20	-22.45	39.44	6.31	Average	100	90	4	13810.00	56.97	88.20	-31.23	50.66	6.31	Peak	100	90	5	20715.00	40.92	54.00	-13.08	38.66	2.26	Average	100	40	6	20715.00	52.43	74.00	-21.57	50.17	2.26	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	58.73	68.20	-9.47	53.95	4.78	Average	106	332																																																																
2	7125.00	70.45	88.20	-17.75	65.67	4.78	Peak	106	332																																																																
3	13810.00	45.75	68.20	-22.45	39.44	6.31	Average	100	90																																																																
4	13810.00	56.97	88.20	-31.23	50.66	6.31	Peak	100	90																																																																
5	20715.00	40.92	54.00	-13.08	38.66	2.26	Average	100	40																																																																
6	20715.00	52.43	74.00	-21.57	50.17	2.26	Peak	100	40																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	5.9519G	-12.13	5.9931G	-62.45	-52.13	-10.32	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	5.9588G	-12.25	5.9056G	-62.19	-52.25	-9.94	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	5.98138G	-10.97	6.0262G	-59.92	-50.97	-8.95	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.17657G	-5.73	6.025G	-54.88	-45.73	-9.15	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.27867G	-1.91	6.0578G	-51.04	-41.91	-9.13	1
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.1994G	2.03	6.593G	-46.68	-37.97	-8.71	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.4728G	-11.35	6.4441G	-62.70	-51.35	-11.35	2
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42751G	-11.66	6.4767G	-62.40	-51.66	-10.74	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42742G	-10.54	6.383G	-60.76	-50.54	-10.22	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.43983G	-4.60	6.345G	-55.20	-44.60	-10.60	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.86189G	-12.98	6.8966G	-62.17	-52.98	-9.19	2
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.87G	-12.89	6.9081G	-61.66	-52.89	-8.77	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.83381G	-13.63	6.9232G	-59.69	-53.63	-6.06	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.90016G	-6.03	6.9866G	-54.55	-46.03	-8.52	2
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.43227G	-3.40	6.1154G	-51.64	-43.40	-8.24	2
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.8586G	0.63	6.1642G	-44.32	-39.37	-4.95	3
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	7.02G	-12.44	6.9728G	-61.45	-52.44	-9.01	2
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	7.02289G	-12.57	6.9703G	-60.95	-52.57	-8.38	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99581G	-10.55	6.9382G	-58.41	-50.55	-7.86	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.98784G	-5.28	6.9022G	-53.44	-45.28	-8.16	2
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99139G	-2.01	6.7386G	-49.59	-42.01	-7.58	4

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9519G	-12.13	5.9931G	-62.45	-52.13	-10.32	1
5955MHz	Pass	5.96189G	-11.66	5.9948G	-62.41	-51.66	-10.75	2
5955MHz	Pass	5.96249G	-10.70	5.918G	-61.96	-50.70	-11.26	3
5955MHz	Pass	5.96129G	-10.91	5.9891G	-62.30	-50.91	-11.39	4
6175MHz	Pass	6.18249G	-11.38	6.1306G	-62.89	-51.38	-11.51	1
6175MHz	Pass	6.18189G	-11.46	6.1396G	-62.92	-51.46	-11.46	2
6175MHz	Pass	6.1725G	-10.70	6.2127G	-62.47	-50.70	-11.77	3
6175MHz	Pass	6.18159G	-10.84	6.2193G	-62.84	-50.84	-12.00	4
6415MHz	Pass	6.41G	-11.17	6.3757G	-62.85	-51.17	-11.68	1
6415MHz	Pass	6.4128G	-11.03	6.4502G	-62.79	-51.03	-11.76	2
6415MHz	Pass	6.40971G	-10.62	6.4625G	-62.28	-50.62	-11.66	3
6415MHz	Pass	6.42249G	-10.56	6.45G	-62.73	-50.56	-12.17	4
6435MHz	Pass	6.4394G	-10.71	6.4658G	-62.77	-50.71	-12.06	1
6435MHz	Pass	6.42941G	-11.55	6.4755G	-62.98	-51.55	-11.43	2
6435MHz	Pass	6.4322G	-10.05	6.4707G	-62.20	-50.05	-12.15	3
6435MHz	Pass	6.42751G	-10.12	6.4822G	-62.86	-50.12	-12.74	4
6475MHz	Pass	6.4725G	-10.61	6.4448G	-62.77	-50.61	-12.16	1
6475MHz	Pass	6.4728G	-11.35	6.4441G	-62.70	-51.35	-11.35	2
6475MHz	Pass	6.4712G	-10.13	6.4347G	-62.14	-50.13	-12.01	3
6475MHz	Pass	6.48249G	-10.08	6.4358G	-62.67	-50.08	-12.59	4
6515MHz	Pass	6.5172G	-11.00	6.4679G	-62.79	-51.00	-11.79	1
6515MHz	Pass	6.5128G	-10.94	6.479G	-62.69	-50.94	-11.75	2
6515MHz	Pass	6.5175G	-10.04	6.4777G	-62.16	-50.04	-12.12	3
6515MHz	Pass	6.5125G	-10.43	6.485G	-62.47	-50.43	-12.04	4
6535MHz	Pass	6.5375G	-12.66	6.4999G	-62.99	-52.66	-10.33	1
6535MHz	Pass	6.5328G	-12.64	6.4989G	-62.88	-52.64	-10.24	2
6535MHz	Pass	6.5328G	-11.71	6.4975G	-62.43	-51.71	-10.72	3
6535MHz	Pass	6.5325G	-12.02	6.4901G	-62.83	-52.02	-10.81	4
6715MHz	Pass	6.7197G	-12.96	6.7644G	-62.55	-52.96	-9.59	1
6715MHz	Pass	6.7119G	-13.24	6.7566G	-62.52	-53.24	-9.28	2
6715MHz	Pass	6.71G	-12.34	6.7641G	-61.93	-52.34	-9.59	3
6715MHz	Pass	6.7122G	-13.23	6.7621G	-62.51	-53.23	-9.28	4
6855MHz	Pass	6.8575G	-12.75	6.9G	-62.01	-52.75	-9.26	1
6855MHz	Pass	6.86189G	-12.98	6.8966G	-62.17	-52.98	-9.19	2
6855MHz	Pass	6.86189G	-12.00	6.8966G	-61.55	-52.00	-9.55	3
6855MHz	Pass	6.8519G	-11.37	6.8967G	-62.06	-51.37	-10.69	4
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86941G	-12.45	6.9244G	-61.82	-52.45	-9.37	1
6875MHz Straddles UNII-7 and UNII-8	Pass	6.88G	-12.07	6.9219G	-61.79	-52.07	-9.72	2
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86751G	-11.77	6.9155G	-61.78	-51.77	-10.01	3
6875MHz Straddles UNII-7 and UNII-8	Pass	6.8719G	-11.80	6.9211G	-61.88	-51.80	-10.08	4
6895MHz	Pass	6.8906G	-11.93	6.93G	-61.64	-51.93	-9.71	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.90279G	-11.76	6.9408G	-61.60	-51.76	-9.84	2
6895MHz	Pass	6.8975G	-11.11	6.9448G	-61.57	-51.11	-10.46	3
6895MHz	Pass	6.8925G	-11.49	6.9404G	-61.67	-51.49	-10.18	4
7015MHz	Pass	7.0122G	-12.10	6.9655G	-61.45	-52.10	-9.35	1
7015MHz	Pass	7.02G	-12.44	6.9728G	-61.45	-52.44	-9.01	2
7015MHz	Pass	7.00781G	-11.62	6.9667G	-61.47	-51.62	-9.85	3
7015MHz	Pass	7.02219G	-11.39	6.9667G	-61.51	-51.39	-10.12	4
7095MHz	Pass	7.0975G	-12.34	7.0501G	-67.03	-52.34	-14.69	1
7095MHz	Pass	7.0975G	-12.90	7.0485G	-66.63	-52.90	-13.73	2
7095MHz	Pass	7.0975G	-11.71	7.0473G	-66.90	-51.71	-15.19	3
7095MHz	Pass	7.0975G	-11.50	7.0568G	-67.01	-51.50	-15.51	4
7115MHz	Pass	7.1172G	-12.33	7.0843G	-67.10	-52.33	-14.77	1
7115MHz	Pass	7.1112G	-12.62	7.0826G	-66.02	-52.62	-13.40	2
7115MHz	Pass	7.1172G	-11.79	7.0665G	-67.53	-51.79	-15.74	3
7115MHz	Pass	7.1175G	-11.54	7.073G	-67.37	-51.54	-15.83	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96249G	-11.72	5.9913G	-62.04	-51.72	-10.32	1
5955MHz	Pass	5.9588G	-12.25	5.9056G	-62.19	-52.25	-9.94	2
5955MHz	Pass	5.9538G	-11.41	5.9079G	-62.29	-51.41	-10.88	3
5955MHz	Pass	5.94991G	-11.00	5.912G	-62.01	-51.00	-11.01	4
6175MHz	Pass	6.1787G	-10.98	6.1365G	-62.73	-50.98	-11.75	1
6175MHz	Pass	6.1738G	-11.04	6.1407G	-62.59	-51.04	-11.55	2
6175MHz	Pass	6.1763G	-10.63	6.1434G	-62.58	-50.63	-11.95	3
6175MHz	Pass	6.16941G	-10.41	6.2155G	-62.55	-50.41	-12.14	4
6415MHz	Pass	6.40981G	-11.06	6.462G	-62.59	-51.06	-11.53	1
6415MHz	Pass	6.40751G	-10.98	6.4598G	-62.53	-50.98	-11.55	2
6415MHz	Pass	6.40751G	-11.16	6.4602G	-62.58	-51.16	-11.42	3
6415MHz	Pass	6.40741G	-11.03	6.451G	-62.53	-51.03	-11.50	4
6435MHz	Pass	6.42661G	-11.26	6.4736G	-62.63	-51.26	-11.37	1
6435MHz	Pass	6.42751G	-11.66	6.4767G	-62.40	-51.66	-10.74	2
6435MHz	Pass	6.42801G	-10.83	6.4714G	-62.55	-50.83	-11.72	3
6435MHz	Pass	6.42901G	-10.37	6.4674G	-62.51	-50.37	-12.14	4
6475MHz	Pass	6.4704G	-10.76	6.4268G	-62.46	-50.76	-11.70	1
6475MHz	Pass	6.4787G	-11.48	6.432G	-62.64	-51.48	-11.16	2
6475MHz	Pass	6.48149G	-10.84	6.4442G	-62.39	-50.84	-11.55	3
6475MHz	Pass	6.4725G	-10.23	6.4412G	-62.40	-50.23	-12.17	4
6515MHz	Pass	6.52059G	-11.10	6.4833G	-62.43	-51.10	-11.33	1
6515MHz	Pass	6.5144G	-11.25	6.4693G	-62.56	-51.25	-11.31	2
6515MHz	Pass	6.5175G	-10.71	6.4805G	-62.42	-50.71	-11.71	3
6515MHz	Pass	6.52329G	-10.02	6.4843G	-62.32	-50.02	-12.30	4
6535MHz	Pass	6.52741G	-12.56	6.4938G	-62.53	-52.56	-9.97	1
6535MHz	Pass	6.5316G	-12.56	6.4892G	-62.66	-52.56	-10.10	2
6535MHz	Pass	6.52751G	-12.33	6.504G	-62.58	-52.33	-10.25	3
6535MHz	Pass	6.5394G	-11.78	6.4866G	-62.58	-51.78	-10.80	4
6715MHz	Pass	6.70961G	-12.62	6.7607G	-62.28	-52.62	-9.66	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6715MHz	Pass	6.7125G	-12.63	6.7614G	-62.10	-52.63	-9.47	2
6715MHz	Pass	6.70881G	-12.58	6.7549G	-62.20	-52.58	-9.62	3
6715MHz	Pass	6.70991G	-12.57	6.7646G	-62.26	-52.57	-9.69	4
6855MHz	Pass	6.84931G	-12.64	6.8996G	-61.84	-52.64	-9.20	1
6855MHz	Pass	6.8565G	-12.49	6.9008G	-61.78	-52.49	-9.29	2
6855MHz	Pass	6.8502G	-11.63	6.9047G	-61.84	-51.63	-10.21	3
6855MHz	Pass	6.84751G	-11.87	6.8957G	-61.72	-51.87	-9.85	4
6875MHz Straddles UNII-7 and UNII-8	Pass	6.87G	-12.89	6.9081G	-61.66	-52.89	-8.77	1
6875MHz Straddles UNII-7 and UNII-8	Pass	6.88119G	-12.43	6.9133G	-61.67	-52.43	-9.24	2
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86971G	-11.86	6.9215G	-61.49	-51.86	-9.63	3
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86701G	-12.06	6.9211G	-61.58	-52.06	-9.52	4
6895MHz	Pass	6.8904G	-12.61	6.9339G	-61.44	-52.61	-8.83	1
6895MHz	Pass	6.8924G	-11.39	6.9313G	-60.91	-51.39	-9.52	2
6895MHz	Pass	6.8988G	-11.46	6.9348G	-61.44	-51.46	-9.98	3
6895MHz	Pass	6.88641G	-11.38	6.9419G	-61.43	-51.38	-10.05	4
7015MHz	Pass	7.00911G	-12.75	6.9666G	-61.46	-52.75	-8.71	1
7015MHz	Pass	7.02289G	-12.57	6.9703G	-60.95	-52.57	-8.38	2
7015MHz	Pass	7.0111G	-12.54	6.9757G	-61.55	-52.54	-9.01	3
7015MHz	Pass	7.0189G	-12.00	6.9727G	-61.37	-52.00	-9.37	4
7095MHz	Pass	7.0911G	-12.74	7.0545G	-66.53	-52.74	-13.79	1
7095MHz	Pass	7.10389G	-12.66	7.063G	-66.00	-52.66	-13.34	2
7095MHz	Pass	7.0975G	-12.53	7.0644G	-66.92	-52.53	-14.39	3
7095MHz	Pass	7.0978G	-12.54	7.0548G	-66.75	-52.54	-14.21	4
7115MHz	Pass	7.12379G	-12.04	7.073G	-66.62	-52.04	-14.58	1
7115MHz	Pass	7.12379G	-12.49	7.0787G	-66.18	-52.49	-13.69	2
7115MHz	Pass	7.12329G	-11.74	7.066G	-67.10	-51.74	-15.36	3
7115MHz	Pass	7.12379G	-11.52	7.0657G	-66.60	-51.52	-15.08	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97859G	-10.20	6.0282G	-59.89	-50.20	-9.69	1
5965MHz	Pass	5.98138G	-10.97	6.0262G	-59.92	-50.97	-8.95	2
5965MHz	Pass	5.97859G	-9.92	6.0468G	-59.88	-49.92	-9.96	3
5965MHz	Pass	5.98158G	-9.61	6.0518G	-59.86	-49.61	-10.25	4
6165MHz	Pass	6.18138G	-10.23	6.0722G	-60.36	-50.23	-10.13	1
6165MHz	Pass	6.18118G	-10.49	6.073G	-60.32	-50.49	-9.83	2
6165MHz	Pass	6.18258G	-10.01	6.0824G	-60.37	-50.01	-10.36	3
6165MHz	Pass	6.17119G	-9.68	6.0944G	-60.44	-49.68	-10.76	4
6405MHz	Pass	6.39621G	-9.56	6.3428G	-60.63	-49.56	-11.07	1
6405MHz	Pass	6.38742G	-9.69	6.4694G	-60.68	-49.69	-10.99	2
6405MHz	Pass	6.4026G	-9.88	6.465G	-60.68	-49.88	-10.80	3
6405MHz	Pass	6.39481G	-9.51	6.4786G	-60.63	-49.51	-11.12	4
6445MHz	Pass	6.43941G	-9.66	6.3804G	-60.56	-49.66	-10.90	1
6445MHz	Pass	6.42742G	-10.54	6.383G	-60.76	-50.54	-10.22	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6445MHz	Pass	6.42882G	-9.92	6.51G	-60.75	-49.92	-10.83	3
6445MHz	Pass	6.45119G	-9.39	6.5086G	-60.74	-49.39	-11.35	4
6485MHz	Pass	6.47941G	-9.39	6.4238G	-60.66	-49.39	-11.27	1
6485MHz	Pass	6.46762G	-10.12	6.4246G	-60.64	-50.12	-10.52	2
6485MHz	Pass	6.50078G	-9.23	6.4142G	-60.67	-49.23	-11.44	3
6485MHz	Pass	6.4814G	-9.13	6.4176G	-60.63	-49.13	-11.50	4
6525MHz Straddles UNII-6 and UNII-7	Pass	6.53099G	-11.08	6.6052G	-60.55	-51.08	-9.47	1
6525MHz Straddles UNII-6 and UNII-7	Pass	6.50882G	-11.07	6.6212G	-60.57	-51.07	-9.50	2
6525MHz Straddles UNII-6 and UNII-7	Pass	6.5288G	-11.08	6.622G	-60.30	-51.08	-9.22	3
6525MHz Straddles UNII-6 and UNII-7	Pass	6.54318G	-10.78	6.6208G	-60.48	-50.78	-9.70	4
6565MHz	Pass	6.55881G	-11.26	6.646G	-60.41	-51.26	-9.15	1
6565MHz	Pass	6.54882G	-11.17	6.6306G	-60.32	-51.17	-9.15	2
6565MHz	Pass	6.55381G	-10.95	6.625G	-60.31	-50.95	-9.36	3
6565MHz	Pass	6.57999G	-10.26	6.6288G	-60.35	-50.26	-10.09	4
6725MHz	Pass	6.71361G	-11.44	6.7956G	-59.91	-51.44	-8.47	1
6725MHz	Pass	6.73899G	-11.52	6.7972G	-60.06	-51.52	-8.54	2
6725MHz	Pass	6.71201G	-11.56	6.789G	-60.03	-51.56	-8.47	3
6725MHz	Pass	6.71561G	-11.75	6.7894G	-60.13	-51.75	-8.38	4
6845MHz	Pass	6.83381G	-13.44	6.9254G	-59.72	-53.44	-6.28	1
6845MHz	Pass	6.83381G	-13.63	6.9232G	-59.69	-53.63	-6.06	2
6845MHz	Pass	6.8426G	-12.98	6.9404G	-59.46	-52.98	-6.48	3
6845MHz	Pass	6.83041G	-13.01	6.9262G	-59.62	-53.01	-6.61	4
6885MHz Straddles UNII-7 and UNII-8	Pass	6.87801G	-11.43	6.9498G	-59.55	-51.43	-8.12	1
6885MHz Straddles UNII-7 and UNII-8	Pass	6.89639G	-10.99	6.9536G	-59.44	-50.99	-8.45	2
6885MHz Straddles UNII-7 and UNII-8	Pass	6.87161G	-10.63	6.9504G	-59.55	-50.63	-8.92	3
6885MHz Straddles UNII-7 and UNII-8	Pass	6.88G	-10.83	6.951G	-59.49	-50.83	-8.66	4
6925MHz	Pass	6.91861G	-10.09	6.9854G	-59.29	-50.09	-9.20	1
6925MHz	Pass	6.93939G	-9.74	6.997G	-58.69	-49.74	-8.95	2
6925MHz	Pass	6.91241G	-10.39	6.9896G	-59.68	-50.39	-9.29	3
6925MHz	Pass	6.91601G	-10.11	6.988G	-59.46	-50.11	-9.35	4
7005MHz	Pass	6.99001G	-10.43	6.9428G	-58.89	-50.43	-8.46	1
7005MHz	Pass	6.99581G	-10.55	6.9382G	-58.41	-50.55	-7.86	2
7005MHz	Pass	6.99361G	-10.18	6.9414G	-59.17	-50.18	-8.99	3
7005MHz	Pass	6.99761G	-9.80	6.9438G	-59.19	-49.80	-9.39	4
7085MHz	Pass	7.0878G	-10.81	7.0246G	-64.38	-50.81	-13.57	1
7085MHz	Pass	7.07381G	-11.04	7.0242G	-64.19	-51.04	-13.15	2
7085MHz	Pass	7.0824G	-10.96	7.0212G	-64.63	-50.96	-13.67	3
7085MHz	Pass	7.07501G	-10.71	7.0214G	-64.80	-50.71	-14.09	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5985MHz	Pass	6.01977G	-4.58	5.8438G	-55.36	-44.58	-10.78	1
5985MHz	Pass	6.01817G	-5.04	5.8626G	-55.26	-45.04	-10.22	2
5985MHz	Pass	6.02096G	-4.33	5.8626G	-55.25	-44.33	-10.92	3
5985MHz	Pass	6.01857G	-4.37	5.8638G	-55.33	-44.37	-10.96	4
6145MHz	Pass	6.17657G	-5.73	6.025G	-54.88	-45.73	-9.15	1
6145MHz	Pass	6.13141G	-5.60	6.019G	-54.92	-45.60	-9.32	2
6145MHz	Pass	6.12862G	-5.44	6.0162G	-54.94	-45.44	-9.50	3
6145MHz	Pass	6.18176G	-5.56	6.025G	-55.05	-45.56	-9.49	4
6385MHz	Pass	6.37221G	-4.58	6.225G	-54.88	-44.58	-10.30	1
6385MHz	Pass	6.36102G	-4.57	6.215G	-55.15	-44.57	-10.58	2
6385MHz	Pass	6.35503G	-4.51	6.221G	-54.94	-44.51	-10.43	3
6385MHz	Pass	6.35503G	-4.51	6.2638G	-55.27	-44.51	-10.76	4
6465MHz	Pass	6.43023G	-3.88	6.3046G	-54.70	-43.88	-10.82	1
6465MHz	Pass	6.43983G	-4.60	6.345G	-55.20	-44.60	-10.60	2
6465MHz	Pass	6.4698G	-3.91	6.3422G	-54.80	-43.91	-10.89	3
6465MHz	Pass	6.43183G	-3.83	6.333G	-55.04	-43.83	-11.21	4
6545MHz Straddles UNII-6 and UNII-7	Pass	6.56978G	-5.55	6.3846G	-55.10	-45.55	-9.55	1
6545MHz Straddles UNII-6 and UNII-7	Pass	6.57897G	-5.75	6.6666G	-55.46	-45.75	-9.71	2
6545MHz Straddles UNII-6 and UNII-7	Pass	6.56858G	-5.38	6.425G	-55.11	-45.38	-9.73	3
6545MHz Straddles UNII-6 and UNII-7	Pass	6.57537G	-5.15	6.667G	-55.35	-45.15	-10.20	4
6625MHz	Pass	6.66136G	-5.60	6.7974G	-54.87	-45.60	-9.27	1
6625MHz	Pass	6.66016G	-5.54	6.7822G	-54.98	-45.54	-9.44	2
6625MHz	Pass	6.66176G	-5.39	6.777G	-55.06	-45.39	-9.67	3
6625MHz	Pass	6.65937G	-5.67	6.7738G	-55.07	-45.67	-9.40	4
6705MHz	Pass	6.69621G	-6.06	6.8954G	-54.88	-46.06	-8.82	1
6705MHz	Pass	6.74256G	-6.22	6.9026G	-54.99	-46.22	-8.77	2
6705MHz	Pass	6.69301G	-6.21	6.8986G	-54.97	-46.21	-8.76	3
6705MHz	Pass	6.66864G	-6.18	6.8962G	-55.04	-46.18	-8.86	4
6785MHz	Pass	6.75743G	-5.84	6.945G	-54.48	-45.84	-8.64	1
6785MHz	Pass	6.80098G	-5.86	6.9338G	-54.57	-45.86	-8.71	2
6785MHz	Pass	6.74944G	-5.20	6.931G	-54.46	-45.20	-9.26	3
6785MHz	Pass	6.74784G	-5.36	6.939G	-54.50	-45.36	-9.14	4
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83263G	-5.80	6.9854G	-54.43	-45.80	-8.63	1
6865MHz Straddles UNII-7 and UNII-8	Pass	6.90016G	-6.03	6.9866G	-54.55	-46.03	-8.52	2
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83463G	-5.41	6.9866G	-54.34	-45.41	-8.93	3
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83383G	-5.28	6.9854G	-54.47	-45.28	-9.19	4
6945MHz	Pass	6.93581G	-5.18	6.785G	-53.77	-45.18	-8.59	1
6945MHz	Pass	6.92742G	-4.37	6.8238G	-53.23	-44.37	-8.86	2
6945MHz	Pass	6.91863G	-5.47	6.825G	-54.39	-45.47	-8.92	3
6945MHz	Pass	6.949G	-5.08	6.8078G	-54.38	-45.08	-9.30	4


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7025MHz	Pass	6.98984G	-5.03	6.9002G	-53.84	-45.03	-8.81	1
7025MHz	Pass	6.98784G	-5.28	6.9022G	-53.44	-45.28	-8.16	2
7025MHz	Pass	6.99543G	-5.41	6.9034G	-54.11	-45.41	-8.70	3
7025MHz	Pass	6.99783G	-4.89	6.9046G	-54.12	-44.89	-9.23	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6025MHz	Pass	6.05857G	-2.37	6.273G	-52.52	-42.37	-10.15	1
6025MHz	Pass	6.07055G	-2.24	6.2706G	-52.65	-42.24	-10.41	2
6025MHz	Pass	6.05937G	-1.22	6.2714G	-52.00	-41.22	-10.78	3
6025MHz	Pass	6.05777G	-1.03	6.2722G	-52.22	-41.03	-11.19	4
6185MHz	Pass	6.22096G	-1.37	5.937G	-51.56	-41.37	-10.19	1
6185MHz	Pass	6.24814G	-1.55	5.9362G	-51.46	-41.55	-9.91	2
6185MHz	Pass	6.22096G	-1.26	5.9394G	-51.64	-41.26	-10.38	3
6185MHz	Pass	6.21457G	-0.89	5.9338G	-51.79	-40.89	-10.90	4
6345MHz	Pass	6.27867G	-1.91	6.0578G	-51.04	-41.91	-9.13	1
6345MHz	Pass	6.36018G	-1.51	6.0554G	-51.02	-41.51	-9.51	2
6345MHz	Pass	6.32822G	-1.60	6.0922G	-51.04	-41.60	-9.44	3
6345MHz	Pass	6.26908G	-1.44	6.0754G	-51.51	-41.44	-10.07	4
6505MHz Straddles UNII-6 and UNII-7	Pass	6.42988G	-2.76	6.185G	-51.20	-42.76	-8.44	1
6505MHz Straddles UNII-6 and UNII-7	Pass	6.43227G	-3.40	6.1154G	-51.64	-43.40	-8.24	2
6505MHz Straddles UNII-6 and UNII-7	Pass	6.55135G	-2.79	6.2394G	-51.34	-42.79	-8.55	3
6505MHz Straddles UNII-6 and UNII-7	Pass	6.54016G	-2.57	6.2506G	-51.83	-42.57	-9.26	4
6665MHz	Pass	6.65941G	-2.32	6.949G	-51.50	-42.32	-9.18	1
6665MHz	Pass	6.72814G	-2.21	6.9546G	-51.45	-42.21	-9.24	2
6665MHz	Pass	6.64822G	-1.94	6.2658G	-51.46	-41.94	-9.52	3
6665MHz	Pass	6.6698G	-1.99	6.941G	-51.63	-41.99	-9.64	4
6825MHz Straddles UNII-7and UNII-8	Pass	6.74908G	-3.14	6.505G	-51.82	-43.14	-8.68	1
6825MHz Straddles UNII-7and UNII-8	Pass	6.84898G	-3.08	6.5794G	-51.77	-43.08	-8.69	2
6825MHz Straddles UNII-7and UNII-8	Pass	6.76186G	-2.79	6.4314G	-51.65	-42.79	-8.86	3
6825MHz Straddles UNII-7and UNII-8	Pass	6.75147G	-2.50	6.5722G	-51.57	-42.50	-9.07	4
6985MHz	Pass	6.94904G	-2.26	6.7418G	-50.45	-42.26	-8.19	1
6985MHz	Pass	6.9898G	-1.84	6.741G	-49.90	-41.84	-8.06	2
6985MHz	Pass	6.981G	-2.67	6.7386G	-50.69	-42.67	-8.02	3
6985MHz	Pass	6.99139G	-2.01	6.7386G	-49.59	-42.01	-7.58	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6105MHz	Pass	6.0778G	1.13	5.5578G	-48.66	-38.87	-9.79	1
6105MHz	Pass	6.137G	1.63	6.5898G	-47.71	-38.14	-9.57	2
6105MHz	Pass	6.0778G	1.20	5.545G	-48.64	-38.80	-9.84	3
6105MHz	Pass	6.1994G	2.03	6.593G	-46.68	-37.97	-8.71	4
6265MHz	Pass	6.273G	1.69	6.7562G	-47.34	-38.31	-9.03	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6265MHz	Pass	6.297G	1.58	6.7546G	-47.42	-38.42	-9.00	2
6265MHz	Pass	6.289G	1.91	6.7514G	-47.18	-37.98	-9.20	3
6265MHz	Pass	6.2586G	1.89	6.7562G	-46.93	-38.11	-8.82	4
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.3802G	0.51	6.9898G	-46.87	-39.49	-7.38	1
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.4314G	0.33	6.9978G	-46.78	-39.67	-7.11	2
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.3882G	0.17	6.9994G	-46.83	-39.83	-7.00	3
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.27G	0.77	6.9978G	-46.76	-39.23	-7.53	4
6585MHz Straddles UNII-6 and UNII-7	Pass	6.609G	0.20	5.9882G	-45.56	-39.79	-5.77	1
6585MHz Straddles UNII-6 and UNII-7	Pass	6.6506G	0.55	6.0282G	-47.12	-39.45	-7.67	2
6585MHz Straddles UNII-6 and UNII-7	Pass	6.6314G	1.09	6.081G	-45.49	-38.91	-6.58	3
6585MHz Straddles UNII-6 and UNII-7	Pass	6.6298G	1.02	6.0634G	-47.68	-38.98	-8.70	4
6745MHz Straddles UNII-7and UNII-8	Pass	6.6986G	0.85	5.9482G	-44.92	-39.15	-5.77	1
6745MHz Straddles UNII-7and UNII-8	Pass	6.7898G	1.28	5.9514G	-44.85	-38.72	-6.13	2
6745MHz Straddles UNII-7and UNII-8	Pass	6.697G	0.86	6.0314G	-44.96	-39.14	-5.82	3
6745MHz Straddles UNII-7and UNII-8	Pass	6.7146G	0.75	6.2506G	-45.65	-39.25	-6.40	4
6905MHz Straddles UNII-7and UNII-8	Pass	6.8106G	0.19	6.3322G	-45.34	-39.81	-5.53	1
6905MHz Straddles UNII-7and UNII-8	Pass	6.937G	0.51	6.1082G	-45.45	-39.49	-5.96	2
6905MHz Straddles UNII-7and UNII-8	Pass	6.8586G	0.63	6.1642G	-44.32	-39.37	-4.95	3
6905MHz Straddles UNII-7and UNII-8	Pass	6.8522G	0.89	6.3882G	-44.58	-39.11	-5.47	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


5955MHz_TX

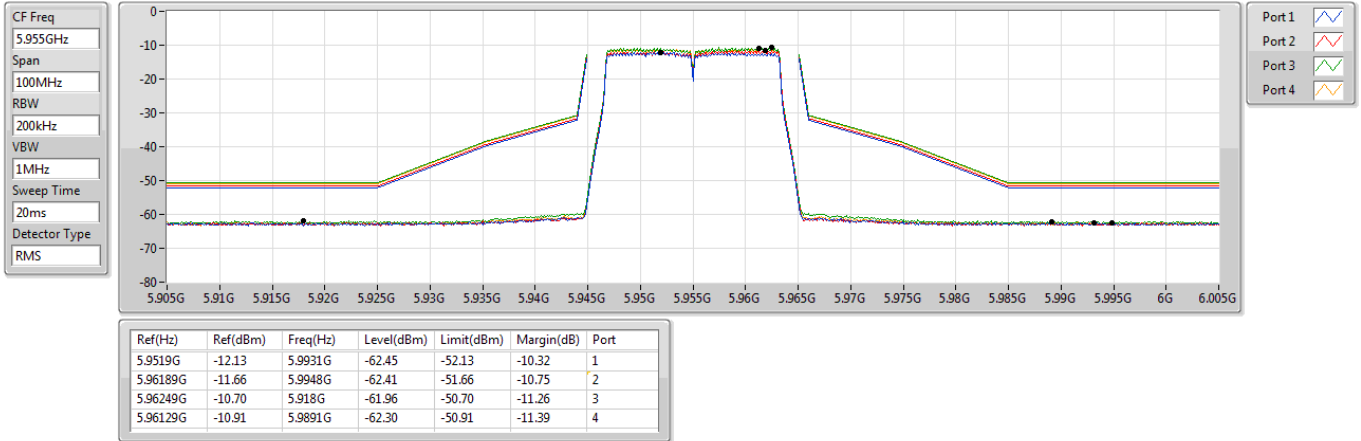

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6175MHz_TX

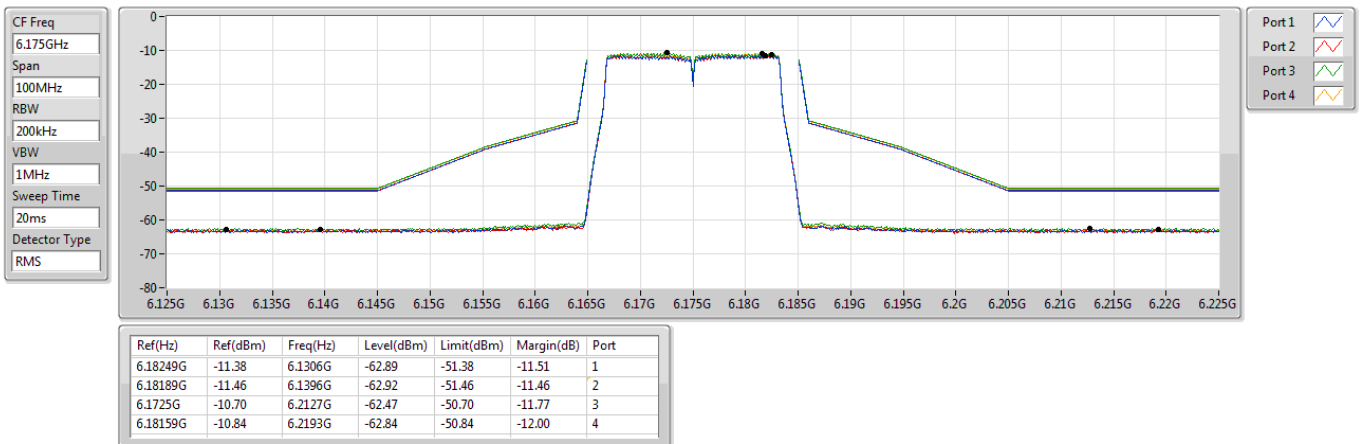

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6415MHz_TX

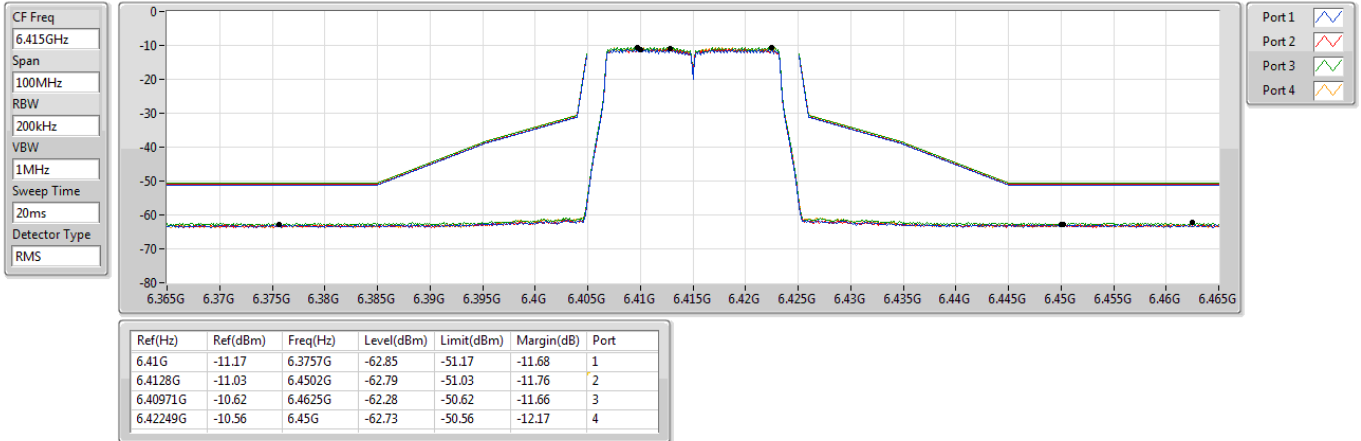

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6435MHz_TX

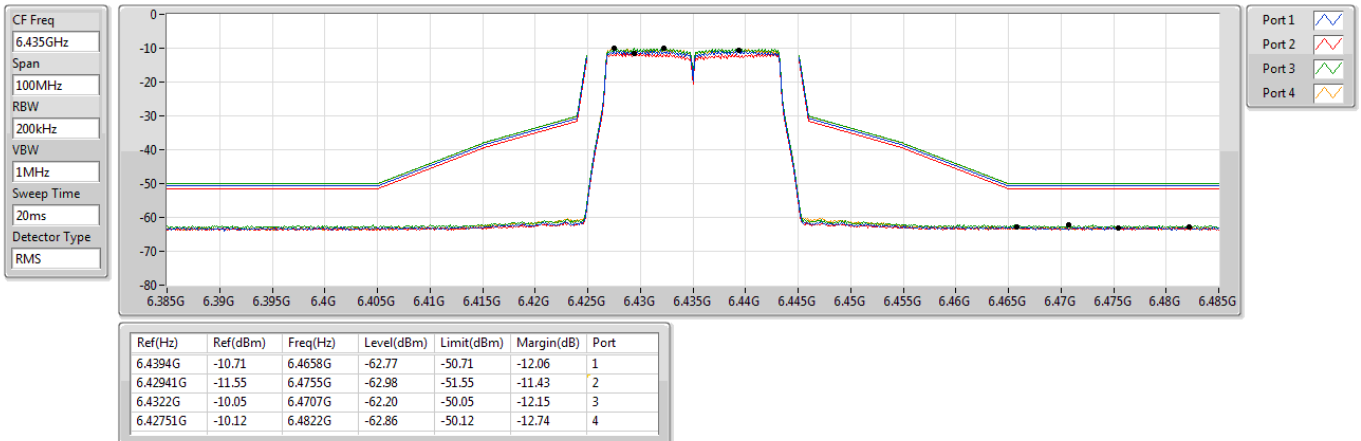

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6475MHz_TX

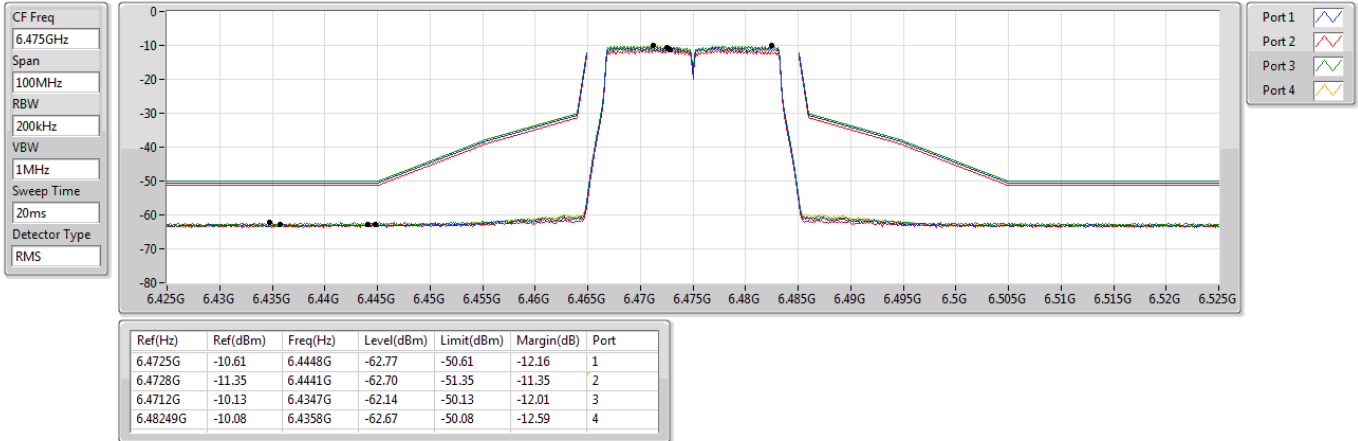

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6515MHz_TX

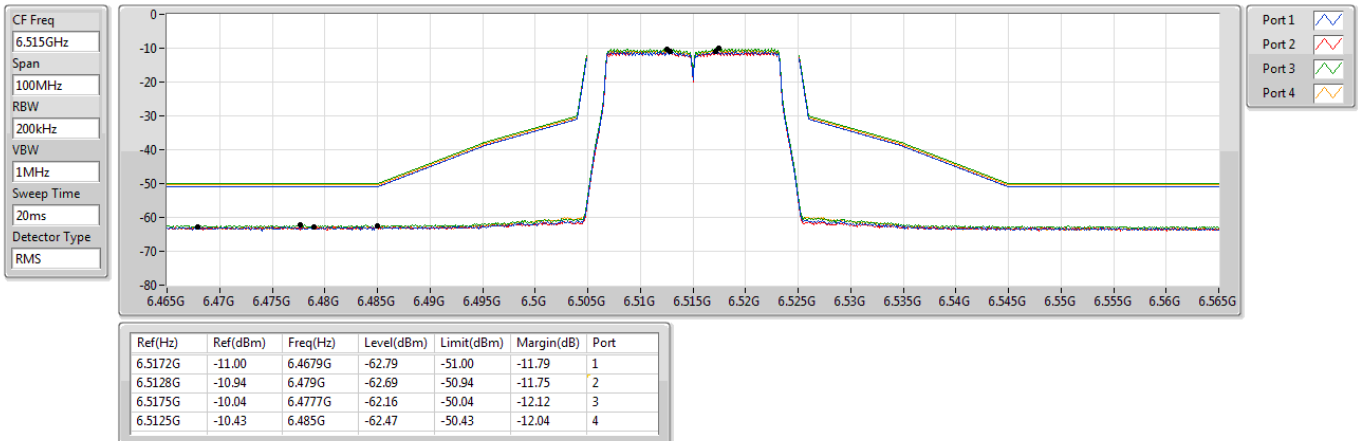

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6535MHz_TX

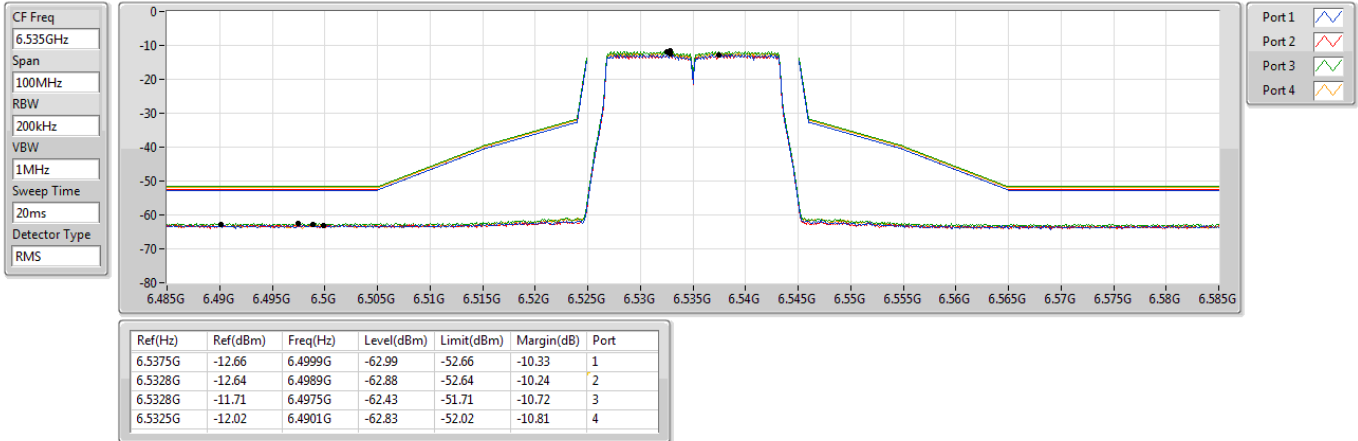

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK


6715MHz_TX

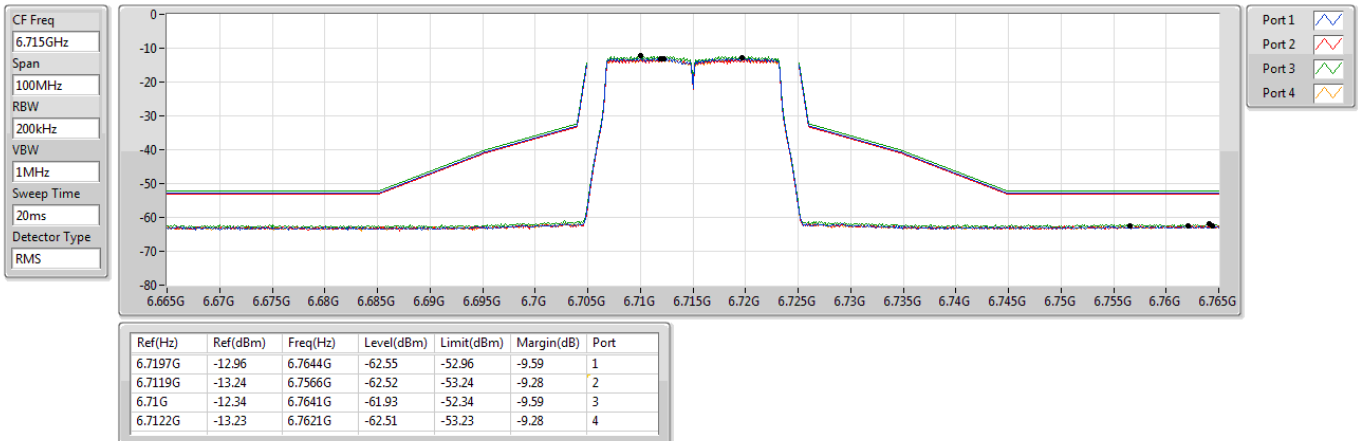

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK

6855MHz_TX

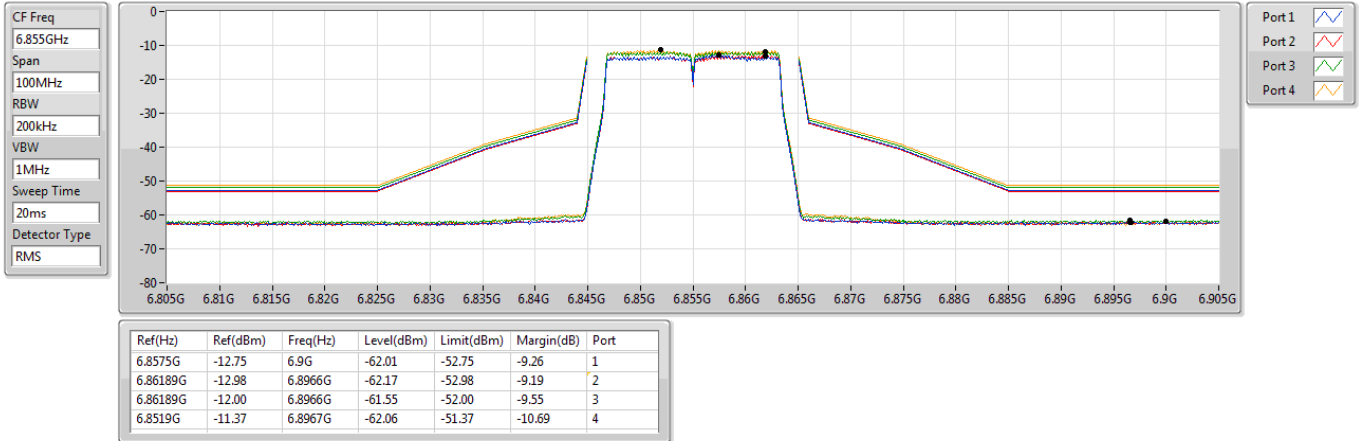

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

MASK

6875MHz Straddle 6.525-6.875GHz_TX

