

System Performance Check Report

Summary

|                 |                 |     |             |             |              |
|-----------------|-----------------|-----|-------------|-------------|--------------|
| Dipole          | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D750V3 – SN1122 | 750.0           | HSL | 20.0        | -4.4        | -3.4         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 15                 |      | CW, 0--    | 750.0, 0                        | 9.75              | 0.887                  | 41.9             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2043 | HBBL-600-10000, 2024-Jan-02 | EX3DV4 – SN7376, 2023-07-25 | DAE4 Sn1343, 2023-06-30 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.818     | 0.816     |
| psSAR10g [W/Kg]  | 0.545     | 0.544     |
| Power Drift [dB] | -0.04     |           |

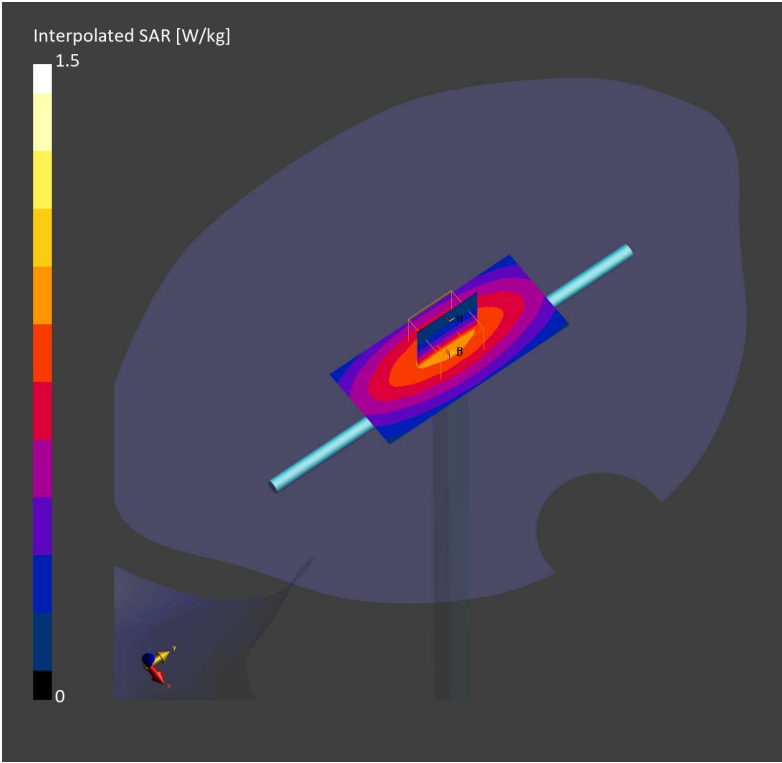

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D1750V2 – SN1125 | 1750.0          | HSL | 20.0        | -5.2        | -4.9         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 1750.0, 0                       | 8.61              | 1.35                   | 40.9             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2043 | HBBL-600-10000, 2023-Dec-19 | EX3DV4 – SN7376, 2023-07-25 | DAE4 Sn1343, 2023-06-30 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 3.58      | 3.50      |
| psSAR10g [W/Kg]  | 1.92      | 1.86      |
| Power Drift [dB] | -0.12     |           |

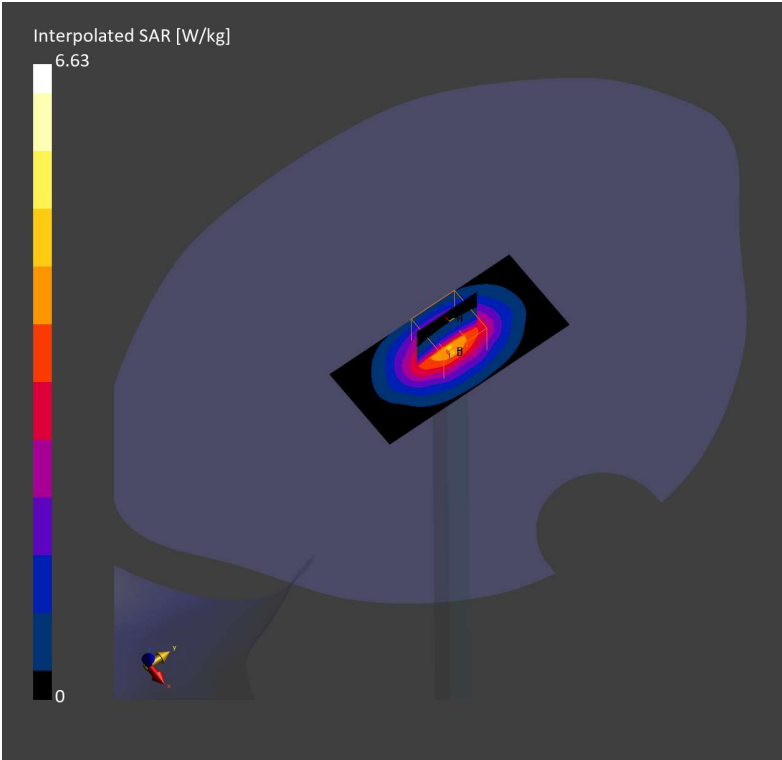

System Performance Check Report

Summary

|                 |                 |     |             |             |              |
|-----------------|-----------------|-----|-------------|-------------|--------------|
| Dipole          | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| CLA-13 – SN1015 | 13.0            | HSL | 20.0        | 11.9        | 10.7         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 0                  |      | CW, 0--    | 13.0, 0                         | 17.89             | 0.731                  | 54.4             |

Hardware Setup


|                                    |                     |                             |                         |
|------------------------------------|---------------------|-----------------------------|-------------------------|
| Phantom                            | TSL, Measured Date  | Probe, Calibration Date     | DAE, Calibration Date   |
| ELI V6.0 (20deg probe tilt) – 2005 | HSL750, 2024-Jan-02 | EX3DV4 – SN7646, 2023-03-23 | DAE4 Sn1447, 2023-03-22 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 32.0 x 32.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.061     | 0.059     |
| psSAR10g [W/Kg]  | 0.049     | 0.036     |
| Power Drift [dB] | -0.01     |           |

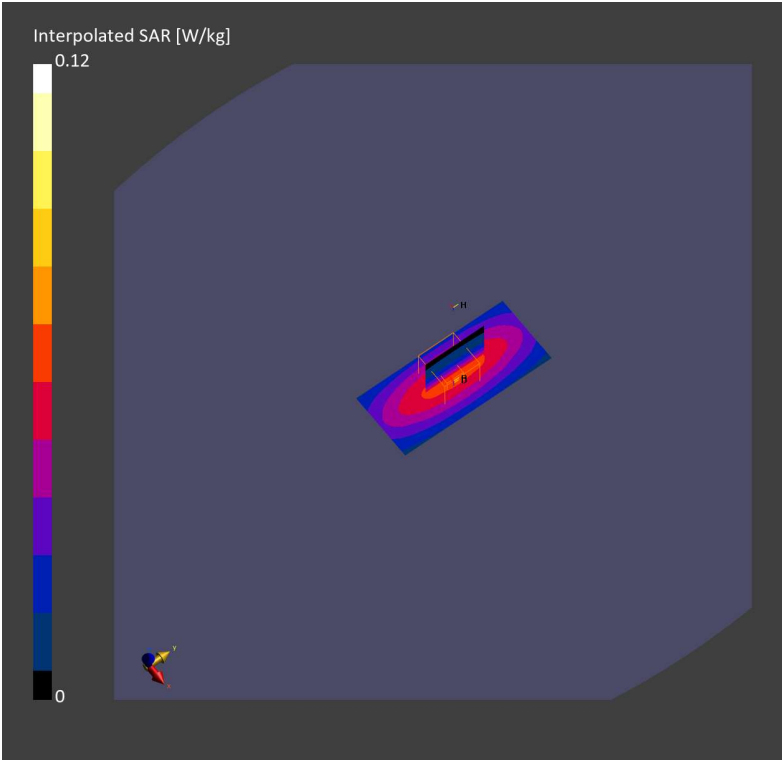

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D835V2 – SN4d174 | 835.0           | HSL | 20.0        | -6.8        | -5.5         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 15                 |      | CW, 0--    | 835.0, 0                        | 10.0              | 0.938                  | 42.2             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2039 | HBBL-600-10000, 2023-Dec-18 | EX3DV4 – SN7545, 2023-08-25 | DAE4 Sn1447, 2023-03-22 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 32.0 x 32.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.900     | 0.916     |
| psSAR10g [W/Kg]  | 0.594     | 0.604     |
| Power Drift [dB] | -0.05     |           |

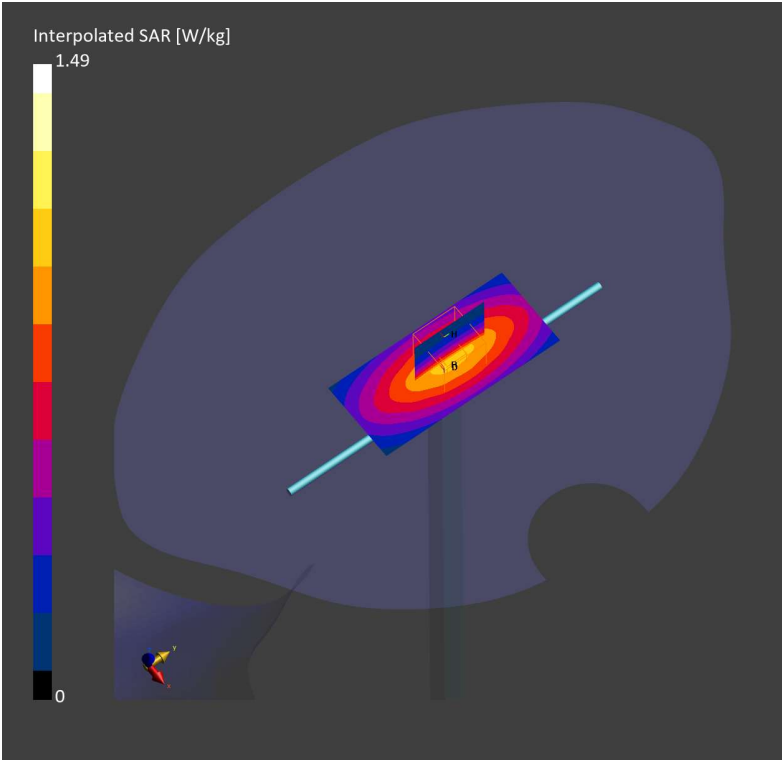

System Performance Check Report

Summary

|                   |                 |     |             |             |              |
|-------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole            | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D1900V2 – SN5d190 | 1900.0          | HSL | 20.0        | 1.4         | 0.4          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 1900.0, 0                       | 8.72              | 1.44                   | 39.8             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2039 | HBBL-600-10000, 2024-Jan-03 | EX3DV4 – SN7646, 2023-03-23 | DAE4 Sn1447, 2023-03-22 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 32.0 x 32.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 4.12      | 4.10      |
| psSAR10g [W/Kg]  | 2.13      | 2.10      |
| Power Drift [dB] | -0.06     |           |

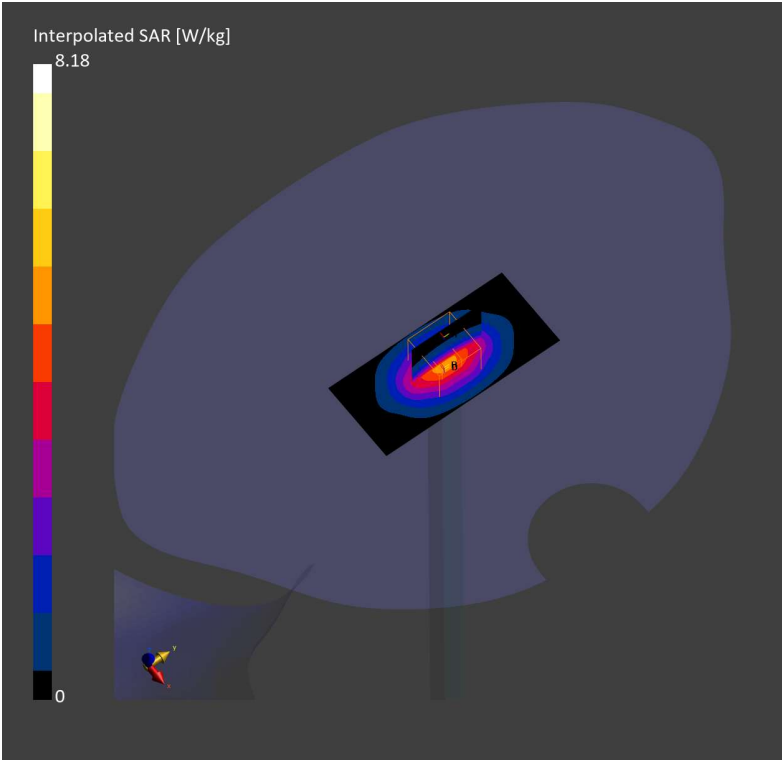

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D835V2 – SN4d194 | 835.0           | HSL | 20.0        | –9.0        | –7.5         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 15                 |      | CW, 0--    | 835.0, 0                        | 8.38              | 0.907                  | 40.2             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2024-Jan-11 | EX3DV4 – SN7645, 2023-09-20 | DAE4 Sn1468, 2023-08-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 0.898     | 0.893     |
| psSAR10g [W/Kg]  | 0.591     | 0.593     |
| Power Drift [dB] | –0.13     |           |

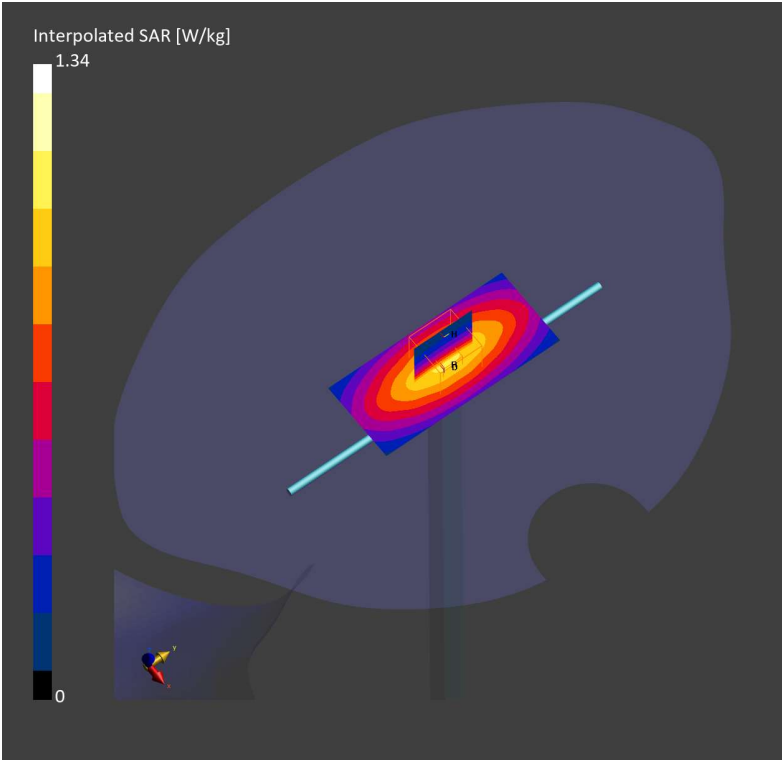

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D1750V2 – SN1180 | 1750.0          | HSL | 20.0        | -3.2        | 0.1          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 1750.0, 0                       | 7.68              | 1.33                   | 41.4             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2024-Jan-15 | EX3DV4 – SN7645, 2023-09-20 | DAE4 Sn1468, 2023-08-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 3.31      | 3.36      |
| psSAR10g [W/Kg]  | 1.78      | 1.86      |
| Power Drift [dB] | 0.03      |           |

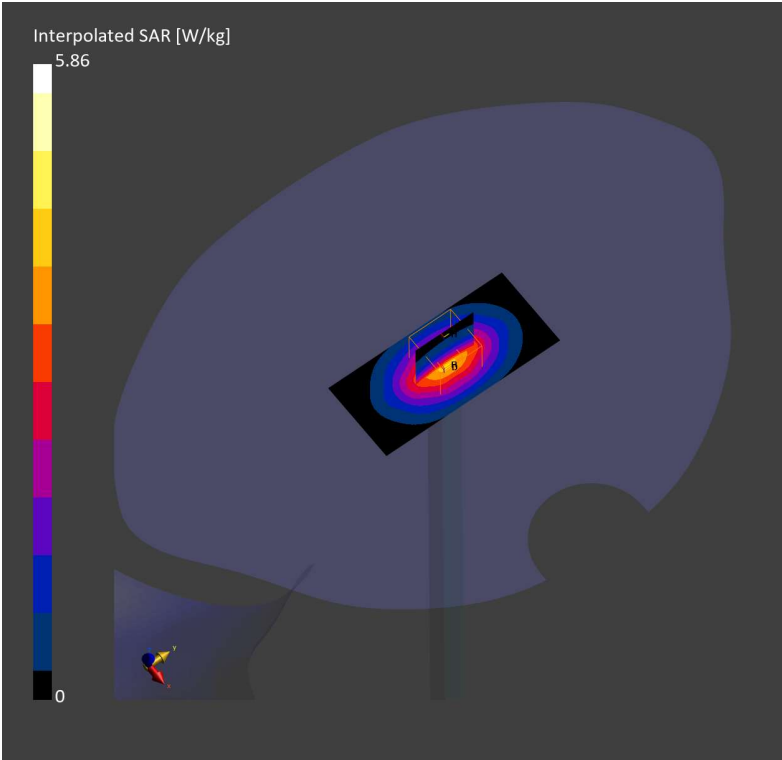

System Performance Check Report

Summary

|                   |                 |     |             |             |              |
|-------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole            | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D1900V2 – SN5d199 | 1900.0          | HSL | 20.0        | -1.0        | 1.7          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 1900.0, 0                       | 7.56              | 1.40                   | 41.2             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2024-Jan-15 | EX3DV4 – SN7645, 2023-09-20 | DAE4 Sn1468, 2023-08-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 90.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 15.0 | 6.0 x 6.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 3.84      | 3.87      |
| psSAR10g [W/Kg]  | 1.99      | 2.07      |
| Power Drift [dB] | 0.02      |           |

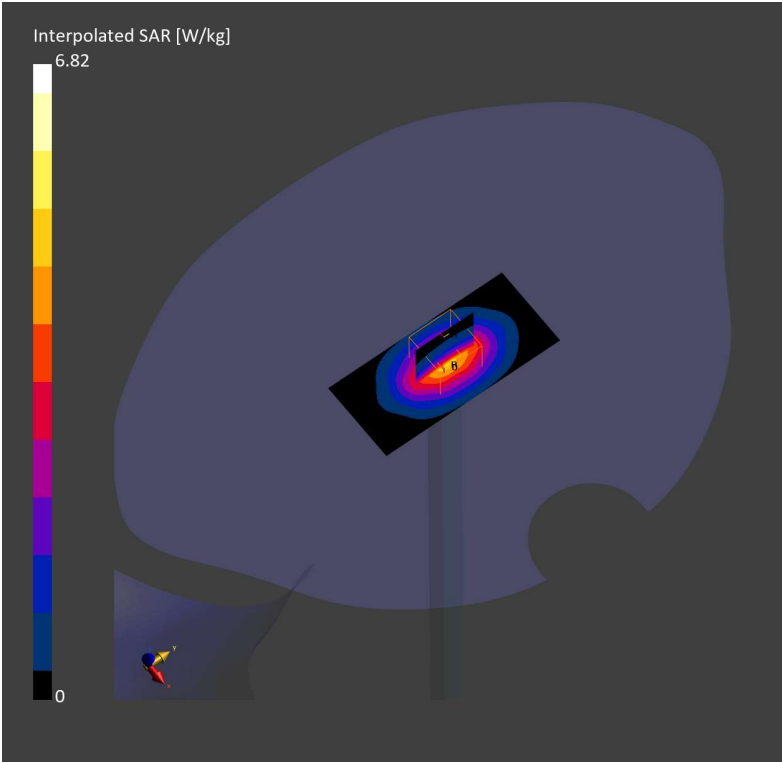

System Performance Check Report

Summary

|                 |                 |     |             |             |              |
|-----------------|-----------------|-----|-------------|-------------|--------------|
| Dipole          | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D2450V2 – SN960 | 2450.0          | HSL | 20.0        | -2.9        | -2.6         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 2450.0, 0                       | 6.96              | 1.78                   | 40.7             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2023-Dec-27 | EX3DV4 – SN7645, 2023-09-20 | DAE4 Sn1468, 2023-08-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 4.94      | 4.97      |
| psSAR10g [W/Kg]  | 2.28      | 2.32      |
| Power Drift [dB] | -0.01     |           |

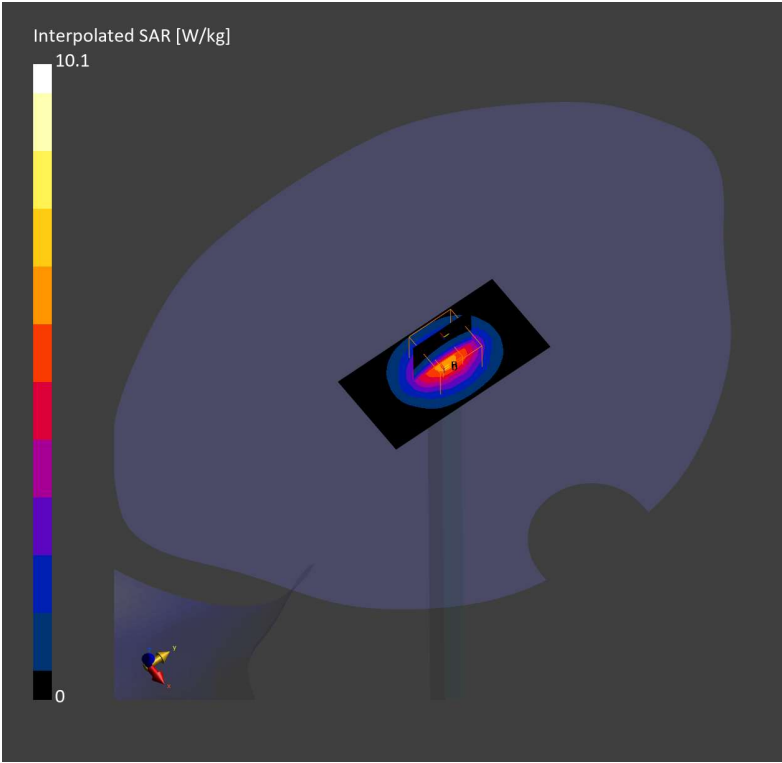

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D2600V2 – SN1097 | 2600.0          | HSL | 20.0        | -3.4        | -3.0         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 2600.0, 0                       | 8.26              | 1.96                   | 40.3             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2023-Dec-13 | EX3DV4 – SN7646, 2023-03-23 | DAE4 Sn1468, 2023-08-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 5.46      | 5.49      |
| psSAR10g [W/Kg]  | 2.45      | 2.48      |
| Power Drift [dB] | -0.03     |           |

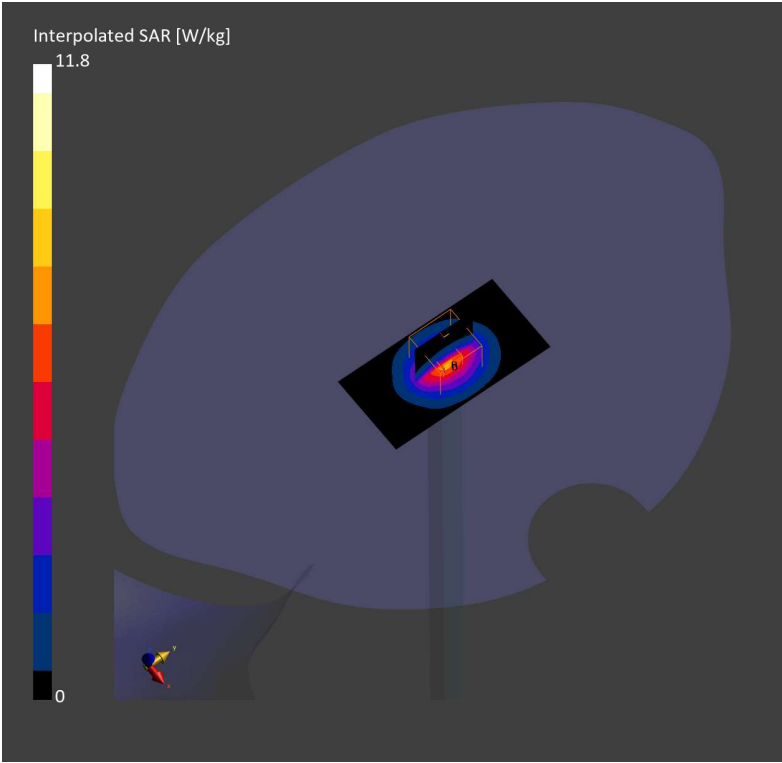

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D5GHzV2 – SN1325 | 5250.0          | HSL | 20.0        | 6.7         | 9.2          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 5250.0, 0                       | 5.76              | 4.55                   | 37.0             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2023-Dec-04 | EX3DV4 – SN7646, 2023-03-23 | DAE4 Sn1447, 2023-03-22 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 7.76      | 8.45      |
| psSAR10g [W/Kg]  | 2.29      | 2.46      |
| Power Drift [dB] | 0.05      |           |

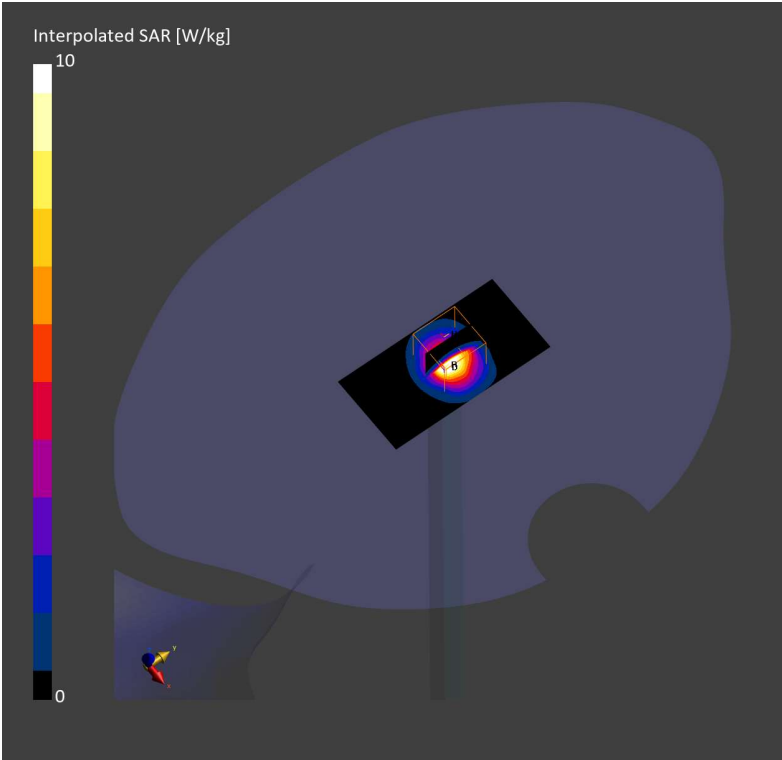

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D5GHzV2 – SN1325 | 5600.0          | HSL | 20.0        | 5.7         | 8.5          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 5600.0, 0                       | 5.15              | 4.96                   | 36.3             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2038 | HBBL-600-10000, 2023-Dec-04 | EX3DV4 – SN7646, 2023-03-23 | DAE4 Sn1447, 2023-03-22 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 8.19      | 8.83      |
| psSAR10g [W/Kg]  | 2.40      | 2.57      |
| Power Drift [dB] | 0.03      |           |

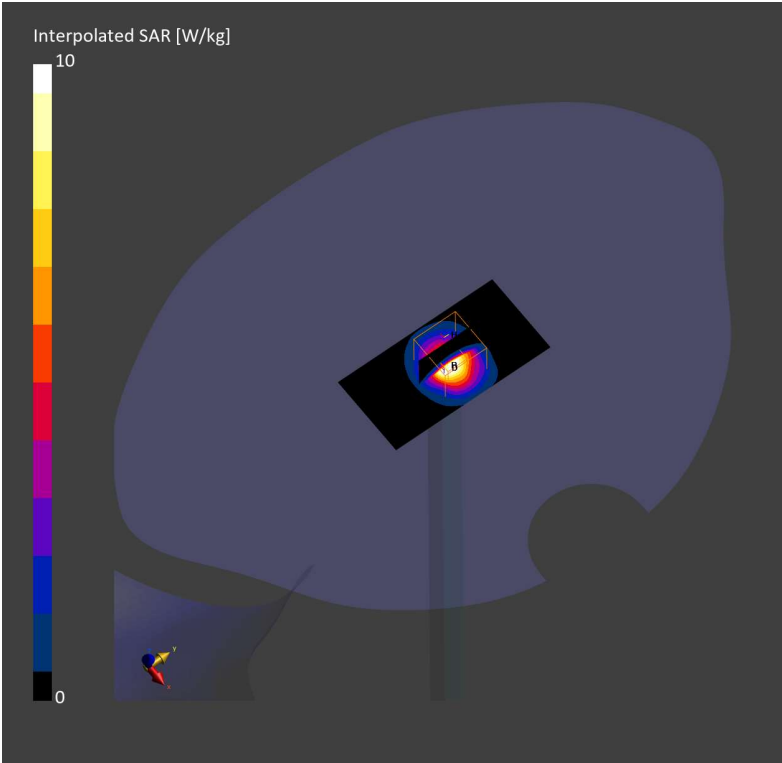

System Performance Check Report

Summary

|                 |                 |     |             |             |              |
|-----------------|-----------------|-----|-------------|-------------|--------------|
| Dipole          | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D2450V2 – SN939 | 2450.0          | HSL | 20.0        | -8.6        | -9.7         |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 2450.0, 0                       | 8.21              | 1.79                   | 38.3             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2037 | HBBL-600-10000, 2023-Dec-05 | EX3DV4 – SN7652, 2023-04-24 | DAE4 Sn1670, 2023-05-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 5.0 x 5.0 x 1.5    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 4.75      | 4.80      |
| psSAR10g [W/Kg]  | 2.20      | 2.24      |
| Power Drift [dB] | -0.18     |           |

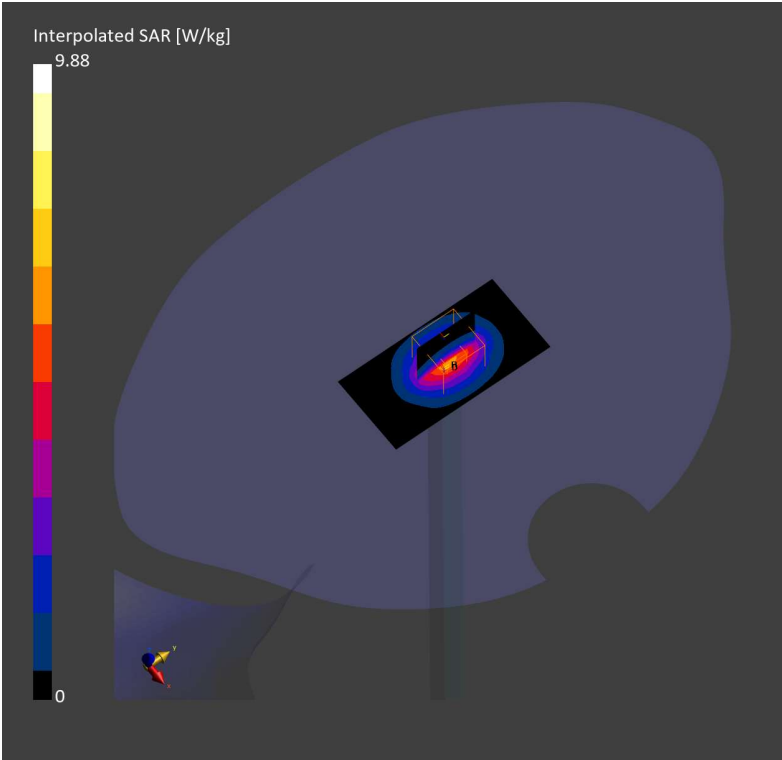

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D5GHzV2 – SN1325 | 5800.0          | HSL | 20.0        | -2.3        | 2.0          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 5800.0, 0                       | 5.19              | 5.16                   | 35.9             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2037 | HBBL-600-10000, 2024-Jan-02 | EX3DV4 – SN7652, 2023-04-24 | DAE4 Sn1670, 2023-05-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 7.32      | 7.85      |
| psSAR10g [W/Kg]  | 2.16      | 2.29      |
| Power Drift [dB] | 0.04      |           |

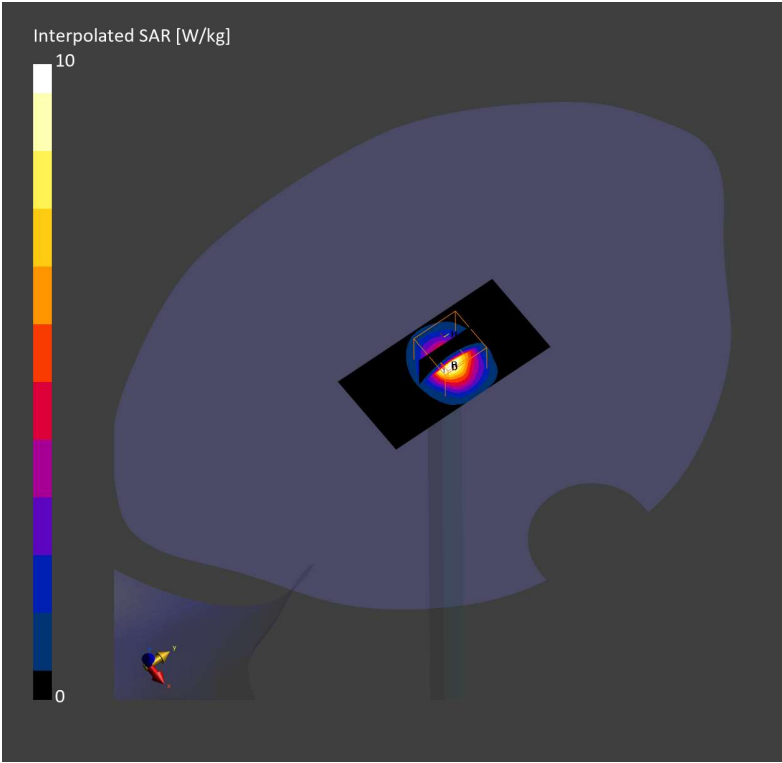

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D5GHzV2 – SN1209 | 5600.0          | HSL | 20.0        | 2.3         | 2.4          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 5600.0, 0                       | 4.91              | 5.03                   | 35.7             |

Hardware Setup


|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2037 | HBBL-600-10000, 2024-Jan-08 | EX3DV4 – SN7652, 2023-04-24 | DAE4 Sn1670, 2023-05-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 7.69      | 8.49      |
| psSAR10g [W/Kg]  | 2.23      | 2.42      |
| Power Drift [dB] | 0.05      |           |

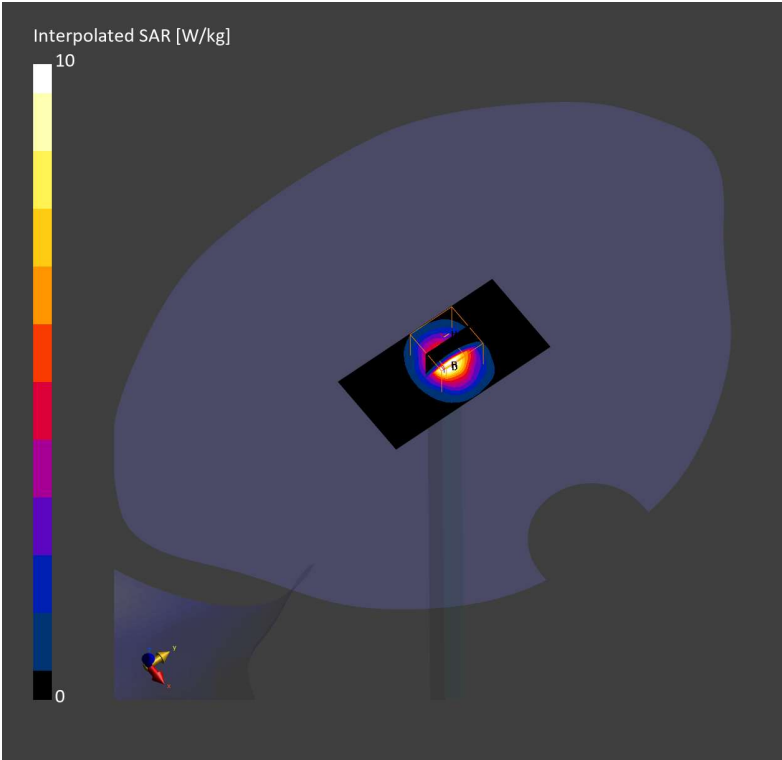

System Performance Check Report

Summary

|                  |                 |     |             |             |              |
|------------------|-----------------|-----|-------------|-------------|--------------|
| Dipole           | Frequency [MHz] | TSL | Power [dBm] | Dev. 1g [%] | Dev. 10g [%] |
| D5GHzV2 – SN1209 | 5800.0          | HSL | 20.0        | 4.5         | 5.3          |

Exposure Conditions

|                      |                    |      |            |                                 |                   |                        |                  |
|----------------------|--------------------|------|------------|---------------------------------|-------------------|------------------------|------------------|
| Phantom Section, TSL | Test Distance [mm] | Band | Group, UID | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity |
| Flat, HSL            | 10                 |      | CW, 0--    | 5800.0, 0                       | 5.19              | 5.26                   | 35.3             |

Hardware Setup

|                                         |                             |                             |                         |
|-----------------------------------------|-----------------------------|-----------------------------|-------------------------|
| Phantom                                 | TSL, Measured Date          | Probe, Calibration Date     | DAE, Calibration Date   |
| Twin-SAM V8.0 (30deg probe tilt) – 2037 | HBBL-600-10000, 2024-Jan-08 | EX3DV4 – SN7652, 2023-04-24 | DAE4 Sn1670, 2023-05-24 |

Scans Setup

|                     |             |                    |
|---------------------|-------------|--------------------|
|                     | Area Scan   | Zoom Scan          |
| Grid Extents [mm]   | 40.0 x 80.0 | 22.0 x 22.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |

Measurement Results

|                  |           |           |
|------------------|-----------|-----------|
|                  | Area Scan | Zoom Scan |
| psSAR1g [W/Kg]   | 7.75      | 8.49      |
| psSAR10g [W/Kg]  | 2.27      | 2.41      |
| Power Drift [dB] | 0.01      |           |

