




Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, Band 4, CH157		:	

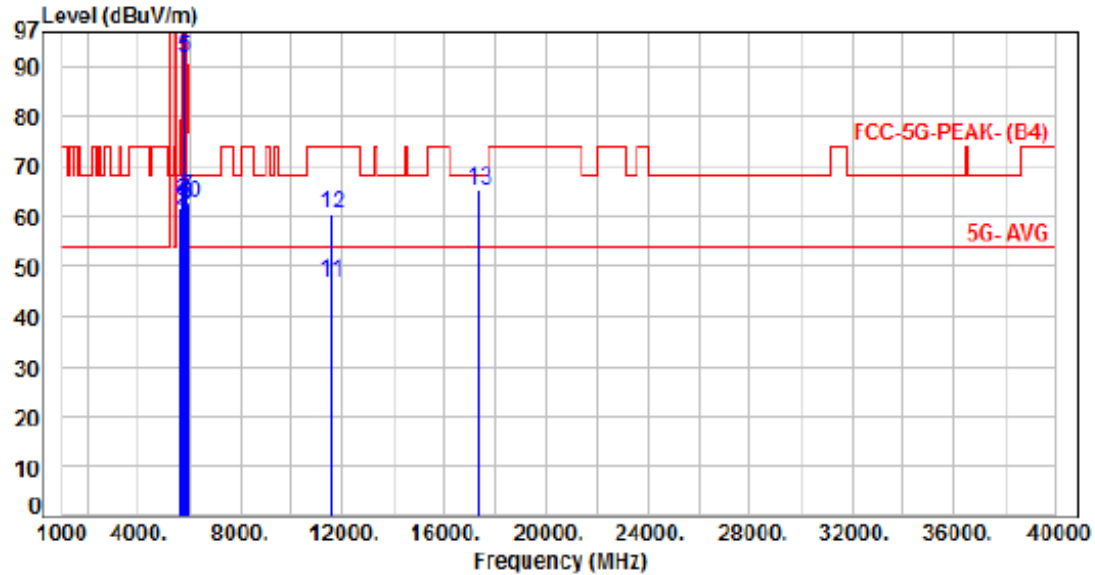

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.38	61.73	68.20	-6.47	Peak	100	115	P
2	5700.00	7.37	54.03	61.40	105.20	-43.80	Peak	100	115	P
3	5720.00	7.34	55.55	62.89	110.80	-47.91	Peak	100	115	P
4	5725.00	7.33	55.71	63.04	122.20	-59.16	Peak	100	115	P
5	5785.00	7.37	84.28	91.65	200.00	-108.35	Average	100	115	P
6	5785.00	7.37	94.08	101.45	200.00	-98.55	Peak	100	115	P
7	5850.00	7.43	56.52	63.95	122.20	-58.25	Peak	100	115	P
8	5855.00	7.45	55.13	62.58	110.80	-48.22	Peak	100	115	P
9	5875.00	7.54	54.79	62.33	105.20	-42.87	Peak	100	115	P
10	5925.00	7.66	54.92	62.58	68.20	-5.62	Peak	100	115	P
11	11570.00	17.83	28.92	46.75	54.00	-7.25	Average	100	77	P
12	11570.00	17.83	42.67	60.50	74.00	-13.50	Peak	100	77	P
13	17355.00	24.42	40.68	65.10	68.20	-3.10	Peak	100	155	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Band 4, CH165		:

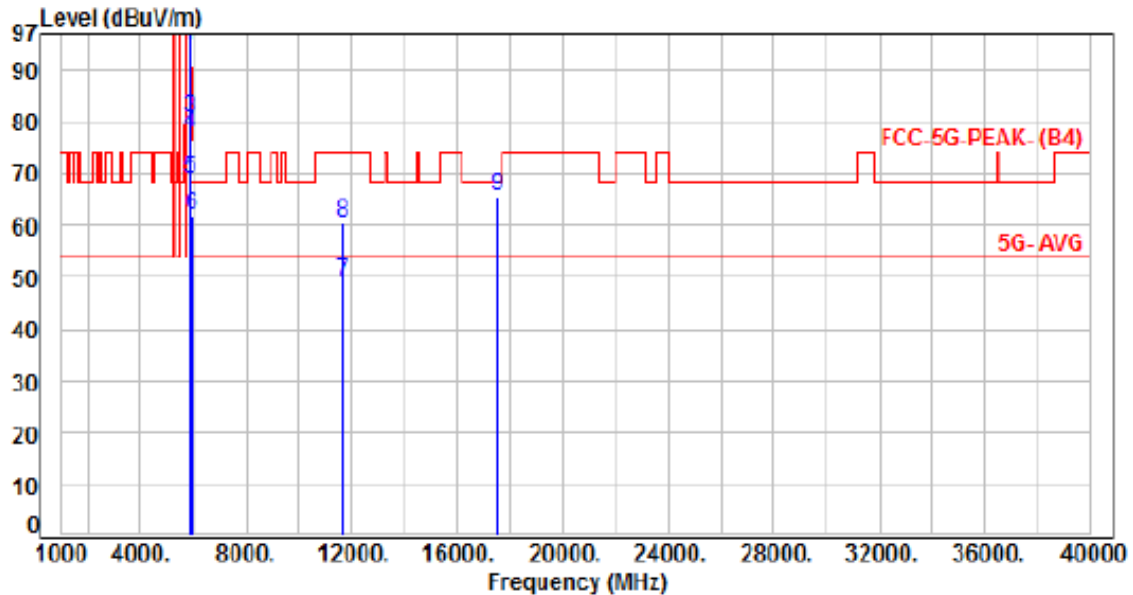

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	87.33	94.75	200.00	-105.25	Average	108	278	P
2	5825.00	7.42	96.87	104.29	200.00	-95.71	Peak	108	278	P
3	5850.00	7.43	73.18	80.61	122.20	-41.59	Peak	108	278	P
4	5855.00	7.45	70.30	77.75	110.80	-33.05	Peak	108	278	P
5	5875.00	7.54	61.55	69.09	105.20	-36.11	Peak	108	278	P
6	5925.00	7.66	54.18	61.84	68.20	-6.36	Peak	108	278	P
7	11650.00	17.99	31.05	49.04	54.00	-4.96	Average	100	141	P
8	11650.00	17.99	42.39	60.38	74.00	-13.62	Peak	100	141	P
9	17475.00	25.00	40.59	65.59	68.20	-2.61	Peak	100	260	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Band 4, CH165		:

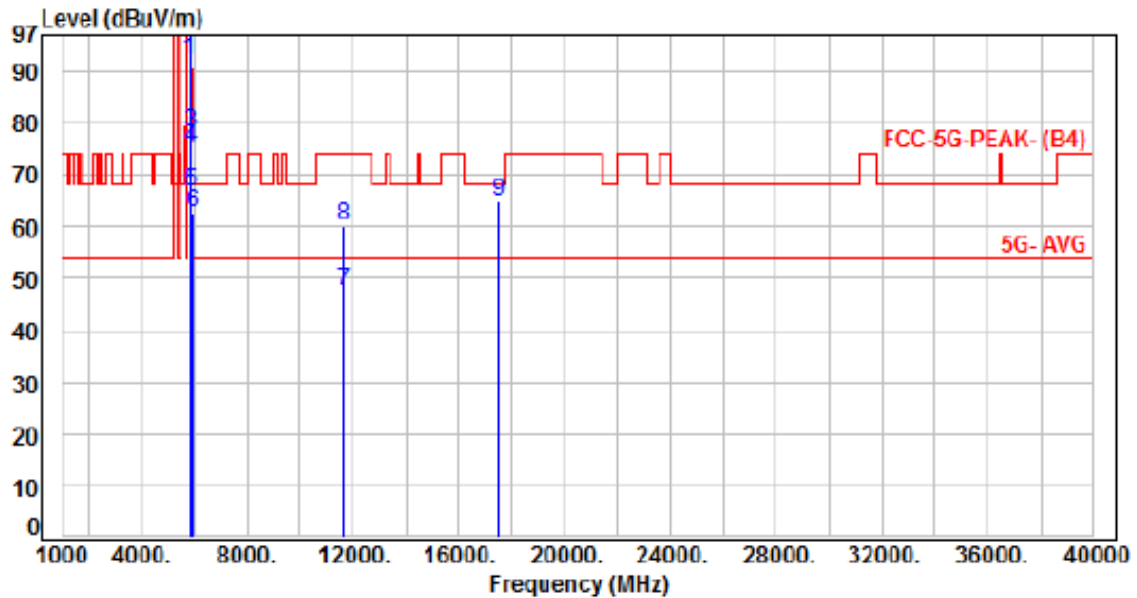

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.42	84.65	92.07	200.00	-107.93	Average	102	113	P
2	5825.00	7.42	94.31	101.73	200.00	-98.27	Peak	102	113	P
3	5850.00	7.43	70.76	78.19	122.20	-44.01	Peak	102	113	P
4	5855.00	7.45	67.85	75.30	110.80	-35.50	Peak	102	113	P
5	5875.00	7.54	59.26	66.80	105.20	-38.40	Peak	102	113	P
6	5925.00	7.66	55.06	62.72	68.20	-5.48	Peak	102	113	P
7	11650.00	17.99	29.44	47.43	54.00	-6.57	Average	100	82	P
8	11650.00	17.99	42.18	60.17	74.00	-13.83	Peak	100	82	P
9	17475.00	25.00	40.08	65.08	68.20	-3.12	Peak	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, Band 4, CH151		:	

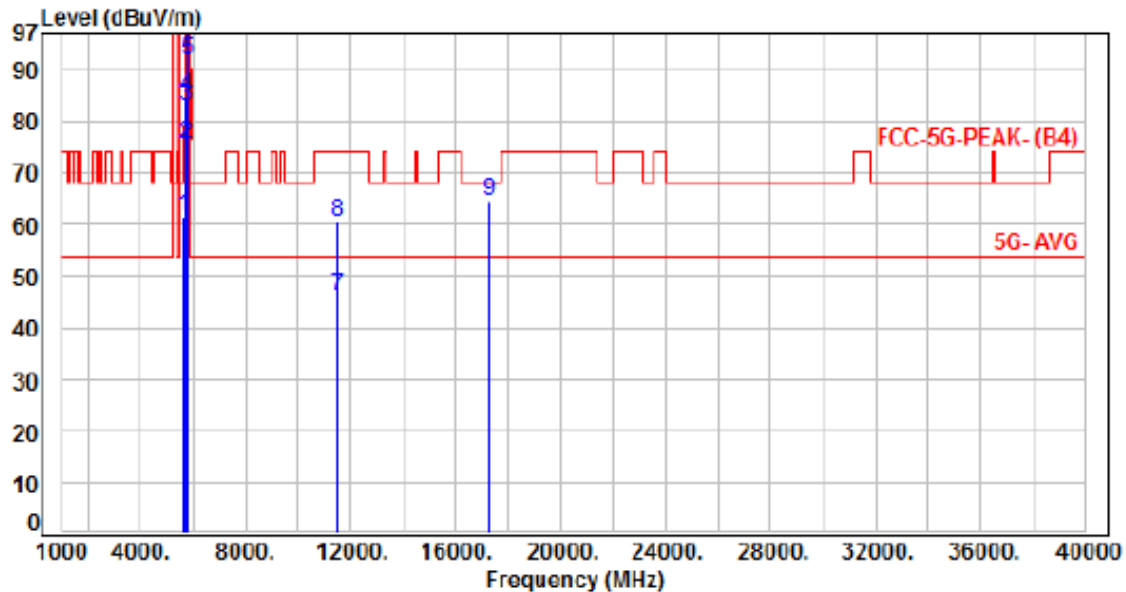

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.34	61.69	68.20	-6.51	Peak	100	272	P
2	5700.00	7.37	68.40	75.77	105.20	-29.43	Peak	100	272	P
3	5720.00	7.34	75.66	83.00	110.80	-27.80	Peak	100	272	P
4	5725.00	7.33	77.32	84.65	122.20	-37.55	Peak	100	272	P
5	5755.00	7.30	84.53	91.83	200.00	-108.17	Average	100	272	P
6	5755.00	7.30	94.69	101.99	200.00	-98.01	Peak	100	272	P
7	11510.00	17.70	28.57	46.27	54.00	-7.73	Average	100	128	P
8	11510.00	17.70	42.89	60.59	74.00	-13.41	Peak	100	128	P
9	17265.00	23.77	40.83	64.60	68.20	-3.60	Peak	100	258	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, Band 4, CH151		:	

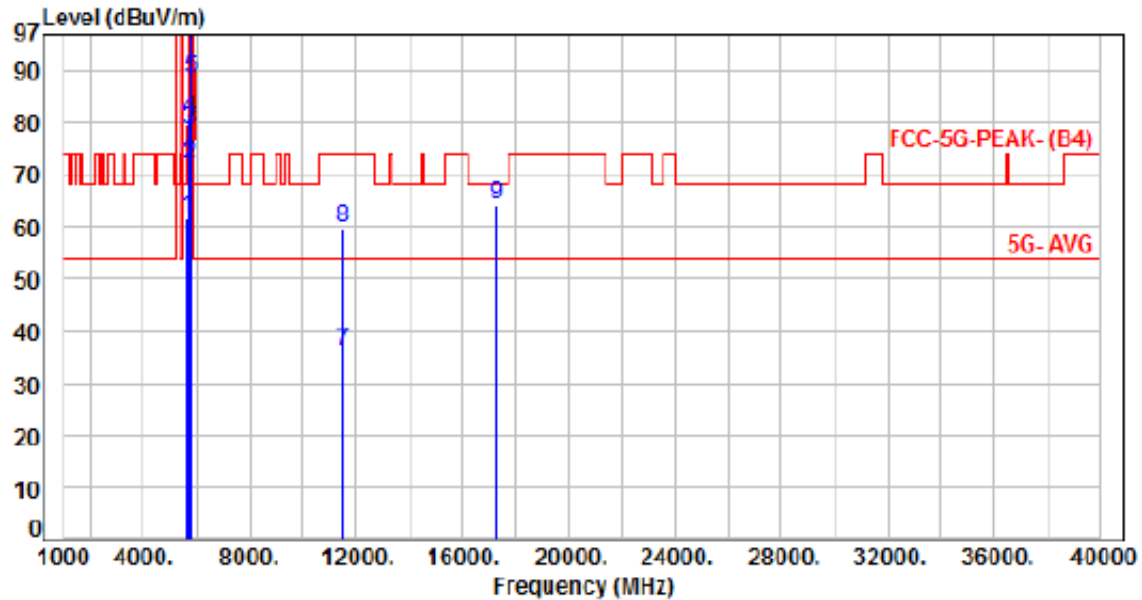

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	54.15	61.50	68.20	-6.70	Peak	101	114	P
2	5700.00	7.37	64.44	71.81	105.20	-33.39	Peak	101	114	P
3	5720.00	7.34	71.37	78.71	110.80	-32.09	Peak	101	114	P
4	5725.00	7.33	73.54	80.87	122.20	-41.33	Peak	101	114	P
5	5755.00	7.30	81.18	88.48	200.00	-111.52	Average	101	114	P
6	5755.00	7.30	91.21	98.51	200.00	-101.49	Peak	101	114	P
7	11510.00	7.35	28.81	36.16	68.20	-32.04	Average	100	79	P
8	11510.00	17.70	42.18	59.88	74.00	-14.12	Peak	100	79	P
9	17265.00	23.77	40.36	64.13	68.20	-4.07	Peak	100	159	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, Band 4, CH159		:

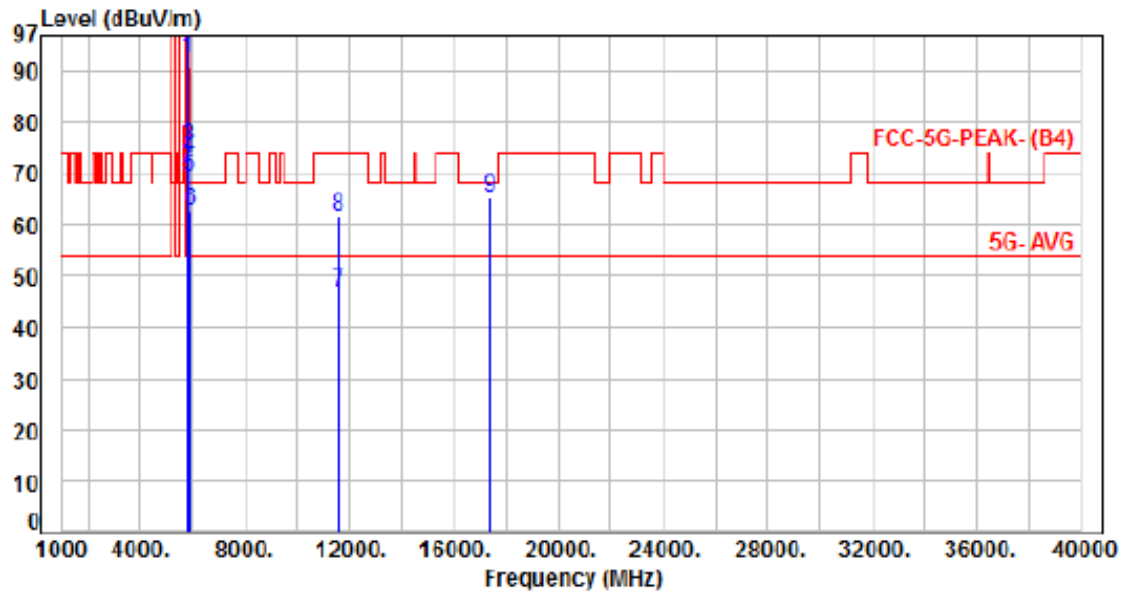

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	85.37	92.76	200.00	-107.24	Average	100	268	P
2	5795.00	7.39	94.82	102.21	200.00	-97.79	Peak	100	268	P
3	5850.00	7.43	67.67	75.10	122.20	-47.10	Peak	100	268	P
4	5855.00	7.45	65.73	73.18	110.80	-37.62	Peak	100	268	P
5	5875.00	7.54	61.93	69.47	105.20	-35.73	Peak	100	268	P
6	5925.00	7.66	54.96	62.62	68.20	-5.58	Peak	100	268	P
7	11590.00	17.86	29.16	47.02	54.00	-6.98	Average	100	133	P
8	11590.00	17.86	43.77	61.63	74.00	-12.37	Peak	100	133	P
9	17385.00	24.49	40.66	65.15	68.20	-3.05	Peak	100	267	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, Band 4, CH159		:	

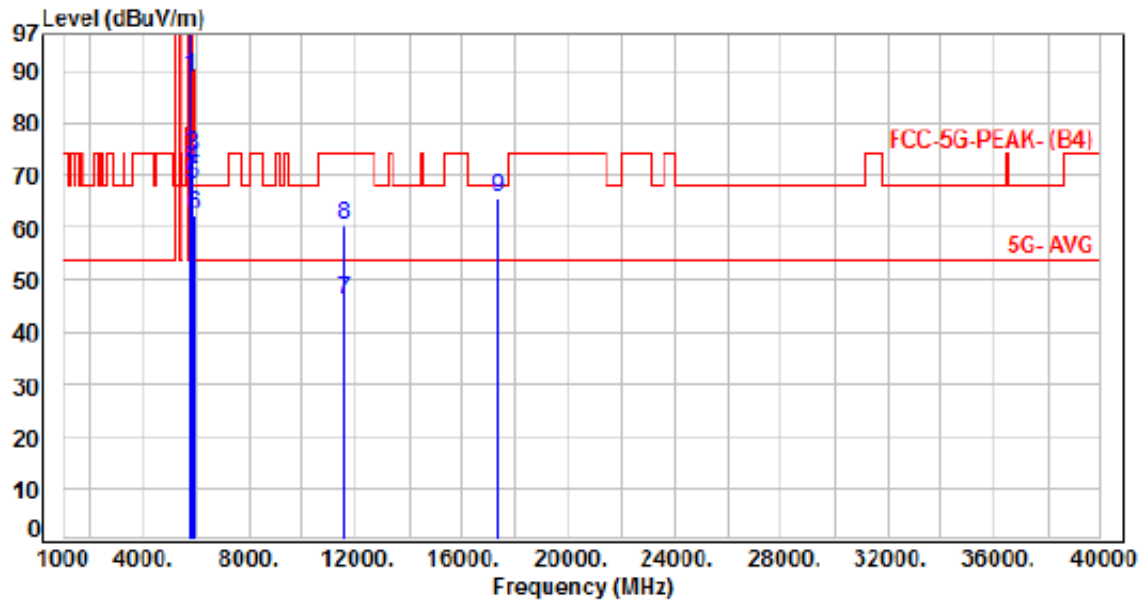

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.39	81.59	88.98	200.00	-111.02	Average	107	113	P
2	5795.00	7.39	91.28	98.67	200.00	-101.33	Peak	107	113	P
3	5850.00	7.43	66.45	73.88	122.20	-48.32	Peak	107	113	P
4	5855.00	7.45	64.18	71.63	110.80	-39.17	Peak	107	113	P
5	5875.00	7.54	60.62	68.16	105.20	-37.04	Peak	107	113	P
6	5925.00	7.66	54.79	62.45	68.20	-5.75	Peak	107	113	P
7	11590.00	17.86	28.40	46.26	54.00	-7.74	Average	100	76	P
8	11590.00	17.86	42.50	60.36	74.00	-13.64	Peak	100	76	P
9	17385.00	24.49	41.19	65.68	68.20	-2.52	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, Band 4, CH155		:

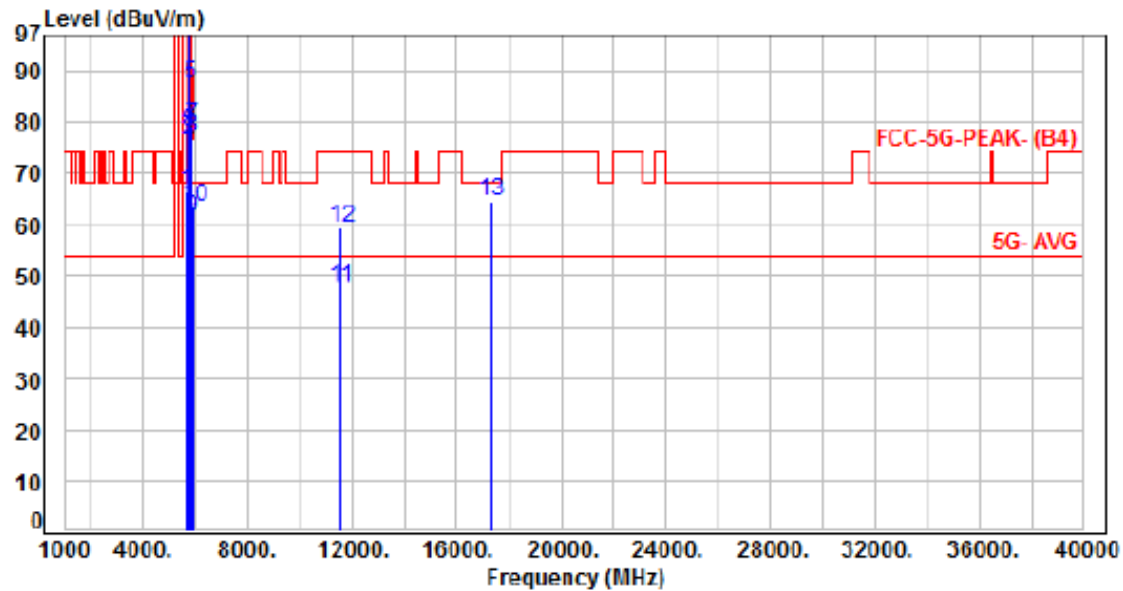

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	59.19	66.54	68.20	-1.66	Peak	100	265	P
2	5700.00	7.37	69.11	76.48	105.20	-28.72	Peak	100	265	P
3	5720.00	7.34	70.99	78.33	110.80	-32.47	Peak	100	265	P
4	5725.00	7.33	71.74	79.07	122.20	-43.13	Peak	100	265	P
5	5775.00	7.35	80.05	87.40	200.00	-112.60	Average	100	265	P
6	5775.00	7.35	89.81	97.16	200.00	-102.84	Peak	100	265	P
7	5850.00	7.43	71.92	79.35	122.20	-42.85	Peak	100	265	P
8	5855.00	7.45	69.59	77.04	110.80	-33.76	Peak	100	265	P
9	5875.00	7.54	53.71	61.25	105.20	-43.95	Peak	100	265	P
10	5925.00	7.66	55.69	63.35	68.20	-4.85	Peak	100	265	P
11	11550.00	17.79	29.84	47.63	54.00	-6.37	Average	100	133	P
12	11550.00	17.79	41.69	59.48	74.00	-14.52	Peak	100	133	P
13	17325.00	24.20	40.52	64.72	68.20	-3.48	Peak	100	262	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 4, CH155		:	

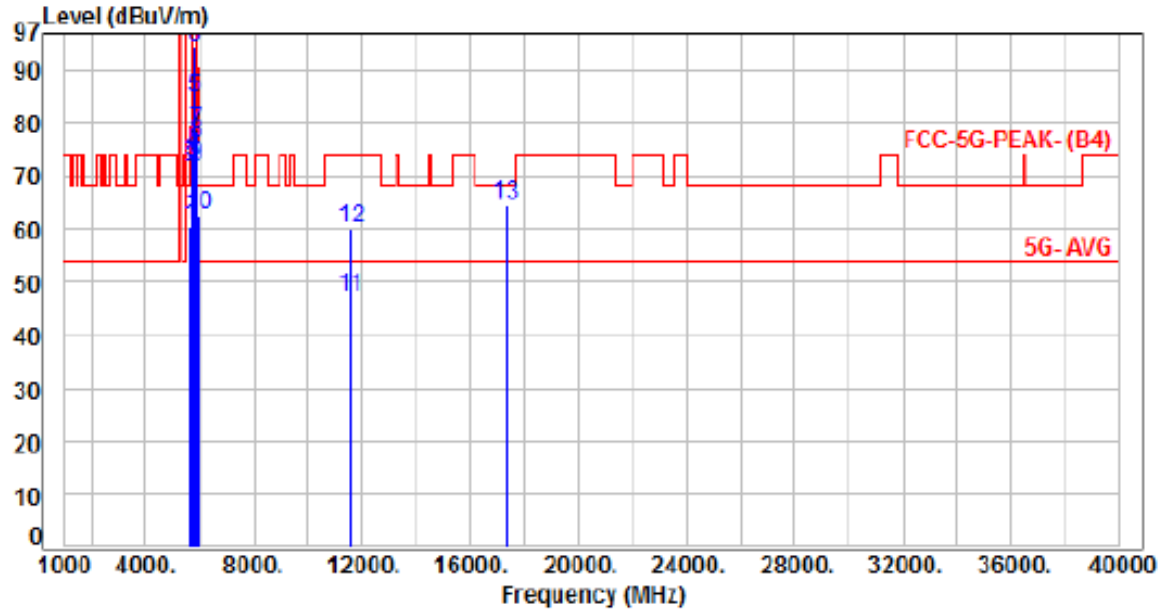

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.35	53.29	60.64	68.20	-7.56	Peak	100	274	P
2	5700.00	7.37	64.11	71.48	105.20	-33.72	Peak	100	274	P
3	5720.00	7.34	65.27	72.61	110.80	-38.19	Peak	100	274	P
4	5725.00	7.33	66.84	74.17	122.20	-48.03	Peak	100	274	P
5	5775.00	7.35	77.43	84.78	200.00	-115.22	Average	100	274	P
6	5775.00	7.35	87.14	94.49	200.00	-105.51	Peak	100	274	P
7	5850.00	7.43	71.22	78.65	122.20	-43.55	Peak	100	274	P
8	5855.00	7.45	68.88	76.33	110.80	-34.47	Peak	100	274	P
9	5875.00	7.54	64.35	71.89	105.20	-33.31	Peak	100	274	P
10	5925.00	7.66	55.03	62.69	68.20	-5.51	Peak	100	274	P
11	11550.00	17.79	29.41	47.20	54.00	-6.80	Average	100	84	P
12	11550.00	17.79	42.40	60.19	74.00	-13.81	Peak	100	84	P
13	17325.00	24.20	40.47	64.67	68.20	-3.53	Peak	100	155	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle and Measurement methods


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout



7.4. Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11a,6M	1.364	1.369	99.63%
802.11ac VHT20	0.979	0.984	99.49%
802.11ac VHT40	0.494	0.502	98.40%
802.11ac VHT80	0.250	0.259	96.63%

7.5. Measurement Methods


26 dB and 6dB Emission BW	KDB 789033 D02 v02r01, Section C
99% Occupied BW	KDB 789033 D02 v02r01, Section D
Conducted Output Power	KDB 789033 D02 v02r01, Section E.2.d and E.3.b (Method PM-G)
Power Spectral Density	KDB 789033 D02 v02r01, Section F
Unwanted emissions in restricted bands	KDB 789033 D02 v02r01, Sections G and H
Unwanted emissions in non-restricted bands	KDB 789033 D02 v02r01, Sections G and H




Modulation Type: 802.11a (6Mbps)

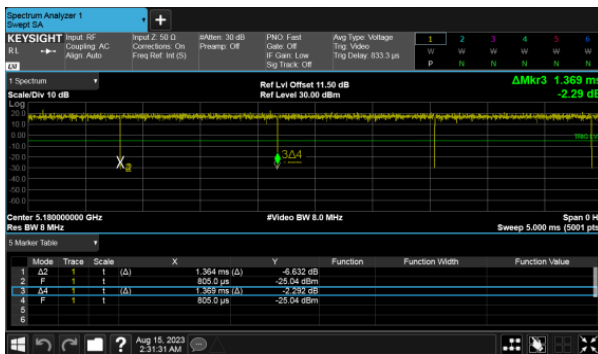


Modulation Type: 802.11ac VHT80 (29.3Mbps)

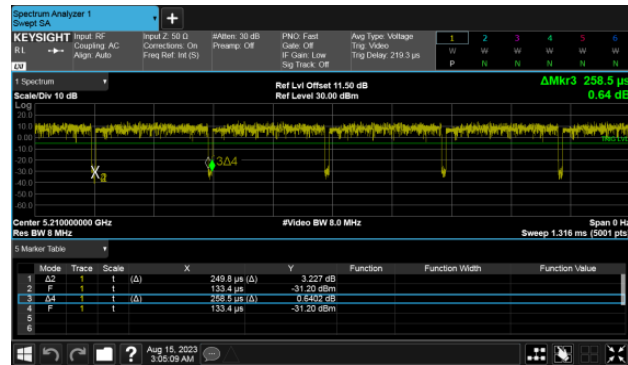

Modulation Type: 802.11ac VHT20 (6.5Mbps)

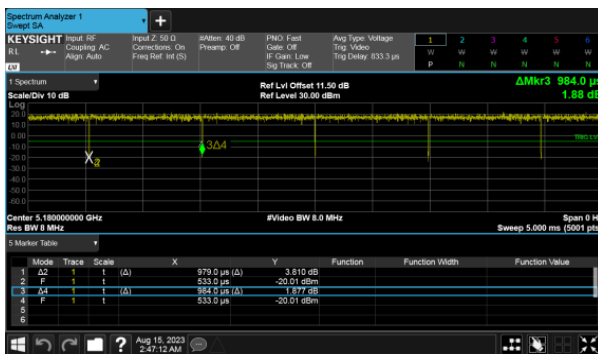

Modulation Type: 802.11ac VHT40 (13.5Mbps)

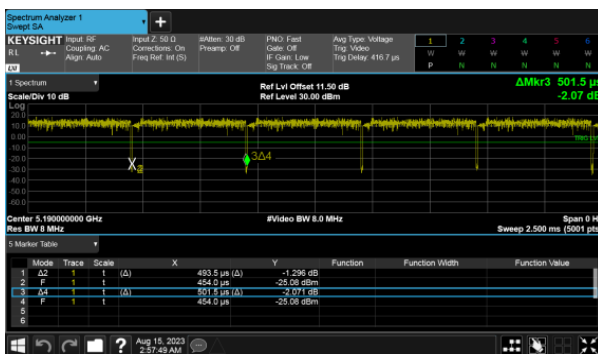



8. 6dB Bandwidth & 99% Occupied Bandwidth

8.1. Test Limit


FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

8.3. Test Setup Layout





8.4. Test Result and Data

In the 5.8G Band

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth(MHz)	Minimum Limit (MHz)
			ANT C	
11a	149	5745	16.36	0.50
11a	157	5785	16.36	0.50
11a	165	5825	16.35	0.50
11ac VHT20	149	5745	17.58	0.50
11ac VHT20	157	5785	17.57	0.50
11ac VHT20	165	5825	17.56	0.50
11ac VHT40	151	5755	35.13	0.50
11ac VHT40	159	5795	35.13	0.50
11ac VHT80	155	5775	75.12	0.50

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)
			ANT C
11a	149	5745	22.55
11a	157	5785	23.26
11a	165	5825	22.06
11ac VHT20	149	5745	21.87
11ac VHT20	157	5785	23.41
11ac VHT20	165	5825	22.18
11ac VHT40	151	5755	40.92
11ac VHT40	159	5795	42.98
11ac VHT80	155	5775	75.65




UNII Emission Bandwidth Result (Extends across 5725MHz band)				
Modulation Type	Data Rate / MCS	Frequency (MHz)	6dB Bandwidth(MHz)	99% Bandwidth(MHz)
			ANT C	ANT C
11a	6 Mbps	5720	3.22	14.09
11ac VHT20	NSS1-MCS0	5720	3.80	14.72
11ac VHT40	NSS1-MCS0	5710	2.71	29.90
11ac VHT80	NSS1-MCS0	5690	2.68	69.96




6dB Bandwidth


Modulation Type: 802.11a (6Mbps)
CH149

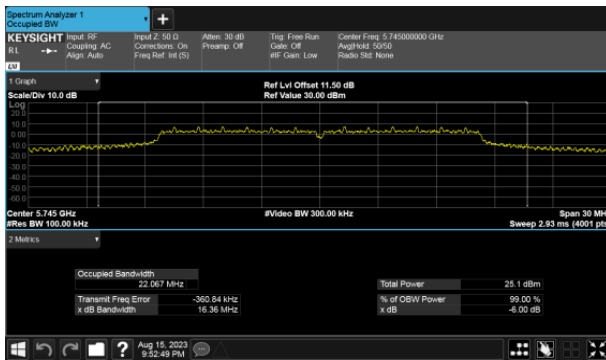


Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH149

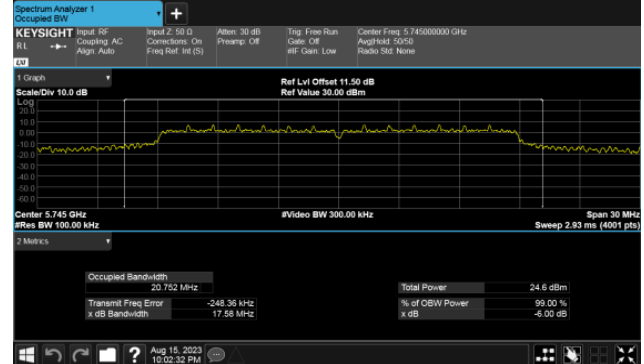


CH157

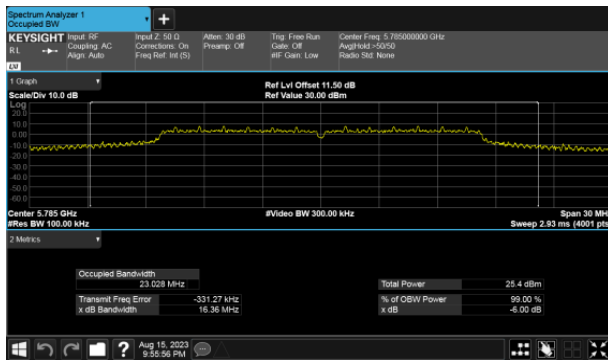


CH157

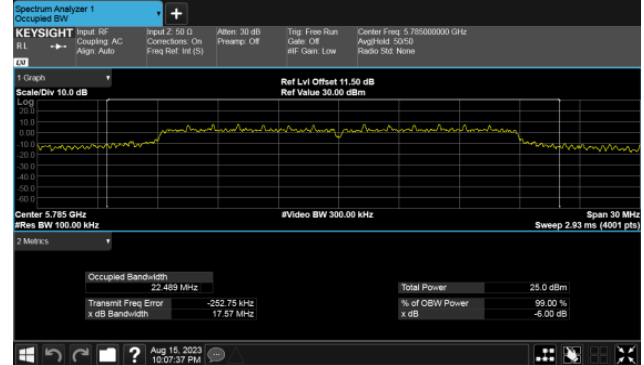

CH165


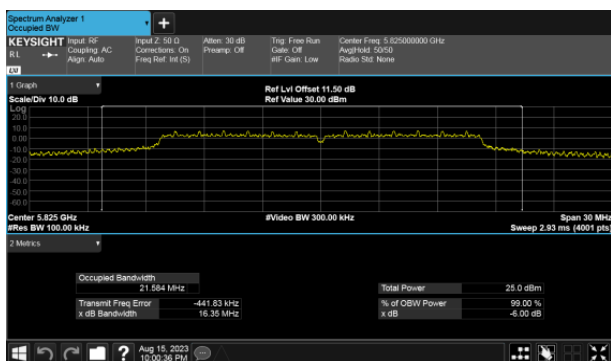


CH165

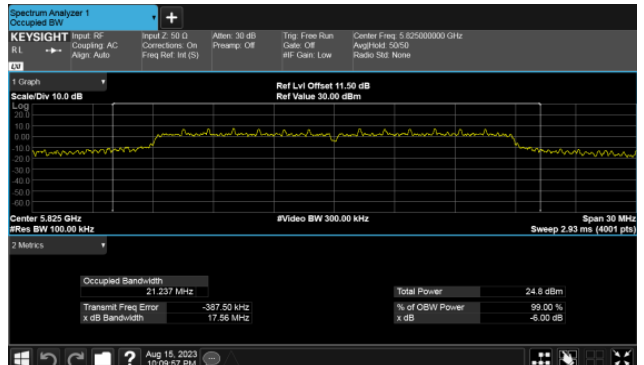




6dB Bandwidth

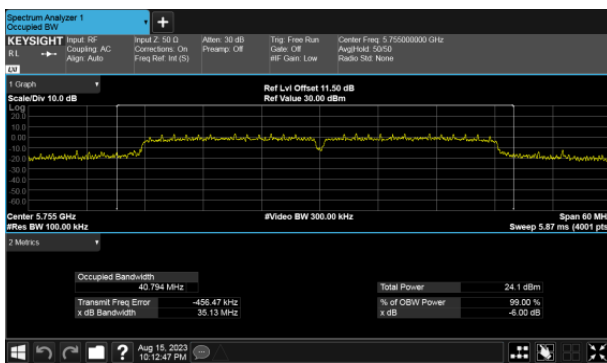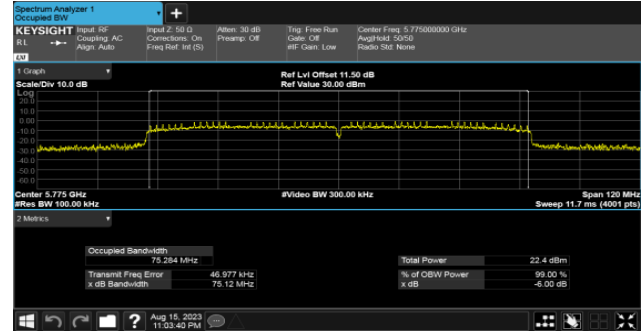Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155

CH159

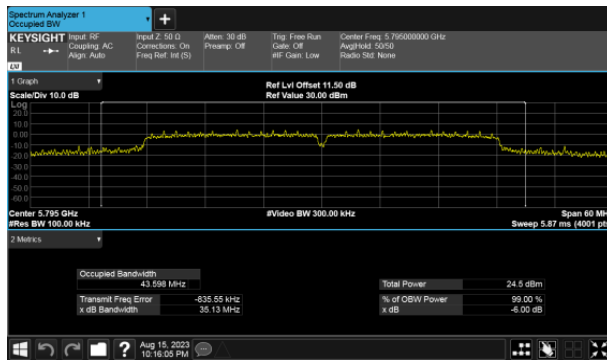





6dB Bandwidth

Extends across 5725MHz Band, Straddle Channel


Modulation Type: 802.11a (6Mbps)
CH144

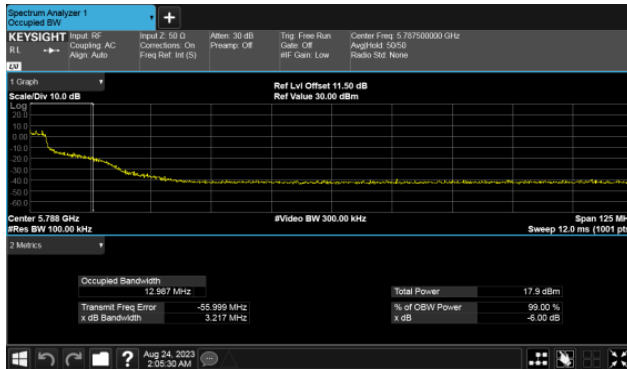


Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH138

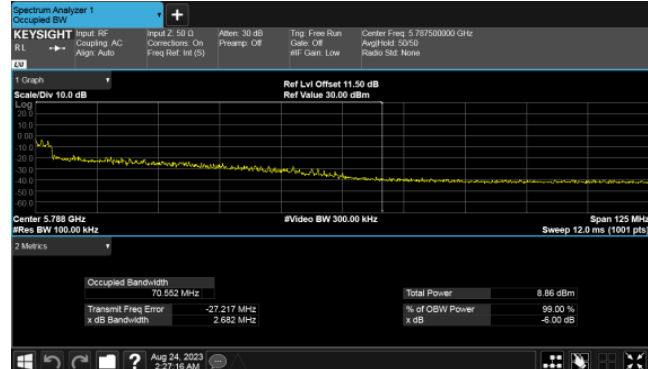

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH144

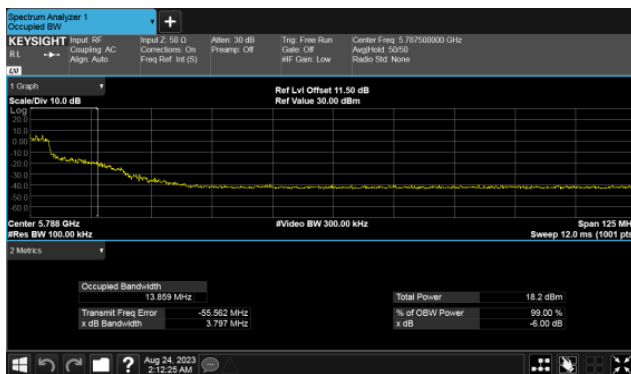

Modulation Type: 802.11ac VHT40 (29.3Mbps)
CH142

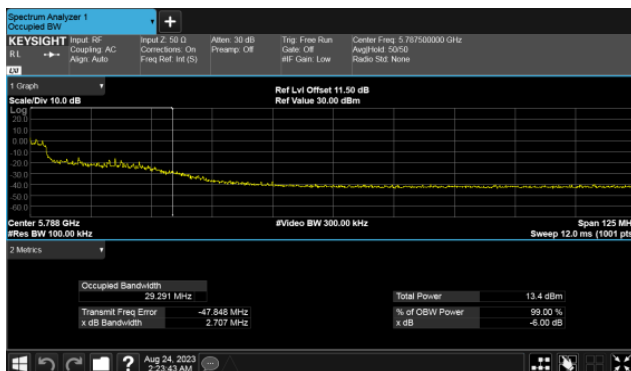




99% Occupied Bandwidth
Modulation Type: 802.11a (6Mbps)
CH149




Modulation Type: 802.11ac, VHT20 (6.5Mbps)
CH149

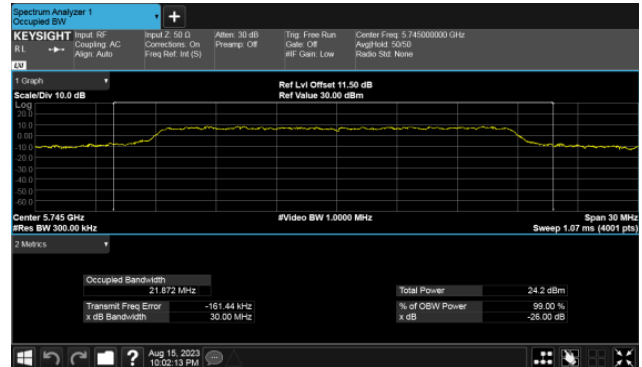


CH157




CH157

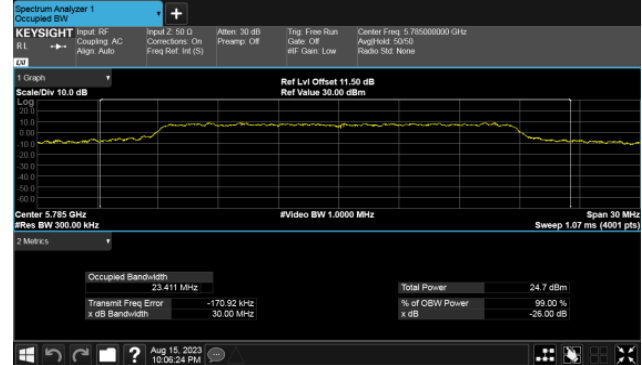

CH165


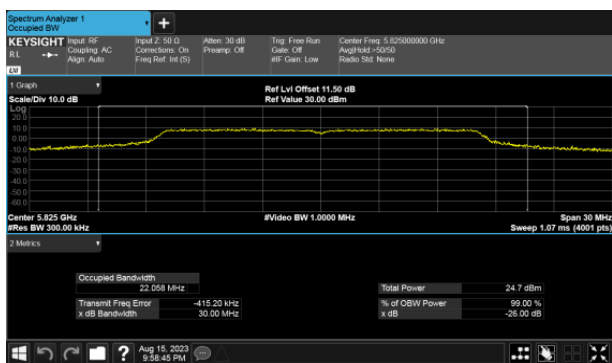


CH165

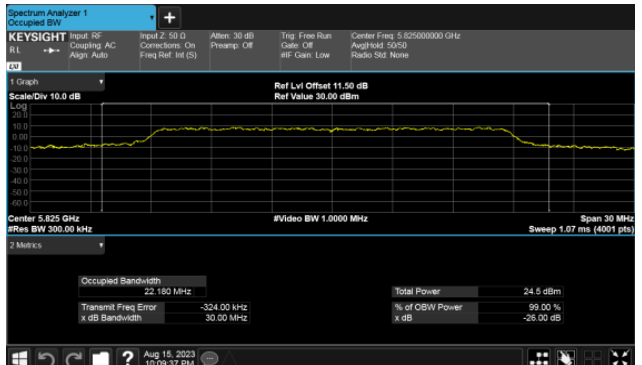




99% Occupied Bandwidth

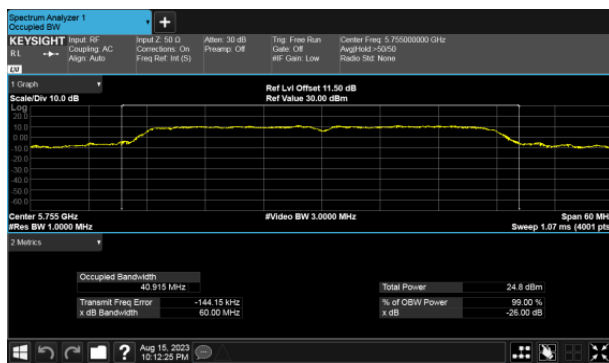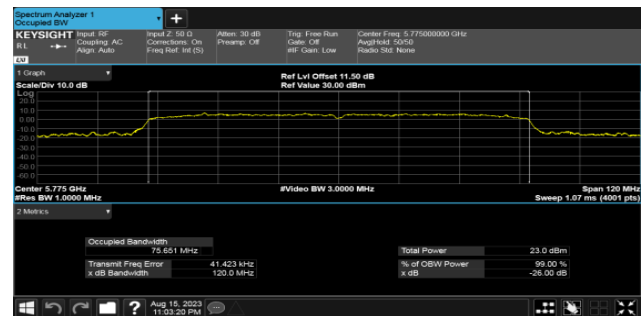Modulation Type: 802.11ac, VHT40 (13.5Mbps)
CH151Modulation Type: 802.11ac, VHT80 (29.3Mbps)
CH155

CH159

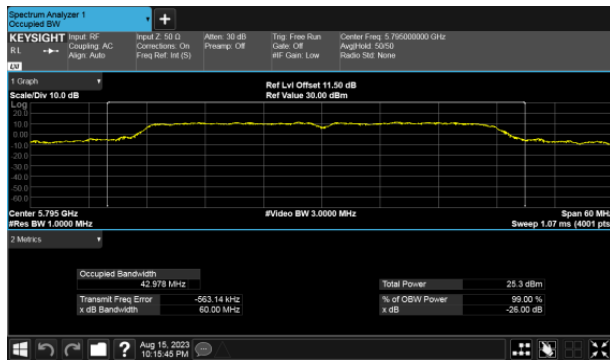





99% Bandwidth

Extends across 5725MHz Band, Straddle Channel


Modulation Type: 802.11a (6Mbps)
CH144

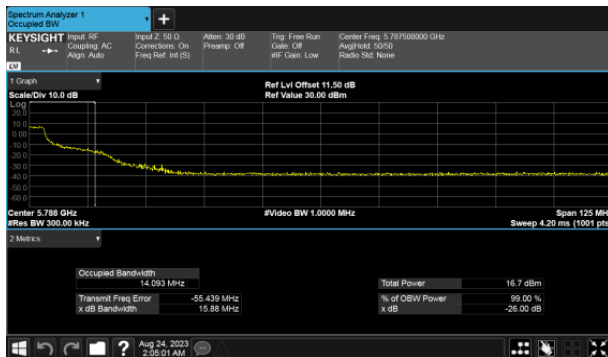


Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH138

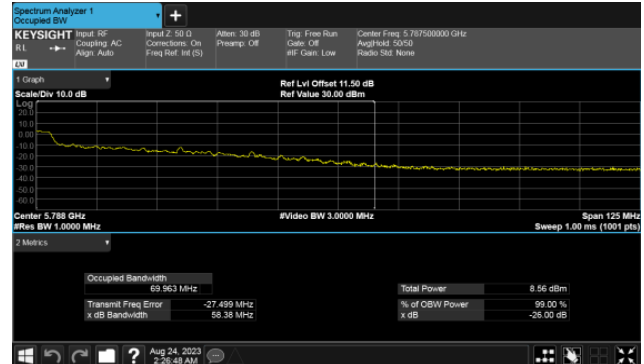

Modulation Type: 802.11ac VHT20 (6.5Mbps)
CH144

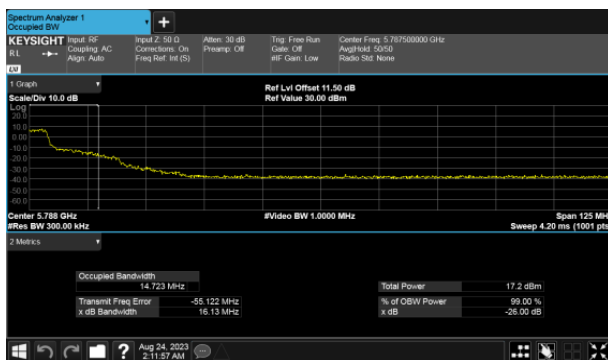

Modulation Type: 802.11ac VHT40 (29.3Mbps)
CH142

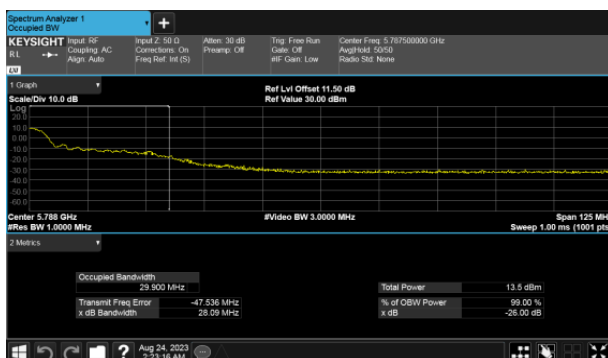



9. 26dB Bandwidth & 99% Occupied Bandwidth


9.1. Test Limit

None; for reporting purposes only.

9.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

9.3. Test Setup Layout





9.4. Test Result and Data

In the 5.2G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)
			ANT C
11a	36	5180	29.92
11a	40	5200	30.00
11a	48	5240	30.00
11ac VHT20	36	5180	29.97
11ac VHT20	40	5200	30.00
11ac VHT20	48	5240	30.00
11ac VHT40	38	5190	45.65
11ac VHT40	46	5230	60.00
11ac VHT80	42	5210	86.29

In the 5.3G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)
			ANT C
11a	52	5260	30.00
11a	60	5300	30.00
11a	64	5320	30.00
11ac VHT20	52	5260	30.00
11ac VHT20	60	5300	30.00
11ac VHT20	64	5320	30.00
11ac VHT40	54	5270	60.00
11ac VHT40	62	5310	47.69
11ac VHT80	58	5290	85.82

In the 5.5G Band

Mode	Channel	Frequency (MHz)	26dB Bandwidth(MHz)
			ANT C
11a	100	5500	30.00
11a	120	5600	30.00
11a	140	5700	22.31
11ac VHT20	100	5500	30.00
11ac VHT20	120	5600	30.00
11ac VHT20	140	5700	22.77
11ac VHT40	102	5510	52.61
11ac VHT40	118	5590	60.00
11ac VHT40	134	5670	59.44
11ac VHT80	106	5530	86.65
11ac VHT80	122	5610	119.00



UNII Emission Bandwidth Result (Within 5470-5725MHz band)			
Modulation Type	Data Rate / MCS	Frequency (MHz)	26dB Bandwidth(MHz)
			ANT C
11a	6 Mbps	5720	25.63
11ac VHT20	NSS1-MCS0	5720	27.84
11ac VHT40	NSS1-MCS0	5710	54.87
11ac VHT80	NSS1-MCS0	5690	102.30



In the 5.2G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)
			ANT C
11a	36	5180	17.60
11a	40	5200	17.80
11a	48	5240	17.86
11ac VHT20	36	5180	18.36
11ac VHT20	40	5200	18.41
11ac VHT20	48	5240	18.45
11ac VHT40	38	5190	36.83
11ac VHT40	46	5230	37.42
11ac VHT80	42	5210	74.89

In the 5.3G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)
			ANT C
11a	52	5260	18.03
11a	60	5300	18.04
11a	64	5320	17.81
11ac VHT20	52	5260	18.50
11ac VHT20	60	5300	18.54
11ac VHT20	64	5320	18.42
11ac VHT40	54	5270	37.46
11ac VHT40	62	5310	36.88
11ac VHT80	58	5290	74.80

In the 5.5G Band

Modulation Type	Channel	Frequency (MHz)	99% Bandwidth(MHz)
			ANT C
11a	100	5500	18.72
11a	120	5600	19.05
11a	140	5700	17.12
11ac VHT20	100	5500	18.48
11ac VHT20	120	5600	18.65
11ac VHT20	140	5700	18.07
11ac VHT40	102	5510	36.96
11ac VHT40	118	5590	38.09
11ac VHT40	134	5670	37.07
11ac VHT80	106	5530	74.82
11ac VHT80	122	5610	75.61




UNII Emission Bandwidth Result (Within 5470-5725MHz band)			
Modulation Type	Data Rate / MCS	Frequency (MHz)	99% Bandwidth(MHz)
			ANT C
11a	6 Mbps	5720	18.20
11ac VHT20	NSS1-MCS0	5720	19.16
11ac VHT40	NSS1-MCS0	5710	39.56
11ac VHT80	NSS1-MCS0	5690	77.88




26dB Bandwidth Band 1
Modulation Type: 802.11a (6Mbps)
CH36




802.11ac VHT20 (6.5Mbps)
CH36

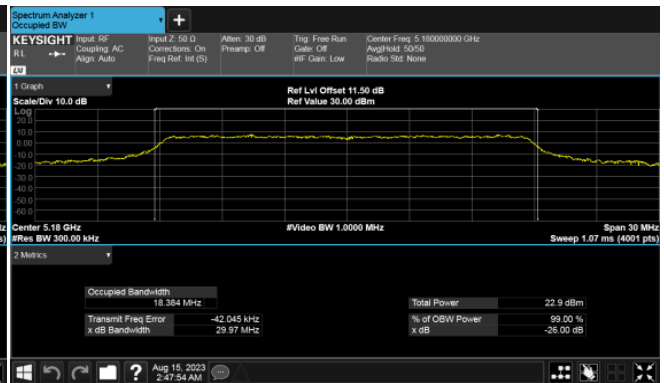


CH40

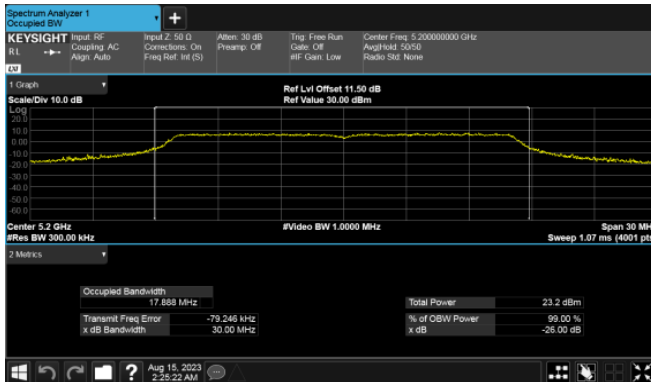


CH40

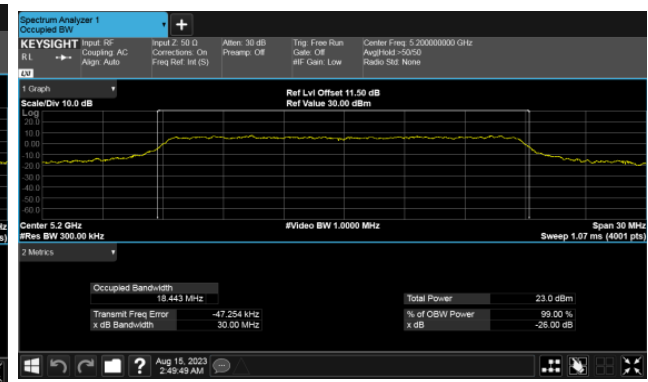

CH48

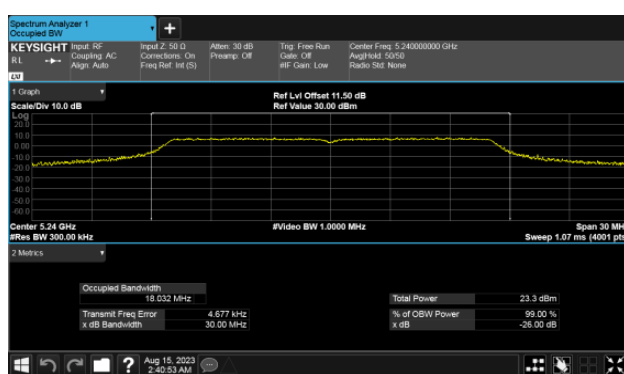


CH48

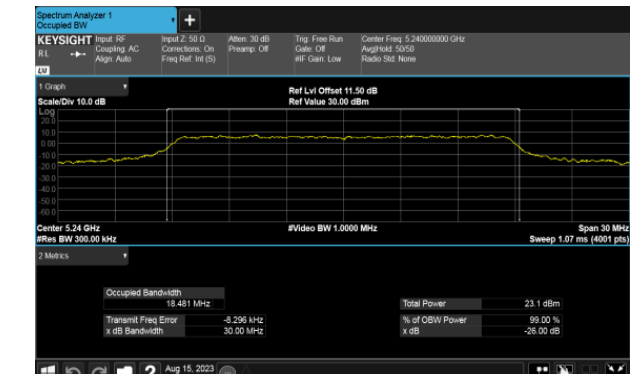




26dB Bandwidth Band 1


Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH38

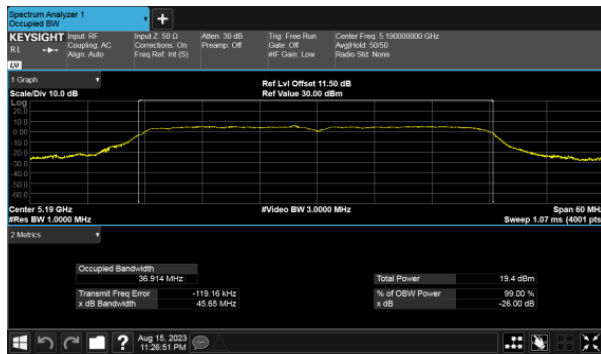

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH42

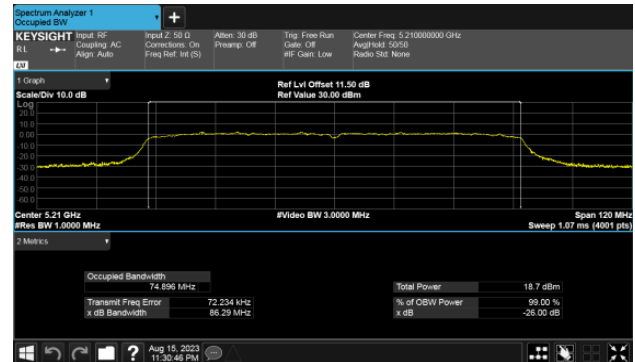


CH46

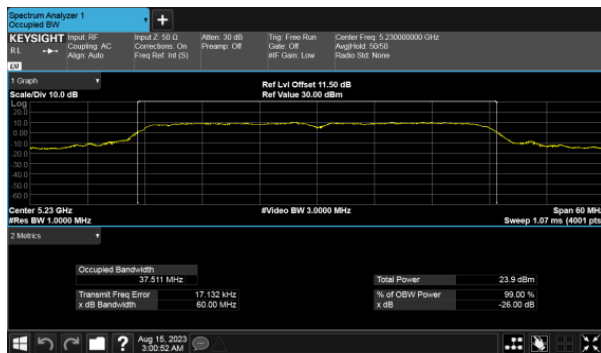




26dB Bandwidth Band 2
Modulation Type: 802.11a (6Mbps)
CH52

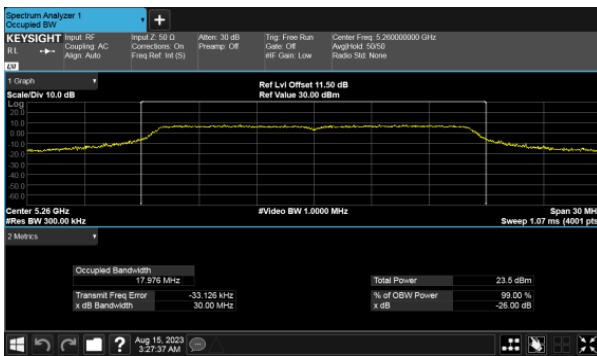

802.11ac VHT20 (6.5Mbps)
CH52




CH60

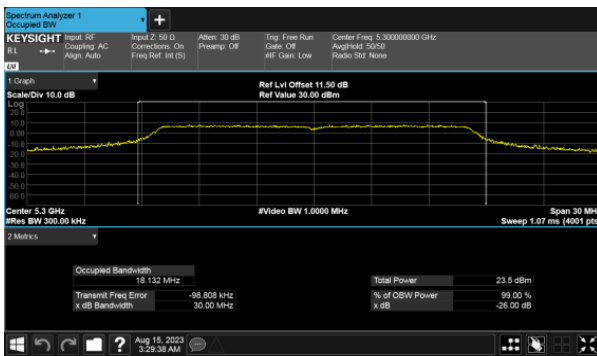

CH60



CH64

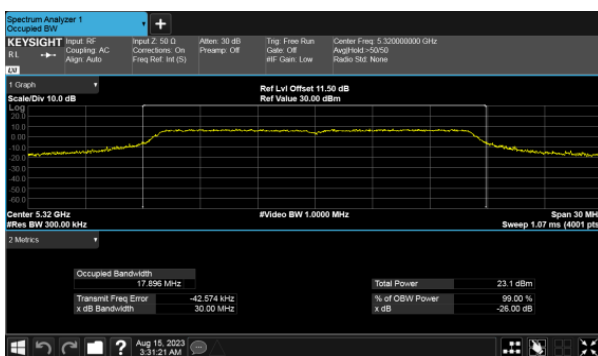


CH64






26dB Bandwidth Band 2

Modulation Type: 802.11ac VHT40 (13.5Mbps)
CH54

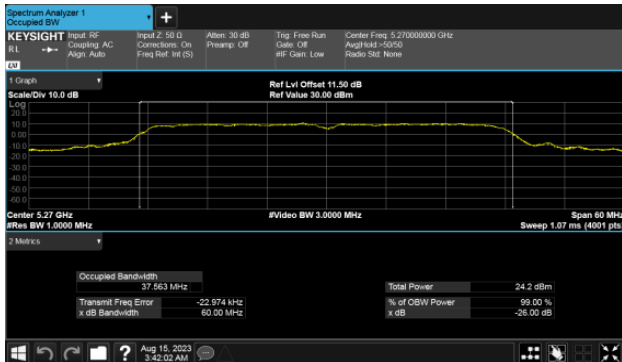

Modulation Type: 802.11ac VHT80 (29.3Mbps)
CH58

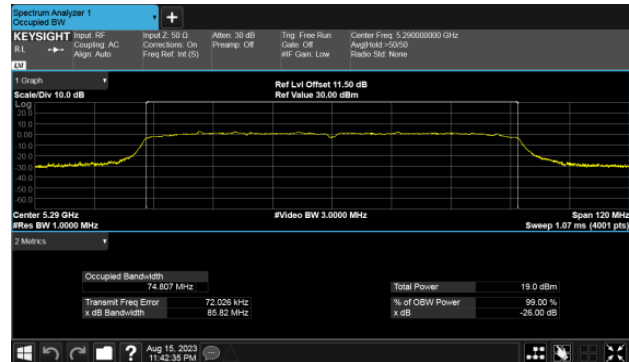

CH62

