

FCC PART 15.247



TEST REPORT

For

**Qingdao Yeelink Information Technology Co., Ltd.**

Room 1108, Building 1, 61 Haier Rd.,

**FCC ID: 2ABEU-XMCTD01YL**

<b>Report Type:</b> Original Report	<b>Product Type:</b> YEELIGHT Bedside Lamp
<b>Test Engineer:</b> Matt Yao	
<b>Report Number:</b> RKS160428002-00C	
<b>Report Date:</b> 2016-05-11	
<b>Reviewed By:</b> EMC Manager	Jesse Huang 
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
EUT EXERCISE SOFTWARE .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>FCC§15.247 (i), §1.1310 &amp;§2.1093 –RF EXPOSURE .....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
MEASUREMENT RESULT .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION .....	12
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST RESULTS SUMMARY .....	18
TEST DATA .....	19
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>22</b>
APPLICABLE STANDARD .....	22
TEST PROCEDURE .....	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA .....	22

<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA .....	25
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA .....	27
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA .....	29

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The Qingdao Yeelink Information Technology Co., Ltd.'s product, model number: XMCTD01YL (FCC ID: 2ABEU-XMCTD01YL) or the "EUT" in this report was a YEELIGHT Bedside Lamp, which was measured approximately: 100mm (L) x100mm (W) x221mm (H), rated input voltage: DC 12.0V From Adapter.

*\* All measurement and test data in this report was gathered from production sample serial number: 20160428001 (Assigned by BACL, Kunshan). The EUT was received on 2016-04-28.*

### Objective

This report is prepared on behalf of Qingdao Yeelink Information Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

NA.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v03r05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

### **Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
...	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

### Equipment Modifications

No modification was made to the EUT tested.

### EUT Exercise Software

Bluetool

The worst case was performed under:  
Power level 7

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
DELL	PC	GX620	D65874152

**External I/O Cable**

Cable Description	Length (m)	From Port	To
Adapter cable	1.5	Charge Port	EUT

**Block Diagram of Test Setup**

For conducted emission

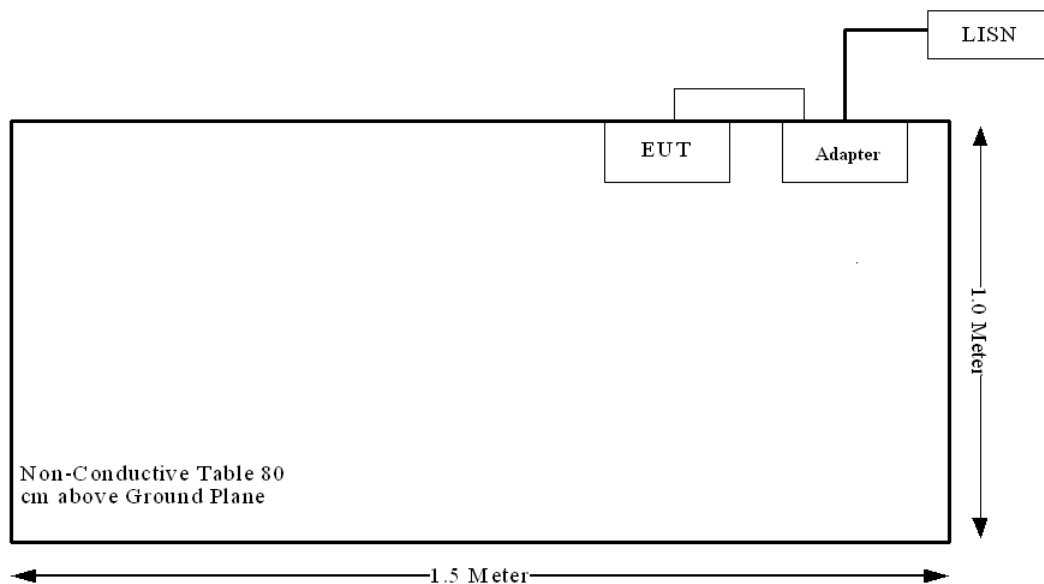

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1310 & §2.1093	RF EXPOSURE	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance



---

**FCC§15.247 (i), §1.1310 &§2.1093 –RF EXPOSURE**

---

**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

**Measurement Result**

The maximum conducted peak output power = 0 dBm (1mW) at 2402~2480MHz  
$$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$$
$$= 1/5 \cdot (\sqrt{2.480}) = 0.31 < 3.0$$

Note: The target power :  $-2 \pm 2$ dBm, which declared by the Manufacturer.

**So the stand-alone SAR evaluation is not necessary.**

**FCC §15.203 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Antenna Connector Construction**

The EUT has a PCB antenna arrangement for Bluetooth, which the antenna gain is 2.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207


### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Kunshan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

### EUT Setup

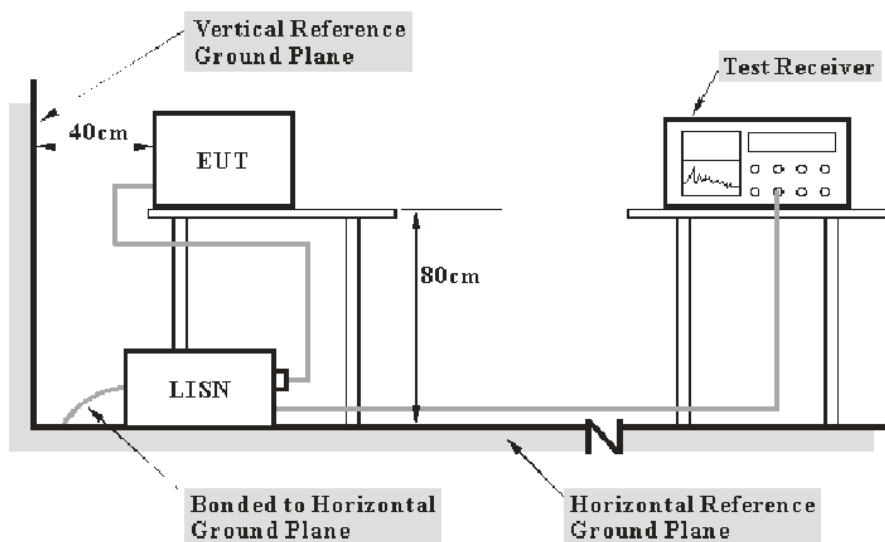

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	892239/018	2015-06-23	2016-06-22
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2015-06-19	2016-06-18
HP	Current probe	8710-1744	636	2015-06-19	2016-06-18
FCC	ISN	FCC-TLISN-T8-02	20376	2015-06-23	2016-06-22
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2015-10-01	2016-10-01
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	--	--

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

**15.08 at 0.165000 MHz in the Line conducted mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$


In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data


### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Yao on 2016-04-28.*

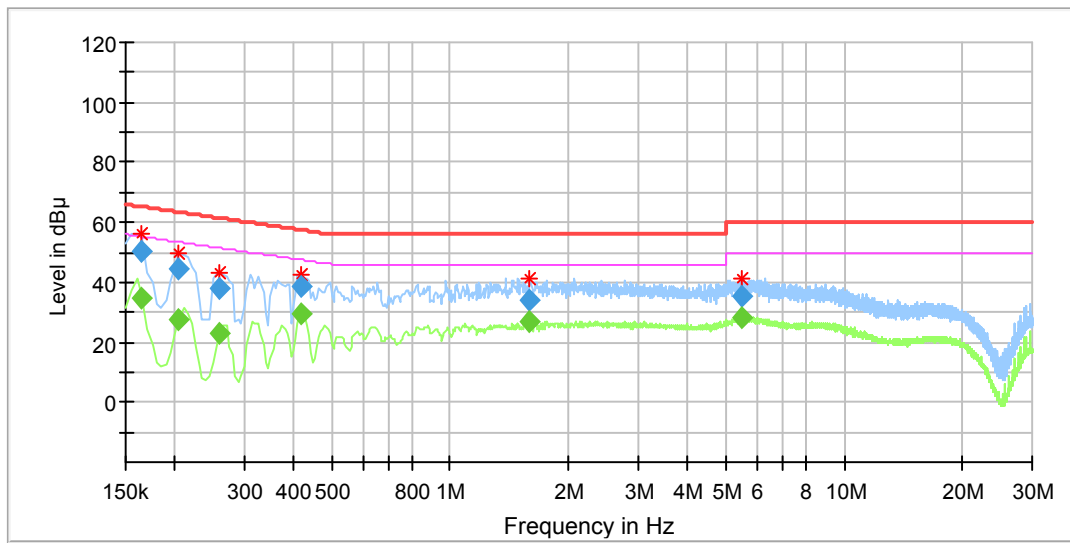**AC 120V/60 Hz, Line**

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.165000	---	34.99	9.000	L1	11.0	20.22	55.21	Compliance
0.165000	50.13	---	9.000	L1	11.0	15.08	65.21	Compliance
0.205000	---	27.57	9.000	L1	11.0	25.84	53.41	Compliance
0.205000	44.23	---	9.000	L1	11.0	19.18	63.41	Compliance
0.260000	---	22.79	9.000	L1	11.0	28.64	51.43	Compliance
0.260000	38.18	---	9.000	L1	11.0	23.25	61.43	Compliance
0.420000	---	29.61	9.000	L1	11.0	17.84	47.45	Compliance
0.420000	38.37	---	9.000	L1	11.0	19.08	57.45	Compliance
1.595000	---	26.86	9.000	L1	11.1	19.14	46.00	Compliance
1.595000	34.32	---	9.000	L1	11.1	21.68	56.00	Compliance
5.495000	---	28.15	9.000	L1	11.3	21.85	50.00	Compliance
5.495000	35.05	---	9.000	L1	11.3	24.95	60.00	Compliance

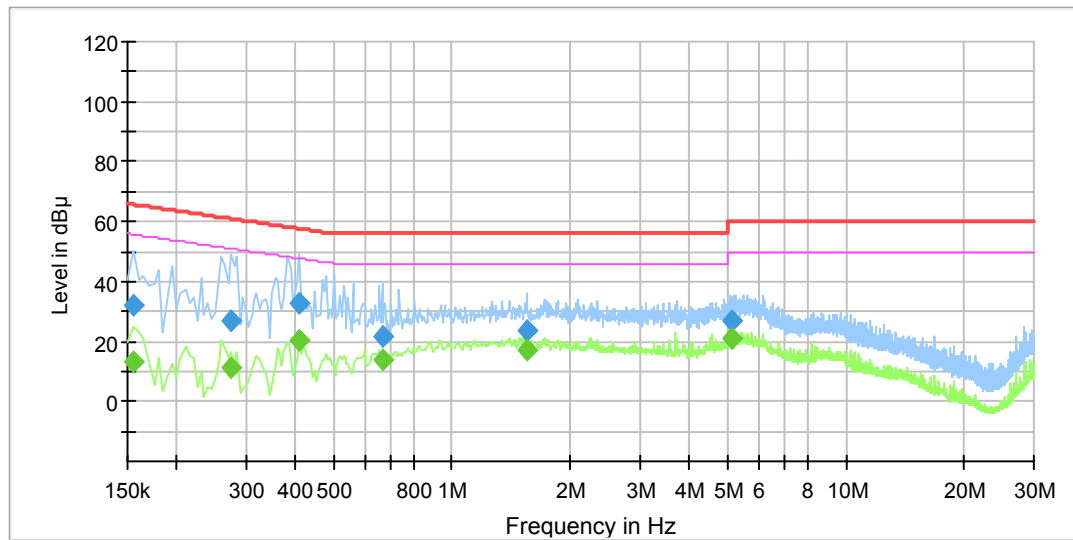**AC 120V/60 Hz, Neutral**

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.155000	---	13.15	9.000	N	11.0	42.58	55.73	Compliance
0.155000	32.03	---	9.000	N	11.0	33.70	65.73	Compliance
0.275000	---	11.11	9.000	N	11.0	39.86	50.97	Compliance
0.275000	26.86	---	9.000	N	11.0	34.11	60.97	Compliance
0.410000	---	20.25	9.000	N	11.0	27.40	47.65	Compliance
0.410000	32.48	---	9.000	N	11.0	25.17	57.65	Compliance
0.665000	---	13.95	9.000	N	11.1	32.05	46.00	Compliance
0.665000	21.76	---	9.000	N	11.1	34.24	56.00	Compliance
1.550000	---	16.94	9.000	N	11.2	29.06	46.00	Compliance
1.550000	23.42	---	9.000	N	11.2	32.58	56.00	Compliance
5.120000	---	21.00	9.000	N	11.4	29.00	50.00	Compliance
5.120000	27.01	---	9.000	N	11.4	32.99	60.00	Compliance

**Note:**

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

## **FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

### **Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;


### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

### **EUT Setup**

**Below 1 GHz:**

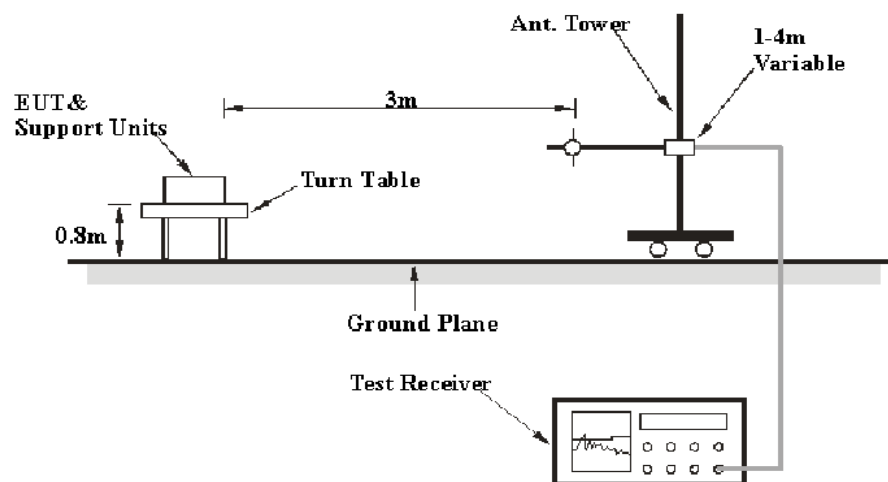

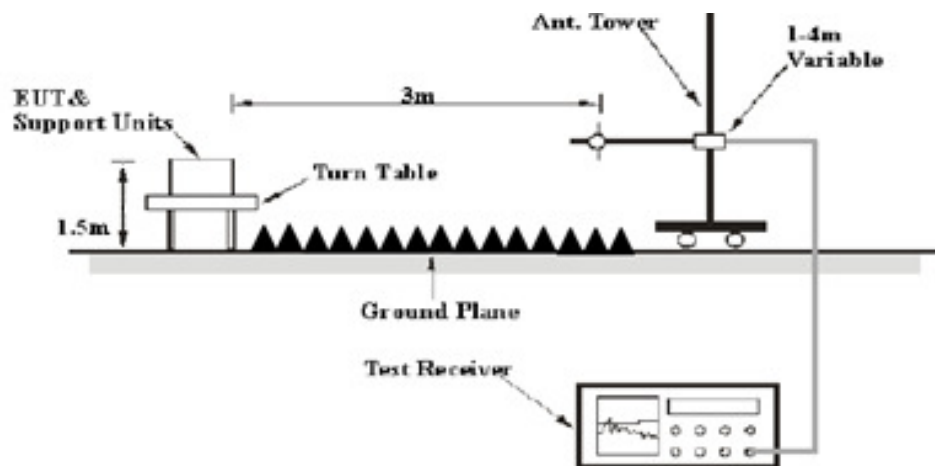

**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2015-09-16	2016-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2015-09-16	2016-09-16
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2015-09-16	2016-09-16
champrotek	Chamber	Chamber A	1#	2015-09-17	2016-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**3.47 dB at 76.196250 MHz in the Vertical polarization**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if


$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL,  $U_{(L_m)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Matt Yao on 2016-05-06.

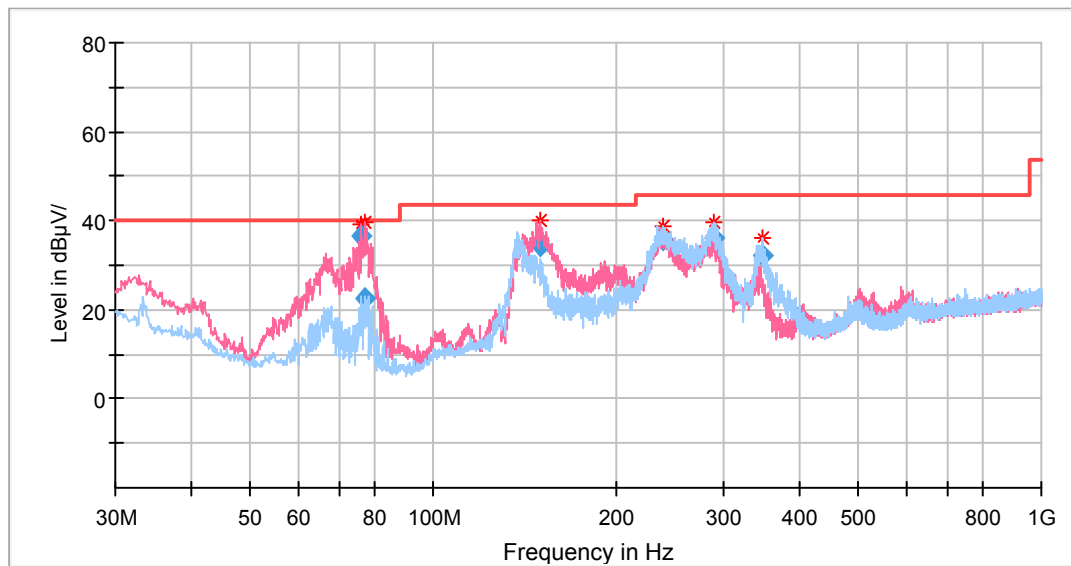**30 MHz-1 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
76.196250	53.63	QP	157.0	100.0	V	-17.1	36.53	40.00	3.47
77.287500	39.57	QP	105.0	100.0	V	-17.1	22.47	40.00	17.53
149.552500	46.86	QP	47.0	100.0	V	-12.3	34.56	43.50	8.94
238.913750	47.72	QP	297.0	200.0	H	-12.1	35.62	46.00	10.38
290.323750	46.81	QP	183.0	100.0	H	-10.6	36.21	46.00	9.79
346.826250	41.67	QP	178.0	100.0	H	-9.4	32.27	46.00	13.73

**1GHz-25GHz***EUT operation mode: Transmitting*

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
2402	94.44	PK	165.0	150.0	V	3.00	97.44	/	/
2402	83.95	Ave	165.0	150.0	V	3.00	86.95	/	/
2402	93.67	PK	250.0	150.0	H	3.00	96.67	/	/
2402	82.85	Ave	250.0	150.0	H	3.00	85.85	/	/
2385	33.10	PK	197.0	150.0	V	4.90	38.00	74	36.00
2385	19.98	Ave	197.0	150.0	V	4.90	24.88	54	29.12
2390	33.12	PK	110.0	150.0	H	4.90	38.02	74	35.98
2390	19.99	Ave	110.0	150.0	H	4.90	24.89	54	29.11
4804	31.30	PK	110.0	150.0	H	13.70	45.00	74	29.00
4804	17.54	Ave	110.0	150.0	H	13.70	31.24	54	22.76
6653	35.34	PK	137.0	250.0	H	17.8	53.14	74	20.86
6653	21.67	Ave	137.0	250.0	H	17.8	39.47	54	14.53
7206	15.89	Ave	50.0	150.0	H	20.50	36.39	54	17.61
7206	29.14	PK	50.0	150.0	H	20.50	49.64	74	24.36
Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Middle Channel (2440MHz)									
2440	95.45	PK	165.0	150.0	V	2.60	98.05	/	/
2440	84.72	Ave	165.0	150.0	V	2.60	87.32	/	/
2440	95.17	PK	155.0	150.0	H	2.60	97.77	/	/
2440	84.09	Ave	155.0	150.0	H	2.60	86.69	/	/
1743	29.06	Ave	33.0	250.0	V	3.50	32.56	54	21.44
1743	41.83	PK	33.0	250.0	V	3.50	45.33	74	28.67
2262	31.13	Ave	80.0	150.0	V	0.70	31.83	54	22.17
2262	41.88	PK	80.0	150.0	V	0.70	42.58	74	31.42
4880	17.66	Ave	80.0	150.0	H	13.90	31.56	54	22.44
4880	31.64	PK	80.0	150.0	H	13.90	45.54	74	28.46
6625	34.87	PK	142.0	150.0	V	17.70	52.57	74	21.43
6625	21.67	Ave	142.0	150.0	V	17.70	39.37	54	14.63
7320	29.33	PK	325.0	150.0	H	20.80	50.13	74	23.87
7320	16.54	Ave.	325.0	150.0	H	20.80	37.34	54	16.66


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
High Channel (2480 MHz)									
2480	94.43	PK	155.0	150.0	V	3.20	97.63	/	/
2480	83.22	Ave	155.0	150.0	V	3.20	86.42	/	/
2480	93.52	PK	116.0	150.0	H	3.20	96.72	/	/
2480	82.69	Ave	116.0	150.0	H	3.20	85.89	/	/
2483.5	43.24	PK	163.0	150.0	V	4.20	47.44	74	26.56
2483.5	28.48	Ave	163.0	150.0	V	4.20	32.68	54	21.32
2487	36.33	PK	155.0	150.0	V	5.00	41.33	74	32.67
2487	21.66	Ave	155.0	150.0	V	5.00	26.66	54	27.34
4960	17.72	Ave	84.0	150.0	H	14.10	31.82	54	22.18
4960	31.88	PK	84.0	150.0	H	14.10	45.98	74	28.02
6639	21.72	Ave	105.0	200.0	H	17.70	39.42	54	14.58
6639	35.22	PK	105.0	200.0	H	17.70	52.92	74	21.08
7440	14.44	Ave	316.0	150.0	H	21.20	35.64	54	18.36
7440	28.49	PK	316.0	150.0	H	21.20	49.69	74	24.31

**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH****Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

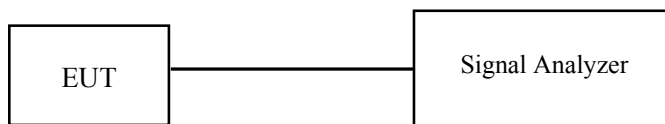**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Yao on 2016-05-04.*


**Test Result:** Pass.

Please refer to the following tables and plots.


*EUT operation mode: Transmitting*

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
Low	2402	0.686	$\geq 500$
Middle	2440	0.695	$\geq 500$
High	2480	0.686	$\geq 500$

### Low Channel

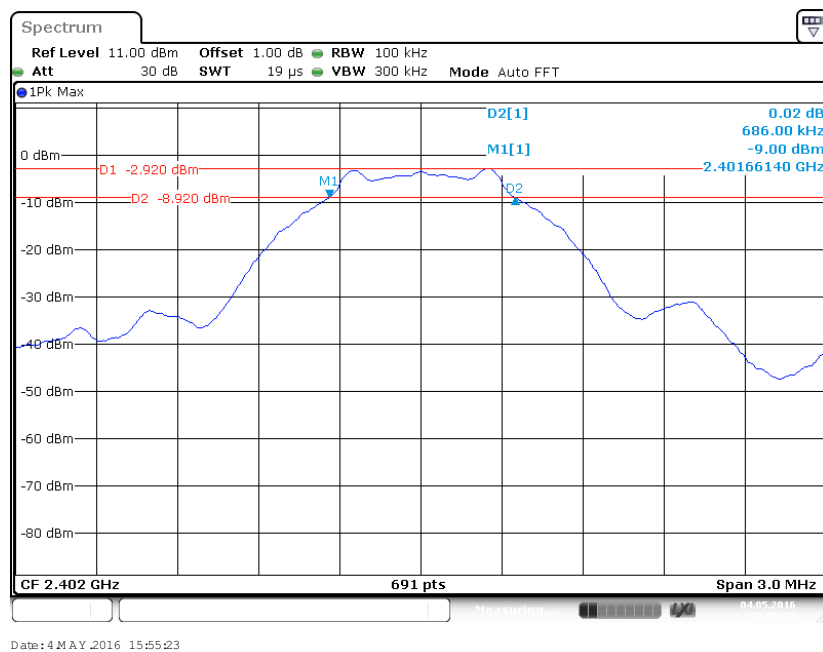


### Middle Channel

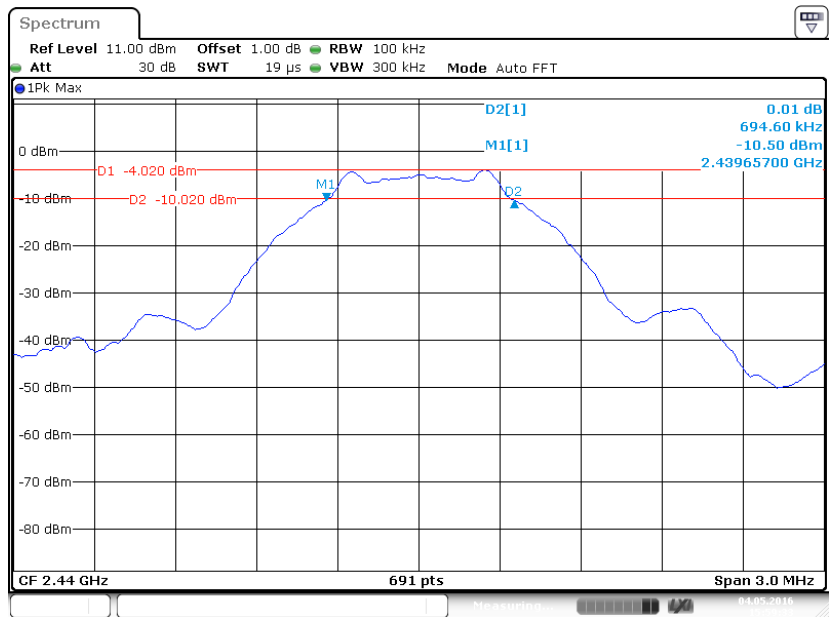

Date: 4 MAY 2016 15:59:32

### High Channel

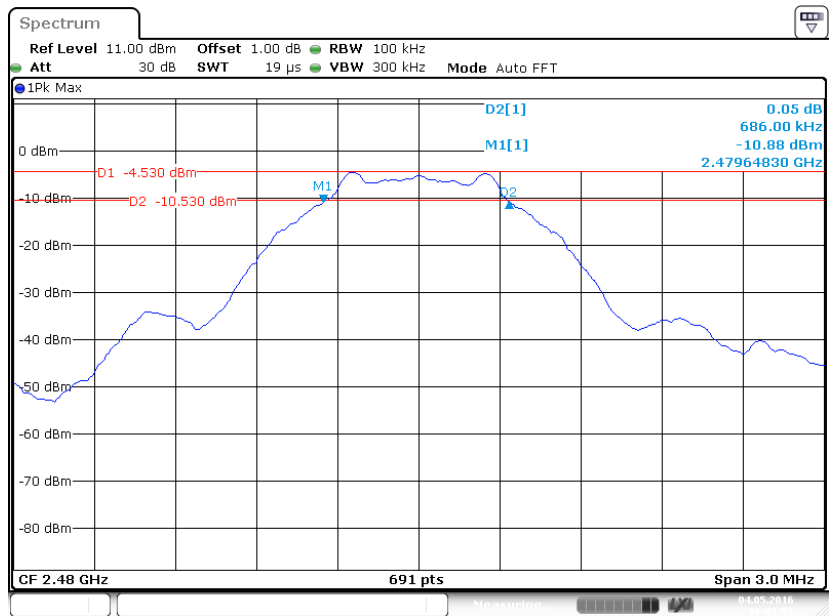

Date: 4 MAY 2016 16:01:53




## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2014-05-27	2016-05-27
Rohde & Schwarz	Power Sensor	NRP-Z91	200014	2015-08-01	2017-07-31
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Yao on 2016-05-04.*

*EUT operation mode: Transmitting*

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	-2.33	30	Pass
Middle	2440	-3.44	30	Pass
High	2480	-3.86	30	Pass

## **FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**


Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Yao on 2016-05-04.*


**Test Result:** *Compliance*

Please refer to the following table and plots.

### Band Edge, Left Side

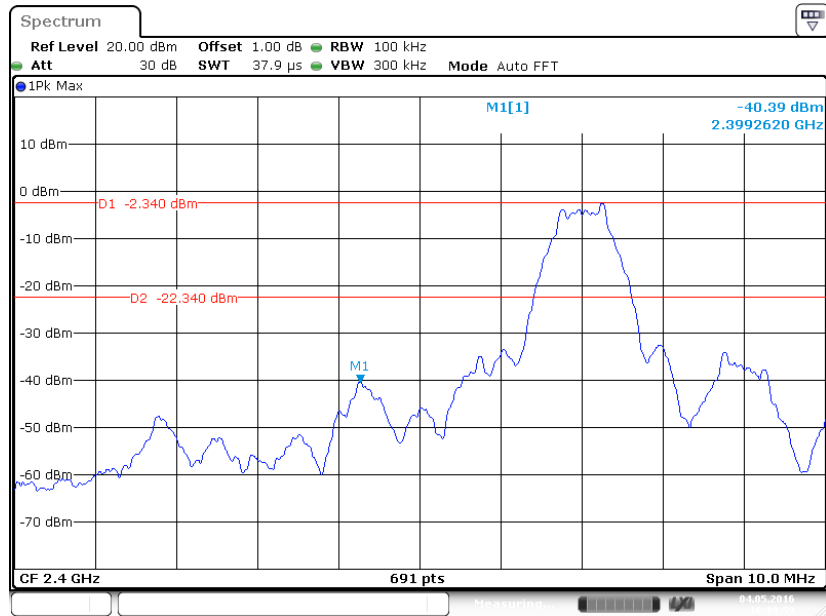

### Band Edge, Right Side

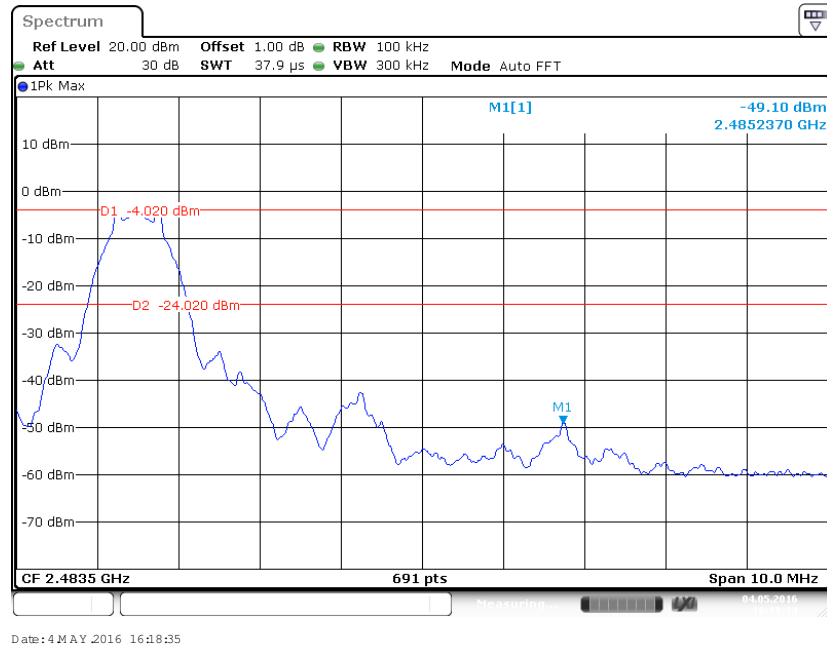

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r05 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

*The testing was performed by Matt Yao on 2016-05-04.*

*EUT operation mode: Transmitting*


**Test Result: Pass**

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-14.49	$\leq 8$
Middle	2440	-15.56	$\leq 8$
High	2480	-16.15	$\leq 8$

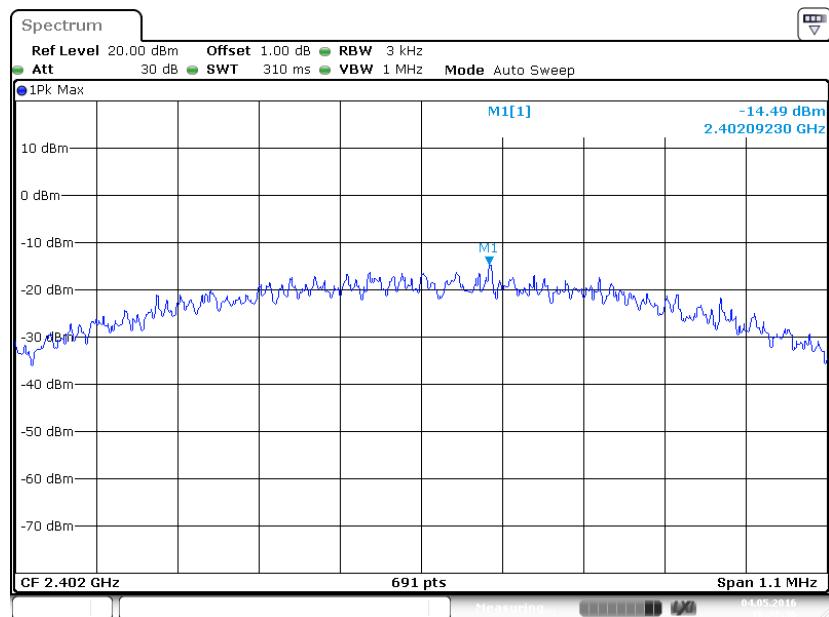
**Power Spectral Density, BLE Low Channel**

Date: 4 MAY 2016 16:27:36

### Power Spectral Density, BLE Middle Channel

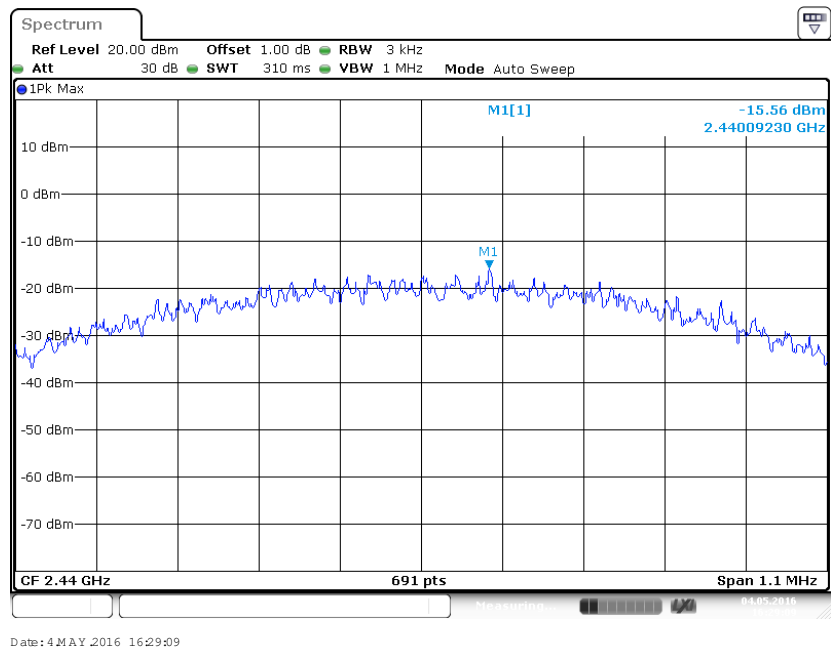

### Power Spectral Density, BLE High Channel

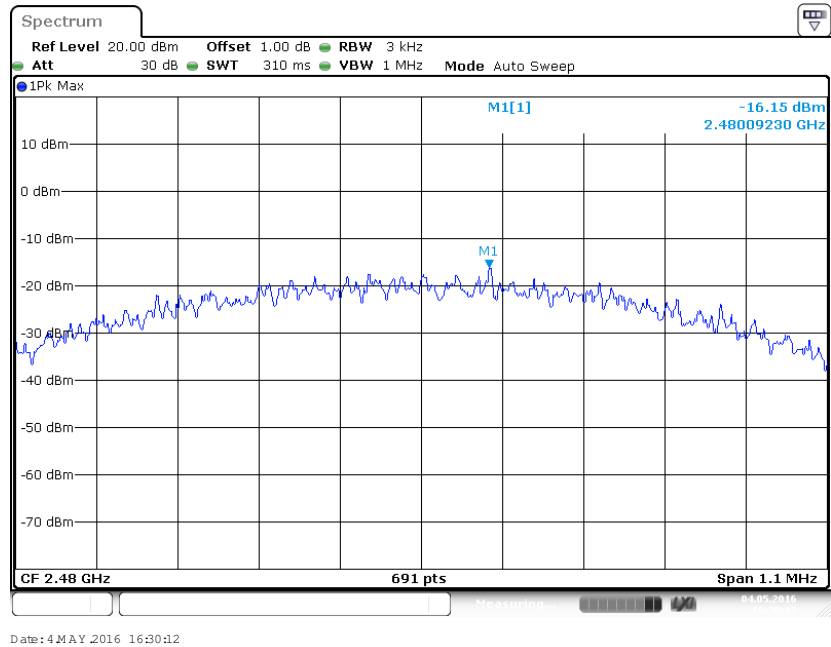

\*\*\*\*\* END OF REPORT \*\*\*\*\*