

# FCC Part 22H & 24E Measurement and Test Report For

**Santok Limited**

**Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South  
Ruislip, Middlesex, HA4 0EJ United Kingdom**

**FCC ID: 2AE7RSANTOKQ65**

|                                      |                                                  |
|--------------------------------------|--------------------------------------------------|
| <b>FCC Rules:</b>                    | <u>FCC Part 22H, FCC Part 24E</u>                |
| <b>Product Description:</b>          | <u>Mobile Phone</u>                              |
| <b>Tested Model:</b>                 | <u>Q65</u>                                       |
| <b>Report No.:</b>                   | <u>STR15068223I-1</u>                            |
| <b>Tested Date:</b>                  | <u>2015-06-26 to 2015-07-08</u>                  |
| <b>Issued Date:</b>                  | <u>2015-07-08</u>                                |
| <b>Tested By:</b>                    | <u>Lebron Wang / Engineer</u> <i>Lebron Wang</i> |
| <b>Reviewed By:</b>                  | <u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>  |
| <b>Approved &amp; Authorized By:</b> | <u>Jandy So / PSQ Manager</u> <i>Jandyso</i>     |
| <b>Prepared By:</b>                  |                                                  |

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

**TABLE OF CONTENTS**

|                                                             |            |
|-------------------------------------------------------------|------------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>3</b>   |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3          |
| 1.2 TEST STANDARDS.....                                     | 5          |
| 1.3 TEST METHODOLOGY.....                                   | 5          |
| 1.4 TEST FACILITY.....                                      | 5          |
| 1.5 EUT SETUP AND TEST MODE.....                            | 6          |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                     | <b>8</b>   |
| <b>3. RF EXPOSURE .....</b>                                 | <b>9</b>   |
| 3.1 STANDARD APPLICABLE.....                                | 9          |
| 3.2 TEST RESULT.....                                        | 9          |
| <b>4. RF OUTPUT POWER.....</b>                              | <b>10</b>  |
| 4.1 STANDARD APPLICABLE.....                                | 10         |
| 4.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 10         |
| 4.3 TEST PROCEDURE.....                                     | 10         |
| 4.4 ENVIRONMENTAL CONDITIONS .....                          | 11         |
| 4.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 11         |
| <b>5. PEAK-TO-AVERAGE RADIO (PAR) OF TRANSMITTER.....</b>   | <b>19</b>  |
| 5.1 STANDARD APPLICABLE.....                                | 19         |
| 5.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 19         |
| 5.3 TEST PROCEDURE.....                                     | 19         |
| 5.4 ENVIRONMENTAL CONDITIONS .....                          | 19         |
| 5.5 SUMMARY OF TEST RESULTS .....                           | 20         |
| <b>6. EMISSION BANDWIDTH.....</b>                           | <b>22</b>  |
| 6.1 STANDARD APPLICABLE.....                                | 22         |
| 6.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 22         |
| 6.3 TEST PROCEDURE.....                                     | 22         |
| 6.4 ENVIRONMENTAL CONDITIONS .....                          | 22         |
| 6.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 23         |
| <b>7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>    | <b>43</b>  |
| 7.1 STANDARD APPLICABLE.....                                | 43         |
| 7.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 43         |
| 7.3 TEST PROCEDURE.....                                     | 43         |
| 7.4 ENVIRONMENTAL CONDITIONS .....                          | 43         |
| 7.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 44         |
| <b>8. SPURIOUS RADIATED EMISSIONS.....</b>                  | <b>92</b>  |
| 8.1 MEASUREMENT UNCERTAINTY .....                           | 92         |
| 8.2 STANDARD APPLICABLE.....                                | 92         |
| 8.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 92         |
| 8.4 TEST PROCEDURE.....                                     | 92         |
| 8.5 ENVIRONMENTAL CONDITIONS .....                          | 93         |
| 8.6 SUMMARY OF TEST RESULTS/PLOTS .....                     | 93         |
| <b>9. FREQUENCY STABILITY .....</b>                         | <b>103</b> |
| 9.1 STANDARD APPLICABLE.....                                | 103        |
| 9.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 103        |
| 9.3 TEST PROCEDURE.....                                     | 103        |
| 9.4 ENVIRONMENTAL CONDITIONS .....                          | 104        |
| 9.5 SUMMARY OF TEST RESULTS/PLOTS .....                     | 104        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Santok Limited  
 Address of applicant: Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom  
 Manufacturer: GIPO HOLDINGS LIMITED  
 Address of manufacturer: East 1201, Phase II, Hi-tech Plaza, Futian District, Shenzhen

| General Description of EUT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Product Name:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Mobile Phone                                           |
| Brand Name:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Tecmobile                                              |
| Model No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Q65                                                    |
| Adding Model:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Raspberry, Lychee, Storm 2, Sync 5S, Sync 5i, Sync 5.5 |
| Hardware Version:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | DR100-MB-V0.2                                          |
| Software Version:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Q65_DS819_V0.0.2_150625                                |
| IMEI:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 355386000145387/355386000145395                        |
| Rated Voltage:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | DC 3.7V Li-ion Battery                                 |
| Battery:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1500mAh                                                |
| Power Adaptor:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Q65                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Input: AC 100-240V Output: DC 5V/1000mA                |
| Device Category:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Portable Device                                        |
| <p><i>The EUT is GSM850/900/DCS1800/PCS1900, WCDMA Band II, V, Mobile Phone. The Mobile Phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EGPRS class 12 for GSM850 and GSM1900 and Bluetooth, Wi-Fi, GPS and camera functions. For more information see the following datasheet</i></p> <p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Q65, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p> |                                                        |

| <b>Technical Characteristics of EUT</b> |                                                                          |
|-----------------------------------------|--------------------------------------------------------------------------|
| <b>2G</b>                               |                                                                          |
| Support Networks:                       | GSM, GPRS, EGPRS                                                         |
| Support Band:                           | GSM850/PCS1900                                                           |
| Uplink Frequency:                       | GSM/GPRS/EDGE 850: 824~849MHz<br>GSM/GPRS/EDGE 1900: 1850~1910MHz        |
| Downlink Frequency:                     | GSM/GPRS/EDGE 850: 869~894MHz<br>GSM/GPRS/EDGE 1900: 1930~1990MHz        |
| Max RF Output Power:                    | GSM850: 32.13dBm, GSM1900: 29.24dBm                                      |
| Type of Modulation:                     | GMSK, 8PSK                                                               |
| Type of Emission:                       | GSM850: 256KGXW, GSM1900: 255KGXW<br>EDGE850: 258KG7W, EDGE1900: 264KG7W |
| Type of Antenna:                        | Integral Antenna                                                         |
| Antenna Gain:                           | GSM850:3.60dBi, GSM1900: 3.24dBi                                         |
| GPRS/EGPRS Class:                       | Class 12                                                                 |
| <b>3G</b>                               |                                                                          |
| Support Networks:                       | WCDMA, HSDPA, HSUPA                                                      |
| Support Band:                           | WCDMA Band II, WCDMA Band V,                                             |
| Uplink Frequency:                       | WCDMA Band II: 1850~1980MHz<br>WCDMA Band V: 824~849MHz                  |
| Downlink Frequency:                     | WCDMA Band II: 1930~1990MHz<br>WCDMA Band V: 869~894MHz                  |
| Max RF Output Power:                    | WCDMA850: 22.36dBm, WCDMA1900: 21.55dBm                                  |
| Type of Modulation:                     | BPSK                                                                     |
| Type of Emission:                       | WCDMA850: 4M17F9W, WCDMA1900: 4M19F9W                                    |
| Type of Antenna:                        | Integral Antenna                                                         |
| Antenna Gain:                           | WCDMA850: 3.60dBi, WCDMA1900: 2.68dBi                                    |

## 1.2 Test Standards

The following report is prepared on behalf of the Santok Limited in accordance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603-C: 2004 and ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

### CNAS Registration No.: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. Some measurement facilities used to collect the measurement data are located at Building 28/29, Shigudong, Xili Industrial Area, Xili Street, Nanshan District, Shenzhen, Guangdong, China

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List |               |                            |
|----------------|---------------|----------------------------|
| Test Mode      | Description   | Remark                     |
| TM1            | GSM 850       | Low, Middle, High Channels |
| TM2            | GPRS 850      | Low, Middle, High Channels |
| TM2            | EGPRS 850     | Low, Middle, High Channels |
| TM3            | GSM 1900      | Low, Middle, High Channels |
| TM4            | GPRS 1900     | Low, Middle, High Channels |
| TM4            | EGPRS 1900    | Low, Middle, High Channels |
| TM5            | WCDMA Band V  | Low, Middle, High Channels |
| TM6            | HSDPA Band V  | Low, Middle, High Channels |
| TM7            | HSUPA Band V  | Low, Middle, High Channels |
| TM8            | WCDMA Band II | Low, Middle, High Channels |
| TM9            | HSDPA Band II | Low, Middle, High Channels |
| TM10           | HSUPA Band II | Low, Middle, High Channels |

| Testing Configure |                   |                   |                |
|-------------------|-------------------|-------------------|----------------|
| Support Band      | Support Standard  | Channel Frequency | Channel Number |
| GSM 850           | GSM/GPRS/EDGE     | 824.2 MHz         | 128            |
|                   |                   | 836.4 MHz         | 190            |
|                   |                   | 848.8 MHz         | 251            |
| PCS 1900          | GSM/GPRS/EDGE     | 1850.2 MHz        | 512            |
|                   |                   | 1880.0 MHz        | 661            |
|                   |                   | 1909.8 MHz        | 810            |
| WCDMA Band V      | WCDMA/HSDPA/HSUPA | 826.4 MHz         | 4132           |
|                   |                   | 836.6 MHz         | 4183           |
|                   |                   | 846.6 MHz         | 4233           |
| WCDMA Band II     | WCDMA/HSDPA/HSUPA | 1852.4MHz         | 9262           |
|                   |                   | 1880.0MHz         | 9400           |
|                   |                   | 1907.6MHz         | 9538           |

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

## EUT Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| Earphone Cable    | 1.2        | Unshielded          | Without Core           |
| USB Cable         | 1.0        | Shielded            | Without Core           |

## Auxiliary Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| Notebook    | Lenovo       | E10   | LR-63C8R      |

## Special Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| /                 | /          | /                   | /                      |

## 2. SUMMARY OF TEST RESULTS

| FCC Rules                  | Description of Test Item                  | Result    |
|----------------------------|-------------------------------------------|-----------|
| § 1.1307, § 2.1093         | RF Exposure                               | Compliant |
| § 22.913 (a), § 24.232 (c) | RF Output Power                           | Compliant |
| § 22.917 (b), § 24.238 (b) | Emission Bandwidth                        | Compliant |
| § 22.917 (a), § 24.238 (a) | Spurious Emissions at Antenna<br>Terminal | Compliant |
| § 22.917 (a), § 24.238 (a) | Spurious Radiation Emissions              | Compliant |
| § 22.917 (a), § 24.238 (a) | Out of Band Emissions                     | Compliant |
| § 22.355, § 24.235         | Frequency Stability                       | Compliant |

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR report.

## 4. RF Output Power

### 4.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

### 4.2 Test Equipment List and Details

| Description                          | Manufacturer         | Model    | Serial Number | Cal. Date  | Due. Date  |
|--------------------------------------|----------------------|----------|---------------|------------|------------|
| Spectrum Analyzer                    | Rohde & Schwarz      | FSP      | 836079/035    | 2015-05-28 | 2016-05-27 |
| Pre-amplifier                        | Agilent              | 8447F    | 3113A06717    | 2015-05-28 | 2016-05-27 |
| Pre-amplifier                        | Compliance Direction | PAP-0118 | 24002         | 2015-05-28 | 2016-05-27 |
| Trilog Broadband Antenna             | SCHWARZBECK          | VULB9163 | 9163-333      | 2015-05-24 | 2016-05-23 |
| Trilog Broadband Antenna             | SCHWARZBECK          | VULB9163 | 9163-334      | 2015-05-24 | 2016-05-23 |
| Horn Antenna                         | ETS                  | 3117     | 00086197      | 2015-05-24 | 2016-05-23 |
| Horn Antenna                         | ETS                  | 3117     | 00086198      | 2015-05-24 | 2016-05-23 |
| Universal Radio Communication Tester | Rohde & Schwarz      | CMU200   | 112012        | 2015-05-28 | 2016-05-27 |
| Signal Generator                     | R&S                  | SMR20    | 100047        | 2015-05-28 | 2016-05-27 |

### 4.3 Test Procedure

Conducted output power test method:



Radiated power test method:

- 1.The setup of EUT is according with per TIA/EIA Standard 603C and ANSI C63.4-2009 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.

4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

#### 4.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24 °C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

#### 4.5 Summary of Test Results/Plots

Radiated Power

ERP For GSM Mode GSM850

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | dBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 824.2          | 30.07         | 1.5    | 0      | H     | 1.5        | 0            | 28.57  | 38.45              |
| 824.2          | 32.09         | 1.5    | 0      | V     | 1.5        | 0            | 30.59  | 38.45              |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 836.6          | 30.03         | 1.5    | 0      | H     | 1.5        | 0            | 28.53  | 38.45              |
| 836.6          | 32.07         | 1.5    | 0      | V     | 1.5        | 0            | 30.56  | 38.45              |
| High Channel   |               |        |        |       |            |              |        |                    |
| 848.8          | 30.02         | 1.5    | 0      | H     | 1.5        | 0            | 28.52  | 38.45              |
| 848.8          | 32.05         | 1.5    | 0      | V     | 1.5        | 0            | 30.55  | 38.45              |

EIRP For GSM Mode PCS1900

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 24E Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | DBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 1850.2         | 19.36         | 1.5    | 0      | H     | 1.9        | 7.7          | 25.16  | 33                 |
| 1850.2         | 22.27         | 1.5    | 0      | V     | 1.9        | 7.7          | 28.07  | 33                 |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 1880.0         | 19.33         | 1.5    | 0      | H     | 1.9        | 7.7          | 25.13  | 33                 |
| 1880.0         | 22.21         | 1.5    | 0      | V     | 1.9        | 7.7          | 28.01  | 33                 |
| High Channel   |               |        |        |       |            |              |        |                    |
| 1909.8         | 19.46         | 1.5    | 0      | H     | 1.9        | 7.7          | 25.26  | 33                 |
| 1909.8         | 22.51         | 1.5    | 0      | V     | 1.9        | 7.7          | 28.31  | 33                 |

## ERP For GPRS Mode GSM850

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | dBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 824.2          | 29.26         | 1.5    | 0      | H     | 1.5        | 0            | 27.76  | 38.45              |
| 824.2          | 31.87         | 1.5    | 0      | V     | 1.5        | 0            | 30.37  | 38.45              |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 836.6          | 29.18         | 1.5    | 0      | H     | 1.5        | 0            | 27.68  | 38.45              |
| 836.6          | 31.80         | 1.5    | 0      | V     | 1.5        | 0            | 30.30  | 38.45              |
| High Channel   |               |        |        |       |            |              |        |                    |
| 848.8          | 29.16         | 1.5    | 0      | H     | 1.5        | 0            | 27.66  | 38.45              |
| 848.8          | 31.75         | 1.5    | 0      | V     | 1.5        | 0            | 30.25  | 38.45              |

## EIRP For GPRS Mode PCS1900

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 24E Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | DBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 1850.2         | 19.22         | 1.5    | 0      | H     | 1.9        | 7.7          | 25.02  | 33                 |
| 1850.2         | 21.21         | 1.5    | 0      | V     | 1.9        | 7.7          | 27.01  | 33                 |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 1880.0         | 18.82         | 1.5    | 0      | H     | 1.9        | 7.7          | 24.62  | 33                 |
| 1880.0         | 21.13         | 1.5    | 0      | V     | 1.9        | 7.7          | 26.93  | 33                 |
| High Channel   |               |        |        |       |            |              |        |                    |
| 1909.8         | 18.47         | 1.5    | 0      | H     | 1.9        | 7.7          | 24.27  | 33                 |
| 1909.8         | 22.05         | 1.5    | 0      | V     | 1.9        | 7.7          | 27.85  | 33                 |

## ERP For EDGE Mode GSM850

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | dBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 824.2          | 25.65         | 1.5    | 0      | H     | 1.5        | 0            | 24.15  | 38.45              |
| 824.2          | 26.86         | 1.5    | 0      | V     | 1.5        | 0            | 25.36  | 38.45              |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 836.6          | 25.18         | 1.5    | 0      | H     | 1.5        | 0            | 23.68  | 38.45              |
| 836.6          | 26.41         | 1.5    | 0      | V     | 1.5        | 0            | 24.91  | 38.45              |
| High Channel   |               |        |        |       |            |              |        |                    |
| 848.8          | 25.55         | 1.5    | 0      | H     | 1.5        | 0            | 24.05  | 38.45              |
| 848.8          | 26.16         | 1.5    | 0      | V     | 1.5        | 0            | 24.66  | 38.45              |

## EIRP For EDGE Mode PCS1900

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 24E Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | DBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 1850.2         | 16.32         | 1.5    | 0      | H     | 1.9        | 7.7          | 22.12  | 33                 |
| 1850.2         | 18.56         | 1.5    | 0      | V     | 1.9        | 7.7          | 24.36  | 33                 |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 1880.0         | 16.32         | 1.5    | 0      | H     | 1.9        | 7.7          | 22.61  | 33                 |
| 1880.0         | 18.16         | 1.5    | 0      | V     | 1.9        | 7.7          | 23.96  | 33                 |
| High Channel   |               |        |        |       |            |              |        |                    |
| 1909.8         | 16.54         | 1.5    | 0      | H     | 1.9        | 7.7          | 22.34  | 33                 |
| 1909.8         | 18.73         | 1.5    | 0      | V     | 1.9        | 7.7          | 24.53  | 33                 |

## ERP For WCDMA Mode Band V

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dBd          | dBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 826.4          | 20.55         | 1.5    | 0      | H     | 1.5        | 0            | 19.05  | 38.45              |
| 826.4          | 21.62         | 1.5    | 0      | V     | 1.5        | 0            | 20.12  | 38.45              |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 836.6          | 20.41         | 1.5    | 0      | H     | 1.5        | 0            | 18.91  | 38.45              |
| 836.6          | 21.65         | 1.5    | 0      | V     | 1.5        | 0            | 20.15  | 38.45              |
| High Channel   |               |        |        |       |            |              |        |                    |
| 846.6          | 20.81         | 1.5    | 0      | H     | 1.5        | 0            | 19.31  | 38.45              |
| 846.6          | 21.78         | 1.5    | 0      | V     | 1.5        | 0            | 20.28  | 38.45              |

## ERP For HSDPA Mode Band V

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dBd          | dBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 826.4          | 20.74         | 1.5    | 0      | H     | 1.5        | 0            | 19.24  | 38.45              |
| 826.4          | 21.65         | 1.5    | 0      | V     | 1.5        | 0            | 20.15  | 38.45              |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 836.6          | 20.55         | 1.5    | 0      | H     | 1.5        | 0            | 19.05  | 38.45              |
| 836.6          | 21.64         | 1.5    | 0      | V     | 1.5        | 0            | 20.14  | 38.45              |
| High Channel   |               |        |        |       |            |              |        |                    |
| 846.6          | 20.84         | 1.5    | 0      | H     | 1.5        | 0            | 19.34  | 38.45              |
| 846.6          | 21.74         | 1.5    | 0      | V     | 1.5        | 0            | 20.24  | 38.45              |

## ERP For HSUPA Mode Band V

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 22H Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dBd          | dBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 826.4          | 20.84         | 1.5    | 0      | H     | 1.5        | 0            | 19.34  | 38.45              |
| 826.4          | 21.92         | 1.5    | 0      | V     | 1.5        | 0            | 20.42  | 38.45              |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 836.6          | 20.95         | 1.5    | 0      | H     | 1.5        | 0            | 19.35  | 38.45              |
| 836.6          | 22.05         | 1.5    | 0      | V     | 1.5        | 0            | 20.55  | 38.45              |
| High Channel   |               |        |        |       |            |              |        |                    |
| 846.6          | 20.55         | 1.5    | 0      | H     | 1.5        | 0            | 19.05  | 38.45              |
| 846.6          | 21.66         | 1.5    | 0      | V     | 1.5        | 0            | 20.16  | 38.45              |

## ERP For WCDMA Mode Band II

| Frequency      | Substitute SG | Height | Table  | Polar | Cable loss | Antenna Gain | Result | FCC Part 24E Limit |
|----------------|---------------|--------|--------|-------|------------|--------------|--------|--------------------|
| MHz            | dBm           | Meter  | Degree | H / V | dB         | dB           | DBm    | dBm                |
| Low Channel    |               |        |        |       |            |              |        |                    |
| 1852.4         | 14.06         | 1.5    | 0      | H     | 1.9        | 7.7          | 19.86  | 33                 |
| 1852.4         | 15.55         | 1.5    | 0      | V     | 1.9        | 7.7          | 21.35  | 33                 |
| Middle Channel |               |        |        |       |            |              |        |                    |
| 1880.0         | 14.01         | 1.5    | 0      | H     | 1.9        | 7.7          | 19.81  | 33                 |
| 1880.0         | 15.58         | 1.5    | 0      | V     | 1.9        | 7.7          | 21.38  | 33                 |
| High Channel   |               |        |        |       |            |              |        |                    |
| 1907.6         | 14.25         | 1.5    | 0      | H     | 1.9        | 7.7          | 20.05  | 33                 |
| 1907.6         | 15.62         | 1.5    | 0      | V     | 1.9        | 7.7          | 21.42  | 33                 |

## ERP For HSDPA Mode Band II

| Frequency      | Substitute<br>SG | Height | Table  | Polar | Cable loss | Antenna<br>Gain | Result | FCC Part 24E<br>Limit |
|----------------|------------------|--------|--------|-------|------------|-----------------|--------|-----------------------|
| MHz            | dBm              | Meter  | Degree | H / V | dB         | dB              | DBm    | dBm                   |
| Low Channel    |                  |        |        |       |            |                 |        |                       |
| 1852.4         | 14.12            | 1.5    | 0      | H     | 1.9        | 7.7             | 19.92  | 33                    |
| 1852.4         | 15.58            | 1.5    | 0      | V     | 1.9        | 7.7             | 21.38  | 33                    |
| Middle Channel |                  |        |        |       |            |                 |        |                       |
| 1880.0         | 14.24            | 1.5    | 0      | H     | 1.9        | 7.7             | 20.04  | 33                    |
| 1880.0         | 15.90            | 1.5    | 0      | V     | 1.9        | 7.7             | 21.70  | 33                    |
| High Channel   |                  |        |        |       |            |                 |        |                       |
| 1907.6         | 13.62            | 1.5    | 0      | H     | 1.9        | 7.7             | 19.42  | 33                    |
| 1907.6         | 15.02            | 1.5    | 0      | V     | 1.9        | 7.7             | 20.82  | 33                    |

## EIRP For HSUPA Mode Band II

| Frequency      | Substitute<br>SG | Height | Table  | Polar | Cable loss | Antenna<br>Gain | Result | FCC Part 24E<br>Limit |
|----------------|------------------|--------|--------|-------|------------|-----------------|--------|-----------------------|
| MHz            | dBm              | Meter  | Degree | H / V | dB         | dB              | DBm    | dBm                   |
| Low Channel    |                  |        |        |       |            |                 |        |                       |
| 1852.4         | 12.62            | 1.5    | 0      | H     | 1.9        | 7.7             | 18.42  | 33                    |
| 1852.4         | 14.72            | 1.5    | 0      | V     | 1.9        | 7.7             | 20.52  | 33                    |
| Middle Channel |                  |        |        |       |            |                 |        |                       |
| 1880.0         | 12.87            | 1.5    | 0      | H     | 1.9        | 7.7             | 18.67  | 33                    |
| 1880.0         | 14.66            | 1.5    | 0      | V     | 1.9        | 7.7             | 20.46  | 33                    |
| High Channel   |                  |        |        |       |            |                 |        |                       |
| 1907.6         | 12.45            | 1.5    | 0      | H     | 1.9        | 7.7             | 18.25  | 33                    |
| 1907.6         | 14.78            | 1.5    | 0      | V     | 1.9        | 7.7             | 20.58  | 33                    |

Note: Result = Substitute - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

| Test Mode    | Channel        | Frequency (MHz) | Average Power (dBm) | FCC Part 22.913 Limit (dBm) |
|--------------|----------------|-----------------|---------------------|-----------------------------|
| GSM          | Low Channel    | 824.2           | 32.13               | 38.45                       |
|              | Middle Channel | 836.4           | 32.02               | 38.45                       |
|              | High Channel   | 848.8           | 32.01               | 38.45                       |
| GPRS(1 Slot) | Low Channel    | 824.2           | 31.91               | 38.45                       |
|              | Middle Channel | 836.4           | 31.85               | 38.45                       |
|              | High Channel   | 848.8           | 31.83               | 38.45                       |
| EDGE(1 Slot) | Low Channel    | 824.2           | 27.73               | 38.45                       |
|              | Middle Channel | 836.6           | 27.66               | 38.45                       |
|              | High Channel   | 848.8           | 27.34               | 38.45                       |

For PCS Band (GSM1900)

| Test Mode    | Channel        | Frequency (MHz) | Average Power (dBm) | FCC Part 24.232 Limit (dBm) |
|--------------|----------------|-----------------|---------------------|-----------------------------|
| GSM          | Low Channel    | 1850.2          | 29.12               | 33.0                        |
|              | Middle Channel | 1880.0          | 29.08               | 33.0                        |
|              | High Channel   | 1909.8          | 29.24               | 33.0                        |
| GPRS(1 Slot) | Low Channel    | 1850.2          | 29.10               | 33.0                        |
|              | Middle Channel | 1880.0          | 29.07               | 33.0                        |
|              | High Channel   | 1909.8          | 29.17               | 33.0                        |
| EDGE(1 Slot) | Low Channel    | 1850.2          | 25.23               | 33.0                        |
|              | Middle Channel | 1880.0          | 25.18               | 33.0                        |
|              | High Channel   | 1909.8          | 25.39               | 33.0                        |

## For WCDMA Band V

| Test Mode | Channel        | Frequency (MHz) | Average Power (dBm) | FCC Part 22.913 Limit (dBm) |
|-----------|----------------|-----------------|---------------------|-----------------------------|
| WCDMA     | Low Channel    | 826.4           | 22.30               | 38.45                       |
|           | Middle Channel | 836.6           | 22.18               | 38.45                       |
|           | High Channel   | 846.6           | 22.36               | 38.45                       |
| HSDPA     | Low Channel    | 826.4           | 21.32               | 38.45                       |
|           | Middle Channel | 836.6           | 21.26               | 38.45                       |
|           | High Channel   | 846.6           | 21.43               | 38.45                       |
| HSUPA     | Low Channel    | 826.4           | 21.34               | 38.45                       |
|           | Middle Channel | 836.6           | 21.22               | 38.45                       |
|           | High Channel   | 846.6           | 21.41               | 38.45                       |

## For WCDMA Band II

| Test Mode | Channel        | Frequency (MHz) | Average Power (dBm) | FCC Part 22.913 Limit (dBm) |
|-----------|----------------|-----------------|---------------------|-----------------------------|
| WCDMA     | Low Channel    | 1852.4          | 21.52               | 38.45                       |
|           | Middle Channel | 1880.0          | 21.55               | 38.45                       |
|           | High Channel   | 1907.6          | 21.17               | 38.45                       |
| HSDPA     | Low Channel    | 1852.4          | 20.55               | 38.45                       |
|           | Middle Channel | 1880.0          | 20.64               | 38.45                       |
|           | High Channel   | 1907.6          | 20.30               | 38.45                       |
| HSUPA     | Low Channel    | 1852.4          | 20.57               | 38.45                       |
|           | Middle Channel | 1880.0          | 20.63               | 38.45                       |
|           | High Channel   | 1907.6          | 20.41               | 38.45                       |

## 5. Peak-to-average Radio (PAR) of Transmitter

### 5.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 5.2 Test Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number | Cal. Date  | Due. Date  |
|-----------------|--------------------------------------|--------|---------------|------------|------------|
| Aglient         | Spectrum Analyzer                    | E4402B | US41192821    | 2015-05-28 | 2016-05-27 |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 112012        | 2015-05-28 | 2016-05-27 |

### 5.3 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded.

Test Configuration for the emission bandwidth testing:

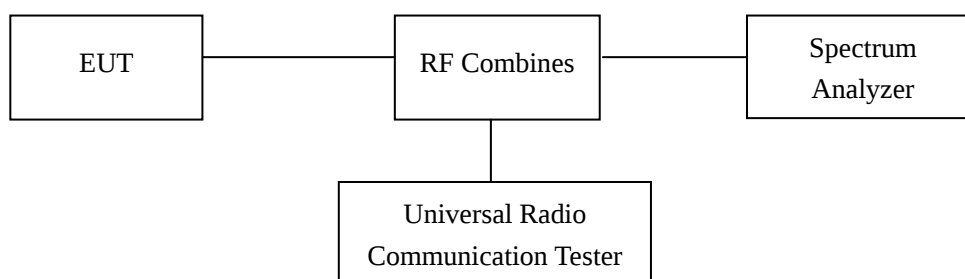

### 5.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

## 5.5 Summary of Test Results

For Cellular Band

| Test Mode     | Channel | Frequency (MHz) | Peak Power (dBm) | Average Power (dBm) | PAR (dB) | Limit (dB) |
|---------------|---------|-----------------|------------------|---------------------|----------|------------|
| GSM           | 128     | 824.2           | 35.88            | 32.13               | 3.75     | 13         |
|               | 190     | 836.4           | 35.14            | 32.02               | 3.12     | 13         |
|               | 251     | 848.8           | 34.96            | 32.01               | 2.95     | 13         |
| GPRS (1 Slot) | 128     | 824.2           | 36.35            | 31.91               | 4.44     | 13         |
|               | 190     | 836.4           | 36.15            | 31.85               | 4.30     | 13         |
|               | 251     | 848.8           | 35.89            | 31.83               | 4.06     | 13         |
| EDGE (1 Slot) | 128     | 824.2           | 28.99            | 27.73               | 1.26     | 13         |
|               | 190     | 836.6           | 28.87            | 27.66               | 1.21     | 13         |
|               | 251     | 848.8           | 28.5             | 27.34               | 1.16     | 13         |

For PCS Band

| Test Mode     | Channel | Frequency (MHz) | Peak Power (dBm) | Average Power (dBm) | PAR  | Limit |
|---------------|---------|-----------------|------------------|---------------------|------|-------|
| GSM           | 512     | 1850.2          | 32.00            | 29.12               | 2.88 | 13    |
|               | 661     | 1880.0          | 31.88            | 29.08               | 2.80 | 13    |
|               | 810     | 1909.8          | 32.15            | 29.24               | 2.91 | 13    |
| GPRS (1 Slot) | 512     | 1850.2          | 31.65            | 29.10               | 2.55 | 13    |
|               | 661     | 1880.0          | 31.32            | 29.07               | 2.25 | 13    |
|               | 810     | 1909.8          | 32.01            | 29.17               | 2.84 | 13    |
| EDGE (1 Slot) | 512     | 1850.2          | 26.96            | 25.23               | 1.73 | 13    |
|               | 661     | 1880.0          | 26.82            | 25.18               | 1.64 | 13    |
|               | 810     | 1909.8          | 27.02            | 25.39               | 1.63 | 13    |

For WCDMA Band V

| Test Mode | Channel | Frequency (MHz) | Peak Power (dBm) | Average Power (dBm) | PAR  | Limit |
|-----------|---------|-----------------|------------------|---------------------|------|-------|
| WCDMA     | 4132    | 826.4           | 25.80            | 22.30               | 3.50 | 13    |
|           | 4183    | 836.6           | 25.66            | 22.18               | 3.48 | 13    |
|           | 4233    | 846.6           | 25.89            | 22.36               | 3.53 | 13    |
| HSDPA     | 4132    | 826.4           | 25.07            | 21.32               | 3.75 | 13    |
|           | 4183    | 836.6           | 24.63            | 21.26               | 3.37 | 13    |
|           | 4233    | 846.6           | 25.17            | 21.43               | 3.74 | 13    |
| HSUPA     | 4132    | 826.4           | 25.71            | 21.34               | 4.37 | 13    |
|           | 4183    | 836.6           | 25.67            | 21.22               | 4.45 | 13    |
|           | 4233    | 846.6           | 25.82            | 21.41               | 4.41 | 13    |

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 6.2 Test Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number | Cal. Date  | Due. Date  |
|-----------------|--------------------------------------|--------|---------------|------------|------------|
| Aglient         | Spectrum Analyzer                    | E4402B | US41192821    | 2015-05-28 | 2016-05-27 |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 112012        | 2015-05-28 | 2016-05-27 |

### 6.3 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

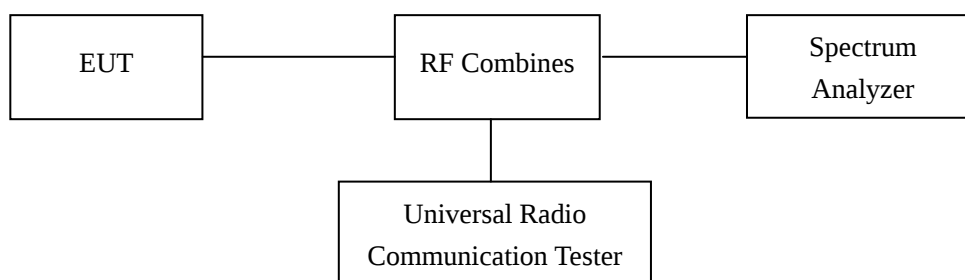

### 6.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

## 6.5 Summary of Test Results/Plots

For Cellular Band

| Test Mode | Channel | Frequency (MHz) | 99% Emission Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|-----------|---------|-----------------|------------------------------|--------------------------------|
| GSM       | 128     | 824.2           | 253.6328                     | 330.844                        |
|           | 190     | 836.6           | 255.7647                     | 336.158                        |
|           | 251     | 848.8           | 254.5349                     | 337.858                        |
| GPRS      | 128     | 824.2           | 251.5453                     | 330.044                        |
|           | 190     | 836.6           | 252.6995                     | 337.553                        |
|           | 251     | 848.8           | 253.2655                     | 332.768                        |
| EDGE      | 128     | 824.2           | 257.9256                     | 331.959                        |
|           | 190     | 836.6           | 256.3761                     | 331.198                        |
|           | 251     | 848.8           | 254.9209                     | 334.860                        |

For PCS Band

| Test Mode | Channel | Frequency (MHz) | 99% Emission Bandwidth (kHz) | 26 dB Emission Bandwidth (kHz) |
|-----------|---------|-----------------|------------------------------|--------------------------------|
| GSM       | 512     | 1850.2          | 252.4603                     | 328.356                        |
|           | 661     | 1880.0          | 255.0221                     | 334.202                        |
|           | 810     | 1909.8          | 248.5105                     | 333.075                        |
| GPRS      | 512     | 1850.2          | 251.8461                     | 336.372                        |
|           | 661     | 1880.0          | 252.4075                     | 336.892                        |
|           | 810     | 1909.8          | 254.8679                     | 341.604                        |
| EDGE      | 512     | 1850.2          | 253.8806                     | 316.421                        |
|           | 661     | 1880.0          | 263.6890                     | 333.912                        |
|           | 810     | 1909.8          | 249.0509                     | 298.734                        |

## For Band V


| Test Mode | Channel | Frequency (MHz) | 99% Emission Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|-----------|---------|-----------------|------------------------------|--------------------------------|
| WCDMA     | 4132    | 826.4           | 4.1569                       | 4.693                          |
|           | 4182    | 836.4           | 4.1641                       | 4.687                          |
|           | 4233    | 846.6           | 4.1637                       | 4.660                          |
| HSDPA     | 4132    | 826.4           | 4.1620                       | 4.717                          |
|           | 4182    | 836.4           | 4.1458                       | 4.668                          |
|           | 4233    | 846.6           | 4.1680                       | 4.678                          |
| HSUPA     | 4132    | 826.4           | 4.1650                       | 4.665                          |
|           | 4182    | 836.4           | 4.1554                       | 4.687                          |
|           | 4233    | 846.6           | 4.1583                       | 4.702                          |

## For Band II


| Test Mode | Channel | Frequency (MHz) | 99% Emission Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) |
|-----------|---------|-----------------|------------------------------|--------------------------------|
| WCDMA     | 9262    | 1852.4          | 4.1675                       | 4.715                          |
|           | 9400    | 1880.0          | 4.1620                       | 4.707                          |
|           | 9538    | 1907.6          | 4.1882                       | 4.761                          |
| HSDPA     | 9262    | 1852.4          | 4.1717                       | 4.702                          |
|           | 9400    | 1880.0          | 4.1611                       | 4.696                          |
|           | 9538    | 1907.6          | 4.1705                       | 4.682                          |
| HSUPA     | 9262    | 1852.4          | 4.1624                       | 4.740                          |
|           | 9400    | 1880.0          | 4.1698                       | 4.695                          |
|           | 9538    | 1907.6          | 4.1807                       | 5.262                          |

Please refer to the following test plots:


For Cellular Band  
GSM Low Channel

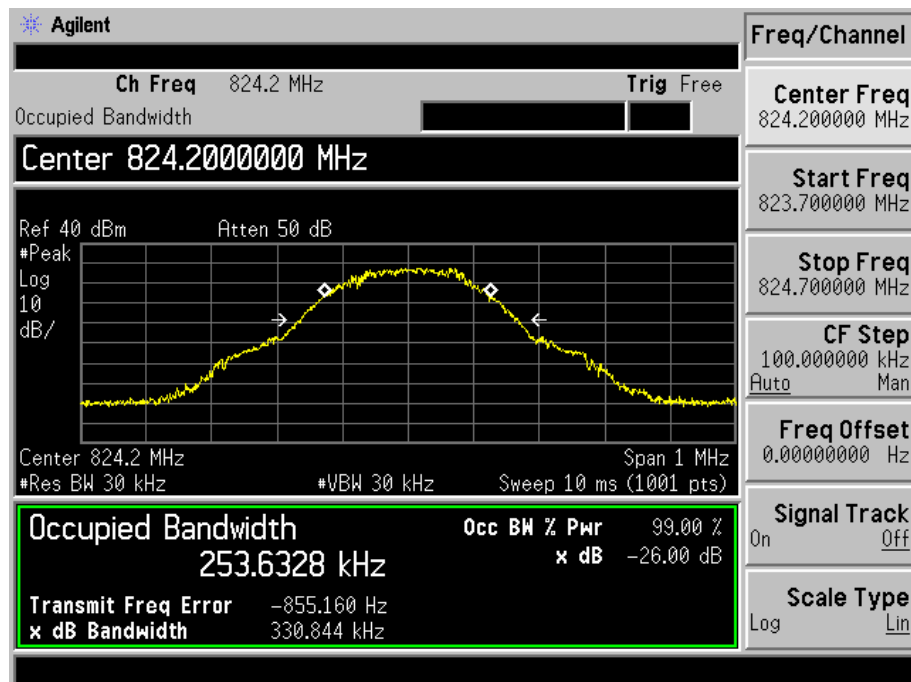


GSM Middle Channel

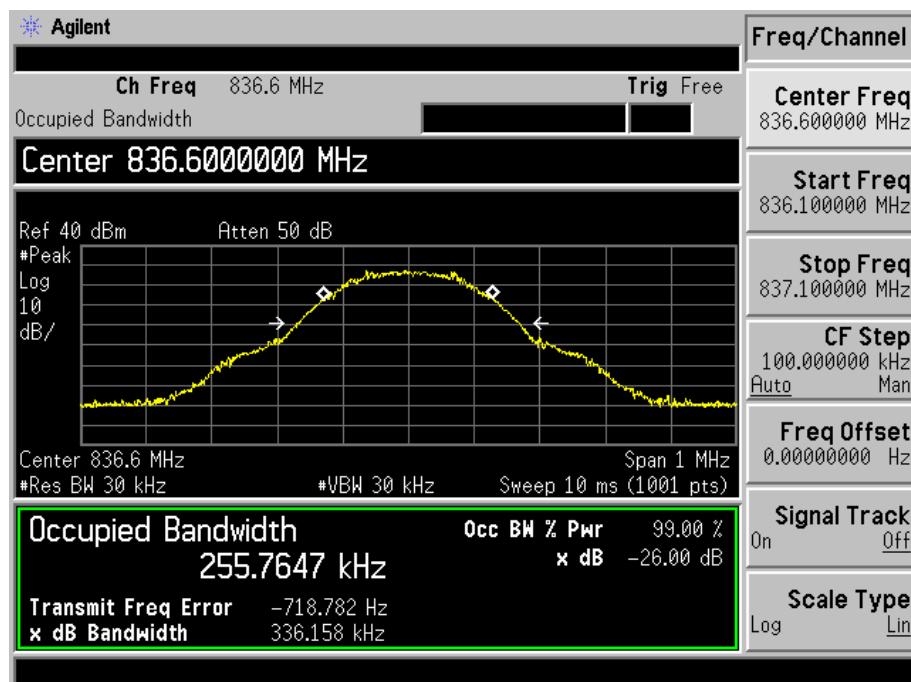


## GSM High channel

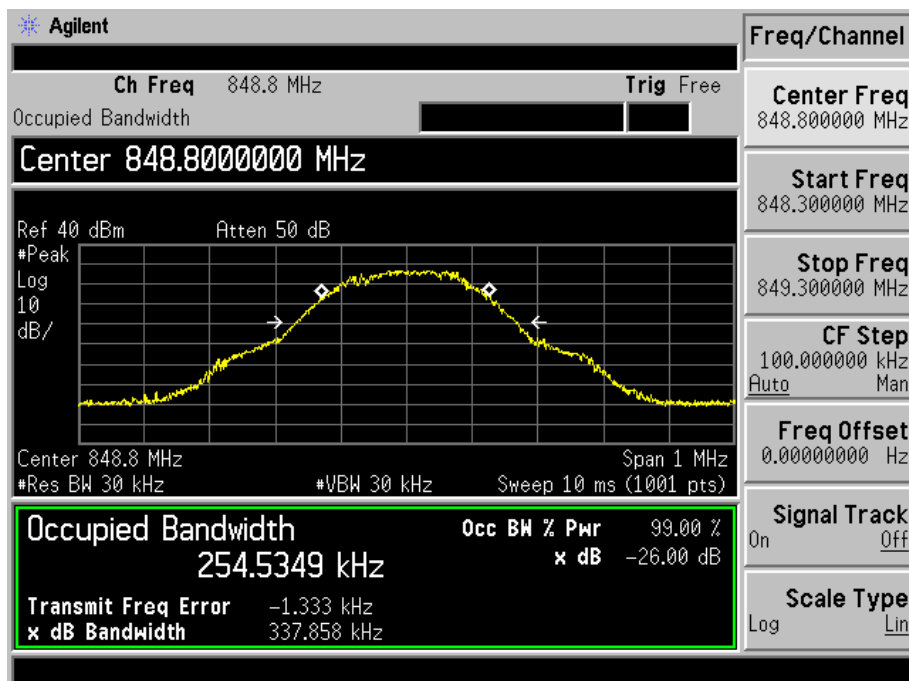


## GPRS Low Channel

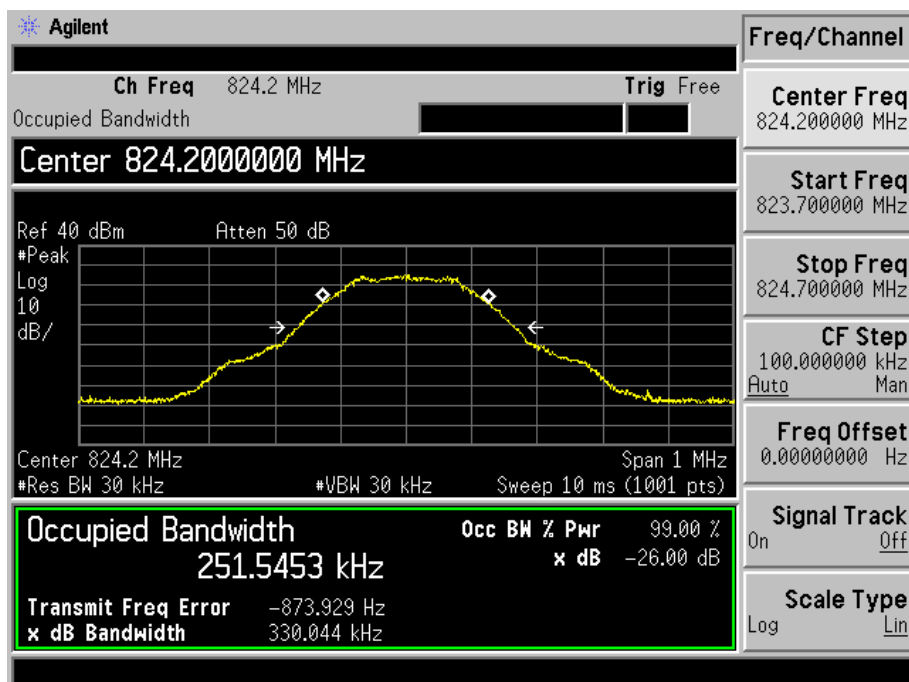


## GPRS Middle Channel

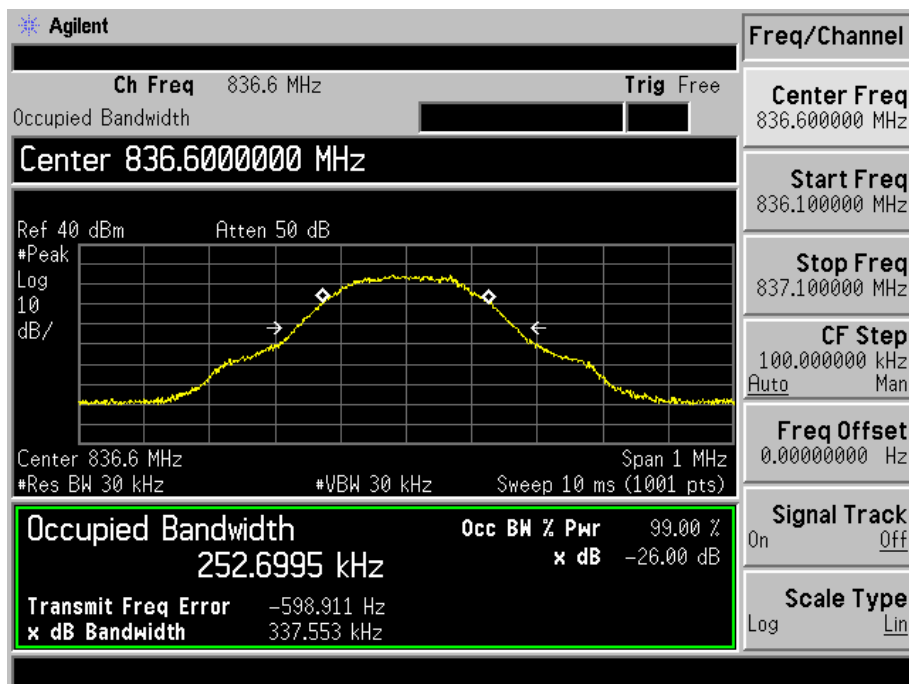


## GPRS High Channel

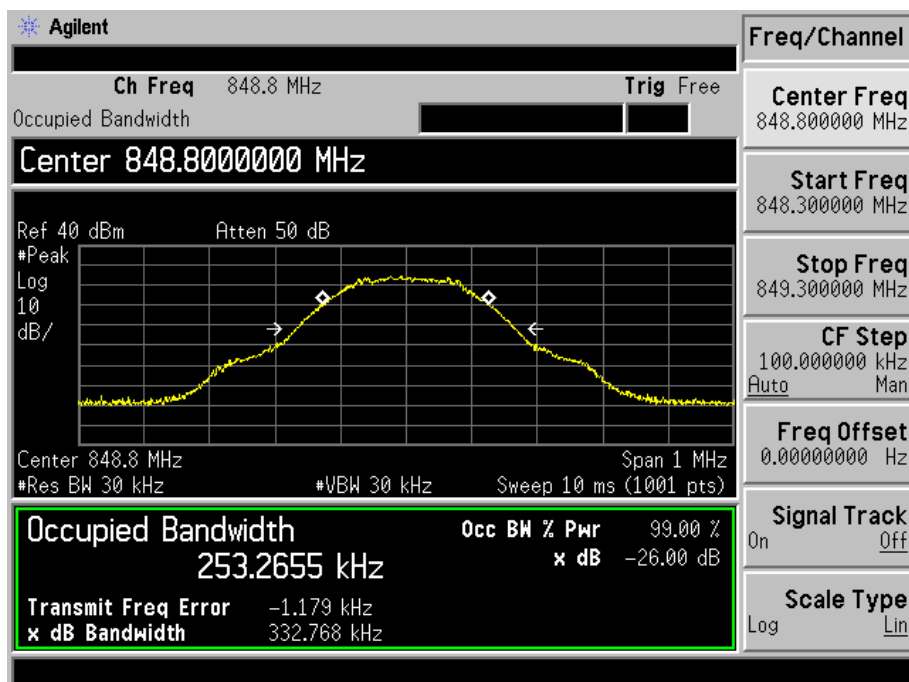



## EDGE Low Channel

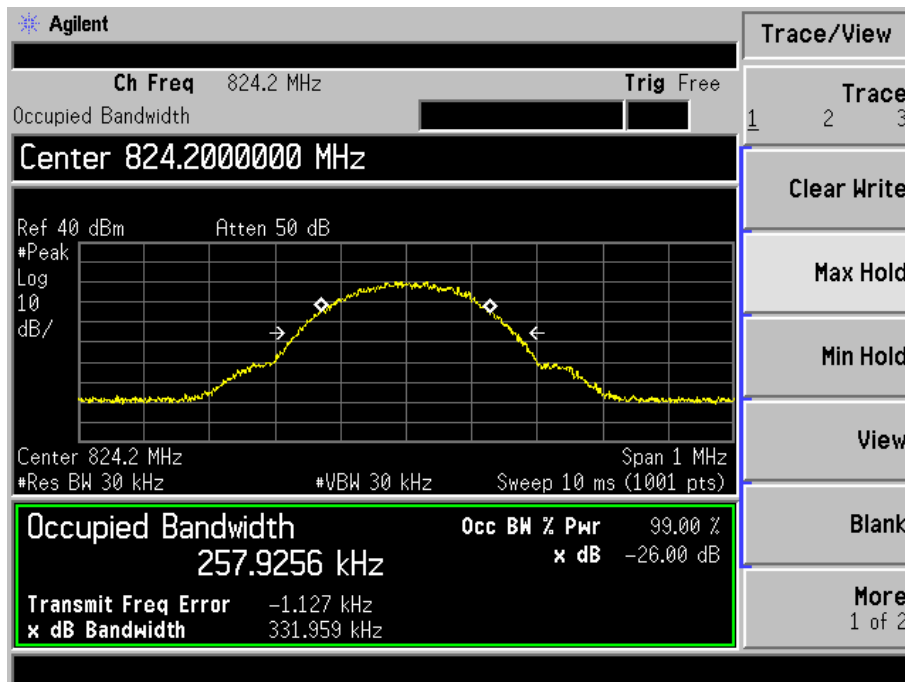


## EDGE Middle Channel

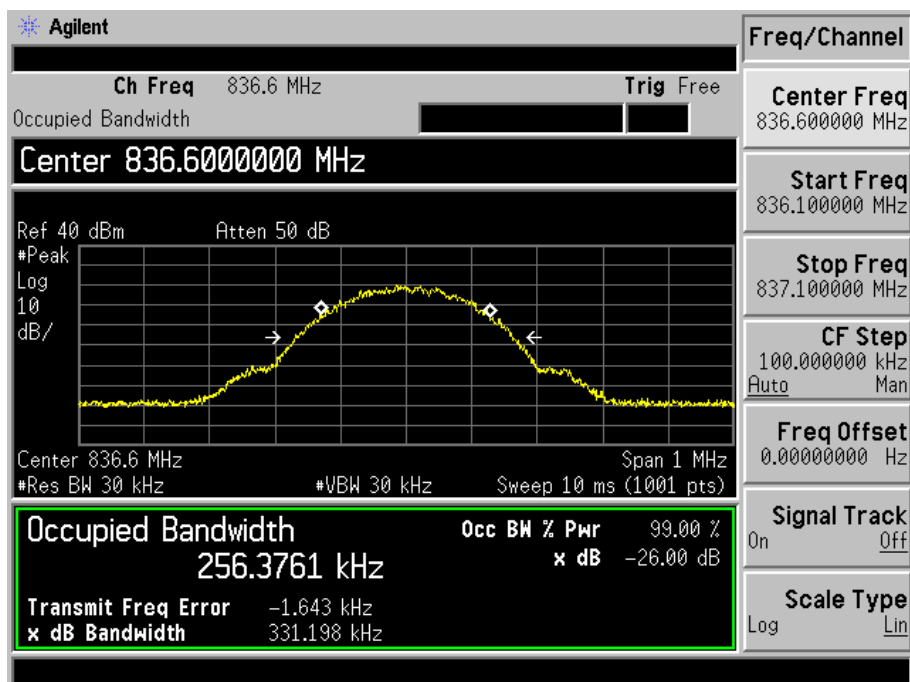


## EDGE High channel

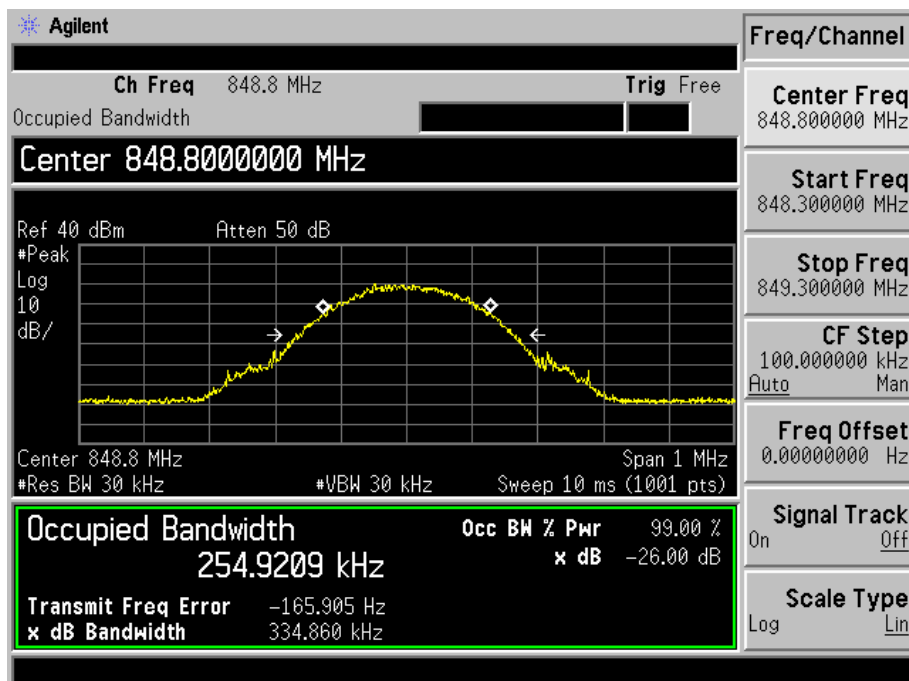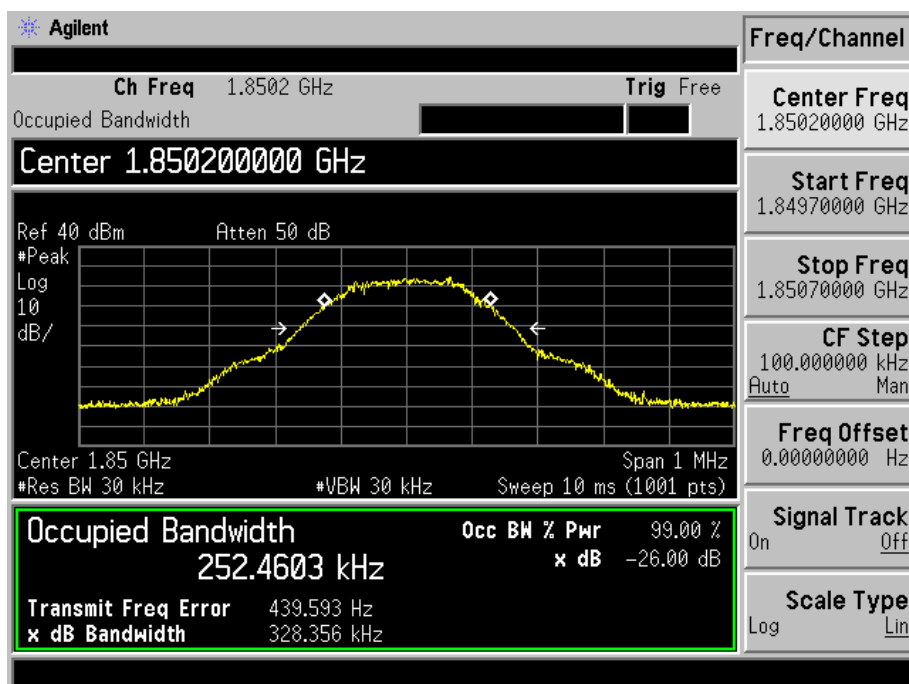For PCS Band  
GSM Low Channel


## GSM Middle Channel

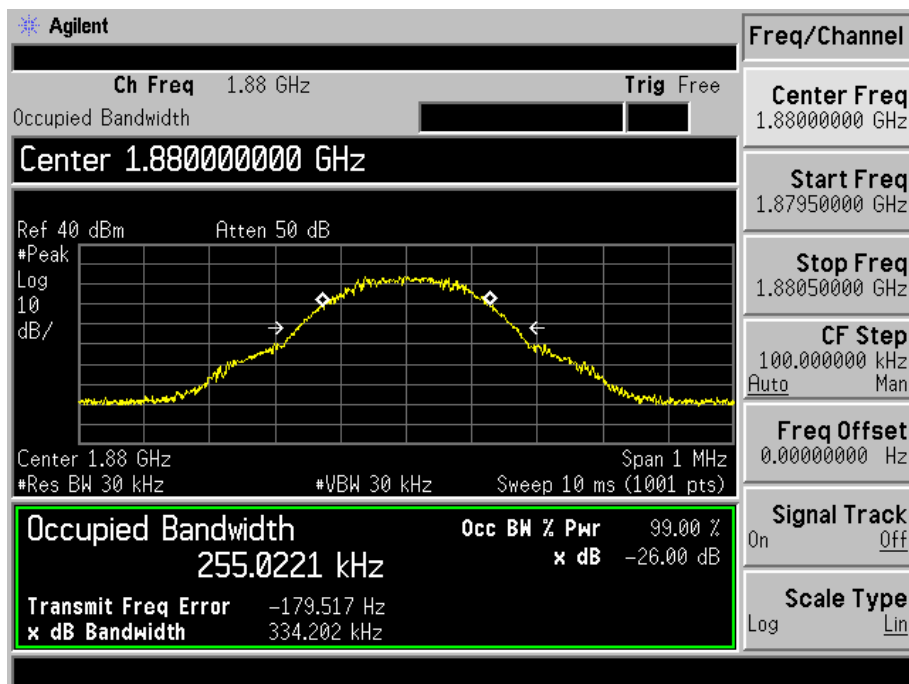


## GSM High channel

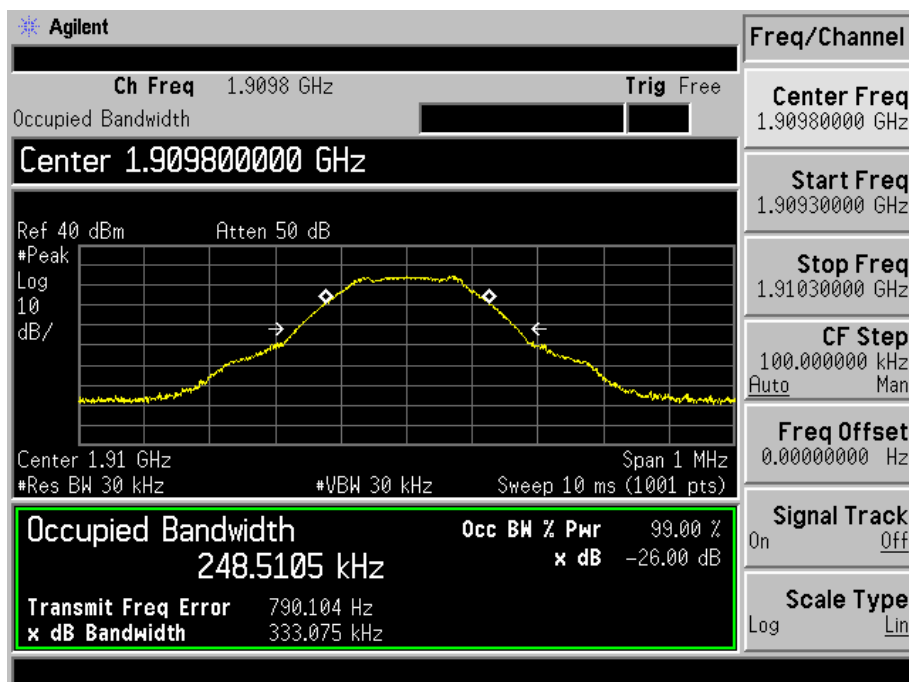


## GPRS Low Channel

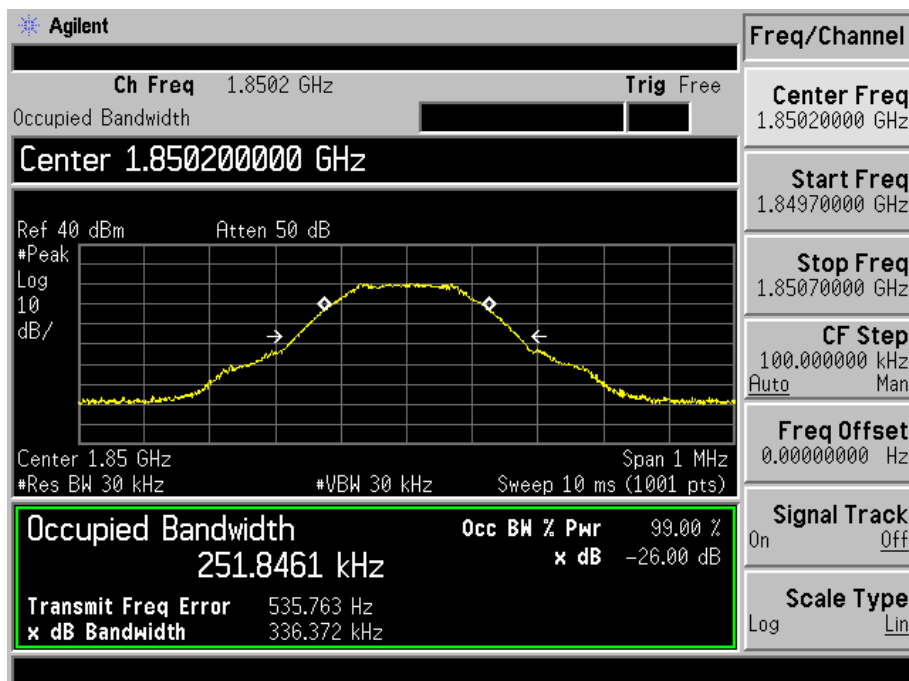


## GPRS Middle Channel

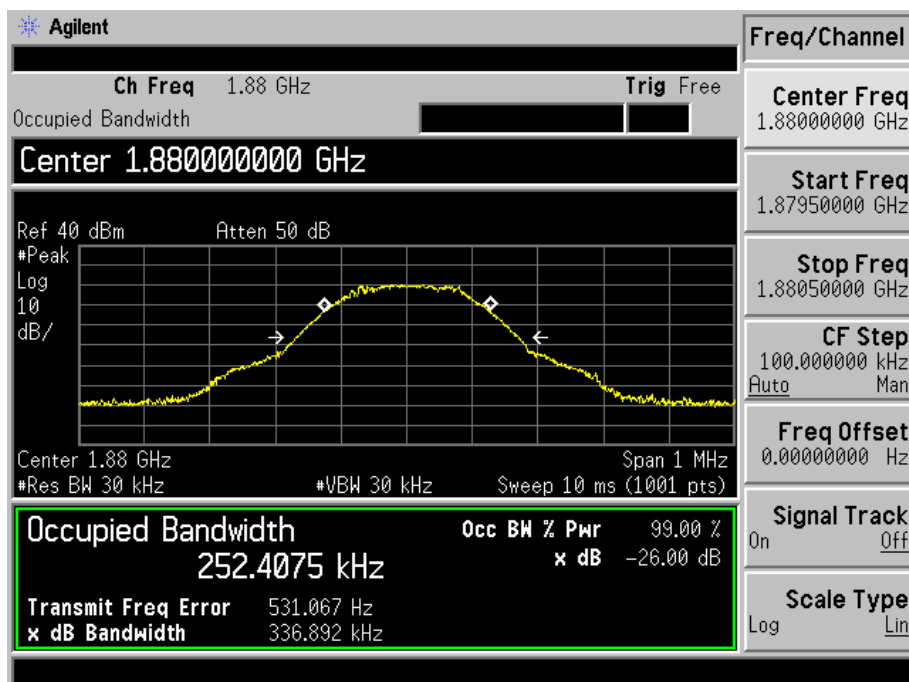


## GPRS High Channel

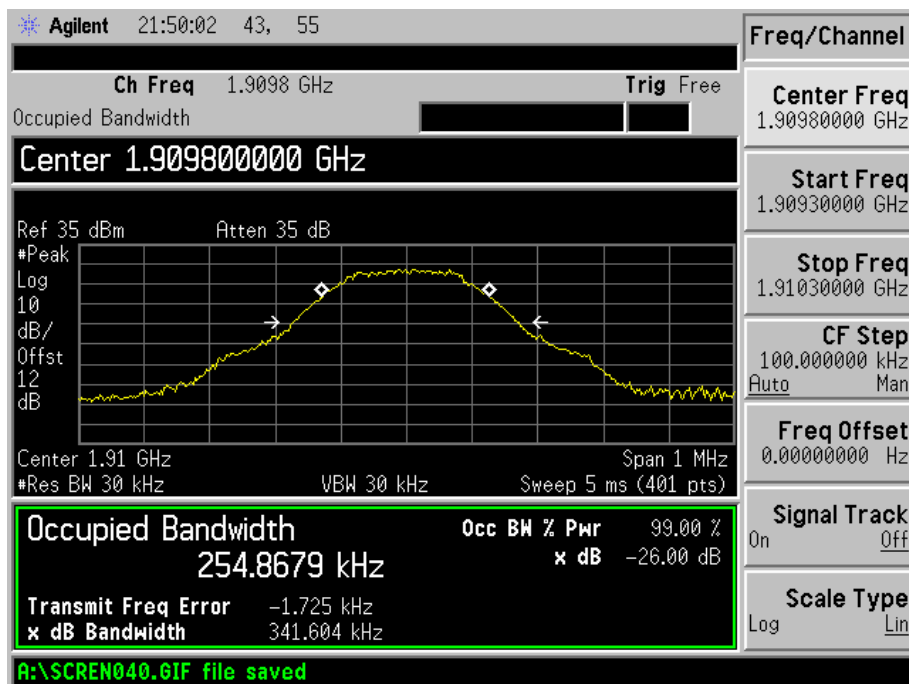


## EDGE Low Channel

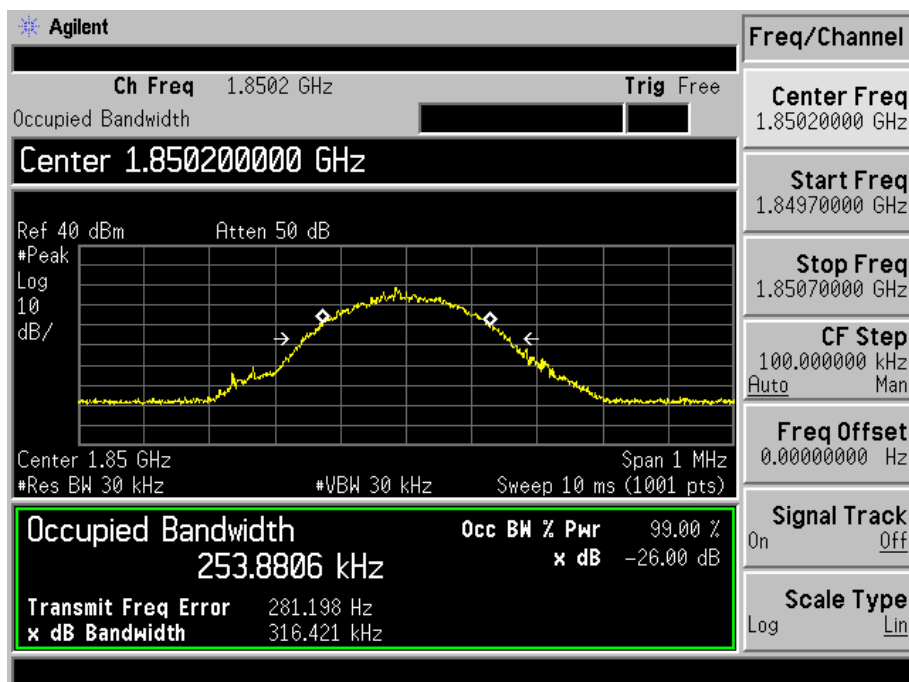

## EDGE Middle Channel

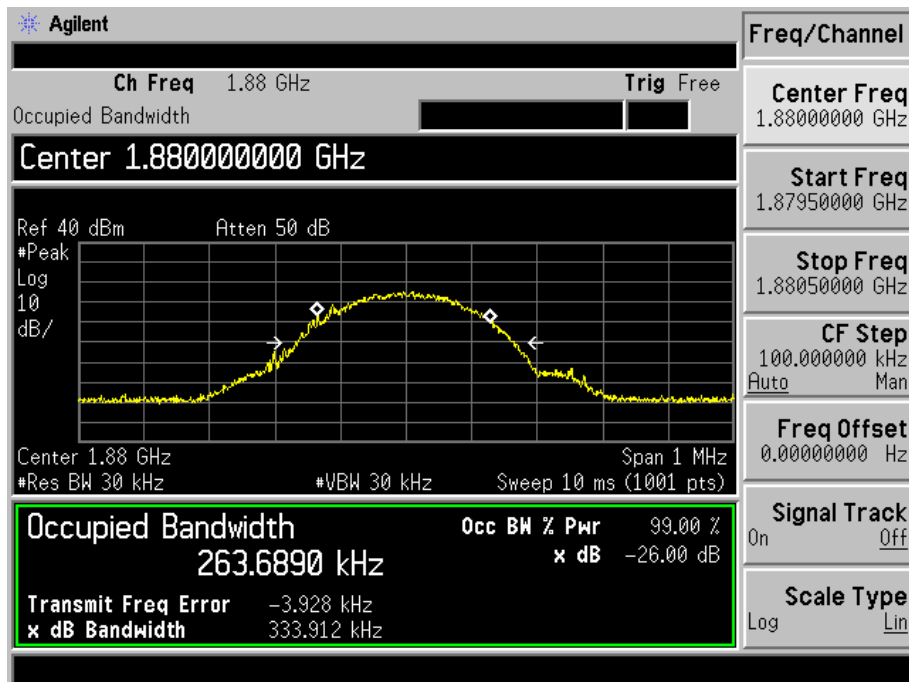


## EDGE High channel

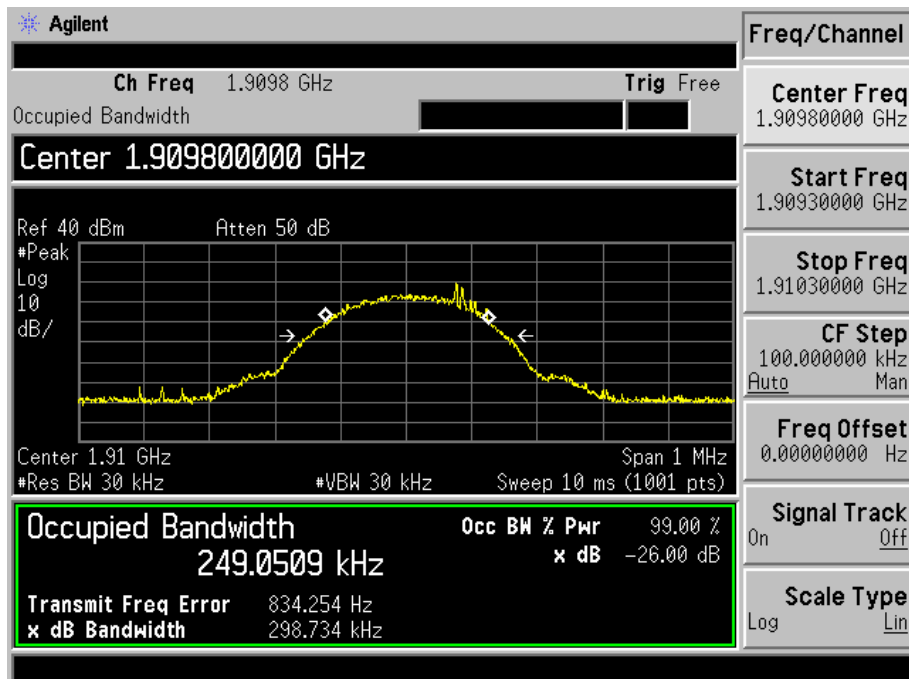


For Band V


WCDMA Low Channel

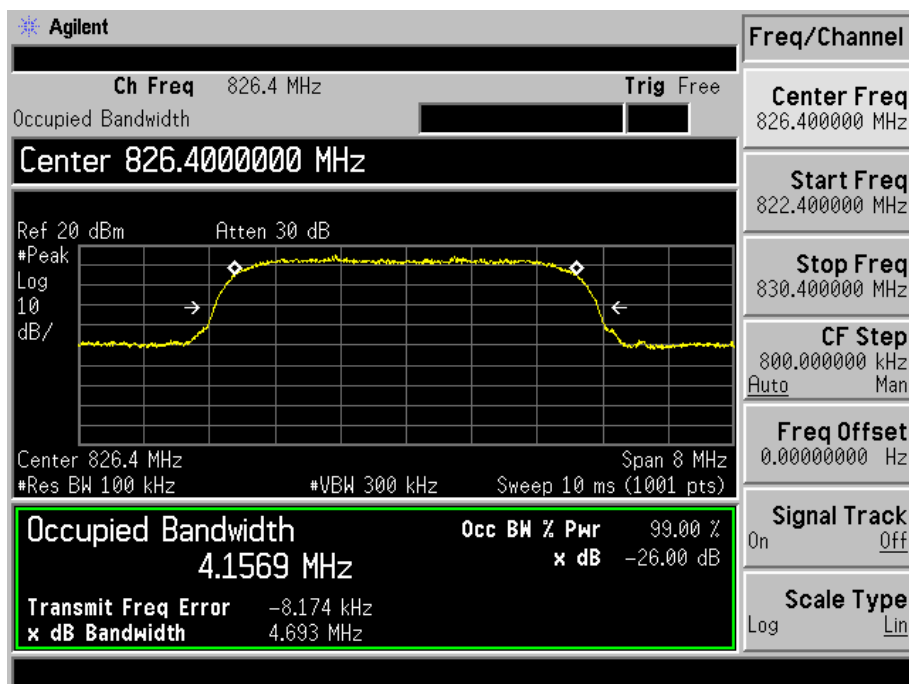


WCDMA Middle Channel

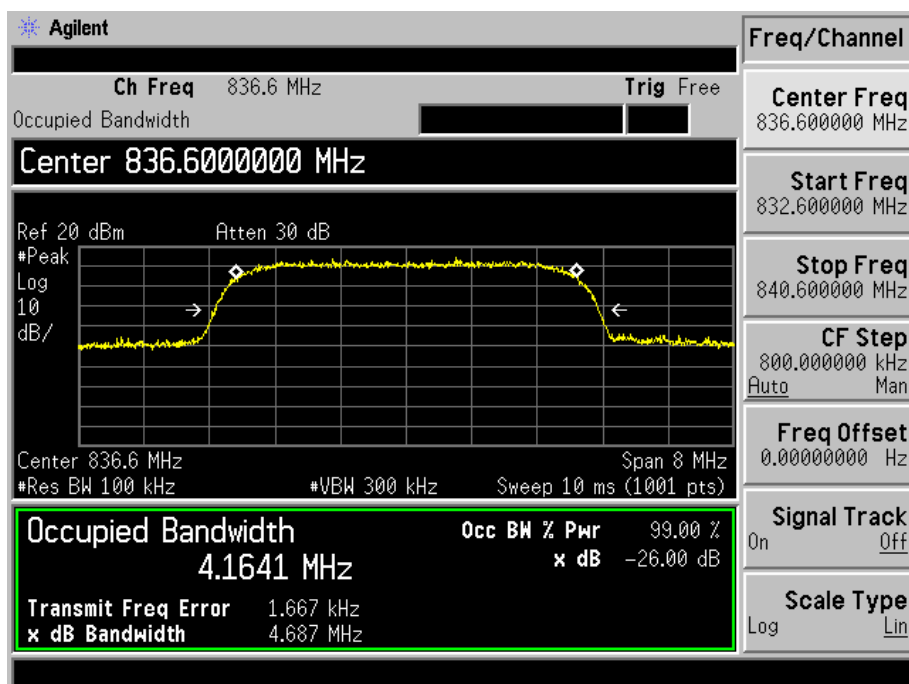


## WCDMA High Channel

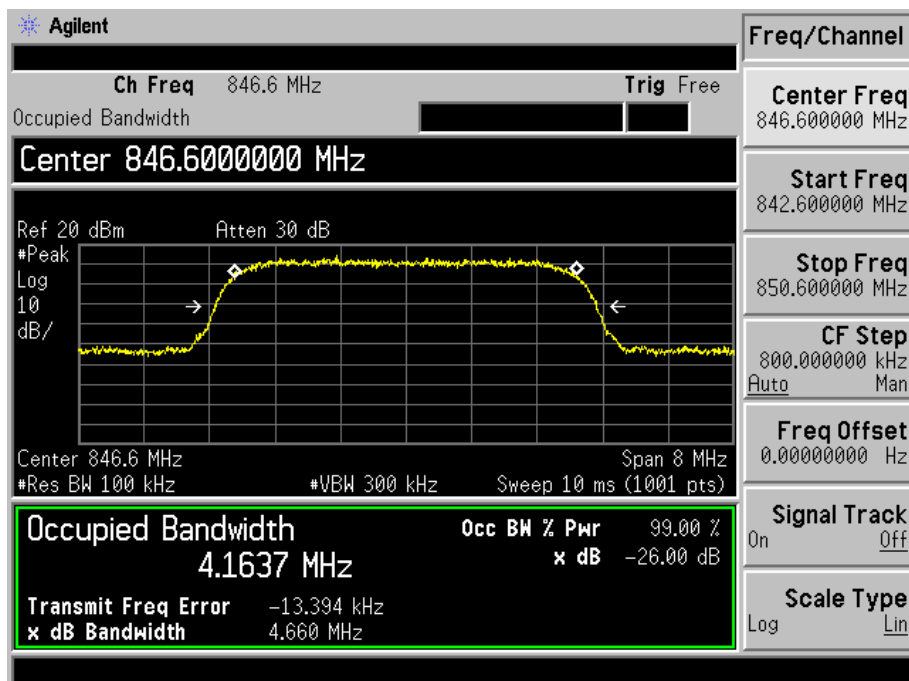


## HSDPA Low Channel

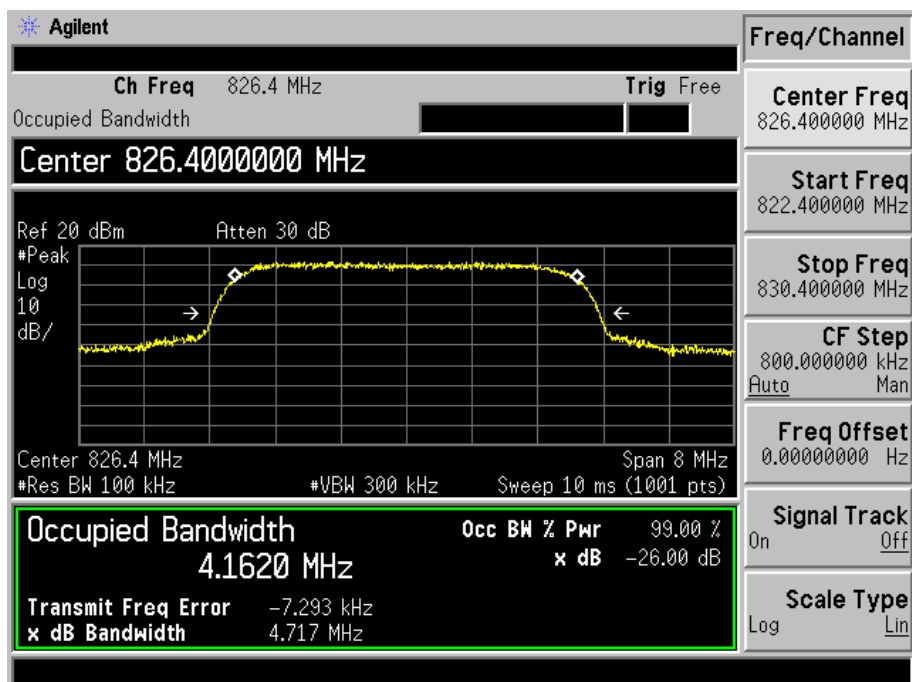


## HSDPA Middle Channel

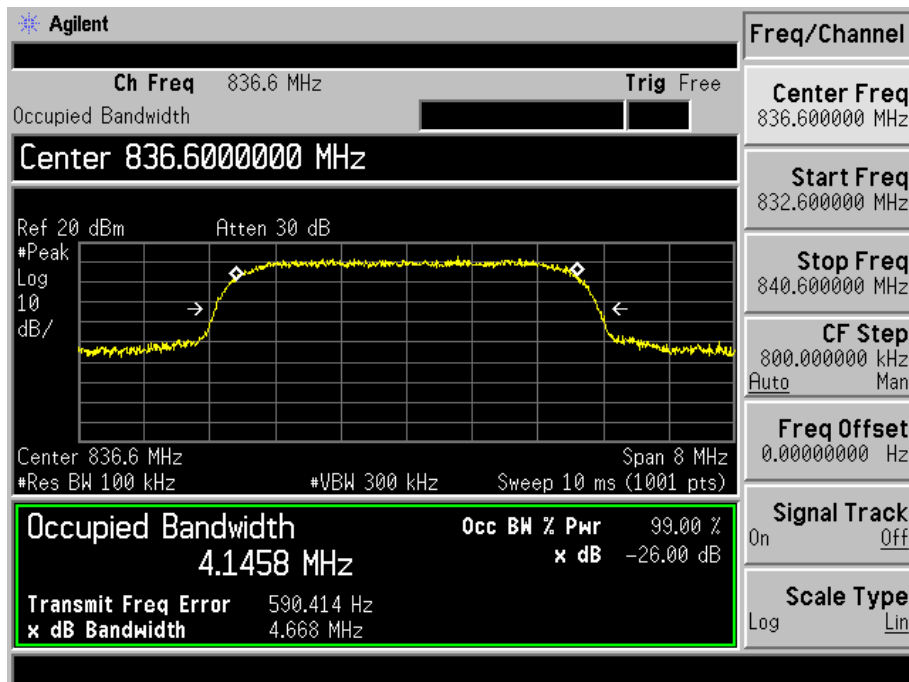


## HSDPA High Channel

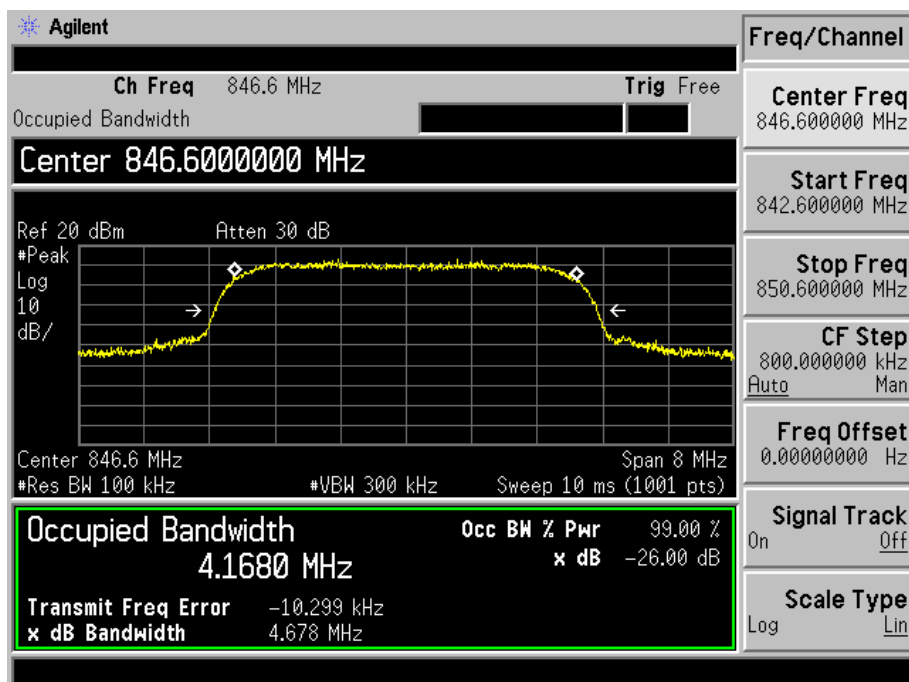


## HSUPA Low Channel

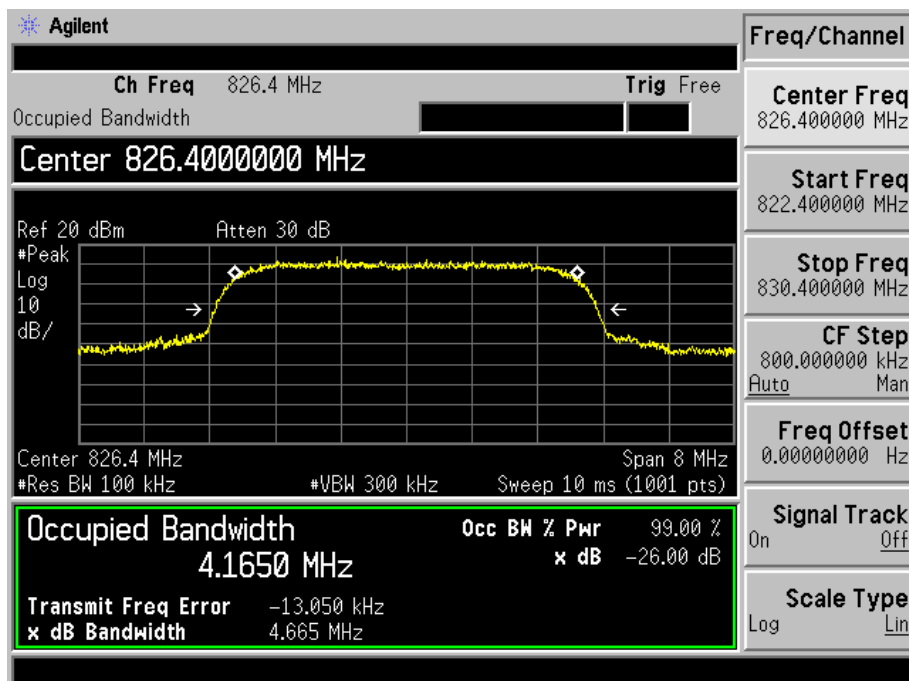

## HSUPA Middle Channel

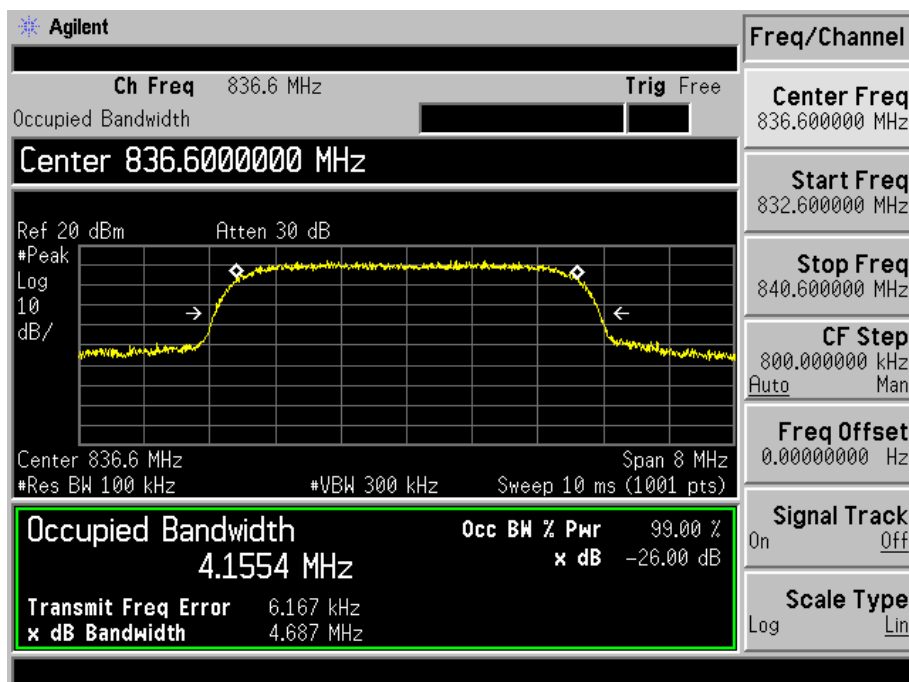


## HSUPA High Channel

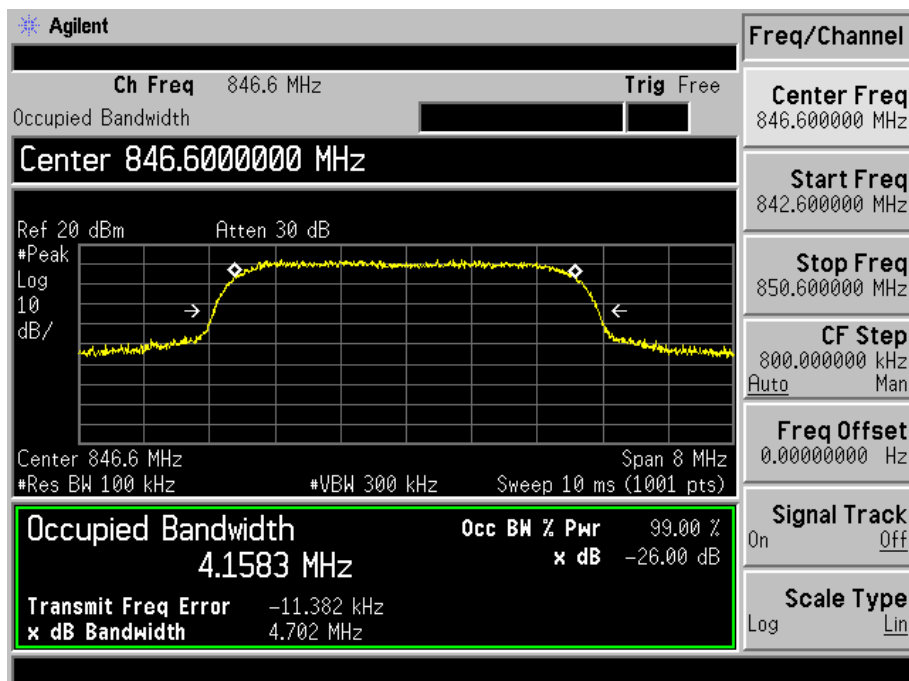


## For Band II


## WCDMA Low Channel

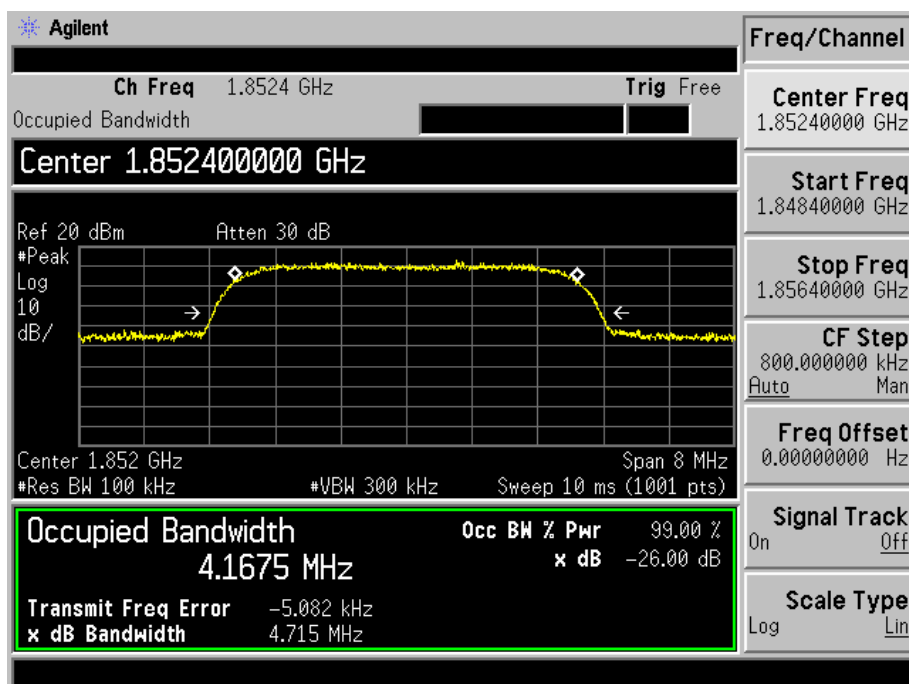


## WCDMA Middle Channel

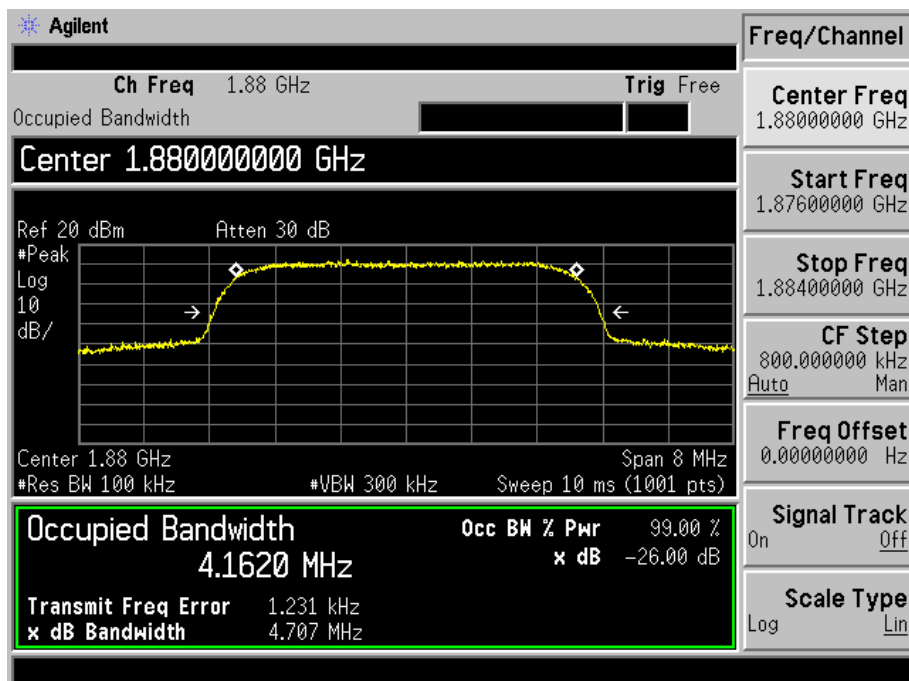


## WCDMA High Channel

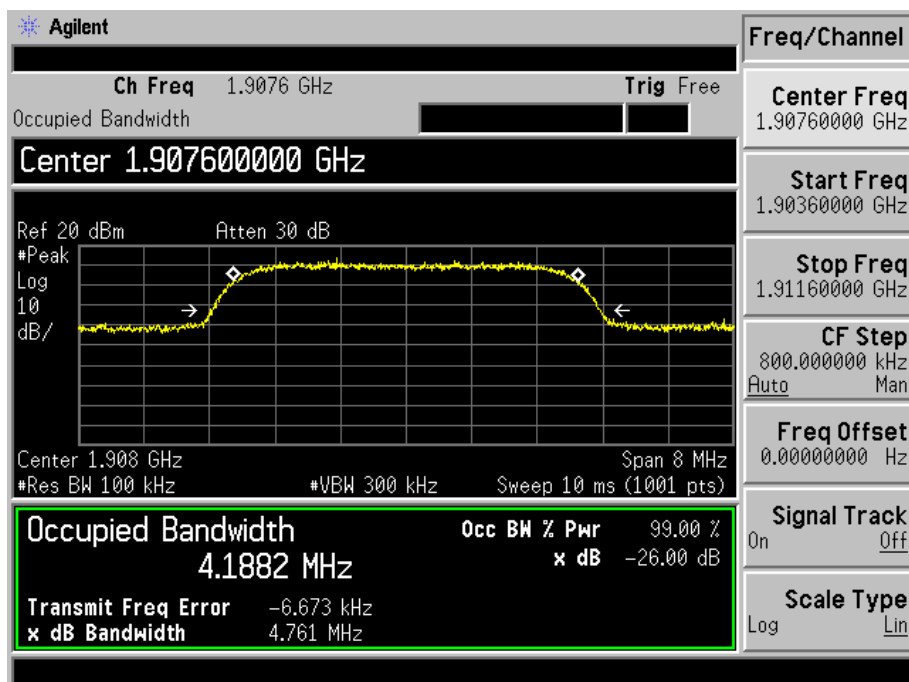


## HSDPA Low Channel

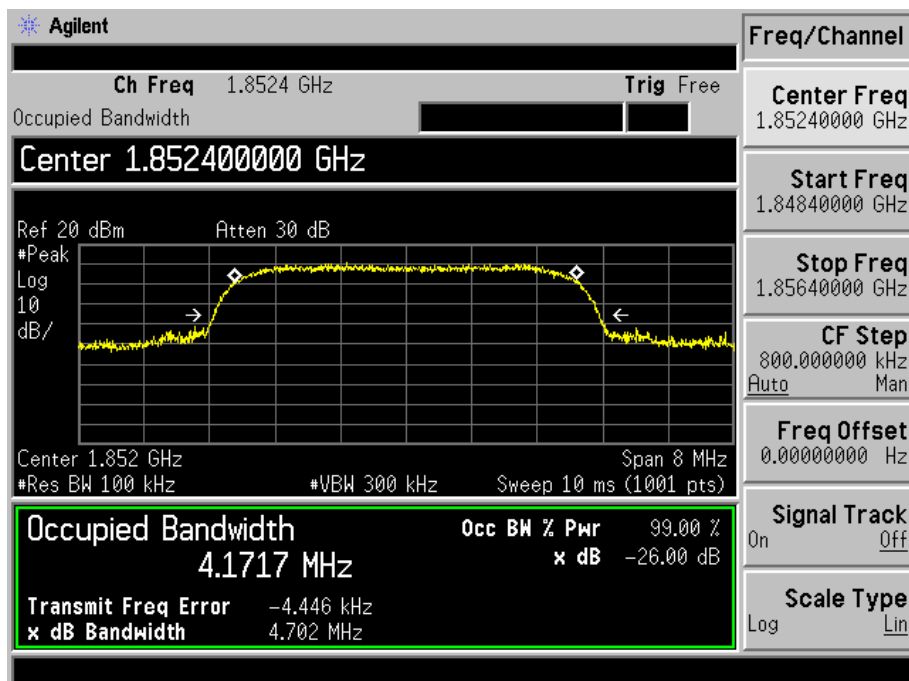


## HSDPA Middle Channel

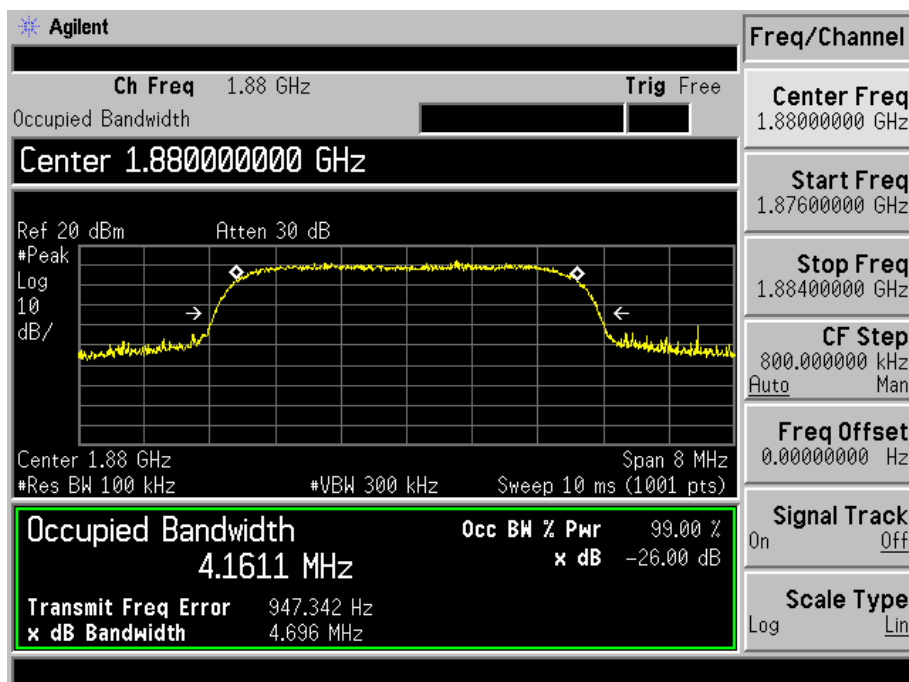


## HSDPA High Channel

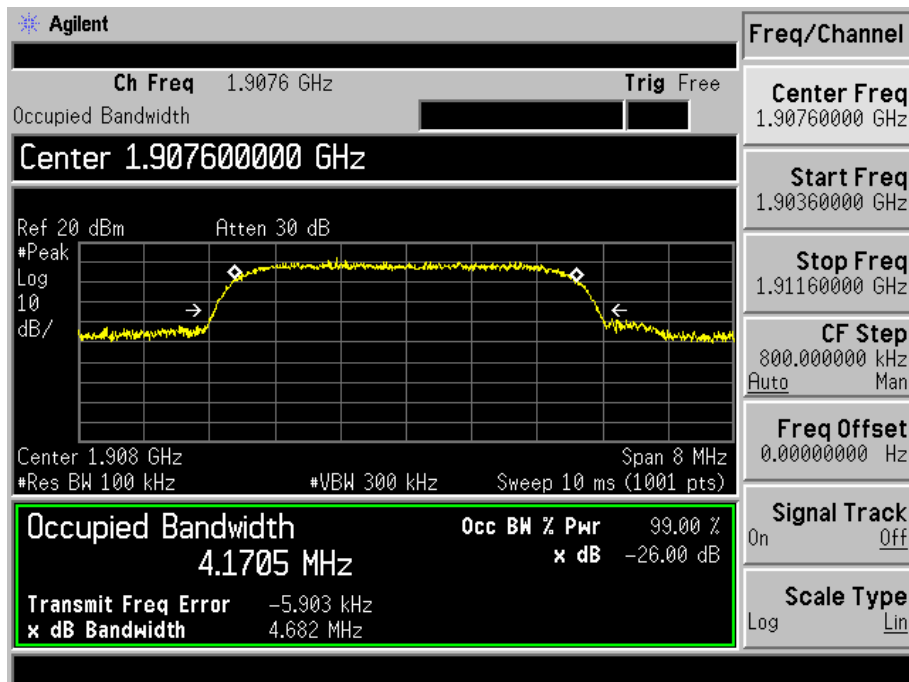


## HSUPA Low Channel

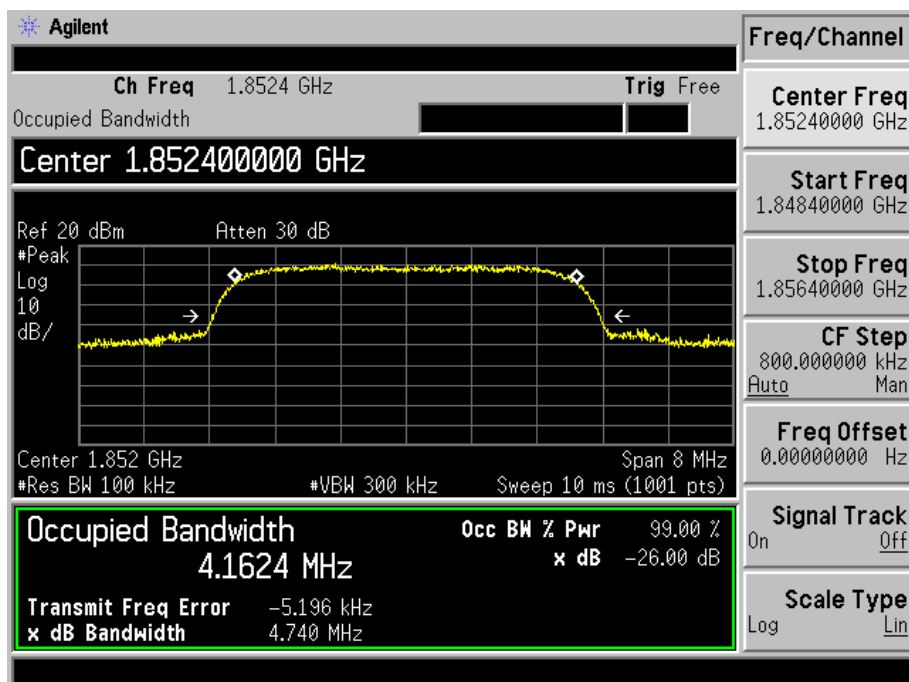

## HSUPA Middle Channel

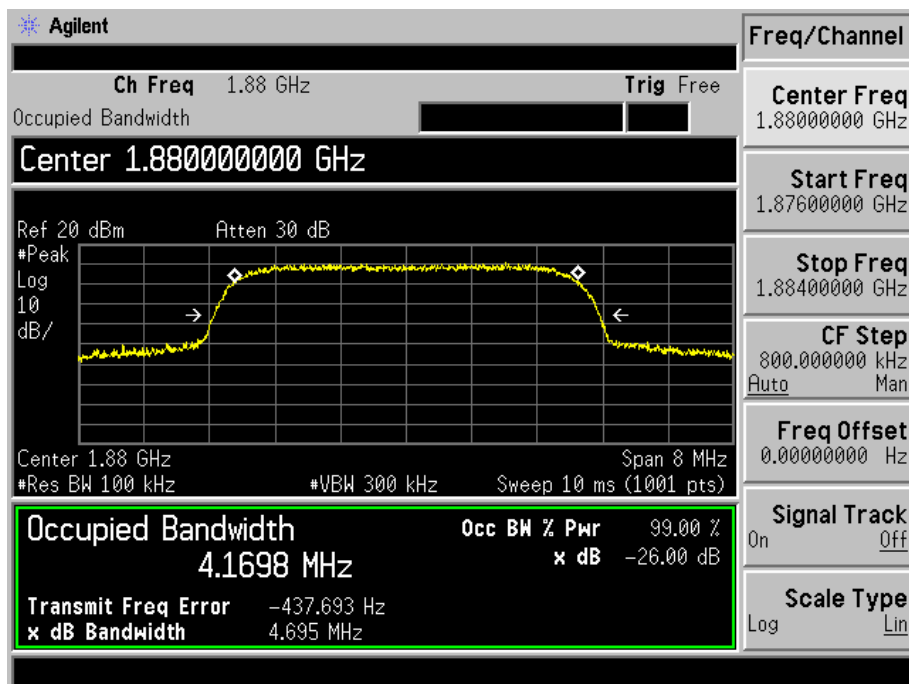

## HSUPA High Channel

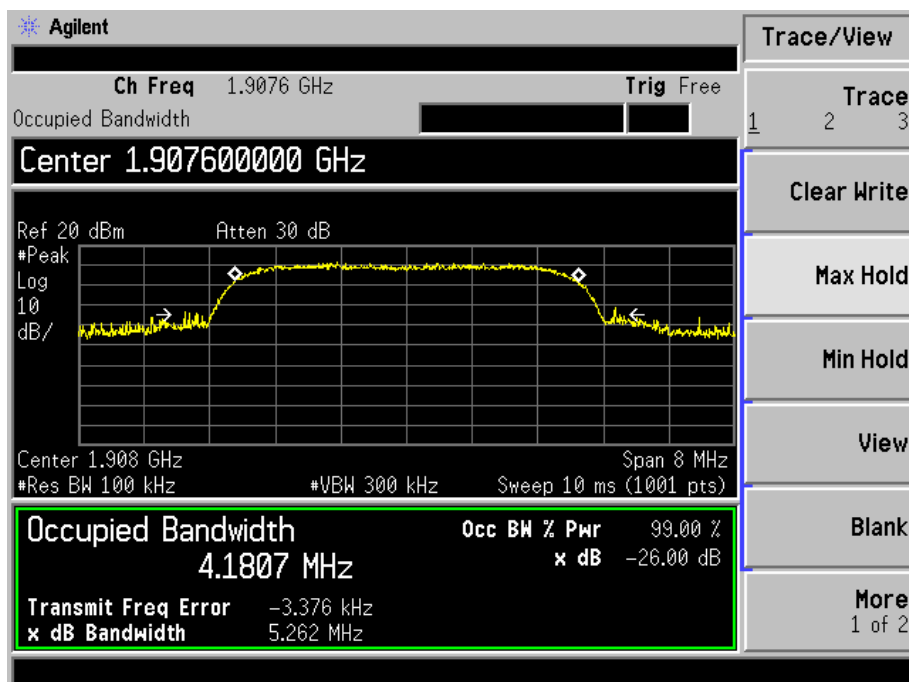

## 7. Out of Band Emissions at Antenna Terminal

### 7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


### 7.2 Test Equipment List and Details

| Manufacturer    | Description                          | Model  | Serial Number | Cal. Date  | Due. Date  |
|-----------------|--------------------------------------|--------|---------------|------------|------------|
| Aglient         | Spectrum Analyzer                    | E4402B | US41192821    | 2015-05-28 | 2016-05-27 |
| Rohde & Schwarz | Spectrum Analyzer                    | FSP    | 836079/035    | 2015-05-28 | 2016-05-27 |
| Rohde & Schwarz | Universal Radio Communication Tester | CMU200 | 112012        | 2015-05-28 | 2016-05-27 |

### 7.3 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

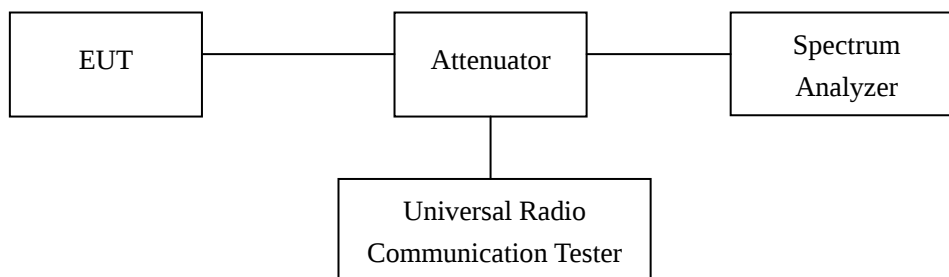


### 7.4 Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 53%       |
| ATM Pressure:      | 1018 mbar |

## 7.5 Summary of Test Results/Plots


Please refer to the following test plots For Cellular Band  
GSM Low Channel 30MHz to 1GHz

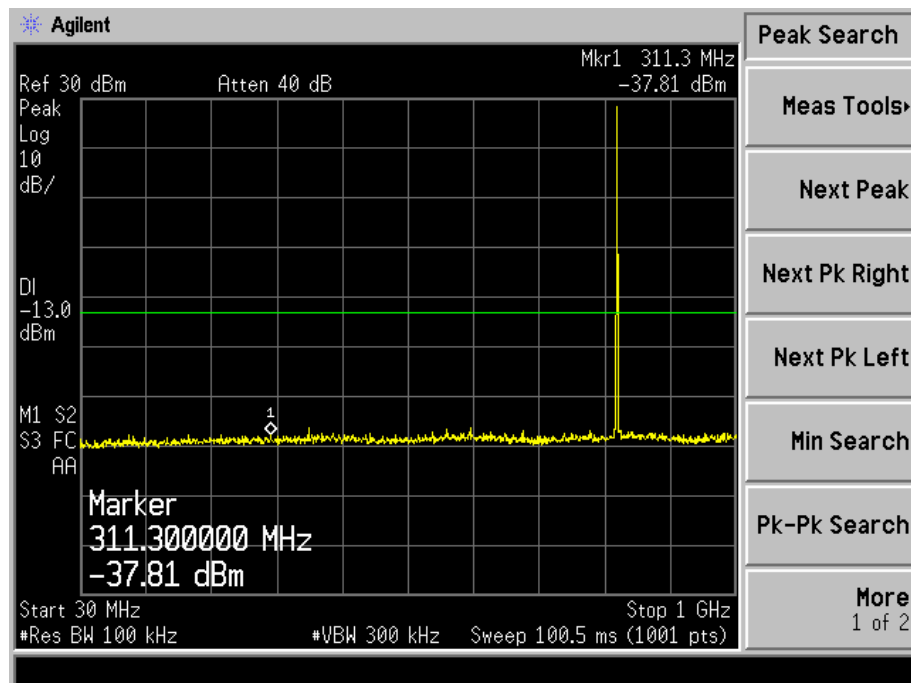


Above 1GHz

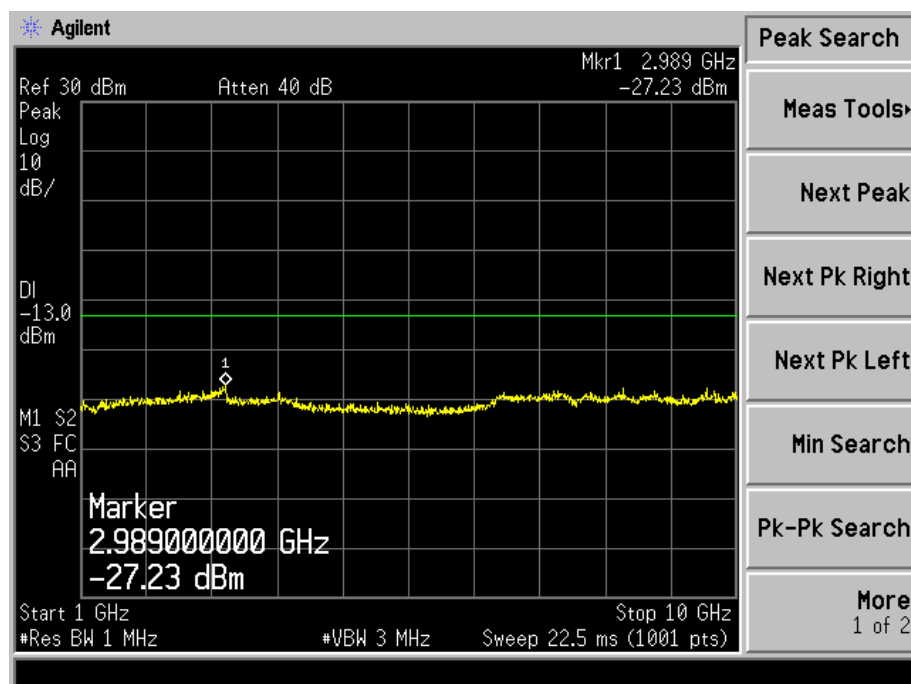


GSM Middle Channel  
30MHz to 1GHz

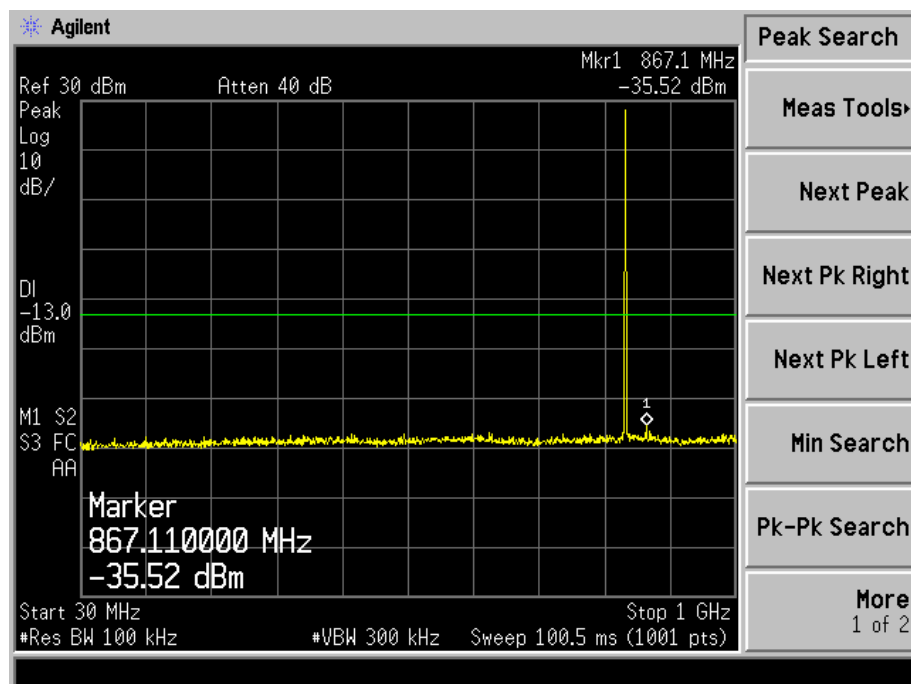


Above 1GHz

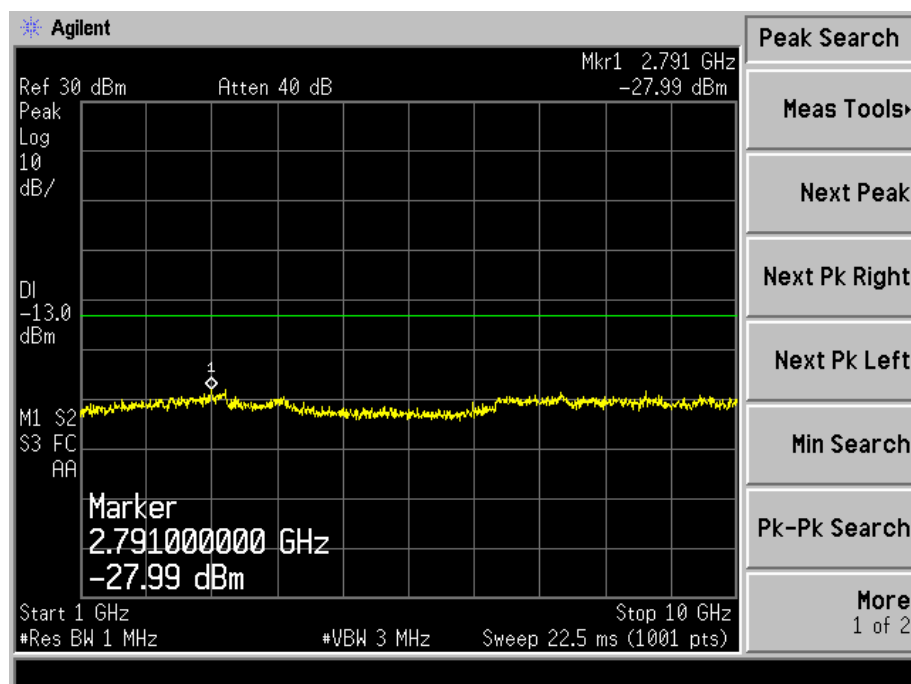


GSM High Channel  
30MHz to 1GHz

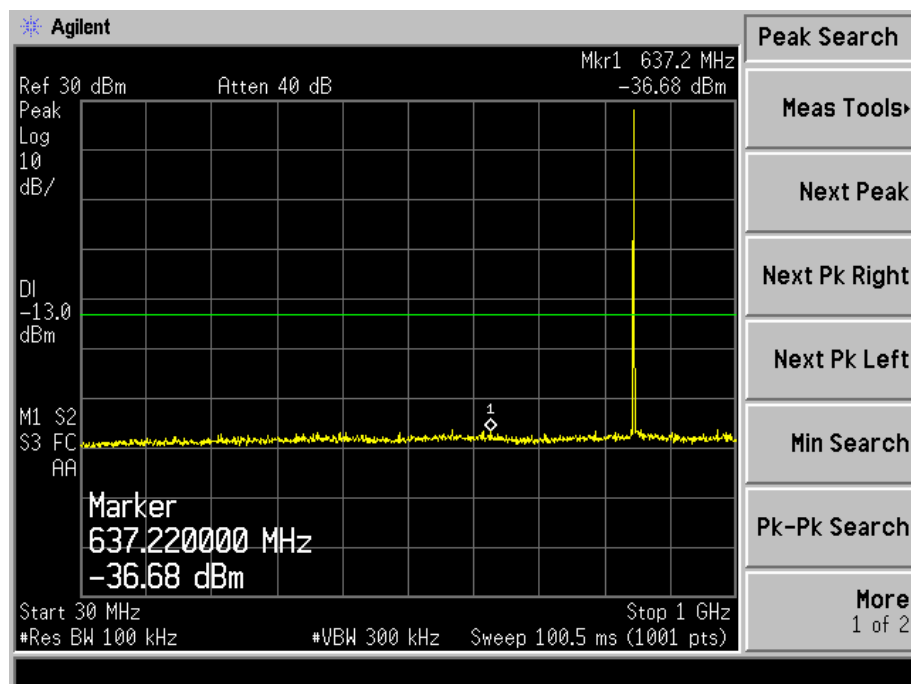


Above 1GHz

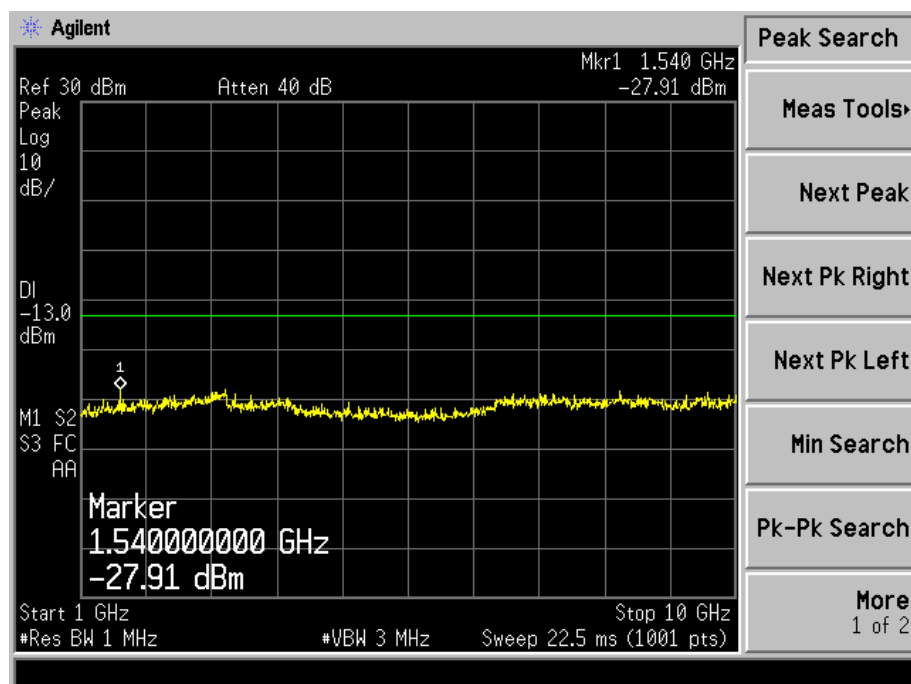


## GSM Low Band Emission

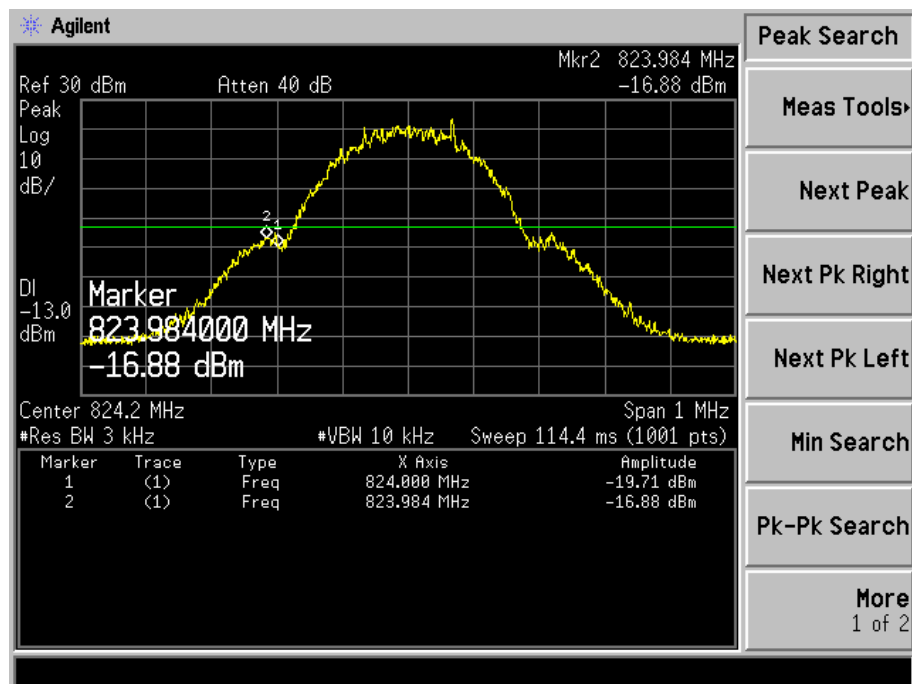


## GSM High Band Emission

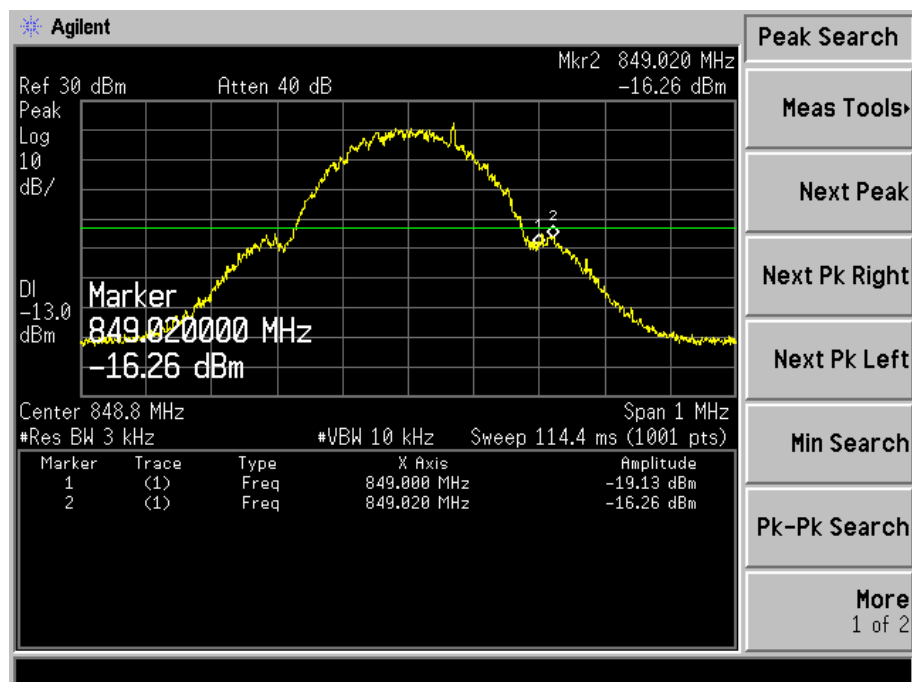


GPRS Low Channel  
30MHz to 1GHz

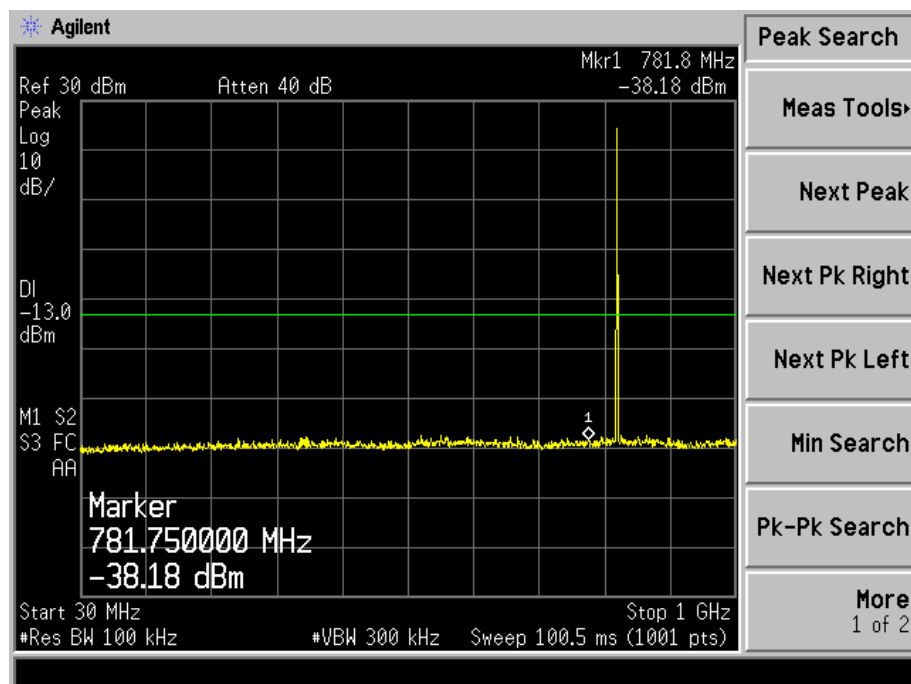


Above 1GHz

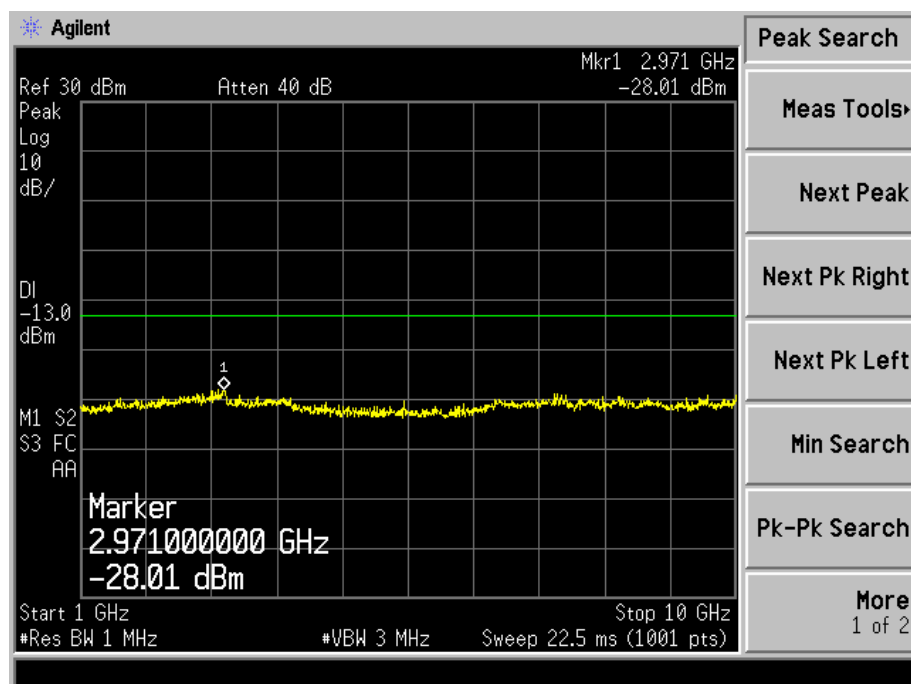


GPRS Middle Channel  
30MHz to 1GHz

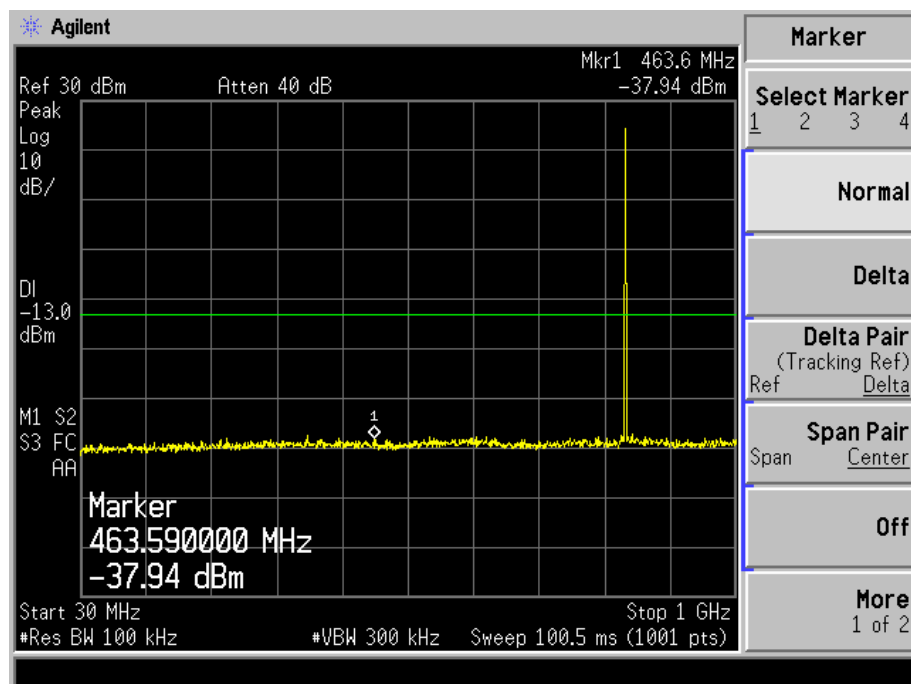


Above 1GHz

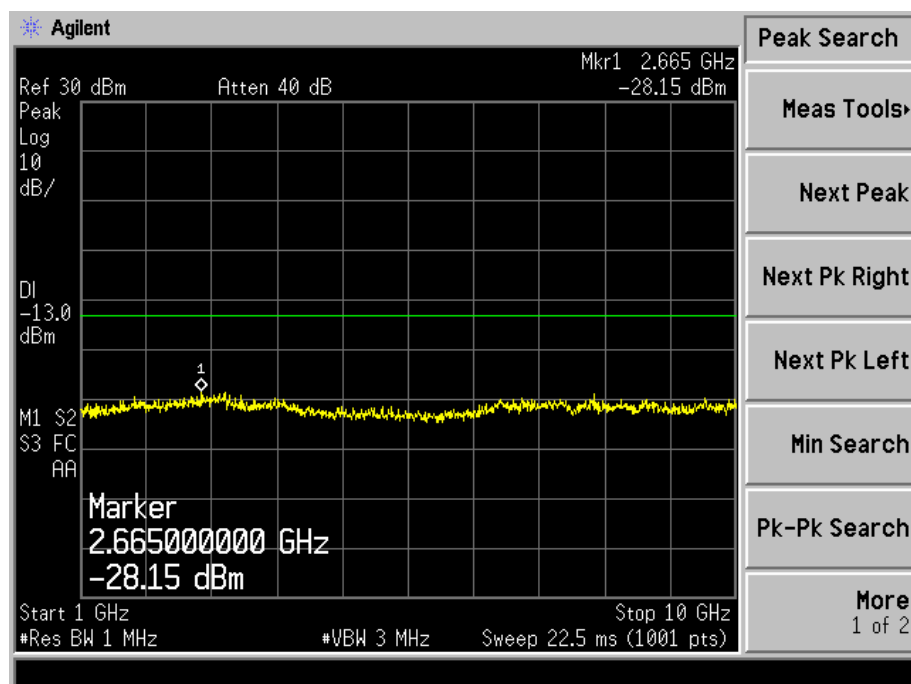


GPRS High Channel  
30MHz to 1GHz

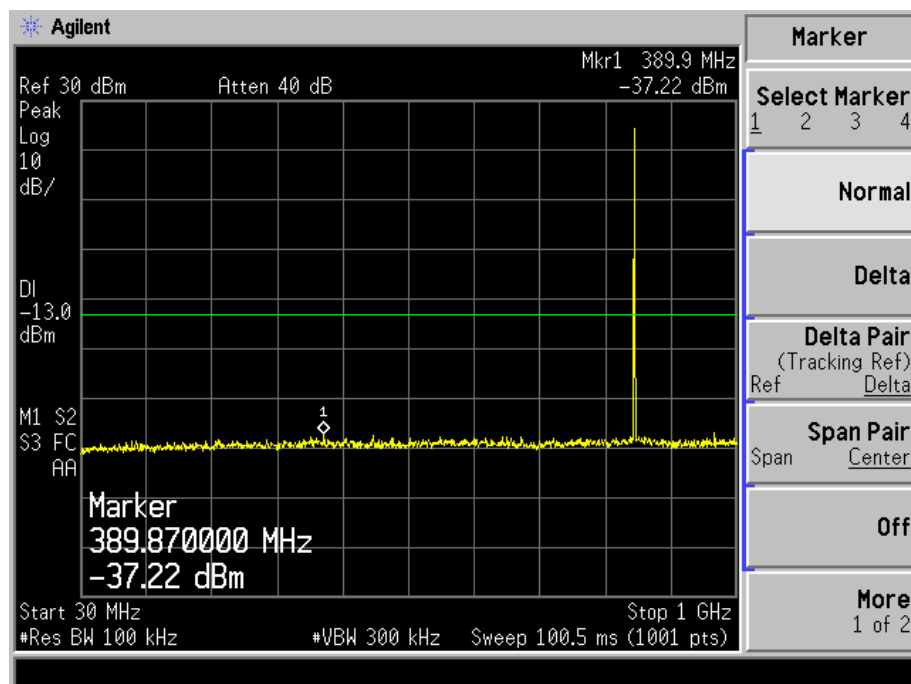


Above 1GHz

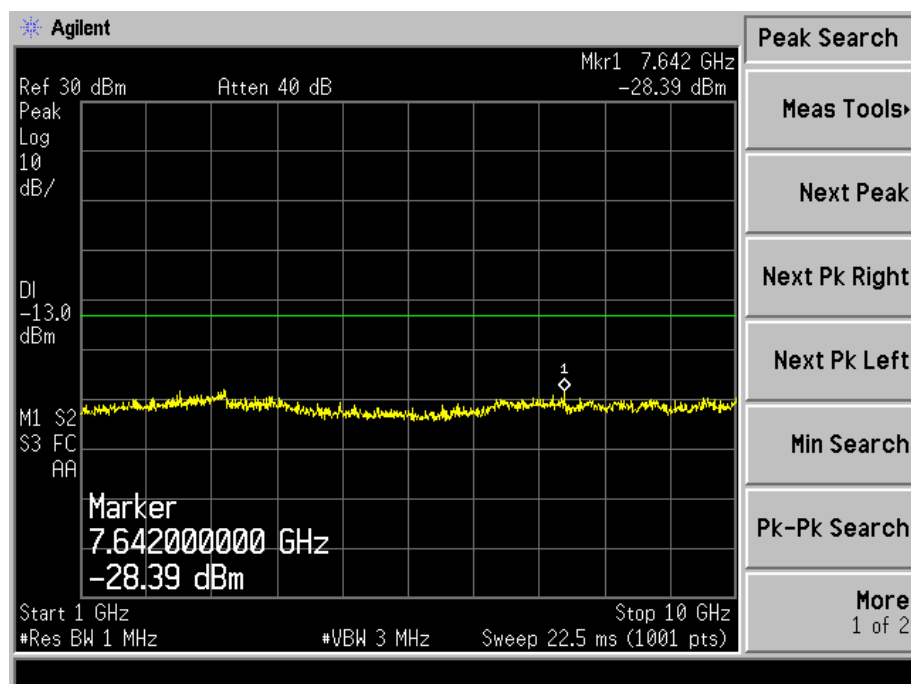


## GPRS Low Band Emission

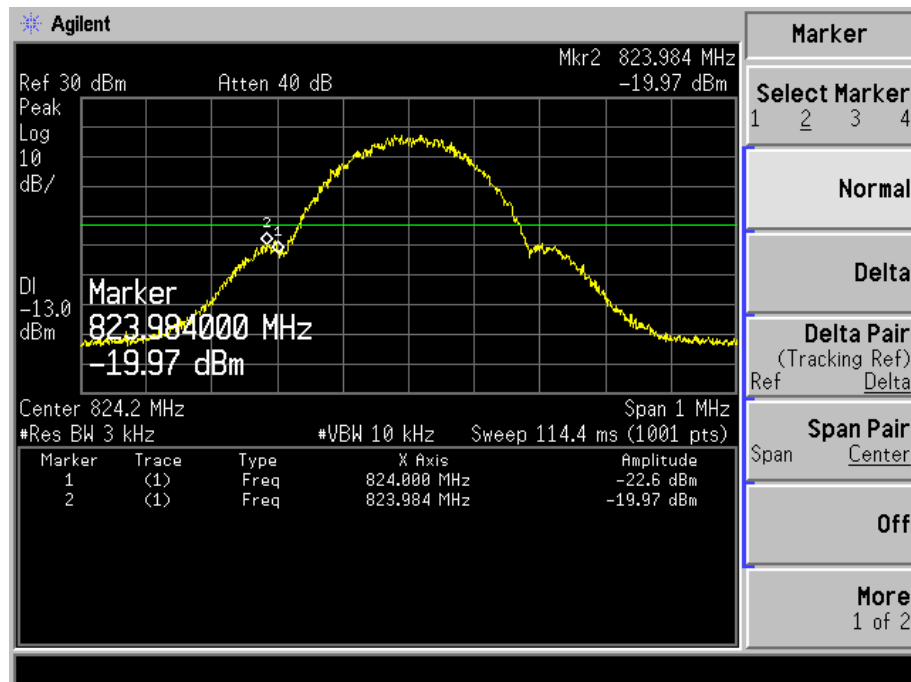


## GPRS High Band Emission

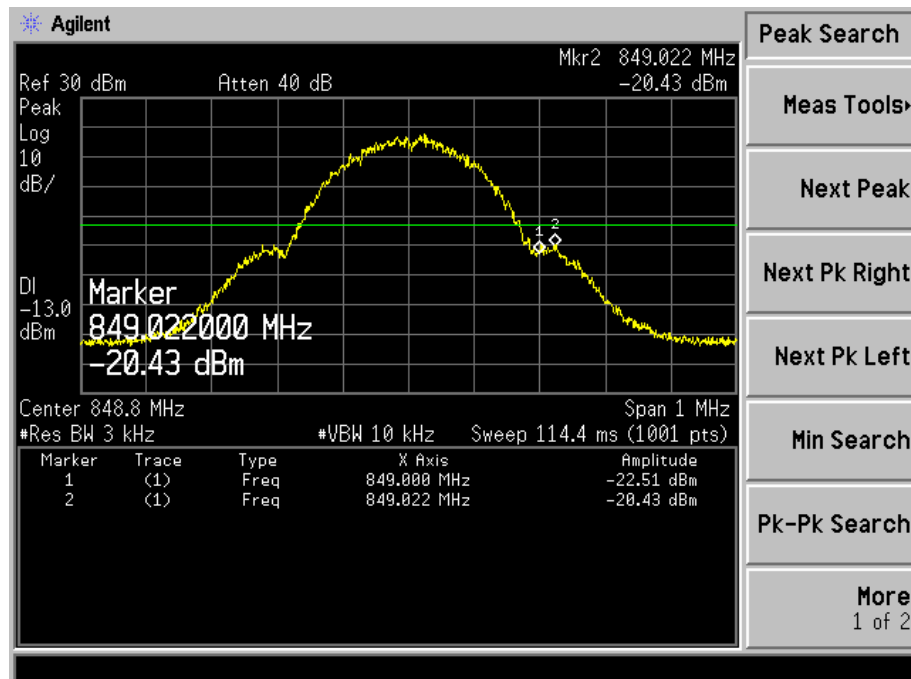


EDGE Low Channel  
30MHz to 1GHz

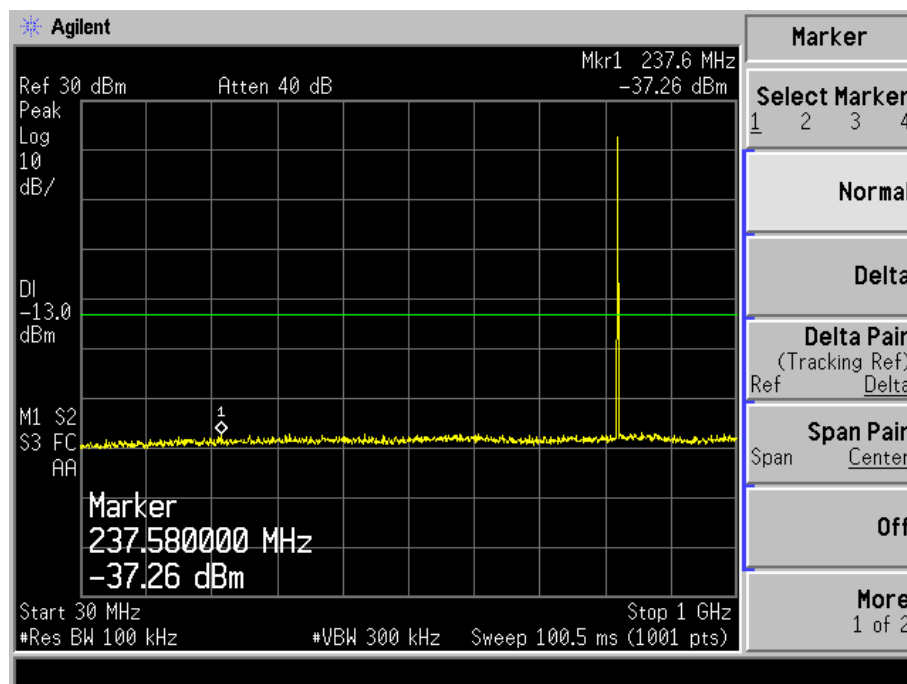


Above 1GHz

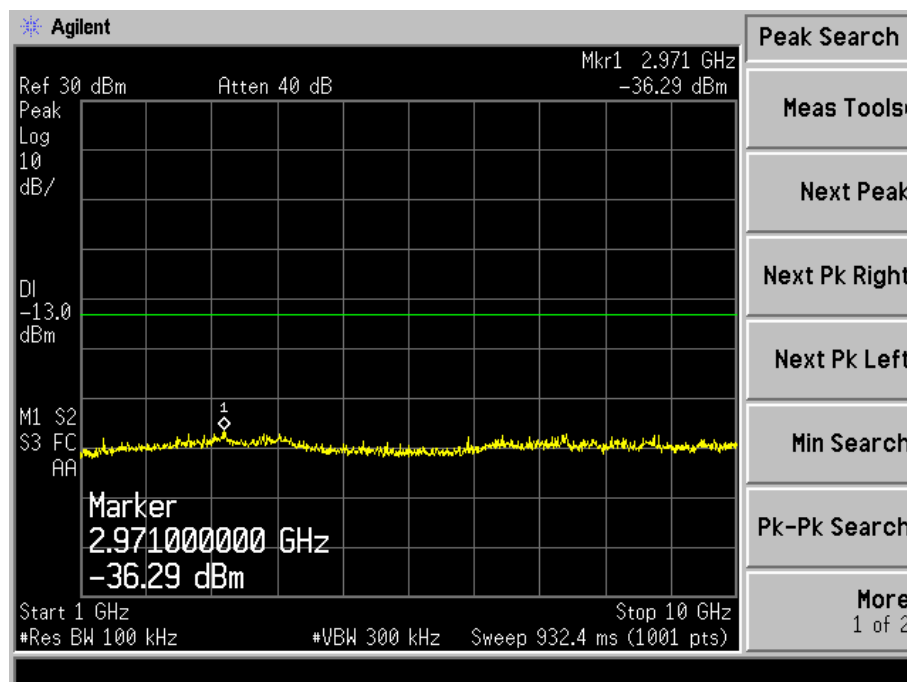


EDGE Middle Channel  
30MHz to 1GHz

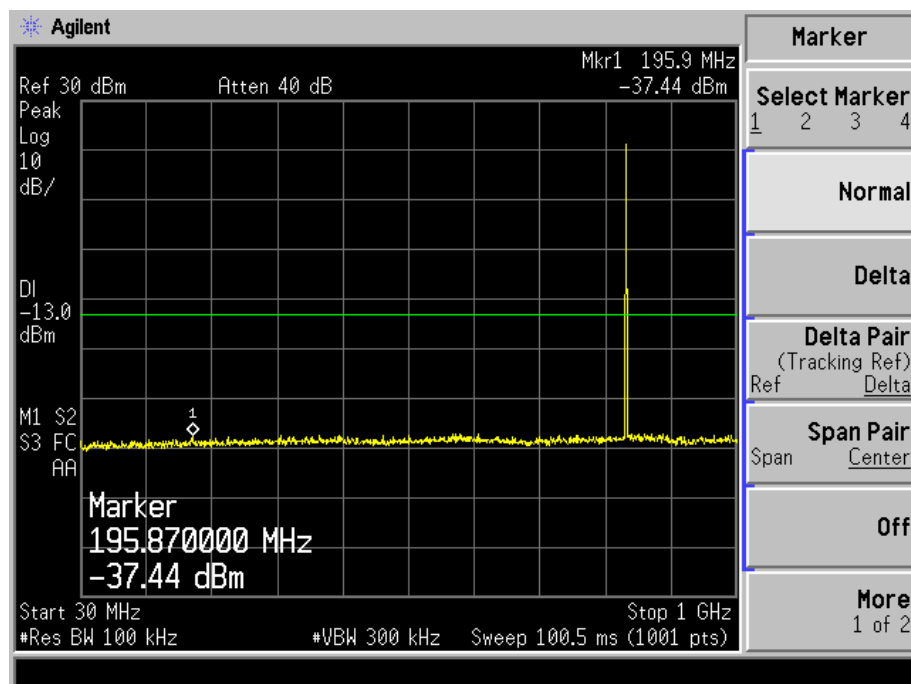


Above 1GHz

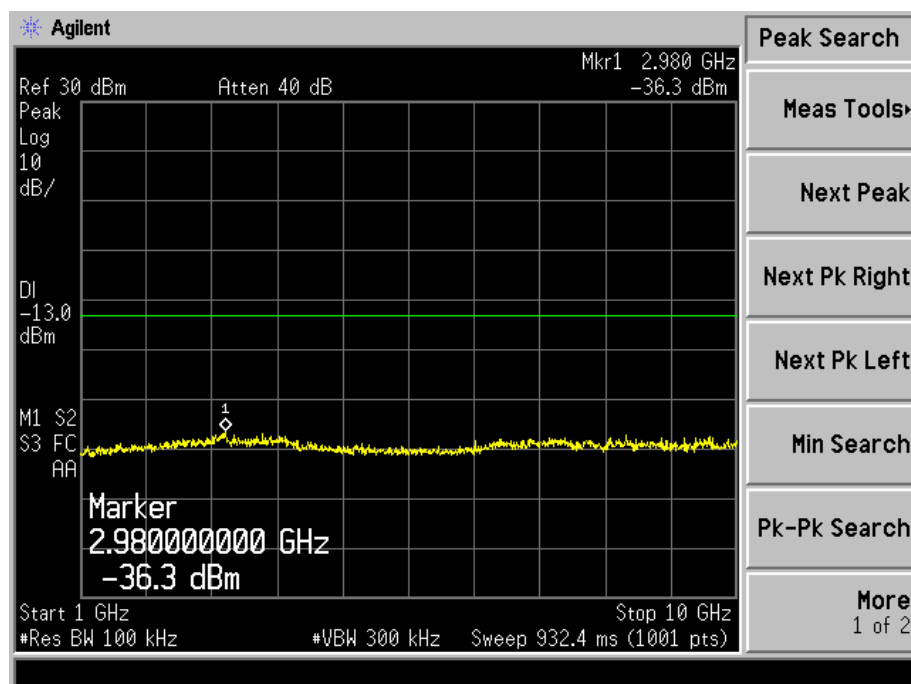


EDGE High Channel  
30MHz to 1GHz

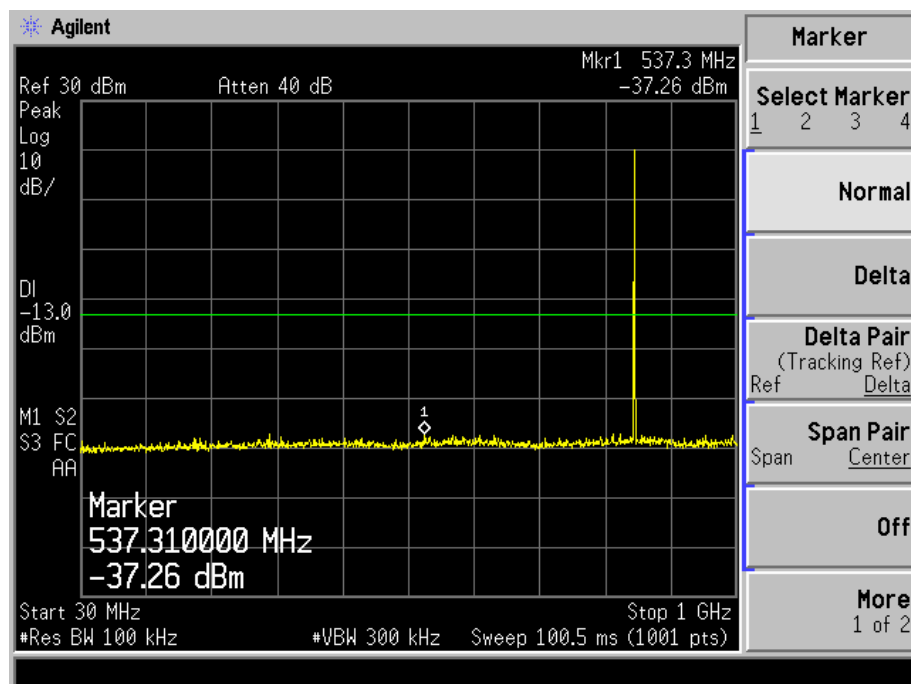


Above 1GHz

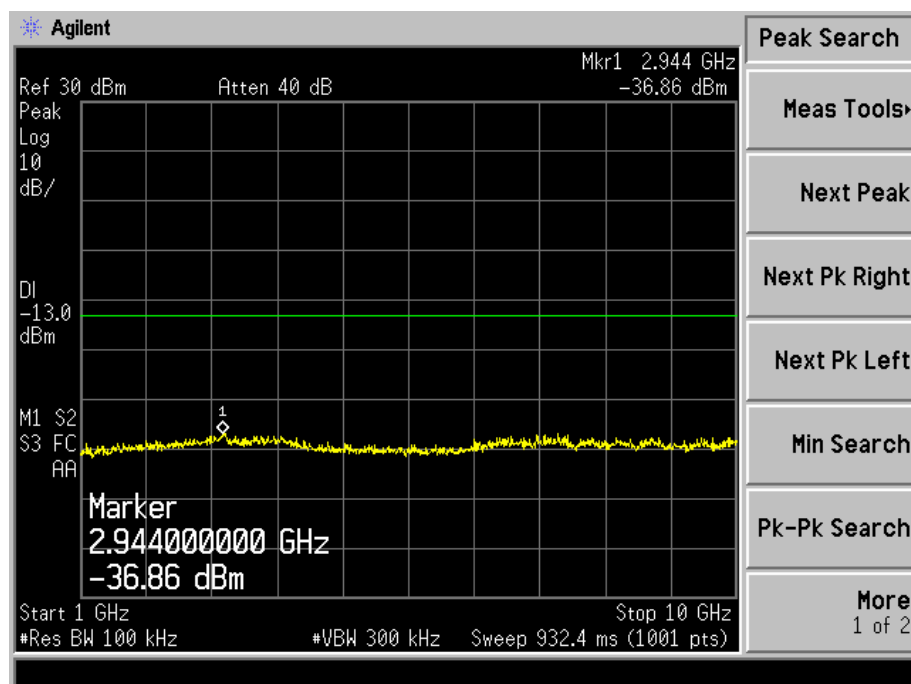


## EDGE Low Band Emission

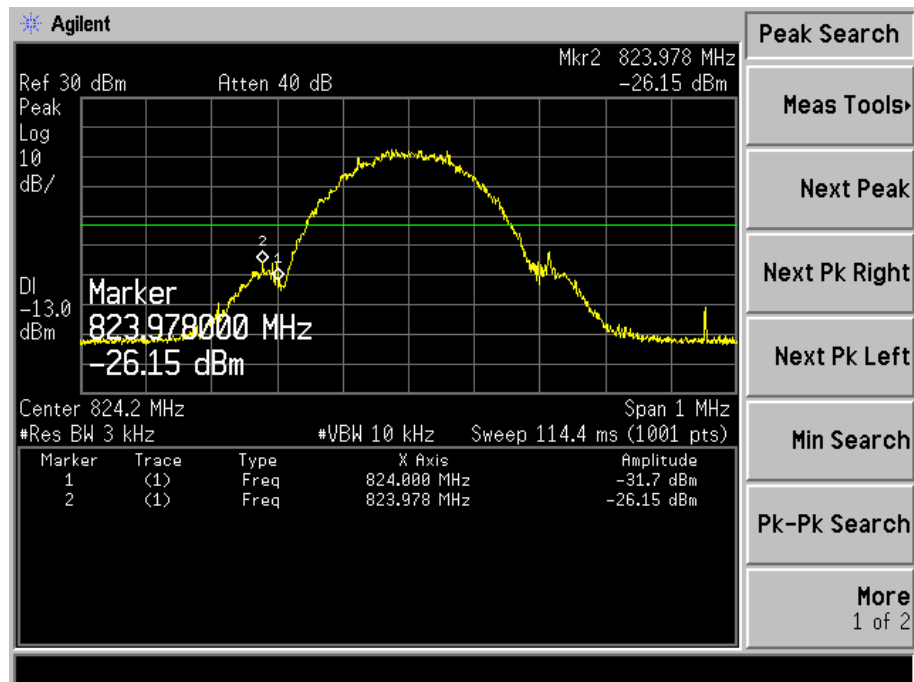


## EDGE High Band Emission

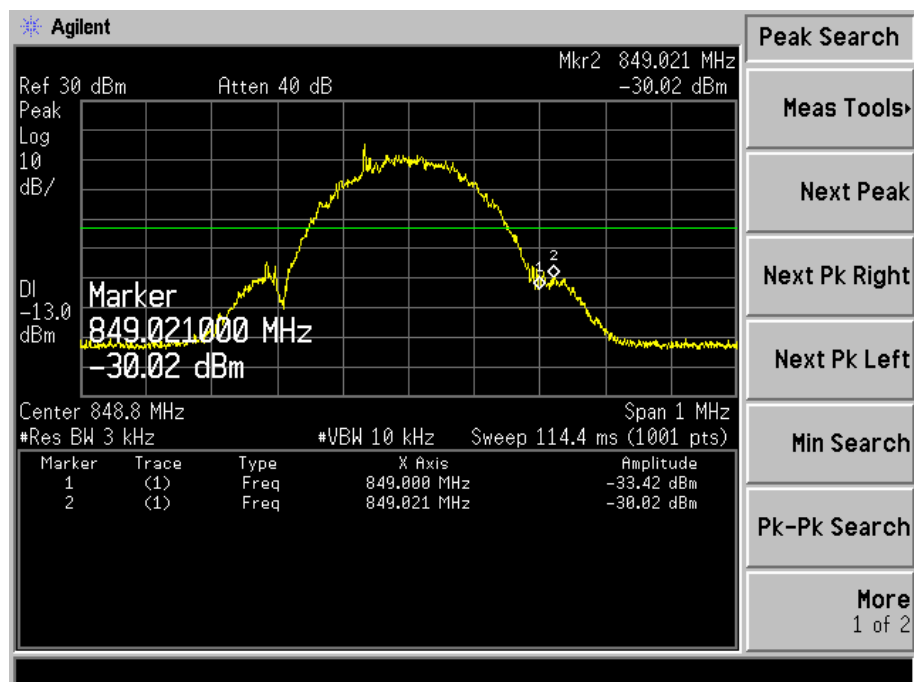


For PCS Band  
GSM Low Channel  
30MHz to 1GHz

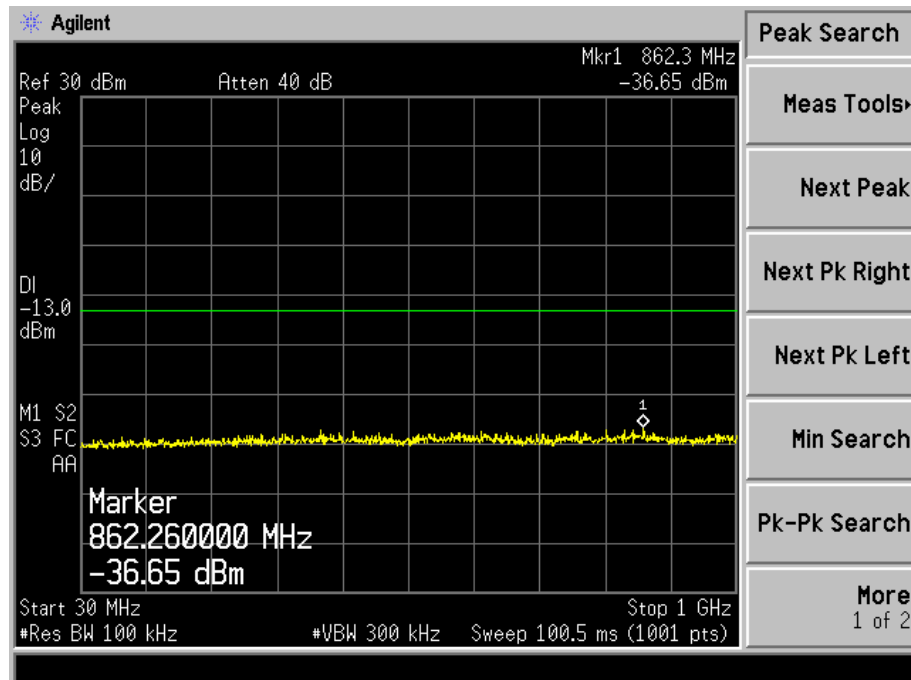


Above 1GHz

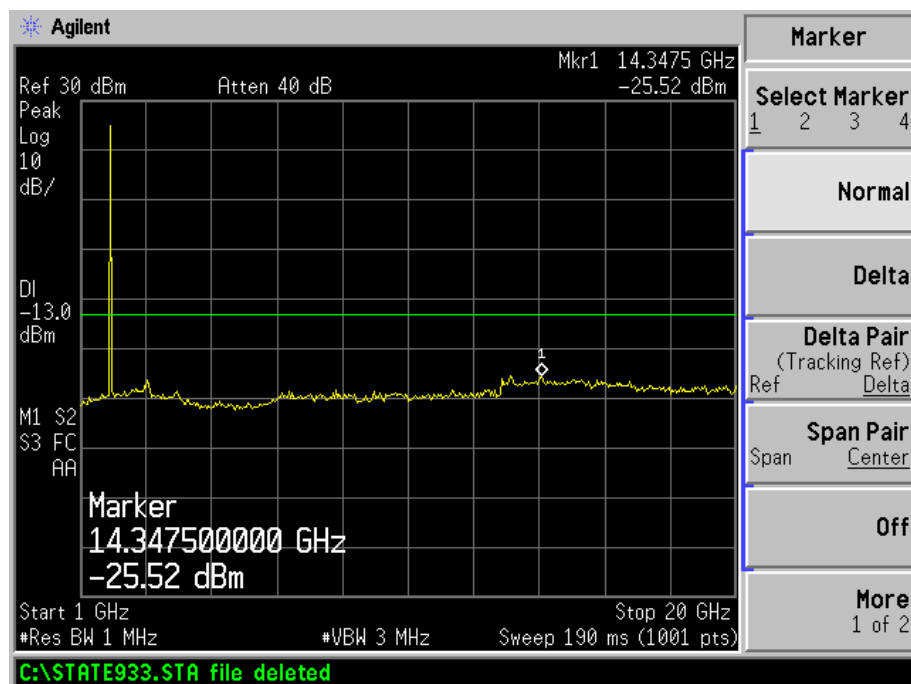


GSM Middle Channel  
30MHz to 1GHz

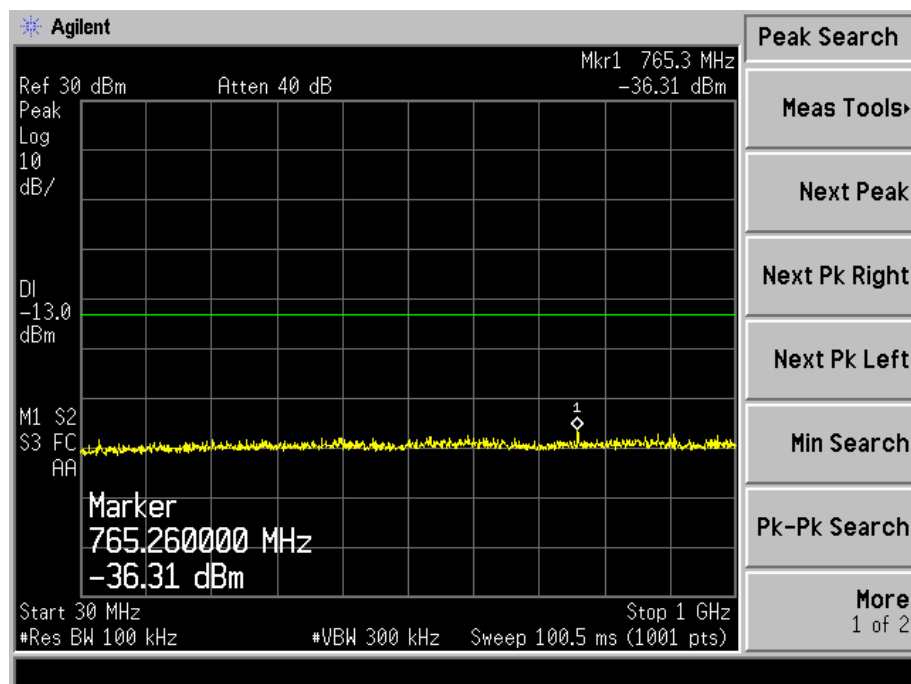


Above 1GHz

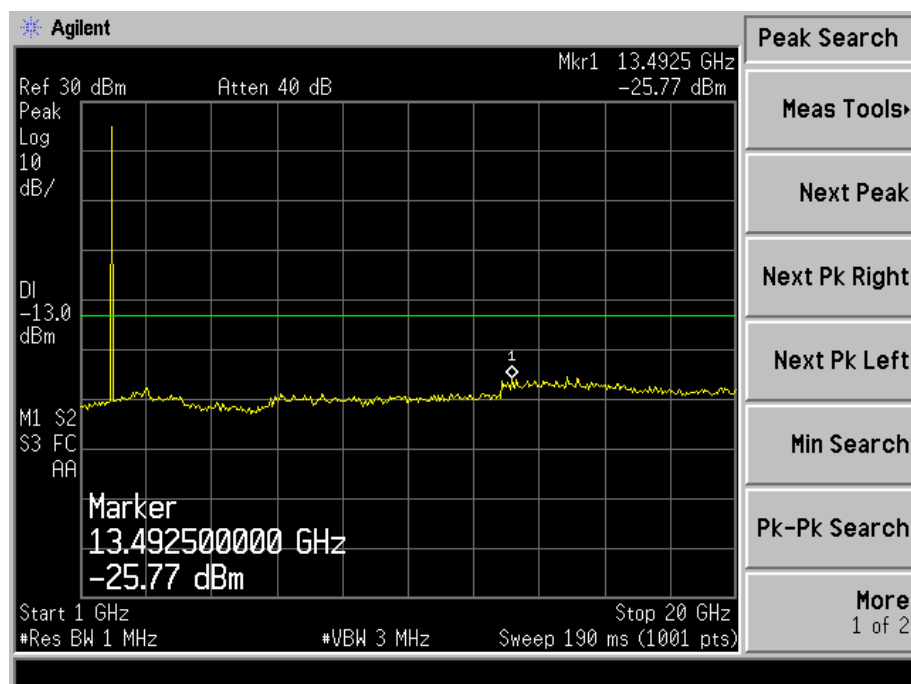


GSM High Channel  
30MHz to 1GHz

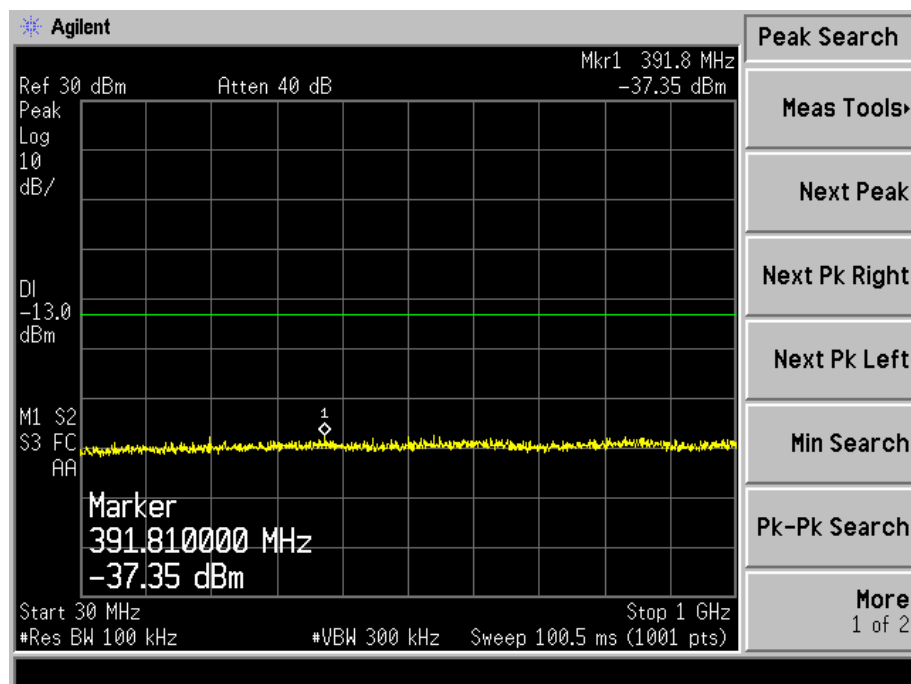


Above 1GHz

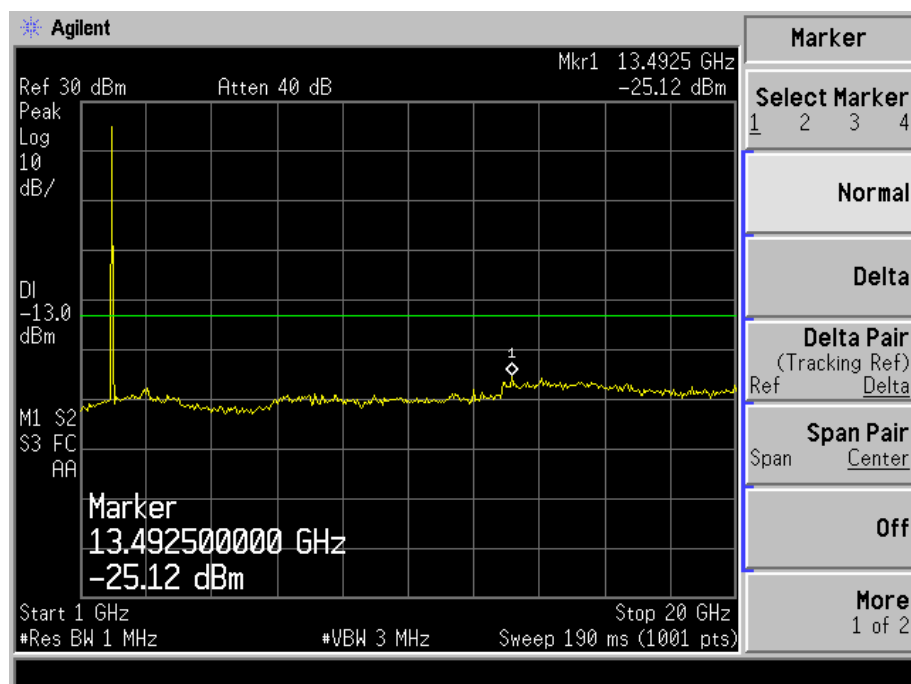


## GSM Low Band Emission

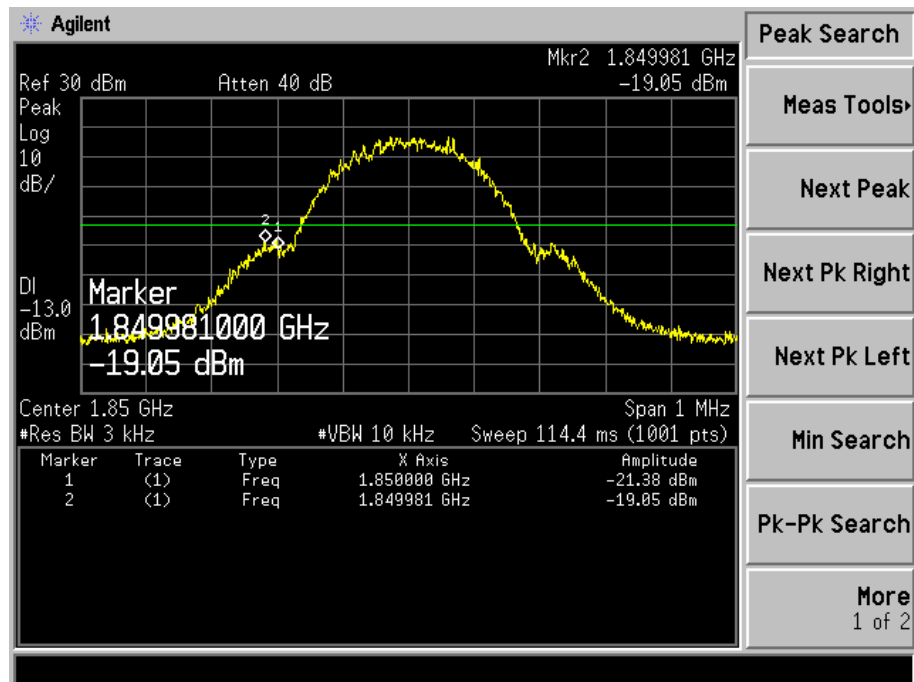


## GSM High Band Emission

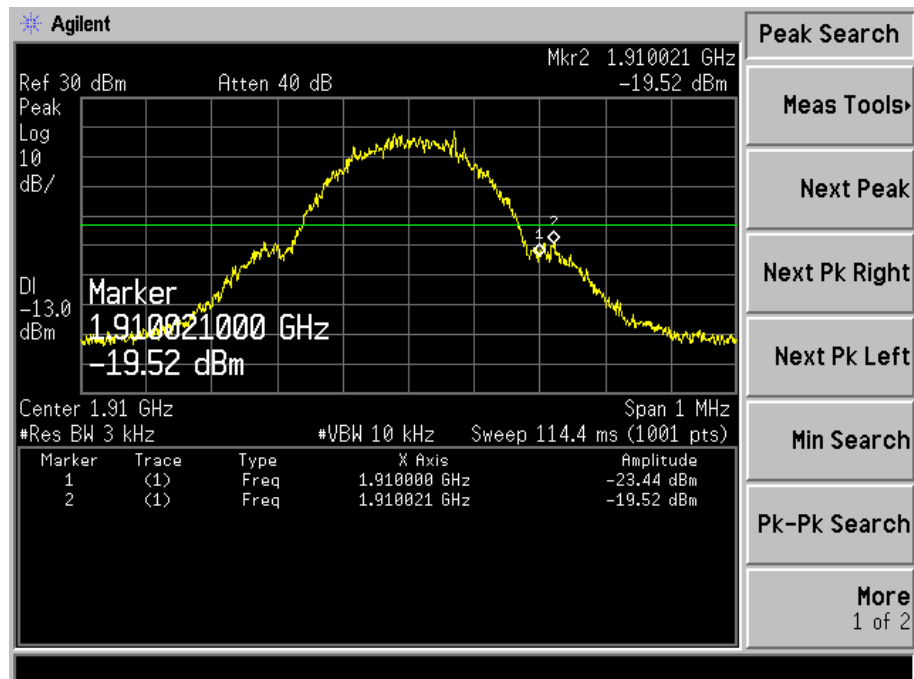


GPRS Low Channel  
30MHz to 1GHz

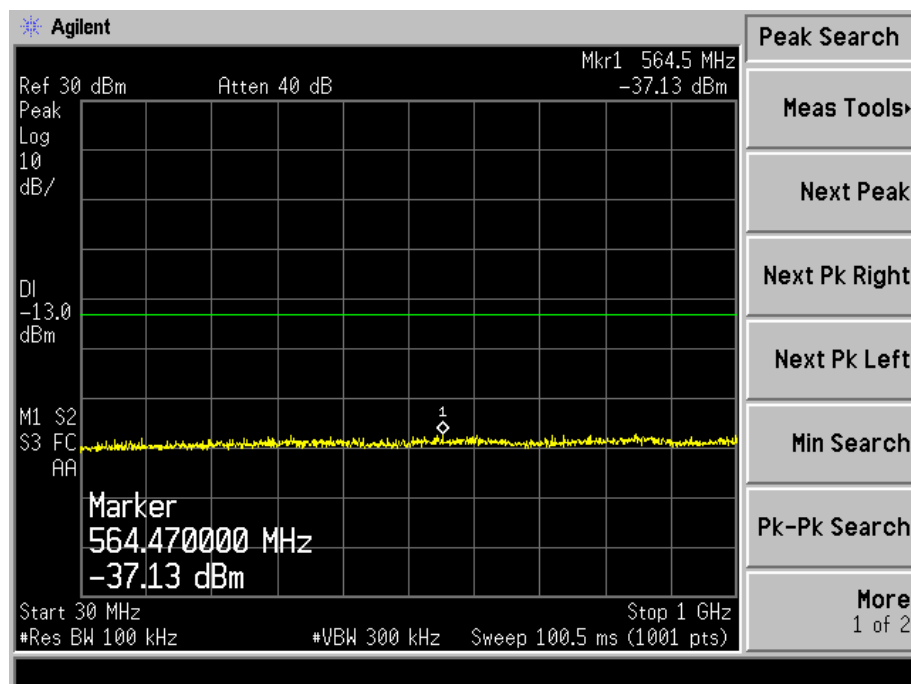


Above 1GHz

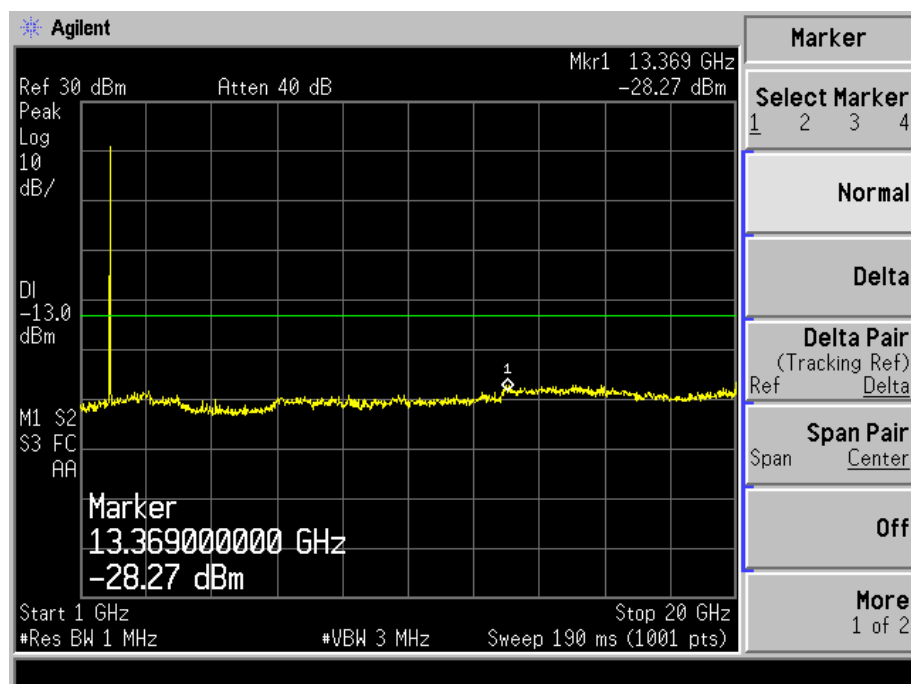


GPRS Middle Channel  
30MHz to 1GHz

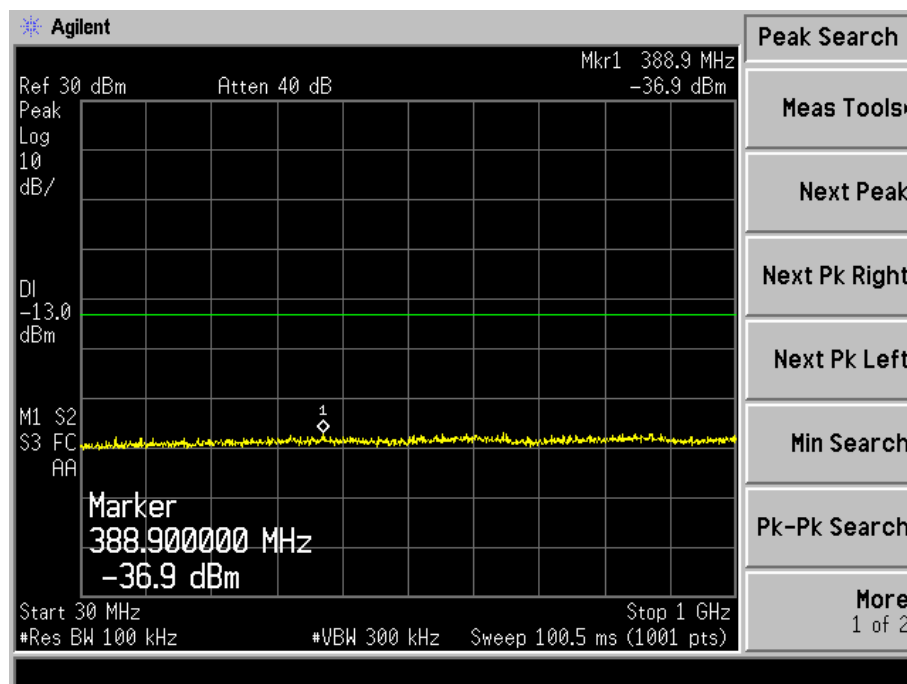


Above 1GH

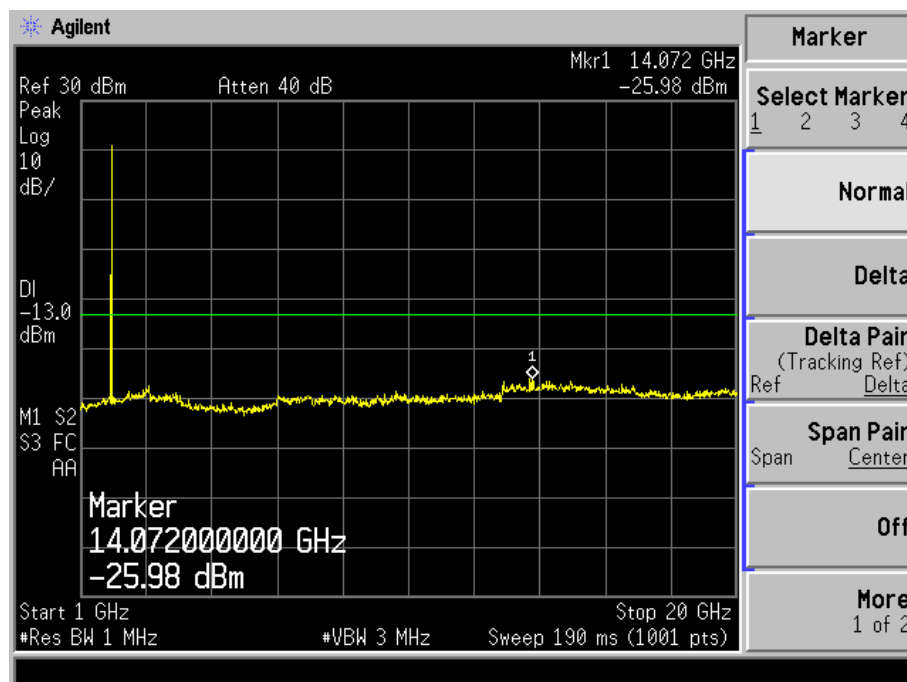


GPRS High Channel  
30MHz to 1GHz

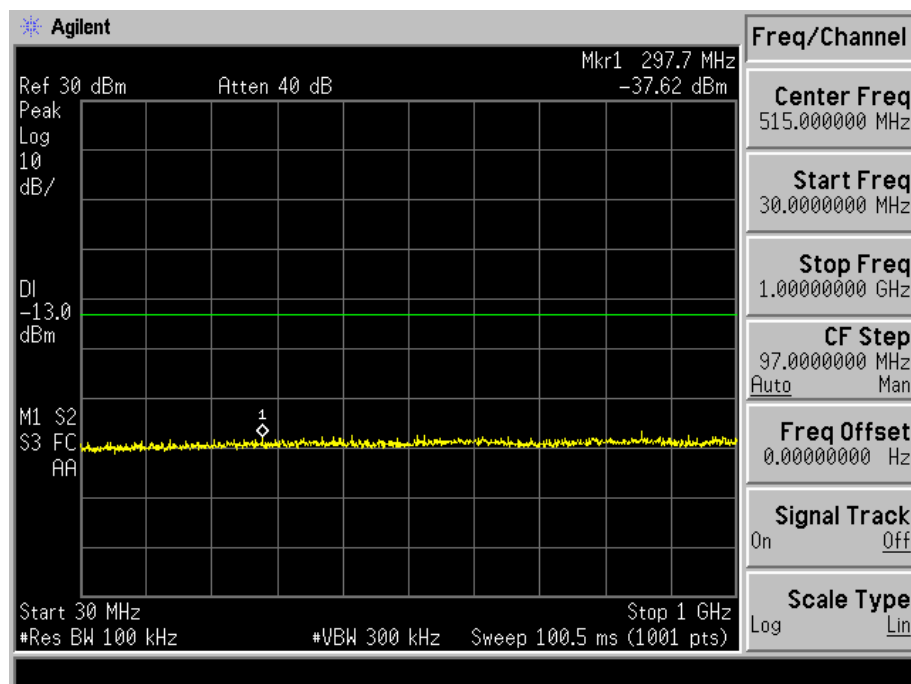


Above 1GHz

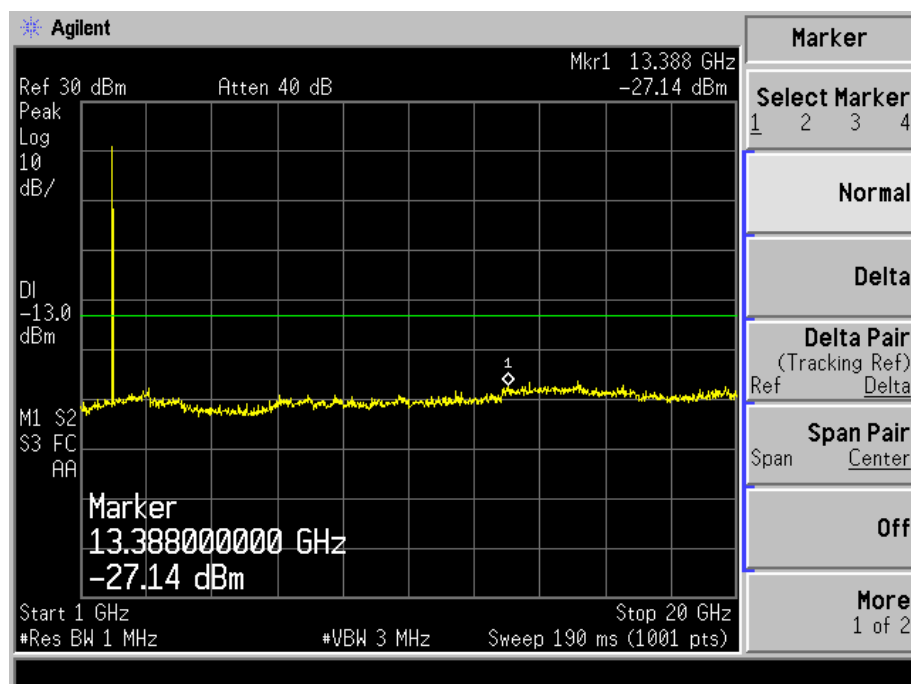


## GPRS Low Band Emission

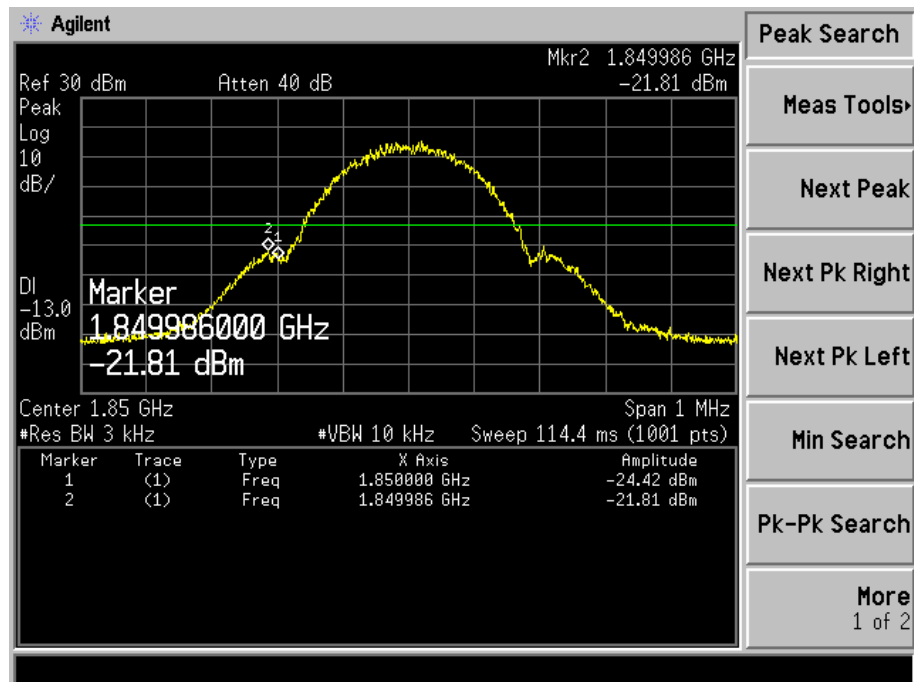


## GPRS High Band Emission

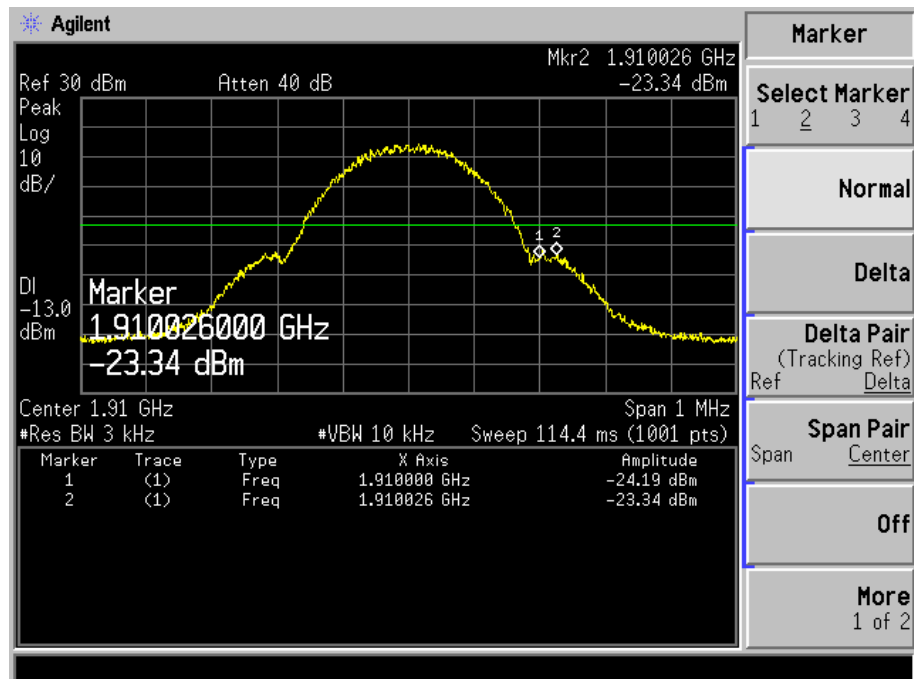


EDGE Low Channel  
30MHz to 1GHz

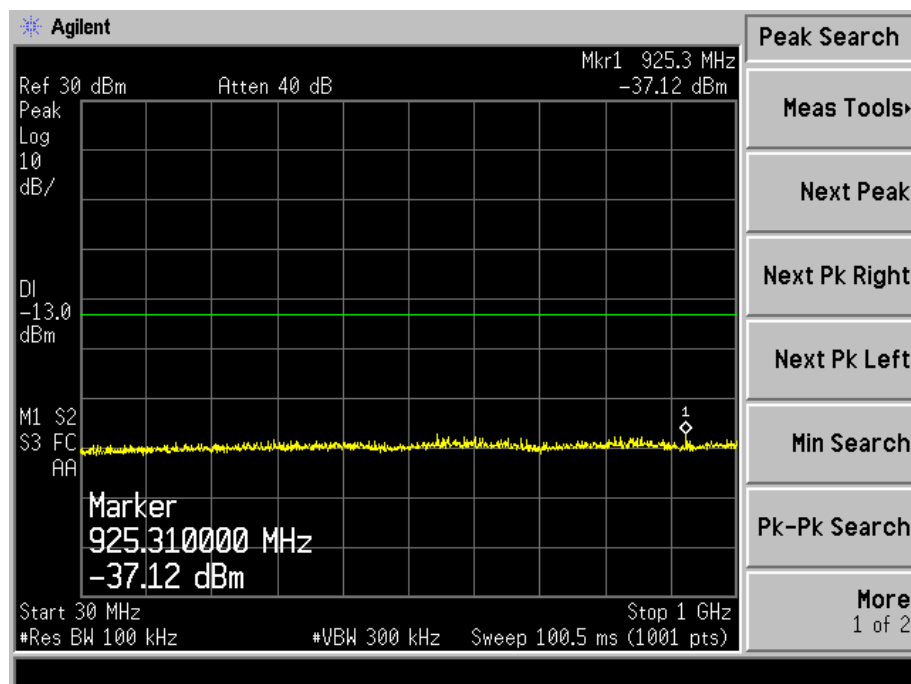


Above 1GHz

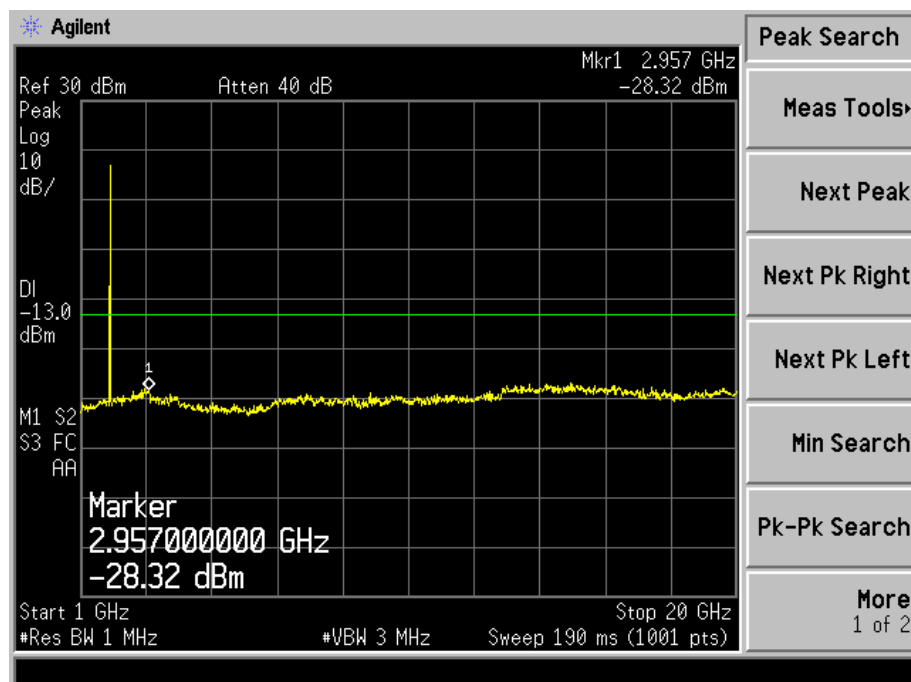


EDGE Middle Channel  
30MHz to 1GHz

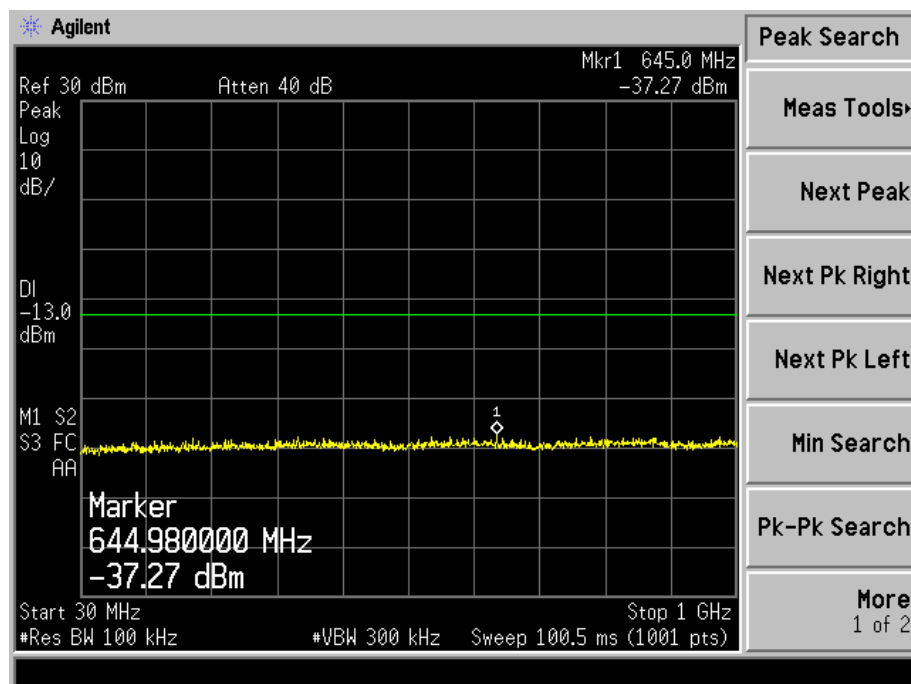


Above 1GHz

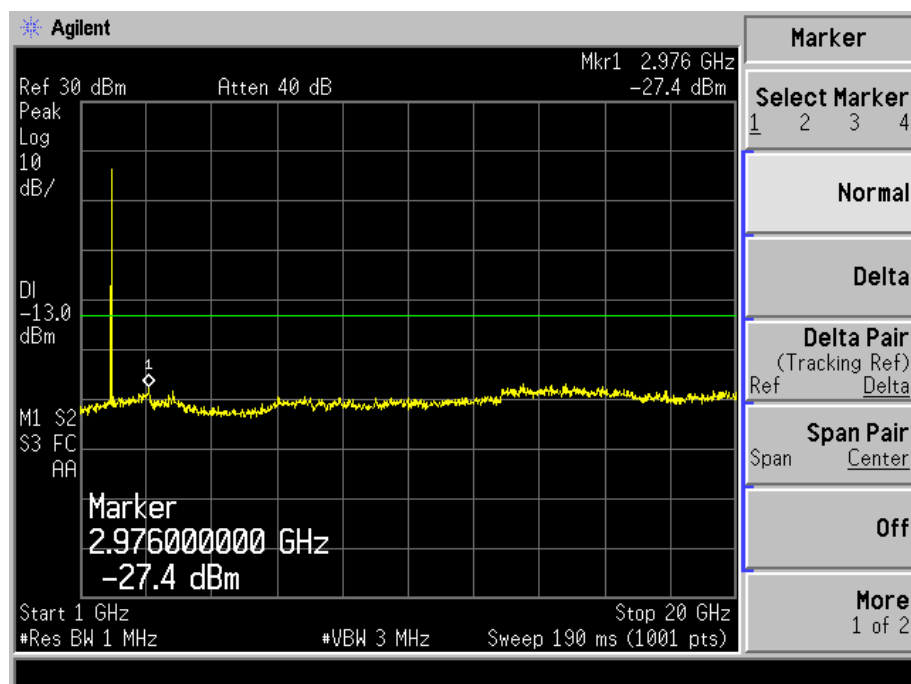


EDGE High Channel  
30MHz to 1GHz

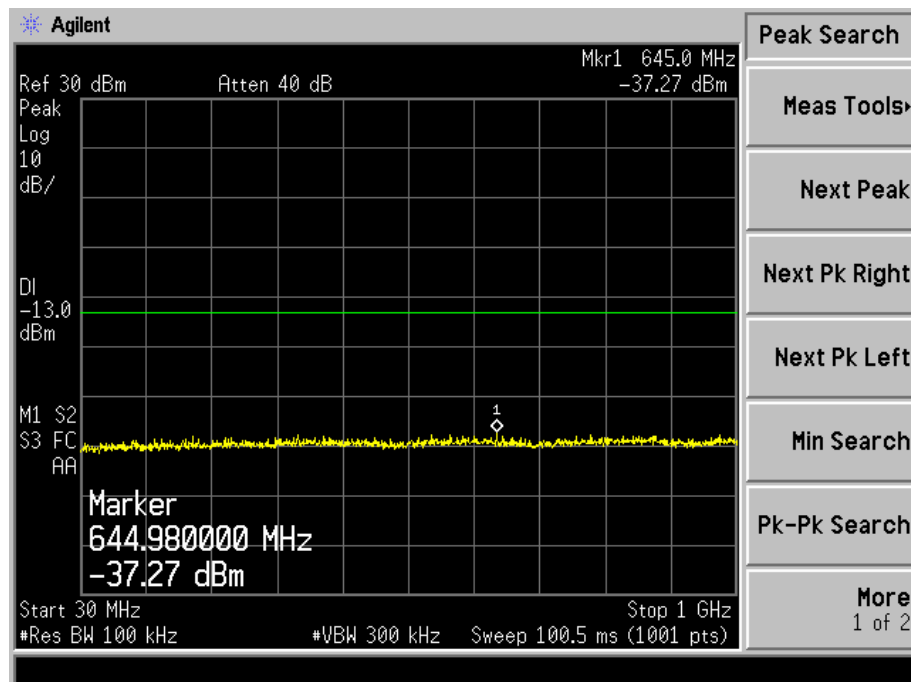


Above 1GHz

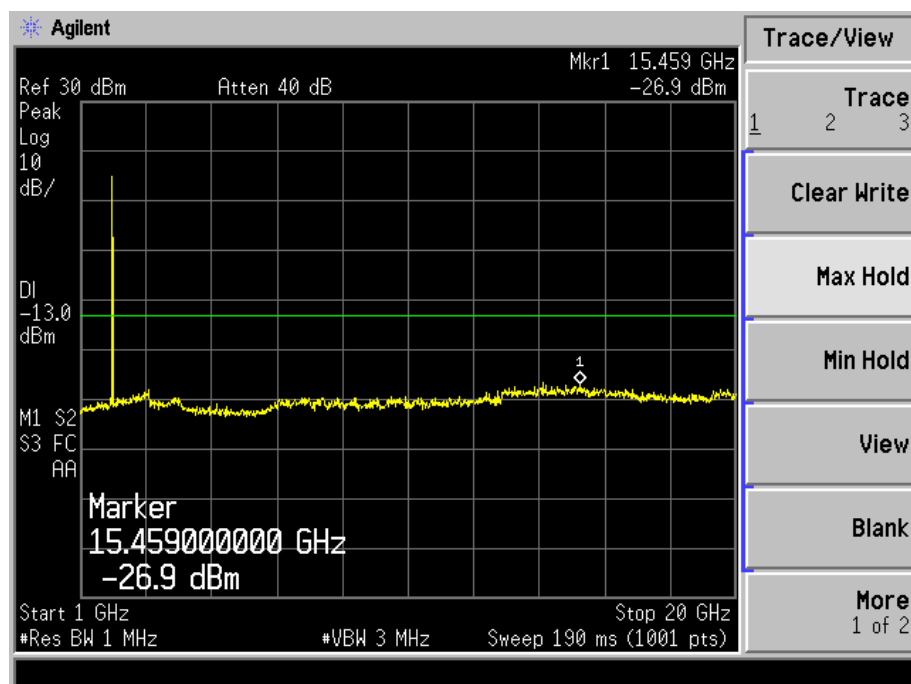

## EDGE Low Band Emission

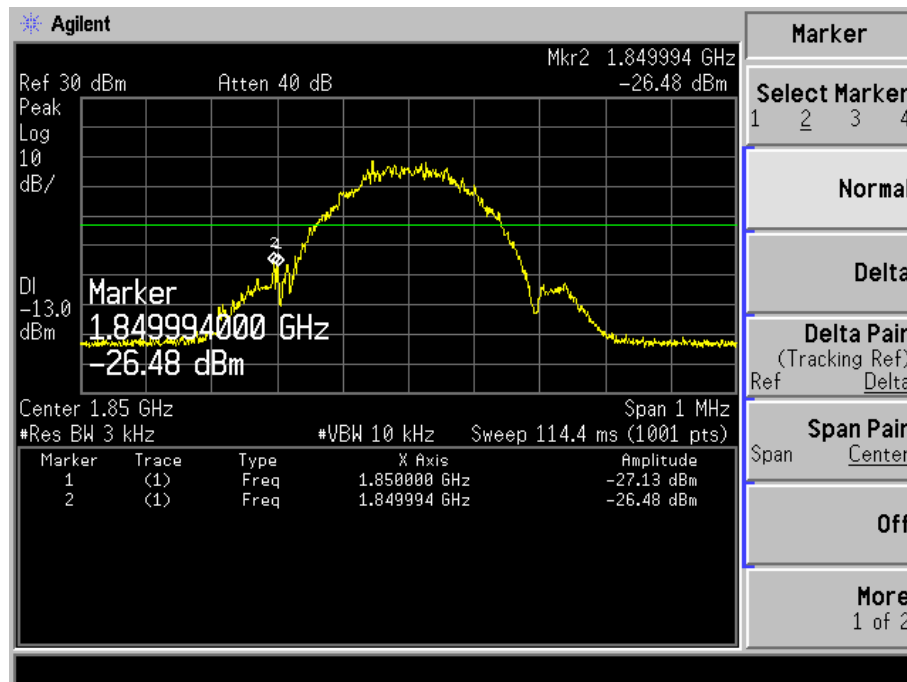


## EDGE High Band Emission

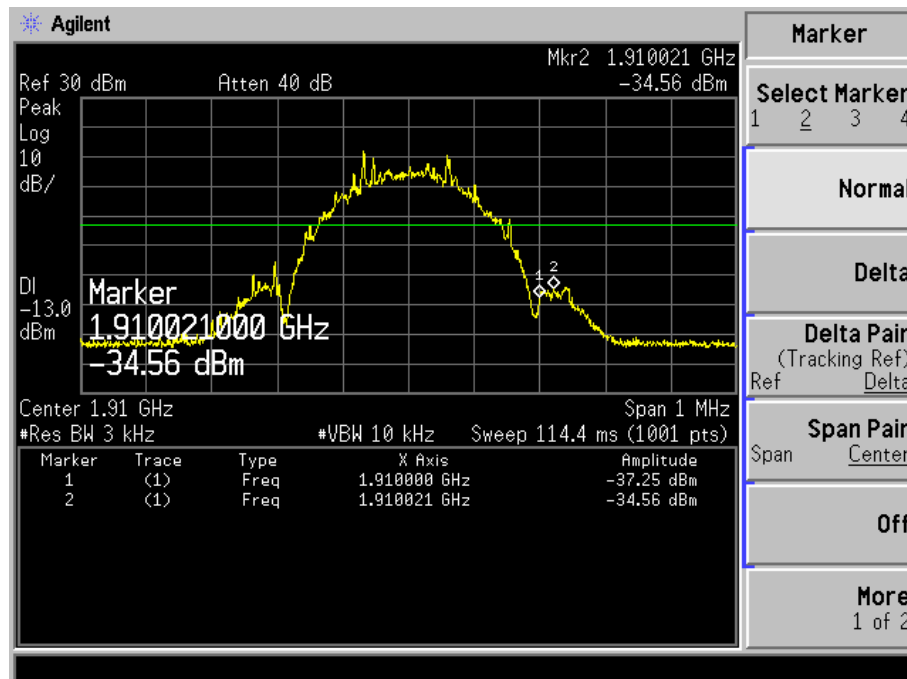


**For Band V**

WCDMA Low Channel


30MHz to 1GHz

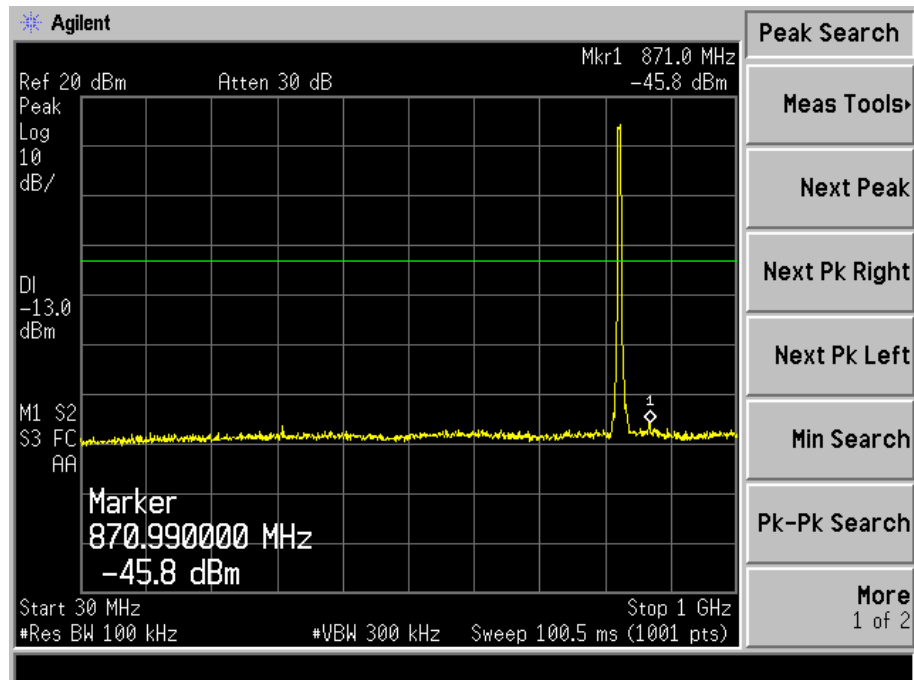


Above 1GHz

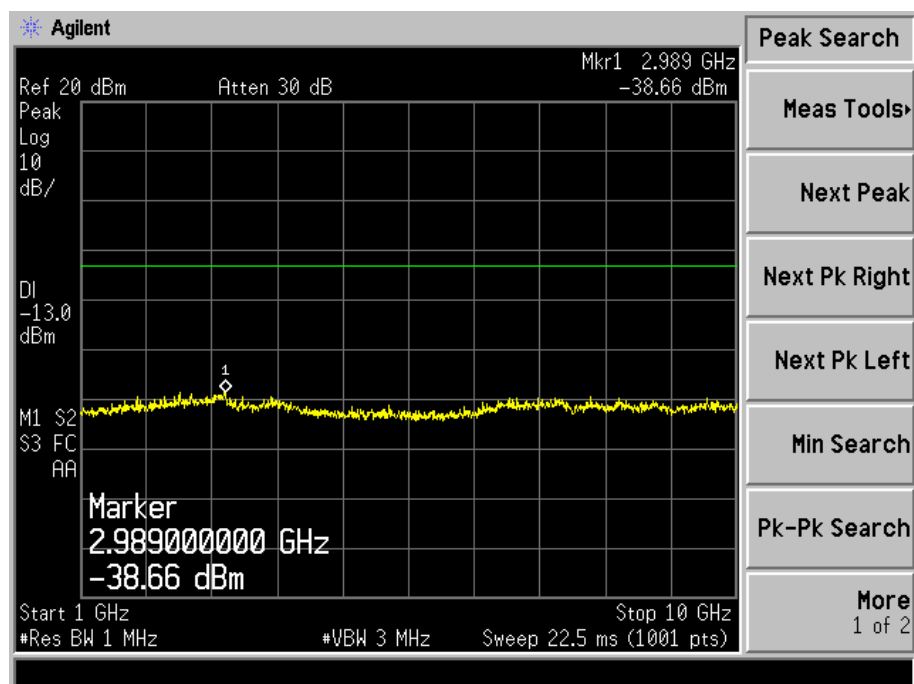


WCDMA Middle Channel  
30MHz to 1GHz

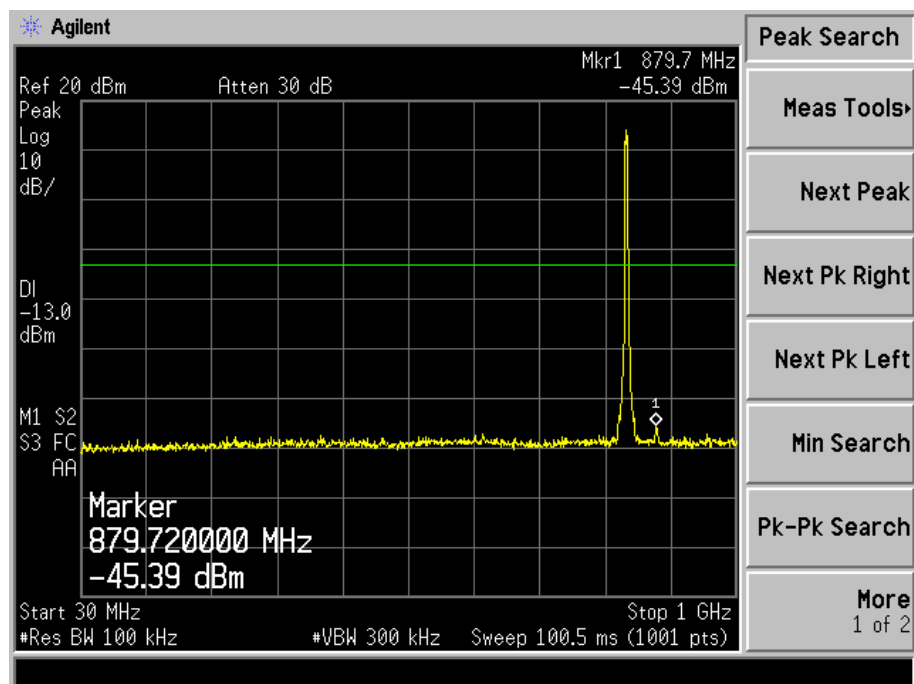


Above 1GHz

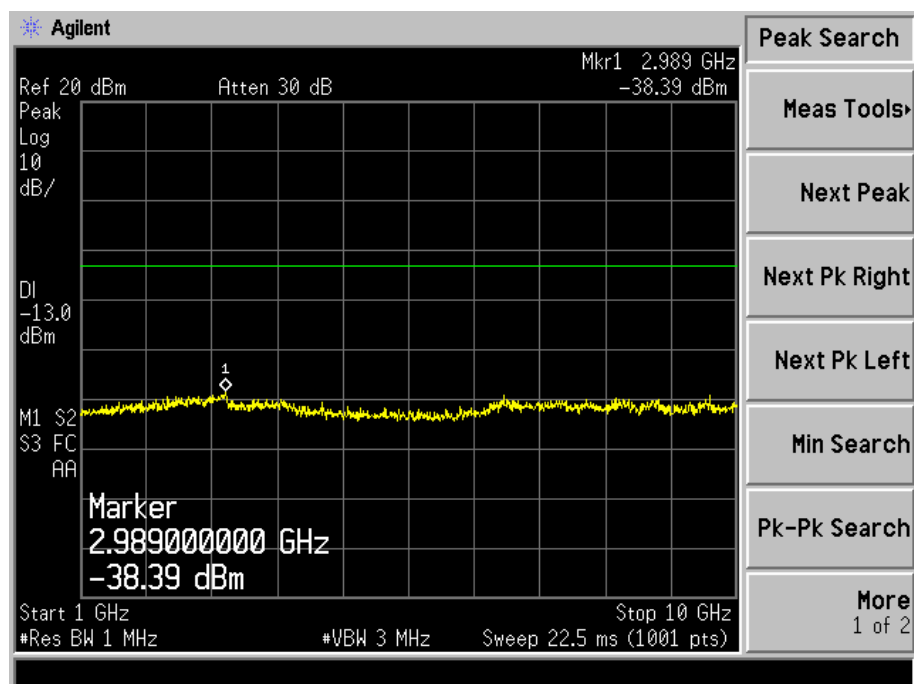


WCDMA High Channel  
30MHz to 1GHz

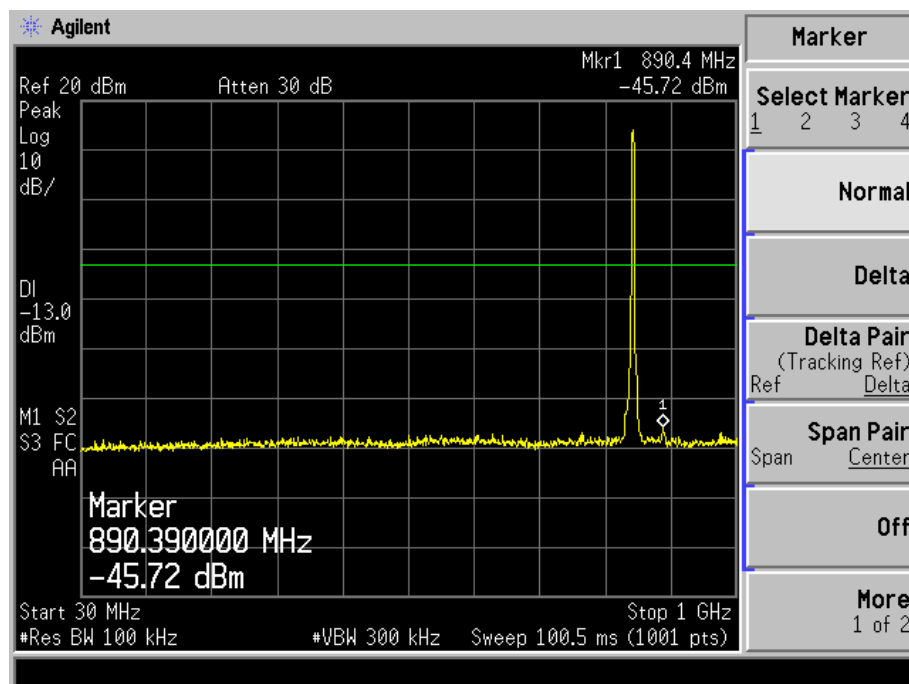


Above 1GHz

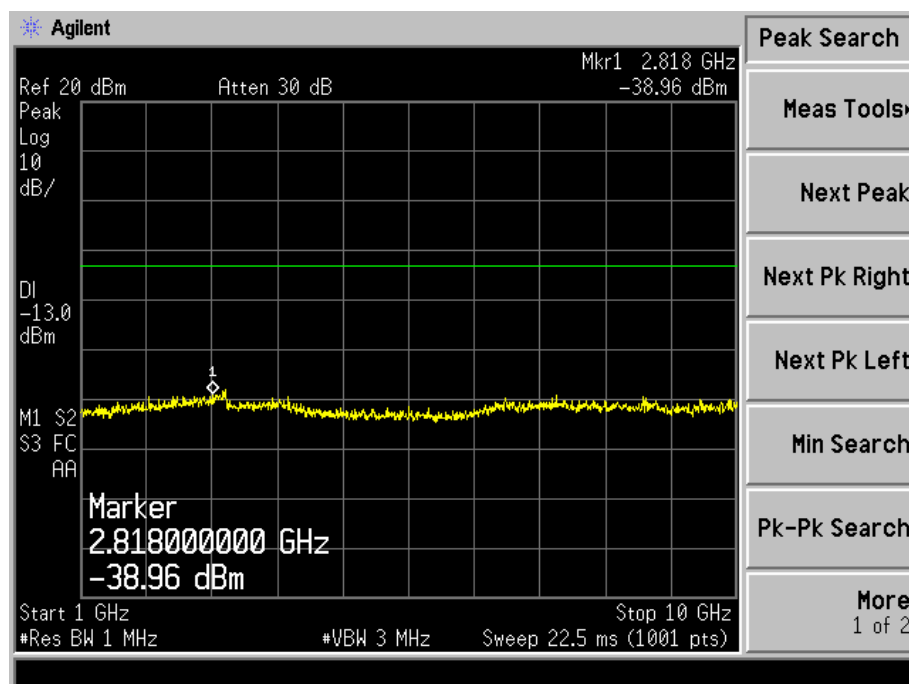


## WCDMA Low Band Spurious Emission

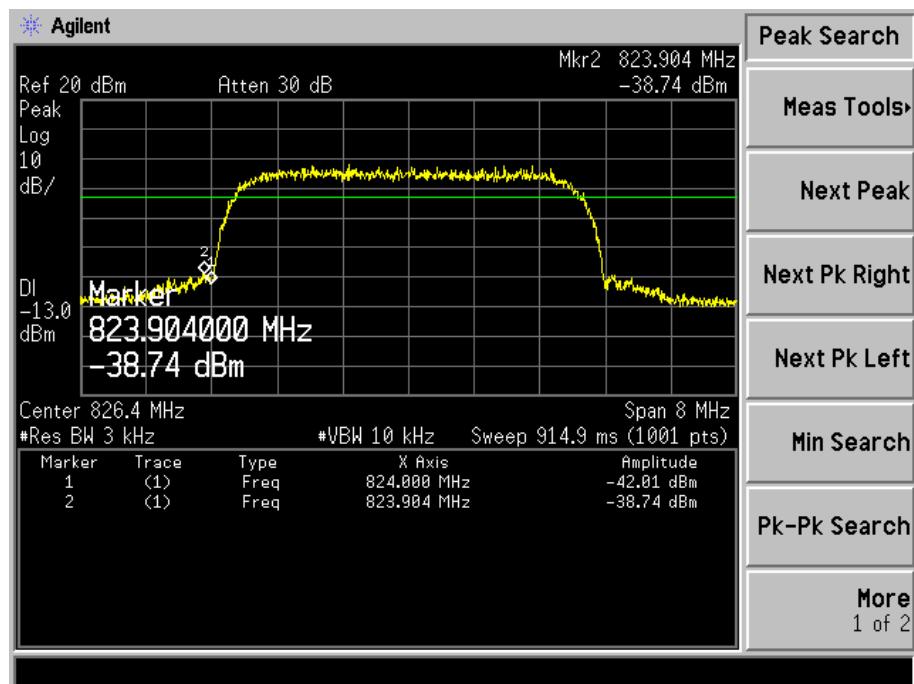


## WCDMA High Band Spurious Emission

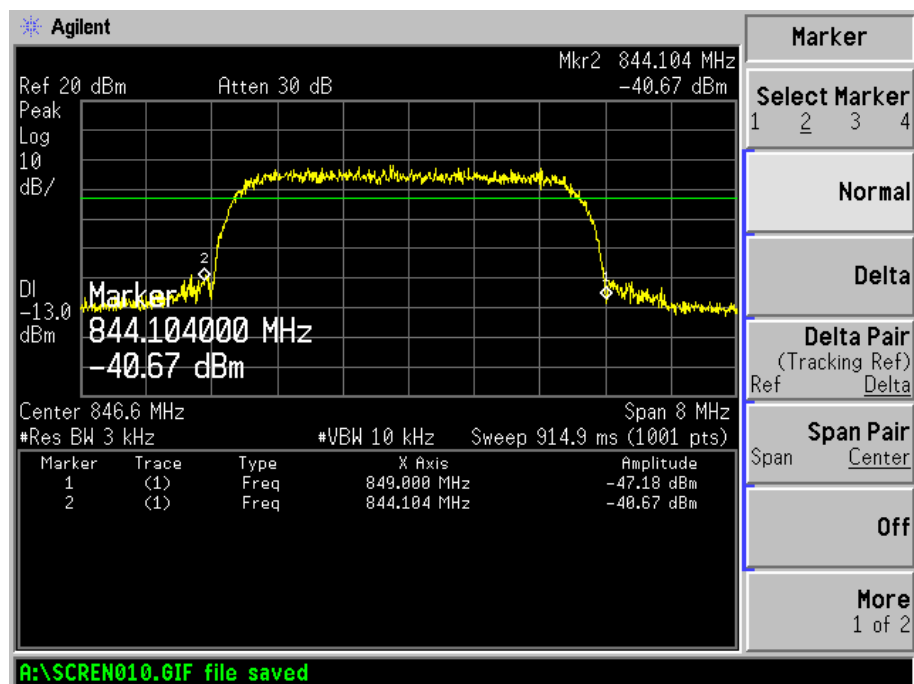


### HSDPA Low Channel 30MHz to 1GHz

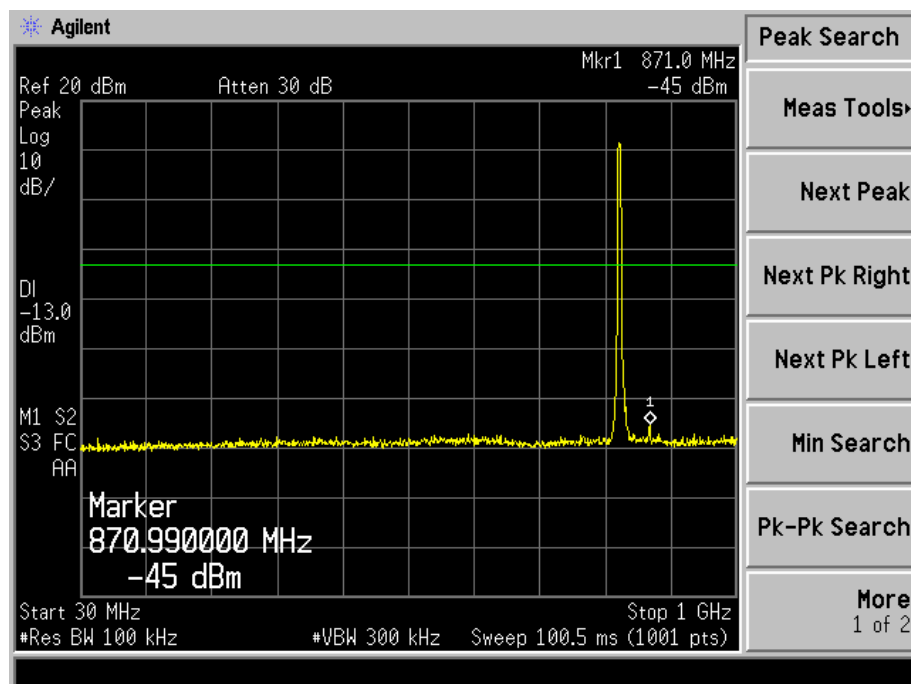


### Above 1GHz

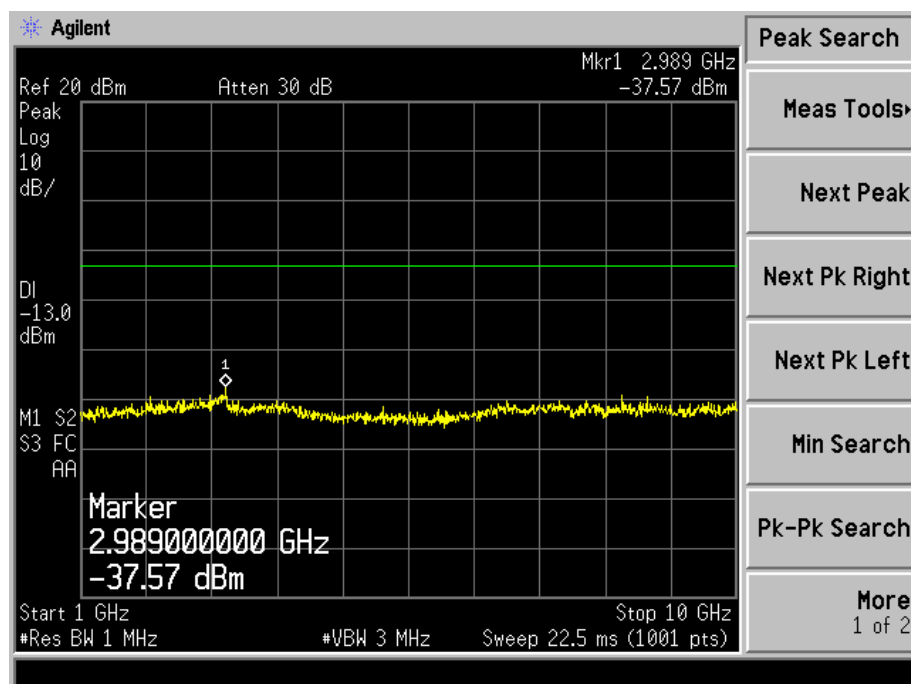


HSDPA Middle Channel  
30MHz to 1GHz

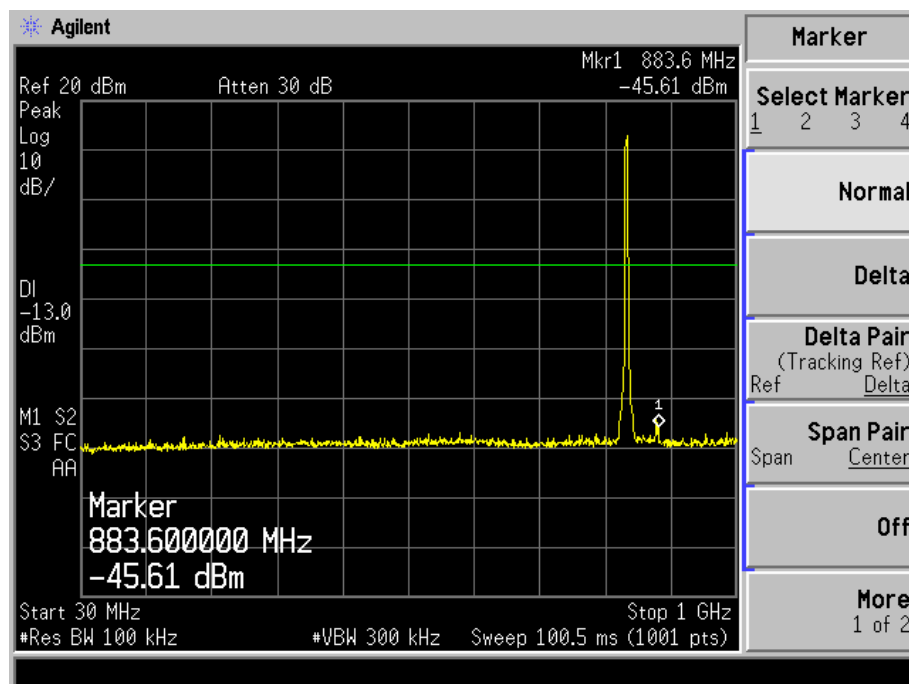


Above 1GHz

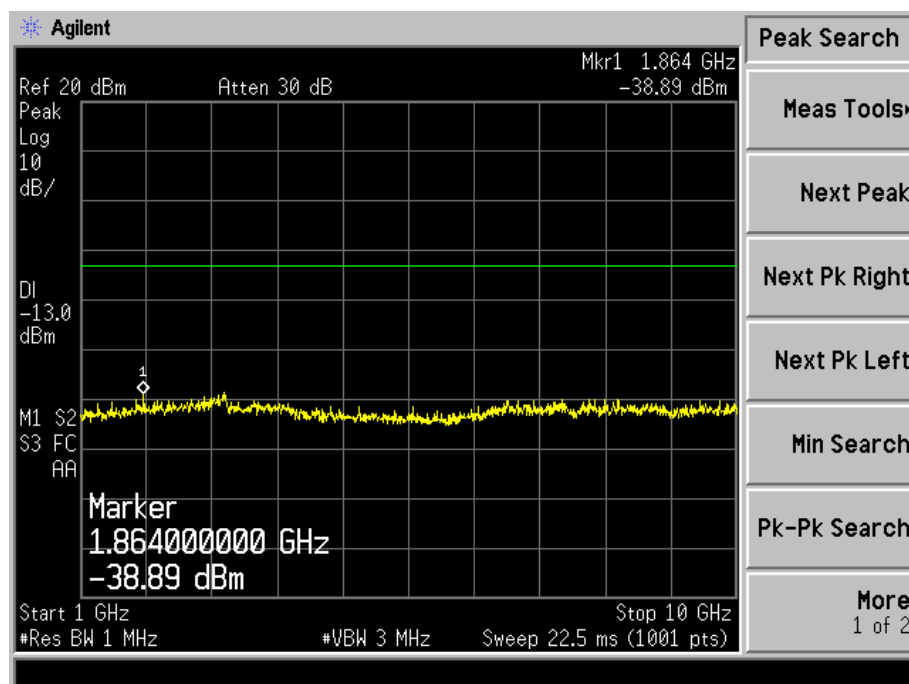


### HSDPA High Channel 30MHz to 1GHz

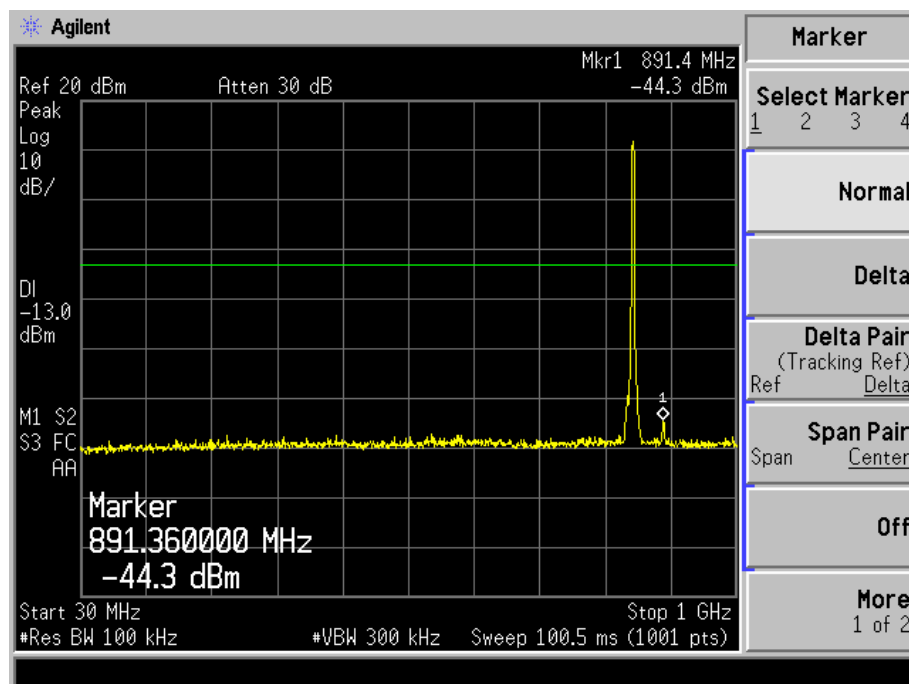


### Above 1GHz

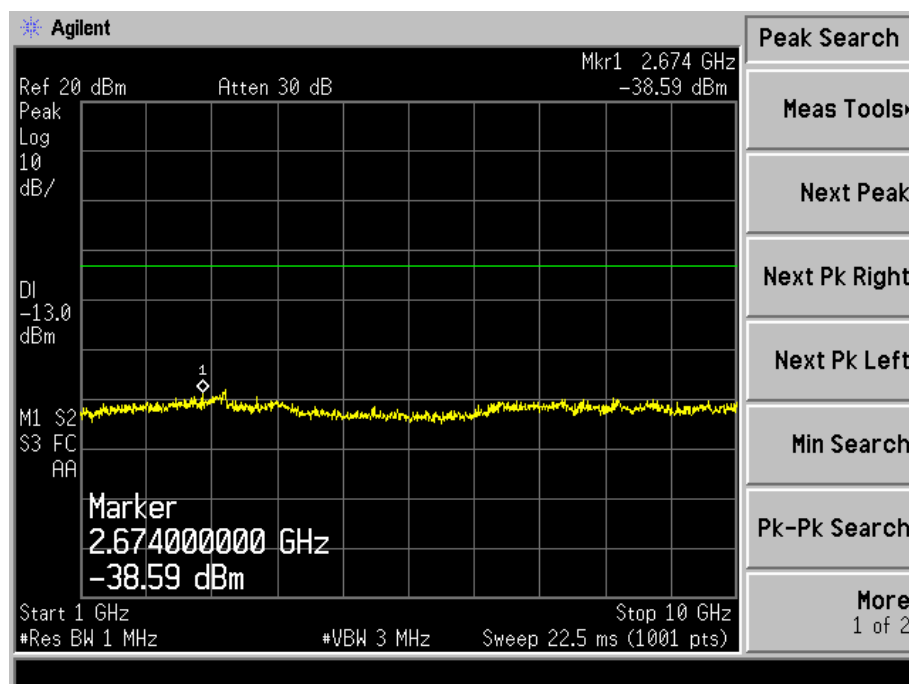


## HSDPA Low Band Spurious Emission

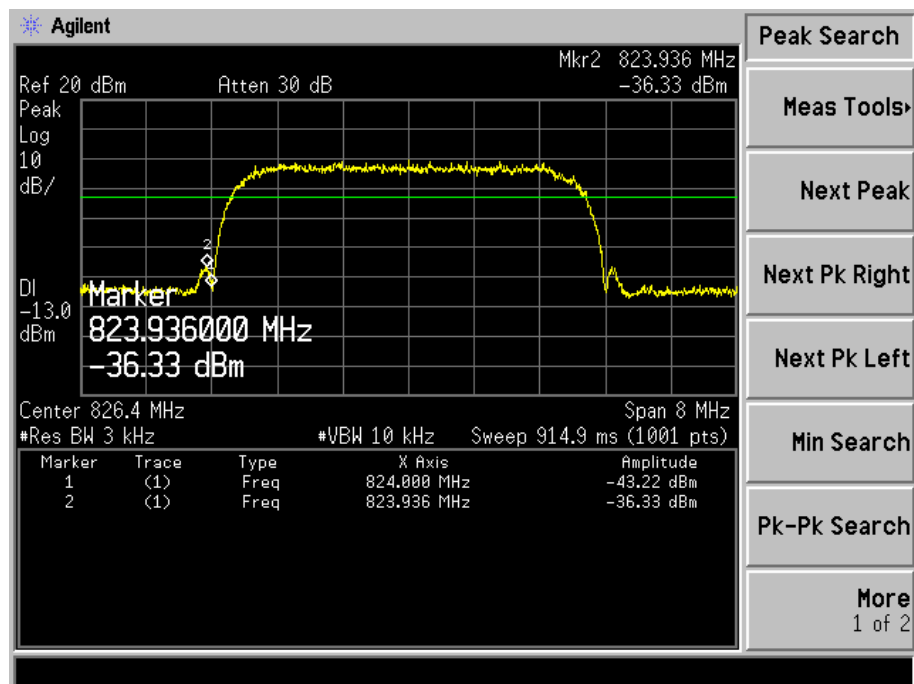


## HSDPA High Band Spurious Emission

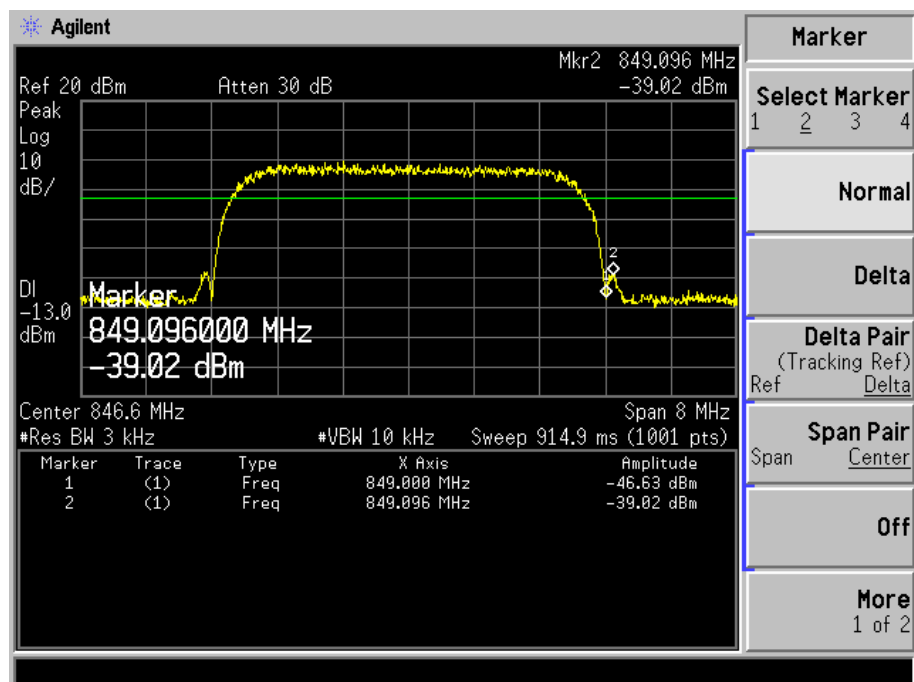


HSUPA Low Channel  
30MHz to 1GHz

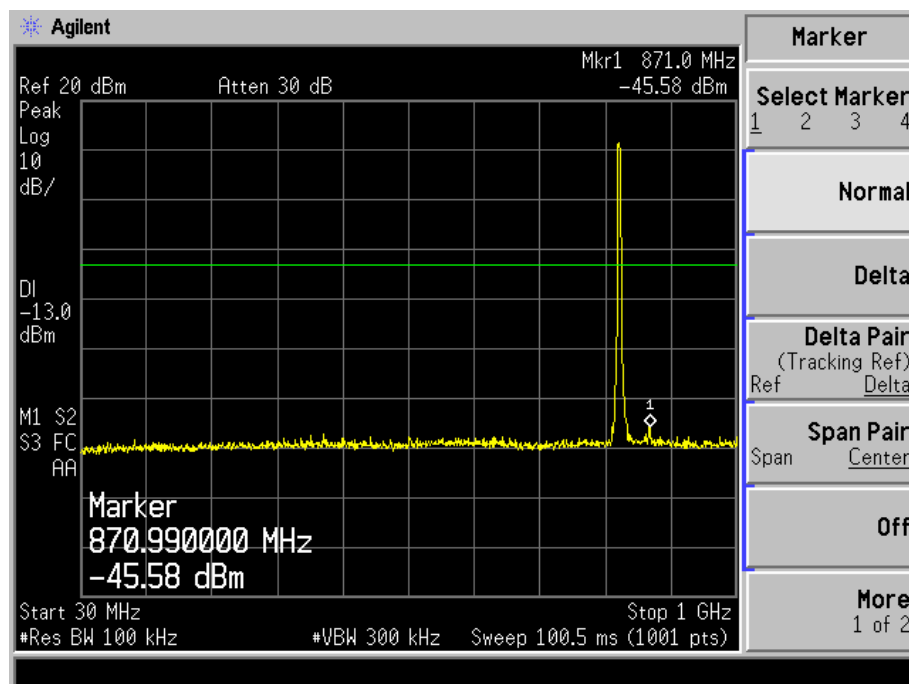


Above 1GHz

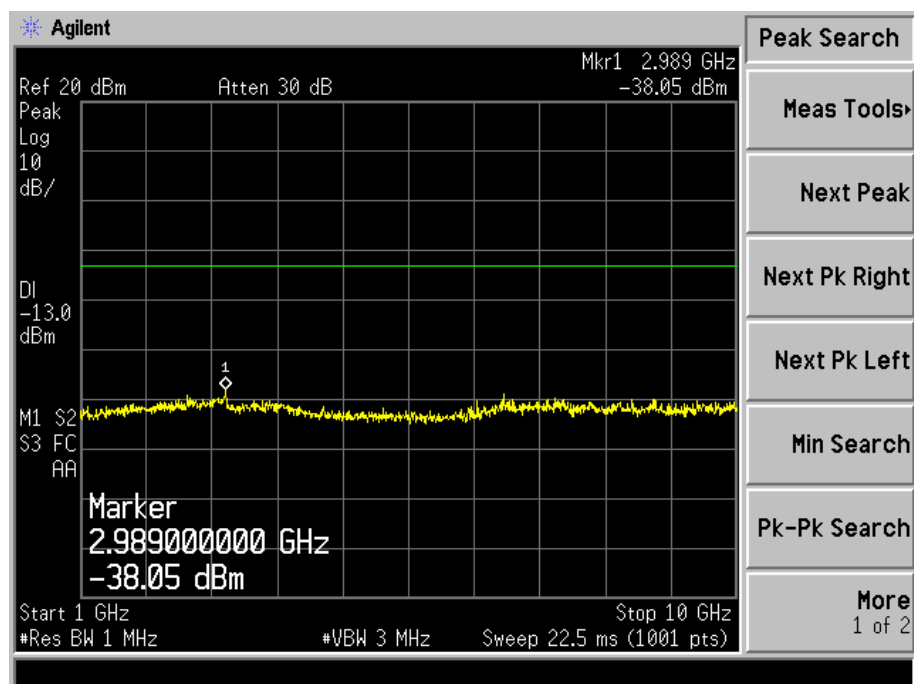


HSUPA Middle Channel  
30MHz to 1GHz

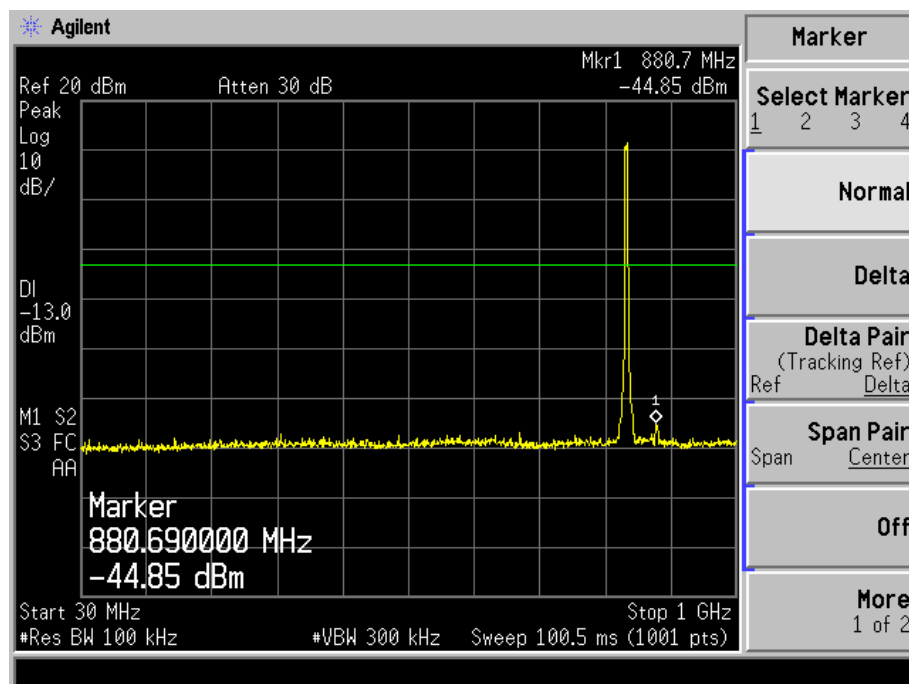


Above 1GHz

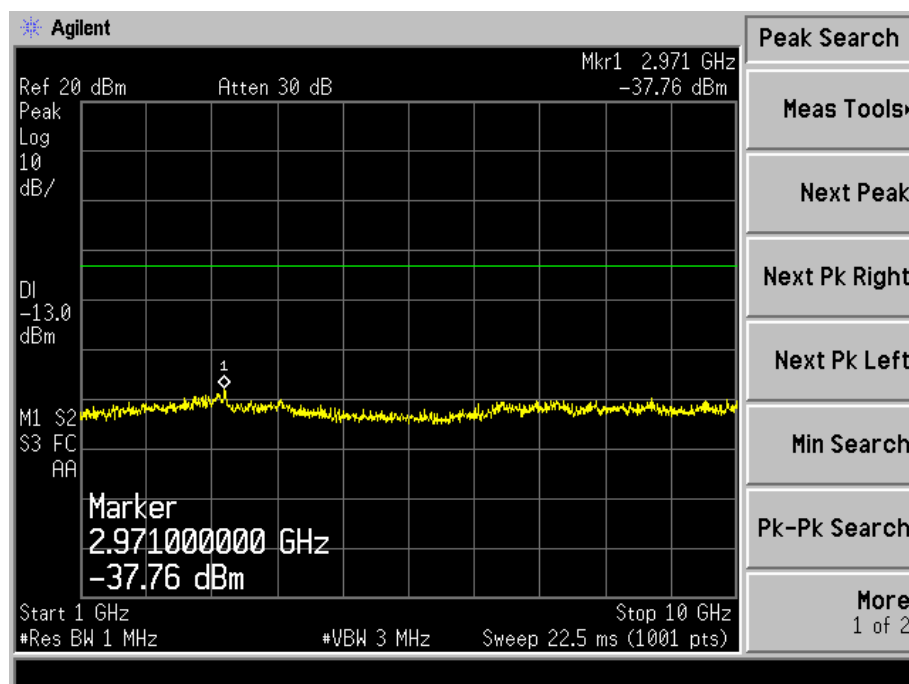


HSUPA High Channel  
30MHz to 1GHz

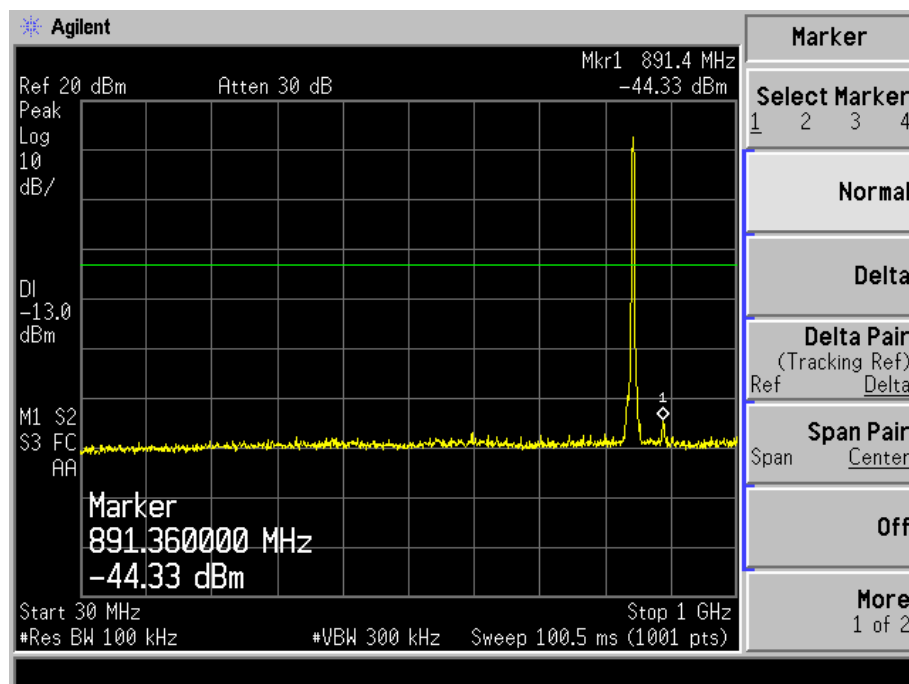


Above 1GHz

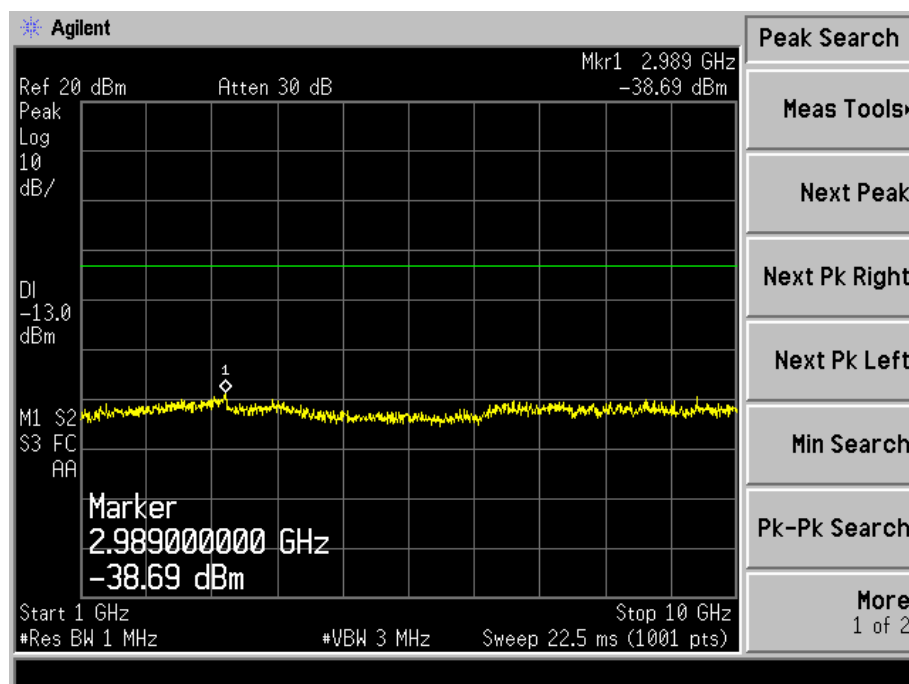

## HSUPA Low Band Spurious Emission

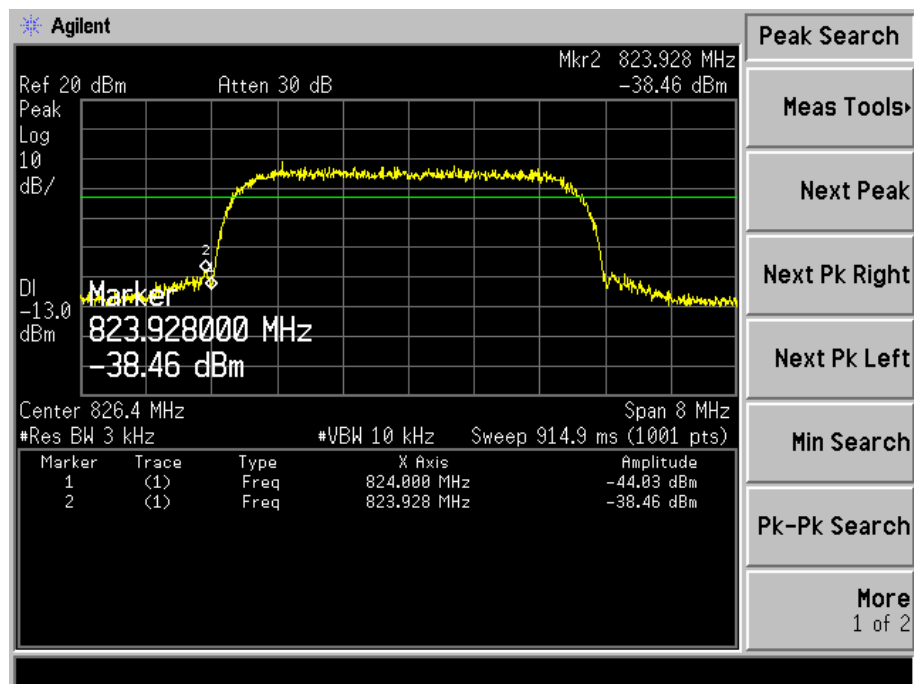


## HSUPA High Band Spurious Emission

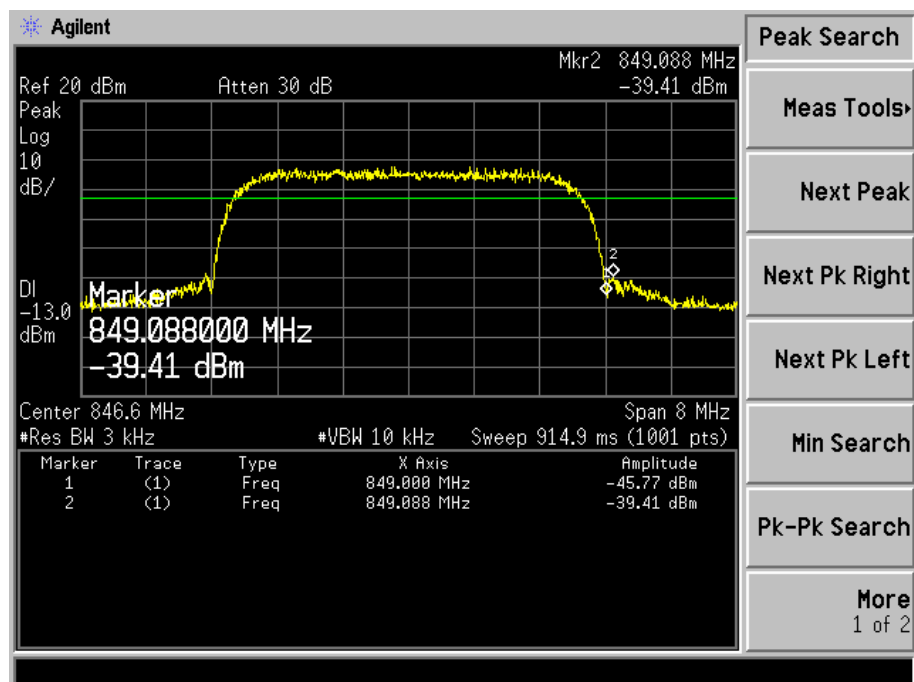


**For Band II**

WCDMA Low Channel


30MHz to 1GHz

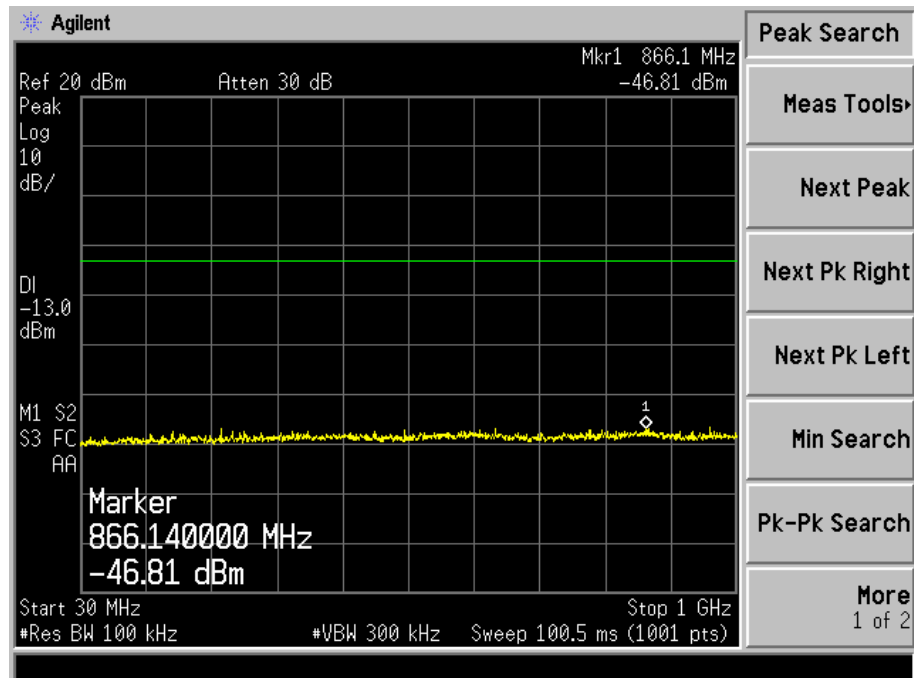


Above 1GHz

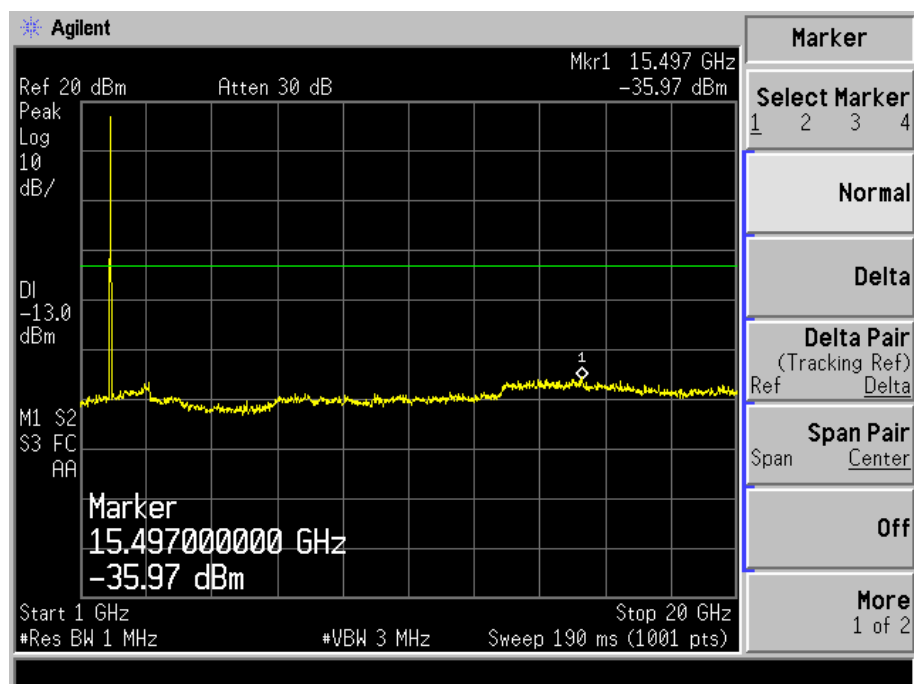


WCDMA Middle Channel  
30MHz to 1GHz

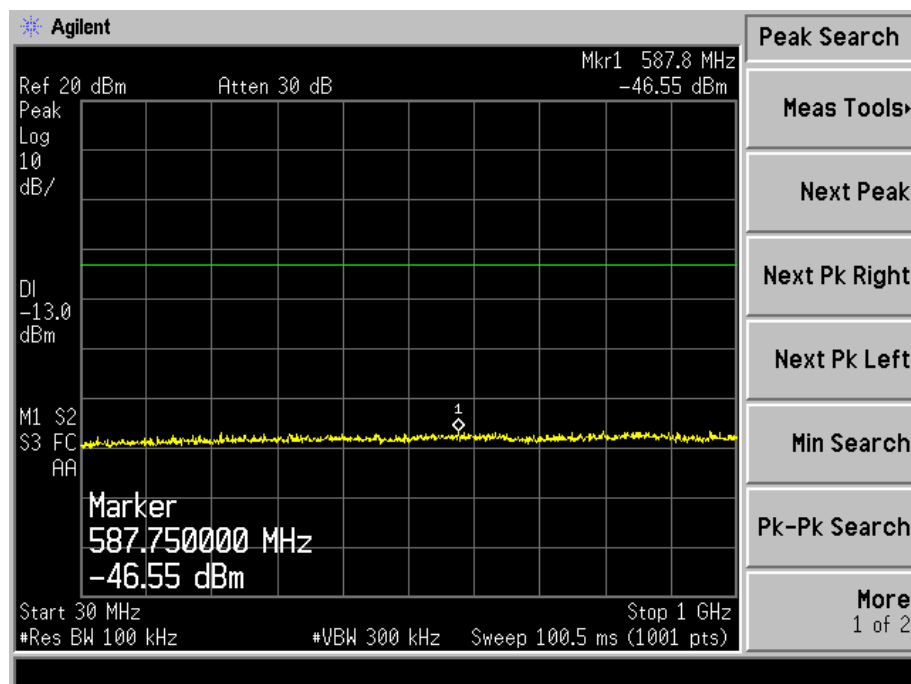


Above 1GHz

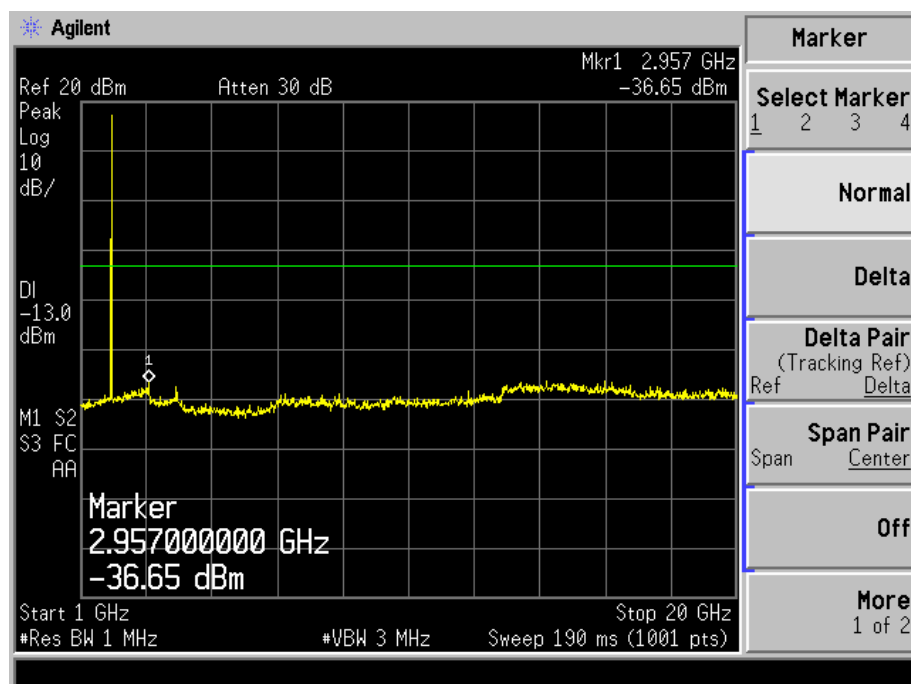


WCDMA High Channel  
30MHz to 1GHz

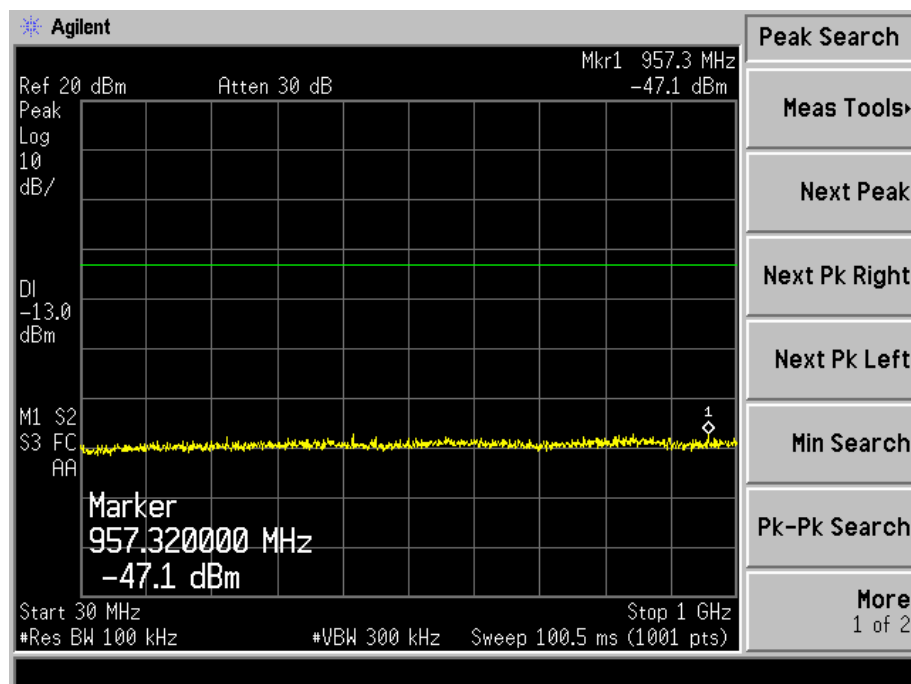


Above 1GHz

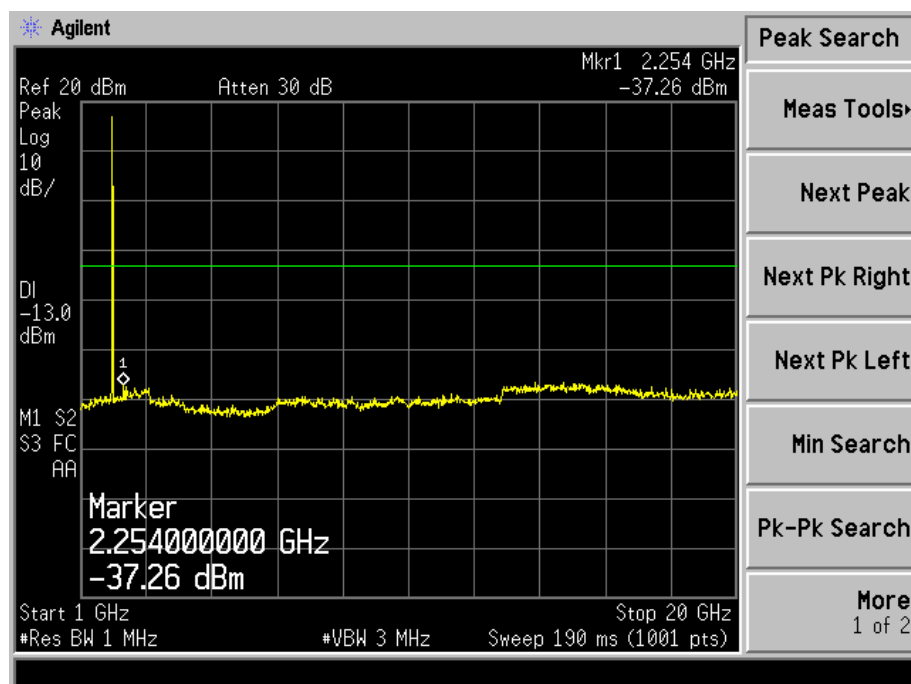


## WCDMA Low Band Spurious Emission

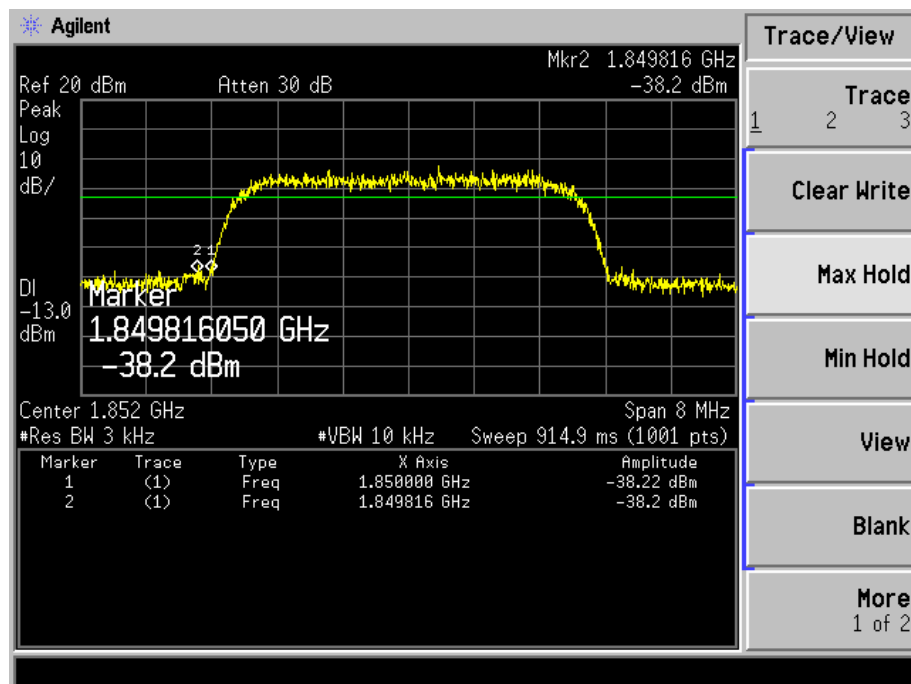


## WCDMA High Band Spurious Emission

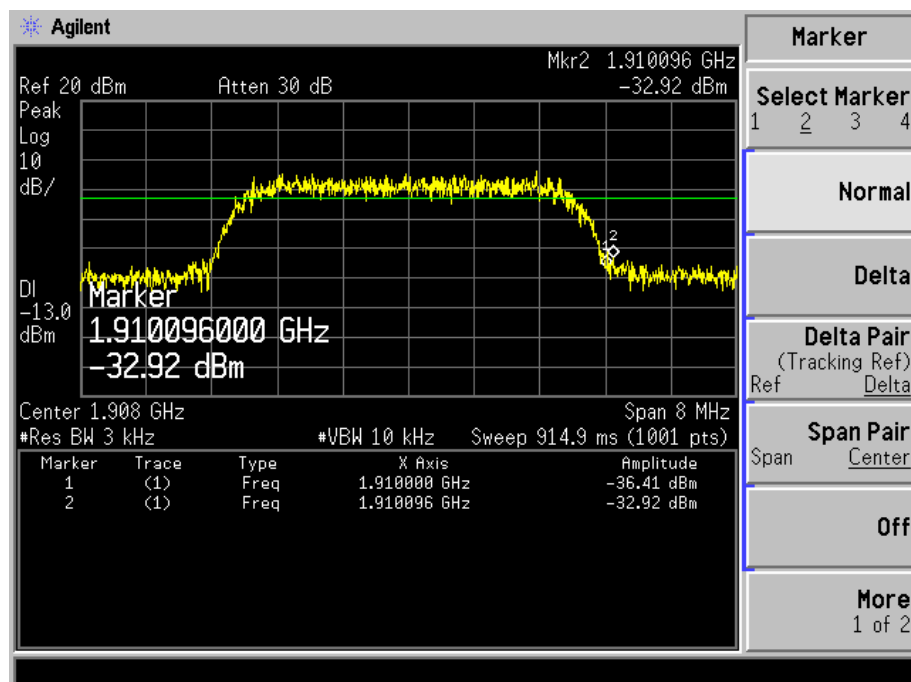


### HSDPA Low Channel 30MHz to 1GHz

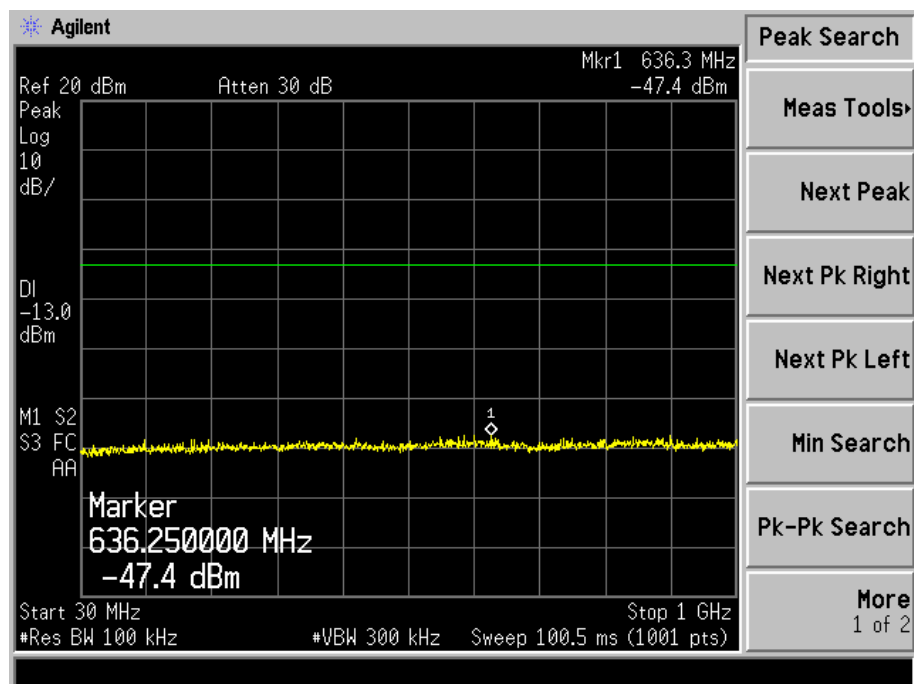


### Above 1GHz

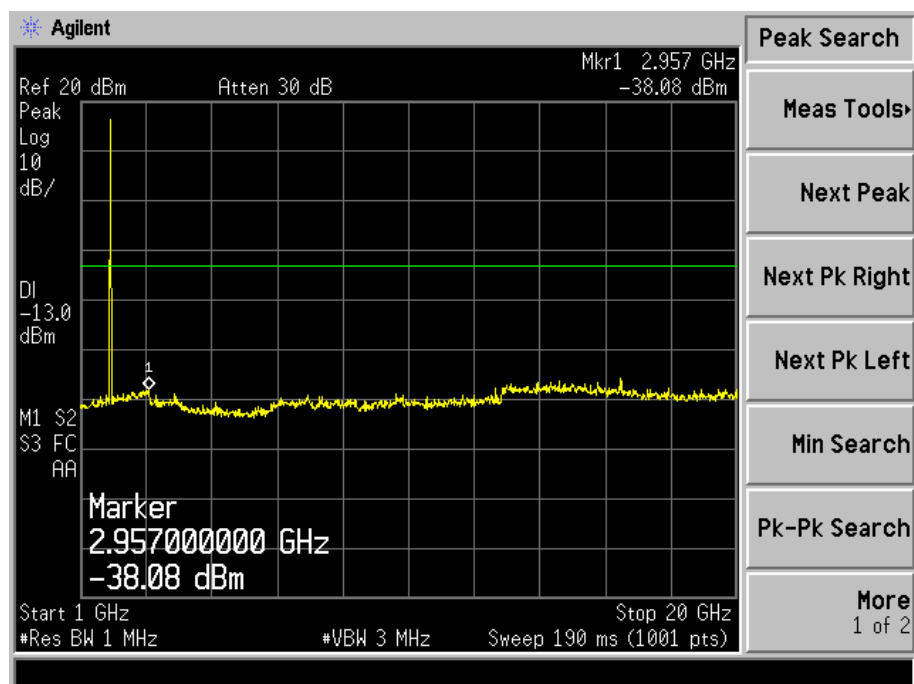


HSDPA Middle Channel  
30MHz to 1GHz

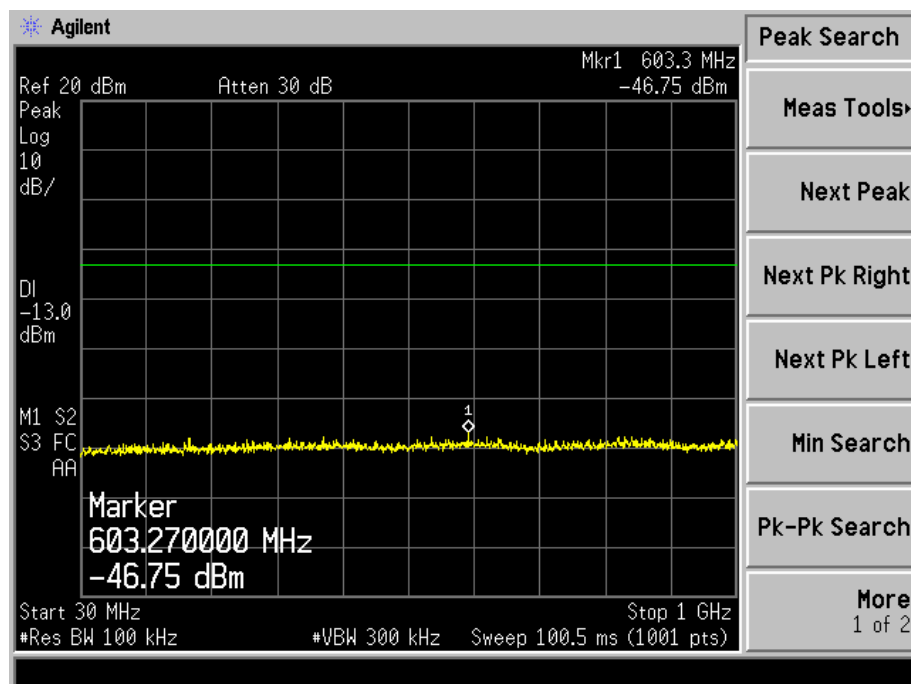


Above 1GHz

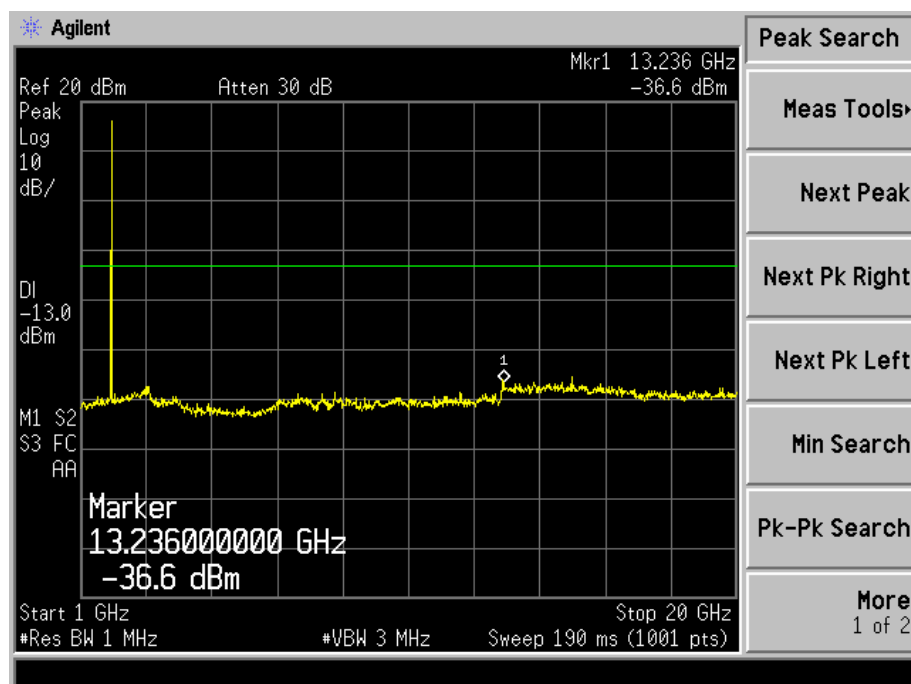


### HSDPA High Channel 30MHz to 1GHz

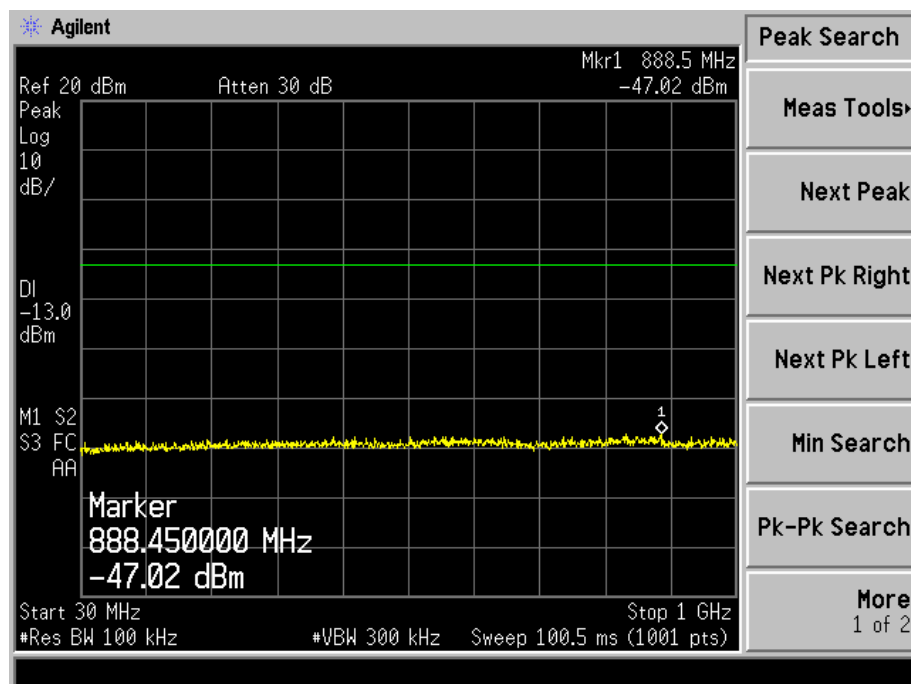


### Above 1GHz

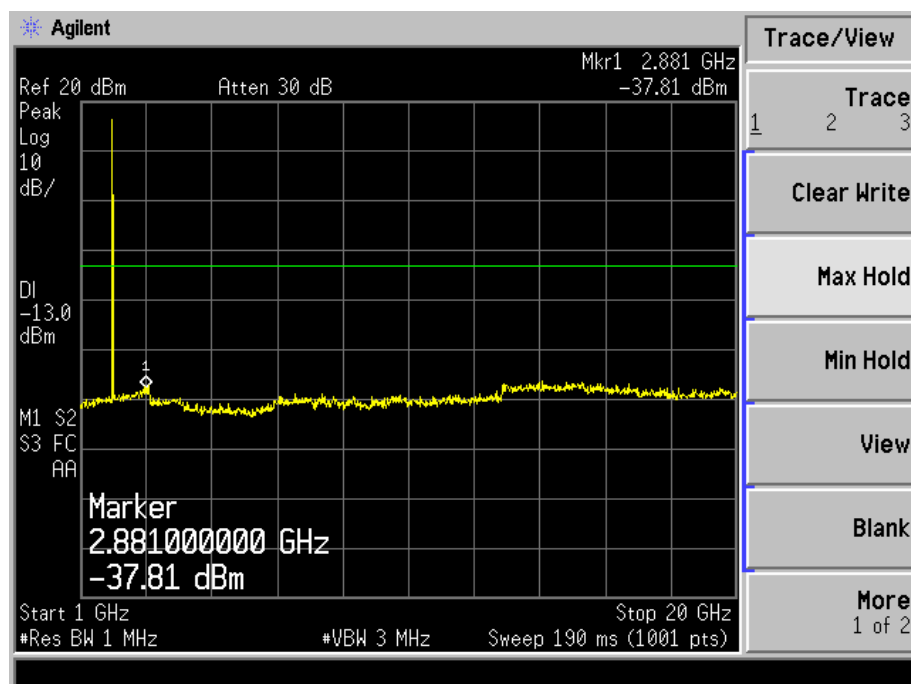


## HSDPA Low Band Spurious Emission

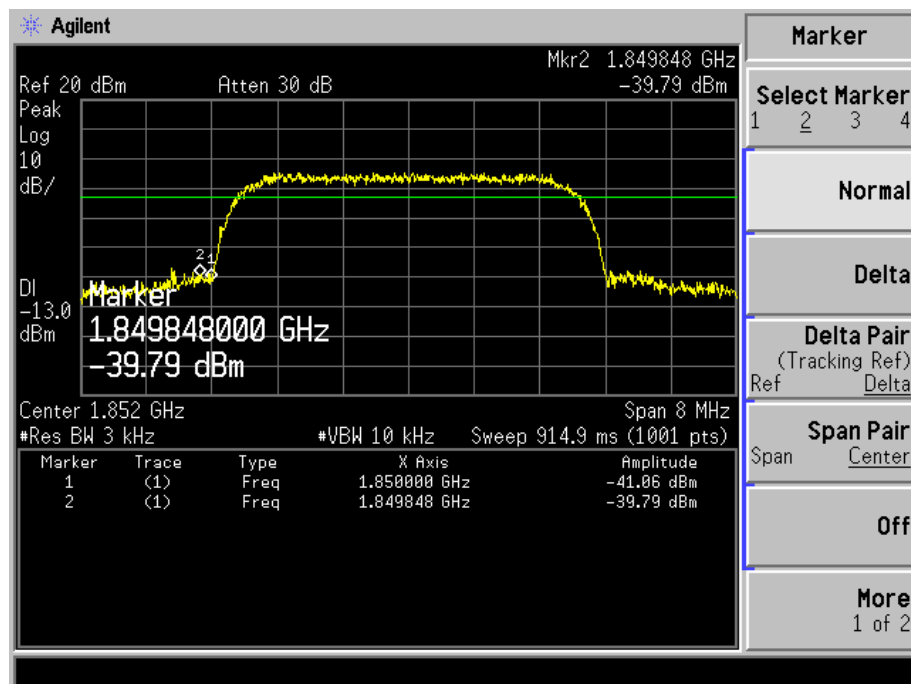


## HSDPA High Band Spurious Emission

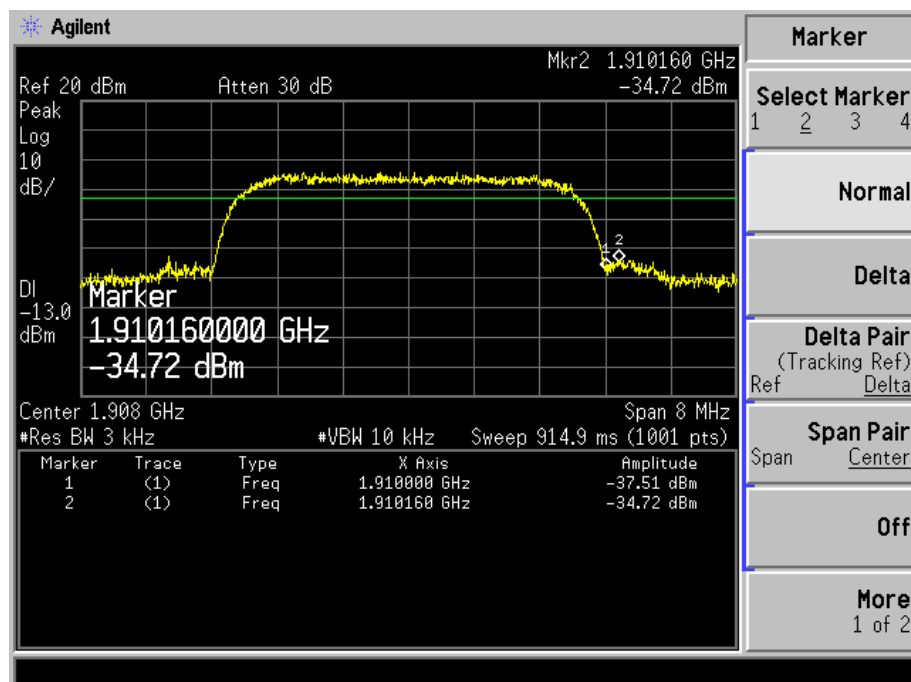


HSUPA Low Channel  
30MHz to 1GHz

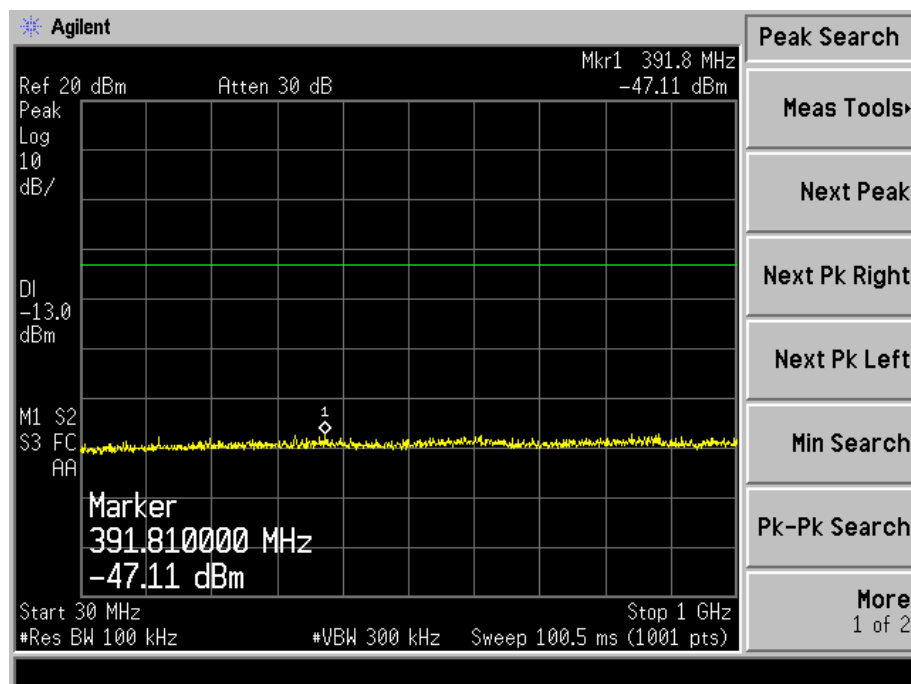


Above 1GHz

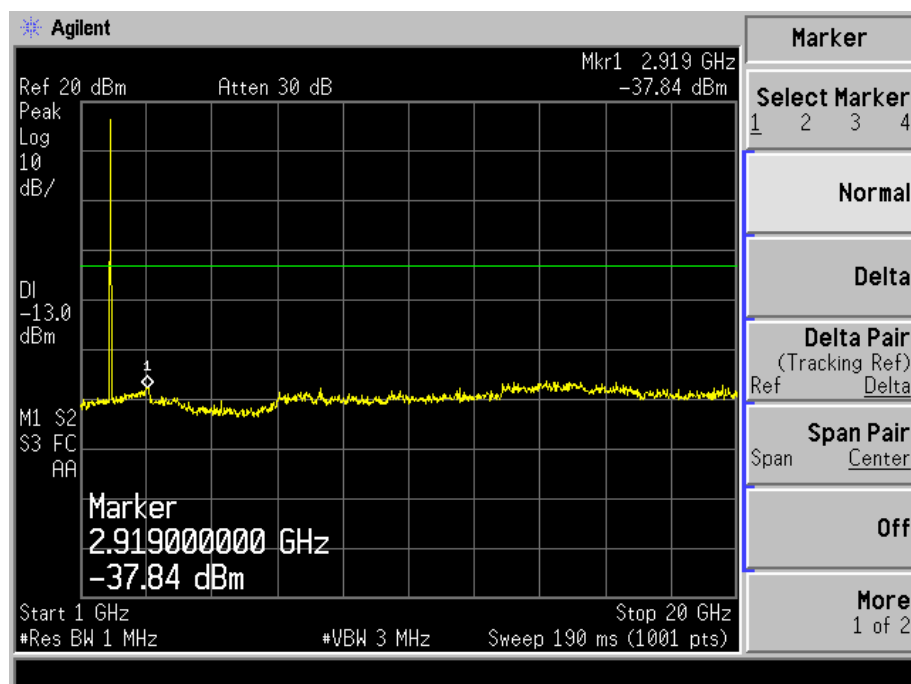


HSUPA Middle Channel  
30MHz to 1GHz

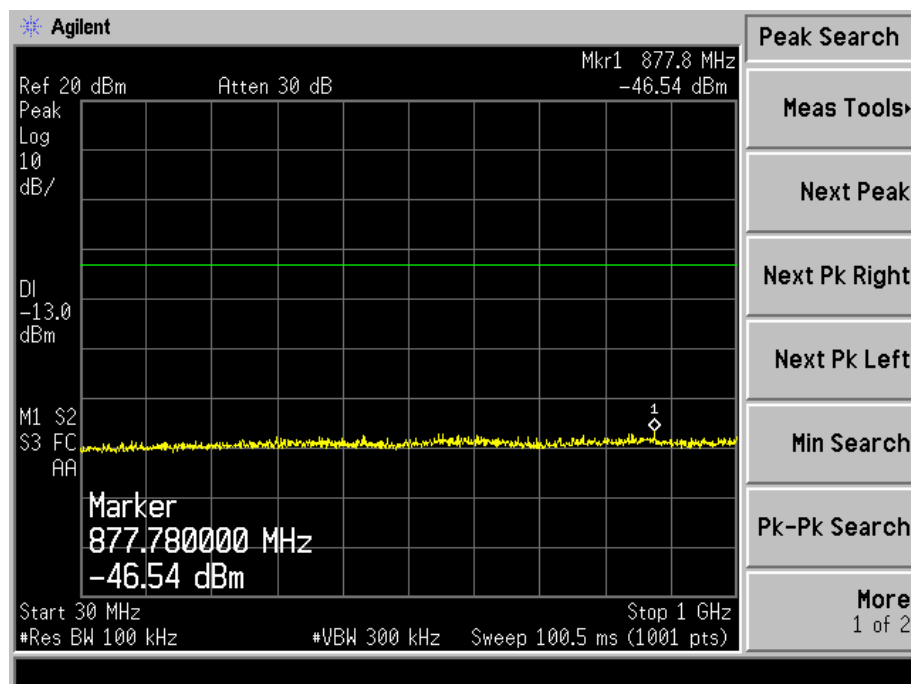


Above 1GHz

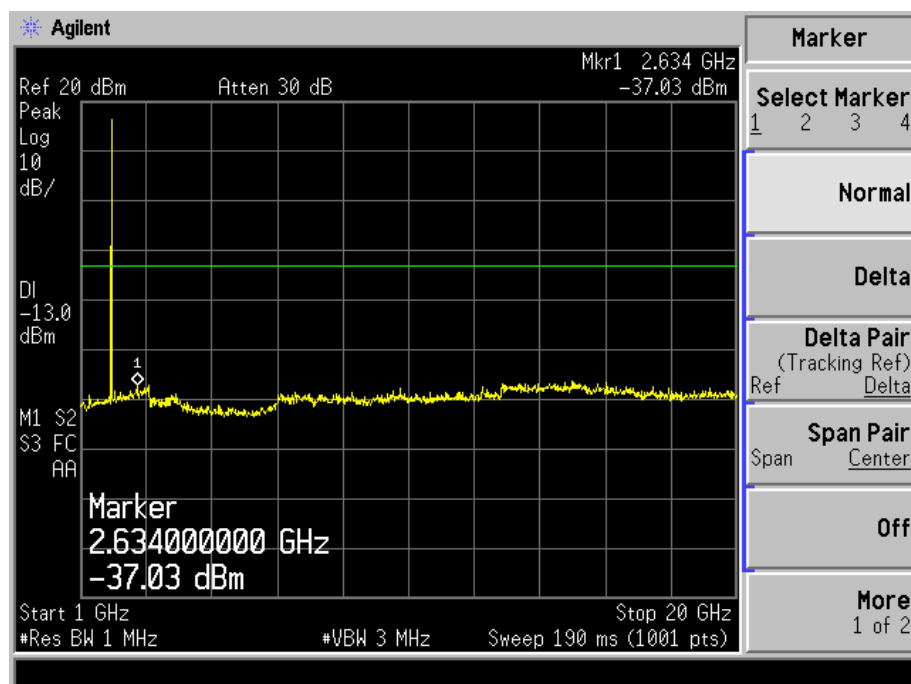


HSUPA High Channel  
30MHz to 1GHz

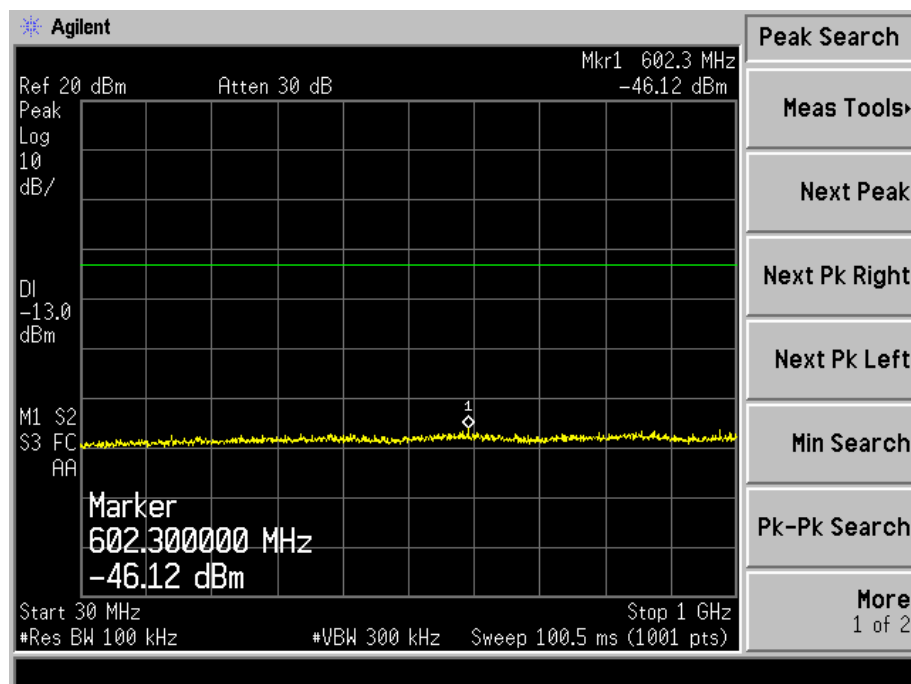


Above 1GHz

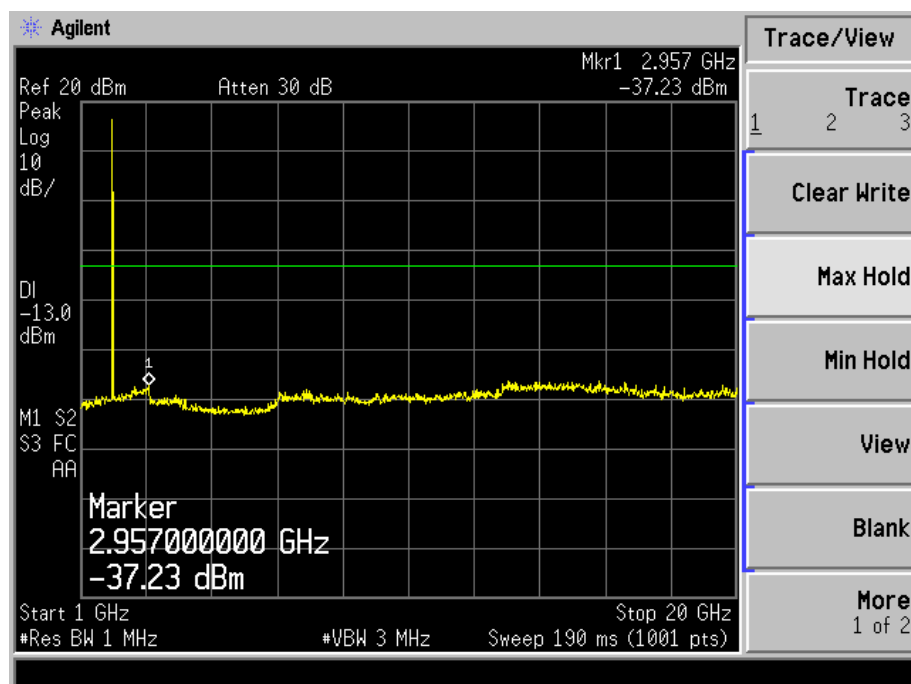

## HSUPA Low Band Spurious Emission

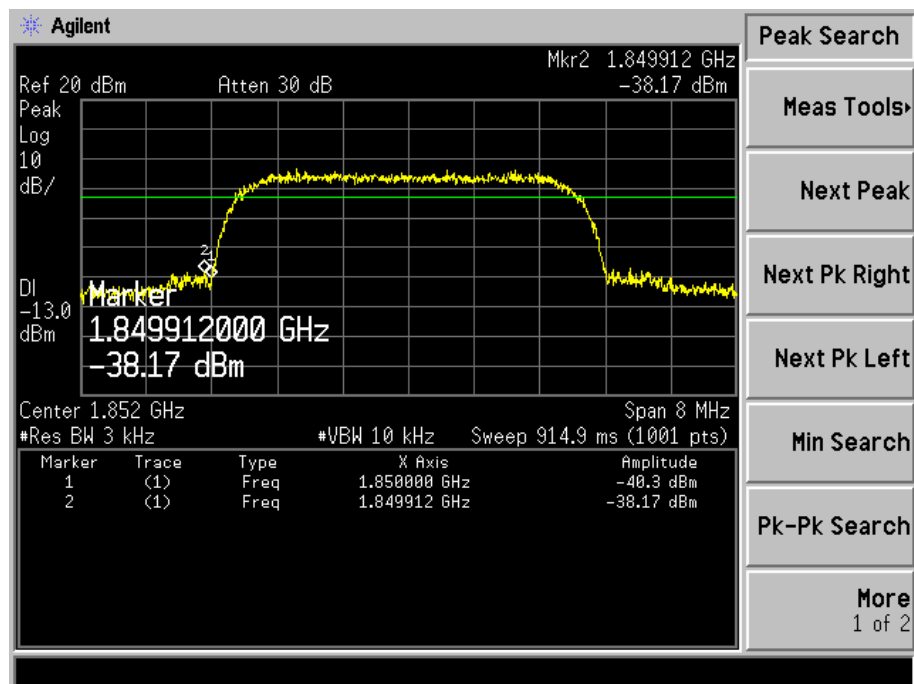

## HSUPA High Band Spurious Emission

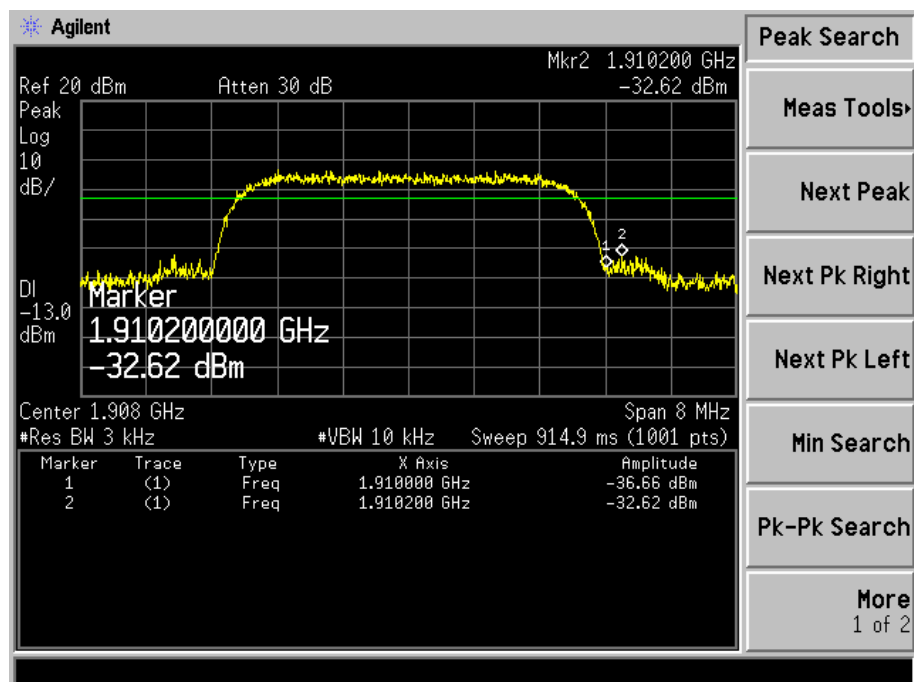

## 8. Spurious Radiated Emissions

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.20$  dB.

### 8.2 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 8.3 Test Equipment List and Details

| Description                          | Manufacturer         | Model    | Serial Number | Cal. Date  | Due. Date  |
|--------------------------------------|----------------------|----------|---------------|------------|------------|
| Spectrum Analyzer                    | R&S                  | FSP      | 836079/035    | 2015-05-28 | 2016-05-27 |
| Pre-amplifier                        | Agilent              | 8447F    | 3113A06717    | 2015-05-28 | 2016-05-27 |
| Pre-amplifier                        | Compliance Direction | PAP-0118 | 24002         | 2015-05-28 | 2016-05-27 |
| Trilog Broadband Antenna             | SCHWARZBECK          | VULB9163 | 9163-333      | 2015-05-24 | 2016-05-23 |
| Horn Antenna                         | ETS                  | 3117     | 00086197      | 2015-05-24 | 2016-05-23 |
| Horn Antenna                         | EMCO                 | 3116     | 9203-2178     | 2015-05-24 | 2016-05-23 |
| Universal Radio Communication Tester | Rohde & Schwarz      | CMU200   | 112012        | 2015-05-28 | 2016-05-27 |
| Signal Generator                     | R&S                  | SMR20    | 100047        | 2015-05-28 | 2016-05-27 |

### 8.4 Test Procedure

1. The setup of EUT is according with per TIA/EIA Standard 603C and ANSI C63.4-2009 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB =  $43 + 10 \log_{10}$  (power out in Watts)

## 8.5 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 52%       |
| ATM Pressure:      | 1012 mbar |

## 8.6 Summary of Test Results/Plots

According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:


**-29.63 dB at 2479.2 MHz in the Vertical polarization, For band V Mode, 9 kHz to 20 GHz, 3Meters**

*Note: this EUT was tested in 3 orthogonal positions, the **antenna horizontally** is worst case position and the data was reported.*

Spurious Emission From 30MHz to 1GHz


For Cellular Band\_ GSM850 Mode

Horizontal:

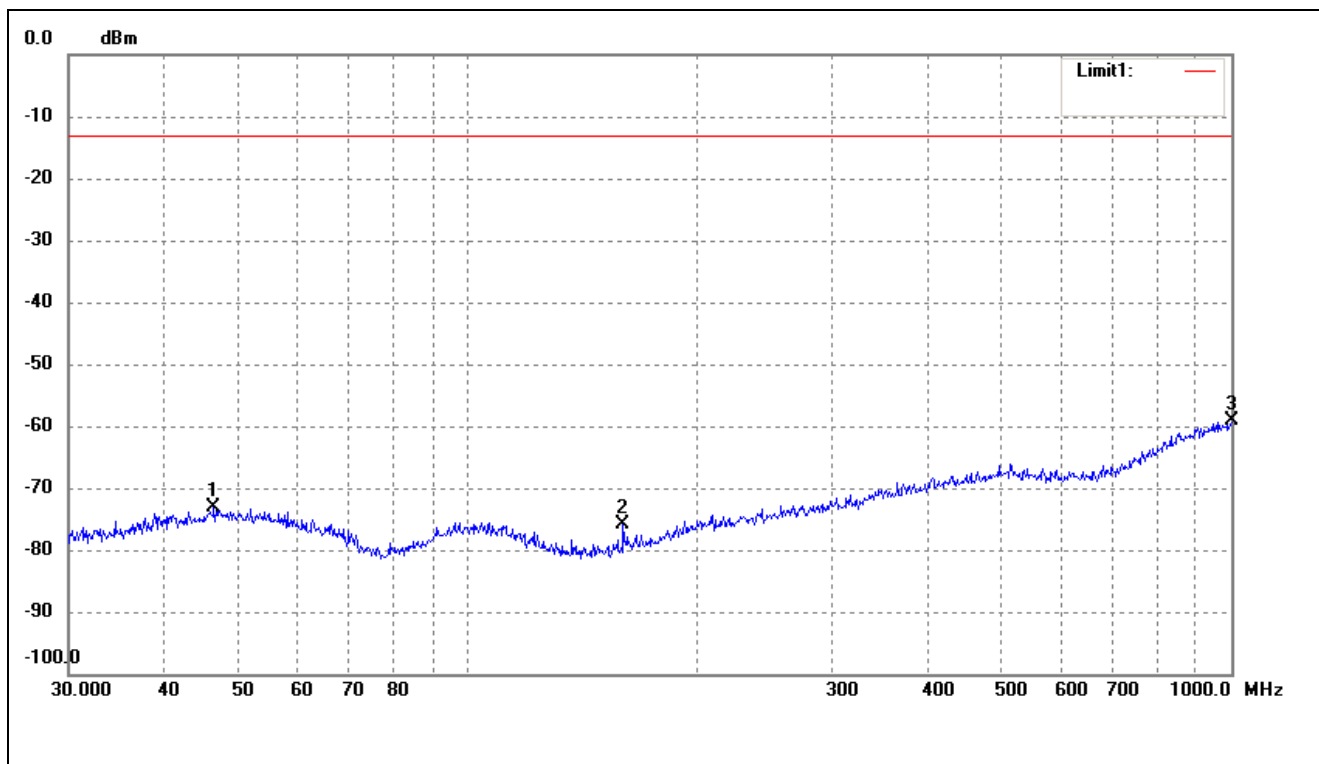

| No. | Frequency<br>(MHz) | Reading<br>(dBm) | Correct<br>dB | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Remark |
|-----|--------------------|------------------|---------------|-----------------|----------------|----------------|--------|
| 1   | 46.5030            | -77.48           | 4.34          | -73.14          | -13.00         | -60.14         | ERP    |
| 2   | 159.7844           | -75.40           | -0.55         | -75.95          | -13.00         | -62.95         | ERP    |
| 3   | 1000.0000          | -77.72           | 18.48         | -59.24          | -13.00         | -46.24         | ERP    |


Vertical:

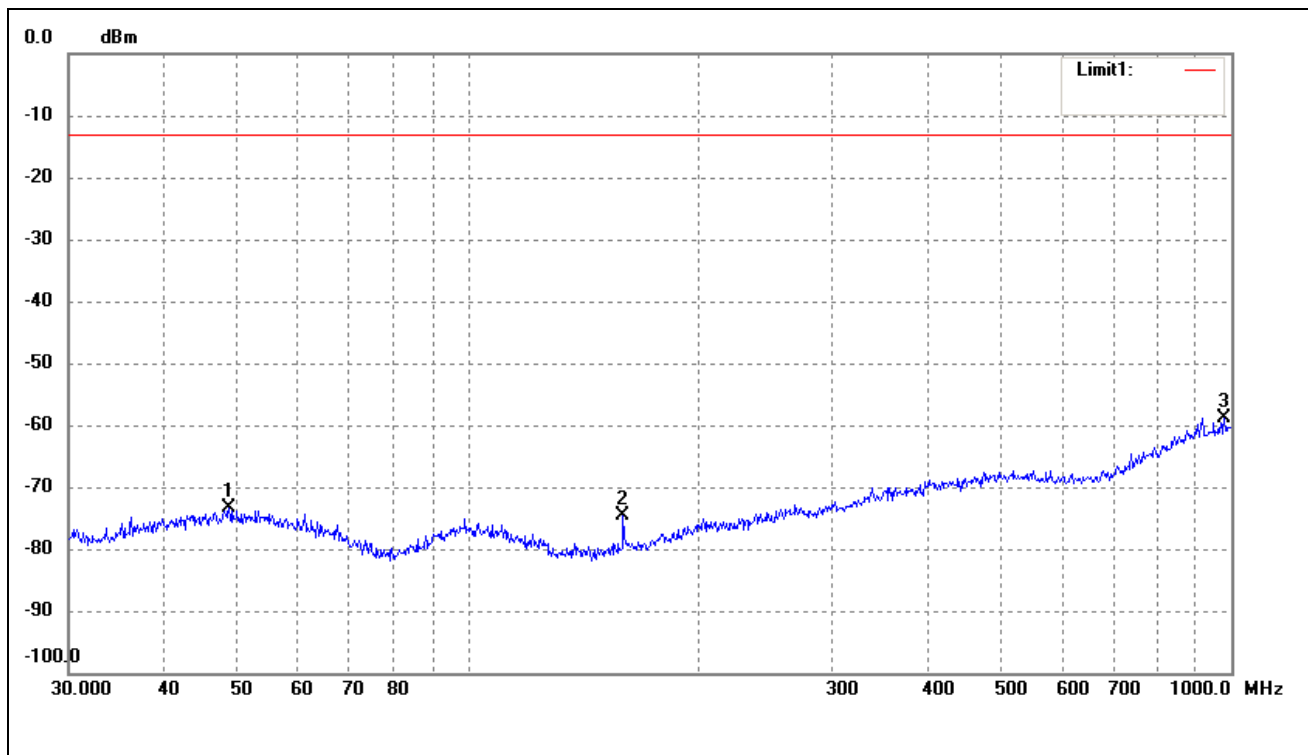

| No. | Frequency | Reading | Correct | Result | Limit  | Margin | Remark |
|-----|-----------|---------|---------|--------|--------|--------|--------|
|     | (MHz)     | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   |        |
| 1   | 48.6719   | -77.72  | 4.35    | -73.37 | -13.00 | -60.37 | ERP    |
| 2   | 159.7844  | -74.16  | -0.55   | -74.71 | -13.00 | -61.71 | ERP    |
| 3   | 979.1804  | -77.02  | 18.17   | -58.85 | -13.00 | -45.85 | ERP    |


For Cellular Band\_ GSM1900 Mode

Horizontal:

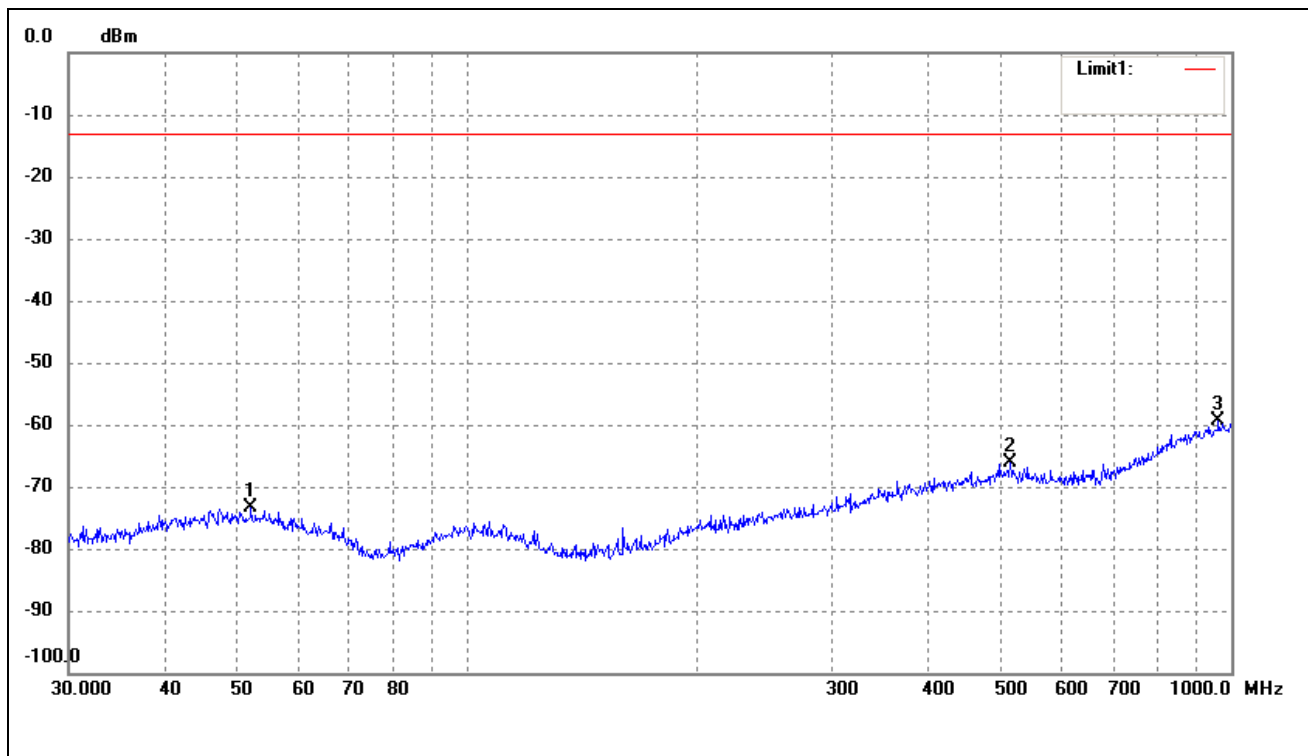

| No. | Frequency<br>(MHz) | Reading<br>(dBm) | Correct<br>dB | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Remark |
|-----|--------------------|------------------|---------------|-----------------|----------------|----------------|--------|
| 1   | 52.0251            | -77.42           | 4.15          | -73.27          | -13.00         | -60.27         | ERP    |
| 2   | 513.6331           | -76.82           | 10.61         | -66.21          | -13.00         | -53.21         | ERP    |
| 3   | 962.1623           | -77.25           | 17.92         | -59.33          | -13.00         | -46.33         | ERP    |


Vertical:

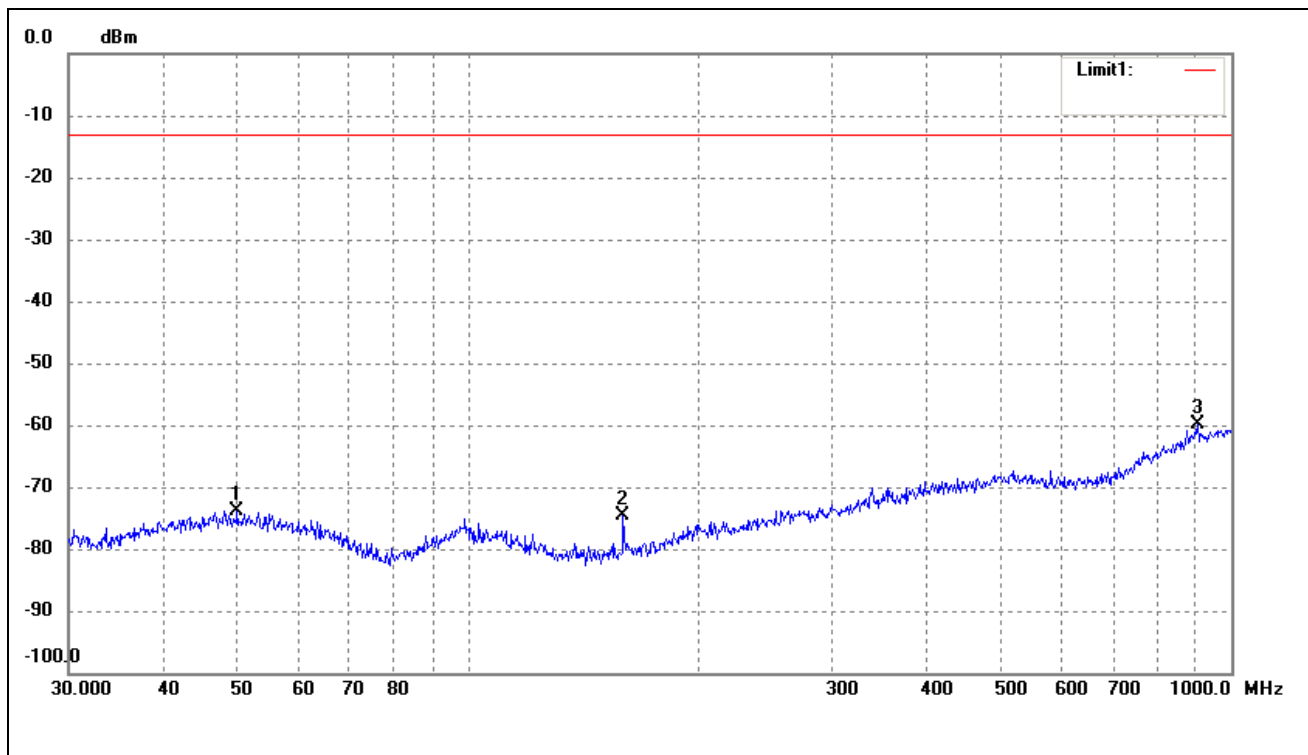

| No. | Frequency | Reading | Correct | Result | Limit  | Margin | Remark |
|-----|-----------|---------|---------|--------|--------|--------|--------|
|     | (MHz)     | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   |        |
| 1   | 49.8814   | -78.20  | 4.36    | -73.84 | -13.00 | -60.84 | ERP    |
| 2   | 159.7844  | -74.16  | -0.55   | -74.71 | -13.00 | -61.71 | ERP    |
| 3   | 903.3094  | -76.99  | 17.22   | -59.77 | -13.00 | -46.77 | ERP    |


For band V Mode

Horizontal:

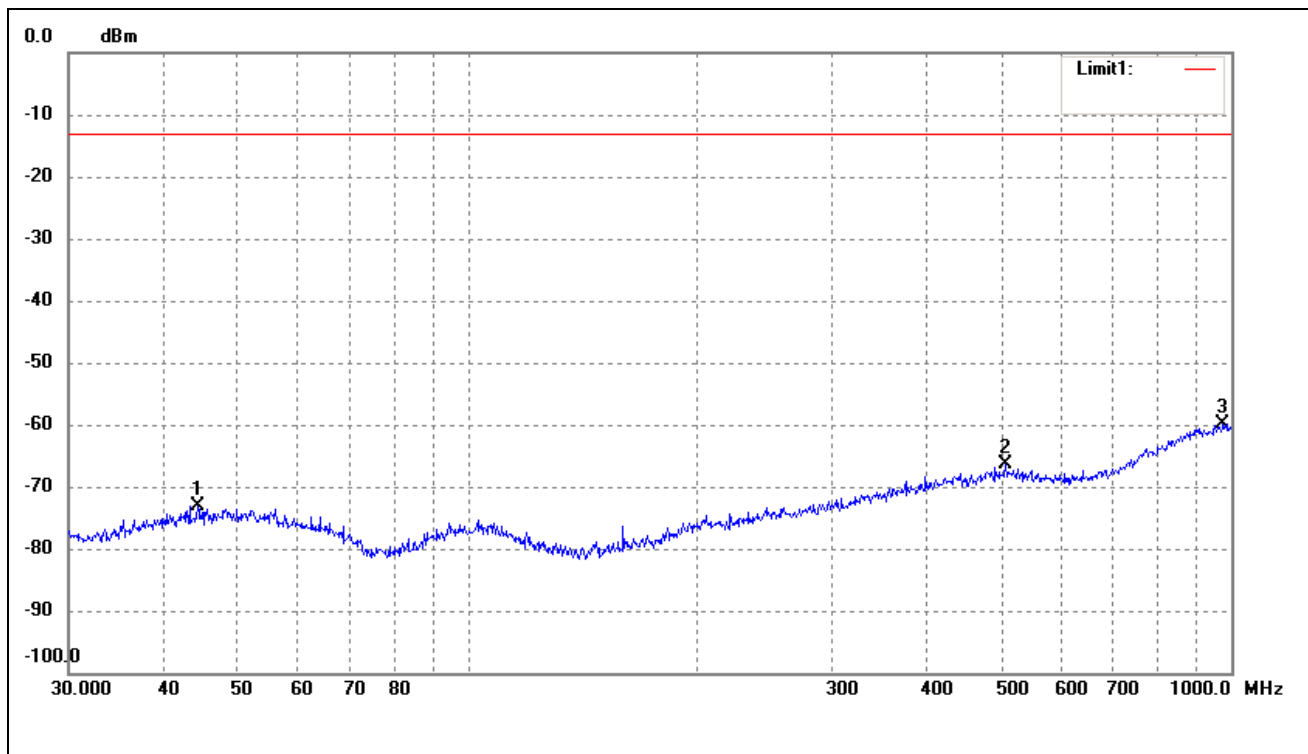

| No. | Frequency<br>(MHz) | Reading<br>(dBm) | Correct<br>dB | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Remark |
|-----|--------------------|------------------|---------------|-----------------|----------------|----------------|--------|
| 1   | 44.2752            | -77.36           | 4.19          | -73.17          | -13.00         | -60.17         | ERP    |
| 2   | 506.4791           | -77.01           | 10.64         | -66.37          | -13.00         | -53.37         | ERP    |
| 3   | 975.7529           | -77.91           | 18.12         | -59.79          | -13.00         | -46.79         | ERP    |


Vertical:

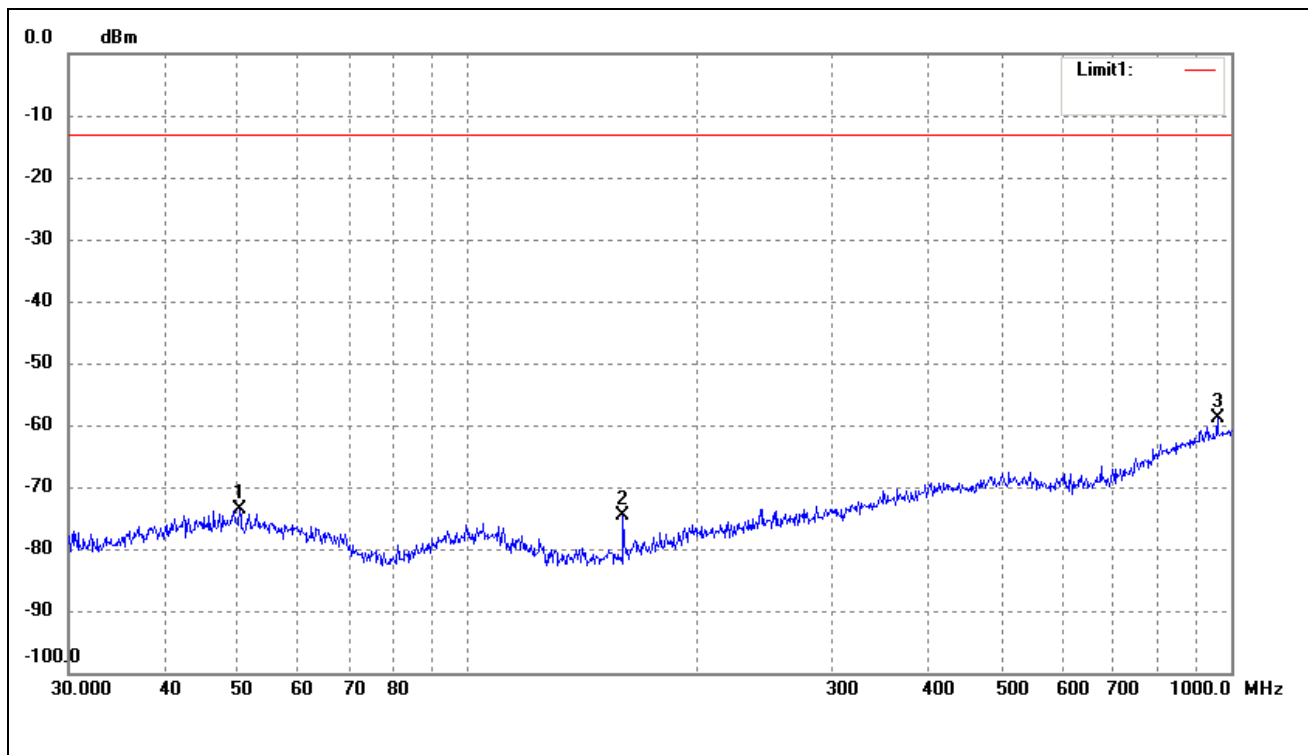

| No. | Frequency<br>(MHz) | Reading<br>(dBm) | Correct<br>dB | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Remark |
|-----|--------------------|------------------|---------------|-----------------|----------------|----------------|--------|
| 1   | 50.2325            | -78.06           | 4.33          | -73.73          | -13.00         | -60.73         | ERP    |
| 2   | 159.7844           | -74.09           | -0.55         | -74.64          | -13.00         | -61.64         | ERP    |
| 3   | 958.7943           | -76.62           | 17.86         | -58.76          | -13.00         | -45.76         | ERP    |


For band II Mode

Horizontal:

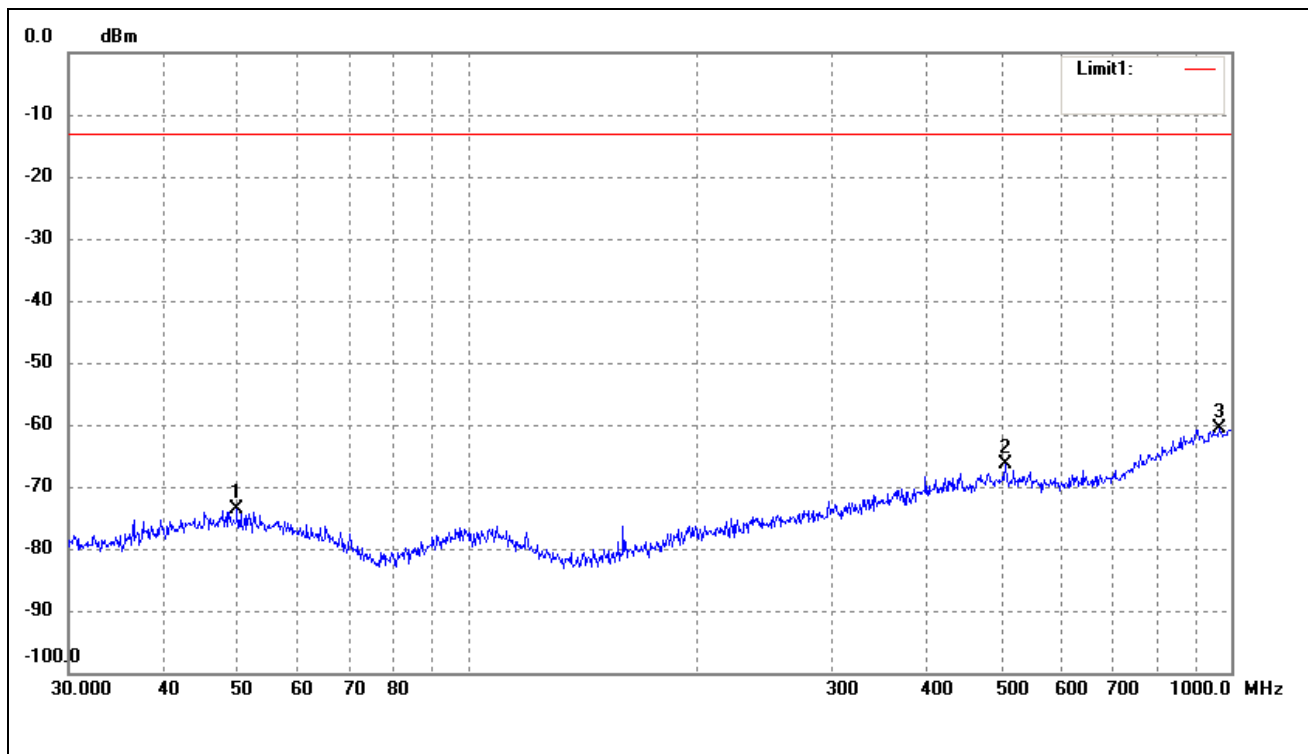

| No. | Frequency<br>(MHz) | Reading<br>(dBm) | Correct<br>dB | Result<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Remark |
|-----|--------------------|------------------|---------------|-----------------|----------------|----------------|--------|
| 1   | 49.8814            | -78.07           | 4.36          | -73.71          | -13.00         | -60.71         | ERP    |
| 2   | 506.4791           | -77.01           | 10.64         | -66.37          | -13.00         | -53.37         | ERP    |
| 3   | 965.5421           | -78.64           | 17.96         | -60.68          | -13.00         | -47.68         | ERP    |

Vertical:

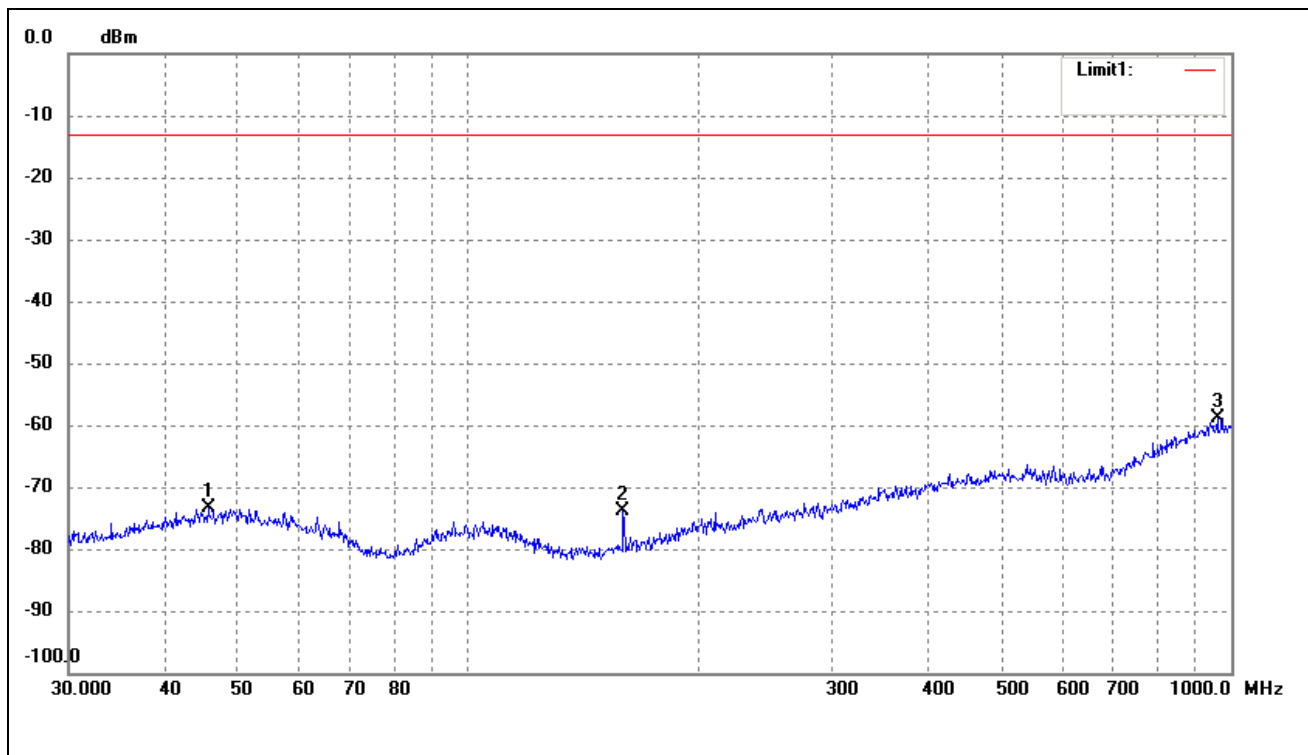

| No. | Frequency | Reading | Correct | Result | Limit  | Margin | Remark |
|-----|-----------|---------|---------|--------|--------|--------|--------|
|     | (MHz)     | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   |        |
| 1   | 45.6948   | -77.65  | 4.34    | -73.31 | -13.00 | -60.31 | ERP    |
| 2   | 159.7844  | -73.30  | -0.55   | -73.85 | -13.00 | -60.85 | ERP    |
| 3   | 958.7943  | -76.60  | 17.86   | -58.76 | -13.00 | -45.78 | ERP    |

Note:  $\text{Margin} = (\text{Reading} + \text{Correct}) - \text{Limit}$

*Spurious Emissions Above 1GHz*  
*For Cellular Band\_GSM850 Mode*

| Frequency                 | Reading | Correct | Result | Limit  | Margin | Polar |
|---------------------------|---------|---------|--------|--------|--------|-------|
| (MHz)                     | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   | H/V   |
| Low Channel (824.2MHz)    |         |         |        |        |        |       |
| 1648.4                    | -60.69  | 10.25   | -50.44 | -13.00 | -37.44 | H     |
| 2472.6                    | -59.79  | 14.02   | -45.77 | -13.00 | -32.77 | H     |
| 1648.4                    | -60.04  | 10.25   | -49.79 | -13.00 | -36.79 | V     |
| 2472.6                    | -58.95  | 14.02   | -44.93 | -13.00 | -31.93 | V     |
| Middle Channel (836.6MHz) |         |         |        |        |        |       |
| 1673.2                    | -60.02  | 10.14   | -49.88 | -13.00 | -36.88 | H     |
| 2509.8                    | -59.72  | 13.86   | -45.86 | -13.00 | -32.86 | H     |
| 1673.2                    | -59.98  | 10.14   | -49.84 | -13.00 | -36.84 | V     |
| 2509.8                    | -60.38  | 13.86   | -46.52 | -13.00 | -33.52 | V     |
| High Channel (848.8MHz)   |         |         |        |        |        |       |
| 1697.6                    | -60.38  | 14.05   | -46.33 | -13.00 | -33.33 | H     |
| 2546.4                    | -59.64  | 14.41   | -45.23 | -13.00 | -32.23 | H     |
| 1697.6                    | -60.36  | 14.05   | -46.31 | -13.00 | -33.31 | V     |
| 2546.4                    | -59.56  | 14.41   | -45.15 | -13.00 | -32.15 | V     |

*For PCS Band\_GSM1900 Mode*

| Frequency                | Reading | Correct | Result | Limit  | Margin | Polar |
|--------------------------|---------|---------|--------|--------|--------|-------|
| (MHz)                    | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   | H/V   |
| Low Channel (1850.2MHz)  |         |         |        |        |        |       |
| 3700.4                   | -59.90  | 13.67   | -46.23 | -13.00 | -33.23 | H     |
| 5550.6                   | -58.38  | 14.54   | -43.84 | -13.00 | -30.84 | H     |
| 3700.4                   | -59.25  | 13.67   | -45.58 | -13.00 | -32.58 | V     |
| 5550.6                   | -60.60  | 14.54   | -46.06 | -13.00 | -33.06 | V     |
| Middle Channel (1880MHz) |         |         |        |        |        |       |
| 3760.0                   | -59.51  | 13.77   | -45.74 | -13.00 | -32.74 | H     |
| 5640.0                   | -58.69  | 14.35   | -44.34 | -13.00 | -31.34 | H     |
| 3760.0                   | -59.16  | 13.77   | -45.39 | -13.00 | -32.39 | V     |
| 5640.0                   | -58.87  | 14.35   | -44.52 | -13.00 | -31.52 | V     |
| High Channel (1909.8MHz) |         |         |        |        |        |       |
| 3819.6                   | -60.28  | 13.77   | -46.51 | -13.00 | -33.51 | H     |
| 5729.4                   | -60.08  | 14.28   | -45.8  | -13.00 | -32.80 | H     |
| 3819.6                   | -59.84  | 13.77   | -46.07 | -13.00 | -33.07 | V     |
| 5729.4                   | -59.72  | 14.28   | -45.44 | -13.00 | -32.44 | V     |

*For Band V Mode*

| Frequency                 | Reading | Correct | Result | Limit  | Margin | Polar |
|---------------------------|---------|---------|--------|--------|--------|-------|
| (MHz)                     | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   | H/V   |
| Low Channel (826.4MHz)    |         |         |        |        |        |       |
| 1652.8                    | -59.45  | 14.98   | -44.47 | -13.00 | -31.47 | H     |
| 2479.2                    | -59.97  | 17.02   | -42.95 | -13.00 | -29.95 | H     |
| 1652.8                    | -58.42  | 14.98   | -43.44 | -13.00 | -30.44 | V     |
| 2479.2                    | -59.65  | 17.02   | -42.63 | -13.00 | -29.63 | V     |
| Middle Channel (836.4MHz) |         |         |        |        |        |       |
| 1672.8                    | -58.68  | 6.86    | -51.82 | -13.00 | -38.82 | H     |
| 2509.2                    | -59.17  | 14.62   | -44.55 | -13.00 | -31.55 | H     |
| 1672.8                    | -59.63  | 6.86    | -52.77 | -13.00 | -39.77 | V     |
| 2509.2                    | -60.66  | 14.62   | -46.04 | -13.00 | -33.04 | V     |
| High Channel (846.6MHz)   |         |         |        |        |        |       |
| 1693.2                    | -57.79  | 6.86    | -50.93 | -13.00 | -37.93 | H     |
| 2539.8                    | -60.81  | 15.03   | -45.78 | -13.00 | -32.78 | H     |
| 1693.2                    | -58.29  | 6.86    | -51.43 | -13.00 | -38.43 | V     |
| 2539.8                    | -59.73  | 15.03   | -44.70 | -13.00 | -31.70 | V     |

*For Band II Mode*

| Frequency                | Reading | Correct | Result | Limit  | Margin | Polar |
|--------------------------|---------|---------|--------|--------|--------|-------|
| (MHz)                    | (dBm)   | dB      | (dBm)  | (dBm)  | (dB)   | H/V   |
| Low Channel (1852.4MHz)  |         |         |        |        |        |       |
| 3704.8                   | -58.81  | 5.88    | -52.93 | -13.00 | -39.93 | H     |
| 5557.2                   | -59.37  | 15.37   | -44.00 | -13.00 | -31.00 | H     |
| 3704.8                   | -59.87  | 5.88    | -53.99 | -13.00 | -40.99 | V     |
| 5557.2                   | -60.10  | 15.37   | -44.73 | -13.00 | -31.73 | V     |
| Middle Channel (1880MHz) |         |         |        |        |        |       |
| 3760.8                   | -59.29  | 10.17   | -49.12 | -13.00 | -36.12 | H     |
| 5640.0                   | -59.14  | 14.69   | -44.45 | -13.00 | -31.45 | H     |
| 3760.8                   | -58.86  | 10.17   | -48.69 | -13.00 | -35.69 | V     |
| 5640.0                   | -59.41  | 14.69   | -44.72 | -13.00 | -31.72 | V     |
| High Channel (1907.6MHz) |         |         |        |        |        |       |
| 3815.2                   | -59.33  | 6.91    | -52.42 | -13.00 | -39.42 | H     |
| 5722.8                   | -59.37  | 15.33   | -44.04 | -13.00 | -31.04 | H     |
| 3815.2                   | -59.63  | 6.91    | -52.72 | -13.00 | -39.72 | V     |
| 5722.8                   | -58.96  | 15.33   | -43.63 | -13.00 | -30.63 | H     |

Note: Result=Reading+ Correct, Margin= Result- Limit

Testing is carried out with frequency rang 9kHz to 20GHz, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so the data is not display.

## 9. Frequency Stability

### 9.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

| Frequency range (MHz) | Base, fixed (ppm) | Mobile ≤3 watts (ppm) | Mobile ≤3 watts (ppm) |
|-----------------------|-------------------|-----------------------|-----------------------|
| 25 to 50              | 20.0              | 20.0                  | 50.0                  |
| 50 to 450             | 5.0               | 5.0                   | 50.0                  |
| 450 to 512            | 2.5               | 5.0                   | 5.0                   |
| 821 to 896            | 1.5               | 2.5                   | 2.5                   |
| 928 to 929            | 5.0               | N/A                   | N/A                   |
| 929 to 960            | 1.5               | N/A                   | N/A                   |
| 2110 to 2220          | 10.0              | N/A                   | N/A                   |

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 9.2 Test Equipment List and Details

| Manufacturer    | Description                   | Model      | Serial Number | Cal. Date  | Due. Date  |
|-----------------|-------------------------------|------------|---------------|------------|------------|
| Aglient         | Spectrum Analyzer             | E4402B-ESA | US41192821    | 2015-05-28 | 2016-05-27 |
| Rohde & Schwarz | Universal Radio Communication | CMU200     | 112012        | 2015-05-28 | 2016-05-27 |
| GONGWEN         | Moisture Test Chamber         | GDS-150    | SEMT-0013     | 2015-05-28 | 2016-05-27 |

### 9.3 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

| Temperature:   | Supply Voltage                      |
|----------------|-------------------------------------|
| 20°C           | 85-115% of declared nominal voltage |
| -30°C to +50°C | Normal                              |

## 9.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 20°C      |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

## 9.5 Summary of Test Results/Plots

For Cellular Band GSM Mode

| Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm |                      |                                     |             |
|---------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                  | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                               |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                            | 3.7                  | 58                                  | 0.0693      |
| 40                                                            | 3.7                  | 54                                  | 0.0645      |
| 30                                                            | 3.7                  | 49                                  | 0.0586      |
| 20                                                            | 3.7                  | 47                                  | 0.0562      |
| 10                                                            | 3.7                  | 52                                  | 0.0622      |
| 0                                                             | 3.7                  | 46                                  | 0.0550      |
| -10                                                           | 3.7                  | -9                                  | -0.0108     |
| -20                                                           | 3.7                  | -20                                 | -0.0239     |
| -30                                                           | 3.7                  | -24                                 | -0.0287     |

For PCS Band GSM Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                 | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                              |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                           | 3.7                  | 64                                  | 0.0340      |
| 40                                                           | 3.7                  | 61                                  | 0.0324      |
| 30                                                           | 3.7                  | 57                                  | 0.0303      |
| 20                                                           | 3.7                  | 66                                  | 0.0351      |
| 10                                                           | 3.7                  | 62                                  | 0.0330      |
| 0                                                            | 3.7                  | 66                                  | 0.0351      |
| -10                                                          | 3.7                  | 77                                  | 0.0410      |
| -20                                                          | 3.7                  | 72                                  | 0.0383      |
| -30                                                          | 3.7                  | 79                                  | 0.0420      |

## For Cellular Band GPRS Mode

| Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm |                      |                                     |             |
|---------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                  | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                               |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                            | 3.7                  | 62                                  | 0.0741      |
| 40                                                            | 3.7                  | 58                                  | 0.0693      |
| 30                                                            | 3.7                  | 53                                  | 0.0634      |
| 20                                                            | 3.7                  | 51                                  | 0.0610      |
| 10                                                            | 3.7                  | 56                                  | 0.0669      |
| 0                                                             | 3.7                  | 50                                  | 0.0598      |
| -10                                                           | 3.7                  | -5                                  | -0.0060     |
| -20                                                           | 3.7                  | -16                                 | -0.0191     |
| -30                                                           | 3.7                  | -20                                 | -0.0239     |

## For PCS Band GPRS Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                 | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                              |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                           | 3.7                  | 58                                  | 0.0309      |
| 40                                                           | 3.7                  | 55                                  | 0.0293      |
| 30                                                           | 3.7                  | 51                                  | 0.0271      |
| 20                                                           | 3.7                  | 60                                  | 0.0319      |
| 10                                                           | 3.7                  | 56                                  | 0.0298      |
| 0                                                            | 3.7                  | 60                                  | 0.0319      |
| -10                                                          | 3.7                  | 71                                  | 0.0378      |
| -20                                                          | 3.7                  | 66                                  | 0.0351      |
| -30                                                          | 3.7                  | 73                                  | 0.0388      |

## For Cellular Band EDGE Mode

| Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm |                      |                                     |             |
|---------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                  | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                               |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                            | 3.7                  | -48                                 | -0.0574     |
| 40                                                            | 3.7                  | -57                                 | -0.0681     |
| 30                                                            | 3.7                  | -35                                 | -0.0418     |
| 20                                                            | 3.7                  | -46                                 | -0.0550     |
| 10                                                            | 3.7                  | -52                                 | -0.0622     |
| 0                                                             | 3.7                  | -46                                 | -0.0550     |
| -10                                                           | 3.7                  | -55                                 | -0.0657     |
| -20                                                           | 3.7                  | -60                                 | -0.0717     |
| -30                                                           | 3.7                  | -63                                 | -0.0753     |

## For PCS Band EDGE Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                 | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                              |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                           | 3.7                  | 62                                  | 0.0330      |
| 40                                                           | 3.7                  | 53                                  | 0.0282      |
| 30                                                           | 3.7                  | 48                                  | 0.0255      |
| 20                                                           | 3.7                  | 45                                  | 0.0239      |
| 10                                                           | 3.7                  | 48                                  | 0.0255      |
| 0                                                            | 3.7                  | 52                                  | 0.0277      |
| -10                                                          | 3.7                  | 58                                  | 0.0309      |
| -20                                                          | 3.7                  | 63                                  | 0.0335      |
| -30                                                          | 3.7                  | 70                                  | 0.0372      |

## For WCDMA Band V Mode

| Reference Frequency(Middle Channel): 836.4 MHz, Limit: 2.5ppm |                      |                                     |             |
|---------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                  | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                               |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                            | 3.7                  | -46                                 | -0.0550     |
| 40                                                            | 3.7                  | -39                                 | -0.0466     |
| 30                                                            | 3.7                  | -36                                 | -0.0430     |
| 20                                                            | 3.7                  | -50                                 | -0.0598     |
| 10                                                            | 3.7                  | -31                                 | -0.0371     |
| 0                                                             | 3.7                  | -26                                 | -0.0311     |
| -10                                                           | 3.7                  | -37                                 | -0.0442     |
| -20                                                           | 3.7                  | -41                                 | -0.0490     |
| -30                                                           | 3.7                  | -20                                 | -0.0239     |

## For WCDMA Band II Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                 | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                              |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                           | 3.7                  | 53                                  | 0.0282      |
| 40                                                           | 3.7                  | 50                                  | 0.0266      |
| 30                                                           | 3.7                  | 46                                  | 0.0245      |
| 20                                                           | 3.7                  | 55                                  | 0.0293      |
| 10                                                           | 3.7                  | 51                                  | 0.0271      |
| 0                                                            | 3.7                  | 55                                  | 0.0293      |
| -10                                                          | 3.7                  | 66                                  | 0.0351      |
| -20                                                          | 3.7                  | 61                                  | 0.0324      |
| -30                                                          | 3.7                  | 68                                  | 0.0362      |

## For HSDPA Band V Mode

| Reference Frequency(Middle Channel): 836.4 MHz, Limit: 2.5ppm |                      |                                     |             |
|---------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                  | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                               |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                            | 3.7                  | -68                                 | -0.0813     |
| 40                                                            | 3.7                  | -61                                 | -0.0729     |
| 30                                                            | 3.7                  | -58                                 | -0.0693     |
| 20                                                            | 3.7                  | -72                                 | -0.0861     |
| 10                                                            | 3.7                  | -53                                 | -0.0634     |
| 0                                                             | 3.7                  | -48                                 | -0.0574     |
| -10                                                           | 3.7                  | -59                                 | -0.0705     |
| -20                                                           | 3.7                  | -63                                 | -0.0753     |
| -30                                                           | 3.7                  | -42                                 | -0.0502     |

## For HSDPA Band II Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                 | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                              |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                           | 3.7                  | 59                                  | 0.0314      |
| 40                                                           | 3.7                  | 56                                  | 0.0298      |
| 30                                                           | 3.7                  | 52                                  | 0.0277      |
| 20                                                           | 3.7                  | 61                                  | 0.0324      |
| 10                                                           | 3.7                  | 57                                  | 0.0303      |
| 0                                                            | 3.7                  | 61                                  | 0.0324      |
| -10                                                          | 3.7                  | 72                                  | 0.0383      |
| -20                                                          | 3.7                  | 67                                  | 0.0356      |
| -30                                                          | 3.7                  | 74                                  | 0.0394      |

## For HSUPA Band V Mode

| Reference Frequency(Middle Channel): 836.4 MHz, Limit: 2.5ppm |                      |                                     |             |
|---------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                  | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                               |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                            | 3.7                  | -54                                 | -0.0646     |
| 40                                                            | 3.7                  | -47                                 | -0.0562     |
| 30                                                            | 3.7                  | -44                                 | -0.0526     |
| 20                                                            | 3.7                  | -58                                 | -0.0693     |
| 10                                                            | 3.7                  | -39                                 | -0.0466     |
| 0                                                             | 3.7                  | -34                                 | -0.0407     |
| -10                                                           | 3.7                  | -45                                 | -0.0538     |
| -20                                                           | 3.7                  | -49                                 | -0.0586     |
| -30                                                           | 3.7                  | -28                                 | -0.0335     |

## For HSUPA Band II Mode

| Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                 | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                              |                      | MCF (Hz)                            | Error (ppm) |
| 50                                                           | 3.7                  | 61                                  | 0.0324      |
| 40                                                           | 3.7                  | 58                                  | 0.0309      |
| 30                                                           | 3.7                  | 54                                  | 0.0287      |
| 20                                                           | 3.7                  | 63                                  | 0.0335      |
| 10                                                           | 3.7                  | 59                                  | 0.0314      |
| 0                                                            | 3.7                  | 63                                  | 0.0335      |
| -10                                                          | 3.7                  | 74                                  | 0.0394      |
| -20                                                          | 3.7                  | 69                                  | 0.0367      |
| -30                                                          | 3.7                  | 76                                  | 0.0404      |

So, Frequency Stability Versus Input Voltage is:

| Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm  |                      |                                     |             |
|-------------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                      | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                   |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                | 3.3                  | 72                                  | 0.0861      |
|                                                                   | 3.7                  | 68                                  | 0.0813      |
|                                                                   | 4.2                  | 63                                  | 0.0753      |
| Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm  |                      |                                     |             |
| Environment Temperature (°C)                                      | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                   |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                | 3.3                  | 64                                  | 0.0340      |
|                                                                   | 3.7                  | 68                                  | 0.0362      |
|                                                                   | 4.2                  | 79                                  | 0.0420      |
| Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm |                      |                                     |             |
| Environment Temperature (°C)                                      | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                   |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                | 3.3                  | 51                                  | 0.0610      |
|                                                                   | 3.7                  | 46                                  | 0.0550      |
|                                                                   | 4.2                  | 44                                  | 0.0526      |
| Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
| Environment Temperature (°C)                                      | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                   |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                | 3.3                  | 69                                  | 0.0367      |
|                                                                   | 3.7                  | 65                                  | 0.0346      |
|                                                                   | 4.2                  | 74                                  | 0.0394      |

| Reference Frequency(Middle Channel): EDGE 836.6MHz, Limit: 2.5ppm |                      |                                     |             |
|-------------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                      | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                   |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                | 3.3                  | 64                                  | 0.0765      |
|                                                                   | 3.7                  | 62                                  | 0.0741      |
|                                                                   | 4.2                  | 67                                  | 0.0801      |
| Reference Frequency(Middle Channel): EDGE 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
| Environment Temperature (°C)                                      | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                   |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                | 3.3                  | 74                                  | 0.0394      |
|                                                                   | 3.7                  | 70                                  | 0.0372      |
|                                                                   | 4.2                  | 74                                  | 0.0394      |

| Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                       | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                    |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                 | 3.3                  | -55                                 | -0.0658     |
|                                                                    | 3.7                  | -48                                 | -0.0574     |
|                                                                    | 4.2                  | -45                                 | -0.0538     |
| Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
| Environment Temperature (°C)                                       | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                    |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                 | 3.3                  | 46                                  | 0.0245      |
|                                                                    | 3.7                  | 42                                  | 0.0223      |
|                                                                    | 4.2                  | 51                                  | 0.0271      |
| Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm |                      |                                     |             |
| Environment Temperature (°C)                                       | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                    |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                 | 3.3                  | -59                                 | -0.0705     |
|                                                                    | 3.7                  | -40                                 | -0.0478     |
|                                                                    | 4.2                  | -35                                 | -0.0418     |

| Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm |                      |                                     |             |
|--------------------------------------------------------------------|----------------------|-------------------------------------|-------------|
| Environment Temperature (°C)                                       | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                    |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                 | 3.3                  | 62                                  | 0.0330      |
|                                                                    | 3.7                  | 57                                  | 0.0303      |
|                                                                    | 4.2                  | 64                                  | 0.0340      |
| Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm |                      |                                     |             |
| Environment Temperature (°C)                                       | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                    |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                 | 3.3                  | -45                                 | -0.0538     |
|                                                                    | 3.7                  | -59                                 | -0.0705     |
|                                                                    | 4.2                  | -40                                 | -0.0478     |
| Reference Frequency(Middle Channel): HSUPA1880 MHz, Limit: 2.5ppm  |                      |                                     |             |
| Environment Temperature (°C)                                       | Power Supplied (VDC) | Frequency Measure with Time Elapsed |             |
|                                                                    |                      | Frequency (Hz)                      | Error (ppm) |
| 20                                                                 | 3.3                  | 51                                  | 0.0271      |
|                                                                    | 3.7                  | 47                                  | 0.0250      |
|                                                                    | 4.2                  | 51                                  | 0.0271      |

\*\*\*\*\* END OF REPORT \*\*\*\*\*