

TEST REPORT

Applicant	BenQ Corporation
Address	16 Jihu Road, Neihu, Taipei 114, Taiwan

Manufacturer or Supplier	BenQ Corporation
Address	16 Jihu Road, Neihu, Taipei 114, Taiwan
Product	Wireless USB Adapter
Brand Name	BenQ
Model	TDY31
Additional Model & Model Difference	N/A
Date of tests	Aug. 26, 2021 ~ Sep. 26, 2021

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Andy Zhu Supervisor / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Jan. 04, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <https://www.cps.bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3 DUTY CYCLE OF TEST SIGNAL	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 TEST TYPES AND RESULTS	12
4.1. CONDUCTED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2. RADIATED EMISSION MEASUREMENT	17
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2 TEST INSTRUMENTS	18
4.2.3 TEST PROCEDURES	19
4.2.4 DEVIATION FROM TEST STANDARD	20
4.2.5 TEST SETUP	20
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS	22
4.3 6DB BANDWIDTH MEASUREMENT	36
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	36
4.3.2 TEST INSTRUMENTS	36
4.3.3 TEST PROCEDURE	36
4.3.4 DEVIATION FROM TEST STANDARD	36
4.3.5 TEST SETUP	37
4.3.6 EUT OPERATING CONDITIONS	37

4.3.7	TEST RESULTS	38
4.4	CONDUCTED OUTPUT POWER.....	43
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	43
4.4.2	TEST SETUP.....	43
4.4.3	TEST INSTRUMENTS.....	43
4.4.4	TEST PROCEDURES	44
4.4.5	DEVIATION FROM TEST STANDARD	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST SETUP.....	47
4.5.3	TEST INSTRUMENTS.....	47
4.5.4	TEST PROCEDURE.....	47
4.5.5	DEVIATION FROM TEST STANDARD	47
4.5.6	EUT OPERATING CONDITION	48
4.5.7	TEST RESULTS	48
4.6	OUT OF BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT.....	53
4.6.2	TEST SETUP.....	53
4.6.3	TEST INSTRUMENTS.....	53
4.6.4	TEST PROCEDURE.....	53
4.6.5	DEVIATION FROM TEST STANDARD	54
4.6.6	EUT OPERATING CONDITION	54
4.6.7	TEST RESULTS	55
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	66
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	67



Test Report No.: RF2107WDG0280-1

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2107WDG0280-1	Original release	Jan. 04, 2022

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.05dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.82dB
	1GHz ~ 18GHz	4.94dB
	18GHz ~ 40GHz	5.07dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless USB Adapter
MODEL NO.	TDY31
ADDITIONAL NO.	N/A
FCC ID	JVPTDY31
NOMINAL VOLTAGE	DC 5V from USB host unit
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
PEAK OUTPUT POWER	216.531mW(Maximum)
ANTENNA TYPE	FPC antenna with 2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2107WDG0280) for detailed product photo.
4. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitter and 2 receiver.

MODULATION MODE	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

5. ANTENNA LIST

Ant. No.	Vendor	Antenna Type	Operation Frequency Range (MHz)	Gain (dBi)
Chain 0	Tengxiang Technology.Inc	FPC	2.4GHz	2
Chain 1		FPC	2.4GHz	2
Directional Gain for PSD			5.01dBi	
Directional Gain for power			2dBi	

All antennas have the same gain, Directional gain = GANT + Array Gain, where Array Gain is as follows.
 For power spectral density (PSD) measurements on all devices, Array Gain = 10 log(NANT/NSS=1) dB.
 For power measurements on IEEE 802.11 devices, Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered by Notebook with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
A	WIFI (2.4G) Link

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	11	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 53%RH	DC 5V From Notebook	Jelly
RE≥1G	25deg. C, 53%RH	DC 5V From Notebook	Jelly
PLC	20deg. C, 56%RH	DC 5V From Notebook	Alex
APCM	25deg. C, 60%RH	DC 5V From Notebook	Vincent


3.3 DUTY CYCLE OF TEST SIGNAL

802.11b: Duty cycle = $8.188/8.248 = 0.993$

802.11g: Duty cycle = $1.360/1.414 = 0.962$, Duty factor = $10 * \log(1/0.93) = 0.169$

802.11n (HT20): Duty cycle = $1.270/1.324 = 0.959$, Duty factor = $10 * \log(1/0.93) = 0.181$

802.11n (HT40): Duty cycle = $0.631/0.685 = 0.921$, Duty factor = $10 * \log(1/0.93) = 0.357$

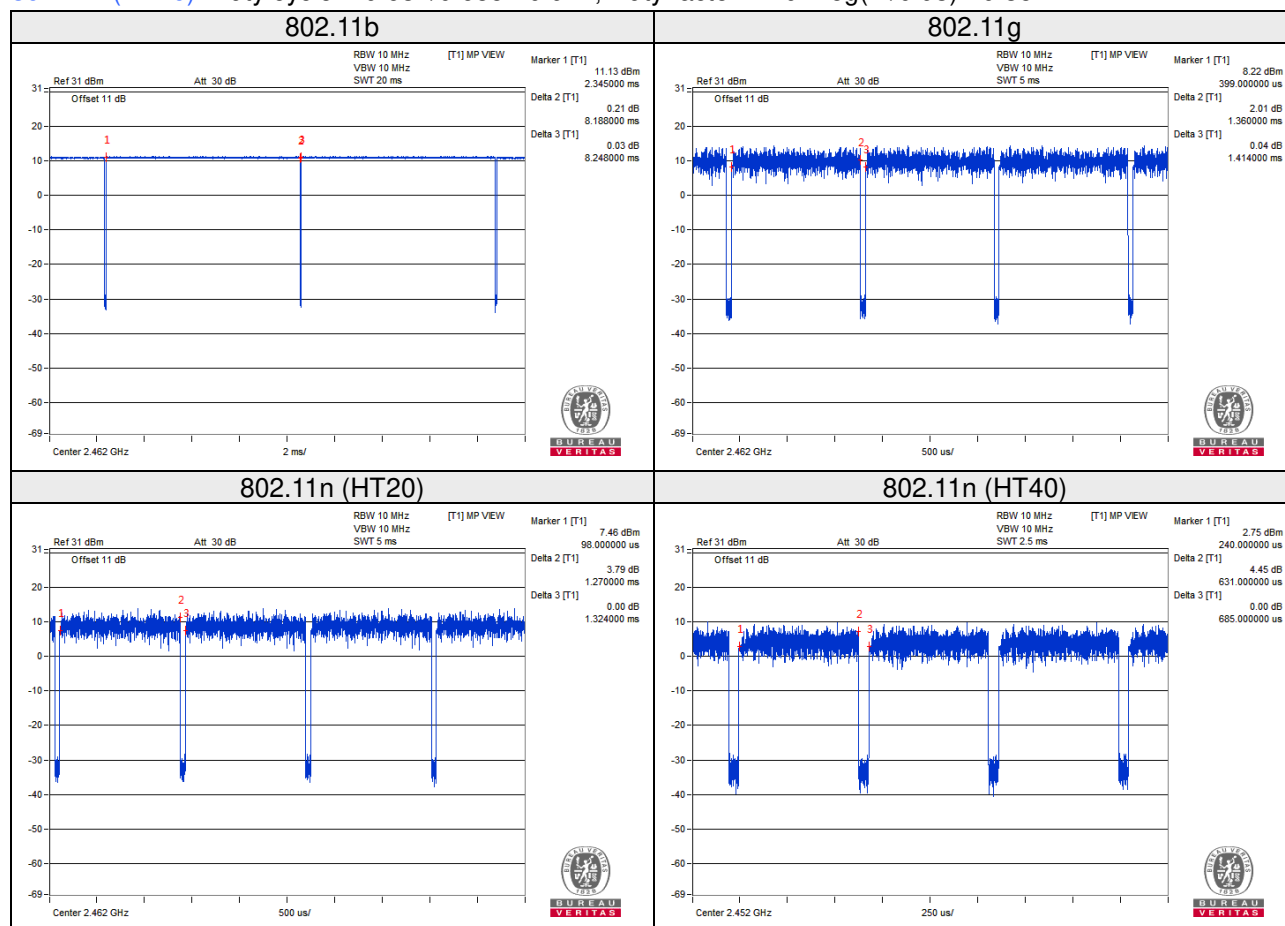

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(sDoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	Latitude 5280	77K2GH2	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 0.8m, DC Line: Unshielded, Detachable 1.8m

4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 07,22
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 07,22
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 07,22
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Sep. 17,22
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

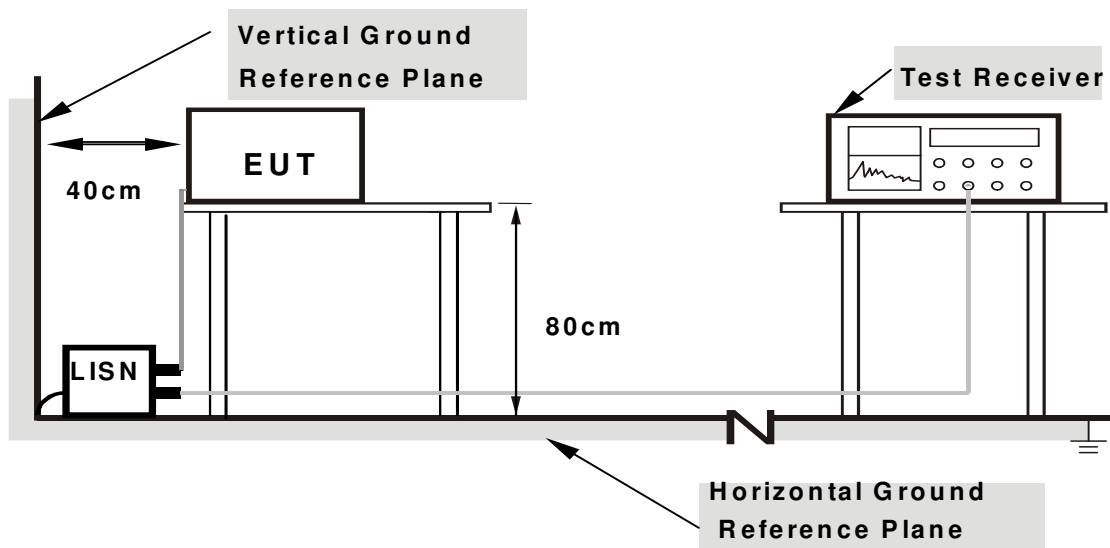

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15900	9.67	35.77	22.09	45.44	31.76	65.52	55.52	-20.08	-23.76
2	0.22151	9.72	34.05	20.97	43.77	30.69	62.76	52.76	-18.99	-22.07
3	0.36101	9.80	26.85	20.01	36.65	29.81	58.71	48.71	-22.05	-18.89
4	0.42747	9.83	28.04	19.94	37.87	29.77	57.30	47.30	-19.44	-17.54
5	2.42700	9.85	23.82	16.52	33.67	26.37	56.00	46.00	-22.33	-19.63
6	2.91975	9.86	24.71	19.24	34.57	29.10	56.00	46.00	-21.43	-16.90


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

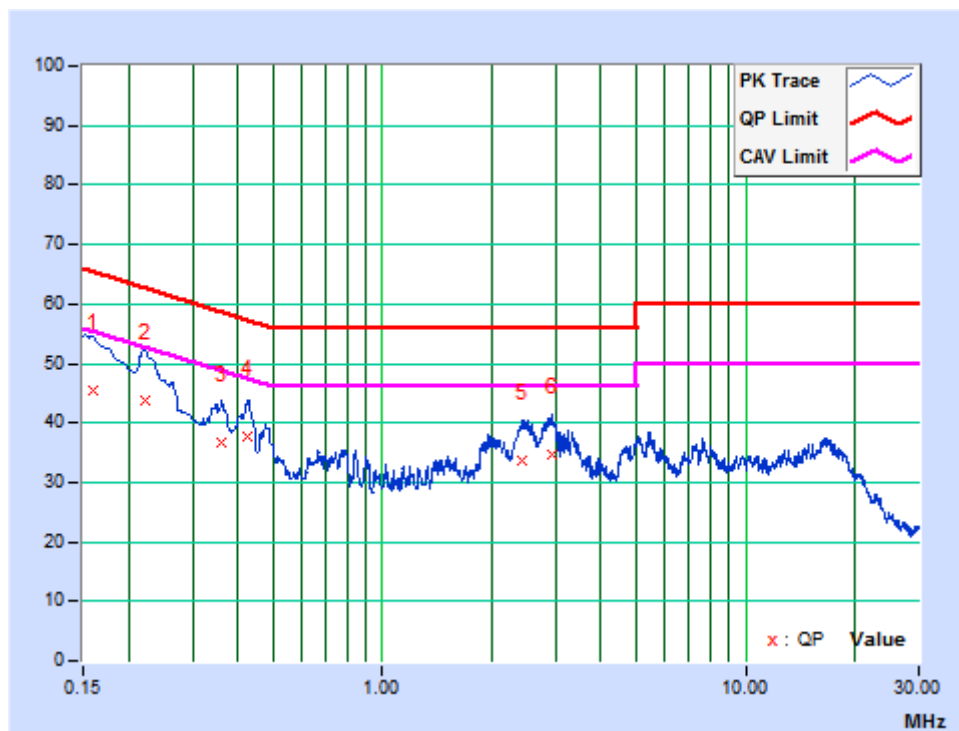

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16125	9.67	35.82	21.50	45.49	31.17	65.40	55.40	-19.91	-24.23
2	0.23600	9.73	37.34	22.68	47.07	32.41	62.24	52.24	-15.16	-19.82
3	0.35700	9.81	33.29	24.27	43.10	34.08	58.80	48.80	-15.70	-14.72
4	0.42860	9.83	38.56	26.40	48.39	36.23	57.28	47.28	-8.89	-11.05
5	0.69303	9.82	21.08	11.84	30.90	21.66	56.00	46.00	-25.10	-24.34
6	0.84035	9.83	26.93	21.45	36.76	31.28	56.00	46.00	-19.24	-14.72

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

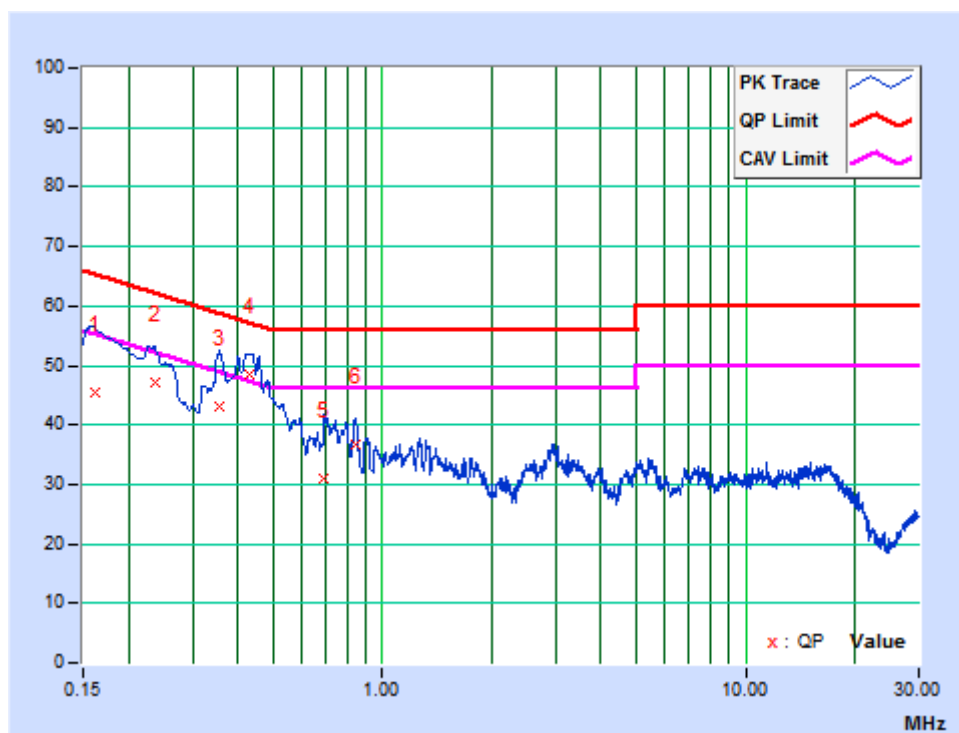

4.2. RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 07,22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 09, 22
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 29,22
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 13,22
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	May 29,22
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 29,22
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	May 09, 22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May 22,22
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	May 08,22
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Mar. 13,22
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

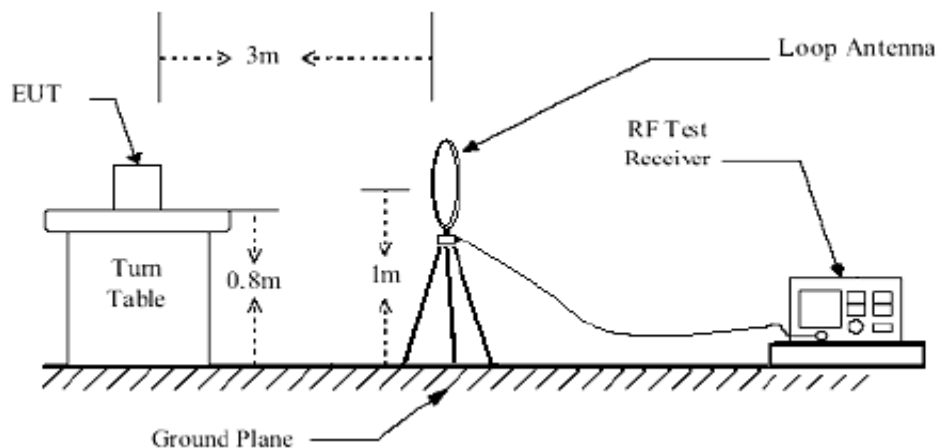


Below 1GHz test setup

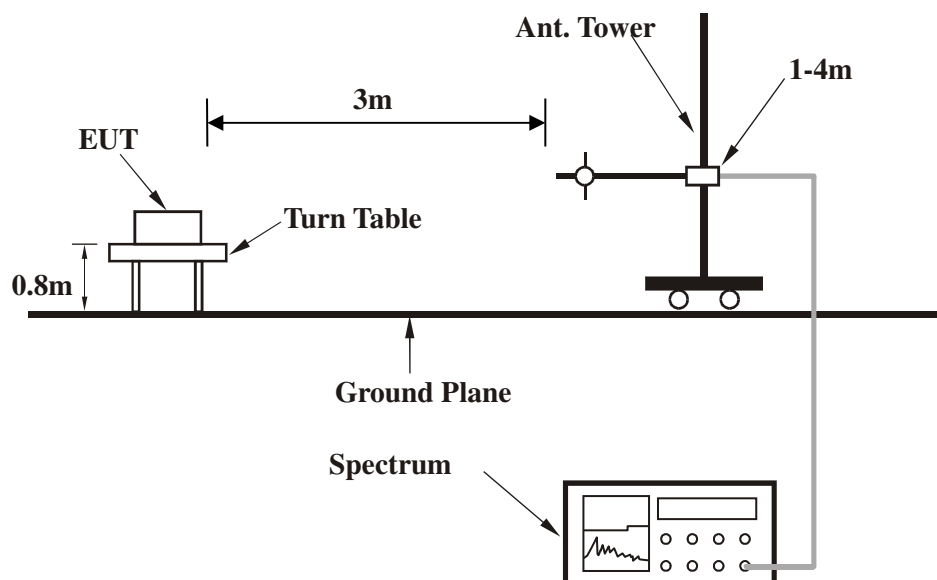

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

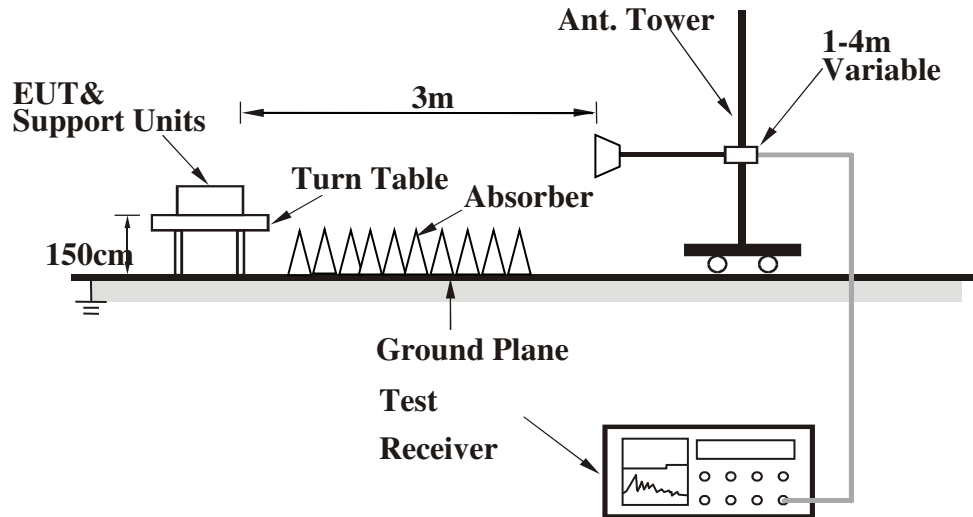

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	216.54	25.29 QP	46.00	-20.71	2.36H	195	45.70	-20.41
2	230.53	25.38 QP	46.00	-20.62	2.49H	148	44.93	-19.55
3	289.60	18.18 QP	46.00	-27.82	2.89H	133	34.76	-16.58
4	476.14	27.97 QP	46.00	-18.03	1.73H	170	39.81	-11.84
5	530.54	28.46 QP	46.00	-17.54	1.31H	181	39.21	-10.75
6	704.65	21.92 QP	46.00	-24.08	1.17H	116	29.91	-7.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

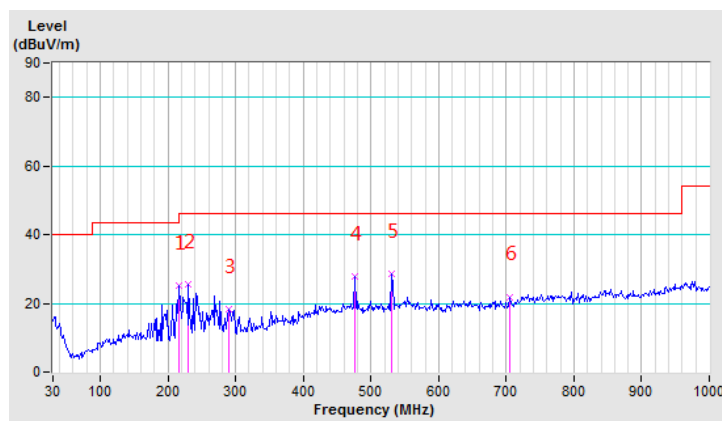


CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	168.35	22.41 QP	43.50	-21.09	1.79V	125	41.71	-19.30
2	225.87	29.24 QP	46.00	-16.76	1.92V	230	49.11	-19.87
3	319.13	24.21 QP	46.00	-21.79	1.83V	201	40.40	-16.19
4	371.99	28.26 QP	46.00	-17.74	2.02V	85	42.65	-14.39
5	533.65	25.88 QP	46.00	-20.12	1.85V	144	36.47	-10.59
6	634.70	21.93 QP	46.00	-24.07	2.65V	167	29.83	-7.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

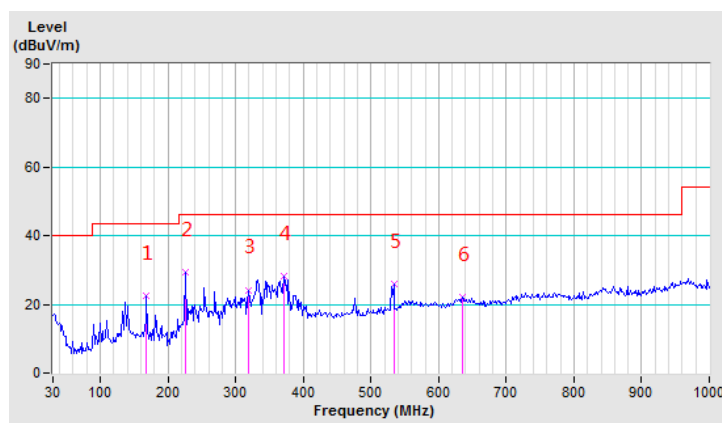

ABOVE 1GHz DATA
802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	41.93 PK	74.00	-32.07	2.84H	153	38.71	3.22
2	2390.00	29.23 AV	54.00	-24.77	2.84H	153	26.01	3.22
3	*2412.00	88.76 PK			2.29H	153	85.54	3.22
4	*2412.00	84.16 AV			2.29H	153	80.94	3.22
5	4824.00	57.13 PK	74.00	-16.87	2.85H	0	53.91	3.22
6	4824.00	41.05 AV	54.00	-12.95	2.85H	0	37.83	3.22
7	#7236.00	58.22 PK	74.00	-15.78	1.59H	0	55.00	3.22
8	#7236.00	42.16 AV	54.00	-11.84	1.59H	0	38.94	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.24 PK	74.00	-29.76	2.82V	346	41.02	3.22
2	2390.00	32.28 AV	54.00	-21.72	2.82V	346	29.06	3.22
3	*2412.00	99.44 PK			2.37V	346	96.22	3.22
4	*2412.00	94.71 AV			2.37V	346	91.49	3.22
5	4824.00	58.47 PK	74.00	-15.53	2.20V	0	55.25	3.22
6	4824.00	42.53 AV	54.00	-11.47	2.20V	0	39.31	3.22
7	#7236.00	59.63 PK	74.00	-14.37	1.82V	0	56.41	3.22
8	#7236.00	43.59 AV	54.00	-10.41	1.82V	0	40.37	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	90.05 PK			2.55H	14	86.83	3.22
2	*2437.00	86.13 AV			2.55H	14	82.91	3.22
3	4874.00	58.84 PK	74.00	-15.16	2.89H	0	55.62	3.22
4	4874.00	47.39 AV	54.00	-6.61	2.89H	0	44.17	3.22
5	7311.00	58.29 PK	74.00	-15.71	2.46H	0	55.07	3.22
6	7311.00	43.16 AV	54.00	-10.84	2.46H	0	39.94	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.29 PK			2.54V	139	95.07	3.22
2	*2437.00	94.94 AV			2.54V	139	91.72	3.22
3	4874.00	59.83 PK	74.00	-14.17	2.30V	0	56.61	3.22
4	4874.00	48.34 AV	54.00	-5.66	2.30V	0	45.12	3.22
5	7311.00	59.29 PK	74.00	-14.71	2.32V	0	56.07	3.22
6	7311.00	45.17 AV	54.00	-8.83	2.32V	0	41.95	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	89.05 PK			2.55H	206	85.83	3.22
2	*2462.00	85.12 AV			2.55H	206	81.90	3.22
3	2483.50	41.04 PK	74.00	-32.96	1.58H	206	37.82	3.22
4	2483.50	29.33 AV	54.00	-24.67	1.58H	206	26.11	3.22
5	4924.00	58.44 PK	74.00	-15.56	2.44H	0	55.22	3.22
6	4924.00	44.17 AV	54.00	-9.83	2.44H	0	40.95	3.22
7	7386.00	59.15 PK	74.00	-14.85	2.38H	0	55.93	3.22
8	7386.00	42.08 AV	54.00	-11.92	2.38H	0	38.86	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.92 PK			1.65V	215	96.70	3.22
2	*2462.00	95.16 AV			1.65V	215	91.94	3.22
3	2483.50	43.01 PK	74.00	-30.99	2.42V	215	39.79	3.22
4	2483.50	30.94 AV	54.00	-23.06	2.42V	215	27.72	3.22
5	4924.00	59.65 PK	74.00	-14.35	2.63V	0	56.43	3.22
6	4924.00	46.83 AV	54.00	-7.17	2.63V	0	43.61	3.22
7	7386.00	60.25 PK	74.00	-13.75	2.87V	0	57.03	3.22
8	7386.00	44.28 AV	54.00	-9.72	2.87V	0	41.06	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	42.11 PK	74.00	-31.89	2.70H	133	38.89	3.22
2	2390.00	30.30 AV	54.00	-23.70	2.70H	133	27.08	3.22
3	*2412.00	91.02 PK			2.15H	133	87.80	3.22
4	*2412.00	80.69 AV			2.15H	133	77.47	3.22
5	4824.00	57.04 PK	74.00	-16.96	1.90H	0	53.82	3.22
6	4824.00	40.28 AV	54.00	-13.72	1.90H	0	37.06	3.22
7	#7236.00	57.66 PK	74.00	-16.34	2.10H	0	54.44	3.22
8	#7236.00	41.54 AV	54.00	-12.46	2.10H	0	38.32	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.29 PK	74.00	-19.71	2.37V	18	51.07	3.22
2	2390.00	35.59 AV	54.00	-18.41	2.37V	18	32.37	3.22
3	*2412.00	100.57 PK			2.34V	18	97.35	3.22
4	*2412.00	90.32 AV			2.34V	18	87.10	3.22
5	4824.00	58.25 PK	74.00	-15.75	2.46V	0	55.03	3.22
6	4824.00	42.34 AV	54.00	-11.66	2.46V	0	39.12	3.22
7	#7236.00	59.14 PK	74.00	-14.86	2.81V	0	55.92	3.22
8	#7236.00	43.06 AV	54.00	-10.94	2.81V	0	39.84	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	90.25 PK			2.77H	153	87.03	3.22
2	*2437.00	81.06 AV			2.77H	153	77.84	3.22
3	4874.00	57.15 PK	74.00	-16.85	2.94H	0	53.93	3.22
4	4874.00	46.29 AV	54.00	-7.71	2.94H	0	43.07	3.22
5	7311.00	58.13 PK	74.00	-15.87	1.97H	0	54.91	3.22
6	7311.00	42.69 AV	54.00	-11.31	1.97H	0	39.47	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.53 PK			2.74V	354	95.31	3.22
2	*2437.00	94.83 AV			2.74V	354	91.61	3.22
3	4874.00	58.62 PK	74.00	-15.38	2.54V	0	55.40	3.22
4	4874.00	47.51 AV	54.00	-6.49	2.54V	0	44.29	3.22
5	7311.00	59.26 PK	74.00	-14.74	1.82V	0	56.04	3.22
6	7311.00	43.25 AV	54.00	-10.75	1.82V	0	40.03	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	90.25 PK			2.01H	55	87.03	3.22
2	*2462.00	80.34 AV			2.01H	55	77.12	3.22
3	2483.50	43.56 PK	74.00	-30.44	2.46H	55	40.34	3.22
4	2483.50	30.64 AV	54.00	-23.36	2.46H	55	27.42	3.22
5	4924.00	56.14 PK	74.00	-17.86	1.86H	0	52.92	3.22
6	4924.00	40.05 AV	54.00	-13.95	1.86H	0	36.83	3.22
7	7386.00	57.85 PK	74.00	-16.15	2.58H	0	54.63	3.22
8	7386.00	41.66 AV	54.00	-12.34	2.58H	0	38.44	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.84 PK			2.02V	148	96.62	3.22
2	*2462.00	89.56 AV			2.02V	148	86.34	3.22
3	2483.50	50.16 PK	74.00	-23.84	1.97V	148	46.94	3.22
4	2483.50	32.54 AV	54.00	-21.46	1.97V	148	29.32	3.22
5	4924.00	57.16 PK	74.00	-16.84	1.84V	0	53.94	3.22
6	4924.00	40.26 AV	54.00	-13.74	1.84V	0	37.04	3.22
7	7386.00	58.44 PK	74.00	-15.56	2.96V	0	55.22	3.22
8	7386.00	42.05 AV	54.00	-11.95	2.96V	0	38.83	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n HT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	41.54 PK	74.00	-32.46	2.33H	163	38.32	3.22
2	2390.00	30.16 AV	54.00	-23.84	2.33H	163	26.94	3.22
3	*2412.00	89.54 PK			1.83H	163	86.32	3.22
4	*2412.00	84.25 AV			1.83H	163	81.03	3.22
5	4824.00	57.25 PK	74.00	-16.75	2.57H	0	54.03	3.22
6	4824.00	41.15 AV	54.00	-12.85	2.57H	0	37.93	3.22
7	#7236.00	58.36 PK	74.00	-15.64	1.76H	0	55.14	3.22
8	#7236.00	41.07 AV	54.00	-12.93	1.76H	0	37.85	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	43.65 PK	74.00	-30.35	2.18V	205	40.43	3.22
2	2390.00	32.14 AV	54.00	-21.86	2.18V	205	28.92	3.22
3	*2412.00	99.26 PK			2.81V	205	96.04	3.22
4	*2412.00	94.57 AV			2.81V	205	91.35	3.22
5	4824.00	58.15 PK	74.00	-15.85	2.01 V	0	54.93	3.22
6	4824.00	42.36 AV	54.00	-11.64	2.01V	0	39.14	3.22
7	#7236.00	59.19 PK	74.00	-14.81	1.76 V	0	55.97	3.22
8	#7236.00	42.58 AV	54.00	-11.42	1.76 V	0	39.36	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	90.26 PK			2.84H	119	87.04	3.22
2	*2437.00	86.45 AV			2.84H	119	83.23	3.22
3	4874.00	57.12 PK	74.00	-16.88	1.54H	0	53.90	3.22
4	4874.00	45.13 AV	54.00	-8.87	1.54H	0	41.91	3.22
5	7311.00	58.34 PK	74.00	-15.66	2.50H	0	55.12	3.22
6	7311.00	43.59 AV	54.00	-10.41	2.50H	0	40.37	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.69 PK			2.04V	29	95.47	3.22
2	*2437.00	95.16 AV			2.04V	29	91.94	3.22
3	4874.00	58.66 PK	74.00	-15.34	2.07V	0	55.44	3.22
4	4874.00	47.52 AV	54.00	-6.48	2.07V	0	44.30	3.22
5	7311.00	59.13 PK	74.00	-14.87	2.63V	0	55.91	3.22
6	7311.00	45.04 AV	54.00	-8.96	2.63V	0	41.82	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	89.63 PK			2.74H	229	86.41	3.22
2	*2462.00	85.44 AV			2.74H	229	82.22	3.22
3	2483.50	41.33 PK	74.00	-32.67	1.65H	229	38.11	3.22
4	2483.50	30.69 AV	54.00	-23.31	1.65H	229	27.47	3.22
5	4924.00	58.64 PK	74.00	-15.36	1.72H	0	55.42	3.22
6	4924.00	44.29 AV	54.00	-9.71	1.72H	0	41.07	3.22
7	7386.00	59.33 PK	74.00	-14.67	2.11	0	56.11	3.22
8	7386.00	42.11 AV	54.00	-11.89	2.11H	0	38.89	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.57 PK			2.27V	109	96.35	3.22
2	*2462.00	95.23 AV			2.27V	109	92.01	3.22
3	2483.50	43.26 PK	74.00	-30.74	2.83V	109	40.04	3.22
4	2483.50	31.54 AV	54.00	-22.46	2.83V	109	28.32	3.22
5	4924.00	59.33 PK	74.00	-14.67	2.38V	0	56.11	3.22
6	4924.00	45.05 AV	54.00	-8.95	2.38V	0	41.83	3.22
7	7386.00	60.11 PK	74.00	-13.89	2.25V	0	56.89	3.22
8	7386.00	44.57 AV	54.00	-9.43	2.25V	0	41.35	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency.

802.11n HT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.05 PK	74.00	-29.95	1.65H	155	40.83	3.22
2	2390.00	31.64 AV	54.00	-22.36	1.65H	155	28.42	3.22
3	*2422.00	86.49 PK			1.72H	155	83.27	3.22
4	*2422.00	75.63 AV			1.72H	155	72.41	3.22
5	4844.00	57.21 PK	74.00	-16.79	2.63H	0	53.99	3.22
6	4844.00	40.16 AV	54.00	-13.84	2.63H	0	36.94	3.22
7	7266.00	57.44 PK	74.00	-16.56	1.53H	0	54.22	3.22
8	7266.00	41.36 AV	54.00	-12.64	1.53H	0	38.14	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.90 PK	74.00	-18.10	2.12V	102	52.68	3.22
2	2390.00	44.03 AV	54.00	-9.97	2.12V	102	40.81	3.22
3	*2422.00	96.78 PK			1.64V	102	93.56	3.22
4	*2422.00	86.44 AV			1.64V	102	83.22	3.22
5	4844.00	58.69 PK	74.00	-15.31	1.59V	0	55.47	3.22
6	4844.00	42.53 AV	54.00	-11.47	1.59V	0	39.31	3.22
7	7266.00	59.16 PK	74.00	-14.84	2.39V	0	55.94	3.22
8	7266.00	43.02 AV	54.00	-10.98	2.39V	0	39.80	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	89.48 PK			2.20H	207	86.26	3.22
2	*2437.00	85.22 AV			2.20H	207	82.00	3.22
3	4874.00	57.36 PK	74.00	-16.64	2.04H	0	54.14	3.22
4	4874.00	41.59 AV	54.00	-12.41	2.04H	0	38.37	3.22
5	7311.00	58.22 PK	74.00	-15.78	1.76H	0	55.00	3.22
6	7311.00	43.08 AV	54.00	-10.92	1.76H	0	39.86	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	96.16 PK			2.11V	13	92.94	3.22
2	*2437.00	93.25 AV			2.11V	13	90.03	3.22
3	4874.00	58.49 PK	74.00	-15.51	2.89V	0	55.27	3.22
4	4874.00	43.25 AV	54.00	-10.75	2.89V	0	40.03	3.22
5	7311.00	59.14 PK	74.00	-14.86	2.82V	0	55.92	3.22
6	7311.00	44.52 AV	54.00	-9.48	2.82V	0	41.30	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	87.54 PK			2.79H	25	84.32	3.22
2	*2452.00	78.69 AV			2.79H	25	75.47	3.22
3	2483.50	47.36 PK	74.00	-26.64	2.89H	25	44.14	3.22
4	2483.50	34.52 AV	54.00	-19.48	2.89H	25	31.30	3.22
5	4904.00	57.05 PK	74.00	-16.95	2.55H	0	53.83	3.22
6	4904.00	41.39 AV	54.00	-12.61	2.55H	0	38.17	3.22
7	7356.00	58.44 PK	74.00	-15.56	2.75H	0	55.22	3.22
8	7356.00	42.15 AV	54.00	-11.85	2.75H	0	38.93	3.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.23 PK			1.82V	154	93.01	3.22
2	*2452.00	85.40 AV			1.82V	154	82.18	3.22
3	2483.50	55.34 PK	74.00	-18.66	2.67V	154	52.12	3.22
4	2483.50	40.26 AV	54.00	-13.74	2.67V	154	37.04	3.22
5	4904.00	58.17 PK	74.00	-15.83	2.58V	0	54.95	3.22
6	4904.00	42.11 AV	54.00	-11.89	2.58V	0	38.89	3.22
7	7356.00	59.25 PK	74.00	-14.75	2.36V	0	56.03	3.22
8	7356.00	43.26 AV	54.00	-10.74	2.36V	0	40.04	3.22

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 09, 22
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 22
Power Meter	Anritsu	ML2495A	1139001	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24,22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03,21
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 10,22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24,22
Signal Generator	Agilent	N5183A	MY50140980	Aug. 10,22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 04,22
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A

NOTES: 1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

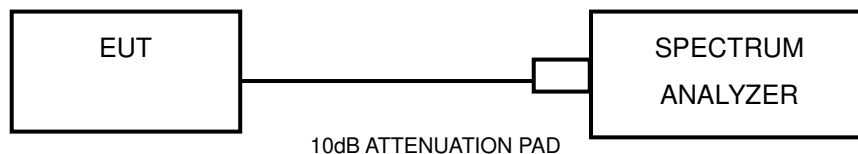

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	9.09	9.09	0.5	PASS
6	2437	9.12	9.11	0.5	PASS
11	2462	9.12	9.12	0.5	PASS

802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.37	16.38	0.5	PASS
6	2437	16.37	16.36	0.5	PASS
11	2462	16.37	16.37	0.5	PASS


802.11n HT20


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.00	16.95	0.5	PASS
6	2437	16.99	16.96	0.5	PASS
11	2462	17.00	16.96	0.5	PASS


802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	35.87	35.60	0.5	PASS
6	2437	35.83	35.35	0.5	PASS
9	2452	35.91	35.36	0.5	PASS

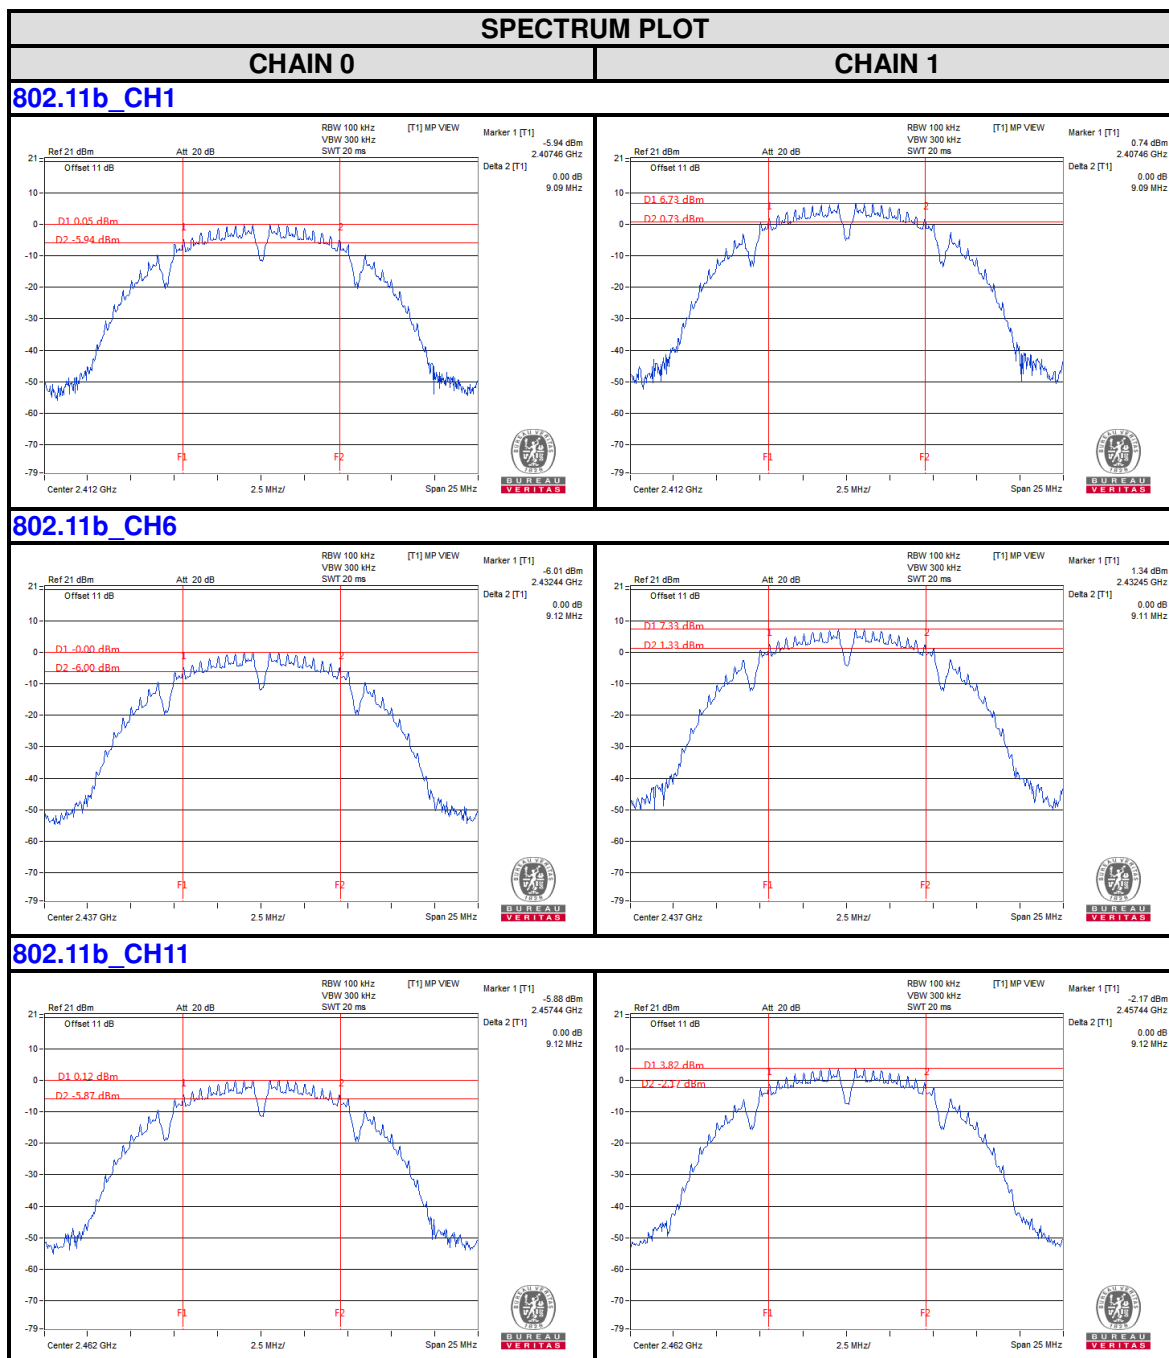

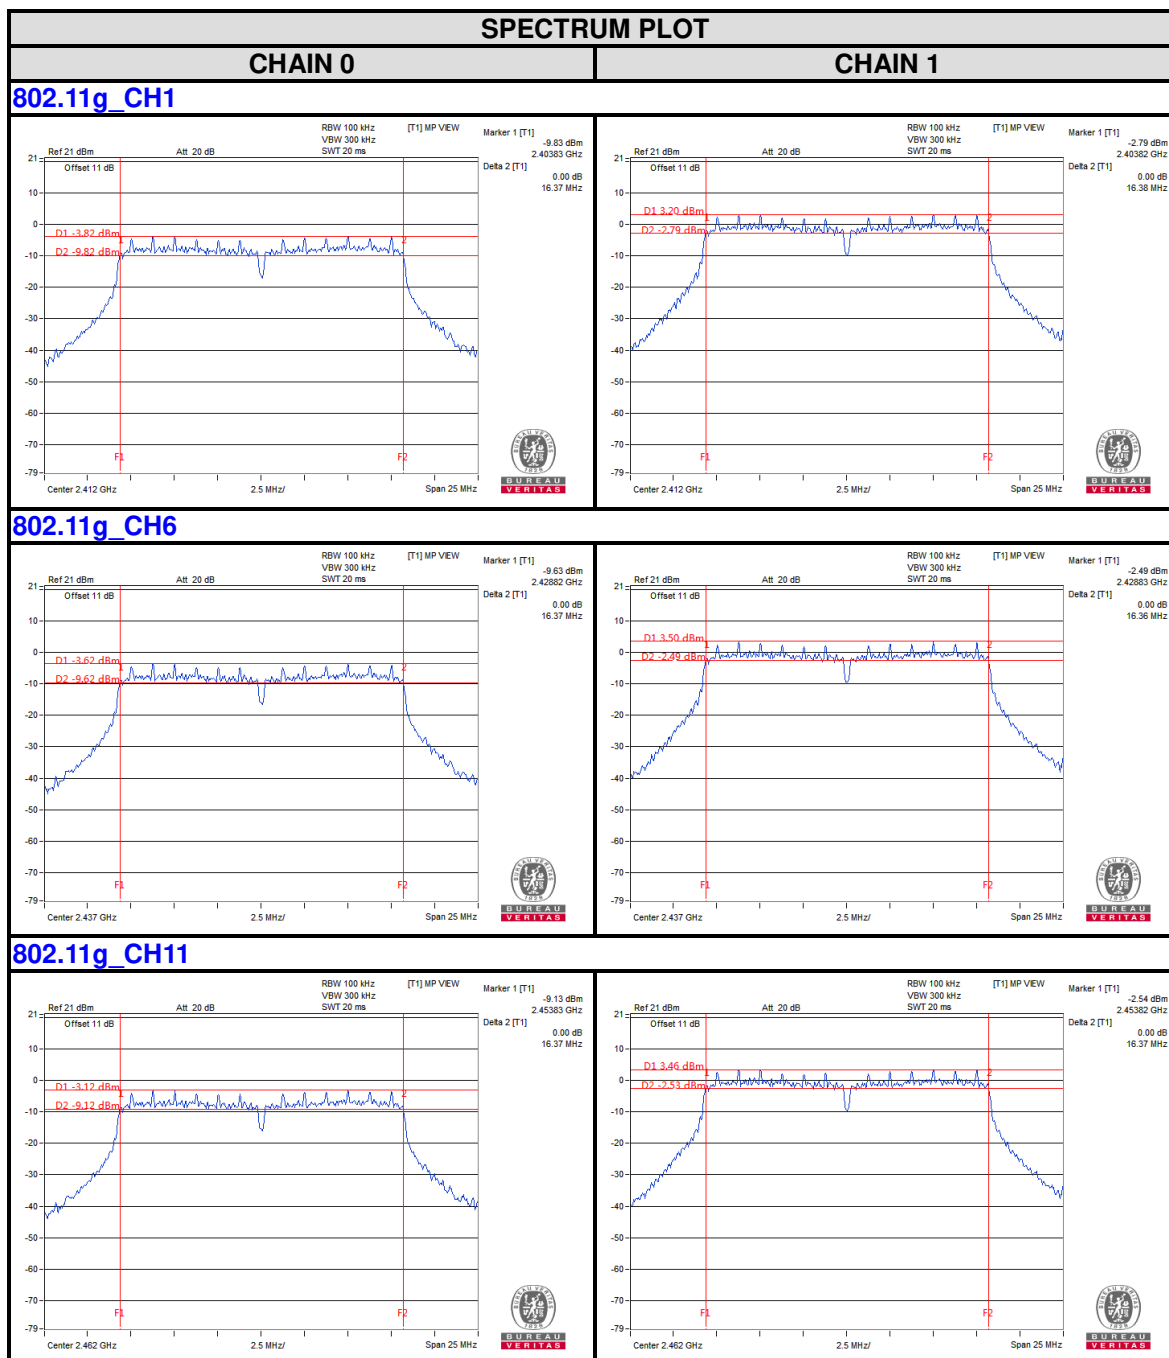

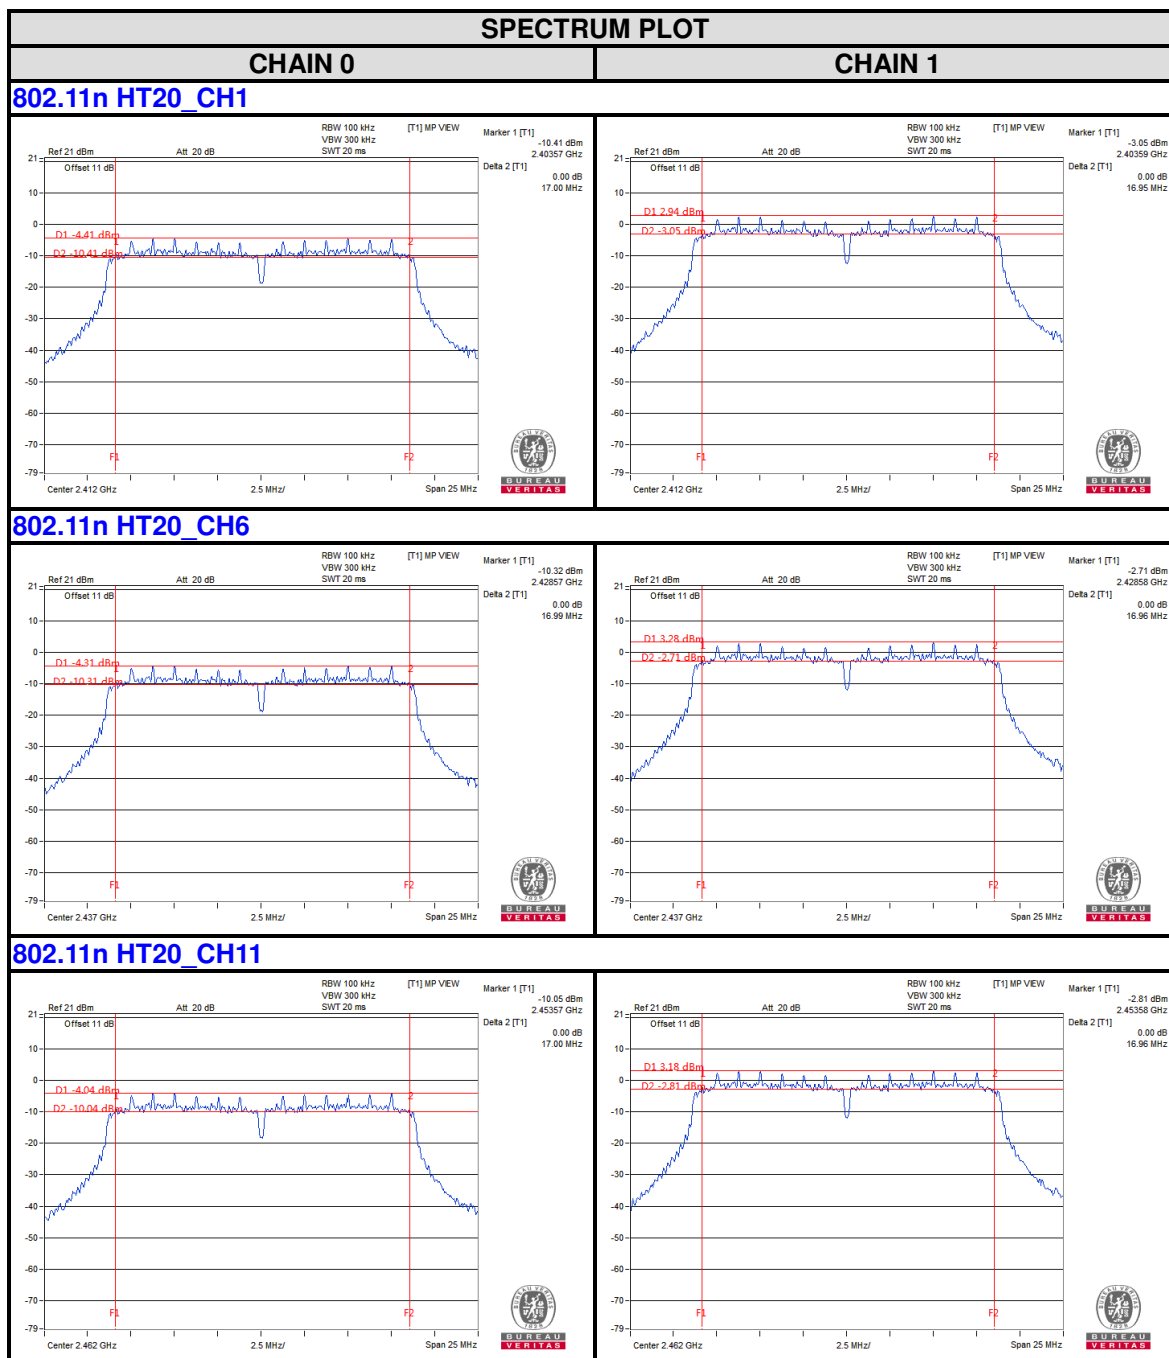

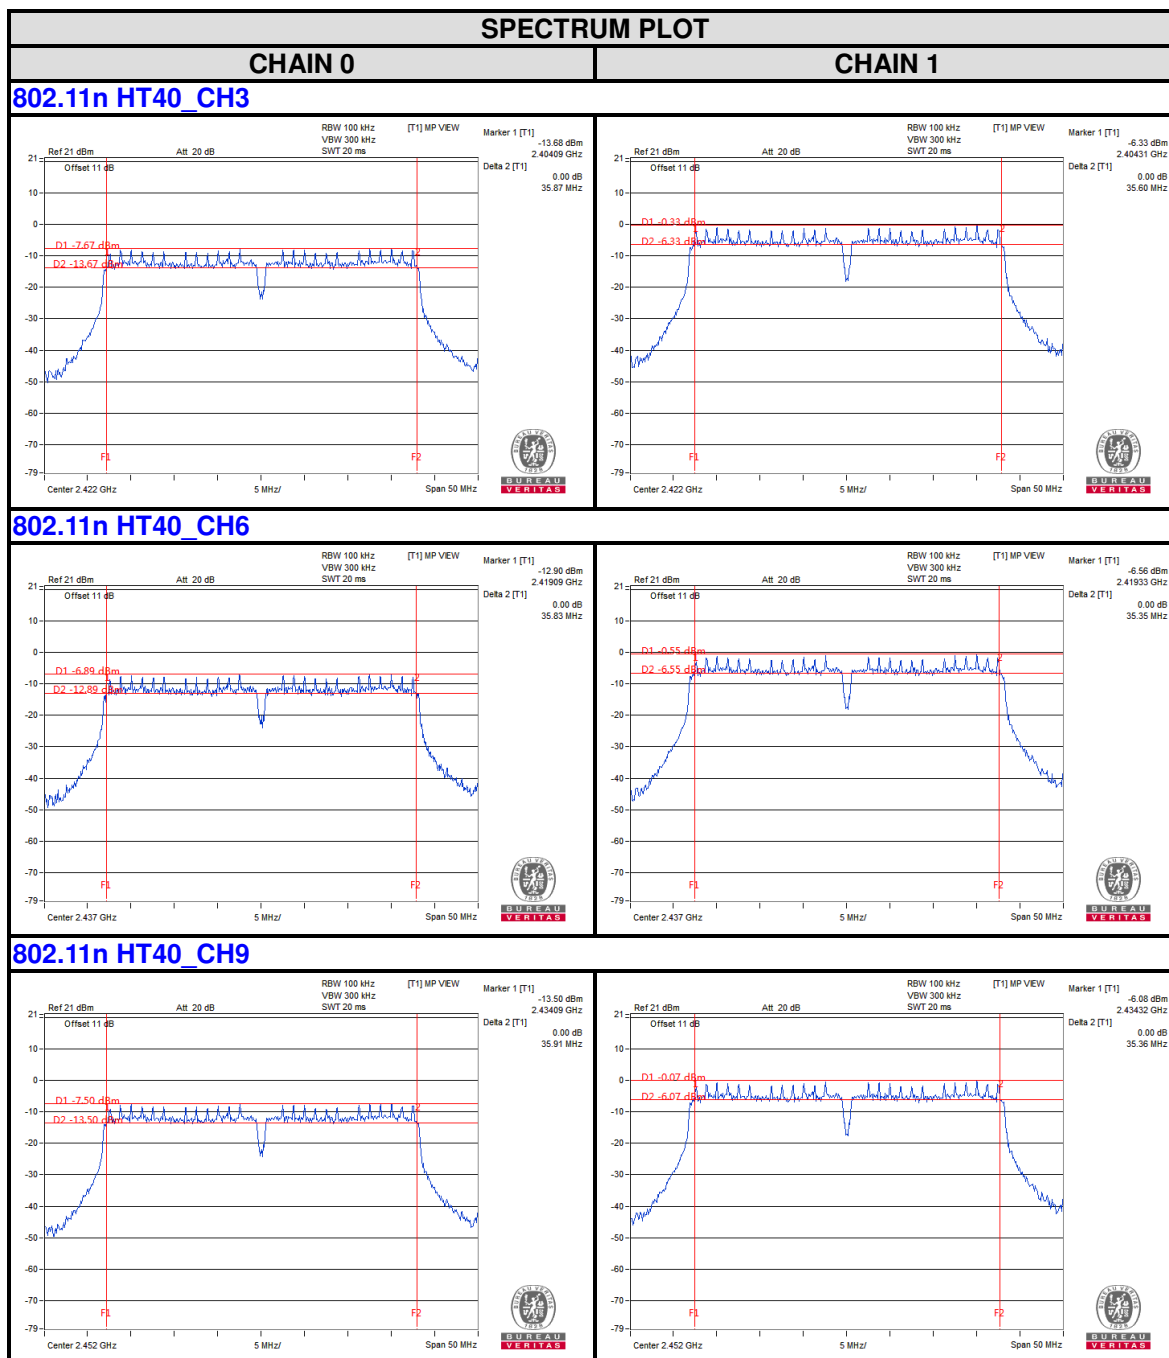


4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.4.2 TEST SETUP

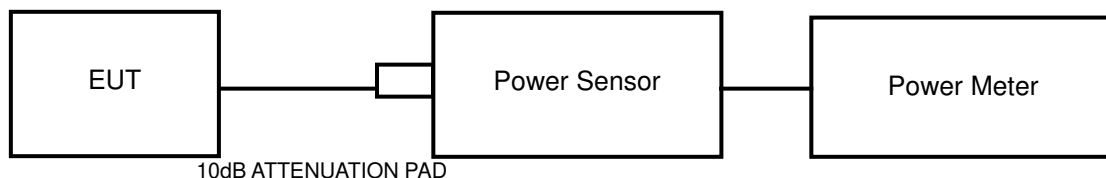

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 09, 22
Power Sensor	Keysight	U2021XA	MY55060018	May 09, 22
Power Meter	Anritsu	ML2495A	1139001	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24,22
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Nov. 03,21
Oscilloscope	Agilent	DSO9254A	MY51260160	Aug. 10,22
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Feb. 24,22
Signal Generator	Agilent	N5183A	MY50140980	Aug. 10,22
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Sep. 04,22
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	CONDUCTED POWER (dBm)		CONDUCTED POWER (mW)		TOTAL MAX. POWER OUTPUT		PEAK POWER LIMIT (W)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	mW	dBm		
1	2412	11.93	16.13	15.596	41.020	56.616	17.53	1	PASS
6	2437	12.55	15.97	17.989	39.537	57.525	17.60	1	PASS
11	2462	12.65	15.98	18.408	39.628	58.036	17.64	1	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the limit is no need to be reduced.

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	CONDUCTED POWER (dBm)		CONDUCTED POWER (mW)		TOTAL MAX. POWER OUTPUT		PEAK POWER LIMIT (W)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	mW	dBm		
1	2412	16.42	20.64	43.853	115.878	159.731	22.03	1	PASS
6	2437	16.84	20.24	48.306	105.682	153.988	21.87	1	PASS
11	2462	19.97	20.69	99.312	117.220	216.531	23.36	1	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the limit is no need to be reduced.

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	CONDUCTED POWER (dBm)		CONDUCTED POWER (mW)		TOTAL MAX. POWER OUTPUT		PEAK POWER LIMIT (W)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	mW	dBm		
1	2412	15.49	19.74	35.400	94.189	129.589	21.13	1	PASS
6	2437	16.04	20.34	40.179	108.143	148.322	21.71	1	PASS
11	2462	15.55	19.58	35.892	90.782	126.674	21.03	1	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the limit is no need to be reduced.

802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	CONDUCTED POWER (dBm)		CONDUCTED POWER (mW)		TOTAL MAX. POWER OUTPUT		PEAK POWER LIMIT (W)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	mW	dBm		
3	2422	14.73	18.50	29.717	70.795	100.512	20.02	1	PASS
6	2437	14.98	18.68	31.477	73.790	105.267	20.22	1	PASS
9	2452	15.96	19.02	39.446	79.799	119.245	20.76	1	PASS

NOTE: Directional gain = $2\text{dBi} + 10\log(2) = 5.01\text{dBi} < 6\text{dBi}$, so the limit is no need to be reduced.

AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		AVERAGE POWER (mW)		TOTAL POWER (dBm)	TOTAL POWER (mW)
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
1	2412	9.54	11.93	8.995	15.596	13.91	24.591
6	2437	9.16	12.55	8.241	17.989	14.19	26.230
11	2462	9.79	12.65	9.528	18.408	14.46	27.936

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		AVERAGE POWER (mW)		TOTAL POWER (dBm)	TOTAL POWER (mW)
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
1	2412	9.20	12.80	8.318	19.055	14.37	27.372
6	2437	9.60	12.19	9.120	16.558	14.10	25.678
11	2462	9.62	13.26	9.162	21.184	14.82	30.346

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		AVERAGE POWER (mW)		TOTAL POWER (dBm)	TOTAL POWER (mW)
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
1	2412	8.52	12.45	7.112	17.579	13.93	24.691
6	2437	8.53	11.90	7.129	15.488	13.54	22.617
11	2462	8.39	12.22	6.902	16.672	13.72	23.574

802.11n HT40


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)		AVERAGE POWER (mW)		TOTAL POWER (dBm)	TOTAL POWER (mW)
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
3	2422	7.32	10.87	5.395	12.218	12.46	17.613
6	2437	7.37	11.18	5.458	13.122	12.69	18.580
9	2452	7.56	11.46	5.702	13.996	12.94	19.698

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the DTS Bandwidth.
- c) Set RBW to: 3KHz
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)		TOTAL (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1			
1	2412	-14.66	-7.72	-6.92	8.00	PASS
6	2437	-14.39	-7.43	-6.63	8.00	PASS
11	2462	-14.46	-10.60	-9.10	8.00	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the limit is no need to be reduced.

802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)		TOTAL (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1			
1	2412	-17.84	-10.99	-10.17	8.00	PASS
6	2437	-17.89	-11.45	-10.56	8.00	PASS
11	2462	-17.45	-10.58	-9.77	8.00	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the limit is no need to be reduced.

802.11n HT20


Channel	FREQ. (MHz)	PSD (dBm/3kHz)		TOTAL (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1			
1	2412	-18.15	-12.55	-11.49	8.00	PASS
6	2437	-17.79	-10.43	-9.70	8.00	PASS
11	2462	-17.55	-10.40	-9.63	8.00	PASS


NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the limit is no need to be reduced.


802.11n HT40


Channel	FREQ. (MHz)	PSD (dBm/3kHz)		TOTAL (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
		Chain 0	Chain 1			
3	2422	-22.95	-15.30	-14.61	8.00	PASS
6	2437	-22.36	-15.53	-14.71	8.00	PASS
9	2452	-22.59	-15.63	-14.83	8.00	PASS

NOTE: Directional gain = 2dBi + 10log(2) = 5.01dBi < 6dBi , so the limit is no need to be reduced.

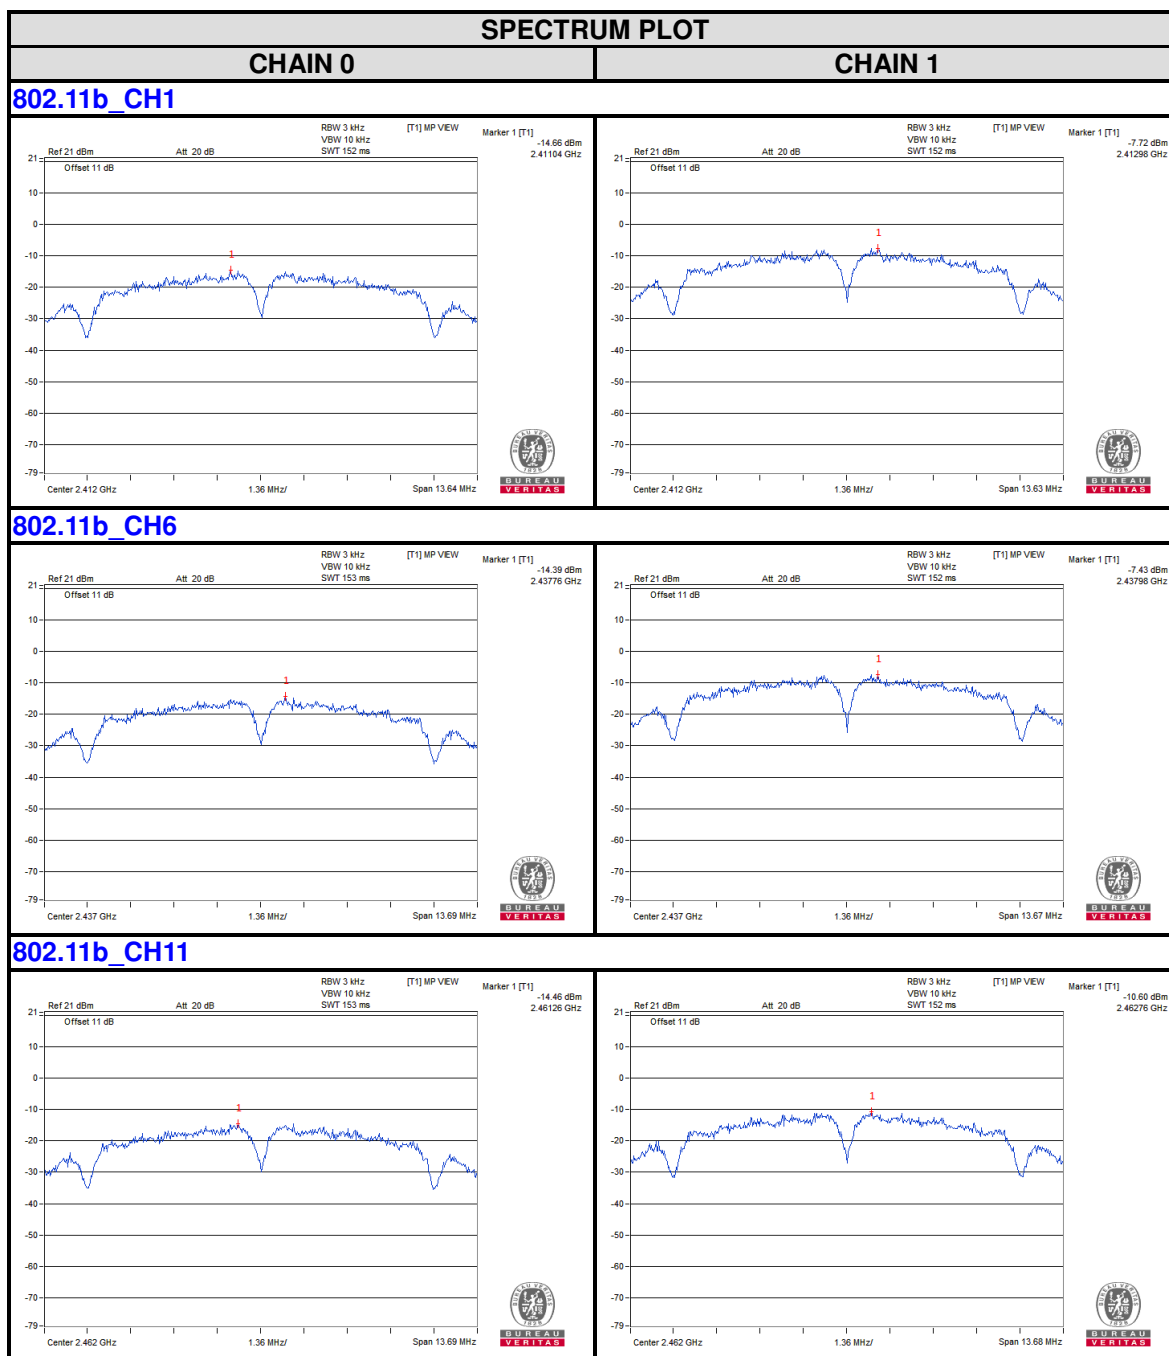

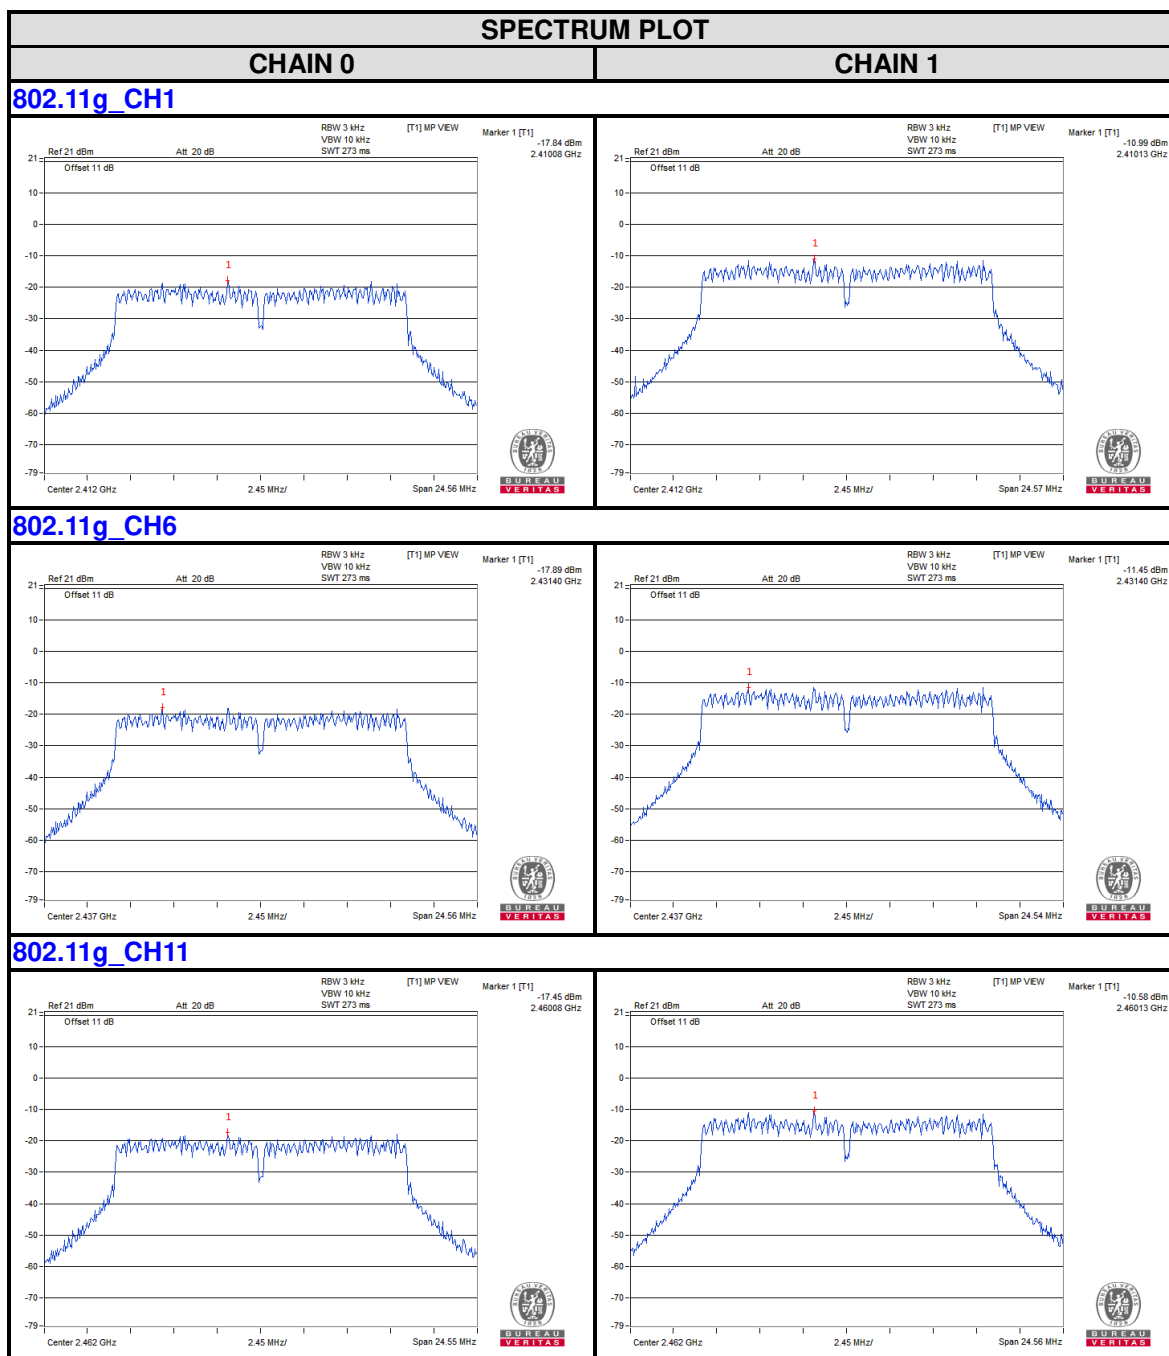

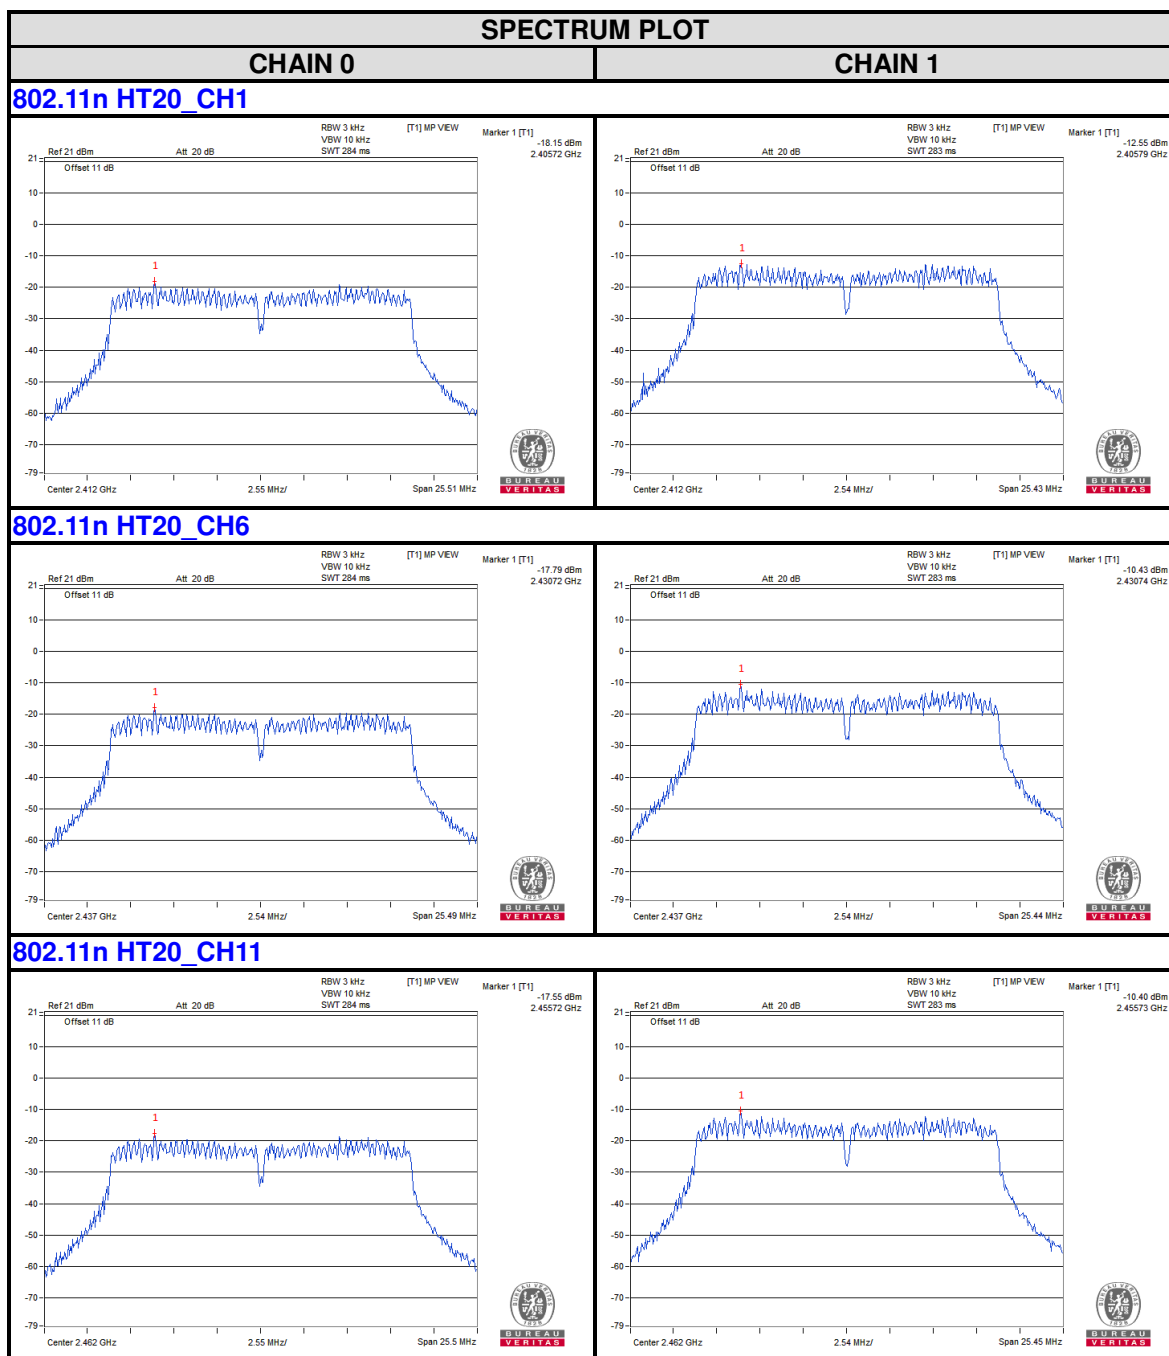

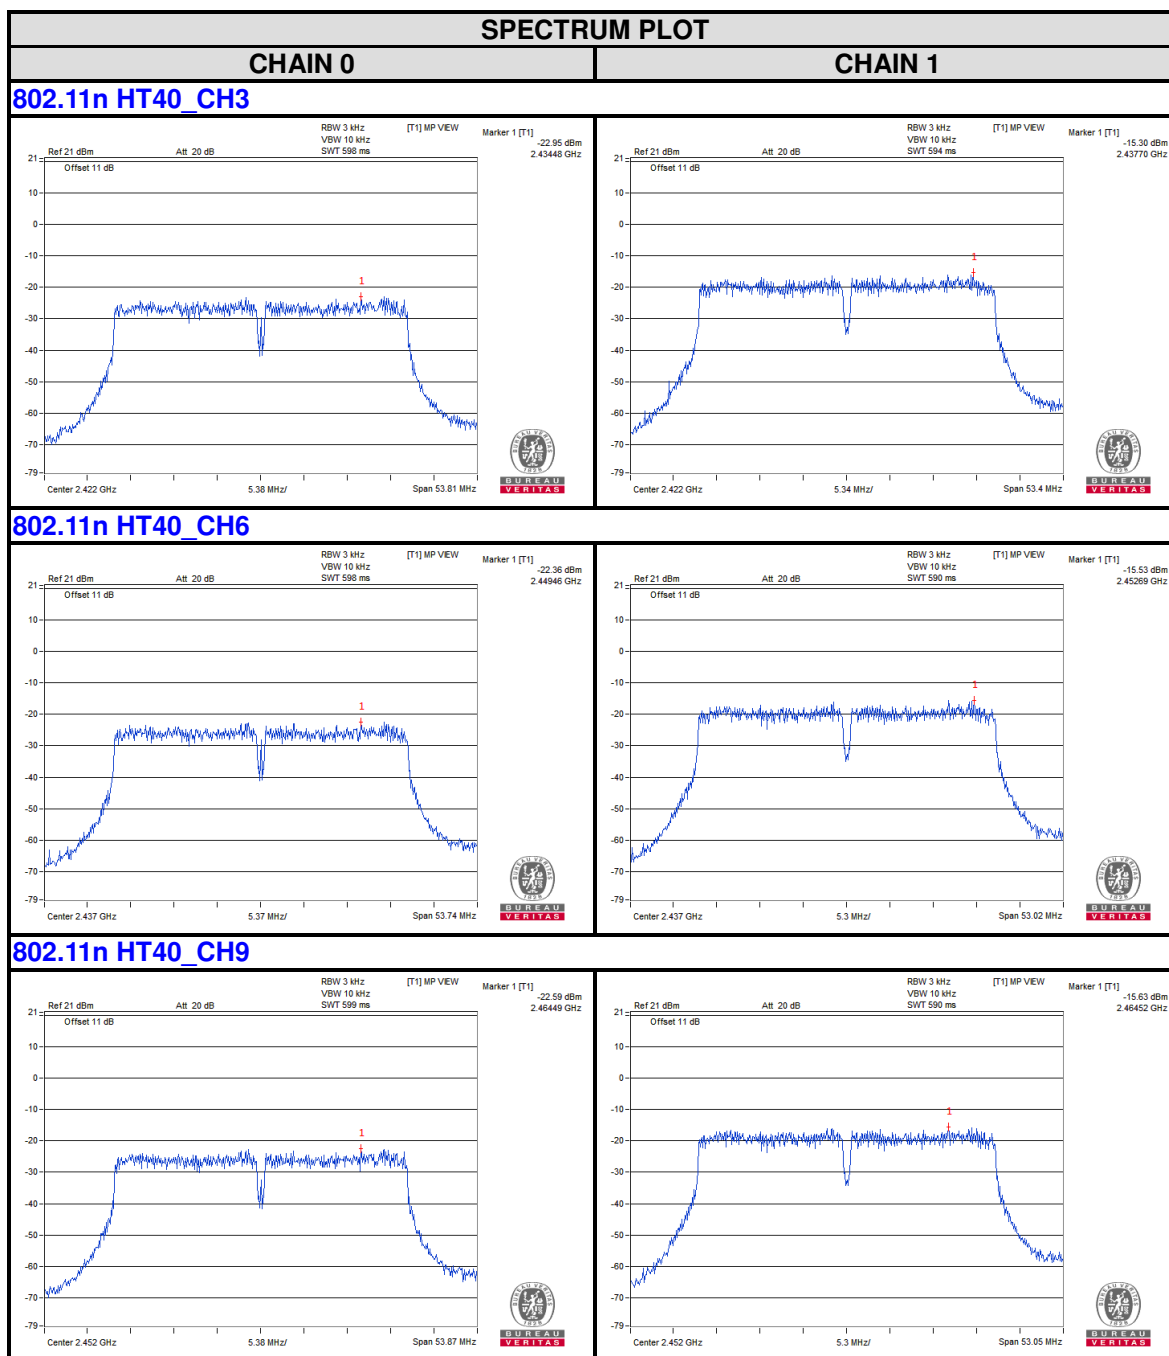

4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION


Same as item 4.3.6

4.6.7 TEST RESULTS


802.11b

Chain 0


CH 1

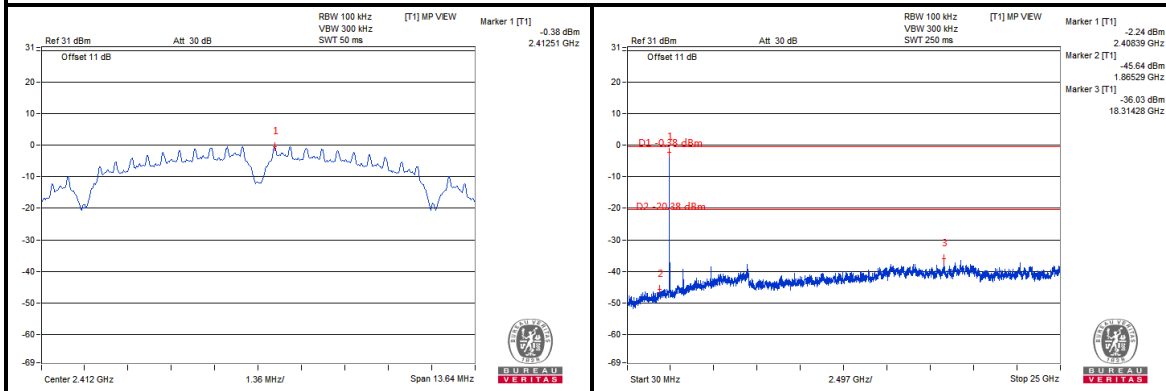


CH 6

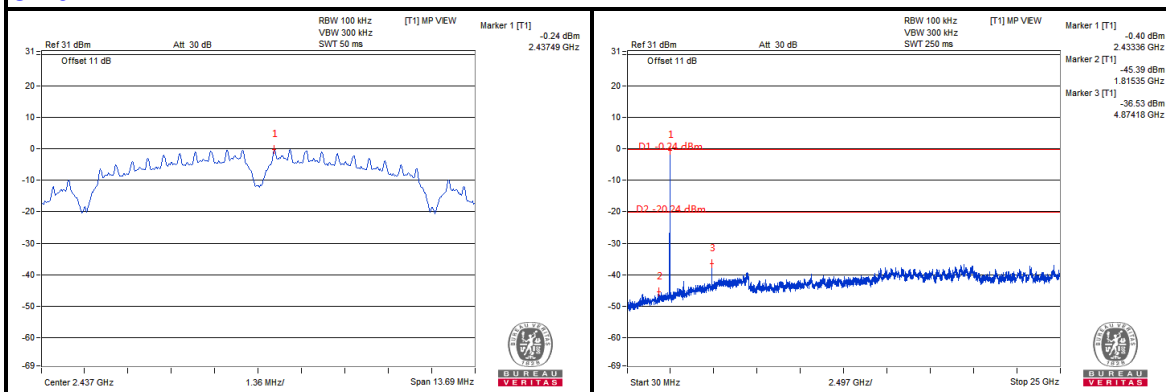

CH 11

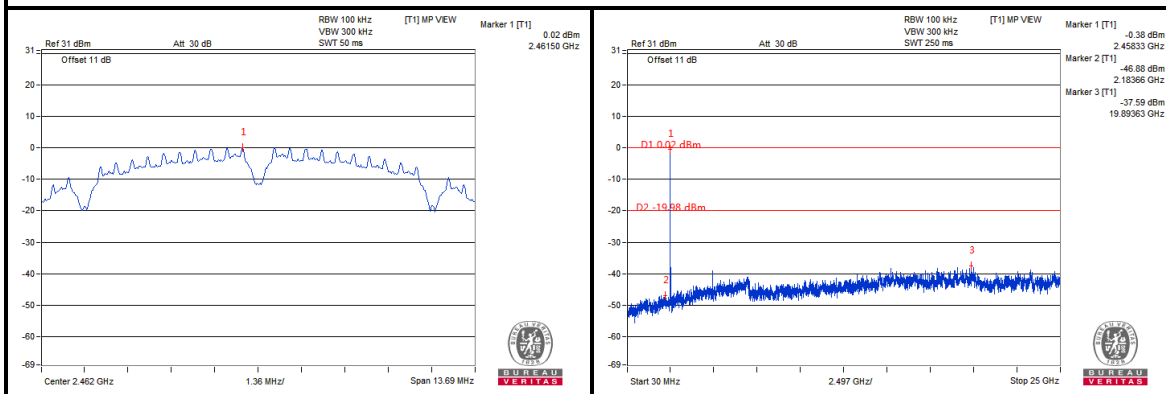


Chain 1

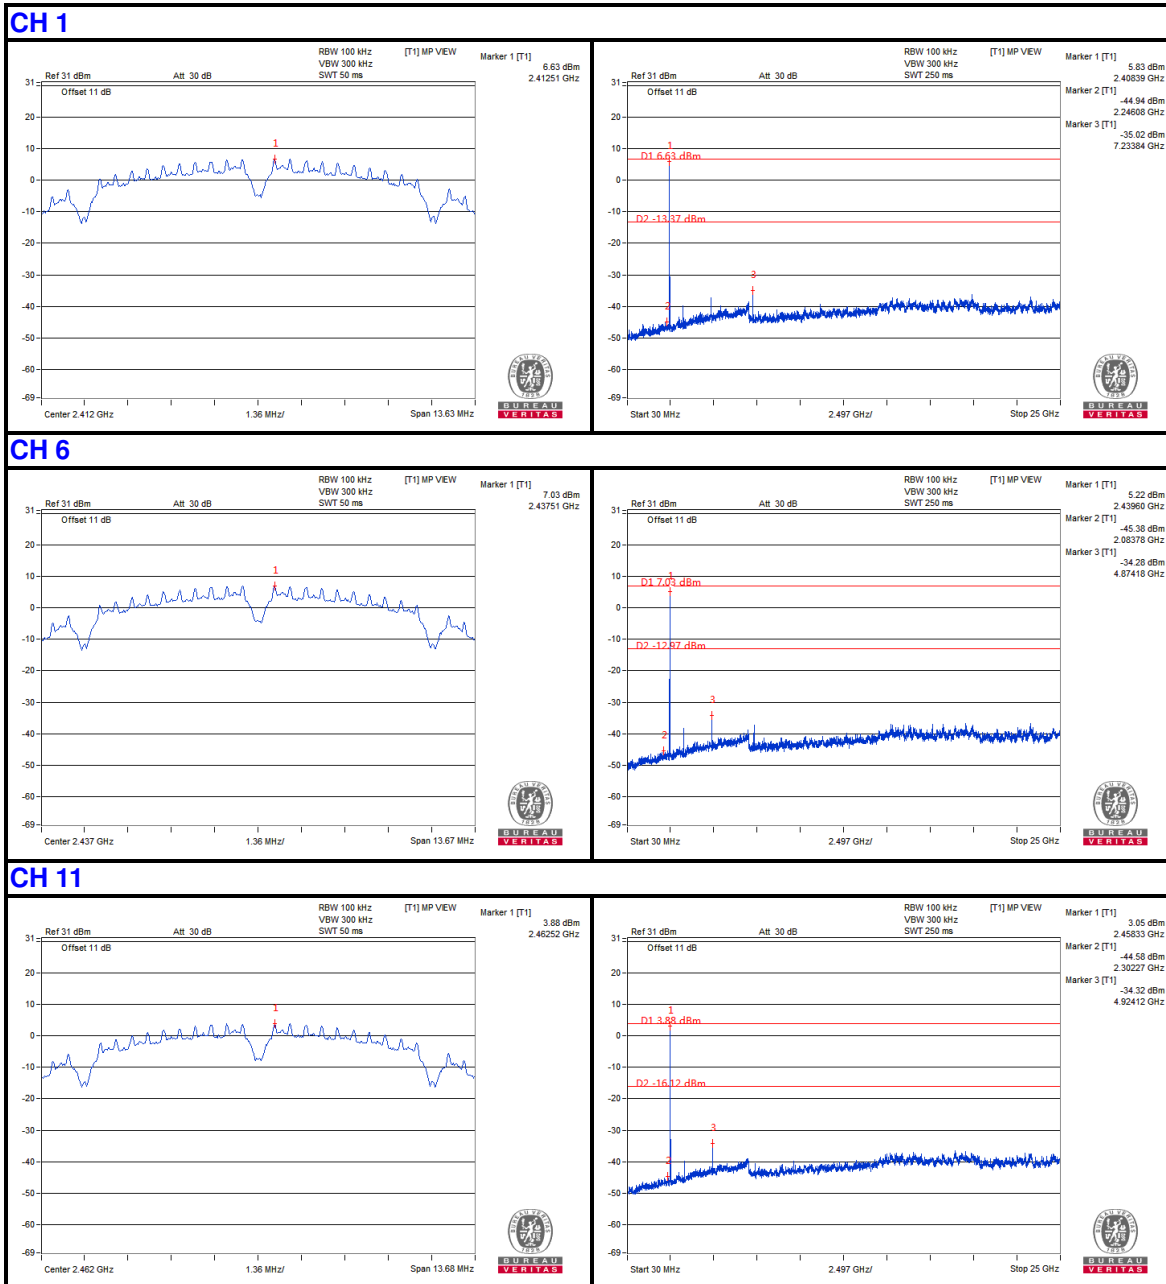


802.11g
Chain 0


CH 1

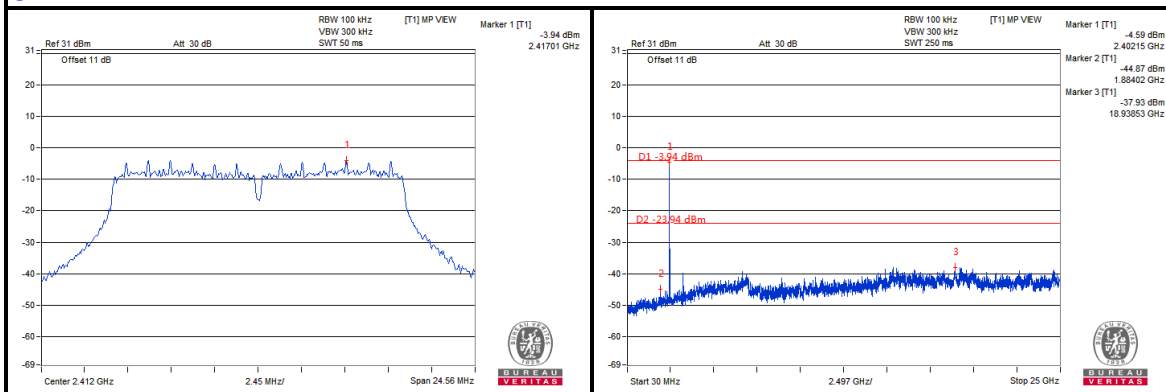

CH 6

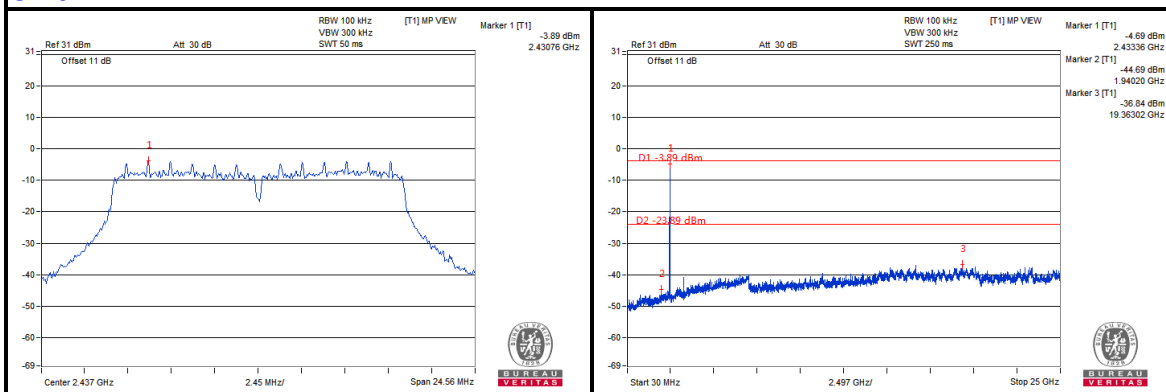


CH 11

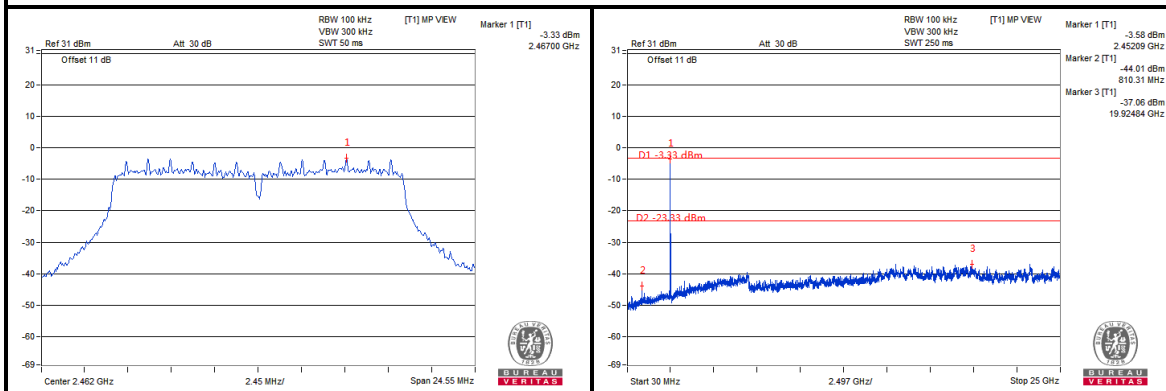


Chain 1


CH 1

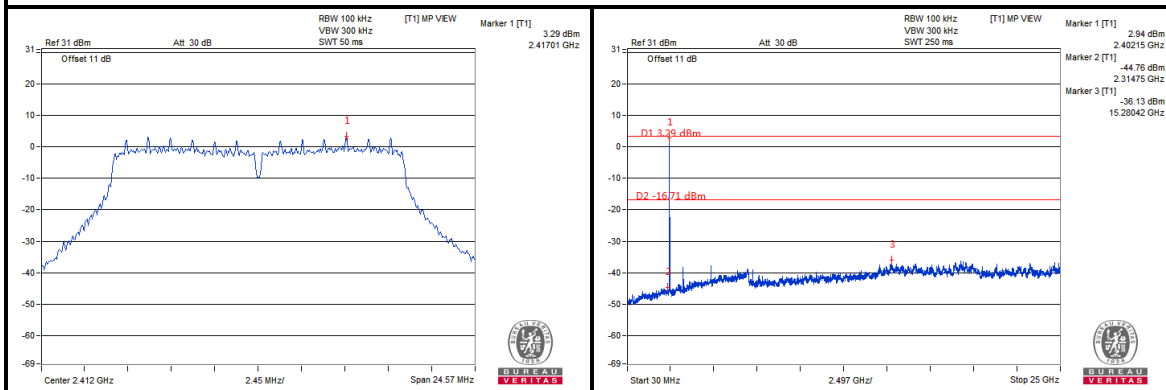

CH 6

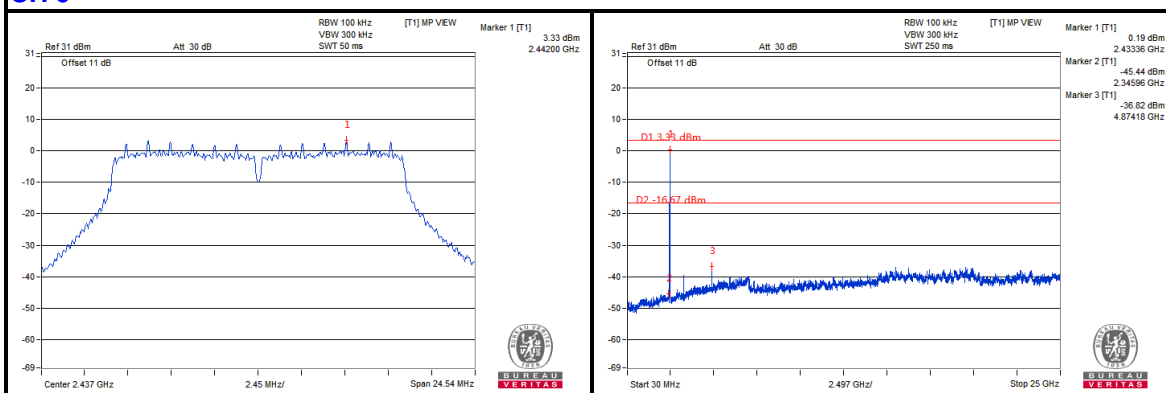


CH 11

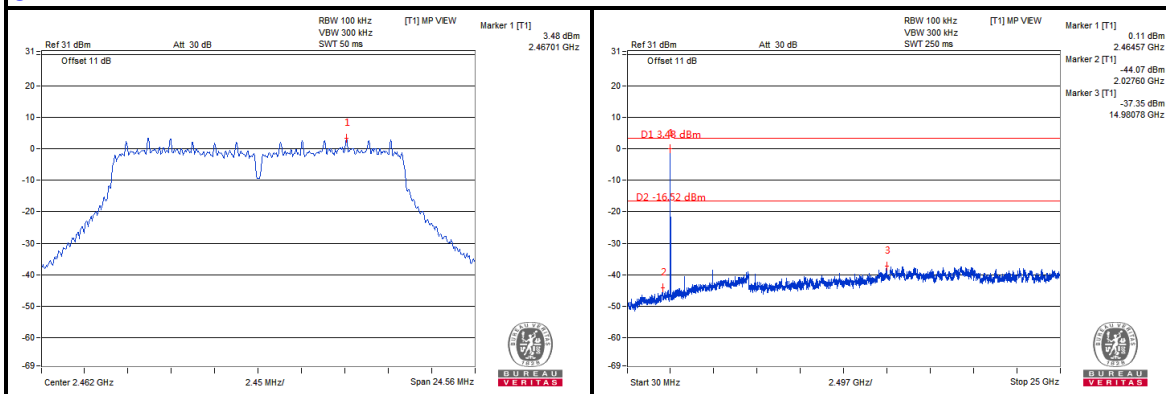


802.11n HT20

Chain 0


CH 1

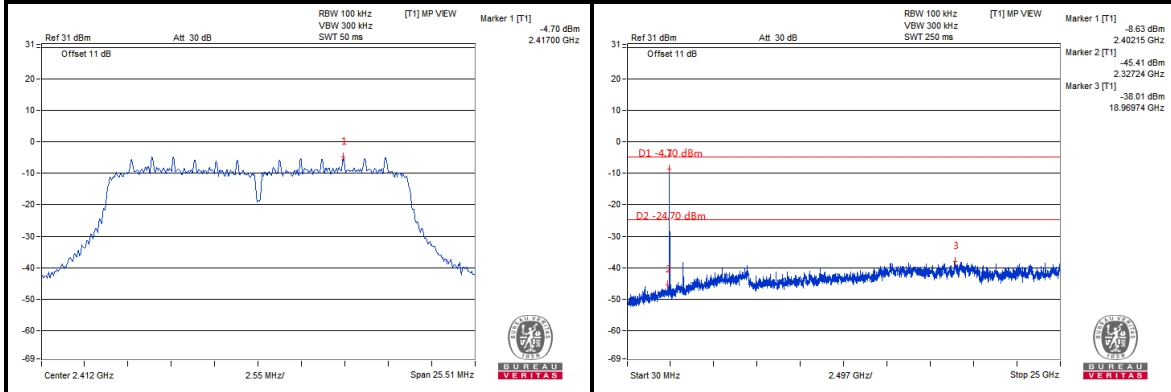

CH 6

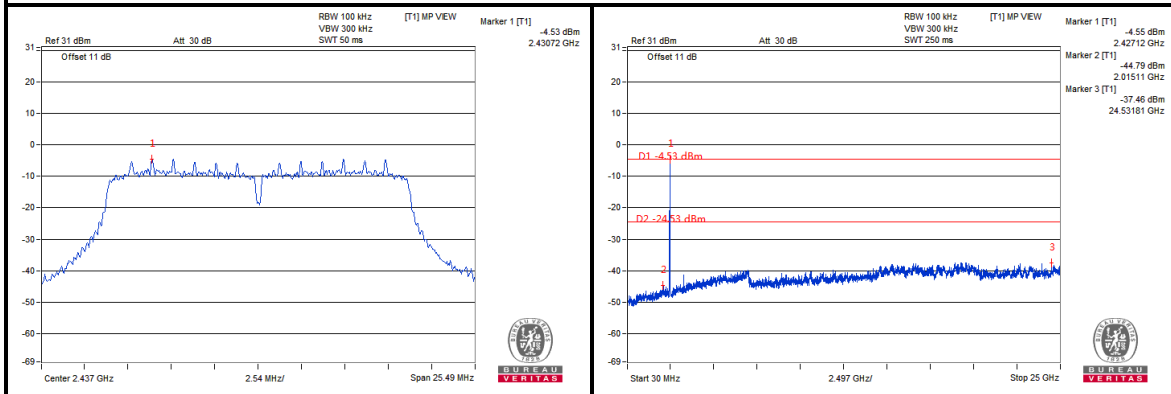


CH 11

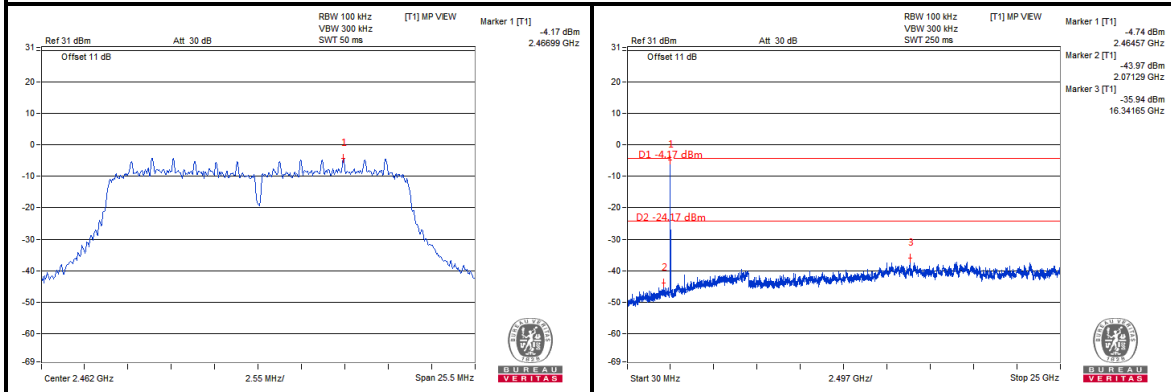


Chain 1


CH 1

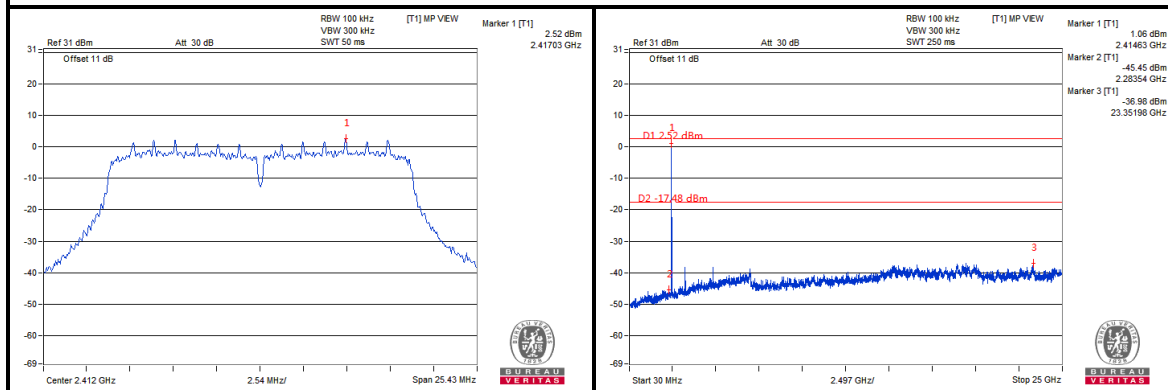

CH 6

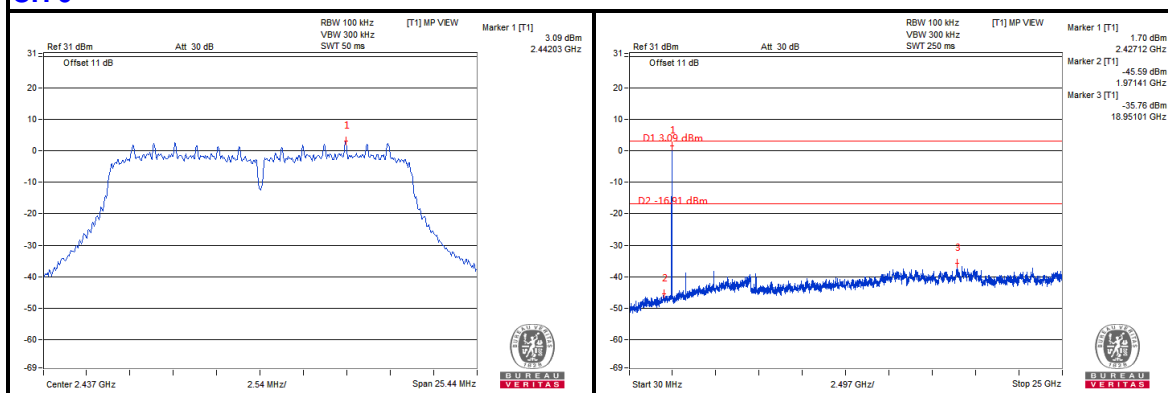



CH 11

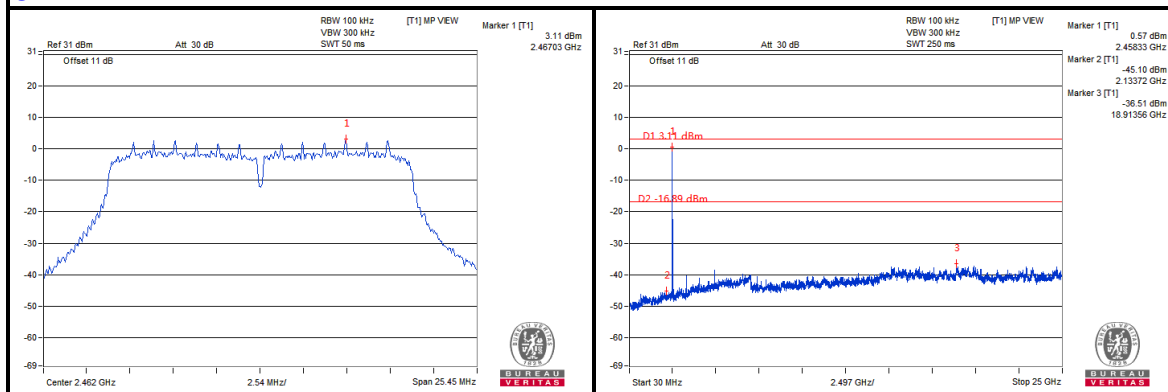



802.11n HT40

Chain 0



CH 3

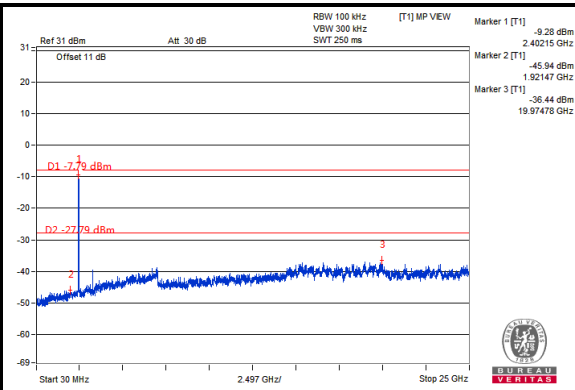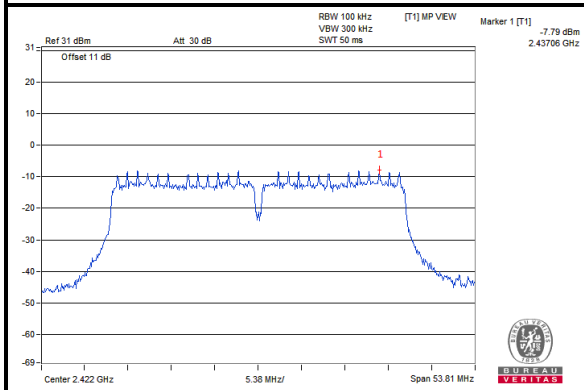

CH 6

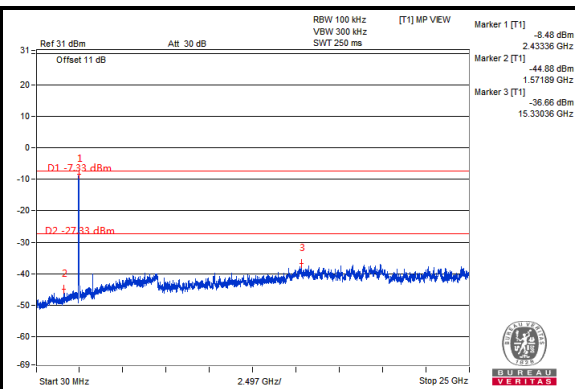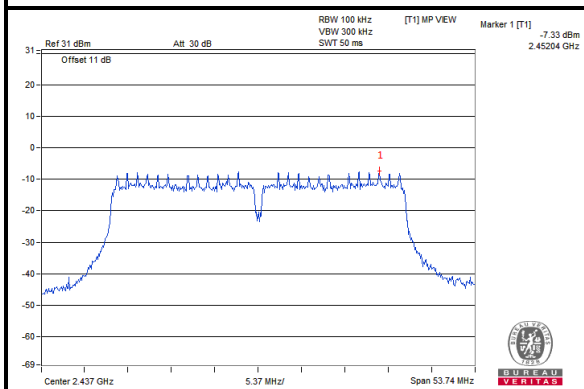


CH 9

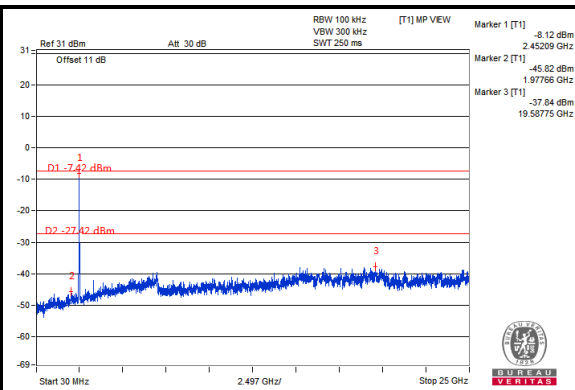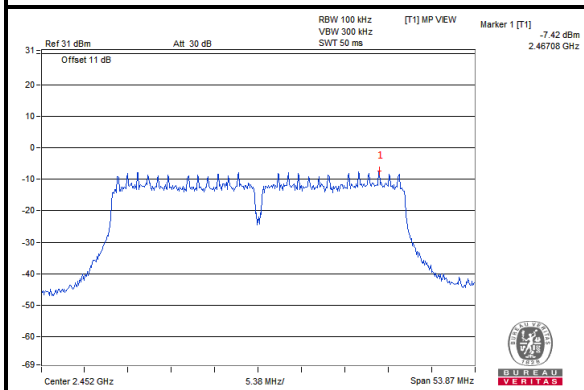


Chain 1


CH 3

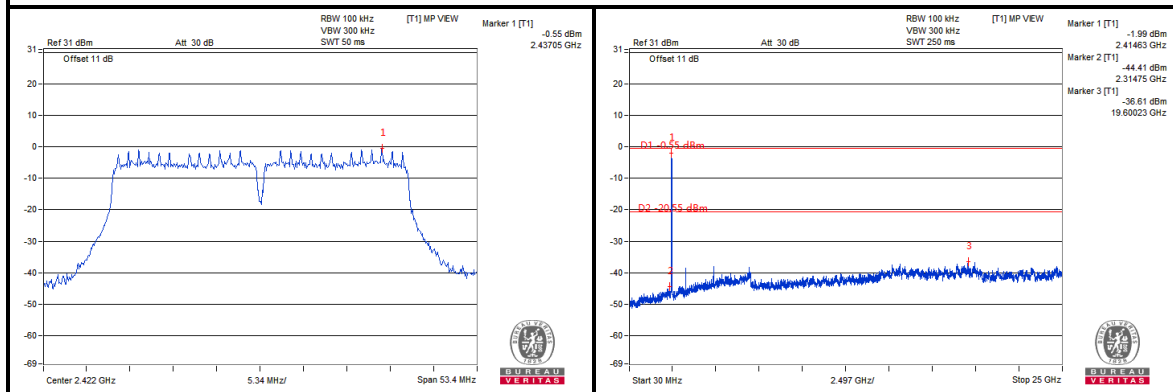

CH 6

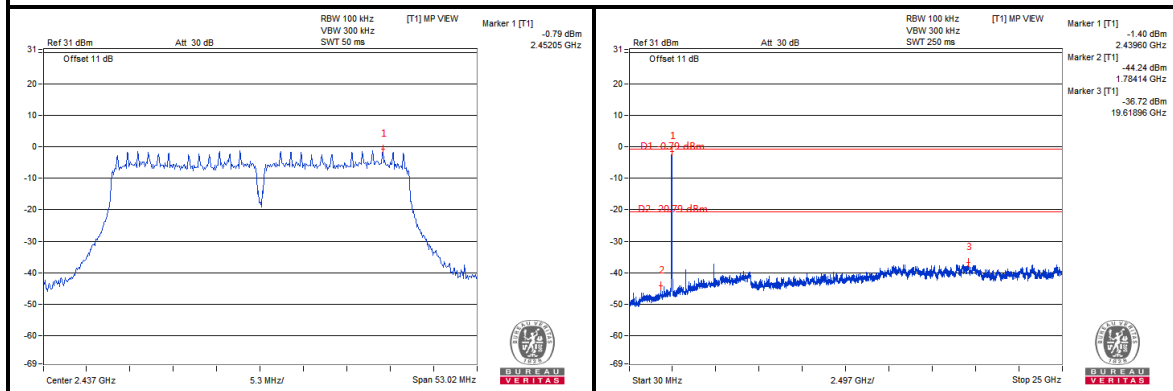


CH 9

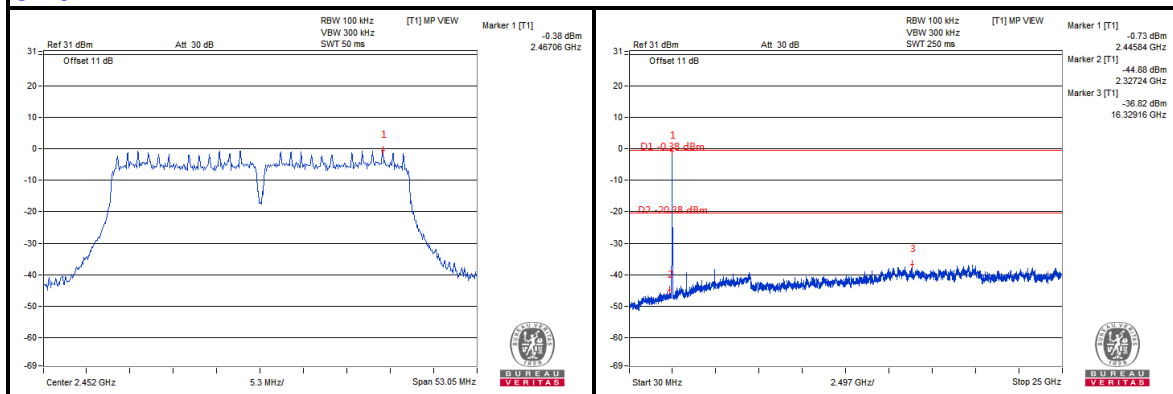


802.11b

Chain 0

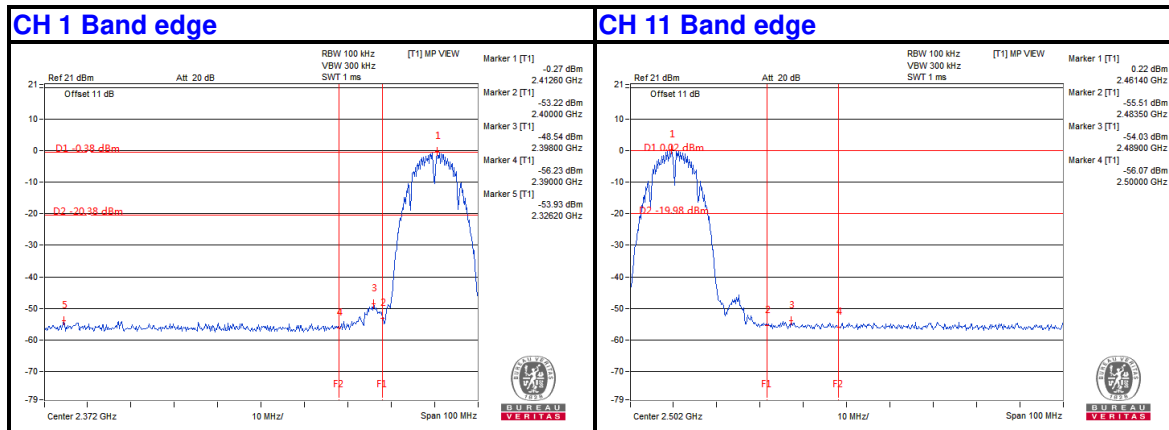


Chain 1

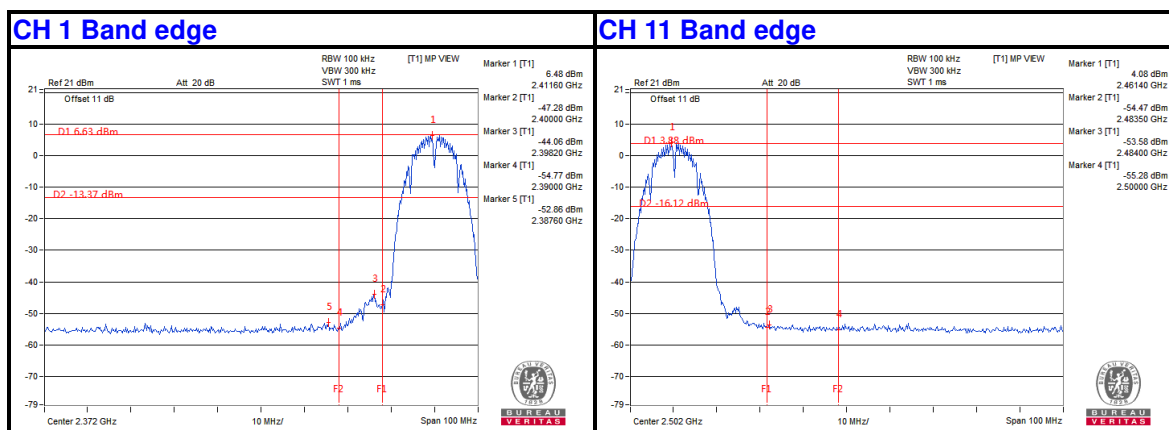


802.11g

Chain 0

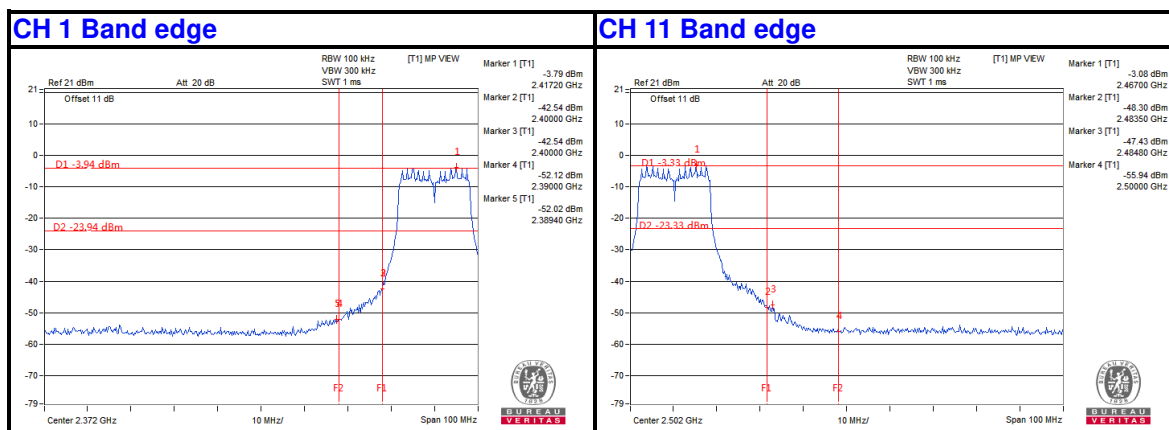


Chain 1

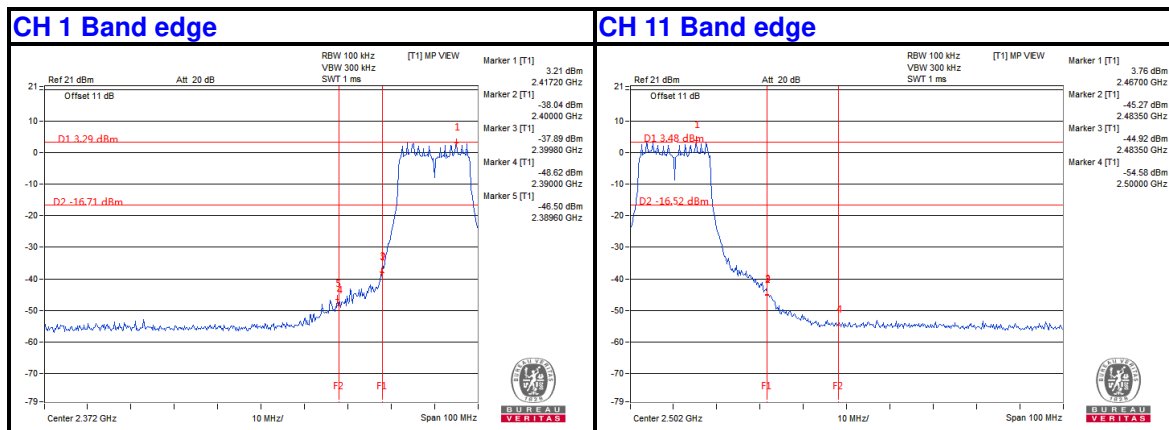


802.11n HT20


Chain 0

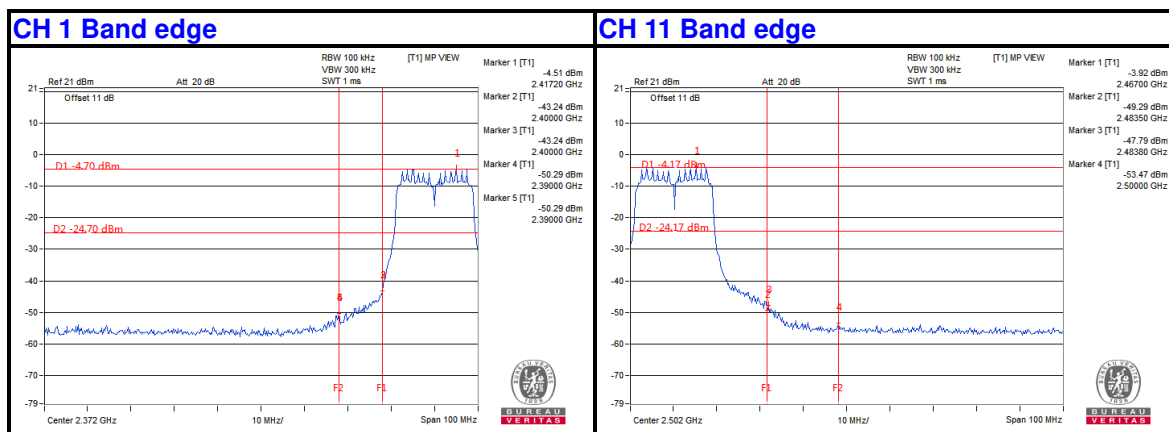


Chain 1

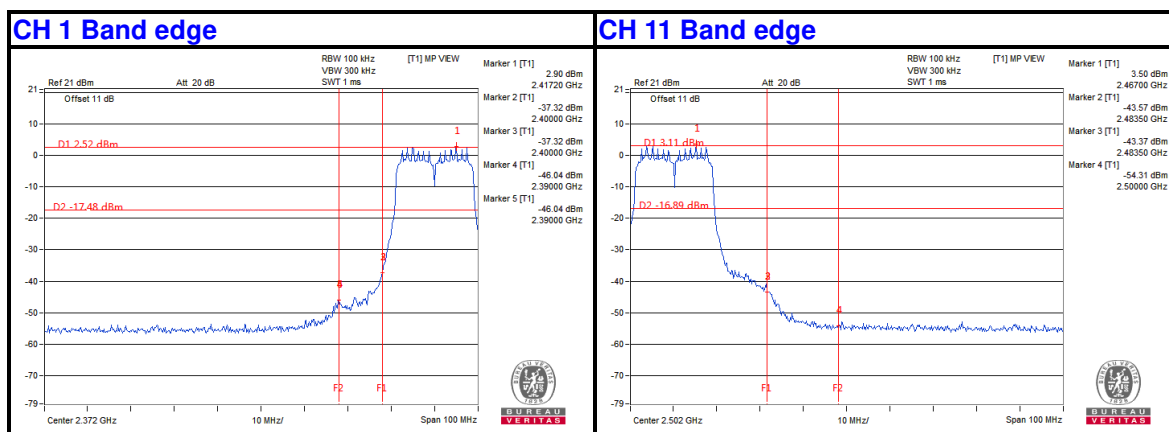

802.11n HT40
Chain 0

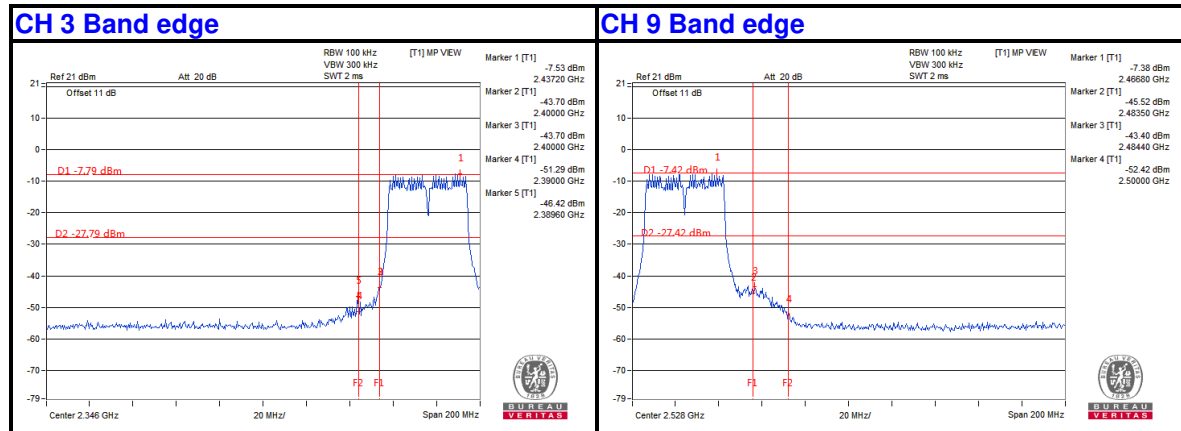

Chain 1

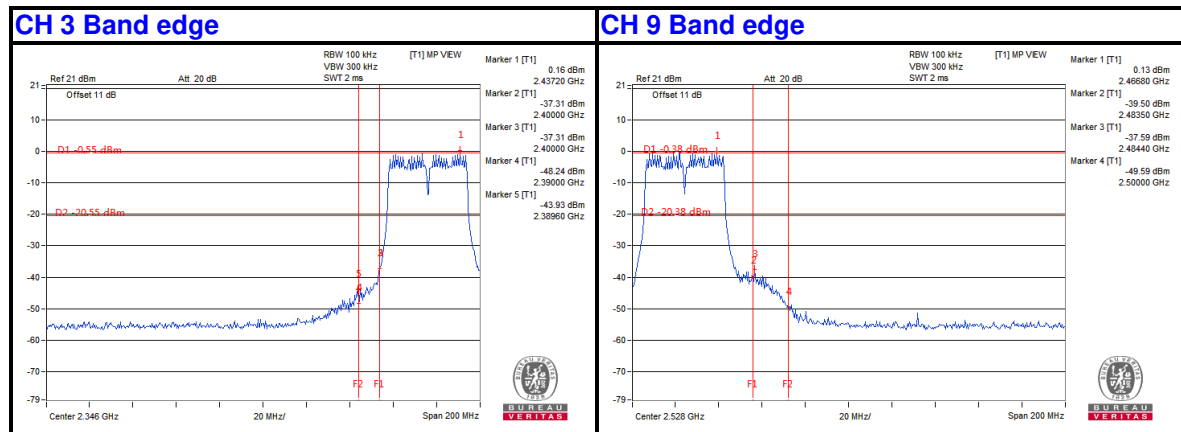



Test Report No.: RF2107WDG0280-1

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---