



深圳市显盈科技股份有限公司
Fullink Technology Co., Ltd
零件承认书

Approved product specifications

供应商名称 东莞市聚源精密科技有限公司

Supplier Name Dongguan Juyuan Precision Electronics Co., LTD

供应商内部物料编码 Supplier internal BOM number	:	18.00585
品 号 Number	:	线圈模组
品 名 Trade name	:	A11 单线圈模组
规 格 Specification	:	双槽带孔硬磁片 0.08X24X2P 漆包线 10TS
项目号 Item number	:	501-00XQ-0000023
版 本 Version	:	A1

供应商核准签章

Supplier approval seal

制作 Production	审核 Audit	核准 approved by	供应商公司印章 supplier company chop

Fullink 确认核准
Fullink confirms approval

品质管理部 Quality Management	产品中心 Product Center						
审核 Audit	确认 Confirm		审核 Audit		核准 approved by		

地址 address :中国广东省深圳市宝安区燕罗街道燕川社区红湖东路西侧嘉达工业园 7 栋
B7, Jiada Industrial Park, West of Honghu East Road, Yanchuan Community, Yanluo
Street, Bao'an District, Shenzhen City, Guangdong Province, China

TEL: 0755-29696659

FAX: 0755-29696621

目 录

[illegible]

东莞市聚源精密科技有限公司

Dongguan Juyuan Precision Electronics Co., LTD

客户品号

The customer product number

客户品名

The customer name

客户规格

customer specification

线圈模组

A11 单线圈模组

双槽带孔硬磁片 0.08X24X2P 漆包线 10TS

变更履历表

Change Your Resume


[illegible]

产品型号: Model Number	A11	客户料号: Customer P / N	501-00XQ-0000023
		供应商料号: Supplier P / N	18.00585

一，外观与尺寸（Appearance Size）：（单位/mm）	A	5±0.5
	B	20.5±0.5
	C	40±1
	D	42.5±1
	E	3.5±1.5
	F	37±2
	G	0.5±0.1
	H	不含离型纸 1.4MAX
	I	
	J	
	K	
	L	
	M	
	N	
	O	
	P	
	Q	
	R	
	S	
	T	
	U	
	V	
	W	
	X	
	Y	
	Z	

The technical drawing illustrates the A11 component from two perspectives. The top view shows a circular component with a central hole and a notch at the bottom. Dimensions A, B, C, and D are indicated for the central hole, notch, and overall width. A red arrow points to the top edge with the label '线圈反贴' (Coil reverse pasting). Another red arrow points to a small rectangular feature with the label '3mm高温胶带' (3mm high temperature tape). A third red arrow points to the notch with the label '手撕位' (Hand-tear position). The side view shows the component's profile with dimensions H and G. A red arrow points to the bottom surface with the label '磁片背面贴双面胶' (Double-sided adhesive tape on the back of the magnetic sheet).

二，原理图（Schematic Diagram）：

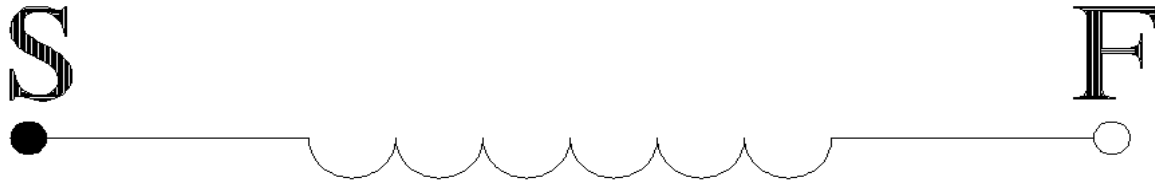


三，绕线参数（Winding Parameters）：


绕组 Winding	开始 Start	结束 Finish	圈数 Turns	线径 Line Diameter	绕线方式 Winding Way	绕线方向 Winding Direction	层数&圈数 Layer&Circle
	S	F	10TS	0.08*24*2P	单层密绕	逆时针	1 层/10TS

四，电气特性（Electrical Characteristics）：

项目 Item	端子 Terminal	测试条件 Test Conditions	测试仪器 Test Instrument	参数 Parameter	单位 Unit	数值 Numerical Value
电感	S-F	100KHz/1.00V/100Ω	1062 电桥	Inductance @100KHz/1V	μH	6.3μH±10%
电阻	S-F	100KHz/1.00V/100Ω	1062 电桥	RS@100KHz/1V	mΩ	120MAX
Q 值	S-F	100KHz/1.00V/100Ω	1062 电桥	@100KHz/1V		20MIN

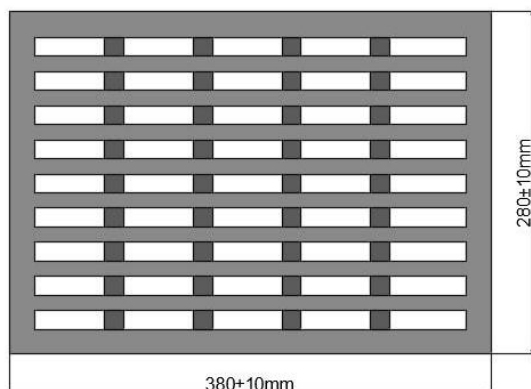

珍珠棉尺寸为: 38*28*6cm,
每个珍珠棉有45格, 每格装6pcs共270pcs产品。

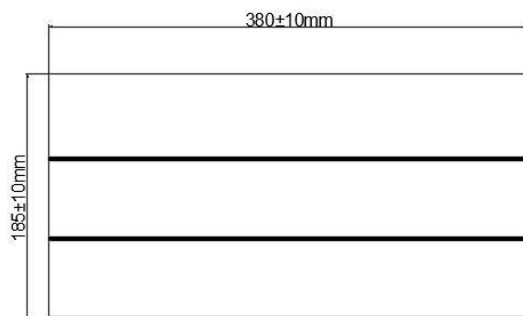

每箱装3层珍珠棉, 珍珠棉之间用纸板隔开



- 1、每层珍珠棉可装 270pcs 产品;
- 2、每箱可装 3 层珍珠棉, 即可装 810 产品

产品 Product	单层数量 Single layer quantity	层数/箱 Layer/Box	总数/箱 Total/Box	重量 Weigh
A11	270pcs	3 层	810pcs	

材料清单

Material List

客户料号: Customer P / N		501-00XQ-0000023		制造商料号: Supplier P / N		18.00585	
序号 No.	材料名称 Material Name	材料规格 Material Specification		材料代号 Material Code		制造商 Manufacturer	
1	热风线	0.08*24*2P		01.00082			
2	无铅锡条	高温		05.00058			
3	胶水	树脂胶		05.00001			
4	高温胶带	3mm		05.00029			
5	圆形硬磁片	42.5*5*0.5mm L 双槽带孔		02.00247			
6	双面胶	41*5.5*0.08mm		05.00255			
7	包装盒	390*280*47mm		04.00029			
8	纸箱	400*300*190mm		04.00008			
9	纸隔板	378*270mm		04.00020			
10							
11							
12							
13							
14							