


Prüfbericht-Nr.: Test report no.:	CN22KAM5 001	Auftrags-Nr.: Order no.:	168360082	Seite 1 von 25 Page 1 of 25
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022-02-22	
Auftraggeber: Client:	SRP Companies 85 Rio Grande Drive Second Floor, Castle Rock, CO 80104, Colorado, United States			
Prüfgegenstand: Test item:	True Wireless Earbuds			
Bezeichnung / Typ-Nr.: Identification / Type no.:	SPORT			
Auftrags-Inhalt: Order content:	FCC and IC approval			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019 ICES-003 Issue 7 October 2020			
Wareneingangsdatum: Date of sample receipt:	2022-03-02	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no:	A003201055-011,044 A003223682-002 A003185981-002			
Prüfzeitraum: Testing period:	2022-03-10 - 2022-03-29			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	genehmigt von: authorized by:			
Datum: Date: 2022-08-03	 Signed by: Alex Lan		 Signed by: Winnie Hou	
Stellung / Position	Assistant Project Manager	Ausstellungsdatum: Issue date: 2022-08-09	Reviewer	
Sonstiges / Other:	FCC ID: 2ATF5TWS-22			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut 3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good 3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 99% BANDWIDTH

RESULT: Pass

5.1.4 20dB BANDWIDTH

RESULT: Pass

5.1.5 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.6 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.7 TIME OF OCCUPANCY

RESULT: Pass

5.1.8 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.9 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.10 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

5.1.11 RADIATED EMISSIONS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>15</i>
5.1.3	<i>99% Bandwidth</i>	<i>16</i>
5.1.4	<i>20dB Bandwidth</i>	<i>17</i>
5.1.5	<i>Carrier Frequency Separation.....</i>	<i>18</i>
5.1.6	<i>Number of Hopping Frequency</i>	<i>19</i>
5.1.7	<i>Time of Occupancy</i>	<i>20</i>
5.1.8	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>21</i>
5.1.9	<i>Radiated Spurious Emission</i>	<i>22</i>
5.1.10	<i>Conducted Emission on AC Mains</i>	<i>23</i>
5.1.11	<i>Radiated Emissions</i>	<i>24</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	25
7	LIST OF TABLES.....	25

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of FCC PART 15C & RSS-247

Appendix C: Test Results of FCC 15B & ICES-003

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2022-08-09
OSP	R&S	OSP 150	101017	2022-12-02
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2022-12-02
Wideband Power Sensor	R&S	NRP-Z81	105677	2022-08-09
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2023-02-27
Artificial Mains Network	R&S	ENV216	101445	2023-02-27
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A
Radiated Emission (3m chamber)				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
3m SAC	ETS-Lindgren	SAC3	CT001632-Q1362	2024-04-26
EMI Test Receiver	R&S	ESR7	102111	2022-12-01
Horn Antenna	R&S	HF907	102706	2022-08-07
Preamplifier (1-18GHz)	FIT	SCU-18F	180077	2022-08-13
Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	2022-12-12
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

Prüfbericht - Nr.: CN22KAM5 001
Test Report No.:

Seite 7 von 25
Page 7 of 25

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUTs are True Wireless Earbuds, which consist of a Charging case, a left earbud and a right earbud, left and right earbuds have the same design and both support Bluetooth wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	True Wireless Earbuds
Type Designation:	SPORT
FCC ID:	2ATF5TWS-22
Operating Voltage (Battery pack of charging base):	Internal battery operated (3.7Vdc, 300mAh) or USB operated (Adapter input voltage 120VAC, 60Hz)
Operating Voltage (Battery pack of earphone):	Internal battery operated (3.7Vdc, 45mAh)
Technical Specification of Bluetooth BR/EDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels
Channel Separation:	1MHz
Antenna Type:	Integral Antenna
Antenna Gain of Bluetooth:	2.00 dBi

Table 4: RF Channel and Frequency of Bluetooth BR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for Bluetooth BR/EDR

3.3 Independent Operation Modes

The basic operation modes are:

A. On, Bluetooth transmitting mode (BR & EDR mode)

- 1) Low Channel
- 2) Middle Channel
- 3) High Channel

B. On, Transmitting on Hopping channel

C. On, Play by Bluetooth

D. On, Charging mode

E. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|--------------------|-------------------------|
| - Application Form | - User Manual |
| - Block Diagram | - Rating Label |
| - Schematics | - Operation Description |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 & ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model SPORT in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	/
AC/DC Adapter	HUAWEI	HW-050100C01	/	Output: DC 5V, 1A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

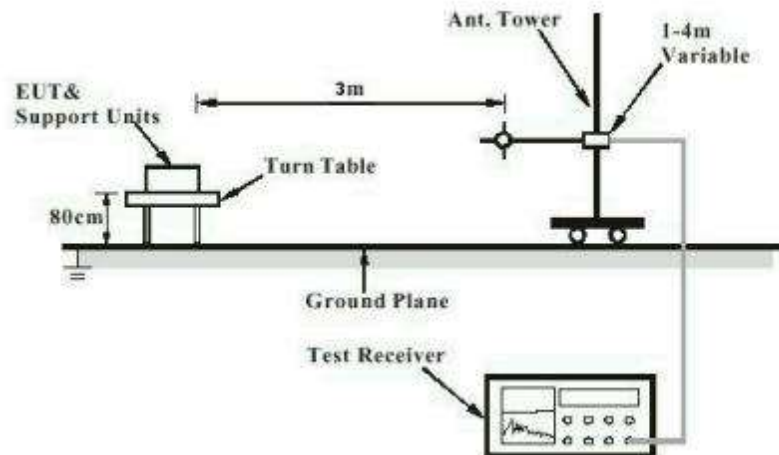


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

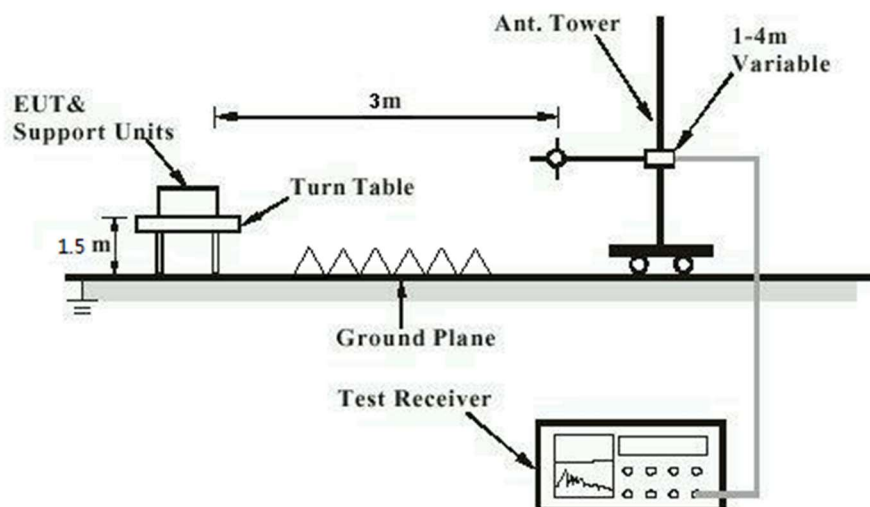


Diagram of Measurement Configuration for Mains Conduction Measurement


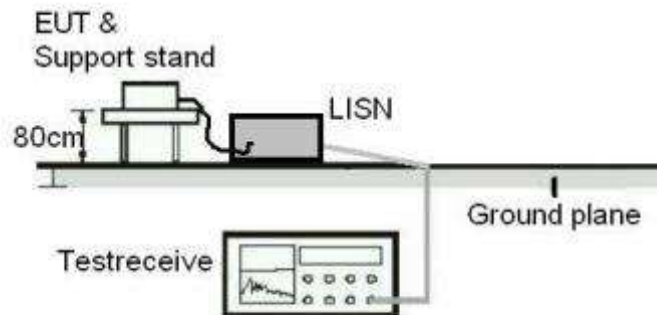


Diagram of Measurement Configuration for Conducted Transmitter Measurement

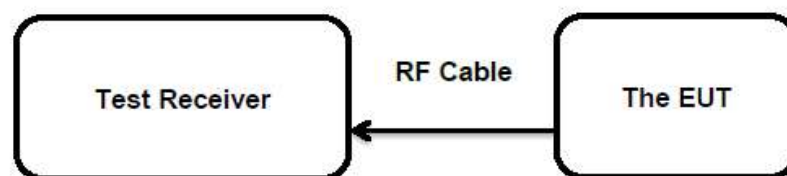

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an Integral antenna, the directional gain of antenna is 2.00 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard	: FCC Part 15.247(b)(1) RSS-247 Clause 5.4(b)
Basic standard	: ANSI C63.10: 2013
Limits	: FHSS < 0.125 Watts
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-03-25
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BR)	2402.0	1.10	0.0013	< 0.125
	2441.0	1.20	0.0013	
	2480.0	1.40	0.0014	
Maximum Measured Value		1.40	0.0014	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	2.30	0.0017	< 0.125
	2441.0	2.00	0.0016	
	2480.0	2.10	0.0016	
Maximum Measured Value		2.30	0.0017	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.00 dBi
e.i.r.p.=P_(Peak power)+ G, which is far below the 4 W

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 16 von 25

Page 16 of 25

5.1.3 99% Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(a) RSS-Gen Clause 6.7
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-03-25
Input voltage	:	Internal battery operated
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 17 von 25

Page 17 of 25

5.1.4 20dB Bandwidth**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(1) RSS-247 Clause 5.1(a)
Basic standard	:	ANSI C63.10: 2013
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-03-25
Input voltage	:	Internal battery operated
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 18 von 25

Page 18 of 25

5.1.5 Carrier Frequency Separation

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(1) RSS-247 Clause 5.1(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-03-25
Input voltage	: Internal battery operated
Operation mode	: B
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 19 von 25

Page 19 of 25

5.1.6 Number of Hopping Frequency

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	: ANSI C63.10: 2013
Limits	: ≥ 15 non-overlapping channels
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-03-25
Input voltage	: Internal battery operated
Operation mode	: B
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 20 von 25

Page 20 of 25

5.1.7 Time of Occupancy

RESULT:**Pass****Test Specification**

Test standard	:	FCC part 15.247(a)(1)(iii) RSS-247 Clause 5.1(d)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 0.4s
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2022-03-25
Input voltage	:	Internal battery operated
Operation mode	:	B
Test channel	:	Low / Middle / High
Ambient temperature	:	24.8 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 21 von 25

Page 21 of 25

5.1.8 Conducted Spurious Emissions Measured in 100 kHz Bandwidth**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: Refer to test result
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.8 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 22 von 25

Page 22 of 25

5.1.9 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Section 8.9 & 8.10
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2022-03-29
Input voltage	: Internal battery operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 23 von 25

Page 23 of 25

5.1.10 Conducted Emission on AC Mains**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.107(a) ICES-003 Issue 7, Clause 3.2.1
Basic standard	: ANSI C63.4:2014
Frequency range	: 0.15 – 30MHz
Classification	: Class B
Limits	: FCC Part 15.107(a) ICES-003 Table 1
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-03-11
Input voltage	: USB operated (Adapter input voltage 120Vac, 60Hz)
Operation mode	: D
Earthing	: Not connected
Ambient temperature	: 24.1 °C
Relative humidity	: 49 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix C.

Prüfbericht - Nr.: CN22KAM5 001

Test Report No.:

Seite 24 von 25

Page 24 of 25

5.1.11 Radiated Emissions**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.109(a) ICES-003 Section 3.2.2
Basic standard	: ANSI C63.4:2014
Frequency range	: 30MHz to 5 th harmonic of the highest frequency
Classification	: Class B
Limits	: FCC Part 15.109(a) ICES-003 Table 2 & 4
Kind of test site	: 3m Semi-Anechoic Chamber

Test Setup

Date of testing	: 2022-03-11 to 2022-03-21
Input voltage	: Internal battery operated USB operated (Adapter input voltage 120Vac, 60Hz)
Operation mode	: C, D
Earthing	: Not connected
Ambient temperature	: 25.2 °C
Relative humidity	: 51 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix C.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Measurement Uncertainty.....	6
Table 3: Technical Specification of EUT	8
Table 4: RF Channel and Frequency of Bluetooth BR/EDR.....	9
Table 5: Auxiliary Equipment Used during Test	11
Table 6: Test Result of Maximum Peak Conducted Output Power, Bluetooth BR & EDR	15

Appendix B: Test Results of FCC PART 15C & RSS-247

APPENDIX B: TEST RESULTS OF FCC 15C	1
APPENDIX B.1: TEST RESULTS OF 99% BANDWIDTH	2
<i>BR mode</i>	2
<i>EDR mode</i>	5
APPENDIX B.2: TEST RESULTS OF 20dB BANDWIDTH	8
<i>BR mode</i>	8
<i>EDR mode</i>	11
APPENDIX B.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	14
<i>BR mode</i>	14
<i>EDR mode</i>	17
APPENDIX B.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	20
<i>BR mode</i>	20
<i>EDR mode</i>	21
APPENDIX B.5: TEST RESULTS OF TIME OF OCCUPANCY	22
<i>BR mode</i>	22
<i>EDR mode</i>	25
APPENDIX B.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH	28
<i>BR mode</i>	28
Low Channel.....	28
Middle Channel.....	29
High Channel.....	30
Band Edge, Low Channel.....	31
Band Edge, High Channel.....	31
Hopping Mode	32
Hopping Mode, Band Edge, Low Channel.....	33
Hopping Mode, Band Edge, High Channle.....	33
<i>EDR mode</i>	34
Low Channel.....	34
Middle Channel.....	35
High Channel.....	36
Band Edge, Low Channel.....	37
Band Edge, High Channel.....	37
Hopping Mode	38
Hopping Mode, Band Edge, Low Channel.....	39
Hopping Mode, Band Edge, High Channle.....	39
APPENDIX B.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	40
30MHz - 1GHz	40
1GHz - 18GHz	44
APPENDIX B.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	56

Appendix B.1: Test Results of 99% Bandwidth

BR mode

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.815000	---	---	2401.607500	2402.422500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

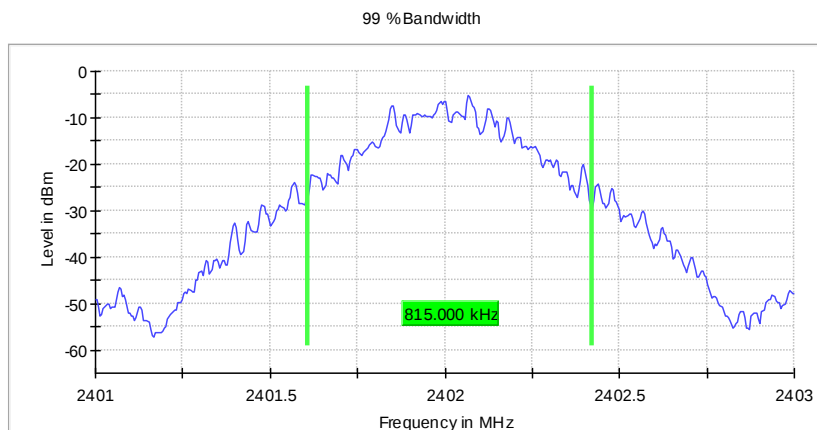

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.30 dB

Occupied Channel Bandwidth 99% (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.805000	---	---	2440.607500	2441.412500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

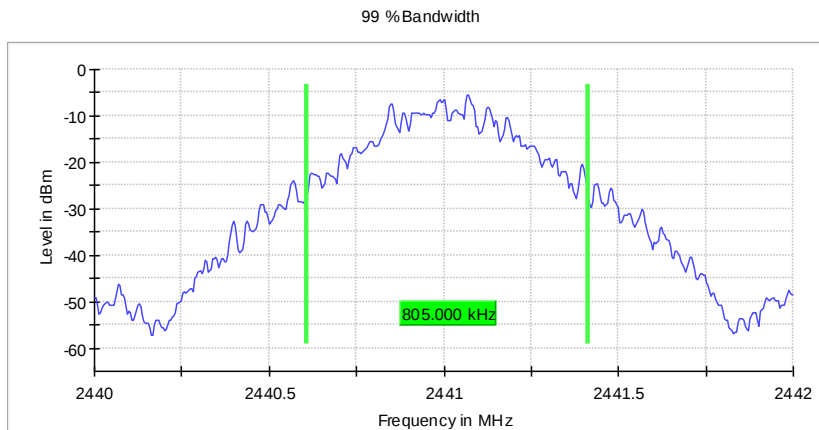

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.805000	---	---	2479.607500	2480.412500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

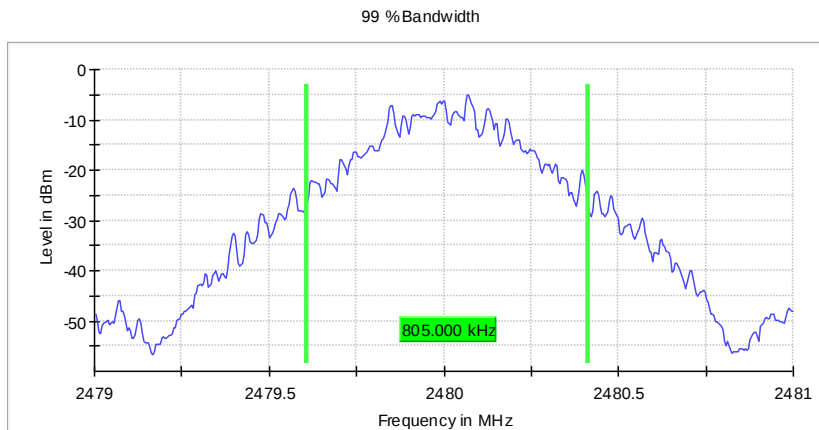

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.30 dB

EDR mode

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.180000	---	---	2401.427500	2402.607500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

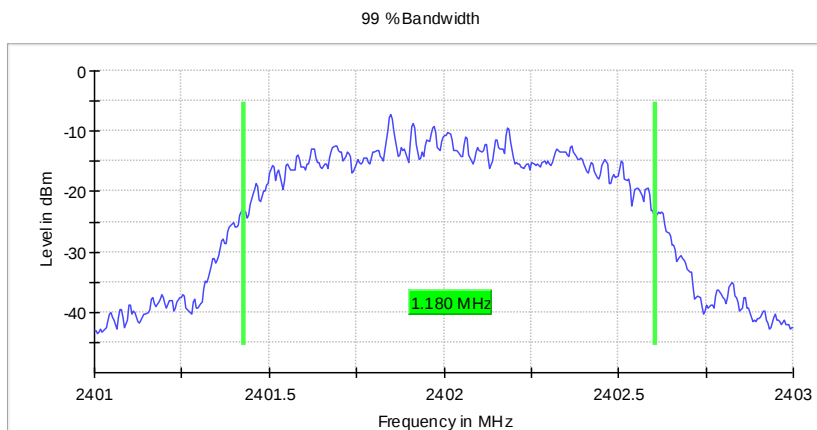

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.30 dB

Occupied Channel Bandwidth 99% (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.175000	---	---	2440.427500	2441.602500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

99 % Bandwidth

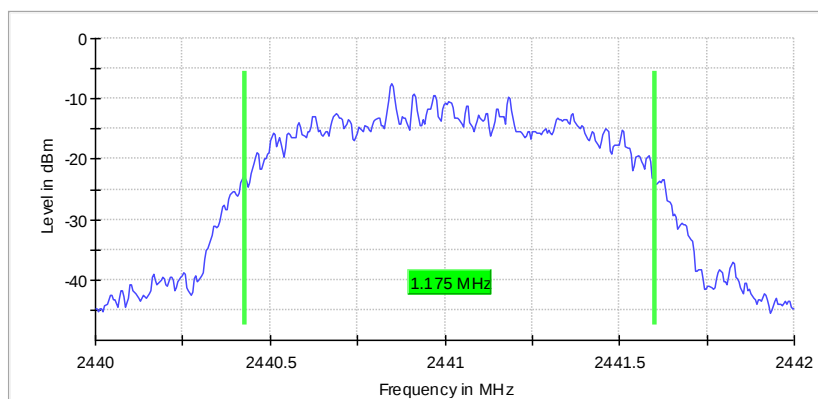

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.180000	---	---	2479.422500	2480.602500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

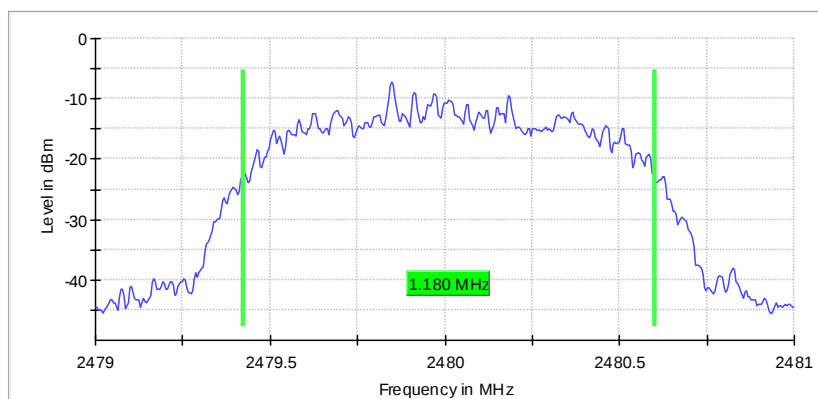

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Appendix B.2: Test Results of 20dB Bandwidth

BR mode

Emission Bandwidth 20 dB (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.925000	---	---	2401.557500	2402.482500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-5.2	PASS

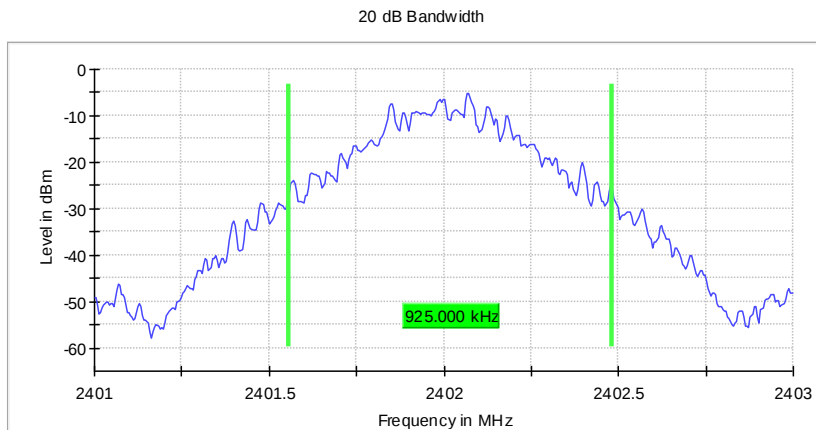

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.10 dB	0.50 dB

Emission Bandwidth 20 dB (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	0.885000	---	---	2440.557500	2441.442500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	-5.4	PASS

20 dB Bandwidth

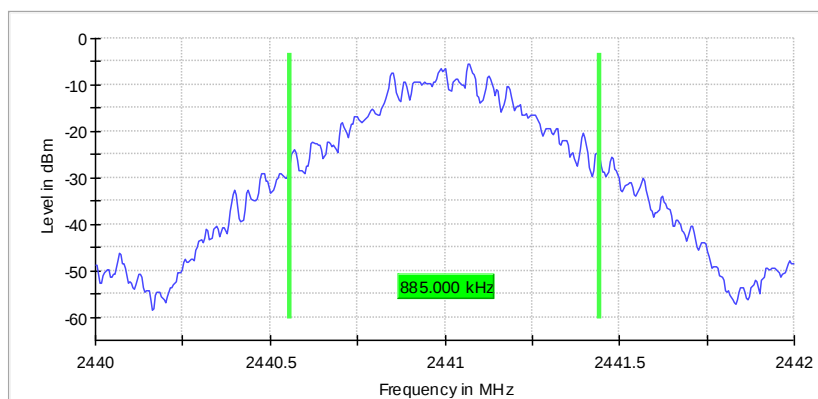**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Emission Bandwidth 20 dB (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.885000	---	---	2479.557500	2480.442500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-5.0	PASS

20 dB Bandwidth

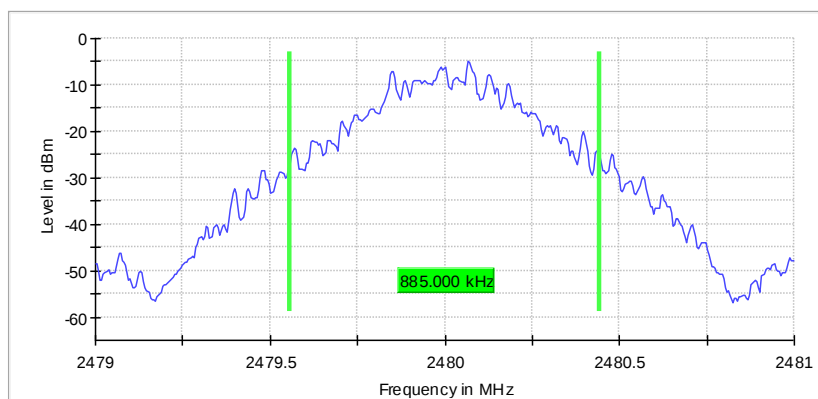**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.05 dB	0.50 dB

EDR mode

Emission Bandwidth 20 dB (2402 MHz; 10.000 dBm; 1 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.275000	---	---	2401.377500	2402.652500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-7.4	PASS

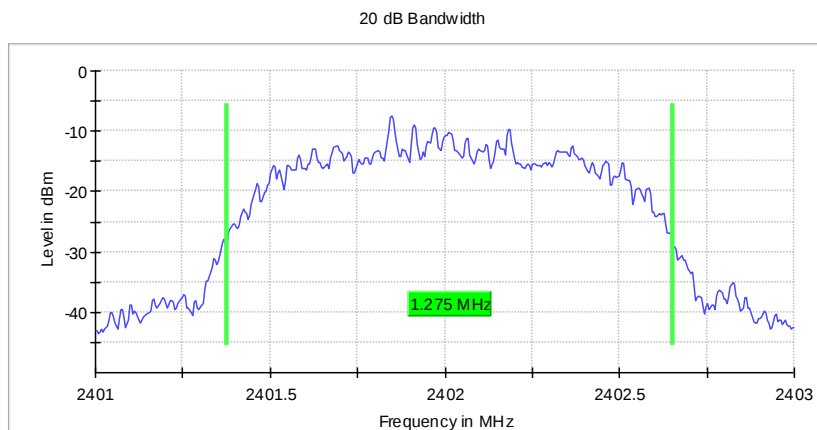

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.06 dB	0.50 dB

Emission Bandwidth 20 dB (2441 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2441.000000	1.285000	---	---	2440.362500	2441.647500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2441.000000	-7.5	PASS

20 dB Bandwidth

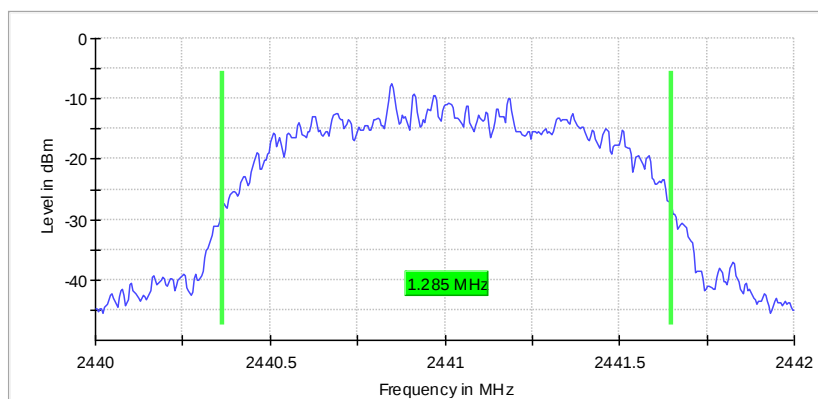**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Emission Bandwidth 20 dB (2480 MHz; 10.000 dBm; 1 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.290000	---	---	2479.357500	2480.647500

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-7.2	PASS

20 dB Bandwidth

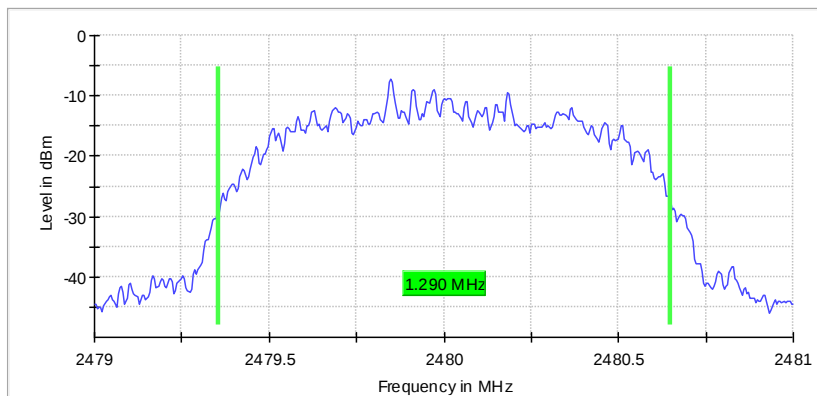
Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.28 dB	0.50 dB

Appendix B.3: Test Results of Carrier Frequency Separation

BR mode

Carrier Frequency Separation (2402 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2402.000000	1.009900	0.616667	---	2401.995050	2403.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

CFS

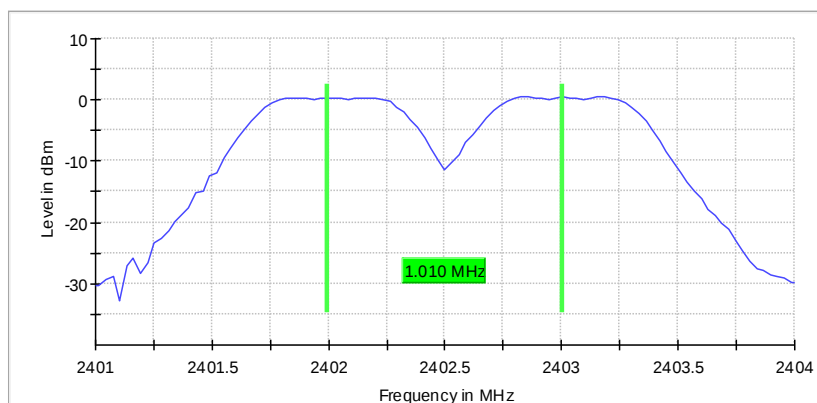

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.01 dB	0.50 dB

Carrier Frequency Separation (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	1.009900	0.590000	---	2440.995050	2442.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

CFS

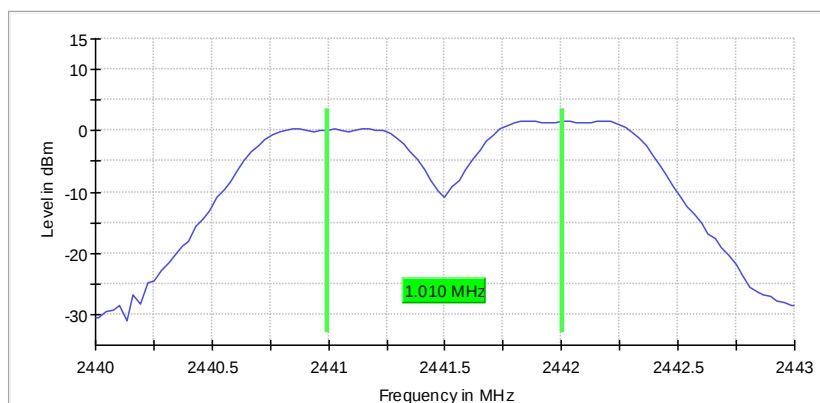

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44300 GHz	2.44300 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
Sweeptime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.06 dB	0.50 dB

Carrier Frequency Separation (2480 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2480.000000	1.009900	0.590000	---	2478.995050	2480.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

CFS

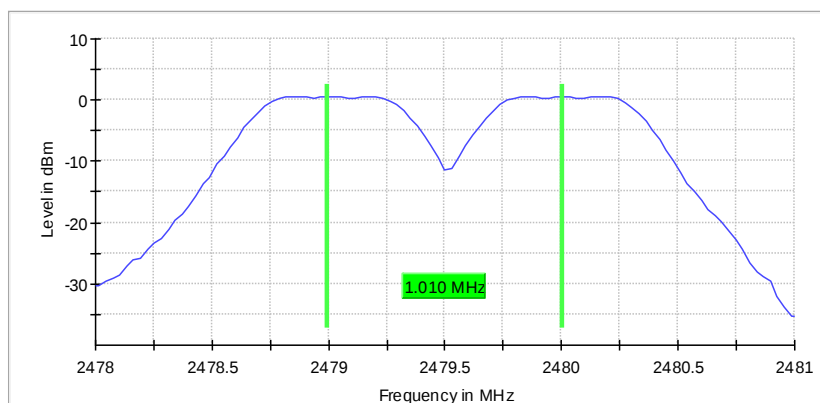

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
Sweeptime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.01 dB	0.50 dB

EDR mode

Carrier Frequency Separation (2402 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2402.000000	1.009900	0.850000	---	2401.995050	2403.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

CFS

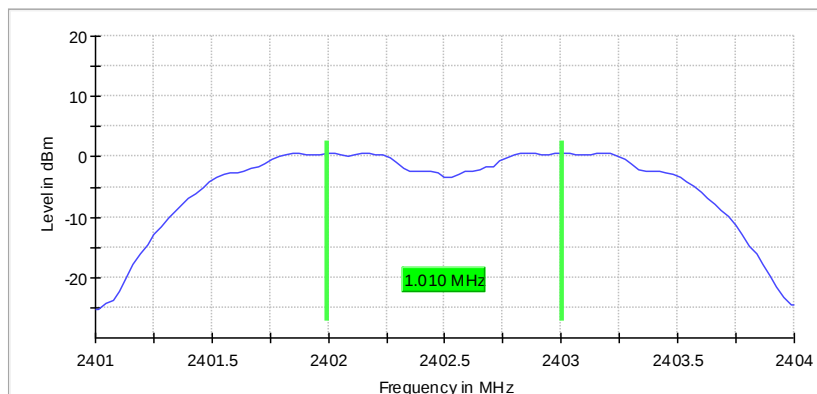

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	1.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.10 dB	0.50 dB

Carrier Frequency Separation (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2441.000000	1.009900	0.856667	---	2440.995050	2442.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2441.000000	PASS

CFS

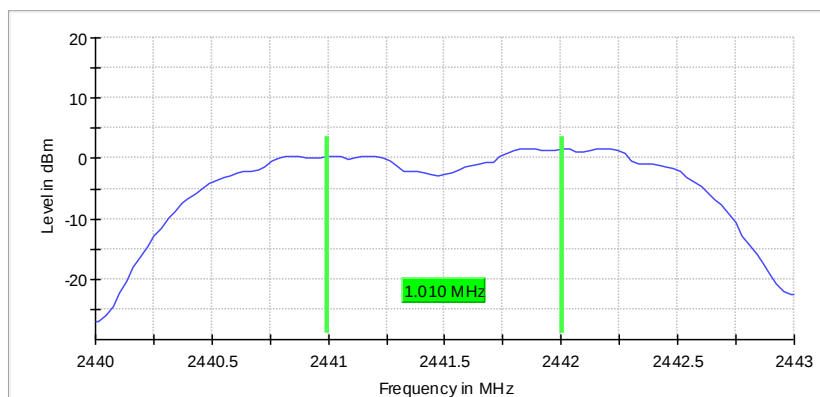

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.44000 GHz	2.44000 GHz
Stop Frequency	2.44300 GHz	2.44300 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	1.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.02 dB	0.50 dB

Carrier Frequency Separation (2480 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2480.000000	1.009900	0.860000	---	2478.995050	2480.004950

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

CFS

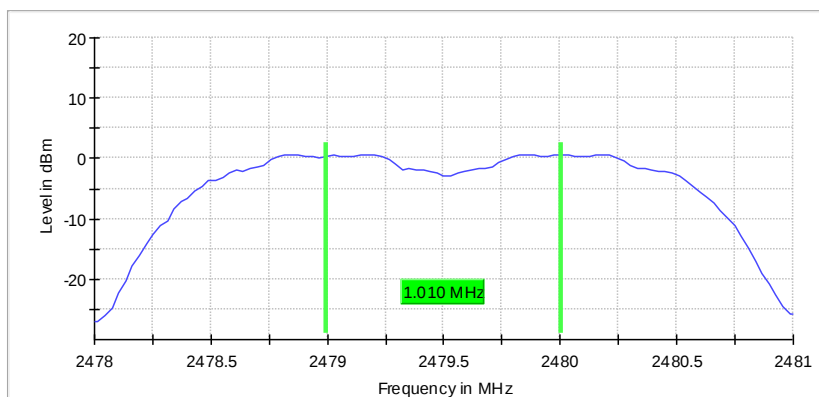

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	3.000 MHz	3.000 MHz
RBW	300.000 kHz	<= 300.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	101	~ 10
SweepTime	1.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.02 dB	0.50 dB

Appendix B.4: Test Results of Number of Hopping Frequency

BR mode


Hopping Frequencies (frequency independent; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(g), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

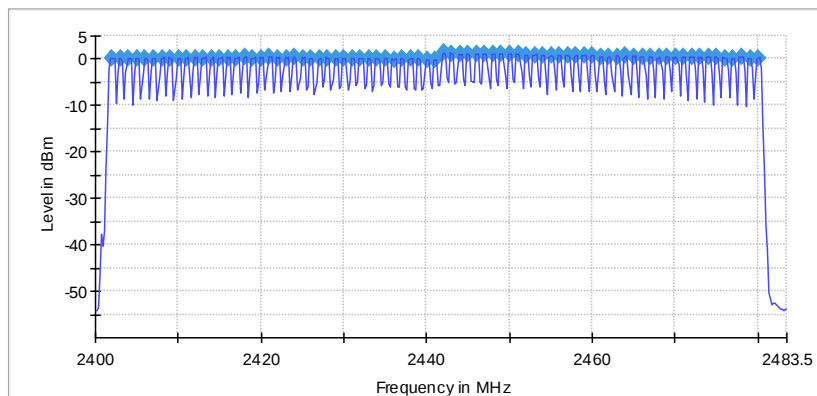

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweeptime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	52 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.50 dB

EDR mode


Hopping Frequencies (frequency independent; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(g), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Channels

Channels	Limit Min	Limit Max	Result
79	15	---	PASS

Sequence

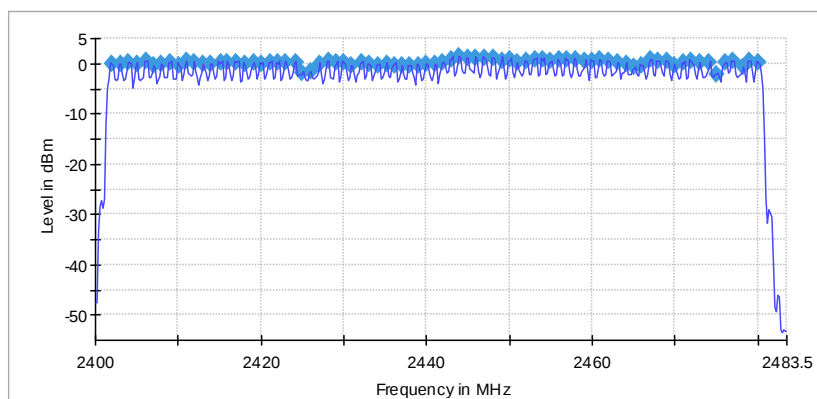

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	200.000 kHz	<= 299.000 kHz
VBW	200.000 kHz	>= 200.000 kHz
SweepPoints	418	~ 418
Sweeptime	1.060 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	79 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Appendix B.5: Test Results of Time of Occupancy

BR mode

Time of Channel Occupancy (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	318	127.520	-10.0

Periode


Min (ms)	Max (ms)	Mean (ms)
3.740	196.250	99.074

Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.39	0.80	400.000	0.000	0.400

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.39	1.650	0.402

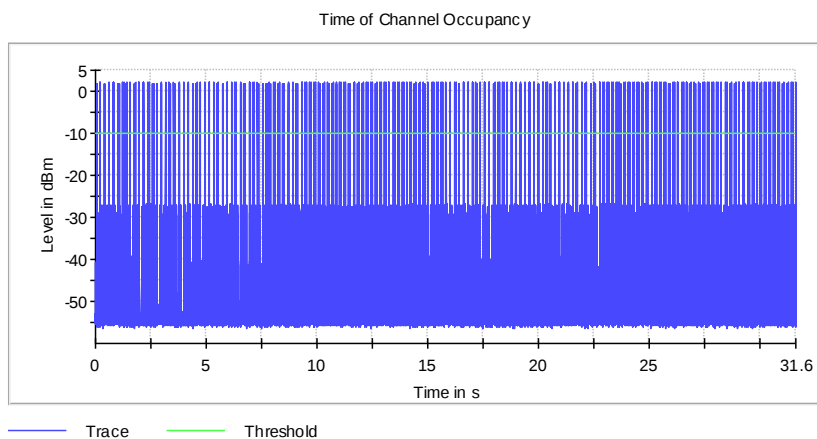

Time of Channel Occupancy(2) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	157	261.460	-10.0

Periode


Min (ms)	Max (ms)	Mean (ms)
5.000	777.480	200.314

Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.650	1.660	400.000	0.000	1.655

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.650	1.660	1.655

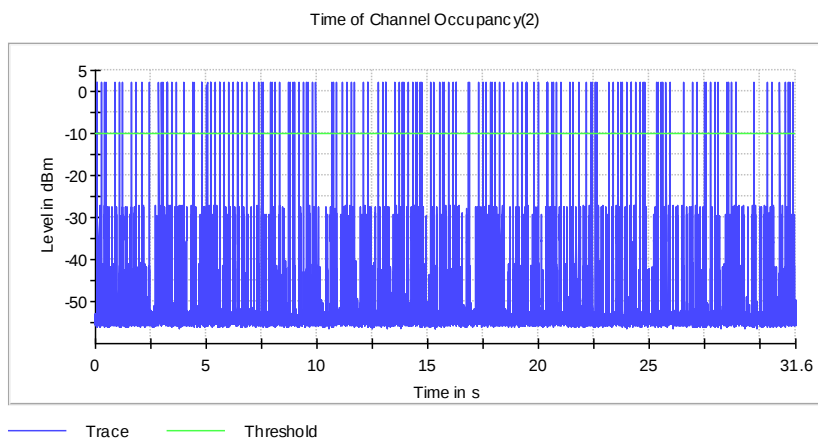

Time of Channel Occupancy(3) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	103	304.750	-10.0

Periode


Min (ms)	Max (ms)	Mean (ms)
26.250	1184.960	298.190

Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.900	5.800	400.000	0.000	2.930

DwellTime

Min (ms)	Max (ms)	Mean (ms)
2.900	6.650	2.939

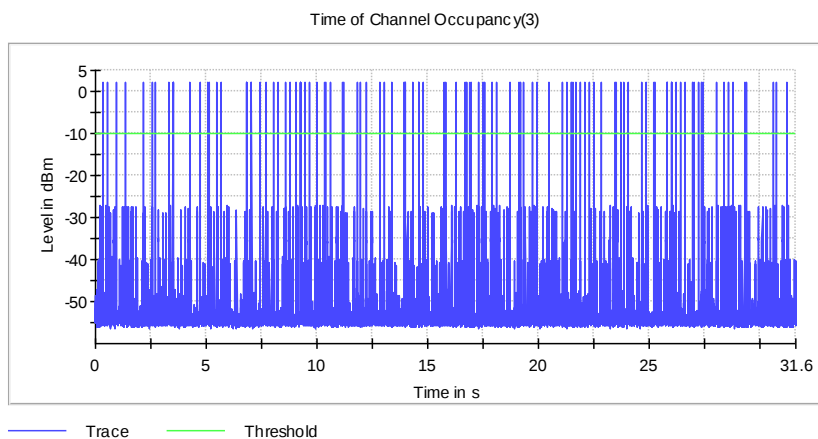

EDR mode

Time of Channel Occupancy (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	318	127.780	-10.0

Periode

Min (ms)	Max (ms)	Mean (ms)
3.750	196.240	99.102


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
0.36	0.82	400.000	0.000	0.401

DwellTime

Min (ms)	Max (ms)	Mean (ms)
0.41	1.660	0.414

Time of Channel Occupancy

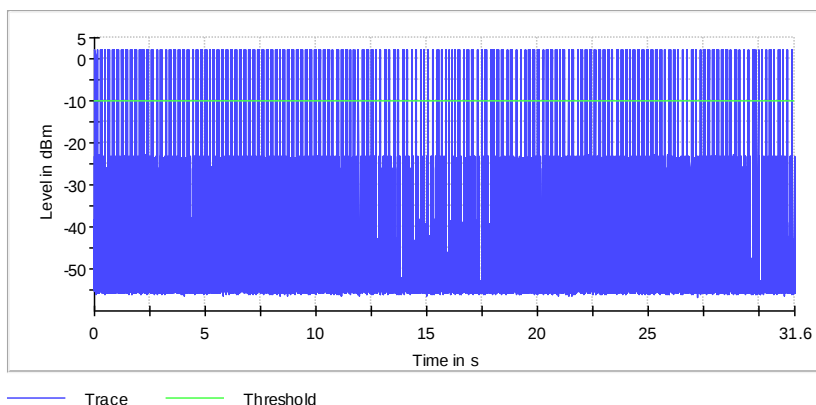

Time of Channel Occupancy(2) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	156	251.440	-10.0

Periode


Min (ms)	Max (ms)	Mean (ms)
5.000	777.470	200.300

Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.550	1.640	400.000	0.000	1.601

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.660	1.670	1.660

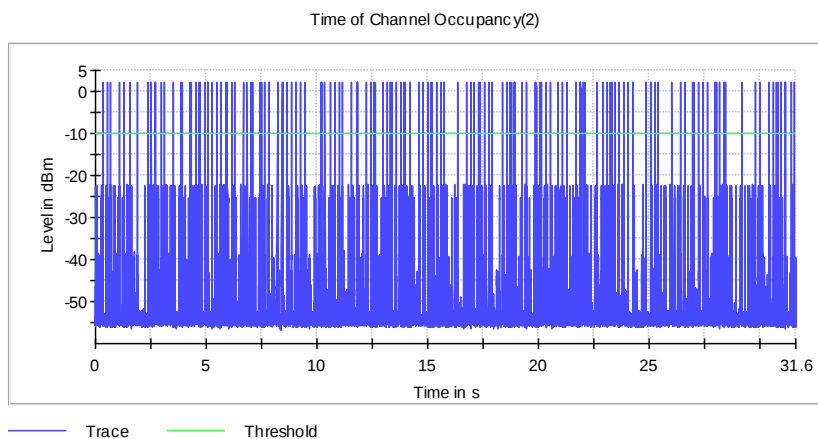

Time of Channel Occupancy(3) (2441 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2441.000000	PASS	106	301.230	-10.0

Periode


Min (ms)	Max (ms)	Mean (ms)
26.250	1184.960	298.991

Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
2.700	5.620	400.000	0.000	2.816

DwellTime


Min (ms)	Max (ms)	Mean (ms)
2.910	6.660	2.946

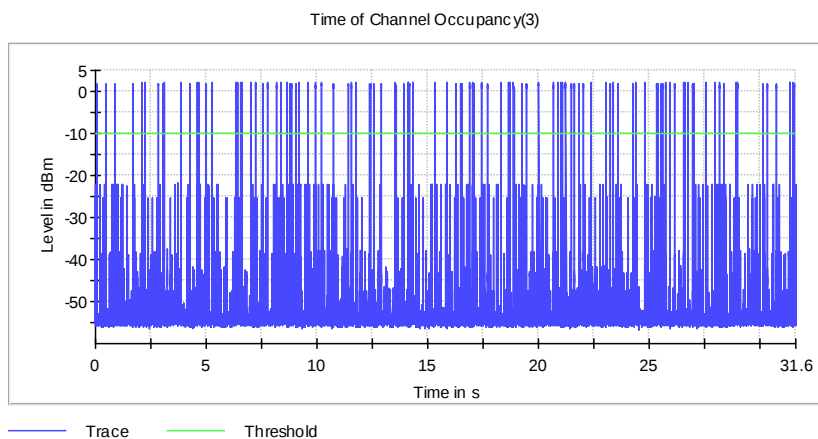


Appendix B.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

BR mode

Low Channel

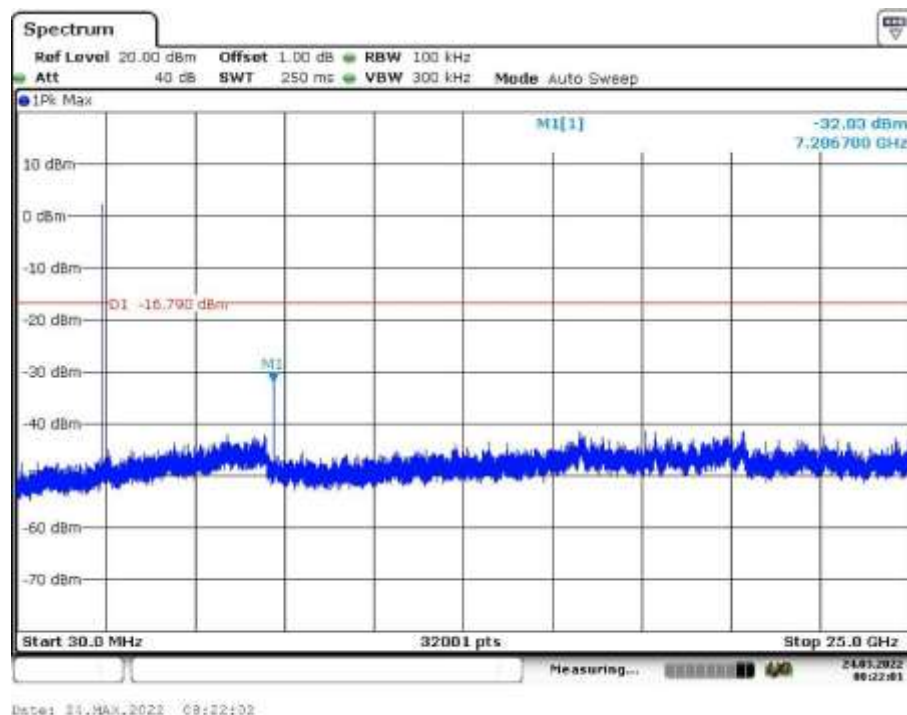


Middle Channel

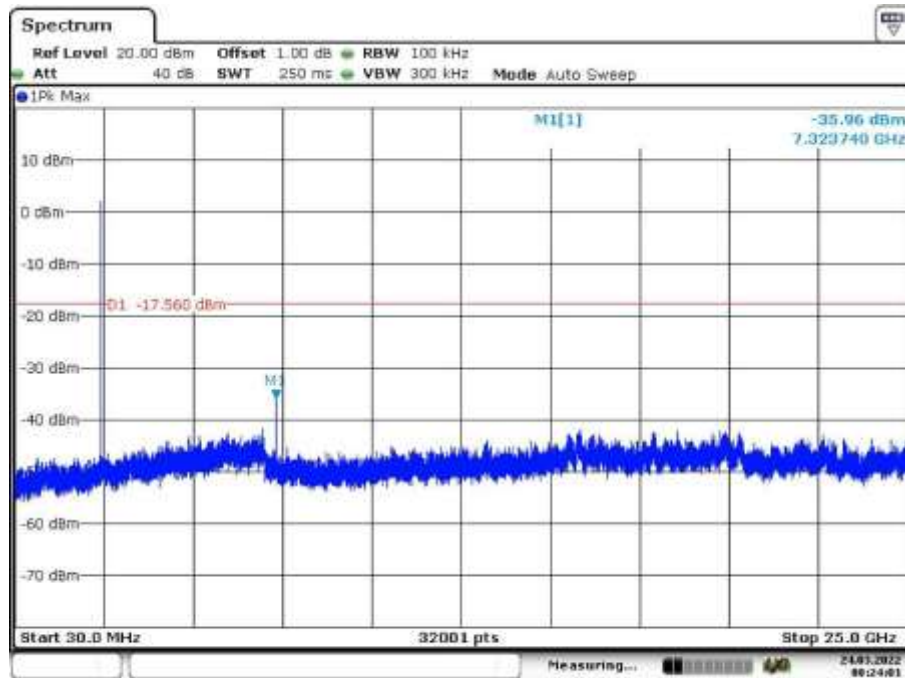

High Channel




Date: 24.MAR.2022 09:26:04

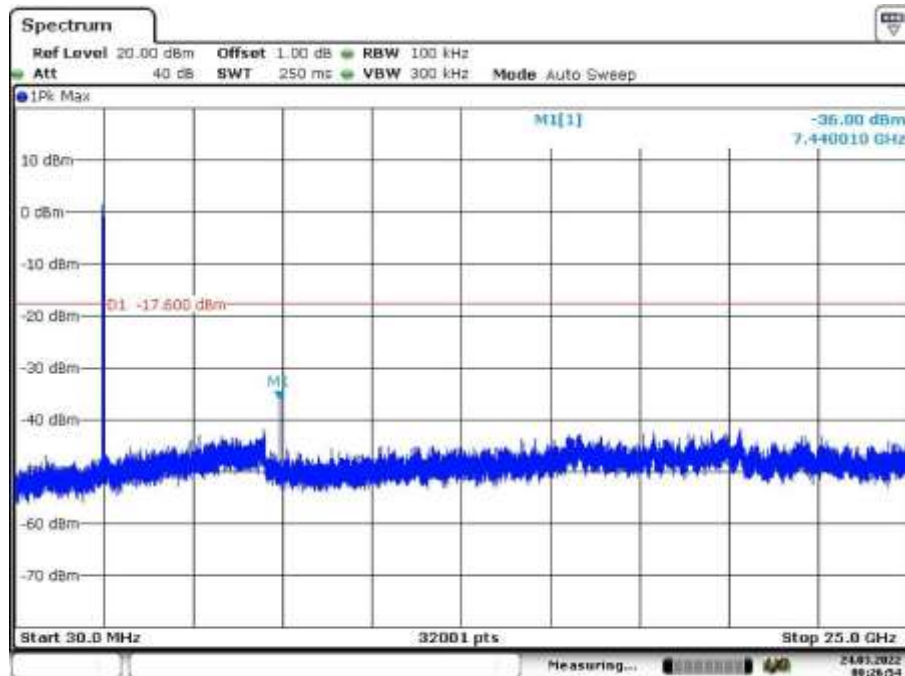


Date: 24.MAR.2022 09:26:04


Band Edge, Low Channel

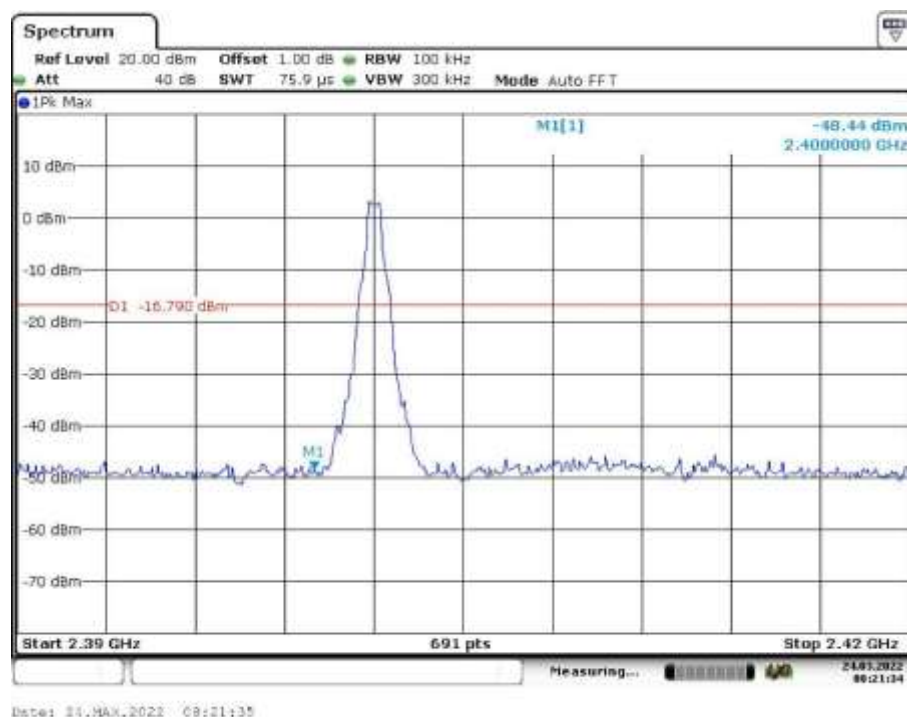


Band Edge, High Channel

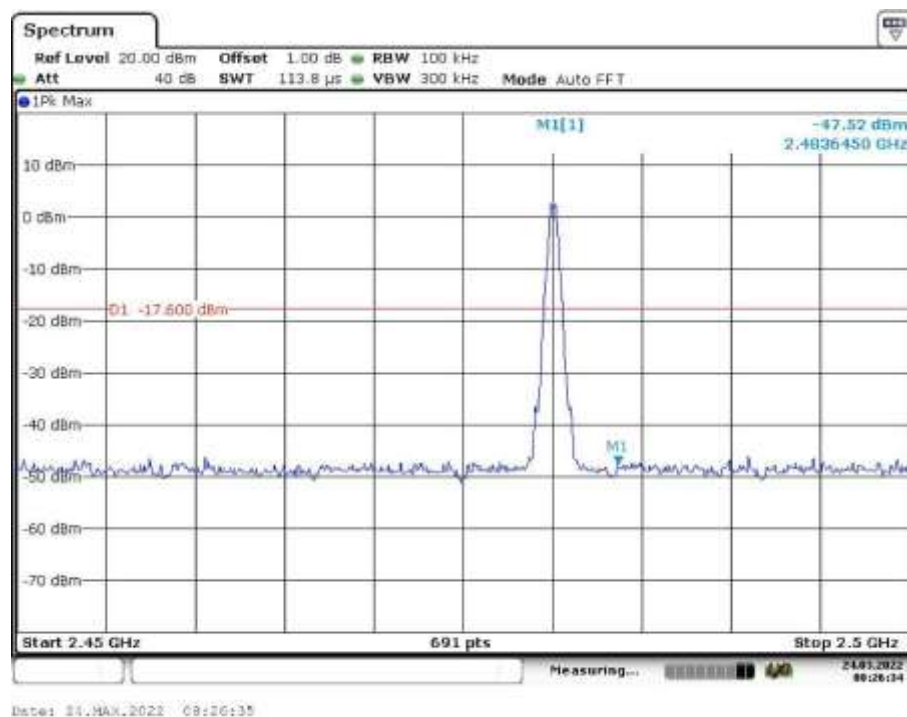

Hopping Mode

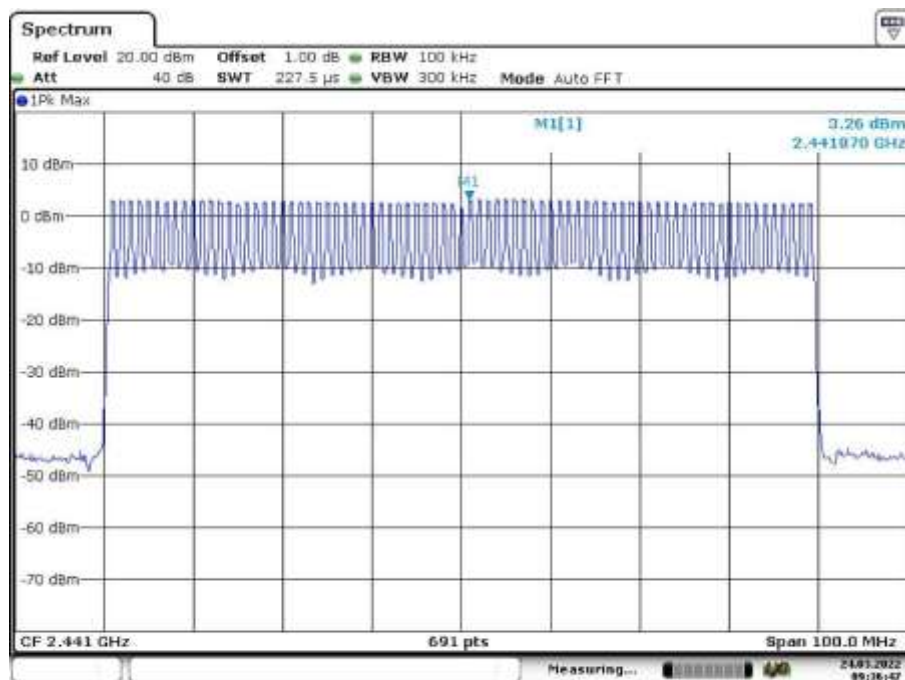


Date: 24.MAR.2022 09:36:47

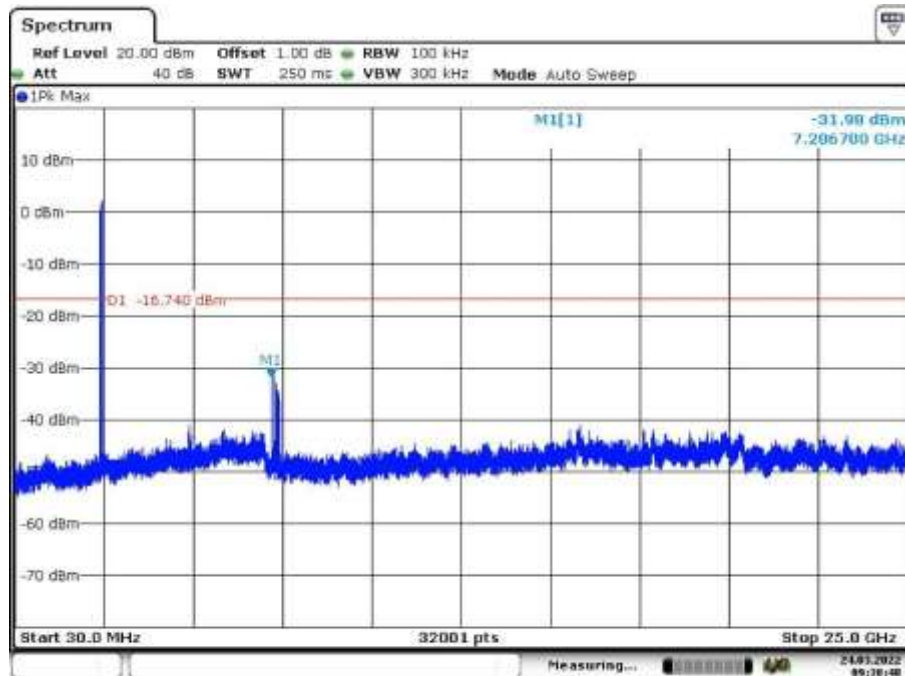


Date: 24.MAR.2022 09:38:49

Hopping Mode, Band Edge, Low Channel

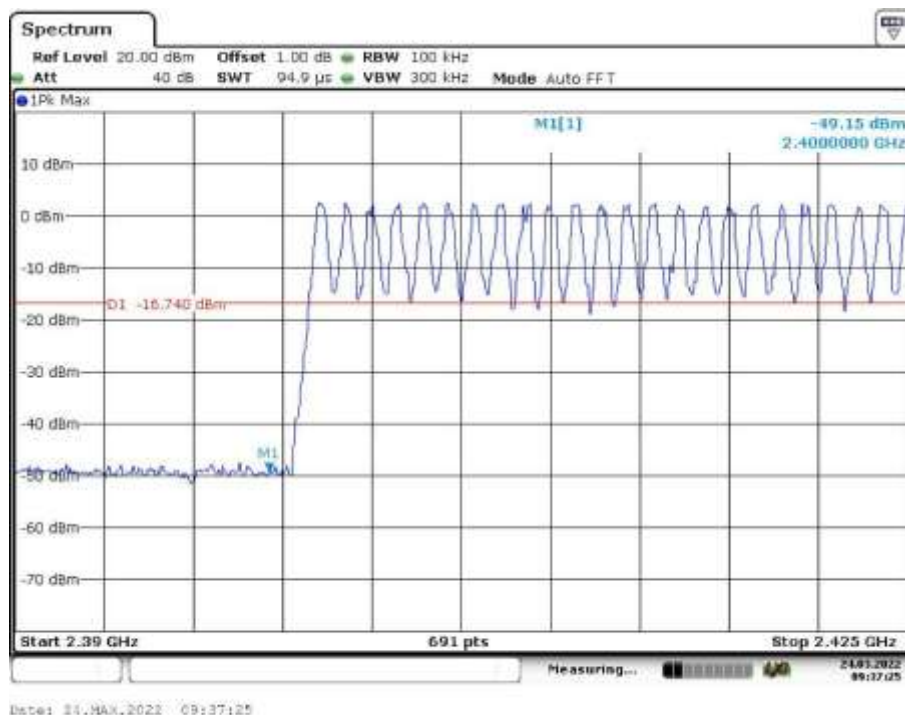


Hopping Mode, Band Edge, High Channel

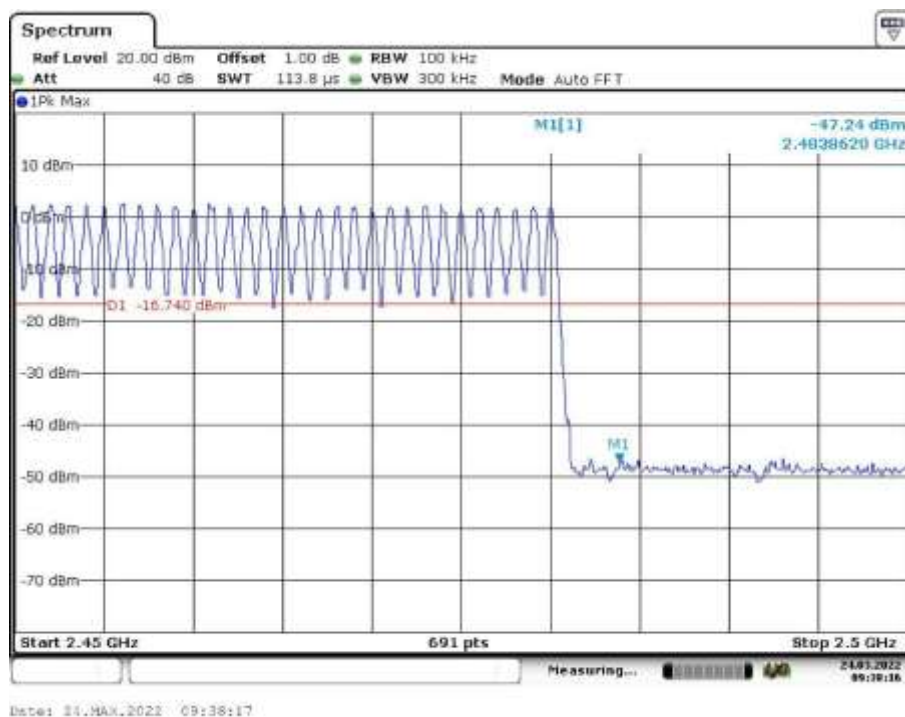


EDR mode

Low Channel


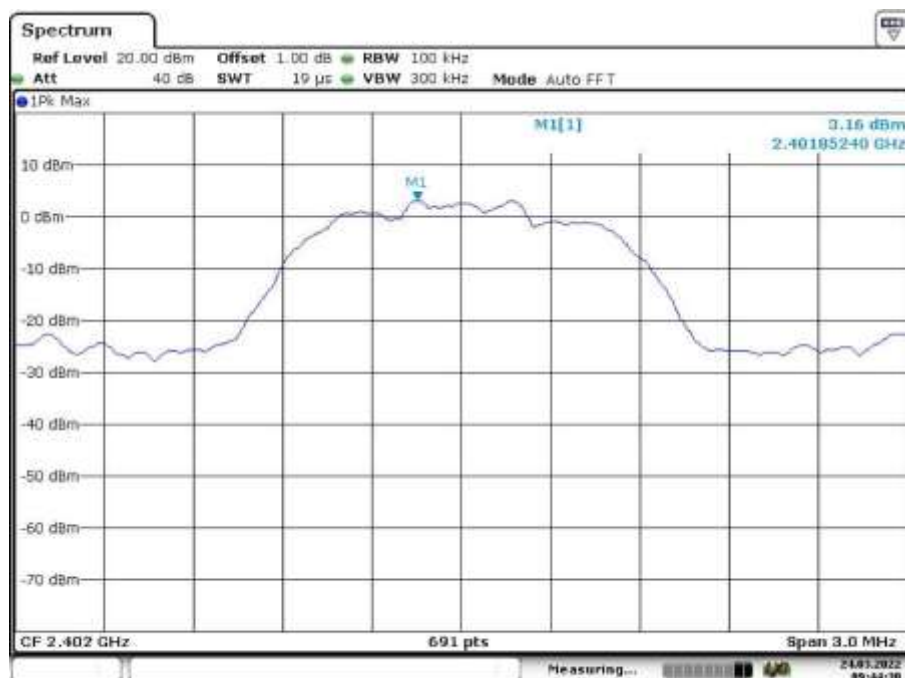


Date: 24.01.2022 09:44:30

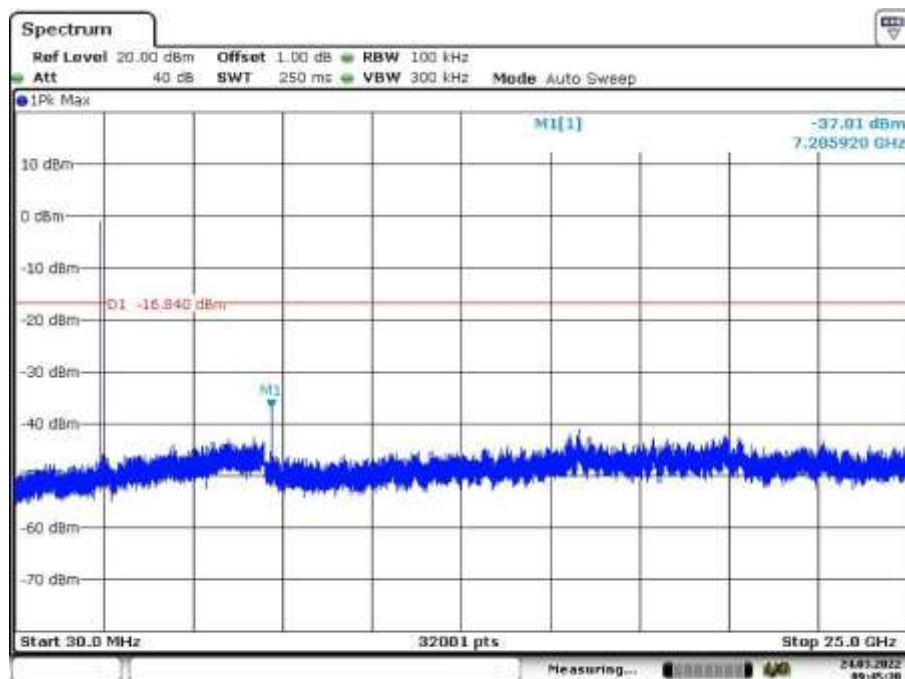

Date: 24.01.2022 09:45:08


Middle Channel

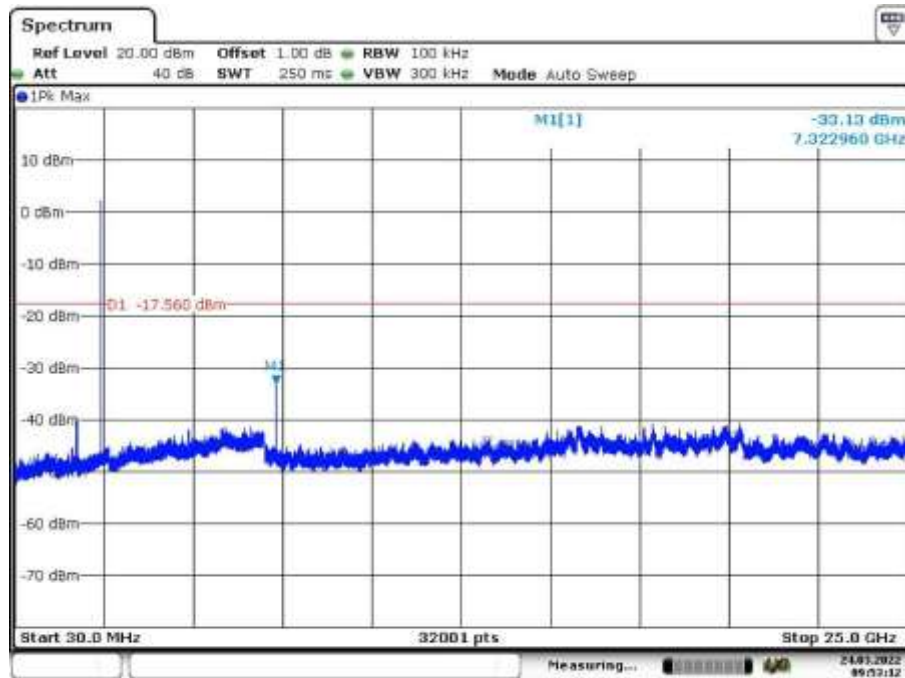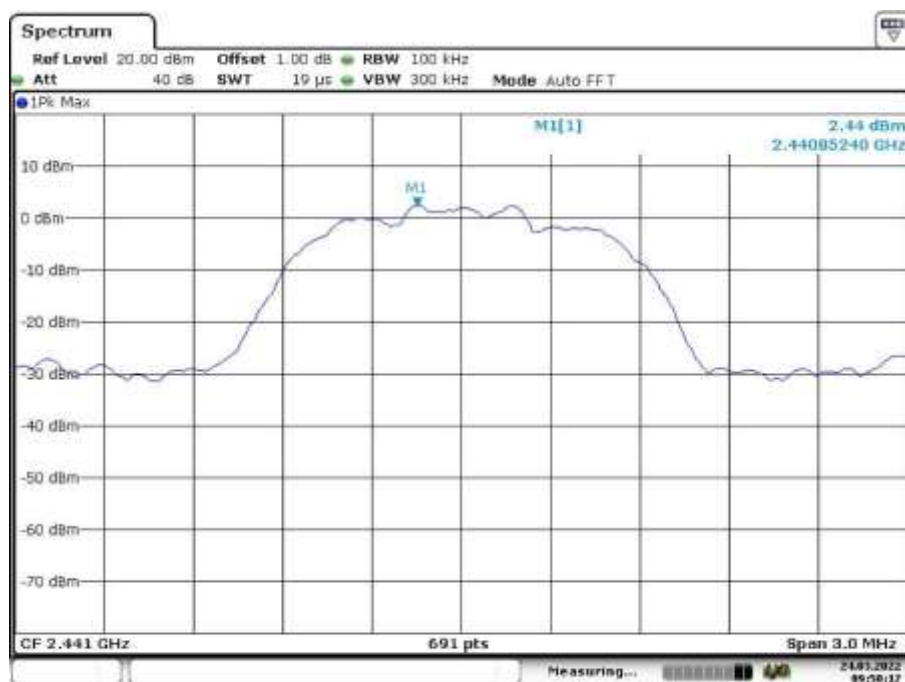

High Channel




Date: 24.01.2022 09:57:57

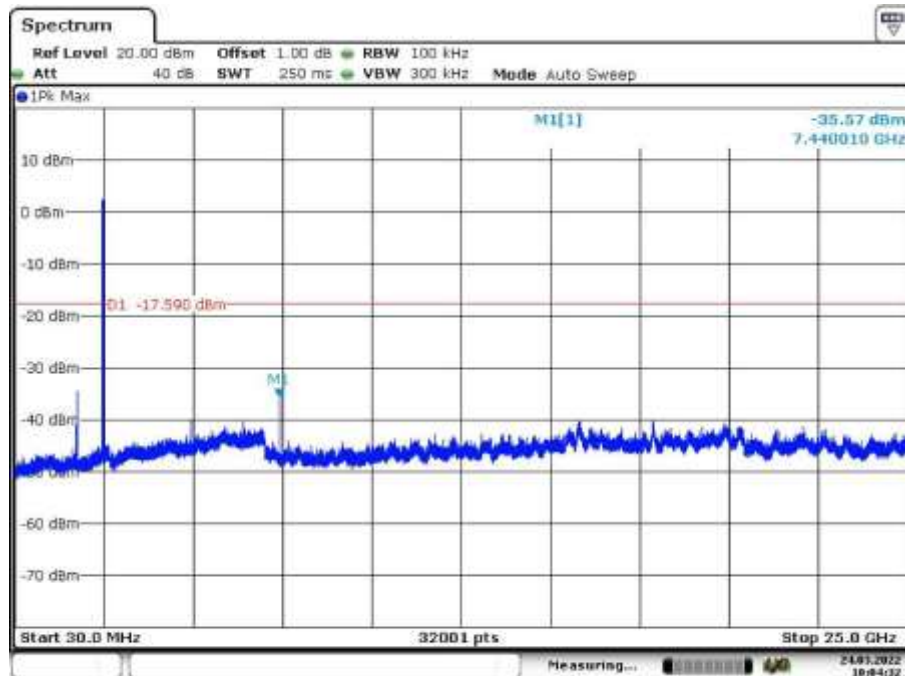


Date: 24.01.2022 10:04:32


Band Edge, Low Channel

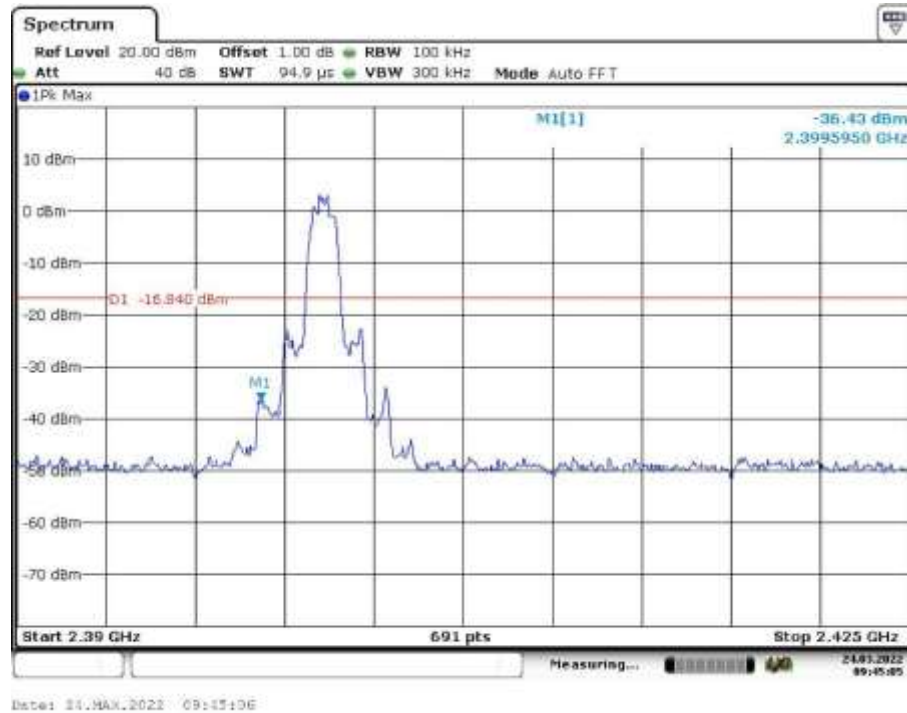


Band Edge, High Channel

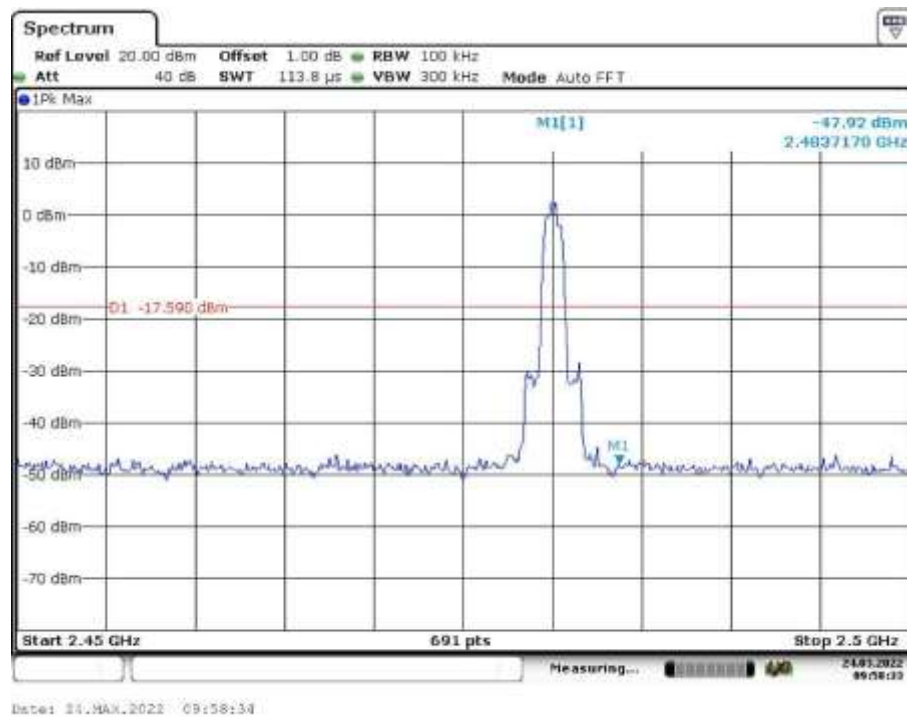

Hopping Mode

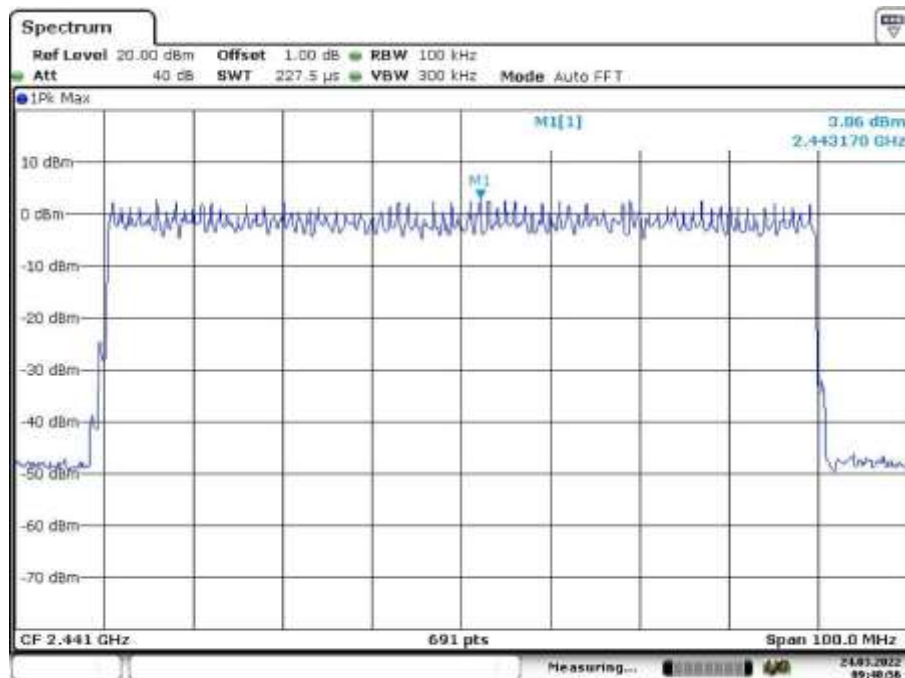


Date: 24.MAR.2022 09:40:37

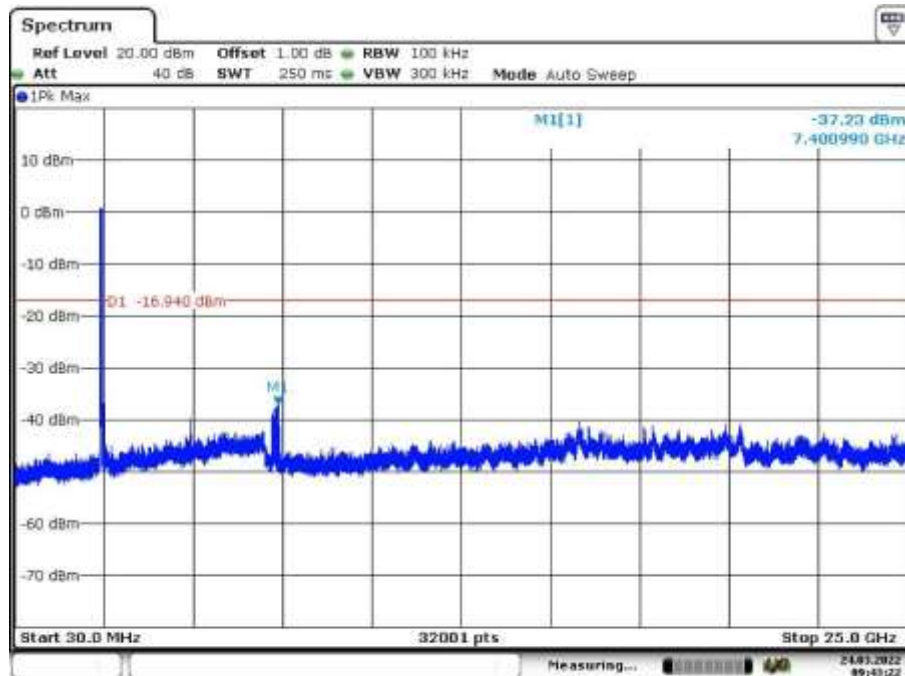


Date: 24.MAR.2022 09:43:23

Hopping Mode, Band Edge, Low Channel

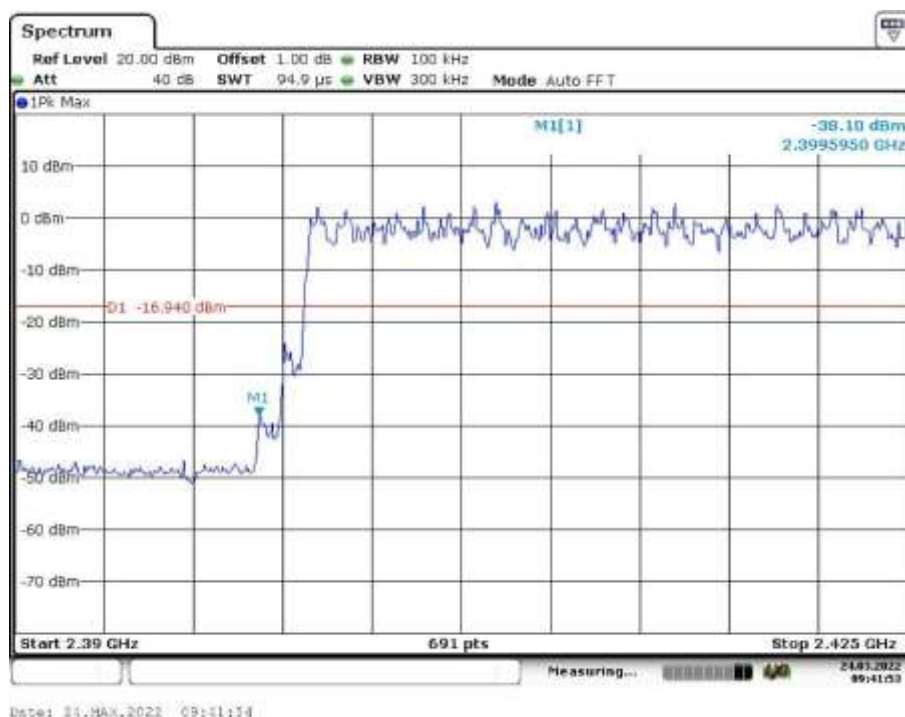

Hopping Mode, Band Edge, High Channel

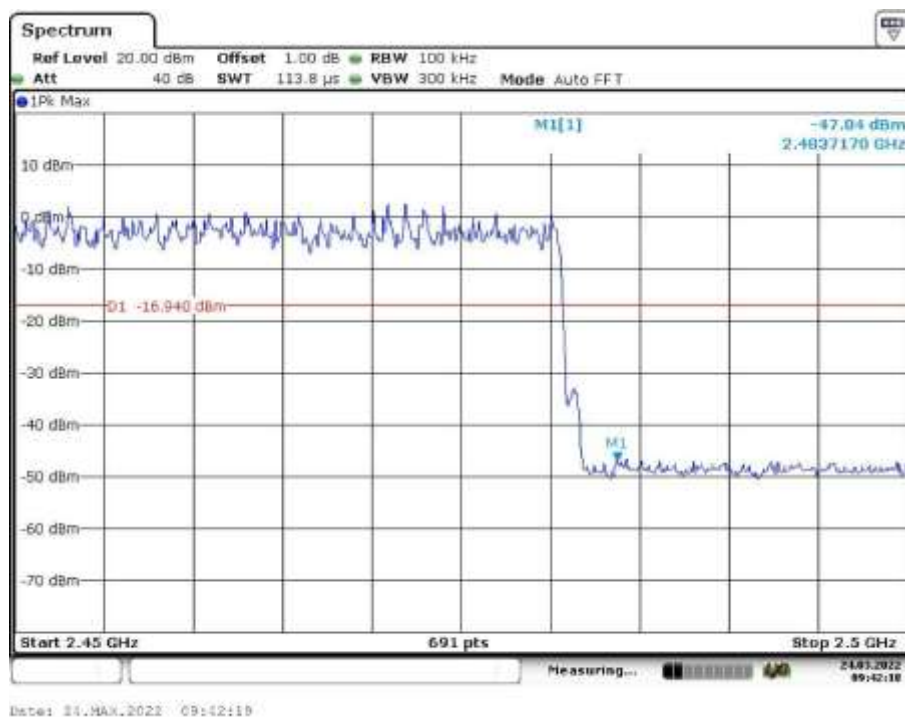

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.


Appendix B.7: Test Results of Radiated Spurious Emissions

Note: This testing was carried out on different modulations, but only the worst case (BR Mode) was presented in this report.

30MHz - 1GHz

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

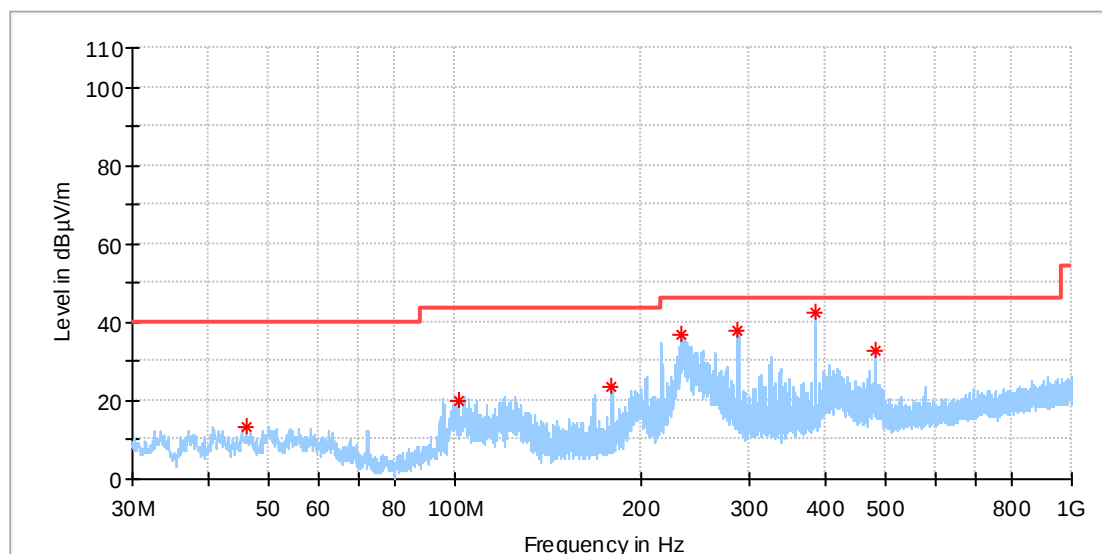

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.005000	13.12	40.00	26.88	100.0	H	330.0	-19.0
101.220385	20.06	43.50	23.44	100.0	H	92.0	-19.3
179.566539	23.52	43.50	19.98	100.0	H	355.0	-20.9
232.991154	37.02	46.00	8.98	100.0	H	313.0	-18.3
287.423077	37.65	46.00	8.35	100.0	H	7.0	-16.9
383.191923	42.24	46.00	3.76	100.0	H	15.0	-14.5
481.423077	32.55	46.00	13.45	100.0	H	37.0	-12.5

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

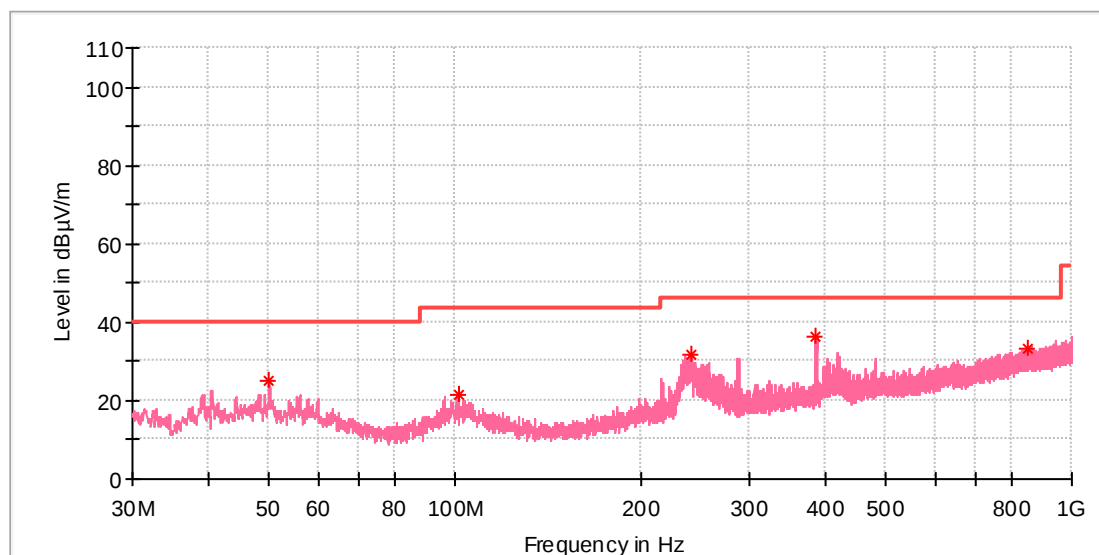

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.982000	24.86	40.00	15.14	100.0	V	108.0	-18.3
101.634500	21.50	43.50	22.00	100.0	V	340.0	-18.9
241.460000	31.60	46.00	14.40	100.0	V	354.0	-17.7
383.710500	36.23	46.00	9.77	100.0	V	70.0	-14.1
849.795500	33.47	46.00	12.53	100.0	V	354.0	-5.5

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

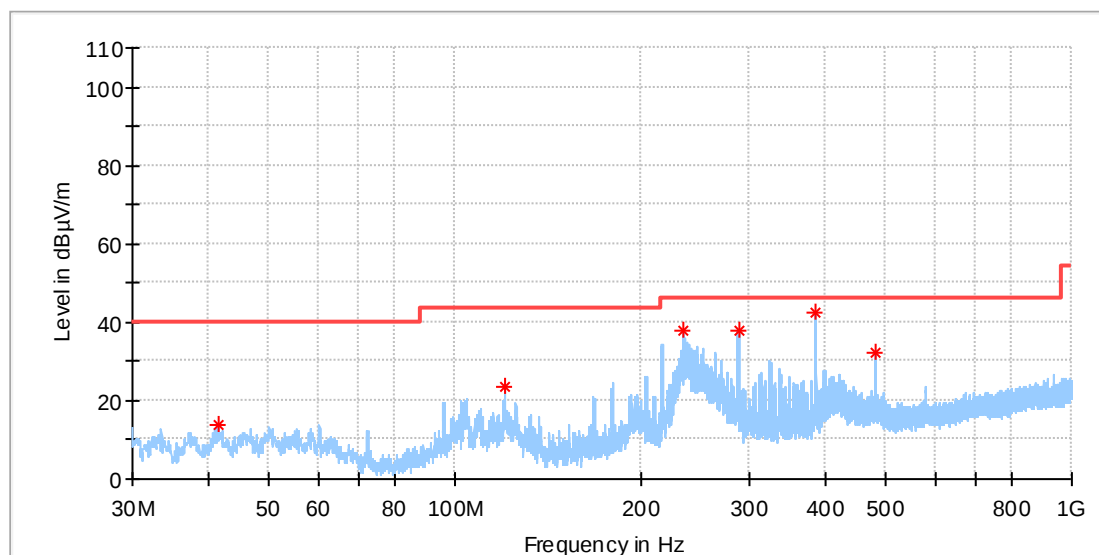

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.229615	13.88	40.00	26.12	100.0	H	58.0	-20.1
120.359231	23.66	43.50	19.84	100.0	H	163.0	-21.1
235.043077	37.88	46.00	8.12	100.0	H	129.0	-18.2
288.952692	37.74	46.00	8.26	100.0	H	10.0	-16.9
385.281154	42.39	46.00	3.61	100.0	H	18.0	-14.4
481.572308	32.41	46.00	13.59	100.0	H	41.0	-12.5

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

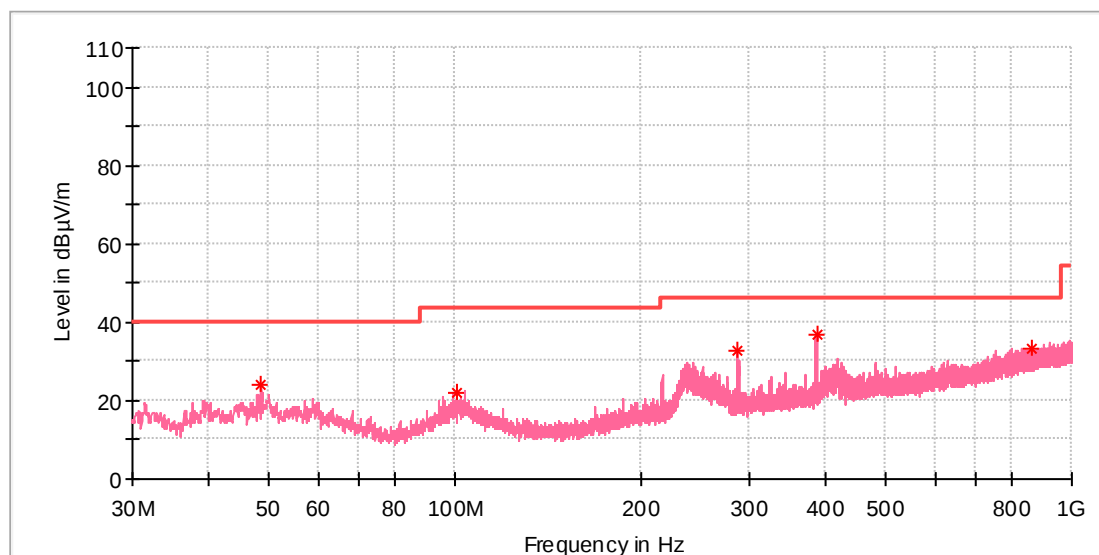

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.575500	23.98	40.00	16.02	100.0	V	0.0	-18.4
100.664500	22.26	43.50	21.24	100.0	V	320.0	-19.0
287.632000	32.75	46.00	13.25	100.0	V	50.0	-16.6
385.553500	36.90	46.00	9.10	100.0	V	50.0	-14.1
858.234500	33.49	46.00	12.51	100.0	V	0.0	-5.4

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

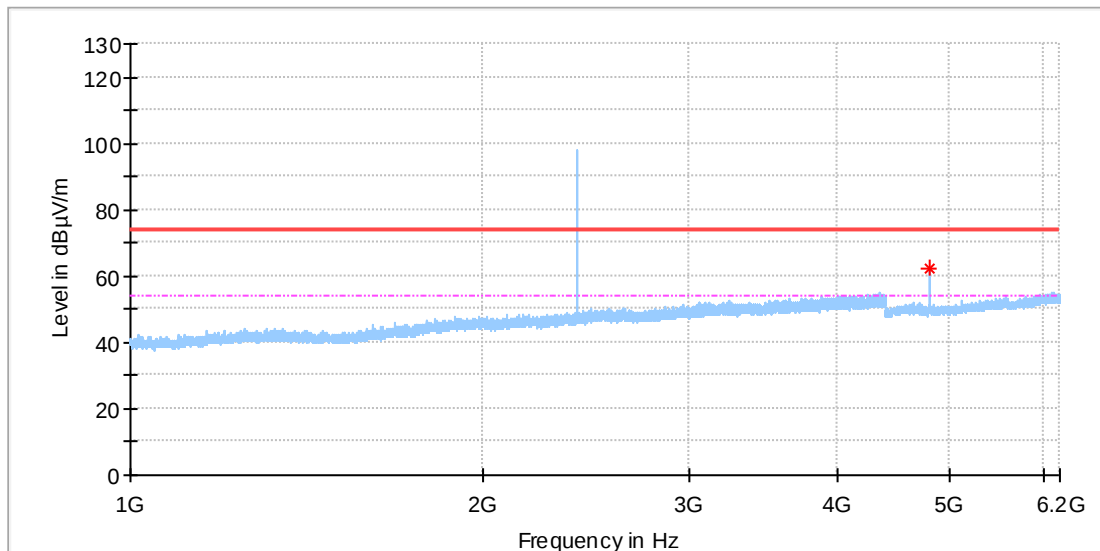

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	62.14	---	74.00	11.86	100.0	H	271.0	11.8
4803.500000	---	31.34	54.00	22.66	100.0	H	271.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

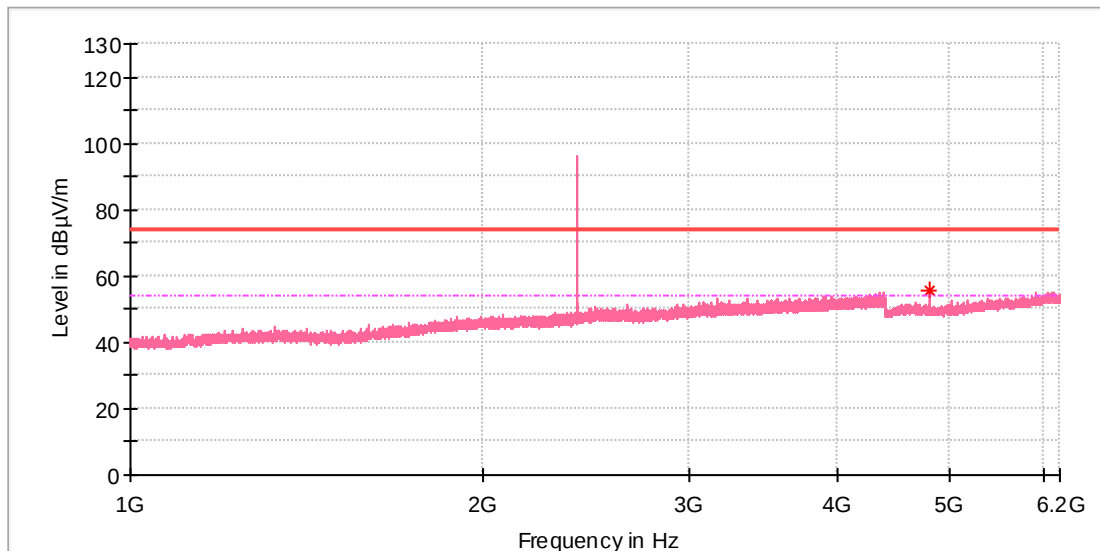

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	55.39	---	74.00	18.61	100.0	V	253.0	11.8
4803.500000	---	24.59	54.00	29.41	100.0	V	253.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

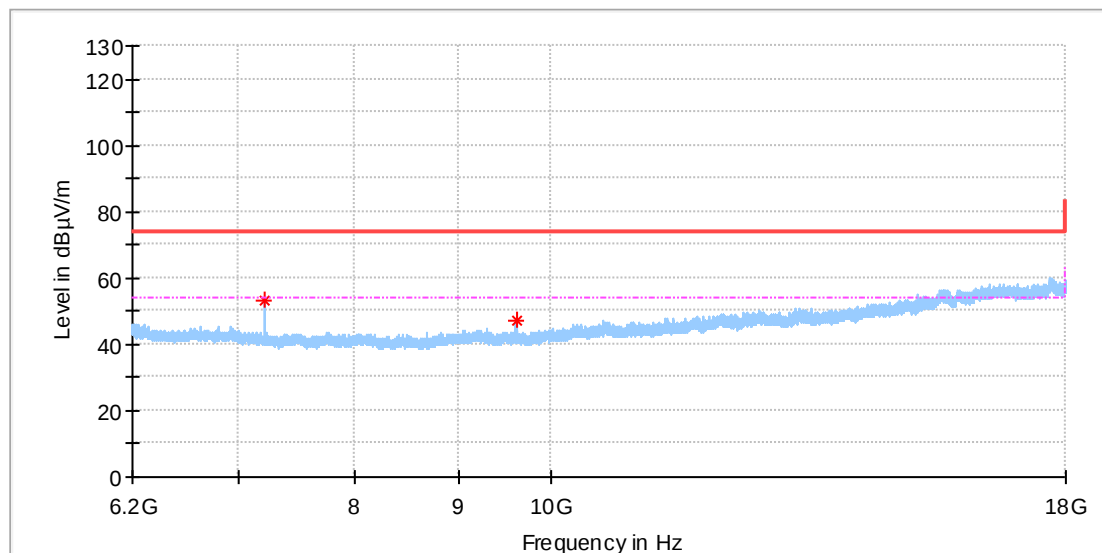

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	53.41	---	74.00	20.59	100.0	H	45.0	8.8
7205.458333	---	22.61	54.00	31.39	100.0	H	45.0	8.8
9608.233333	47.10	---	74.00	26.90	100.0	H	25.0	10.4
9608.233333	---	16.30	54.00	37.70	100.0	H	25.0	10.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

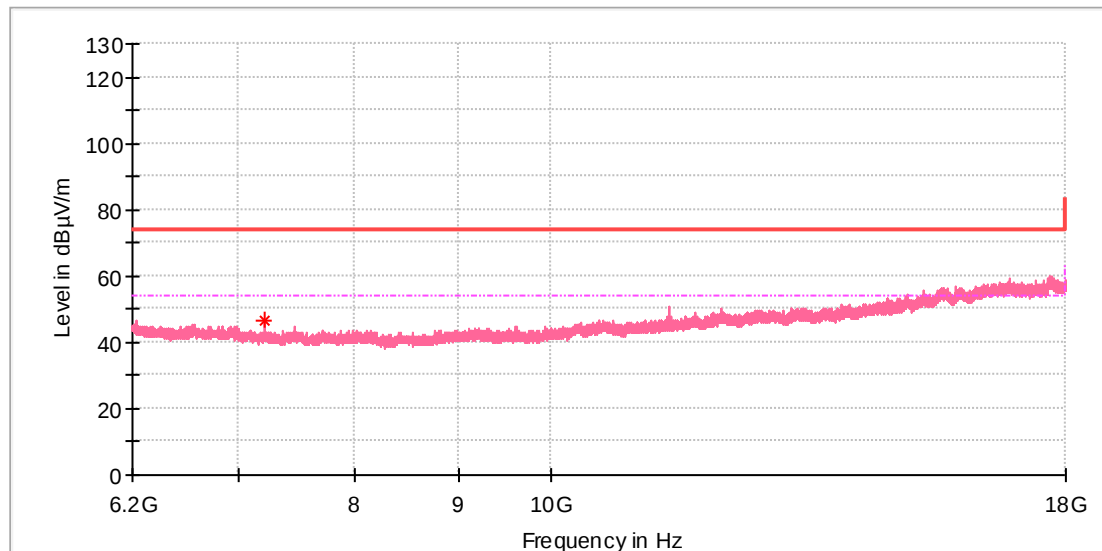

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	46.38	---	74.00	27.62	100.0	V	157.0	8.8
7205.950000	---	15.58	54.00	38.42	100.0	V	157.0	8.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

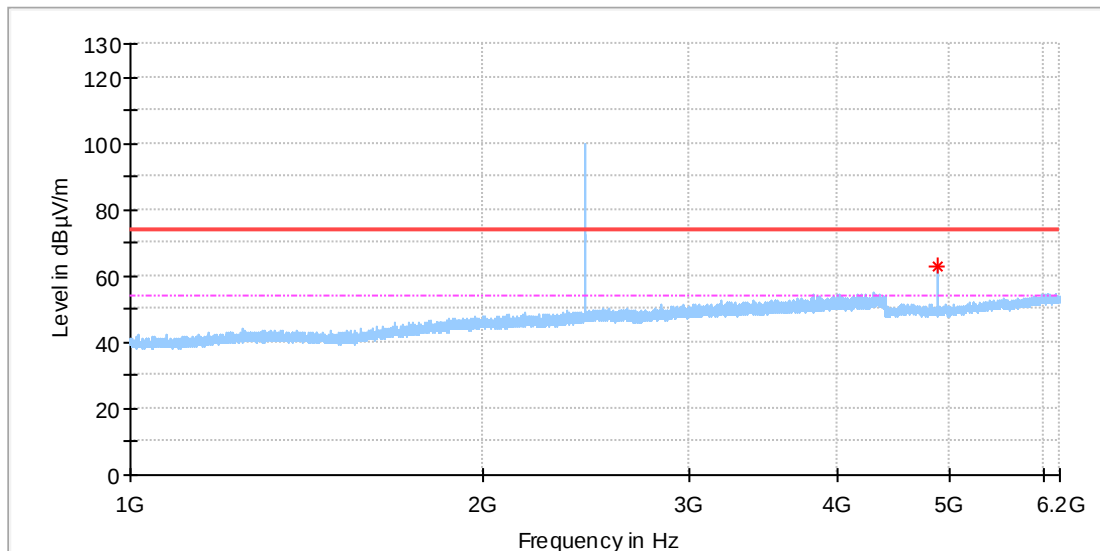

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.500000	62.64	---	74.00	11.36	100.0	H	278.0	11.8
4882.500000	---	31.84	54.00	22.16	100.0	H	278.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

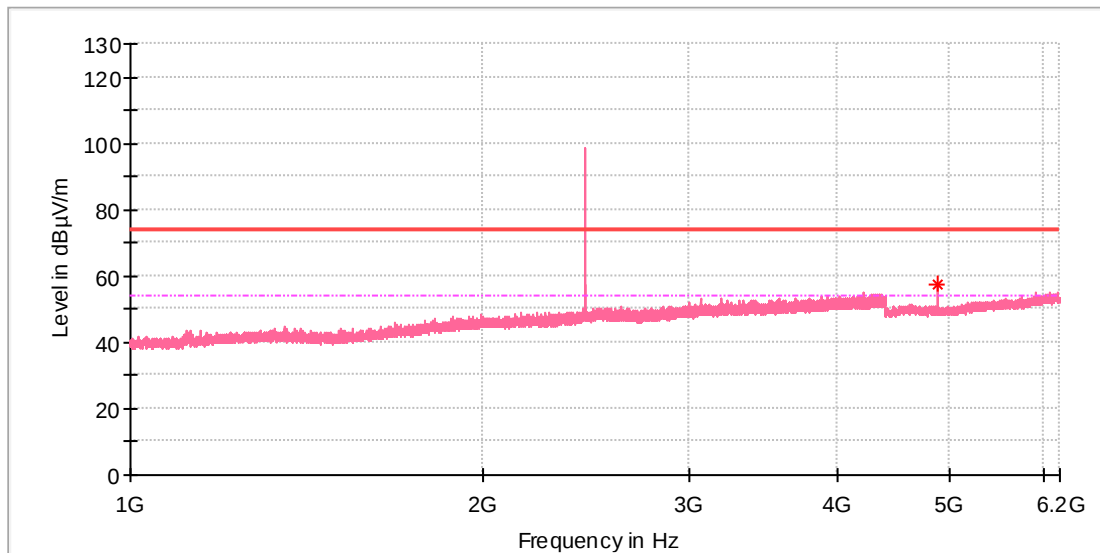

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.500000	57.24	---	74.00	16.76	100.0	V	244.0	11.8
4881.500000	---	26.44	54.00	27.56	100.0	V	244.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

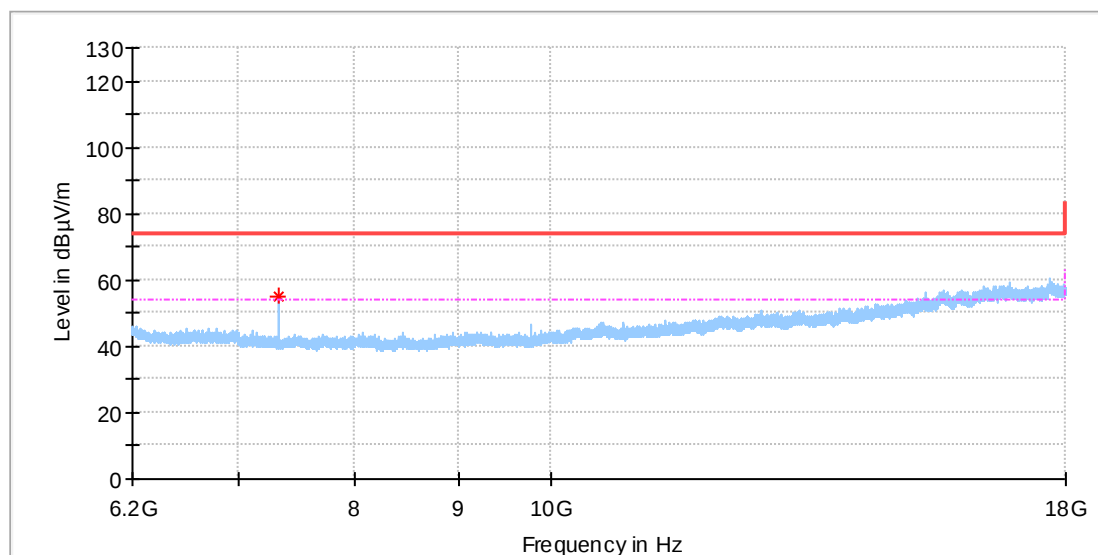

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	54.96	---	74.00	19.04	100.0	H	39.0	8.2
7322.475000	---	24.16	54.00	29.84	100.0	H	39.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

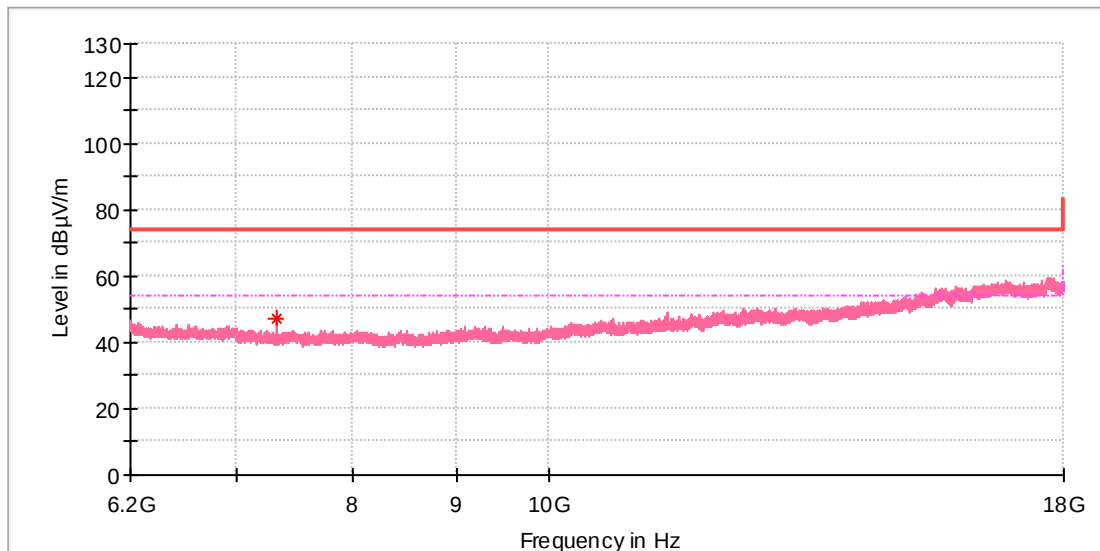

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	47.46	---	74.00	26.54	100.0	V	44.0	8.2
7322.475000	---	16.66	54.00	37.34	100.0	V	44.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

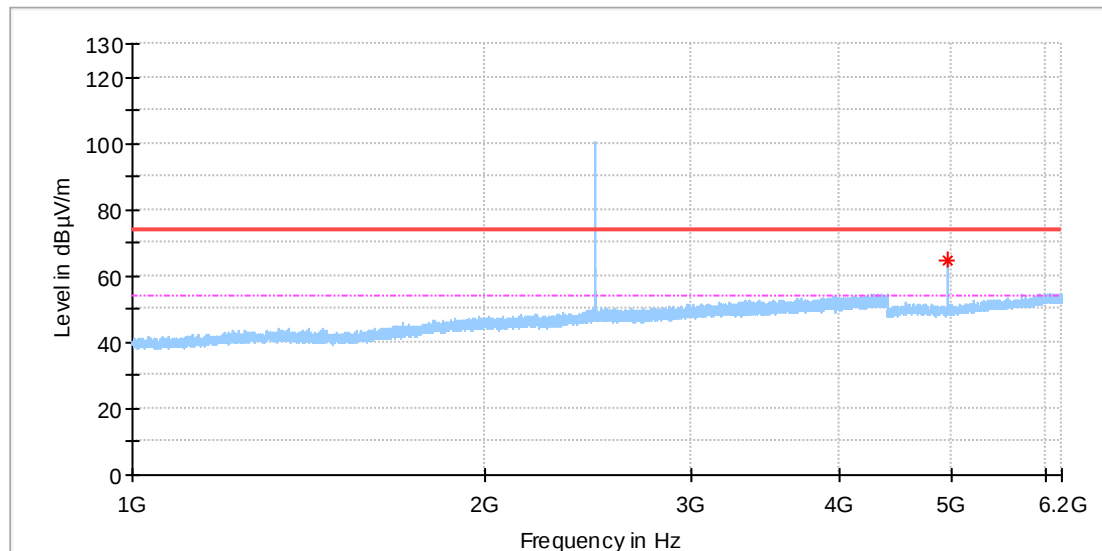

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	64.66	---	74.00	9.34	100.0	H	279.0	11.8
4960.000000	---	33.86	54.00	20.14	100.0	H	279.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

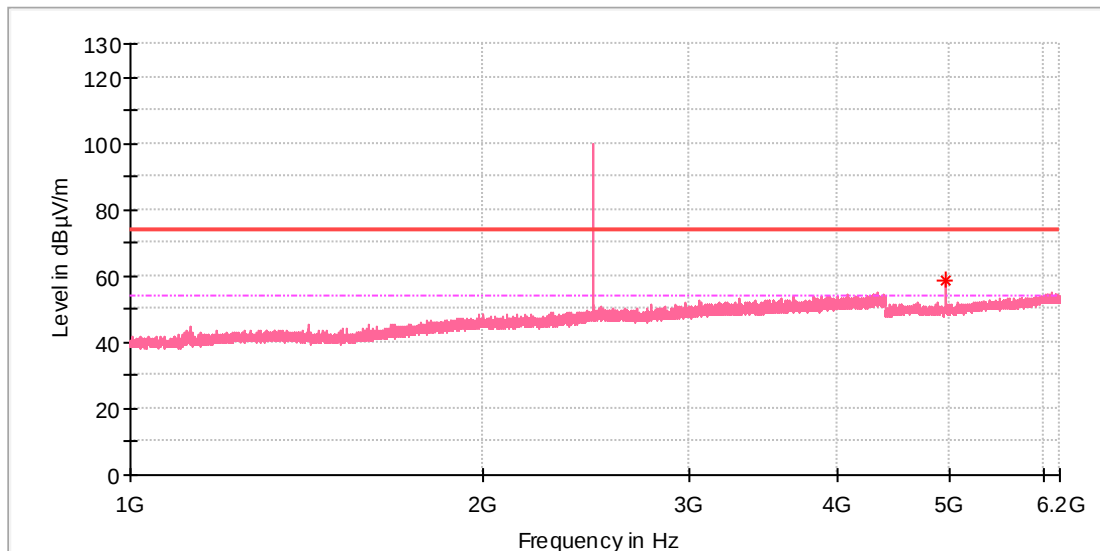

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.500000	58.48	---	74.00	15.52	100.0	V	247.0	11.8
4960.500000	---	27.68	54.00	26.32	100.0	V	247.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: True Wireless Earbuds
Model: SPORT
Test Mode: BR_DH5_High channel
Order No/Sample No: 168360082/A003223682-002
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

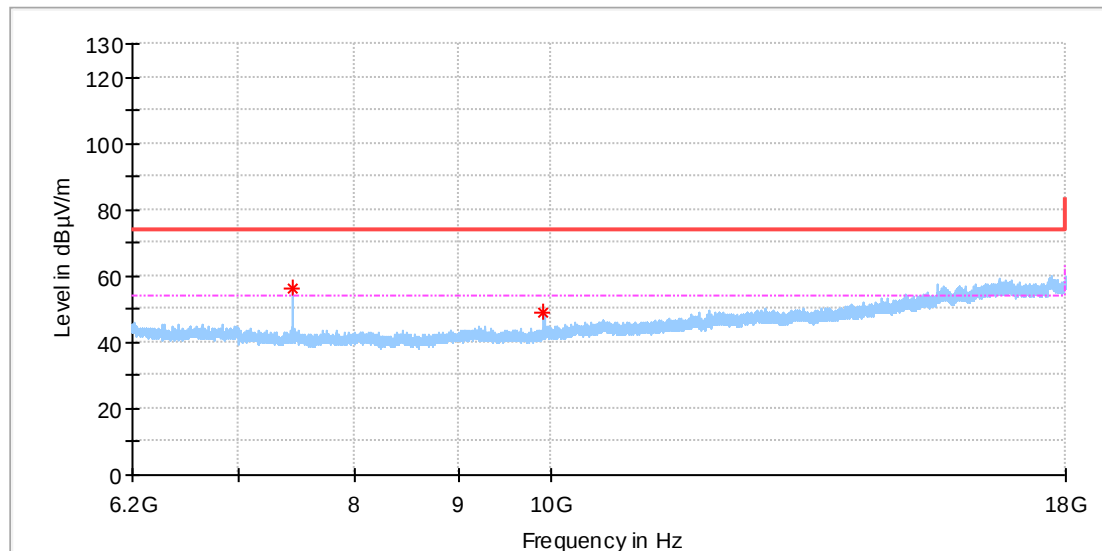

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	56.51	---	74.00	17.49	100.0	H	53.0	8.4
7439.491667	---	25.71	54.00	28.29	100.0	H	53.0	8.4
9919.458333	49.09	---	74.00	24.91	100.0	H	157.0	10.8
9919.458333	---	18.29	54.00	35.71	100.0	H	157.0	10.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

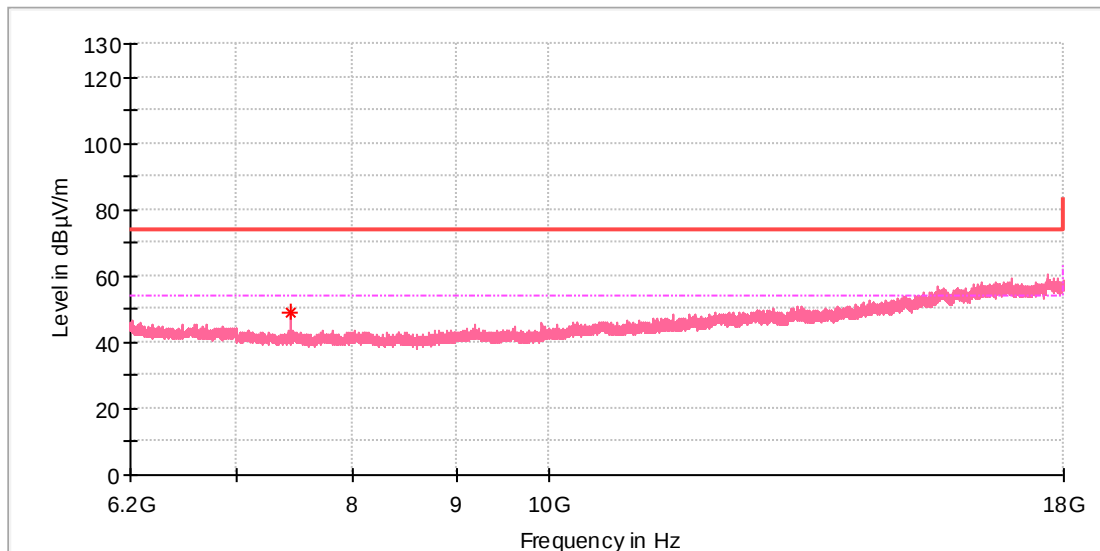

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	48.90	---	74.00	25.10	100.0	V	0.0	8.4
7439.491667	---	18.10	54.00	35.90	100.0	V	0.0	8.4


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

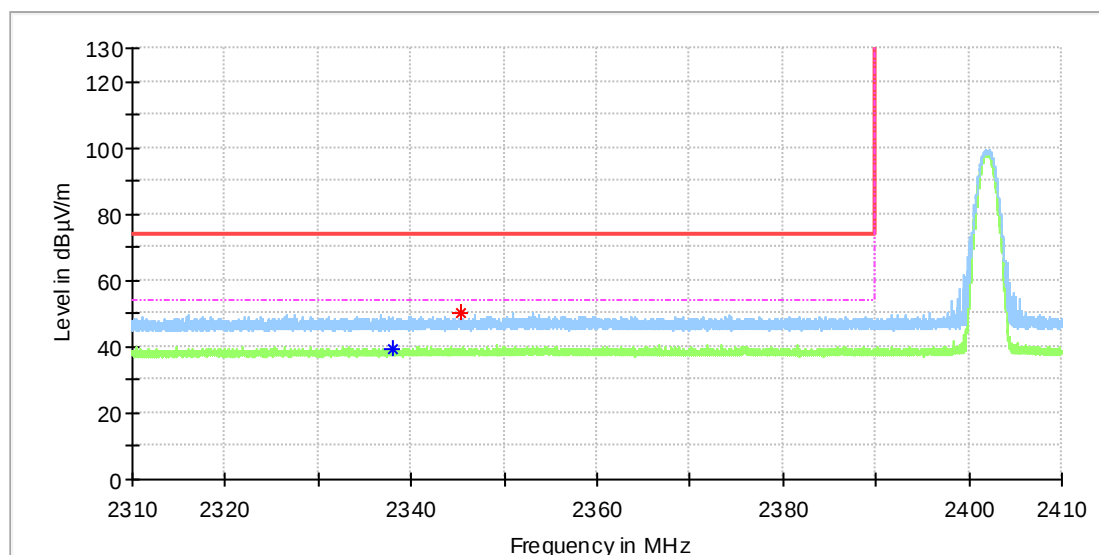

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.000000	---	39.45	54.00	14.55	100.0	H	249.0	6.8
2345.265000	50.08	---	74.00	23.92	100.0	H	176.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

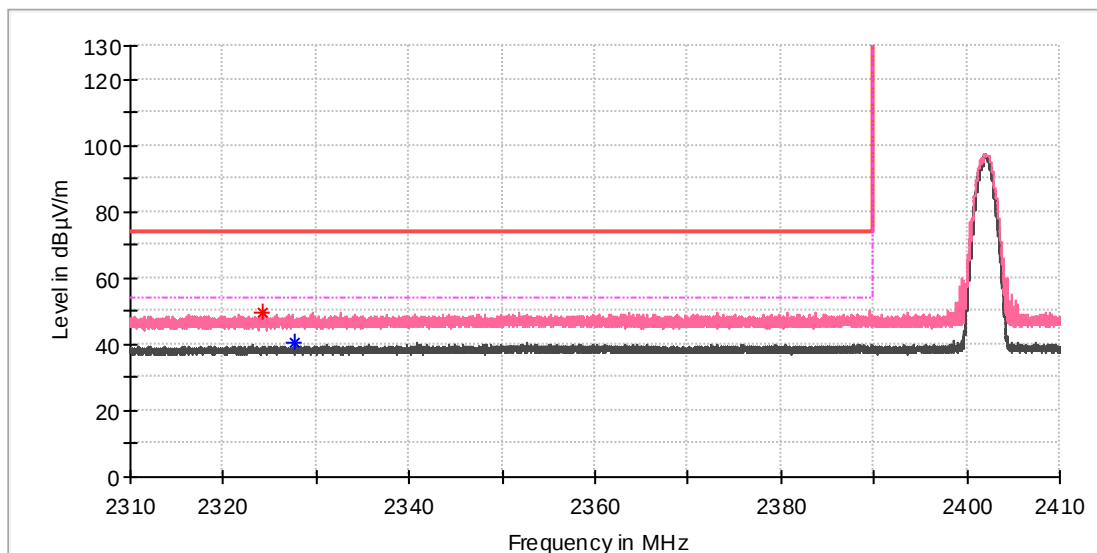

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2324.265000	49.40	---	74.00	24.60	100.0	V	292.0	6.6
2327.620000	---	40.36	54.00	13.64	100.0	V	47.0	6.7

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

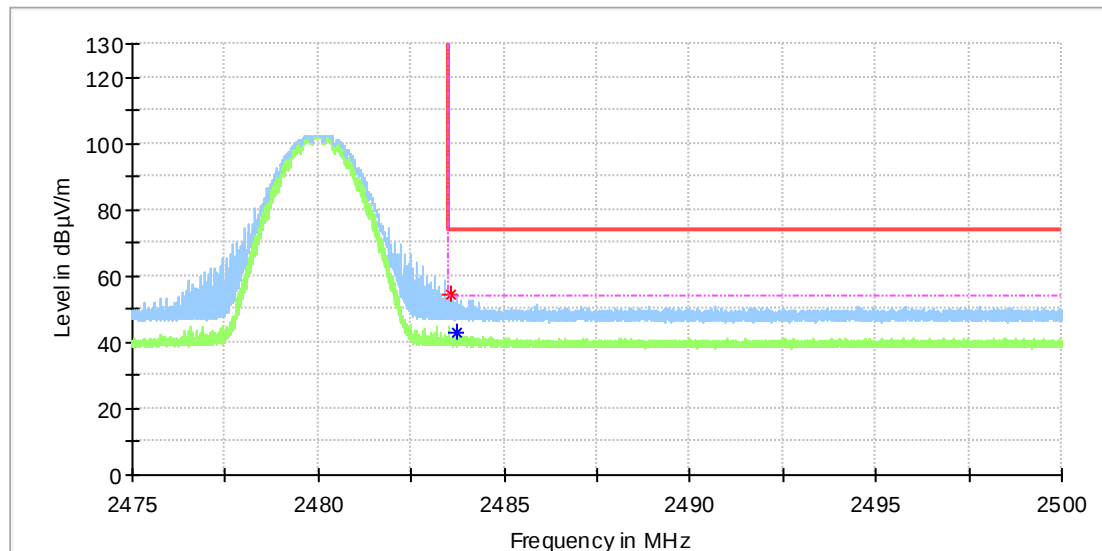

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.545000	54.16	---	74.00	19.84	100.0	H	288.0	7.4
2483.722500	---	42.76	54.00	11.24	100.0	H	238.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	True Wireless Earbuds
Model:	SPORT
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168360082/A003223682-002
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

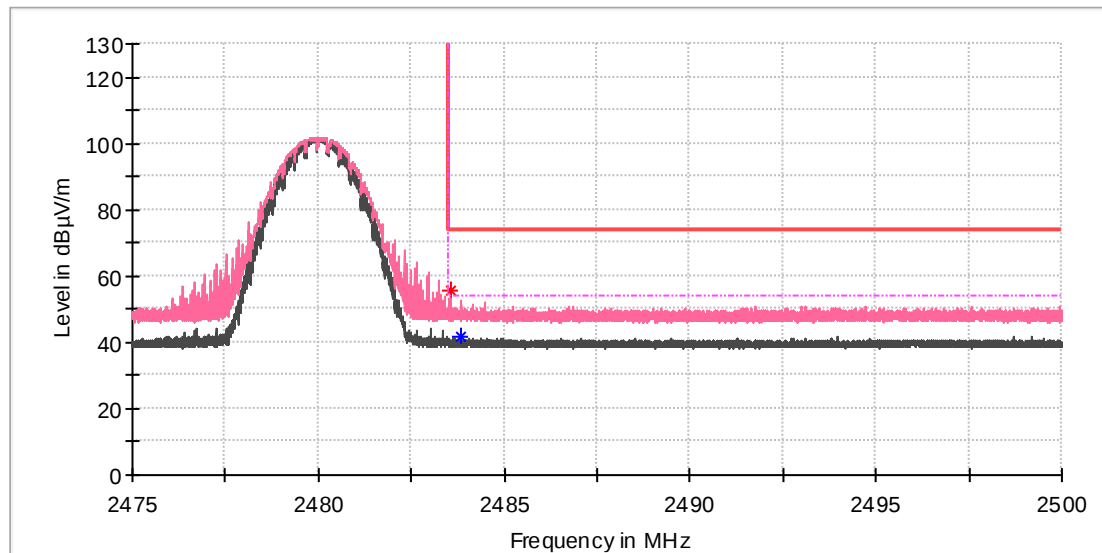

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.560000	55.54	---	74.00	18.46	100.0	V	287.0	7.4
2483.815000	---	41.83	54.00	12.17	100.0	V	287.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix C: Test Results of FCC 15B & ICES-003


APPENDIX C: TEST RESULTS OF FCC 15B & ICES-003	1
APPENDIX C.1: TEST PLOTS OF CONDUCTED EMISSION ON AC MAINS	2
<i>Charging mode</i>	<i>2</i>
APPENDIX C.2: TEST PLOTS OF RADIATED EMISSION, BELOW 1GHz	4
<i>Play by Bluetooth.....</i>	<i>4</i>
<i>Charging mode</i>	<i>6</i>
APPENDIX C.3: TEST PLOTS OF RADIATED EMISSION, ABOVE 1GHz	8
<i>Play by Bluetooth.....</i>	<i>8</i>
<i>Charging mode</i>	<i>10</i>

Appendix C.1: Test Plots of Conducted Emission on AC Mains

Charging mode

EUT Information

EUT Name: True Wireless Earbuds
Order No: 168360082 370
Model: SPORT
Test mode: Charging
Test Voltage: AC 120V, 60Hz
Test By: Charlie Zha
Review By: Gary Chen
Remark: SR2

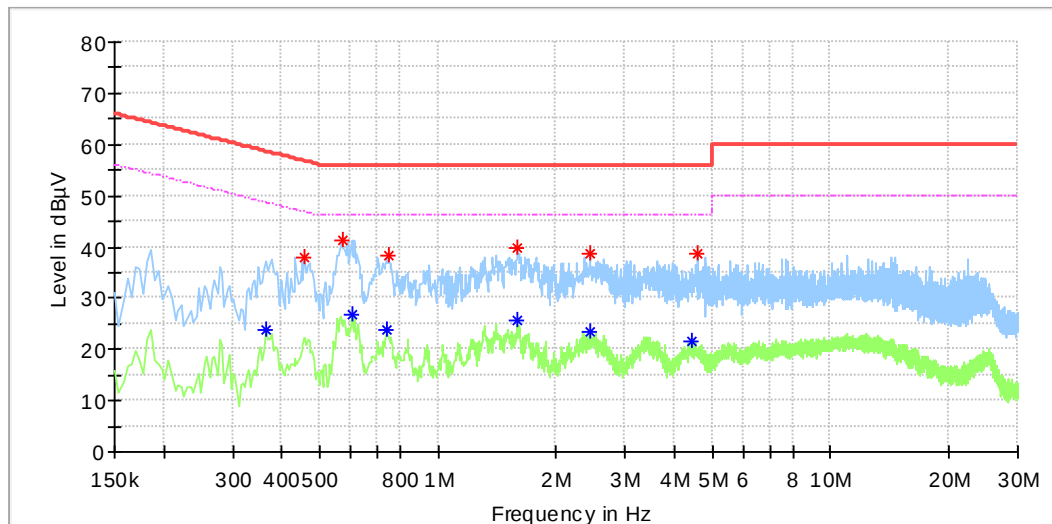


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.366000	---	23.90	48.59	24.69	L1	9.9
0.458000	37.78	---	56.73	18.95	L1	10.0
0.570000	41.44	---	56.00	14.56	L1	10.0
0.602000	---	26.76	46.00	19.24	L1	10.0
0.738000	---	23.94	46.00	22.06	L1	10.0
0.746000	38.16	---	56.00	17.84	L1	10.0
1.594000	---	25.71	46.00	20.29	L1	10.1
1.594000	39.67	---	56.00	16.33	L1	10.1
2.434000	---	23.50	46.00	22.50	L1	10.2
2.438000	38.86	---	56.00	17.14	L1	10.2
4.422000	---	21.64	46.00	24.36	L1	10.2
4.594000	38.70	---	56.00	17.30	L1	10.2

EUT Information

EUT Name: True Wireless Earbuds
 Order No: 168360082 370
 Model: SPORT
 Test mode: Charging
 Test Voltage: AC 120V, 60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: SR2

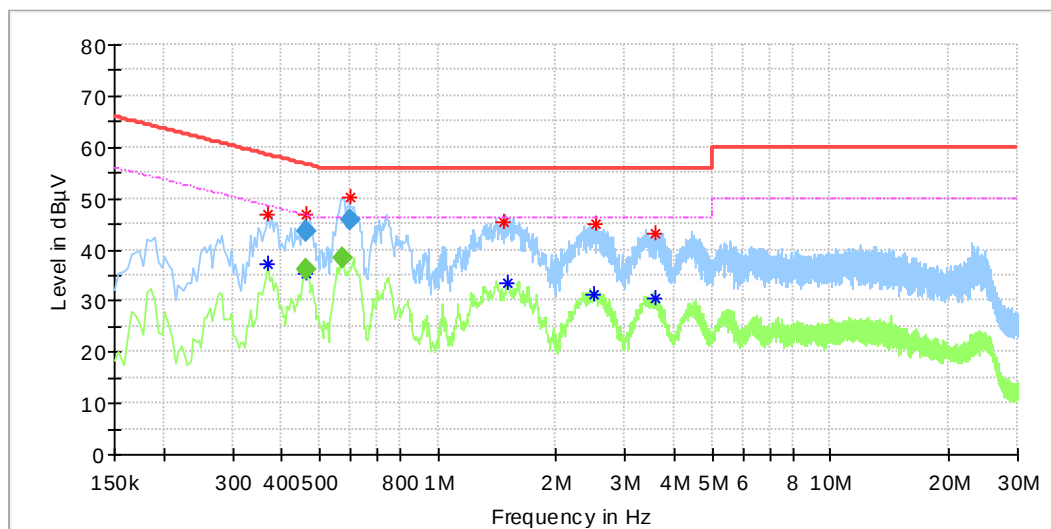

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.370000	---	37.18	48.50	11.32	N	9.8
0.370000	46.97	---	58.50	11.53	N	9.8
0.461500	---	35.52	46.73	11.21	N	9.8
0.462500	46.90	---	56.73	9.83	N	9.8
0.569500	---	38.50	46.00	7.50	N	9.8
0.598500	50.33	---	56.00	5.67	N	9.8
1.478000	45.33	---	56.00	10.67	N	9.8
1.510000	---	33.33	46.00	12.67	N	9.8
2.502000	---	31.35	46.00	14.65	N	9.9
2.522000	44.90	---	56.00	11.10	N	9.9
3.574000	43.34	---	56.00	12.66	N	9.9
3.582000	---	30.53	46.00	15.47	N	9.9

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.461500	---	36.00	46.67	10.67	1000.0	9.000	N	9.8
0.462500	43.70	---	56.65	12.95	1000.0	9.000	N	9.8
0.569500	---	38.27	46.00	7.73	1000.0	9.000	N	9.8
0.598500	45.82	---	56.00	10.18	1000.0	9.000	N	9.8


Appendix C.2: Test Plots of Radiated Emission, Below 1GHz

Note: The following illustration shows the limit that meet the FCC requirements, and these measured value also comply with IC requirements.

Play by Bluetooth

EUT Information

EUT Name:	True Wireless Earbuds
Order No:	168360082 370
Model:	SPORT
Test mode:	Play by Bluetooth
Test Voltage:	Battery
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	3m Chamber

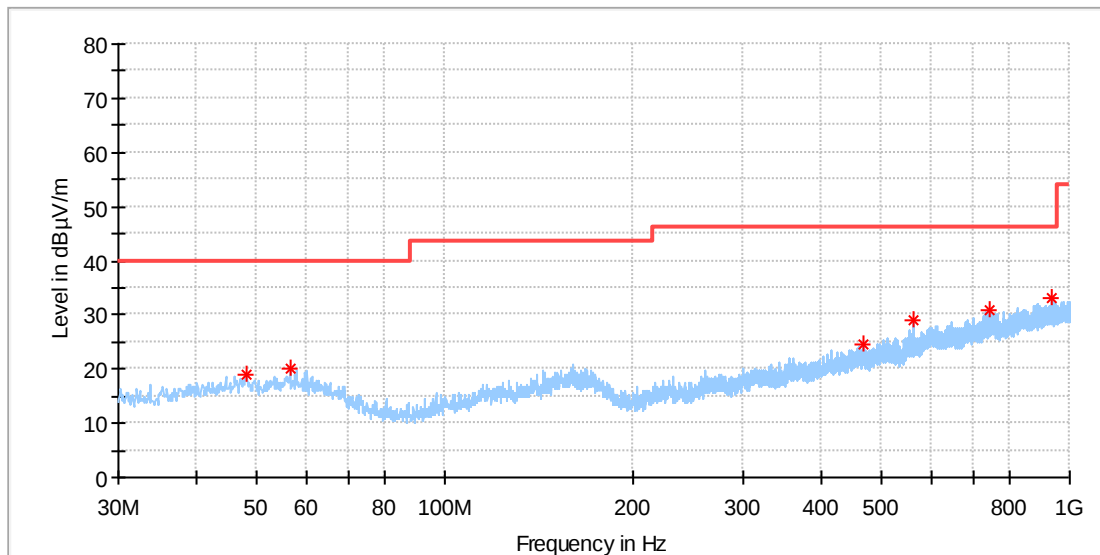


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
56.675000	20.04	40.00	19.96	100.0	H	156.0	21.3
561.657000	29.09	46.00	16.91	100.0	H	282.0	26.5
467.858000	24.58	46.00	21.42	100.0	H	358.0	24.7
744.405000	30.84	46.00	15.16	200.0	H	130.0	30.4
48.139000	18.94	40.00	21.06	200.0	H	204.0	21.4
936.659000	32.98	46.00	13.02	200.0	H	288.0	32.2

EUT Information

EUT Name:	True Wireless Earbuds
Order No:	168360082 370
Model:	SPORT
Test mode:	Play by Bluetooth
Test Voltage:	Battery
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	3m Chamber

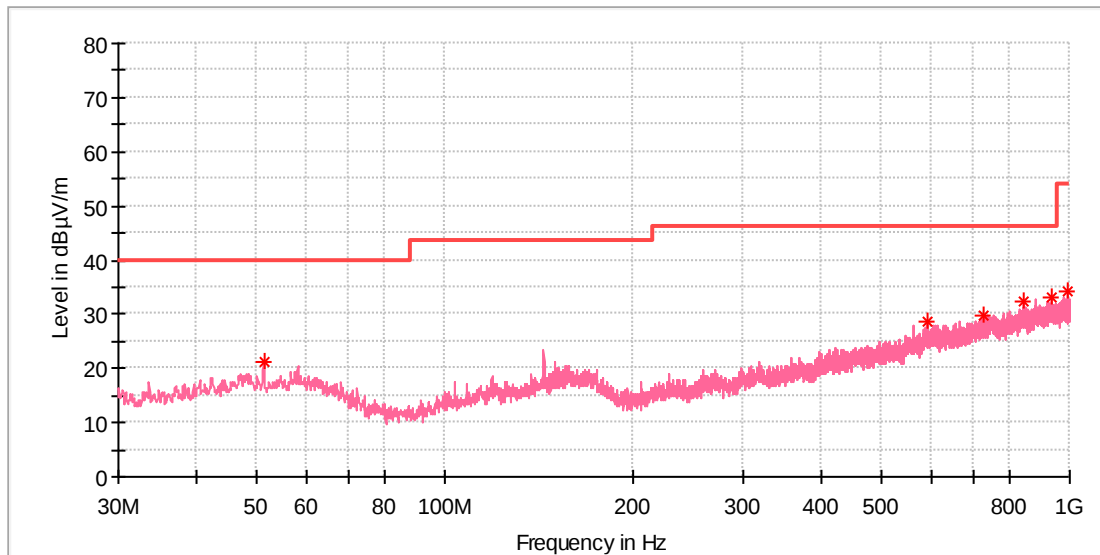


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
992.434000	34.17	54.00	19.83	100.0	V	117.0	32.3
845.770000	32.50	46.00	13.50	100.0	V	148.0	31.1
727.624000	29.78	46.00	16.22	100.0	V	262.0	29.6
591.824000	28.61	46.00	17.39	100.0	V	266.0	27.4
935.980000	33.03	46.00	12.97	200.0	V	232.0	32.2
51.243000	21.10	40.00	18.90	200.0	V	315.0	20.8

Charging mode

EUT Information

EUT Name:	True Wireless Earbuds
Order No:	168360082 370
Model:	SPORT
Test mode:	Charging
Test Voltage:	AC 120V, 60Hz
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	3m Chamber

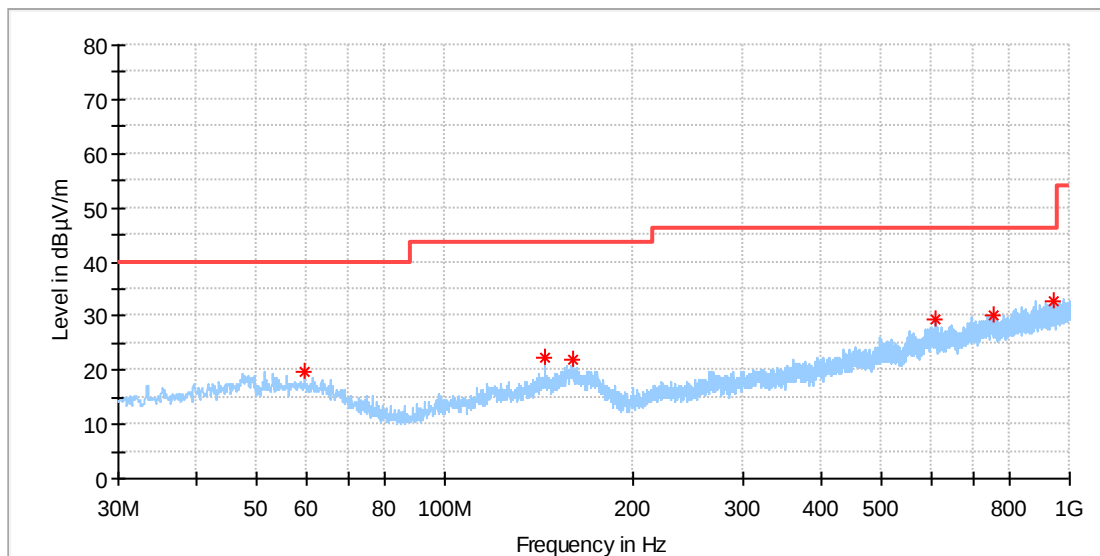


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.488000	19.79	40.00	20.21	100.0	H	243.0	21.0
144.363000	22.25	43.50	21.25	200.0	H	288.0	20.2
160.562000	21.81	43.50	21.69	200.0	H	42.0	21.6
609.672000	29.40	46.00	16.60	200.0	H	22.0	27.8
753.717000	30.12	46.00	15.88	100.0	H	85.0	30.3
944.225000	32.77	46.00	13.23	100.0	H	136.0	32.2

EUT Information

EUT Name: True Wireless Earbuds
 Order No: 168360082 370
 Model: SPORT
 Test mode: Charging
 Test Voltage: AC 120V, 60Hz
 Test By: Charlie Zha
 Review By: Gary Chen
 Remark: 3m Chamber

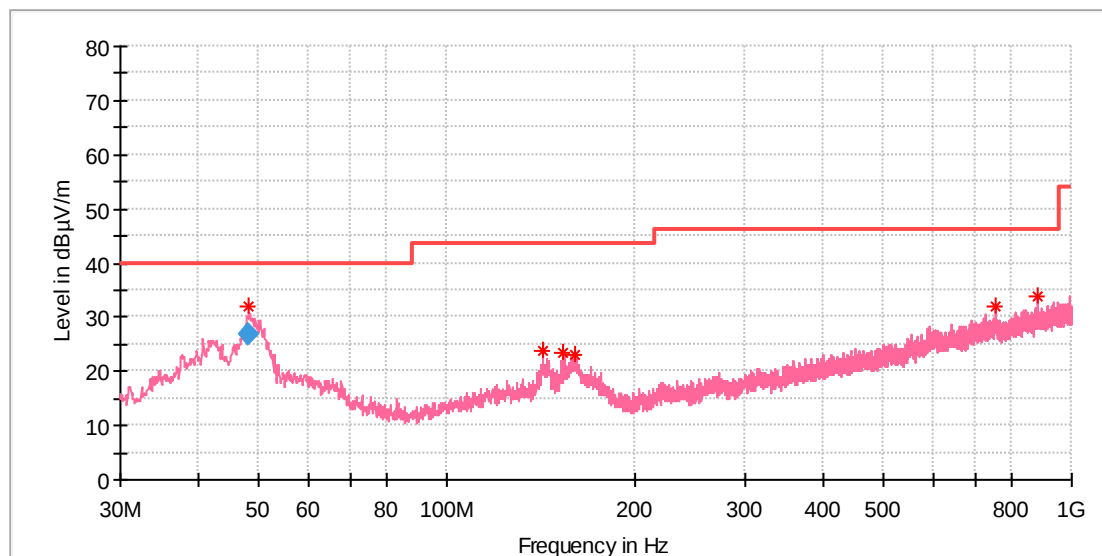

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.199000	32.10	40.00	7.90	100.0	V	152.0	21.4
142.520000	23.83	43.50	19.67	100.0	V	85.0	20.2
153.869000	23.34	43.50	20.16	100.0	V	0.0	21.2
159.883000	23.10	43.50	20.40	100.0	V	32.0	21.7
757.791000	31.99	46.00	14.01	100.0	V	77.0	30.0
883.115000	33.74	46.00	12.26	100.0	V	278.0	31.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.199000	26.79	40.00	13.21	1000.0	120.000	100.0	V	152.0	21.4


Appendix C.3: Test Plots of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5th harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.

Play by Bluetooth

EUT Information

EUT Name:	True Wireless Earbuds
Order No:	168360082 370
Model:	SPORT
Test mode:	Play by Bluetooth
Test Voltage:	Battery
Test By:	Charlie Zha
Review By:	Gary Chen
Remark:	3m Chamber

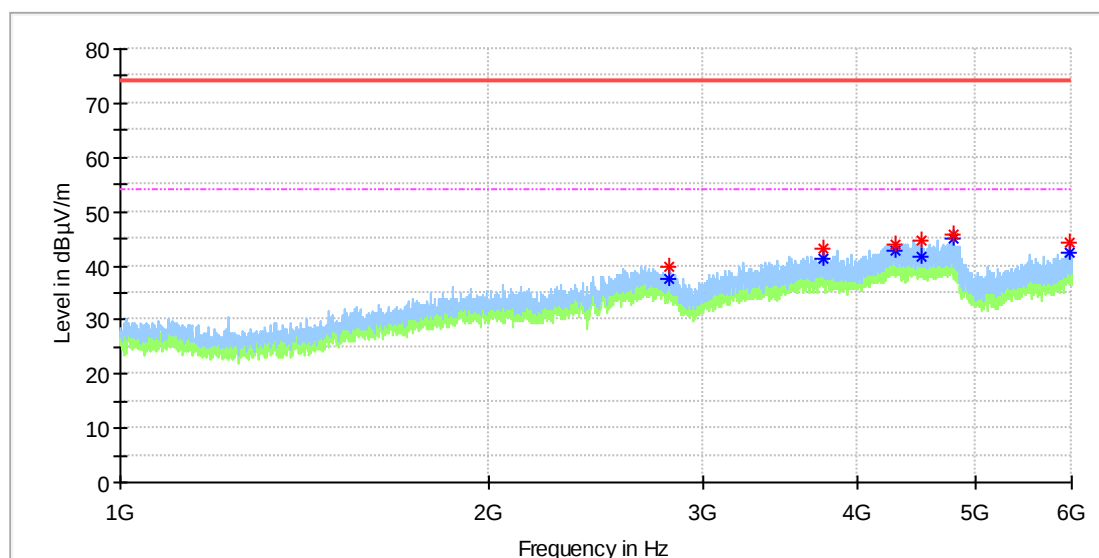


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2812.000000	---	37.69	54.00	16.31	100.0	H	167.0	-3.8
2812.000000	39.87	---	74.00	34.13	100.0	H	167.0	-3.8
3758.500000	43.00	---	74.00	31.00	100.0	H	252.0	0.1
3758.500000	---	41.34	54.00	12.66	100.0	H	252.0	0.1
4309.500000	44.08	---	74.00	29.92	100.0	H	242.0	2.2
4309.500000	---	42.87	54.00	11.13	100.0	H	242.0	2.2
4528.000000	44.73	---	74.00	29.27	100.0	H	158.0	2.0
4528.000000	---	41.62	54.00	12.38	100.0	H	158.0	2.0
4805.000000	---	44.95	54.00	9.05	100.0	H	309.0	2.3
4805.000000	45.76	---	74.00	28.24	100.0	H	309.0	2.3
5976.500000	---	42.40	54.00	11.60	100.0	H	8.0	2.3
5976.500000	44.20	---	74.00	29.80	100.0	H	8.0	2.3

EUT Information

EUT Name: True Wireless Earbuds
Order No: 168360082 370
Model: SPORT
Test mode: Play by Bluetooth
Test Voltage: Battery
Test By: Charlie Zha
Review By: Gary Chen
Remark: 3m Chamber

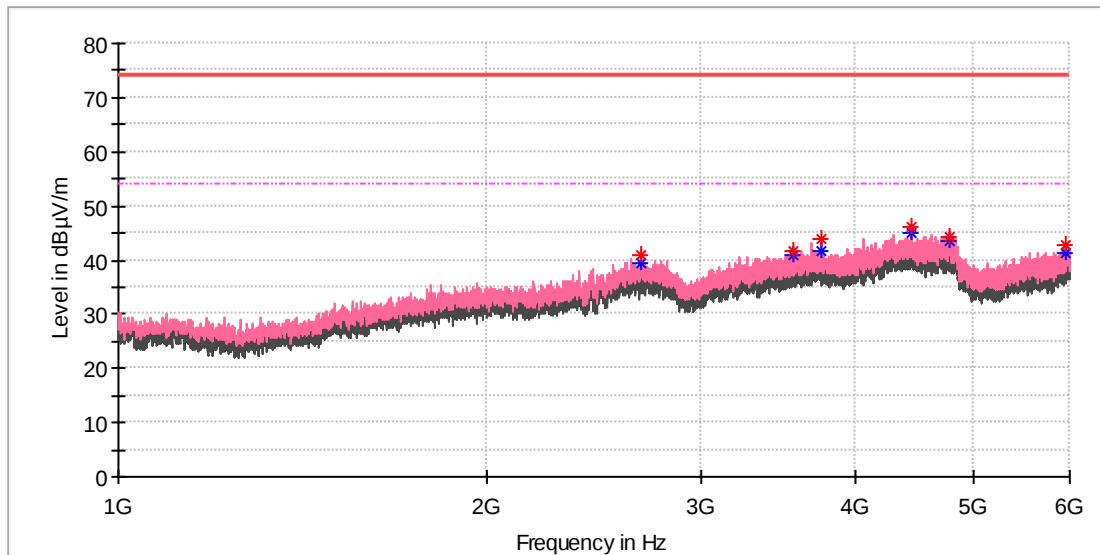


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2674.500000	---	39.26	54.00	14.74	100.0	V	342.0	-3.2
2674.500000	40.98	---	74.00	33.02	100.0	V	342.0	-3.2
3570.000000	---	40.93	54.00	13.07	100.0	V	178.0	-0.7
3570.000000	41.74	---	74.00	32.26	100.0	V	178.0	-0.7
3751.500000	---	41.67	54.00	12.33	100.0	V	299.0	0.1
3751.500000	43.81	---	74.00	30.19	100.0	V	299.0	0.1
4456.500000	46.14	---	74.00	27.86	100.0	V	54.0	2.0
4456.500000	---	45.01	54.00	8.99	100.0	V	54.0	2.0
4780.000000	---	43.50	54.00	10.50	100.0	V	169.0	2.7
4780.000000	44.43	---	74.00	29.57	100.0	V	169.0	2.7
5959.000000	---	41.29	54.00	12.71	100.0	V	86.0	2.1
5960.000000	42.71	---	74.00	31.29	100.0	V	323.0	2.2

Charging mode

EUT Information

EUT Name: True Wireless Earbuds
Order No: 168360082 370
Model: SPORT
Test mode: Charging
Test Voltage: AC 120V, 60Hz
Test By: Charlie Zha
Review By: Gary Chen
Remark: 3m Chamber

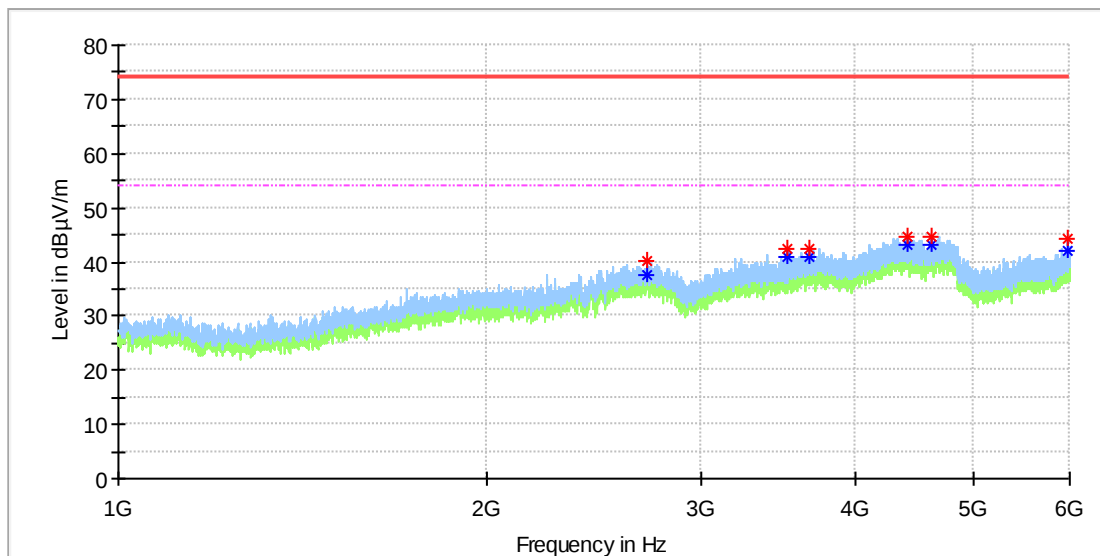


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2705.000000	---	37.56	54.00	16.44	100.0	H	14.0	-3.3
2705.000000	40.13	---	74.00	33.87	100.0	H	14.0	-3.3
3524.000000	---	40.92	54.00	13.08	100.0	H	118.0	-1.0
3524.000000	42.40	---	74.00	31.60	100.0	H	118.0	-1.0
3674.000000	---	40.84	54.00	13.16	100.0	H	97.0	0.1
3674.000000	42.52	---	74.00	31.48	100.0	H	97.0	0.1
4428.000000	---	43.10	54.00	10.90	100.0	H	227.0	1.9
4428.000000	44.59	---	74.00	29.41	100.0	H	227.0	1.9
4632.500000	---	42.99	54.00	11.01	100.0	H	118.0	2.1
4632.500000	44.70	---	74.00	29.30	100.0	H	118.0	2.1
5972.000000	44.19	---	74.00	29.81	100.0	H	74.0	2.2
5972.000000	---	41.92	54.00	12.08	100.0	H	74.0	2.2

EUT Information

EUT Name: True Wireless Earbuds
Order No: 168360082 370
Model: SPORT
Test mode: Charging
Test Voltage: AC 120V, 60Hz
Test By: Charlie Zha
Review By: Gary Chen
Remark: 3m Chamber

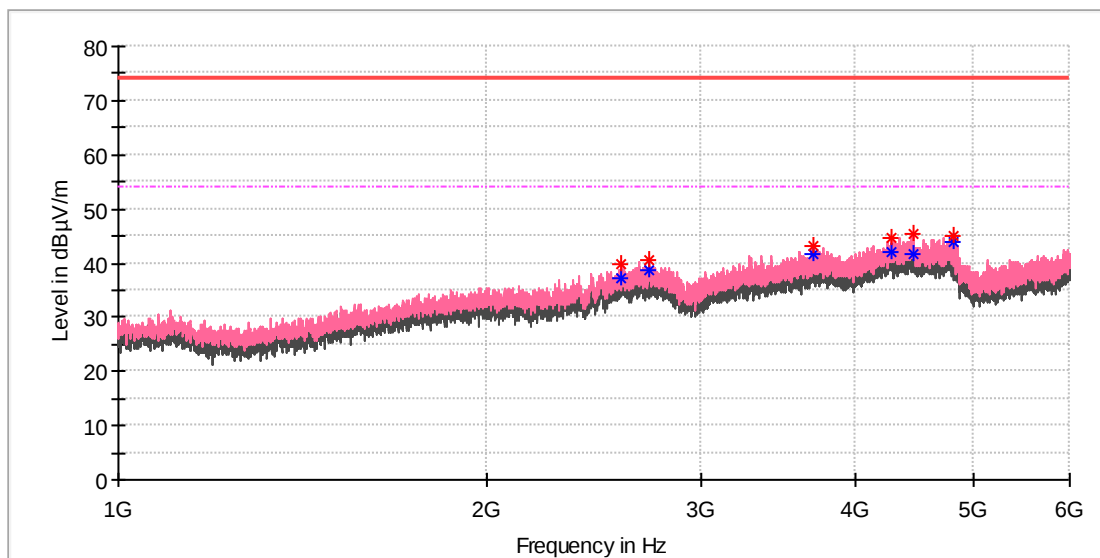

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2577.000000	39.93	---	74.00	34.07	100.0	V	0.0	-3.9
2577.500000	---	37.14	54.00	16.86	100.0	V	0.0	-3.9
2713.000000	40.60	---	74.00	33.40	100.0	V	176.0	-3.3
2713.000000	---	38.57	54.00	15.43	100.0	V	176.0	-3.3
3699.000000	---	41.72	54.00	12.28	100.0	V	186.0	0.3
3699.000000	43.23	---	74.00	30.77	100.0	V	186.0	0.3
4283.000000	44.65	---	74.00	29.35	100.0	V	269.0	2.1
4284.000000	---	42.13	54.00	11.87	100.0	V	14.0	2.1
4470.500000	---	41.68	54.00	12.32	100.0	V	232.0	2.0
4470.500000	45.47	---	74.00	28.53	100.0	V	232.0	2.0
4816.000000	---	43.97	54.00	10.03	100.0	V	310.0	2.1
4816.000000	45.15	---	74.00	28.85	100.0	V	310.0	2.1