



Accredited testing-laboratory

DAR registration number: TTI-P-G-166/98

**Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97**

Test report no.: 4-0520-01-02-b/02
Type identification : Globetrotter
FCC id: NCMOGL1

Table of Content

1 General Information	3
1.1 Notes.....	3
1.2 Statement of Compliance	3
1.3 Testing laboratory.....	4
1.4 Details of applicant.....	4
1.5 Application details.....	4
1.6 Test item.....	5
1.7 Test specifications	5
1.7.1 RF exposure limits	5
2 Technical test.....	6
2.1. Summary of test results	6
2.2 Test environment.....	6
2.3 Test equipment used.....	6
2.4 Test results (Body SAR).....	7
2.5 Tissue dielectric properties.....	8
2.6 Tissue parameters	8
2.7 Measurement uncertainties.....	9
2.8 System validation	10
Appendix 1: System performance verification	11
Appendix 2: Measurement results with superimpose device outline on the SAR plots	12
Appendix 3: Measurement results (printout from DASY TM).....	15
Appendix 4: Photo documentation.....	18
Appendix 5: Calibration parameters of E-field probe	24

1 General Information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.6. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Statement of Compliance

The SAR values found for the Option Globetrotter PCS PCMCIA GPRS card are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992 and the NCRP Report Number 86 for uncontrolled environment.

Tester operator:



2002-02-19 Fabien Coulet

Date	Name	Signature
------	------	-----------

Technical responsibility for area of testing:



2002-02-19 Bernd Rebmann

Date	Name	Signature
------	------	-----------

1.3 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6-10, D-66117 Saarbrücken

Germany

Telephone: +49 681 598 - 0

Fax: + 49 681 598 - 8475

e-mail: info@ict.cetecom.de

Internet: <http://www.cetecom.com>

State of accreditation: The Test laboratory SAR is accredited according to DIN EN 45001.

DAR-No.:TTI-P-G-166/98

Test location, if different from CETECOM ICT Services GmbH

Name: ---

Street: ---

Town: ---

Country: ---

Phone: ---

Fax: ---

1.4 Details of applicant

Name: OPTION international nv sa

Address: Kolonel Begaultlaan 45

Town: B-3012 Leuven

Country: Belgium

Phone: +32 16 317 411

Fax: +32 16 207 164

Contact: Dr Xiao-Hai Shen

Phone: +32 16 317 411

1.5 Application details

Date of receipt of application: 2002-01-09

Date of receipt of test item: 2002-01-15

Date of test: 2002-01-22

Person who have been present during the test: Dr Xiao-Hai Shen

1.6 Test item

Description of test item: PCS 1900 PCMCIA card GPRS
 Type designation: Globetrotter

IMEI No: 004999010000440
 Hardware: P4BIS
 Software: 09-003 (Dec 18 2001 Time 15:52:08)
 Frequency: 1850-1910 MHz
 Serial number: Q91CWAP4C03R
 Type of modulation: 300KF2D
 Number of channels: 300
 Antenna: external
 Power supply: 3.3V/5V DC via PCMCIA port
 Manufacturer: see applicant
 Output power: PCS 1900, power class1, 29.4 dBm conducted

1.7 Test specifications

Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
 Draft IEEE Std 1528-200X: Version 6.4: July 2001

1.7.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 1: RF exposure limits

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

2 Technical test

2.1. Summary of test results

- ☒ No deviations from the technical specification(s) were ascertained in the course of the tests performed.
- ☐ The deviations as specified in 2.4 and 2.5 were ascertained in the course of the tests performed.

2.2 Test environment

Ambient temperature: 21°C – 23°C

Tissue simulating liquid: 21°C – 23°C

2.3 Test equipment used

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1558	February 20, 2001
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1559	February 20, 2001
Schmid & Partner Engineering AG	900 MHz System Validation Dipole	D900V2	102	February 13, 2001
Schmid & Partner Engineering AG	1800 MHz System Validation Dipol	D1800V2	287	February 13, 2001
Schmid & Partner Engineering AG	Data acquisition electronics	DAE3V1	413	January 15, 2001
Schmid & Partner Engineering AG	Software	DASY 3 V3.1c	---	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	SAM	---	Calibration isn't necessary
Rohde & Schwarz	Universal Radio Communication Tester	CMU 200	U-972406/000	August 30, 2001
Hewlett Packard	Network Analyser S-Param. Test Set	HP 8510C HP 8515 A	2643A03725 2723A01379	January18, 2001
Agilent	Dielectric Probe Kit	Agilent 85070C	US99360146	March 8, 2001

2.4 Test results (Body SAR)

Pre results: measured SAR value with an calibrated used conversion factor of 5.4.

Channel (frequency)	Position	Body Worn 1 slot (measured)	Body Worn 2 slots (calculated)	Limit
661 (1880.0 MHz)	top : 1cm distance	0.146 W/kg	0.292 W/kg	1.6 W/kg
661 (1880.0 MHz)	bottom:	0.0935 W/kg	0.187 W/kg	1.6 W/kg
661 (1880.0 MHz)	antenna side 1 cm distance	0.122 W/kg	0.244 W/kg	1.6 W/kg

Table 2: Pre results (Body SAR) 1900 MHz

Final results: SAR value with an used calculated conversion factor of 5.21.

Channel (frequency)	Position	Body Worn 1 slot (measured)	Body Worn 2 slots (calculated)	Limit
661 (1880.0 MHz)	top : 1cm distance	0.151 W/kg	0.302 W/kg	1.6 W/kg
661 (1880.0 MHz)	bottom:	0.0969 W/kg	0.194 W/kg	1.6 W/kg
661 (1880.0 MHz)	antenna side 1 cm distance	0.126 W/kg	0.252 W/kg	1.6 W/kg

Table 3: Final results (Body SAR) 1900 MHz

Note: The table contains the measured SAR values averaged over a mass of 1 g. Upper and lower frequencies were not measured because the values at the middle frequency did not exceed 1.27 W/kg (1.60 W/kg reduced of 2dB)

The calibrated conversion factor at 1800 MHz head tissue decreases approximately 1% per 100 MHz frequency increase. Additional the conversion factor in body tissue is approximately 3% lower than for head tissue for the same frequency. That means, the correct conversion factor for 1880 MHz body tissue is approximately 5.21

The measurement was performed with one active time slot. The EUT can also works with max. two time slots. This aspect was considered, as the measured SAR value with one active time slot was doubled.

The described distance from the EUT to the flat phantom defined from the tip of the antenna to the outside of the flat phantom.

2.5 Tissue dielectric properties

The following materials are used for producing the tissue-equivalent materials:

Ingredients (% by weight)	Frequency (MHz)									
	☐ 450		☐ 835		☐ 900		☒ 1900		☐ 2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	52.64	69.91	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.40	1.35	0.76	0.36	0.13	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	0.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	0.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	47.0	29.96	0.0	26.7

Table 4: Tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

2.6 Tissue parameters

Used Target Frequency	Target Head Tissue		Target Body Tissue		Measured Head Tissue		Measured Body Tissue		Measured Date
	Permit- tivity	Conduc- tivity [S/m]	Permit- tivity	Conduc- tivity [S/m]	Permit- tivity	Conduc- tivity [S/m]	Permit- tivity	Conduc- tivity [S/m]	
☐ 450	43.5	0.87	56.7	0.94	---	---	---	---	---
☐ 835	41.5	0.90	55.2	0.97	---	---	---	---	---
☐ 900	41.5	0.97	55.0	1.05	---	---	---	---	---
☐ 915	41.5	0.98	55.0	1.06	---	---	---	---	---
☒ 1900	40.0	1.40	53.3	1.52	41.0	1.36	54.6	1.6	14 th January 02
☐ 2450	39.2	1.80	52.7	1.95	---	---	---	---	---

Table 5: Parameter of the tissue simulating liquid

Note: The dielectric properties have been measured by the contact probe method at 22°C.

2.7 Measurement uncertainties

The overall combined measurement uncertainty of the measurement system is $\pm 12,1\%$ ($K=1$). The breakdown of the individual uncertainties is as follows:

Calibration Error:					
	Probability Distribution	Standard Uncertainty			
		900 MHz	1500 MHz	1800 MHz	
Incident power	Rectangular	+/- 1,2 %	+/- 1,2 %	+/- 1,2 %	
Mismatch uncertainty	Rectangular	+/- 0,6 %	+/- 0,6 %	+/- 0,6 %	
Exp. fitting error (95% confidence)	Normal	+/- 0,4 %	+/- 0,2 %	+/- 0,2 %	
Liquid permittivity	Rectangular	+/- 2,3 %	+/- 2,8 %	+/- 2,9 %	
Probe positioning	Normal	+/- 0,5 %	+/- 0,8 %	+/- 1.0 %	
Field homogeneity	Rectangular	+/- 0,6 %	+/- 1,2 %	+/- 1,4 %	
Combined Standard Uncertainty		+/- 2,8 %	+/- 3,4 %	+/- 3,6 %	
E-Field Probe Error:					
Error Description	Error	Probability Distribution	Weight	Standard Uncertainty	
Isotropy around axis	+/- 0,2 dB	U-shape	0,5	+/- 2,4 %	
Spherical Isotropy	+/- 0,4 dB	U-shape	0,5	+/- 4,8 %	
Isotropy from gradient	+/- 0,5 dB	U-shape	0		
Spatial resolution	+/- 0,5 %	normal	1	+/- 0,5 %	
Linearity error	+/- 0,2 dB	rectangular	1	+/- 2,5 %	
Calibration error	+/- 3,6 %	normal	1	+/- 3,6 %	
Combined Standard Uncertainty:				+/- 6,9 %	
Source Uncertainty:					
Error Description	Error	Probability Distribution	Weight	Standard Uncertainty	
Device positioning	+/- 6%	normal	1	+/- 6%	
Laboratory set-up	+/- 3 %	normal	1	+/- 3%	
Combined Standard Uncertainty:				+/- 6,7 %	
SAR Evaluation Error					
Error Description	Error	Probability Distribution	Weight	Standard Uncertainty	Offset
Data acquisition error	+/- 1%	rectangular	1	+/- 0,6 %	
ELF and RF disturbances	+/- 0,25 %	normal	1	+/- 0,25 %	
Conductivity assessment	+/- 10 %	rectangular	1	+/- 5,8 %	
Extrapolation and boundary effects	+/- 3 %	normal	1	+/- 3 %	+ 5 %
Probe positioning	+/- 0,1 mm	normal	1	+/- 1 %	
Integration and cube orientation	+/- 3 %	normal	1	+/- 3 %	
Cube shape inaccuracies	+/- 2 %	rectangular	1	+/- 1.2 %	
Combined Standard Uncertainty:				+/- 7,4 %	

Combined Uncertainties		
Error Description	Standard Uncertainty	Offset
E-field probe errors	+/- 6.9 %	
SAR evaluation error	+/- 7.4 %	+/- 5 %
Source uncertainty	+/- 6,7 %	
Combined Standard Uncertainty:	+/- 12.1 %	
Expanded Uncertainty (k=2):	+/- 24,2 %	

Table 6: Measurement uncertainties

The measurement uncertainties were performed by Schmid & Partner Engineering AG.


2.8 System validation

The system validation is used for verifying the accuracy of the complete measurement system and performance of the software. The system validation is performed with 1800 MHz head tissue equivalent material according IEEE Std 1528-200X: 2001. (graphic plot attached).


Validation Kit	Frequency	Target SAR _{1g} (175mW)	Target SAR _{10g} (175mW)	Measured SAR _{1g}	Measured SAR _{10g}	Measured date
DV2 1800, S/N:287	1800 MHz	6.67 mW/g	3.46 mW/g	6.48 mW/g	3.37 mW/g	2002.01.21


Table 7: Results system validation


Appendix 1: System performance verification

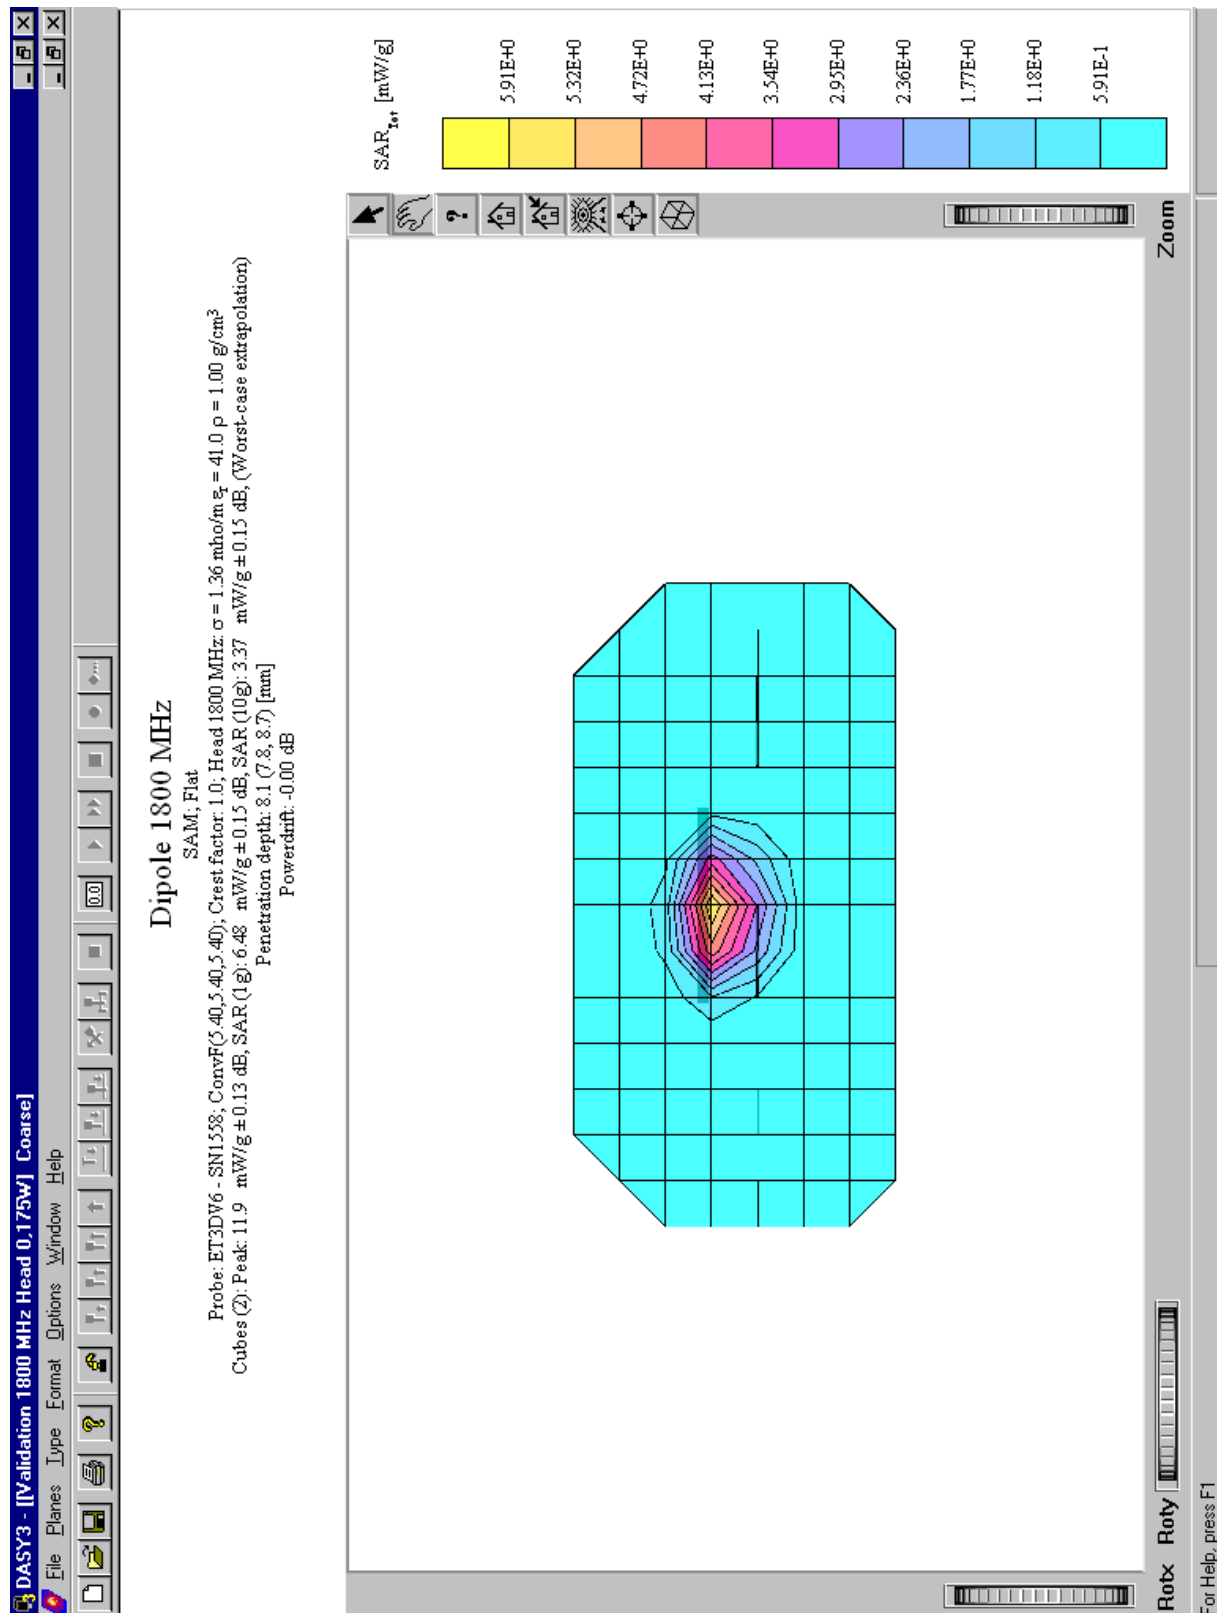



Appendix 2: Measurement results with superimpose device outline on the SAR plots

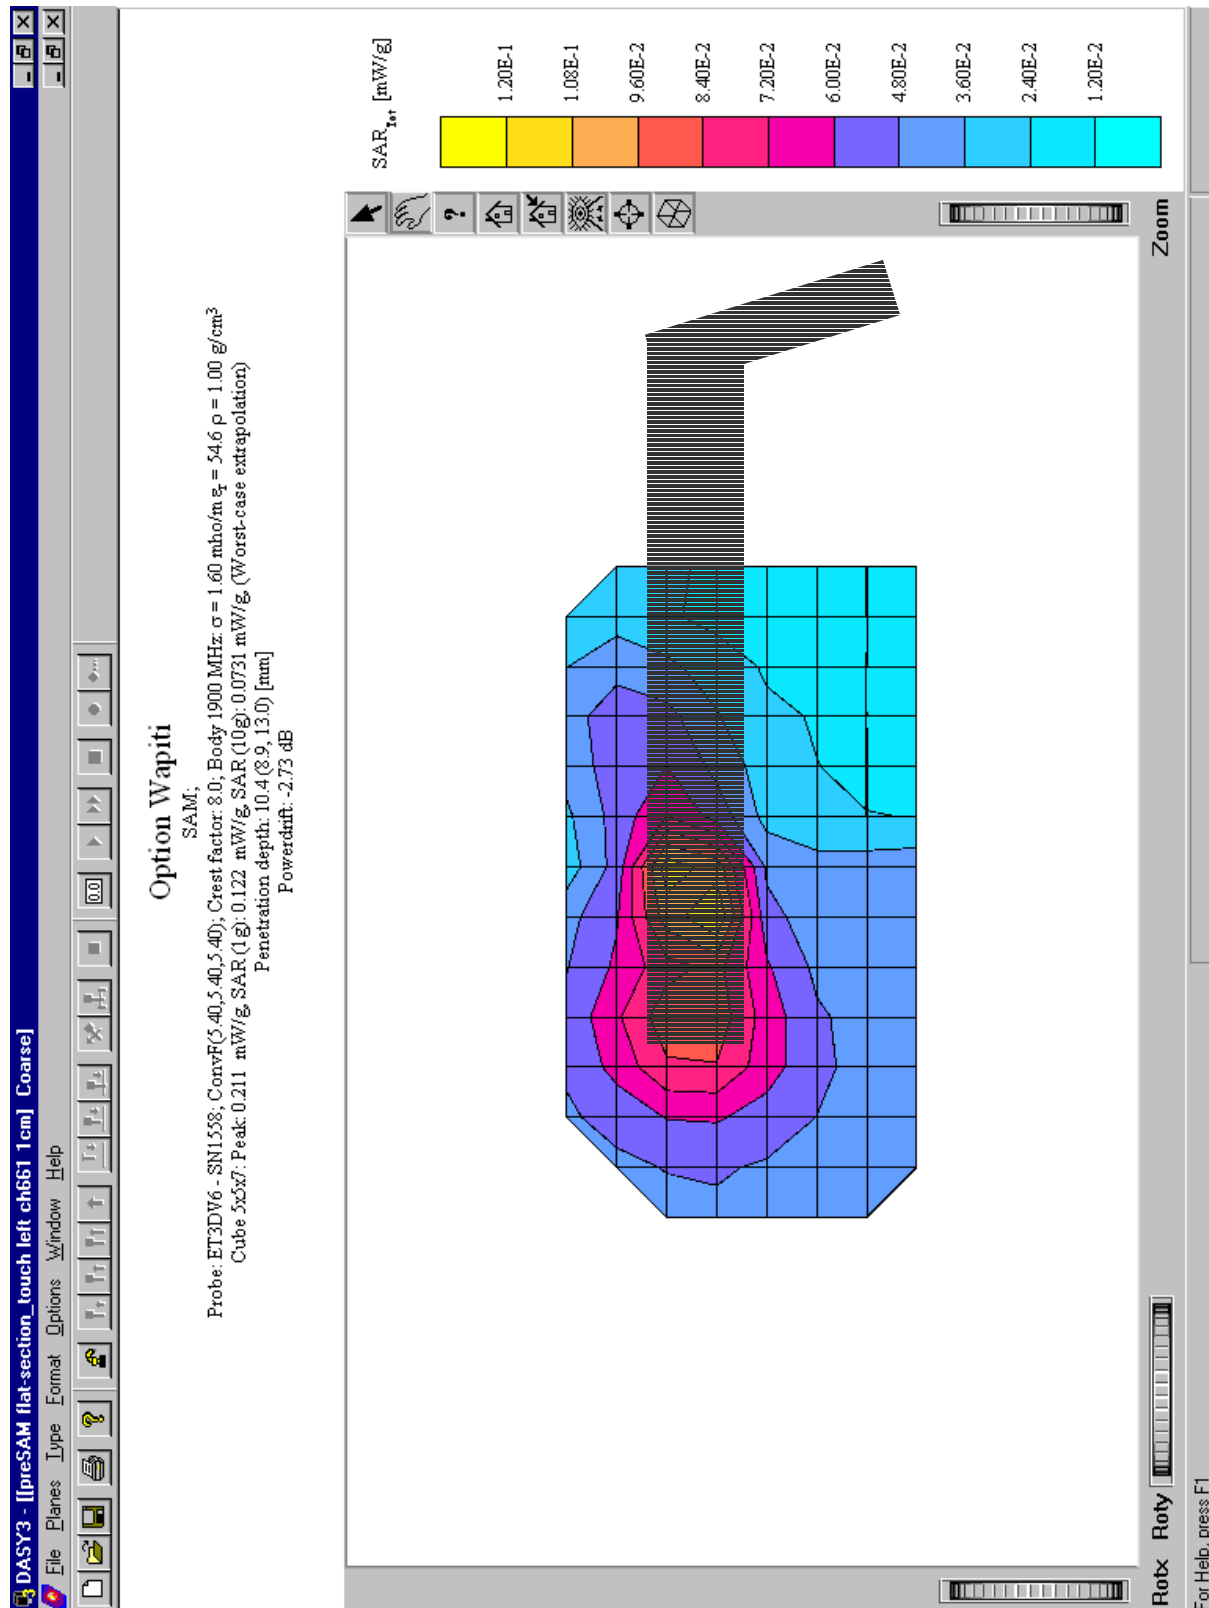


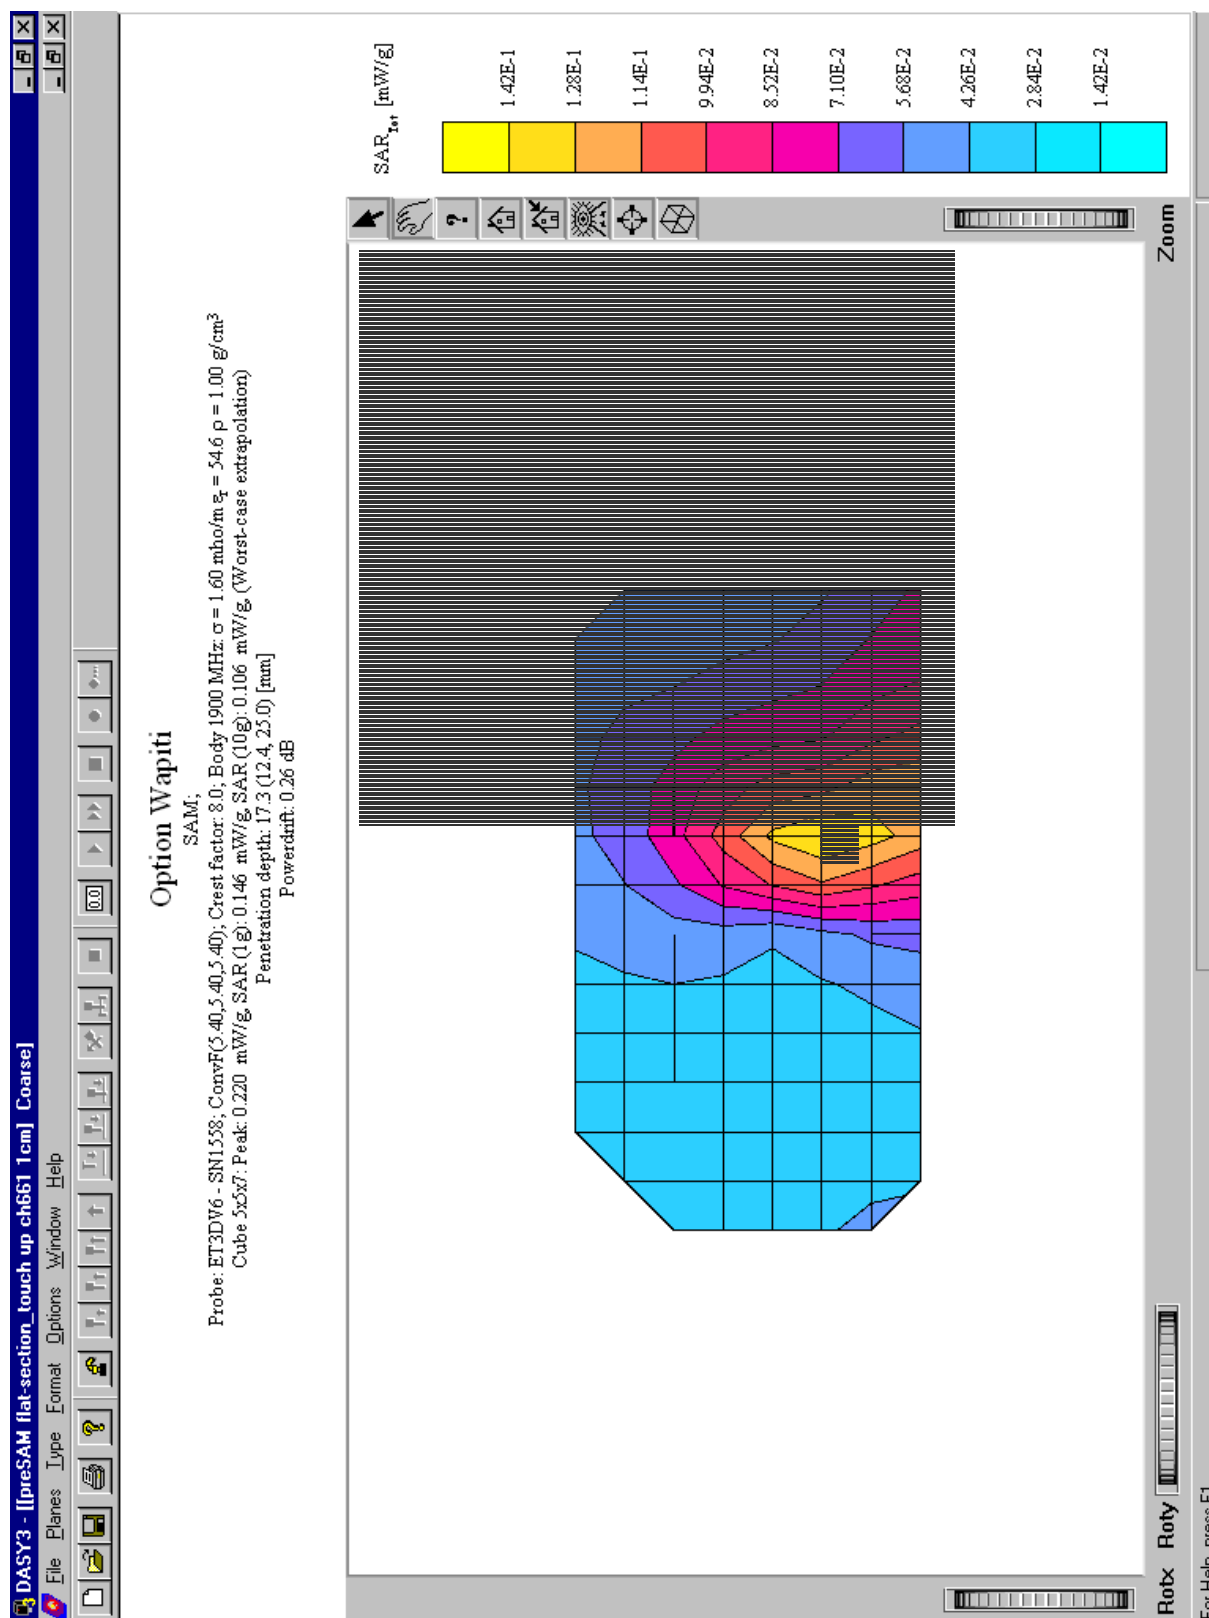

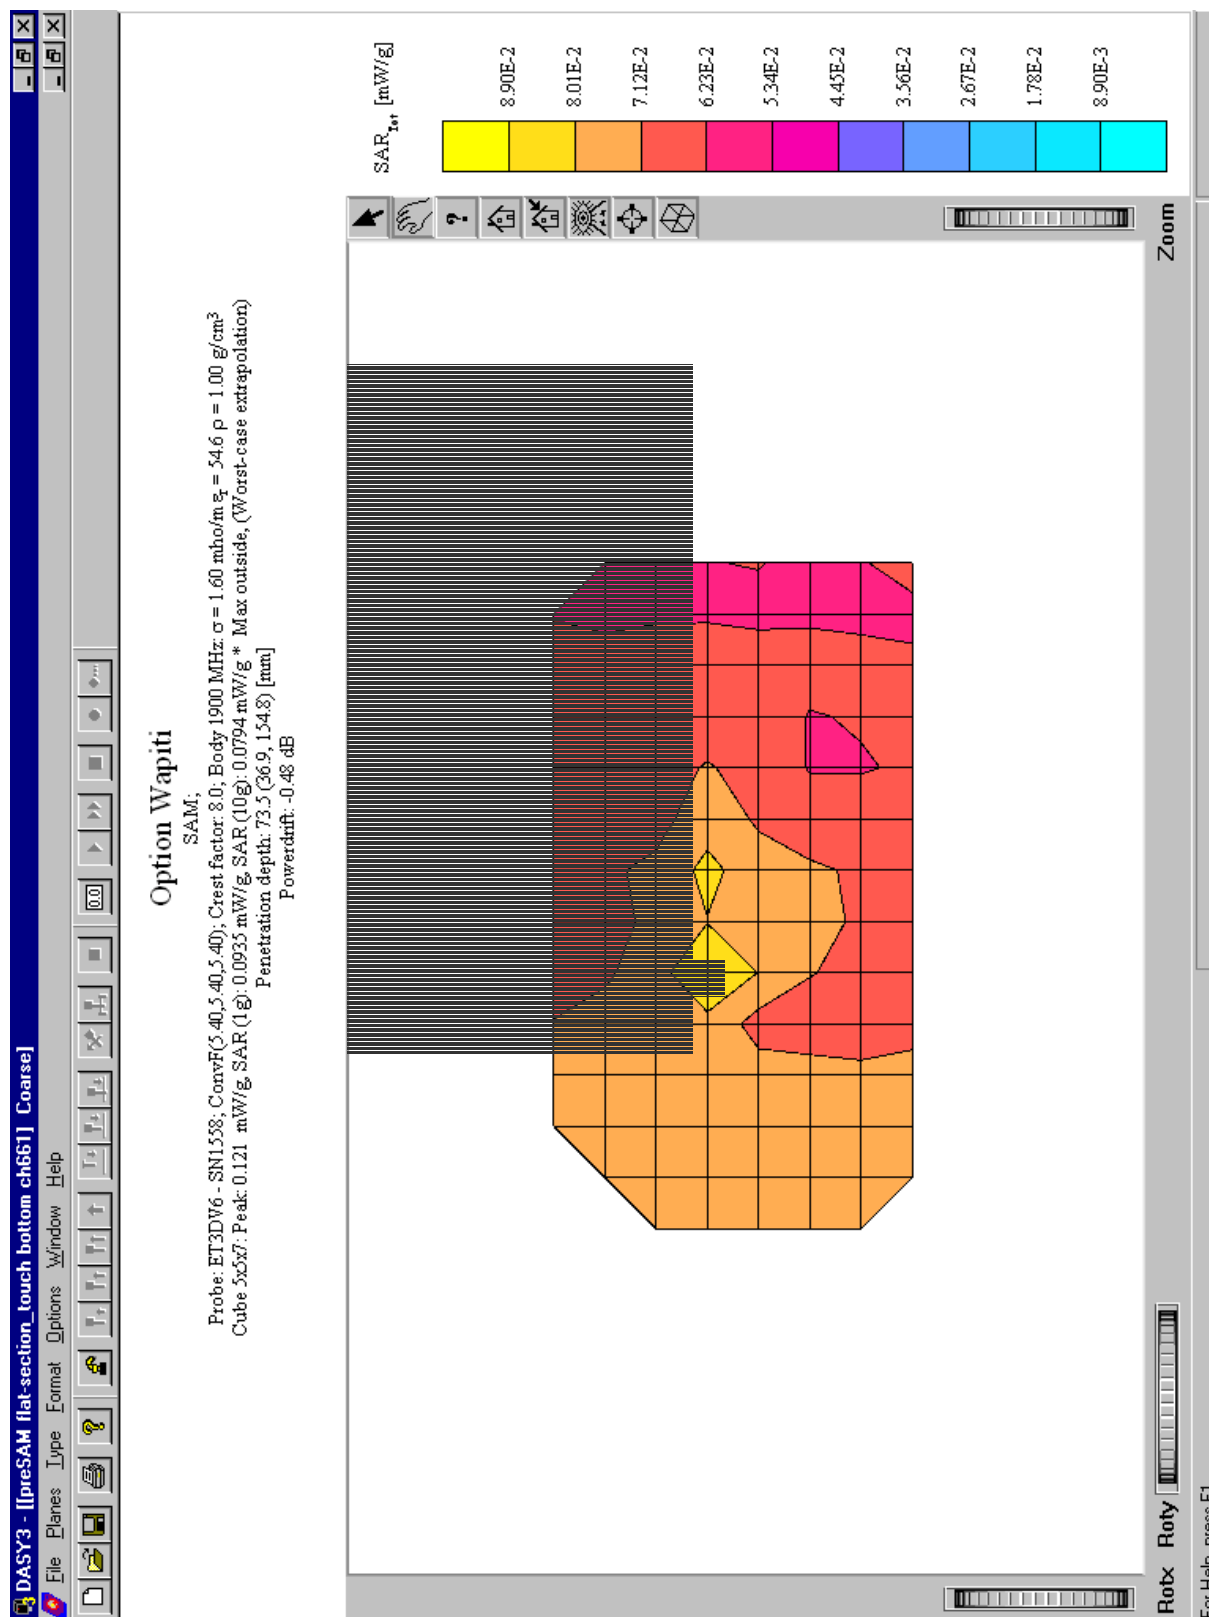

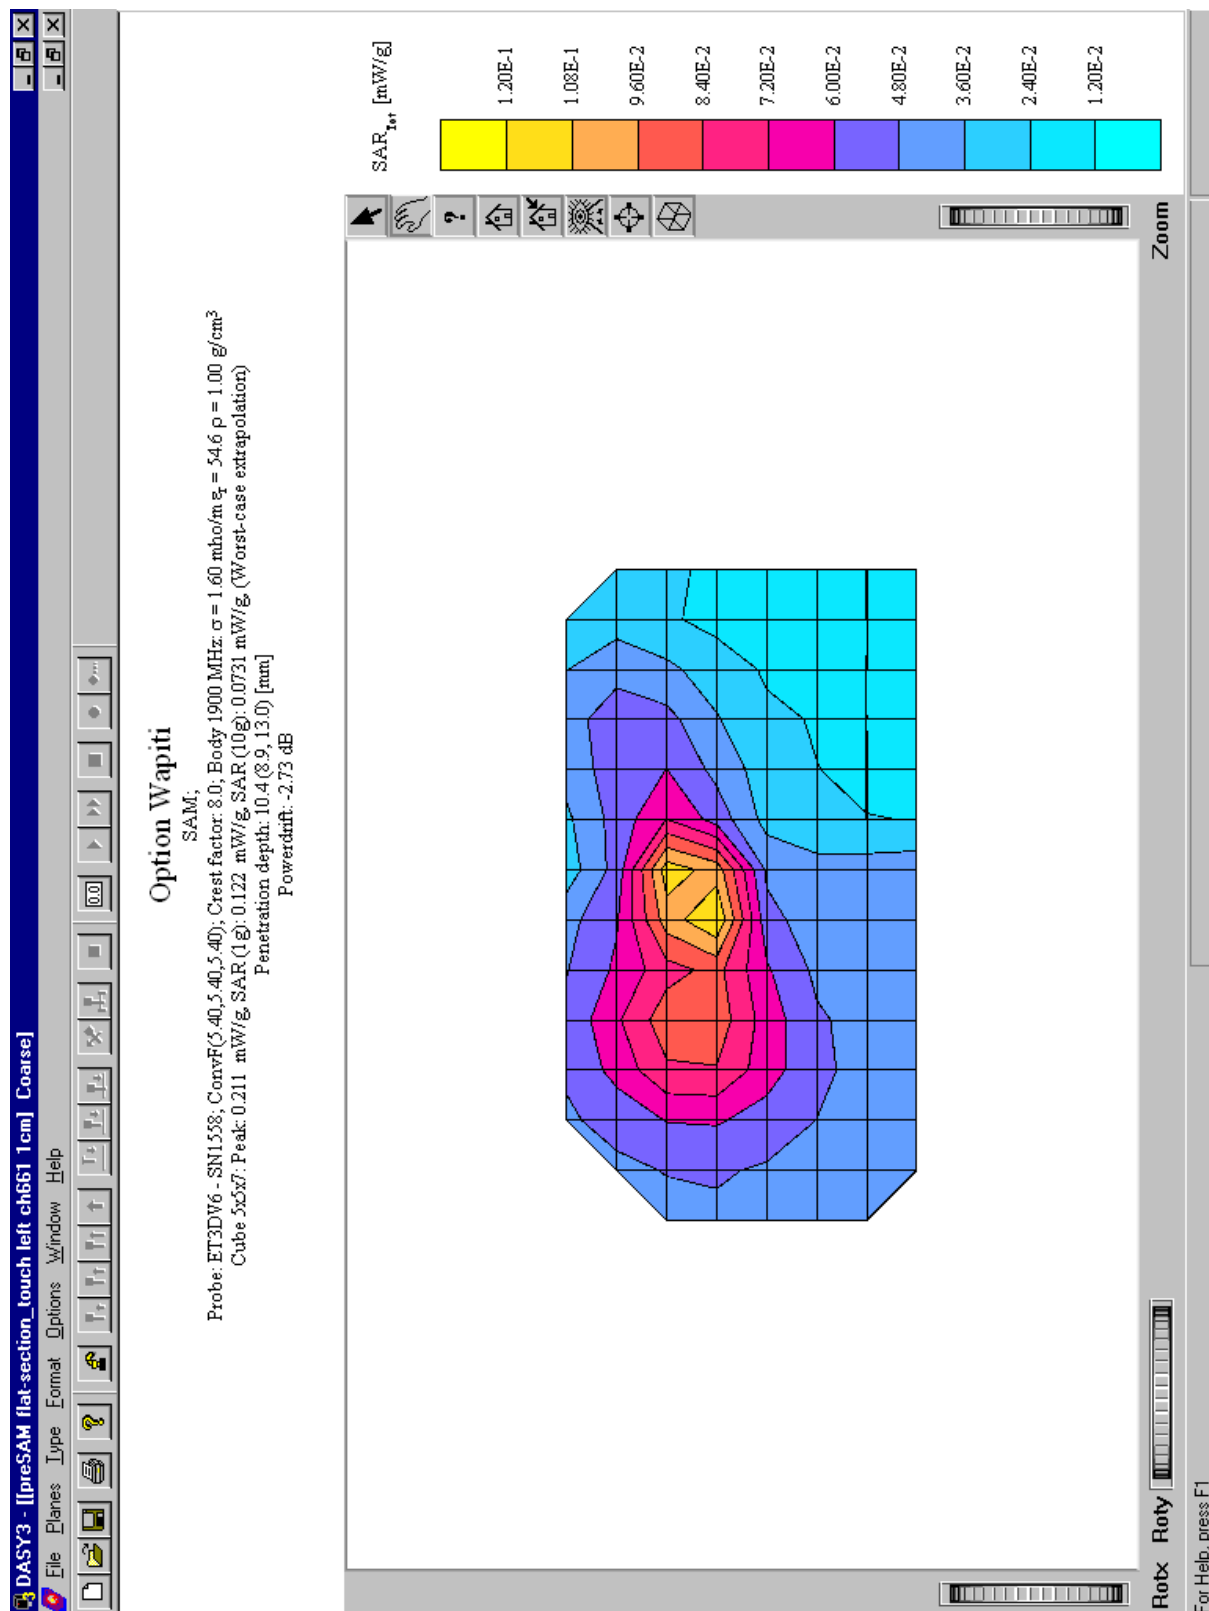Appendix 3: Measurement results (printout from DASYTM)

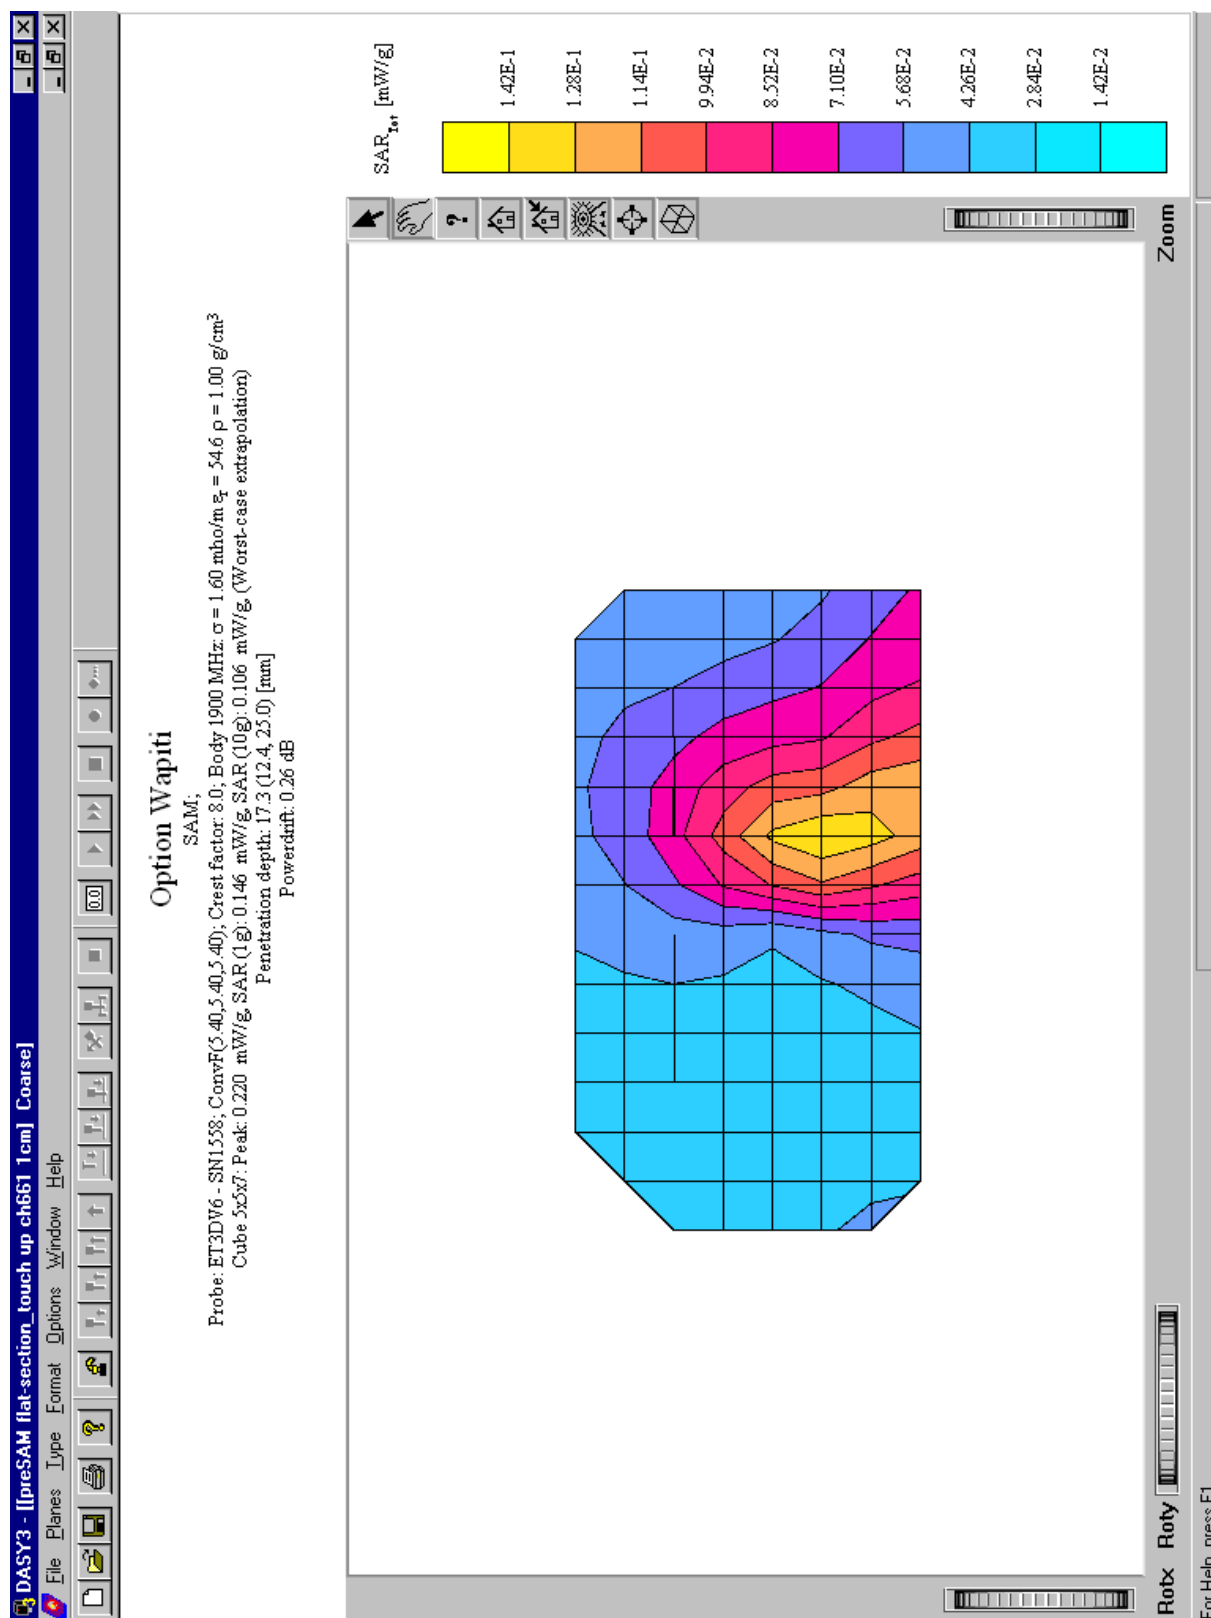

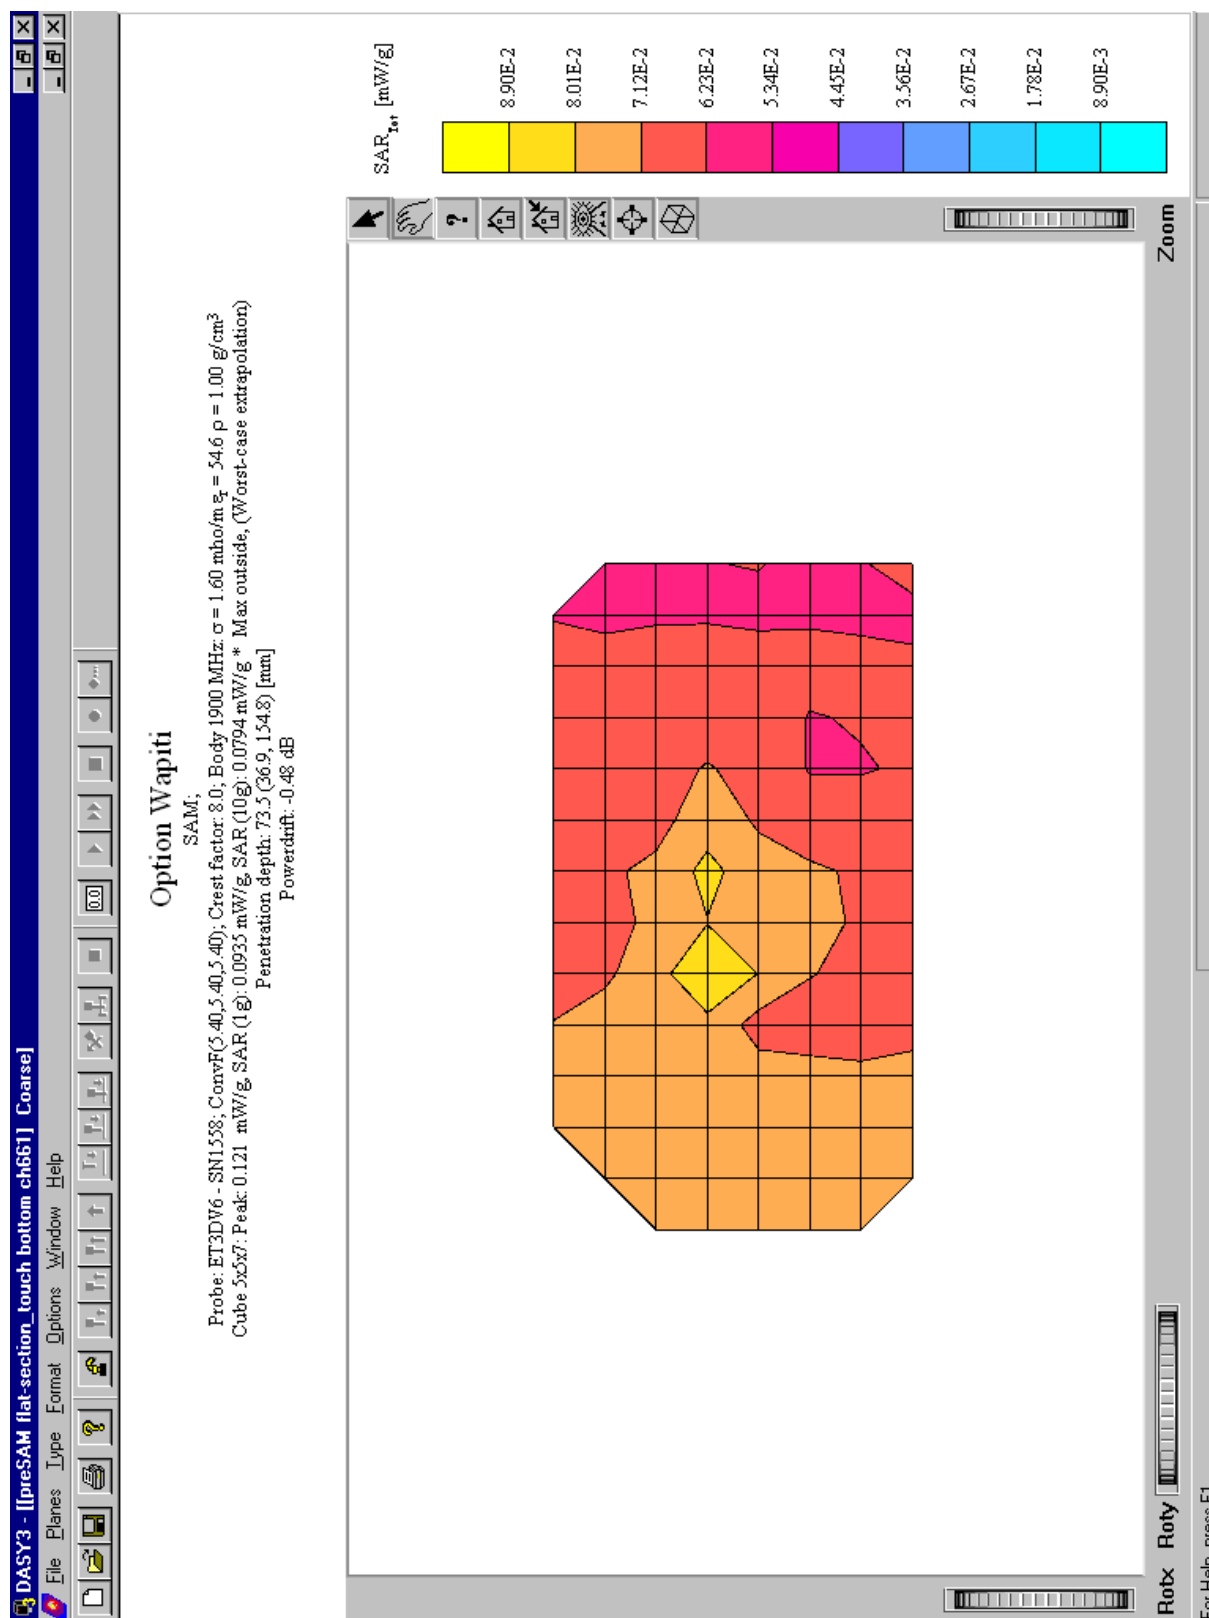

Appendix 4: Photo documentation



Photo 1: Measurement System DASY 3

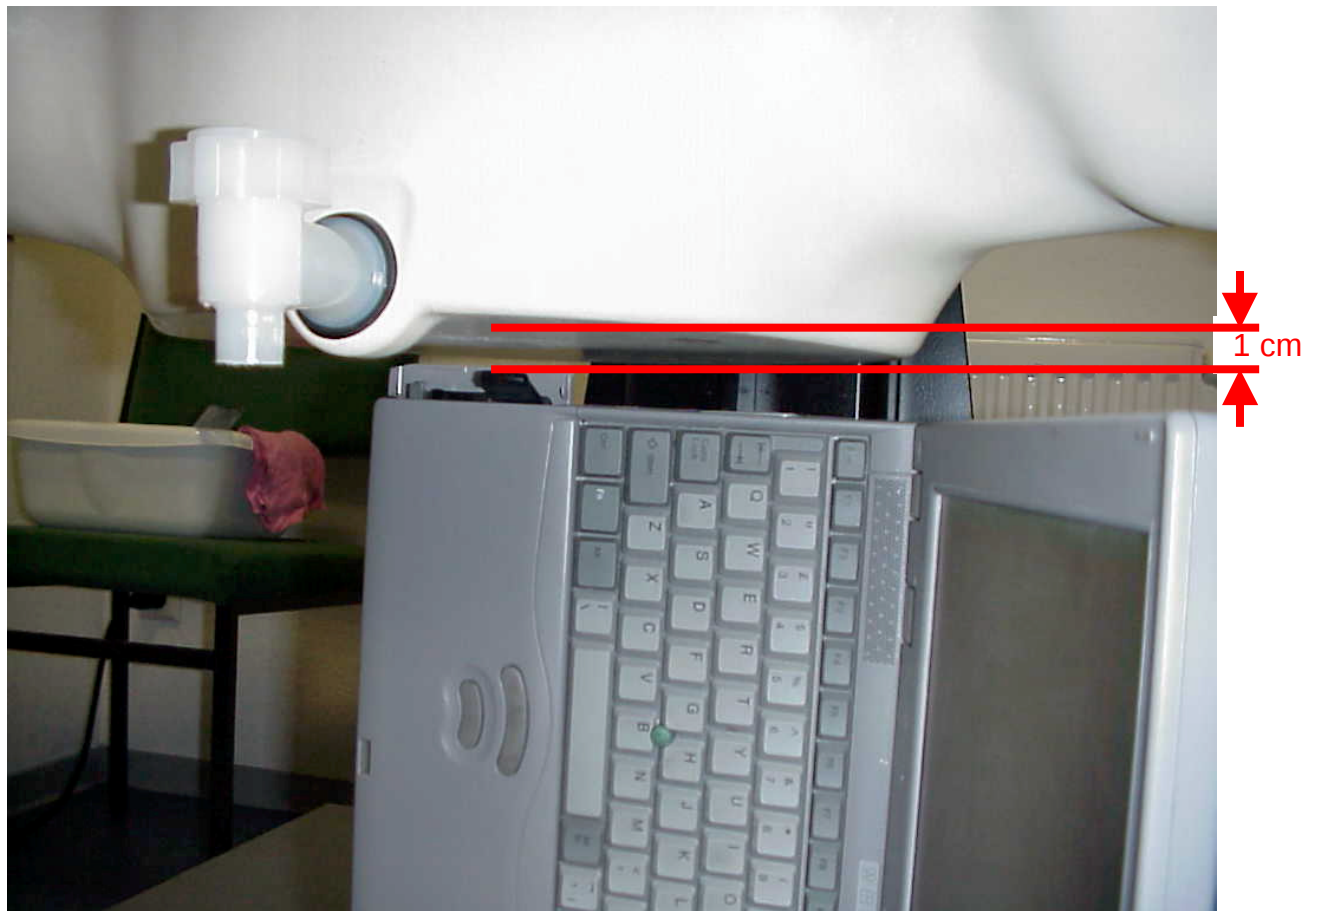


Photo 2: Position left side on the flat phantom (body SAR measurement)

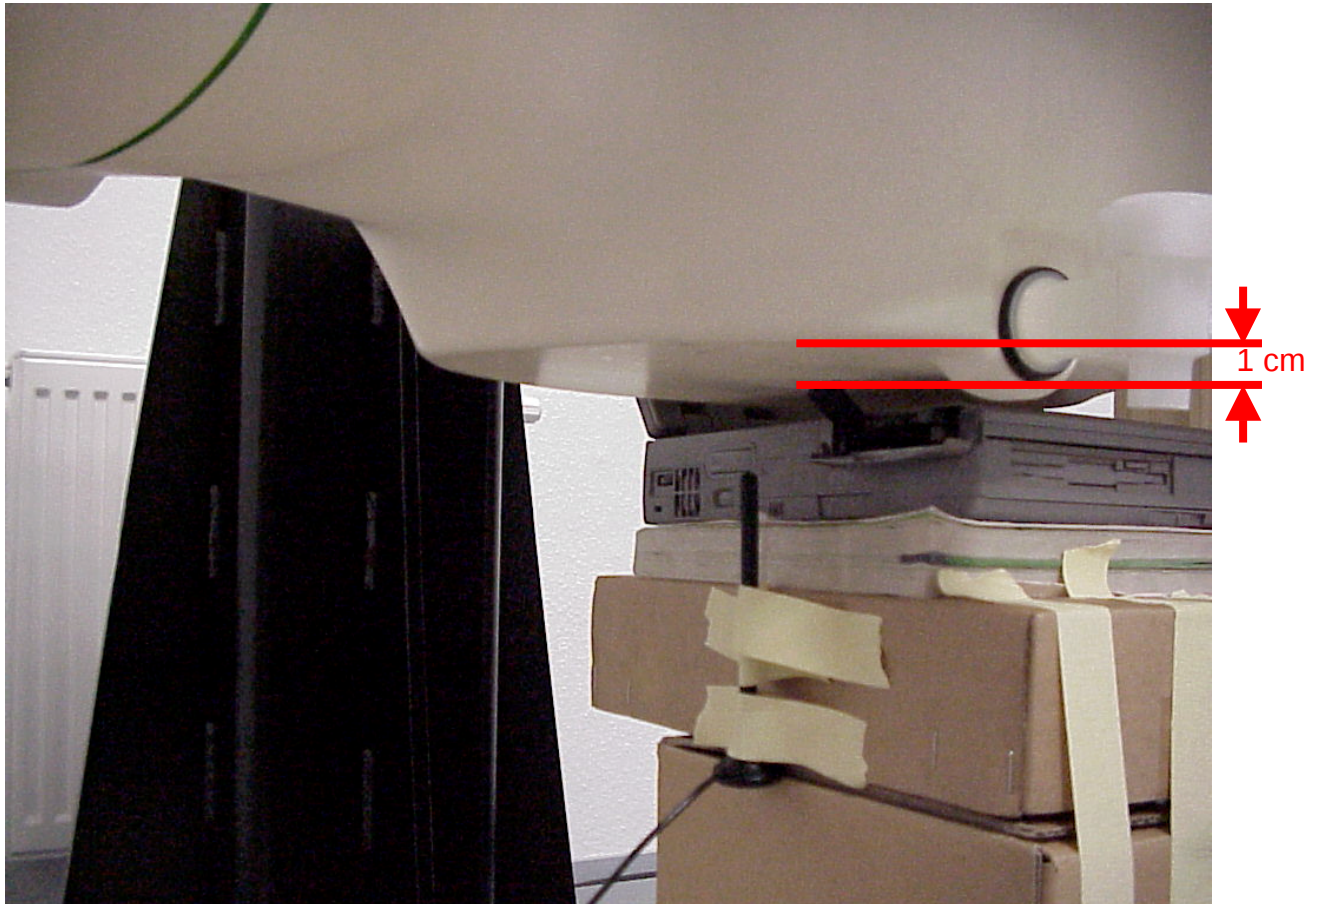


Photo 3: Position up side on the flat phantom (Body SAR measurement)



Photo 4: Position bottom on the flat phantom (Body SAR measurement)

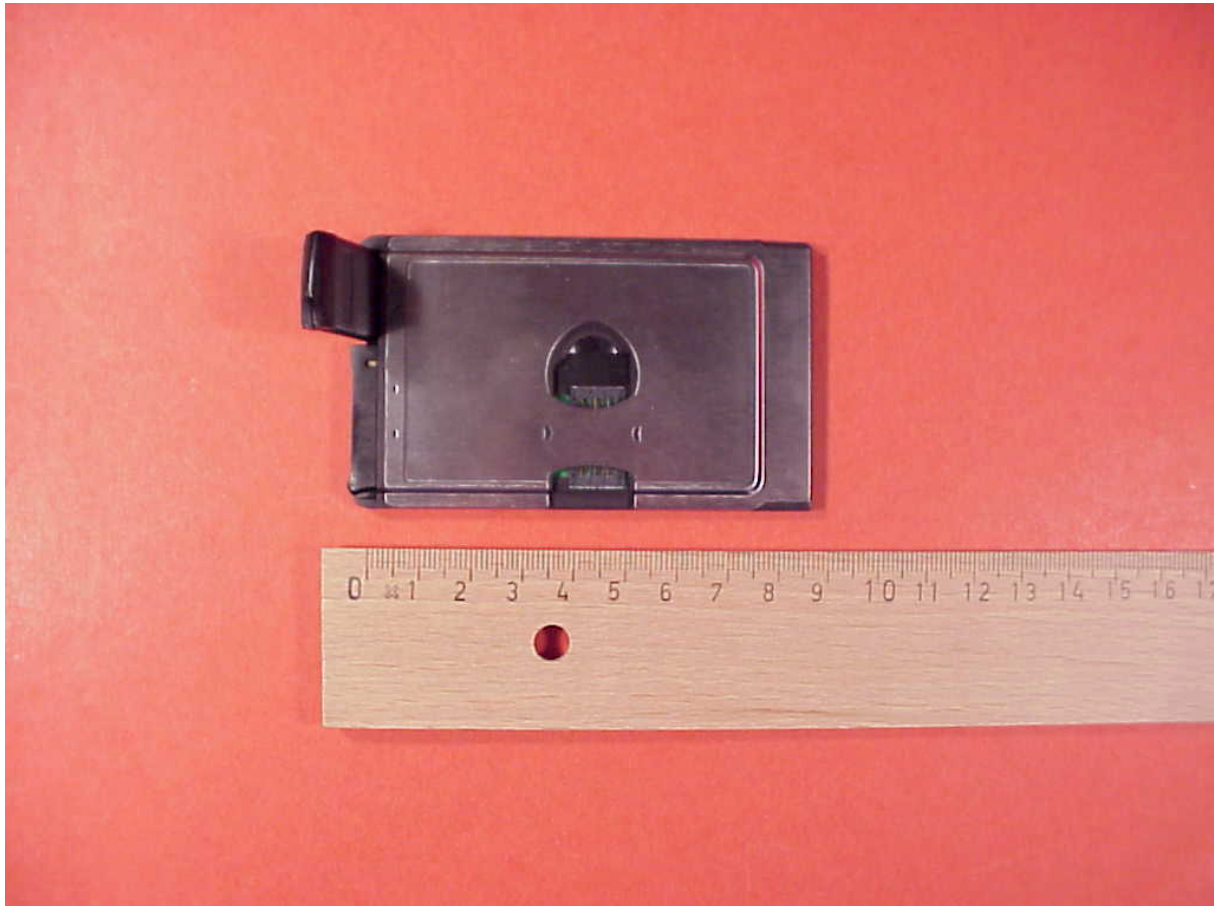


Photo 5: EUT front side

Photo 6: EUT rear side

Appendix 5: Calibration parameters of E-field probe**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate**Dosimetric E-Field Probe**

Type:

ET3DV6

Serial Number:

1558

Place of Calibration:

Zurich

Date of Calibration:

Feb. 20, 2001


Calibration Interval:

12 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:



ET3DV6 SN:1558

DASY3 - Parameters of Probe: ET3DV6 SN:1558**Sensitivity in Free Space****Diode Compression**

NormX	1.48 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	100 mV
NormY	1.35 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	100 mV
NormZ	1.40 $\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	100 mV

Sensitivity in Tissue Simulating Liquid

Head	450 MHz	$\epsilon_r = 43.5 \pm 5\%$	$\sigma = 0.87 \pm 10\% \text{ mho/m}$
ConvF X	7.12 extrapolated	Boundary effect:	
ConvF Y	7.12 extrapolated	Alpha	0.18
ConvF Z	7.12 extrapolated	Depth	3.71
Head	900 MHz	$\epsilon_r = 42 \pm 5\%$	$\sigma = 0.97 \pm 10\% \text{ mho/m}$
ConvF X	6.55 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	6.55 $\pm 7\%$ (k=2)	Alpha	0.27
ConvF Z	6.55 $\pm 7\%$ (k=2)	Depth	3.26
Head	1500 MHz	$\epsilon_r = 40.4 \pm 5\%$	$\sigma = 1.23 \pm 10\% \text{ mho/m}$
ConvF X	5.78 interpolated	Boundary effect:	
ConvF Y	5.78 interpolated	Alpha	0.39
ConvF Z	5.78 interpolated	Depth	2.65
Head	1800 MHz	$\epsilon_r = 40 \pm 5\%$	$\sigma = 1.40 \pm 10\% \text{ mho/m}$
ConvF X	5.40 $\pm 7\%$ (k=2)	Boundary effect:	
ConvF Y	5.40 $\pm 7\%$ (k=2)	Alpha	0.45
ConvF Z	5.40 $\pm 7\%$ (k=2)	Depth	2.35

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.9 $\pm$ 0.2	mm