

																											
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Innoplex Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / IC TEST REPORT Report Revision : Rev.B																										
<table><tr><td>Date/s Tested</td><td>: 29-November-2016 - 09-January-2017</td></tr><tr><td>Report Issue Date</td><td>: 09-January-2017</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solutions - Penang</td></tr><tr><td>Requestor</td><td>: MOHD AFIQ AZFAR JAMANI</td></tr><tr><td>Product Type</td><td>: Portable</td></tr><tr><td>Model Number</td><td>: H92UCH9PW7AN</td></tr><tr><td>Frequency Band</td><td>: 2.412 - 2.462 GHz</td></tr><tr><td>Rated / Max RF Output Power</td><td>: 802.11b - 16.6 mWatts / 22.4mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solution Malaysia Sdn Bhd</td></tr><tr><td>Applicant Address</td><td>: Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>FCC Registrations</td><td>: 772092</td></tr><tr><td>IC Registrations</td><td>: 109AK</td></tr></table>  The equipment was tested accordance to the requirement listed below: <table><tr><td>(2.4GHz Wi-Fi) Part 15C IC RSS 247</td><td>PASS</td></tr></table>		Date/s Tested	: 29-November-2016 - 09-January-2017	Report Issue Date	: 09-January-2017	Manufacturer/Location	: Motorola Solutions - Penang	Requestor	: MOHD AFIQ AZFAR JAMANI	Product Type	: Portable	Model Number	: H92UCH9PW7AN	Frequency Band	: 2.412 - 2.462 GHz	Rated / Max RF Output Power	: 802.11b - 16.6 mWatts / 22.4mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts	Applicant Name	: Motorola Solution Malaysia Sdn Bhd	Applicant Address	: Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia	FCC Registrations	: 772092	IC Registrations	: 109AK	(2.4GHz Wi-Fi) Part 15C IC RSS 247	PASS
Date/s Tested	: 29-November-2016 - 09-January-2017																										
Report Issue Date	: 09-January-2017																										
Manufacturer/Location	: Motorola Solutions - Penang																										
Requestor	: MOHD AFIQ AZFAR JAMANI																										
Product Type	: Portable																										
Model Number	: H92UCH9PW7AN																										
Frequency Band	: 2.412 - 2.462 GHz																										
Rated / Max RF Output Power	: 802.11b - 16.6 mWatts / 22.4mWatts 802.11g - 6.6 mWatts / 8.3 mWatts 802.11n - 10 mWatts / 12.6 mWatts																										
Applicant Name	: Motorola Solution Malaysia Sdn Bhd																										
Applicant Address	: Innoplex Plot 2A, Medan Bayan lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia																										
FCC Registrations	: 772092																										
IC Registrations	: 109AK																										
(2.4GHz Wi-Fi) Part 15C IC RSS 247	PASS																										
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																											
Prepared By: Jino Lim Test Personnel	Approved By: Goh Aik Hong Responsible Engineer																										

Table of Contents

1.0 General Information.....	3
2.0 Summary of Test Results.....	4
3.0. Measurement Uncertainty.....	4
4.0 Equipment List.....	5
5.0 Test Mode Applicability and Test Channel Detail	6
6.0 Transmitter Test Parameters	8
6.1 6dB Channel Bandwidth	8
6.1.1 Test Setup	8
6.1.2 Test Limits:.....	8
6.1.3 Test Data:	8
6.2 Conducted RF Output Power	13
6.2.1 Test Setup	13
6.2.2 Test Limits:.....	14
6.2.3 Test Data:	14
6.3 Duty Cycle of the test signal	16
6.3.1 Test Setup	16
6.3.2 Test Data.....	17
6.4 Maximum Peak Power Spectral Density	20
6.4.1 Test Setup	20
6.4.2 Test Limits:.....	20
6.4.3 Test Result.....	21
6.5 Conducted Spurious Emission	24
6.5.1 Test Setup	24
6.5.2 Test Limits:.....	24
6.5.3 Test Result	24
6.6 Band edge Conducted Spurious Emission	38
6.6.1 Test Setup	38
6.6.2 Test Limits:.....	38
6.6.3 Test Results:	38
6.7 Radiated Emission within restricted bands	51
6.7.1 Test Setup	51
6.7.2 Test Limits:.....	52
6.7.3 Test Data:	53
6.8 AC Powerline Conducted Emission.....	107
6.8.1 Test Setup	107
6.8.2 Test Limits:.....	107
6.8.3 Test Result.....	108

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	09-January-2017	Jino Lim
Rev. B	Revise the Section 2.0 and Section 6.7.1	06-February-2017	Jino Lim

1.0 General Information

EUT Description:

Technologies	2.4GHz Wi-Fi
TX Frequency range	2412MHz – 2462MHz
Modulation Type	DSSS, OFDM
Input/Output	RF Port
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	ANTENNA, CHIP, BEIDOU BT/GPS ANTENNA MODULE

1.1 Channel number and frequency information:

11 Channels are provided for 802.11b, 802.11g and 802.11n (HT20)

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
IMPRES 3000 MAH, LI-ION HIGH CAPACITY BATTERY, LOW VOLTAGE, IP68	MOTOROLA	PMNN4493A
PROGRAMMING, TEST & ALIGNMENT CABLE	MOTOROLA	PMKN4013C

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.10-2013

2.0 Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark
15.247 (b)(1)	RSS-247 5.1(2)	6dB Channel Bandwidth	Pass	NA
15.247 (a)(1)	RSS-247 5.1(1) RSS-247 5.1(2)	Conducted RF Output Power (Peak)	Pass	NA
15.247(a)(1)(iii)	RSS-247 5.1(4)	Maximum Power Spectral Density	Pass	NA
15.247(a)(1)(iii)	RSS-247 5.1(4)	Conducted Spurious Emissions	Pass	NA
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	Pass	NA
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	Pass	NA
15.207	RSS-247 5.5	AC Powerline Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode
15.203	RSS-Gen 8.8	Antenna requirement	NA	Internal antenna is not accessible to the end-user

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.9_R1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6652A	3117A00162	6-Mar-16	6-Mar-17
SPECTRUM ANALYZER	E4445A	MY46181513	11-Dec-14	11-Dec-17
SPECTRUM ANALYZER	FSEK30	838495/014	29-Jun-15	29-Jun-17

Radiated Emission Station (SW Version: EMC FCC RE v1.5.1)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	566	4-Sep-16	4-Sep-17
DRG HORN FREQ.	SAS-571	719	28-Apr-15	28-Apr-17
BILOG ANTENNA	CBL6112B	2964	23-Jan-15	23-Jan-17
POWER SUPPLY	6674A	3126A00133	12-Nov-15	12-Nov-17
MICROWAVE SIGNAL GENERATOR	SMP04	100127	3-Jul-16	3-Jul-17
EMI TEST RECEIVER	ESIB26	100336	19-Oct-16	19-Oct-17
SIGNAL ANALYZER	FSV40	101103	25-Jun-16	25-Jun-17
5M SEMI-ANECHOIC CHAMBER	S800-HX	J2308	29-Jul-16	29-Jul-17
BILOG ANTENNA	CBL6112D	25516	23-Jan-16	23-Jan-17
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	24-Nov-14	24-Feb-17
DATA LOGGER	TM320	12249289	27-Apr-16	27-Apr-17
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TRUNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONNING TOWER	TLT2	NA	Not Required	Not Required
18 - 40GHz PREAMPLIFIER	BBV9721	9721-007	Not Required	Not Required
PREAMPLIFIER	PAM-0118P	361	Not Required	Not Required

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5

Power Line Conducted Emission Test

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Application Mode	802.11bgn mixed	1 to 11	AUTO	DSSS, OFDM	AUTO	AUTO

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
Test Mode	802.11b	1 to 11	1,6,11	DSSS	QPSK	2
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5


Duty Cycle of Test Signal

802.11b, 802.11g and 802.11n (HT20): Duty cycle of test signal is $\geq 98\%$. (Refer to duty cycle test signal)

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


6.1.2 Test Limits:

Normal Condition (25 ° C)
≥ 500 kHz


6.1.3 Test Data:

802.11 b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11b	DSSS	QPSK	2	2412	10.073	13.570	Pass
802.11b	DSSS	QPSK	2	2437	10.064	13.644	Pass
802.11b	DSSS	QPSK	2	2462	10.074	13.620	Pass

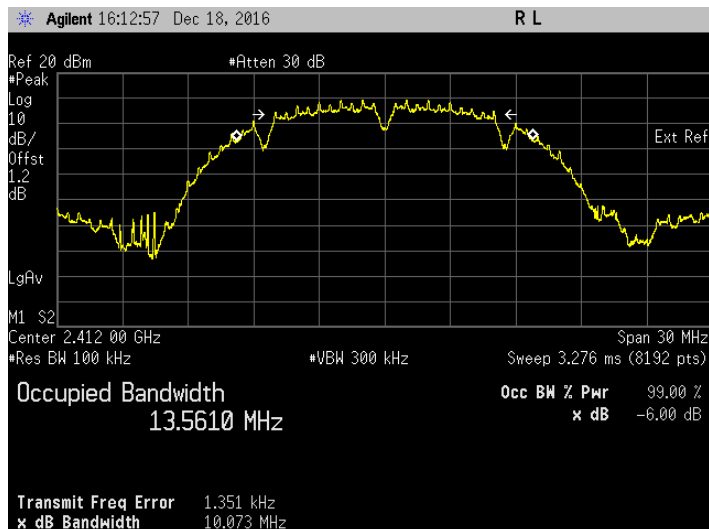


6dB Bandwidth. 802.11b Frequency 2412 MHz

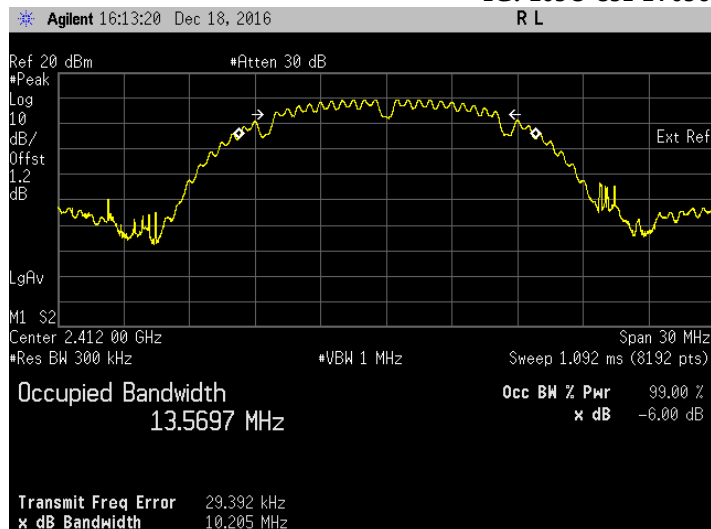


99% Bandwidth. 802.11b Frequency 2412 MHz

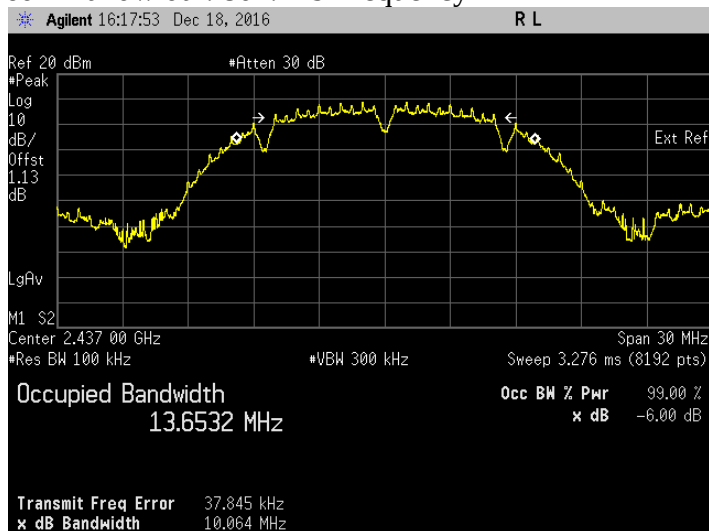


6dB Bandwidth. 802.11b Frequency 2437 MHz

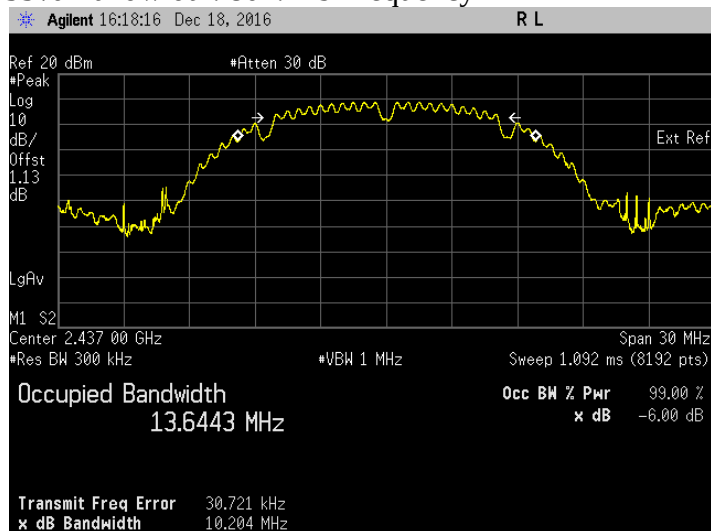

99% Bandwidth. 802.11b Frequency 2437 MHz

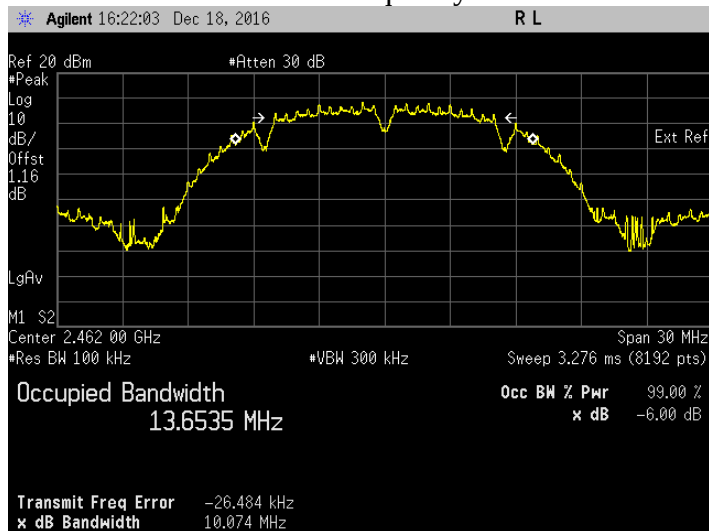



6dB Bandwidth. 802.11b Frequency 2462 MHz

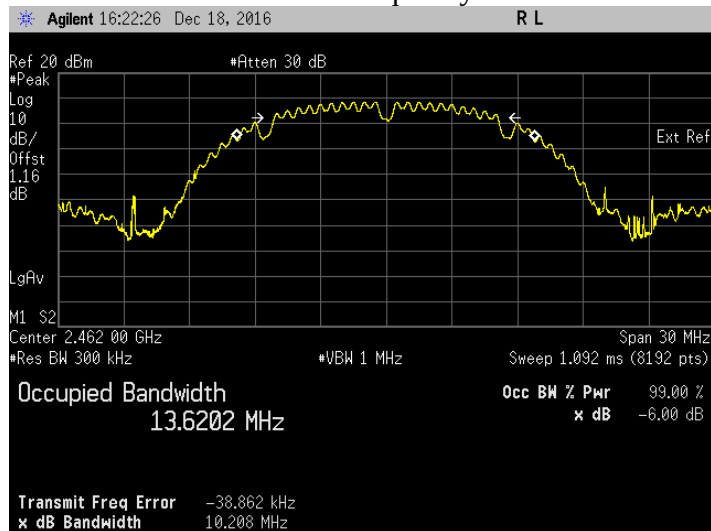

99% Bandwidth. 802.11b Frequency 2462 MHz



802.11 g

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11g	OFDM	BPSK	6	2412	16.371	16.850	Pass
802.11g	OFDM	BPSK	6	2437	16.345	16.830	Pass
802.11g	OFDM	BPSK	6	2462	16.358	16.823	Pass

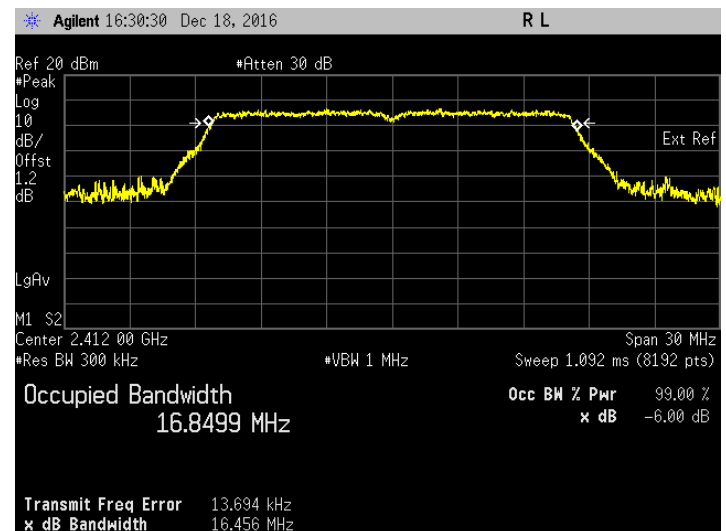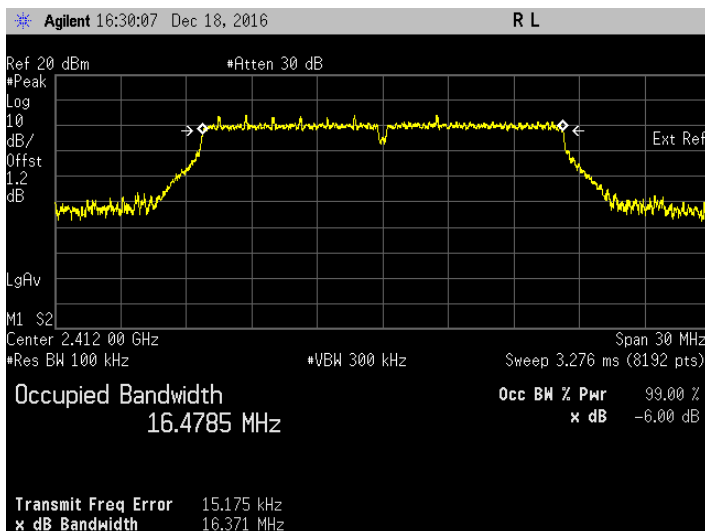


6dB Bandwidth. 802.11g Frequency 2412 MHz

99% Bandwidth. 802.11g Frequency 2412 MHz

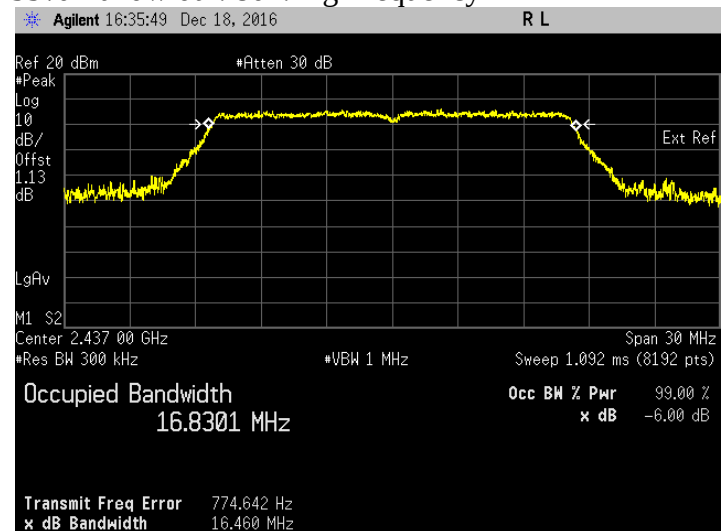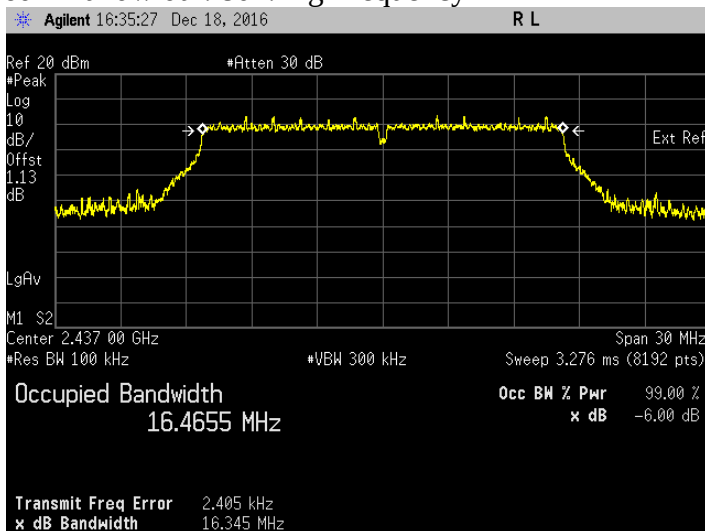


6dB Bandwidth. 802.11g Frequency 2437 MHz

99% Bandwidth. 802.11g Frequency 2437 MHz

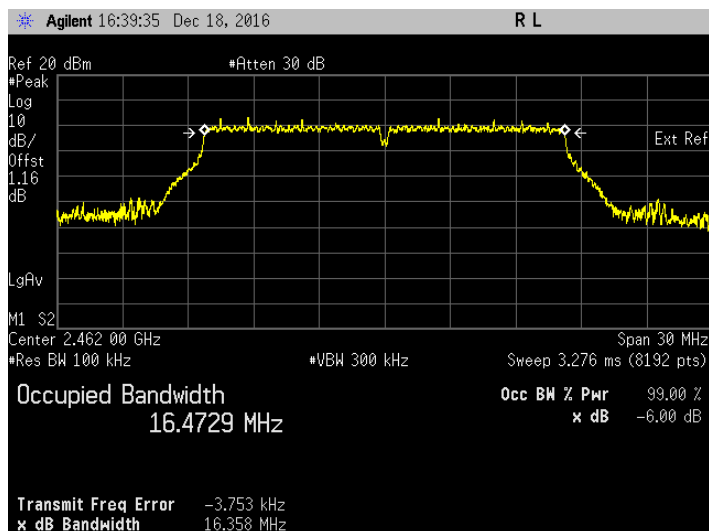


6dB Bandwidth. 802.11g Frequency 2462 MHz

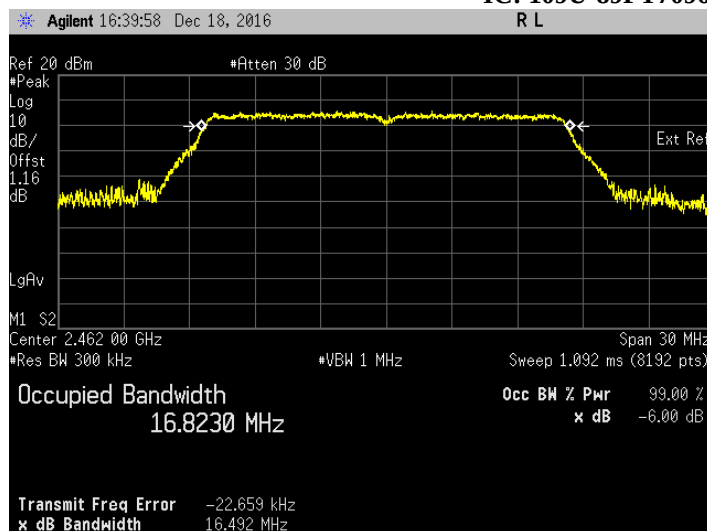


99% Bandwidth. 802.11g Frequency 2462 MHz

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	BPSK	6.5	2412	17.609	17.917	Pass
802.11n	OFDM	BPSK	6.5	2437	17.606	17.951	Pass
802.11n	OFDM	BPSK	6.5	2462	17.617	17.937	Pass

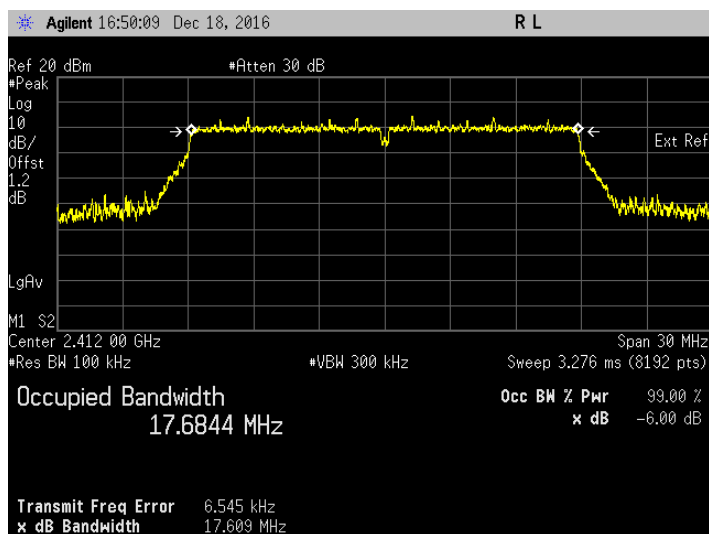


6dB Bandwidth. 802.11n Frequency 2412 MHz

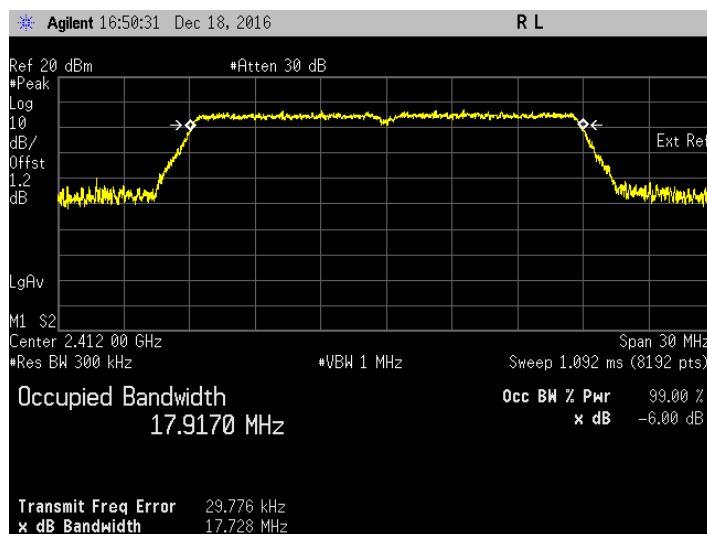


99% Bandwidth. 802.11n Frequency 2412 MHz

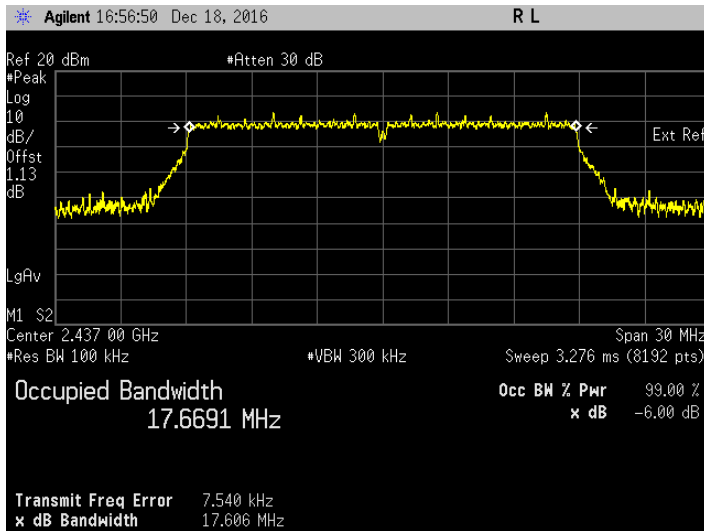


6dB Bandwidth. 802.11n Frequency 2437 MHz

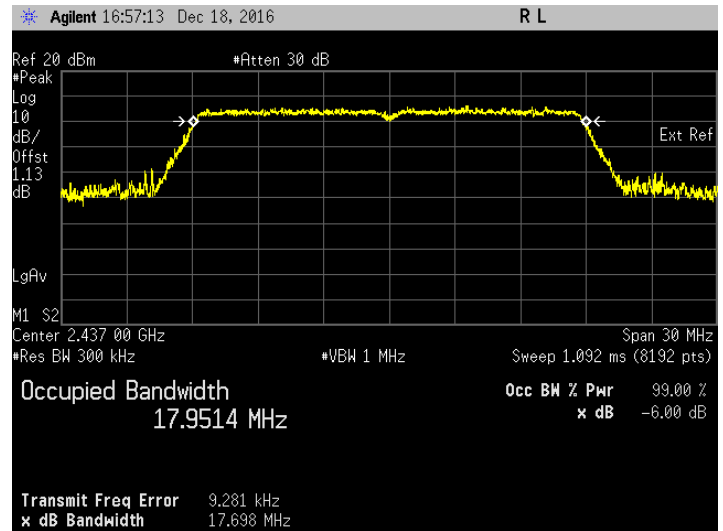

99% Bandwidth. 802.11n Frequency 2437 MHz

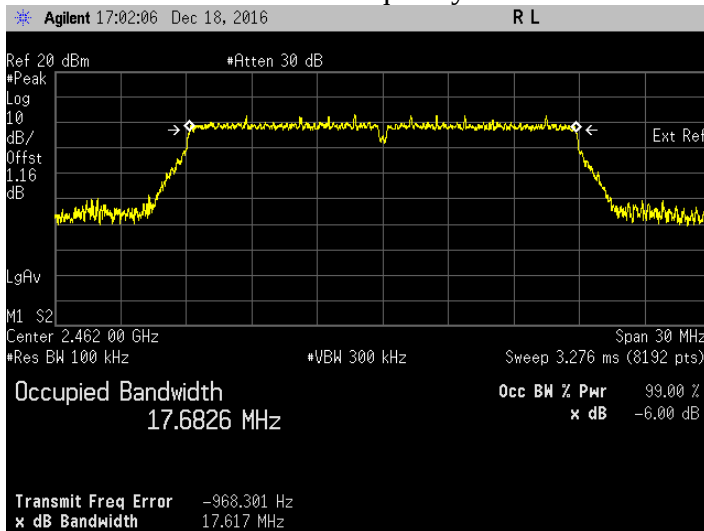


6dB Bandwidth. 802.11n Frequency 2462 MHz

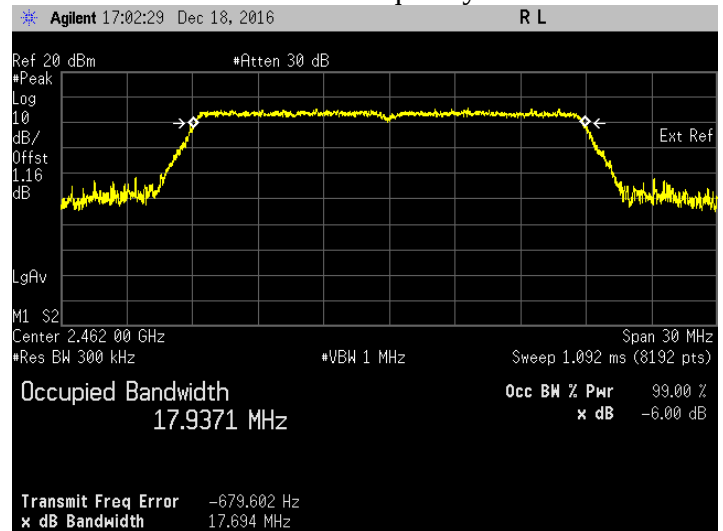

99% Bandwidth. 802.11n Frequency 2462 MHz

6.2 Conducted RF Output Power

6.2.1 Test Setup



Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. Set the RBW = 1 MHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
 - d. Detector = peak.
 - e. Sweep time = auto couple.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
- e) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

Average

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 1 MHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
 - d. Detector = average.
 - e. Sweep time = auto couple.
 - f. Trace mode = free run.
 - g. Allow trace to fully stabilize.
- 5) Add in duty cycle correction into final test result.
- 6) Duty cycle correction is calculated as below:
 $10 \log (1/x)$

6.2.2 Test Limits:

Normal Condition (25 ° C)
≤1 Watt(30 dBm)

6.2.3 Test Data:

Maximum Peak

802.11b

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	16.071	Pass
802.11b	DSSS	QPSK	2	2437	15.168	Pass
802.11b	DSSS	QPSK	2	2462	15.188	Pass

802.11g

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	15.709	Pass
802.11g	OFDM	BPSK	6	2437	16.363	Pass
802.11g	OFDM	BPSK	6	2462	16.127	Pass

802.11n (HT20)

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	18.557	Pass
802.11n	OFDM	BPSK	6.5	2437	17.856	Pass
802.11n	OFDM	BPSK	6.5	2462	18.306	Pass

Average

802.11b

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11b	DSSS	QPSK	2	2412	13.133	Pass
802.11b	DSSS	QPSK	2	2437	12.299	Pass
802.11b	DSSS	QPSK	2	2462	12.335	Pass

802.11g


Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	8.168	Pass
802.11g	OFDM	BPSK	6	2437	8.908	Pass
802.11g	OFDM	BPSK	6	2462	8.668	Pass

802.11n (HT20)

Test Conditions					Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	10.981	Pass
802.11n	OFDM	BPSK	6.5	2437	10.280	Pass
802.11n	OFDM	BPSK	6.5	2462	10.766	Pass

6.3 Duty Cycle of the test signal


6.3.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
 - b. Set the VBW $\geq$ RBW.
 - c. Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
 - d. Detector = Peak.
 - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
- 5) Record the duty cycle as X and save the plot.

6.3.2 Test Data

802.11b

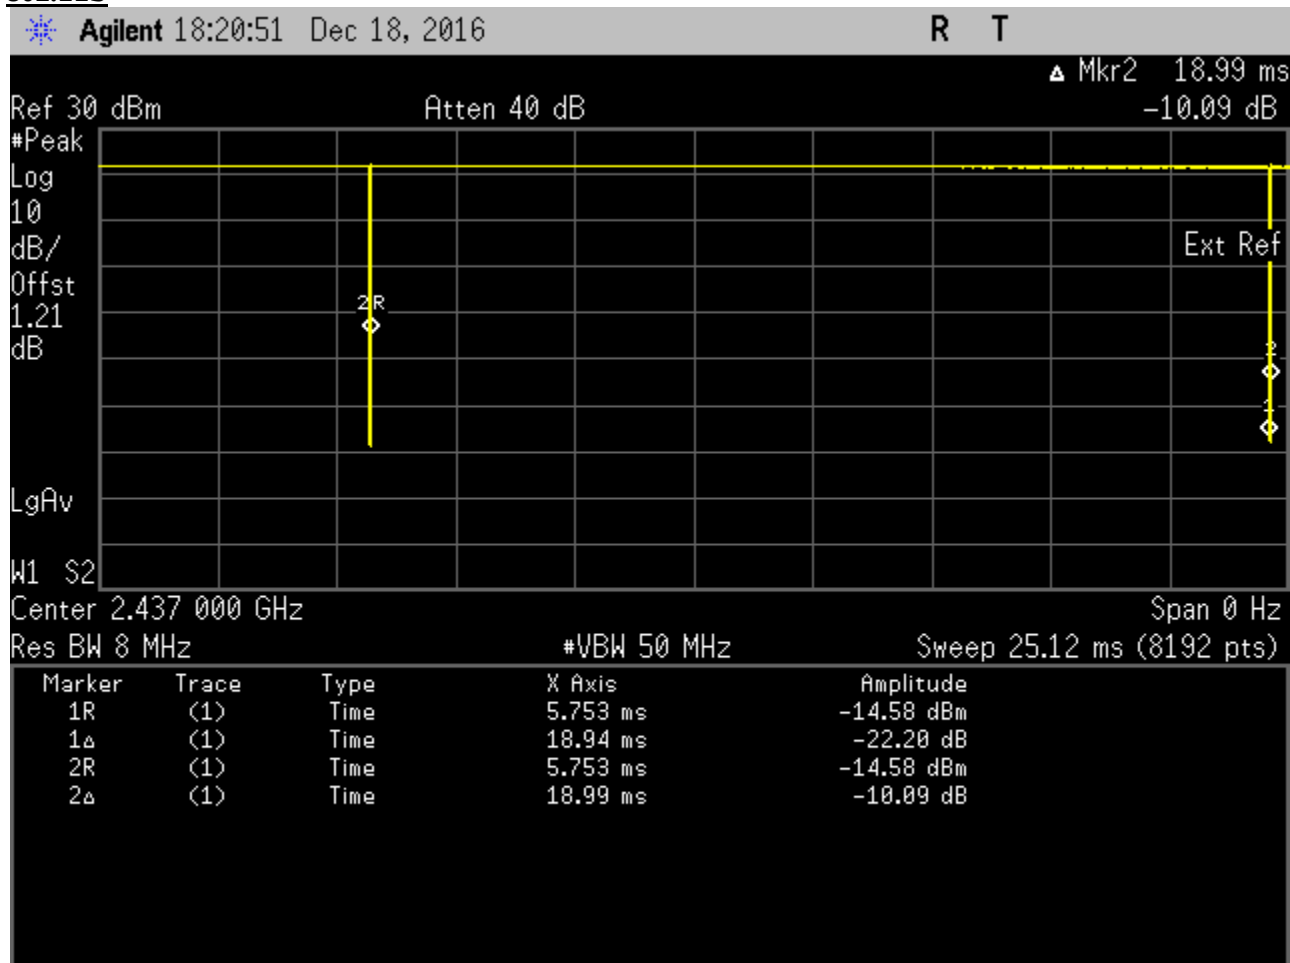


On time	18.94	ms
On + off time	18.99	ms
Duty cycle	0.9974	
Duty Cycle factor	0.011	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11g

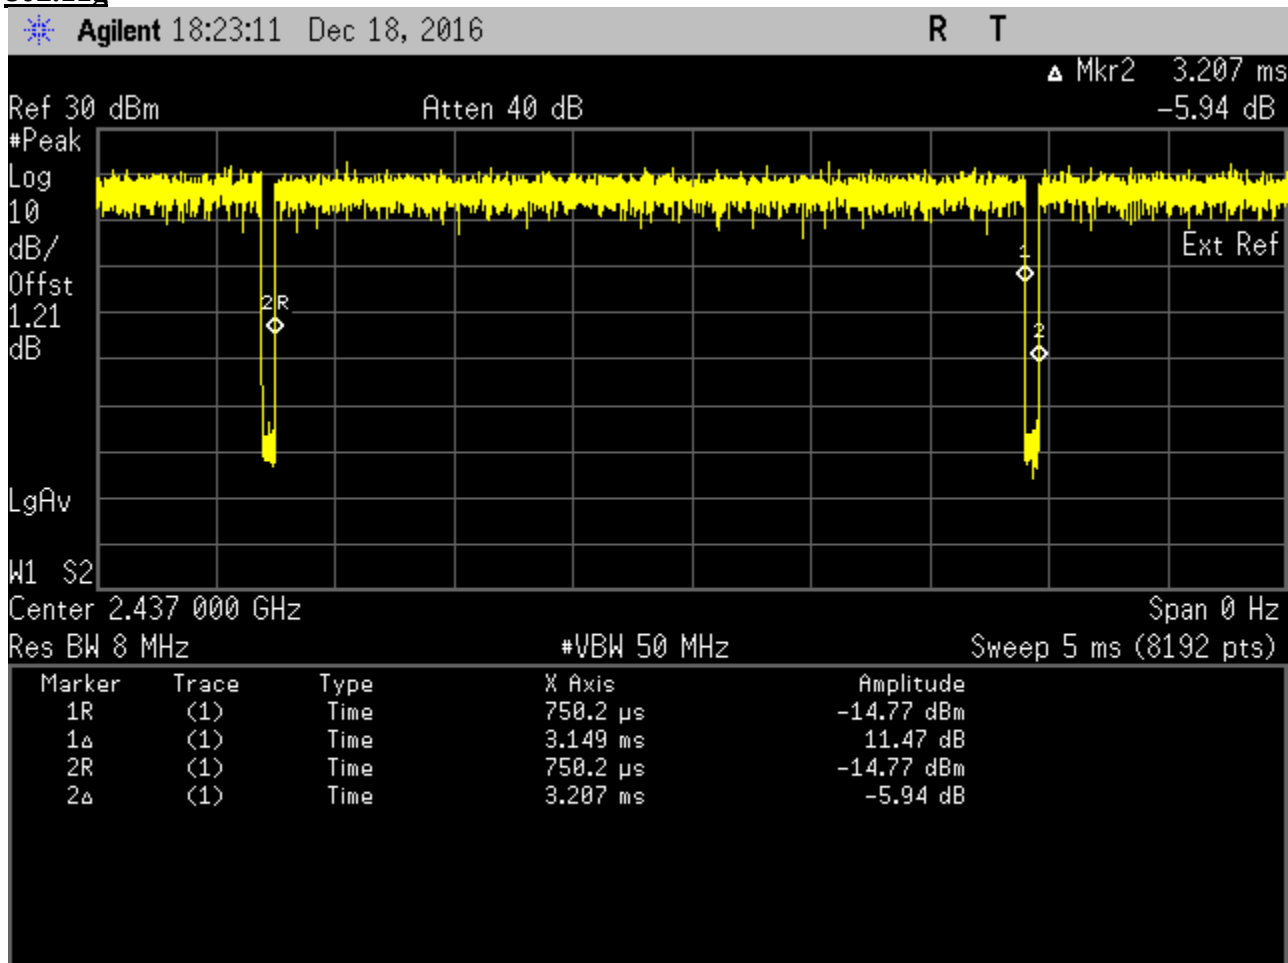


On time	3.149	ms
On + off time	3.207	ms
Duty cycle	0.9819	
Duty Cycle factor	0.079	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11n (HT20)

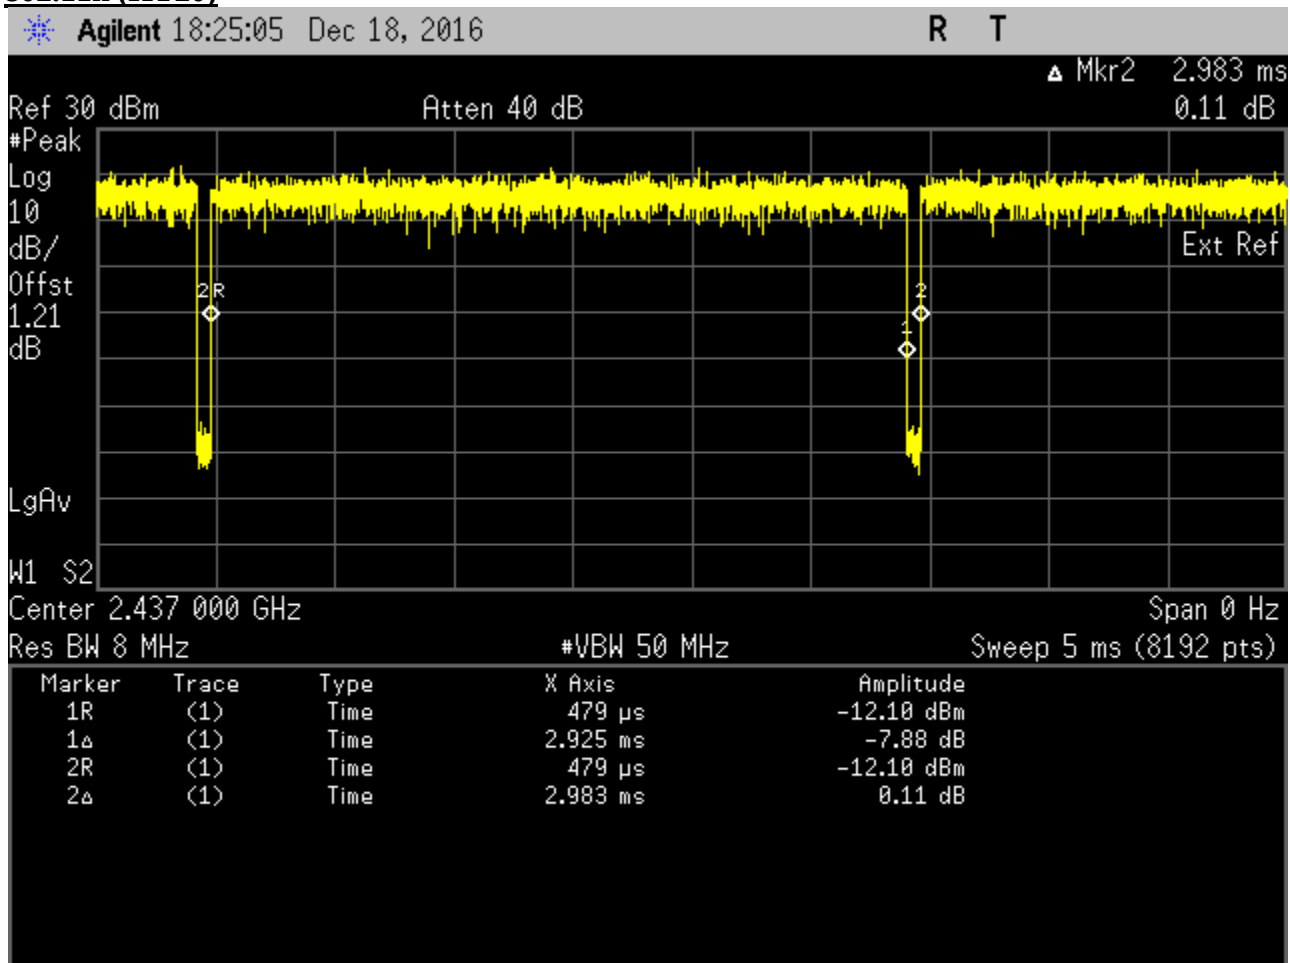


On time	2.925	ms
On + off time	2.983	ms
Duty cycle	0.9806	
Duty Cycle factor	0.085	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

6.4 Maximum Peak Power Spectral Density

6.4.1 Test Setup



Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- e) Convert final result from (dBm/100kHz) $\rightarrow$ (dBm/3kHz).
- f) Example of calculation :

Assume manual measured result is -6.2 dBm

 - = -6.2 dBm - (conversion factor)
 - = -6.2 dBm - $(10 \cdot \log(100/3))$
 - = -6.2 dBm - (15.228 dB)
 - = -21.428dBm


6.4.2 Test Limits:

Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$


6.4.3 Test Result

802.11b


Test Conditions					Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Power (dBm/100kHz)	Power (dBm/3kHz)	Status
802.11b	DSSS	QPSK	2	2412	4.29	-10.94	Pass
802.11b	DSSS	QPSK	2	2437	3.47	-11.76	Pass
802.11b	DSSS	QPSK	2	2462	3.33	-11.90	Pass

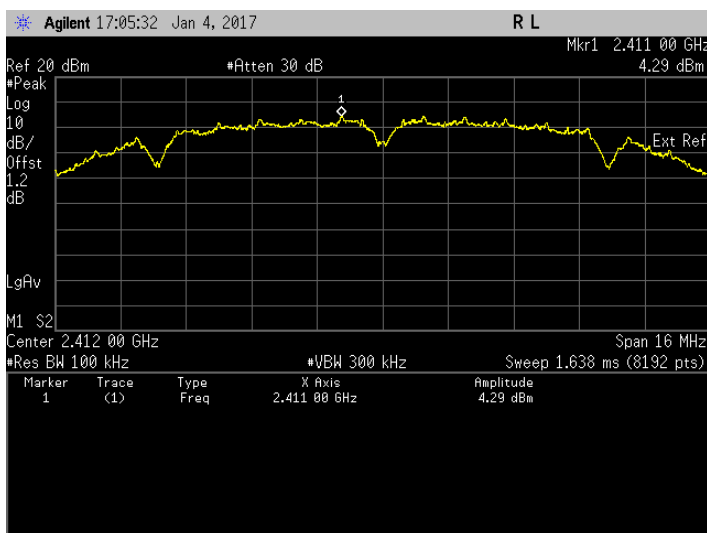

Maximum Power Spectral Density. 802.11b
 Frequency 2412 MHz

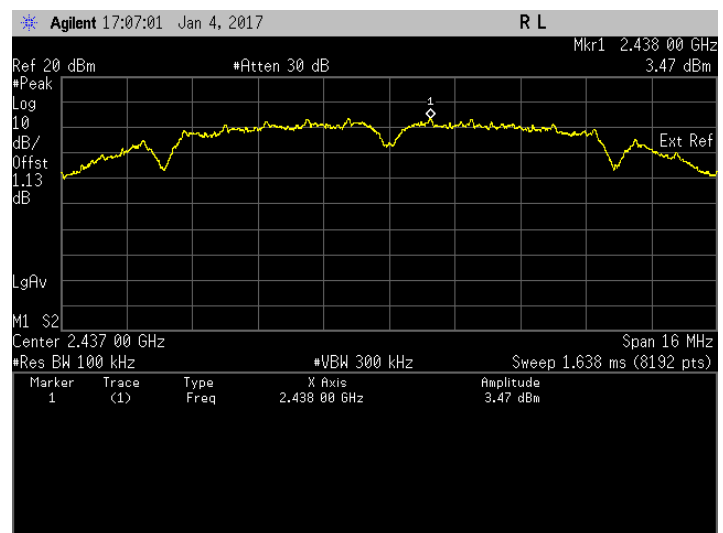


Maximum Power Spectral Density. 802.11b
 Frequency 2437 MHz

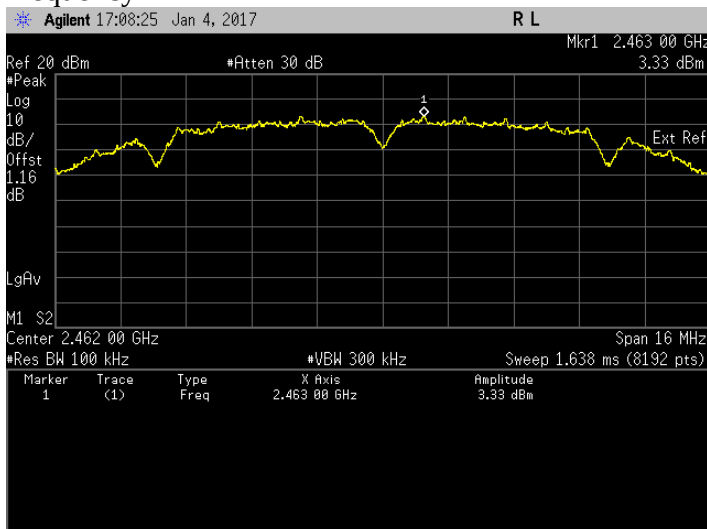


Maximum Power Spectral Density. 802.11b
 Frequency 2462 MHz

802.11g


Test Conditions					Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Power (dBm/100kHz)	Power (dBm/3kHz)	Status
802.11g	OFDM	BPSK	6	2412	-2.08	-17.31	Pass
802.11g	OFDM	BPSK	6	2437	-1.79	-17.02	Pass
802.11g	OFDM	BPSK	6	2462	-1.99	-17.22	Pass

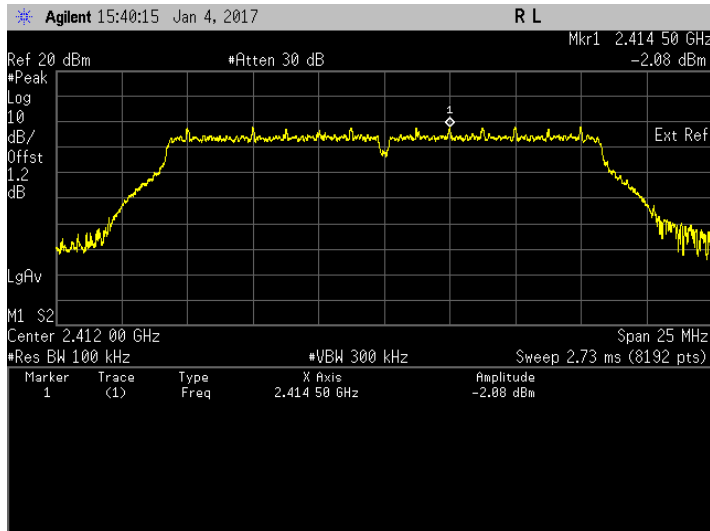

Maximum Power Spectral Density. 802.11g
 Frequency 2412 MHz

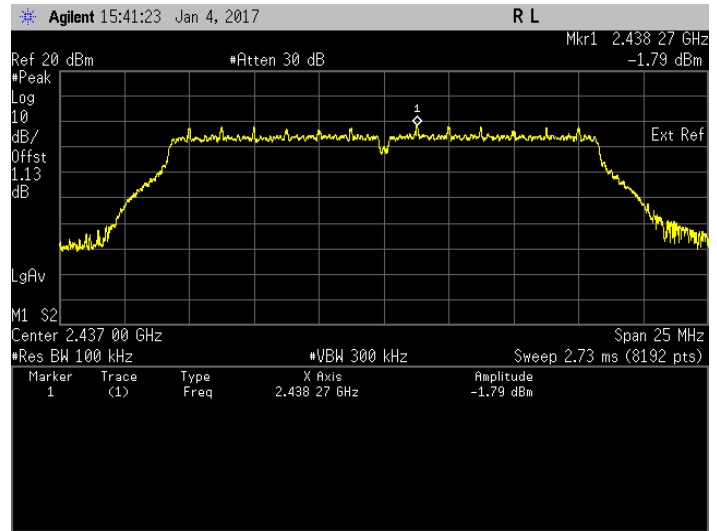


Maximum Power Spectral Density. 802.11g
 Frequency 2437 MHz

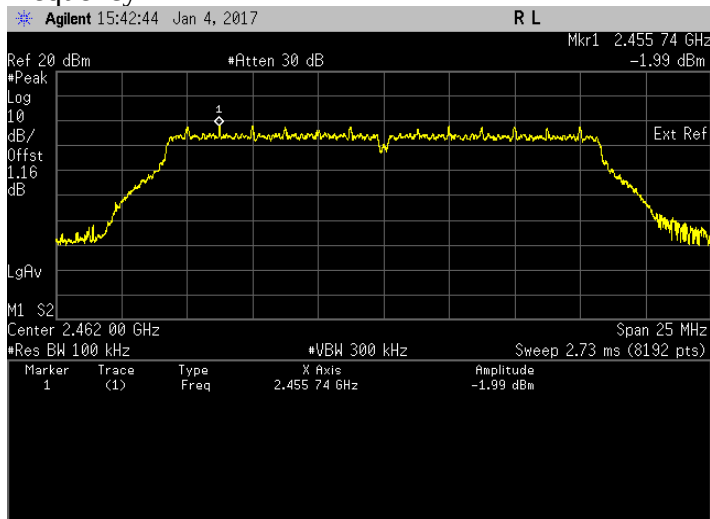


Maximum Power Spectral Density. 802.11g
 Frequency 2462 MHz

802.11n (HT20)


Test Conditions					Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Power (dBm/100kHz)	Power (dBm/3kHz)	Status
802.11n	OFDM	BPSK	6.5	2412	-0.30	-15.53	Pass
802.11n	OFDM	BPSK	6.5	2437	-0.89	-16.12	Pass
802.11n	OFDM	BPSK	6.5	2462	-0.51	-15.74	Pass

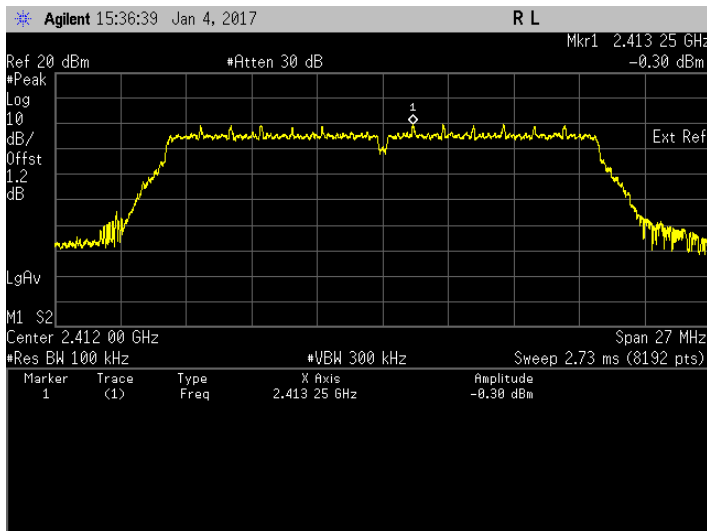

Maximum Power Spectral Density. 802.11n
Frequency 2412 MHz

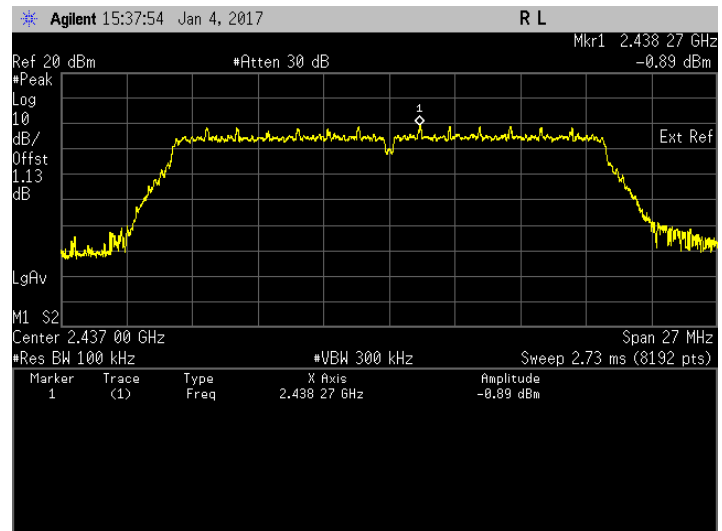


Maximum Power Spectral Density. 802.11n
Frequency 2437 MHz

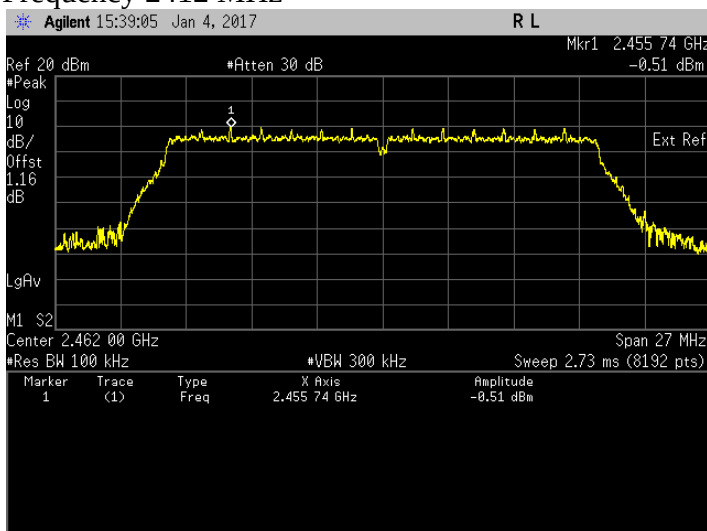

Maximum Power Spectral Density. 802.11n
Frequency 2462 MHz

6.5 Conducted Spurious Emission

6.5.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission and scan up to 10th harmonic.


6.5.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.


6.5.3 Test Result

802.11b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11b	DSSS	QPSK	2	2412	14188.38	-49.28	Pass
					6993.99	-50.42	Pass
					15010.02	-51.37	Pass
802.11b	DSSS	QPSK	2	2437	14198.40	-51.19	Pass
					6983.97	-51.23	Pass
					15050.10	-51.86	Pass
802.11b	DSSS	QPSK	2	2462	6913.83	-50.09	Pass
					6663.33	-50.17	Pass
					14188.38	-49.71	Pass

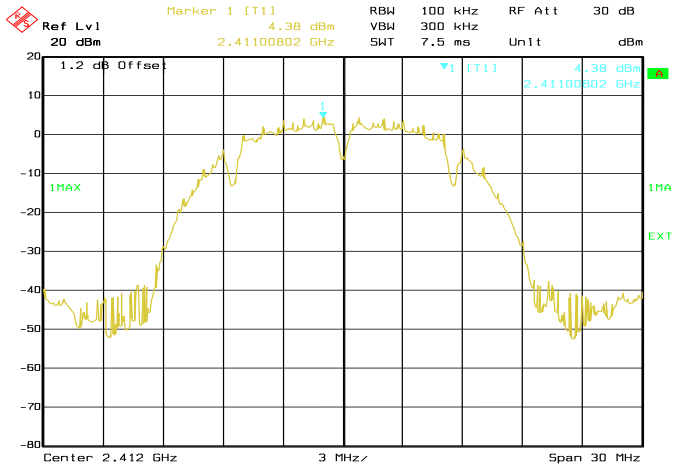


Conducted Emissions. 802.11b, Frequency 2412 MHz Reference Level

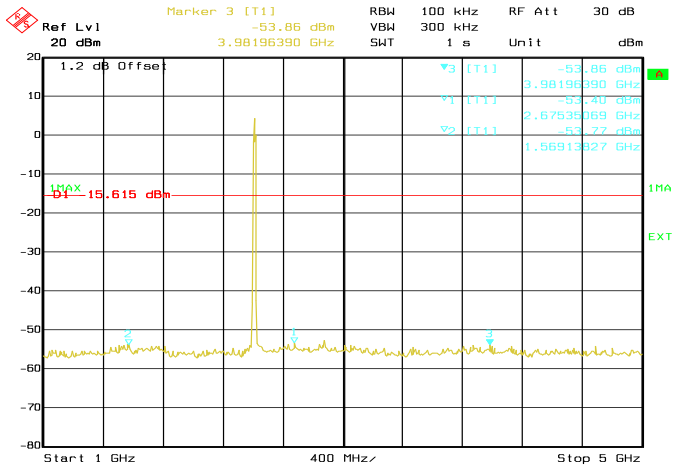


Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

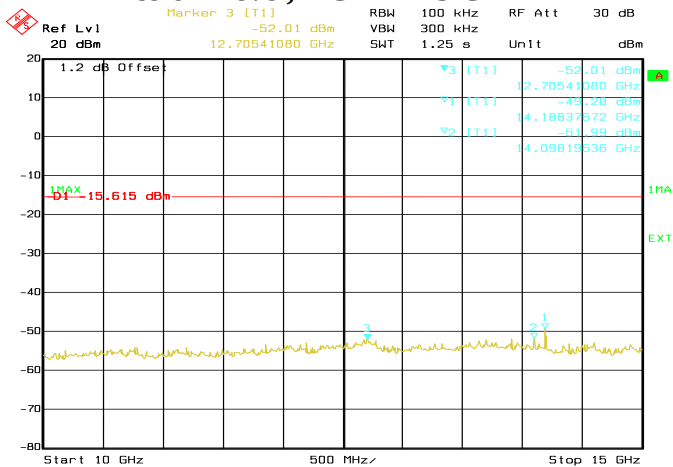


Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

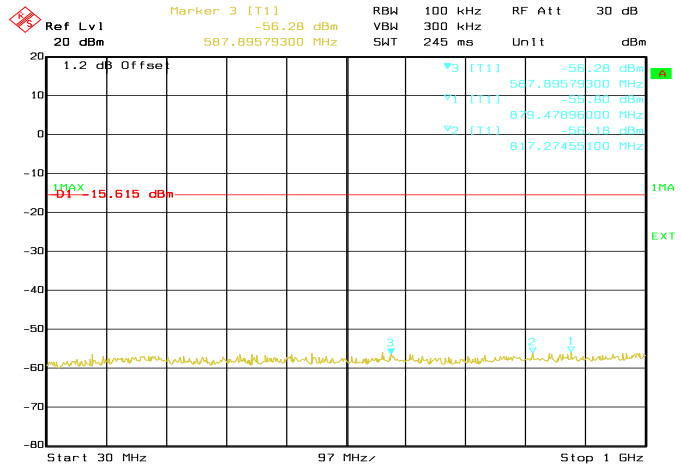

Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

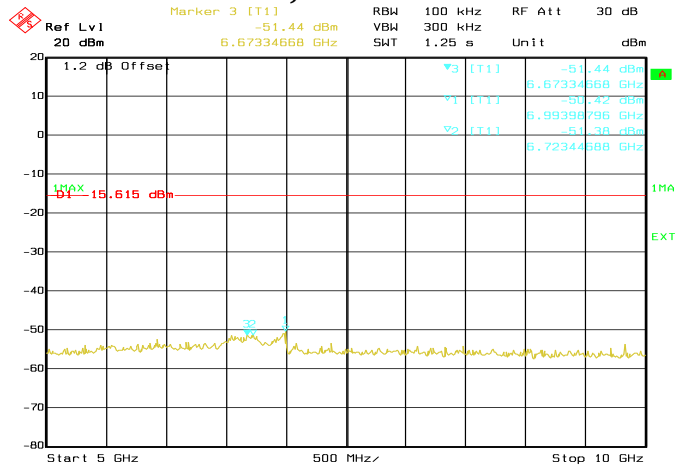

Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

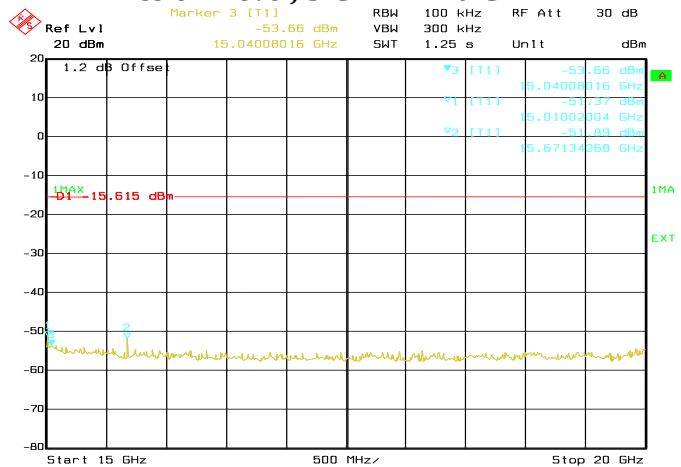

Conducted Emissions. 802.11b, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz



Ref Lvl 20 dBm Marker 1 [T1] 3.65 dBm RBW 100 kHz RF Att 30 dB
 2.43805210 GHz VBW 300 kHz SWT 7.5 ms Unit dBm

1.1 dB Offset

1MAX

3.65 dBm
 2.43805210 GHz

Center 2.437 GHz 3 MHz/ Span 30 MHz

Date: 04.JAN.2017 12:48:48

Ref Lvl 20 dBm Marker 3 [T1] RBW 100 kHz RF Att 30 dB

3.08416832 GHz VBW 300 kHz 1 s Unit dBm

1.1 dB Offset

1MAX
D1 -16.353 dBm

3.08416832 GHz -54.20 dBm
3.03607213 GHz -52.90 dBm
3.03607213 GHz -53.52 dBm
2.63527053 GHz

Start 1.6Hz 400 MHz Stop 5.6Hz

Date: 04.JAN.2017 12:49:54

Marker 3 [T1]
-56.07 dBm
996.11222700 MHz

RBW 100 kHz
VBW 300 kHz
SMT 245 ms

RF Att 30 dB
Unit dBm

Ref Lvl 20 dBm

1.1 dB Offset

▼3 [T1] -56.07 dBm
996.11222700 MHz
▼1 [T1] -55.10 dBm
173.84765600 MHz
▼2 [T1] -55.55 dBm
753.94785600 MHz

1MAX
-01 -16.353 dBm

1.1 dB

Start 30 MHz 97 MHz/ Stop 1 GHz

Date: 04.JAN.2017 12:49:21

Ref Lvl 20 dBm Marker 3 [T1] -51.89 dBm RBW 100 kHz VBW 300 kHz SMT 1.25 s RF Att 30 dB Unit dBm

1.1 dB Offset

▼3 [T1] -51.89 dBm 6.96392784 GHz

▼1 [T1] -51.23 dBm 5.98396792 GHz

▼2 [T1] -51.89 dBm 5.68336672 GHz


1MAX
-D1 -16.353 dBm

2 3

Start 5 GHz 500 MHz Stop 10 GHz


Date: 04.JAN.2017 12:50:26

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

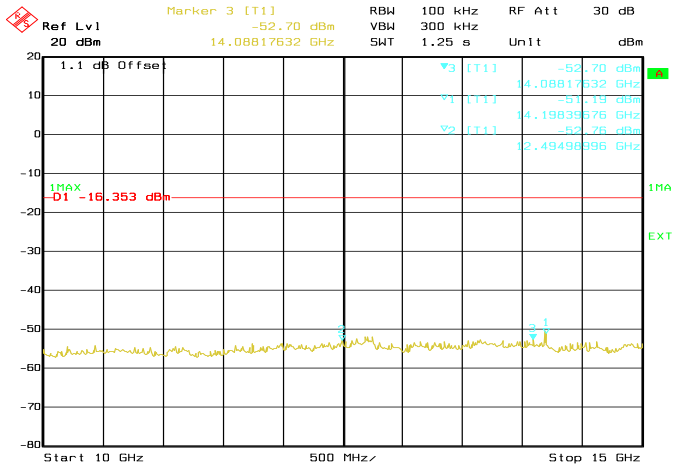


Date: 04.JAN.2017 12:50:59

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

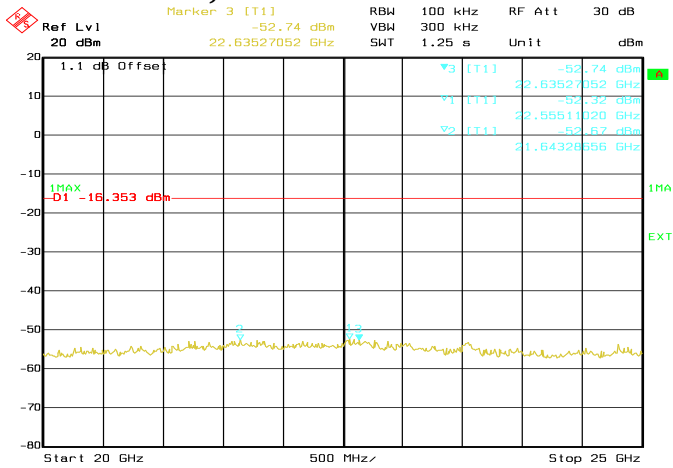


Date: 04.JAN.2017 12:52:06

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

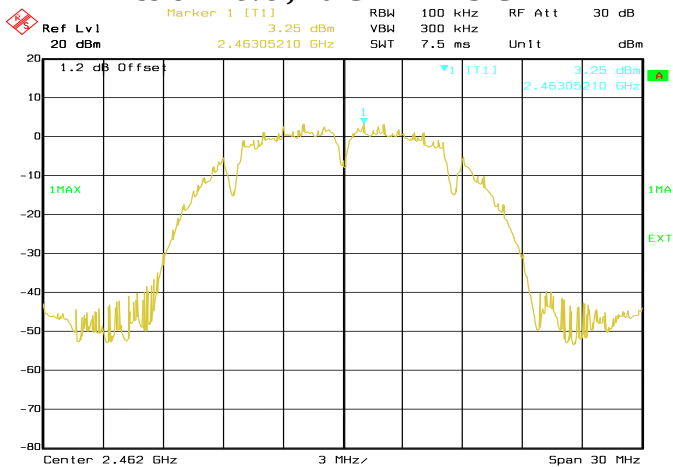


Date: 04.JAN.2017 12:53:12

Conducted Emissions. 802.11b, Frequency 2462 MHz Reference Level

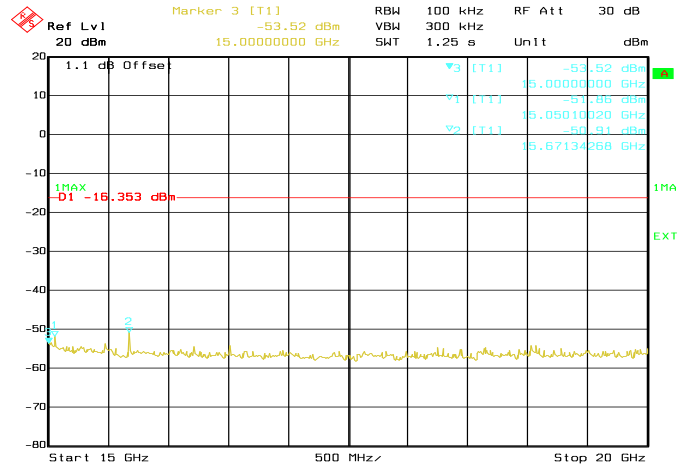


Date: 04.JAN.2017 12:51:32

Conducted Emissions. 802.11b, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz




Date: 04.JAN.2017 12:53:46

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

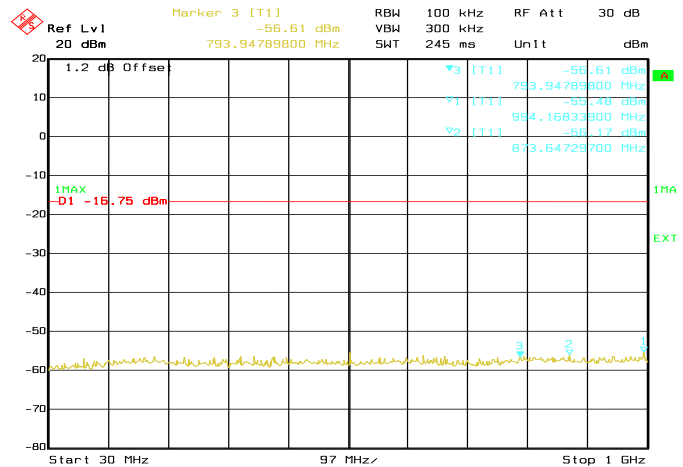


Date: 04.JAN.2017 12:53:46

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

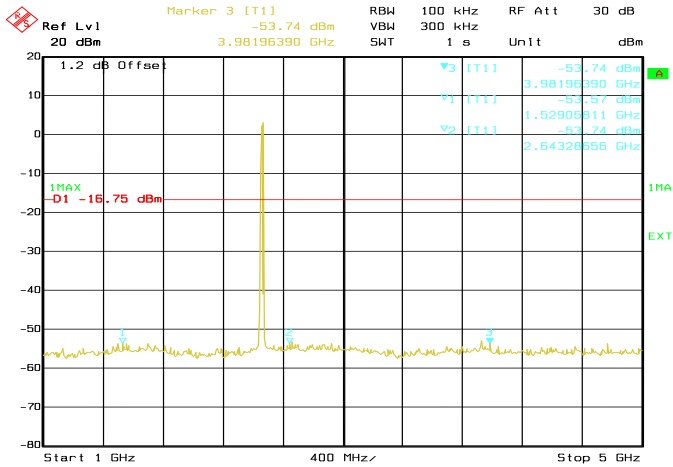


Date: 04.JAN.2017 12:54:19

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

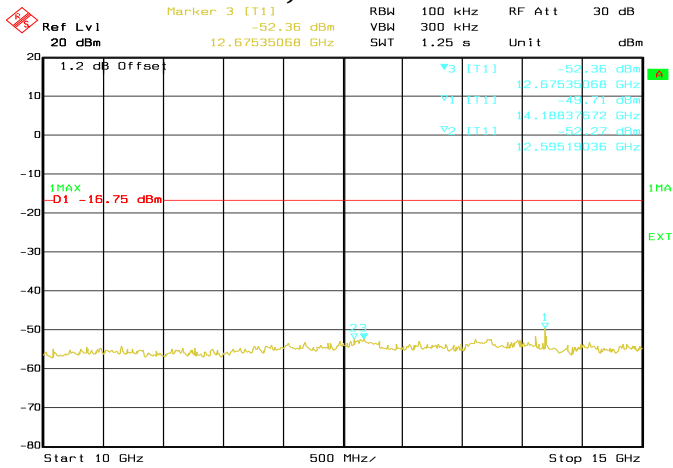


Date: 04.JAN.2017 12:55:24

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

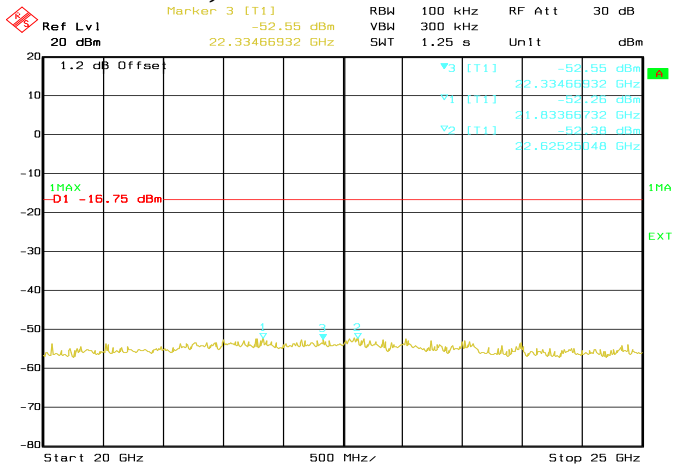


Date: 04.JAN.2017 12:56:30

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz

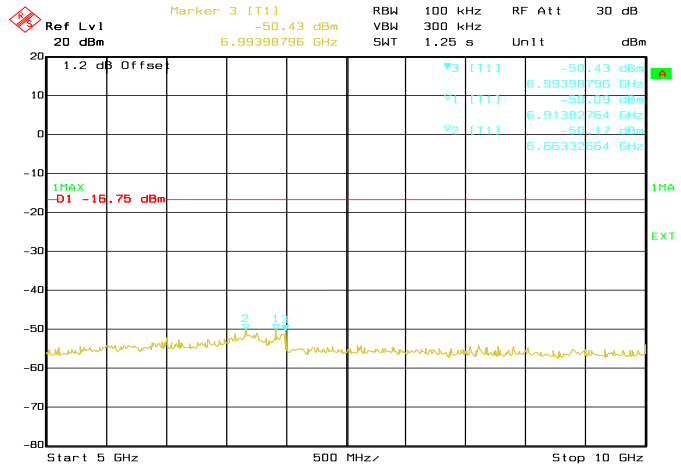

Date: 04.JAN.2017 12:54:51

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

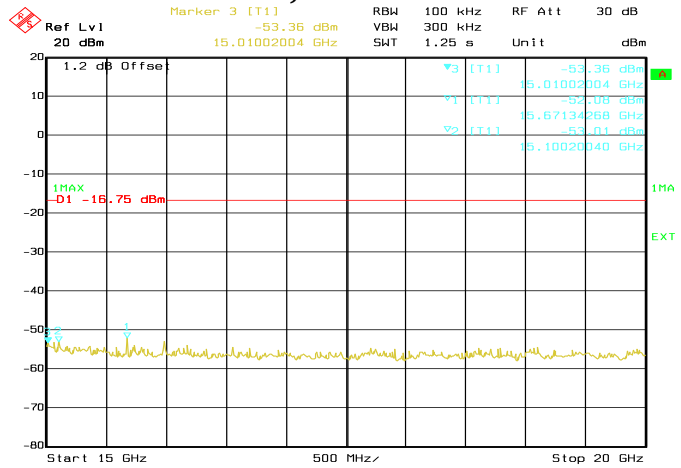


Date: 04.JAN.2017 12:55:57

Conducted Emissions. 802.11b, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz


802.11g

Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11g	OFDM	DBPSK	6	2412	6703.41	-49.40	Pass
					14188.38	-50.30	Pass
					6653.31	-50.92	Pass
802.11g	OFDM	DBPSK	6	2437	14188.38	-49.83	Pass
					6973.95	-50.79	Pass
					6693.39	-50.87	Pass
802.11g	OFDM	DBPSK	6	2462	14188.38	-49.87	Pass
					6993.99	-50.23	Pass
					6683.37	-51.01	Pass

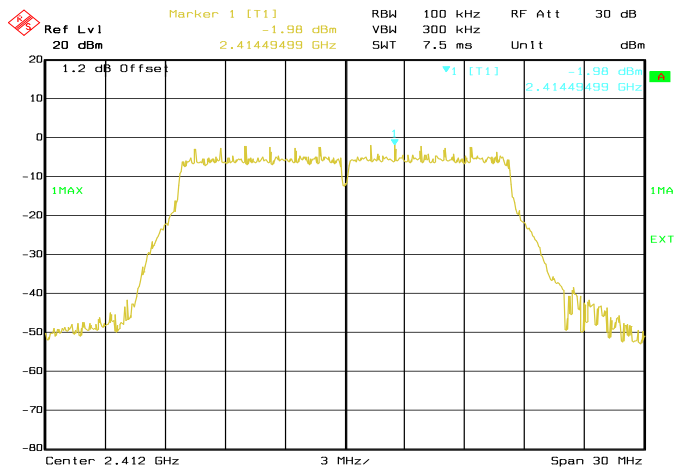


Date: 04.JAN.2017 12:57:51

Conducted Emissions. 802.11g, Frequency 2412 MHz Reference Level

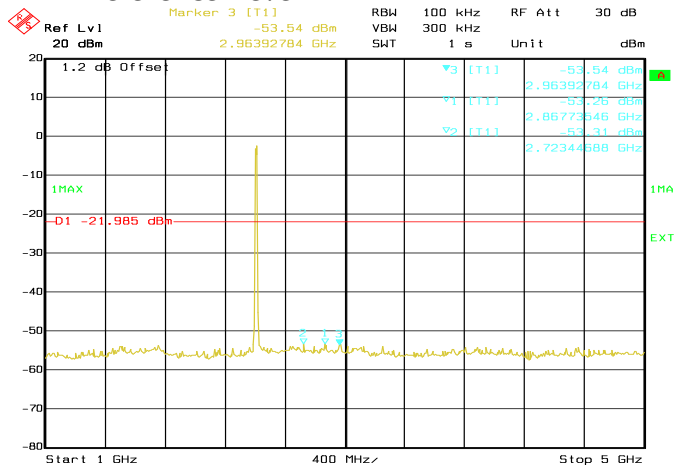


Date: 04.JAN.2017 12:58:57

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

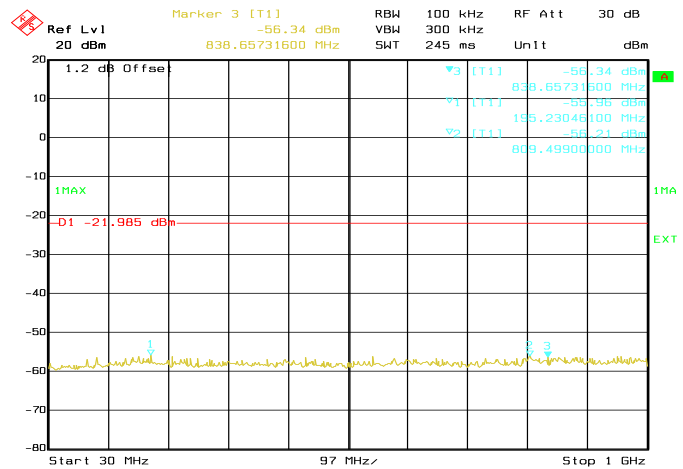


Date: 04.JAN.2017 12:58:24

Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

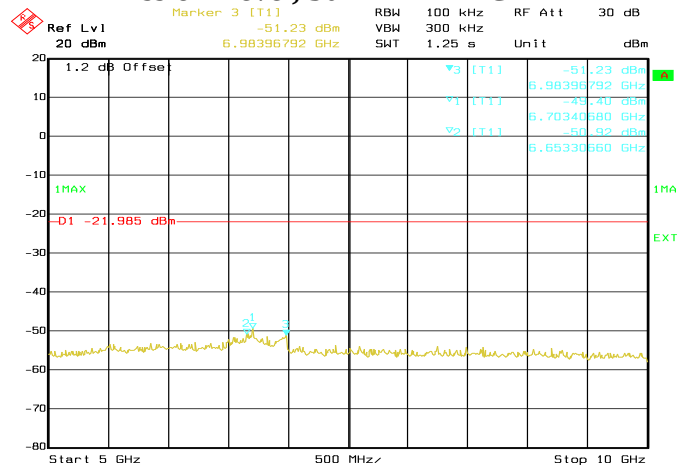


Date: 04.JAN.2017 12:59:30


Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

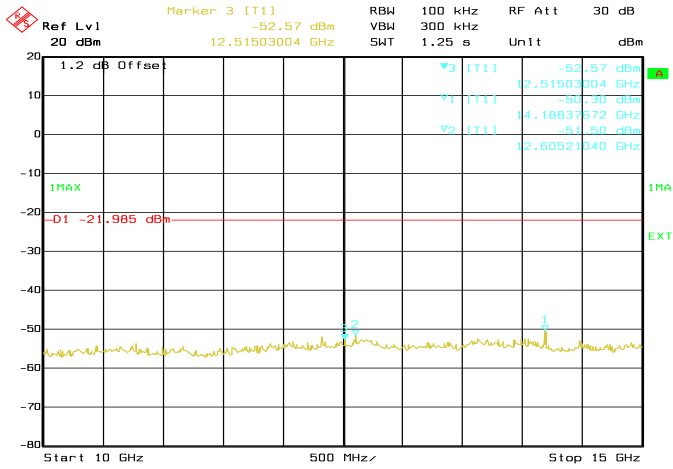


Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

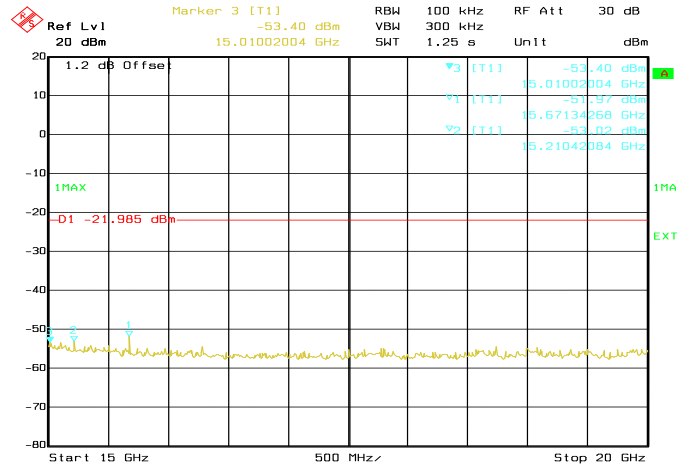


Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz

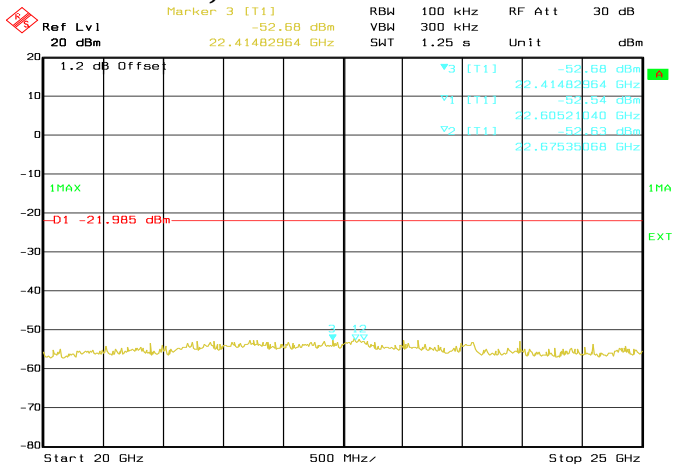


Conducted Emissions. 802.11g, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz

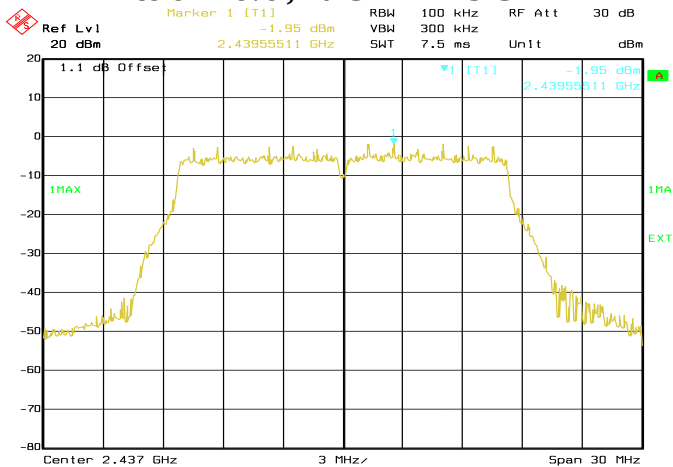


Conducted Emissions. 802.11g, Frequency 2437 MHz Reference Level

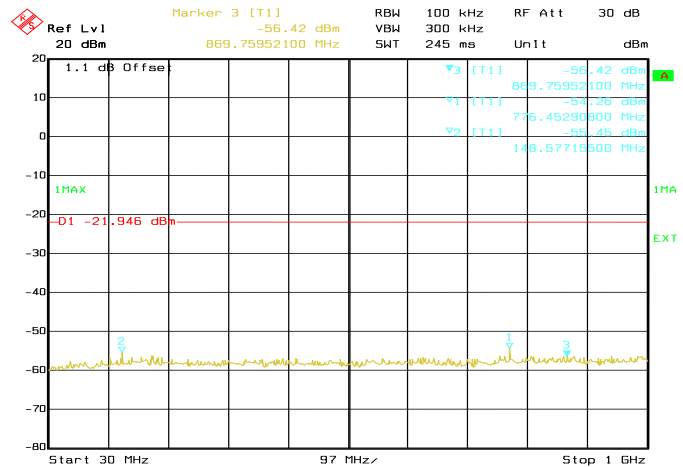


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

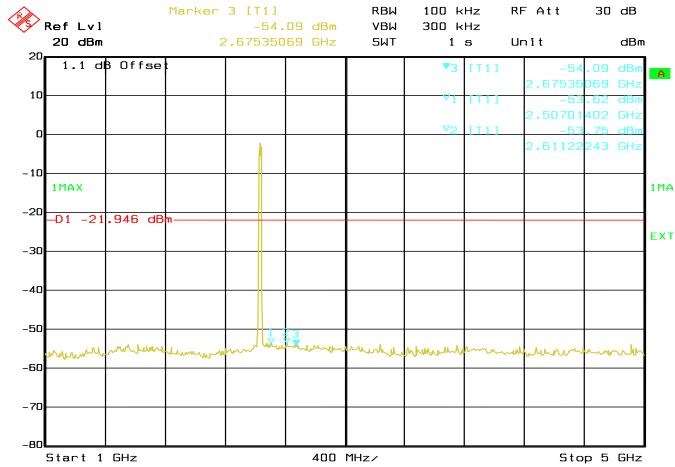


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

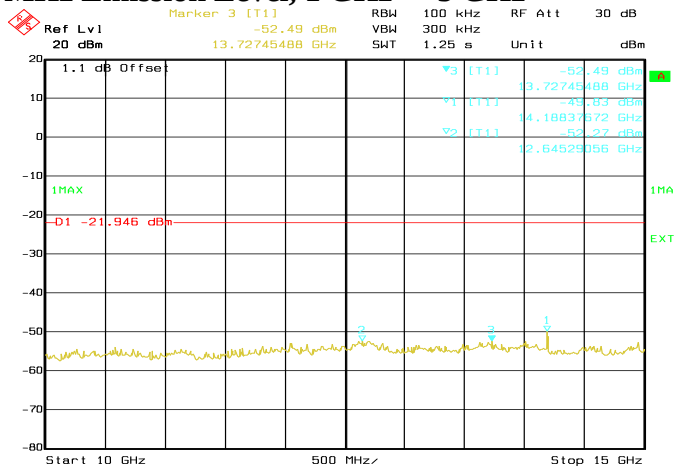


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

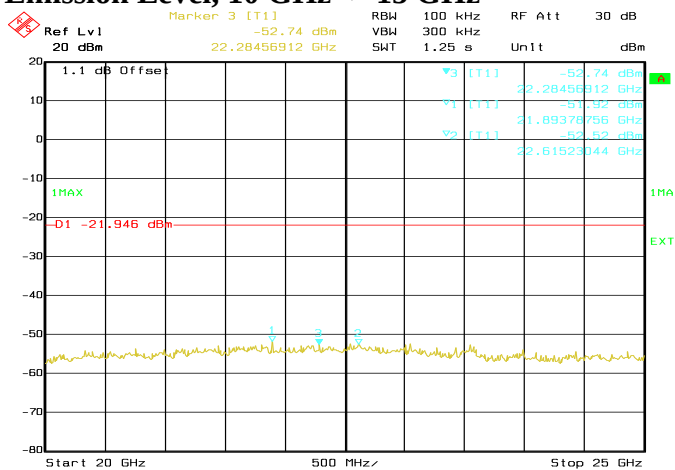


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

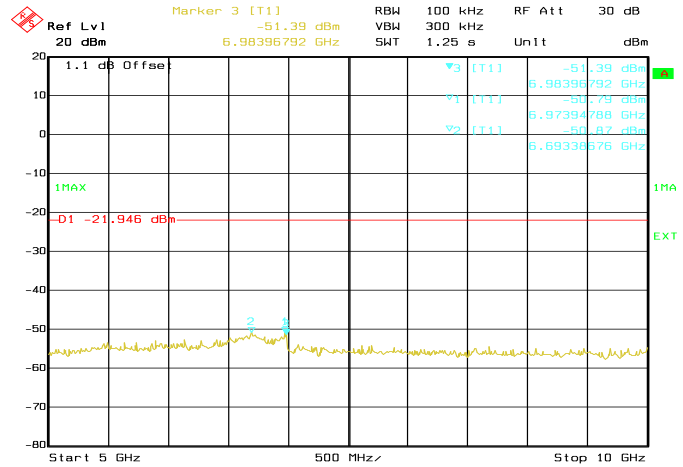


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

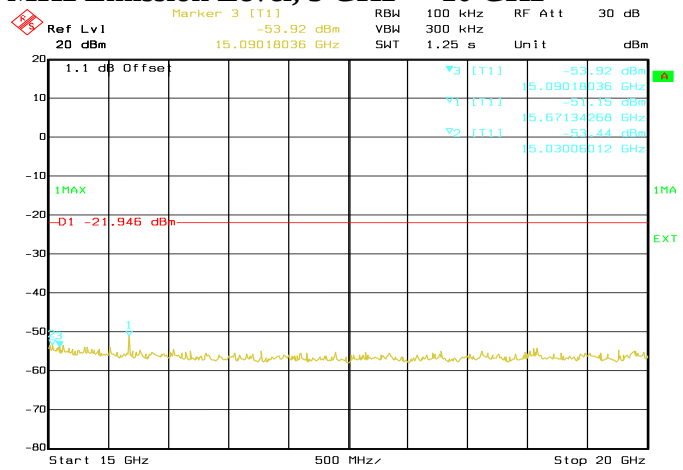


Conducted Emissions. 802.11g, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz

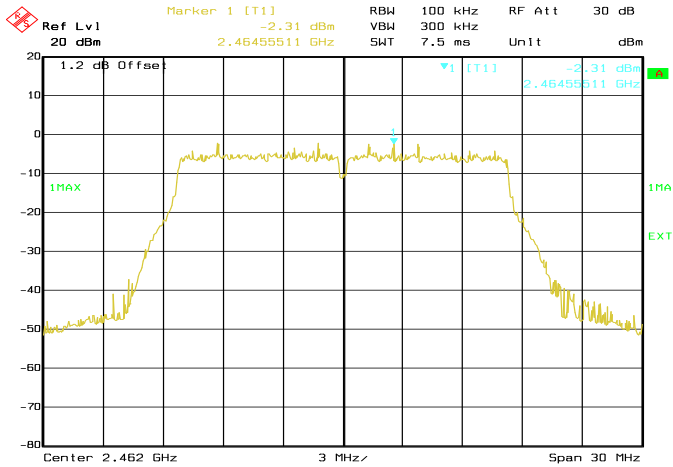


Conducted Emissions. 802.11g, Frequency 2462 MHz Reference Level

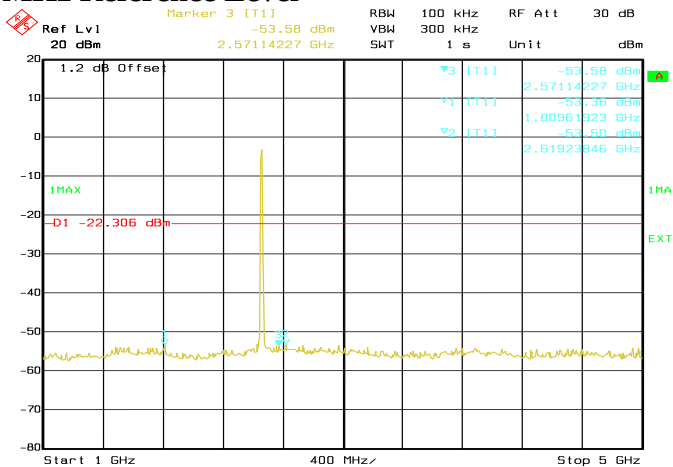


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

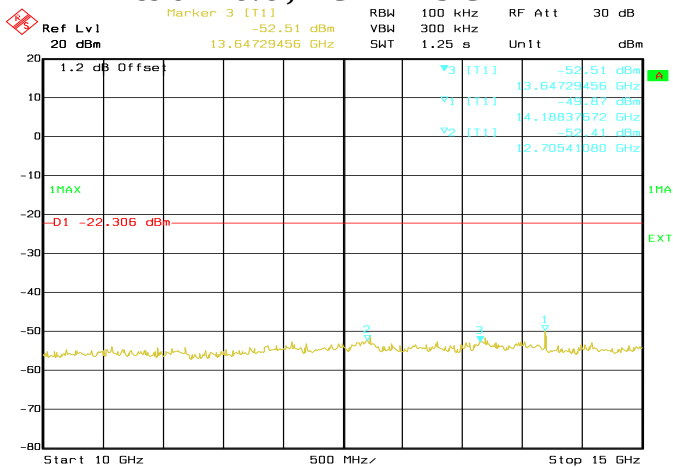


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

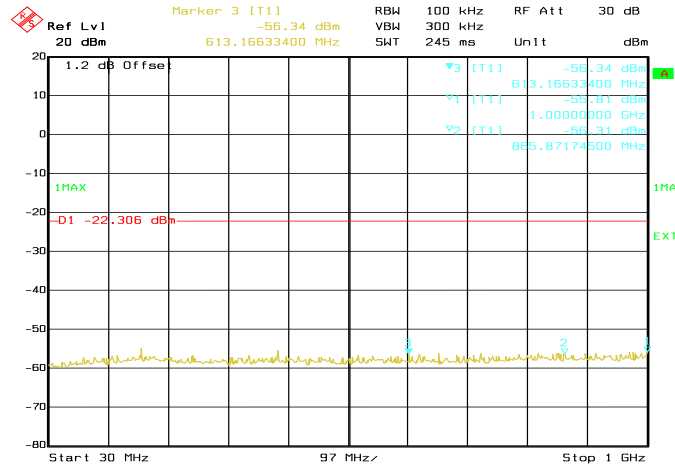


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

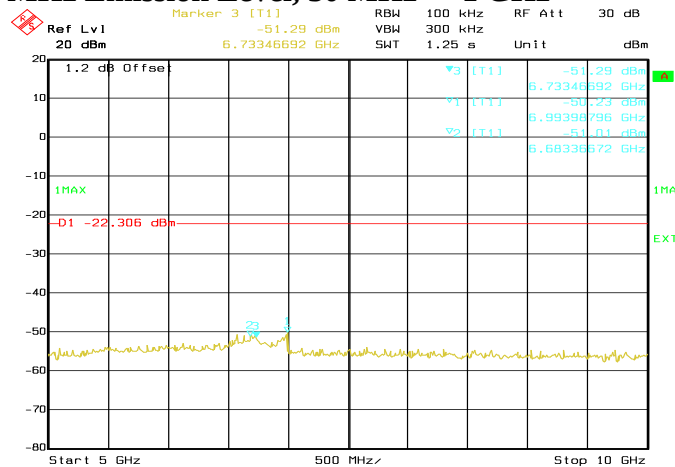

Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

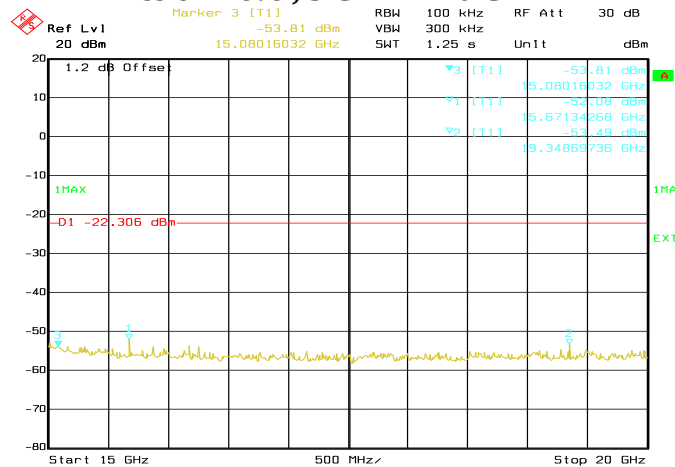


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

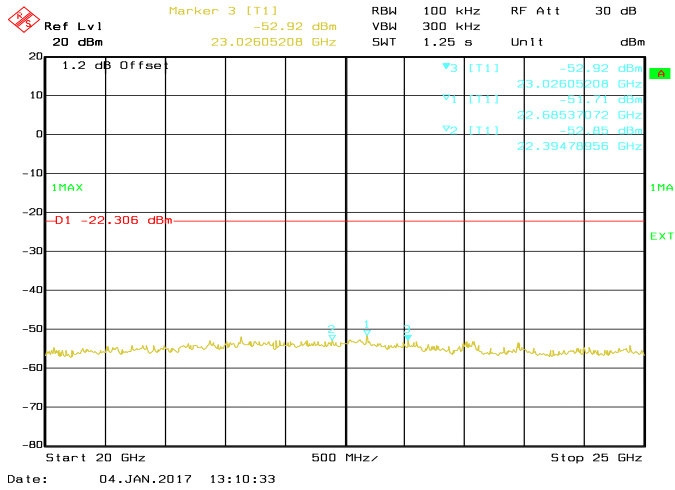


Conducted Emissions. 802.11g, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11n	OFDM	DBPSK	6.5	2412	14188.38	-50.38	Pass
					6963.93	-51.09	Pass
					6723.45	-51.54	Pass
802.11n	OFDM	DBPSK	6.5	2437	14188.38	-50.37	Pass
					6713.43	-50.92	Pass
					6993.99	-51.24	Pass
802.11n	OFDM	DBPSK	6.5	2462	6993.99	-49.76	Pass
					14188.38	-50.69	Pass
					6643.29	-51.15	Pass

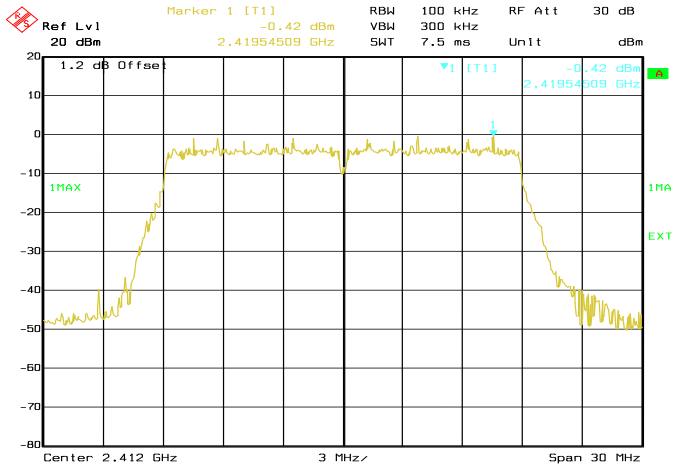


Conducted Emissions. 802.11n, Frequency 2412 MHz Reference Level

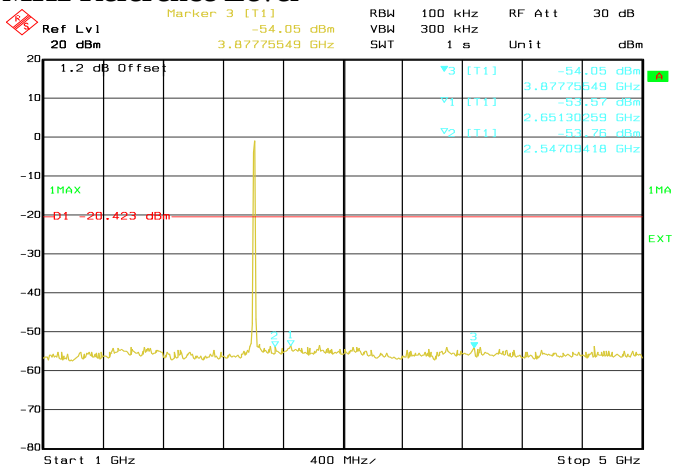


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

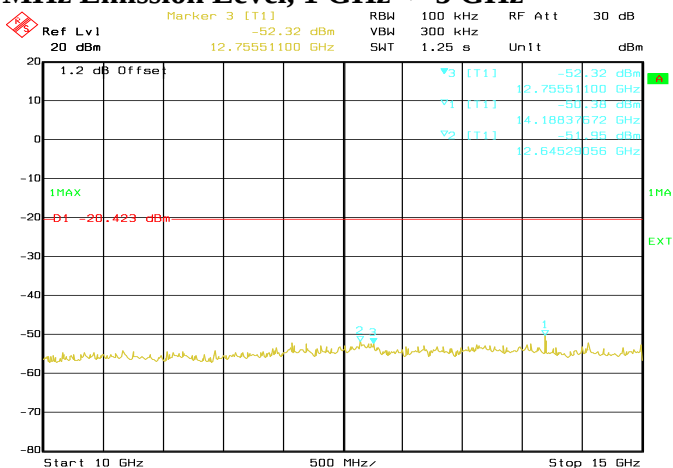


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

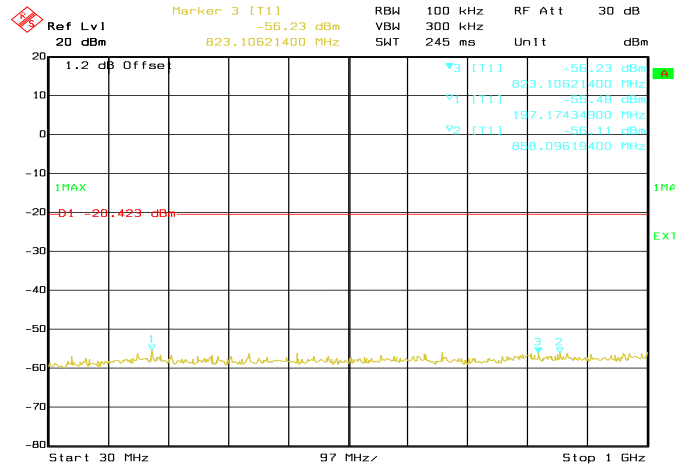


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

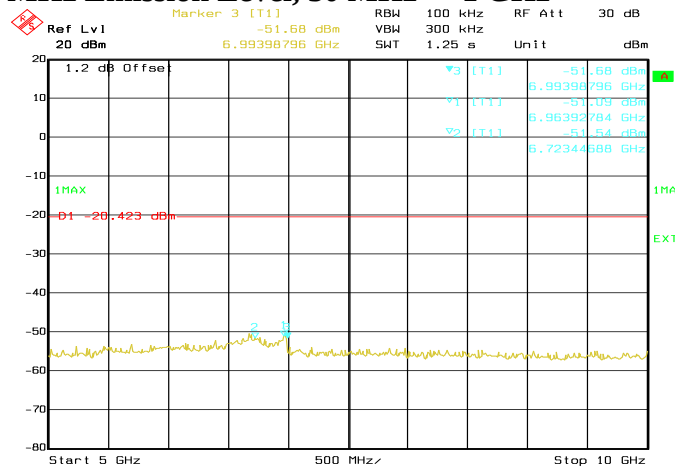


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

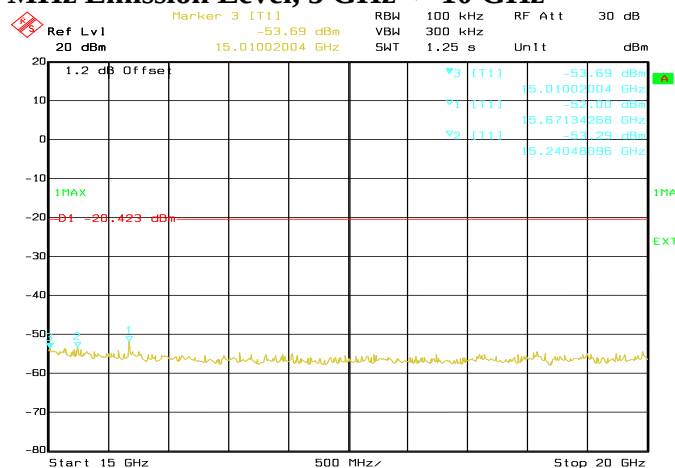


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz

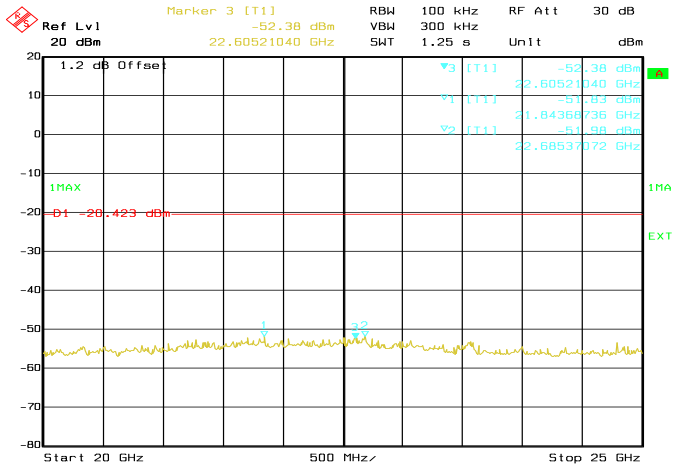


Conducted Emissions. 802.11n, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz

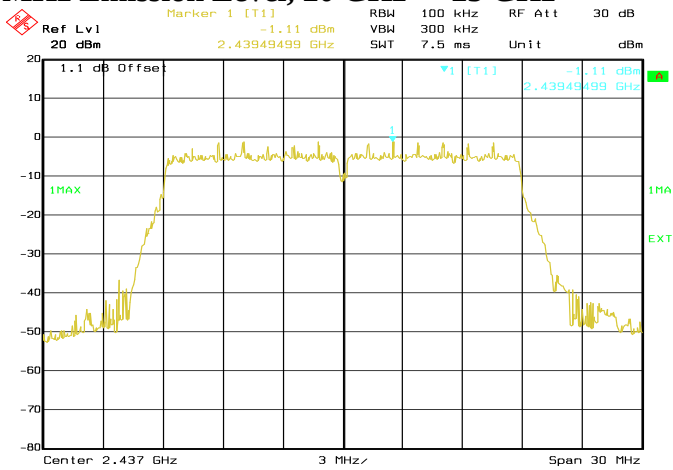


Conducted Emissions. 802.11n, Frequency 2437 MHz Reference Level

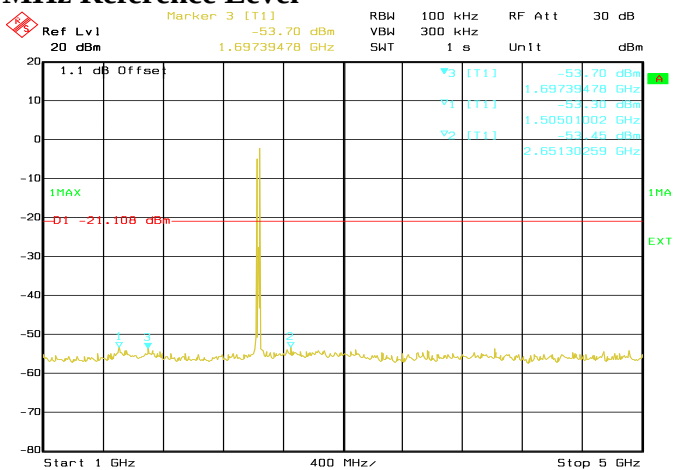


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

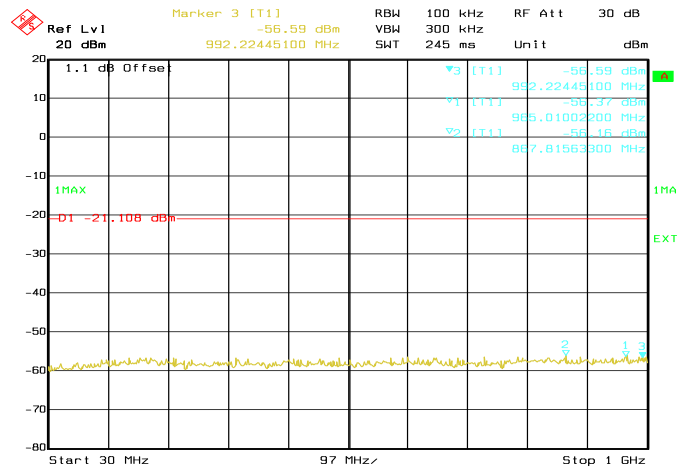


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

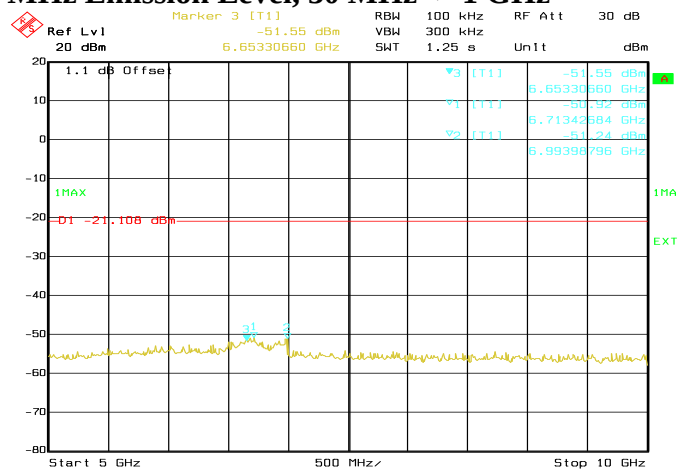


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

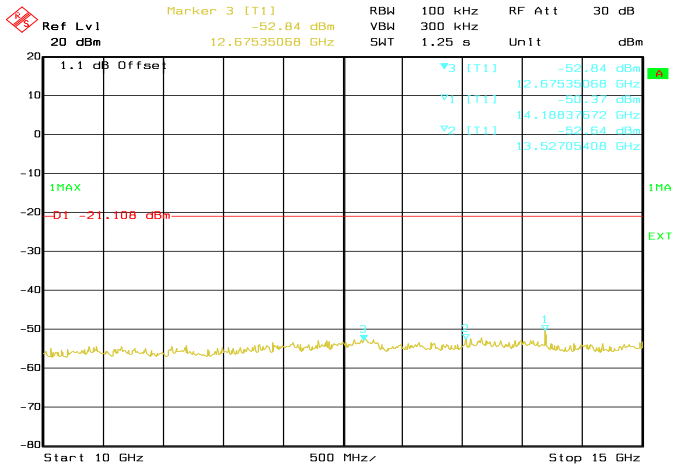


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

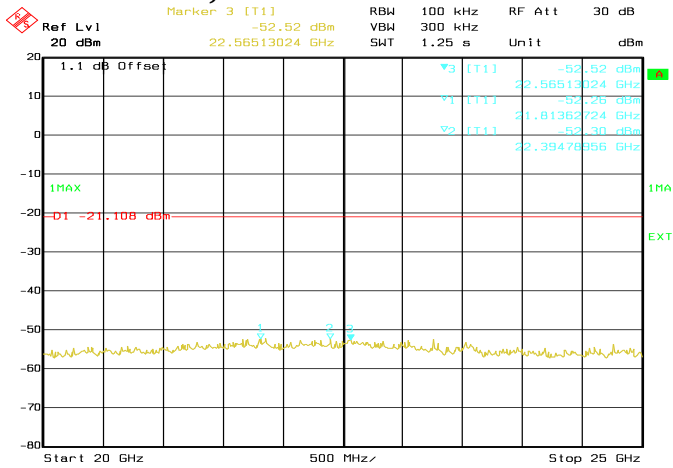


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

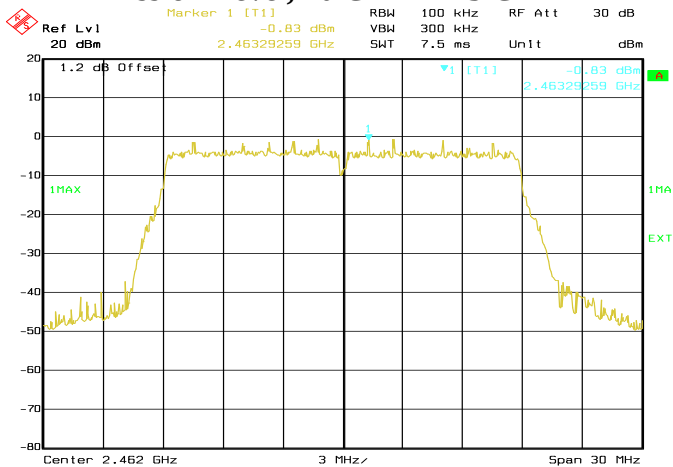


Conducted Emissions. 802.11n, Frequency 2462 MHz Reference Level

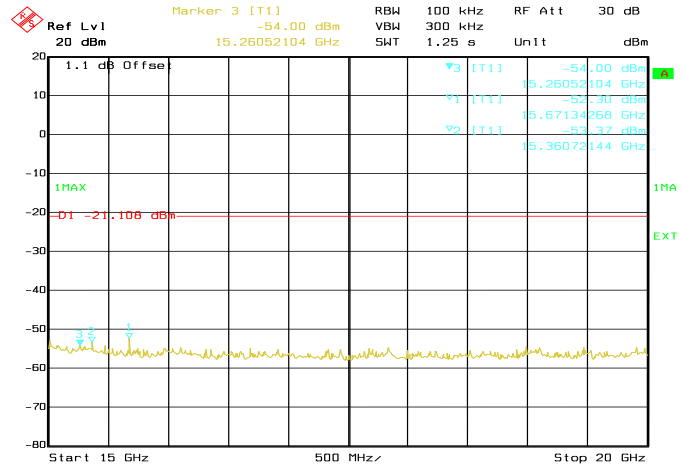


Conducted Emissions. 802.11n, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz




Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

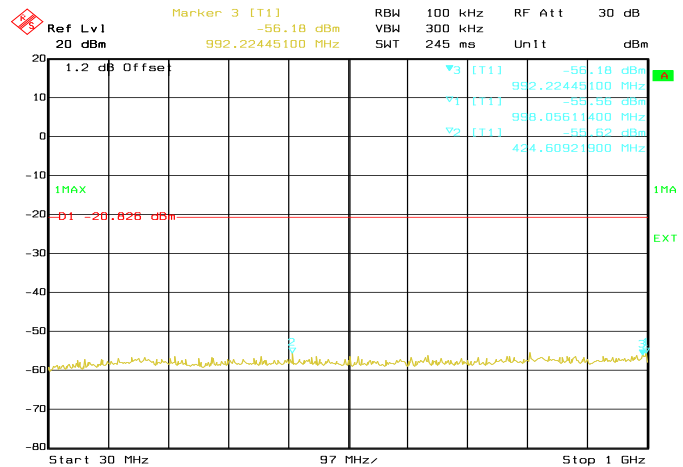


Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

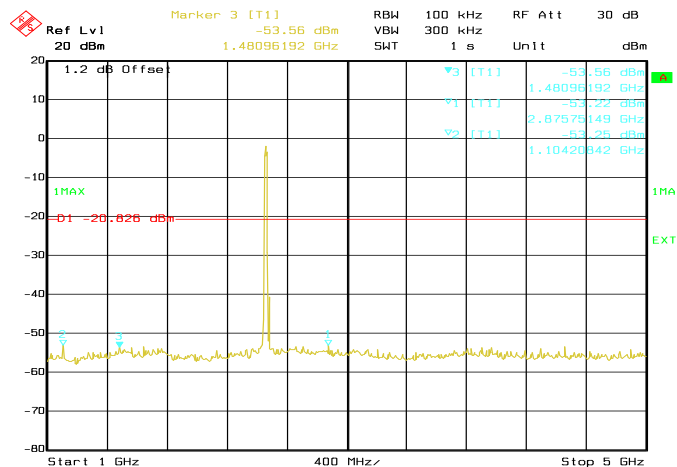


Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

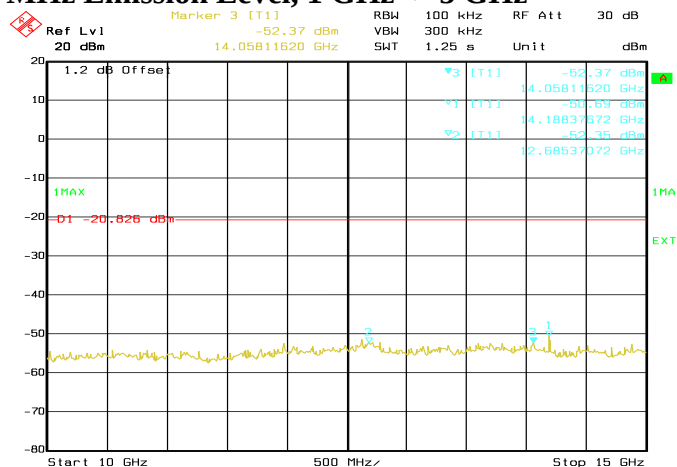


Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

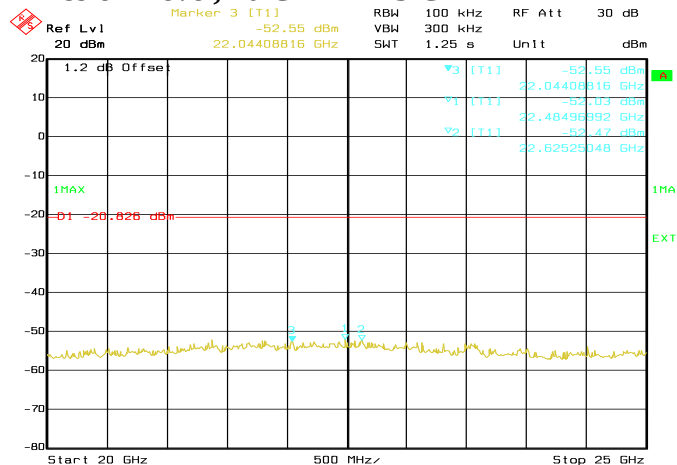

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz

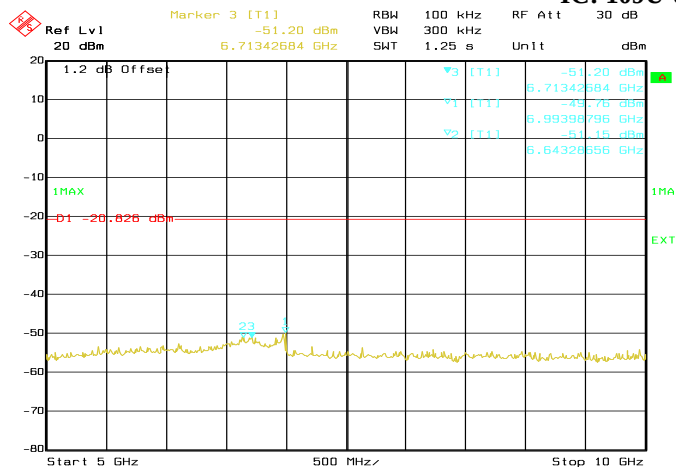


Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

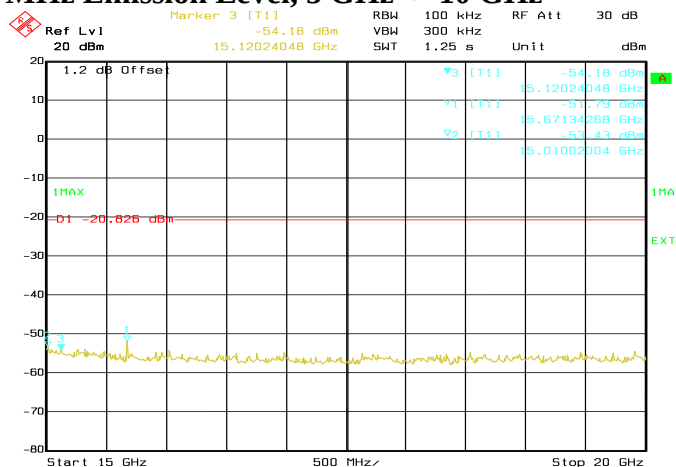

Conducted Emissions. 802.11n, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

6.6 Band edge Conducted Spurious Emission

6.6.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.


6.6.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.


6.6.3 Test Results:

802.11b


Test Conditions					Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Test Frequency (MHz)	Frequencies (MHz)	Level (dBm)	Status
802.11b	DSSS	QPSK	2	2412	2400.00	-46.47	Pass
802.11b	DSSS	QPSK	2	2462	2483.56	-57.30	Pass

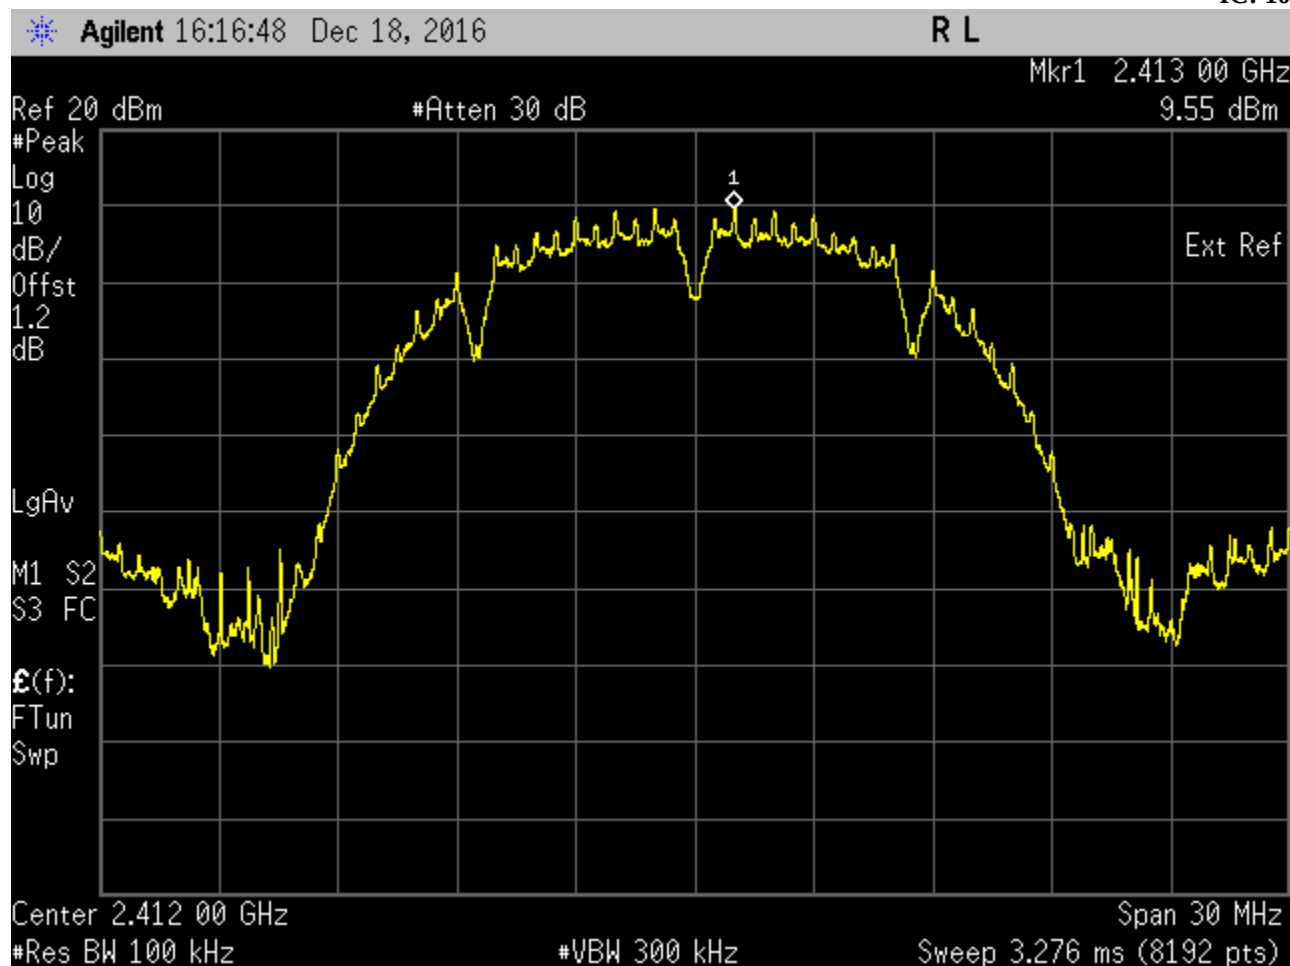


Band Edge. 802.11b Frequency 2412 MHz Reference Level

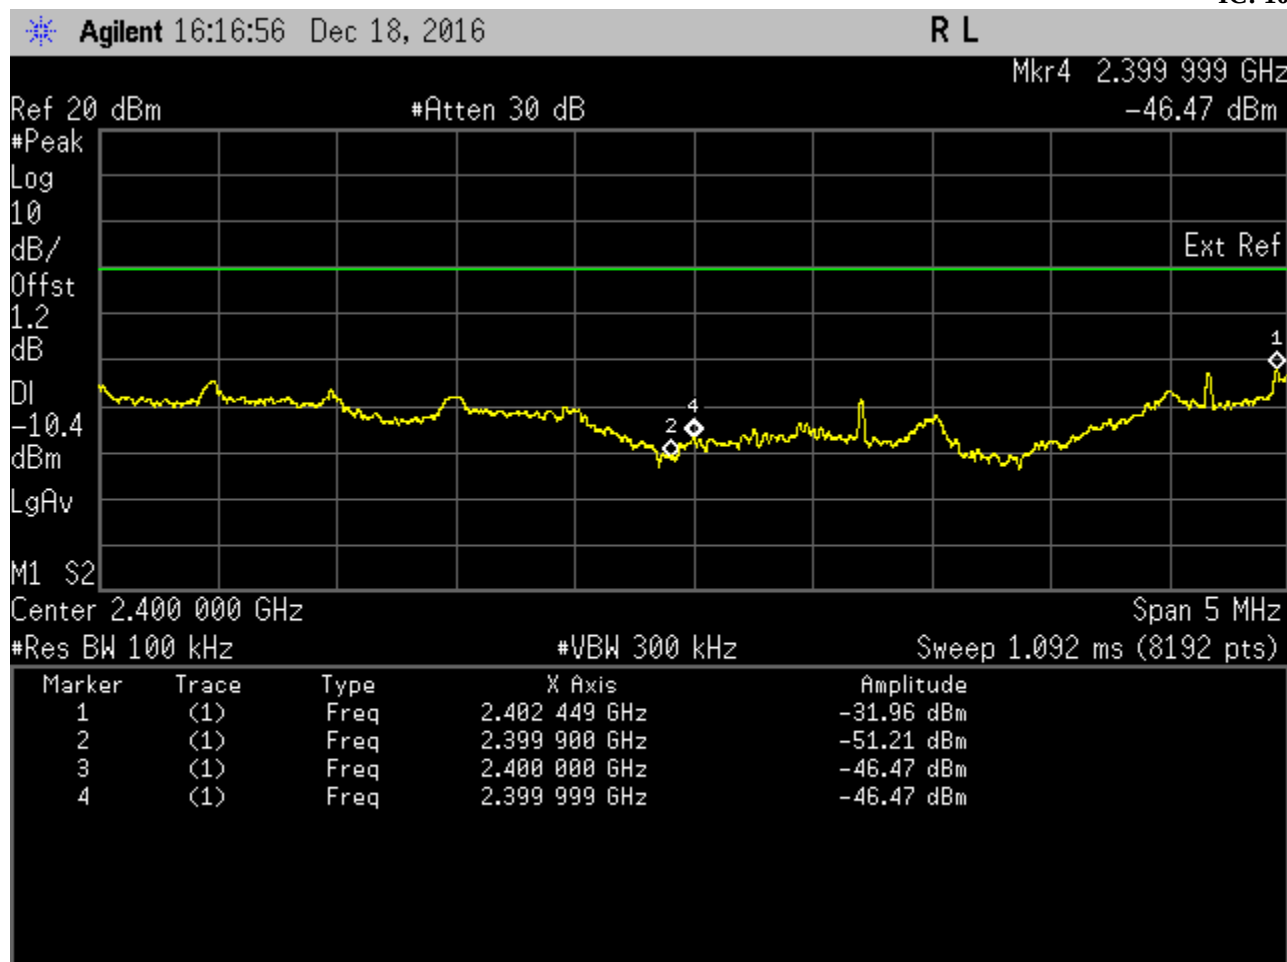

Band Edge. 802.11b Frequency 2412 MHz Band Edge

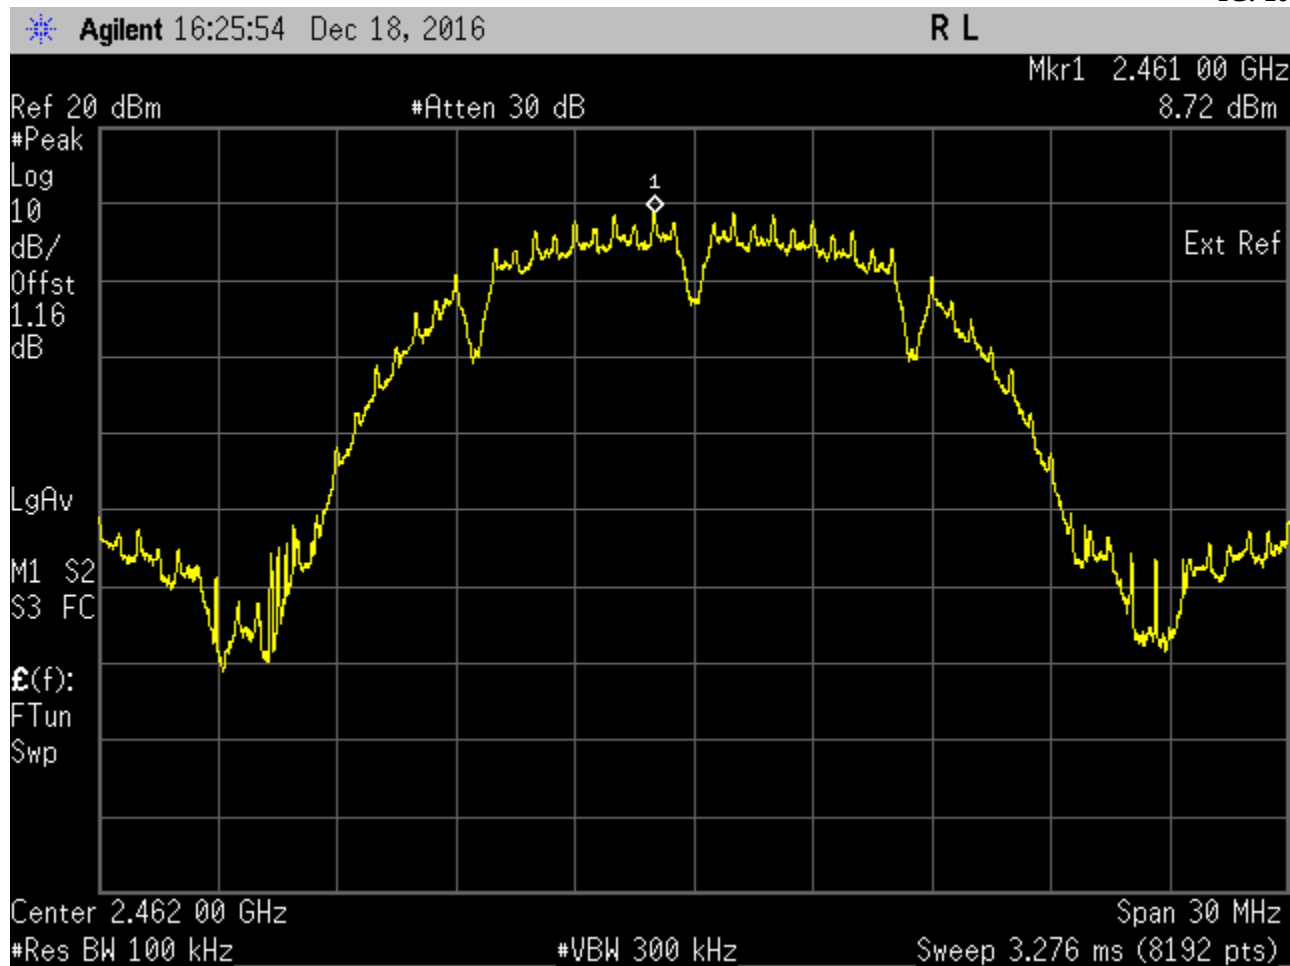


Band Edge. 802.11b Frequency 2462 MHz Reference Level

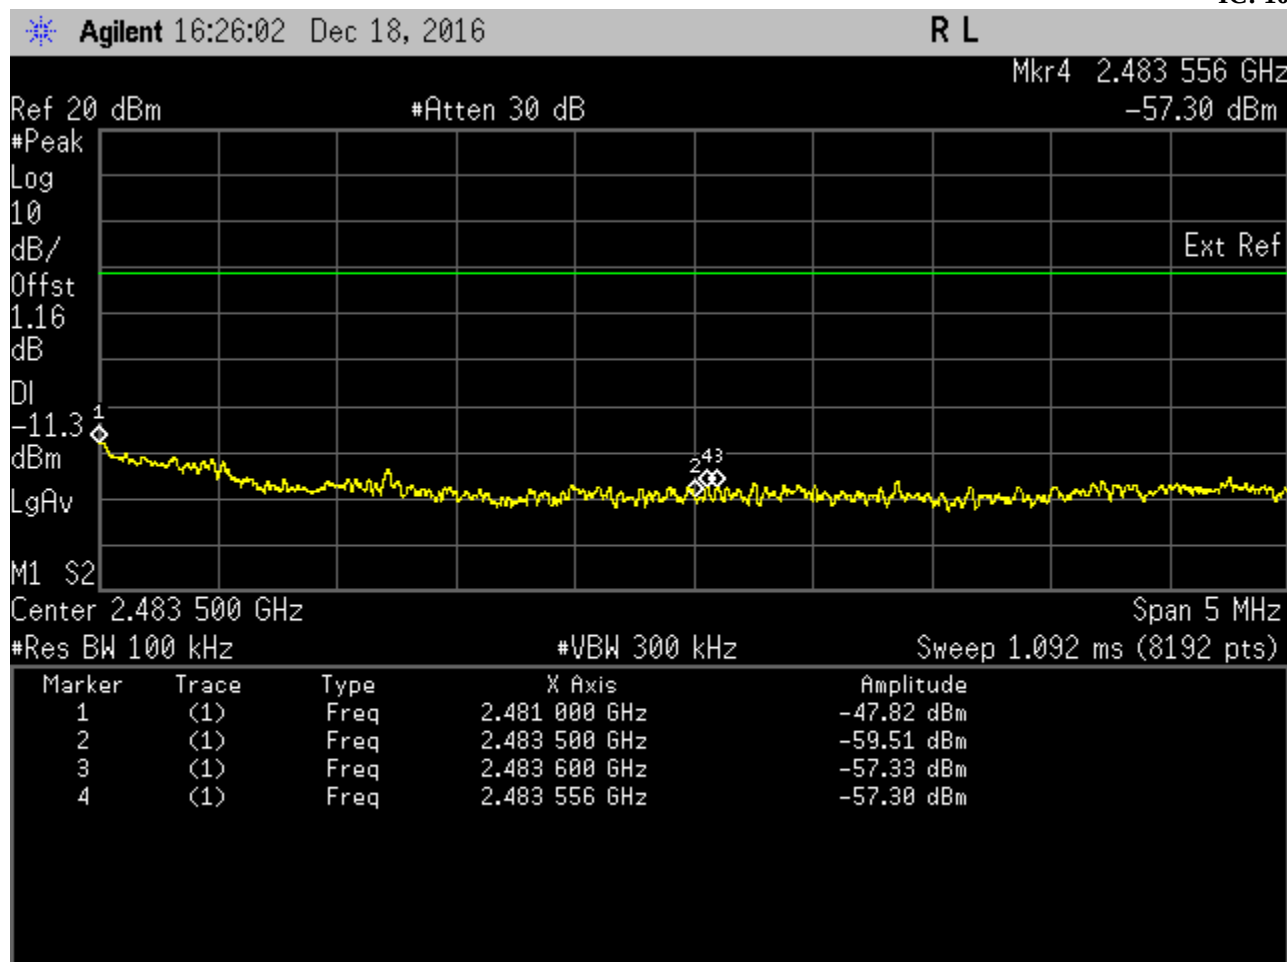


Band Edge. 802.11b Frequency 2462 MHz Band Edge

802.11g


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	2399.95	-50.77	Pass
802.11g	OFDM	BPSK	6	2462	2483.60	-59.99	Pass

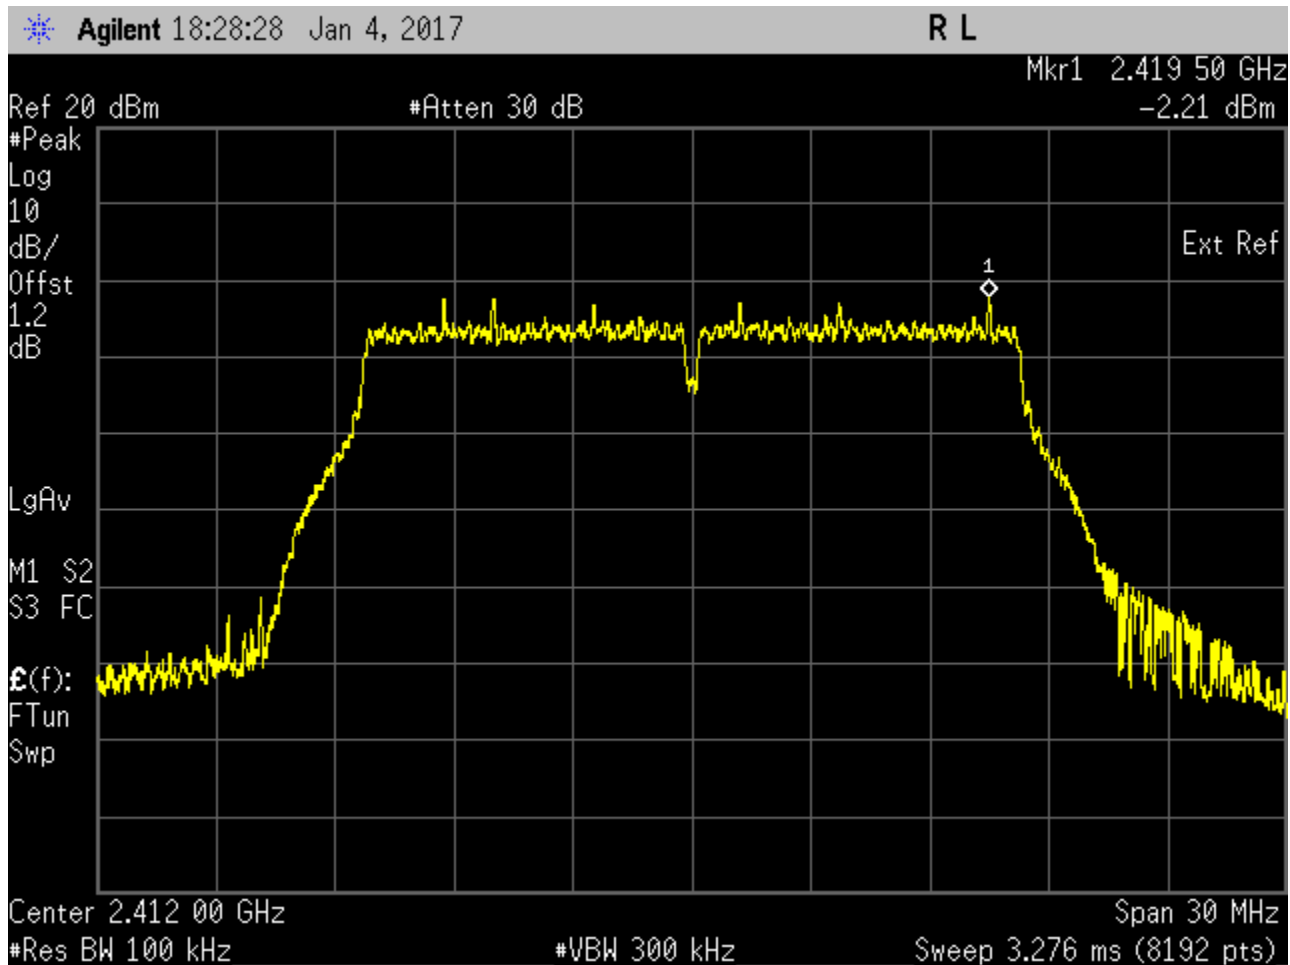


Band Edge. 802.11g Frequency 2412 MHz Reference Level

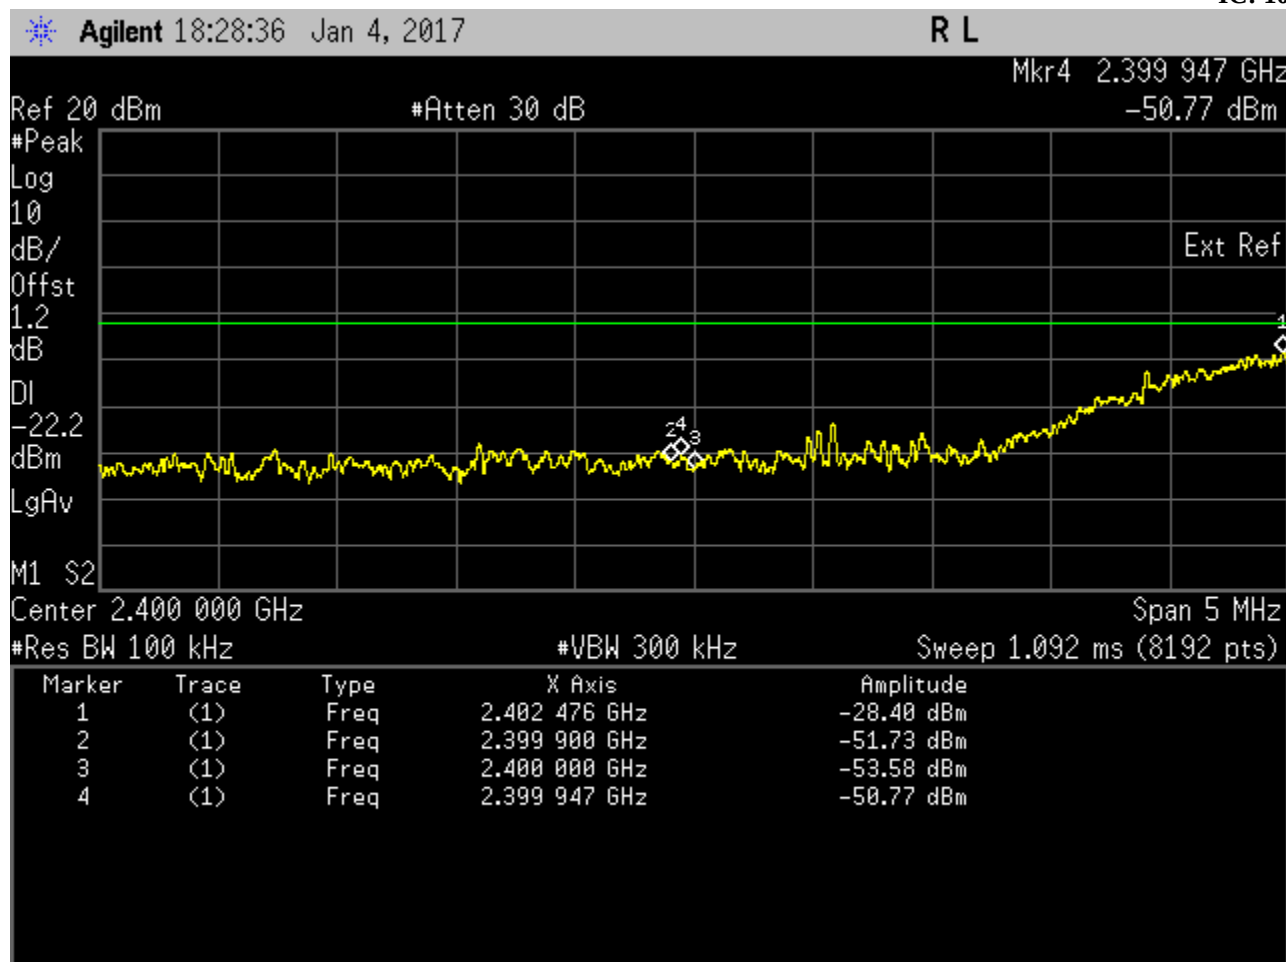

Band Edge. 802.11g Frequency 2412 MHz Band Edge

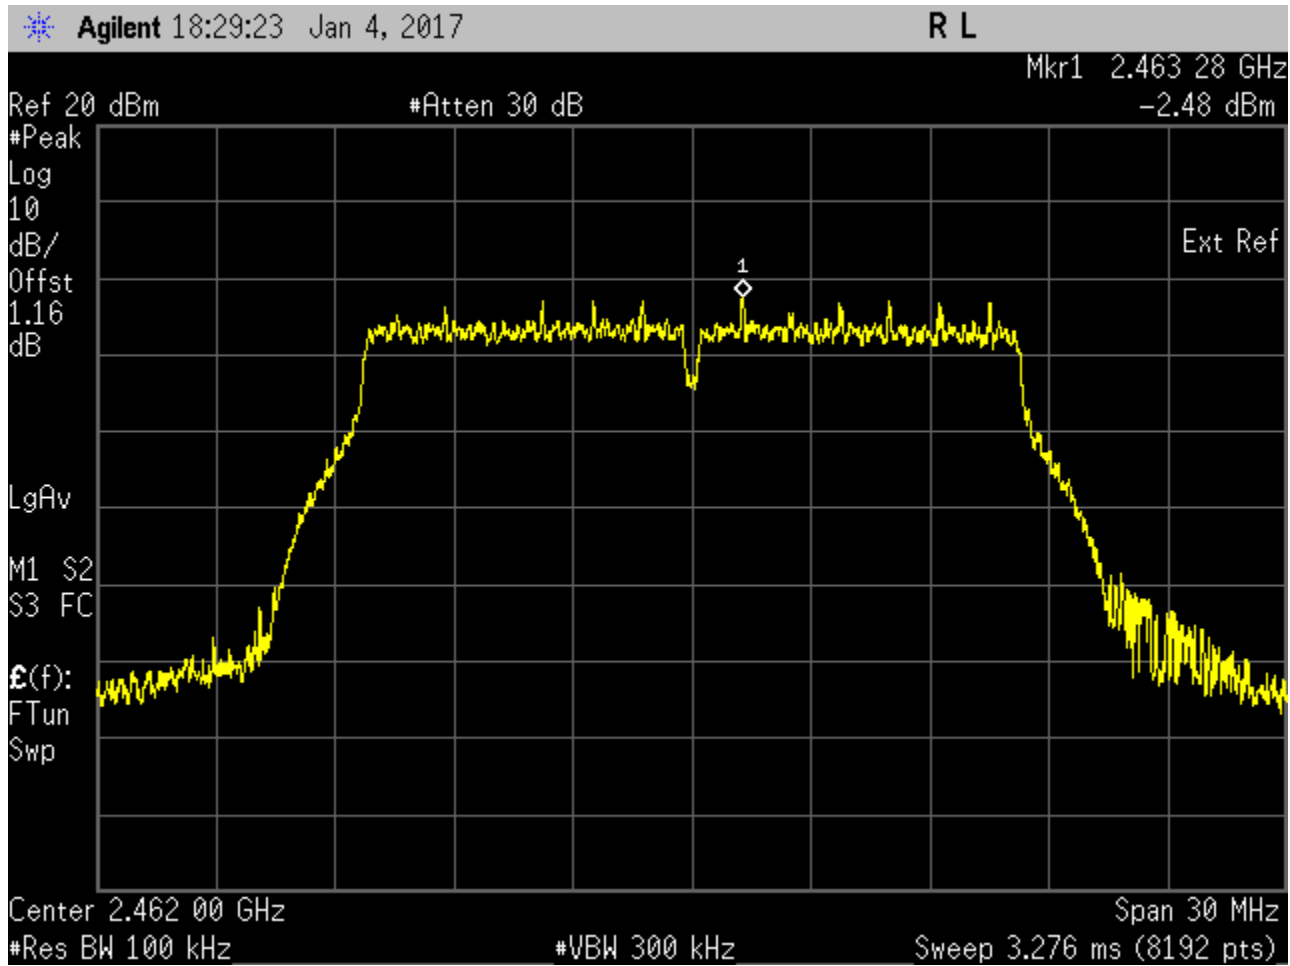


Band Edge. 802.11g Frequency 2462 MHz Reference Level

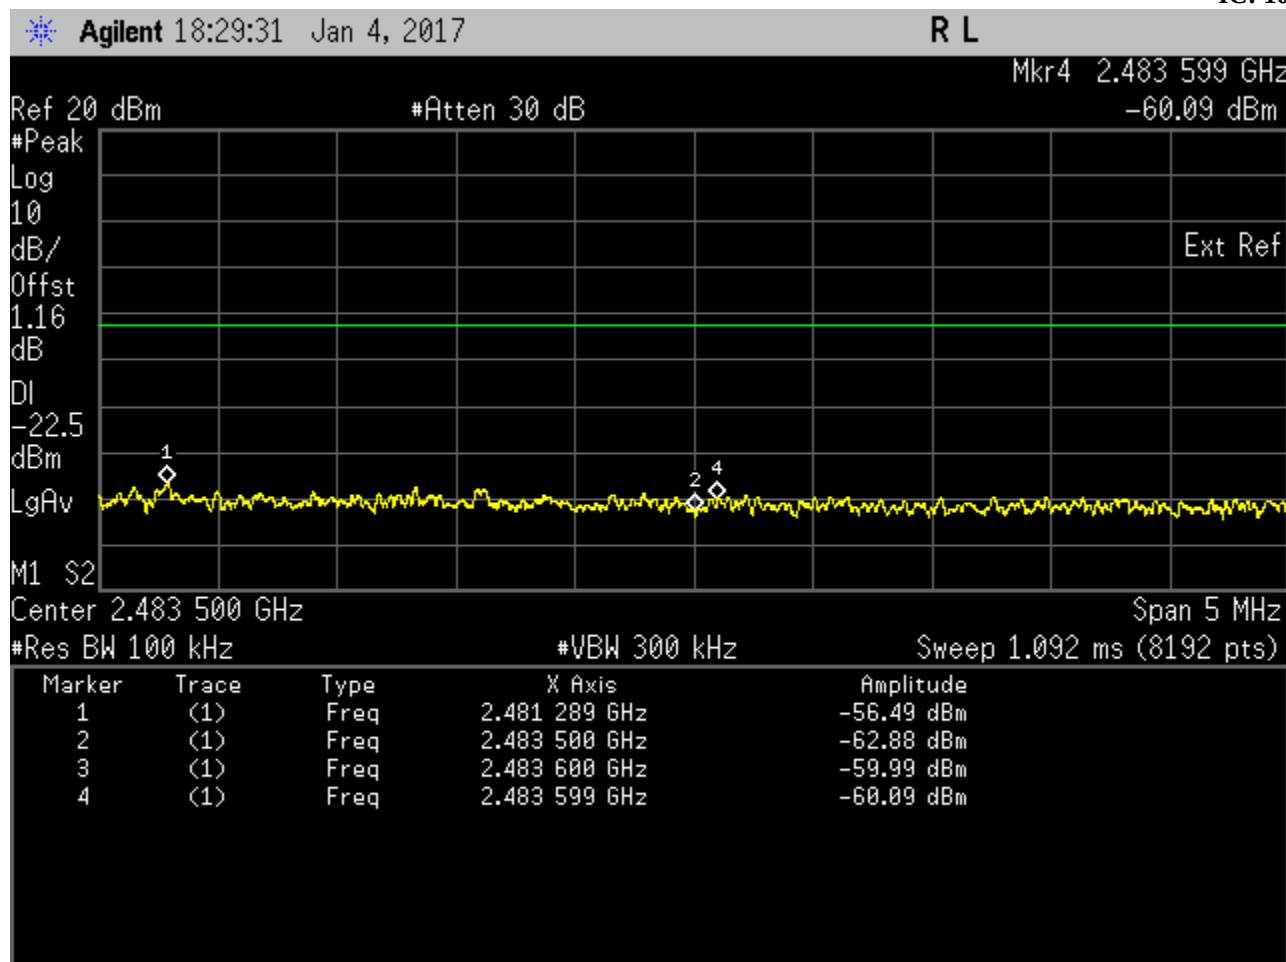


Band Edge. 802.11g Frequency 2462 MHz Band Edge

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	2399.98	-43.34	Pass
802.11n	OFDM	BPSK	6.5	2462	2483.52	-56.78	Pass

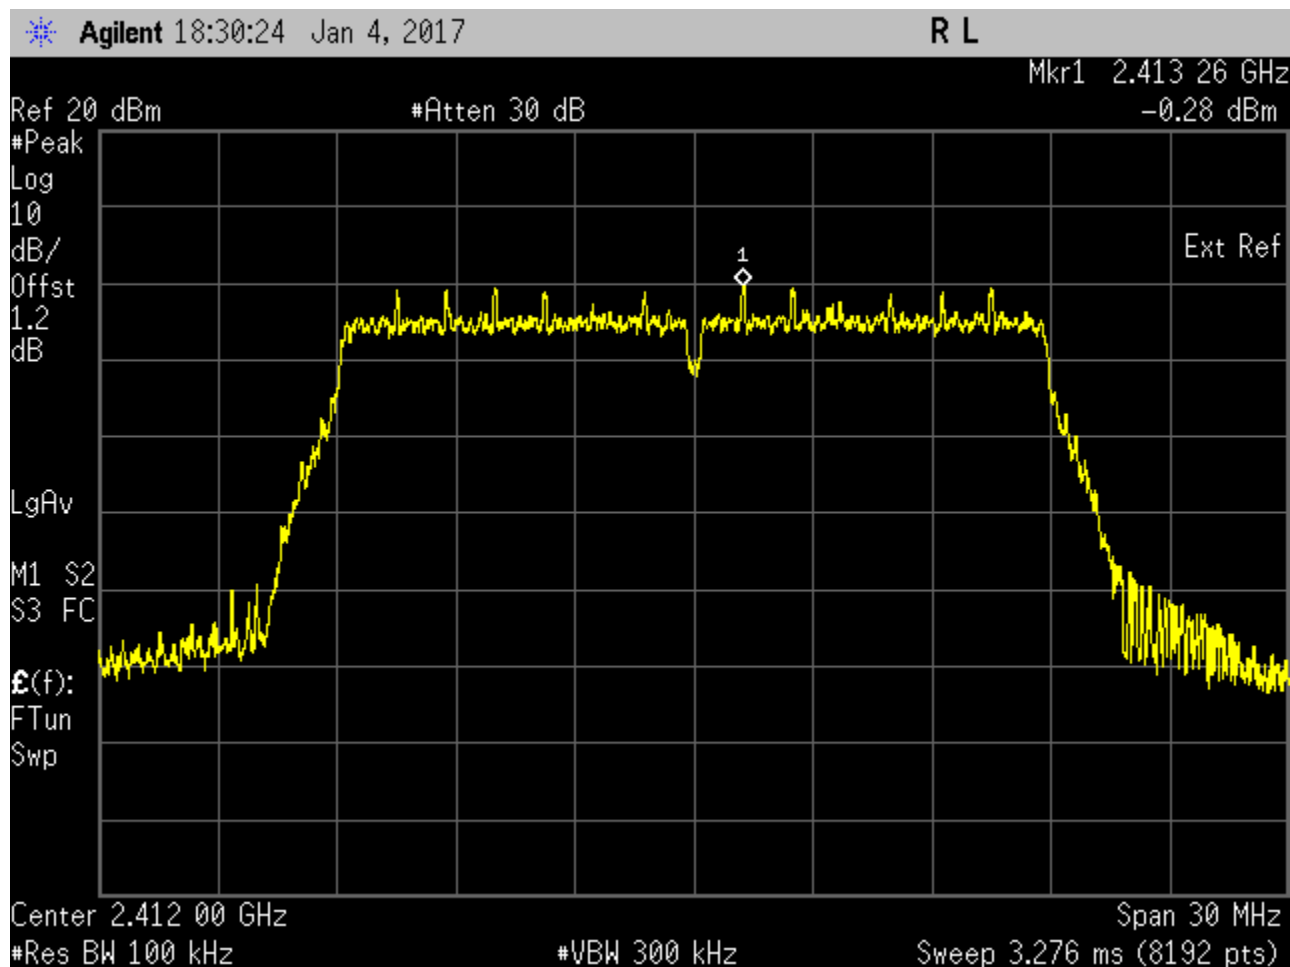


Band Edge. 802.11n Frequency 2412 MHz Reference Level

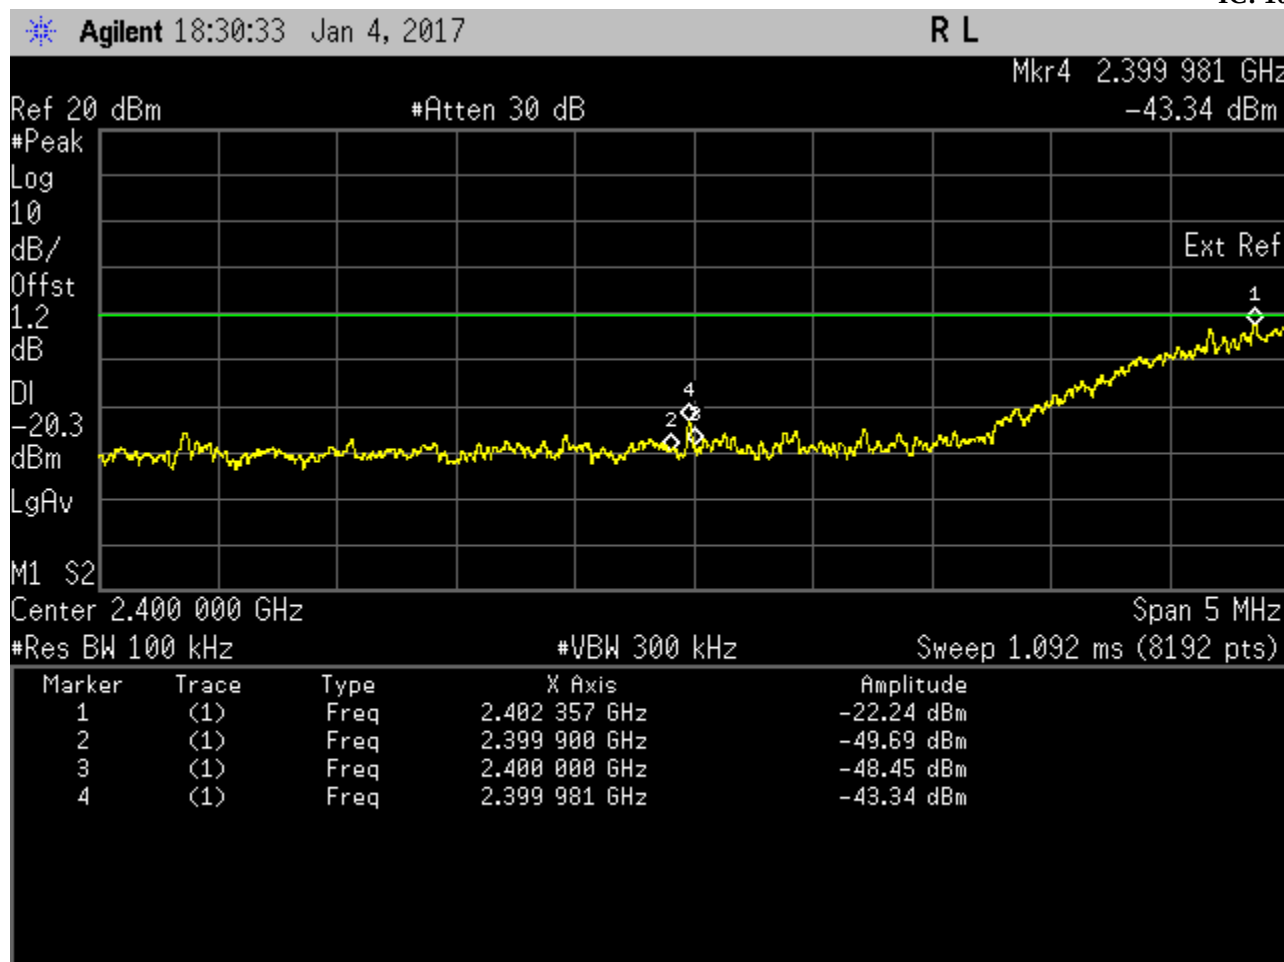

Band Edge. 802.11n Frequency 2412 MHz Band Edge

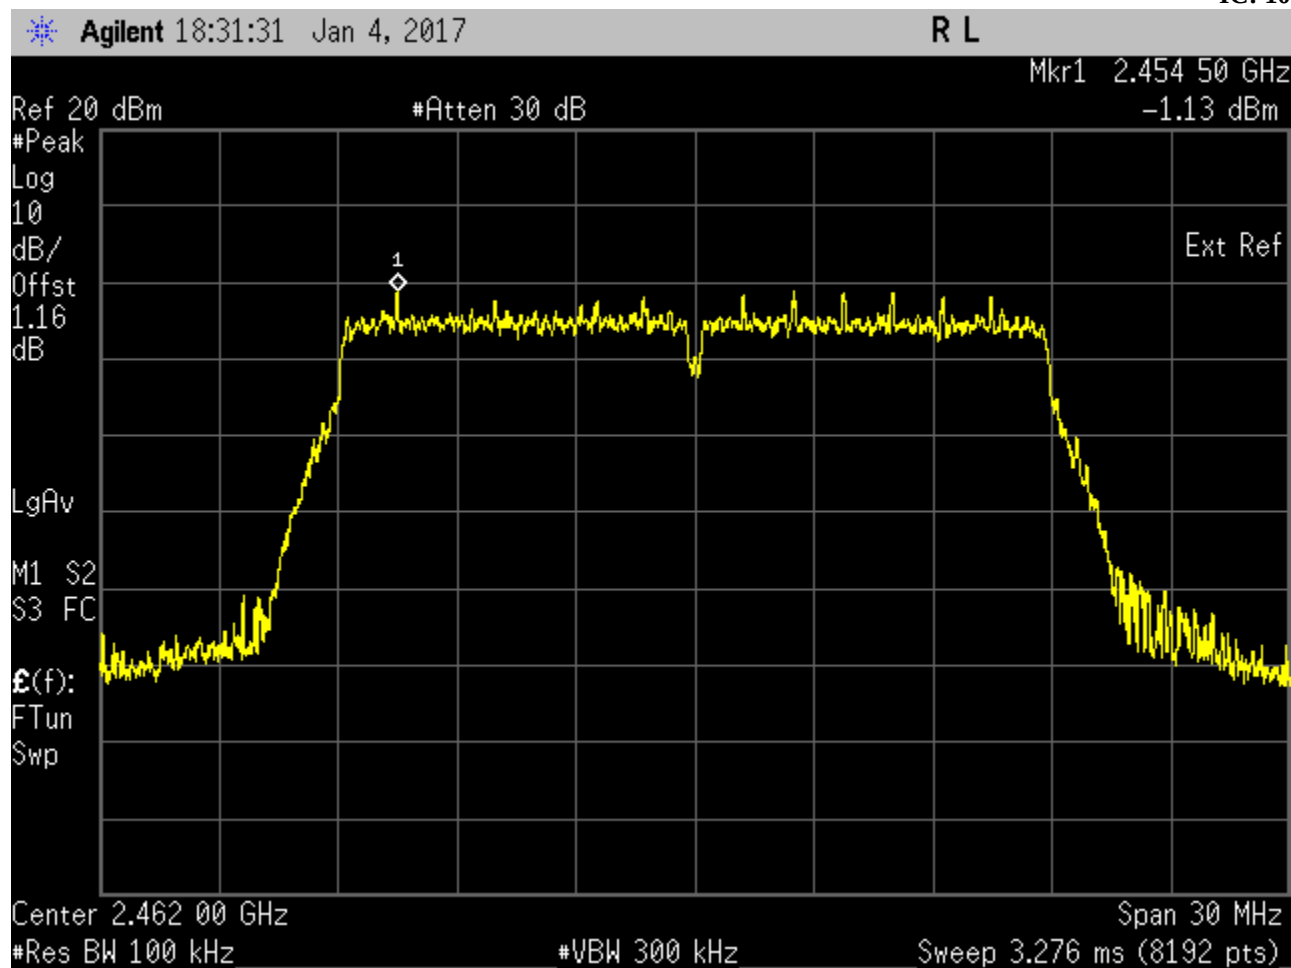


Band Edge. 802.11n Frequency 2462 MHz Reference Level

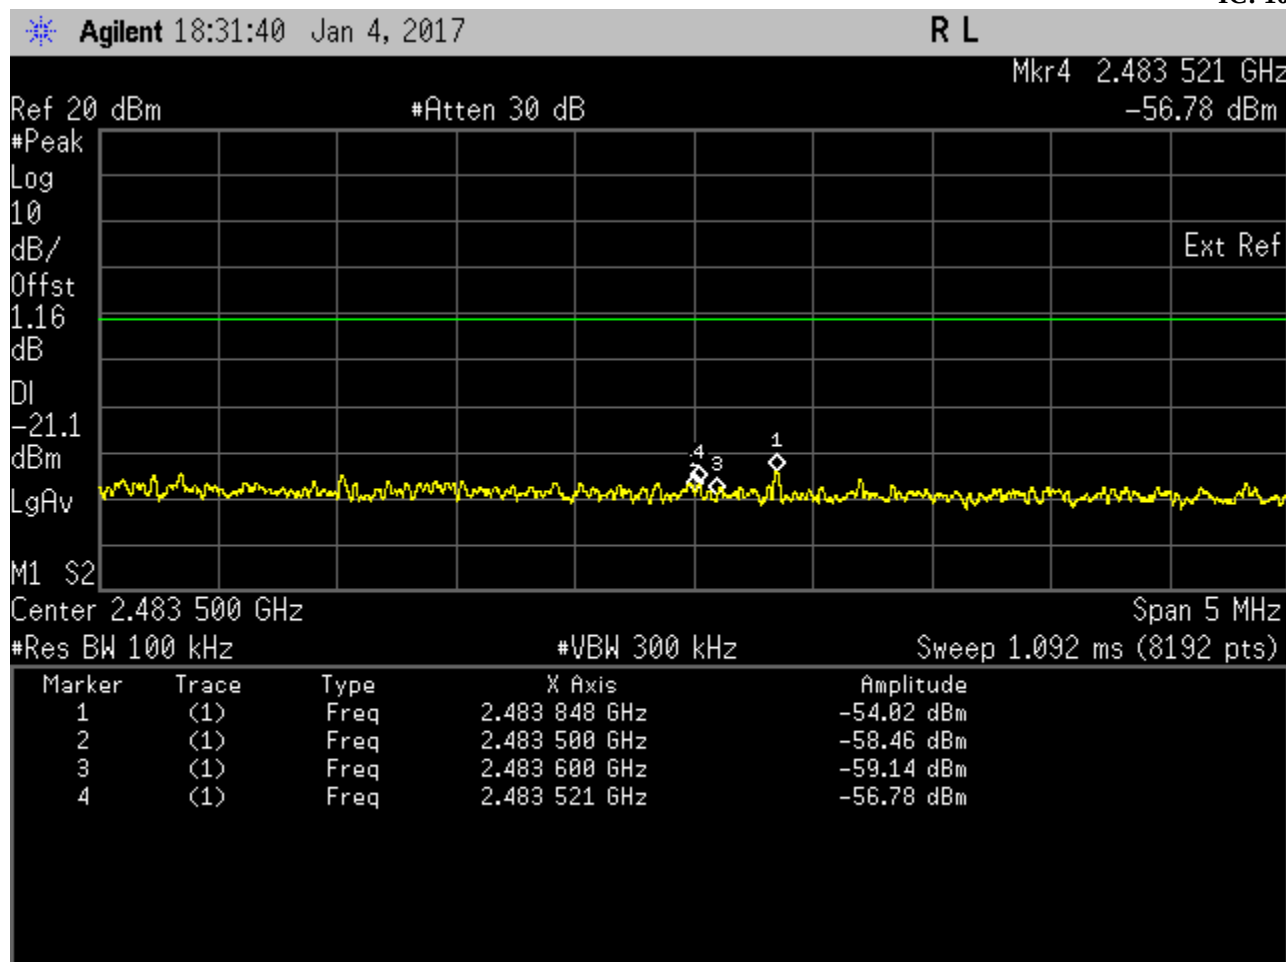

Band Edge. 802.11n Frequency 2462 MHz Band Edge

6.7 Radiated Emission within restricted bands

6.7.1 Test Setup

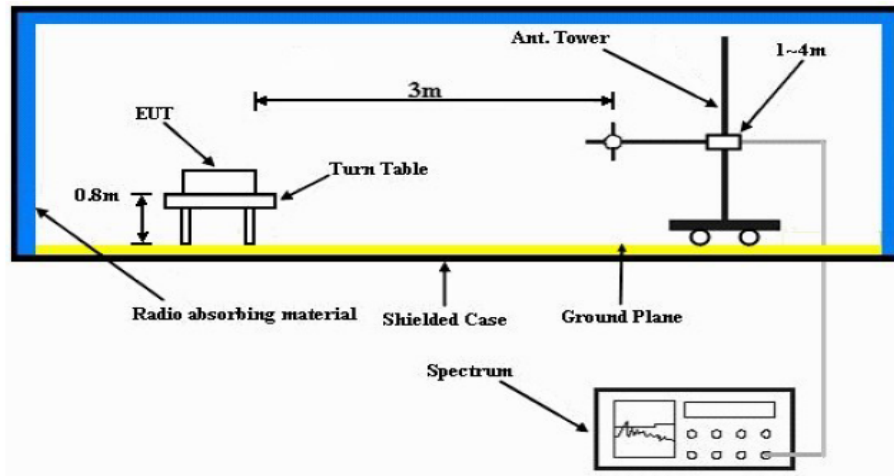

- The EUT is placed on the top of a rotating table 0.8m above the ground ($<1\text{GHz}$) and 1.5m above the ground ($>1\text{GHz}$) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.7.2 Test Limits:


Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:


- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

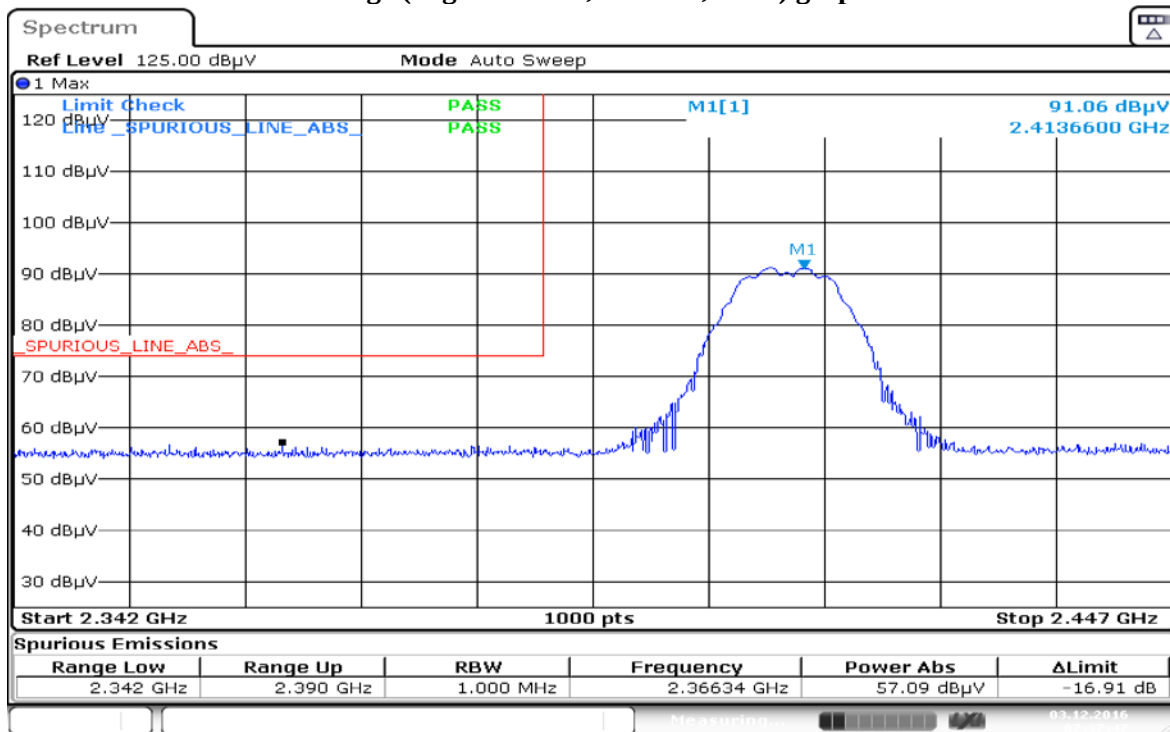


Date: 3.DEC.2016 07:37:47

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

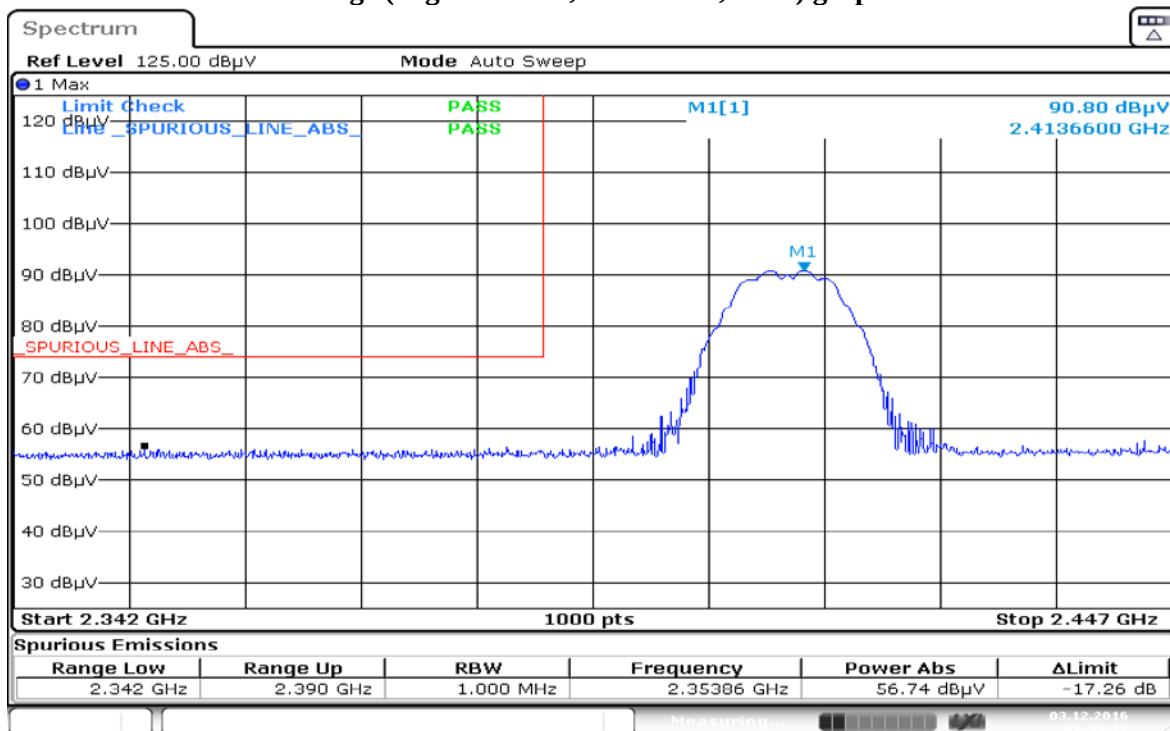


Date: 3.DEC.2016 07:39:12

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

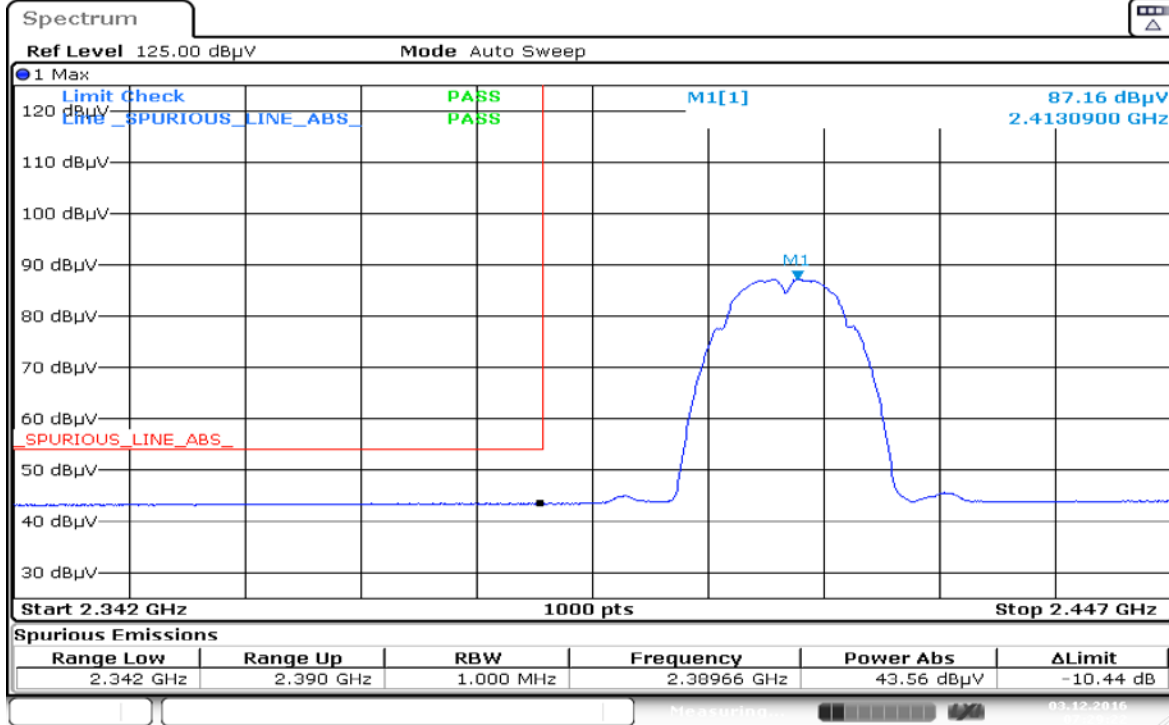

Date: 3.DEC.2016 07:29:22

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

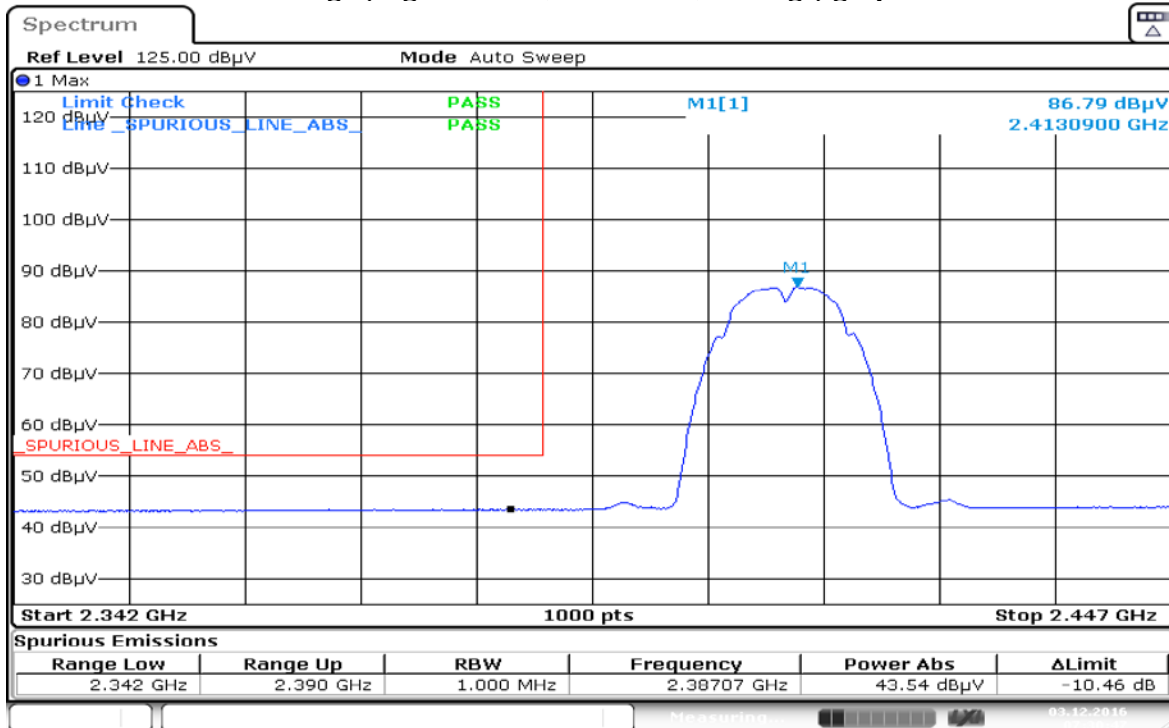

Date: 3.DEC.2016 07:30:47

Model Number: H92UCH9PW7AN **S/N:** 837TSX0488 **EMC SR ID#:** 06481-EMC-00013
Test: WIFI SAC Restricted Band Edge
Battery: PMNN4493A **Accessory:** NA
Test Channel: High **Test Frequency:** 2462.00 MHz **Test Standard:** ANSI C63.10-2013
Worst Case Plane: X-Plane (802.11b)

Restricted Band Edge (High Channel) tabular data

[illegible]


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4
Test Performed by: Nazrin&Qawiman
System MU: 5.01dB

Humidity (%): 71.6
Test Date: Sat, Dec 03, 2016
Duty Cycle (%): > 98%


Note: No spurs were found in this test.

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

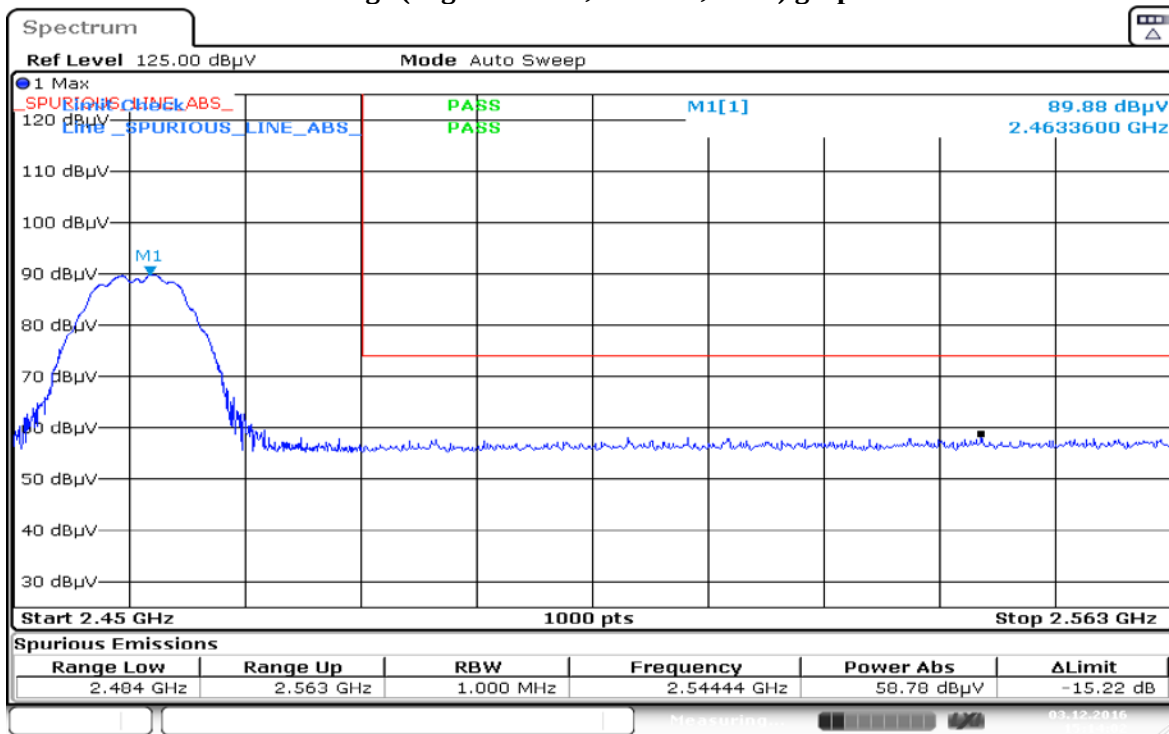


Date: 3.DEC.2016 15:14:02

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

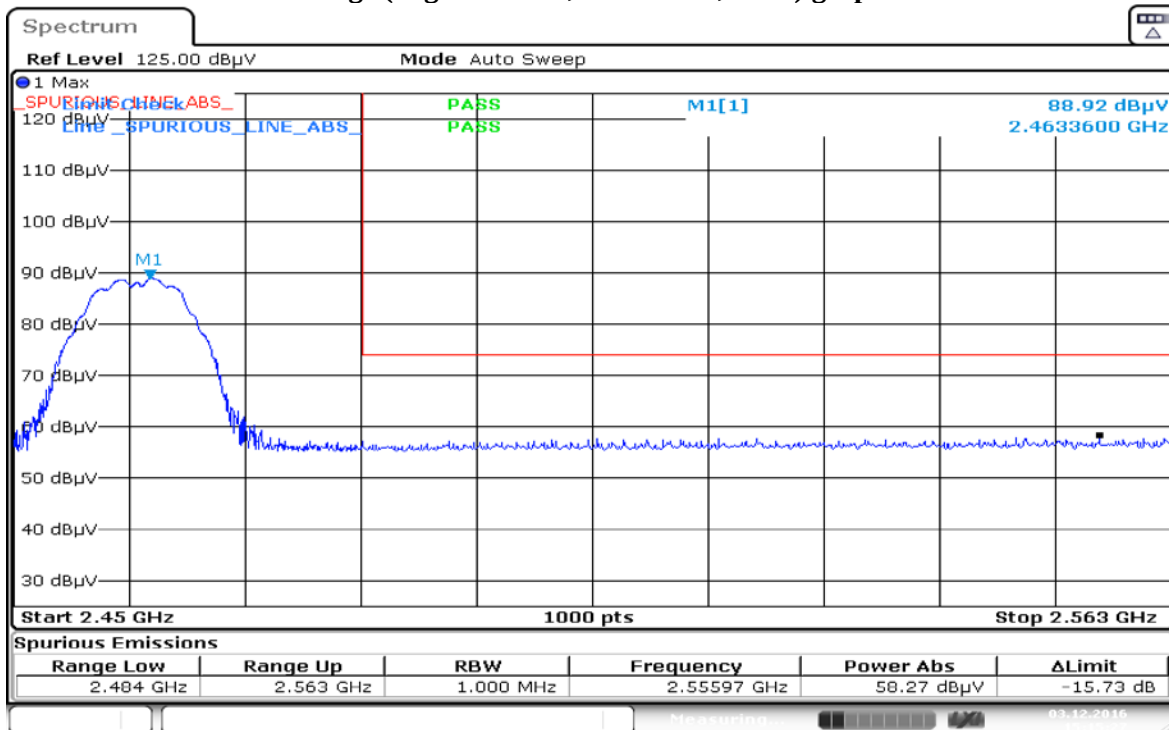


Date: 3.DEC.2016 15:15:27

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

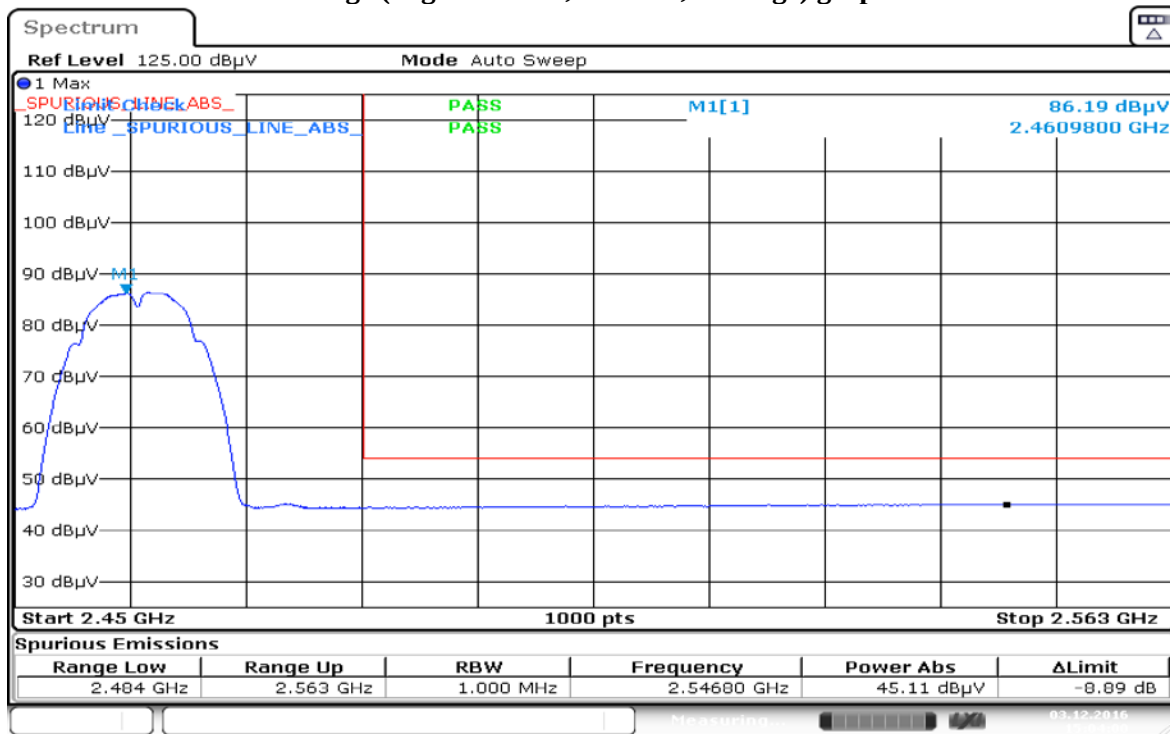

Date: 3.DEC.2016 15:04:00

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

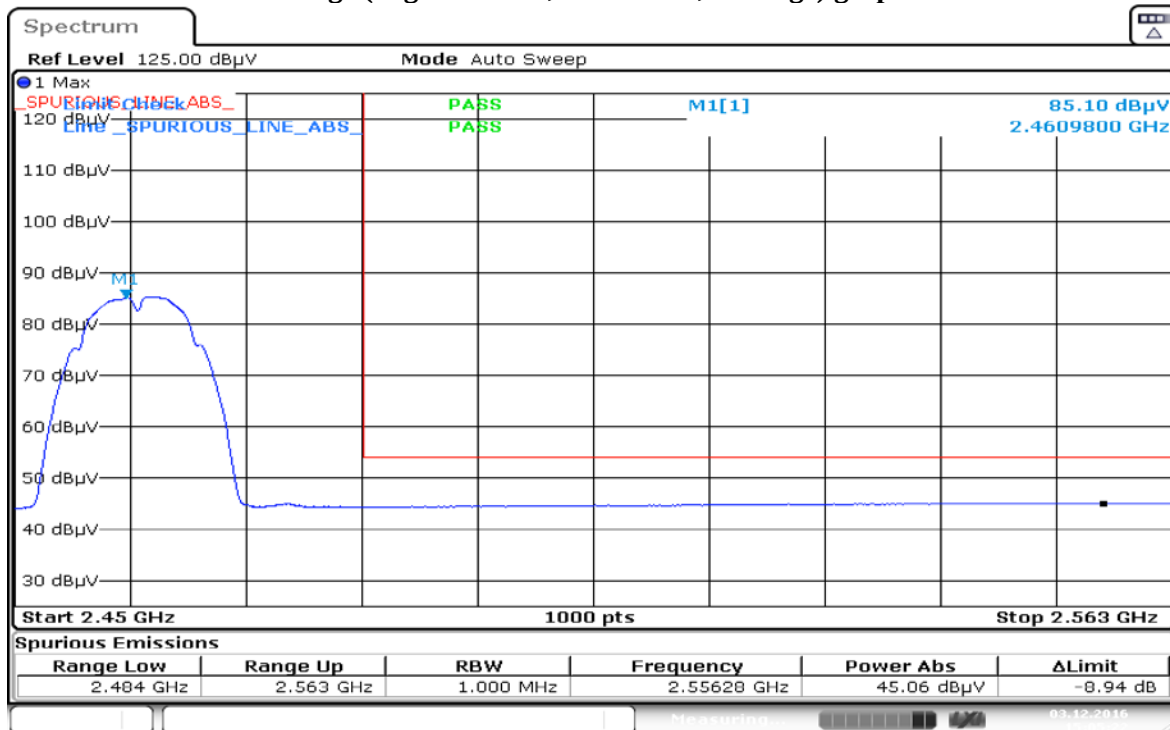

Date: 3.DEC.2016 15:05:22

Test: WIFI SAC Restricted Band Edge

Model Number: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: Low

Test Frequency: 2412.00 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11g)

Restricted Band Edge (Low Channel) tabular data

[illegible]


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4
Test Performed by: Nazrin&Qawiman
System MU: 5.01dB

Humidity (%): 71.6
Test Date: Sat, Dec 03, 2016
Duty Cycle (%): > 98%


Note: No spurs were found in this test.

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

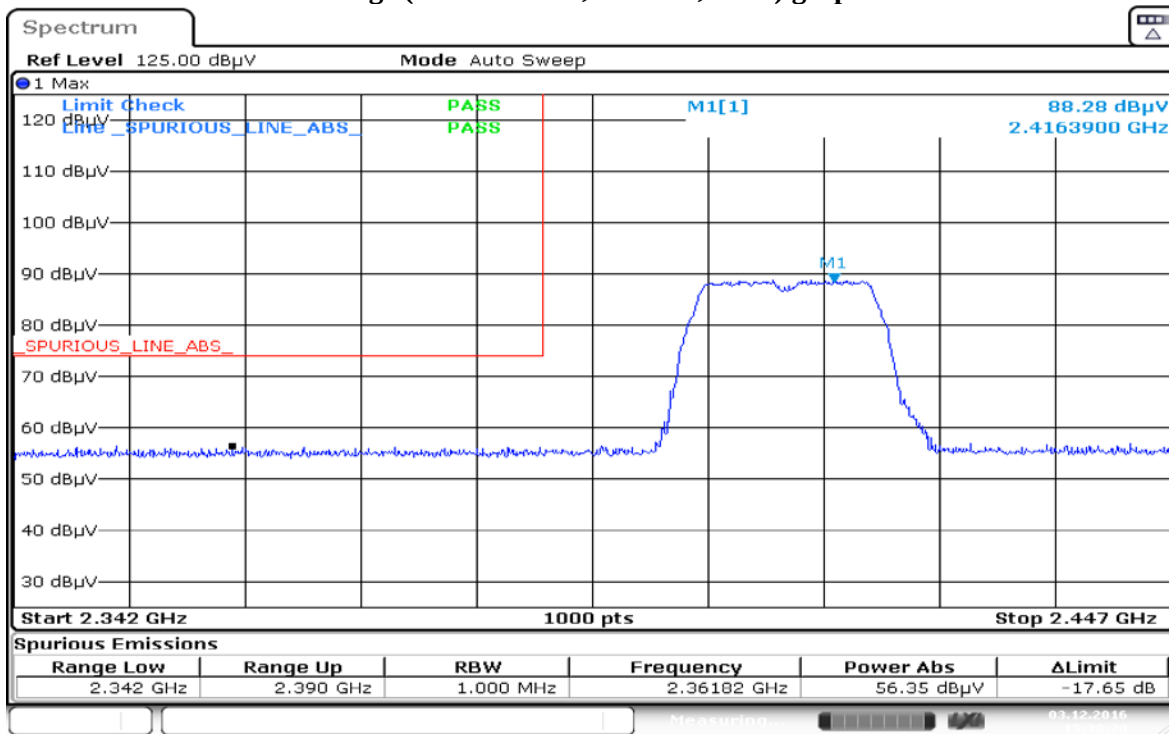


Date: 3.DEC.2016 15:38:20

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

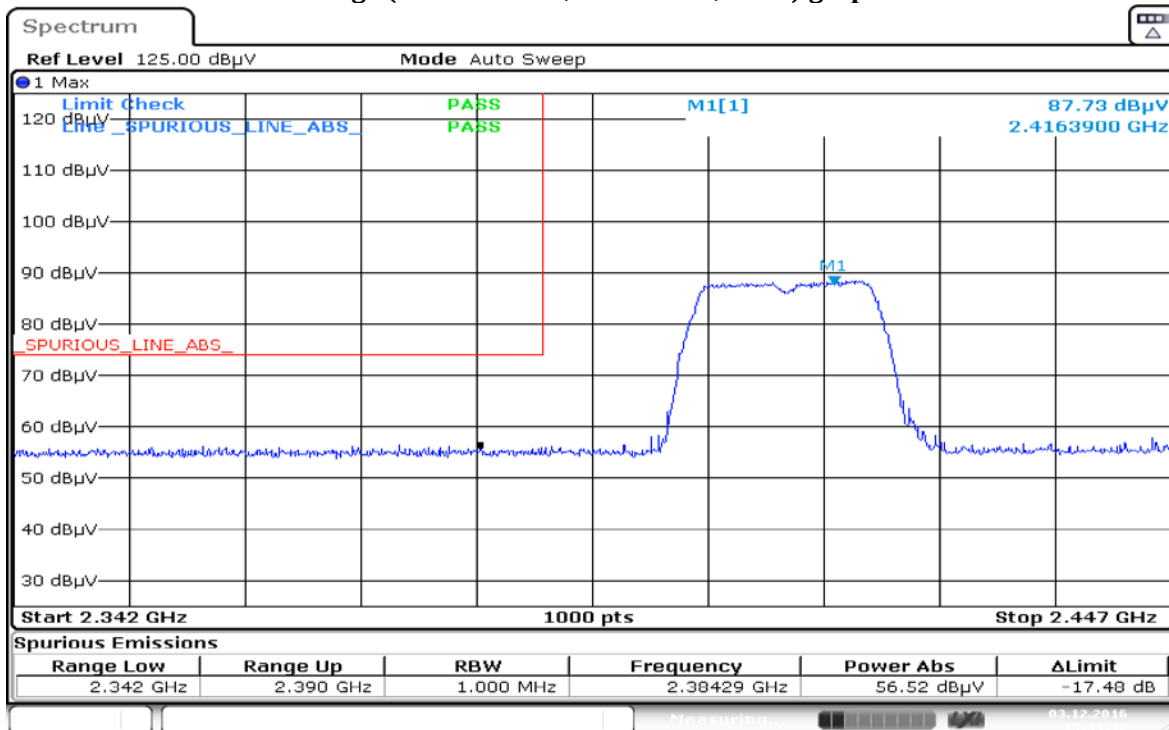


Date: 3.DEC.2016 15:39:42

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

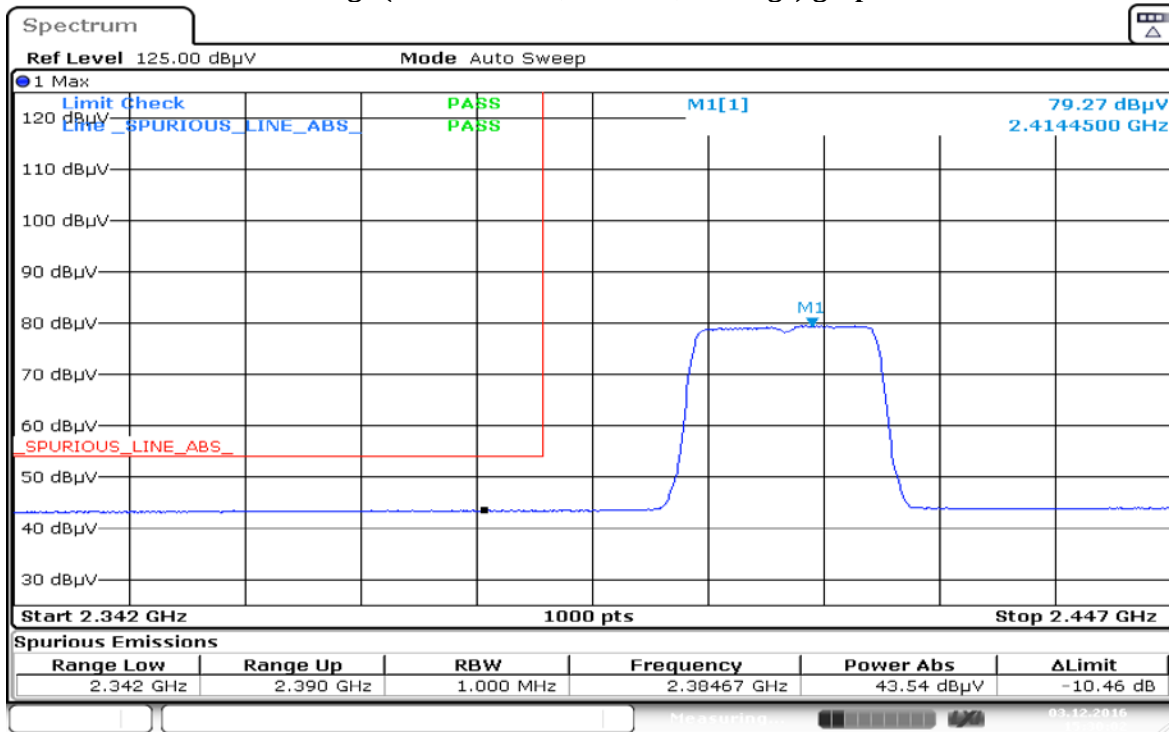

Date: 3.DEC.2016 15:30:02

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

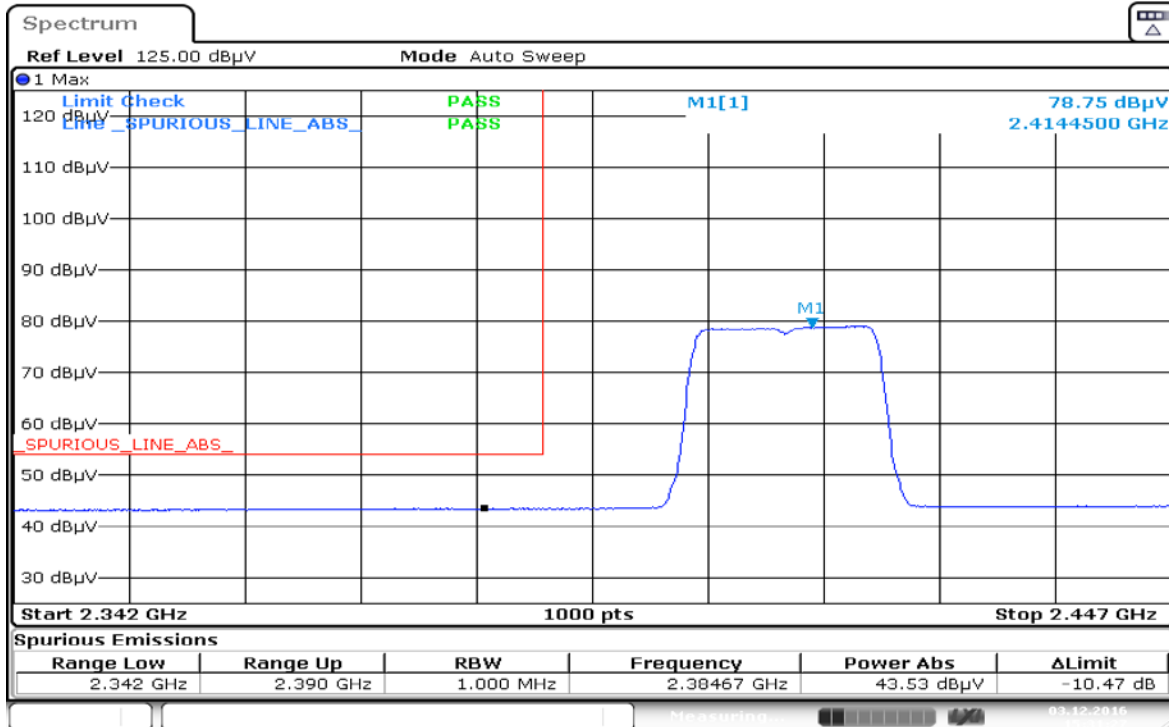

Date: 3.DEC.2016 15:31:27

Test: WIFI SAC Restricted Band Edge

Model Number: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: High

Test Frequency: 2462.00 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11g)

Restricted Band Edge (High Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Sat, Dec 03, 2016

Duty Cycle (%): > 98%


Note: No spurs were found in this test.

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

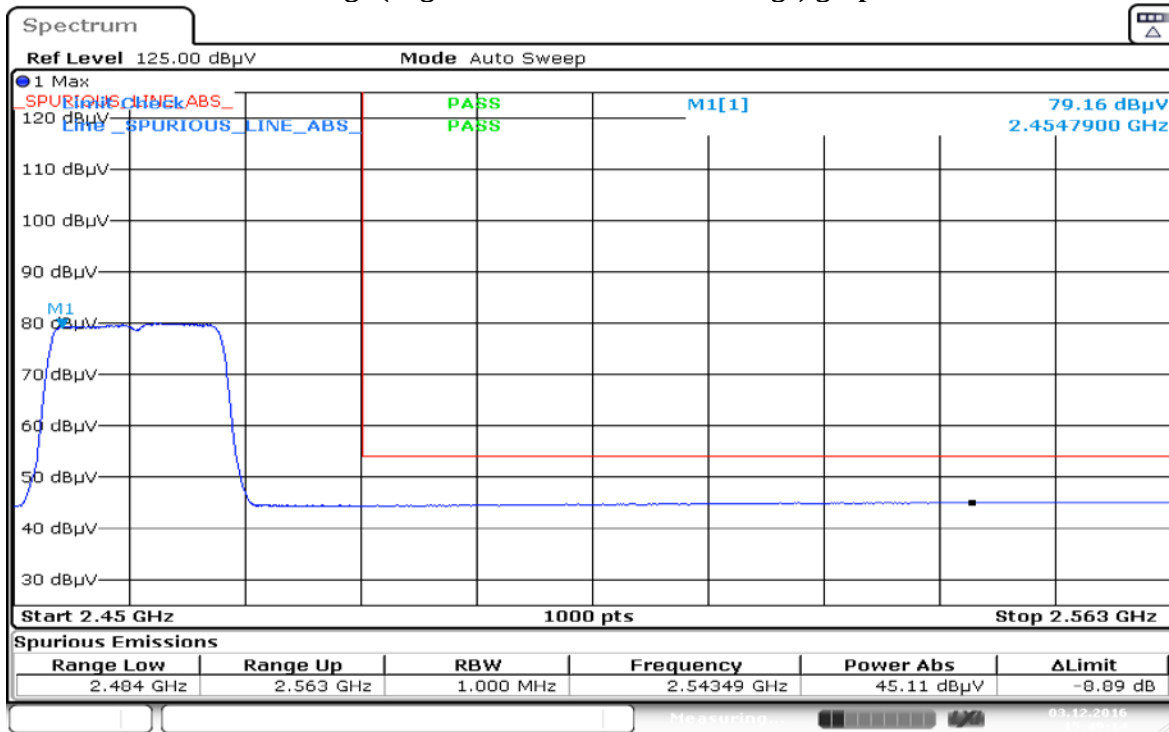

Date: 3.DEC.2016 15:49:15

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

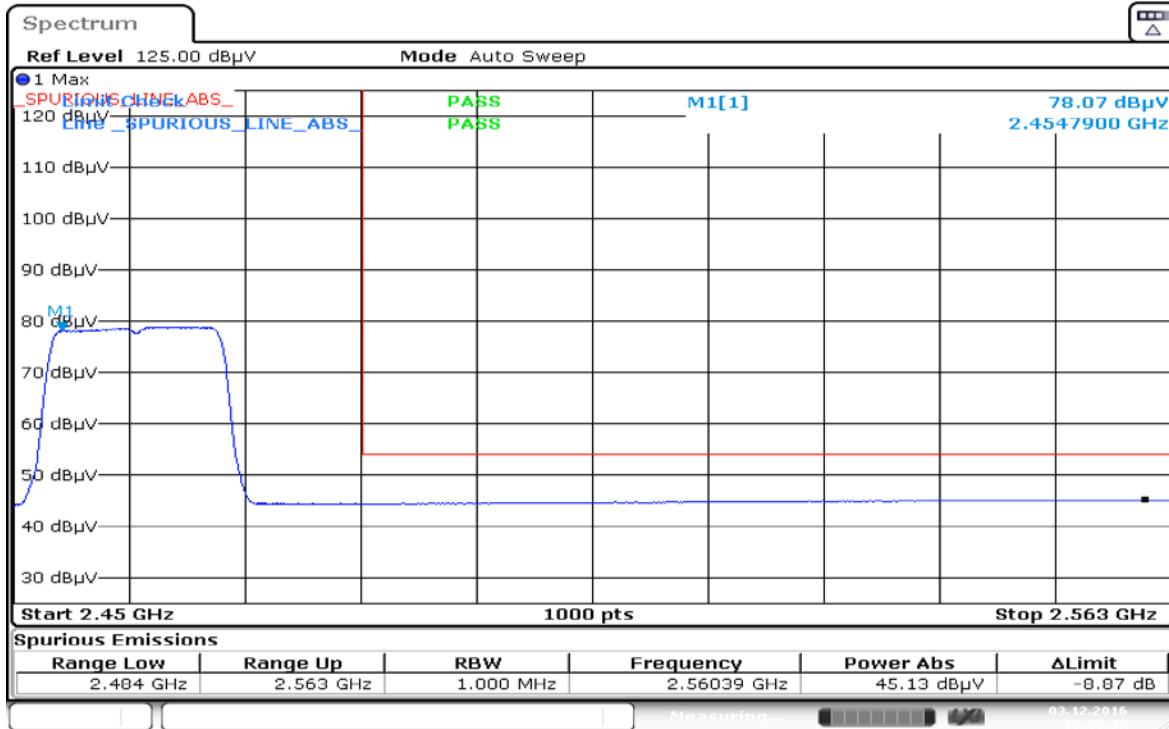

Date: 3.DEC.2016 15:50:37

Test: WIFI SAC Restricted Band Edge

Model Number: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: Low

Test Frequency: 2412.00 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11n)

Restricted Band Edge (Low Channel) tabular data

[illegible]


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4
Test Performed by: Nazrin&Qawiman
System MU: 5.01dB

Humidity (%): 71.6
Test Date: Sat, Dec 03, 2016
Duty Cycle (%): > 98%


Note: No spurs were found in this test.

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

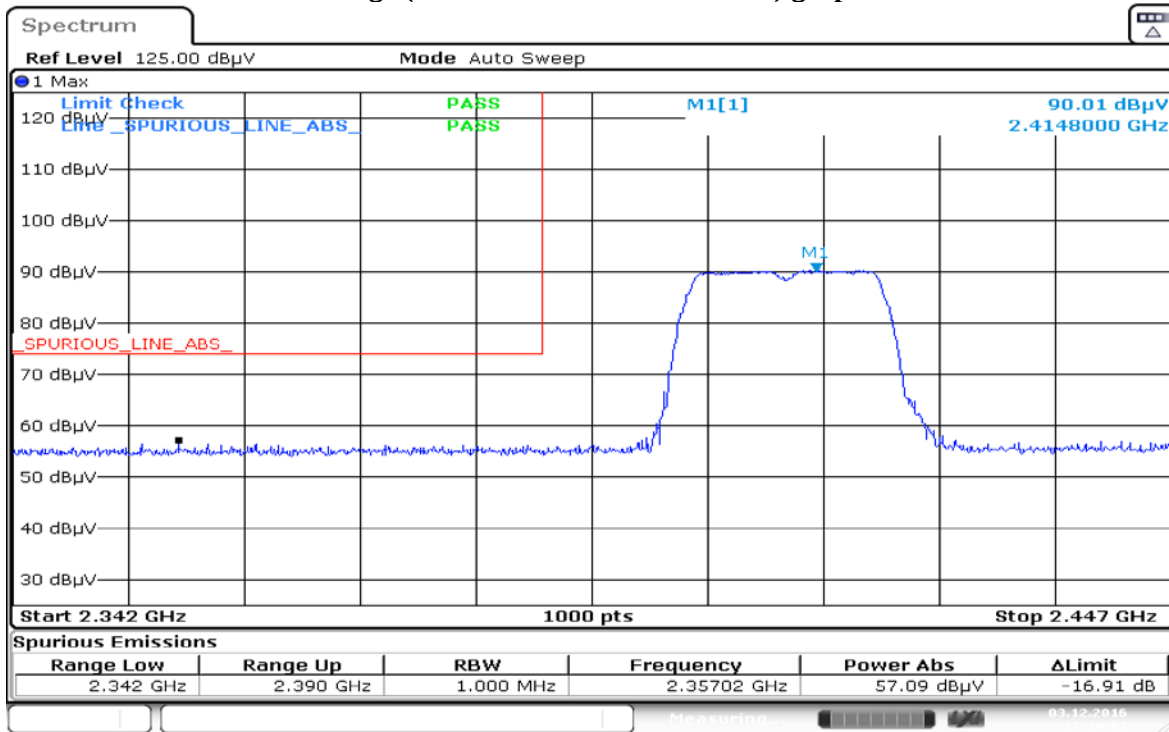


Date: 3.DEC.2016 17:19:02

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

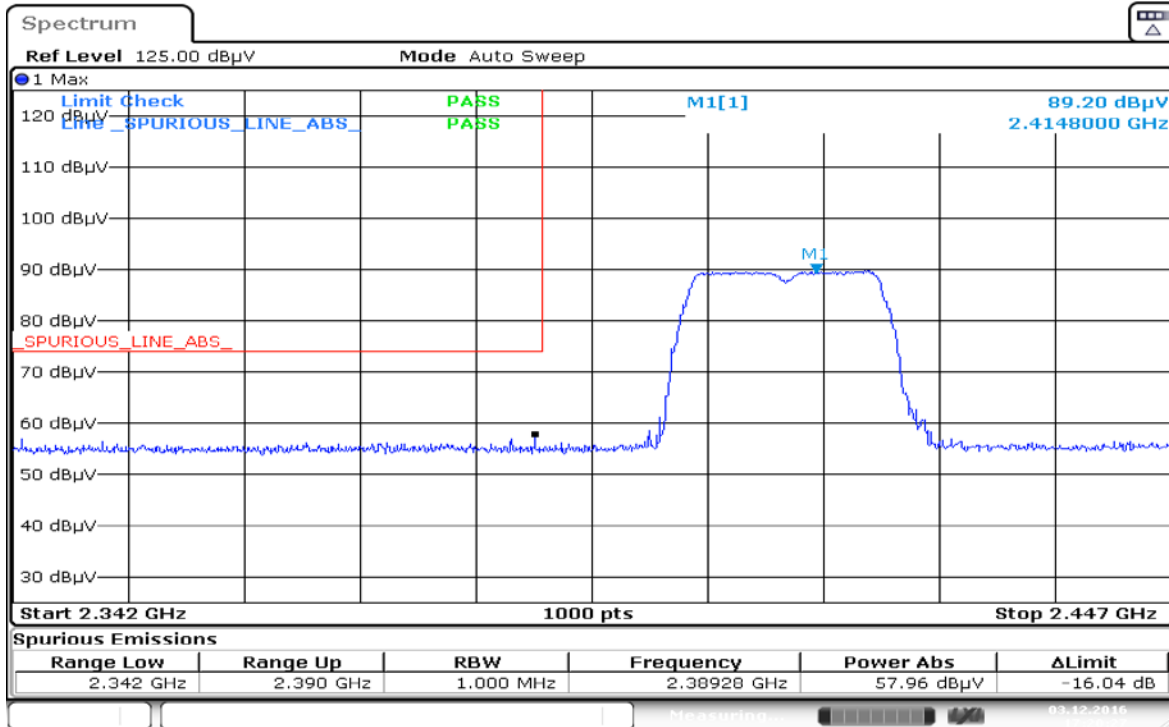


Date: 3.DEC.2016 17:20:27

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

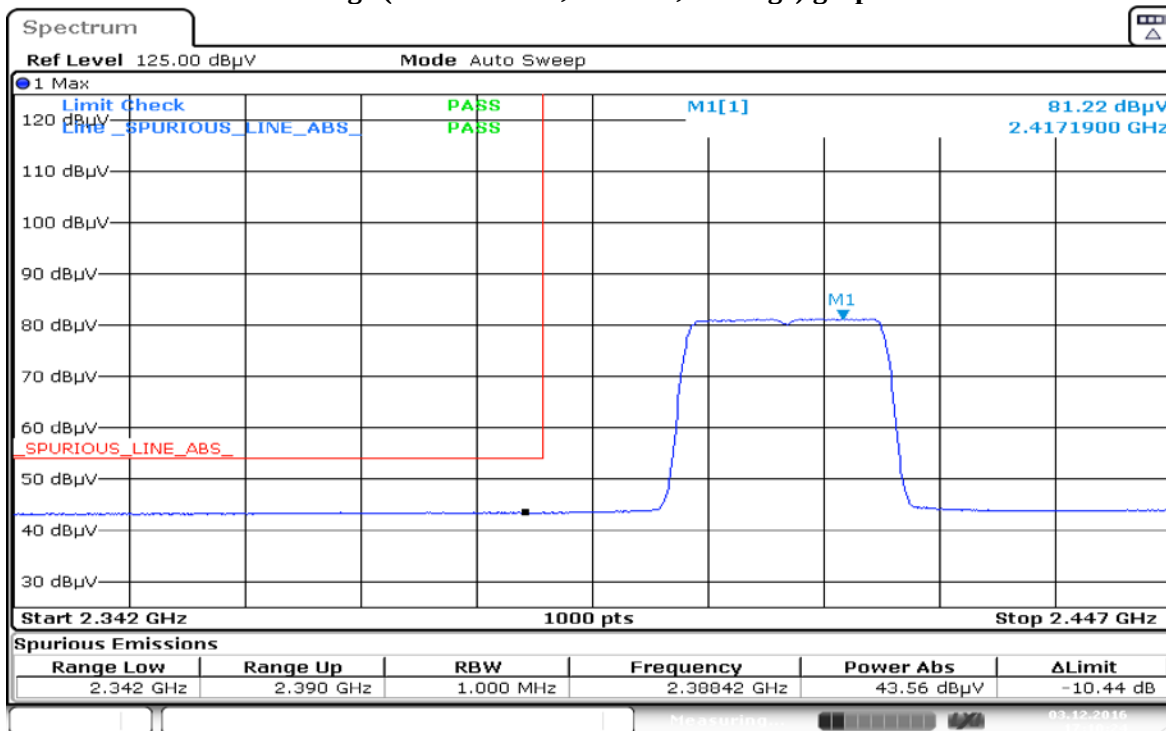

Date: 3.DEC.2016 17:10:25

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

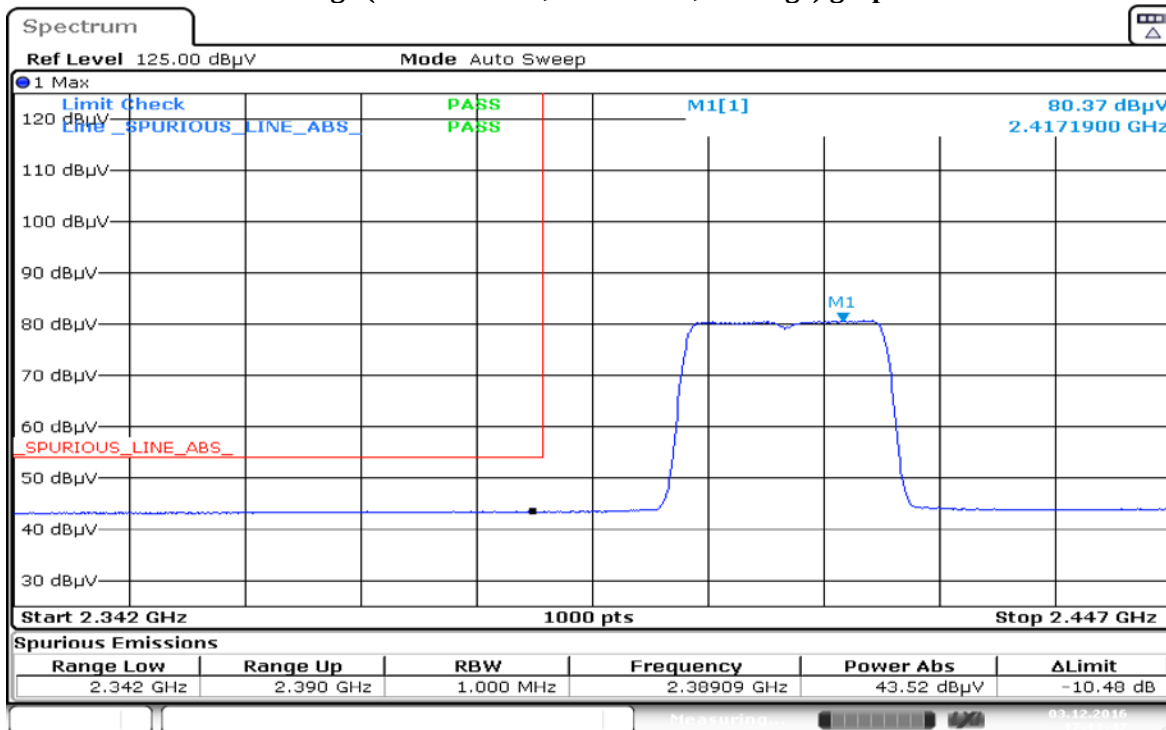

Date: 3.DEC.2016 17:11:47

Test: WIFI SAC Restricted Band Edge

Model Number: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: High

Test Frequency: 2462.00 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11n)

Restricted Band Edge (High Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Sat, Dec 03, 2016

Duty Cycle (%): > 98%


Note: No spurs were found in this test.

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

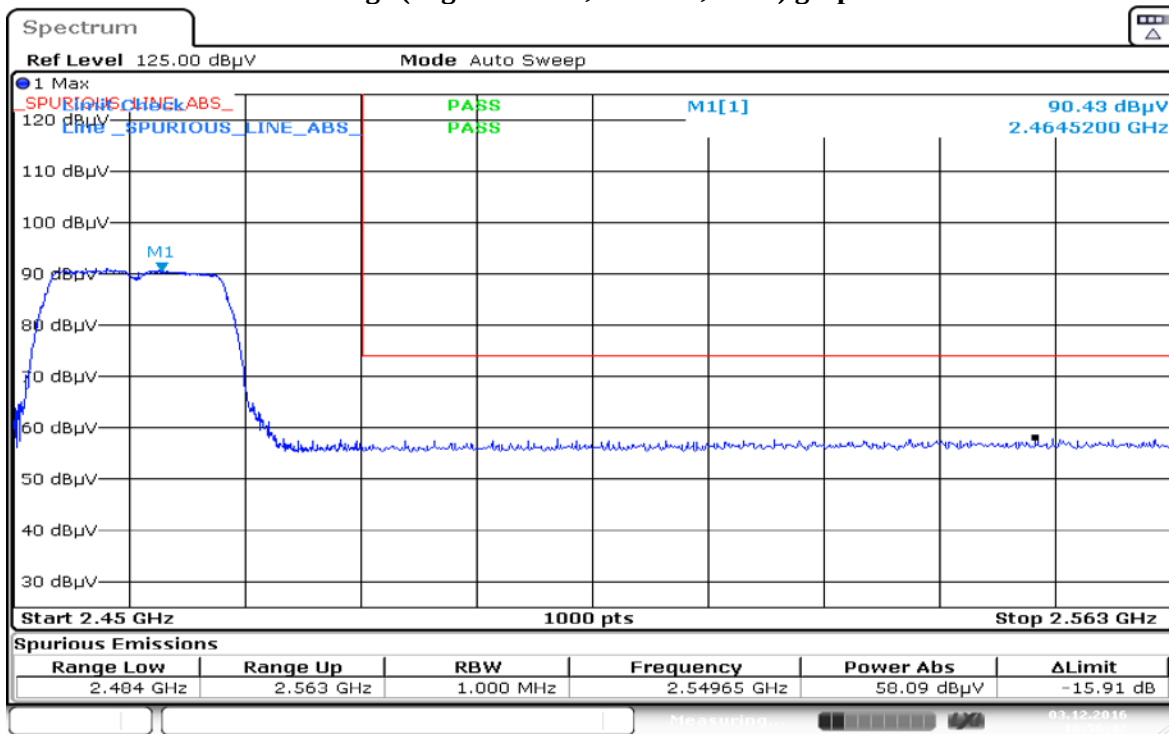


Date: 3.DEC.2016 16:56:42

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

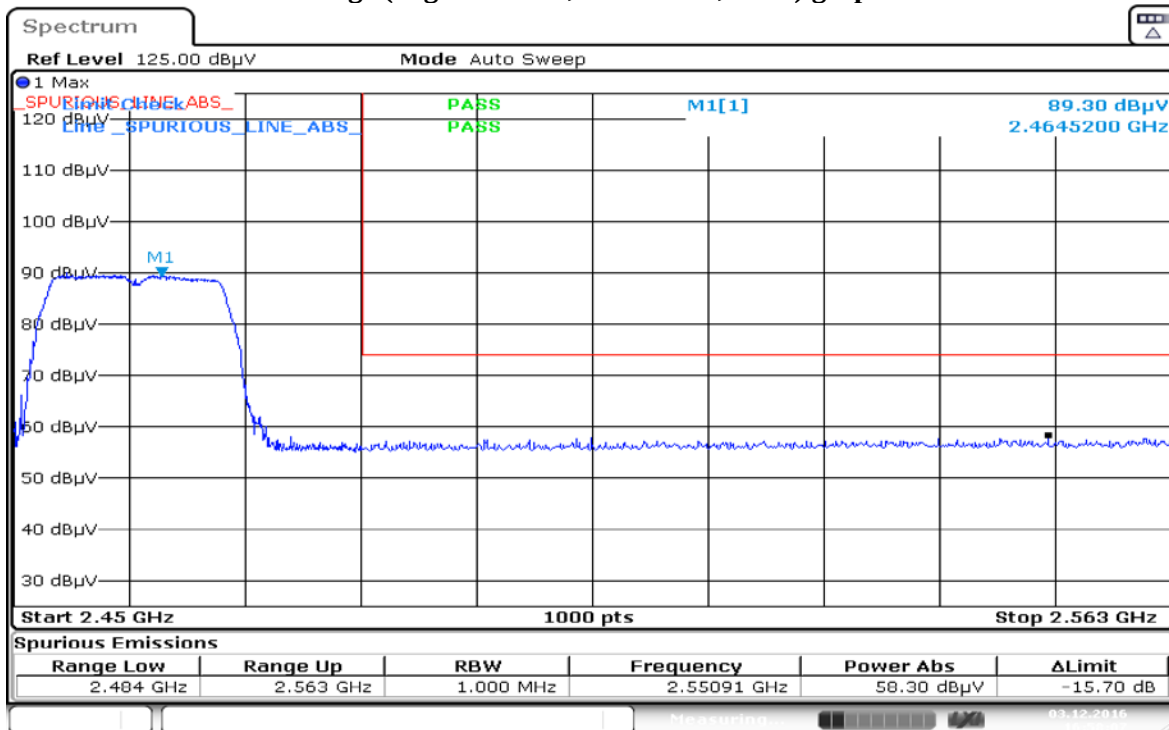


Date: 3.DEC.2016 16:58:07

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

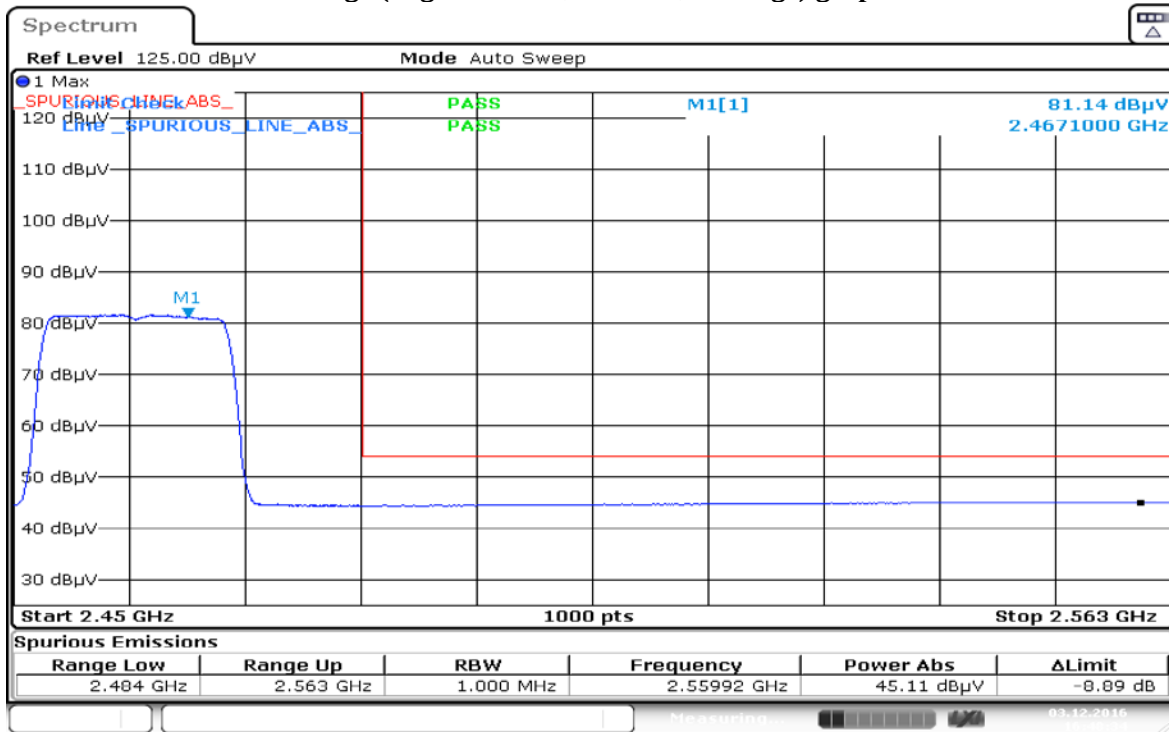

Date: 3.DEC.2016 16:48:35

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

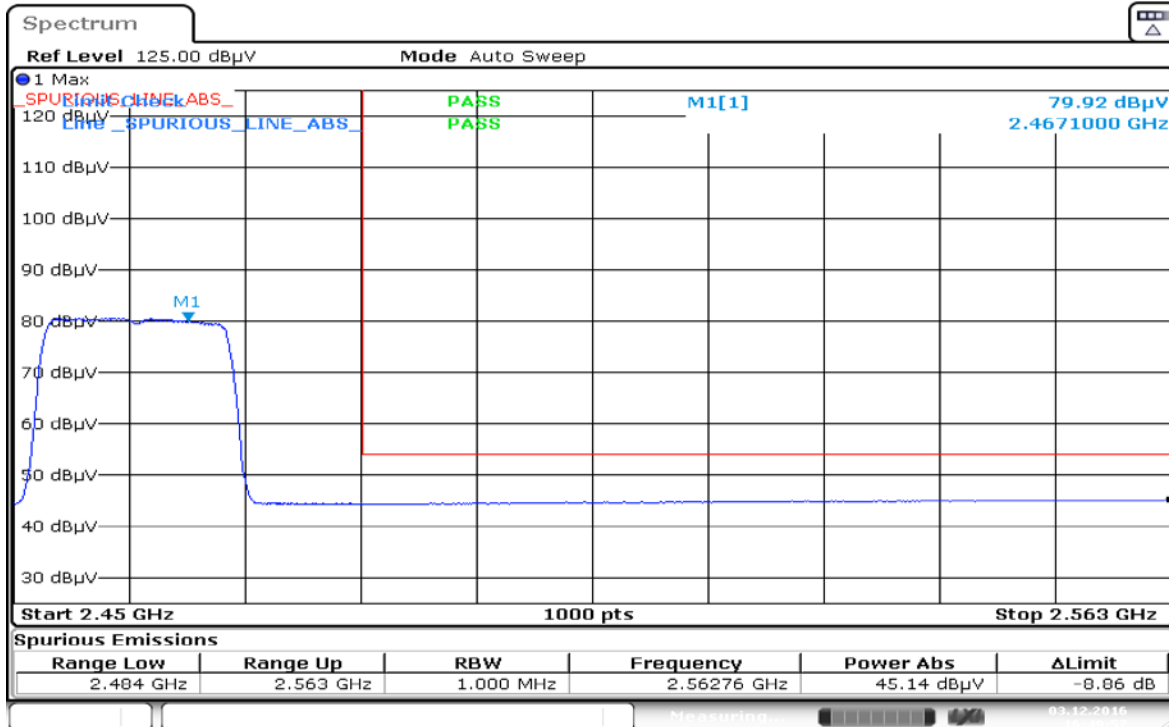

Date: 3.DEC.2016 16:49:57

Test: WIFI SAC Transmitter Radiated Emission

Model#: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: Low

Test Frequency: 2412.00 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11b)

Radiated Emission (Low Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Fri, Dec 02, 2016


Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

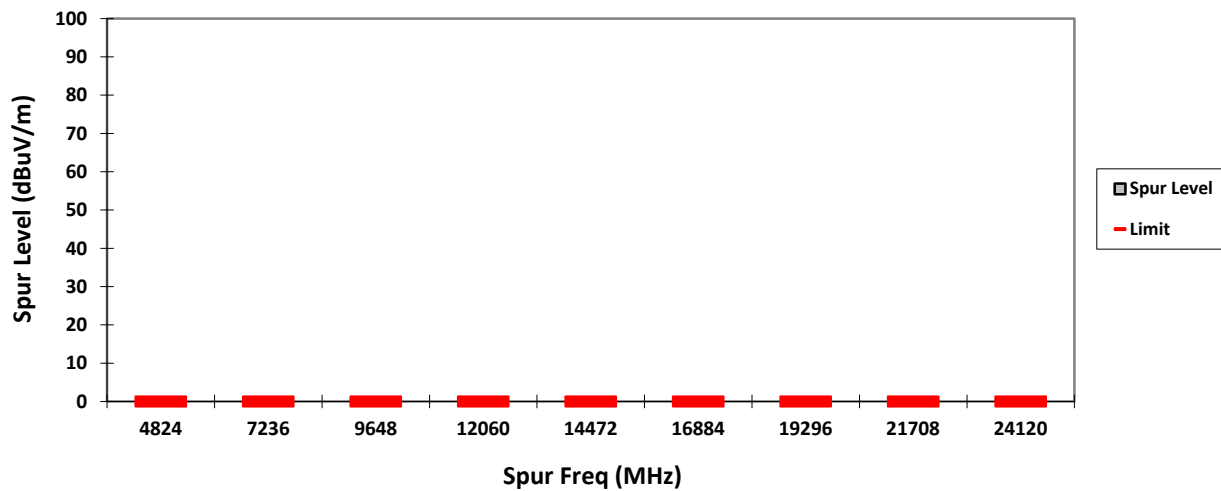


HORIZONTAL, QPK

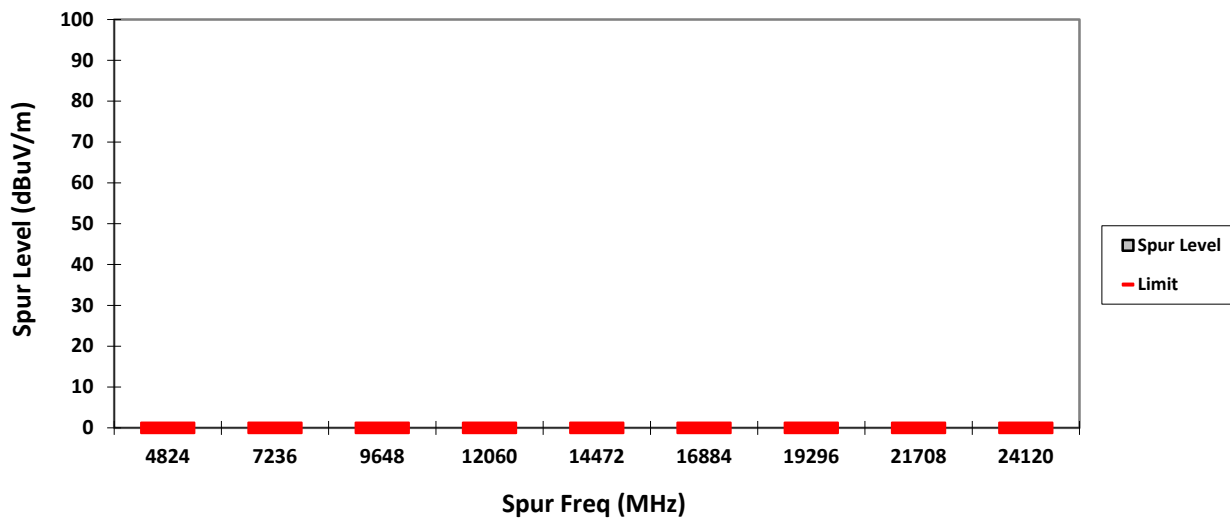


VERTICAL, PK

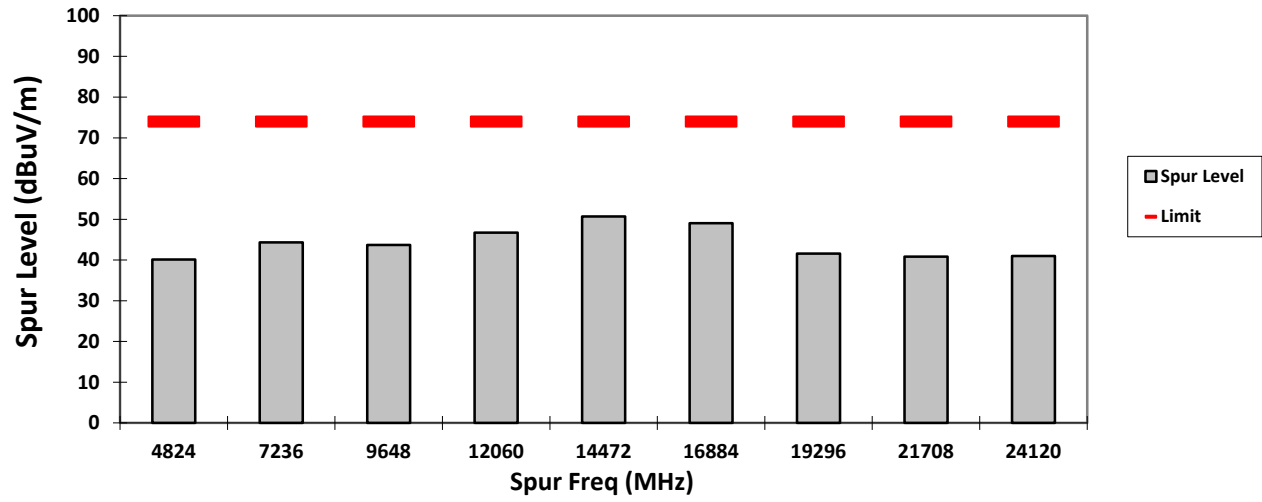


HORIZONTAL, PK

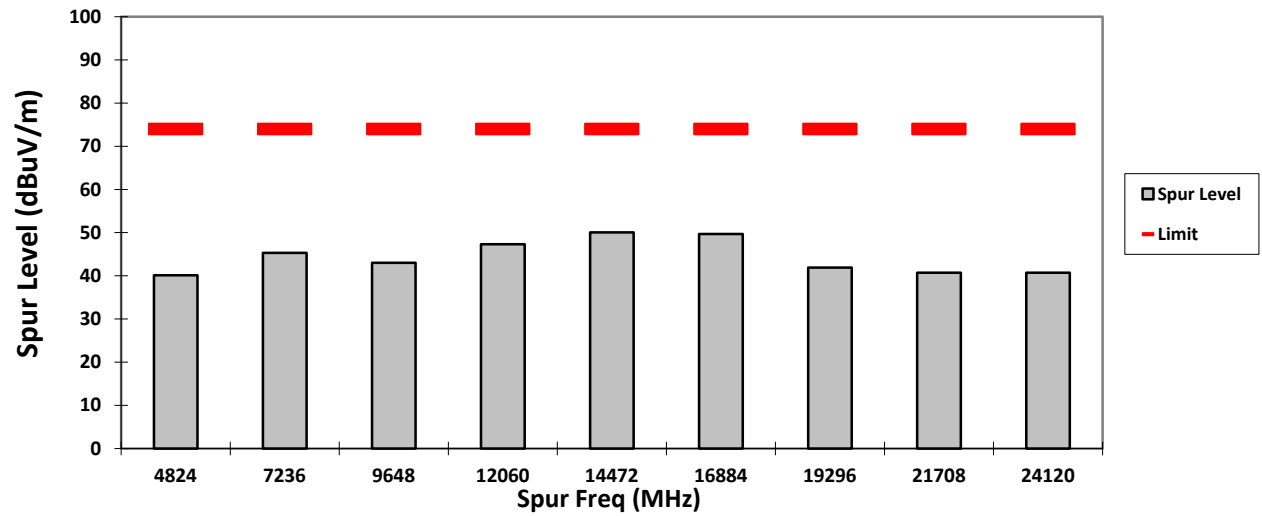

VERTICAL, AV

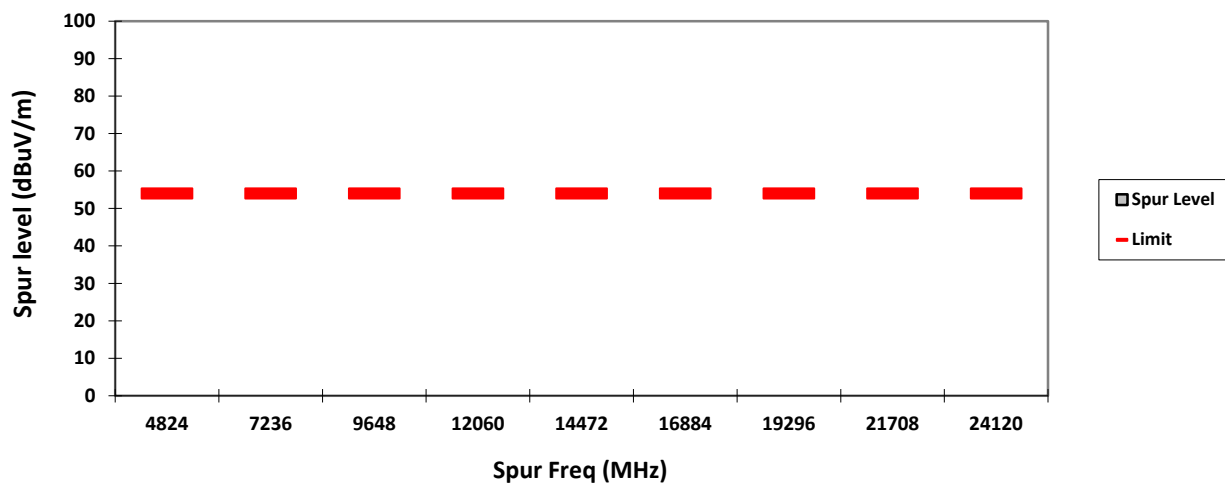

HORIZONTAL, AV

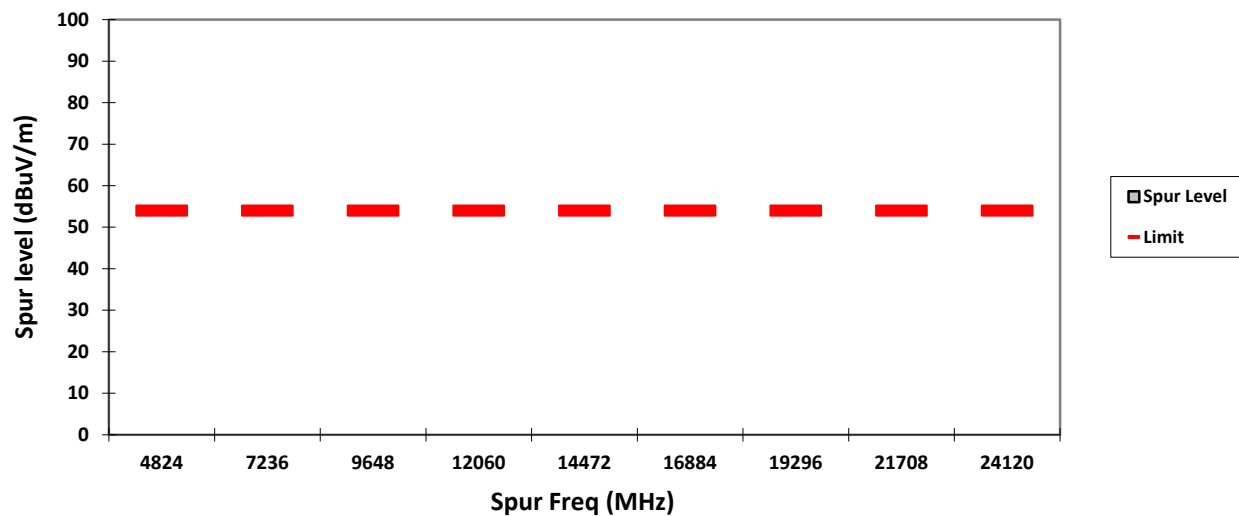

Test: WIFI SAC Transmitter Radiated Emission

Model#: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: Mid

Test Frequency: 2437.00 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11b)

Radiated Emission (Mid Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Fri, Dec 02, 2016


Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

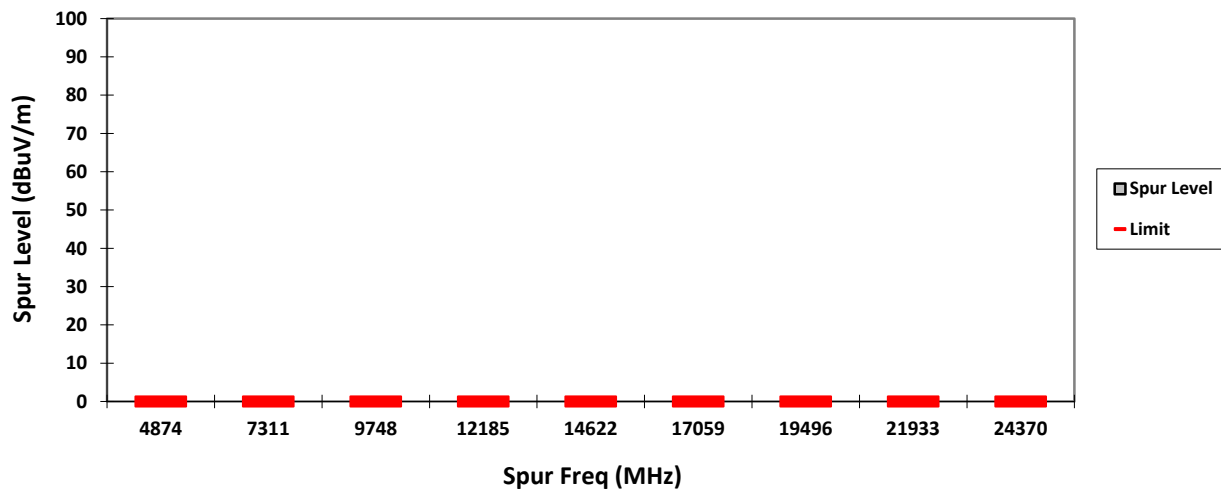


HORIZONTAL, QPK

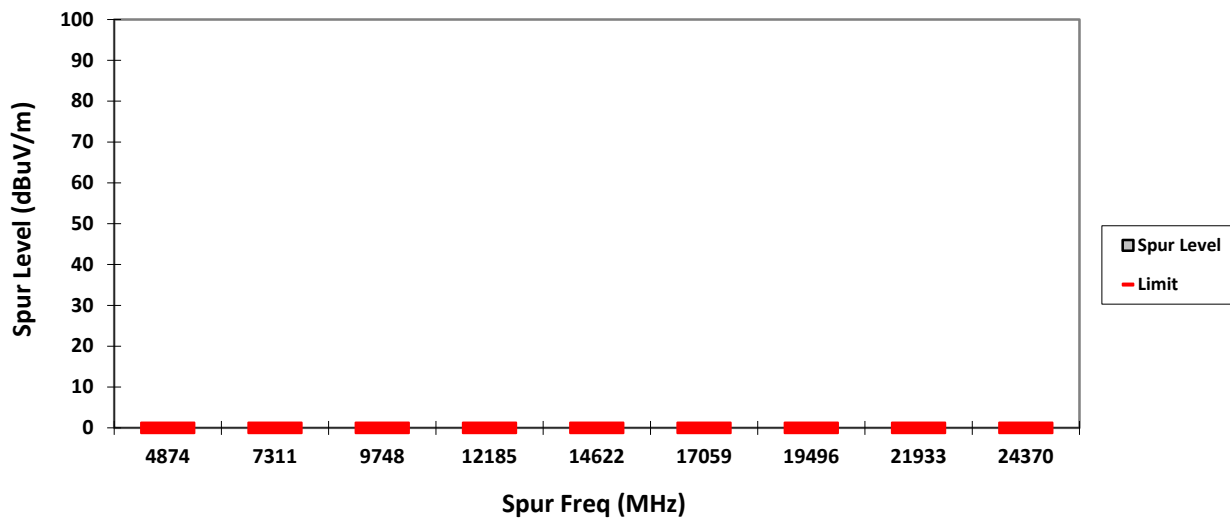


VERTICAL, PK

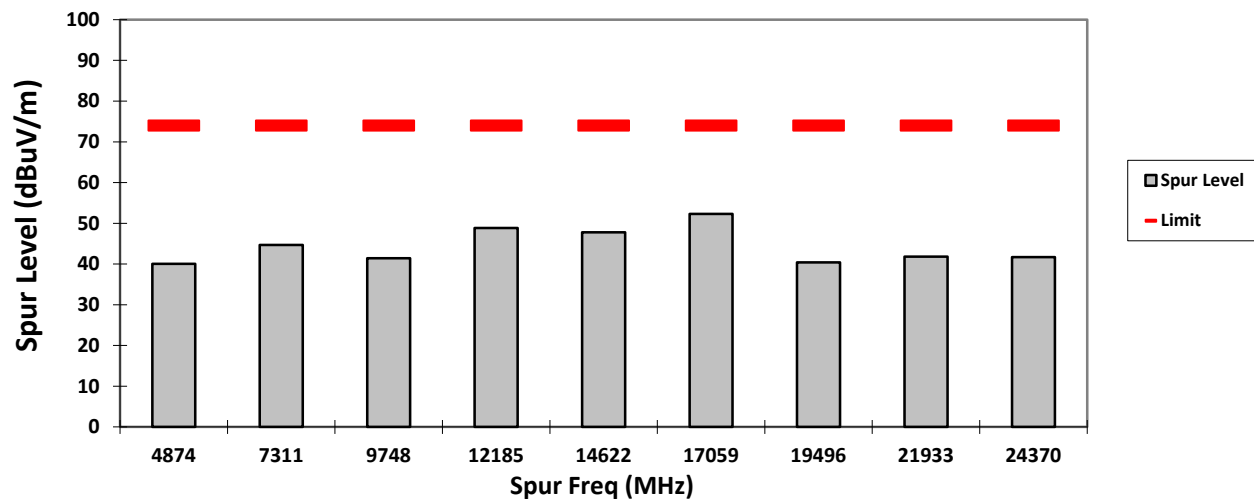


HORIZONTAL, PK

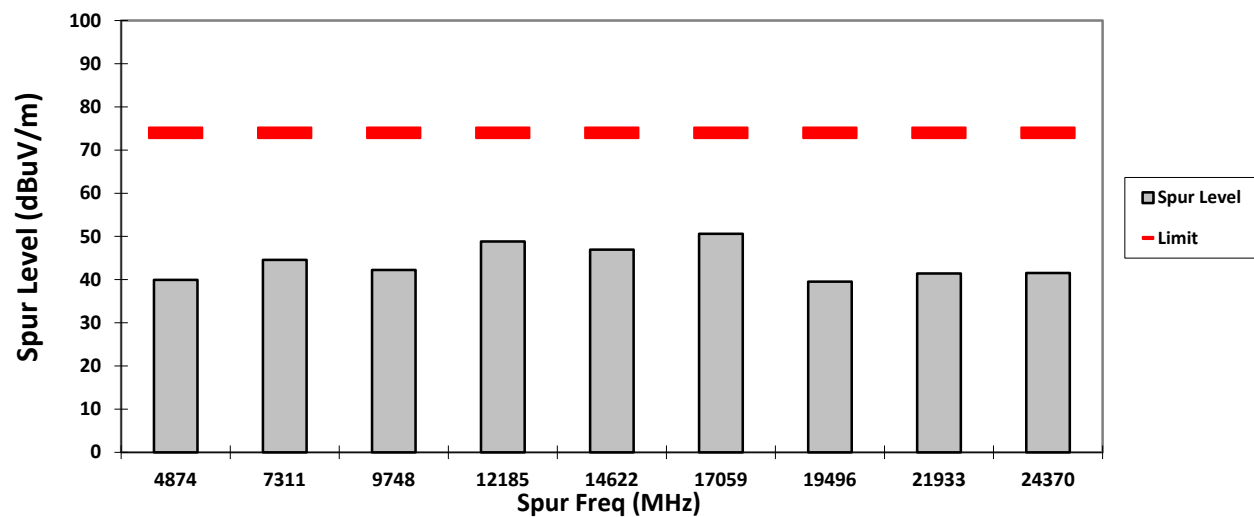

VERTICAL, AV

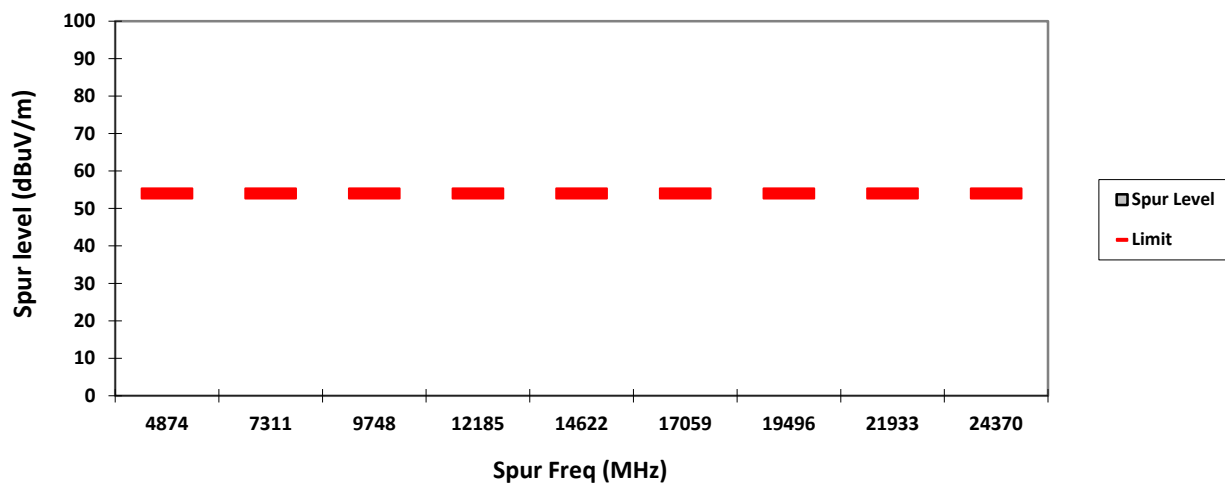

HORIZONTAL, AV

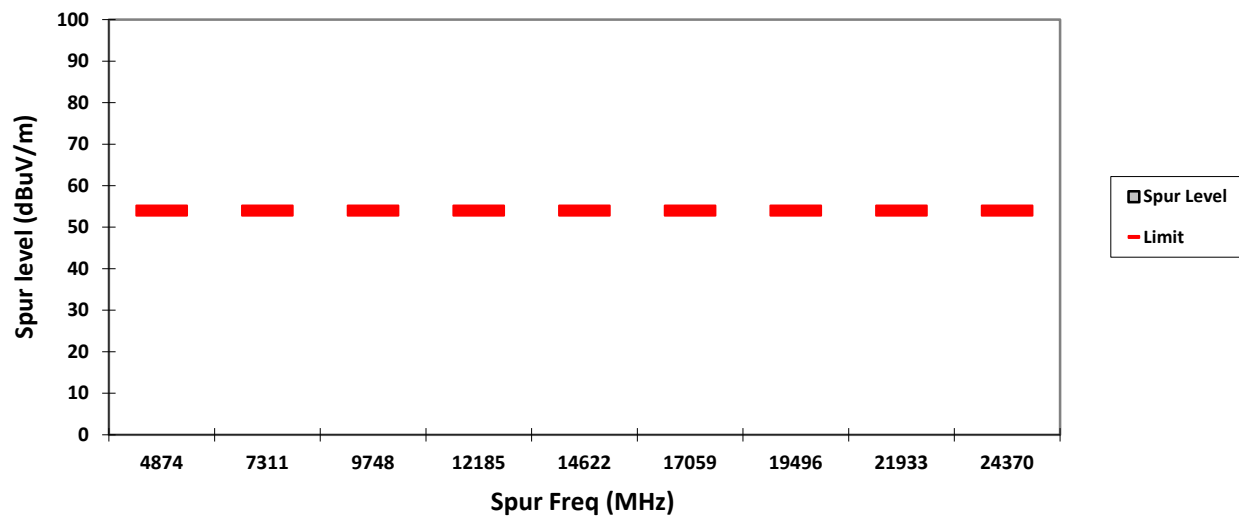

Test: WIFI SAC Transmitter Radiated Emission

Model#: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: High

Test Frequency: 2462.00 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11b)

Radiated Emission (High Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Fri, Dec 02, 2016


Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

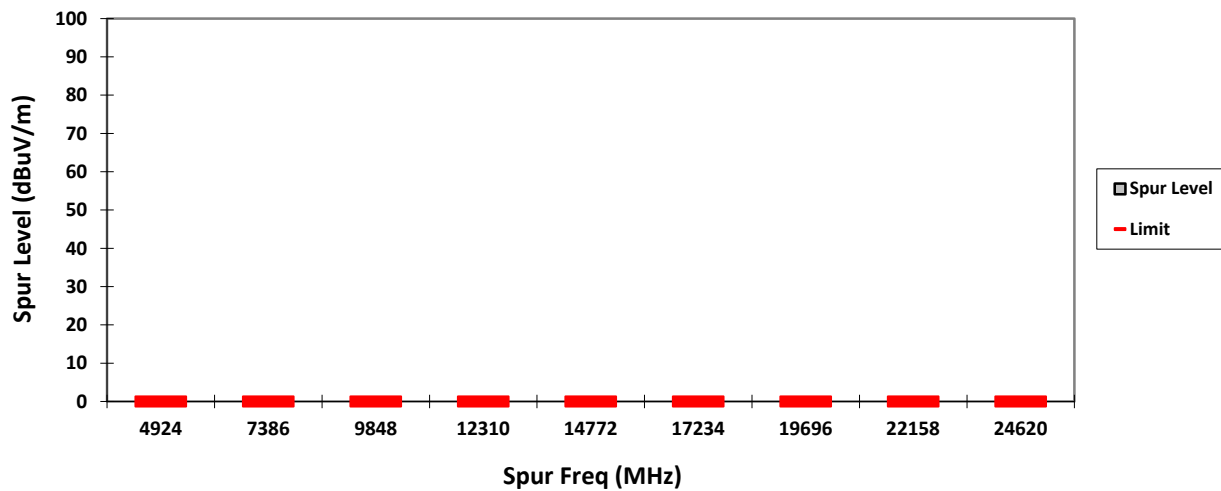


HORIZONTAL, QPK

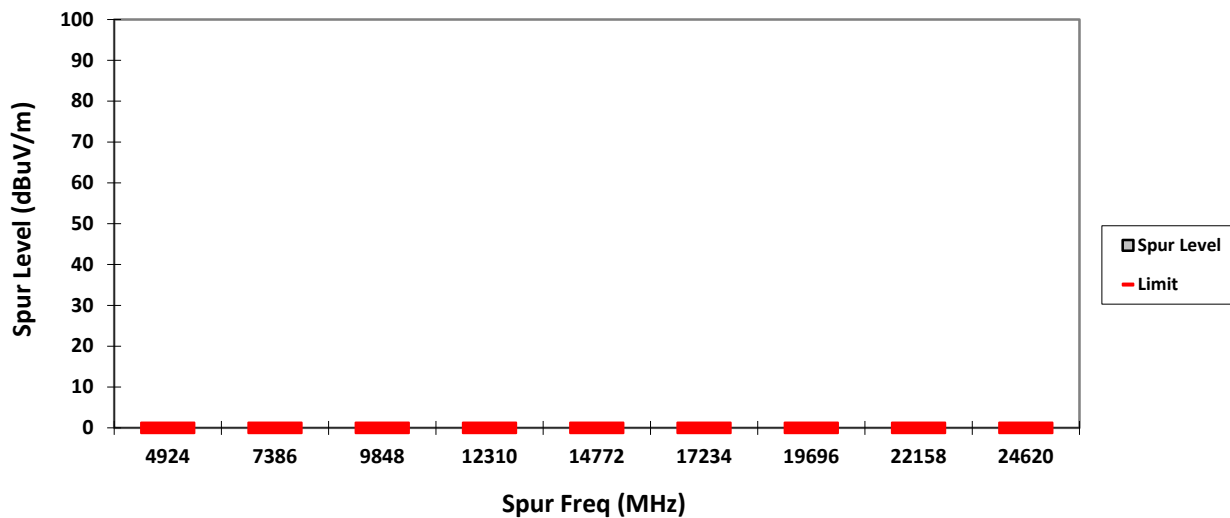


VERTICAL, PK

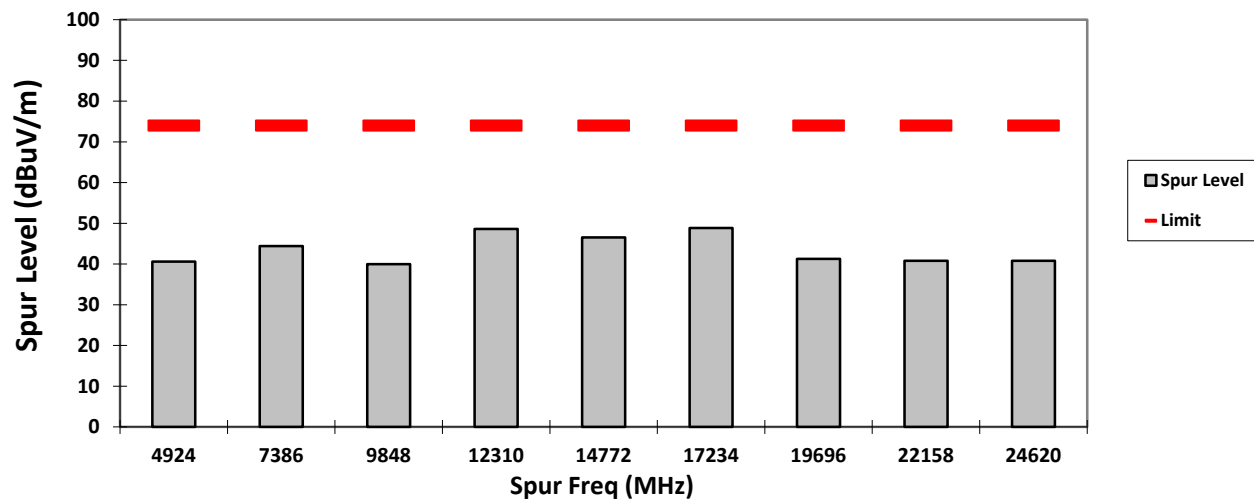


HORIZONTAL, PK

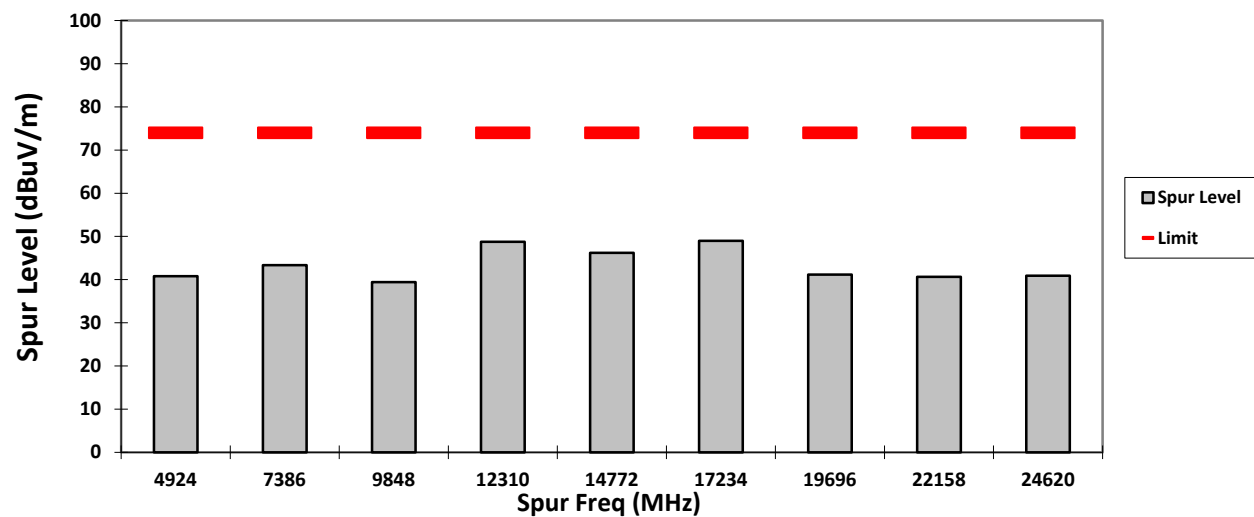

VERTICAL, AV

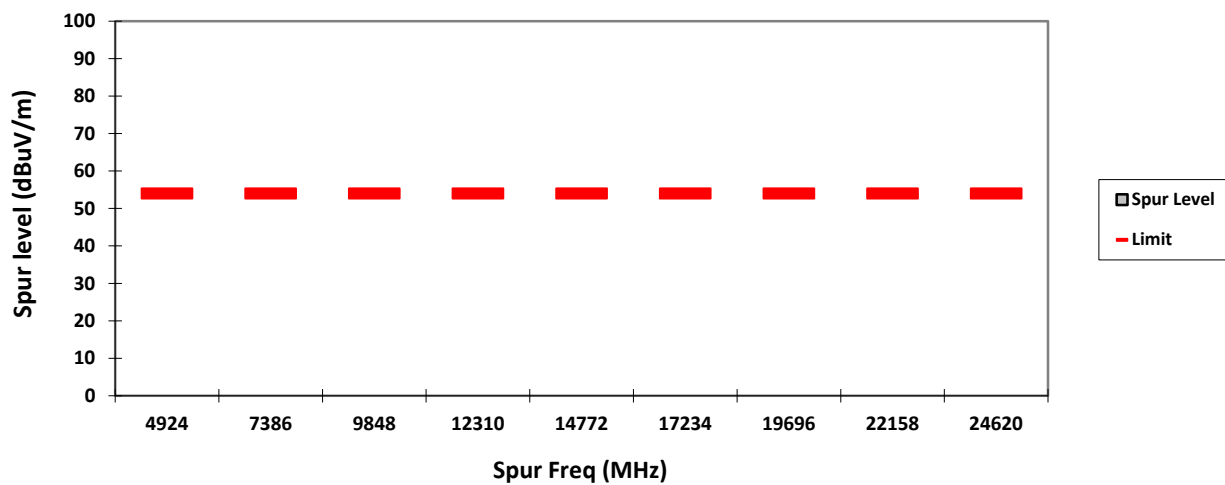

HORIZONTAL, AV

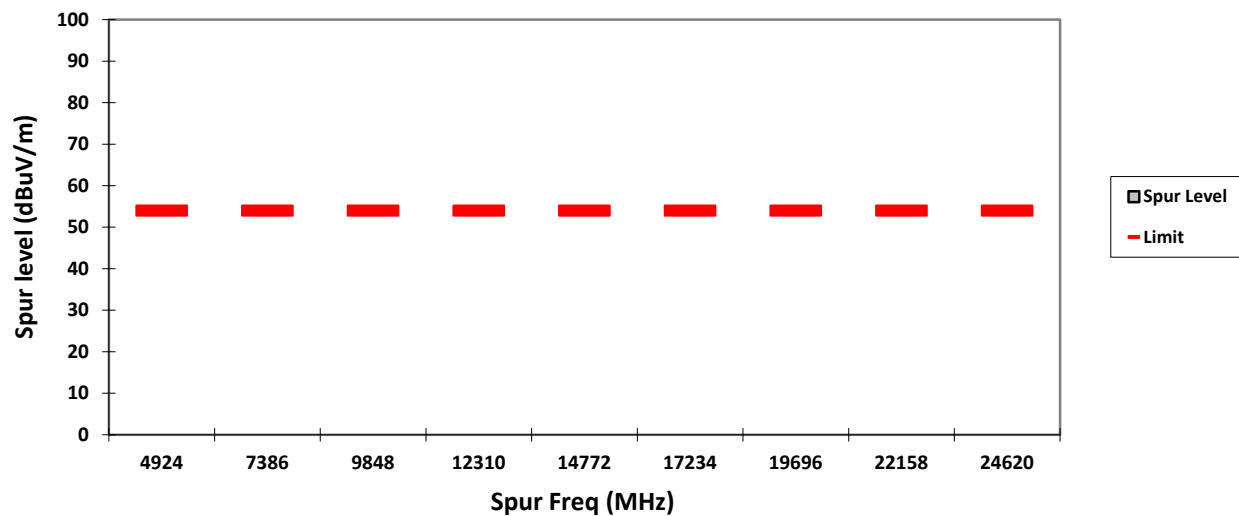

Test: WIFI SAC Transmitter Radiated Emission

Model#: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: Low

Test Frequency: 2412.00 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11g)

Radiated Emission (Low Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Fri, Dec 02, 2016


Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

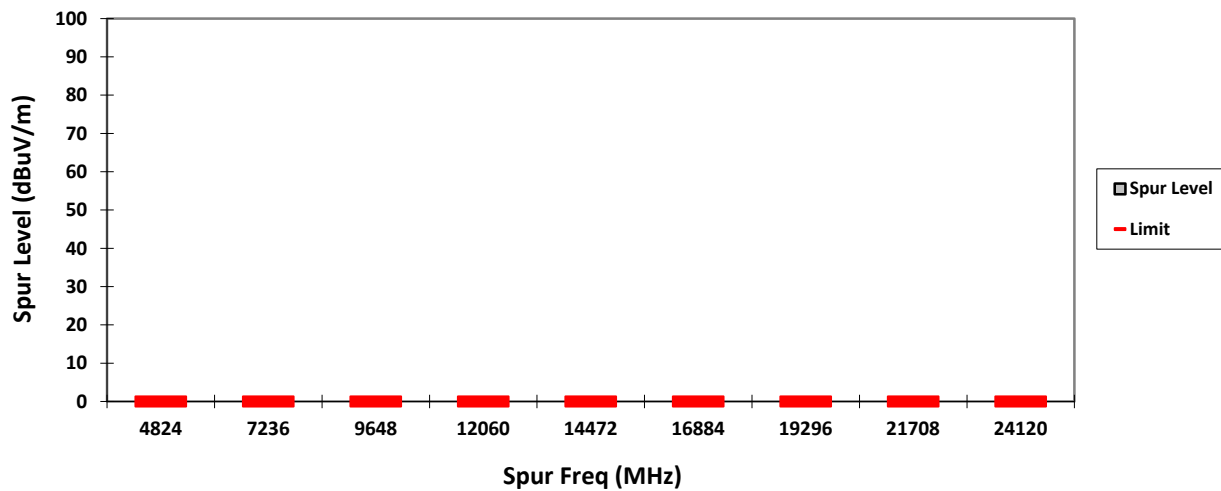


HORIZONTAL, QPK

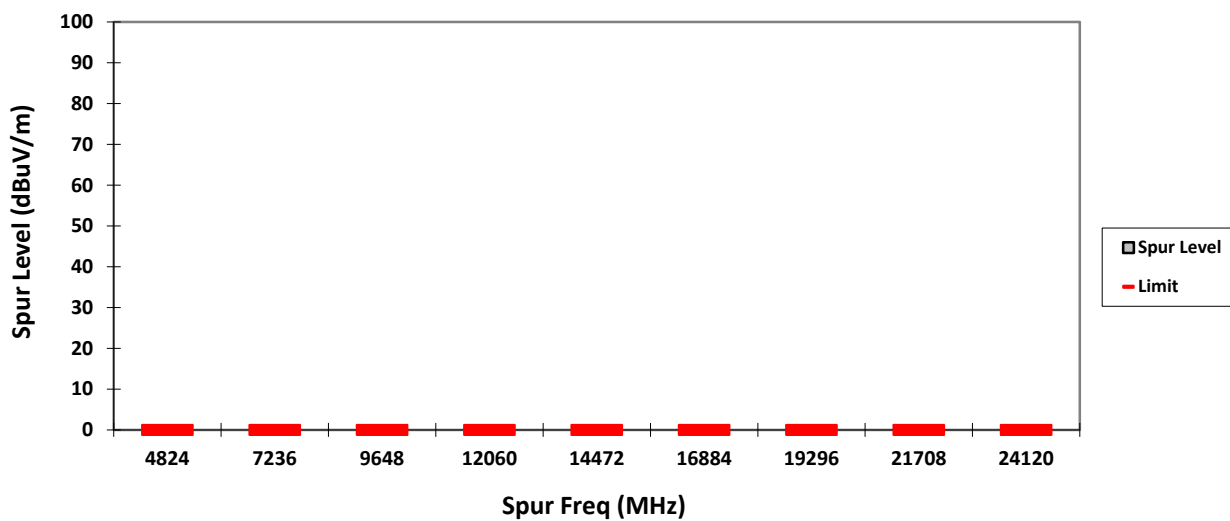


VERTICAL, PK

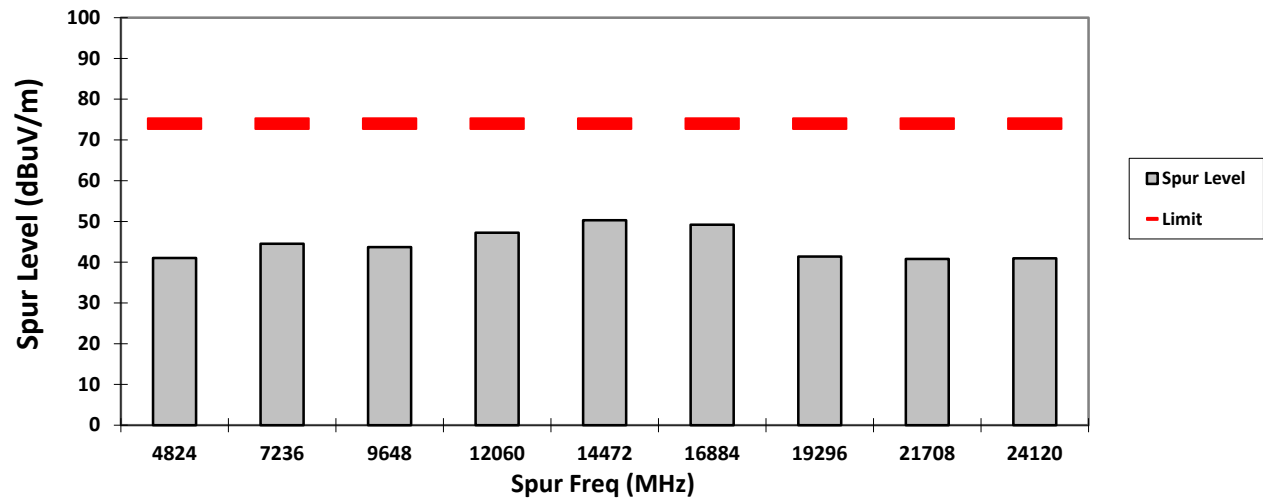


HORIZONTAL, PK

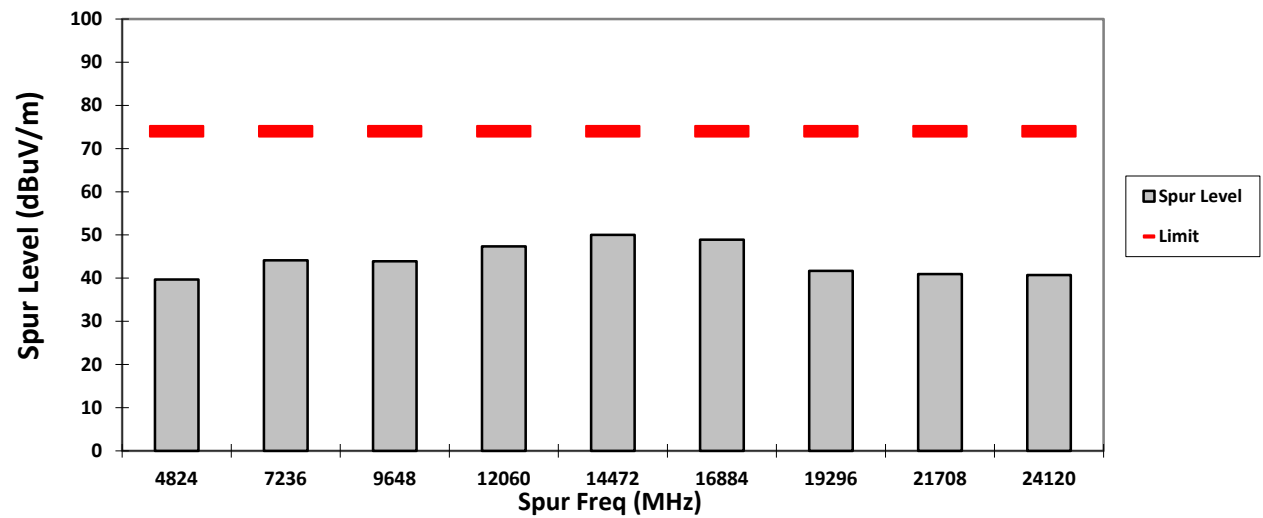

VERTICAL, AV

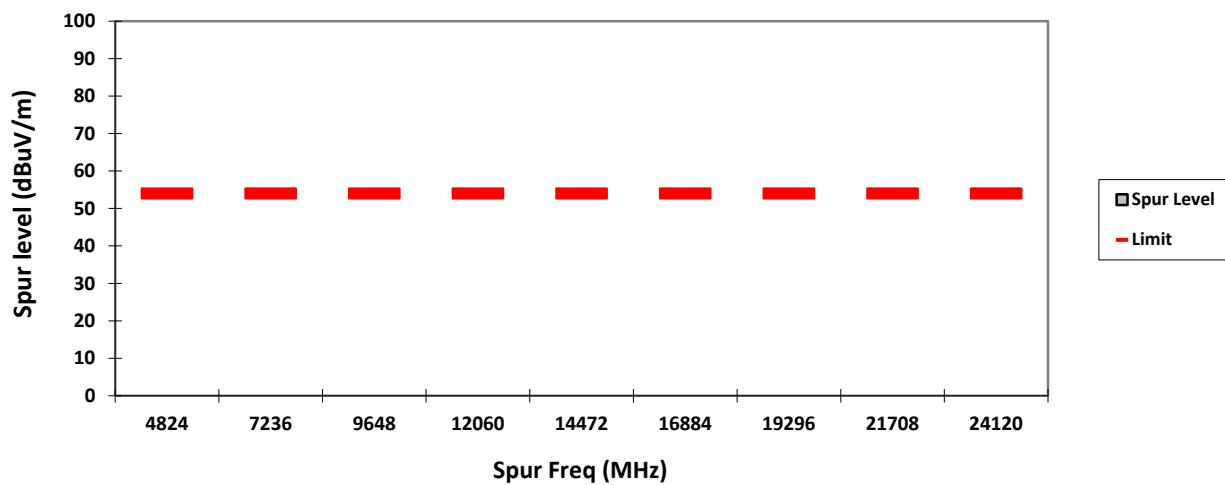

HORIZONTAL, AV

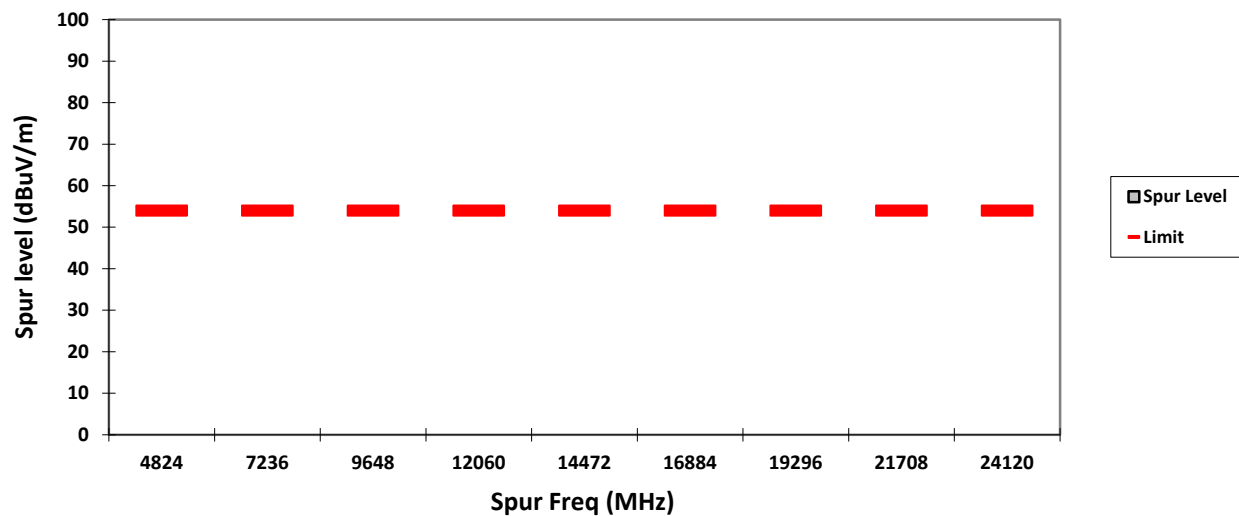

Test: WIFI SAC Transmitter Radiated Emission
Model#: H92UCH9PW7AN **S/N: 837TSX0488** **EMC SR ID#: 06481-EMC-00013**
Battery: PMNN4493A **Accessory: NA**
Test Channel: Mid **Test Frequency: 2437.00 MHz** **Test Standard: ANSI C63.10-2013**
Worst Case Plane: X-Plane (802.11g)

Radiated Emission (Mid Channel) tabular data

Vertical Radiated Emission Result										
Spur Freq (MHz)	Spur level QPK (dBμV/m)	Spur level PK (dBμV/m)	Spur level AV (dBμV/m)	Limit QPK (dBμV/m)	Limit PK (dBμV/m)	Limit AV (dBμV/m)	Margin QPK (dBμV/m)	Margin PK (dBμV/m)	Margin AV (dBμV/m)	Carrier PK Power (dBμV/m)
4874	-	40.7403**	**	-	74	54	-	33.26**	-	-
7311	-	44.5028**	**	-	74	54	-	29.50**	-	-
9748	-	41.5884**	**	-	74	54	-	32.41**	-	-
12185	-	48.5885**	**	-	74	54	-	25.41**	-	-
14622	-	46.2242**	**	-	74	54	-	27.78**	-	-
17059	-	50.2604**	**	-	74	54	-	23.74**	-	-
19496	-	40.2194**	**	-	74	54	-	33.78**	-	-
21933	-	41.5960**	**	-	74	54	-	32.40**	-	-
24370	-	41.5453**	**	-	74	54	-	32.45**	-	-
Horizontal Radiated Emission Result										
4874	-	39.8543**	**	-	74	54	-	34.15**	-	-
7311	-	44.5995**	**	-	74	54	-	29.40**	-	-
9748	-	41.5485**	**	-	74	54	-	32.45**	-	-
12185	-	48.5617**	**	-	74	54	-	25.44**	-	-
14622	-	45.6442**	**	-	74	54	-	28.36**	-	-
17059	-	48.9728**	**	-	74	54	-	25.03**	-	-
19496	-	39.5124**	**	-	74	54	-	34.49**	-	-
21933	-	41.2077**	**	-	74	54	-	32.79**	-	-
24370	-	42.0433**	**	-	74	54	-	31.96**	-	-


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4
Test Performed by: Nazrin&Qawiman
System MU: 5.01dB


Humidity (%): 71.6
Test Date: Fri, Dec 02, 2016
Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

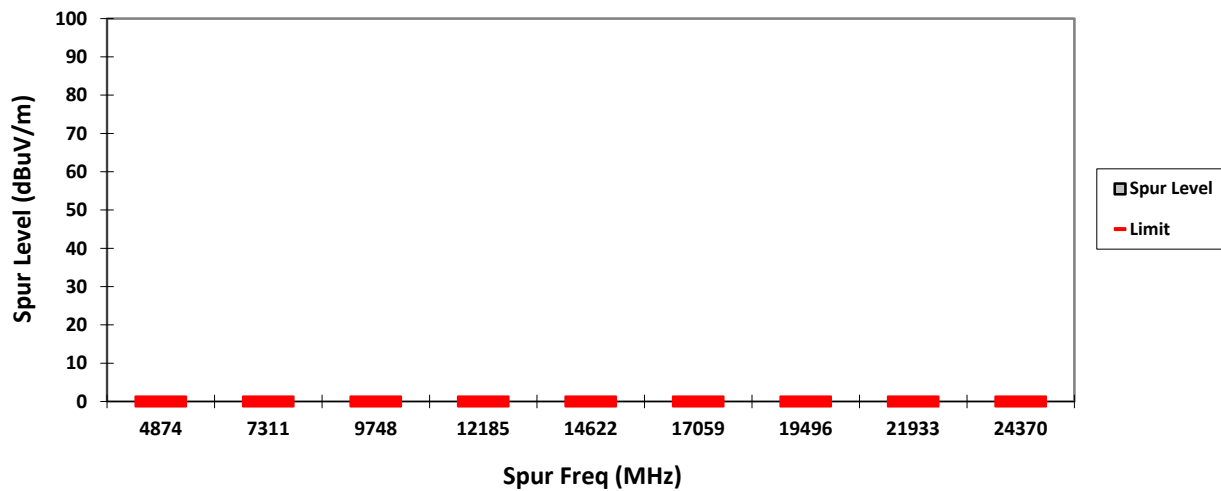


HORIZONTAL, QPK

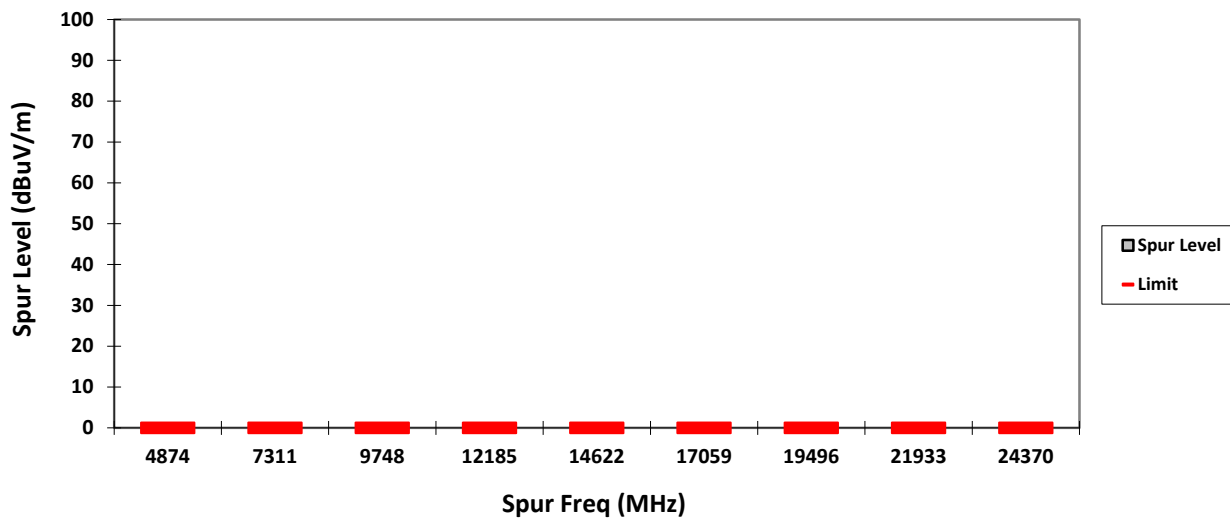


VERTICAL, PK

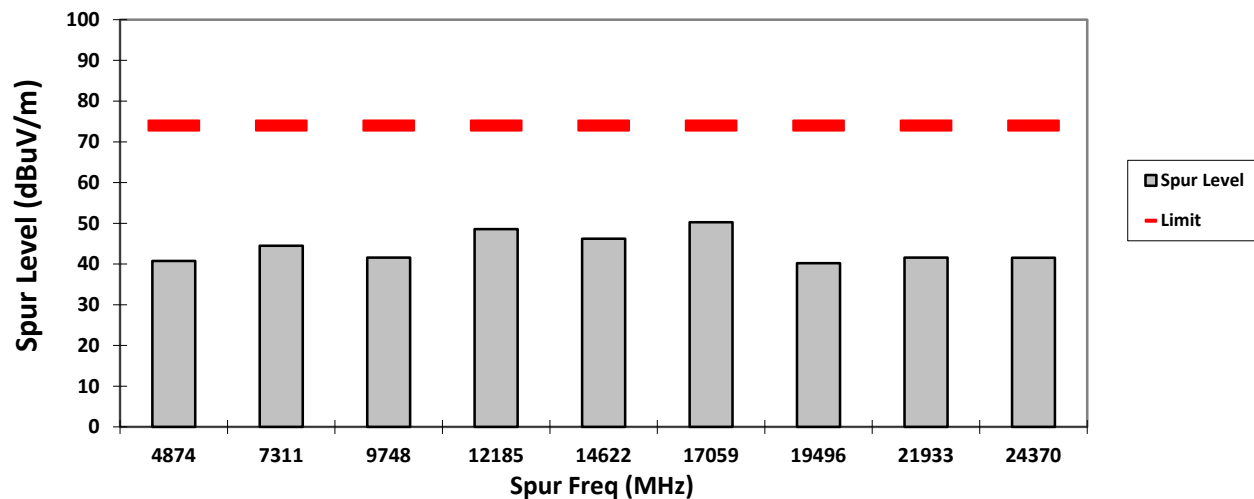


HORIZONTAL, PK

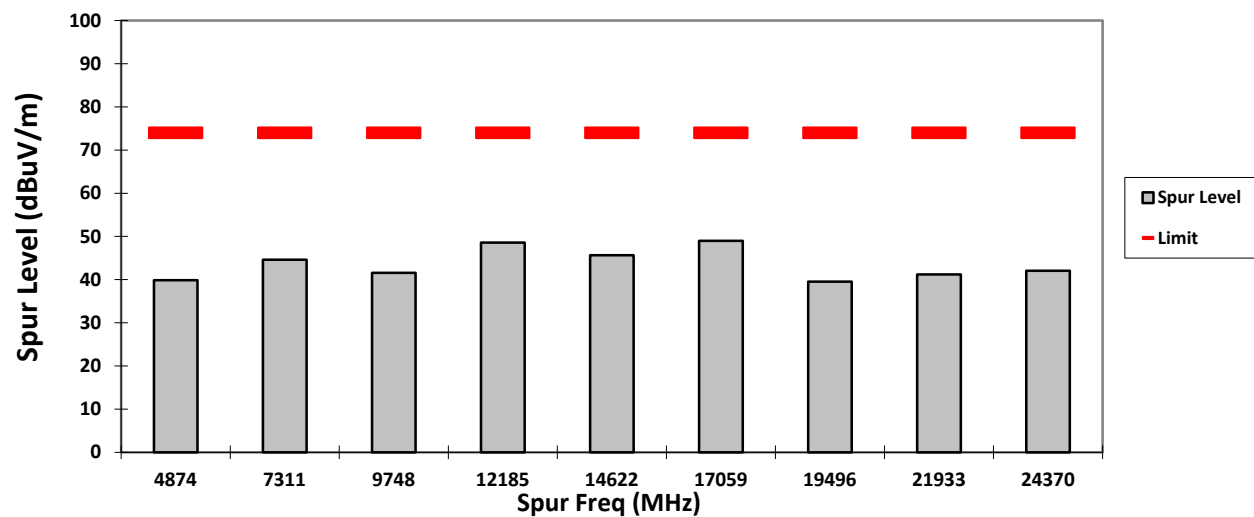

VERTICAL, AV

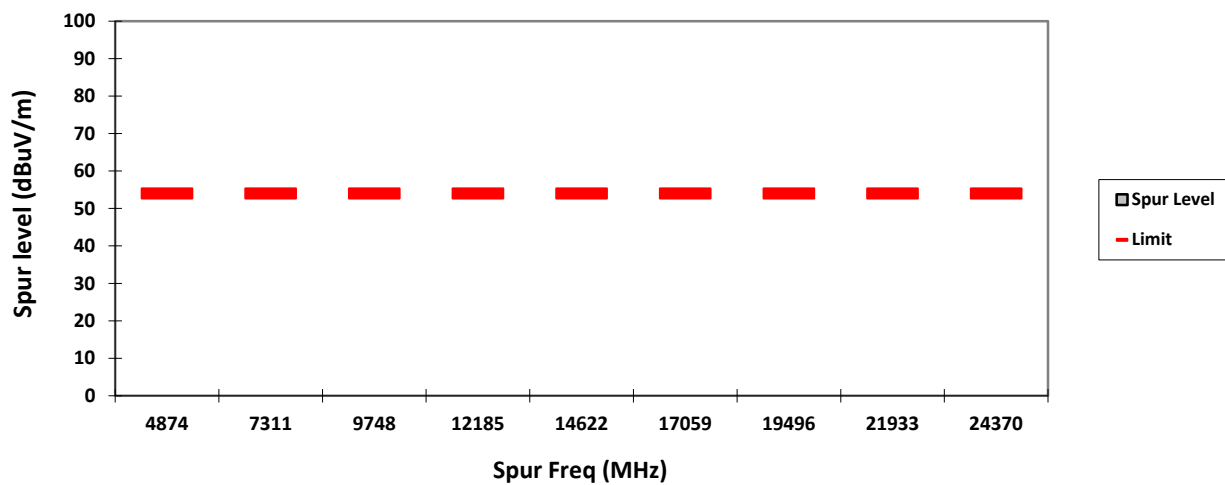

HORIZONTAL, AV

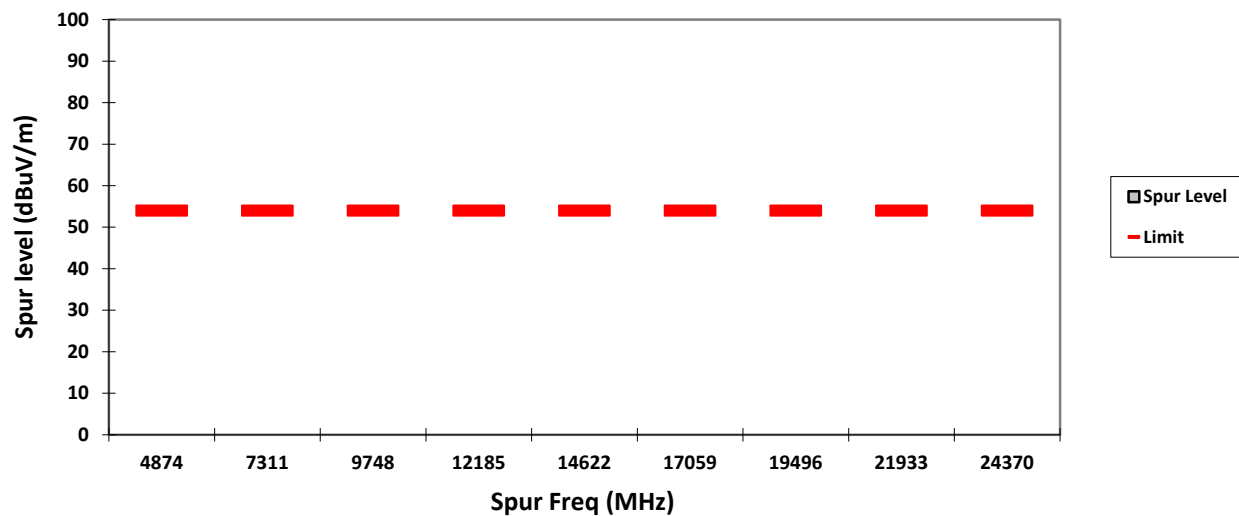

Model#: H92UCH9PW7AN **Test:** WIFI SAC Transmitter Radiated Emission
S/N: 837TSX0488 **EMC SR ID#:** 06481-EMC-00013
Battery: PMNN4493A **Accessory:** NA
Test Channel: High **Test Frequency:** 2462.00 MHz **Test Standard:** ANSI C63.10-2013
Worst Case Plane: X-Plane (802.11g)

Vertical Radiated Emission Result


[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Humidity (%): 71.6
Test Date: Fri, Dec 02, 2016
Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

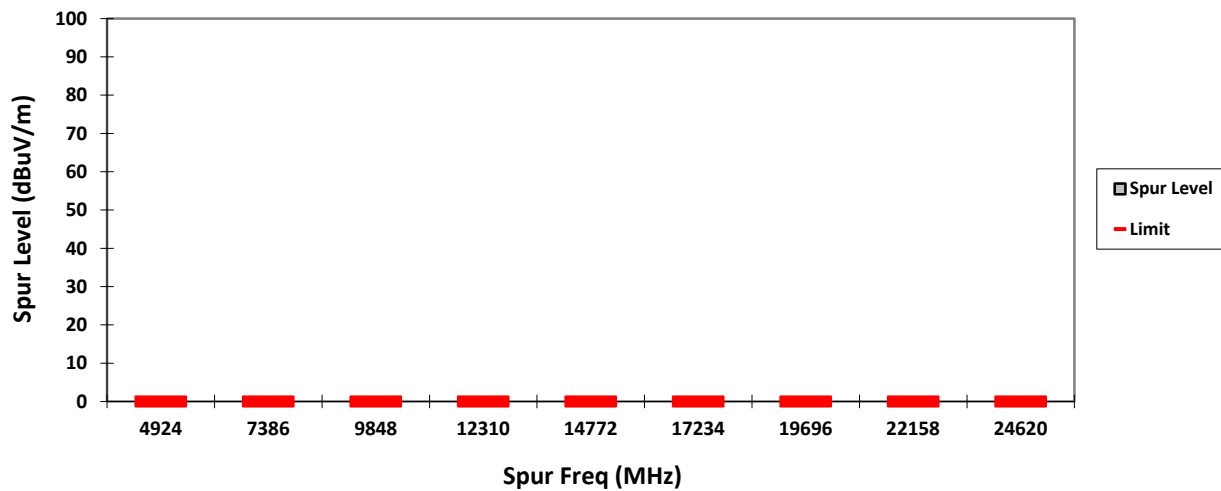


HORIZONTAL, QPK

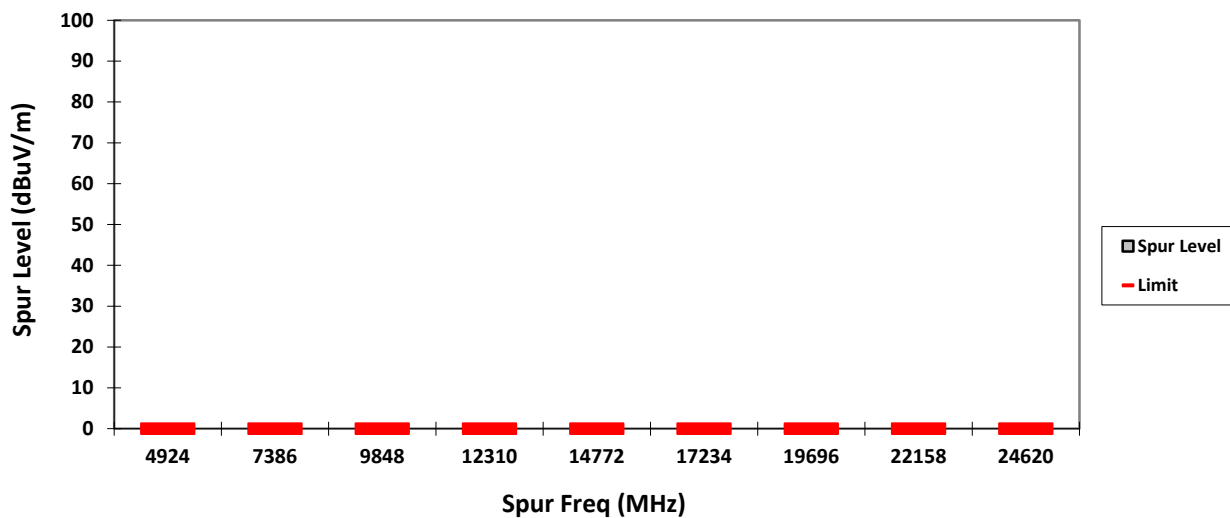


VERTICAL, PK

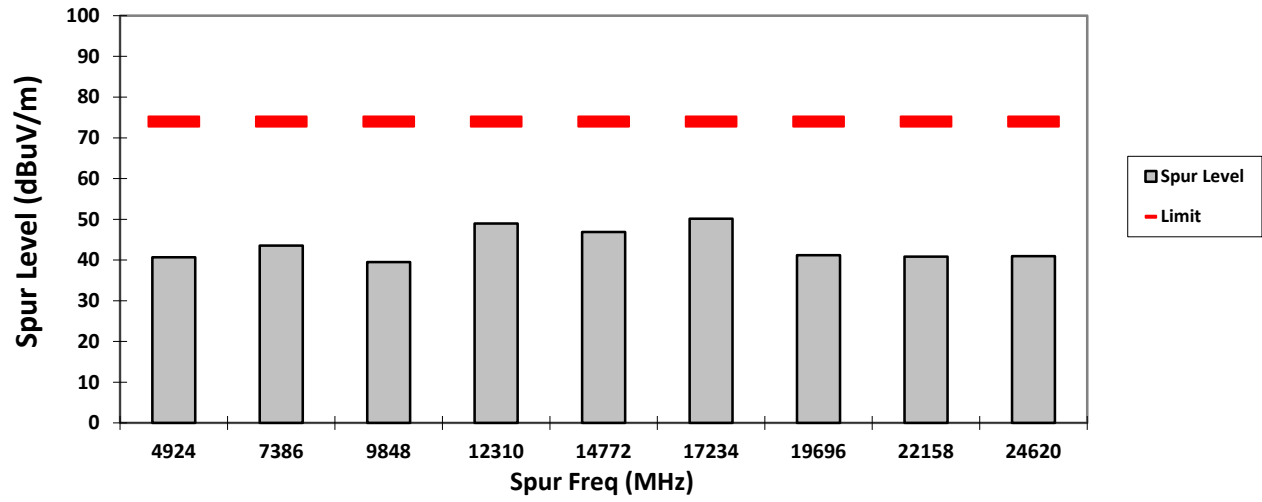


HORIZONTAL, PK

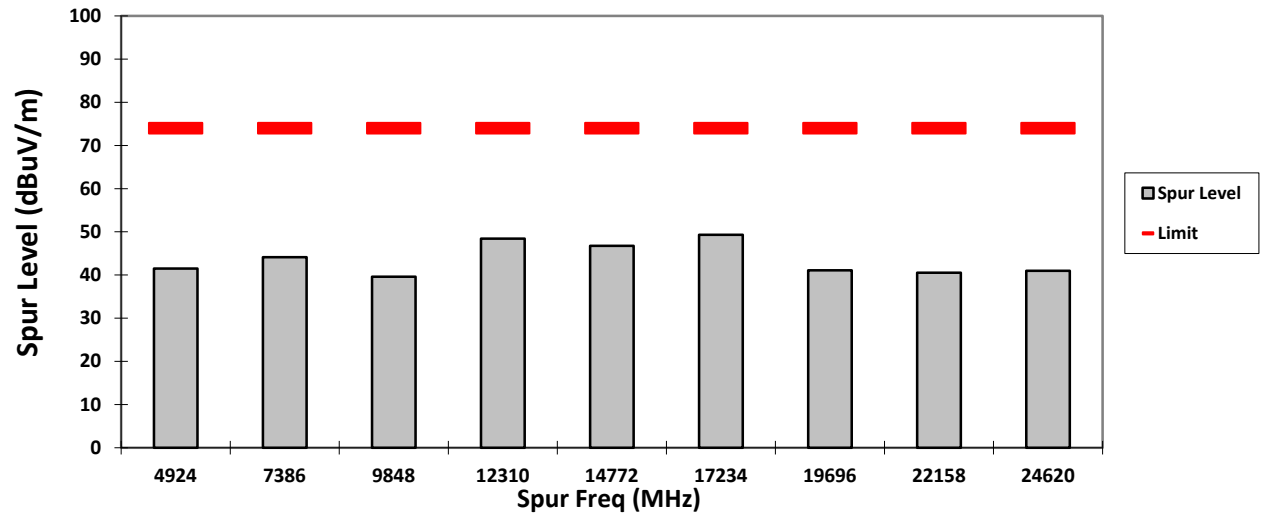

VERTICAL, AV

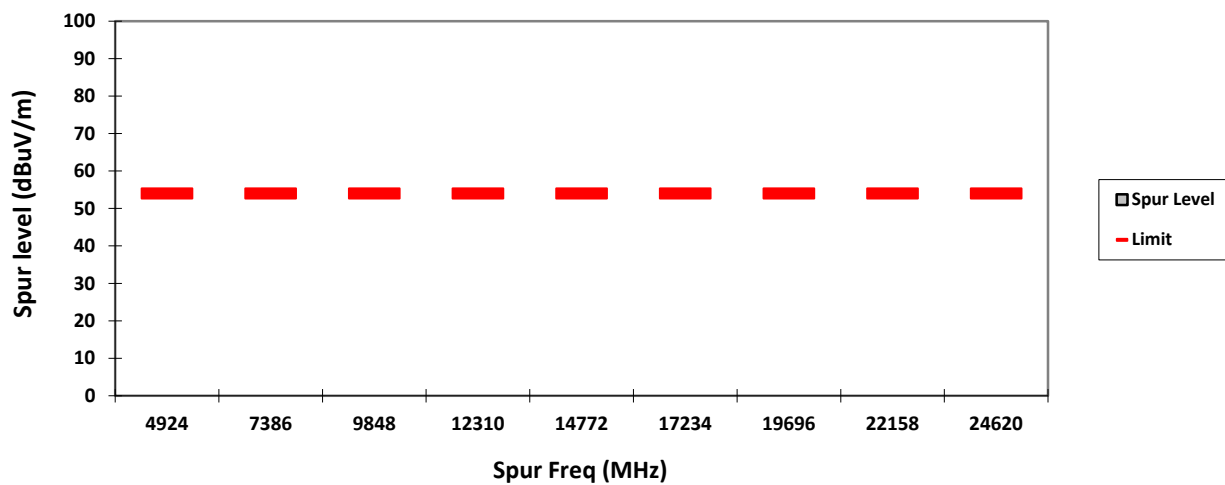

HORIZONTAL, AV

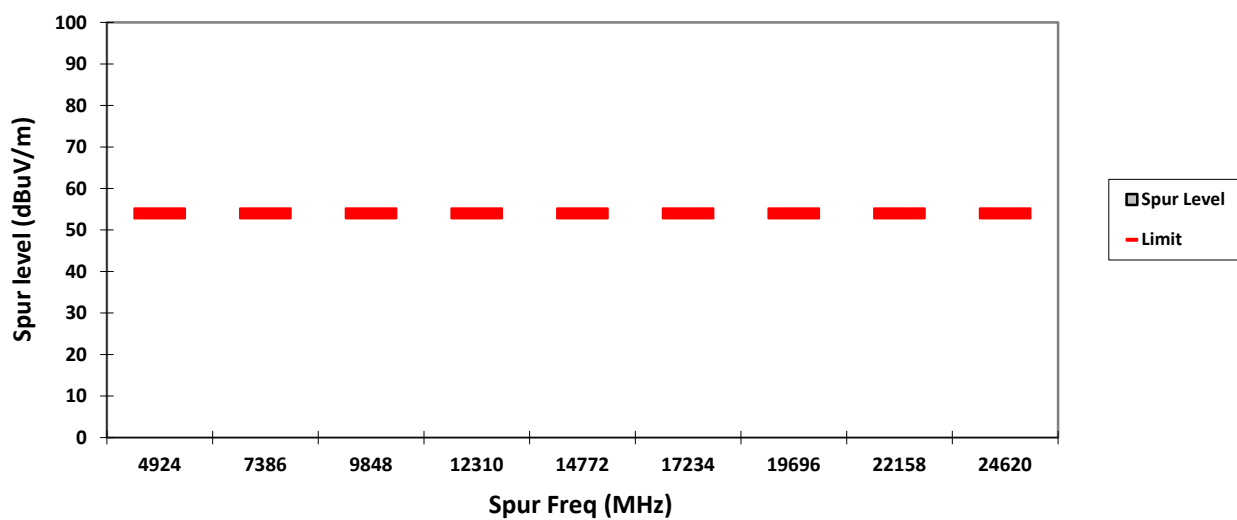

Model#: H92UCH9PW7AN **Test:** WIFI SAC Transmitter Radiated Emission
S/N: 837TSX0488 **EMC SR ID#:** 06481-EMC-00013
Battery: PMNN4493A **Accessory:** NA
Test Channel: Low **Test Frequency:** 2412.00 MHz **Test Standard:** ANSI C63.10-2013
Worst Case Plane: X-Plane (802.11n)

Radiated Emission (Low Channel) tabular data

[illegible]


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4
Test Performed by: Nazrin&Qawiman
System MU: 5.01dB


Humidity (%): 71.6
Test Date: Fri, Dec 02, 2016
Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

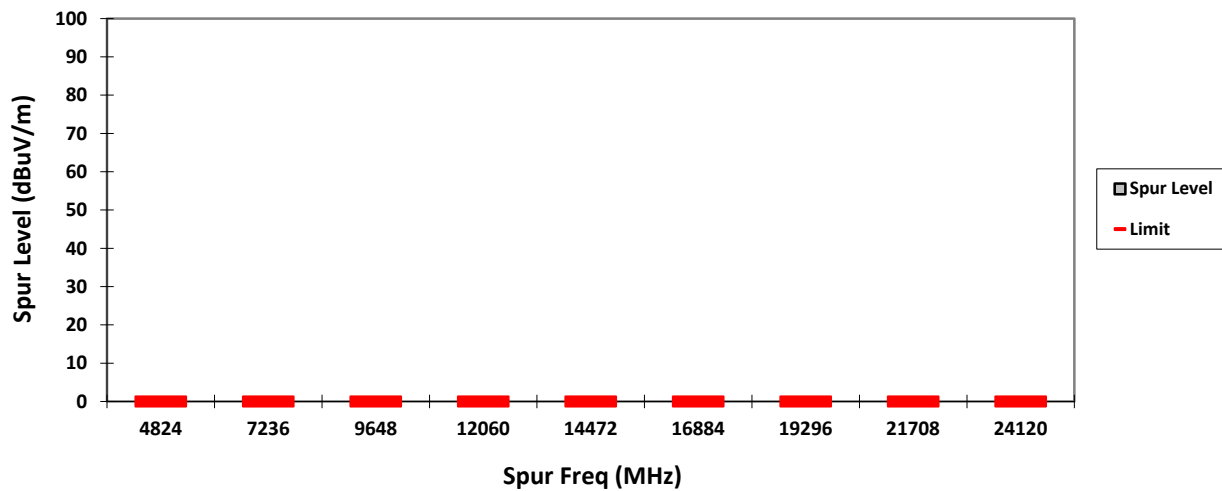


HORIZONTAL, QPK

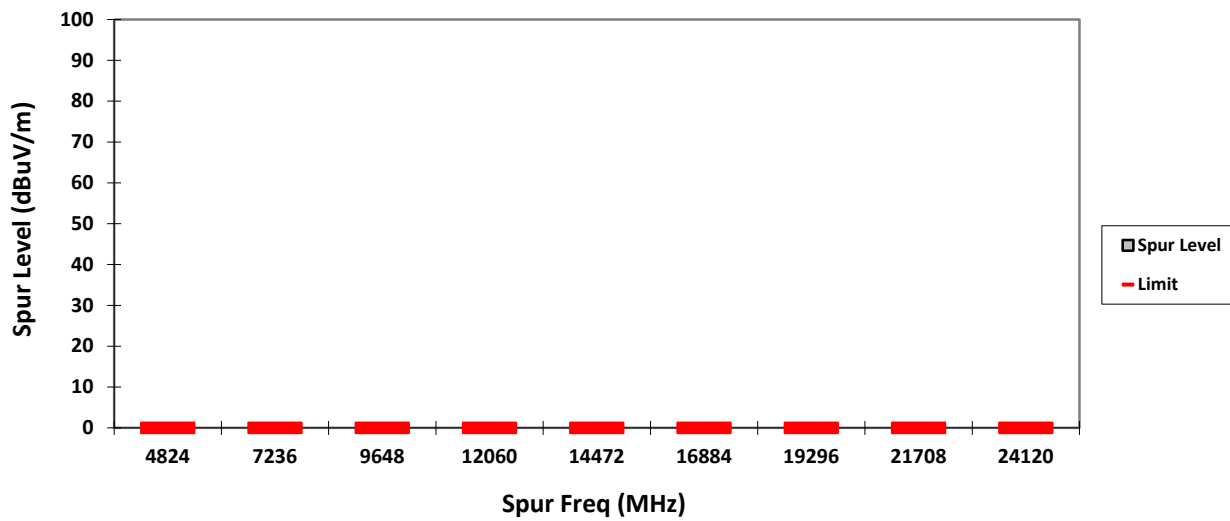


VERTICAL, PK

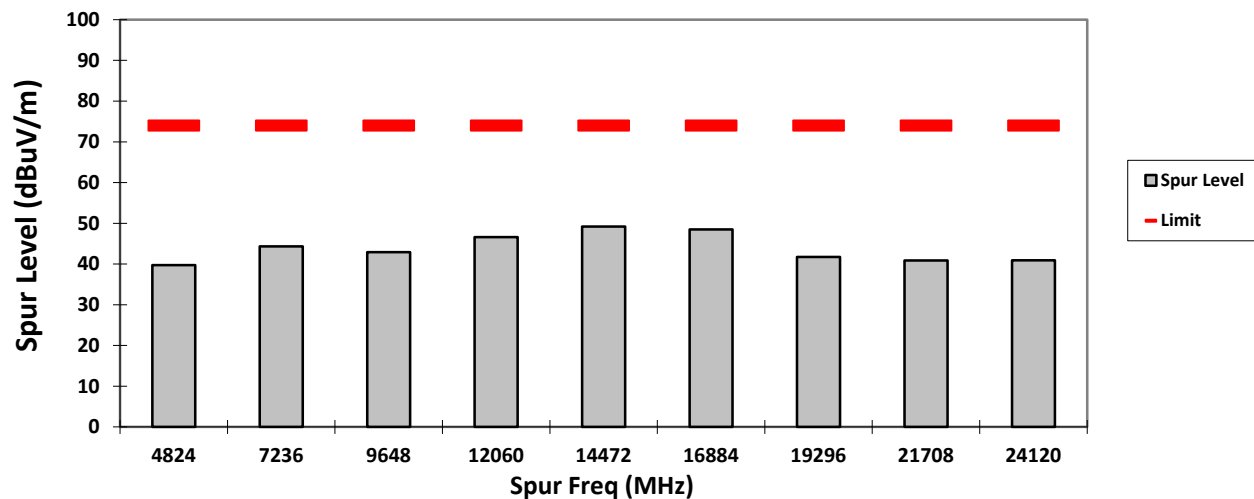


HORIZONTAL, PK

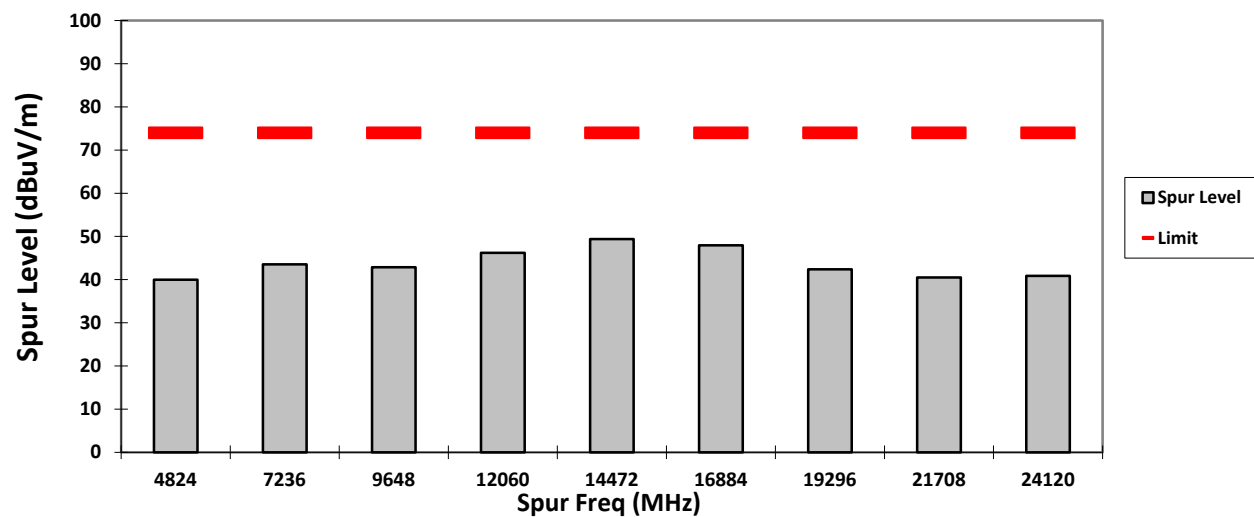

VERTICAL, AV

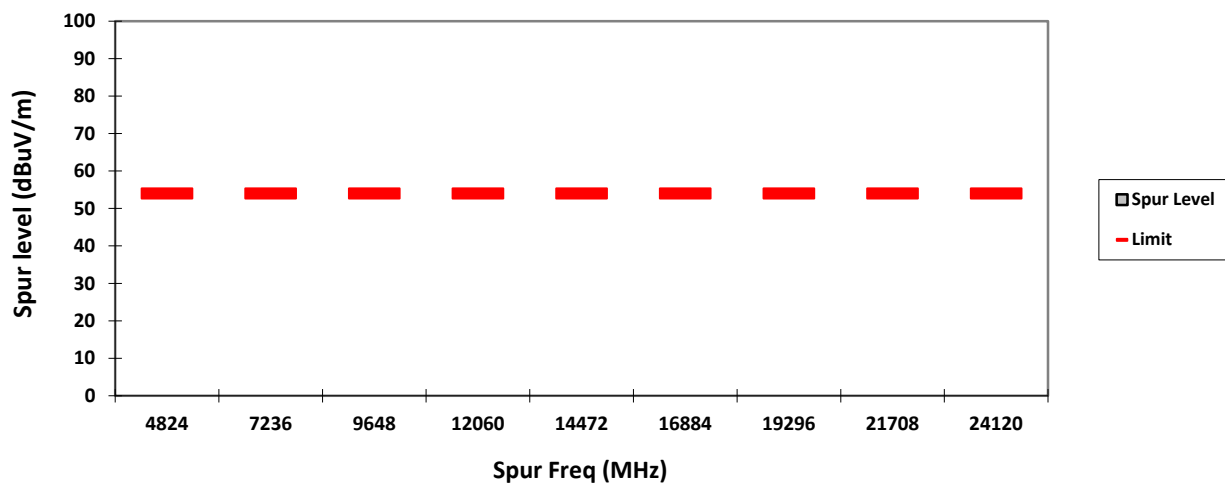

HORIZONTAL, AV

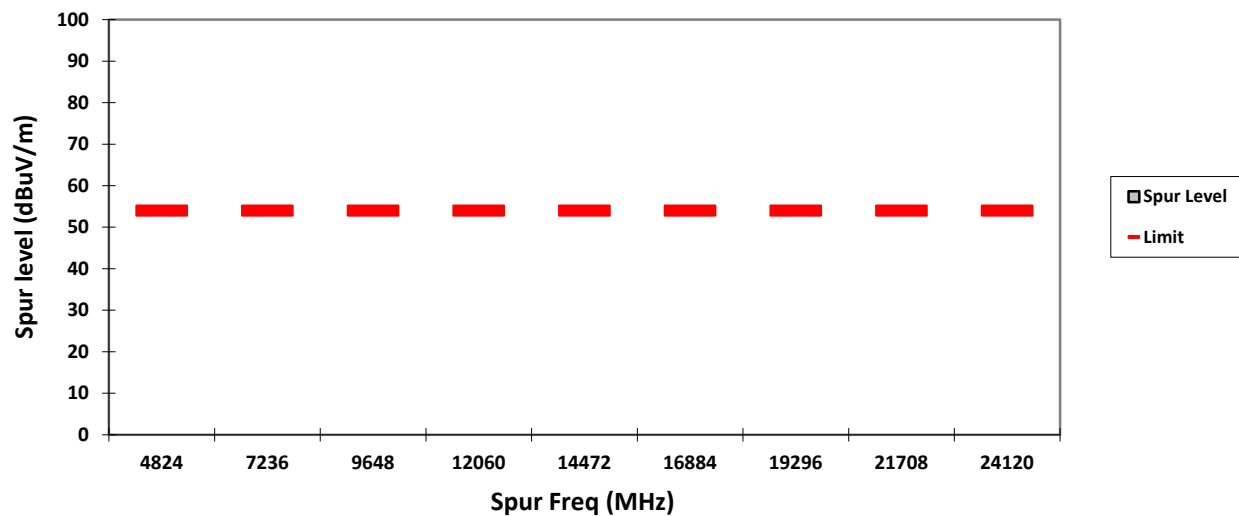

Test: WIFI SAC Transmitter Radiated Emission

Model#: H92UCH9PW7AN

S/N: 837TSX0488

EMC SR ID#: 06481-EMC-00013

Battery: PMNN4493A

Accessory: NA

Test Channel: Mid

Test Frequency: 2437.00 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: X-Plane (802.11n)

Radiated Emission (Mid Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 23.4

Test Performed by: Nazrin&Qawiman

System MU: 5.01dB


Humidity (%): 71.6

Test Date: Fri, Dec 02, 2016


Duty Cycle (%): > 98%

Remarks: ** Indicates the spurious emission could not be detected due to noise limitation or ambient.


VERTICAL, QPK

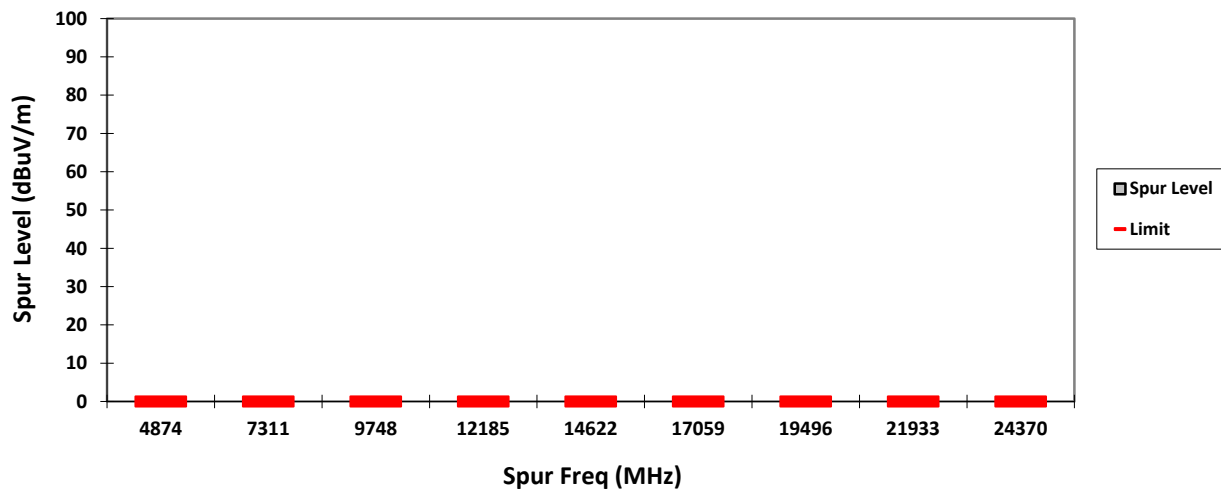


VERTICAL, QPK

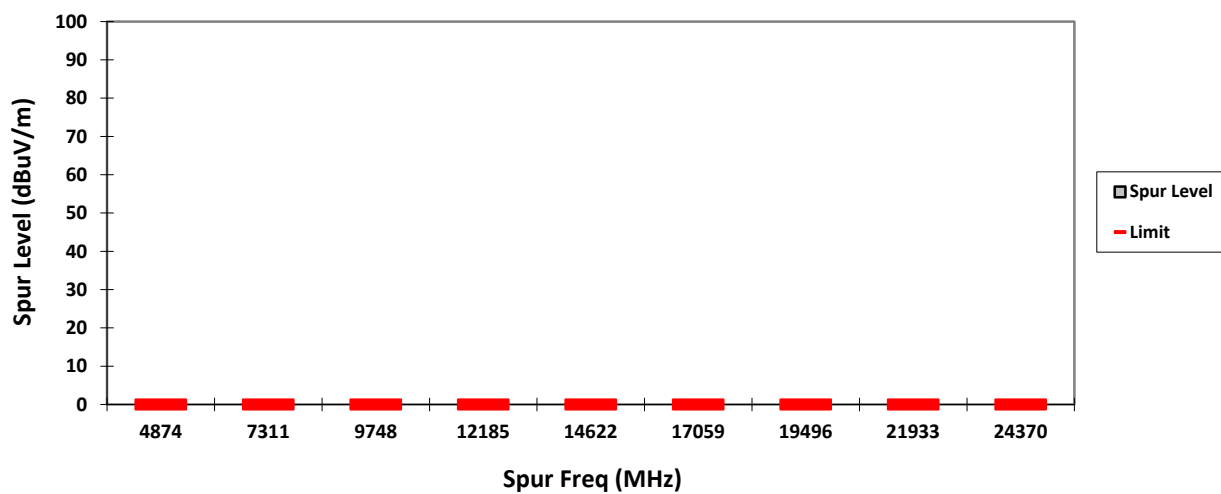


VERTICAL, PK

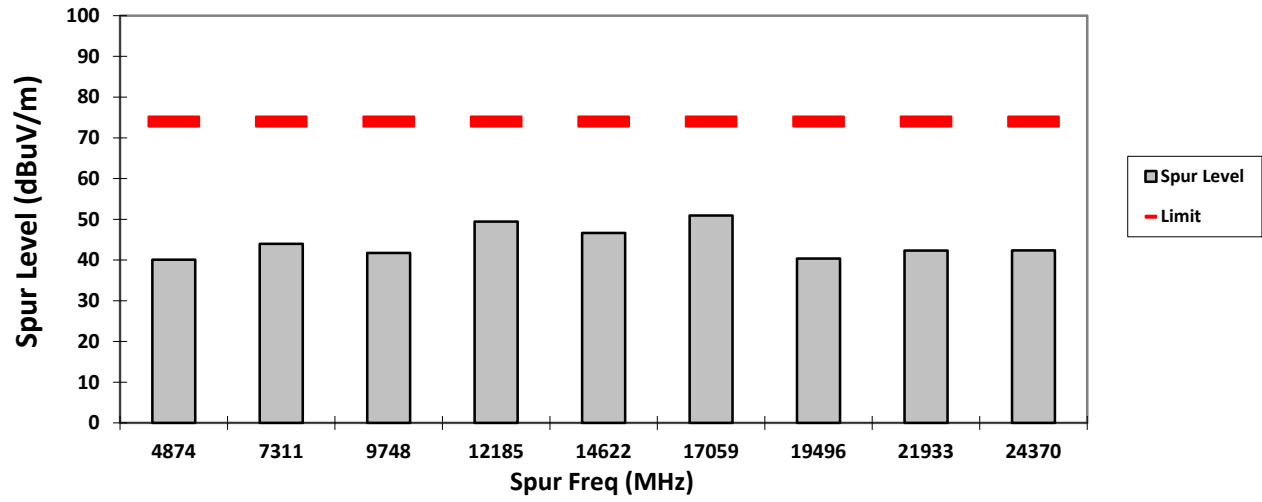


HORIZONTAL, PK

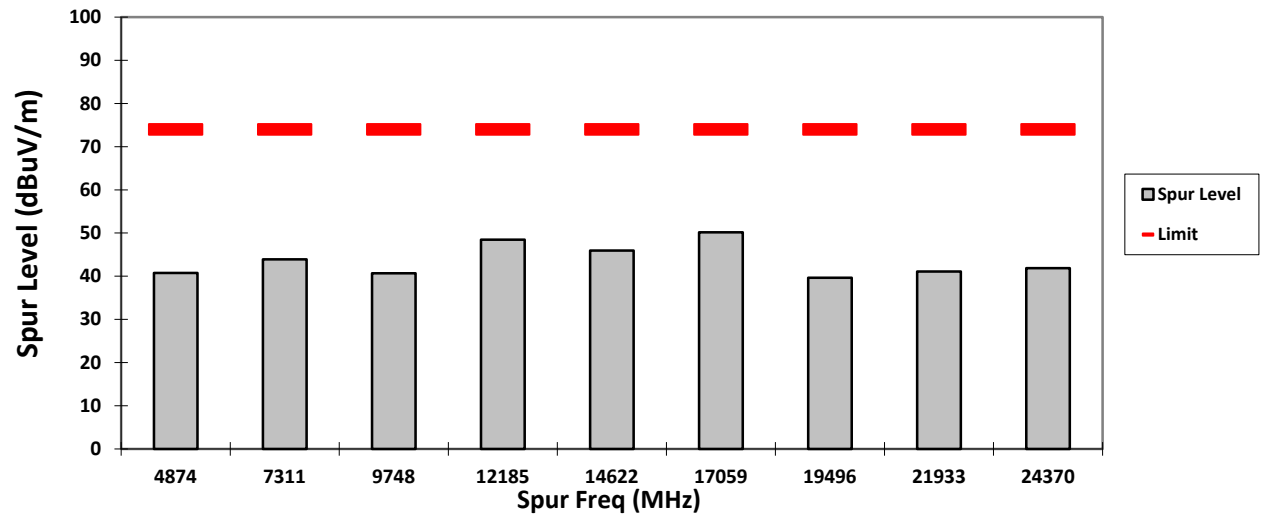


VERTICAL, AV

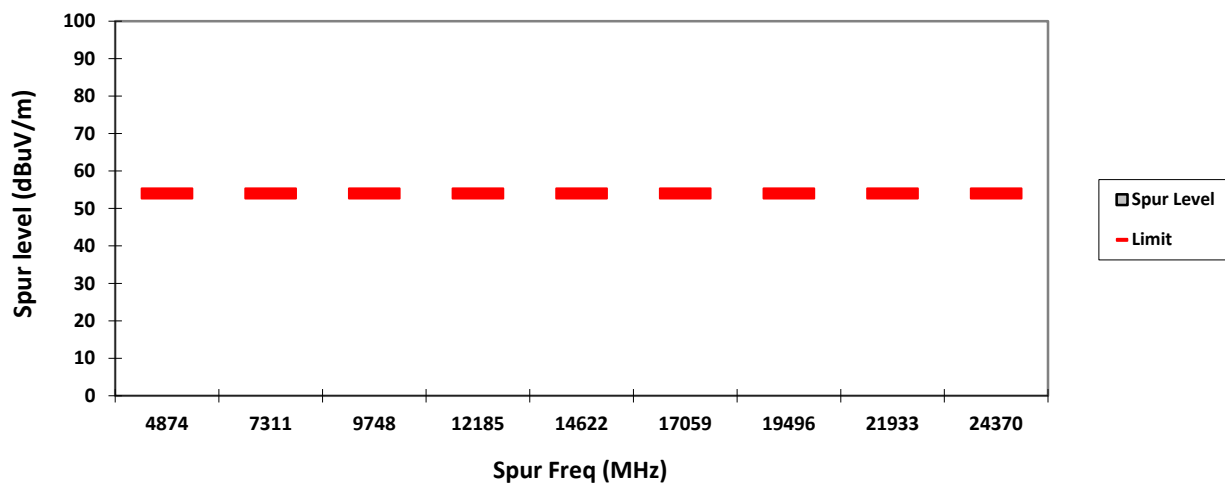


HORIZONTAL, AV

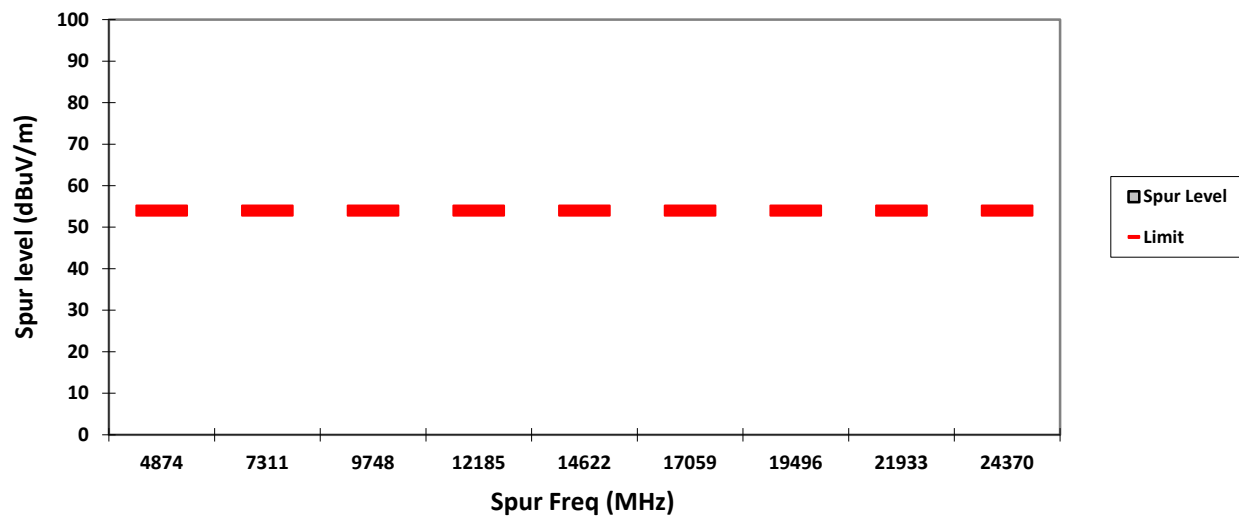


VERTICAL, QPK

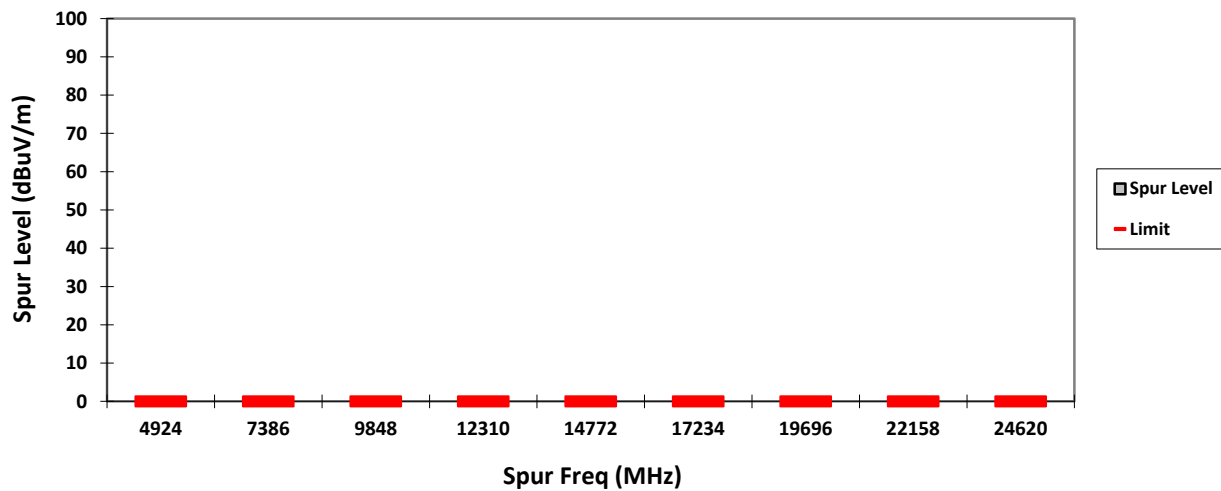


HORIZONTAL, QPK

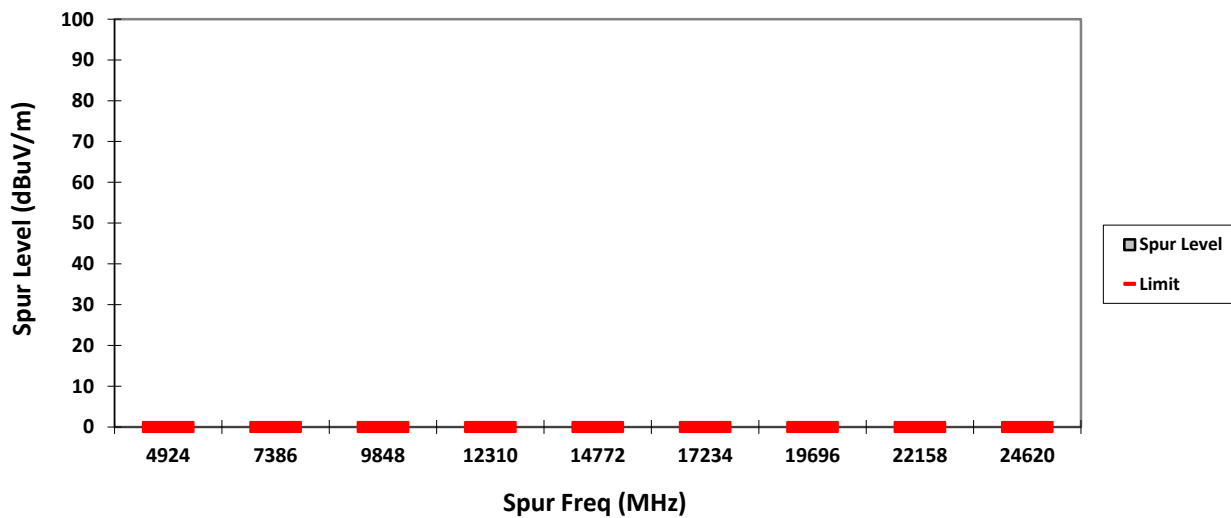


VERTICAL, PK

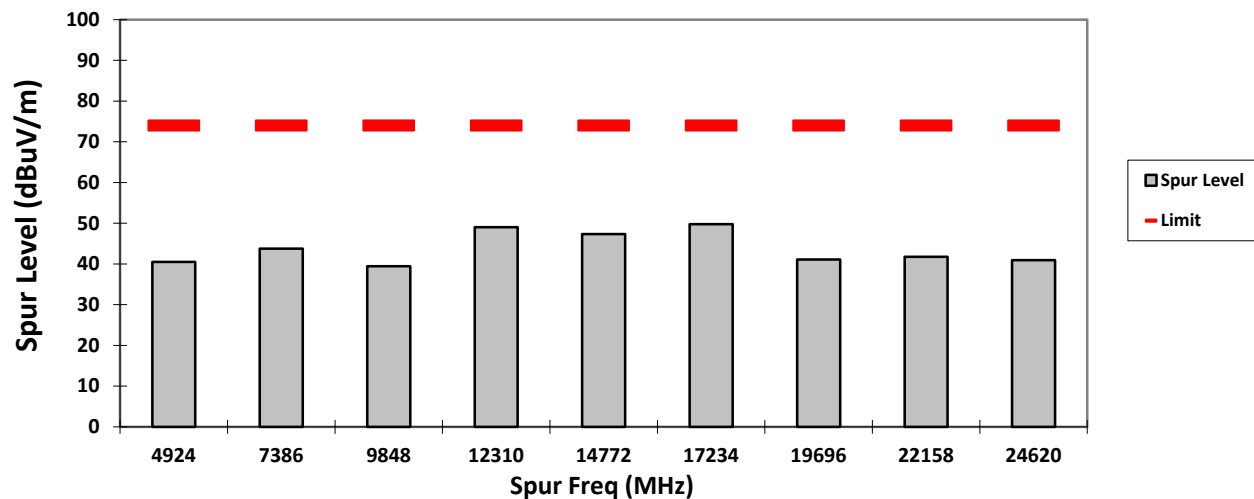


HORIZONTAL, PK

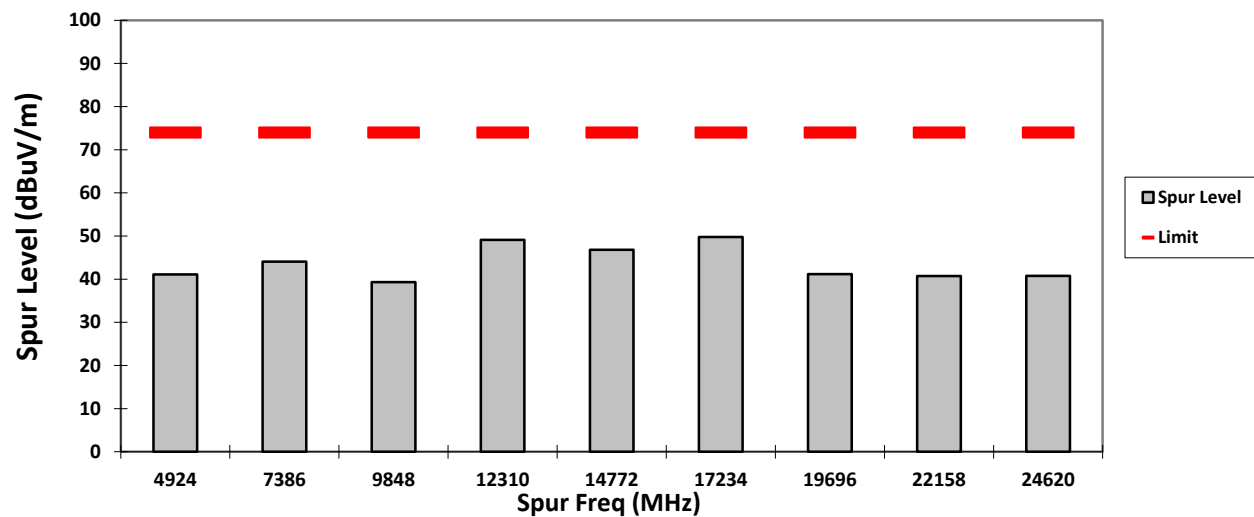

VERTICAL, AV

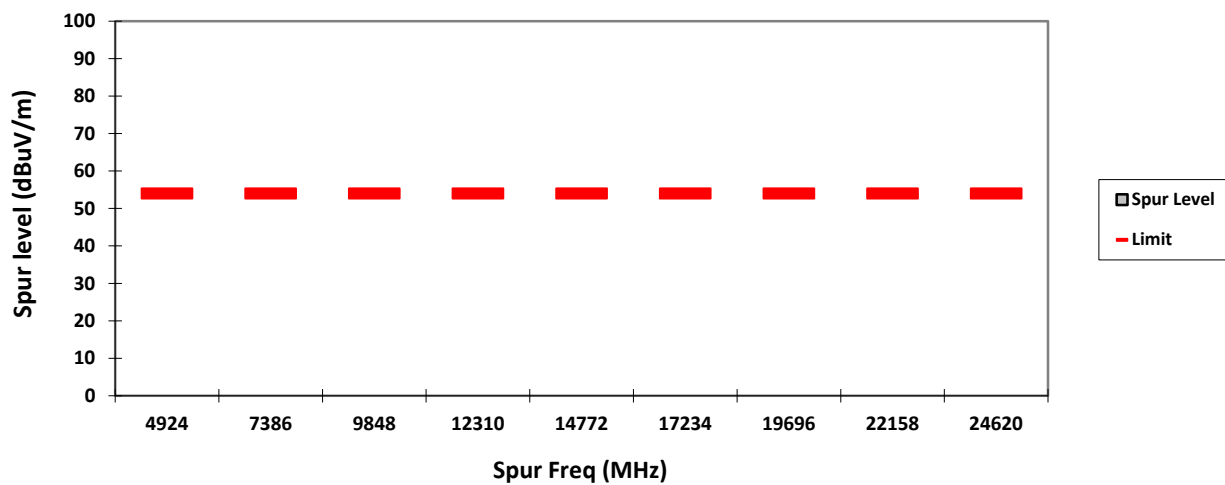


HORIZONTAL, AV

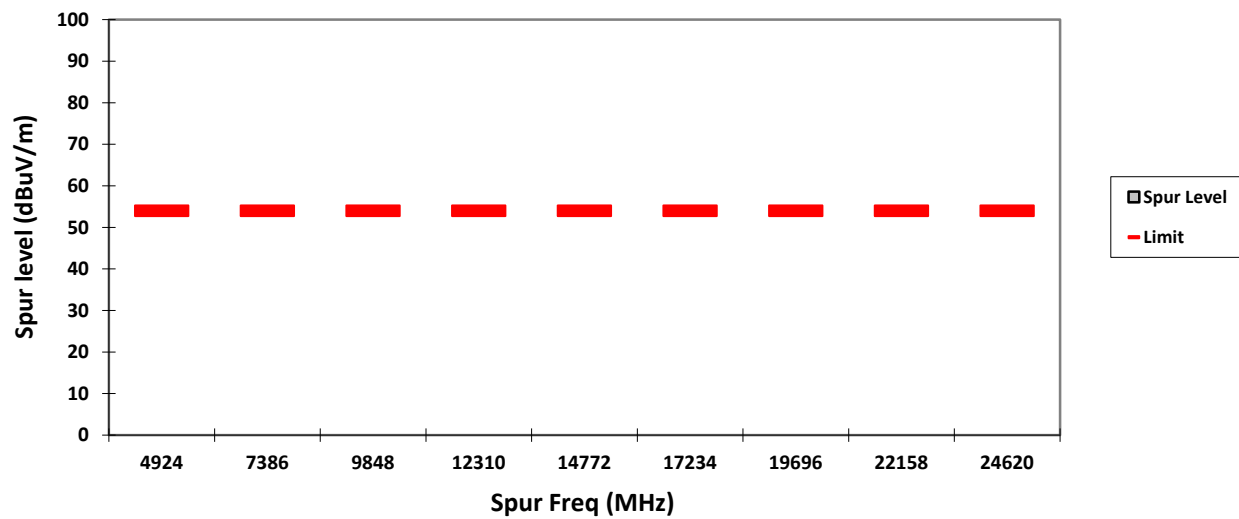

6.8 AC Powerline Conducted Emission

6.8.1 Test Setup

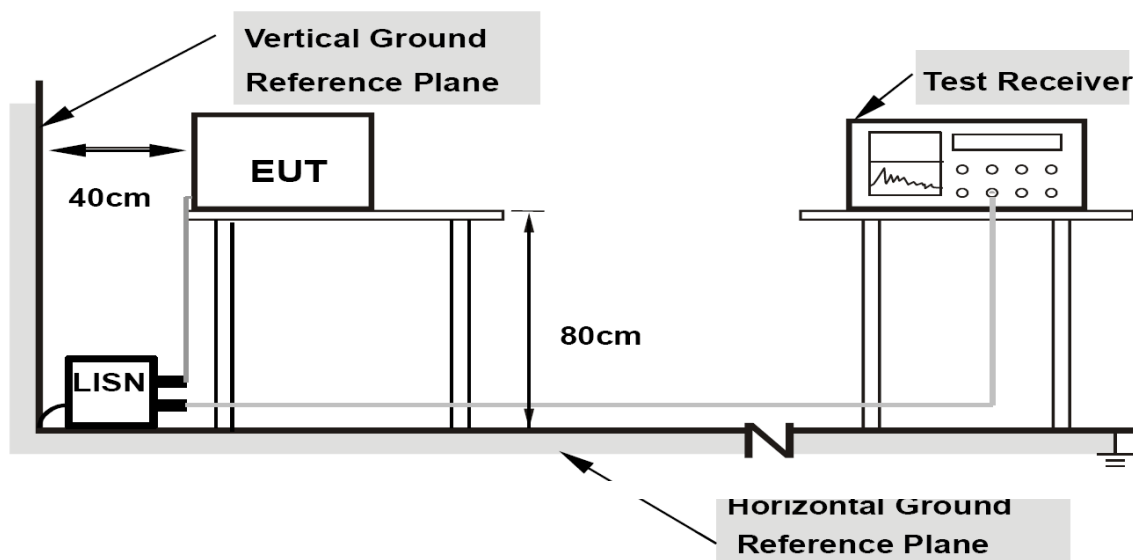

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.8.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.8.3 Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.