Prüfbericht-Nr.: *Test report no.:*	ULR-TC568821300000073F	**Auftrags-Nr.:** *Order no.*:	166145926 0010
Kunden-Referenz-Nr.: *Client reference no.:*	NA	**Auftragsdatum:** *Order date:*	2019-06-13
Auftraggeber: *Client:*	1. HONEYWELL INTERNATIONAL INC, Honeywell Safety and Productivity Solutions 9680 OLD BAILES RD, FORT MILL, SC 29707, USA 2. Metro (Suzhou) Technologies Co., Ltd No: 221, Xinghai street china-Singapore Suzhou Industrial Park.		
Prüfgegenstand: *Test item:*	LUZON - WIFI & BT Module	**Product Type**	Wi-Fi BT Module
Bezeichnung.: *Identification .:*	SOMAT39		
Auftrags-Inhalt: *Order content*:	Testing and issue of Test Report and Grant Certificate		
Prüfgrundlage: *Test specification:*	FCC Part 15 Subpart C 15.247, 15.207 RSS 247 Issue 2 and RSS GEN Issue 5		
Wareneingangsdatum: *Date of sample receipt:*	2021-05-20		
Prüfmuster-Nr & Serien-Nr.: *Test sample no & serial no.:*	A000939665-002 A000939665-001 Engineering Sample		
Prüfzeitraum: *Testing period:*	2021-05-21 - 2021-06-08		
Ort der Prüfung: *Place of testing:*	Wireless laboratory, Bangalore		
Prüflaboratorium: *Testing laboratory:*	TÜV Rheinland (India) Pvt.Ltd., 27/B, 2nd Cross, Electronic City Phase1 Bangalore -560 100, India FCC Test site registration number: 496599 ISED Test site registration number: 3466E-1		
Prüfergebnis*: *Test result*:*	Pass		

geprüft von: *tested by:*		**genehmigt von:** *authorized by:*	
Datum: *Date:* 2021-05-21	**Likhithesh MD**	**Ausstellatum:** *Issue date:* 2021-12-07	**Mahammadgouse Kaladagi**
Stellung / *Position:*	Engineer	**Stellung** / *Position:*	Assistant Manager

Sonstiges / *Other:* FCC ID: HD5-HWUSIA
IC: 1693B-HWUSIA

Zustand des Prüfgegenstandes bei Anlieferung: **Prüfmuster vollständig und unbeschädigt**
Condition of the test item at delivery: ***Test item complete and undamaged***

* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft
	P(ass) = entspricht o.g. Prüfgrundlage(n)		F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
** Legend:*	*1 = very good*	*2 = good*	*3 = satisfactory*	*4 = sufficient*	*5 = poor*
	P(ass) = passed a.m. test		*F(ail) = failed a.m. test specification(s)*	*N/A = not applicable*	*N/T = not tested*

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.
V05

TEST SUMMARY

Test Item	Applicable Standard		Result
	FCC	ISED	
Maximum conducted (average) output power	FCC 15.247(b)(3)	RSS 247 Issue 2, Section 5.4 (d)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 2, Section 5.2 (b)	Pass
DTS Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 2, Section 5.2 (a)	Pass
Emissions in non-restricted frequency bands	FCC 15.247(d)	RSS 247 Issue 2, Section 5.5	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 /8.10	Pass
Conducted Emissions on a.c Power Lines	FCC 15.207	RSS-Gen Issue 5, Section 8.8	Pass

Product Category: Electronics Testing
Test Discipline: EMC Test Facility

Compliance statement for Part 15.203:

"THE ANTENNA TYPE IS PIFA ANTENNA & IS INTERNAL TO THE MODULE, WITH NO POSSIBILITY OF REPLACEMENT WITH A NON-APPROVED ANTENNA BY THE END-USER. THEREFORE, THE EUT IS CONSIDERED TO COMPLY WITH THIS PROVISION."

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
ULR-TC568821300000073F	01	Initial issue of report	2021-11-30
ULR-TC568821300000073F	01	Reviewer comments updated	2021-12-07

Table of Contents

1 GENERAL REMARKS 6
1.1 Attachments 6
2 TEST SITES 7
2.1 Testing Facilities 7
2.2 List of Test and Measurement Instruments 7
3 GENERAL PRODUCT INFORMATION 8
3.1 Product Function and Intended Use 8
3.2 Ratings and System Details of Equipment under Test 8
3.3 Measurement Uncertainty: 9
4 TEST SET-UP AND OPERATION MODE 10
4.1 Principle of Configuration Selection 10
4.2 UUT Operation and Software 10
4.3 Special Accessories and Auxiliary Equipment 10
4.4 Simultaneous Transmission 10
4.5 Countermeasures to achieve EMC Compliance 10
4.6 List of frequencies 10
4.7 Report references 11
5 Operational Description 12
6 TEST METHODOLOGY 12
6.1 Conducted Spurious Emission Test on AC Power Line 12
6.1.1 Test Setup Configuration 13
6.2 Radiated Emission Test 13
6.2.1 Test Setup Configuration 14
7 TEST RESULTS FOR Wi-Fi 16
7.1 Maximum Average Conducted Output Power 16
7.2 Maximum Power Spectral Density 31
7.3 DTS Bandwidth & 99% Bandwidth 46
7.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission 73
7.4.1 Band edge and reference plots 74
7.4.2 Out-Of-Band Emissions 92
7.5 Spurious Radiated Emissions & Restricted Bands of Operation 140
8 TEST RESULTS FOR BLUETOOTH LOW ENERGY 165
8.1 Maximum Peak Conducted Output Power 165
8.2 Maximum Power Spectral Density 168
8.3 DTS Bandwidth & 99% Bandwidth 171
8.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission 176
8.4.1 Band edge and reference plots 177
8.4.2 Out-Of-Band Emissions 179
8.5 Spurious Radiated Emissions & Restricted Bands of Operation 186

9 Conducted Spurious Emission Test on AC Power Line 195
10 LIST OF TABLES 199
11 Power level used for testing 199

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. TEST SETUP PHOTOS

2: EUT EXTERNAL PHOTOS

3: EUT INTERNAL PHOTOS

4: FCC LABEL AND LABEL LOCATION

5: BLOCK DIAGRAM

6: SPECIFICATION OF EUT

7: SCHEMATIC DIAGRAM

8: BILL OF MATERIAL

9: USER MANUAL

10: MAXIMUM PERMISSIBLE EXPOSURE INFORMATION

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
   27/B, 2nd Cross,
   ElectronicCityPhase1
   Bangalore – 560 100,
   India

   Radiated Measurement site type :
   Fully anechoic chamber (used for above 1 GHz measurements)

2. TUV Rheinland (India) Pvt.Ltd.,
   108 , Beside ISBR Business School,
   Electronic city Phase I
   Bangalore - 560 100.
   India

   Radiated Measurement site type :
   Semi anechoic chamber (used for below 1 GHz measurements)

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
EMI Receiver	Rohde & Schwarz	ESW 44	101732	4.73 SP5	27.01.2022	Yearly	Radiated Spurious Emission
Active loop antenna	Frankonia	FMZB 1519 B	1519B-00111	-	28.02.2022	Yearly	
Balloon and Biconical Antenna	Schwarzbeck mess-elektronik	VHBB-9124 / BBA-9106	01028	-	02.09.2021	Yearly	
Log - Periodical Antenna	Schwarzbeck mess-elektronik	VUSLP-9111B	9111B-111	-	31.08.2021	Yearly	
Horn Antenna	Frankonia	HAX-18	802	-	01.03.2022	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
Spectrum Analyser	Agilent Technologies	E4407B	US41192772	A.14.06	10.08.2021	Yearly	Antenna-Port Conducted test
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100811	-	04.08.2021	Yearly	Conducted AC Power line Test
LISN	Rohde & Schwarz	ENV216	100022	-	04.09.2021	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in SAC	EMC 32	10.60.00
2	Radiated spurious emission measurement in FAC	EMC 32	10.60.00

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

LUZON - WIFI & BT Module is a single Modular. The module to be used inside the Honeywell Products. The Module has Dual Band WIFI (2.4GHz & 5GHz) and BLUETOOTH radio interface. This module communicates with external host using SDIO interface for WIFI and UART for BLUETOOTH.

This Module supports 802.11a/b/g/n/ac for WIFI and Supports BT (Basic , EDR & BLE) The module will act as Access Point / Master only in NON - DFS bands. In the DFS band, the Module acts as Slave /Station device which do not have Radar detection functionality.

Powered with QCA6174A, **LUZON - WIFI & BT Module** achieve the best possible connectivity and performance in RF Environment.

This Module will be used to provide the WIFI & BLUETOOTH wireless connectivity for Honeywell Products

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Radio Protocol		Wi-Fi	BLE
Operating Frequency Range		2412MHz to 2462MHz	2402MHz to 2480MHz
No. of Channels		11 (Refer Table 5)	40 (Refer Table 6)
Channel Spacing		5MHz	2MHz
Transmitting Power Level settings		Refer clause 11	
Maximum Measured Power (e.i.r.p)		23.14 dBm (1Mbps 2437MHz)	9.35 dBm(1Mbps 2480MHz)
Modulation		802.11b: DSSS (1Mbps,11Mbps) 802.11g: OFDM (6Mbps, 54Mbps) 802.11n: OFDM (20MHz: MCS0, MCS7 40MHz: MCS0, MCS7)	GFSK
Number of antennas		Supports 1 streaming with ANT0 (ANT1 is disabled)	
Antenna Gain		4.27 dBi	
Antenna Type		PIFA Antenna	
Supply Voltage to Product		3.3VDC , ± 0.1V	
Environmental conditions	Storage	-40degC to +125degC Relative Humidity <85%	
	Operating	-20degC to +65degC Relative Humidity <85% (Non-condensing, relative humidity)	
EUT Dimension		15mm x 15 mm x 2.05mm (L x W X H)	

*__Disclaimer__: The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

Note: Product LUZON - WIFI & BT Module has multiple protocols. All the supported wireless protocols and their respective test results are issued in separate test reports, refer clause 4.7 Report references

3.3 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of *k* = 2

Table 4: Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3 dB
Unwanted Emissions, conducted	±3 dB
All emissions, radiated	±6 dB
Temperature	±3 ℃
Supply Voltages	±3 %
Time	±5 %

Note: The Listed Measurement Uncertainties are the worst-case uncertainty, for the respective test cases. Above Table is for reporting purpose only and not used in determining Final Pass/Fail verdict.

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle on low, mid and high channels

4.2 UUT Operation and Software

Hardware Version Identification number (HVIN) : SOMAT39
Software version : Version A.0 (QCMBR)

4.3 Special Accessories and Auxiliary Equipment

Test laptop (QRCT tool with Software Version : 3.0.296.0),
LAN cable
Master device (Router) : FCC ID : LDK102087

4.4 Simultaneous Transmission

This product does not support simultaneous transmission

4.5 Countermeasures to achieve EMC Compliance

- None

4.6 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2412 – 2462	**1**	**2412**
	2	2417
	3	**2422**
	4	2427
	5	2432
	6	**2437**
	7	2442
	8	2447
	9	**2452**
	10	2457
	11	**2462**

Table 5: List of Wi-Fi center Frequencies

Channel used for Wi-Fi 2.4GHz testing

Protocol: WLAN 802.11b
Channel Low : 2412 MHz
Channel Mid : 2437 MHz
Channel High : 2462 MHz

Protocol: WLAN 802.11g
Channel Low : 2412 MHz
Channel Mid : 2437 MHz
Channel High : 2462 MHz

Protocol: WLAN 802.11n_20MHz
Channel Low : 2412 MHz
Channel Mid : 2437 MHz
Channel High : 2462 MHz

Protocol: WLAN 802.11n_40MHz

Channel Low : 2422 MHz Channel Mid : 2437 MHz Channel High : 2452 MHz

Frequency Band (GHz)	Channel No.	Frequency (MHz)
BLE (2.4-2.4835)	**0**	**2402**
	1	2404
	2	2406
	3	2408
	:	:
	:	:
	18	2438
	19	**2440**
	20	2437
	:	:
	:	:
	36	2474
	37	2476
	38	2478
	39	**2480**

Table 6: List of BLE Center frequencies

Channel used for BLE testing

Channel low : 2402MHz

Channel mid : 2440MHz

Channel High : 2480MHz

Note:

TUV Sample Identification number : A000939665-002 – Radiated test Sample
A000939665-001 – Conducted test Sample

4.7 Report references

Note: Product LUZON - WIFI & BT Module has multiple protocols. All the supported wireless protocols and their respective test results are issued in separate test reports, following table lists the report numbers.

Radio Protocol	Report Number
RF test report for Wi-Fi (2.4GHz) & BLE (2.4GHz) – (This report)	**ULR-TC568821300000073F**
RF test report for Bluetooth (2.4GHz)	ULR-TC568821300000074F
RF test report for Wi-Fi (5GHz)	ULR-TC568821300000075F

5 Operational Description

This LUZON - WIFI & BT Module is a WiFi/BT single modular which will be placed inside the Honeywell products like printers, barcode scanners, RFID readers etc. to enable wireless connectivity. This module includes MAC & physical layer of 802.11a/b/g/n/ac and the Bluetooth modem.

This module operates on 3.6V DC Power supply with internal on board regulation to generate 3.3v for powering ON all the circuits. The entire RF circuits is enclosed in RF shield of dimension 25mm X 25mm.

The module uses internal power amplifier and LNA for 2.4GHz frequency band and an external front end chip for 5GHz frequency band. All filters and diplexers are included in the module to ensure maximum power flatness and optimum VSWR. The module has one antenna chain for 1X1 output.

The module supports range of data rates from 1Mbps in 802.11b mode to MCS9 in 802.11ac mode. This chipset also supports concurrent operation of Bluetooth (Version 5.0) for wireless connectivity during browsing or other device applications. Along with both standard and high speed (HS) Bluetooth data rates, Bluetooth low energy modes are also supported. Hardware WAPI acceleration engine, AES, TKIP, WPA and WPA2 are supported to provide the latest security requirement on your network.

The Device communicates with HOST using SDIO interface for WIFI and UART interface for BLUETOOTH.

6 TEST METHODOLOGY

6.1 Conducted Spurious Emission Test on AC Power Line

Measured levels of ac power-line conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the referance ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150kHz to 30MHz, this measurement was performed with EUT powered by 2 methods and both method are tested individually, one with an AC adaptor with 110V AC 60Hz supply and second with Wireless charger with supply 110V AC 60Hz.

6.1.1 Test Setup Configuration

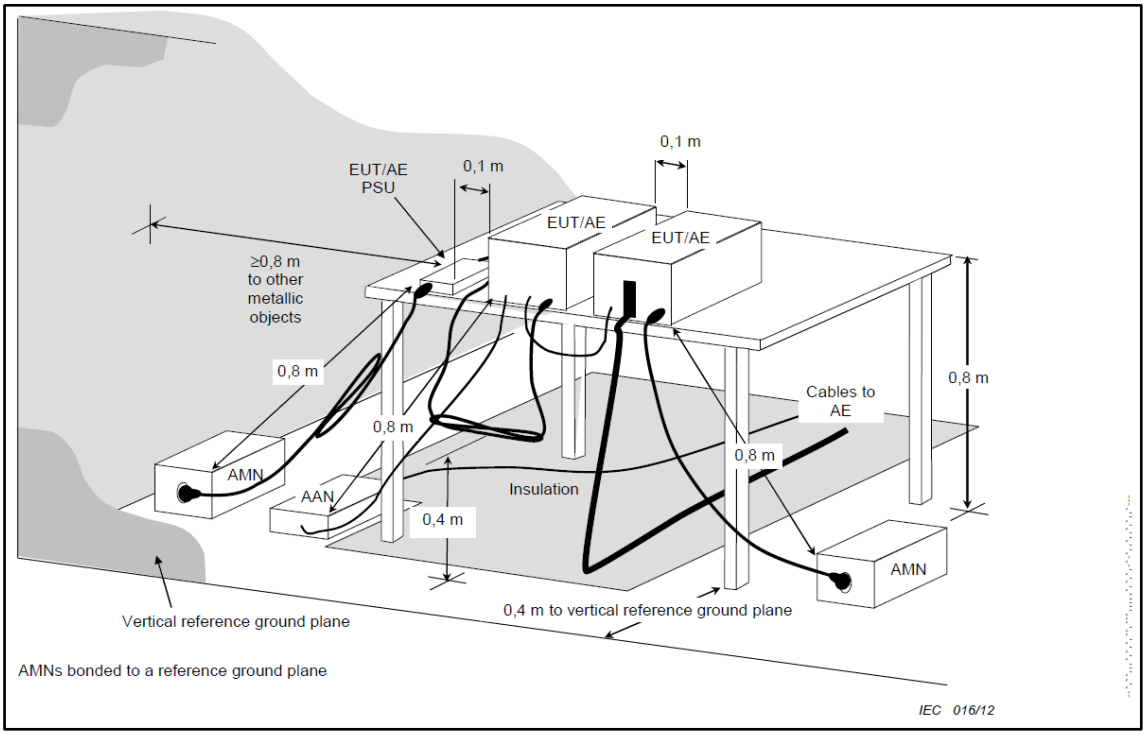

6.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, The measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Baloon and Biconical Antenna, and mesurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

6.2.1 Test Setup Configuration

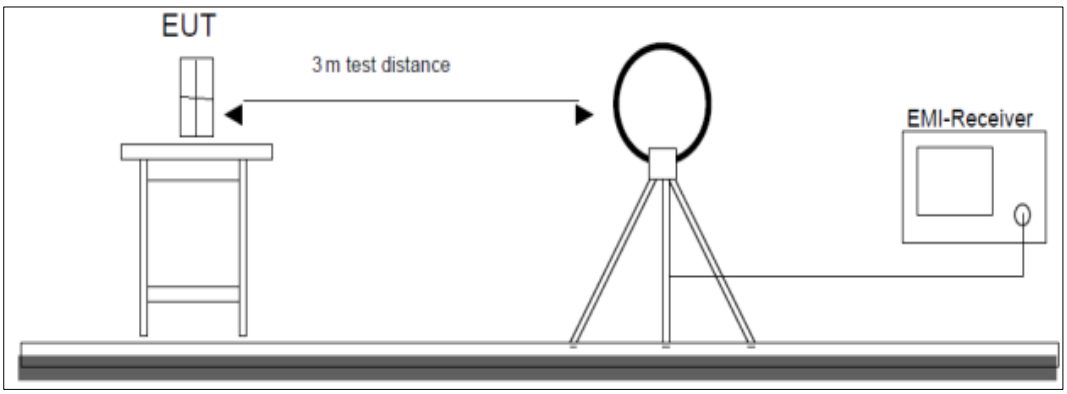

Figure 1: Frequency Range 9 kHz- 30 MHz

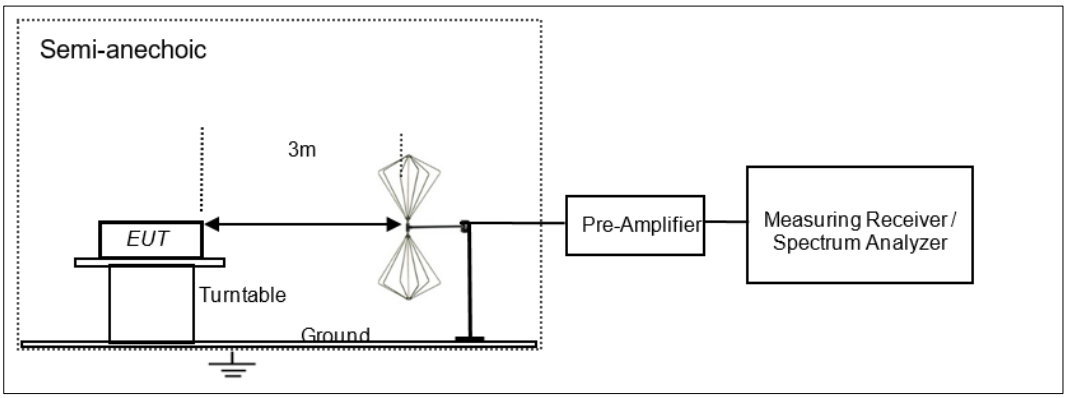

Figure 2: Frequency Range 30 MHz – 200 MHz

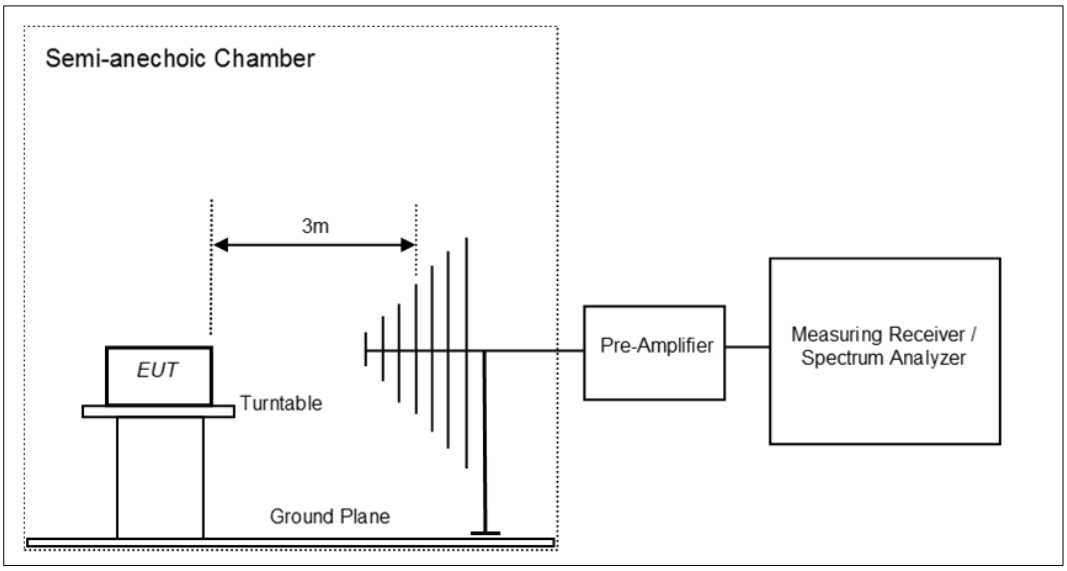

Figure 3: Frequency Range 200 MHz - 1GHz

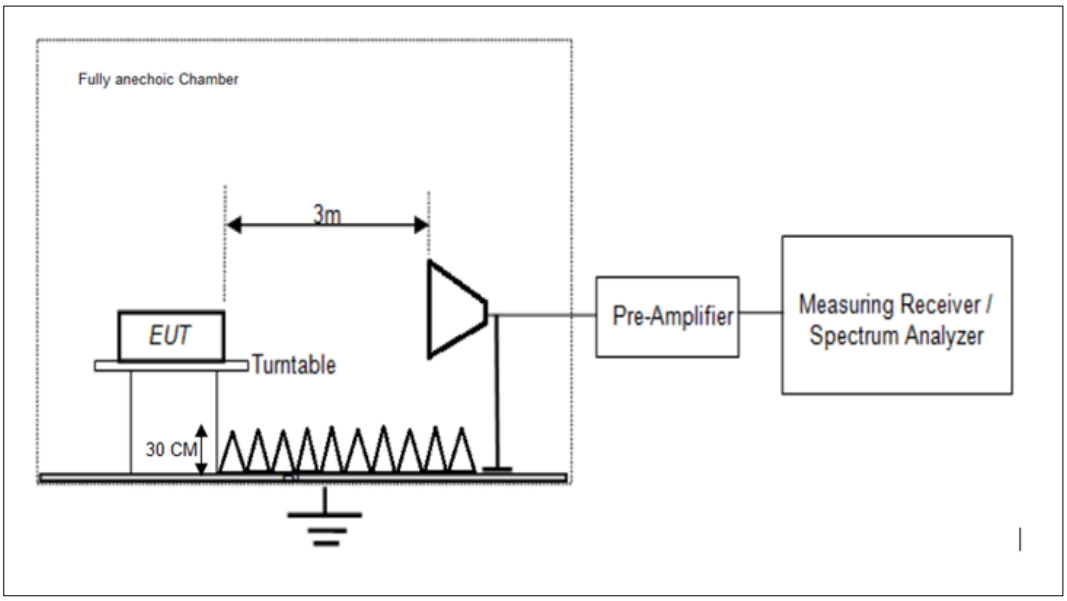

Figure 4: Frequency Range above 1 GHz

7 TEST RESULTS FOR Wi-Fi

7.1 Maximum Average Conducted Output Power

Result ***Pass***

Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.2.2.2 of ANSI C63.10
Measurement Bandwidth	1 MHz
Detector	Average sample detector mode
Port of testing	Antenna port
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36 dBm)

Test Method

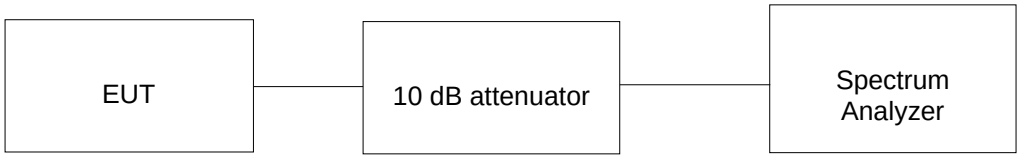

Test Condition

Normal Test Condition:

Temperature (Norm) = + 25 °C Voltage = 3.3VDC Relative humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 8.3.2.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Test results:

Note:
1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average Output power (dBm) = Measured Average power (dBm) + Attenuator factor (10dB) + Cable loss (0.5dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 4.27 dBi
4. Maximum (e.i.r.p) = Maximum Average output power (dBm) + antenna gain (4.27 dBi)

Modulation: 802.11b

Data rate (Mbps)	Channel Frequency (MHz)	Measured Average Power (dBm)	Duty cycle %	Duty cycle correction factor (dB)	Maximum Average output power (dBm)	Maximum (e.i.r.p) (dBm)	Power Limit (dBm)	e.i.r.p Limit (dBm)
1	2412	14.54	98.88	0.05	14.59	18.86	30	36
	2437	18.82	98.88	0.05	18.87	23.14	30	36
	2462	16.65	98.88	0.05	16.7	20.97	30	36
11	2412	14.29	98.88	0.05	14.34	18.61	30	36
	2442	18.72	98.88	0.05	18.77	23.04	30	36
	2462	16.17	98.88	0.05	16.22	20.49	30	36

***Note:** Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average Power

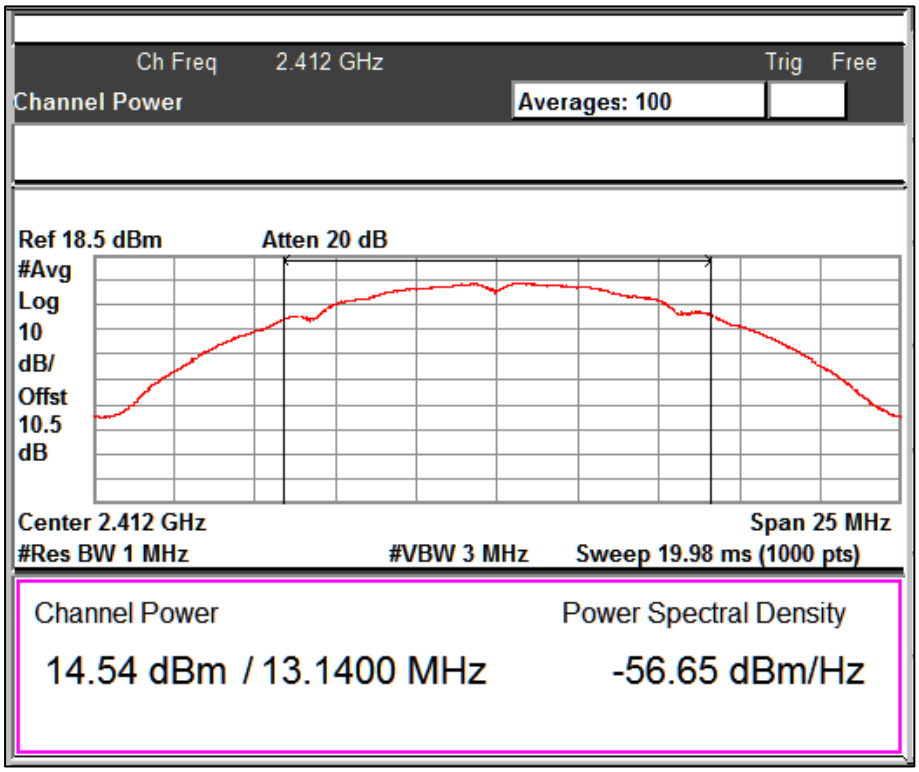

Data Rate: 1Mbps Channel Frequency: 2412MHz

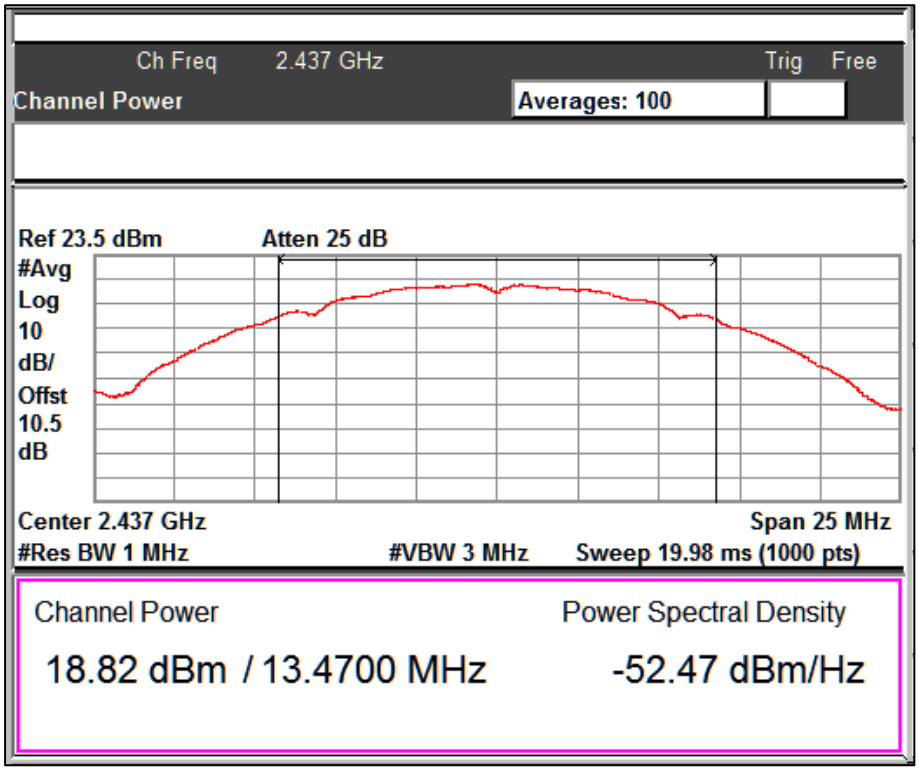

Data Rate: 1Mbps Channel Frequency: 2437MHz

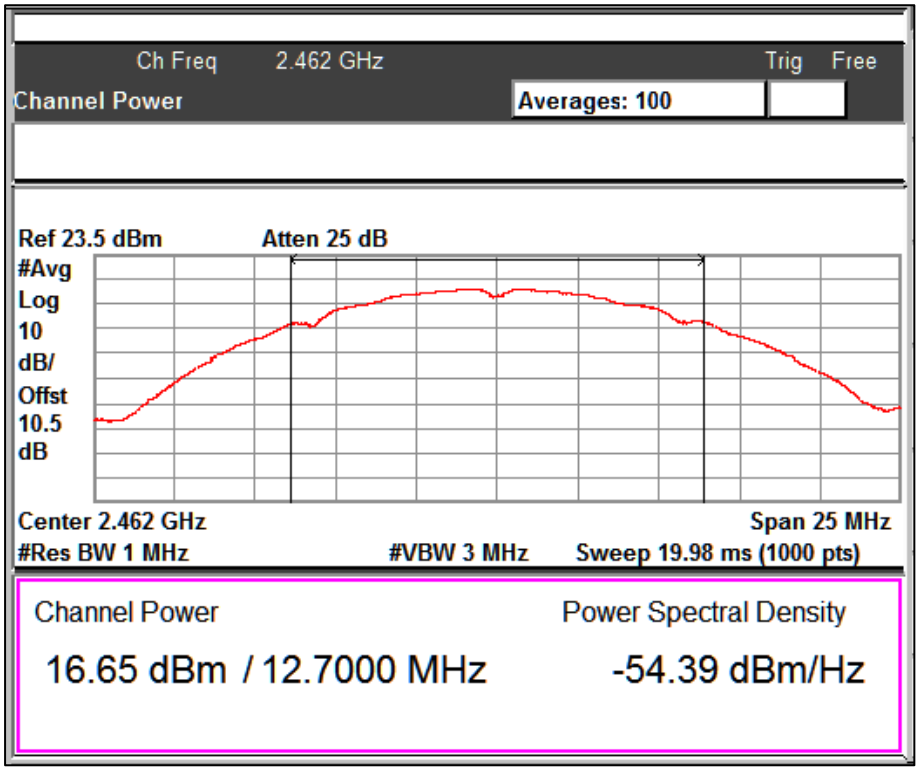

Data Rate: 1Mbps Channel Frequency: 2462MHz

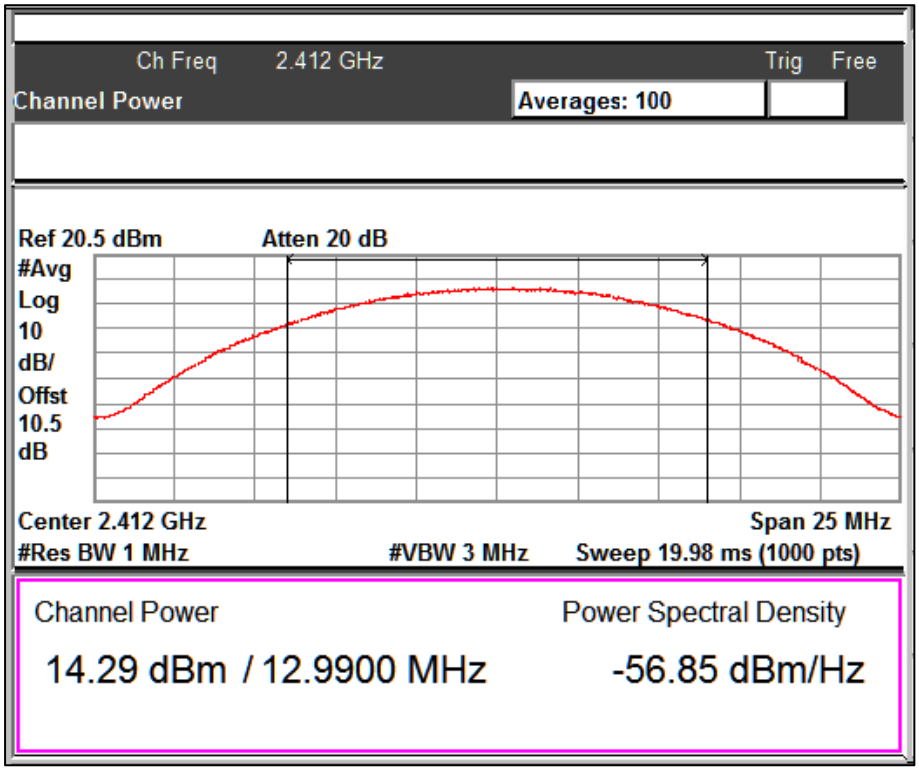

Data Rate: 11Mbps Channel Frequency: 2412MHz

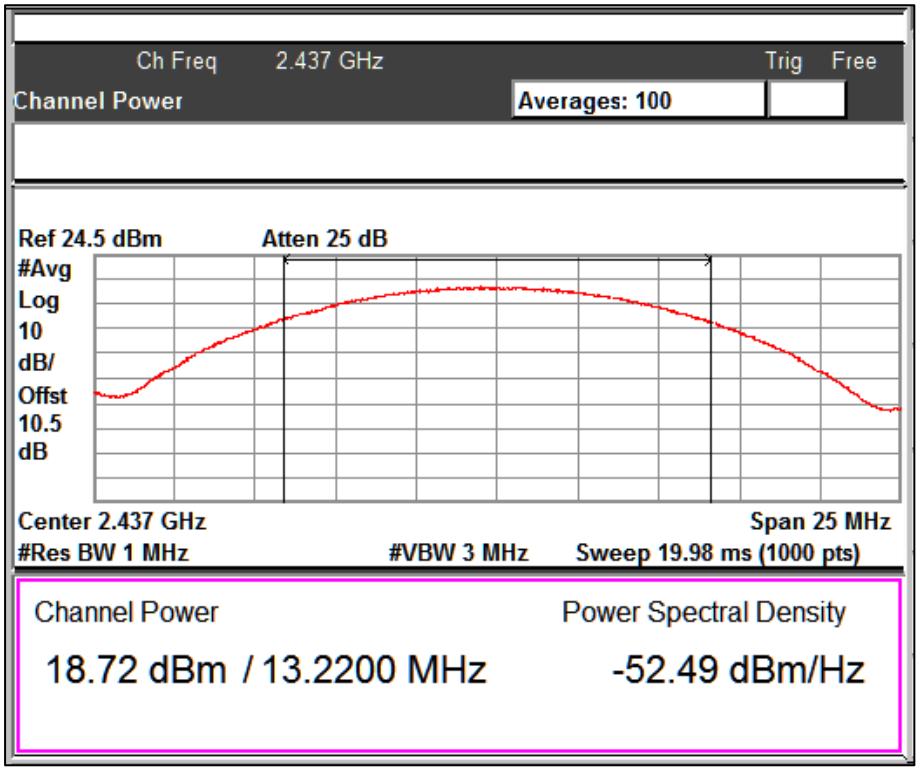

Data Rate: 11Mbps Channel Frequency: 2437MHz

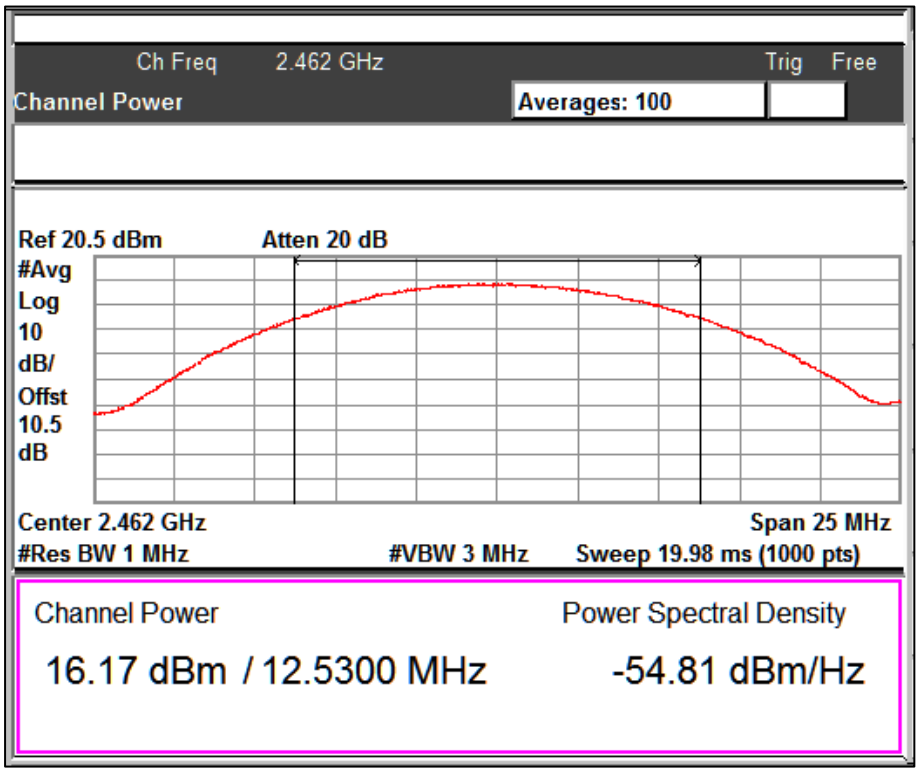

Data Rate: 11Mbps Channel Frequency: 2462MHz

Modulation: 802.11g

Data rate (Mbps)	Channel Frequency (MHz)	Measured Average Power (dBm)	Duty cycle %	Duty cycle correction factor (dB)	Final Average power (dBm)	Maximum (e.i.r.p) (dBm)	Power Limit (dBm)	e.i.r.p Limit (dBm)
6	2412	10.42	98.88	0.05	10.47	14.74	30	36
	2437	16.24	98.88	0.05	16.29	20.56	30	36
	2462	10.58	98.88	0.05	10.63	14.9	30	36
54	2412	8.60	98.88	0.05	8.65	12.92	30	36
	2437	13.87	98.88	0.05	13.92	18.19	30	36
	2462	9.06	98.88	0.05	9.11	13.38	30	36

*****Note: Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average Power

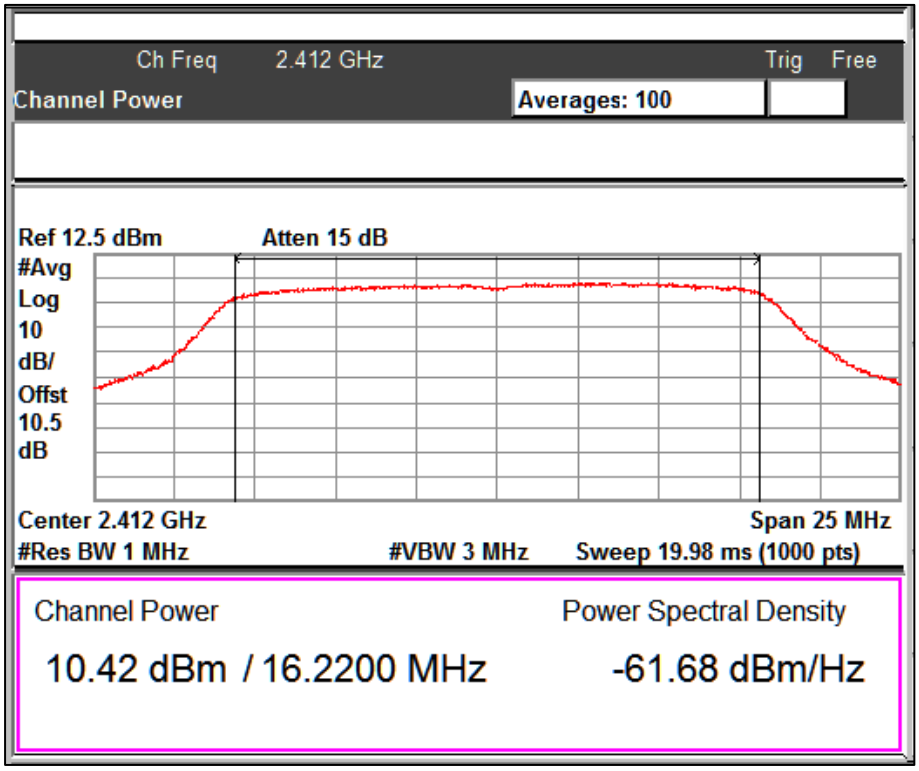

Data Rate: 6Mbps Channel Frequency: 2412MHz

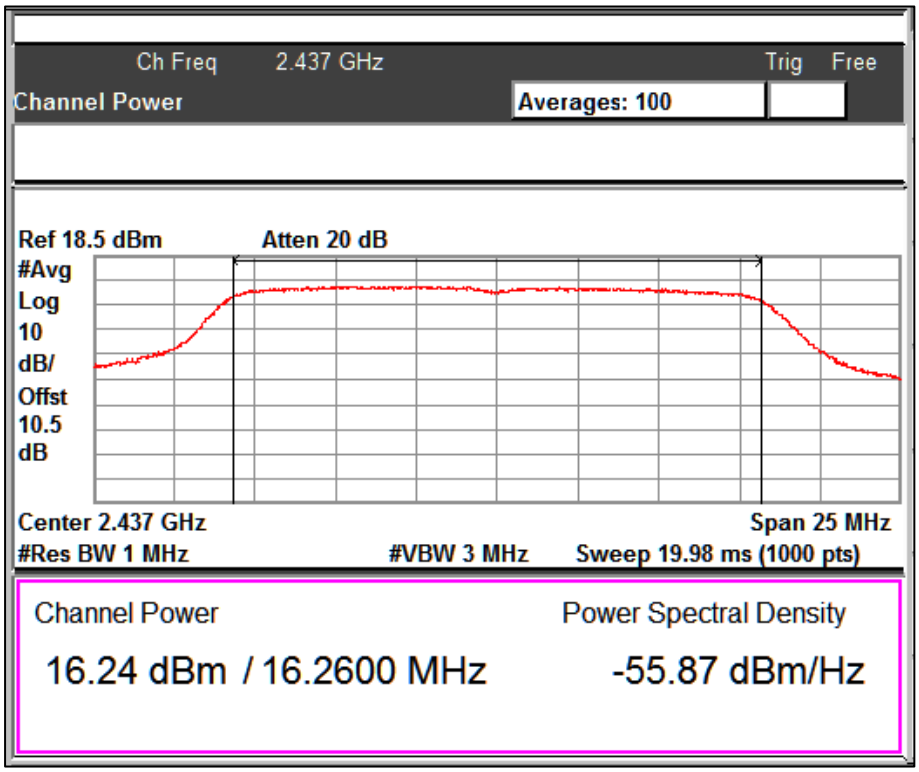

Data Rate: 6Mbps Channel Frequency: 2437MHz

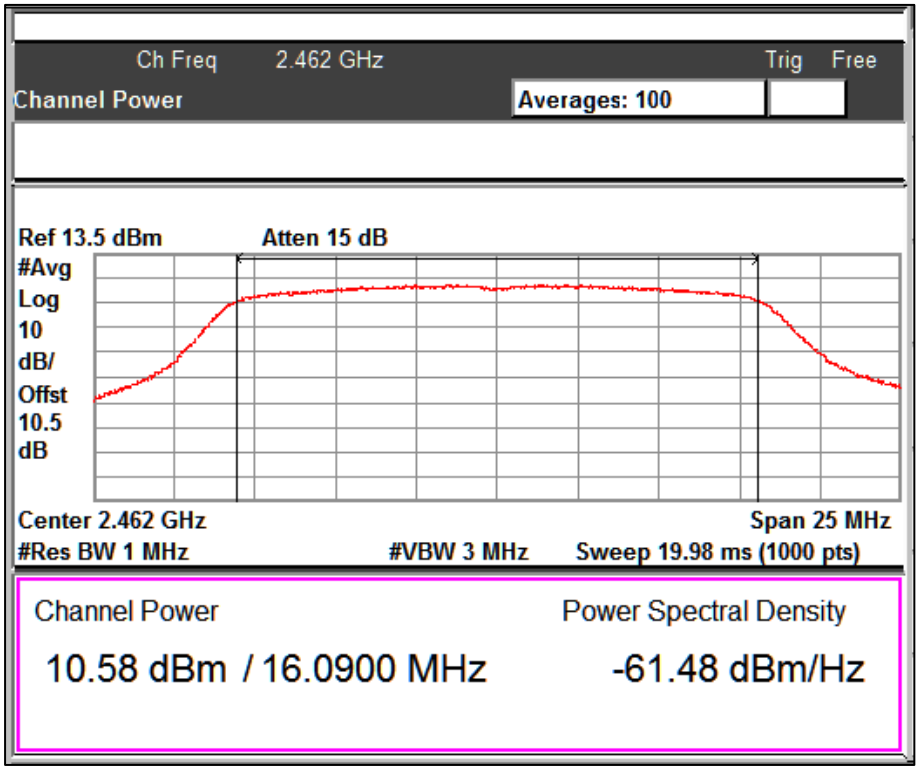

Data Rate: 6Mbps Channel Frequency: 2462MHz

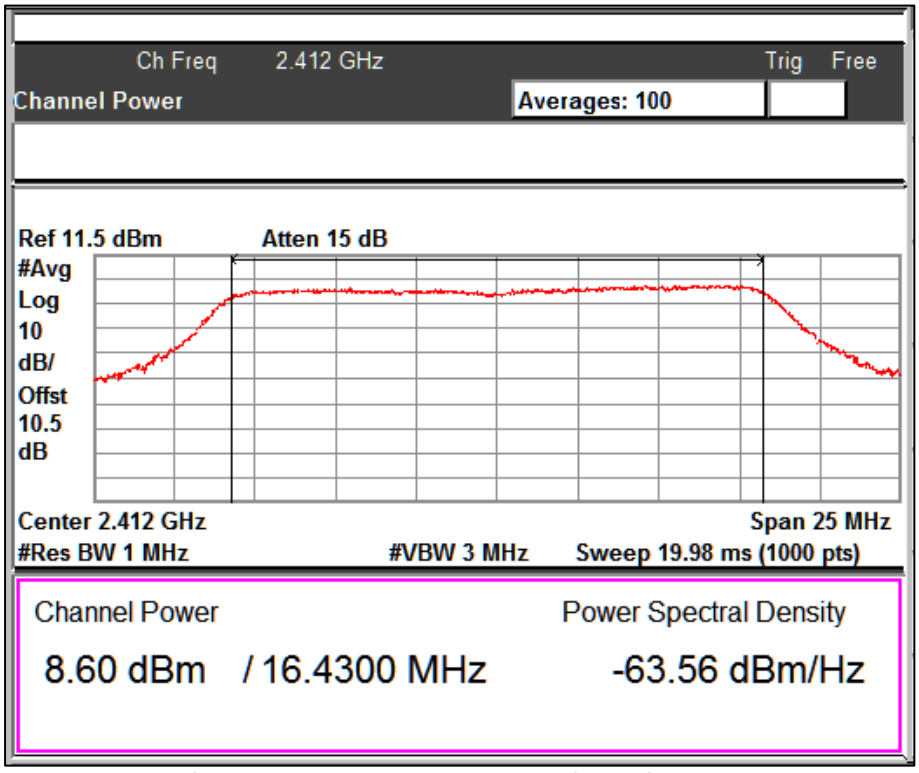

Data Rate: 54Mbps Channel Frequency: 2412MHz

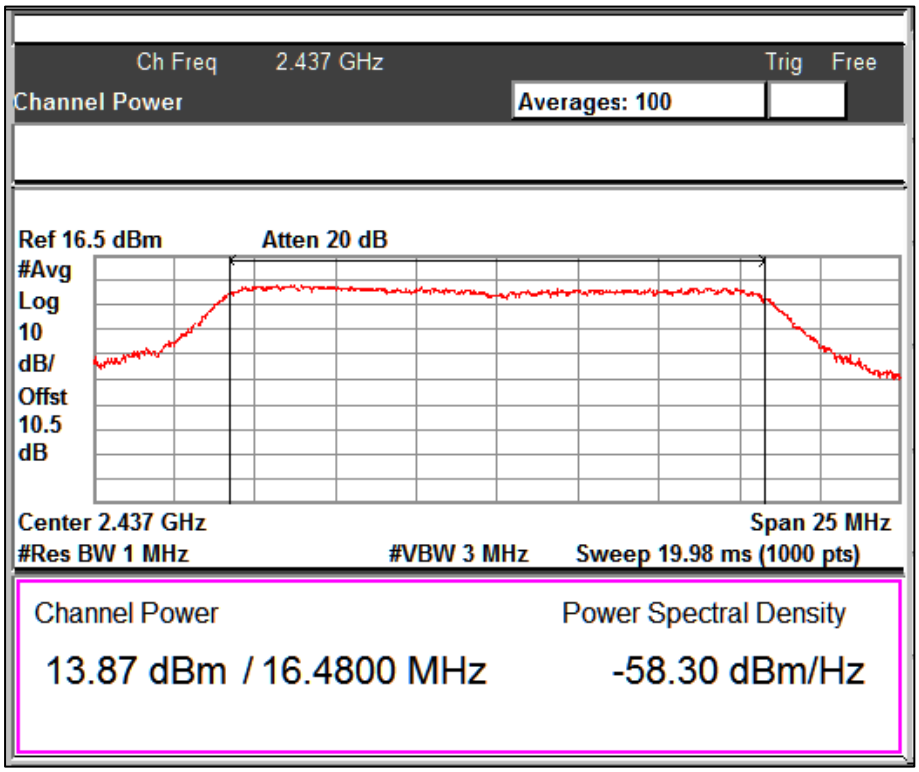

Data Rate: 54Mbps Channel Frequency: 2437MHz

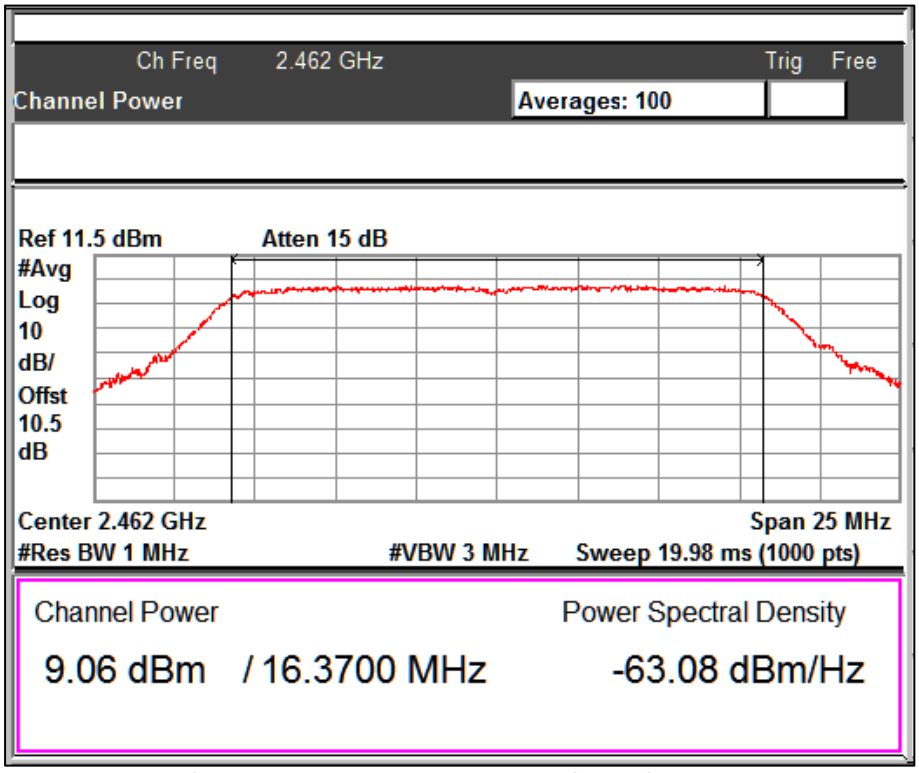

Data Rate: 54Mbps Channel Frequency: 2462MHz

Modulation: 802.11n_20MHz

Data rate (Mbps)	Channel Frequency (MHz)	Measured Average Power (dBm)	Duty cycle %	Duty cycle correction factor (dB)	Final Average power (dBm)	Maximum (e.i.r.p) (dBm)	Power Limit (dBm)	e.i.r.p Limit (dBm)
MCS0	2412	12.59	98.88	0.05	12.64	16.91	30	36
	2437	14.89	98.88	0.05	14.94	19.21	30	36
	2462	12.10	98.88	0.05	12.15	16.42	30	36
MCS7	2412	11.25	98.88	0.05	11.3	15.57	30	36
	2437	13.48	98.88	0.05	13.53	17.8	30	36
	2462	10.44	98.88	0.05	10.49	14.76	30	36

***Note:** Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average Power

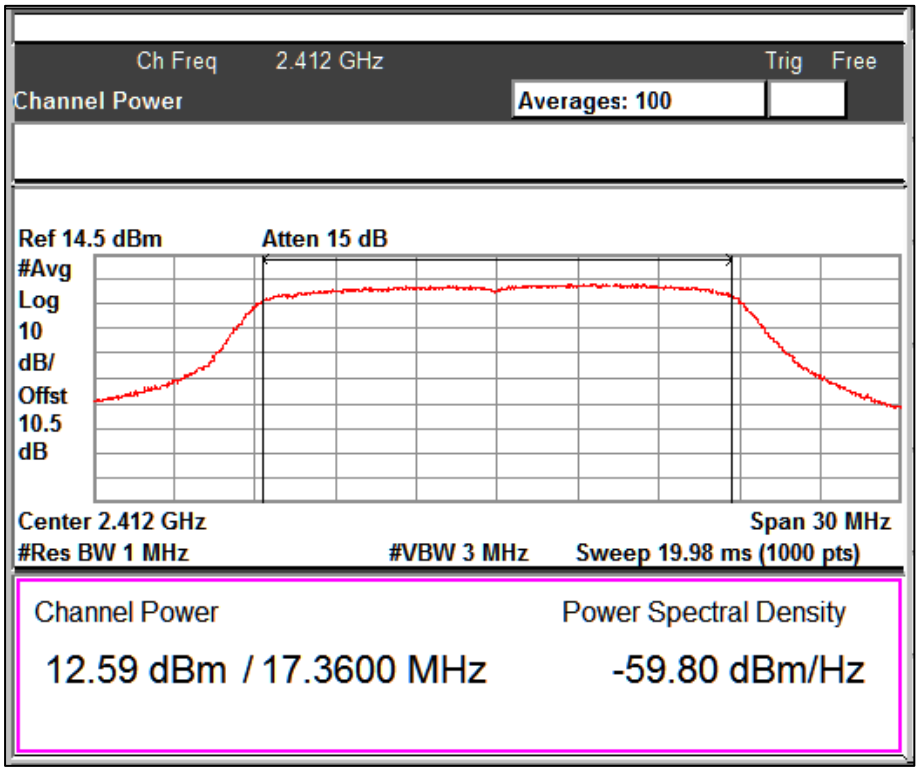

Data Rate: MCS0 Channel Frequency: 2412MHz

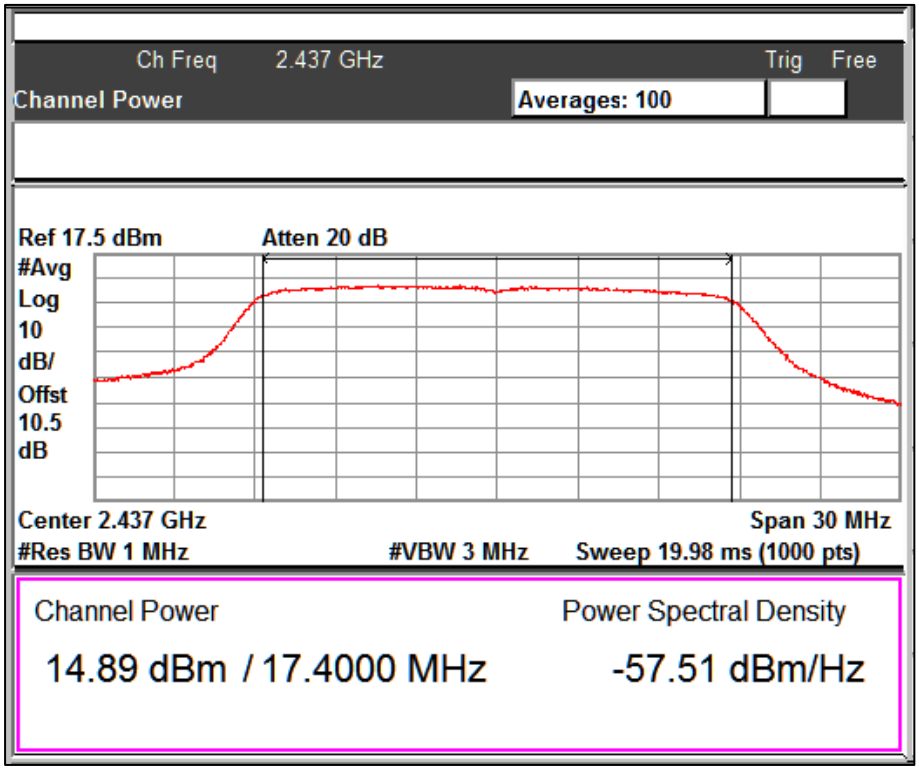

Data Rate: MCS0 Channel Frequency: 2437MHz

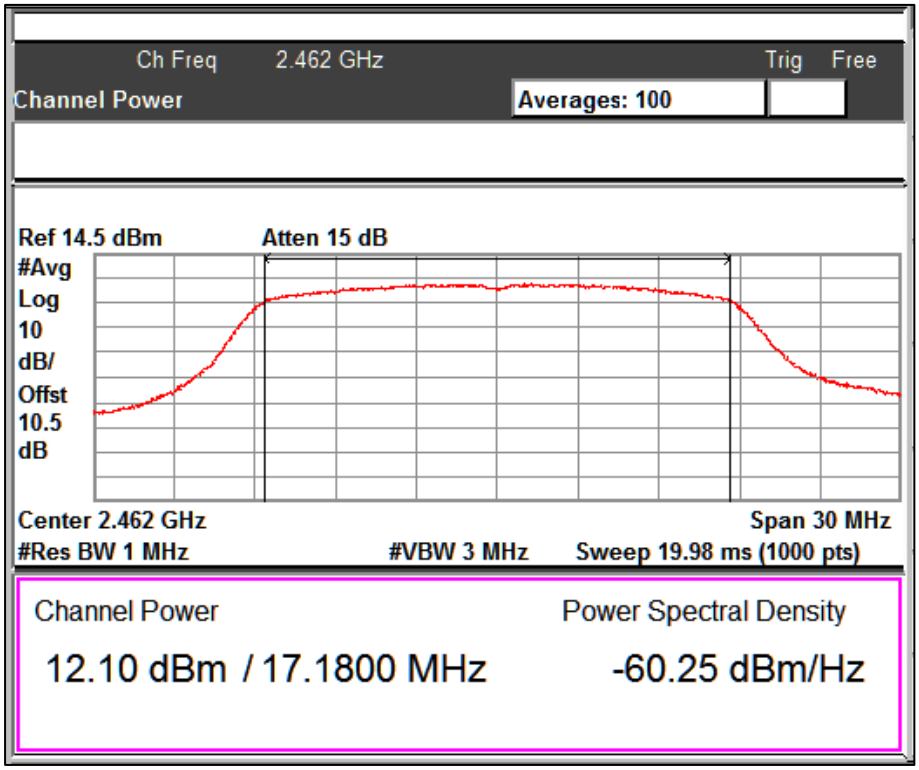

Data Rate: MCS0 Channel Frequency: 2462MHz

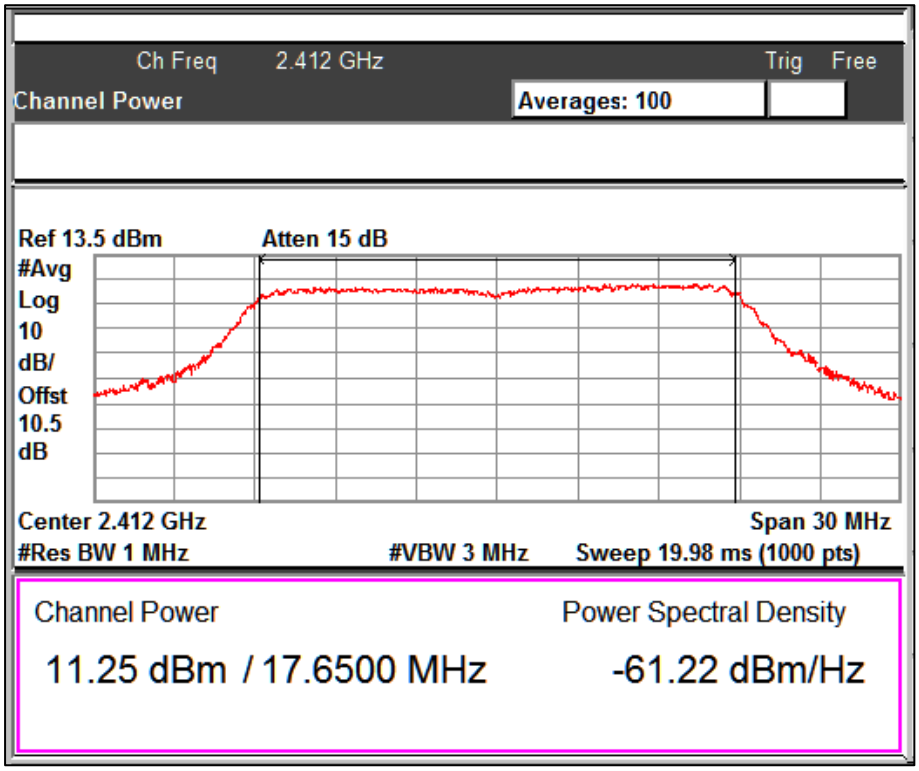

Data Rate: MCS7 Channel Frequency: 2412MHz

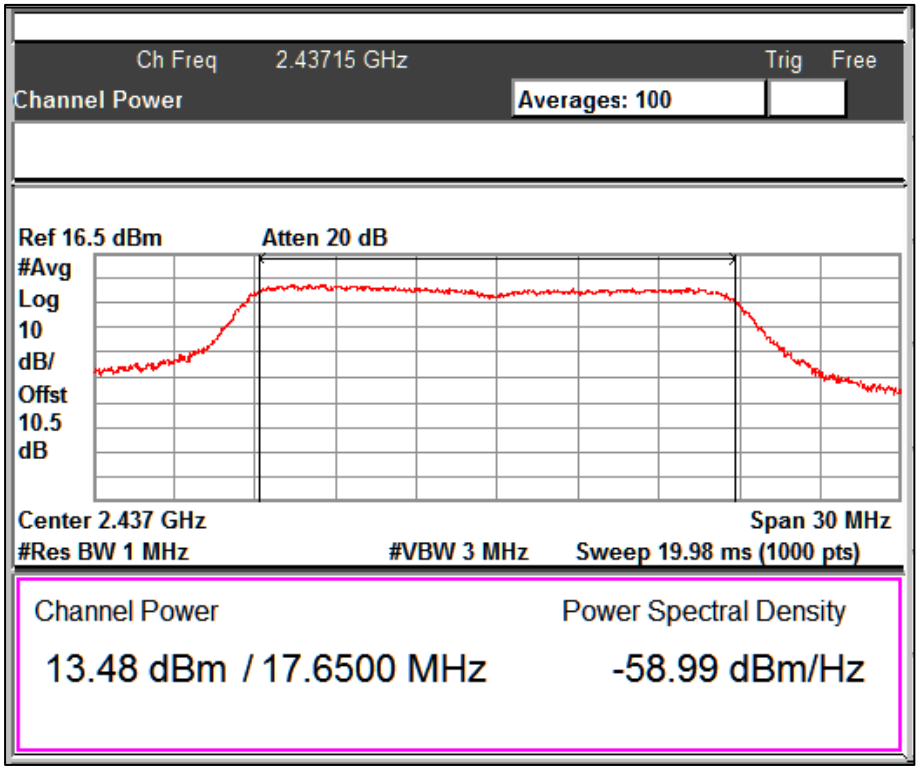

Data Rate: MCS7 Channel Frequency: 2437MHz

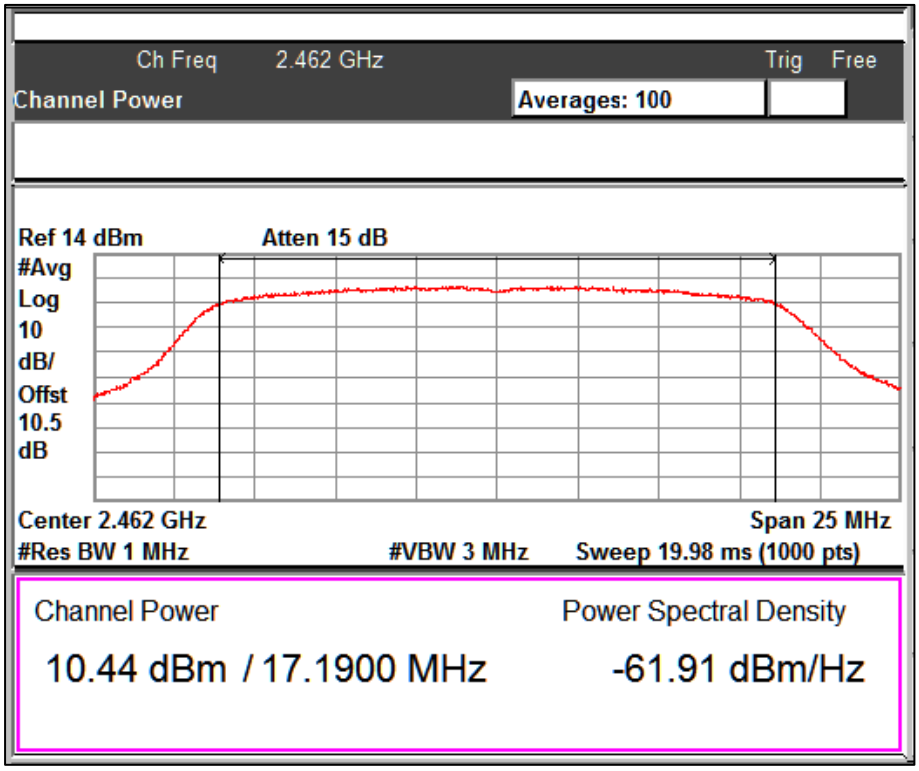

Data Rate: MCS7 Channel Frequency: 2462MHz

Modulation: 802.11n_40MHz

Data rate (Mbps)	Channel Frequency (MHz)	Measured Average Power (dBm)	Duty cycle %	Duty cycle correction factor (dB)	Final Average power (dBm)	Maximum (e.i.r.p) (dBm)	Power Limit (dBm)	e.i.r.p Limit (dBm)
MCS0	2422	12.14	98.88	0.05	12.19	16.46	30	36
	2437	13.35	98.88	0.05	13.4	17.67	30	36
	2452	12.14	98.88	0.05	12.19	16.46	30	36
MCS7	2422	9.40	98.88	0.05	9.45	13.72	30	36
	2437	10.51	98.88	0.05	10.56	14.83	30	36
	2452	7.44	98.88	0.05	7.49	11.76	30	36

***Note:** Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average Power

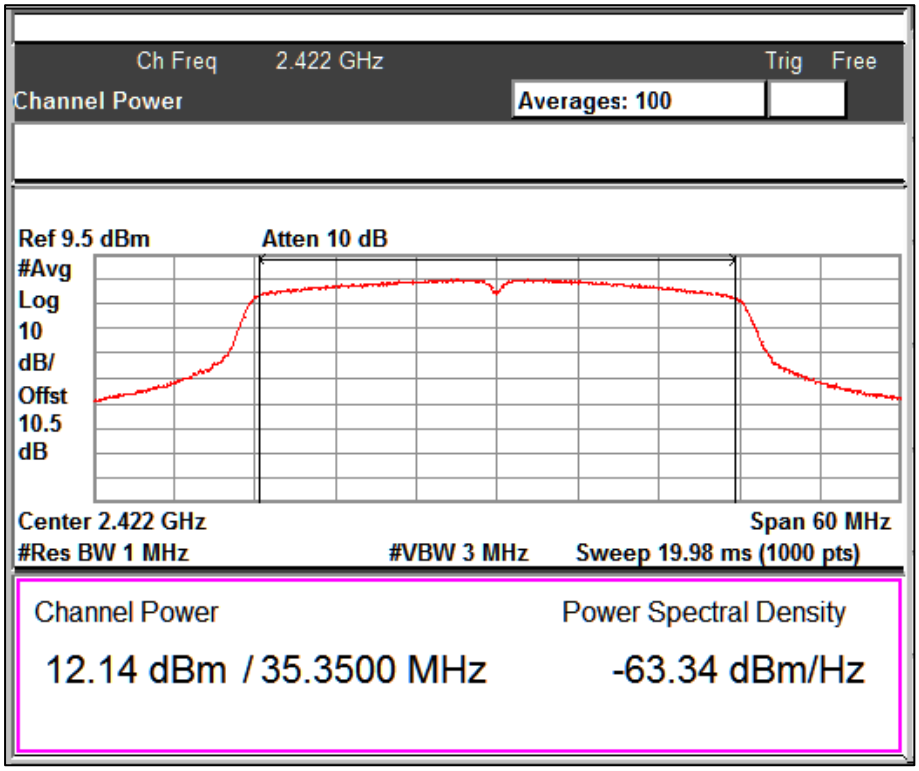

Data Rate: MCS0 Channel Frequency: 2422MHz

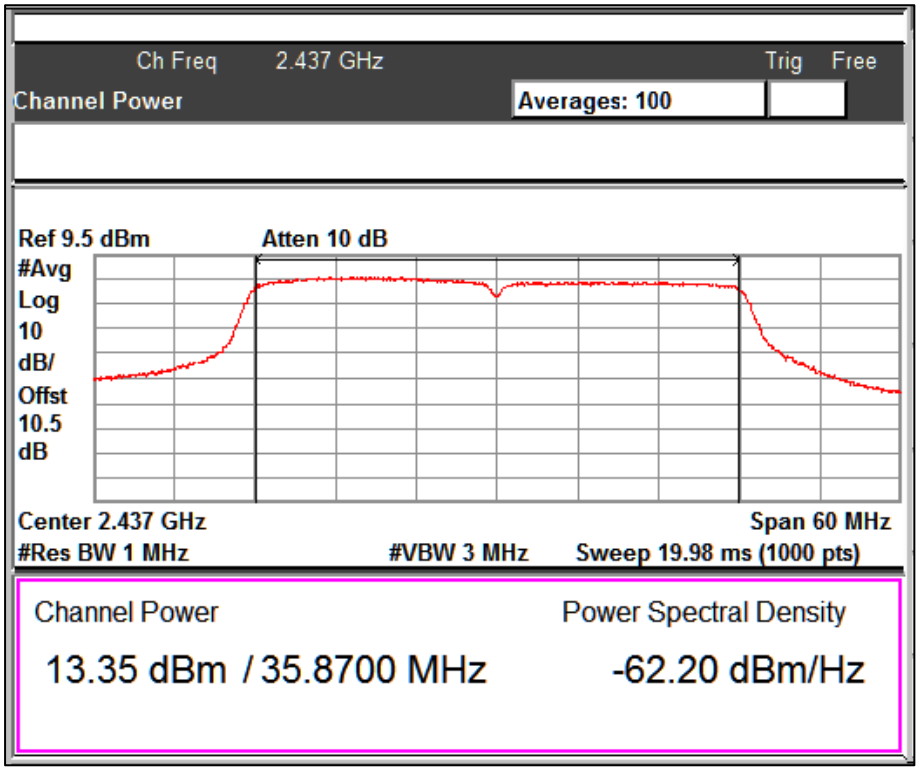

Data Rate: MCS0 Channel Frequency: 2437MHz

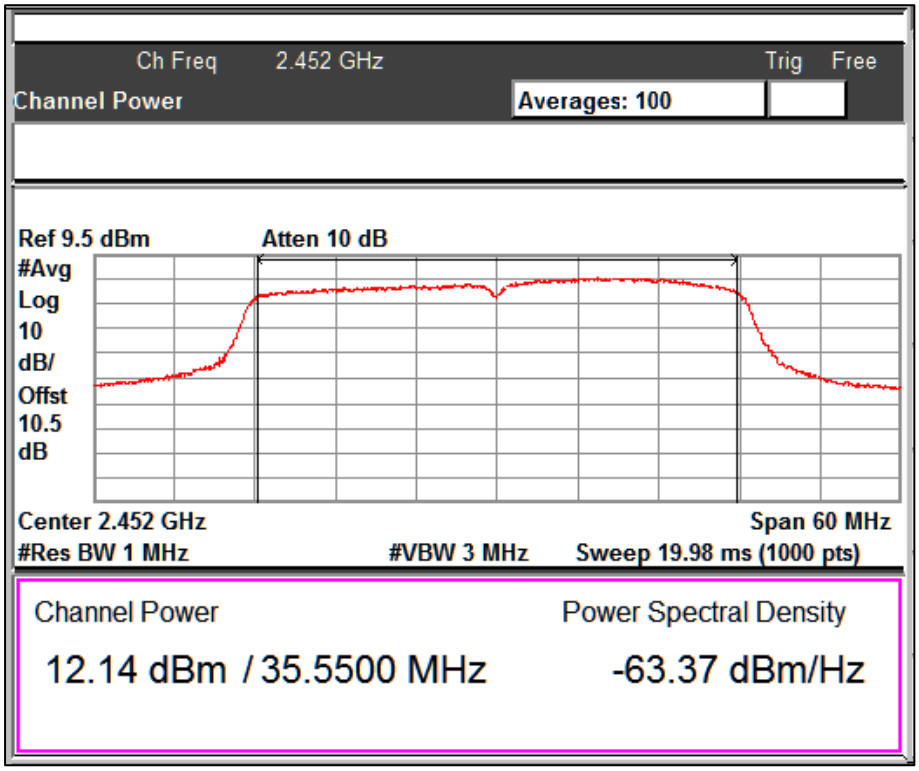

Data Rate: MCS0 Channel Frequency: 2452MHz

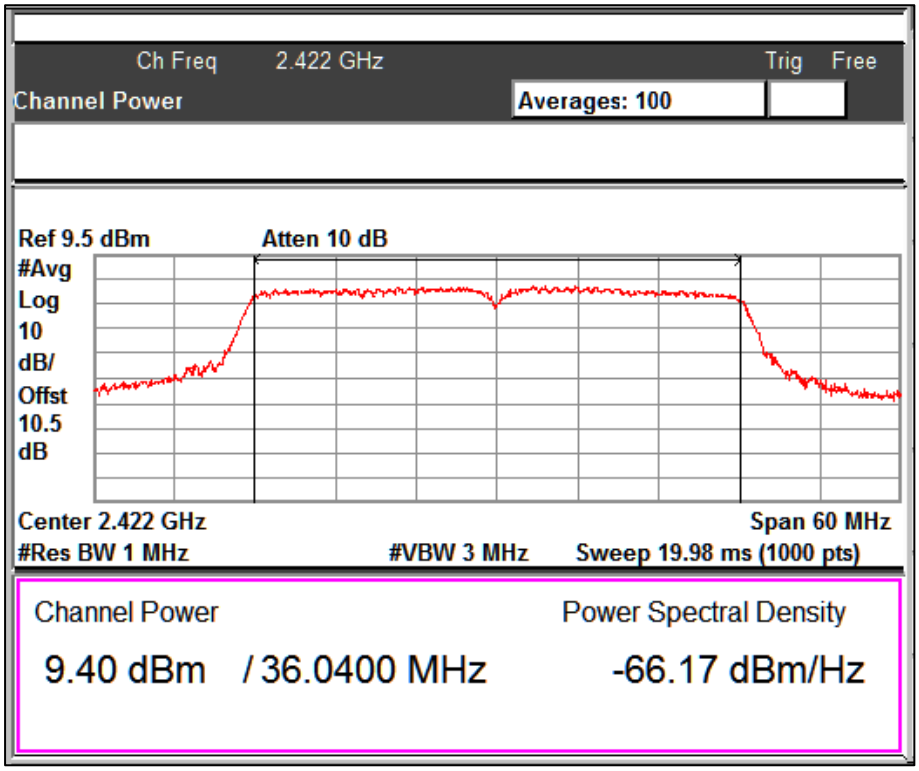

Data Rate: MCS7 Channel Frequency: 2422MHz

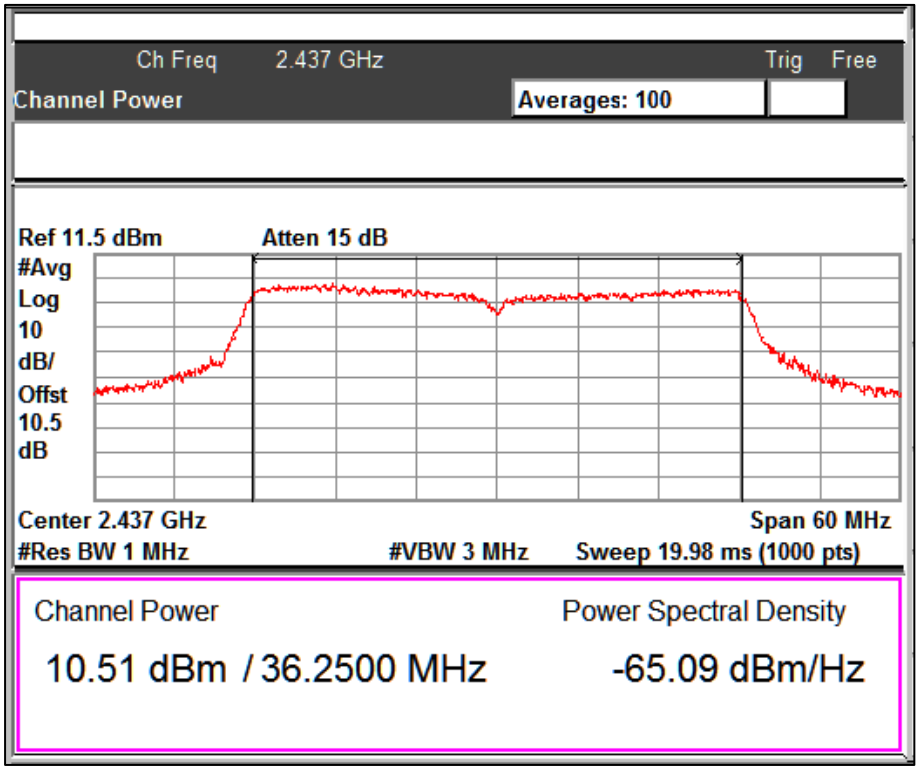

Data Rate: MCS7 Channel Frequency: 2437MHz

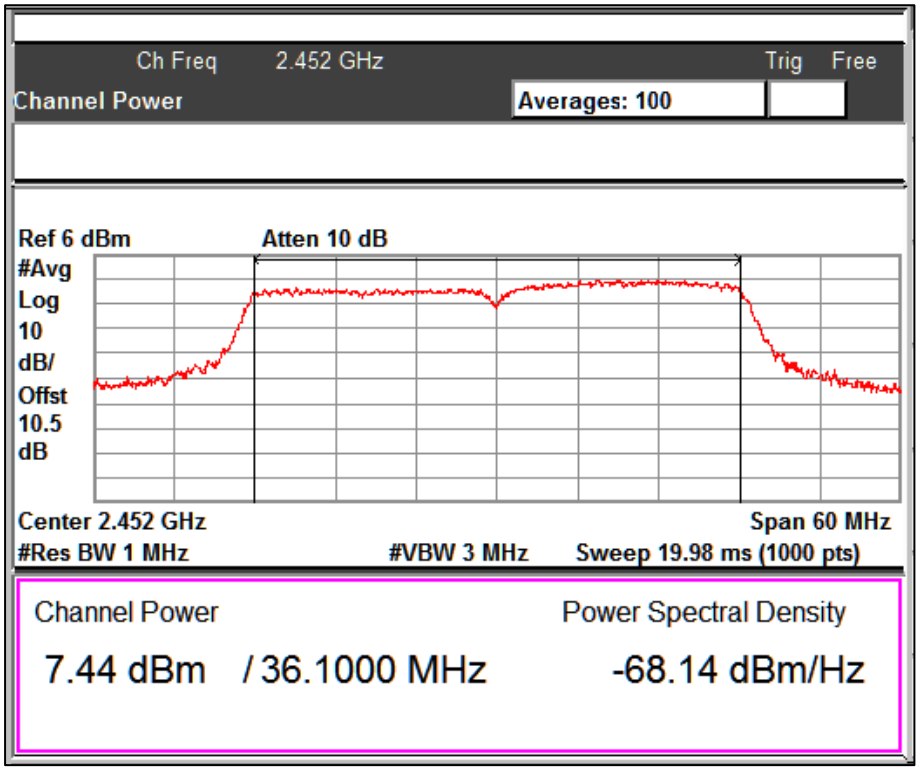

Data Rate: MCS7 Channel Frequency: 2452MHz

7.2 Maximum Power Spectral Density

Result ***Pass***

Test Specification	FCC part 15 Subpart C 15.247 (e) / RSS 247 Issue 2, Section 5.2 (b)
Test Method	Subclause 11.10.3 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Average sample detector mode
Port of testing	Antenna port
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm

Test Method:

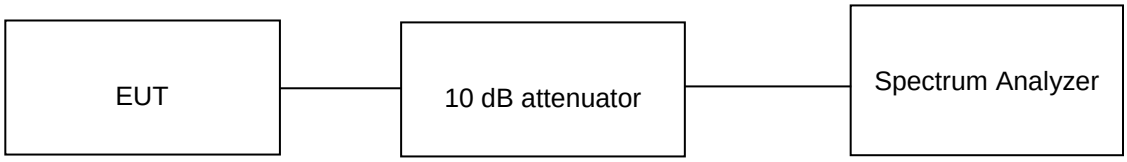

Test Condition

Normal Test Condition:

Temperature (Norm) = + 25 °C Voltage = 3.3VDC Relative humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Test results:

Note:
1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average PSD (dBm) = Measured Average PSD (dBm) + Attenuator factor (10dB) + Cable loss (0.5dB)
3. This product do not support additional beamforming gain / directional gain, it uses signal antenna and hence directional gain of the single antenna is 4.27 dBi

Modulation: 802.11b

Data rate (Mbps)	Channel Frequency (MHz)	Measured average PSD (dBm/100kHz)	Duty cycle %	Duty cycle correction factor (dB)	Maximum average PSD (dBm/100kHz)	PSD Limit (dBm/100kHz)
1	2412	-5.53	98.88	0.05	-5.48	8
	2437	3.20	98.88	0.05	3.25	8
	2462	1.83	98.88	0.05	1.88	8
11	2412	-1.23	98.88	0.05	-1.18	8
	2442	3.30	98.88	0.05	3.35	8
	2462	0.65	98.88	0.05	0.7	8

***Note:** Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average PSD

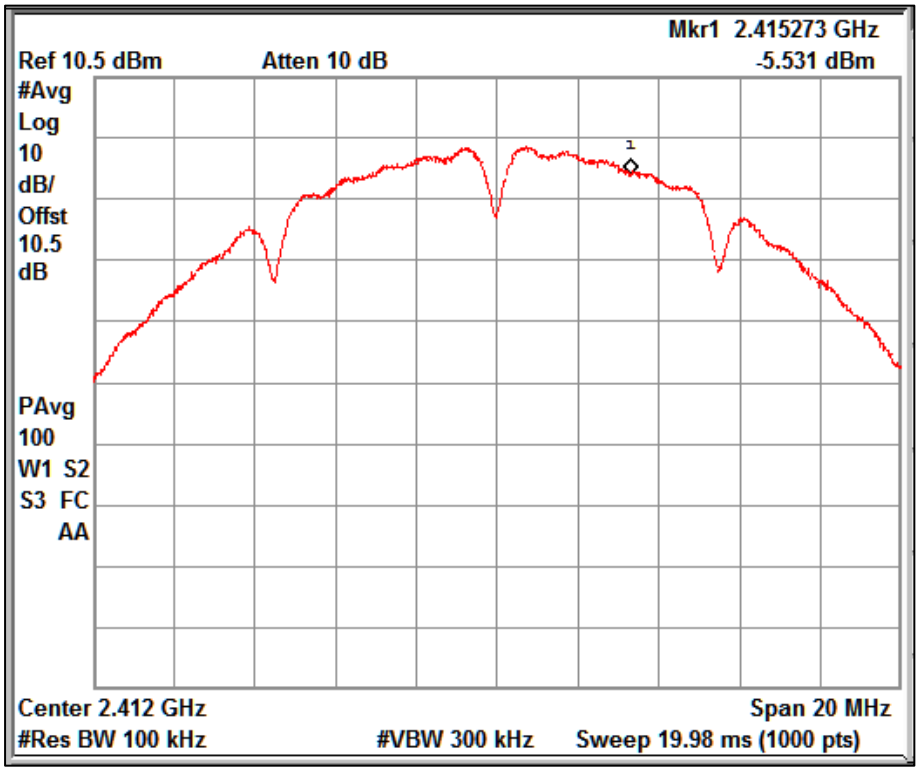

Data Rate: 1Mbps Channel Frequency: 2412MHz

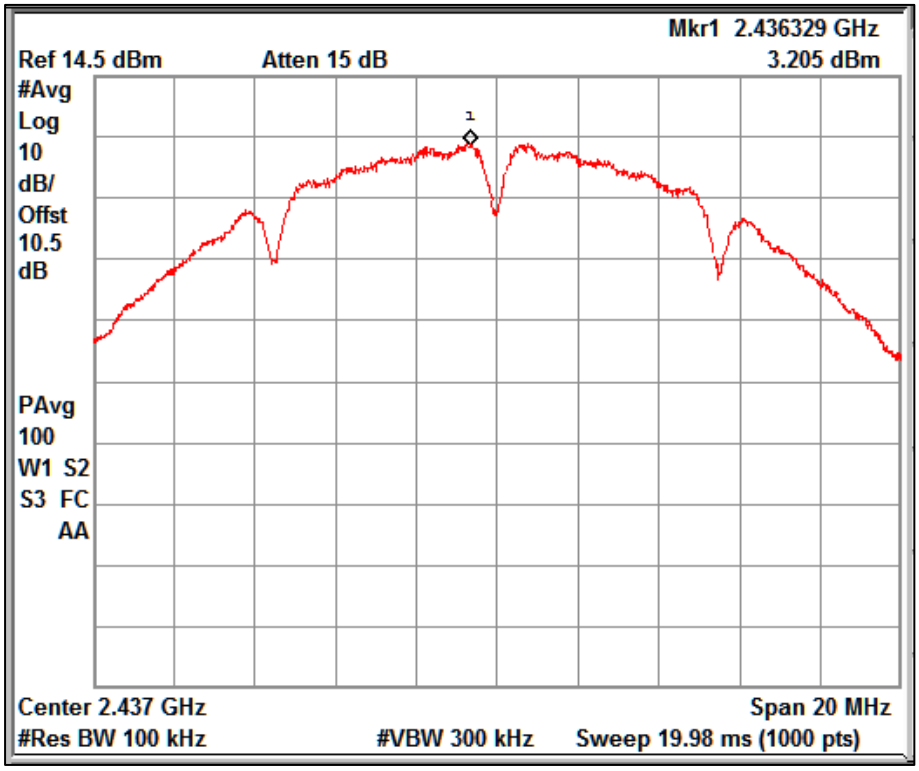

Data Rate: 1Mbps Channel Frequency: 2437MHz

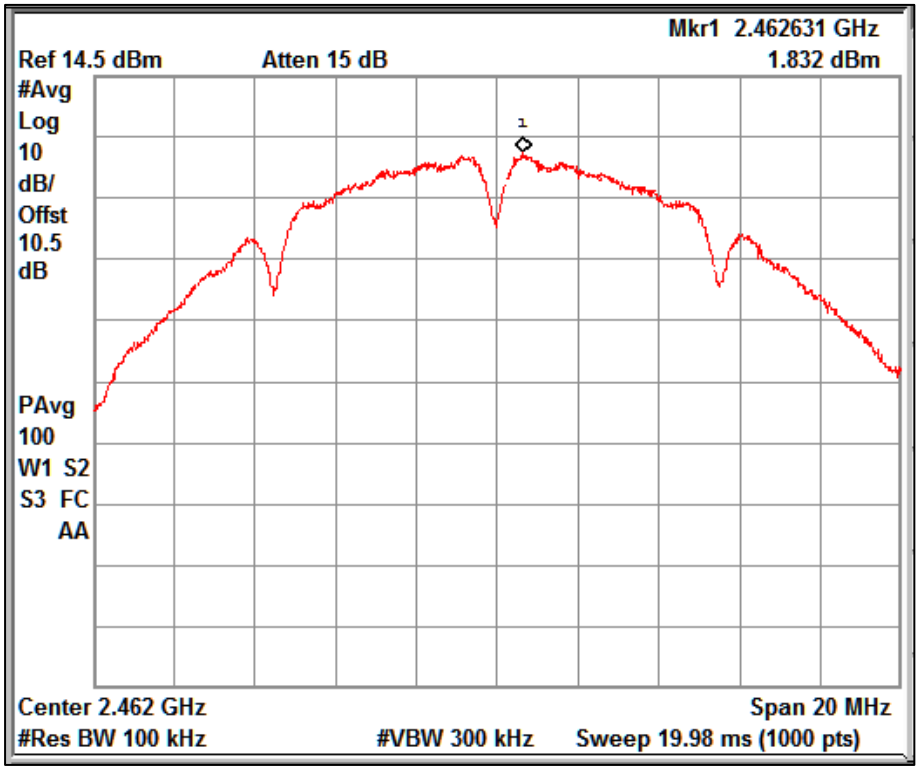

Data Rate: 1Mbps Channel Frequency: 2462MHz

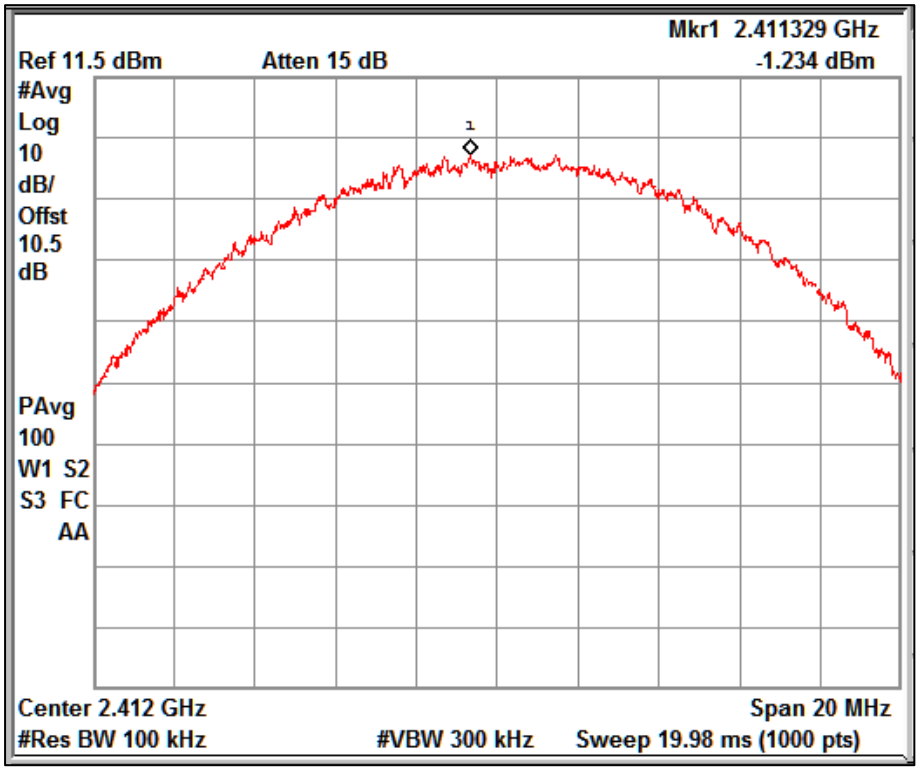

Data Rate: 11Mbps Channel Frequency: 2412MHz

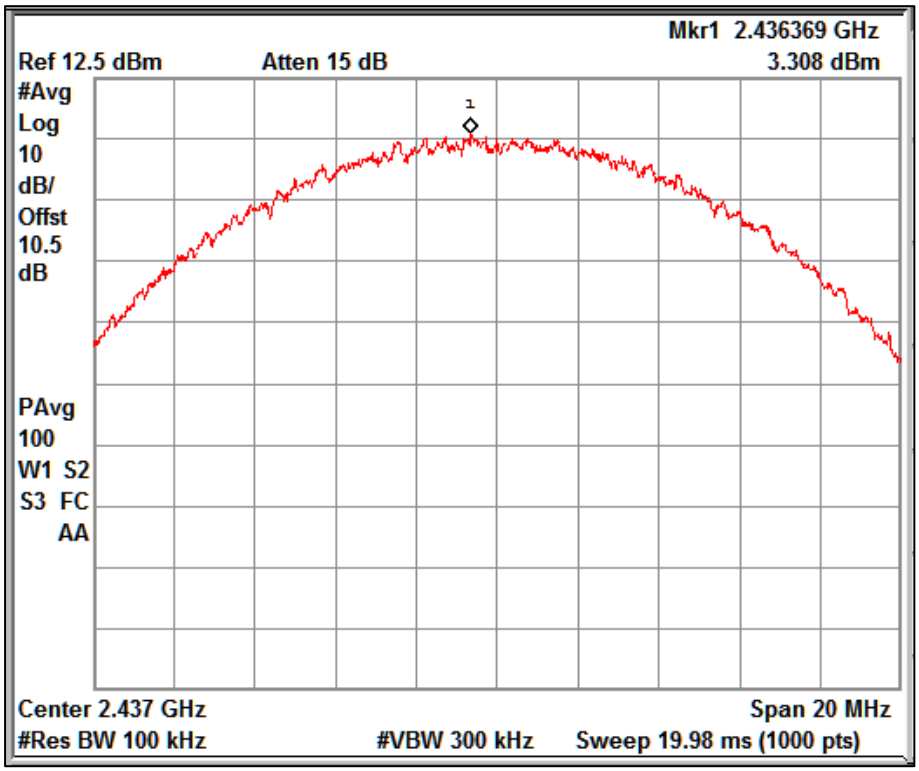

Data Rate: 11Mbps Channel Frequency: 2437MHz

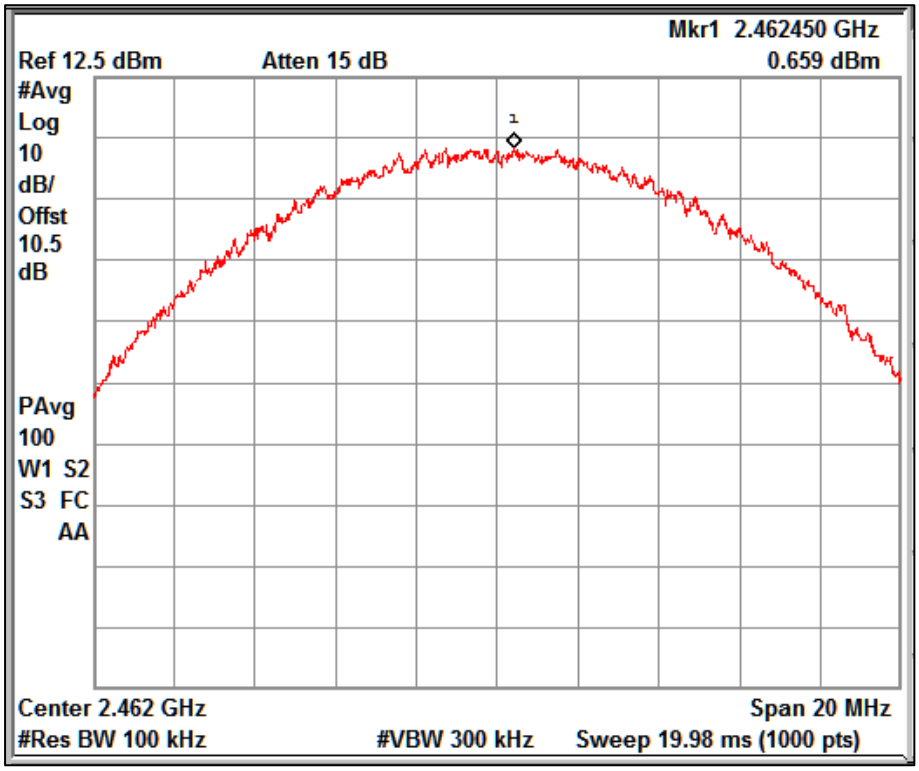

Data Rate: 11Mbps Channel Frequency: 2462MHz

Modulation: 802.11g

Data rate (Mbps)	Channel Frequency (MHz)	Measured average PSD (dBm/100kHz)	Duty cycle %	Duty cycle correction factor (dB)	Maximum average PSD (dBm/100kHz)	PSD Limit (dBm/100kHz)
6	2412	-8.08	98.88	0.05	-8.03	8
	2437	-2.42	98.88	0.05	-2.37	8
	2462	-7.35	98.88	0.05	-7.3	8
54	2412	-8.77	98.88	0.05	-8.72	8
	2437	-3.80	98.88	0.05	-3.75	8
	2462	-8.98	98.88	0.05	-8.93	8

***Note:** Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average PSD

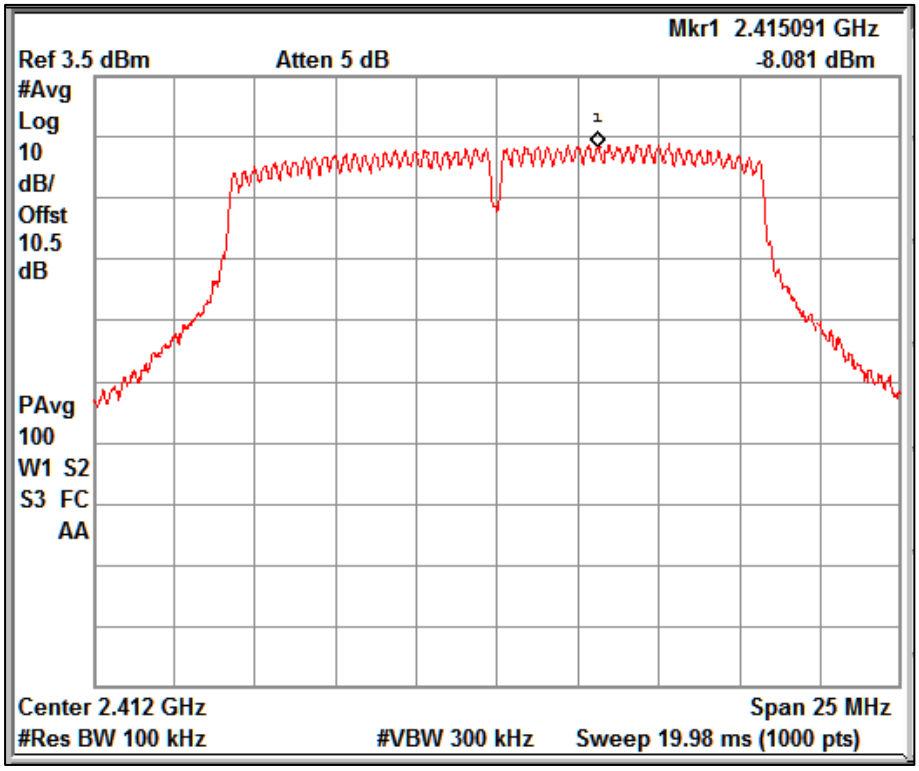

Data Rate: 6Mbps Channel Frequency: 2412MHz

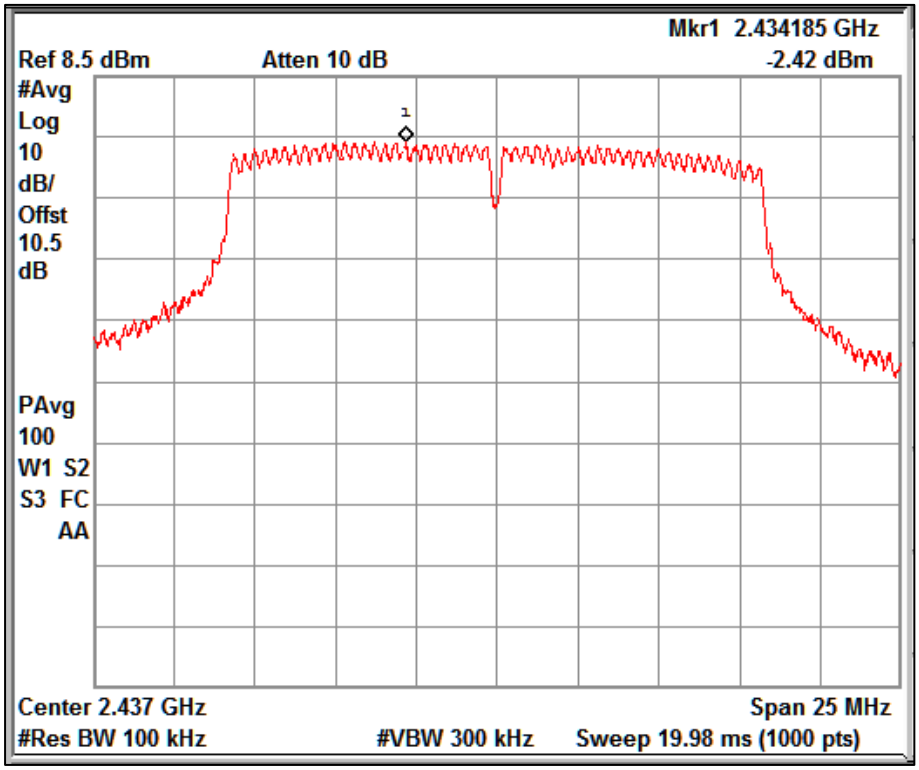

Data Rate: 6Mbps Channel Frequency: 2437MHz

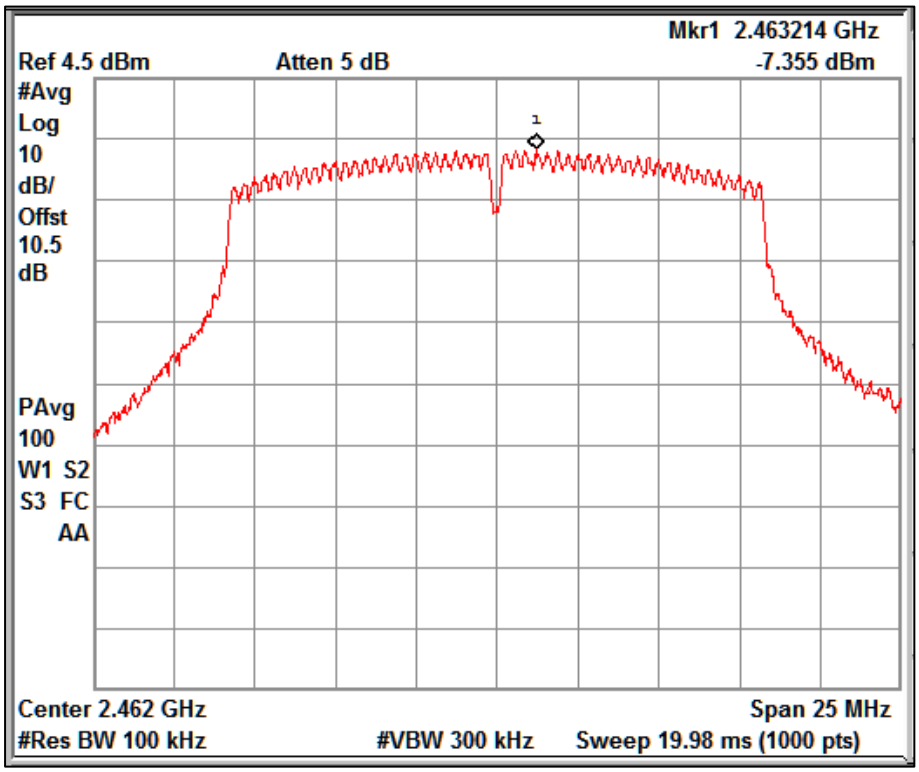

Data Rate: 6Mbps Channel Frequency: 2462MHz

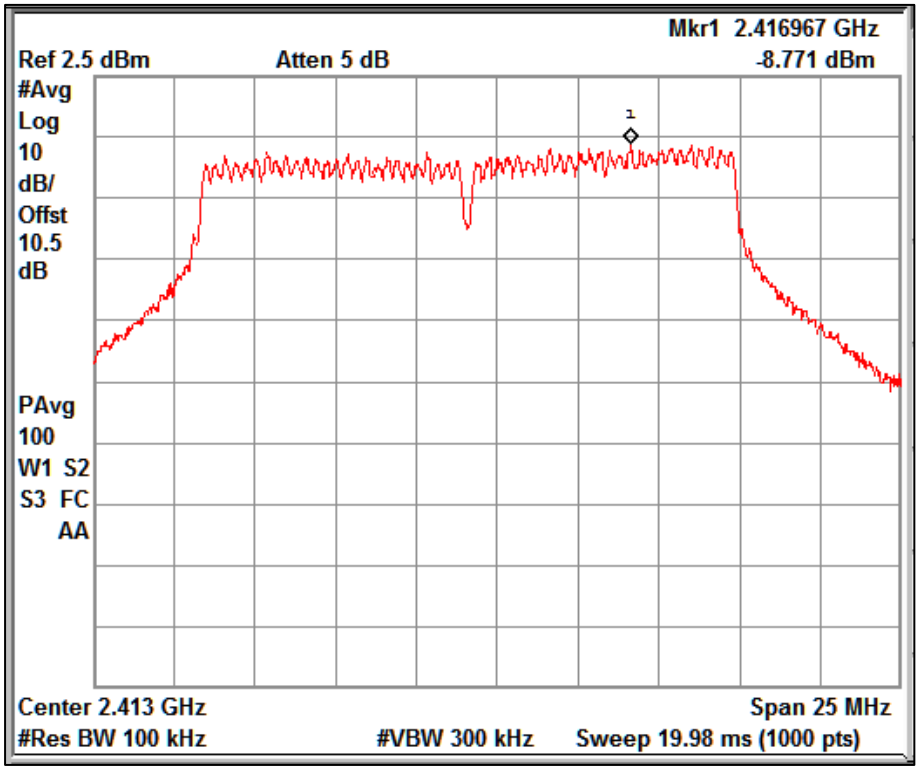

Data Rate: 54Mbps Channel Frequency: 2412MHz

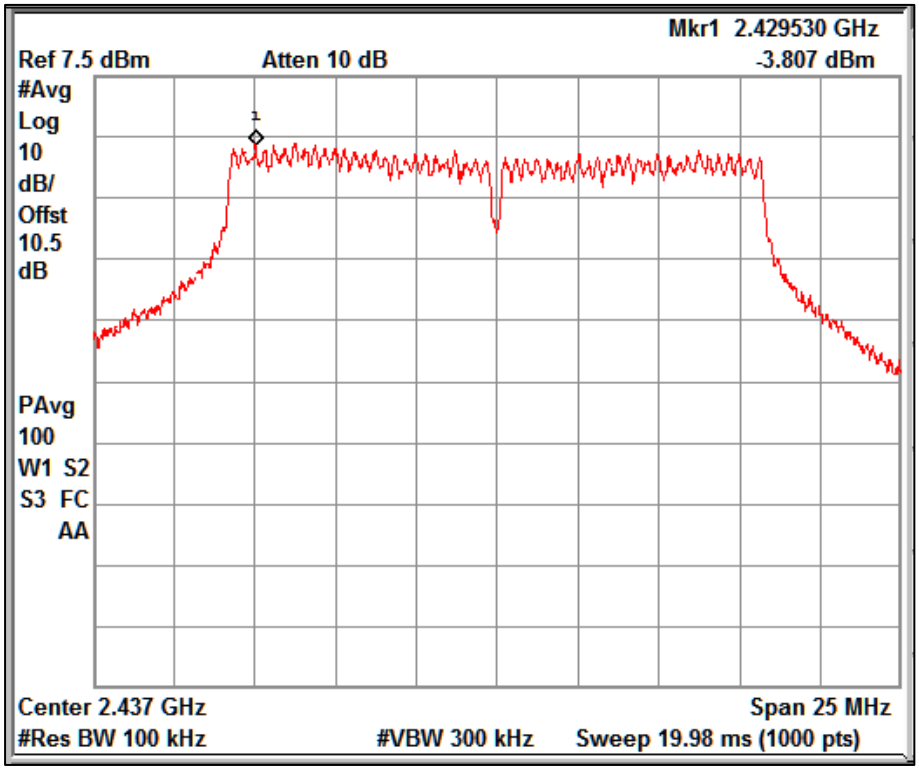

Data Rate: 54Mbps Channel Frequency: 2437MHz

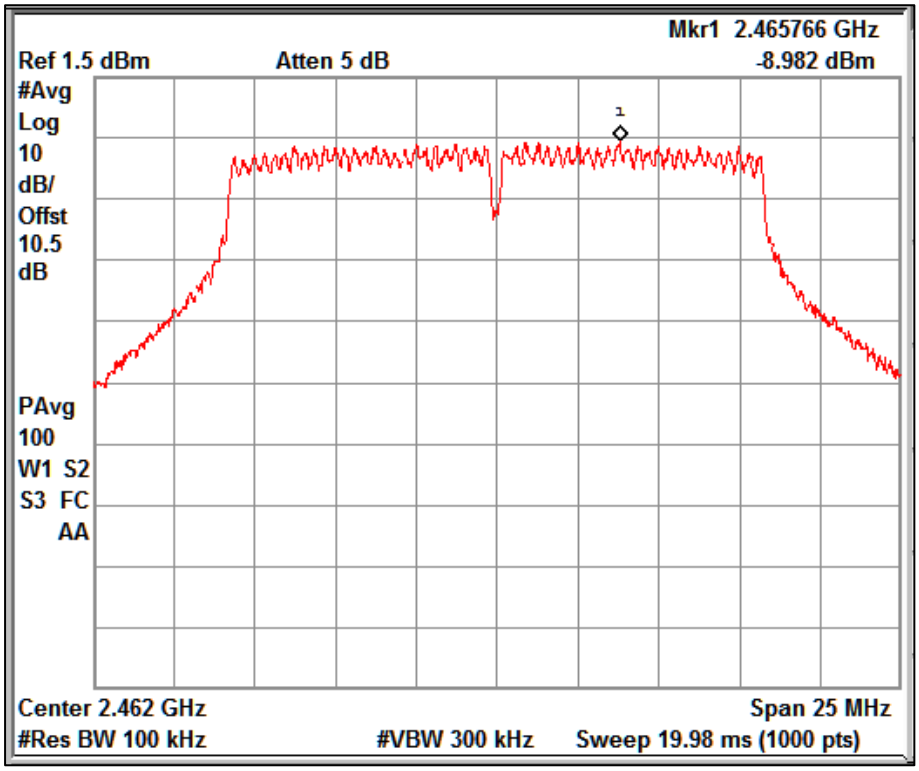

Data Rate: 24Mbps Channel Frequency: 2462MHz

Modulation: 802.11n_20MHz

Data rate (Mbps)	Channel Frequency (MHz)	Measured average PSD (dBm/100kHz)	Duty cycle %	Duty cycle correction factor (dB)	Maximum average PSD (dBm/100kHz)	PSD Limit (dBm/100kHz)
MCS0	2412	-6.46	98.88	0.05	-6.41	8
	2437	-4.87	98.88	0.05	-4.82	8
	2462	-7.36	98.88	0.05	-7.31	8
MCS7	2412	-6.60	98.88	0.05	-6.55	8
	2437	-4.07	98.88	0.05	-4.02	8
	2462	-8.40	98.88	0.05	-8.35	8

***Note:** Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average PSD

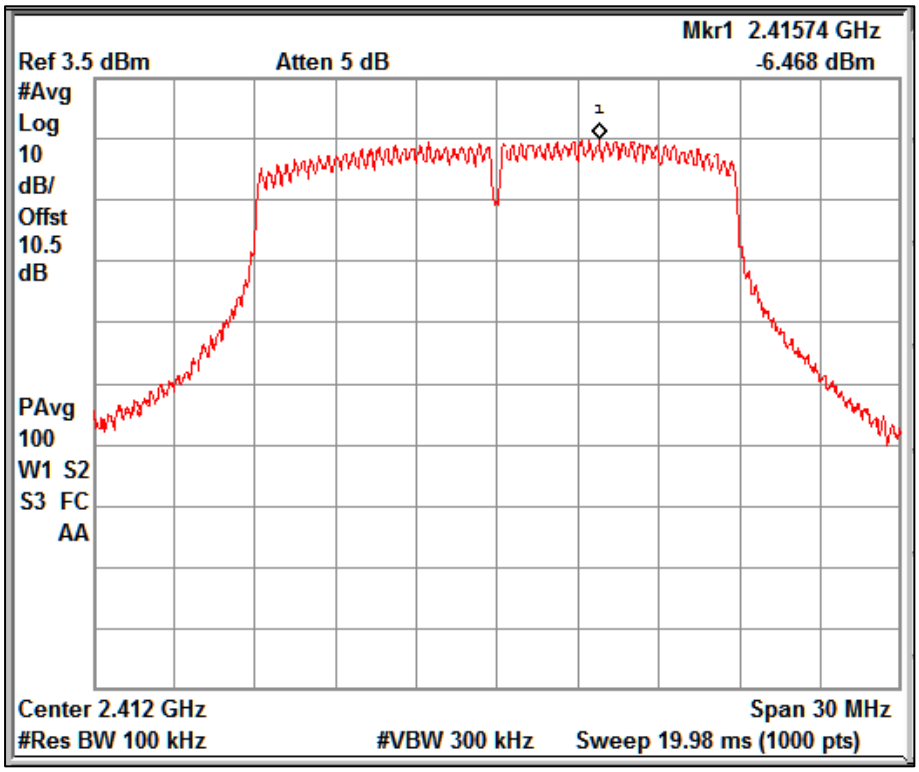

Data Rate: MCS0 Channel Frequency: 2412MHz

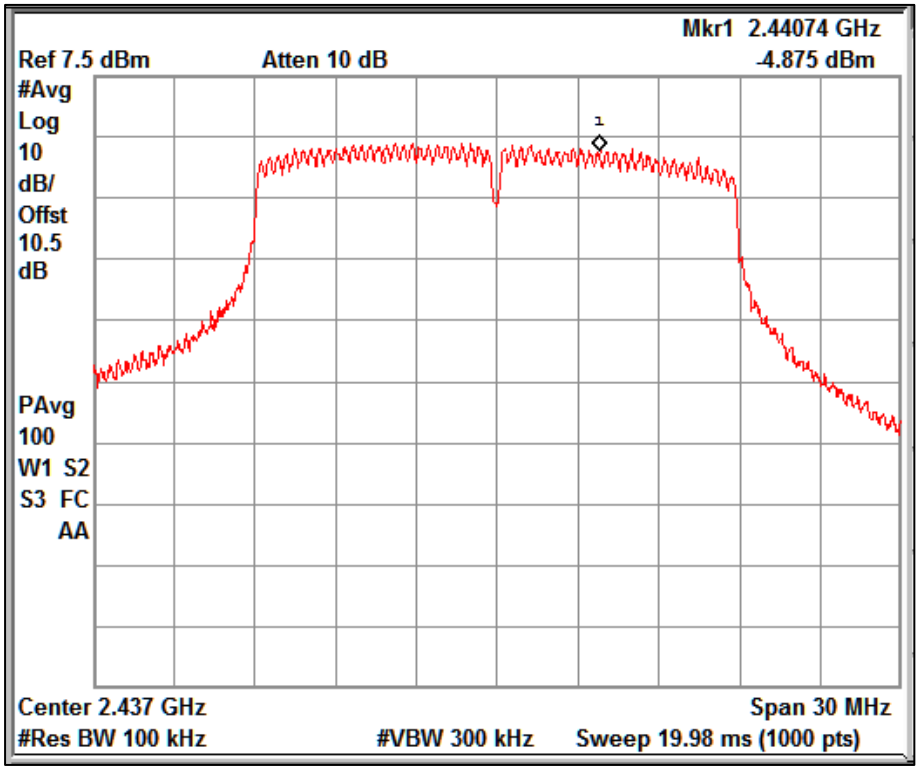

Data Rate: MCS0 Channel Frequency: 2437MHz

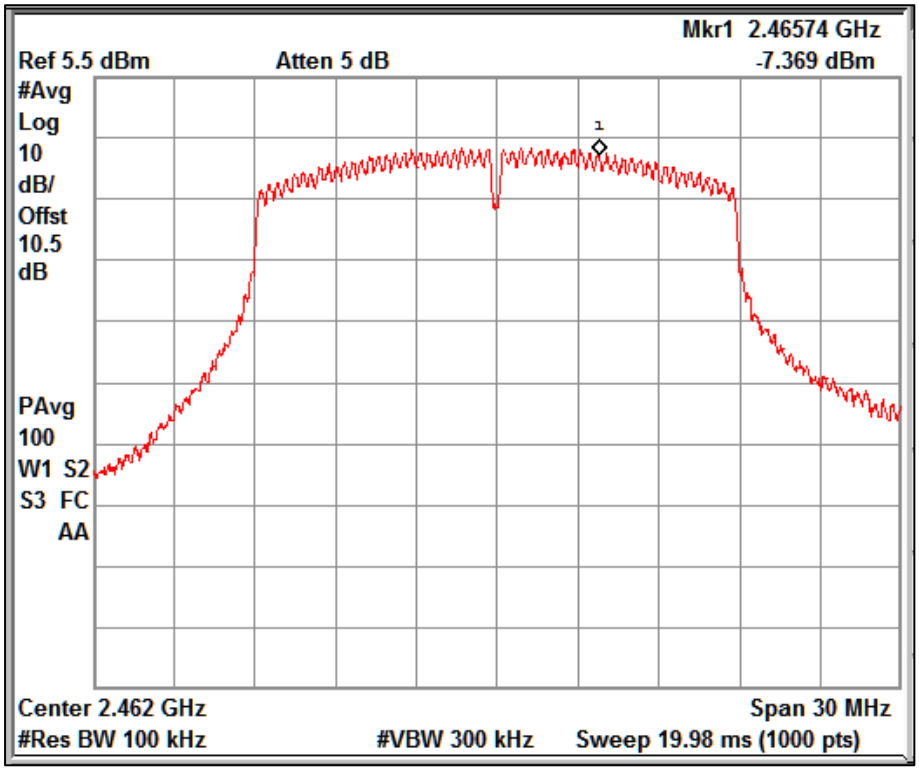

Data Rate: MCS0 Channel Frequency: 2462MHz

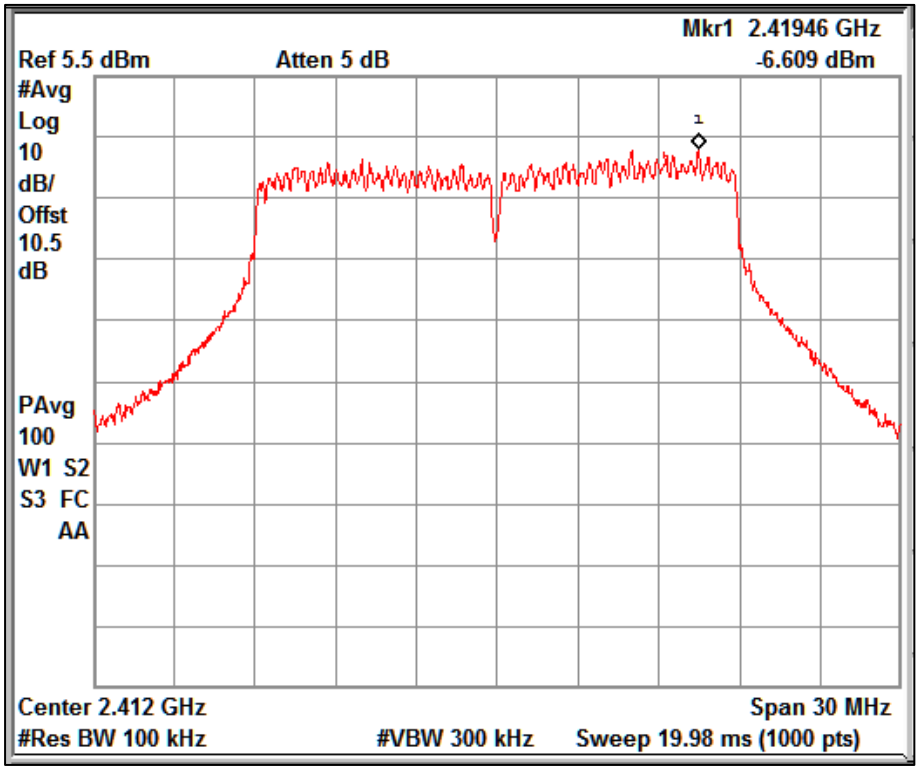

Data Rate: MCS7 Channel Frequency: 2412MHz

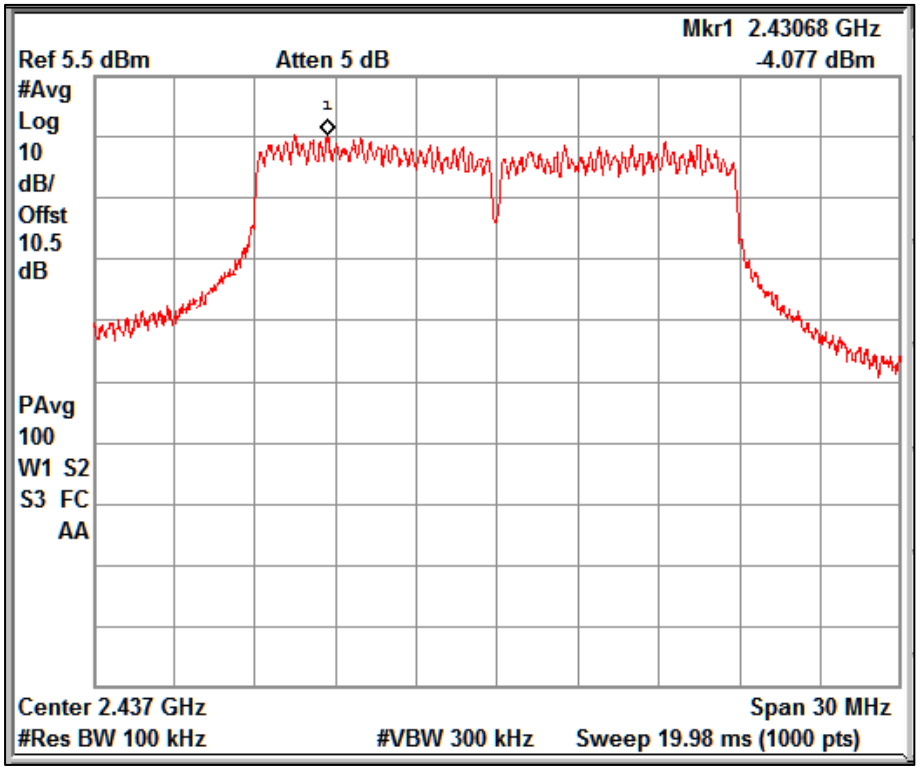

Data Rate: MCS7 Channel Frequency: 2437MHz

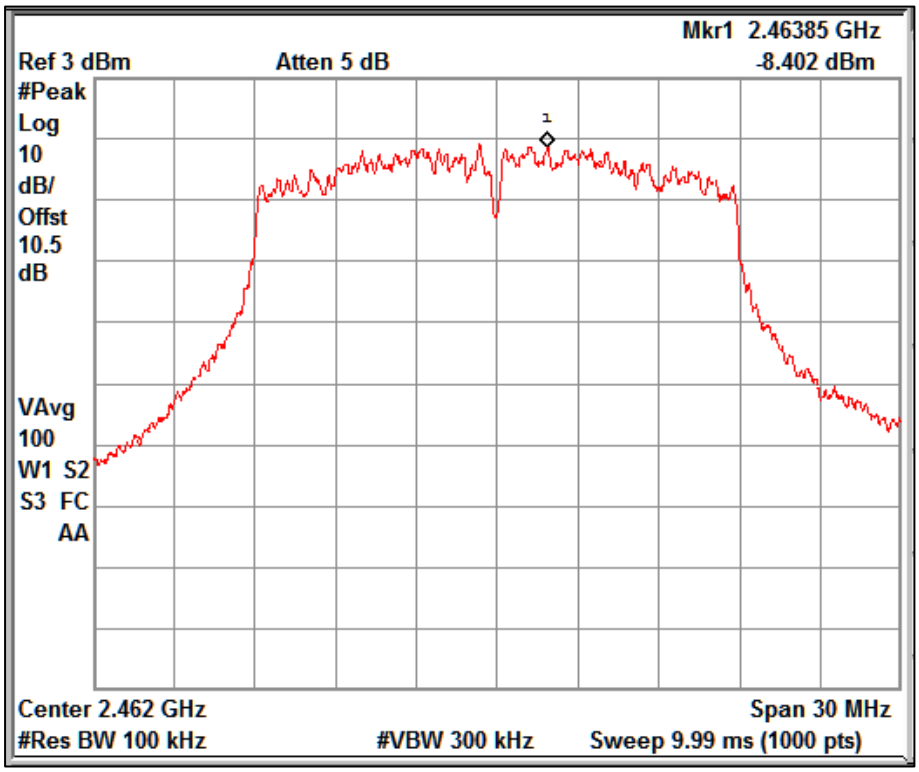

Data Rate: MCS7 Channel Frequency: 2462MHz

Modulation: 802.11n_40MHz

Data rate (Mbps)	Channel Frequency (MHz)	Measured average PSD (dBm/100kHz)	Duty cycle %	Duty cycle correction factor (dB)	Maximum average PSD (dBm/100kHz)	PSD Limit (dBm/100kHz)
MCS0	2422	-8.71	98.88	0.05	-8.66	8
	2437	-7.43	98.88	0.05	-7.38	8
	2452	-9.12	98.88	0.05	-9.07	8
MCS7	2422	-14.35	98.88	0.05	-14.3	8
	2437	-8.41	98.88	0.05	-8.36	8
	2452	-11.48	98.88	0.05	-11.43	8

*****Note: Duty Cycle Correction Factor Calculation

10*LOG (1/X) Where X is Duty Cycle is considered in below results

Duty cycle correction Factor is considered in Final Average PSD

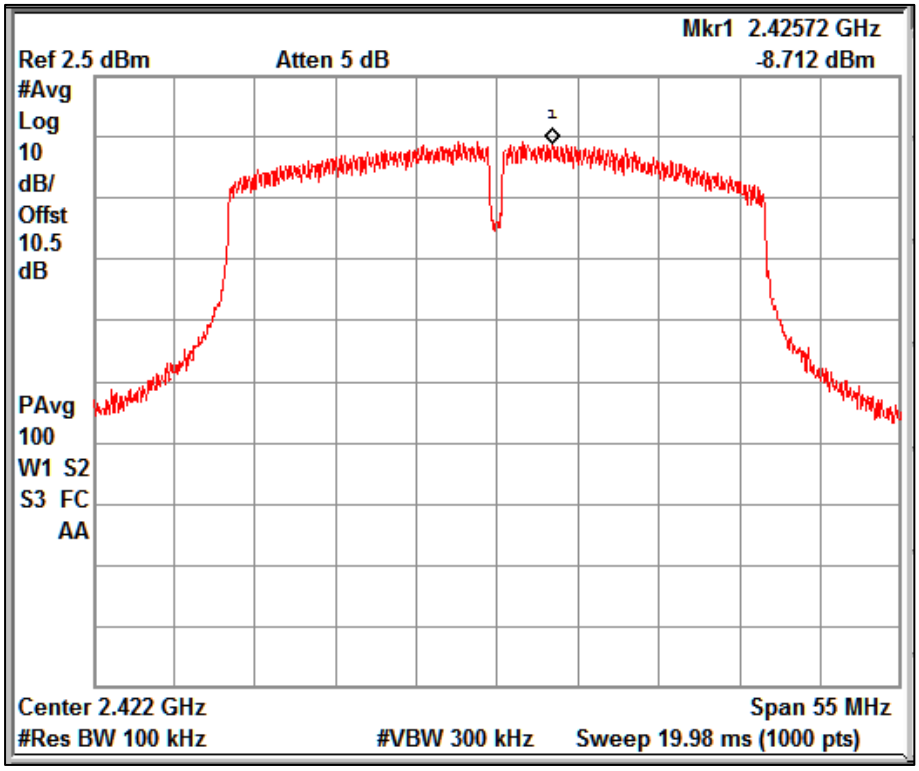

Data Rate: MCS0 Channel Frequency: 2422MHz

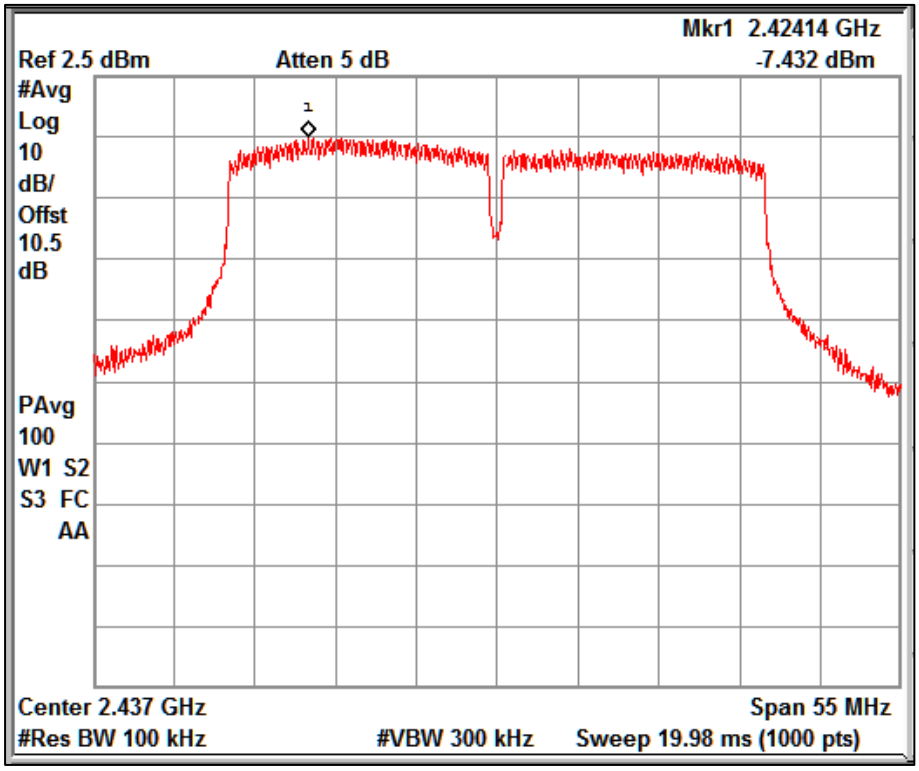

Data Rate: MCS0 Channel Frequency: 2437MHz

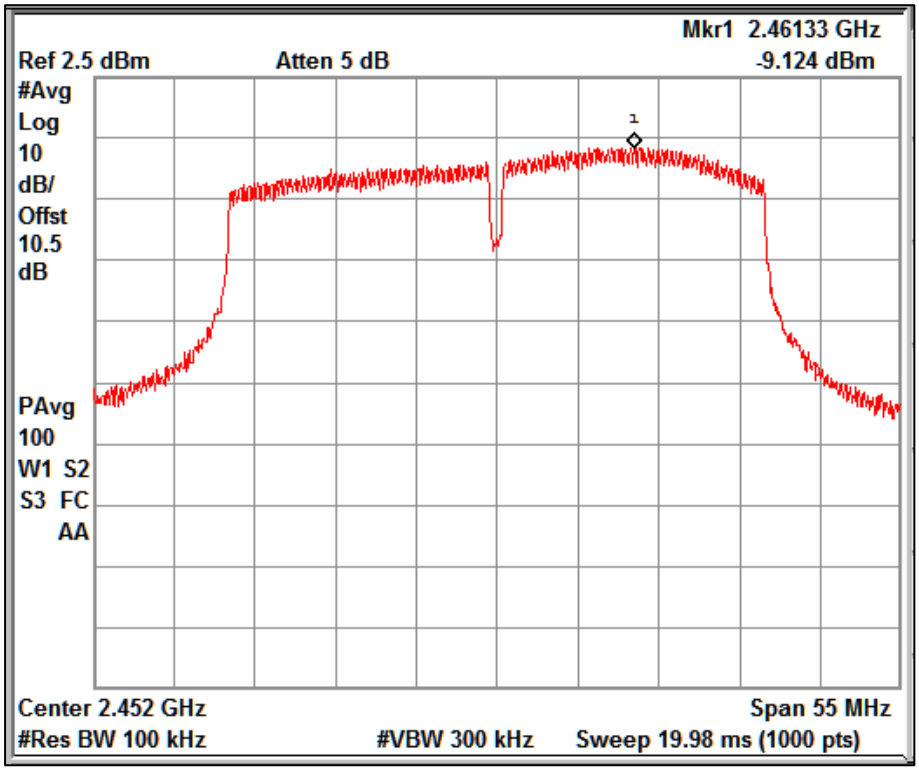

Data Rate: MCS0 Channel Frequency: 2452MHz

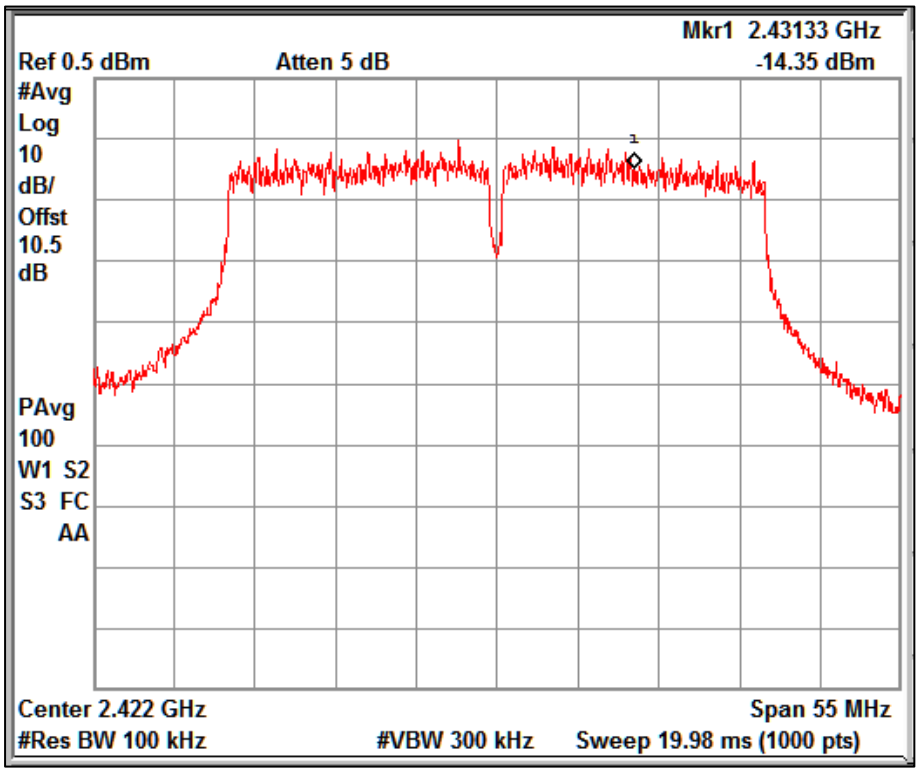

Data Rate: MCS7 Channel Frequency: 2422MHz

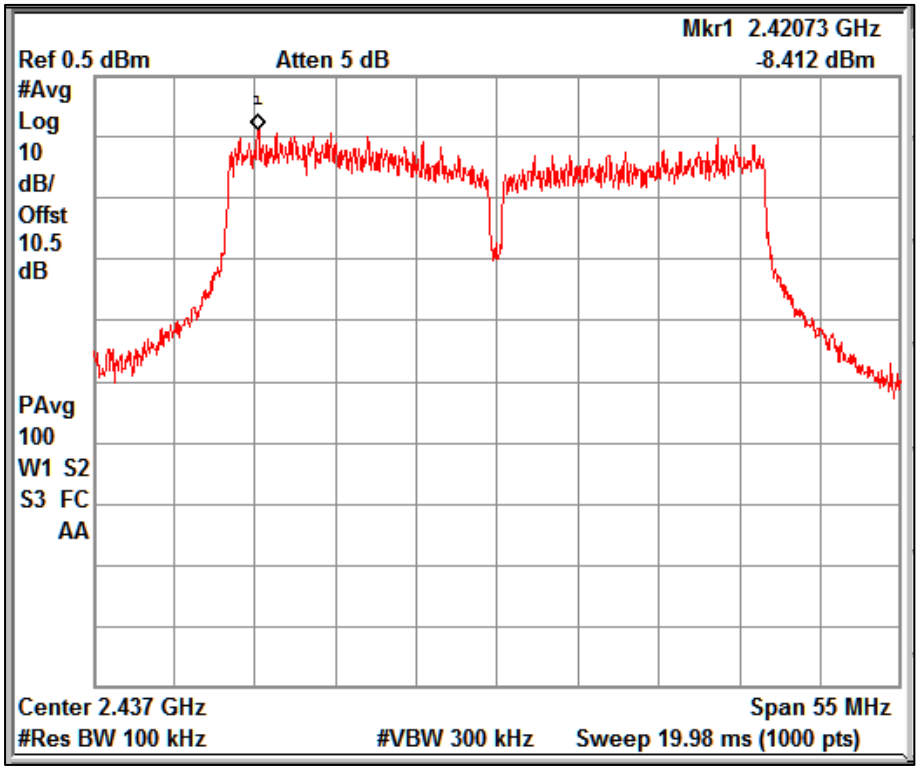

Data Rate: MCS7 Channel Frequency: 2437MHz

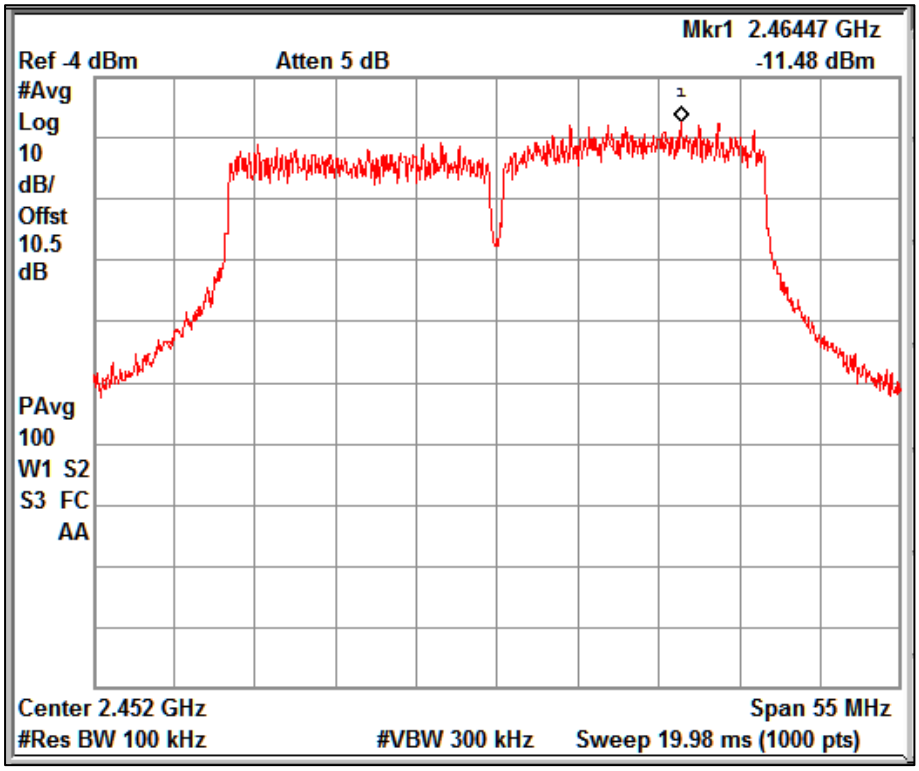

Data Rate: MCS7 Channel Frequency: 2452MHz

7.3 DTS Bandwidth & 99% Bandwidth

Result ***Pass***

Test Specification	FCC part 15 Subpart C 15.247 (a) (2) / RSS 247 Issue 2, Section 5.2 (a)
Test Method	Subclause 11.8.1 of ANSI C63.10
Measurement Bandwidth	100 kHz for x dB bandwidth 1 to 5% of OCB for 99% bandwidth
Detector	Peak
Port of testing	Antenna port
Requirement	The minimum 6 dB bandwidth shall be at least 500 kHz

Test Method:

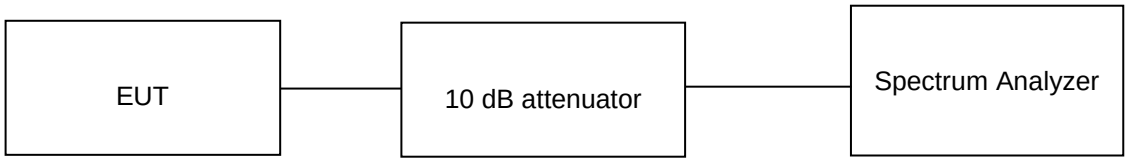

Test Condition

Normal Test Condition:

Temperature (Norm) = + 25 °C Voltage = 3.3VDC Relative humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. For 6 dB Bandwidth Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.
3. For OCW 99 % Bandwidth measurements were made as per section 6.9.3 ANSI C63.10-2013 & 6.7 RSS GEN issue 5

Modulation: 802.11b

Data rate (Mbps)	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)	Minimum Limit (MHz)
1	2412	8.10	13.18	0.5
	2437	7.56	13.56	0.5
	2462	8.05	12.76	0.5
11	2412	8.33	12.99	0.5
	2442	7.49	13.25	0.5
	2462	7.12	12.49	0.5

Graphs for 6 dB bandwidth measurement

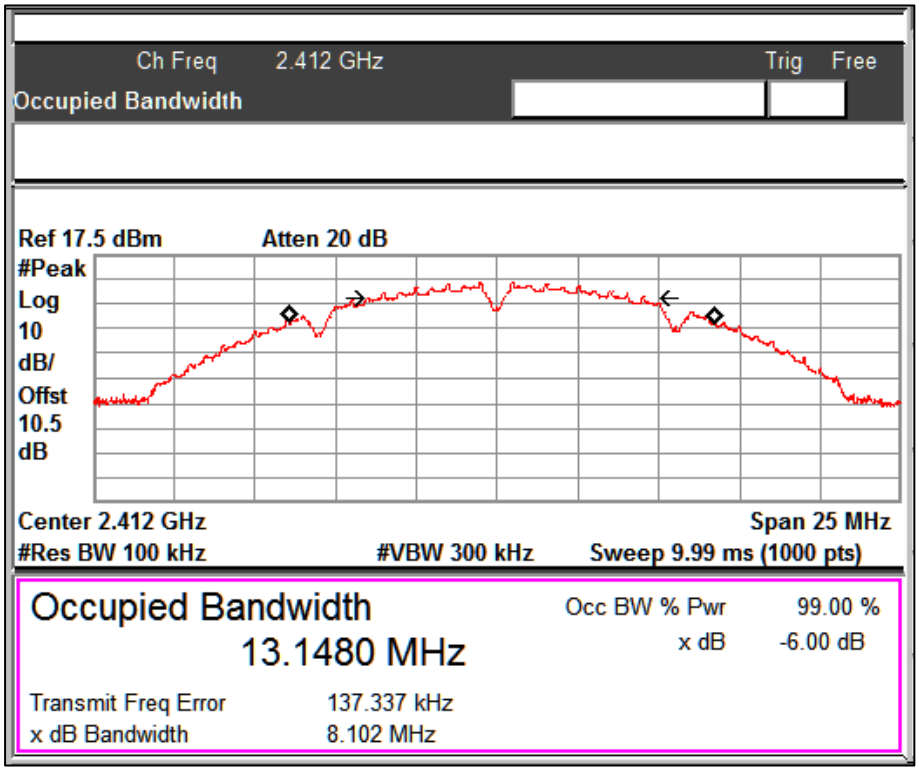

Data Rate: 1Mbps Channel Frequency: 2412MHz

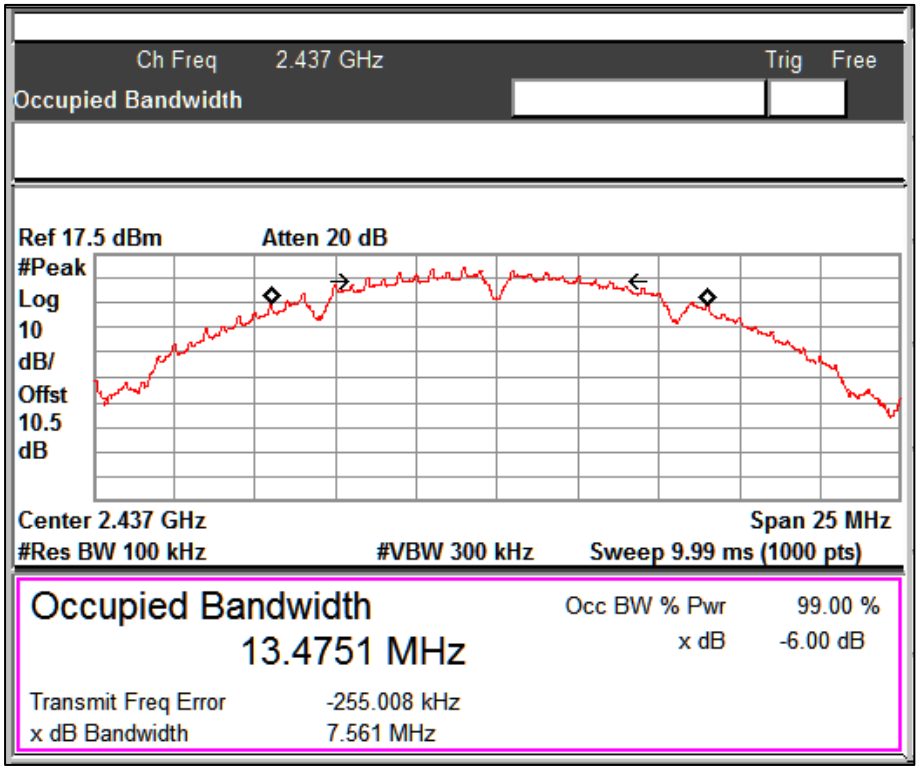

Data Rate: 1Mbps Channel Frequency: 2437MHz

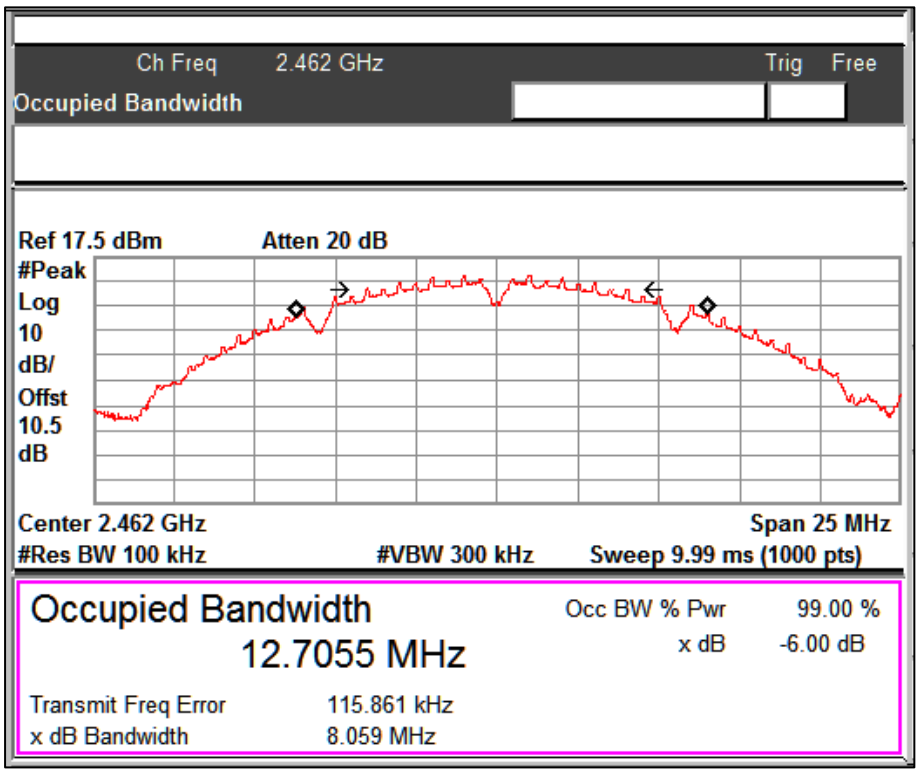

Data Rate: 1Mbps Channel Frequency: 2462MHz

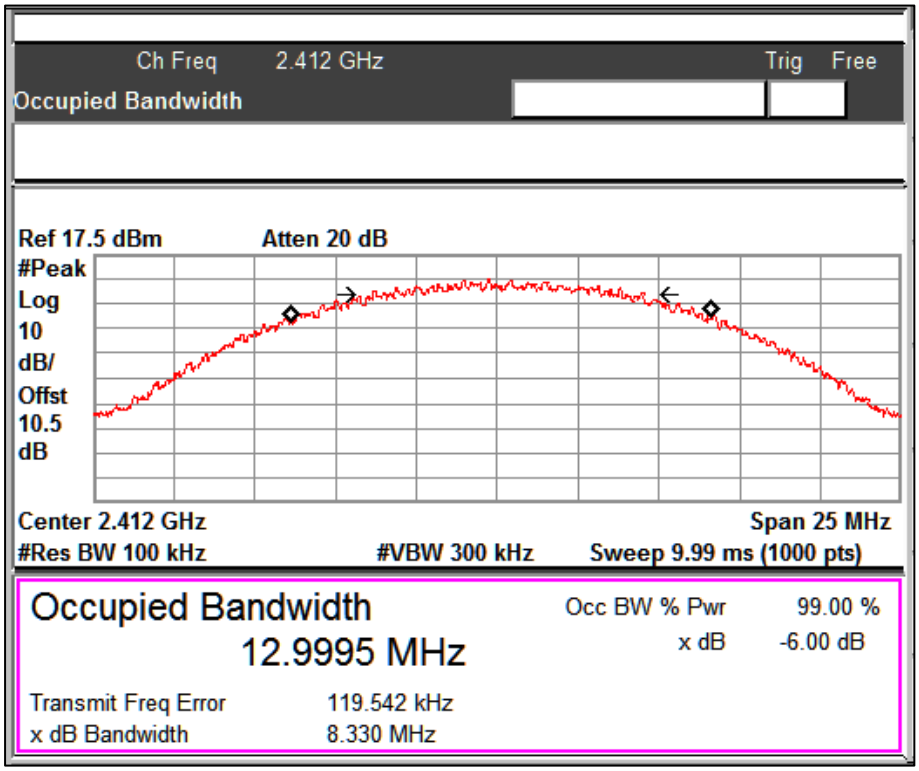

Data Rate: 11Mbps Channel Frequency: 2412MHz

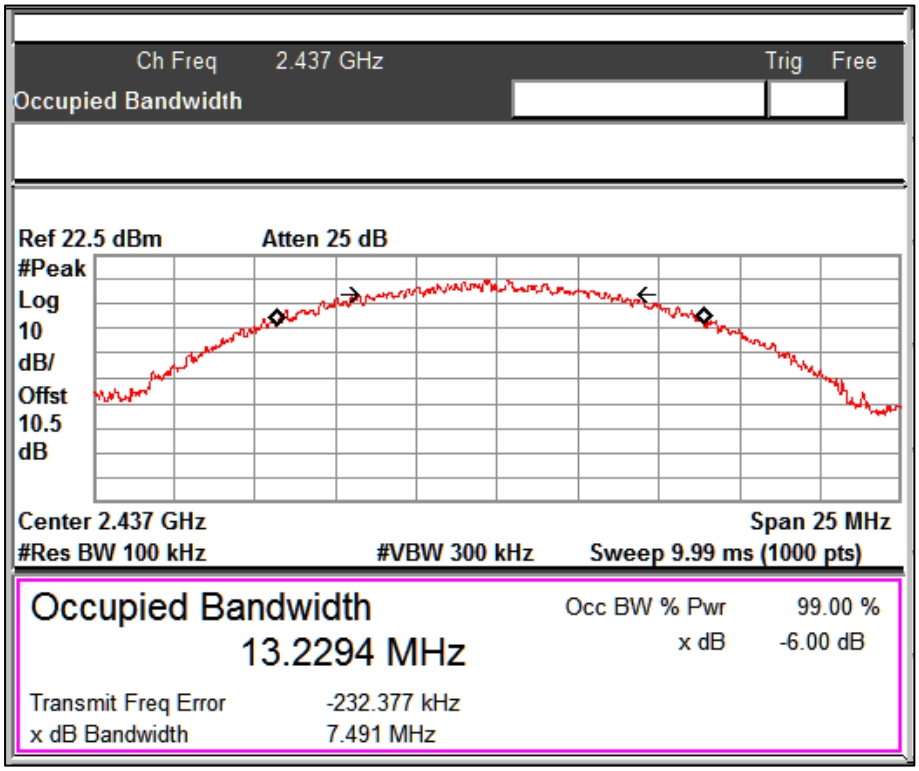

Data Rate: 11Mbps Channel Frequency: 2437MHz

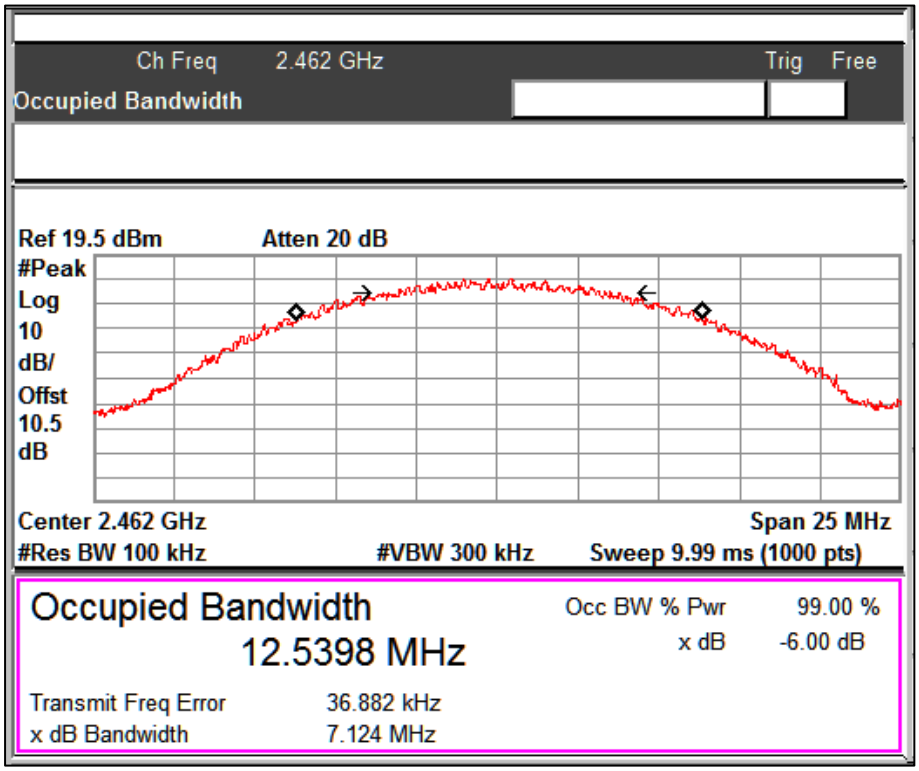

Data Rate: 11Mbps Channel Frequency: 2462MHz

Graphs for OCW 99 % bandwidth measurement

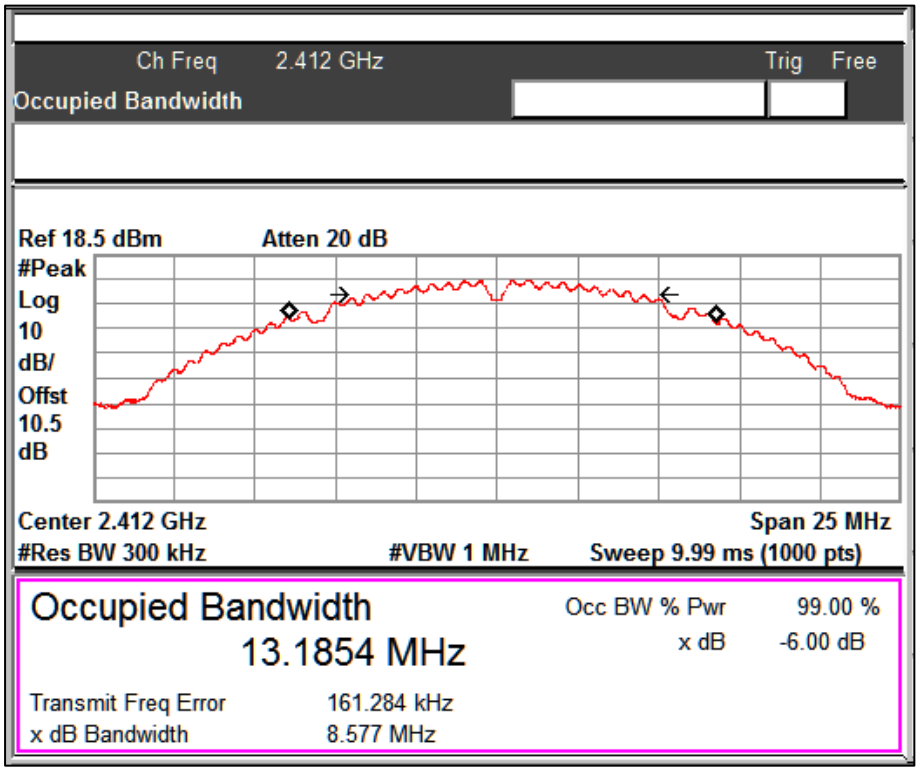

Data Rate: 1Mbps Channel Frequency: 2412MHz

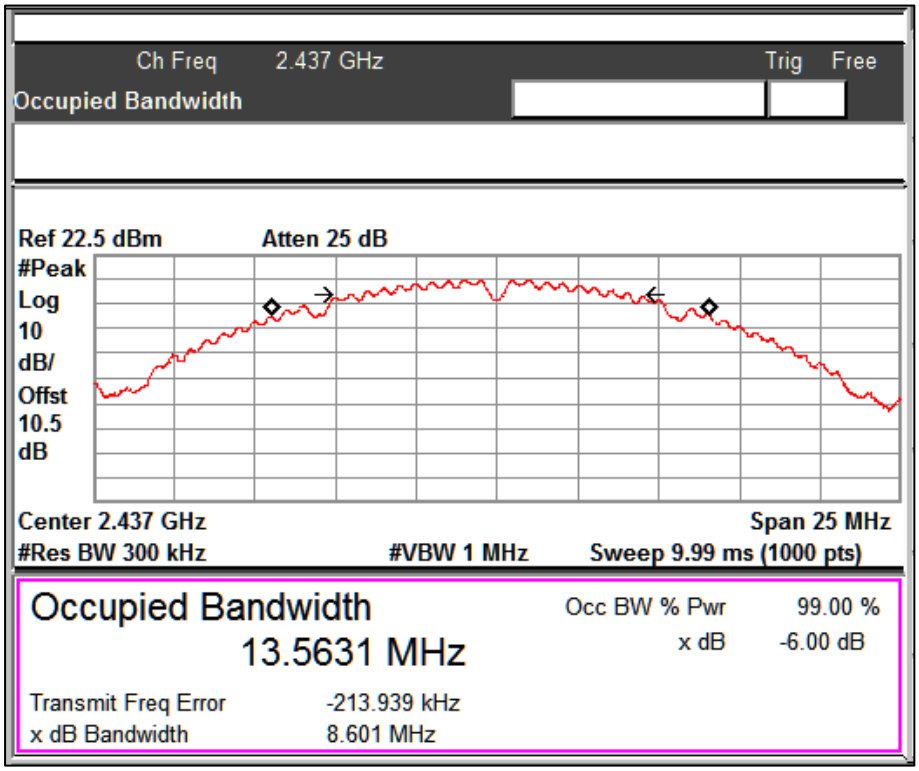

Data Rate: 1Mbps Channel Frequency: 2437MHz

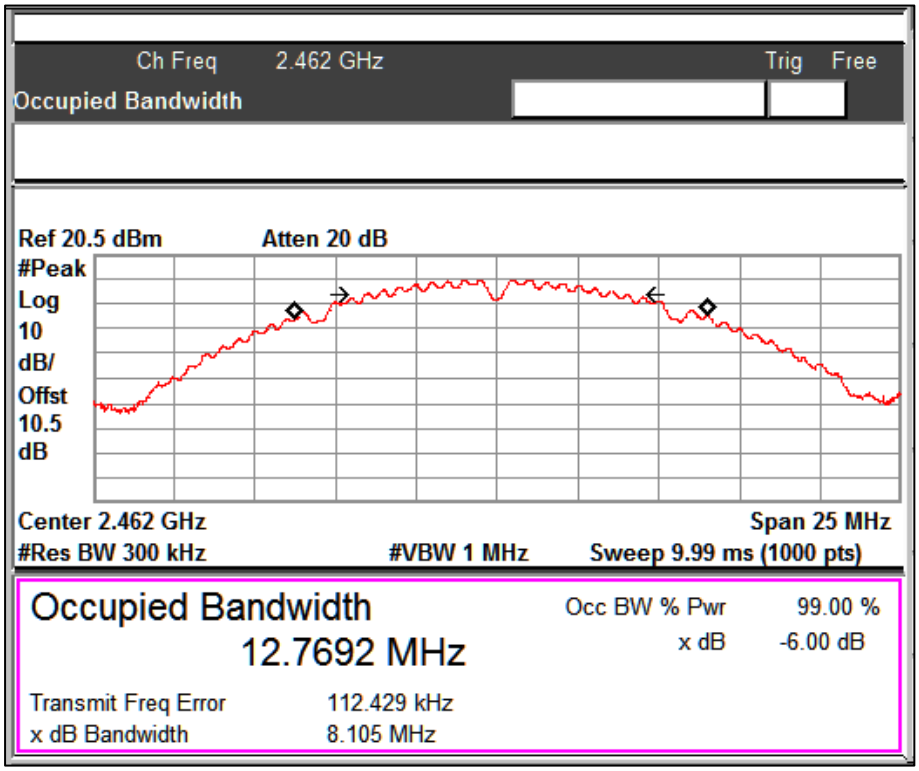

Data Rate: 1Mbps Channel Frequency: 2462MHz

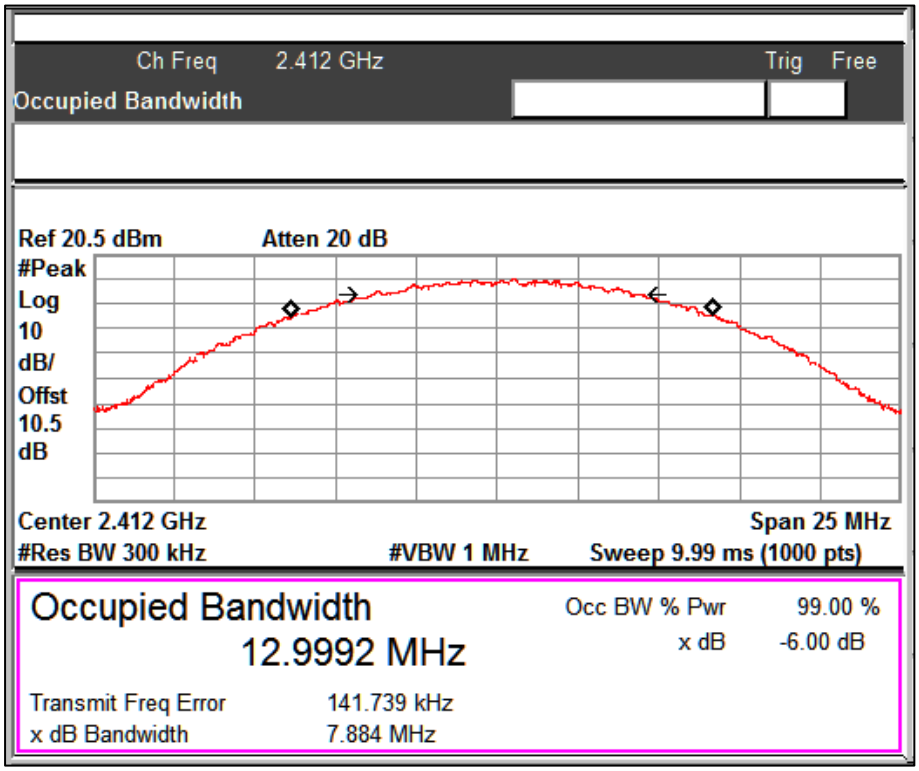

Data Rate: 11Mbps Channel Frequency: 2412MHz

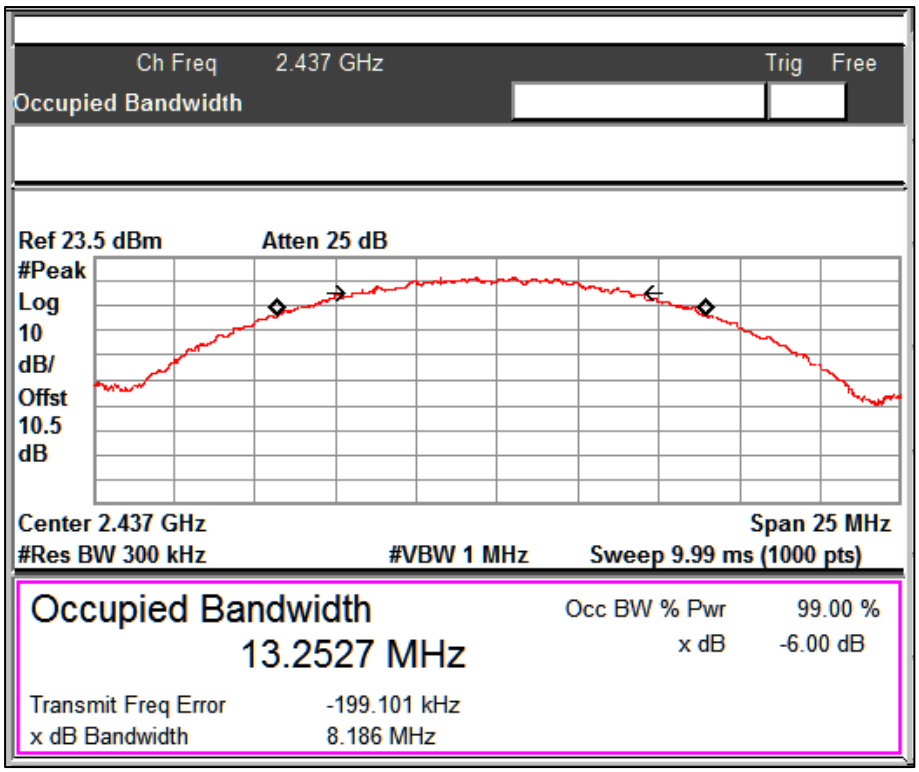

Data Rate: 11Mbps Channel Frequency: 2437MHz

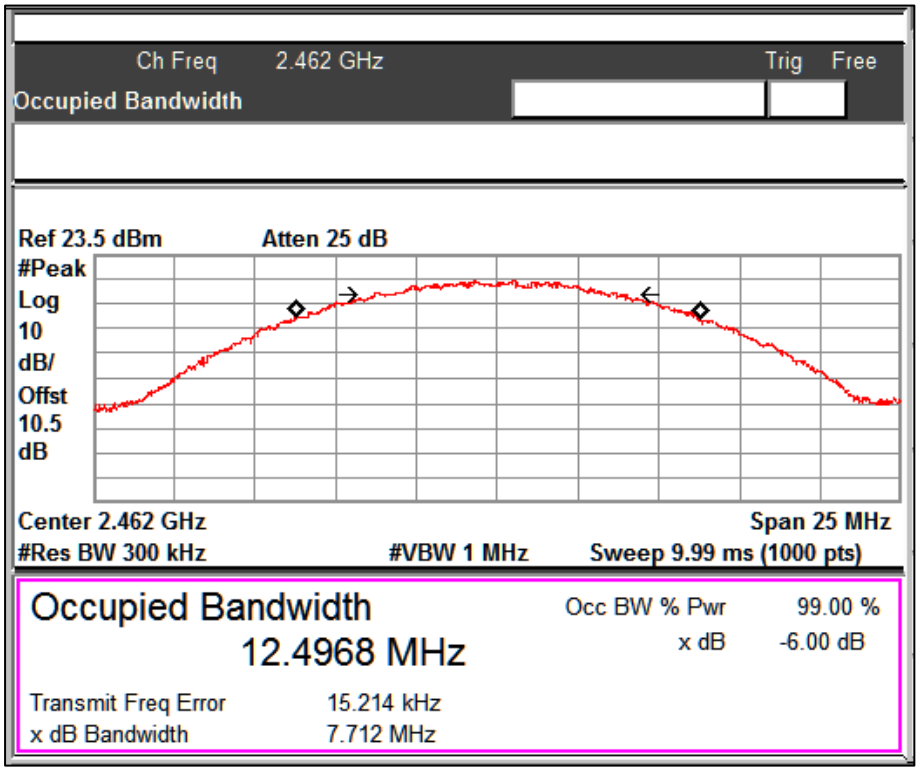

Data Rate: 11Mbps Channel Frequency: 2462MHz

Modulation: 802.11g

Data rate (Mbps)	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)	Minimum Limit (MHz)
6	2412	15.48	16.32	0.5
	2437	15.42	16.40	0.5
	2462	14.02	16.16	0.5
54	2412	16.43	16.79	0.5
	2437	16.47	16.96	0.5
	2462	16.42	16.62	0.5

Graphs for 6 dB bandwidth measurement

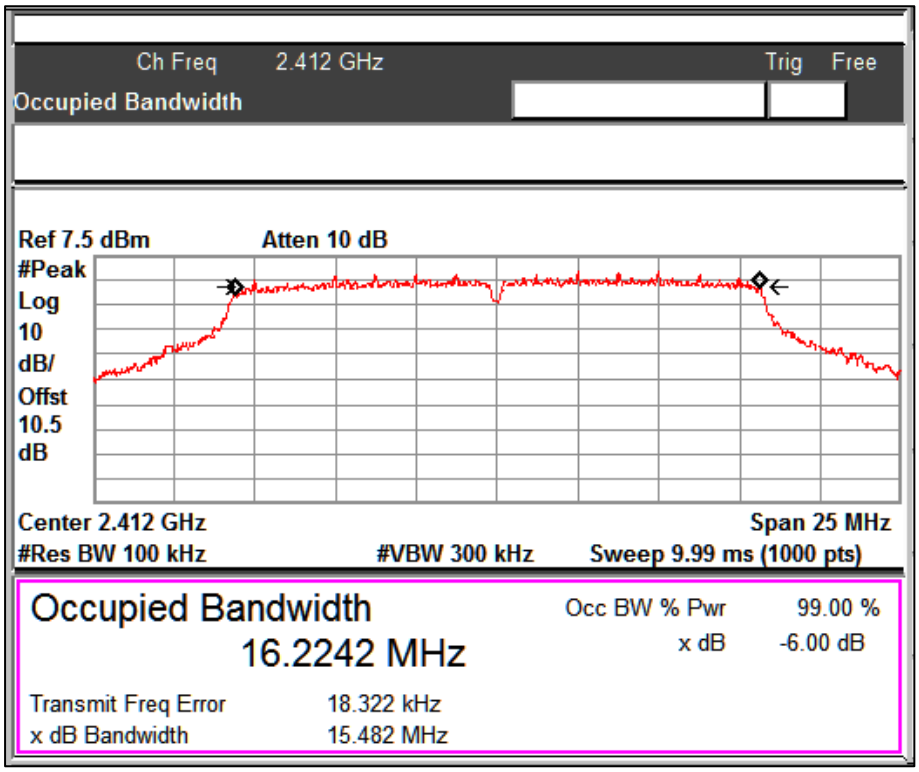

Data Rate: 6Mbps Channel Frequency: 2412MHz

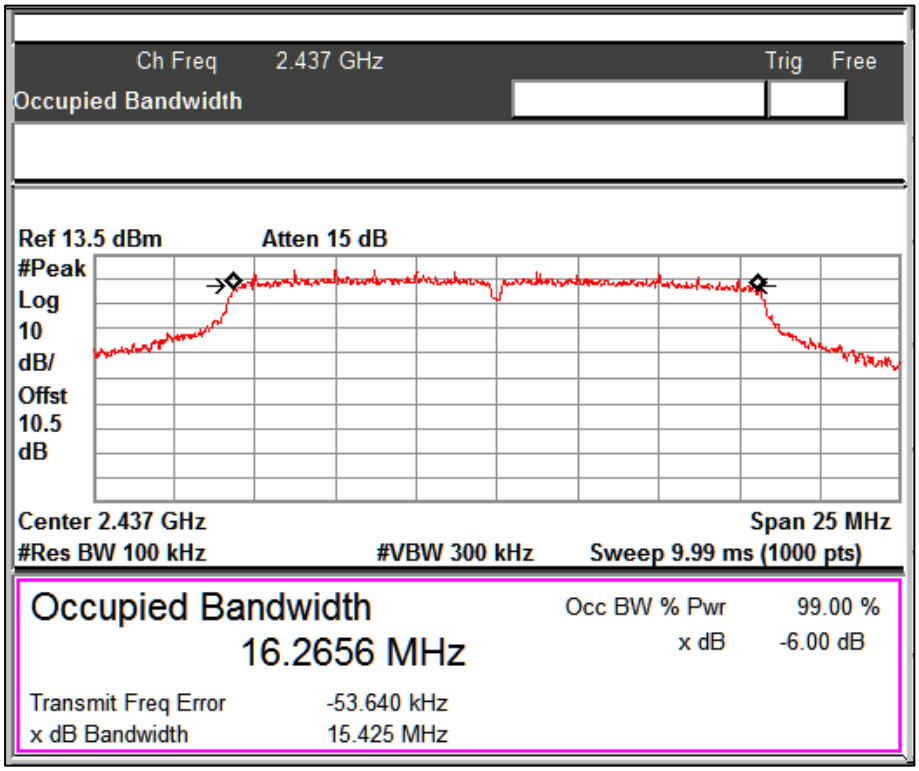

Data Rate: 6Mbps Channel Frequency: 2437MHz

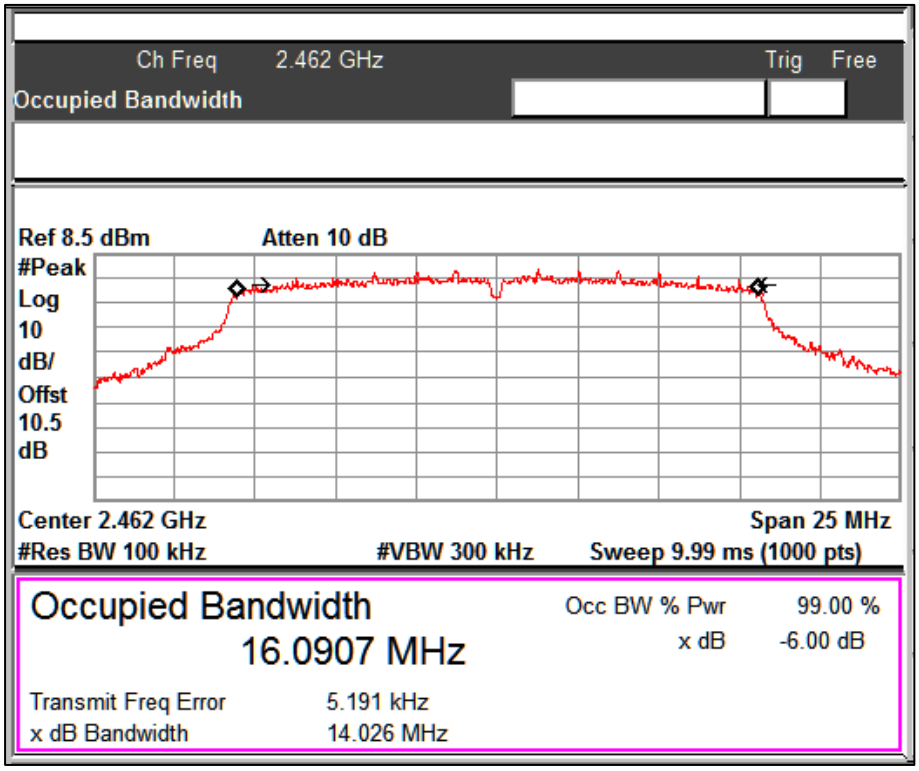

Data Rate: 6Mbps Channel Frequency: 2462MHz

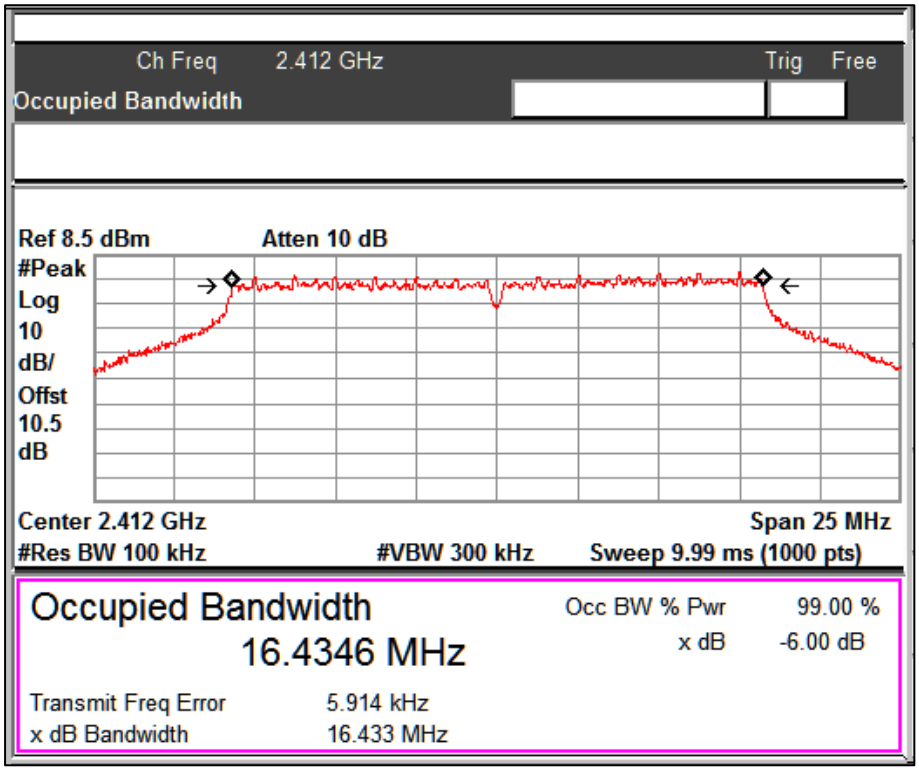

Data Rate: 54Mbps Channel Frequency: 2412MHz

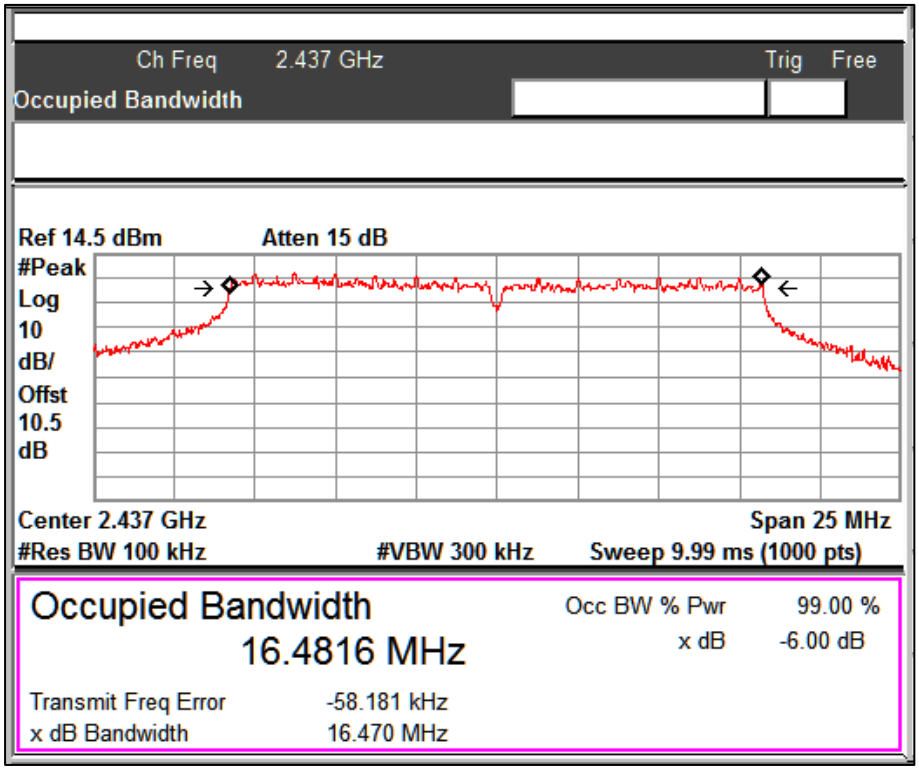

Data Rate: 54Mbps Channel Frequency: 2437MHz

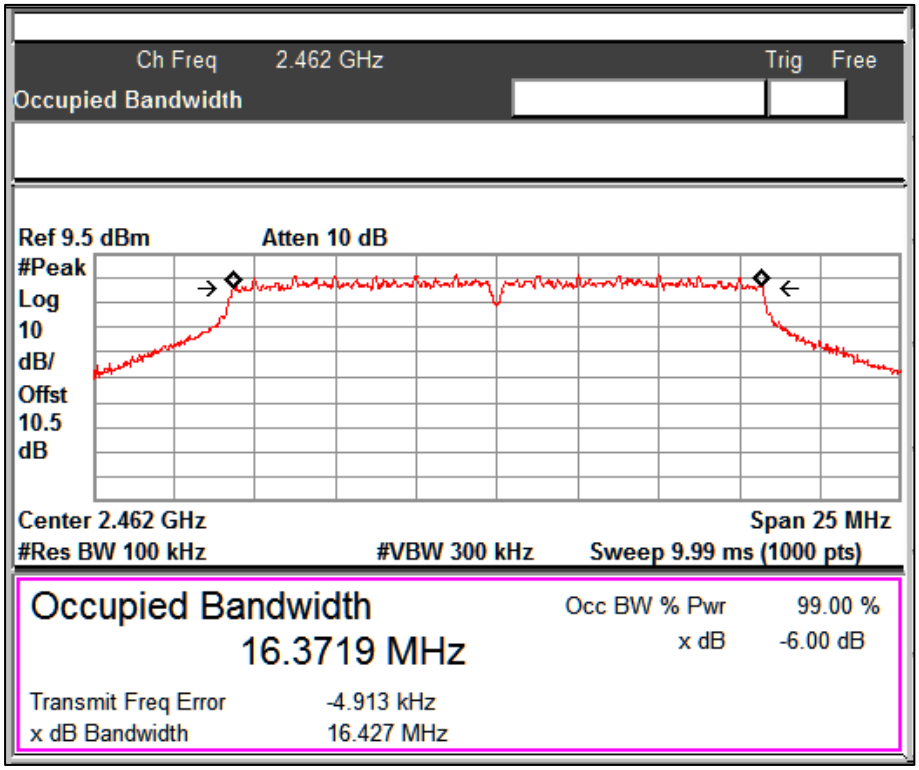

Data Rate: 54Mbps Channel Frequency: 2462MHz

Graphs for OCW 99 % bandwidth measurement

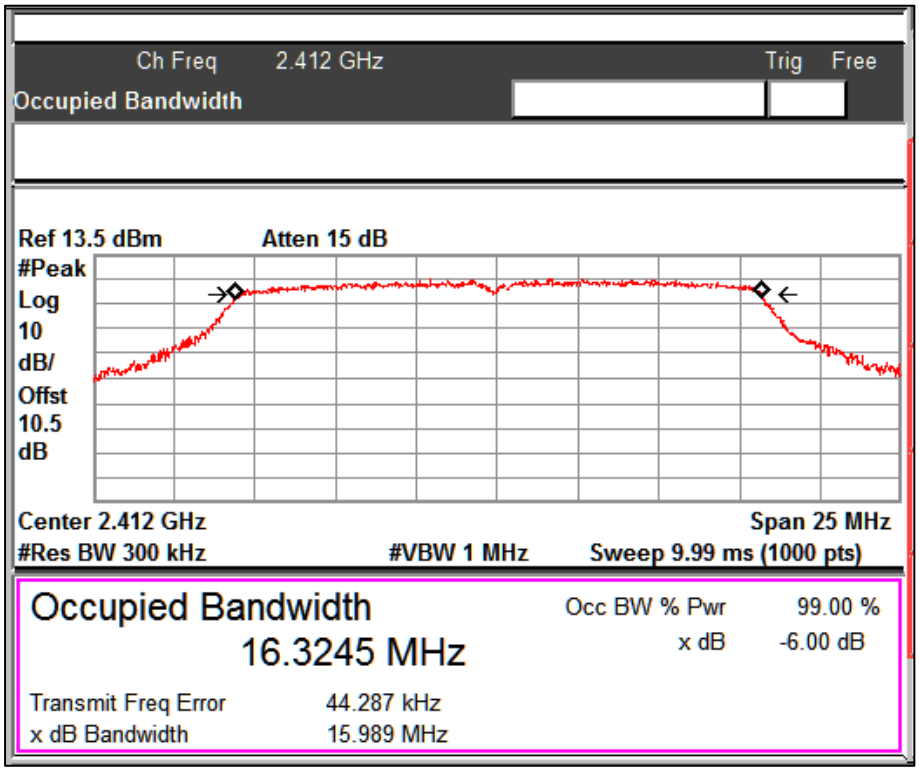

Data Rate: 6Mbps Channel Frequency: 2412MHz

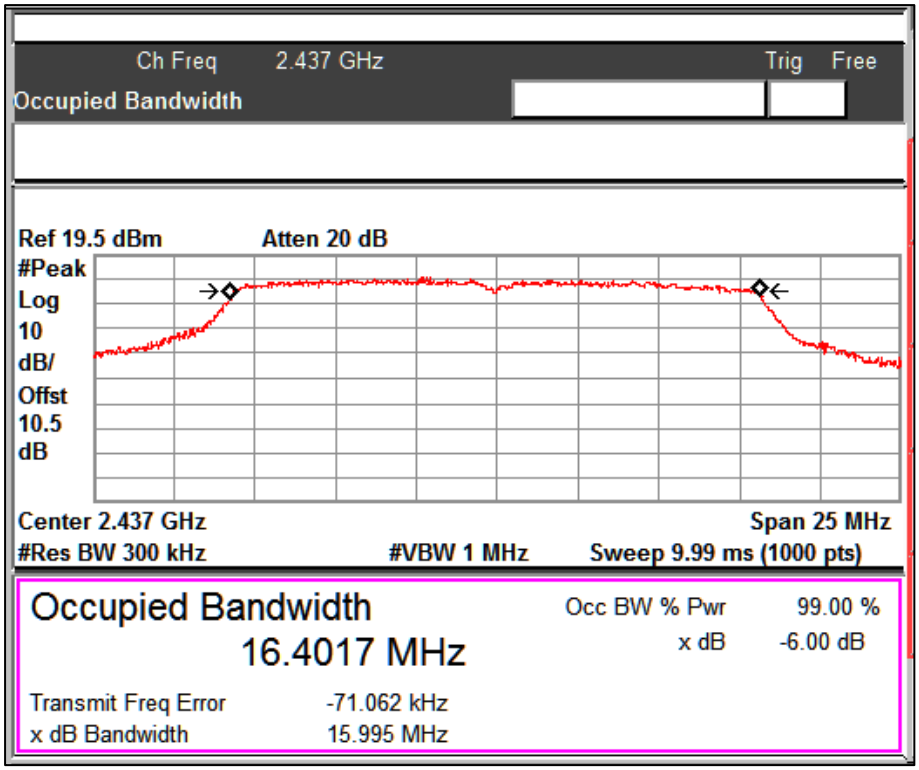

Data Rate: 6Mbps Channel Frequency: 2437MHz

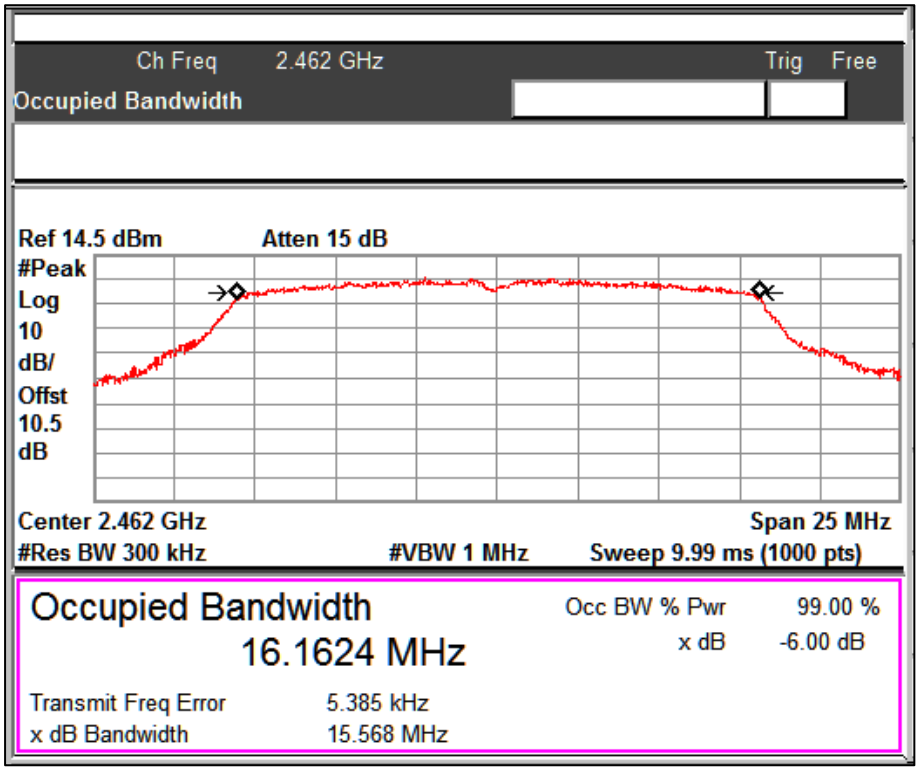

Data Rate: 6Mbps Channel Frequency: 2462MHz

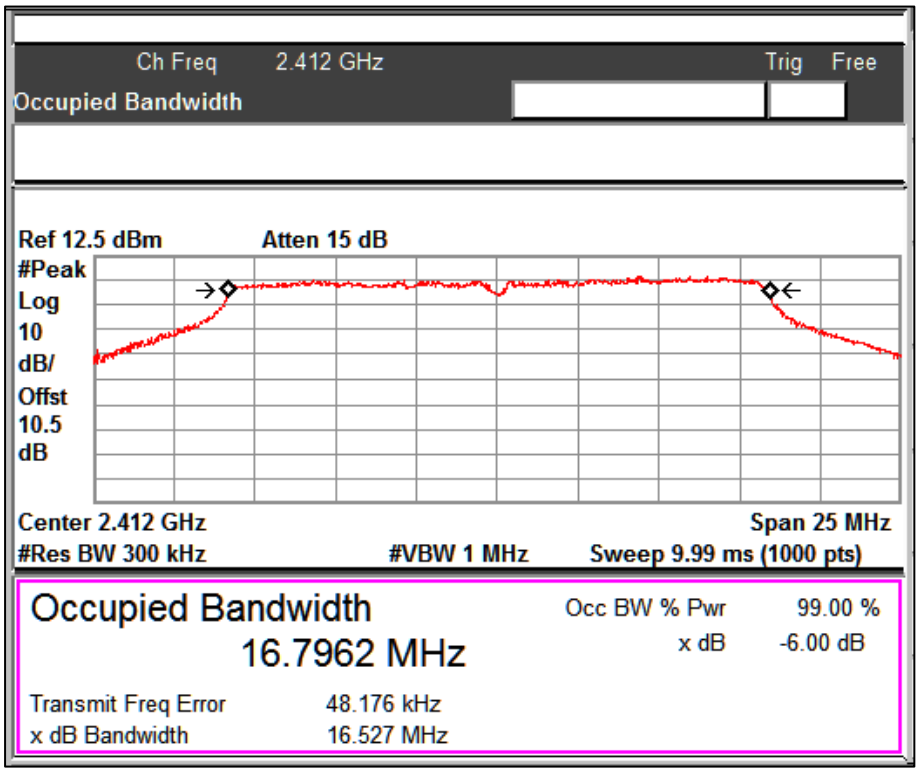

Data Rate: 54Mbps Channel Frequency: 2412MHz

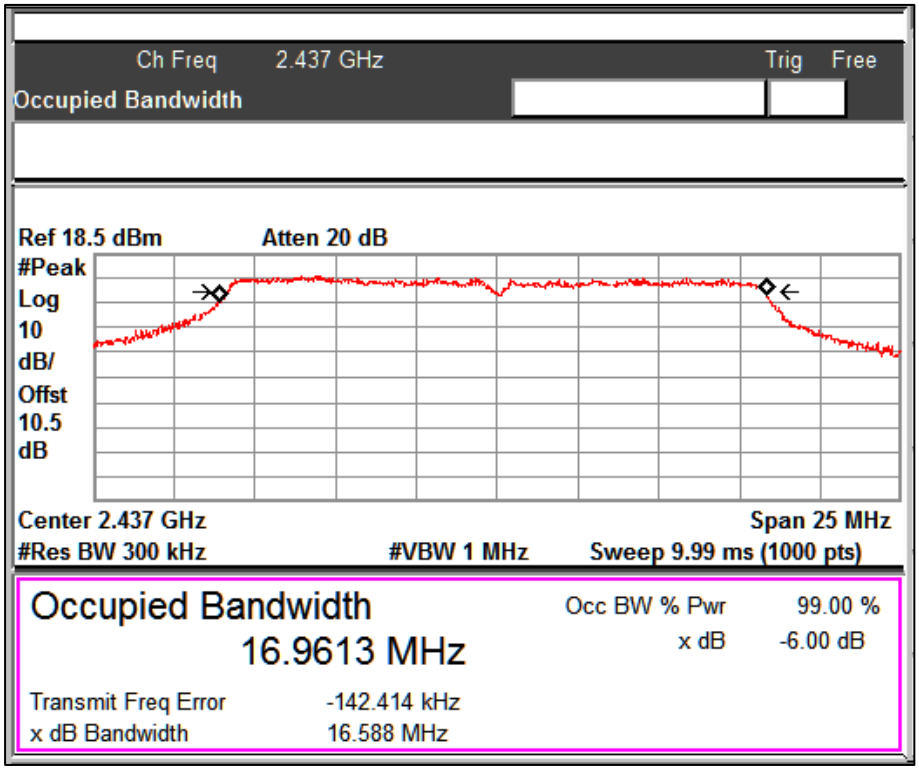

Data Rate: 54Mbps Channel Frequency: 2437MHz

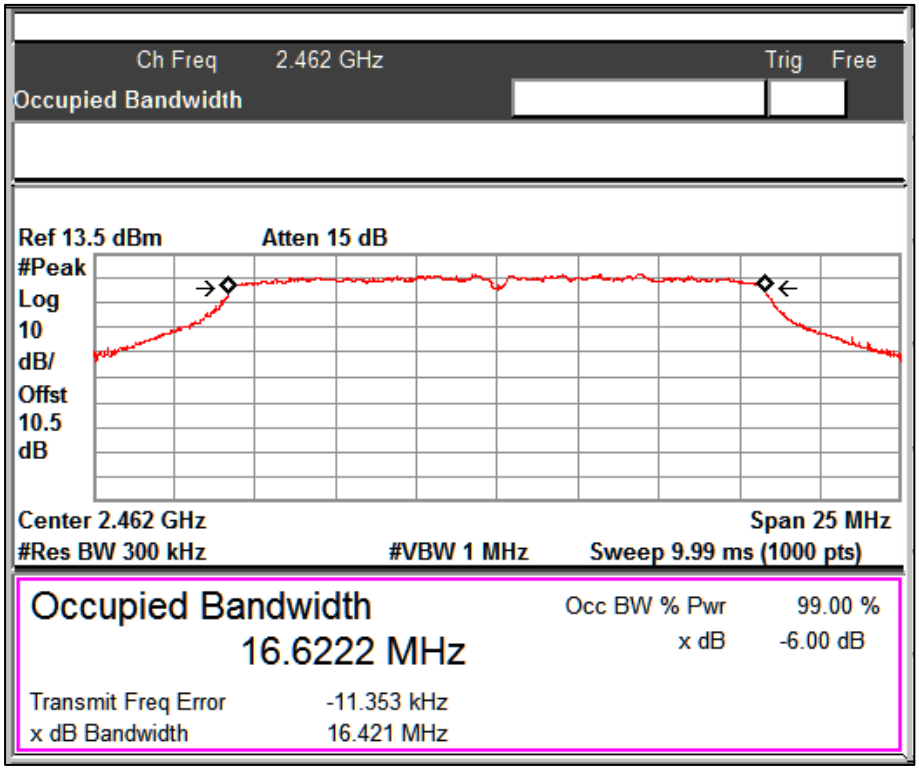

Data Rate: 54Mbps Channel Frequency: 2462MHz

Modulation: 802.11n_20MHz

Data rate (Mbps)	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)	Minimum Limit (MHz)
MCS0	2412	15.94	17.43	0.5
	2437	15.92	17.49	0.5
	2462	15.06	17.23	0.5
MCS7	2412	17.29	17.90	0.5
	2437	17.31	17.98	0.5
	2462	14.99	17.75	0.5

Graphs for 6 dB bandwidth measurement

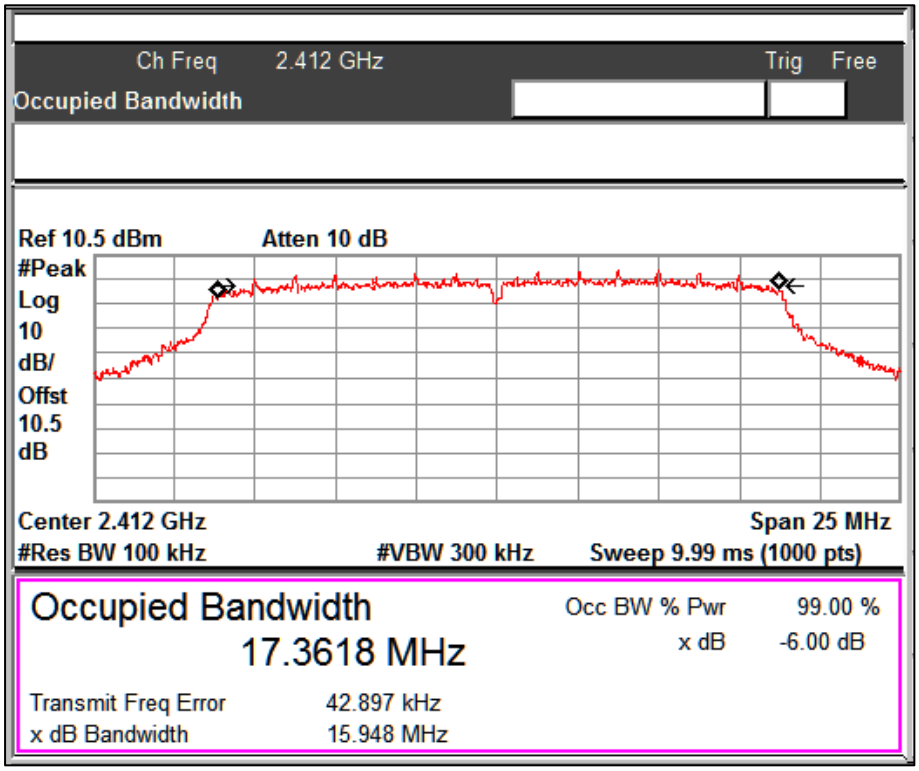

Data Rate: MCS0 Channel Frequency: 2412MHz