




### Channel 140 – Chain A

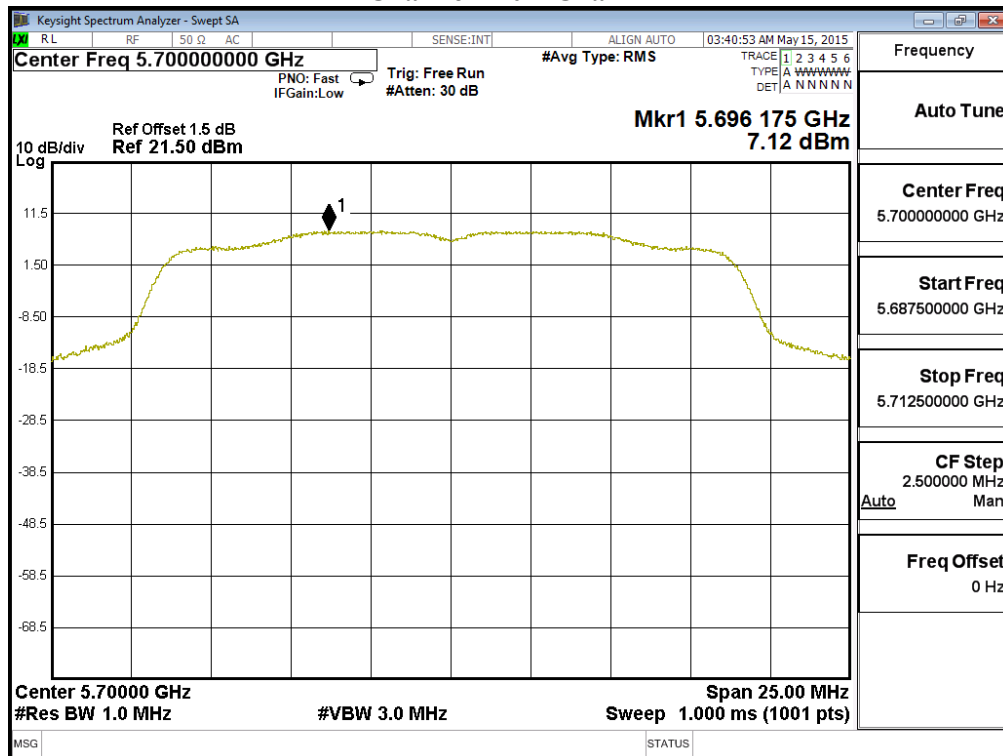


### Channel 36 – Chain B

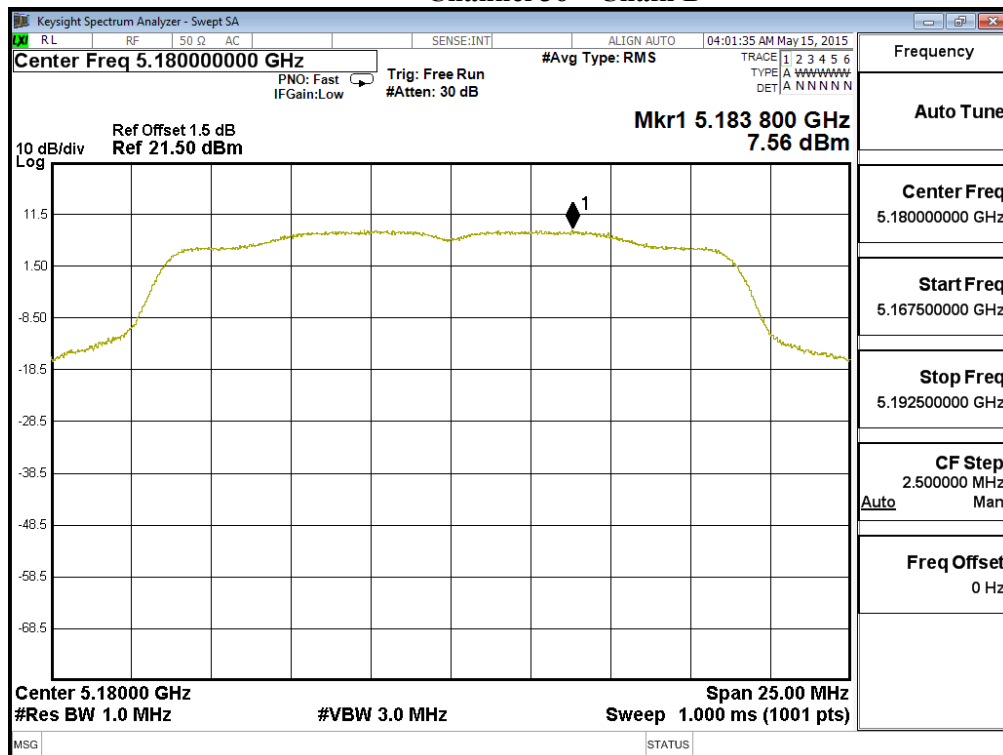


### Channel 44 – Chain B

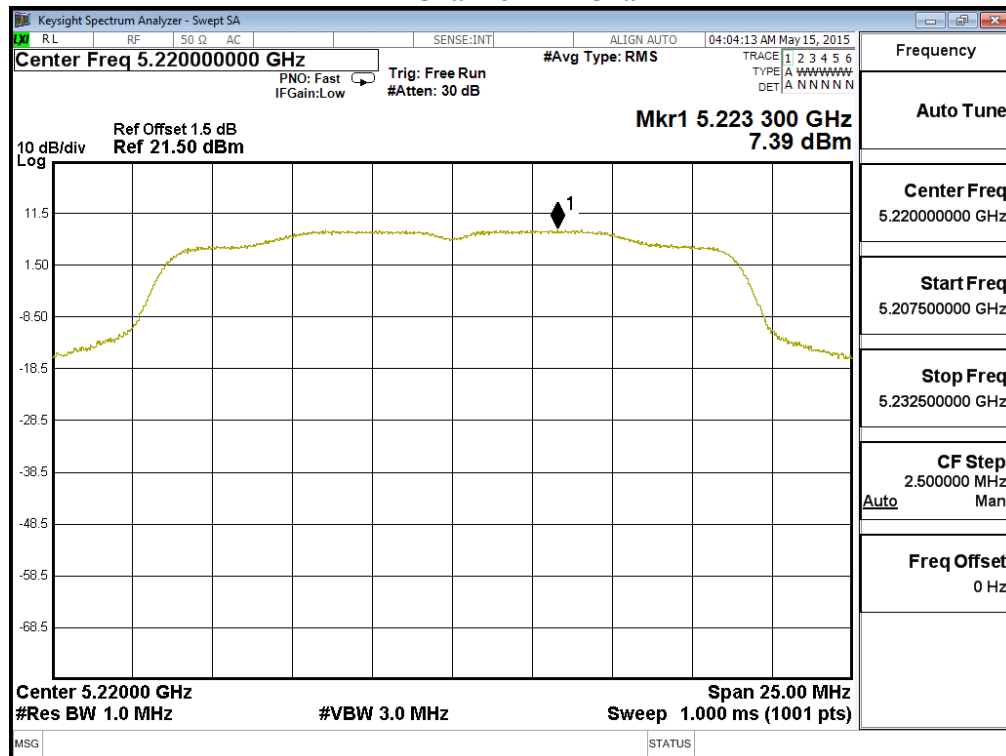


### Channel 48 – Chain B

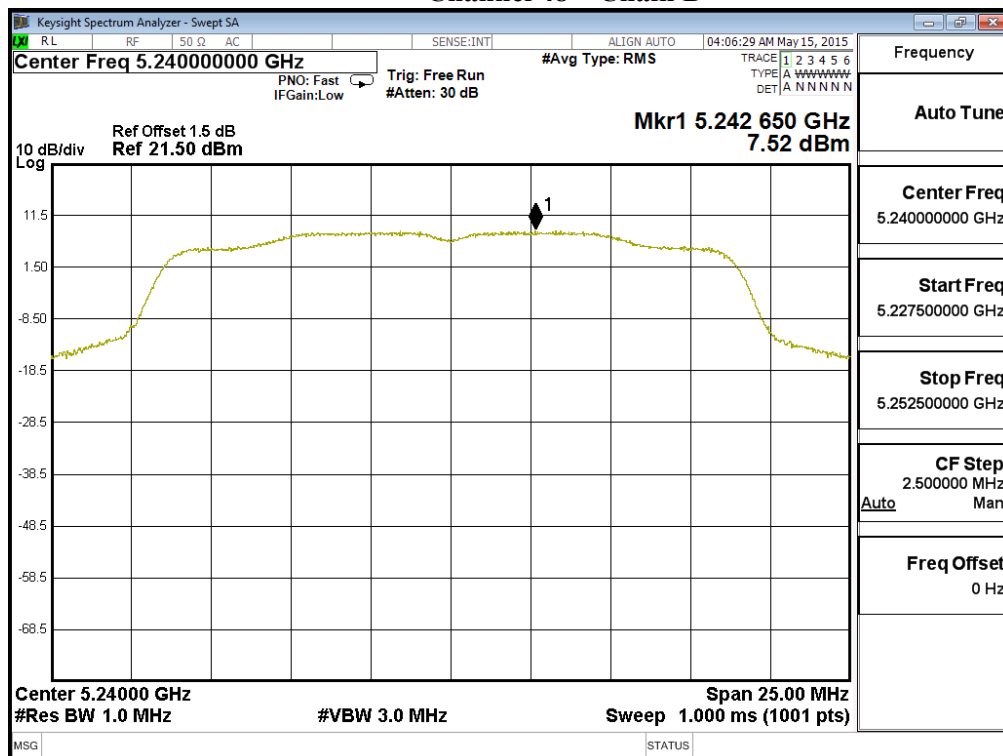


### Channel 52 – Chain B

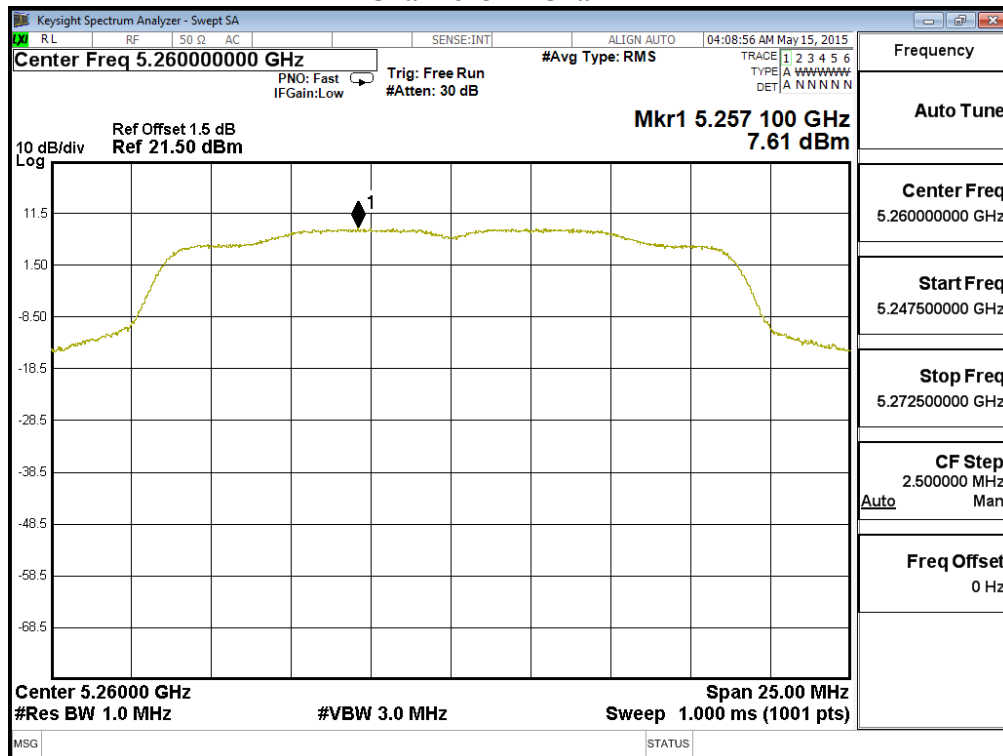


### Channel 60 – Chain B


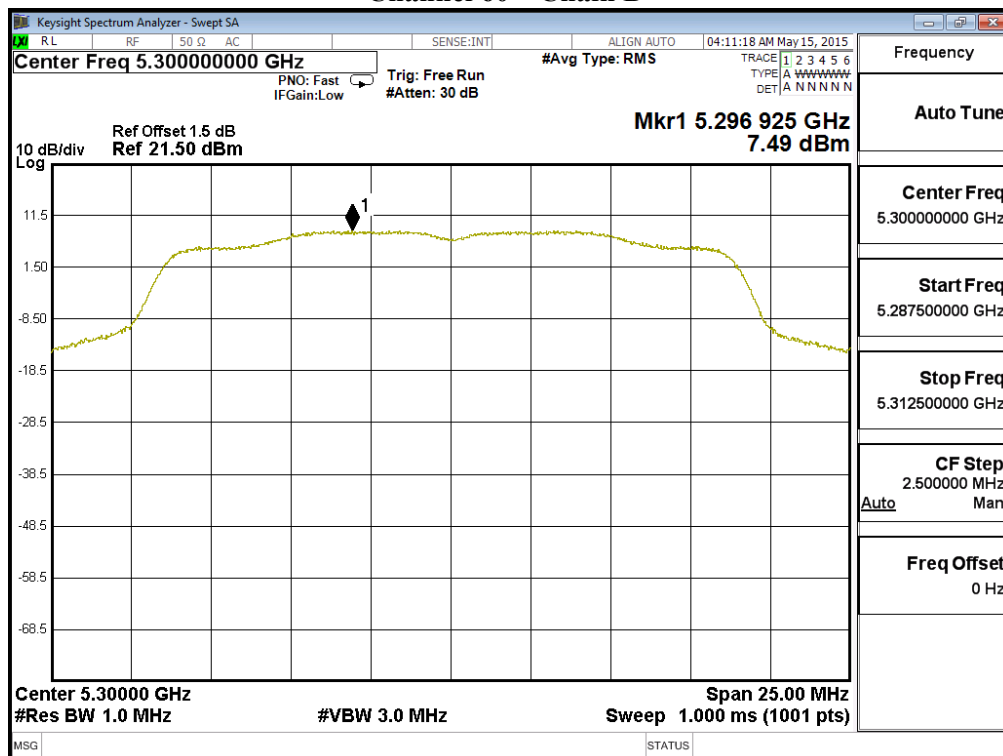


### Channel 64 – Chain B

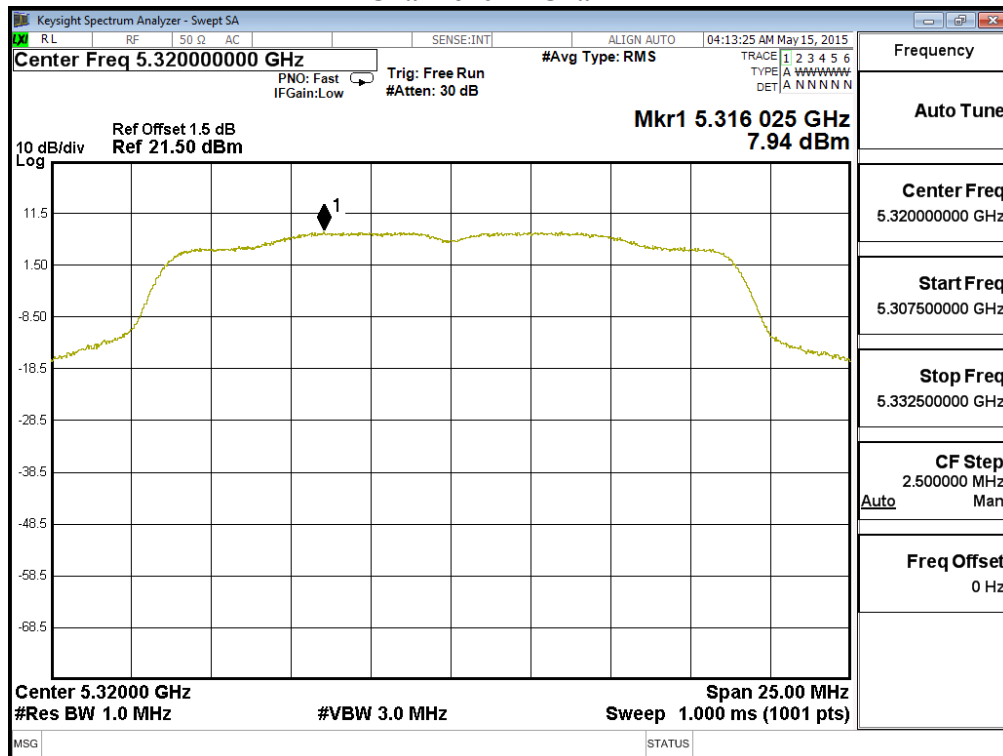

### Channel 100 – Chain B

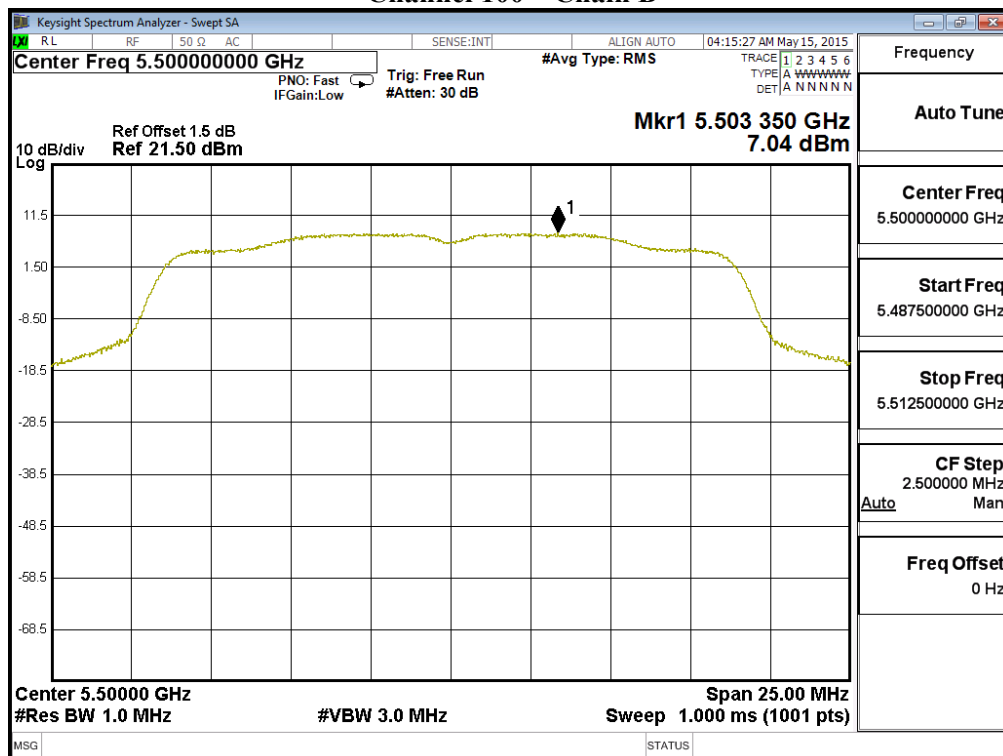

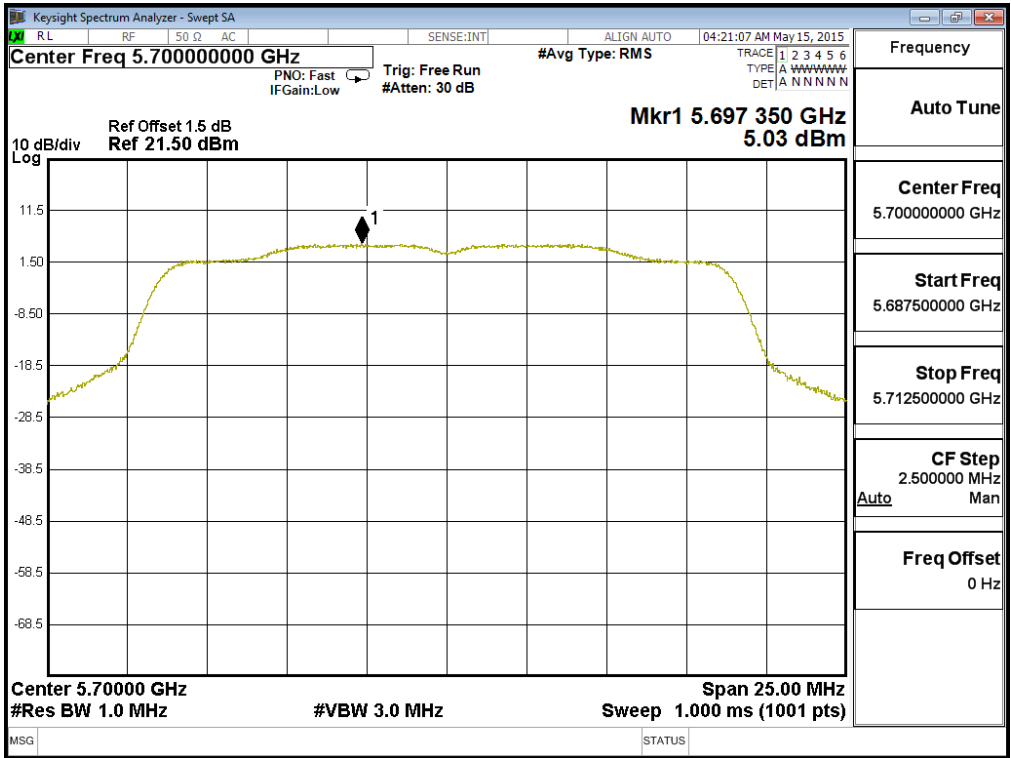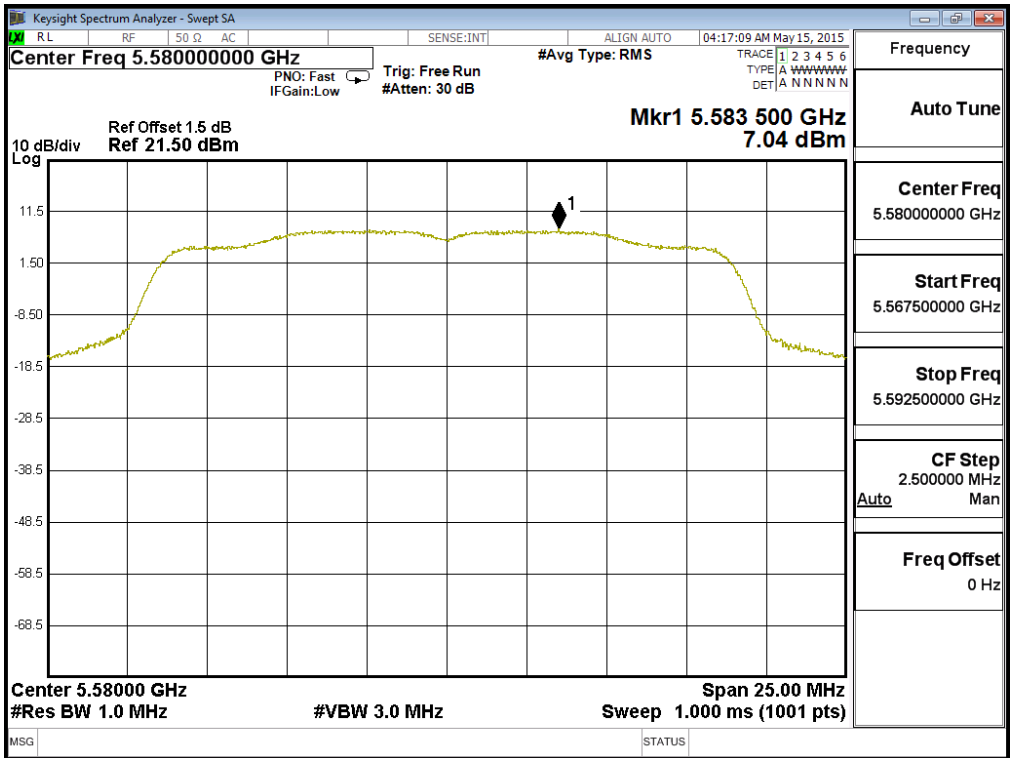


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Peak Power Spectral Density  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps)

Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	Duty Factor (dB)	Total PPSD (dBm)	Required Limit (dBm)	Result
38	5190	A	5.034	0.150	8.194	<11	Pass
		B	5.217	0.150	8.377	<11	Pass
46	5230	A	4.837	0.150	7.997	<11	Pass
		B	4.953	0.150	8.113	<11	Pass
54	5270	A	4.559	0.150	7.719	<11	Pass
		B	4.696	0.150	7.856	<11	Pass
62	5310	A	0.988	0.150	4.148	<11	Pass
		B	0.555	0.150	3.715	<11	Pass
102	5510	A	0.682	0.150	3.842	<11	Pass
		B	0.696	0.150	3.856	<11	Pass
110	5550	A	4.870	0.150	8.030	<11	Pass
		B	5.050	0.150	8.210	<11	Pass
134	5670	A	4.767	0.150	7.927	<11	Pass
		B	4.837	0.150	7.997	<11	Pass


Note:

1. The quantity  $10 \cdot \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.
2. Total PPSS = PPSS value + Duty Factor +  $10 \cdot \log 2$ .


### Channel 38 – Chain A

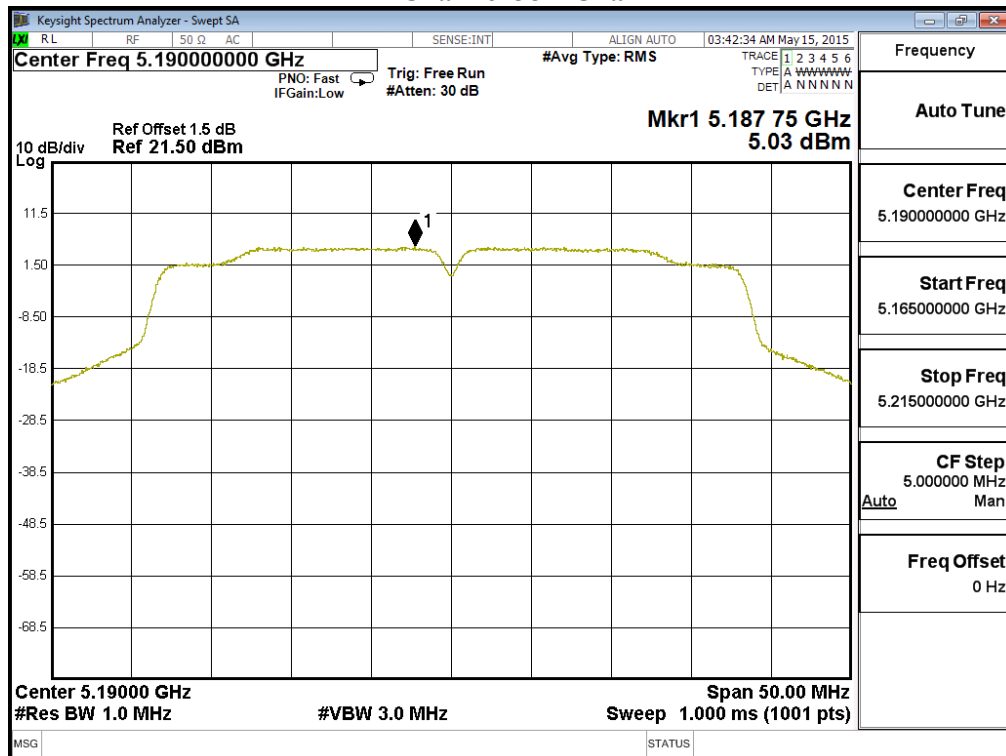


### Channel 46 – Chain A

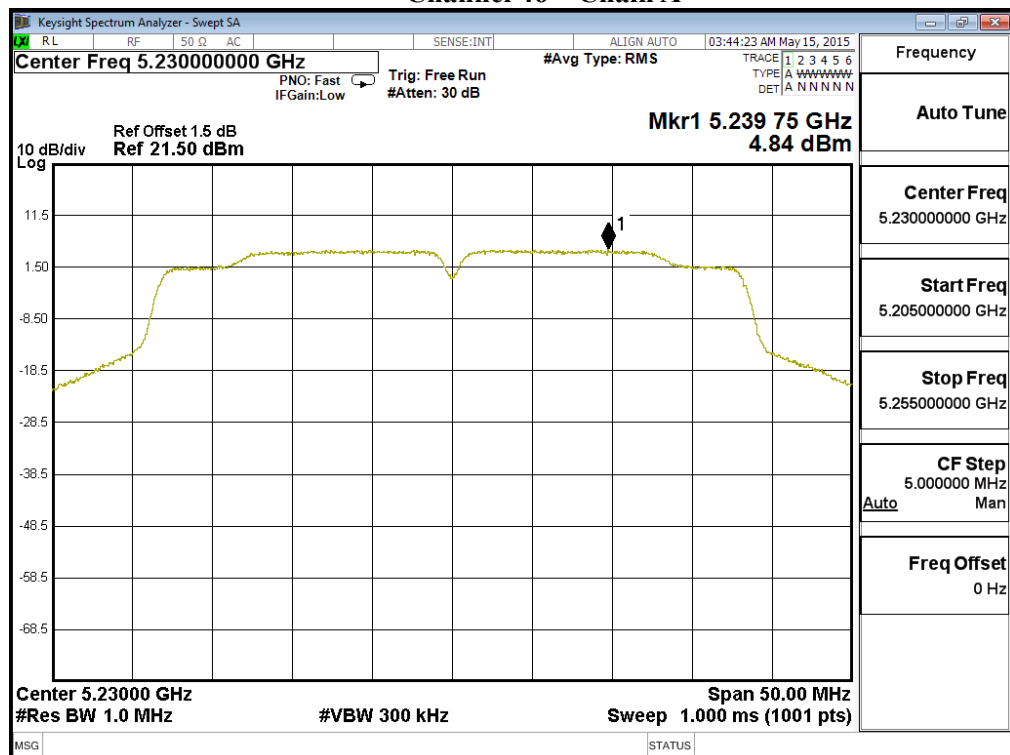

### Channel 54 – Chain A

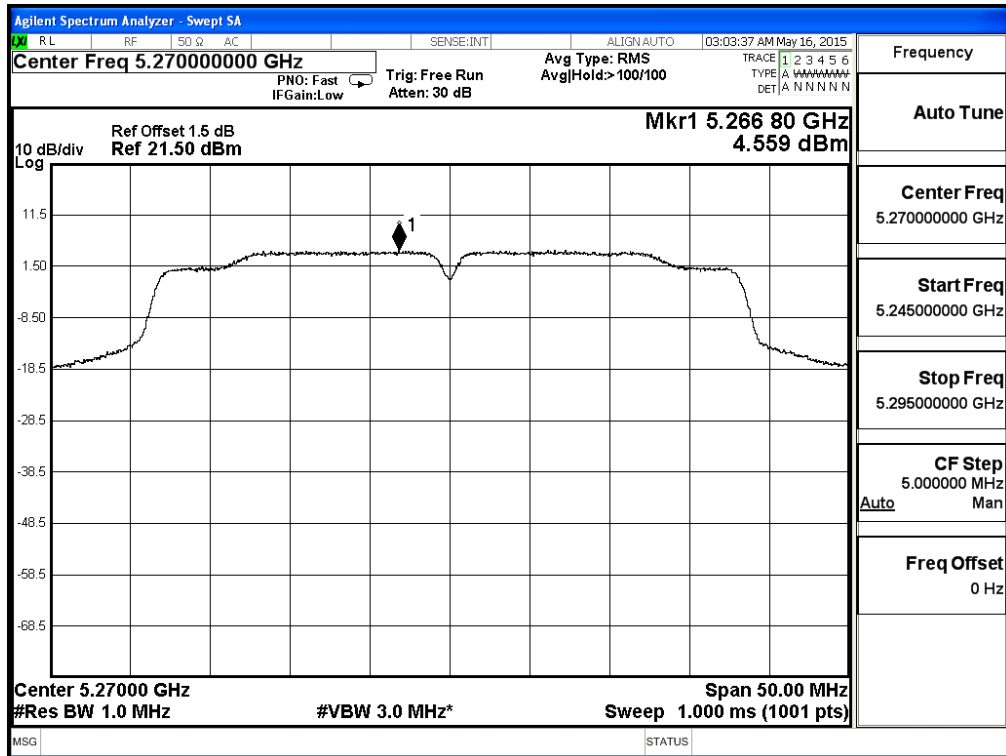


### Channel 62 – Chain A

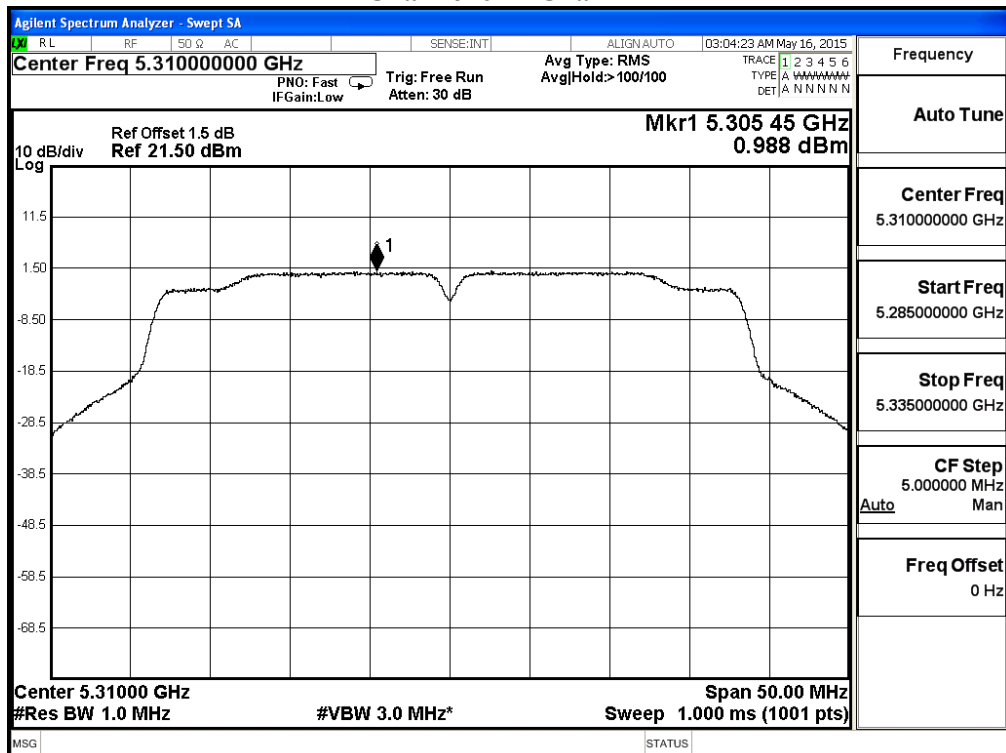





### Channel 102 – Chain A

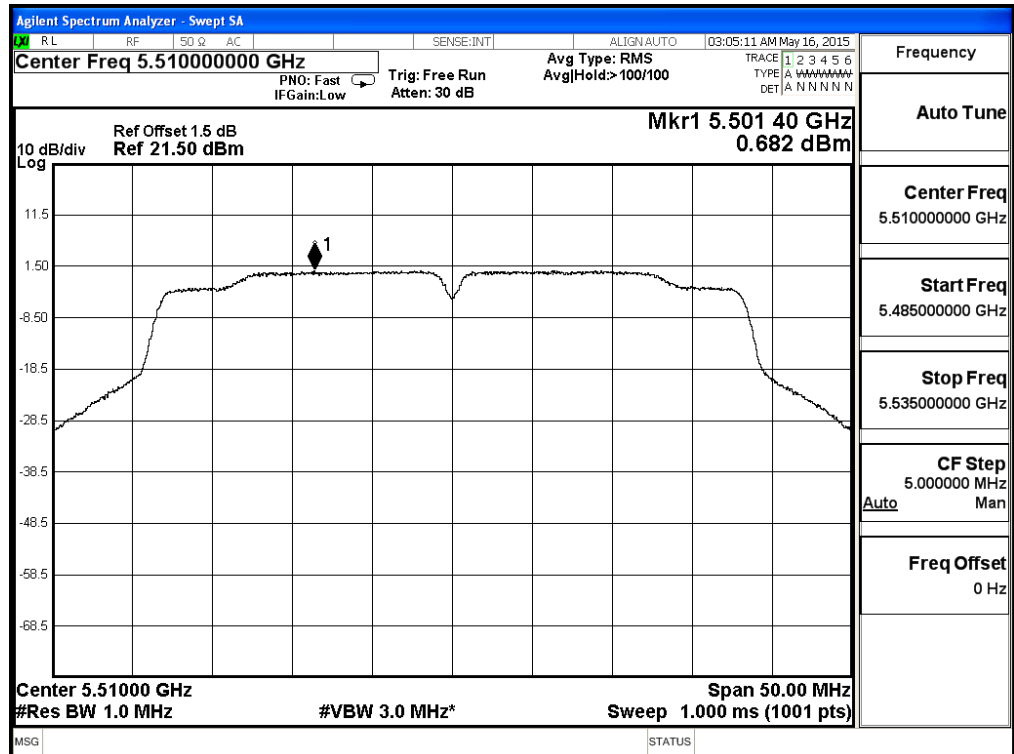


### Channel 110 – Chain A

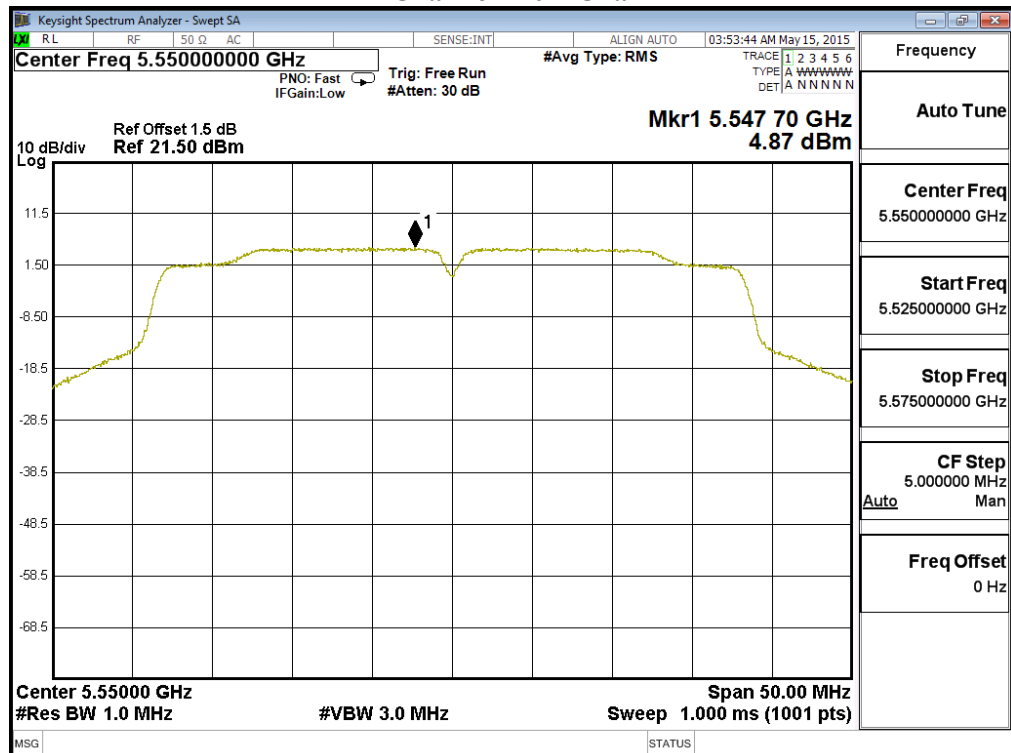


### Channel 134 – Chain A

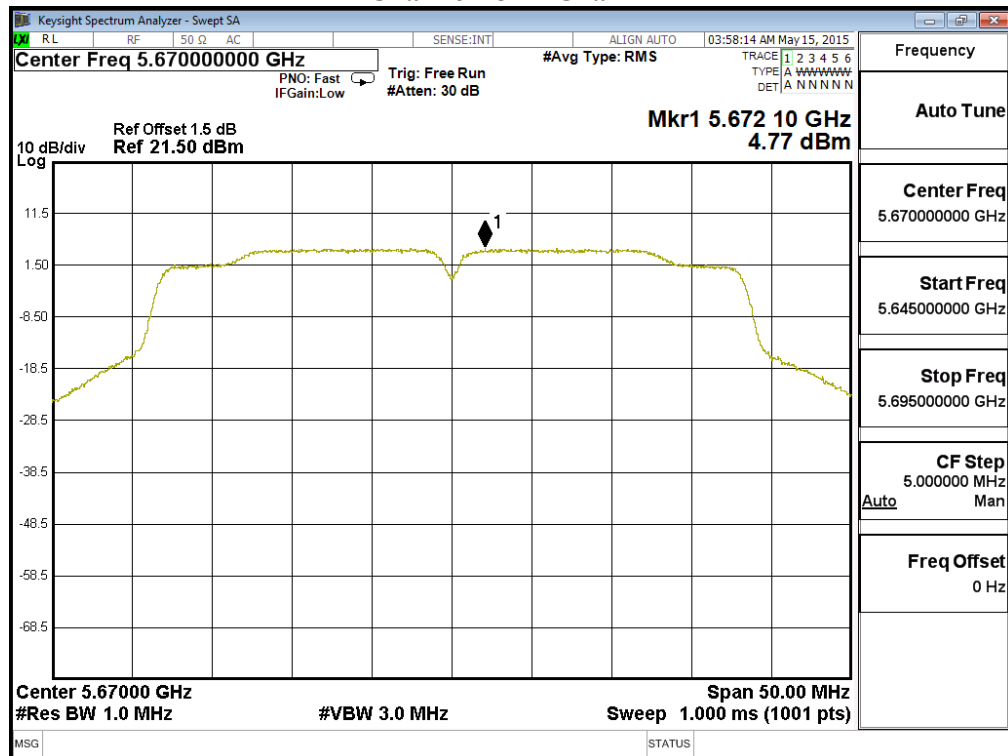


### Channel 38 – Chain B

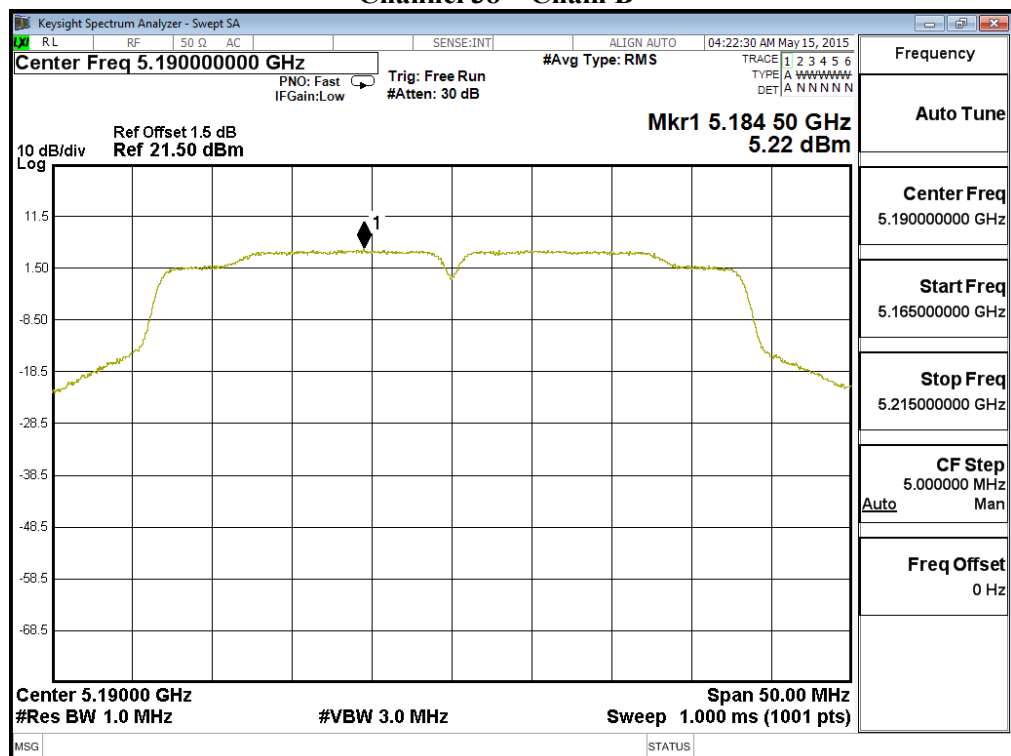


### Channel 46 – Chain B

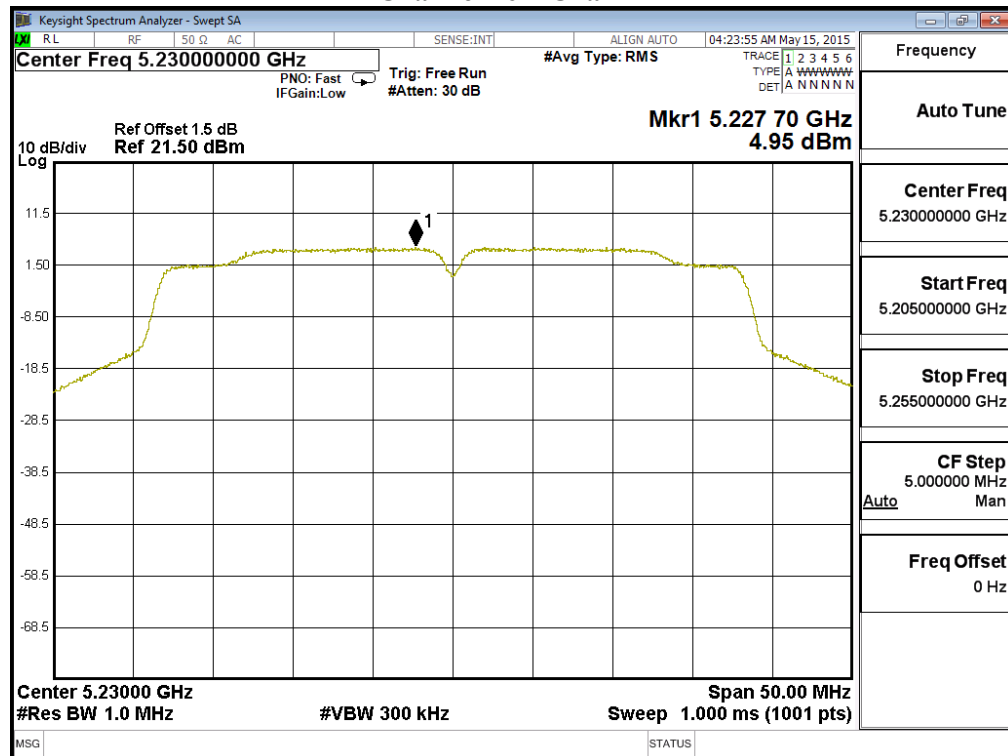


### Channel 54 – Chain B

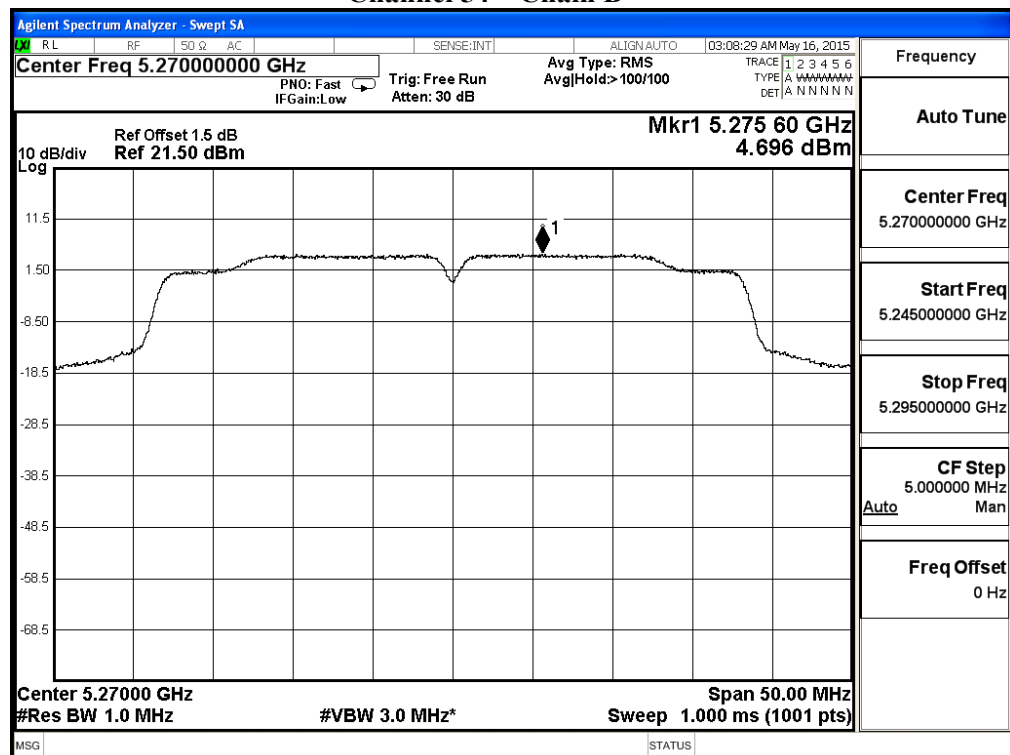


### Channel 62 – Chain B

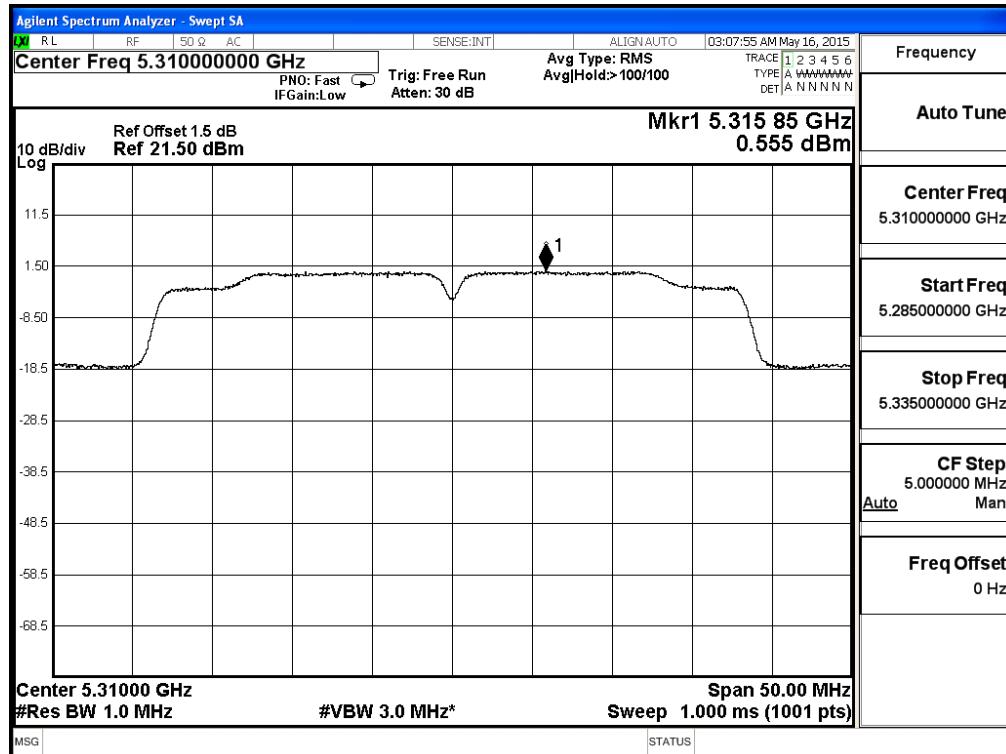


### Channel 102 – Chain B

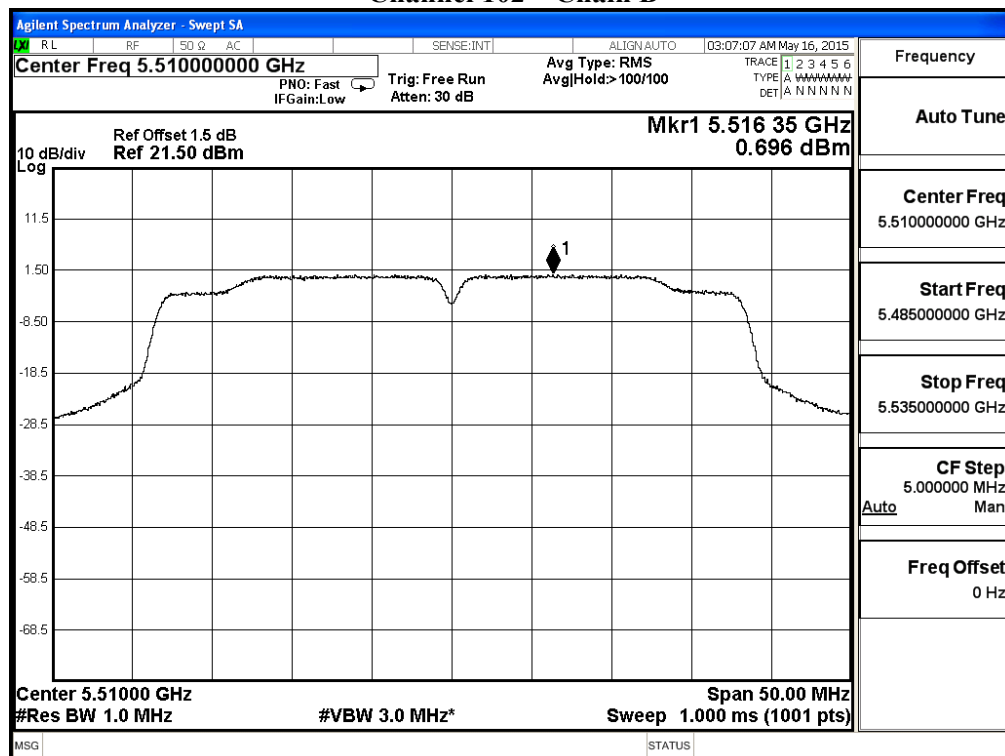

### Channel 110 – Chain B

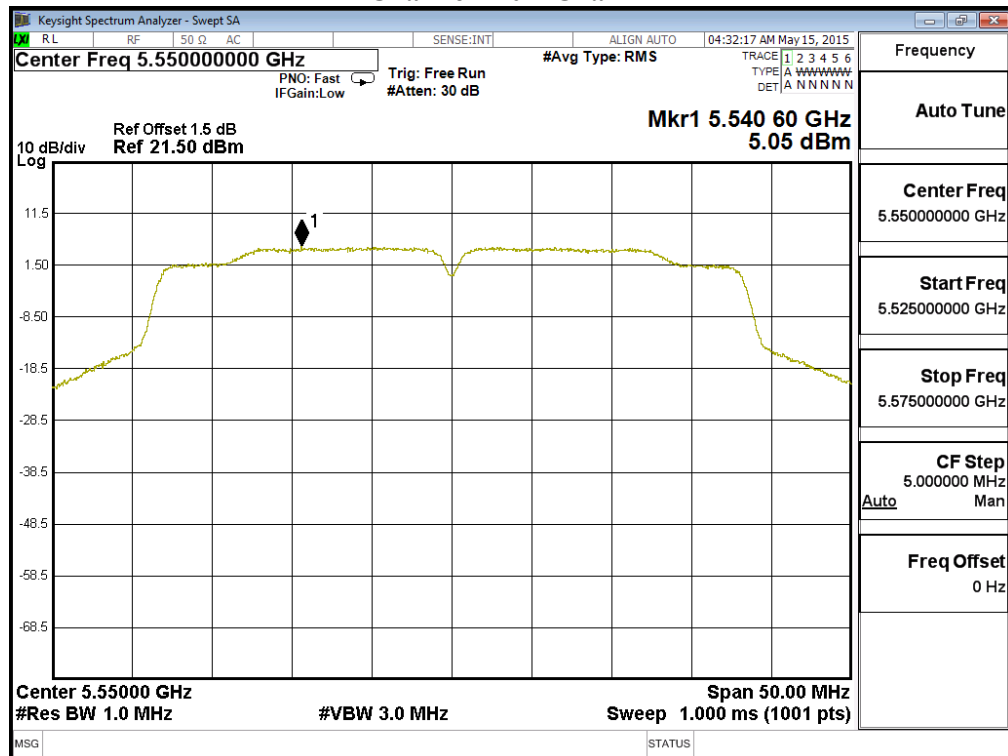

### Channel 134 – Chain B

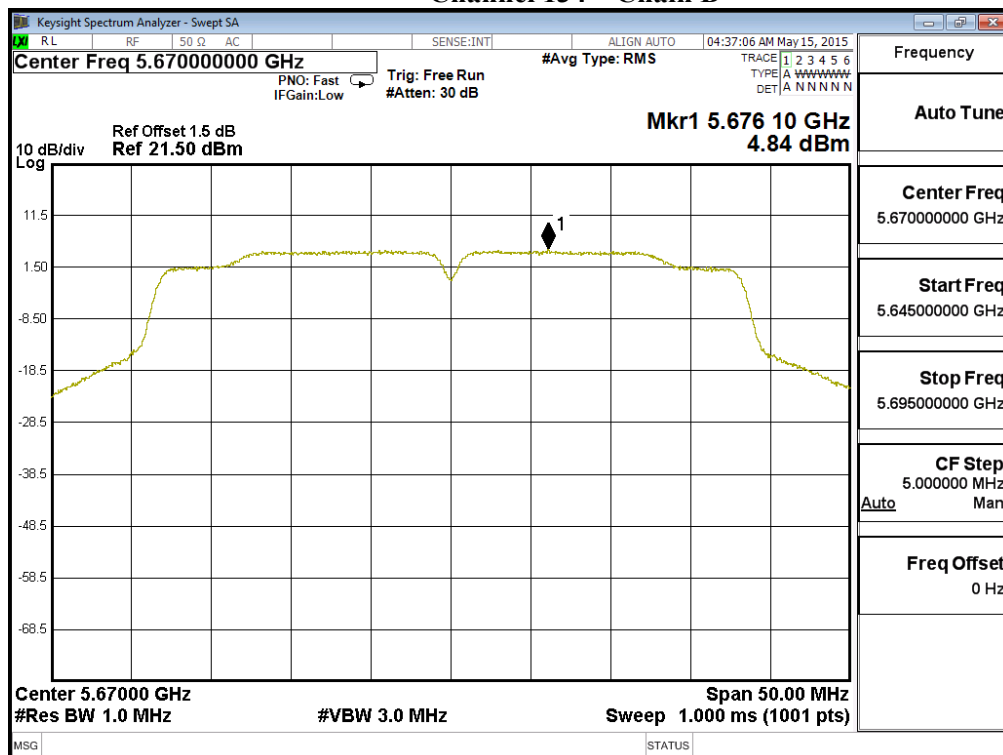


Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Peak Power Spectral Density  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11ac-20BW-7.2Mbps)

Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
144	5720(Band3)	A	7.060	0.110	10.180	<11	Pass
		B	7.253	0.110	10.373	<11	Pass
144	5720(Band4)	A	5.160	0.110	8.280	<30	Pass
		B	5.320	0.110	8.440	<30	Pass


Note:

1. The quantity  $10 \cdot \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.
2. Total PSD = PSD value + Duty Factor +  $10 \cdot \log 2$ .


### Channel 144(Band3) – Chain A

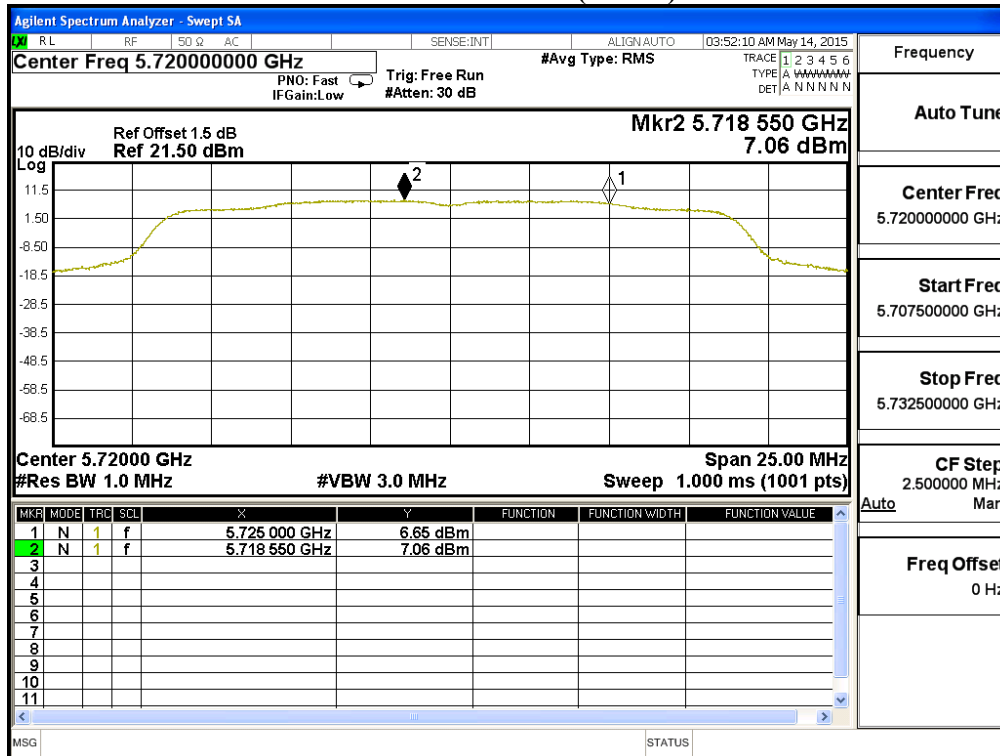


### Channel 144(Band4) – Chain A

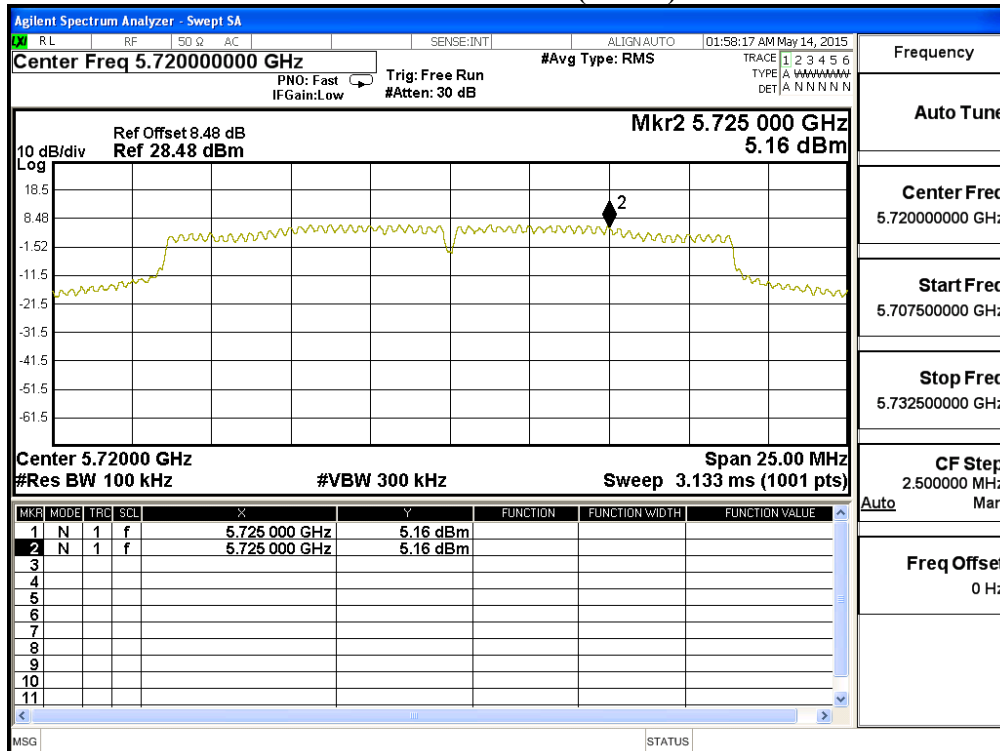

### Channel 144(Band3) – Chain B

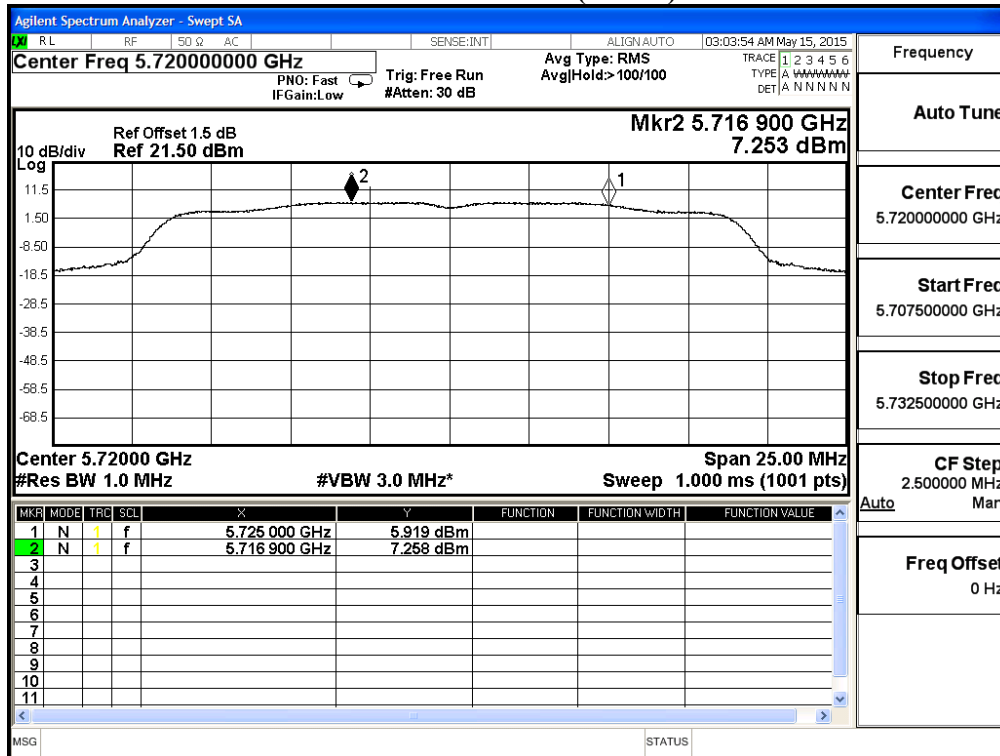

### Channel 144(Band4) – Chain B

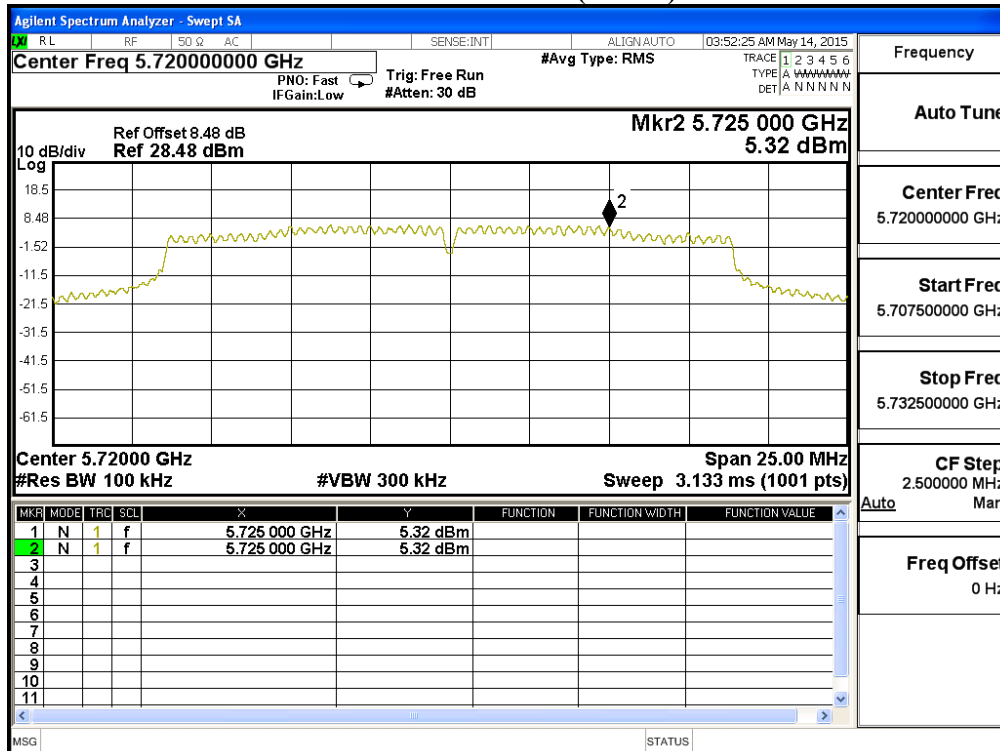




Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Peak Power Spectral Density  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11ac-40BW-15Mbps)

Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	Duty Factor (dB)	Total PPSD (dBm)	Required Limit (dBm)	Result
142	5710(Band3)	A	4.990	0.315	8.315	<11	Pass
		B	4.360	0.315	7.685	<11	Pass
142	5710(Band4)	A	-0.510	0.315	2.815	<30	Pass
		B	-1.230	0.315	2.095	<30	Pass


Note:

1. The quantity  $10 \cdot \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.
2. Total PPSD = PPSD value + Duty Factor +  $10 \cdot \log 2$ .


### Channel 142(Band3) – Chain A

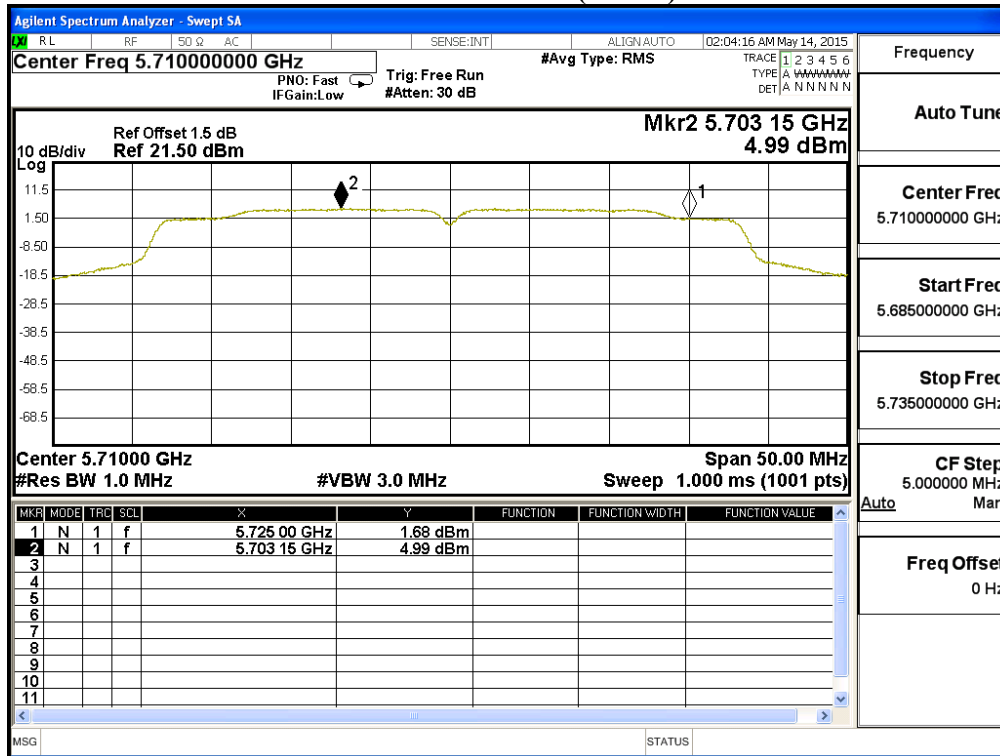


### Channel 142(Band4) – Chain A

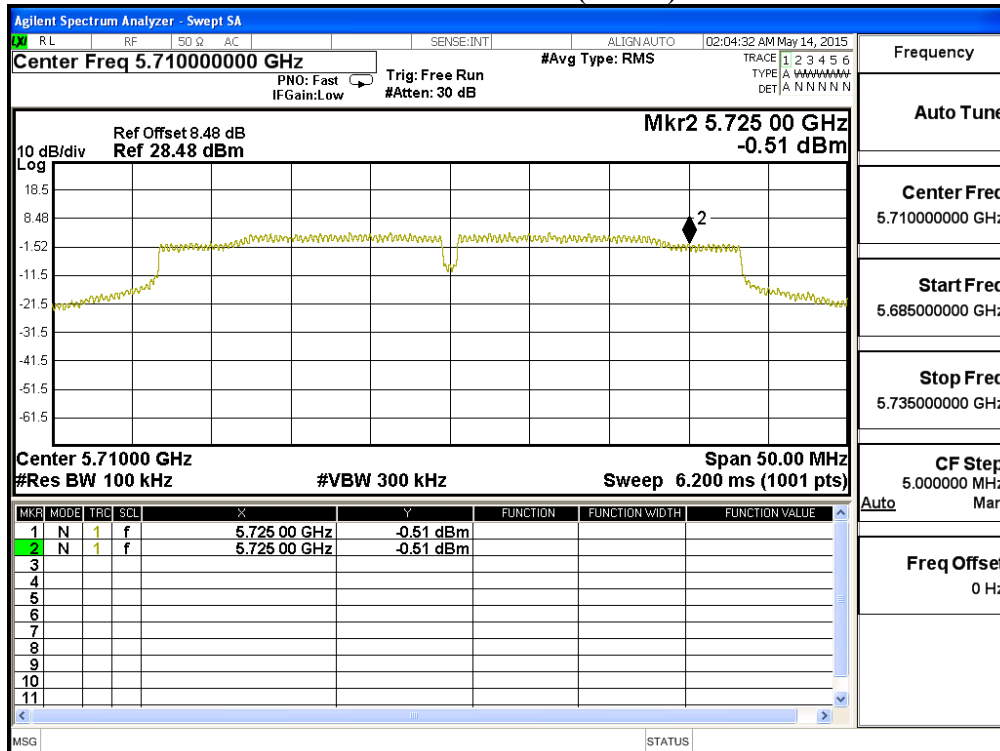

### Channel 142(Band3) – Chain B

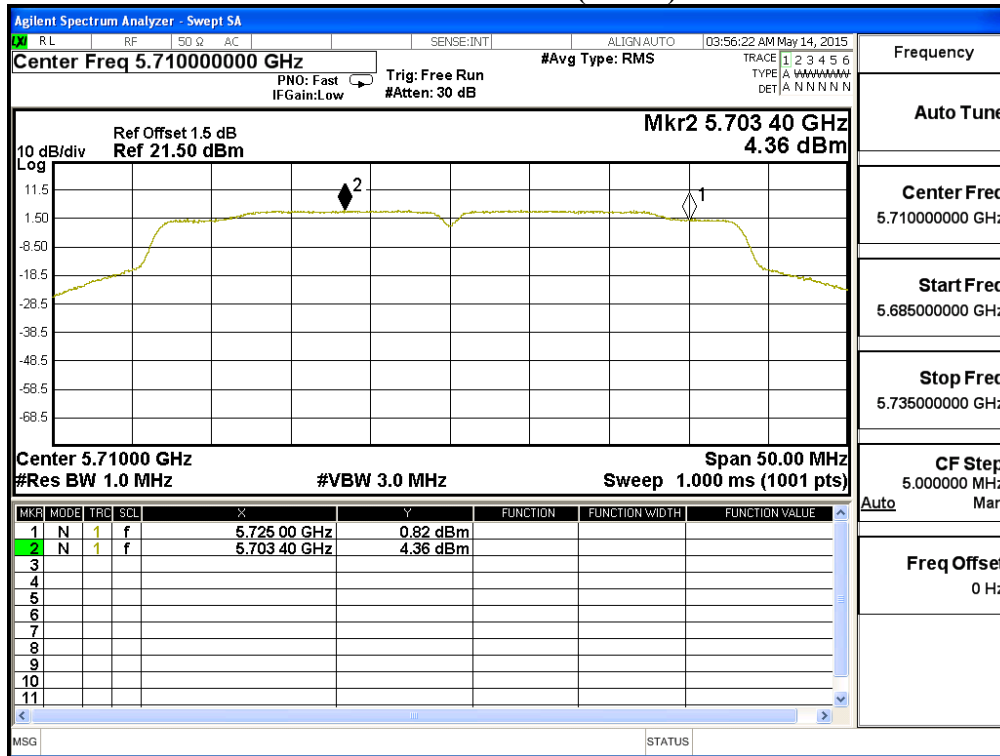

### Channel 142(Band4) – Chain B

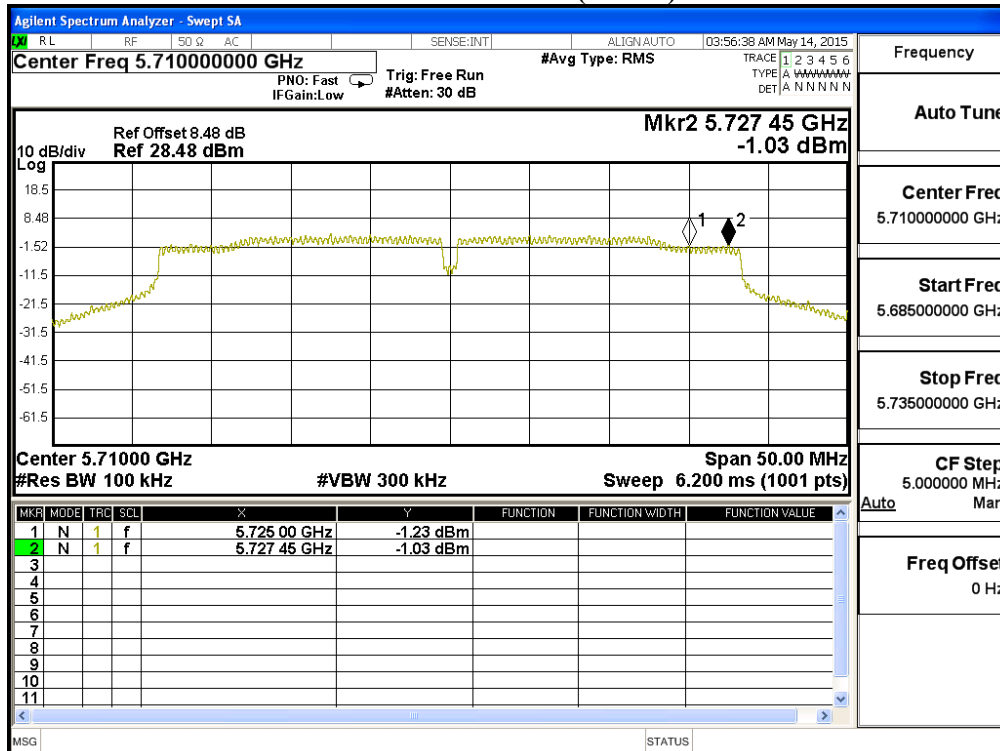


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Peak Power Spectral Density  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps)

Channel Number	Frequency (MHz)	Chain	PPSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
42	5210	A	-1.030	0.283	2.263	<11	Pass
		B	-0.660	0.283	2.633	<11	Pass
58	5290	A	-1.250	0.283	2.043	<11	Pass
		B	-1.200	0.283	2.093	<11	Pass
106	5530	A	-3.310	0.283	-0.017	<11	Pass
		B	-3.580	0.283	-0.287	<11	Pass
122	5610	A	2.250	0.283	5.543	<11	Pass
		B	2.650	0.283	5.943	<11	Pass
138	5690 (Band3)	A	4.700	0.283	7.993	<11	Pass
		B	-3.780	0.283	-0.487	<11	Pass
138	5690 (Band4)	A	1.720	0.283	5.013	<30	Pass
		B	-3.660	0.283	-0.367	<30	Pass


Note:

1. The quantity  $10 \cdot \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.
2. Total PSD = PSD value + Duty Factor +  $10 \cdot \log 2$ .


### Channel 42 – Chain A

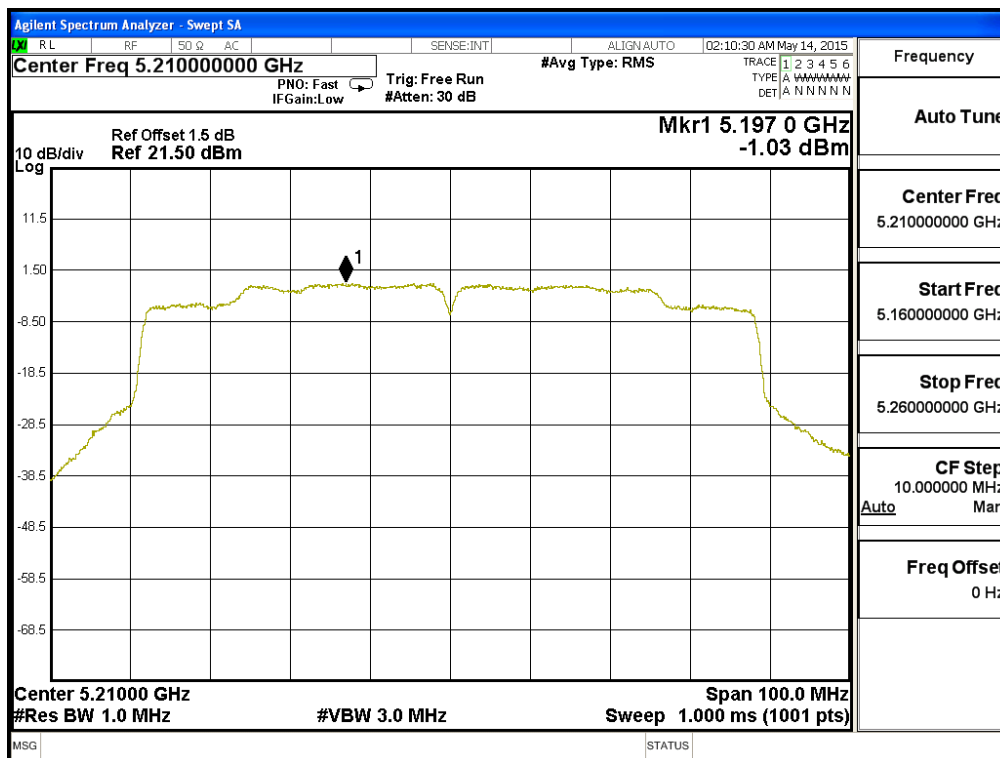


### Channel 58 – Chain A

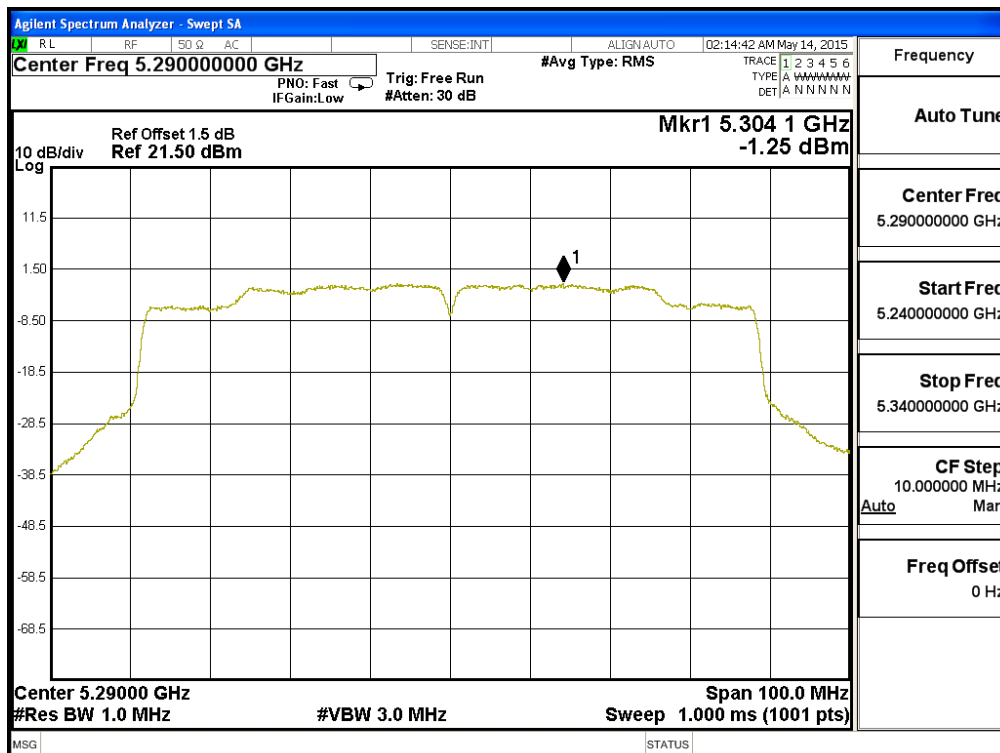


### Channel 106 – Chain A

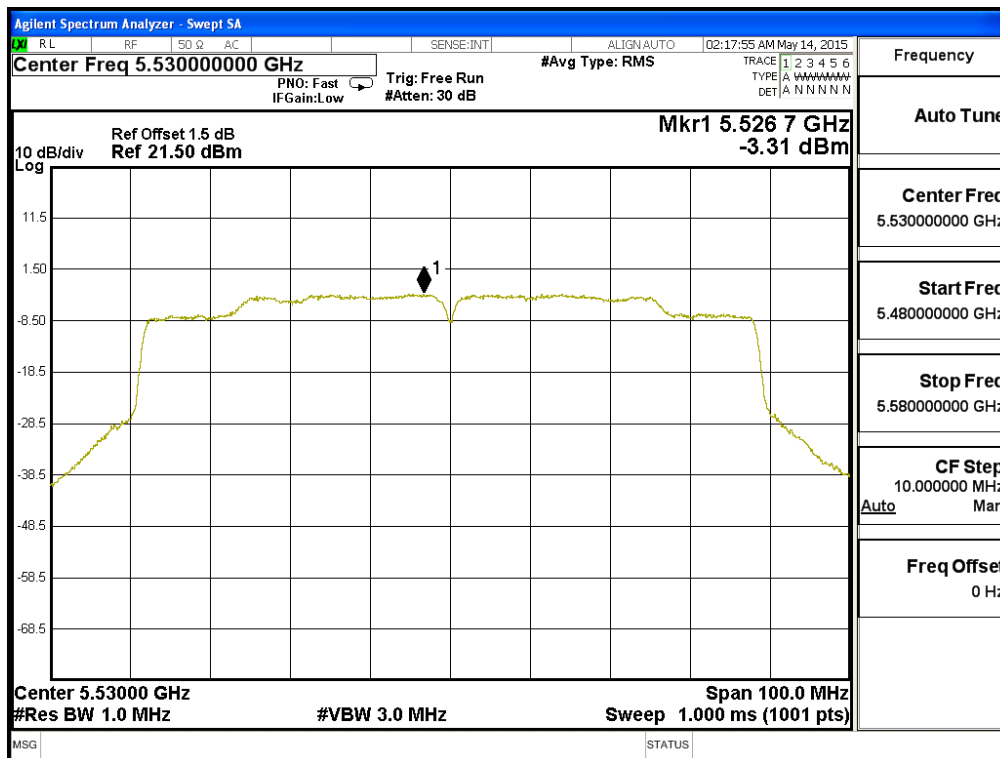


### Channel 122 – Chain A

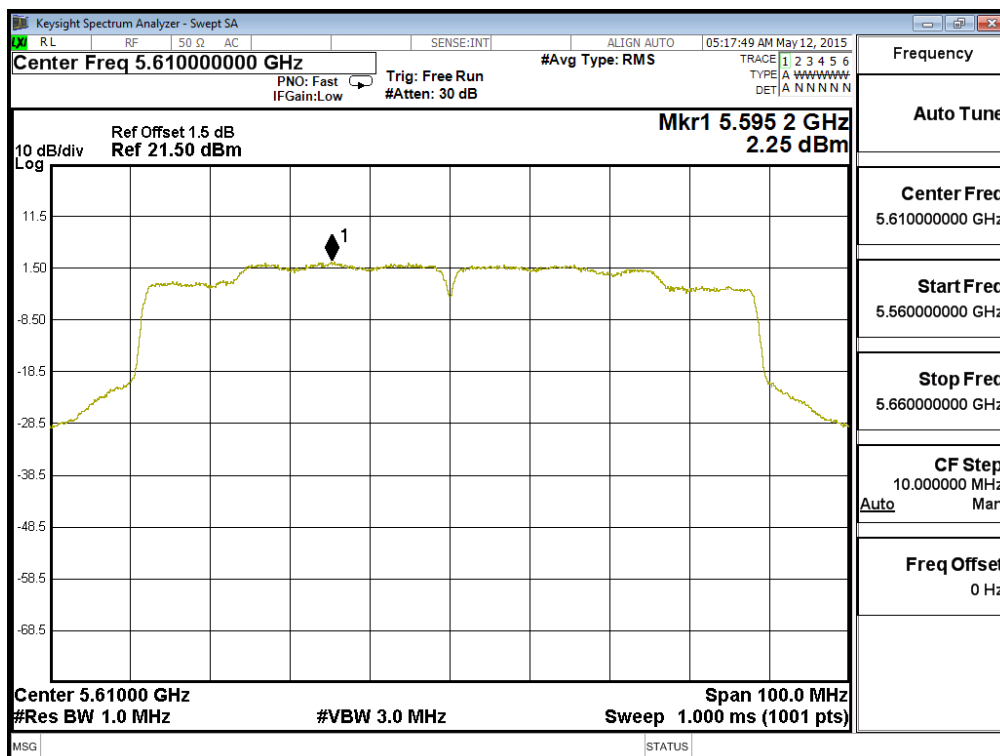


### Channel 138(Band3) – Chain A

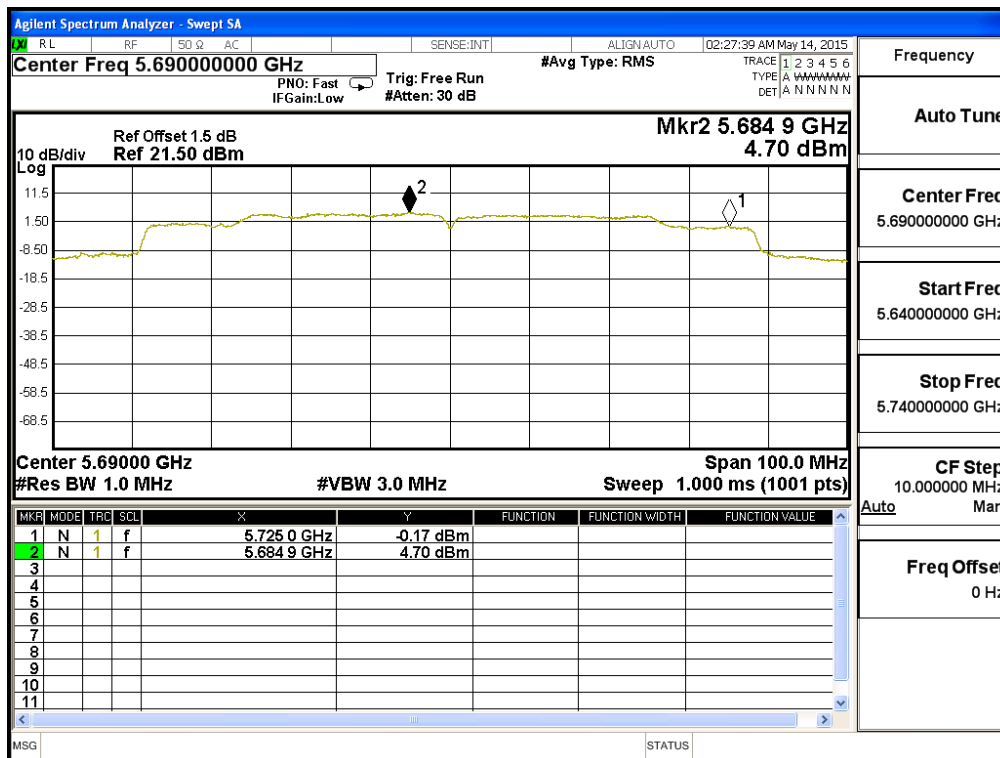


### Channel 138(Band4) – Chain A

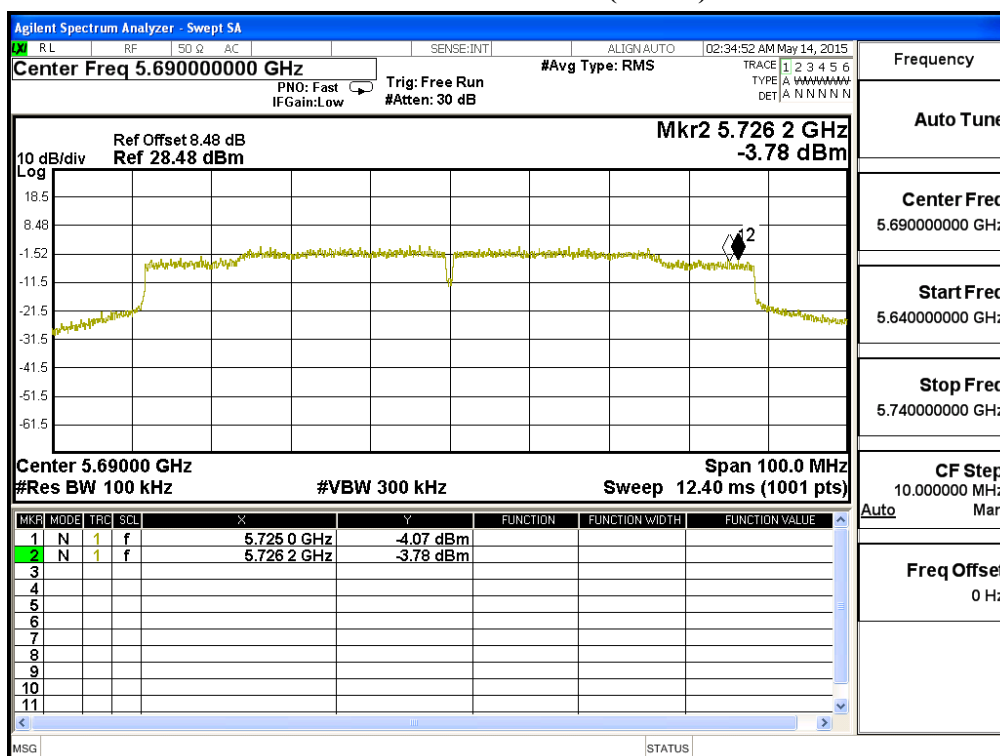

### Channel 42 – Chain B

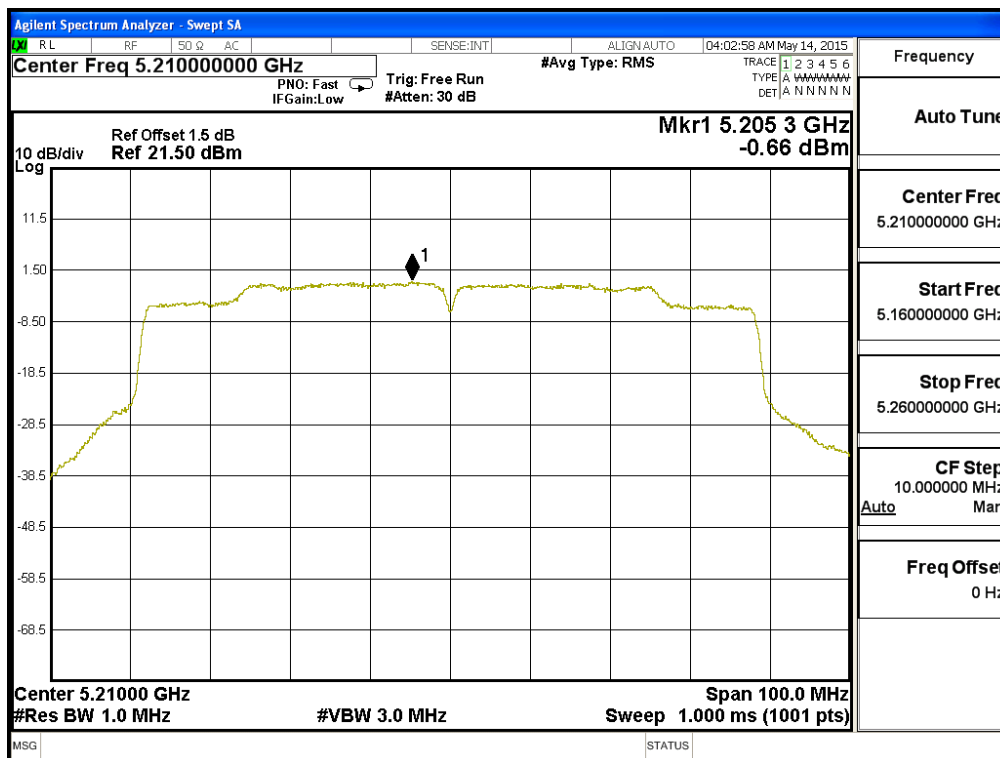


### Channel 58 – Chain B

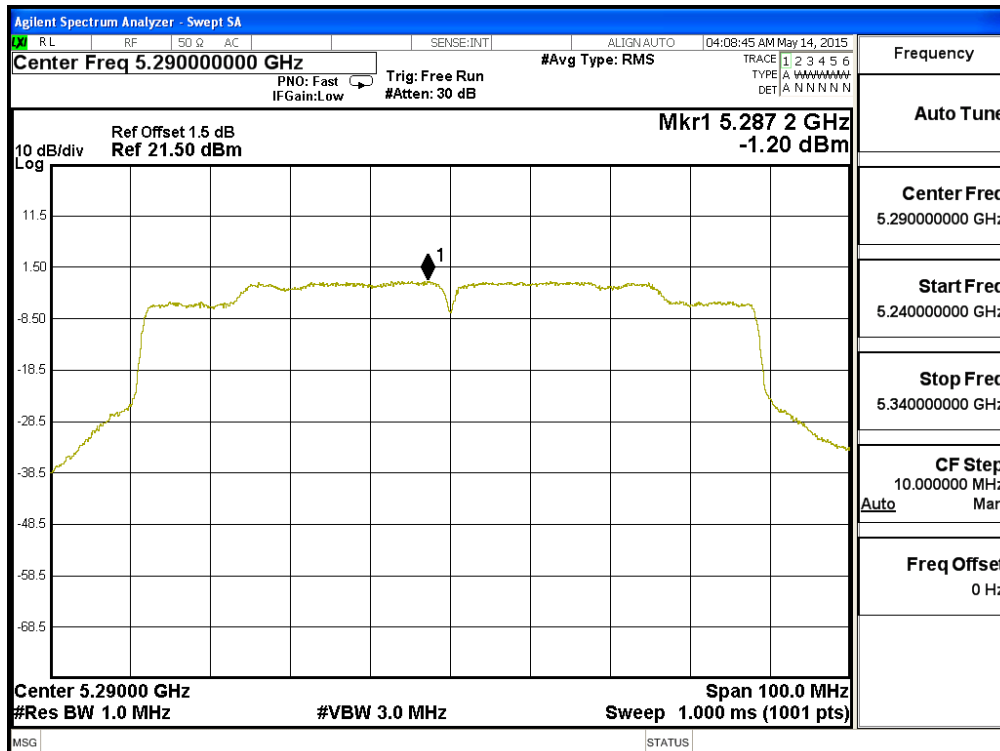





### Channel 106 – Chain B

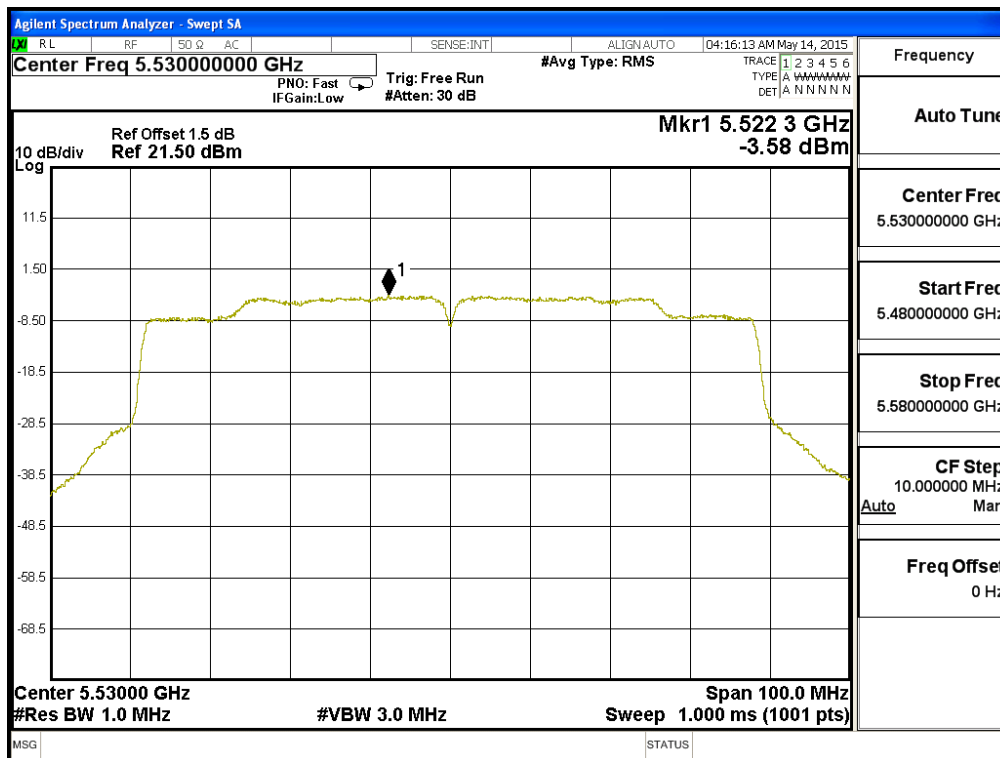


### Channel 122 – Chain B

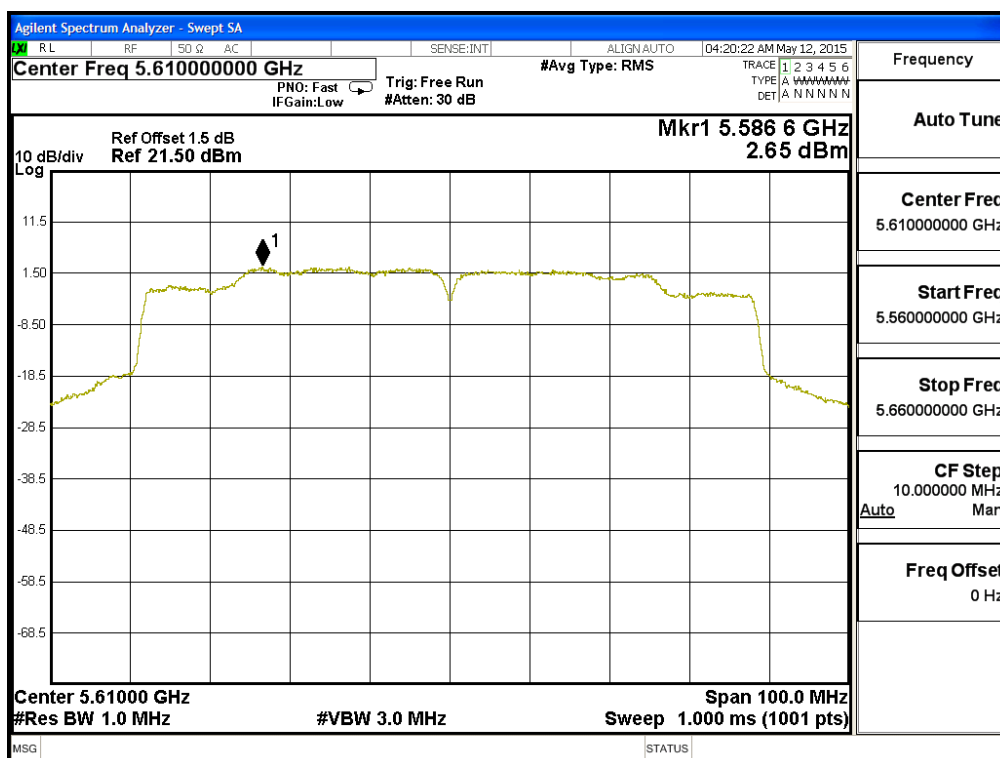

### Channel 138 (Band3) – Chain B

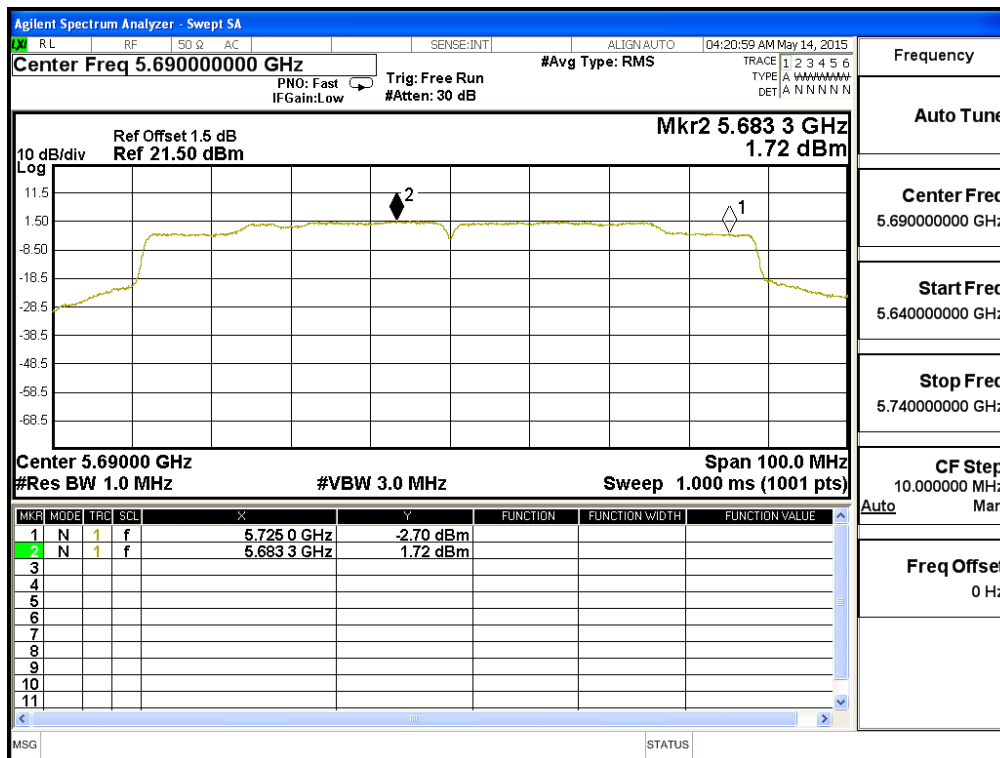

### Channel 138 (Band4) – Chain B

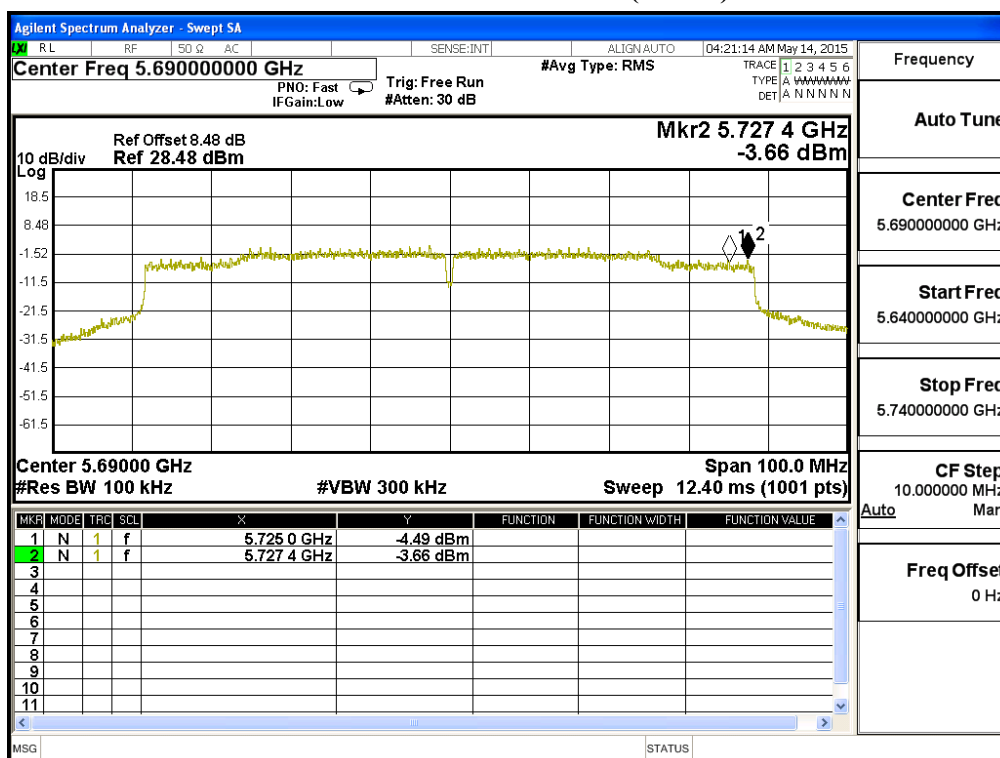

## 5. Radiated Emission

### 5.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2014
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2014
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun, 2014
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun, 2014

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
  2. The test instruments marked with "X" are used to measure the final test results.

## 5.2. Test Setup

### Radiated Emission Below 1GHz

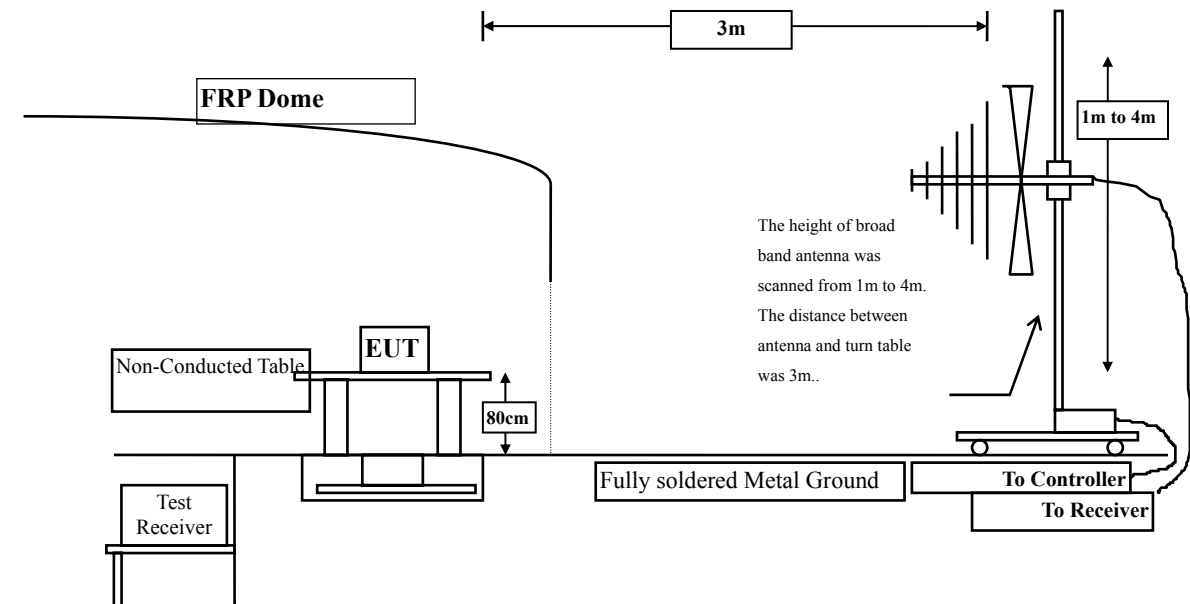

### Radiated Emission Above 1GHz

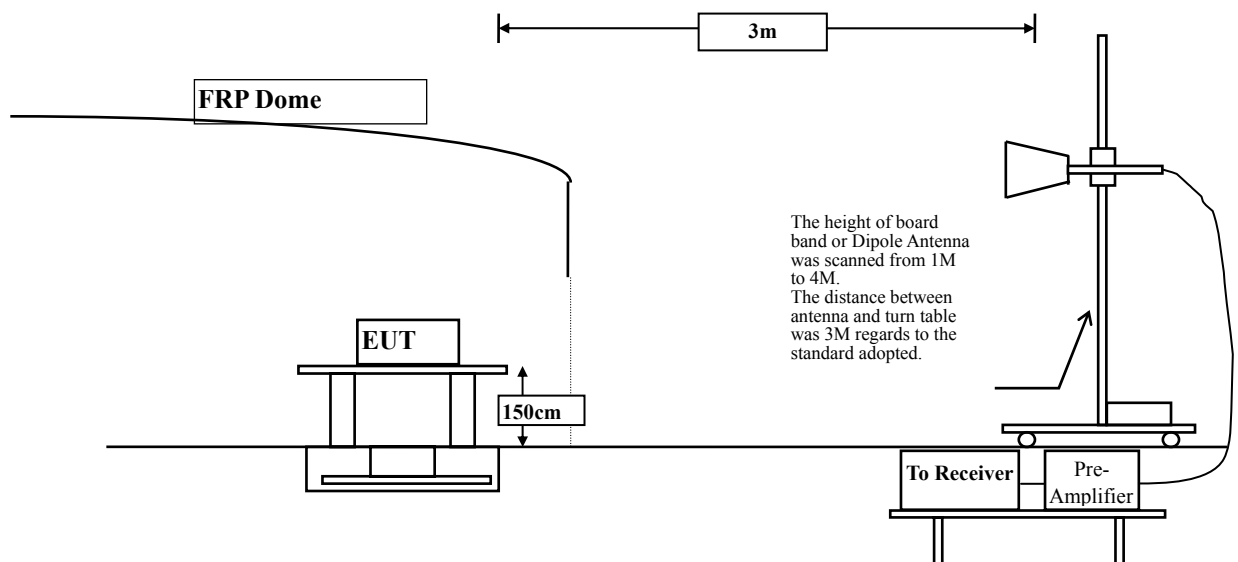

### 5.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209(a) Limits</b>		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBμV/m) = 20 log E field strength (uV/m)

## 5.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

## 5.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

## 5.6. Test Result of Radiated Emission

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10360.000	10.932	36.440	47.372	-26.628	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10360.000	12.436	36.720	49.155	-24.845	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10440.000	9.725	36.770	46.495	-27.505	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10440.000	11.505	36.830	48.335	-25.665	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10480.000	10.464	37.930	48.393	-25.607	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10480.000	12.399	37.520	49.919	-24.081	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5260MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.150	46.681	-27.319	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10520.000	13.441	36.180	49.621	-24.379	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5300MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10600.000	13.182	35.490	48.672	-25.328	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10600.000	14.717	36.740	51.457	-22.543	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5320MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10640.000	12.912	36.580	49.492	-24.508	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10640.000	14.585	36.570	51.155	-22.845	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11000.000	12.513	36.390	48.903	-25.097	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11000.000	14.635	36.540	51.175	-22.825	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11200.000	12.912	35.740	48.652	-25.348	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11200.000	15.146	35.730	50.876	-23.124	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5700MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11400.000	14.753	34.520	49.273	-24.727	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11400.000	16.303	35.380	51.683	-22.317	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10360.000	10.932	35.850	46.782	-27.218	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10360.000	12.436	36.270	48.705	-25.295	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10440.000	9.725	36.360	46.085	-27.915	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10440.000	11.505	36.280	47.785	-26.215	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10480.000	10.464	36.960	47.423	-26.577	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10480.000	12.399	36.290	48.689	-25.311	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5260MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.270	46.801	-27.199	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10520.000	13.441	35.270	48.711	-25.289	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10600.000	13.182	35.190	48.372	-25.628	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10600.000	14.717	35.860	50.577	-23.423	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10540.000	12.058	36.620	48.679	-25.321	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10640.000	14.585	36.790	51.375	-22.625	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11000.000	12.513	35.990	48.503	-25.497	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11000.000	14.635	35.940	50.575	-23.425	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11200.000	12.912	34.650	47.562	-26.438	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11200.000	15.146	36.210	51.356	-22.644	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11400.000	14.753	34.520	49.273	-24.727	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11400.000	16.303	36.380	52.683	-21.317	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10380.000	10.400	35.390	45.790	-28.210	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10380.000	11.965	36.690	48.656	-25.344	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10460.000	9.932	36.080	46.012	-27.988	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10460.000	11.790	36.430	48.220	-25.780	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10540.000	12.058	35.510	47.569	-26.431	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10540.000	13.868	36.890	50.758	-23.242	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5310MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10620.000	13.096	36.230	49.325	-24.675	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10620.000	14.683	36.520	51.203	-22.797	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5510MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11020.000	12.820	35.470	48.290	-25.710	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11020.000	14.966	36.190	51.157	-22.843	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11100.000	12.752	35.890	48.642	-25.358	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11100.000	15.006	36.630	51.636	-22.364	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5670MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11340.000	14.149	35.830	49.979	-24.021	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11340.000	15.891	36.430	52.321	-21.679	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-20BW-7.2Mbps) (5720MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11440.000	14.836	34.360	49.195	-24.805	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11440.000	16.366	34.860	51.226	-22.774	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-40BW-15Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11420.000	14.805	35.940	50.744	-23.256	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11420.000	16.340	35.320	51.660	-22.340	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5210MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10420.000	9.787	36.780	46.567	-27.433	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10420.000	11.491	36.910	48.401	-25.599	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5290MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10580.000	12.903	36.030	48.934	-25.066	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10580.000	14.506	36.560	51.066	-22.934	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5530MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11060.000	13.143	35.260	48.404	-25.596	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11060.000	15.345	35.450	50.795	-23.205	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5610MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11220.000	12.762	35.680	48.442	-25.558	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11220.000	14.926	35.850	50.776	-23.224	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5690MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11380.000	14.610	35.610	50.220	-23.780	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11380.000	16.218	35.280	51.498	-22.502	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10360.000	10.932	36.440	47.372	-26.628	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10360.000	12.436	36.240	48.675	-25.325	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10440.000	9.725	36.320	46.045	-27.955	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10440.000	11.505	36.840	48.345	-25.655	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10480.000	10.464	37.640	48.103	-25.897	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10480.000	12.399	37.580	49.979	-24.021	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5260MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.130	46.661	-27.339	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10520.000	13.441	36.740	50.181	-23.819	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10600.000	13.182	35.240	48.422	-25.578	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10600.000	14.717	36.210	50.927	-23.073	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5320MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10640.000	12.912	36.680	49.592	-24.408	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10640.000	14.585	36.570	51.155	-22.845	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11000.000	12.513	36.490	49.003	-24.997	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11000.000	14.635	36.170	50.805	-23.195	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11200.000	12.912	35.710	48.622	-25.378	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11200.000	15.146	35.280	50.426	-23.574	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5700MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11400.000	14.753	34.680	49.433	-24.567	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11400.000	16.303	36.040	52.343	-21.657	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5180MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10360.000	10.932	35.910	46.842	-27.158	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10360.000	12.436	36.080	48.515	-25.485	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10440.000	9.725	36.220	45.945	-28.055	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10440.000	11.505	36.310	47.815	-26.185	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10480.000	10.464	36.660	47.123	-26.877	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10480.000	12.399	36.770	49.169	-24.831	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.880	47.411	-26.589	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.880	47.411	-26.589	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10600.000	13.182	35.750	48.932	-25.068	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10600.000	14.717	35.910	50.627	-23.373	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5320MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10640.000	12.912	36.420	49.332	-24.668	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10640.000	14.585	36.860	51.445	-22.555	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11000.000	12.513	35.730	48.243	-25.757	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11000.000	14.635	35.550	50.185	-23.815	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11200.000	12.912	34.930	47.842	-26.158	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11200.000	15.146	36.710	51.856	-22.144	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5700MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11400.000	14.753	34.520	49.273	-24.727	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11400.000	16.303	36.120	52.423	-21.577	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10380.000	10.400	35.940	46.340	-27.660	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10380.000	11.965	36.850	48.816	-25.184	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5230MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10460.000	9.932	36.510	46.442	-27.558	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10460.000	11.790	35.490	47.280	-26.720	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10540.000	12.058	35.020	47.079	-26.921	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10540.000	13.868	36.820	50.688	-23.312	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5310MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	36.090	47.621	-26.379	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10620.000	14.683	36.280	50.963	-23.037	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5510MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11020.000	12.820	35.740	48.560	-25.440	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11020.000	14.966	35.290	50.257	-23.743	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11100.000	12.752	35.680	48.432	-25.568	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11100.000	15.006	36.630	51.636	-22.364	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5670MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11340.000	14.149	35.890	50.039	-23.961	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11340.000	15.891	36.570	52.461	-21.539	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-20BW-7.2Mbps) (5720MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11440.000	14.836	34.950	49.785	-24.215	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11440.000	16.366	34.740	51.106	-22.894	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-40BW-15Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11420.000	14.805	35.560	50.364	-23.636	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11420.000	16.340	35.660	52.000	-22.000	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5210MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10420.000	9.787	36.870	46.657	-27.343	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10420.000	11.491	35.880	47.371	-26.629	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5290MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10580.000	12.903	36.350	49.254	-24.746	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10580.000	14.506	36.910	51.416	-22.584	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5530MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11060.000	13.143	35.430	48.574	-25.426	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11060.000	15.345	35.750	51.095	-22.905	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5610MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11220.000	12.762	35.730	48.492	-25.508	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11220.000	14.926	35.280	50.206	-23.794	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5690MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11380.000	14.610	35.610	50.220	-23.780	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11380.000	16.218	35.980	52.198	-21.802	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10360.000	10.932	35.880	46.812	-27.188	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10360.000	12.436	36.230	48.665	-25.335	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10440.000	9.725	36.320	46.045	-27.955	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10440.000	11.505	36.450	47.955	-26.045	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10480.000	10.464	36.690	47.153	-26.847	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10480.000	12.399	36.710	49.109	-24.891	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.280	46.811	-27.189	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10520.000	13.441	36.820	50.261	-23.739	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10600.000	13.182	35.580	48.762	-25.238	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10600.000	14.717	35.260	49.977	-24.023	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5320MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10640.000	12.912	36.490	49.402	-24.598	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10640.000	14.585	36.880	51.465	-22.535	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11000.000	12.513	35.790	48.303	-25.697	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11000.000	14.635	36.140	50.775	-23.225	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11200.000	12.912	34.650	47.562	-26.438	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11200.000	15.146	36.140	51.286	-22.714	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5700MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11400.000	14.753	34.740	49.493	-24.507	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11400.000	16.303	36.620	52.923	-21.077	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10380.000	10.400	35.260	45.660	-28.340	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10380.000	11.965	36.760	48.726	-25.274	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10460.000	9.720	36.590	46.310	-27.690	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10460.000	11.790	36.430	48.220	-25.780	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10540.000	12.058	35.850	47.909	-26.091	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10540.000	13.868	36.890	50.758	-23.242	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5310MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10620.000	13.096	36.230	49.325	-24.675	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10620.000	14.683	36.240	50.923	-23.077	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5510MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11020.000	12.820	35.740	48.560	-25.440	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11020.000	14.966	36.240	51.207	-22.793	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11100.000	12.752	35.610	48.362	-25.638	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11100.000	15.006	36.170	51.176	-22.824	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5670MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11340.000	14.149	35.910	50.059	-23.941	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11340.000	15.891	36.670	52.561	-21.439	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-20BW-14.4Mbps) (5720MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11440.000	14.836	34.360	49.195	-24.805	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11440.000	16.366	34.620	50.986	-23.014	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-40BW-30Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11420.000	14.805	35.290	50.094	-23.906	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11420.000	16.340	35.340	51.680	-22.320	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5210MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10420.000	9.787	36.160	45.947	-28.053	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10420.000	11.491	36.480	47.971	-26.029	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5290MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10420.000	11.491	36.480	47.971	-26.029	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10580.000	14.506	36.240	50.746	-23.254	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5530MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11060.000	13.143	35.430	48.574	-25.426	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11060.000	15.345	35.450	50.795	-23.205	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5610MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11220.000	12.762	35.270	48.032	-25.968	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11220.000	14.926	35.250	50.176	-23.824	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5690MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11380.000	14.610	35.120	49.730	-24.270	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11380.000	16.218	34.210	50.428	-23.572	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10360.000	10.932	35.770	46.702	-27.298	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10360.000	12.436	36.240	48.675	-25.325	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10440.000	9.725	36.290	46.015	-27.985	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10440.000	11.505	36.450	47.955	-26.045	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5240MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10480.000	10.464	36.250	46.713	-27.287	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10480.000	10.464	36.250	46.713	-27.287	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5260MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10520.000	11.531	35.750	47.281	-26.719	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10520.000	13.441	36.810	50.251	-23.749	74.000
15780.000	*	*	*	*	74.000
21040.000	*	*	*	*	74.000
26300.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10600.000	13.182	35.390	48.572	-25.428	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10600.000	14.717	35.880	50.597	-23.403	74.000
15900.000	*	*	*	*	74.000
21200.000	*	*	*	*	74.000
26500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5320MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10540.000	12.058	36.490	48.549	-25.451	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10640.000	14.585	36.830	51.415	-22.585	74.000
15960.000	*	*	*	*	74.000
21280.000	*	*	*	*	74.000
26600.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5500MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11000.000	12.513	35.720	48.233	-25.767	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11000.000	14.635	35.910	50.545	-23.455	74.000
16500.000	*	*	*	*	74.000
22000.000	*	*	*	*	74.000
27500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11200.000	12.912	34.760	47.672	-26.328	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11200.000	15.146	36.130	51.276	-22.724	74.000
16800.000	*	*	*	*	74.000
22400.000	*	*	*	*	74.000
28000.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5700MHz)

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V/m	Margin dB	Limit dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11400.000	14.753	34.910	49.663	-24.337	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11400.000	16.303	36.880	53.183	-20.817	74.000
17100.000	*	*	*	*	74.000
22800.000	*	*	*	*	74.000
28500.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10380.000	10.400	35.870	46.270	-27.730	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10380.000	11.965	36.790	48.756	-25.244	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5230MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10460.000	9.932	36.580	46.512	-27.488	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10460.000	11.790	36.430	48.220	-25.780	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10540.000	12.058	35.840	47.899	-26.101	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10540.000	13.868	36.820	50.688	-23.312	74.000
15810.000	*	*	*	*	74.000
21080.000	*	*	*	*	74.000
26350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5310MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10620.000	13.096	36.690	49.785	-24.215	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10620.000	14.683	36.270	50.953	-23.047	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5510MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10620.000	14.683	36.270	50.953	-23.047	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11020.000	14.966	36.250	51.217	-22.783	74.000
15930.000	*	*	*	*	74.000
21240.000	*	*	*	*	74.000
26550.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11100.000	12.752	35.310	48.062	-25.938	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11100.000	15.006	36.230	51.236	-22.764	74.000
16770.000	*	*	*	*	74.000
22360.000	*	*	*	*	74.000
27950.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5670MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11340.000	14.149	35.950	50.099	-23.901	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11340.000	15.891	36.670	52.561	-21.439	74.000
17010.000	*	*	*	*	74.000
22680.000	*	*	*	*	74.000
28350.000	*	*	*	*	74.000
<b>Average Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-20BW-14.4Mbps) (5720MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11440.000	14.836	34.790	49.625	-24.375	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11440.000	14.836	34.790	49.625	-24.375	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-40BW-30Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11420.000	14.805	35.310	50.114	-23.886	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11420.000	16.340	35.140	51.480	-22.520	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5210MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10420.000	9.787	36.350	46.137	-27.863	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10420.000	11.491	36.570	48.061	-25.939	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5290MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
10580.000	12.903	36.010	48.914	-25.086	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
10580.000	14.506	36.430	50.936	-23.064	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5530MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11060.000	13.143	35.340	48.484	-25.516	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11060.000	15.345	35.750	51.095	-22.905	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5610MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11220.000	12.762	35.310	48.072	-25.928	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11220.000	14.926	35.170	50.096	-23.904	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5690MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
11380.000	14.610	34.970	49.580	-24.420	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*
<b>Vertical</b>					
<b>Peak Detector:</b>					
11380.000	16.218	34.250	50.468	-23.532	74.000
11550.000	*	*	*	*	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
<b>Average</b>					
<b>Detector:</b>					
*	*	*	*	*	*

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
198.780	-9.958	40.135	30.177	-13.323	43.500
338.460	-3.380	39.693	36.312	-9.688	46.000
450.980	0.835	34.601	35.436	-10.564	46.000
598.420	3.524	35.796	39.320	-6.680	46.000
749.740	3.963	31.450	35.413	-10.587	46.000
910.760	6.484	30.760	37.244	-8.756	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
192.960	-5.655	36.696	31.041	-12.459	43.500
350.100	-1.278	38.749	37.471	-8.529	46.000
493.660	-1.656	38.714	37.059	-8.941	46.000
635.280	-1.412	38.535	37.123	-8.877	46.000
813.760	2.886	32.232	35.118	-10.882	46.000
967.020	3.889	26.662	30.551	-23.449	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
169.680	-9.726	37.966	28.240	-15.260	43.500
340.400	-3.237	40.062	36.825	-9.175	46.000
460.680	4.030	31.020	35.050	-10.950	46.000
612.000	3.403	34.427	37.829	-8.171	46.000
771.080	5.126	31.590	36.717	-9.283	46.000
951.500	6.993	24.351	31.344	-14.656	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
177.440	-1.248	29.361	28.113	-15.387	43.500
284.140	-5.517	38.728	33.211	-12.789	46.000
396.660	-2.039	38.574	36.535	-9.465	46.000
575.140	-2.335	37.336	35.001	-10.999	46.000
759.440	2.110	35.696	37.806	-8.194	46.000
924.340	3.149	31.962	35.111	-10.889	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
222.060	-10.124	40.086	29.961	-16.039	46.000
377.260	1.107	34.903	36.010	-9.990	46.000
513.060	3.186	33.303	36.489	-9.511	46.000
662.440	1.882	31.323	33.205	-12.795	46.000
796.300	6.389	32.325	38.714	-7.286	46.000
951.500	6.993	30.558	37.551	-8.449	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
218.180	-6.306	36.743	30.437	-15.563	46.000
398.600	-2.371	38.232	35.861	-10.139	46.000
503.360	-0.086	33.082	32.996	-13.004	46.000
627.520	-0.327	35.413	35.086	-10.914	46.000
806.000	3.686	31.718	35.404	-10.596	46.000
967.020	3.889	26.341	30.230	-23.770	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
189.080	-10.027	39.015	28.988	-14.512	43.500
326.820	-4.499	38.425	33.926	-12.074	46.000
493.660	1.474	35.336	36.811	-9.189	46.000
660.500	1.889	35.682	37.571	-8.429	46.000
804.060	6.271	32.045	38.316	-7.684	46.000
949.560	7.036	24.534	31.570	-14.430	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	35.709	30.308	-13.192	43.500
322.940	-3.616	36.007	32.392	-13.608	46.000
460.680	-1.930	38.748	36.818	-9.182	46.000
658.560	-1.778	37.738	35.960	-10.040	46.000
813.760	2.886	33.703	36.589	-9.411	46.000
967.020	3.889	26.440	30.329	-23.671	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
222.060	-10.124	40.062	29.937	-16.063	46.000
332.640	-3.895	37.790	33.895	-12.105	46.000
445.160	-0.432	37.123	36.691	-9.309	46.000
608.120	3.925	32.561	36.486	-9.514	46.000
782.720	5.387	28.897	34.284	-11.716	46.000
959.260	6.640	30.967	37.607	-8.393	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
218.180	-6.306	35.333	29.027	-16.973	46.000
342.340	-0.936	37.497	36.561	-9.439	46.000
513.060	0.436	34.939	35.375	-10.625	46.000
660.500	-1.111	36.902	35.791	-10.209	46.000
774.960	2.023	28.675	30.698	-15.302	46.000
930.160	3.830	26.619	30.449	-15.551	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
175.500	-9.792	38.258	28.466	-15.034	43.500
342.340	-2.566	37.893	35.327	-10.673	46.000
495.600	1.463	35.454	36.917	-9.083	46.000
646.920	1.489	35.681	37.170	-8.830	46.000
794.360	6.387	29.983	36.370	-9.630	46.000
941.800	6.790	22.087	28.877	-17.123	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
191.020	-5.629	35.811	30.182	-13.318	43.500
309.360	-4.043	39.525	35.482	-10.518	46.000
452.920	-4.860	42.470	37.610	-8.390	46.000
629.460	-1.028	38.949	37.921	-8.079	46.000
782.720	2.757	31.489	34.246	-11.754	46.000
943.740	3.383	26.166	29.549	-16.451	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
187.140	-11.217	39.478	28.261	-15.239	43.500
330.700	-4.284	39.041	34.758	-11.242	46.000
503.360	1.994	35.540	37.534	-8.466	46.000
644.980	1.237	35.207	36.444	-9.556	46.000
798.240	6.409	31.575	37.983	-8.017	46.000
951.500	6.993	23.998	30.991	-15.009	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	32.777	29.042	-14.458	43.500
313.240	-4.090	37.929	33.839	-12.161	46.000
478.140	-3.423	39.820	36.397	-9.603	46.000
627.520	-0.327	38.059	37.732	-8.268	46.000
780.780	2.769	30.887	33.656	-12.344	46.000
934.040	2.986	26.627	29.613	-16.387	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
212.360	-10.382	38.538	28.156	-15.344	43.500
392.780	0.810	35.221	36.031	-9.969	46.000
538.280	3.316	33.257	36.573	-9.427	46.000
677.960	2.830	34.901	37.731	-8.269	46.000
784.660	5.526	25.040	30.566	-15.434	46.000
941.800	6.790	27.256	34.046	-11.954	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
222.060	-6.484	37.786	31.301	-14.699	46.000
340.400	-1.287	36.509	35.222	-10.778	46.000
489.780	-2.262	39.099	36.837	-9.163	46.000
666.320	-0.951	38.447	37.496	-8.504	46.000
800.180	2.637	30.889	33.526	-12.474	46.000
943.740	3.383	28.680	32.063	-13.937	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) (5550MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
216.240	-10.271	38.212	27.941	-18.059	46.000
386.960	1.112	35.409	36.521	-9.479	46.000
540.220	3.499	33.013	36.512	-9.488	46.000
716.760	3.809	31.112	34.921	-11.079	46.000
837.040	6.016	30.410	36.426	-9.574	46.000
934.040	6.956	24.452	31.408	-14.592	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	31.128	27.393	-16.107	43.500
311.300	-4.071	38.920	34.849	-11.151	46.000
472.320	-3.508	41.701	38.193	-7.807	46.000
656.620	-2.535	38.091	35.556	-10.444	46.000
819.580	3.001	31.510	34.511	-11.489	46.000
965.080	3.832	27.673	31.505	-22.495	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-20BW-7.2Mbps) (5720MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
189.080	-10.027	42.950	32.923	-10.577	43.500
307.420	-4.120	42.103	37.983	-8.017	46.000
456.800	2.432	36.142	38.574	-7.426	46.000
610.060	3.657	34.489	38.146	-7.854	46.000
763.320	5.113	24.286	29.399	-16.601	46.000
934.040	6.956	30.428	37.384	-8.616	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
222.060	-6.484	42.237	35.752	-10.248	46.000
361.740	-0.646	38.483	37.836	-8.164	46.000
540.220	2.169	36.583	38.752	-7.248	46.000
662.440	-0.998	32.512	31.514	-14.486	46.000
811.820	2.851	35.171	38.022	-7.978	46.000
968.960	3.936	32.932	36.868	-17.132	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-40BW-15Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
214.300	-10.329	43.410	33.081	-10.419	43.500
377.260	1.107	37.506	38.613	-7.387	46.000
507.240	2.529	35.870	38.399	-7.601	46.000
635.280	1.798	36.313	38.111	-7.889	46.000
776.900	5.167	34.469	39.636	-6.364	46.000
941.800	6.790	22.674	29.464	-16.536	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	37.939	32.538	-10.962	43.500
342.340	-0.936	38.924	37.988	-8.012	46.000
495.600	-1.237	39.410	38.173	-7.827	46.000
691.540	2.092	34.996	37.088	-8.912	46.000
825.400	3.016	26.510	29.526	-16.474	46.000
965.080	3.832	35.371	39.203	-14.797	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5210MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
198.780	-9.958	45.083	35.125	-8.375	43.500
348.160	-1.320	39.610	38.290	-7.710	46.000
487.840	1.400	37.777	39.176	-6.824	46.000
662.440	1.882	34.623	36.505	-9.495	46.000
811.820	6.281	34.128	40.409	-5.591	46.000
943.740	6.843	26.785	33.628	-12.372	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	40.252	36.517	-6.983	43.500
286.080	-5.409	40.901	35.492	-10.508	46.000
394.720	-1.697	40.815	39.118	-6.882	46.000
575.140	-2.335	38.390	36.055	-9.945	46.000
749.740	2.023	37.134	39.157	-6.843	46.000
934.040	2.986	32.740	35.726	-10.274	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5290MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
202.660	-10.183	41.887	31.705	-11.795	43.500
355.920	-1.242	39.220	37.978	-8.022	46.000
501.420	2.019	36.182	38.201	-7.799	46.000
646.920	1.489	35.373	36.862	-9.138	46.000
794.360	6.387	34.477	40.864	-5.136	46.000
949.560	7.036	26.323	33.359	-12.641	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
187.140	-5.607	38.629	33.022	-10.478	43.500
338.460	-1.640	39.558	37.917	-8.083	46.000
499.480	-0.199	38.410	38.210	-7.790	46.000
633.340	-1.450	36.797	35.347	-10.653	46.000
811.820	2.851	35.425	38.276	-7.724	46.000
967.020	3.889	28.780	32.669	-21.331	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) (5690MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
175.500	-9.792	43.315	33.523	-9.977	43.500
282.200	-6.074	43.994	37.920	-8.080	46.000
427.700	0.210	37.225	37.435	-8.565	46.000
602.300	3.794	26.982	30.776	-15.224	46.000
761.380	5.145	34.281	39.425	-6.575	46.000
934.040	6.956	24.856	31.812	-14.188	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
177.440	-1.248	34.437	33.189	-10.311	43.500
303.540	-3.998	41.690	37.692	-8.308	46.000
454.860	-4.096	40.561	36.464	-9.536	46.000
596.480	0.907	39.514	40.421	-5.579	46.000
786.600	2.724	34.459	37.184	-8.816	46.000
939.860	3.400	27.372	30.772	-15.228	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
173.560	-9.543	37.266	27.723	-15.777	43.500
334.580	-3.523	38.350	34.827	-11.173	46.000
482.020	1.664	34.391	36.055	-9.945	46.000
658.560	1.892	35.689	37.581	-8.419	46.000
815.700	6.451	27.422	33.873	-12.127	46.000
968.960	7.356	29.092	36.448	-17.552	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
167.740	-4.506	34.044	29.538	-13.962	43.500
353.980	-1.124	37.623	36.499	-9.501	46.000
509.180	0.804	38.831	39.635	-6.365	46.000
679.900	1.223	38.070	39.293	-6.707	46.000
850.620	-0.397	38.963	38.566	-7.434	46.000
967.020	3.889	32.227	36.116	-17.884	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
229.820	-8.001	39.701	31.700	-14.300	46.000
346.220	-1.347	39.187	37.840	-8.160	46.000
483.960	1.462	34.684	36.146	-9.854	46.000
681.840	2.812	35.672	38.484	-7.516	46.000
796.300	6.389	28.722	35.111	-10.889	46.000
957.320	6.615	23.683	30.298	-15.702	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
175.500	-1.842	36.246	34.404	-9.096	43.500
303.540	-3.998	42.085	38.087	-7.913	46.000
460.680	-1.930	38.804	36.874	-9.126	46.000
602.300	1.704	34.330	36.034	-9.966	46.000
769.140	2.558	31.437	33.995	-12.005	46.000
928.220	3.640	27.328	30.968	-15.032	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
214.300	-10.329	41.507	31.178	-12.322	43.500
340.400	-3.237	39.673	36.436	-9.564	46.000
482.020	1.664	35.947	37.611	-8.389	46.000
637.220	1.572	34.194	35.766	-10.234	46.000
782.720	5.387	26.485	31.872	-14.128	46.000
943.740	6.843	29.133	35.976	-10.024	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	31.438	27.703	-15.797	43.500
266.680	-5.600	41.183	35.583	-10.417	46.000
404.420	-4.251	39.427	35.176	-10.824	46.000
617.820	0.958	36.494	37.452	-8.548	46.000
780.780	2.769	34.162	36.931	-9.069	46.000
965.080	3.832	25.962	29.794	-24.206	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dB $\mu$ V	dB $\mu$ V/m	dB	dB $\mu$ V/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
152.220	-7.926	39.158	31.232	-12.268	43.500
268.620	-5.522	41.208	35.686	-10.314	46.000
402.480	0.915	36.053	36.968	-9.032	46.000
582.900	3.351	35.405	38.756	-7.244	46.000
745.860	3.906	37.709	41.615	-4.385	46.000
945.680	6.910	27.926	34.836	-11.164	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
212.360	-5.752	37.600	31.848	-11.652	43.500
328.760	-2.407	38.225	35.818	-10.182	46.000
474.260	-3.486	40.816	37.330	-8.670	46.000
641.100	-1.915	41.362	39.447	-6.553	46.000
788.540	2.714	36.787	39.501	-6.499	46.000
937.920	3.110	29.266	32.376	-13.624	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
175.500	-9.792	41.003	31.211	-12.289	43.500
330.700	-4.284	40.147	35.864	-10.136	46.000
485.900	1.316	36.963	38.279	-7.721	46.000
629.460	1.212	35.855	37.067	-8.933	46.000
813.760	6.296	31.029	37.325	-8.675	46.000
974.780	7.039	24.020	31.059	-22.941	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
191.020	-5.629	38.318	32.689	-10.811	43.500
303.540	-3.998	41.435	37.437	-8.563	46.000
485.900	-2.324	41.794	39.470	-6.530	46.000
660.500	-1.111	40.394	39.283	-6.717	46.000
823.460	3.081	35.984	39.065	-6.935	46.000
967.020	3.889	32.220	36.109	-17.891	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) (5600MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
189.080	-10.027	40.893	30.866	-12.634	43.500
328.760	-4.477	41.688	37.211	-8.789	46.000
458.740	3.298	33.306	36.604	-9.396	46.000
629.460	1.212	37.319	38.531	-7.469	46.000
776.900	5.167	26.398	31.565	-14.435	46.000
955.380	6.596	32.194	38.790	-7.210	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	34.326	30.591	-12.909	43.500
276.380	-6.006	40.063	34.057	-11.943	46.000
443.220	-6.621	41.386	34.765	-11.235	46.000
596.480	0.907	34.747	35.654	-10.346	46.000
755.560	2.829	31.419	34.248	-11.752	46.000
920.460	3.272	26.633	29.905	-16.095	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
173.560	-9.543	38.450	28.907	-14.593	43.500
305.480	-3.836	36.841	33.005	-12.995	46.000
429.640	0.630	38.004	38.633	-7.367	46.000
592.600	3.437	34.961	38.398	-7.602	46.000
743.920	3.898	33.276	37.174	-8.826	46.000
908.820	6.330	25.938	32.268	-13.732	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
179.380	-0.824	35.247	34.423	-9.077	43.500
319.060	-4.135	42.819	38.684	-7.316	46.000
489.780	-2.262	40.936	38.674	-7.326	46.000
637.220	-1.378	32.048	30.670	-15.330	46.000
809.880	3.026	35.164	38.190	-7.810	46.000
945.680	3.300	28.167	31.467	-14.533	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
173.560	-9.543	38.812	29.269	-14.231	43.500
268.620	-5.522	42.143	36.621	-9.379	46.000
427.700	0.210	35.836	36.046	-9.954	46.000
598.420	3.524	29.090	32.614	-13.386	46.000
782.720	5.387	31.628	37.015	-8.985	46.000
963.140	7.021	24.532	31.553	-22.447	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	40.069	34.668	-8.832	43.500
286.080	-5.409	41.318	35.909	-10.091	46.000
410.240	-4.492	43.113	38.622	-7.378	46.000
631.400	-1.454	39.824	38.370	-7.630	46.000
792.420	2.681	35.265	37.946	-8.054	46.000
968.960	3.936	27.111	31.047	-22.953	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) (5550MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
191.020	-9.679	39.977	30.298	-13.202	43.500
363.680	0.189	35.162	35.351	-10.649	46.000
516.940	3.200	34.428	37.628	-8.372	46.000
662.440	1.882	35.526	37.408	-8.592	46.000
794.360	6.387	25.379	31.766	-14.234	46.000
957.320	6.615	27.470	34.085	-11.915	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
204.600	-5.473	36.734	31.261	-12.239	43.500
332.640	-2.255	39.491	37.236	-8.764	46.000
493.660	-1.656	36.997	35.342	-10.658	46.000
666.320	-0.951	40.089	39.138	-6.862	46.000
804.060	3.371	34.466	37.837	-8.163	46.000
967.020	3.889	28.097	31.986	-22.014	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-20BW-7.2Mbps) (5720MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
185.200	-12.281	42.003	29.722	-13.778	43.500
340.400	-3.237	39.334	36.097	-9.903	46.000
466.500	3.156	34.500	37.656	-8.344	46.000
617.820	2.438	34.379	36.817	-9.183	46.000
782.720	5.387	27.113	32.500	-13.500	46.000
949.560	7.036	27.800	34.836	-11.164	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	36.685	32.950	-10.550	43.500
297.720	-4.356	40.997	36.641	-9.359	46.000
456.800	-3.328	40.167	36.839	-9.161	46.000
596.480	0.907	36.536	37.443	-8.557	46.000
765.260	1.921	36.987	38.908	-7.092	46.000
920.460	3.272	25.190	28.462	-17.538	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-40BW-15Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
181.320	-12.280	44.117	31.837	-11.663	43.500
324.880	-4.510	41.194	36.684	-9.316	46.000
447.100	-0.067	39.174	39.107	-6.893	46.000
610.060	3.657	34.492	38.149	-7.851	46.000
765.260	5.091	31.223	36.314	-9.686	46.000
926.280	6.832	25.861	32.693	-13.307	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	36.755	33.020	-10.480	43.500
324.880	-3.120	40.049	36.929	-9.071	46.000
487.840	-2.290	36.402	34.111	-11.889	46.000
672.140	-0.561	36.831	36.270	-9.730	46.000
833.160	1.716	34.747	36.463	-9.537	46.000
967.020	3.889	27.953	31.842	-22.158	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5210MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
179.380	-11.904	41.891	29.987	-13.513	43.500
326.820	-4.499	42.044	37.545	-8.455	46.000
482.020	1.664	36.897	38.561	-7.439	46.000
613.940	3.132	36.052	39.184	-6.816	46.000
782.720	5.387	31.393	36.780	-9.220	46.000
953.440	6.735	32.026	38.761	-7.239	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	38.494	34.759	-8.741	43.500
313.240	-4.090	41.460	37.370	-8.630	46.000
509.180	0.804	32.004	32.808	-13.192	46.000
664.380	-0.978	35.942	34.964	-11.036	46.000
813.760	2.886	32.772	35.658	-10.342	46.000
941.800	3.460	28.002	31.462	-14.538	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5290MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
189.080	-10.027	41.961	31.934	-11.566	43.500
305.480	-3.836	42.150	38.314	-7.686	46.000
431.580	0.757	34.915	35.672	-10.328	46.000
571.260	2.310	35.120	37.430	-8.570	46.000
767.200	5.099	31.429	36.529	-9.471	46.000
945.680	6.910	24.485	31.395	-14.605	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	41.049	35.648	-7.852	43.500
303.540	-3.998	41.106	37.108	-8.892	46.000
462.620	-2.571	39.924	37.353	-8.647	46.000
612.000	1.943	37.207	39.149	-6.851	46.000
782.720	2.757	31.723	34.480	-11.520	46.000
961.200	3.310	28.133	31.443	-22.557	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) (5690MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
183.260	-12.325	47.450	35.125	-8.375	43.500
317.120	-4.599	39.098	34.498	-11.502	46.000
483.960	1.462	36.211	37.673	-8.327	46.000
619.760	2.074	36.028	38.102	-7.898	46.000
761.380	5.145	32.185	37.329	-8.671	46.000
947.620	6.971	26.562	33.533	-12.467	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	37.912	32.511	-10.989	43.500
315.180	-4.108	42.454	38.346	-7.654	46.000
478.140	-3.423	37.464	34.041	-11.959	46.000
631.400	-1.454	40.074	38.620	-7.380	46.000
809.880	3.026	36.786	39.812	-6.188	46.000
957.320	3.015	35.706	38.721	-7.279	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
183.260	-12.325	36.455	24.130	-19.370	43.500
348.160	-1.320	34.691	33.371	-12.629	46.000
478.140	1.937	36.305	38.242	-7.758	46.000
639.160	1.046	37.928	38.974	-7.026	46.000
773.020	5.145	31.748	36.893	-9.107	46.000
922.400	6.670	23.775	30.445	-15.555	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	31.191	25.790	-17.710	43.500
328.760	-2.407	34.635	32.228	-13.772	46.000
480.080	-3.390	39.130	35.740	-10.260	46.000
664.380	-0.978	37.304	36.326	-9.674	46.000
798.240	2.629	34.556	37.184	-8.816	46.000
968.960	3.936	26.239	30.175	-23.825	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
165.800	-9.915	40.750	30.835	-12.665	43.500
317.120	-4.599	33.539	28.939	-17.061	46.000
450.980	0.835	37.051	37.886	-8.114	46.000
598.420	3.524	34.320	37.844	-8.156	46.000
776.900	5.167	31.757	36.924	-9.076	46.000
947.620	6.971	25.898	32.869	-13.131	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
204.600	-5.473	33.842	28.369	-15.131	43.500
352.040	-1.292	33.859	32.567	-13.433	46.000
470.380	-3.540	39.391	35.851	-10.149	46.000
625.580	0.299	35.383	35.683	-10.317	46.000
823.460	3.081	34.587	37.668	-8.332	46.000
930.160	3.830	33.534	37.364	-8.636	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
177.440	-10.838	38.324	27.486	-16.014	43.500
334.580	-3.523	33.142	29.619	-16.381	46.000
460.680	4.030	33.822	37.852	-8.148	46.000
604.240	4.289	32.254	36.544	-9.456	46.000
788.540	6.144	31.546	37.690	-8.310	46.000
947.620	6.971	25.949	32.920	-13.080	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
198.780	-5.708	32.920	27.212	-16.288	43.500
348.160	-0.890	34.687	33.797	-12.203	46.000
559.620	-2.503	38.756	36.253	-9.747	46.000
712.880	-1.328	38.944	37.616	-8.384	46.000
852.560	-0.364	38.863	38.499	-7.501	46.000
965.080	3.832	32.560	36.392	-17.608	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
179.380	-11.904	38.558	26.654	-16.846	43.500
289.960	-5.470	37.792	32.322	-13.678	46.000
427.700	0.210	36.477	36.687	-9.313	46.000
596.480	3.587	33.615	37.202	-8.798	46.000
740.040	3.710	32.107	35.817	-10.183	46.000
951.500	6.993	23.822	30.815	-15.185	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
167.740	-4.506	30.203	25.697	-17.803	43.500
309.360	-4.043	36.667	32.624	-13.376	46.000
472.320	-3.508	40.451	36.943	-9.057	46.000
625.580	0.299	38.548	38.848	-7.152	46.000
823.460	3.081	31.047	34.128	-11.872	46.000
955.380	2.956	29.464	32.420	-13.580	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
212.360	-10.382	38.441	28.059	-15.441	43.500
365.620	0.382	33.446	33.828	-12.172	46.000
547.980	4.028	34.208	38.236	-7.764	46.000
681.840	2.812	33.830	36.642	-9.358	46.000
817.640	6.716	31.224	37.940	-8.060	46.000
963.140	7.021	30.763	37.784	-16.216	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
200.720	-5.676	35.397	29.721	-13.779	43.500
340.400	-1.287	35.957	34.670	-11.330	46.000
482.020	-3.046	41.254	38.208	-7.792	46.000
639.160	-1.374	38.413	37.039	-8.961	46.000
776.900	2.067	30.873	32.940	-13.060	46.000
920.460	3.272	33.230	36.502	-9.498	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
208.480	-10.485	42.938	32.452	-11.048	43.500
332.640	-3.895	39.650	35.755	-10.245	46.000
466.500	3.156	34.707	37.863	-8.137	46.000
612.000	3.403	31.540	34.942	-11.058	46.000
778.840	5.180	33.008	38.188	-7.812	46.000
959.260	6.640	25.441	32.081	-13.919	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
187.140	-5.607	33.508	27.901	-15.599	43.500
322.940	-3.616	36.081	32.466	-13.534	46.000
462.620	-2.571	40.021	37.450	-8.550	46.000
592.600	-0.953	36.668	35.715	-10.285	46.000
802.120	2.966	27.184	30.150	-15.850	46.000
965.080	3.832	33.638	37.470	-16.530	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-20BW-14.4Mbps) (5720MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBμV/m
	dB	dBμV	dBμV/m		
<b>Horizontal</b>					
<b>Peak Detector</b>					
173.560	-9.543	41.248	31.705	-11.795	43.500
291.900	-5.202	42.446	37.244	-8.756	46.000
427.700	0.210	36.705	36.915	-9.085	46.000
594.540	3.555	32.434	35.989	-10.011	46.000
765.260	5.091	30.894	35.985	-10.015	46.000
961.200	6.810	32.613	39.423	-14.577	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
208.480	-5.585	40.139	34.553	-8.947	43.500
330.700	-2.244	42.596	40.353	-5.647	46.000
511.120	0.783	36.876	37.659	-8.341	46.000
668.260	-0.927	39.142	38.215	-7.785	46.000
796.300	2.639	31.636	34.275	-11.725	46.000
930.160	3.830	34.524	38.354	-7.646	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-40BW-30Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
175.500	-9.792	42.352	32.560	-10.940	43.500
311.300	-4.651	43.129	38.478	-7.522	46.000
482.020	1.664	37.614	39.278	-6.722	46.000
604.240	4.289	30.989	35.279	-10.721	46.000
757.500	5.107	33.911	39.018	-6.982	46.000
930.160	7.530	25.934	33.464	-12.536	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
181.320	-1.910	36.668	34.758	-8.742	43.500
301.600	-3.985	42.756	38.771	-7.229	46.000
460.680	-1.930	39.238	37.308	-8.692	46.000
608.120	2.175	36.465	38.640	-7.360	46.000
774.960	2.023	30.617	32.640	-13.360	46.000
943.740	3.383	35.096	38.479	-7.521	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5210MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
191.020	-9.679	41.280	31.601	-11.899	43.500
321.000	-4.563	41.837	37.274	-8.726	46.000
454.860	1.754	35.937	37.690	-8.310	46.000
596.480	3.587	33.790	37.377	-8.623	46.000
757.500	5.107	28.223	33.330	-12.670	46.000
924.340	6.589	23.087	29.676	-16.324	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	34.442	30.707	-12.793	43.500
338.460	-1.640	37.957	36.316	-9.684	46.000
495.600	-1.237	37.330	36.093	-9.907	46.000
662.440	-0.998	38.739	37.741	-8.259	46.000
788.540	2.714	35.571	38.285	-7.715	46.000
941.800	3.460	32.671	36.131	-9.869	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5290MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
179.380	-11.904	43.616	31.712	-11.788	43.500
321.000	-4.563	41.797	37.234	-8.766	46.000
466.500	3.156	34.643	37.799	-8.201	46.000
635.280	1.798	35.852	37.650	-8.350	46.000
807.940	6.231	31.457	37.688	-8.312	46.000
965.080	7.222	25.345	32.567	-21.433	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
189.080	-5.617	37.343	31.726	-11.774	43.500
317.120	-4.119	41.039	36.919	-9.081	46.000
482.020	-3.046	39.016	35.970	-10.030	46.000
623.640	0.376	36.165	36.541	-9.459	46.000
780.780	2.769	33.931	36.700	-9.300	46.000
945.680	3.300	27.474	30.774	-15.226	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) (5690MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
214.300	-10.329	42.467	32.138	-11.362	43.500
334.580	-3.523	41.771	38.248	-7.752	46.000
487.840	1.400	38.915	40.314	-5.686	46.000
598.420	3.524	36.009	39.533	-6.467	46.000
753.620	4.750	36.462	41.212	-4.788	46.000
959.260	6.640	27.615	34.255	-11.745	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
202.660	-5.573	37.029	31.457	-12.043	43.500
353.980	-1.124	38.770	37.646	-8.354	46.000
497.540	-0.713	35.564	34.851	-11.149	46.000
644.980	-3.223	43.062	39.839	-6.161	46.000
794.360	2.657	36.012	38.669	-7.331	46.000
947.620	3.231	34.467	37.698	-8.302	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
173.560	-9.543	37.002	27.459	-16.041	43.500
326.820	-4.499	37.529	33.030	-12.970	46.000
441.280	0.444	37.395	37.839	-8.161	46.000
580.960	3.466	34.861	38.327	-7.673	46.000
738.100	3.332	34.470	37.802	-8.198	46.000
930.160	7.530	24.187	31.717	-14.283	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
191.020	-5.629	34.462	28.833	-14.667	43.500
330.700	-2.244	36.014	33.771	-12.229	46.000
460.680	-1.930	41.045	39.115	-6.885	46.000
613.940	1.782	37.193	38.975	-7.025	46.000
786.600	2.724	35.265	37.990	-8.010	46.000
968.960	3.936	25.617	29.553	-24.447	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5300MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
194.900	-10.473	39.295	28.822	-14.678	43.500
307.420	-4.120	38.703	34.583	-11.417	46.000
452.920	1.290	37.271	38.561	-7.439	46.000
610.060	3.657	36.001	39.658	-6.342	46.000
771.080	5.126	33.645	38.772	-7.228	46.000
947.620	6.971	24.291	31.262	-14.738	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	36.071	30.670	-12.830	43.500
322.940	-3.616	38.253	34.638	-11.362	46.000
468.440	-3.566	38.202	34.636	-11.364	46.000
613.940	1.782	33.282	35.064	-10.936	46.000
774.960	2.023	34.622	36.645	-9.355	46.000
968.960	3.936	27.917	31.853	-22.147	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) (5600MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
177.440	-10.838	39.002	28.164	-15.336	43.500
278.320	-6.472	40.702	34.230	-11.770	46.000
404.420	0.889	36.493	37.382	-8.618	46.000
559.620	2.147	34.977	37.124	-8.876	46.000
726.460	3.832	33.163	36.995	-9.005	46.000
924.340	6.589	23.619	30.208	-15.792	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	35.452	31.717	-11.783	43.500
301.600	-3.985	38.862	34.877	-11.123	46.000
445.160	-6.402	44.414	38.012	-7.988	46.000
586.780	-2.214	39.731	37.517	-8.483	46.000
745.860	1.316	35.771	37.087	-8.913	46.000
918.520	1.958	28.393	30.351	-15.649	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
189.080	-10.027	40.144	30.117	-13.383	43.500
305.480	-3.836	37.275	33.439	-12.561	46.000
464.560	2.914	34.951	37.865	-8.135	46.000
648.860	1.744	36.181	37.925	-8.075	46.000
774.960	5.153	31.228	36.381	-9.619	46.000
953.440	6.735	25.343	32.078	-13.922	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
225.940	-6.267	37.051	30.784	-15.216	46.000
361.740	-0.646	37.108	36.461	-9.539	46.000
460.680	-1.930	40.695	38.765	-7.235	46.000
586.780	-2.214	39.637	37.423	-8.577	46.000
765.260	1.921	35.667	37.588	-8.412	46.000
924.340	3.149	27.447	30.596	-15.404	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5270MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
189.080	-10.027	38.237	28.210	-15.290	43.500
322.940	-4.536	38.392	33.857	-12.143	46.000
460.680	4.030	34.653	38.683	-7.317	46.000
625.580	1.419	36.239	37.659	-8.341	46.000
769.140	5.118	34.058	39.176	-6.824	46.000
939.860	6.750	24.796	31.546	-14.454	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
183.260	-3.735	31.098	27.363	-16.137	43.500
385.020	-0.441	34.362	33.921	-12.079	46.000
544.100	1.503	35.691	37.194	-8.806	46.000
687.660	2.292	36.021	38.313	-7.687	46.000
835.100	1.401	36.641	38.042	-7.958	46.000
967.020	3.889	27.739	31.628	-22.372	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.



Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) (5550MHz)

Frequency MHz	Correct Factor dB	Reading Level dBμV	Measurement Level dBμV/m	Margin dB	Limit dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
171.620	-9.641	36.253	26.612	-16.888	43.500
276.380	-6.526	37.869	31.343	-14.657	46.000
386.960	1.112	34.075	35.187	-10.813	46.000
557.680	2.511	37.217	39.727	-6.273	46.000
743.920	3.898	34.350	38.248	-7.752	46.000
893.300	5.716	25.999	31.715	-14.285	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
177.440	-1.248	30.819	29.571	-13.929	43.500
346.220	-0.527	36.317	35.790	-10.210	46.000
485.900	-2.324	40.385	38.061	-7.939	46.000
608.120	2.175	34.410	36.585	-9.415	46.000
813.760	2.886	35.213	38.099	-7.901	46.000
968.960	3.936	27.673	31.609	-22.391	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-20BW-14.4Mbps) (5720MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
225.940	-9.647	41.961	32.314	-13.686	46.000
383.080	1.305	36.588	37.893	-8.107	46.000
532.460	3.099	34.699	37.798	-8.202	46.000
679.900	2.823	35.126	37.949	-8.051	46.000
840.920	6.064	30.749	36.813	-9.187	46.000
961.200	6.810	24.266	31.076	-22.924	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
187.140	-5.607	38.405	32.798	-10.702	43.500
315.180	-4.108	40.163	36.055	-9.945	46.000
454.860	-4.096	41.585	37.488	-8.512	46.000
621.700	0.347	36.701	37.048	-8.952	46.000
774.960	2.023	31.372	33.395	-12.605	46.000
945.680	3.300	34.577	37.877	-8.123	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-40BW-30Mbps) (5710MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
163.860	-9.989	41.314	31.325	-12.175	43.500
249.220	-6.216	41.096	34.880	-11.120	46.000
392.780	0.810	36.708	37.518	-8.482	46.000
559.620	2.147	34.595	36.742	-9.258	46.000
738.100	3.332	35.504	38.836	-7.164	46.000
959.260	6.640	25.397	32.037	-13.963	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	38.648	33.247	-10.253	43.500
311.300	-4.071	41.811	37.740	-8.260	46.000
441.280	-6.836	42.916	36.080	-9.920	46.000
600.360	1.302	35.432	36.734	-9.266	46.000
771.080	2.766	29.548	32.315	-13.685	46.000
947.620	3.231	34.390	37.621	-8.379	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5210MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
191.020	-9.679	41.412	31.733	-11.767	43.500
338.460	-3.380	38.392	35.011	-10.989	46.000
460.680	4.030	34.521	38.551	-7.449	46.000
629.460	1.212	35.270	36.482	-9.518	46.000
776.900	5.167	30.431	35.598	-10.402	46.000
943.740	6.843	23.674	30.517	-15.483	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
189.080	-5.617	37.659	32.042	-11.458	43.500
350.100	-1.278	37.819	36.541	-9.459	46.000
505.300	0.056	36.723	36.779	-9.221	46.000
666.320	-0.951	37.573	36.622	-9.378	46.000
802.120	2.966	30.460	33.426	-12.574	46.000
965.080	3.832	26.388	30.220	-23.780	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5290MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
218.180	-10.226	41.829	31.603	-14.397	46.000
363.680	0.189	35.186	35.375	-10.625	46.000
487.840	1.400	34.410	35.809	-10.191	46.000
635.280	1.798	33.853	35.651	-10.349	46.000
776.900	5.167	33.686	38.853	-7.147	46.000
955.380	6.596	24.307	30.903	-15.097	46.000
<b>Vertical</b>					
<b>Peak Detector</b>					
185.200	-5.401	39.594	34.193	-9.307	43.500
330.700	-2.244	40.337	38.094	-7.906	46.000
458.740	-2.562	40.338	37.776	-8.224	46.000
625.580	0.299	36.200	36.500	-9.500	46.000
788.540	2.714	28.214	30.928	-15.072	46.000
953.440	3.015	30.387	33.402	-12.598	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) (5690MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBμV	dBμV/m	dB	dBμV/m
<b>Horizontal</b>					
<b>Peak Detector</b>					
183.260	-12.325	44.297	31.972	-11.528	43.500
334.580	-3.523	40.632	37.109	-8.891	46.000
462.620	3.589	35.788	39.377	-6.623	46.000
676.020	2.841	35.654	38.496	-7.504	46.000
833.160	6.616	25.450	32.066	-13.934	46.000
974.780	7.039	22.121	29.160	-24.840	54.000
<b>Vertical</b>					
<b>Peak Detector</b>					
175.500	-1.842	30.146	28.304	-15.196	43.500
332.640	-2.255	37.366	35.111	-10.889	46.000
503.360	-0.086	35.455	35.369	-10.631	46.000
676.020	0.451	37.744	38.196	-7.804	46.000
837.040	1.606	32.418	34.024	-11.976	46.000
970.900	2.967	28.205	31.172	-22.828	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

#### RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2014
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2014
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2014


- Note:
1. All instruments are calibrated every one year.
  2. The test instruments marked by "X" are used to measure the final test results.

## 6.2. Test Setup

### RF Conducted Measurement:

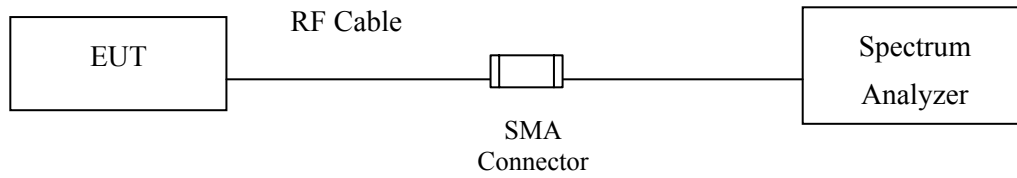

### RF Radiated Measurement:

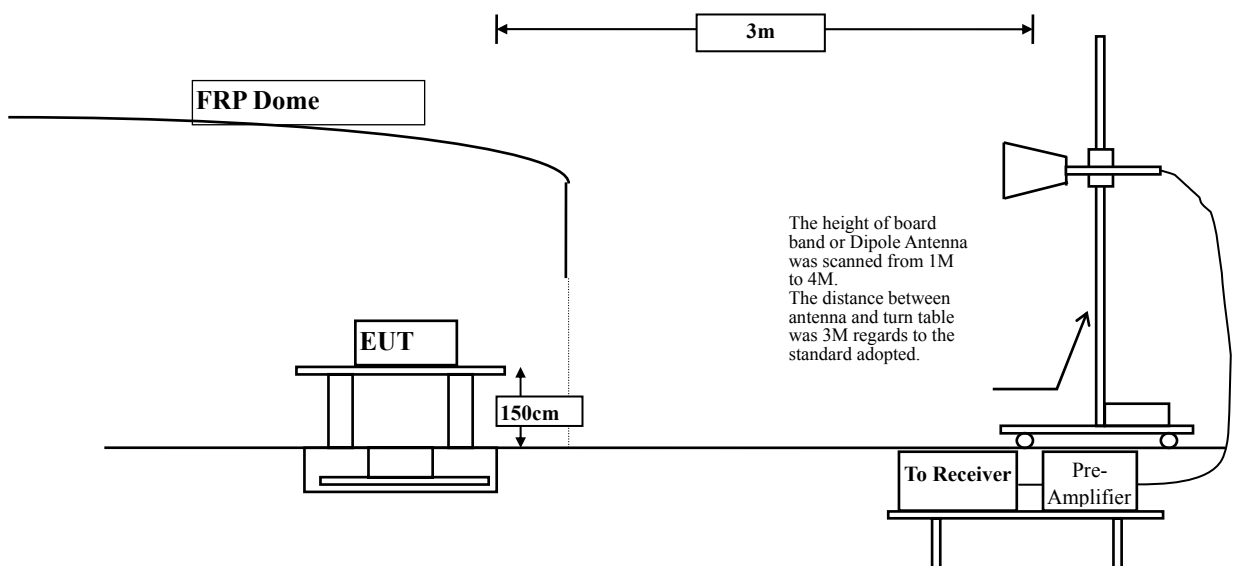



### 6.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBm) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 6.4. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10: 2009; tested to NII test procedure of FCC KDB-789033 section H.)5.) and section H.)6.) for compliance to FCC 47CFR Subpart E requirements.

## **6.5. Uncertainty**

$\pm 3.8$  dB below 1GHz

$\pm 3.9$  dB above 1GHz


## 6.6. Test Result of Band Edge

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps)-Channel 36


### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5147.800	2.804	68.564	71.368	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	67.832	70.628	74.00	54.00	Pass
36 (Peak)	5183.200	2.685	108.088	110.773	--	--	--
36 (Average)	5150.000	2.796	48.493	51.289	74.00	54.00	Pass
36 (Average)	5183.600	2.684	96.197	98.881	--	--	--

**Figure Channel 36: Horizontal (Peak)**

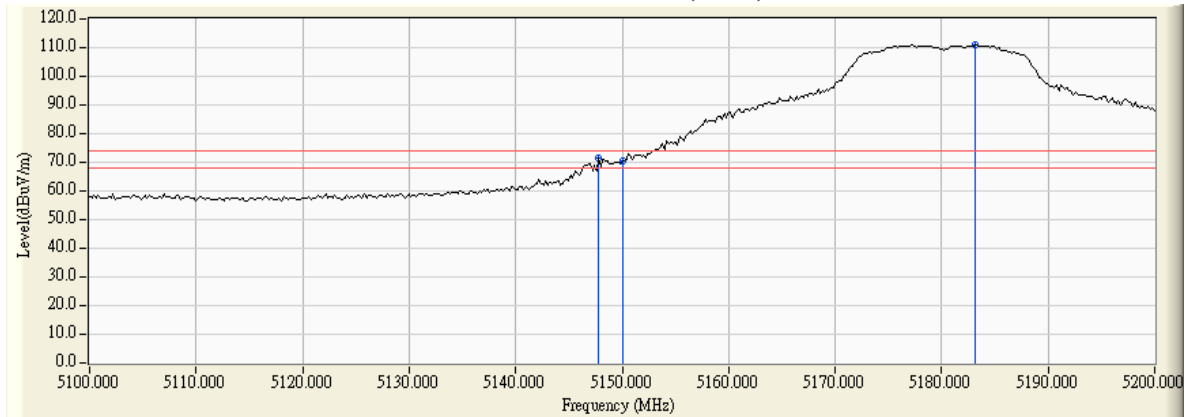

**Figure Channel 36: Horizontal (Average)**

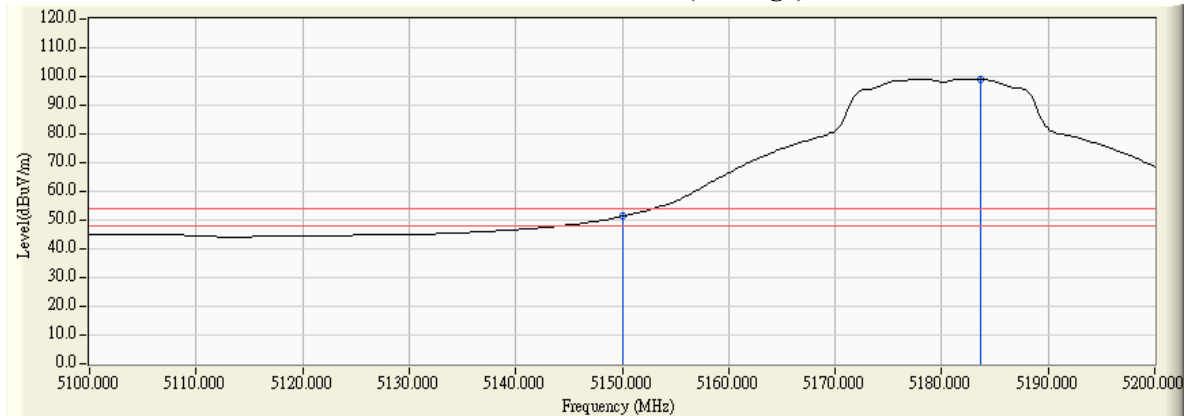


- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
4. “ \* ”, means this data is the worst emission level.  
5. Measurement Level = Reading Level + Correct Factor.  
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps)-Channel 36


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.200	3.323	67.446	70.769	74.00	54.00	Pass
36 (Peak)	5150.000	3.331	67.777	71.109	74.00	54.00	Pass
36 (Peak)	5178.200	3.464	106.976	110.440	--	--	--
36 (Average)	5150.000	3.331	48.865	52.197	74.00	54.00	Pass
36 (Average)	5178.600	3.466	95.643	99.109	--	--	--

**Figure Channel 36: Vertical (Peak)**

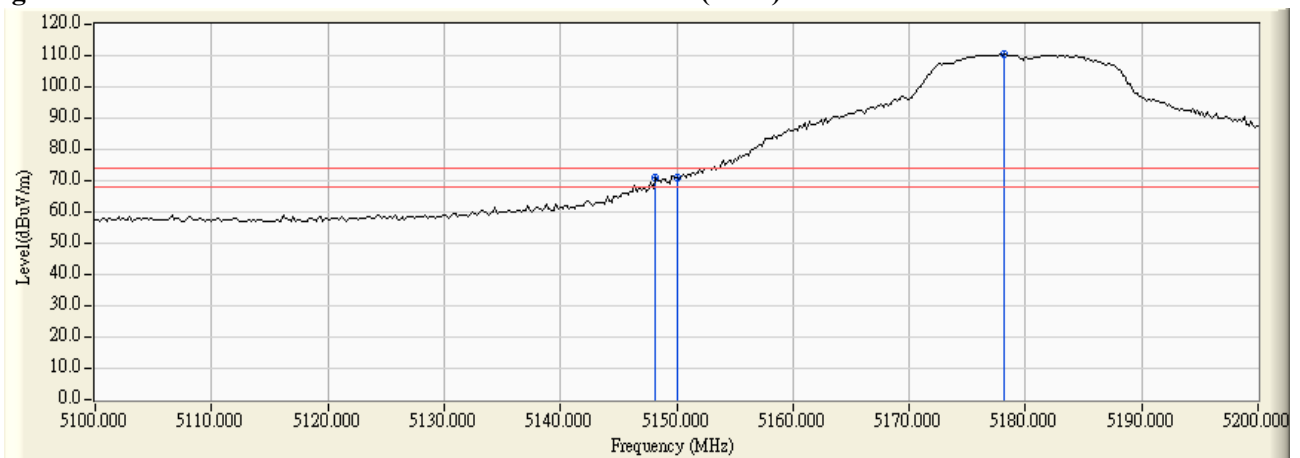

**Figure Channel 36: Vertical (Average)**

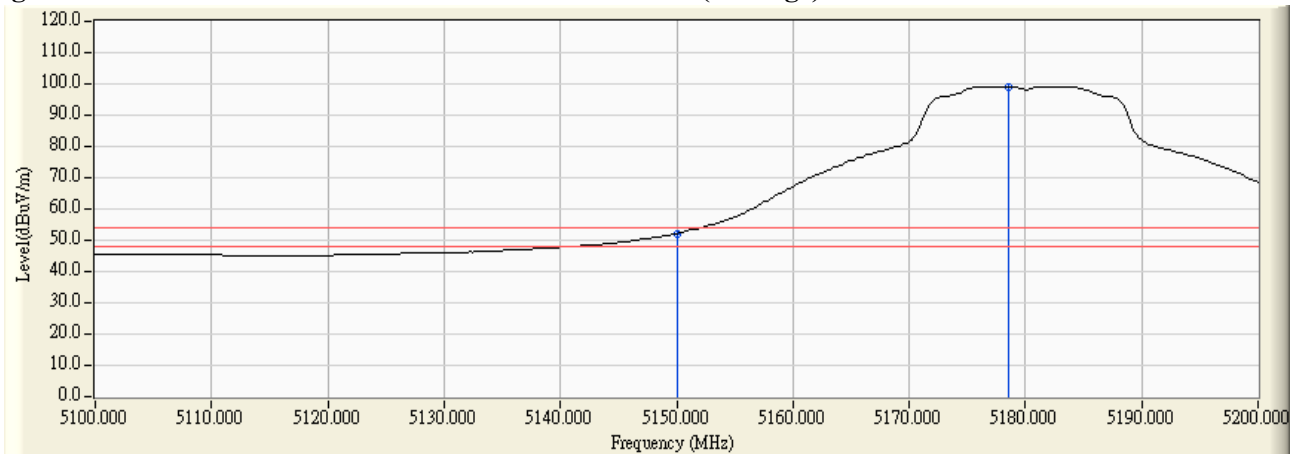

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) -Channel 64

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5318.000	3.646	106.173	109.819	--	--	--
64 (Peak)	5350.000	3.575	63.948	67.523	74.00	54.00	Pass
64 (Average)	5323.600	3.636	95.094	98.730	--	--	--
64 (Average)	5350.000	3.575	48.869	52.444	74.00	54.00	Pass


**Figure Channel 64:**

**Horizontal (Peak)**

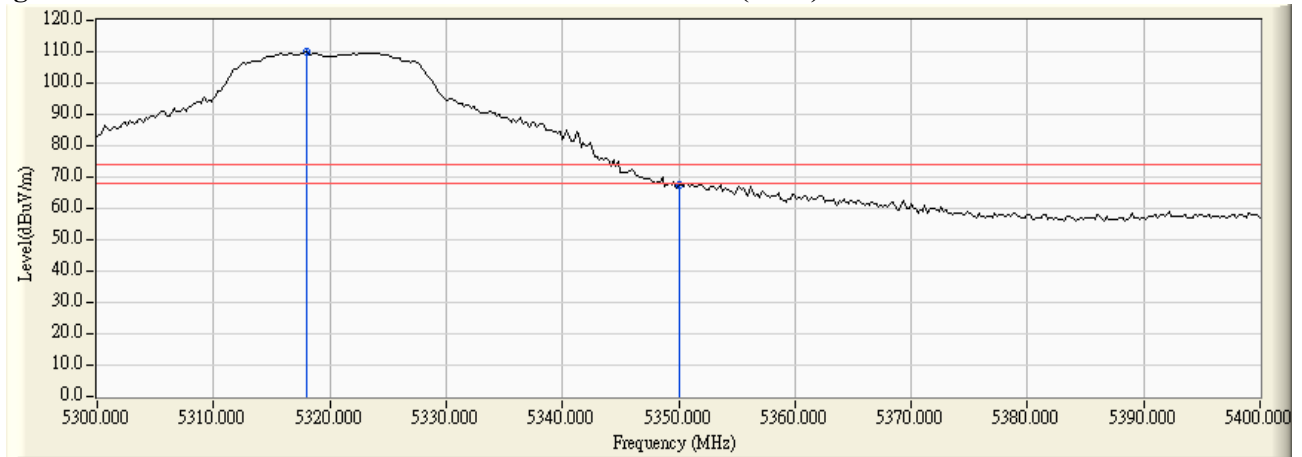

**Figure Channel 64:**

**Horizontal (Average)**

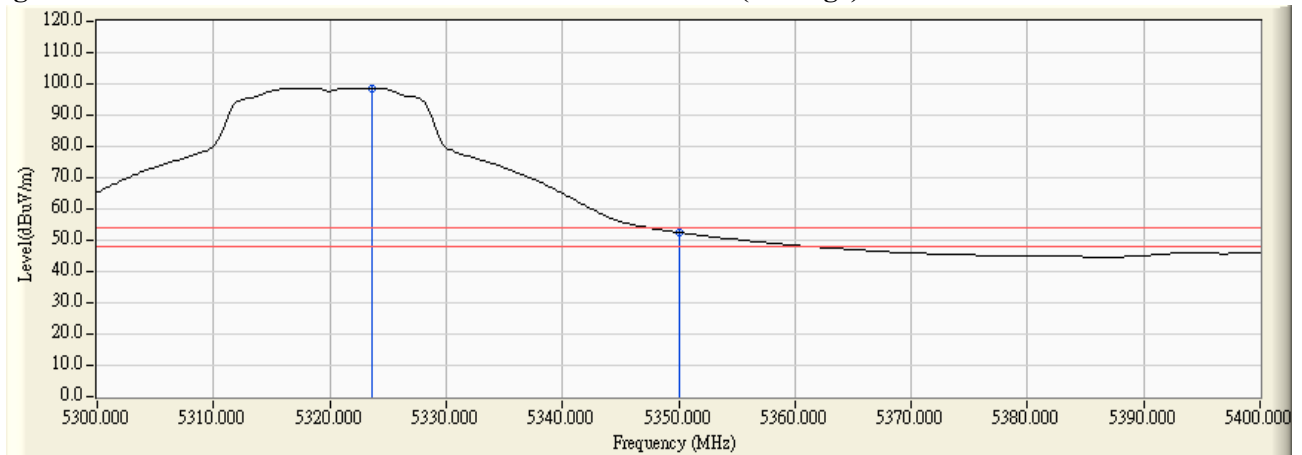

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " \* ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) -Channel 64


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5323.400	3.889	105.284	109.173	--	--	--
64 (Peak)	5350.000	3.900	62.588	66.488	74.00	54.00	Pass
64 (Peak)	5351.800	3.901	64.450	68.351	74.00	54.00	Pass
64 (Average)	5323.200	3.890	94.458	98.347	--	--	--
64 (Average)	5350.000	3.900	48.318	52.218	74.00	54.00	Pass

**Figure Channel 64: Vertical (Peak)**

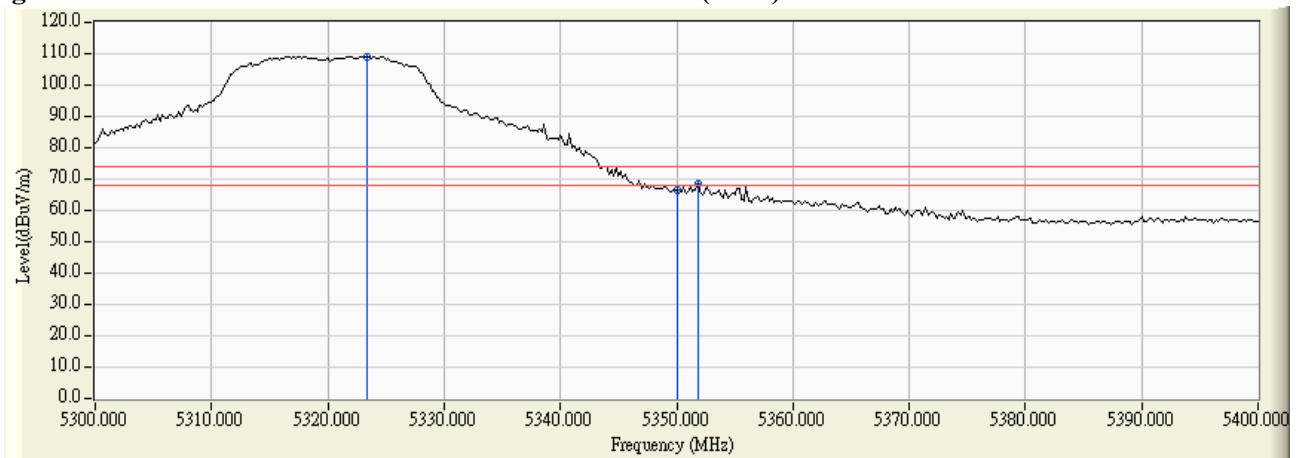

**Figure Channel 64: Vertical (Average)**

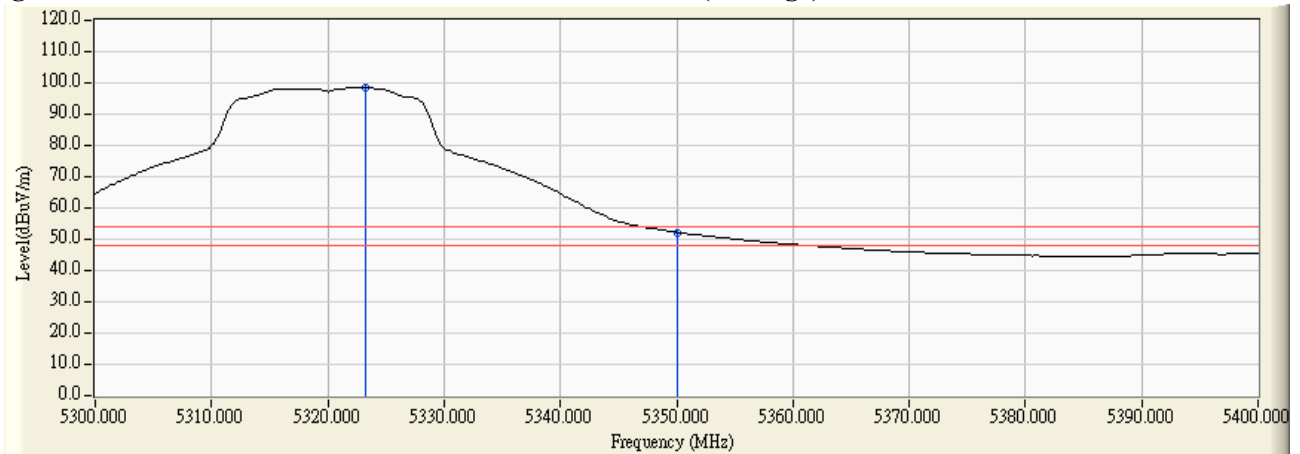

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) -Channel 100


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5454.800	3.675	63.081	66.755	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	62.536	66.311	74.00	54.00	Pass
100 (Peak)	5503.600	4.527	107.322	111.849	--	--	--
100 (Average)	5460.000	3.775	48.822	52.597	74.00	54.00	Pass
100 (Average)	5496.400	4.430	96.328	100.758	--	--	--

**Figure Channel 100: Horizontal (Peak)**

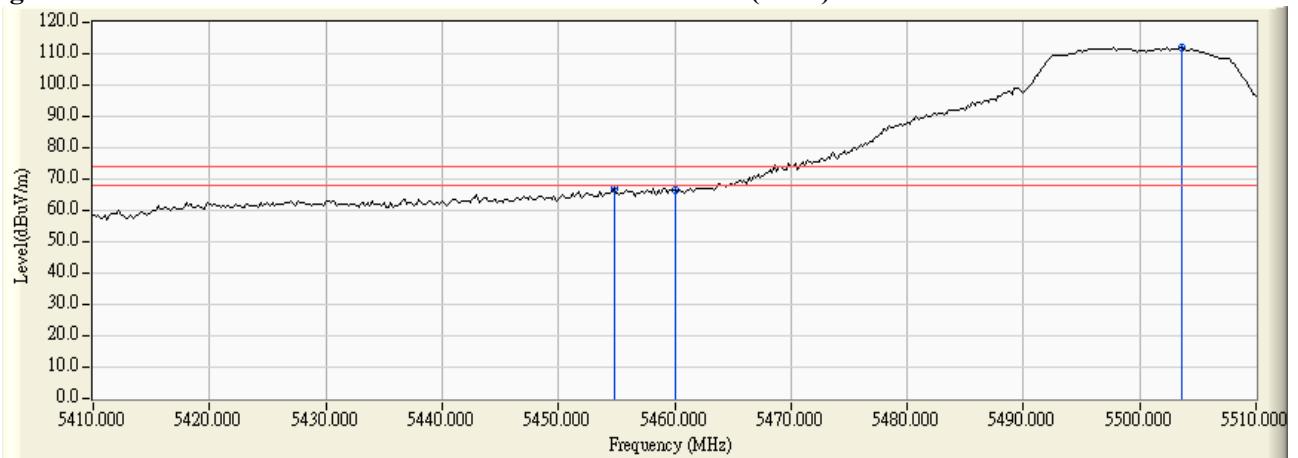

**Figure Channel 100: Horizontal (Average)**

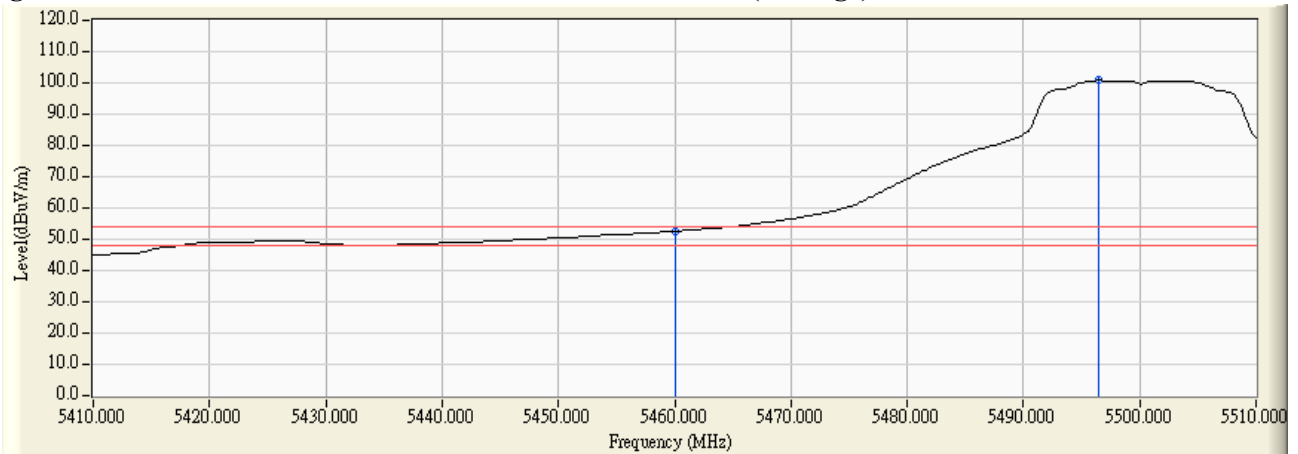

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " \* ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) -Channel 100


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5456.400	3.883	62.629	66.512	74.00	54.00	Pass
100 (Peak)	5460.000	3.934	60.921	64.856	74.00	54.00	Pass
100 (Peak)	5496.000	4.419	106.419	110.838	--	--	--
100 (Average)	5460.000	3.934	48.368	52.303	74.00	54.00	Pass
100 (Average)	5497.400	4.433	95.470	99.903	--	--	--

**Figure Channel 100: Vertical (Peak)**

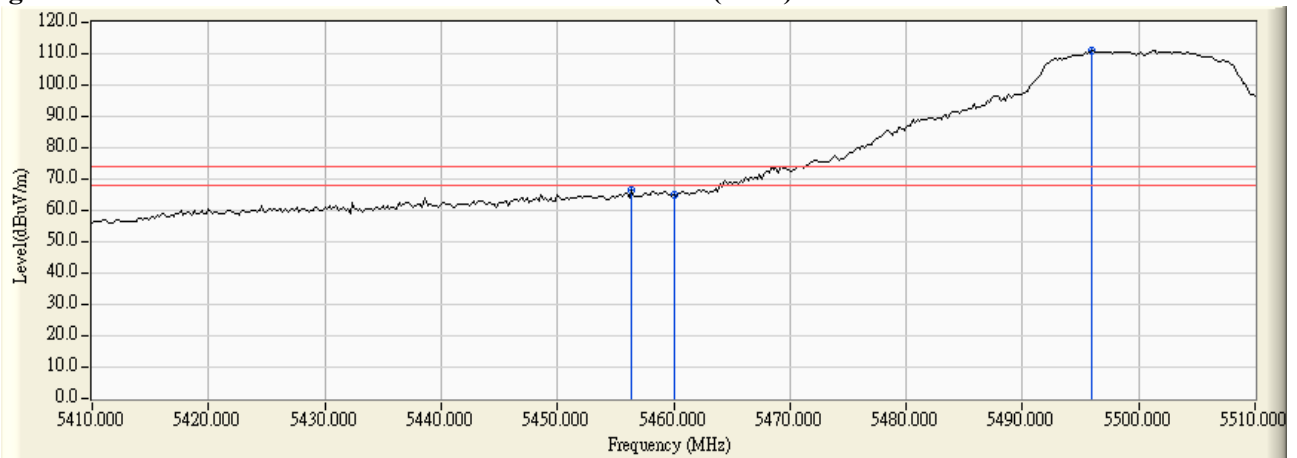

**Figure Channel 100: Vertical (Average)**

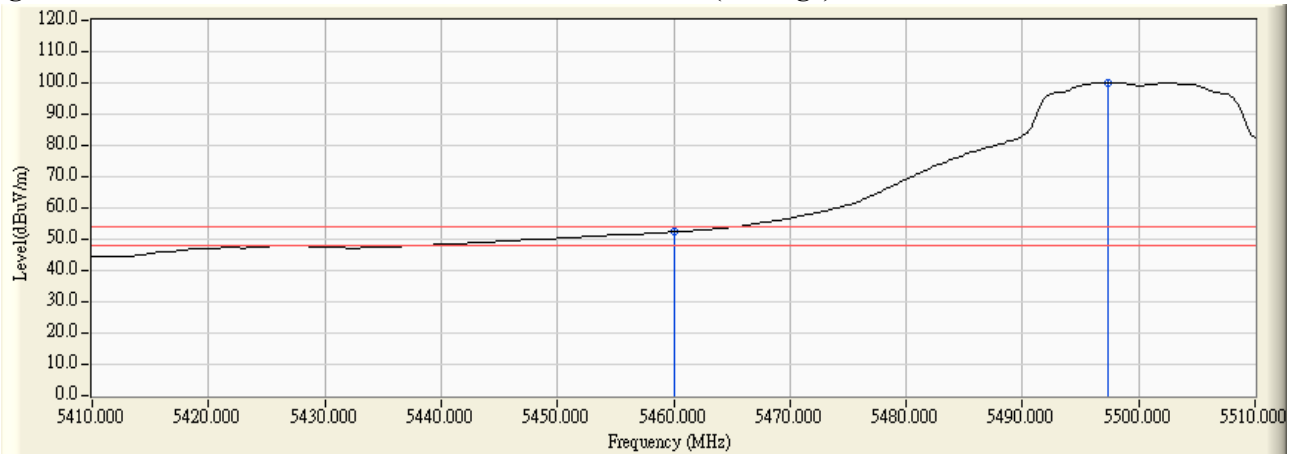

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) -Channel 100

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5470.000	4.488	59.669	64.157	-4.063	68.220	Pass
Horizontal	5508.000	4.824	104.067	108.892	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5465.600	6.080	59.259	65.339	-2.881	68.220	Pass
Vertical	5470.000	6.112	58.275	64.386	-3.834	68.220	Pass
Vertical	5508.400	6.268	103.409	109.677	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11a-6Mbps) -Channel 140

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5702.200	4.633	100.486	105.119	--	--	Pass
Horizontal	5725.000	4.654	62.951	67.605	-0.615	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5703.400	5.987	98.324	104.311	--	--	Pass
Vertical	5725.000	5.992	61.951	67.944	-0.276	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 36


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.800	2.801	65.715	68.515	74.00	54.00	Pass
36 (Peak)	5150.000	2.796	64.269	67.065	74.00	54.00	Pass
36 (Peak)	5175.800	2.710	108.184	110.894	--	--	--
36 (Average)	5150.000	2.796	49.795	52.591	74.00	54.00	Pass
36 (Average)	5178.600	2.700	97.202	99.902	--	--	--

**Figure Channel 36: Horizontal (Peak)**

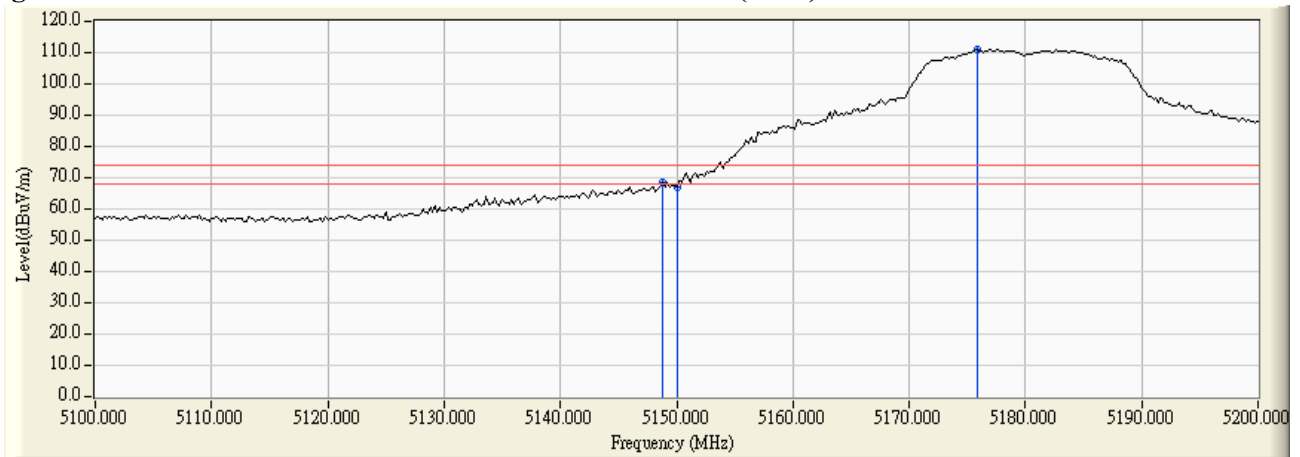

**Figure Channel 36: Horizontal (Average)**

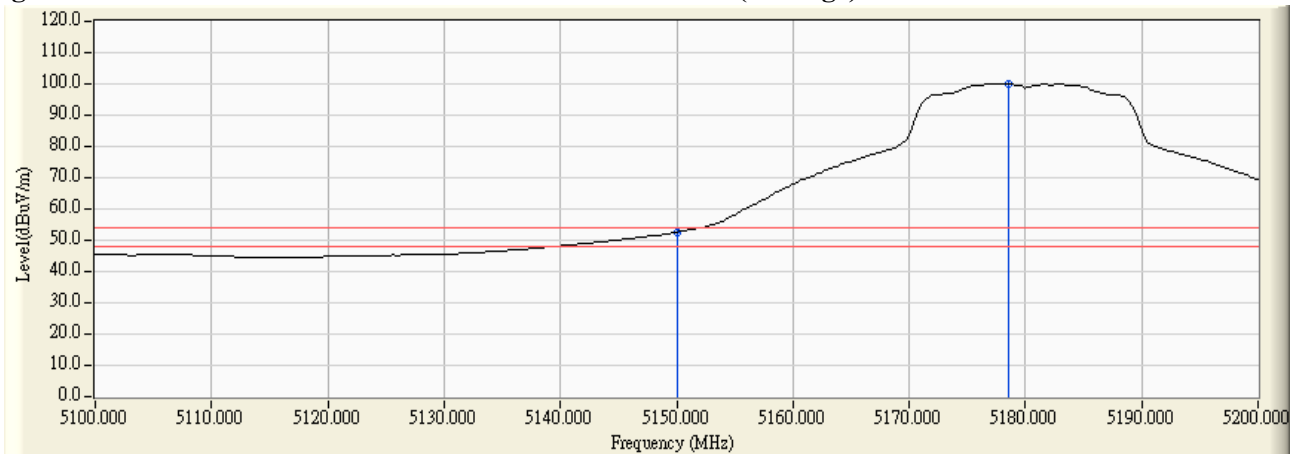

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 36

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5150.000	3.331	64.631	67.963	74.00	54.00	Pass
36 (Peak)	5177.400	3.461	106.194	109.654	--	--	--
36 (Average)	5150.000	3.331	48.472	51.804	74.00	54.00	Pass
36 (Average)	5177.200	3.460	95.217	98.677	--	--	--


**Figure Channel 36:**

**Vertical (Peak)**

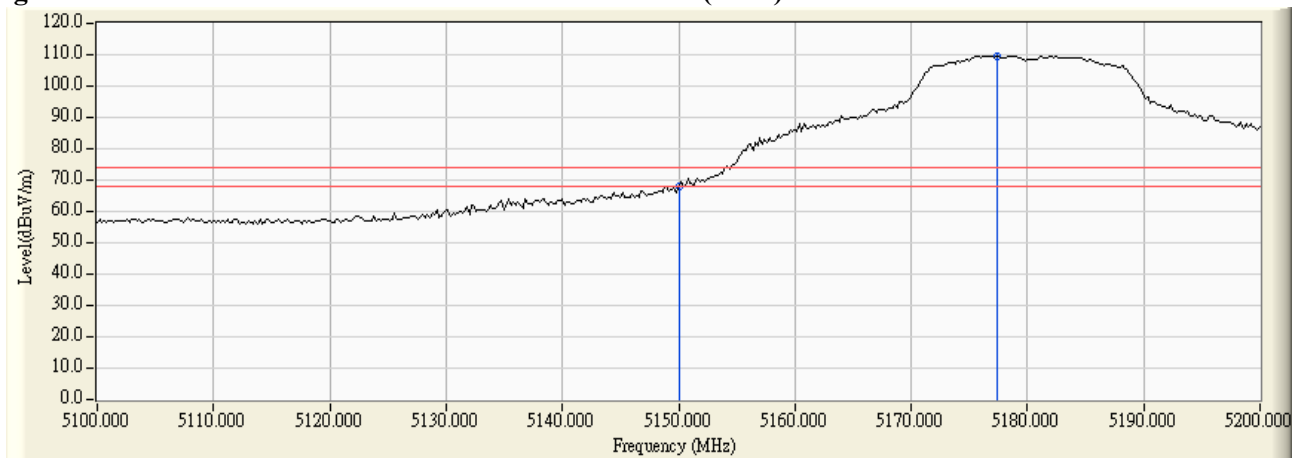

**Figure Channel 36:**

**Vertical (Average)**

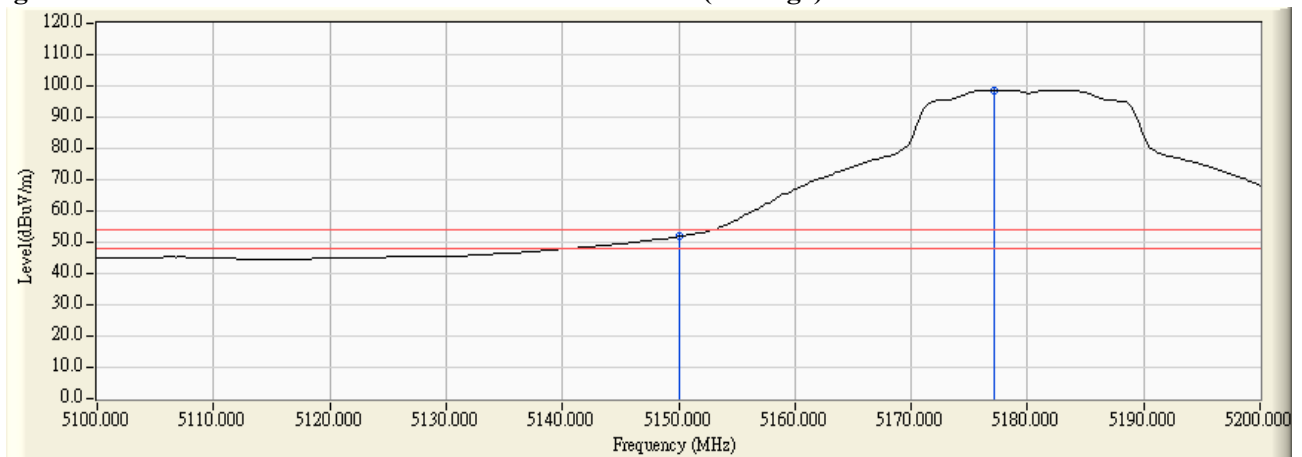

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 64


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5318.400	3.646	105.986	109.632	--	--	--
64 (Peak)	5350.000	3.575	63.750	67.325	74.00	54.00	Pass
64 (Peak)	5358.600	3.517	65.416	68.934	74.00	54.00	Pass
64 (Average)	5322.600	3.637	95.113	98.751	--	--	--
64 (Average)	5350.000	3.575	48.777	52.352	74.00	54.00	Pass

**Figure Channel 64: Horizontal (Peak)**

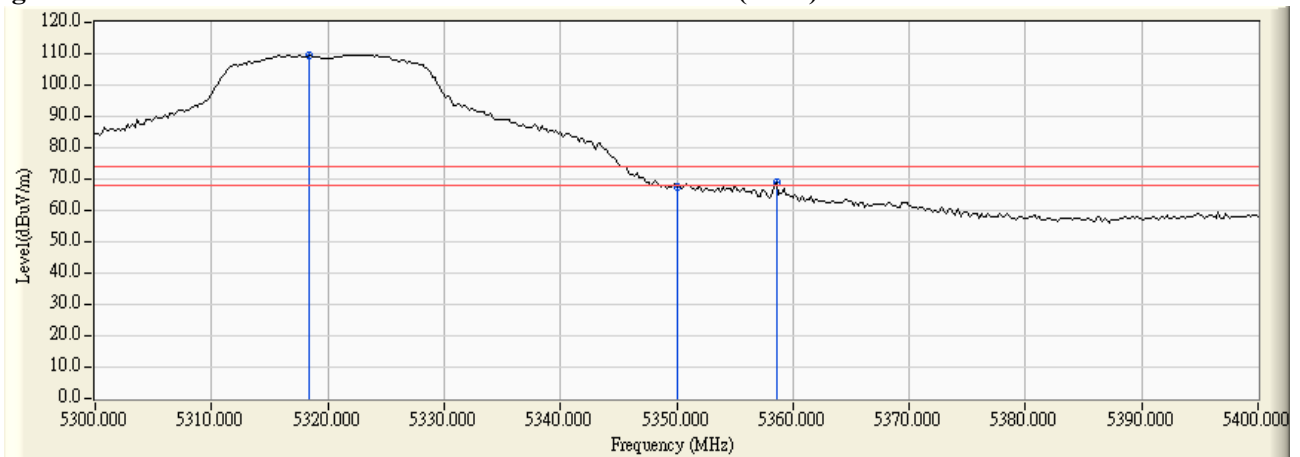

**Figure Channel 64: Horizontal (Average)**

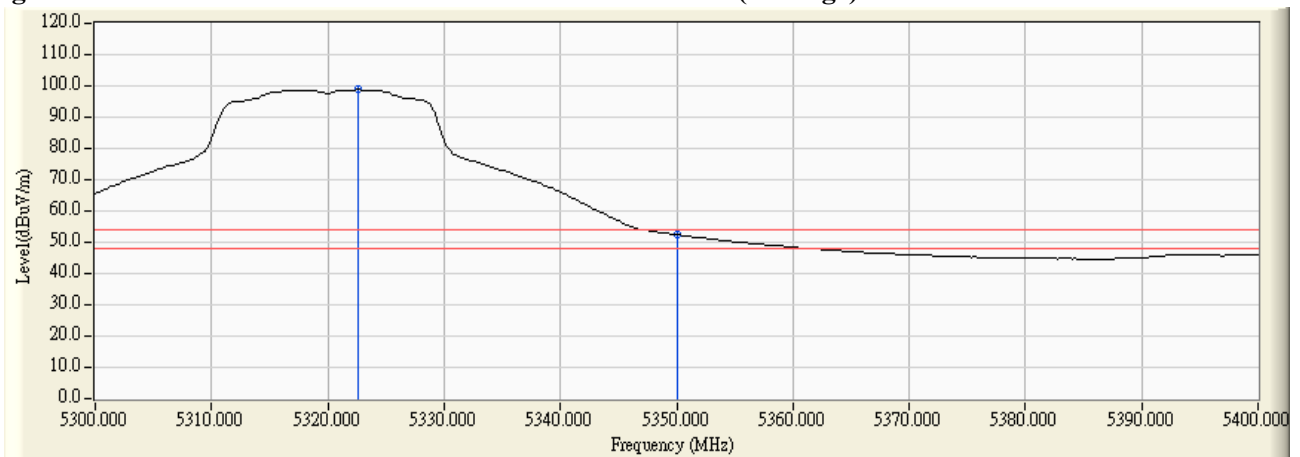

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 64


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5322.200	3.888	105.112	109.001	--	--	--
64 (Peak)	5350.000	3.900	62.744	66.644	74.00	54.00	Pass
64 (Peak)	5358.200	3.868	64.716	68.584	74.00	54.00	Pass
64 (Average)	5323.000	3.889	93.948	97.837	--	--	--
64 (Average)	5350.000	3.900	48.138	52.038	74.00	54.00	Pass

**Figure Channel 64: Vertical (Peak)**

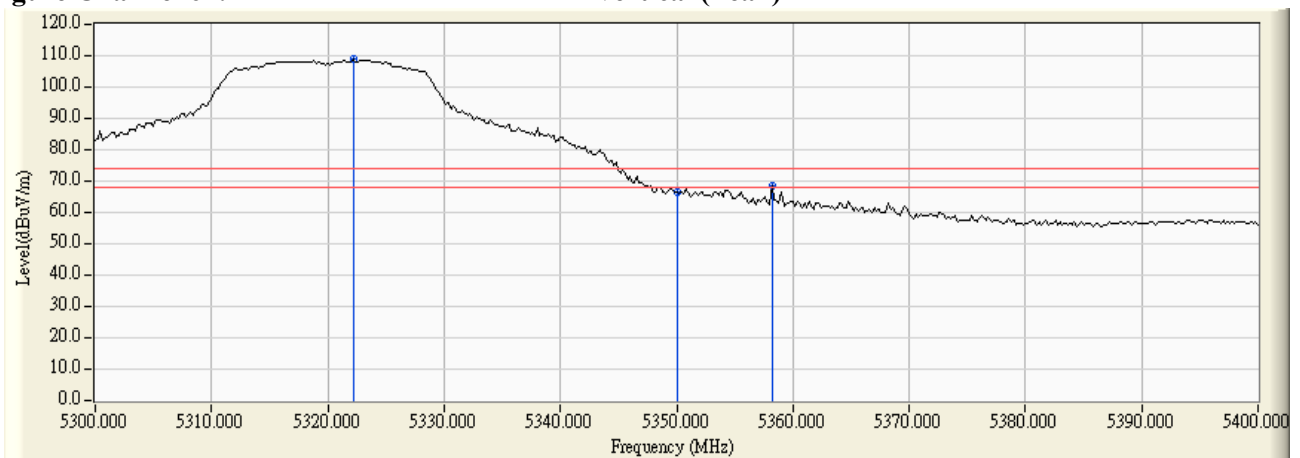

**Figure Channel 64: Vertical (Average)**

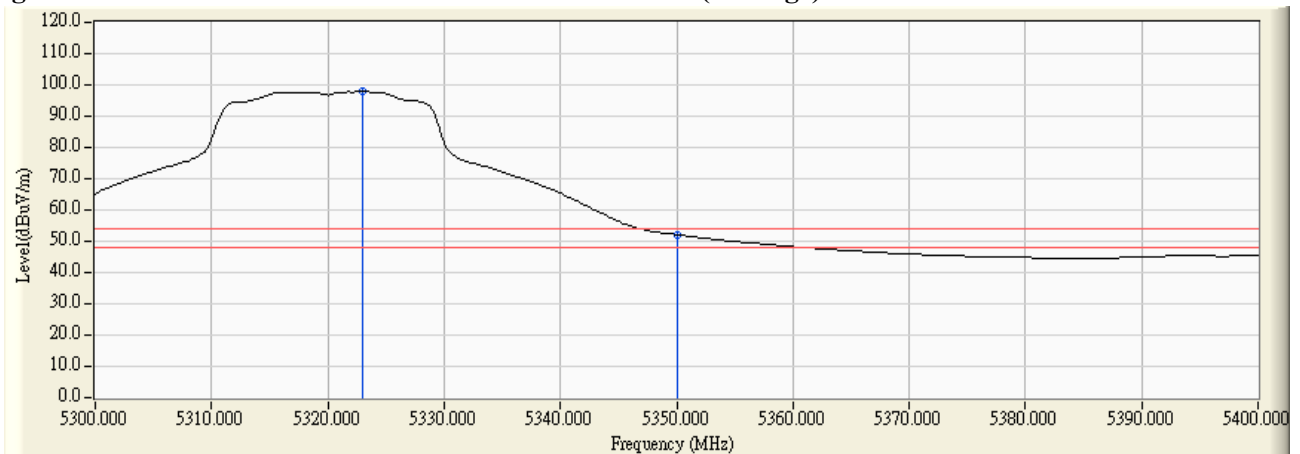

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 100


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5459.200	3.760	65.083	68.843	74.00	54.00	Pass
100 (Peak)	5460.000	3.775	62.991	66.766	74.00	54.00	Pass
100 (Peak)	5495.800	4.422	107.585	112.007	--	--	--
100 (Average)	5460.000	3.775	48.682	52.457	74.00	54.00	Pass
100 (Average)	5496.400	4.430	96.222	100.652	--	--	--

**Figure Channel 100: Horizontal (Peak)**

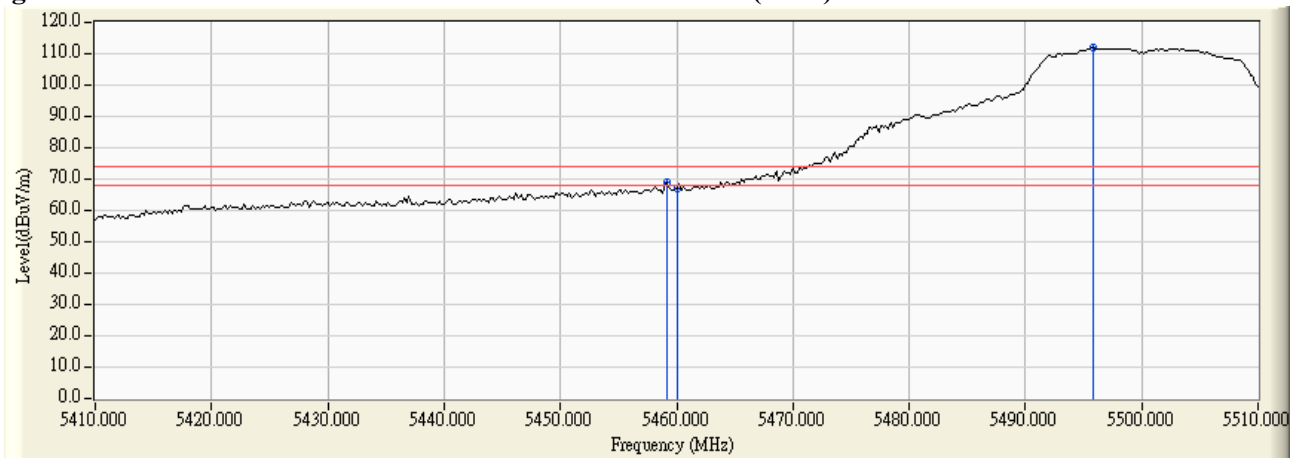

**Figure Channel 100: Horizontal (Average)**

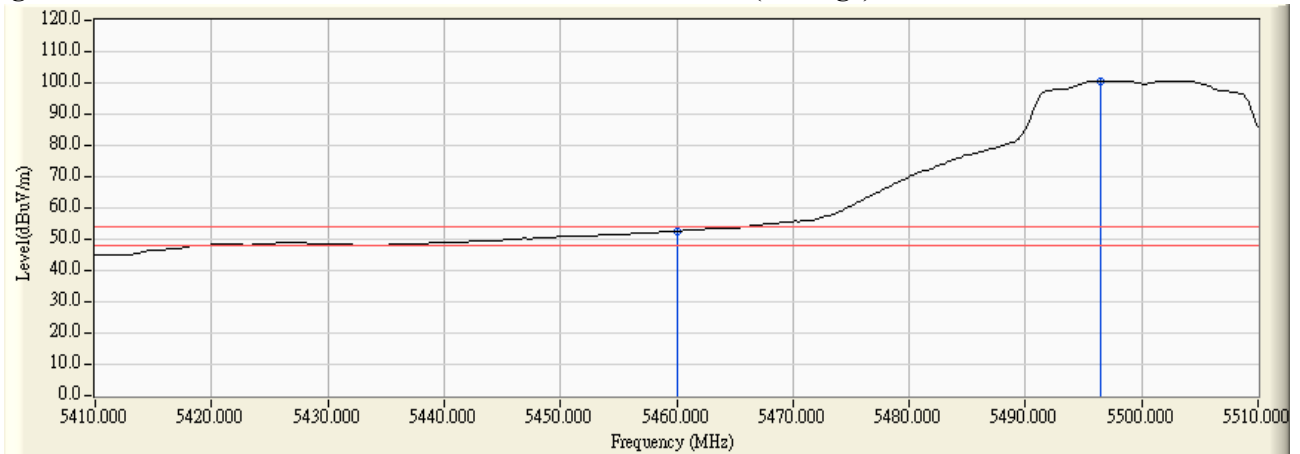

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 100


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5460.000	3.934	60.874	64.809	74.00	54.00	Pass
100 (Peak)	5498.400	4.443	105.814	110.257	--	--	--
100 (Average)	5460.000	3.934	46.629	50.564	74.00	54.00	Pass
100 (Average)	5497.600	4.435	94.467	98.902	--	--	--

**Figure Channel 100: Vertical (Peak)**

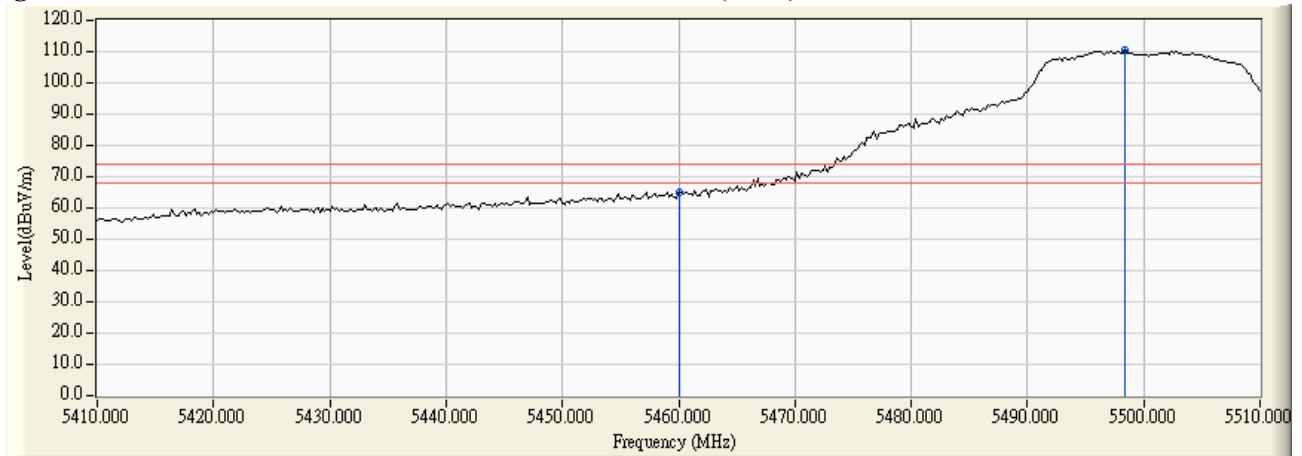

**Figure Channel 100: Vertical (Average)**

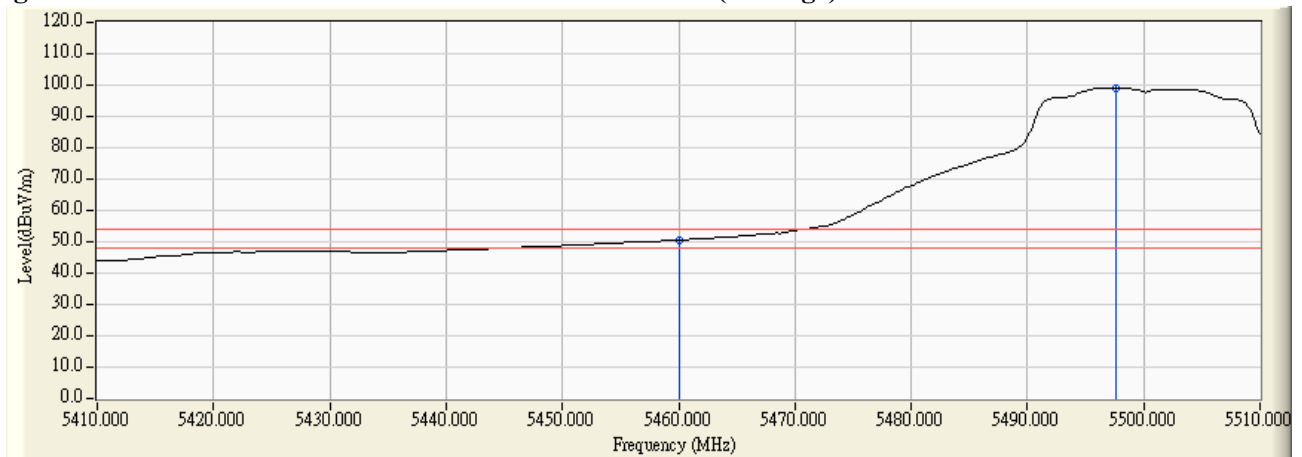

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 100

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5470.000	4.488	59.890	64.378	-3.842	68.220	Pass
Horizontal	5497.400	4.797	101.339	106.135	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5468.800	6.102	60.127	66.230	-1.990	68.220	Pass
Vertical	5470.000	6.112	58.070	64.181	-4.039	68.220	Pass
Vertical	5505.800	6.284	102.934	109.219	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11n-20BW 7.2Mbps) -Channel 140

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5702.400	4.634	97.999	102.632	--	--	Pass
Horizontal	5725.000	4.654	60.084	64.738	-3.482	68.220	Pass
Horizontal	5726.800	4.655	61.190	65.845	-2.375	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5702.600	5.986	96.030	102.016	--	--	Pass
Vertical	5725.000	5.992	59.902	65.895	-2.325	68.220	Pass
Vertical	5726.400	5.992	60.796	66.788	-1.432	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 38


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.200	2.799	64.466	67.265	74.00	54.00	Pass
38 (Peak)	5150.000	2.796	63.374	66.170	74.00	54.00	Pass
38 (Peak)	5182.600	2.687	103.456	106.143	--	--	--
38 (Average)	5150.000	2.796	48.472	51.268	74.00	54.00	Pass
38 (Average)	5195.200	2.645	91.316	93.962	--	--	--

**Figure Channel 38: Horizontal (Peak)**

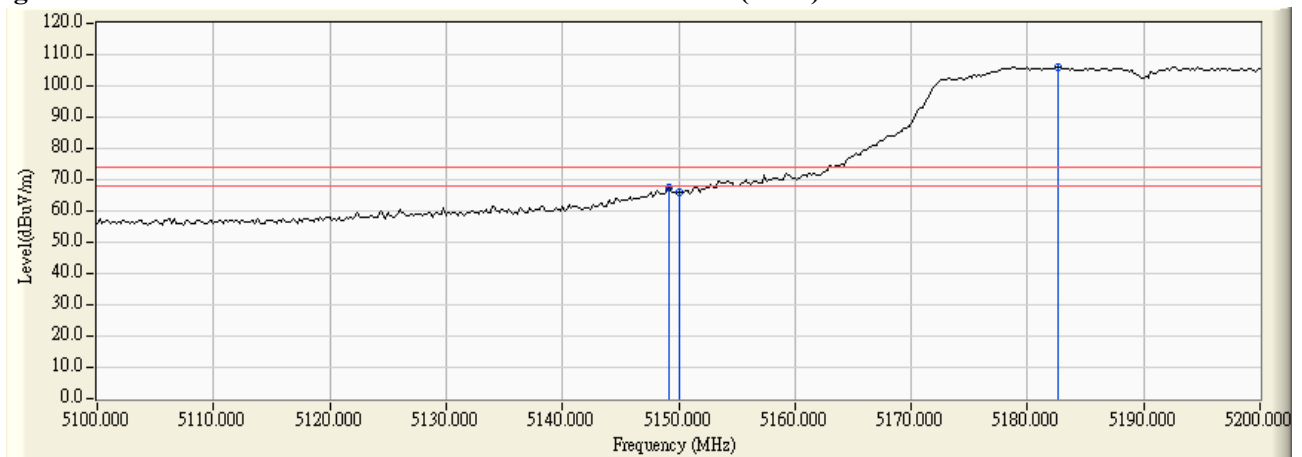

**Figure Channel 38: Horizontal (Average)**

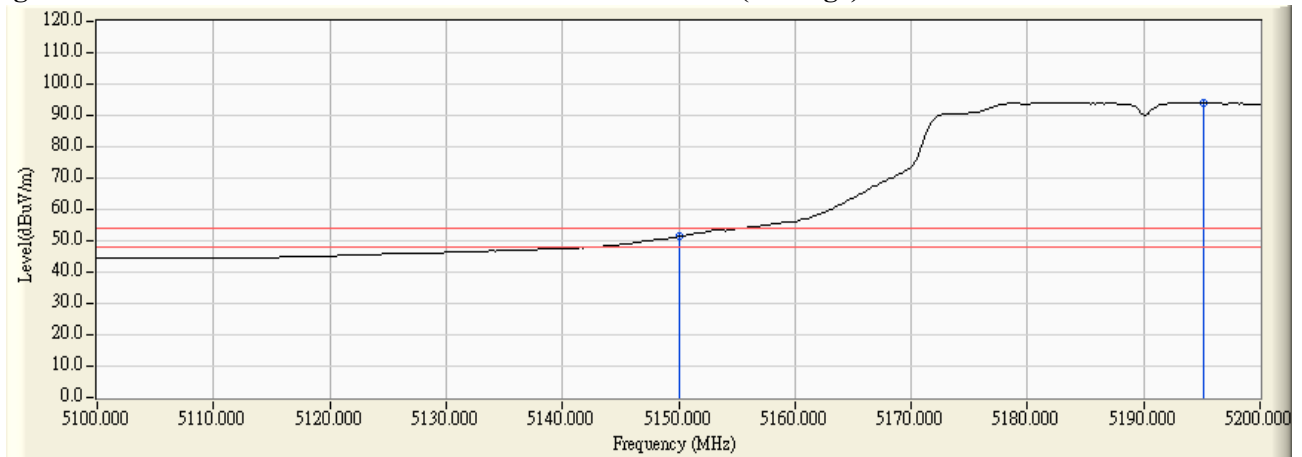

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 38

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5150.000	3.331	63.723	67.055	74.00	54.00	Pass
38 (Peak)	5193.800	3.539	102.139	105.678	--	--	--
38 (Average)	5150.000	3.331	47.610	50.942	74.00	54.00	Pass
38 (Average)	5198.600	3.562	90.085	93.648	--	--	--


**Figure Channel 38:**

**Vertical (Peak)**

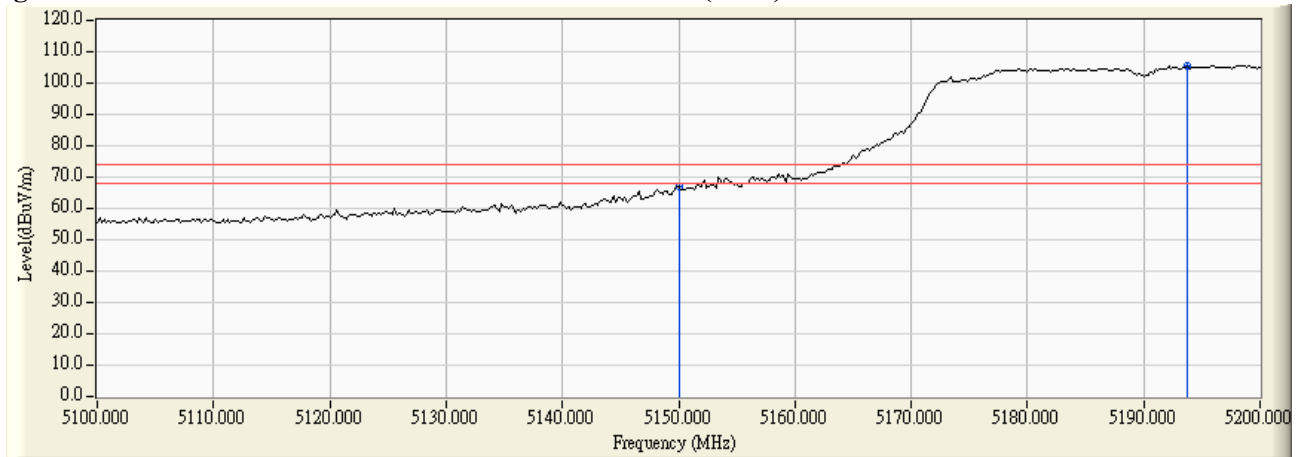

**Figure Channel 38:**

**Vertical (Average)**

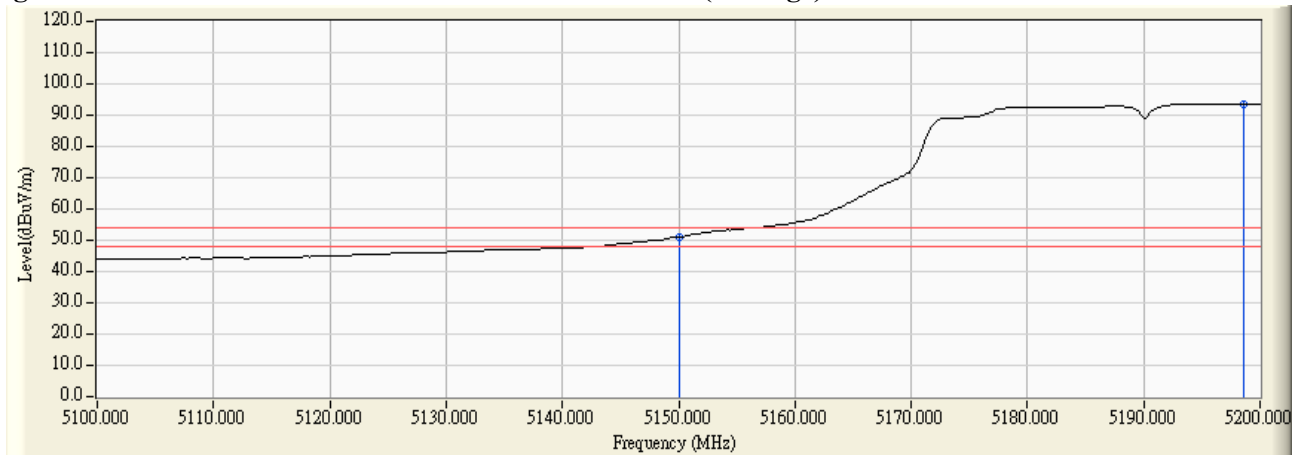

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 62


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5313.800	3.655	101.268	104.922	--	--	--
62 (Peak)	5350.000	3.575	64.991	68.566	74.00	54.00	Pass
62 (Average)	5321.400	3.639	89.372	93.012	--	--	--
62 (Average)	5350.000	3.575	48.903	52.478	74.00	54.00	Pass

**Figure Channel 62: Horizontal (Peak)**

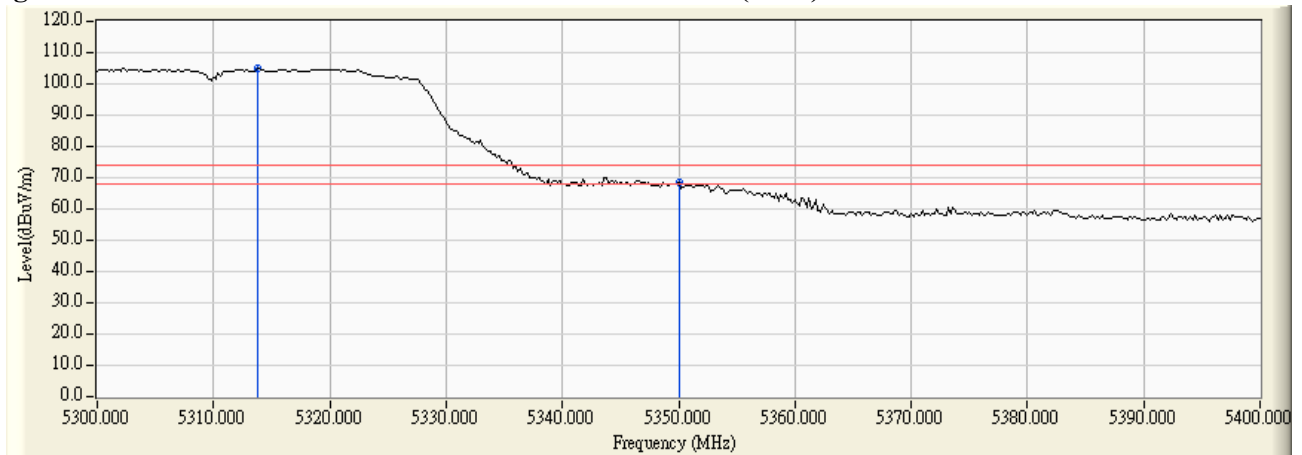

**Figure Channel 62: Horizontal (Average)**

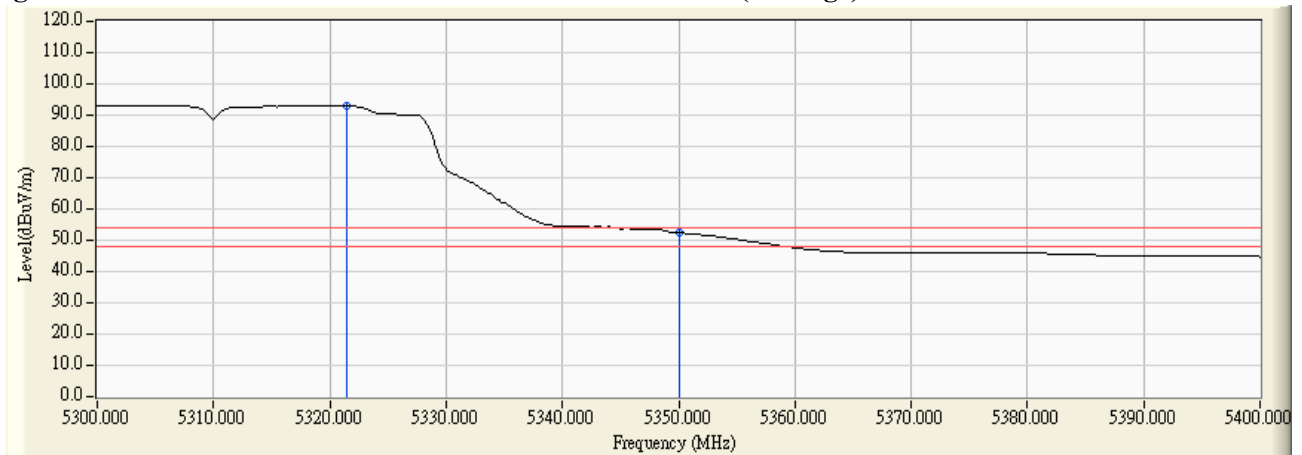

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 62


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5300.000	3.869	99.945	103.814	--	--	--
62 (Peak)	5350.000	3.900	63.318	67.218	74.00	54.00	Pass
62 (Average)	5301.000	3.871	88.133	92.004	--	--	--
62 (Average)	5350.000	3.900	47.420	51.320	74.00	54.00	Pass

**Figure Channel 62: Vertical (Peak)**

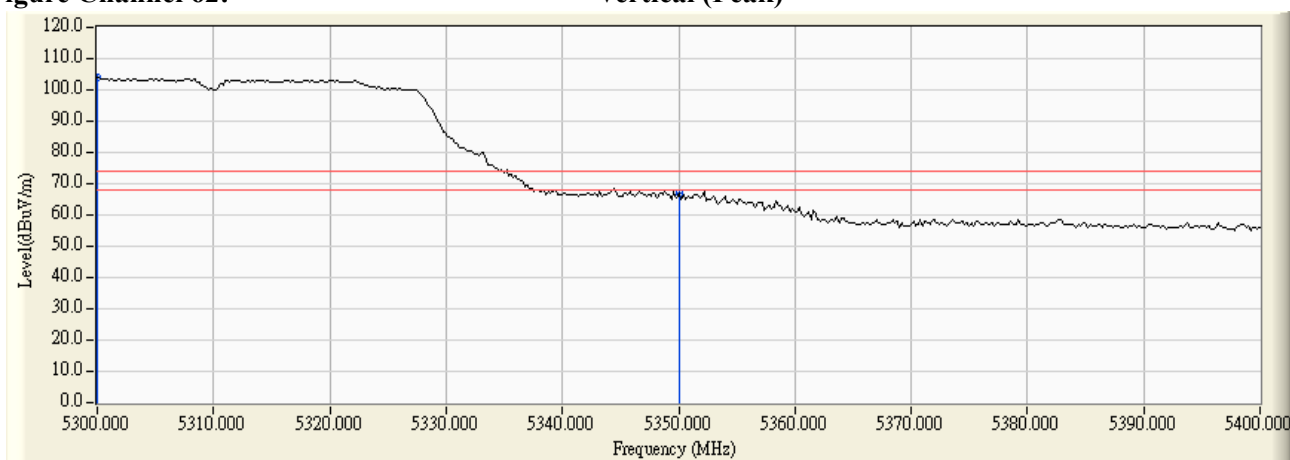

**Figure Channel 62: Vertical (Average)**

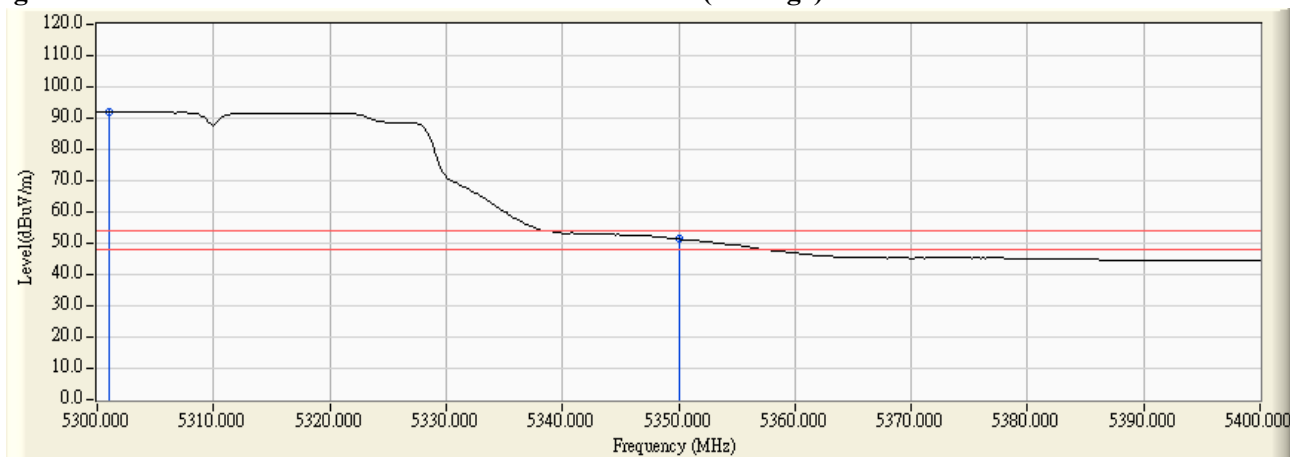

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 102


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5460.000	3.775	64.790	68.565	74.00	54.00	Pass
102 (Peak)	5502.600	4.513	102.654	107.168	--	--	--
102 (Average)	5460.000	3.775	48.627	52.402	74.00	54.00	Pass
102 (Average)	5504.000	4.533	90.475	95.008	--	--	--

**Figure Channel 102: Horizontal (Peak)**

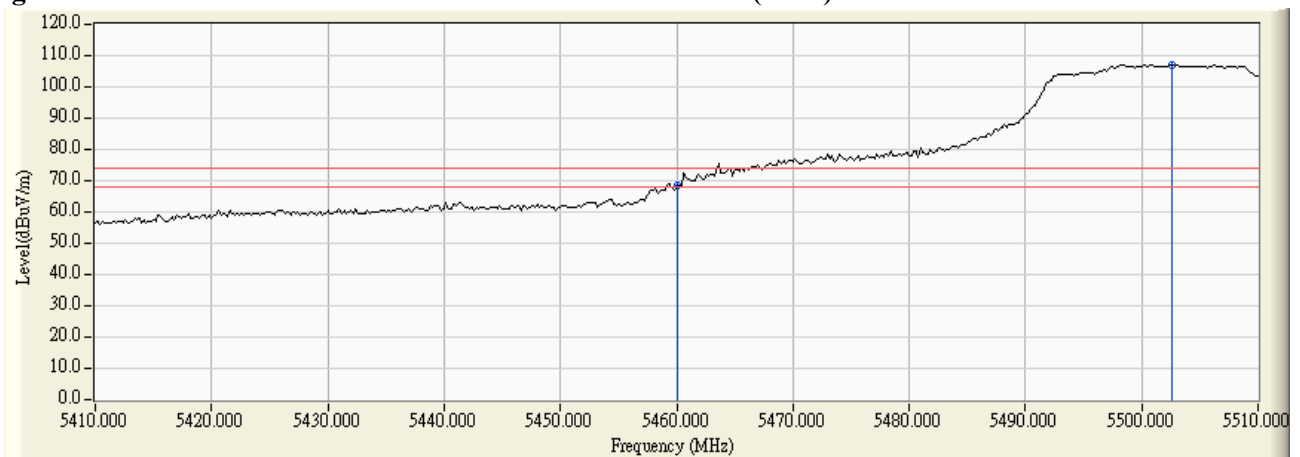

**Figure Channel 102: Horizontal (Average)**

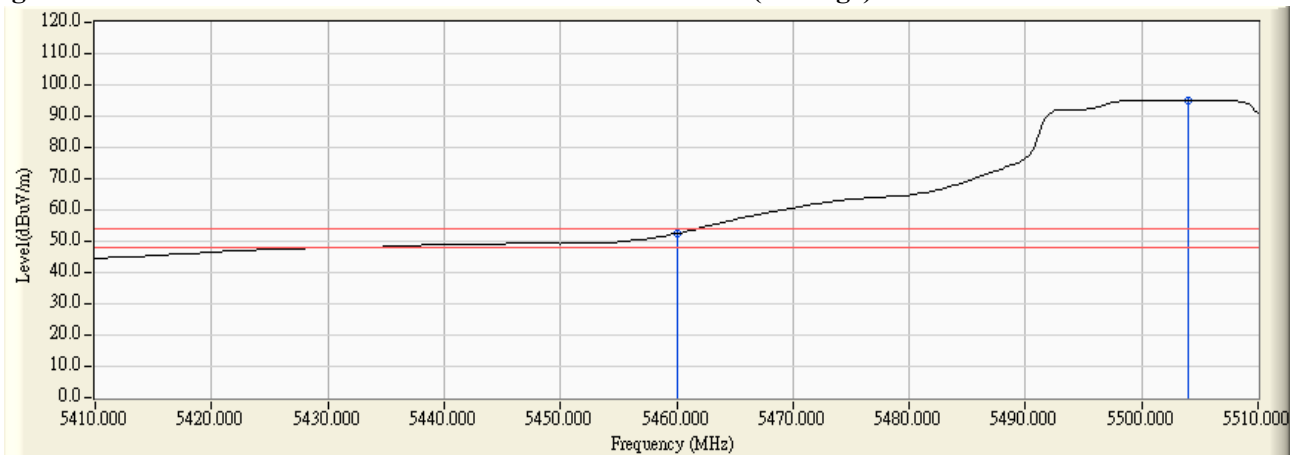

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 102


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5460.000	3.934	62.821	66.756	74.00	54.00	Pass
102 (Peak)	5500.000	4.460	101.075	105.535	--	--	--
102 (Average)	5460.000	3.934	47.527	51.462	74.00	54.00	Pass
102 (Average)	5499.000	4.450	89.103	93.552	--	--	--

**Figure Channel 102: Vertical (Peak)**

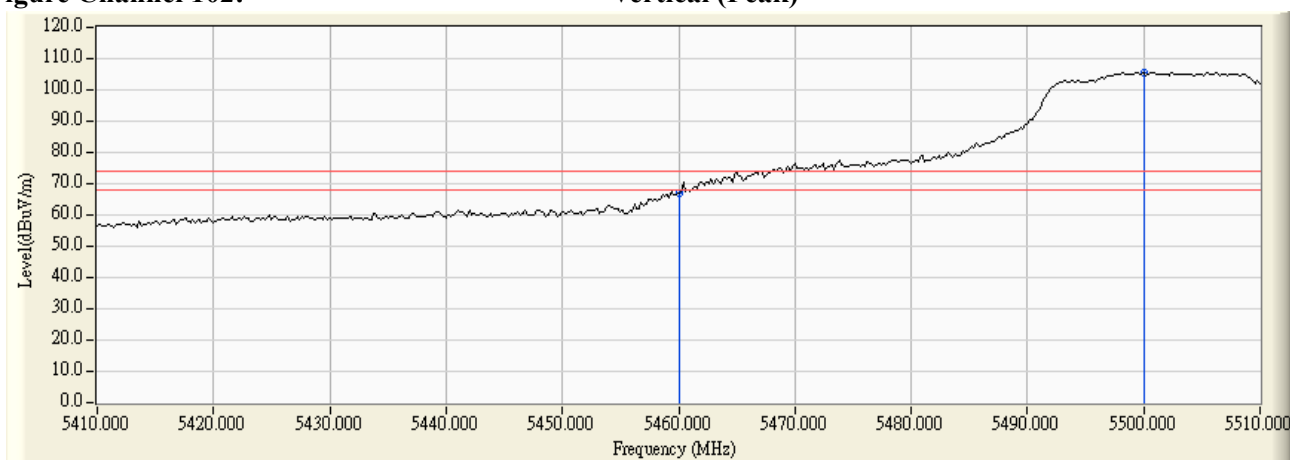

**Figure Channel 102: Vertical (Average)**

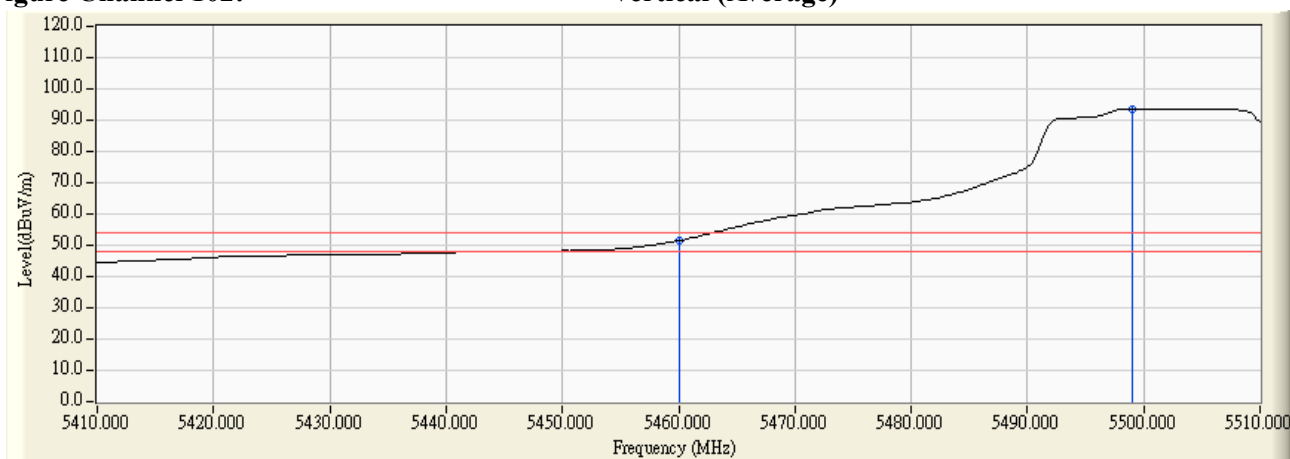

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.



Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 102

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5468.000	4.461	59.413	63.874	-4.346	68.220	Pass
Horizontal	5470.000	4.488	58.939	63.427	-4.793	68.220	Pass
Horizontal	5499.200	4.810	96.360	101.169	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5469.600	6.108	62.119	68.227	0.007	68.220	Pass
Vertical	5470.000	6.112	60.451	66.562	-1.658	68.220	Pass
Vertical	5509.200	6.264	98.082	104.345	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW 15Mbps) -Channel 134

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5678.600	4.531	98.992	103.524	--	--	Pass
Horizontal	5725.000	4.654	60.386	65.040	-3.180	68.220	Pass
Horizontal	5730.000	4.655	61.839	66.494	-1.726	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5678.200	5.932	97.132	103.063	--	--	Pass
Vertical	5725.000	5.992	58.951	64.944	-3.276	68.220	Pass
Vertical	5729.800	5.992	60.505	66.497	-1.723	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-20BW-7.2Mbps) -Channel 44

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	53.231	58.195	-20.025	78.220	Pass
Horizontal	5855.000	4.993	55.273	60.266	-17.954	78.220	Pass
Horizontal	5860.000	5.023	52.854	57.877	-10.343	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	49.780	55.817	-22.403	78.220	Pass
Vertical	5851.800	6.038	51.559	57.598	-20.622	78.220	Pass
Vertical	5860.000	6.047	49.706	55.753	-12.467	68.220	Pass
Vertical	5861.400	6.049	50.742	56.791	-11.429	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-40BW-15Mbps) -Channel 42

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	61.838	66.802	-11.418	78.220	Pass
Horizontal	5851.800	4.974	62.689	67.663	-10.557	78.220	Pass
Horizontal	5860.000	5.023	59.532	64.555	-3.665	68.220	Pass
Horizontal	5862.000	5.034	61.486	66.520	-1.700	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	53.150	59.187	-19.033	78.220	Pass
Vertical	5853.000	6.040	55.540	61.580	-16.640	78.220	Pass
Vertical	5860.000	6.047	52.963	59.010	-9.210	68.220	Pass
Vertical	5865.200	6.052	52.989	59.042	-9.178	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 42


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5150.000	2.796	65.634	68.430	74.00	54.00	Pass
42 (Peak)	5190.200	2.662	100.124	102.786	--	--	--
42 (Average)	5150.000	2.796	48.612	51.408	74.00	54.00	Pass
42 (Average)	5197.600	2.638	86.273	88.911	--	--	--

**Figure Channel 42: Horizontal (Peak)**

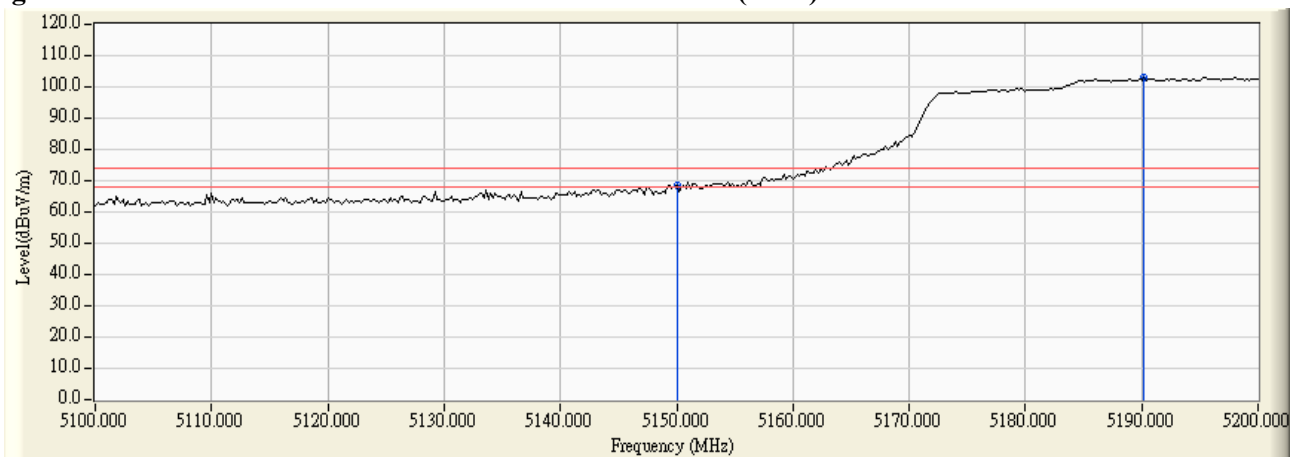

**Figure Channel 42: Horizontal (Average)**

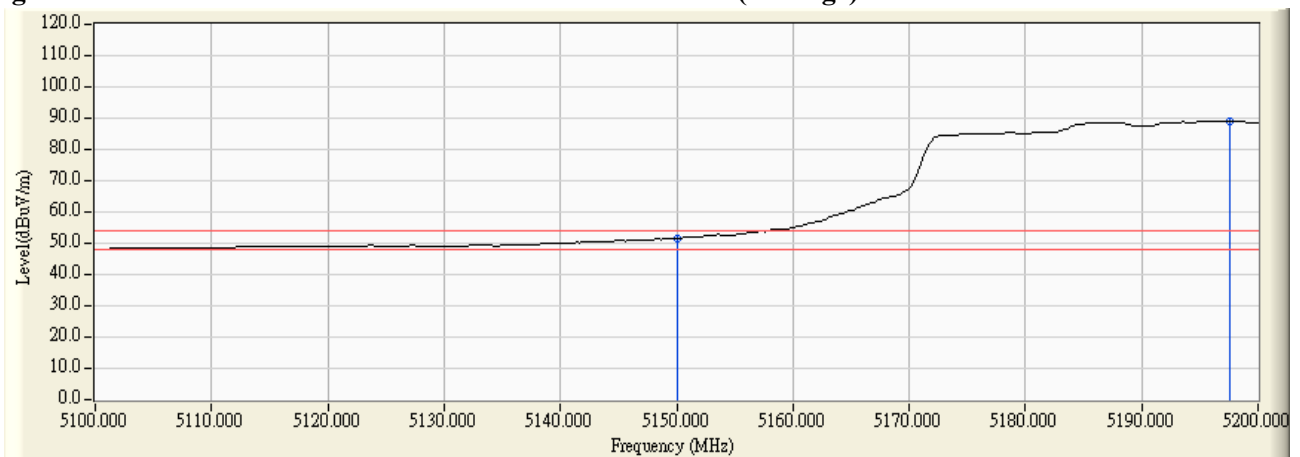

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 42


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5150.000	3.331	62.624	65.956	74.00	54.00	Pass
42 (Peak)	5199.000	3.565	99.406	102.971	--	--	--
42 (Average)	5150.000	3.331	45.832	49.164	74.00	54.00	Pass
42 (Average)	5198.600	3.562	85.366	88.929	--	--	--

**Figure Channel 42: Vertical (Peak)**

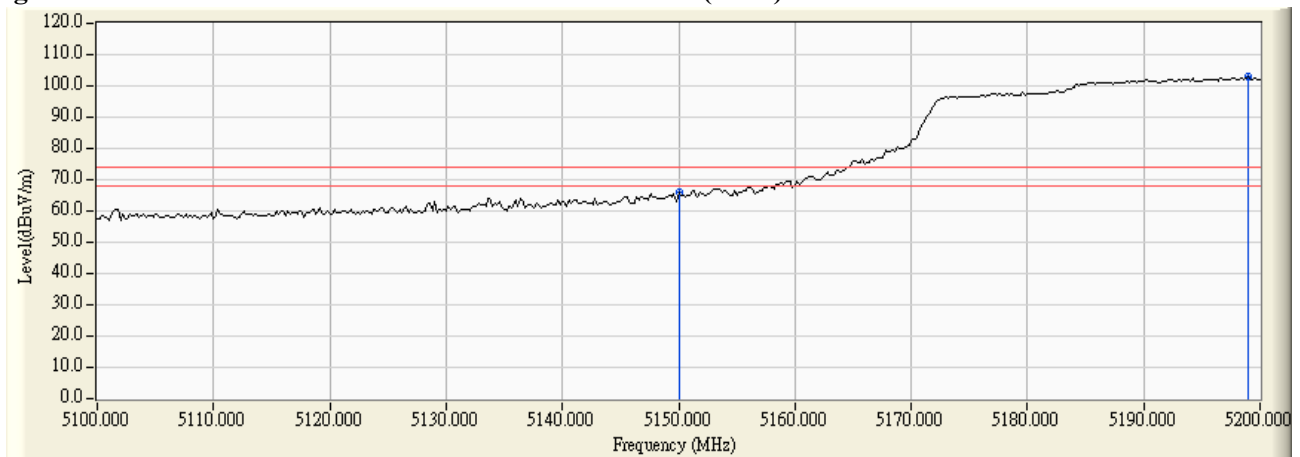

**Figure Channel 42: Vertical (Average)**

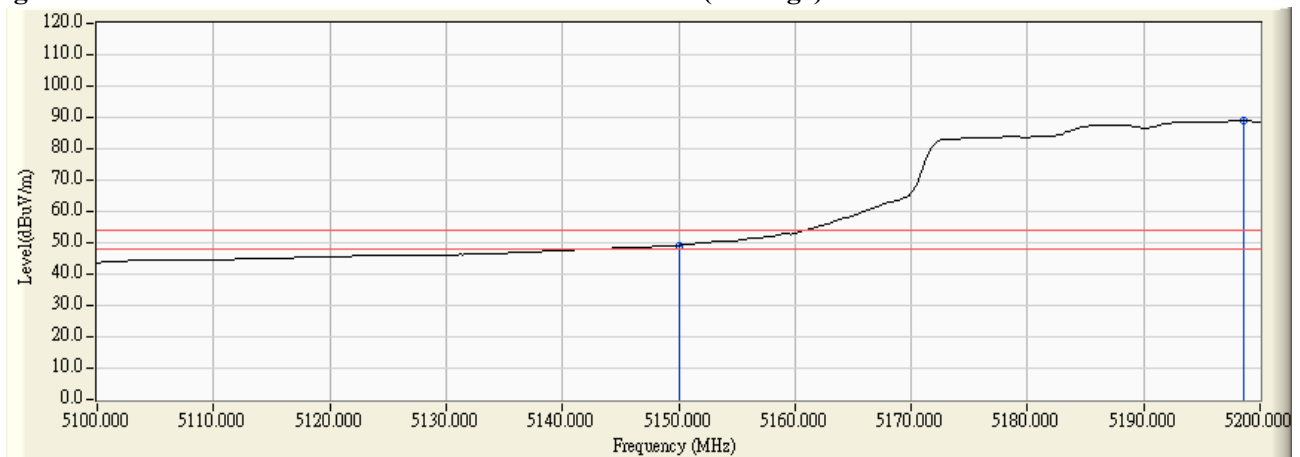

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 58


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5301.200	3.678	96.943	100.622	--	--	--
58 (Peak)	5350.000	3.575	63.118	66.693	74.00	54.00	Pass
58 (Peak)	5368.200	3.442	65.322	68.764	74.00	54.00	Pass
58 (Average)	5301.200	3.678	83.117	86.796	--	--	--
58 (Average)	5350.000	3.575	47.977	51.552	74.00	54.00	Pass
58 (Average)	5362.600	3.487	49.263	52.749	74.00	54.00	Pass

**Figure Channel 58: Horizontal (Peak)**

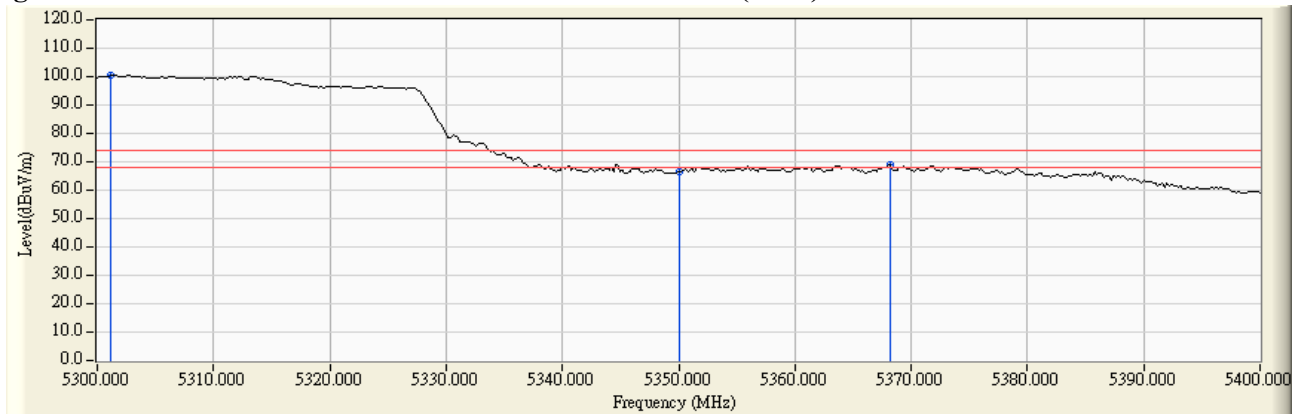

**Figure Channel 58: Horizontal (Average)**

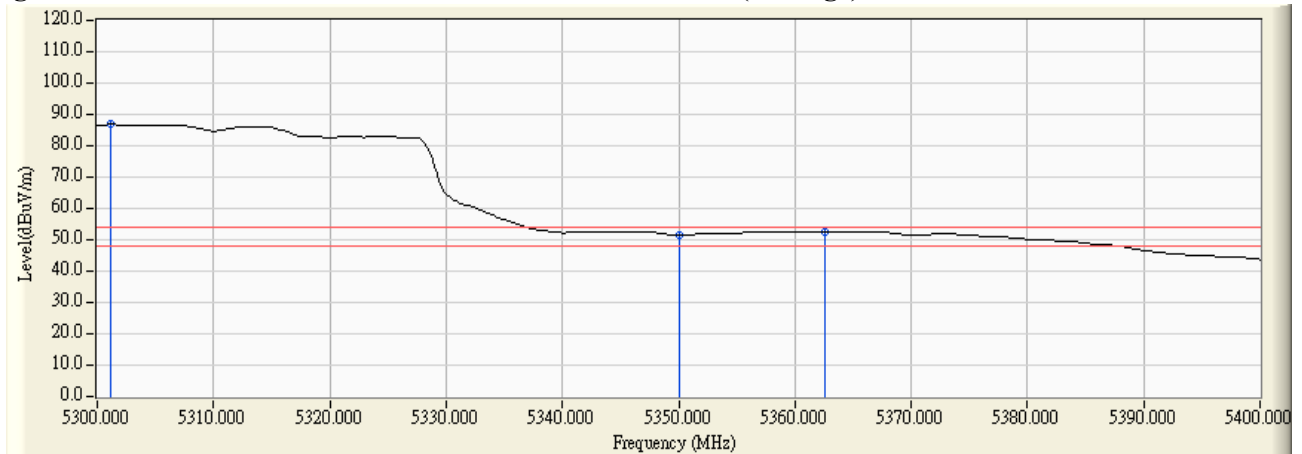

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 58


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5301.200	3.871	96.350	100.221	--	--	--
58 (Peak)	5350.000	3.900	60.673	64.573	74.00	54.00	Pass
58 (Peak)	5351.600	3.900	62.351	66.252	74.00	54.00	Pass
58 (Average)	5303.400	3.873	82.384	86.257	--	--	--
58 (Average)	5350.000	3.900	46.123	50.023	74.00	54.00	Pass

**Figure Channel 58: Vertical (Peak)**

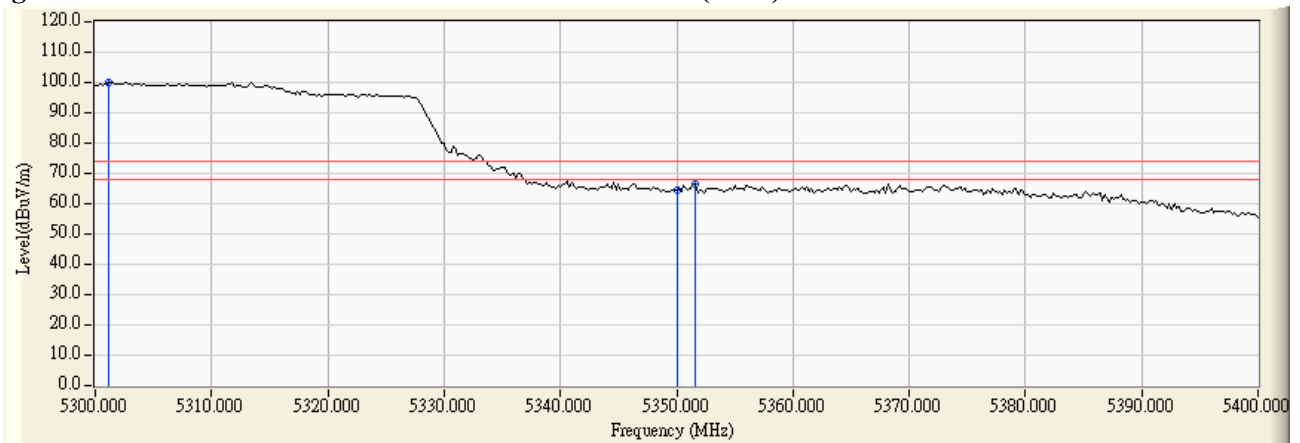

**Figure Channel 58: Vertical (Average)**

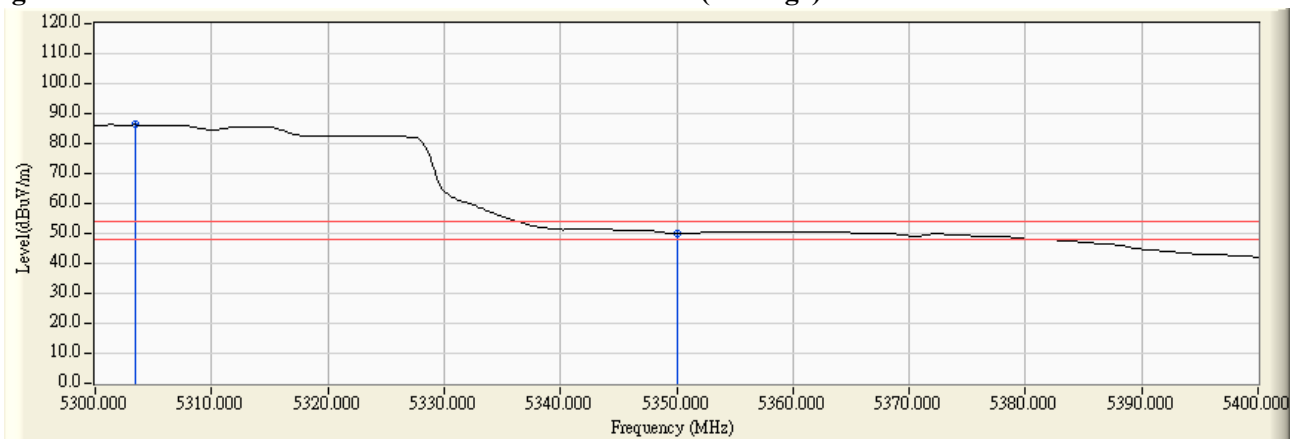

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 106


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5456.800	3.713	64.786	68.499	74.00	54.00	Pass
106 (Peak)	5460.000	3.775	63.697	67.472	74.00	54.00	Pass
106 (Peak)	5505.400	4.546	98.046	102.592	--	--	--
106 (Average)	5457.800	3.732	49.389	53.122	74.00	54.00	Pass
106 (Average)	5460.000	3.775	49.344	53.119	74.00	54.00	Pass
106 (Average)	5507.400	4.544	84.513	89.057	--	--	--

**Figure Channel 106: Horizontal (Peak)**

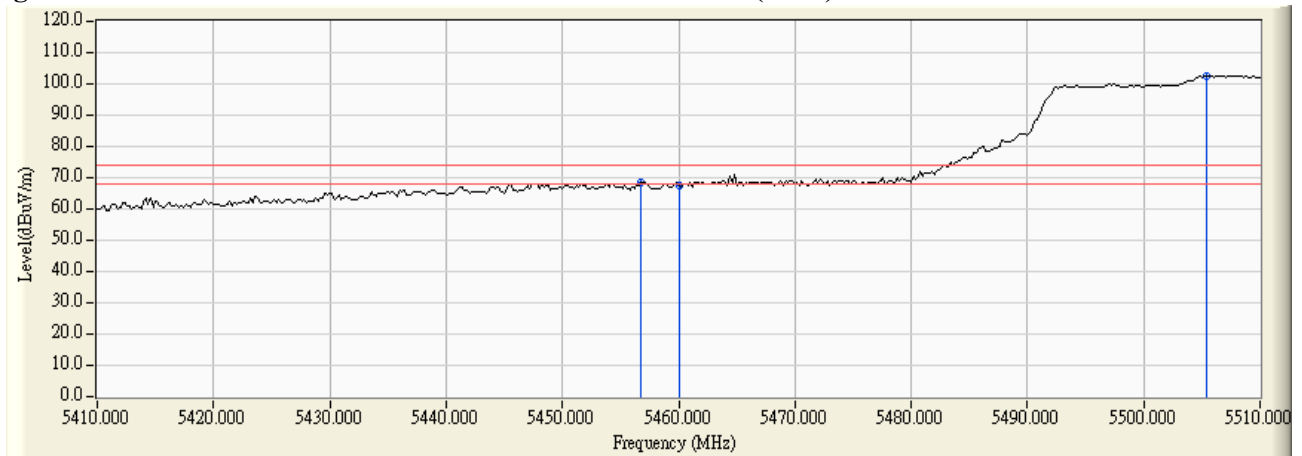

**Figure Channel 106: Horizontal (Average)**

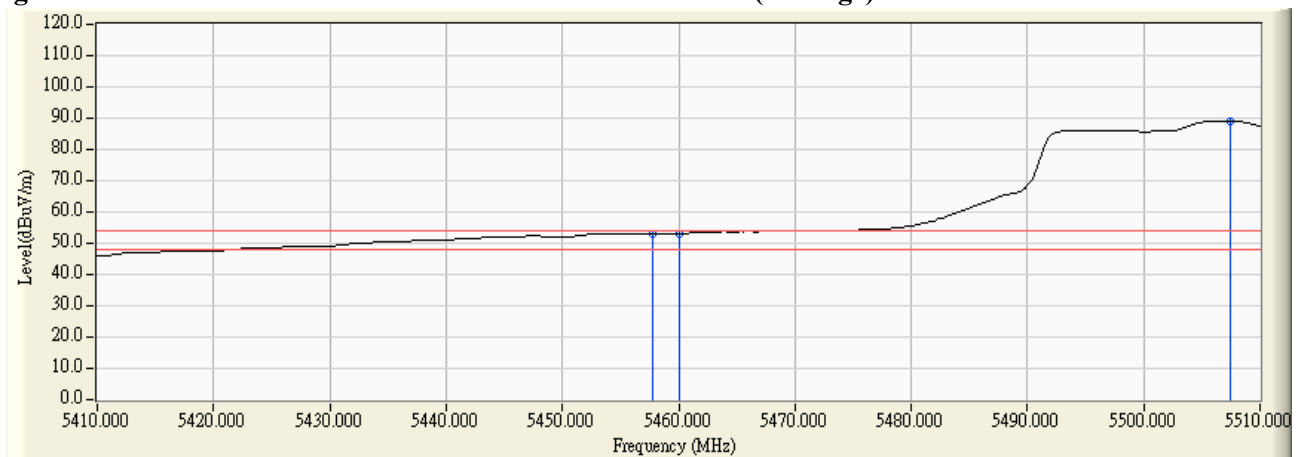

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 106


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5460.000	3.934	61.965	65.900	74.00	54.00	Pass
106 (Peak)	5505.600	4.511	95.407	99.918	--	--	--
106 (Average)	5460.000	3.934	46.759	50.694	74.00	54.00	Pass
106 (Average)	5507.200	4.511	81.878	86.389	--	--	--

**Figure Channel 106: Vertical (Peak)**

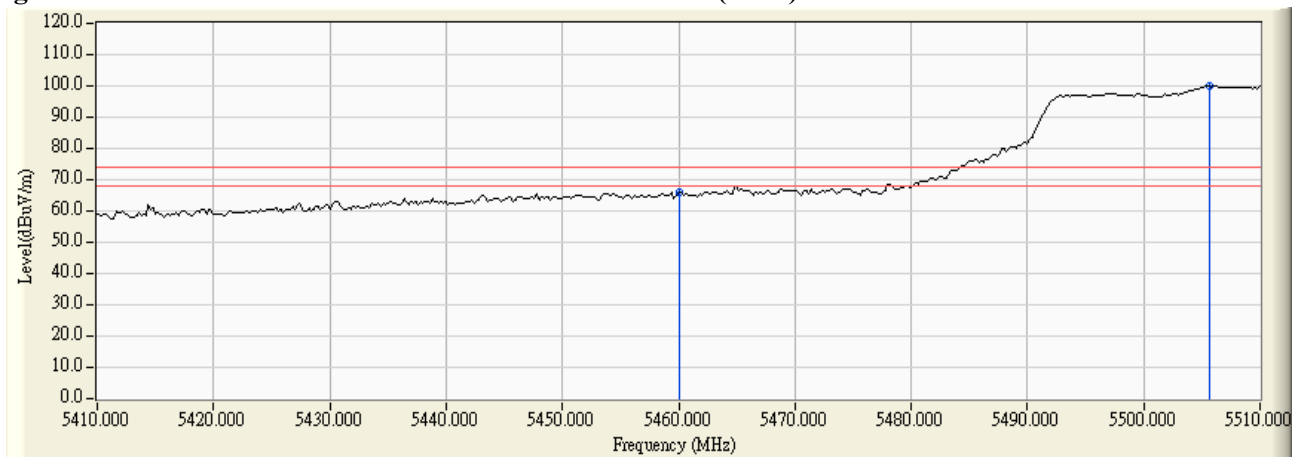

**Figure Channel 106: Vertical (Average)**

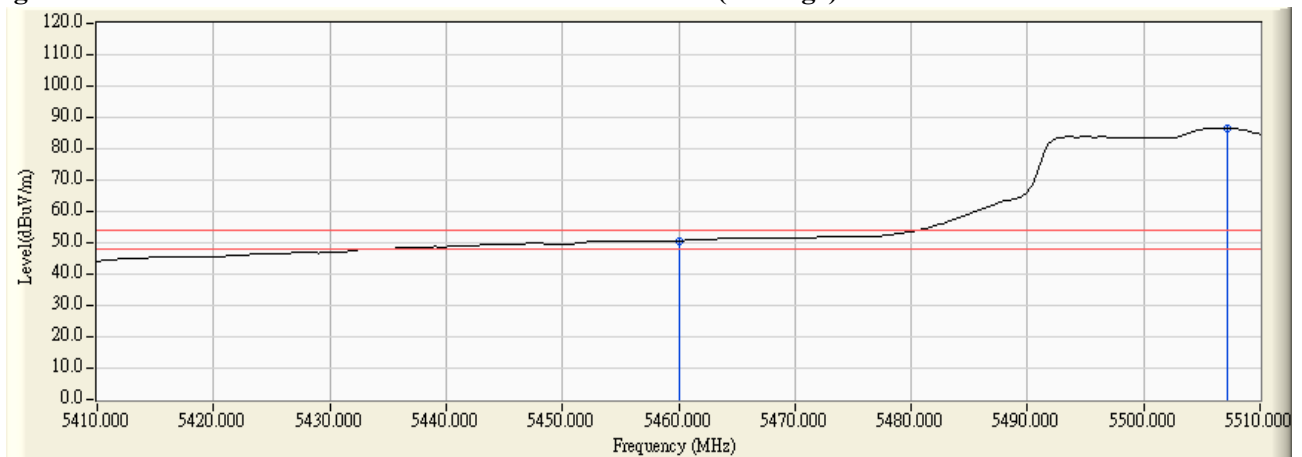

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW-32.5Mbps) -Channel 106

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5465.200	4.423	62.752	67.175	-1.045	68.220	Pass
Horizontal	5470.000	4.488	60.679	65.167	-3.053	68.220	Pass
Horizontal	5510.200	4.807	95.215	100.022	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5464.600	6.073	58.643	64.716	-3.504	68.220	Pass
Vertical	5470.000	6.112	57.717	63.828	-4.392	68.220	Pass
Vertical	5510.000	6.258	90.816	97.074	--	--	Pass


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps)-Channel 36

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5150.000	3.340	60.348	63.688	74.00	54.00	Pass
36 (Peak)	5178.000	3.240	108.002	111.243	--	--	--
36 (Average)	5150.000	3.340	43.755	47.095	74.00	54.00	Pass
36 (Average)	5183.000	3.224	96.604	99.827	--	--	--


**Figure Channel 36:**

**Horizontal (Peak)**

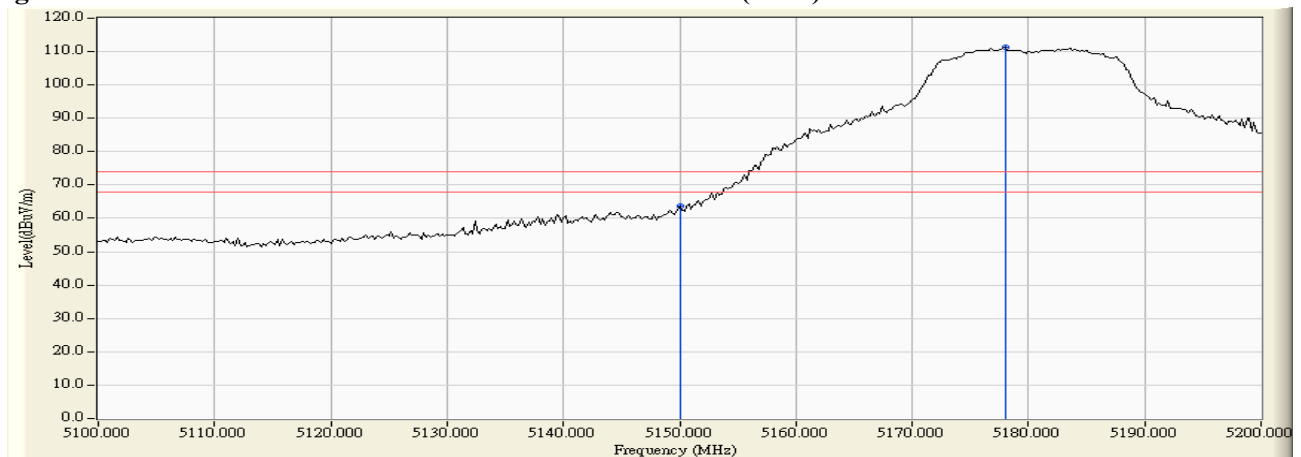

**Figure Channel 36:**

**Horizontal (Average)**

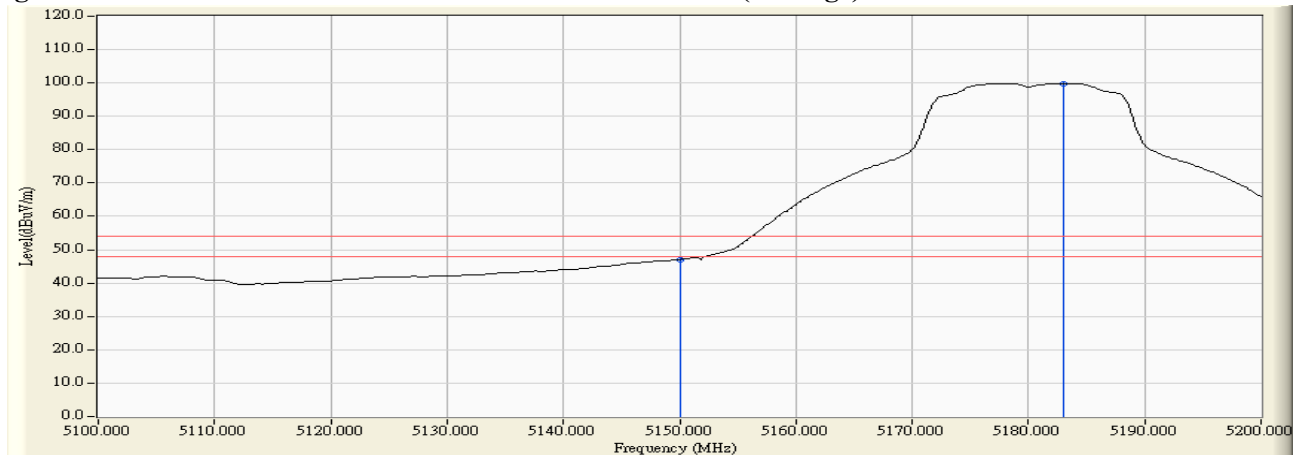


- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.  
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.  
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.  
4. “ \* ”, means this data is the worst emission level.  
5. Measurement Level = Reading Level + Correct Factor.  
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps)-Channel 36


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5147.800	5.254	53.129	58.383	74.00	54.00	Pass
36 (Peak)	5150.000	5.260	52.295	57.555	74.00	54.00	Pass
36 (Peak)	5183.800	5.352	102.378	107.730	--	--	--
36 (Average)	5150.000	5.260	38.942	44.202	74.00	54.00	Pass
36 (Average)	5184.000	5.352	91.409	96.761	--	--	--

**Figure Channel 36: Vertical (Peak)**

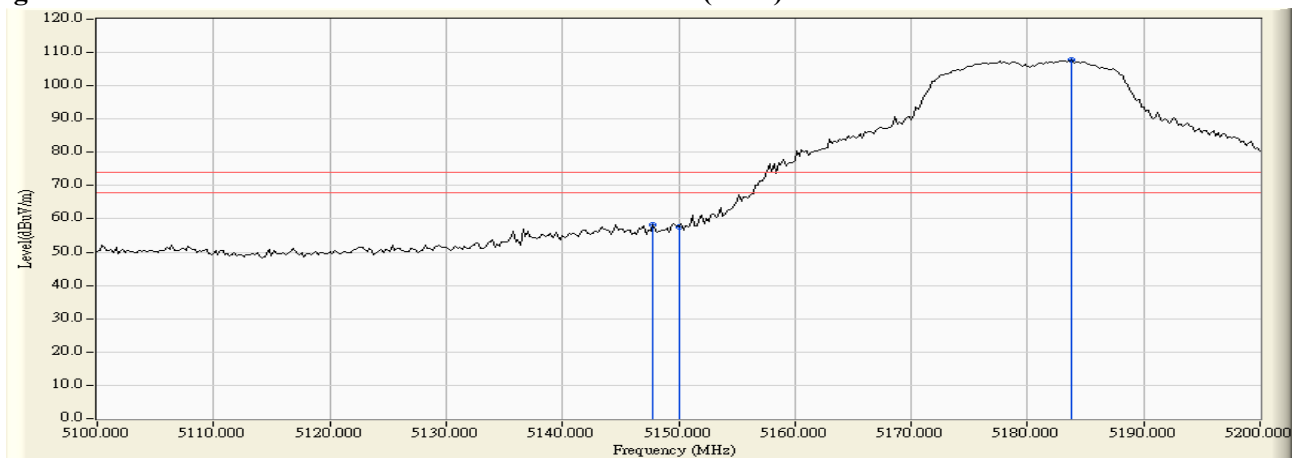

**Figure Channel 36: Vertical (Average)**

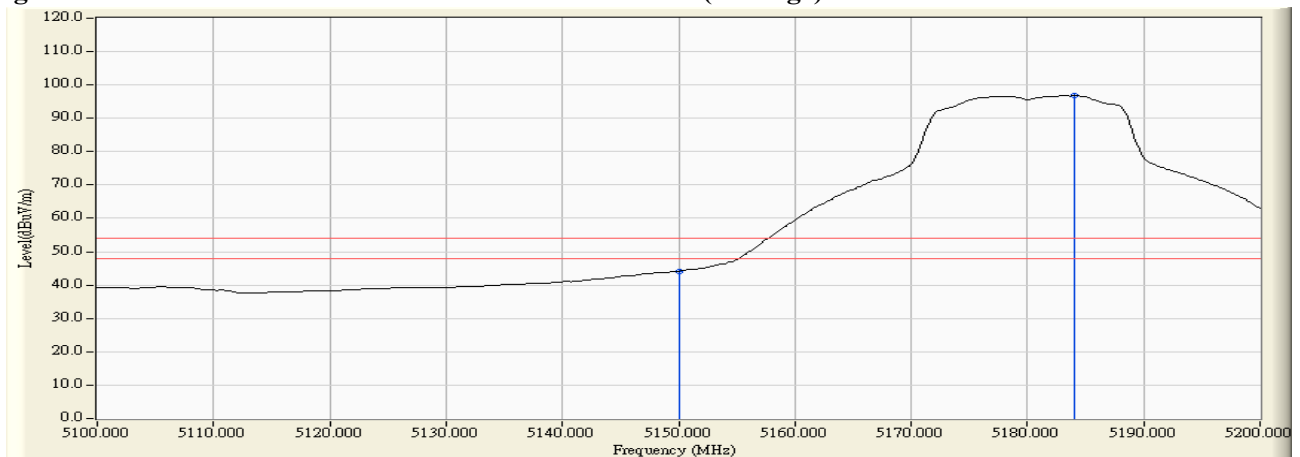

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) -Channel 64

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5315.800	3.826	105.793	109.619	--	--	--
64 (Peak)	5350.000	3.716	62.368	66.085	74.00	54.00	Pass
64 (Average)	5316.200	3.824	95.496	99.320	--	--	--
64 (Average)	5350.000	3.716	47.510	51.227	74.00	54.00	Pass


**Figure Channel 64:**

**Horizontal (Peak)**

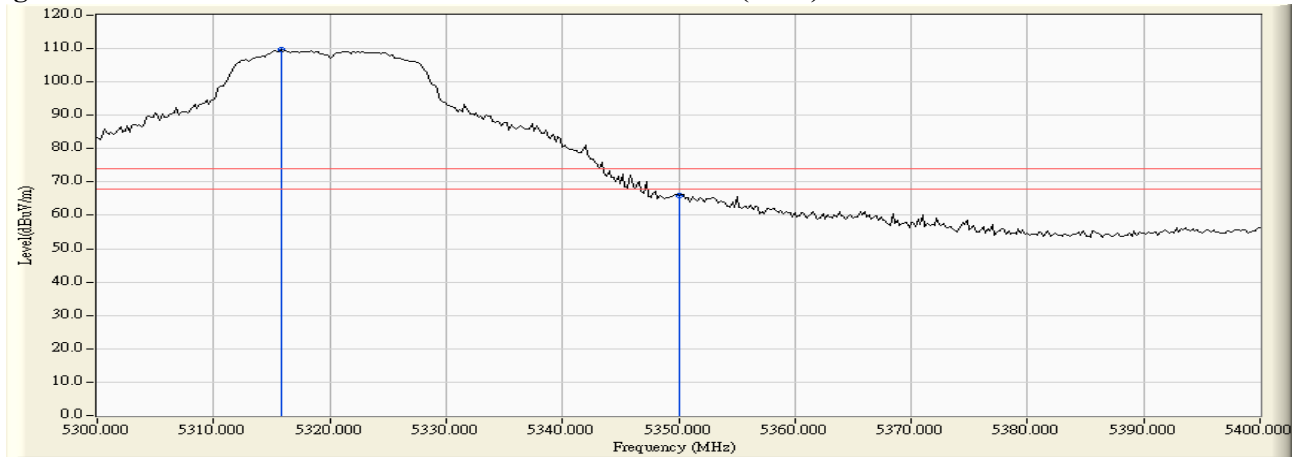

**Figure Channel 64:**

**Horizontal (Average)**

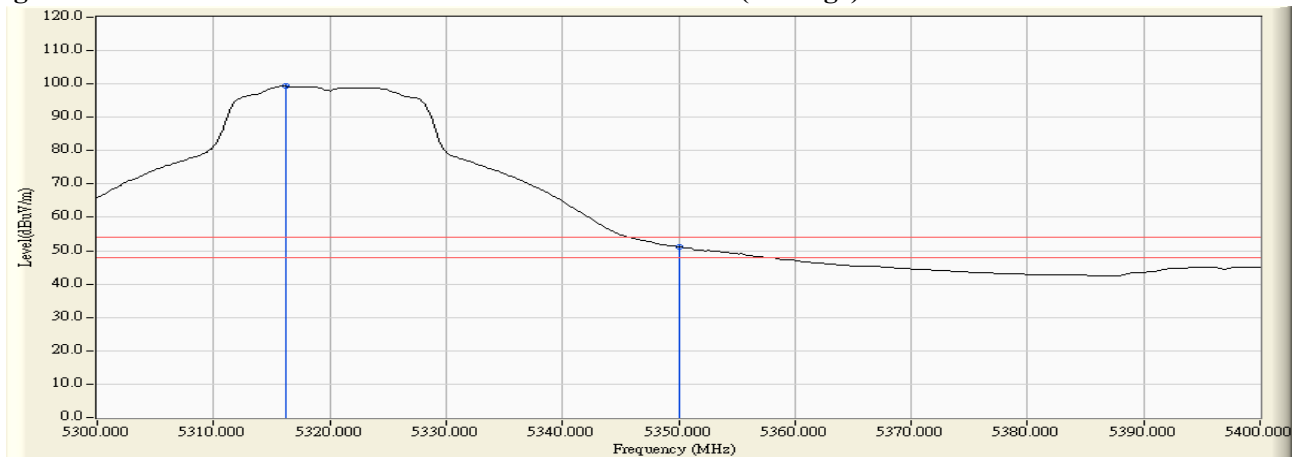

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " \* ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) -Channel 64


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5316.600	5.733	104.168	109.901	--	--	--
64 (Peak)	5350.000	5.691	59.830	65.522	74.00	54.00	Pass
64 (Average)	5316.000	5.733	93.685	99.419	--	--	--
64 (Average)	5350.000	5.691	44.819	50.511	74.00	54.00	Pass

**Figure Channel 64: Vertical (Peak)**

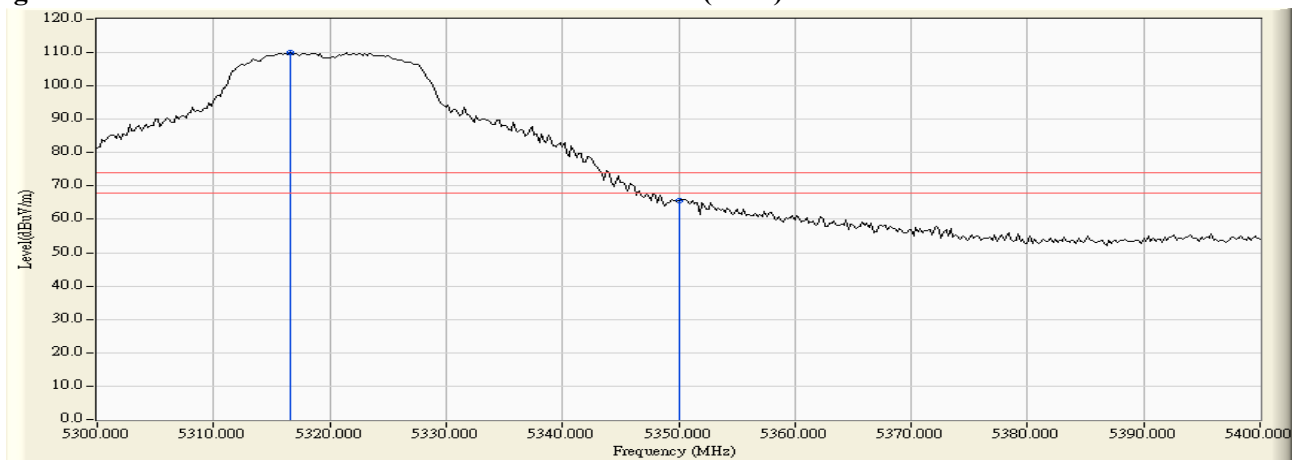

**Figure Channel 64: Vertical (Average)**

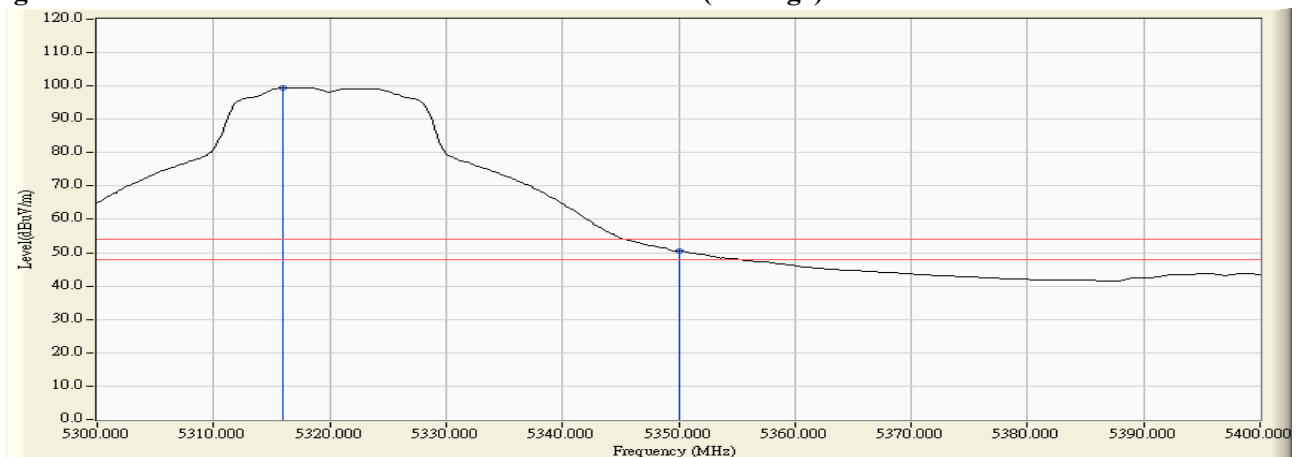

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) -Channel 100


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5459.000	4.340	66.715	71.055	74.00	54.00	Pass
100 (Peak)	5460.000	4.354	65.832	70.186	74.00	54.00	Pass
100 (Peak)	5495.800	4.786	107.291	112.076	--	--	--
100 (Average)	5460.000	4.354	43.705	48.059	74.00	54.00	Pass
100 (Average)	5497.800	4.799	93.780	98.579	--	--	--

**Figure Channel 100: Horizontal (Peak)**

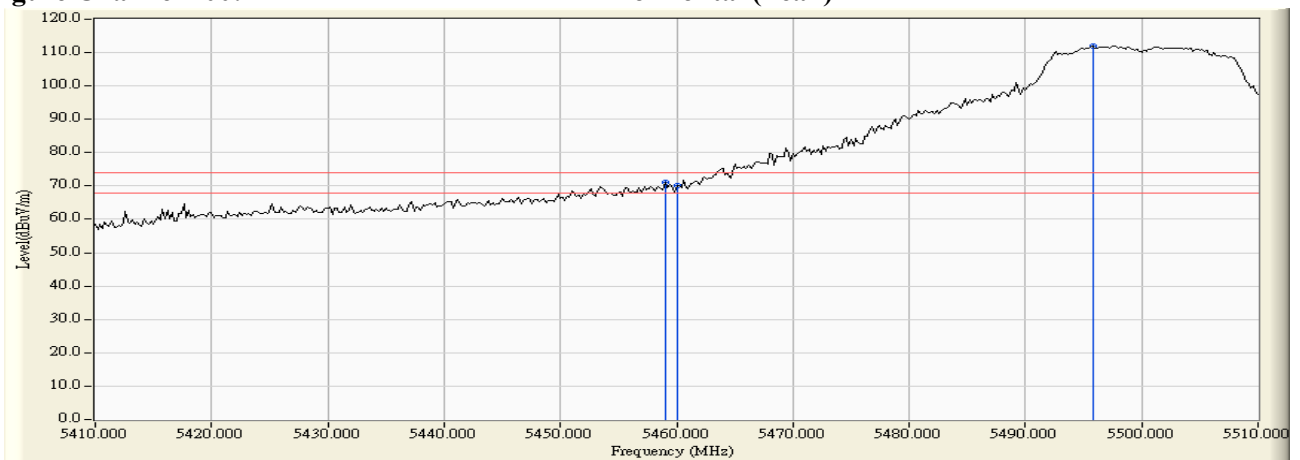

**Figure Channel 100: Horizontal (Average)**

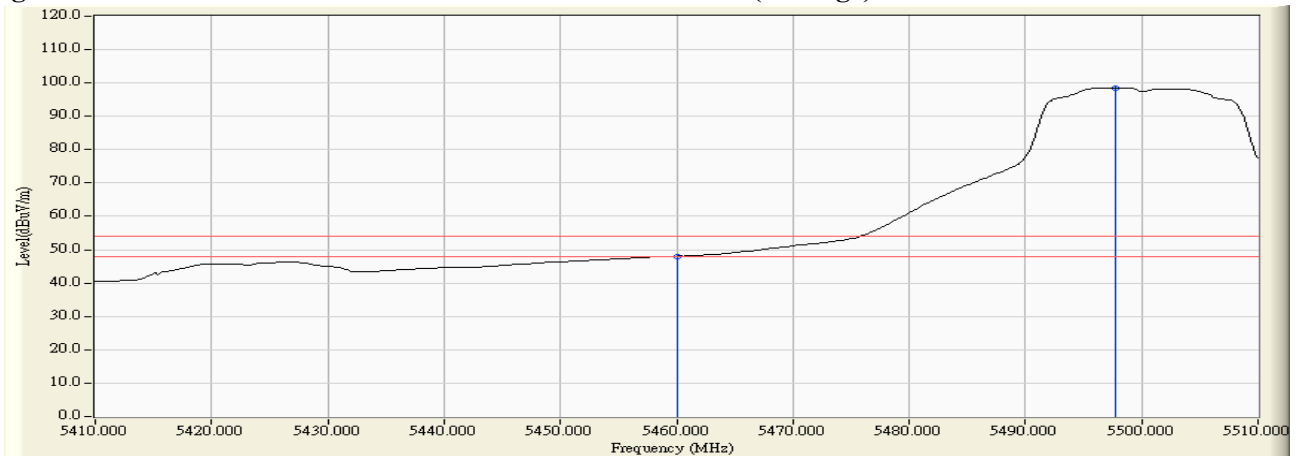

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " \* ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) -Channel 100


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5456.400	6.015	55.539	61.554	74.00	54.00	Pass
100 (Peak)	5460.000	6.041	53.174	59.215	74.00	54.00	Pass
100 (Peak)	5496.400	6.264	100.965	107.229	--	--	--
100 (Average)	5460.000	6.041	39.915	45.956	74.00	54.00	Pass
100 (Average)	5497.200	6.267	90.267	96.533	--	--	--

**Figure Channel 100: Vertical (Peak)**

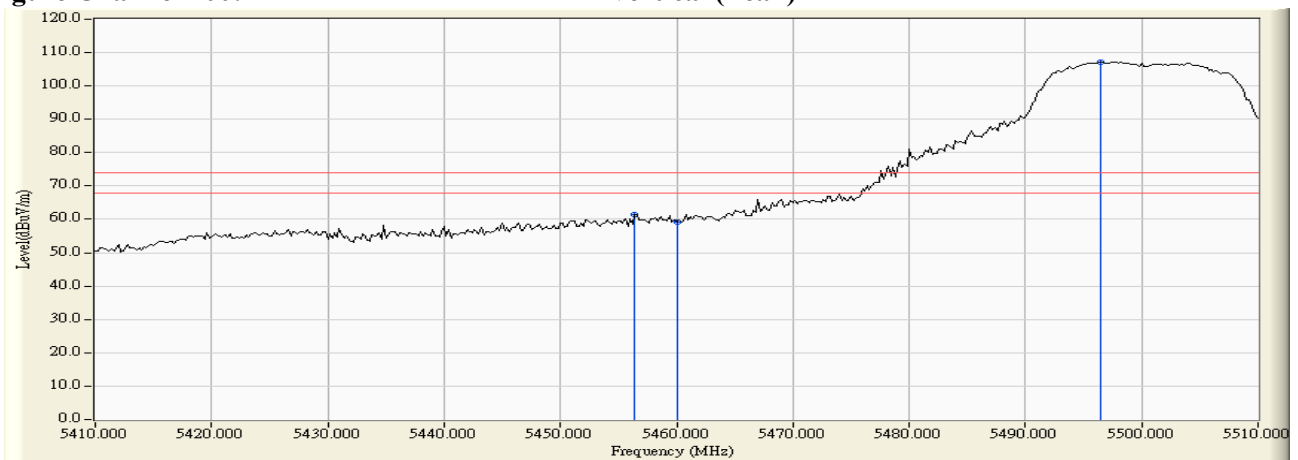

**Figure Channel 100: Vertical (Average)**

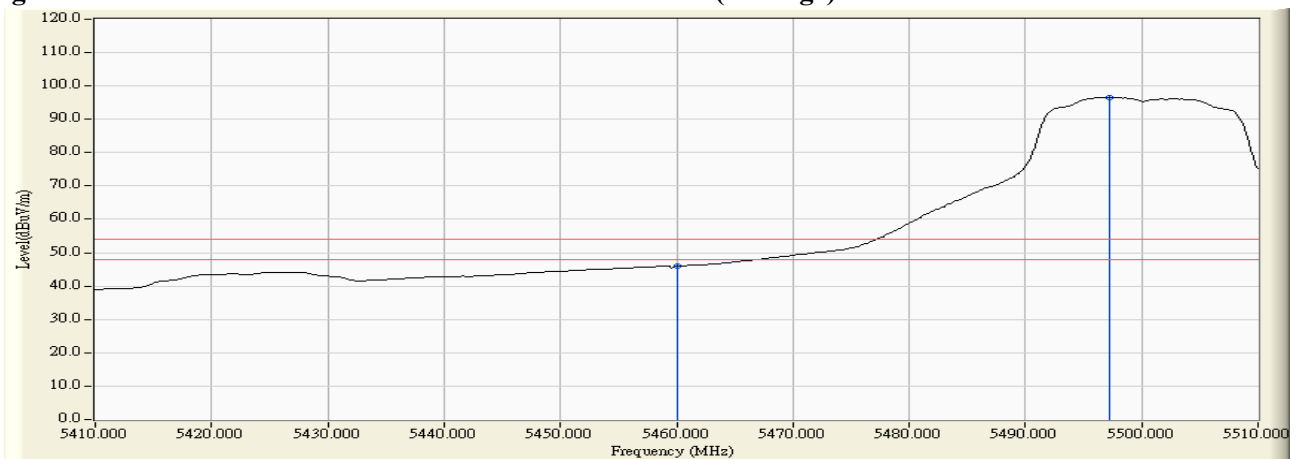

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) -Channel 100

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5468.000	4.461	63.035	67.496	-0.724	68.220	Pass
Horizontal	5470.000	4.488	62.021	66.509	-1.711	68.220	Pass
Horizontal	5498.200	4.801	103.509	108.311	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5467.800	6.095	61.752	67.848	-0.372	68.220	Pass
Vertical	5470.000	6.112	59.793	65.904	-2.316	68.220	Pass
Vertical	5503.800	6.287	102.888	109.174	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11a-6Mbps) -Channel 140

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5697.800	4.620	99.333	103.954	--	--	Pass
Horizontal	5725.000	4.654	61.559	66.213	-2.007	68.220	Pass
Horizontal	5725.400	4.655	62.186	66.840	-1.380	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5703.600	5.988	98.613	104.600	--	--	Pass
Vertical	5725.000	5.992	62.169	68.162	-0.058	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 36


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.000	3.344	67.599	70.943	74.00	54.00	Pass
36 (Peak)	5150.000	3.340	66.968	70.308	74.00	54.00	Pass
36 (Peak)	5182.600	3.224	107.317	110.542	--	--	--
36 (Average)	5150.000	3.340	48.172	51.512	74.00	54.00	Pass
36 (Average)	5178.400	3.240	94.603	97.843	--	--	--

**Figure Channel 36: Horizontal (Peak)**

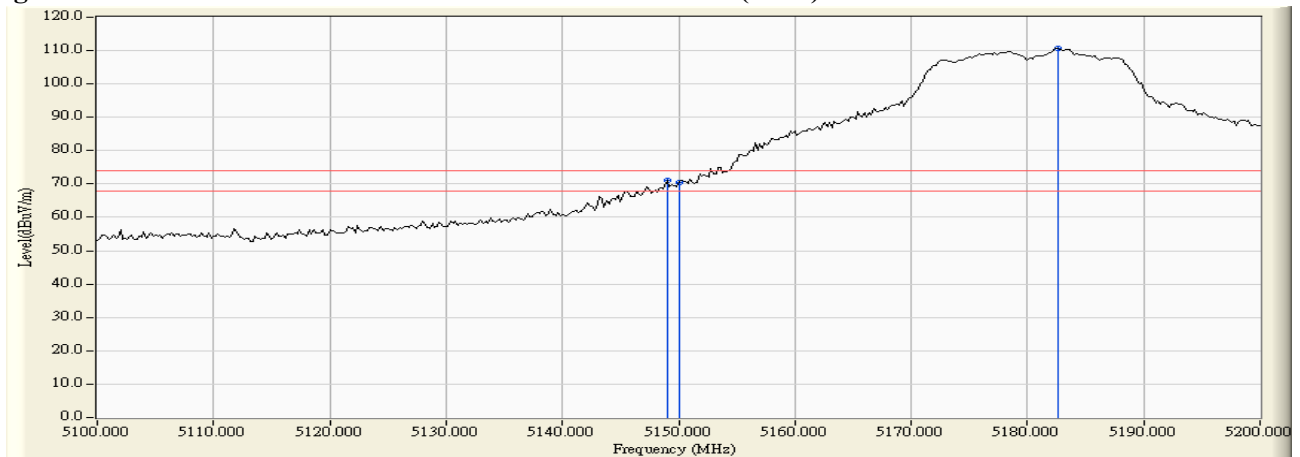

**Figure Channel 36: Horizontal (Average)**

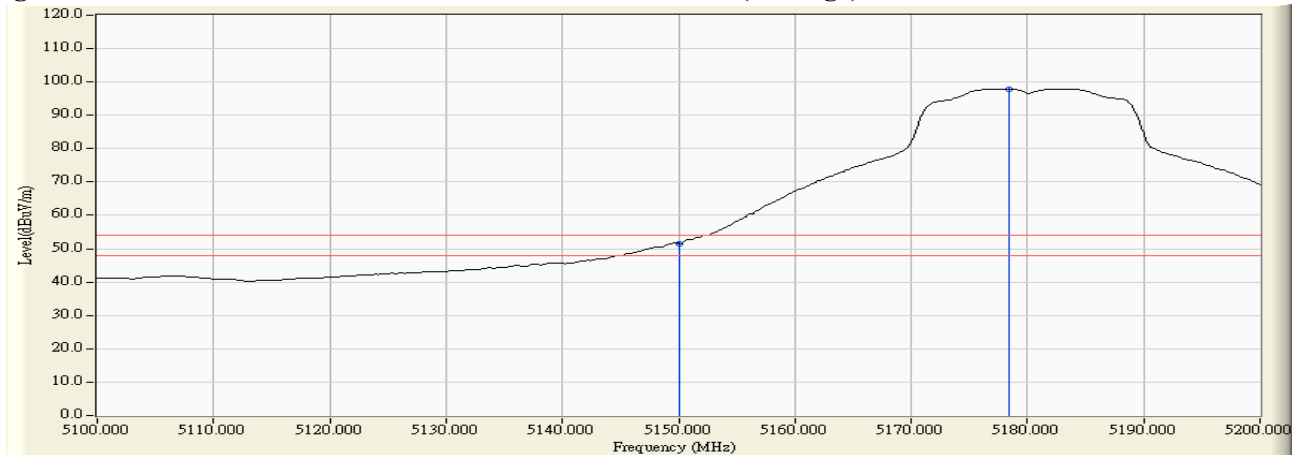

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 36


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.800	5.257	63.072	68.329	74.00	54.00	Pass
36 (Peak)	5150.000	5.260	62.816	68.076	74.00	54.00	Pass
36 (Peak)	5183.600	5.351	106.824	112.175	--	--	--
36 (Average)	5150.000	5.260	46.694	51.954	74.00	54.00	Pass
36 (Average)	5178.400	5.337	92.651	97.988	--	--	--

**Figure Channel 36: Vertical (Peak)**

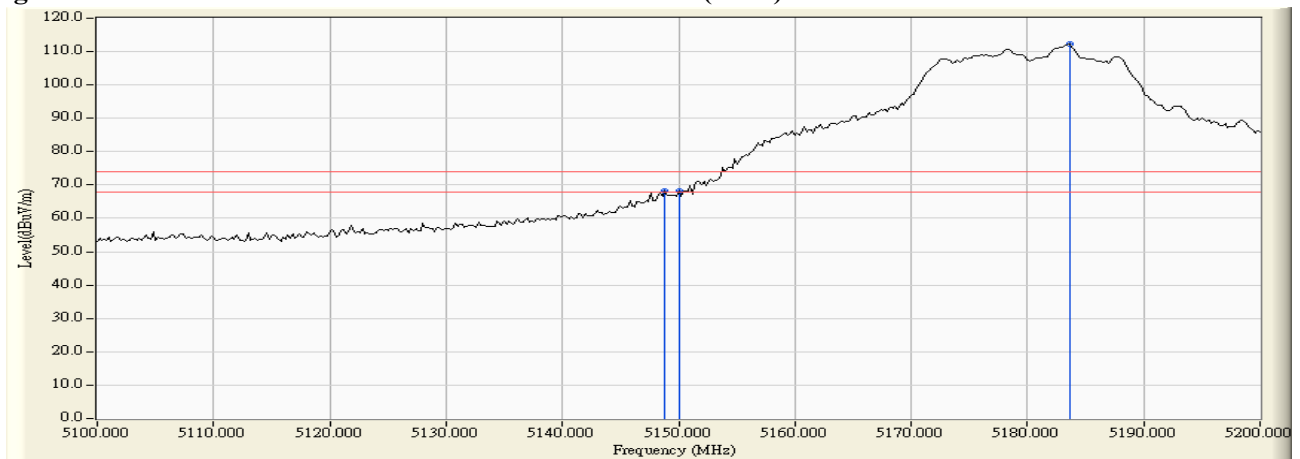

**Figure Channel 36: Vertical (Average)**

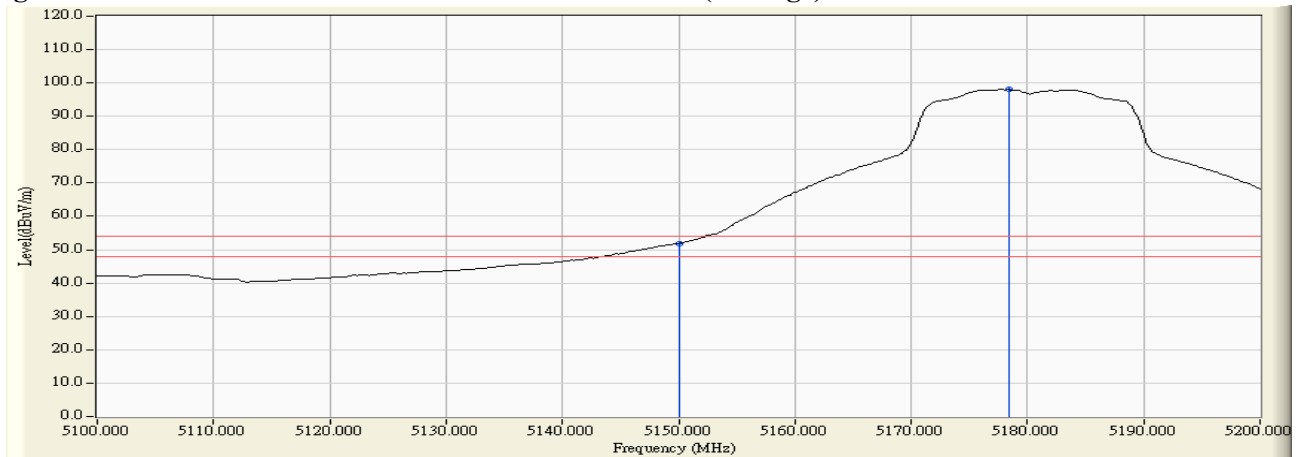

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 64


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5317.200	3.821	106.576	110.397	--	--	--
64 (Peak)	5350.000	3.716	59.849	63.566	74.00	54.00	Pass
64 (Peak)	5355.000	3.700	61.750	65.450	74.00	54.00	Pass
64 (Average)	5317.200	3.821	95.822	99.643	--	--	--
64 (Average)	5350.000	3.716	46.444	50.161	74.00	54.00	Pass

**Figure Channel 64: Horizontal (Peak)**

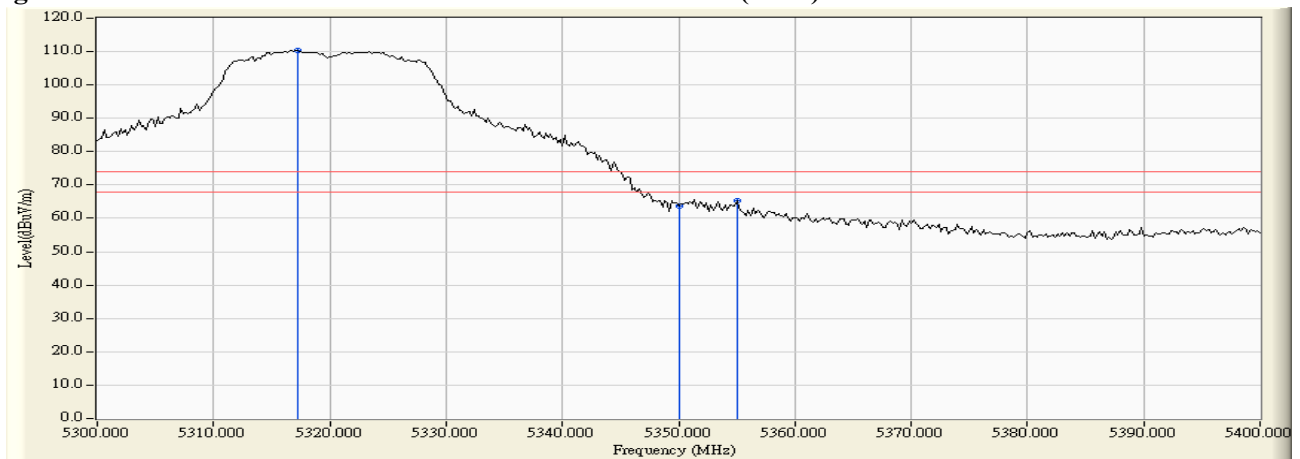

**Figure Channel 64: Horizontal (Average)**

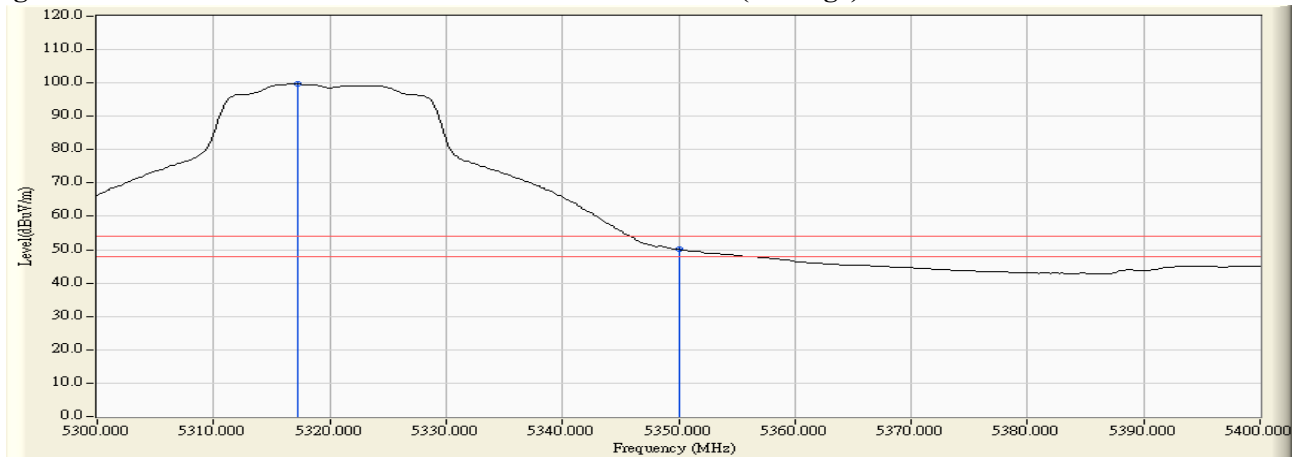

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 64


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5315.800	5.735	103.817	109.551	--	--	--
64 (Peak)	5350.000	5.691	56.496	62.188	74.00	54.00	Pass
64 (Peak)	5350.800	5.690	59.952	65.643	74.00	54.00	Pass
64 (Average)	5317.400	5.732	93.027	98.759	--	--	--
64 (Average)	5350.000	5.691	43.321	49.013	74.00	54.00	Pass

**Figure Channel 64: Vertical (Peak)**

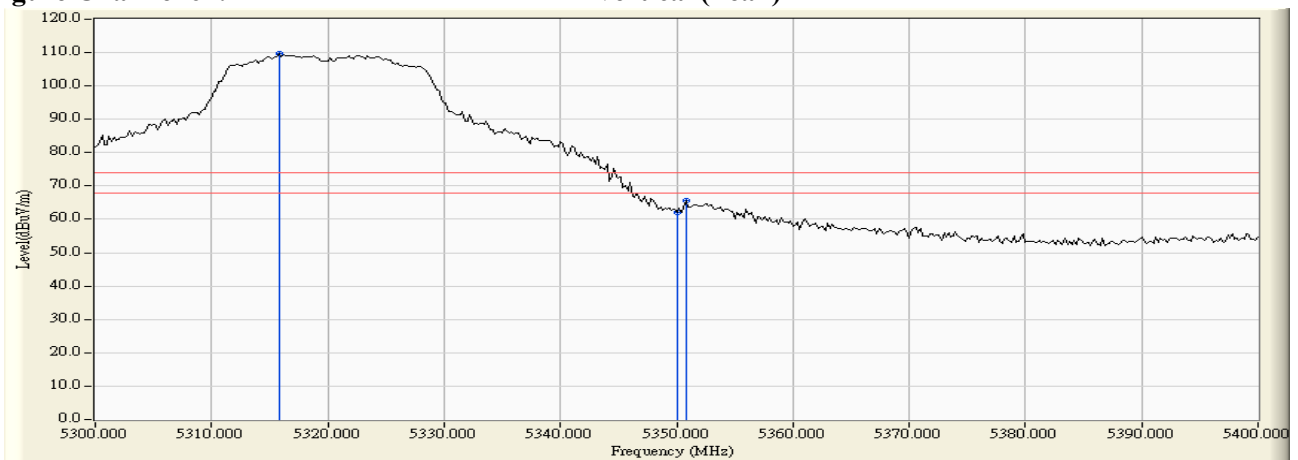

**Figure Channel 64: Vertical (Average)**

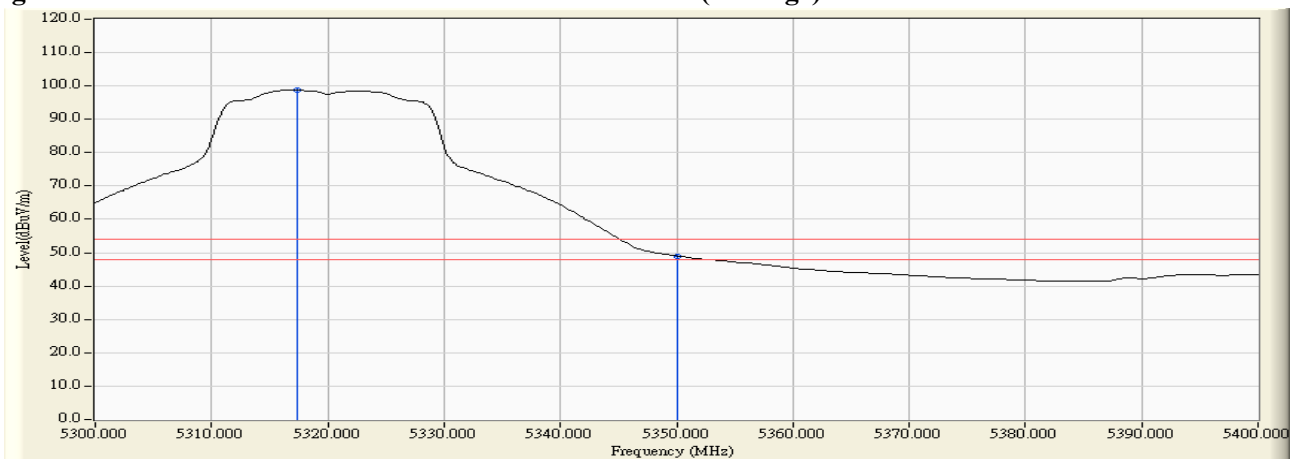

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 100


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5457.200	4.317	59.220	63.536	74.00	54.00	Pass
100 (Peak)	5460.000	4.354	57.962	62.316	74.00	54.00	Pass
100 (Peak)	5497.400	4.797	104.621	109.417	--	--	--
100 (Average)	5460.000	4.354	44.317	48.671	74.00	54.00	Pass
100 (Average)	5497.200	4.795	93.847	98.642	--	--	--

**Figure Channel 100: Horizontal (Peak)**

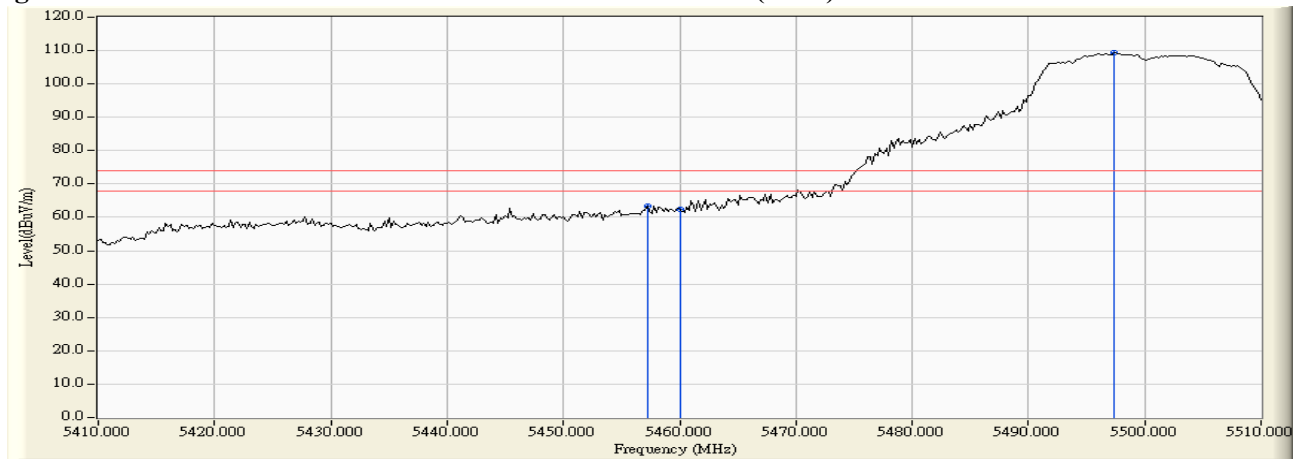

**Figure Channel 100: Horizontal (Average)**

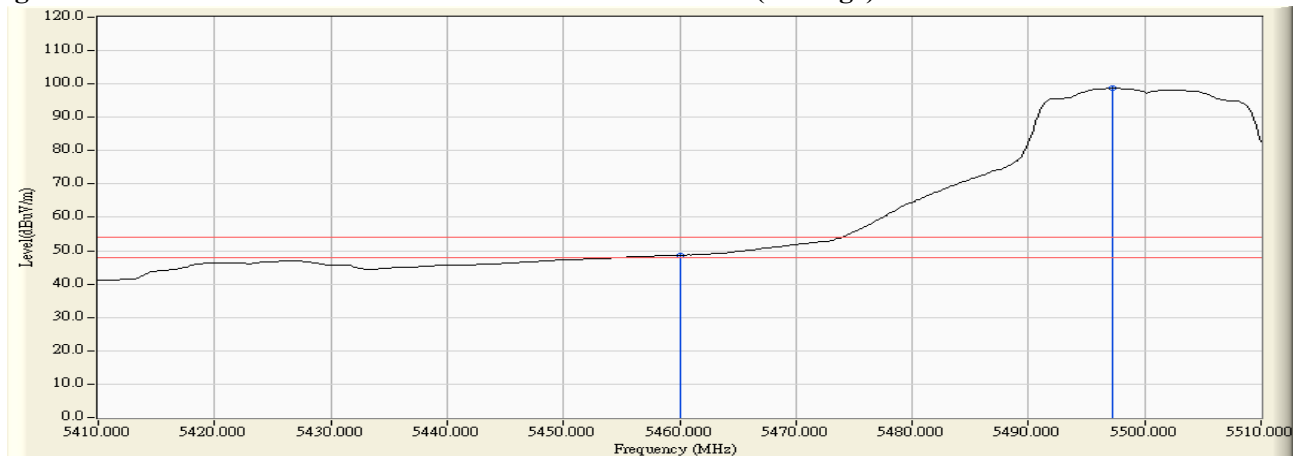

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 100


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5459.000	6.033	56.504	62.538	74.00	54.00	Pass
100 (Peak)	5460.000	6.041	54.663	60.704	74.00	54.00	Pass
100 (Peak)	5497.200	6.267	101.338	107.604	--	--	--
100 (Average)	5460.000	6.041	41.186	47.227	74.00	54.00	Pass
100 (Average)	5497.600	6.267	90.100	96.368	--	--	--

**Figure Channel 100: Vertical (Peak)**

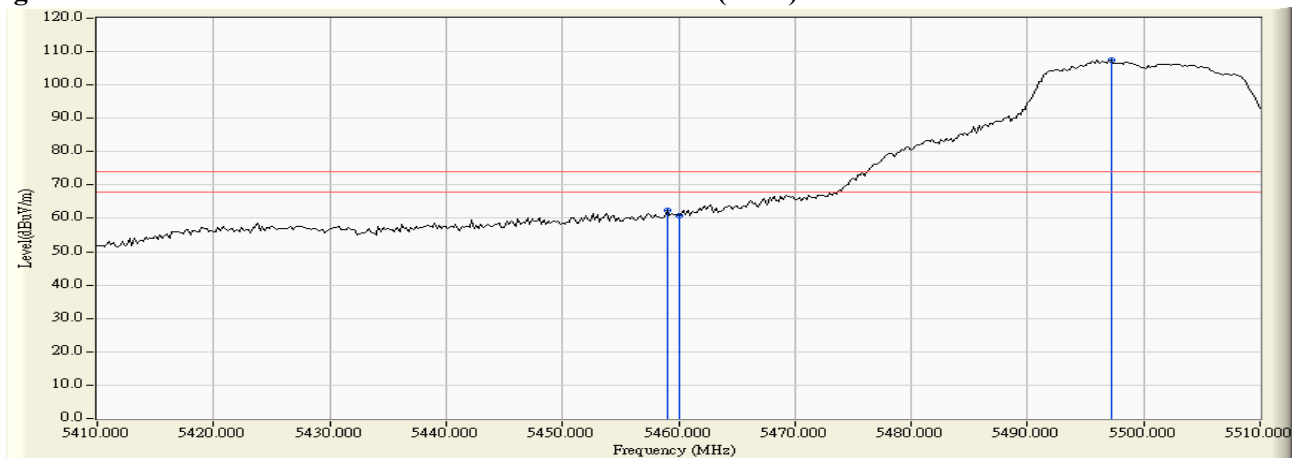

**Figure Channel 100: Vertical (Average)**

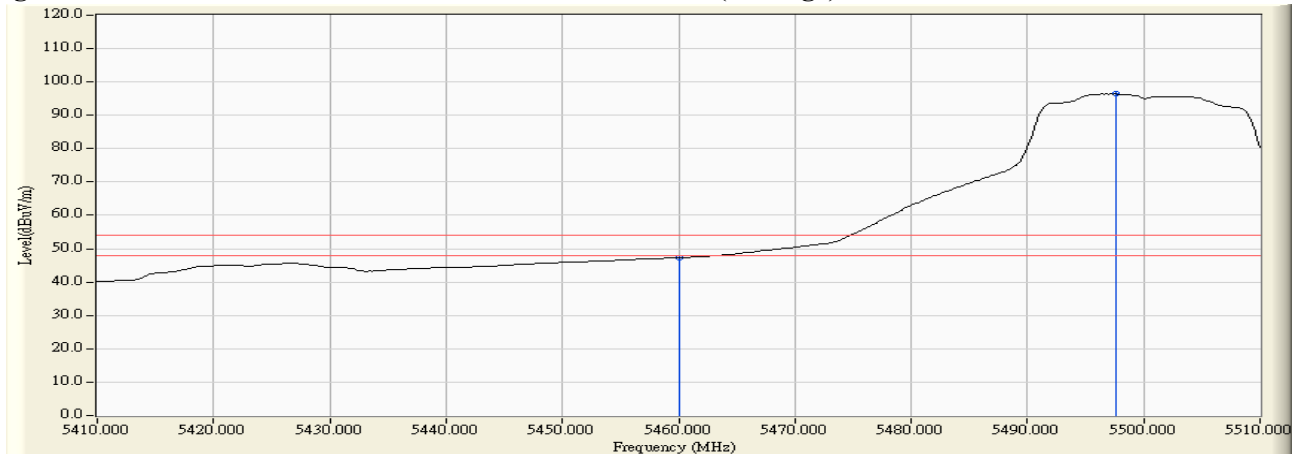

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 100

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5467.600	4.455	61.220	65.676	-2.544	68.220	Pass
Horizontal	5470.000	4.488	59.937	64.425	-3.795	68.220	Pass
Horizontal	5497.200	4.795	103.241	108.036	---	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5469.400	6.106	62.058	68.165	-0.055	68.220	Pass
Vertical	5470.000	6.112	61.441	67.552	-0.668	68.220	Pass
Vertical	5498.400	6.270	102.941	109.211	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW 7.2Mbps) -Channel 140

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5698.200	4.622	99.797	104.419	--	--	Pass
Horizontal	5725.000	4.654	61.516	66.170	-2.050	68.220	Pass
Horizontal	5727.400	4.654	62.028	66.683	-1.537	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5698.400	5.981	98.263	104.243	--	--	Pass
Vertical	5725.000	5.992	61.678	67.671	-0.549	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 38


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.800	3.342	67.426	70.767	74.00	54.00	Pass
38 (Peak)	5150.000	3.340	65.648	68.988	74.00	54.00	Pass
38 (Peak)	5198.000	3.160	104.662	107.822	--	--	--
38 (Average)	5150.000	3.340	49.208	52.548	74.00	54.00	Pass
38 (Average)	5197.600	3.162	92.151	95.313	--	--	--

**Figure Channel 38: Horizontal (Peak)**

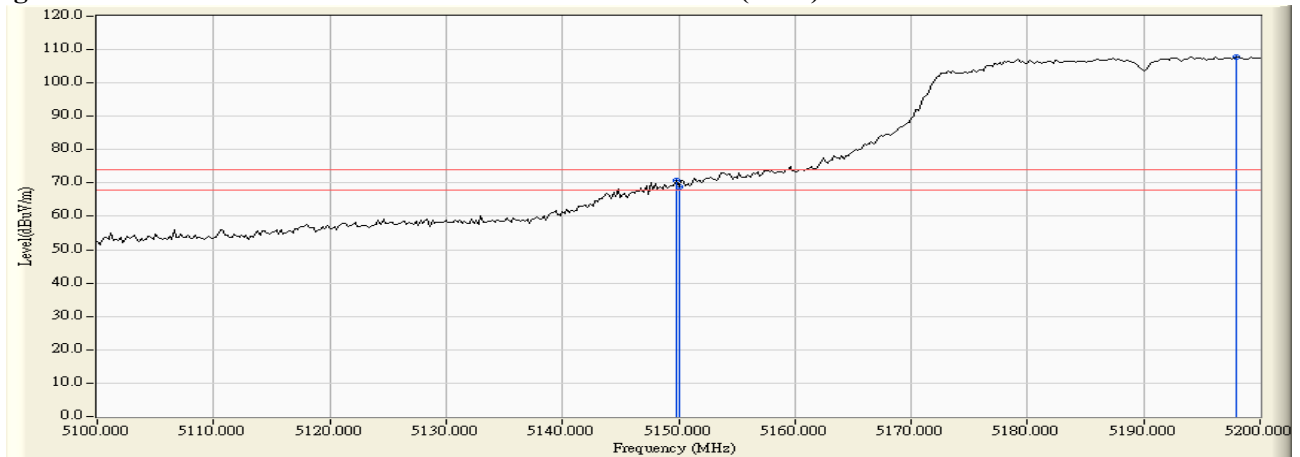

**Figure Channel 38: Horizontal (Average)**

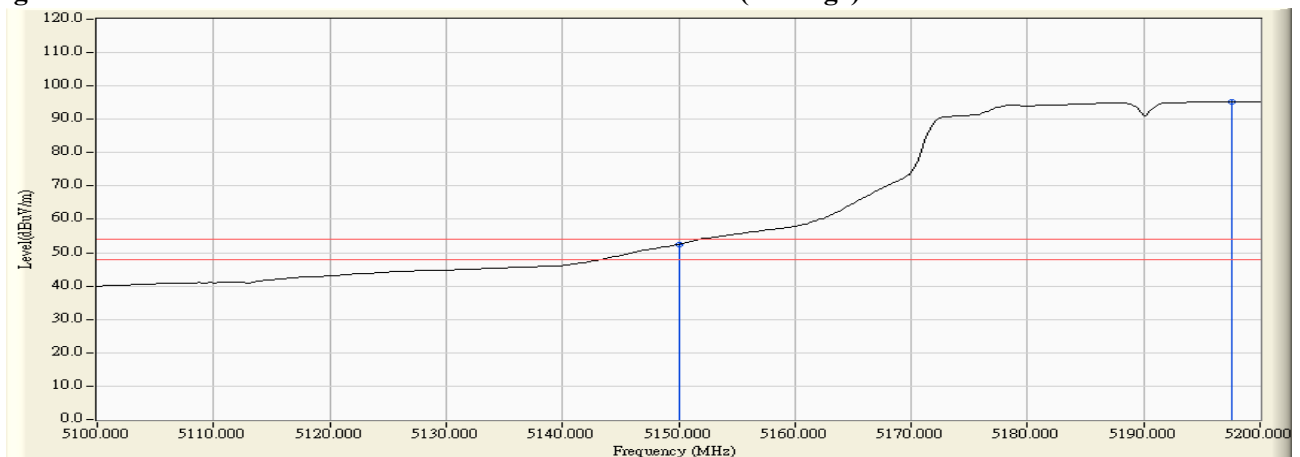

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 38


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5147.000	5.252	53.715	58.967	74.00	54.00	Pass
38 (Peak)	5150.000	5.260	52.425	57.685	74.00	54.00	Pass
38 (Peak)	5194.000	5.374	98.342	103.716	--	--	--
38 (Average)	5150.000	5.260	39.934	45.194	74.00	54.00	Pass
38 (Average)	5199.000	5.383	86.475	91.858	--	--	--

**Figure Channel 38: Vertical (Peak)**

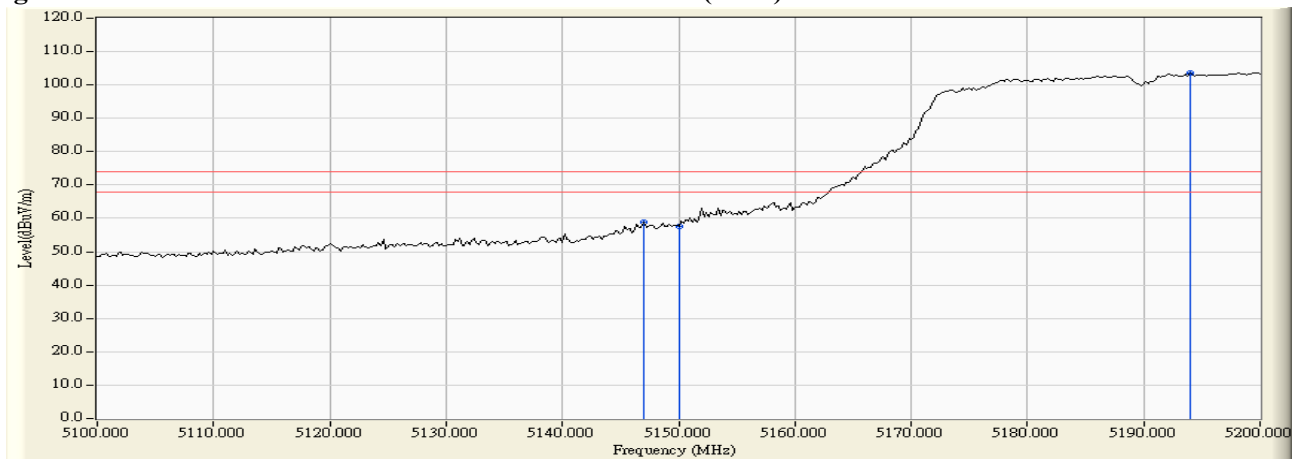

**Figure Channel 38: Vertical (Average)**

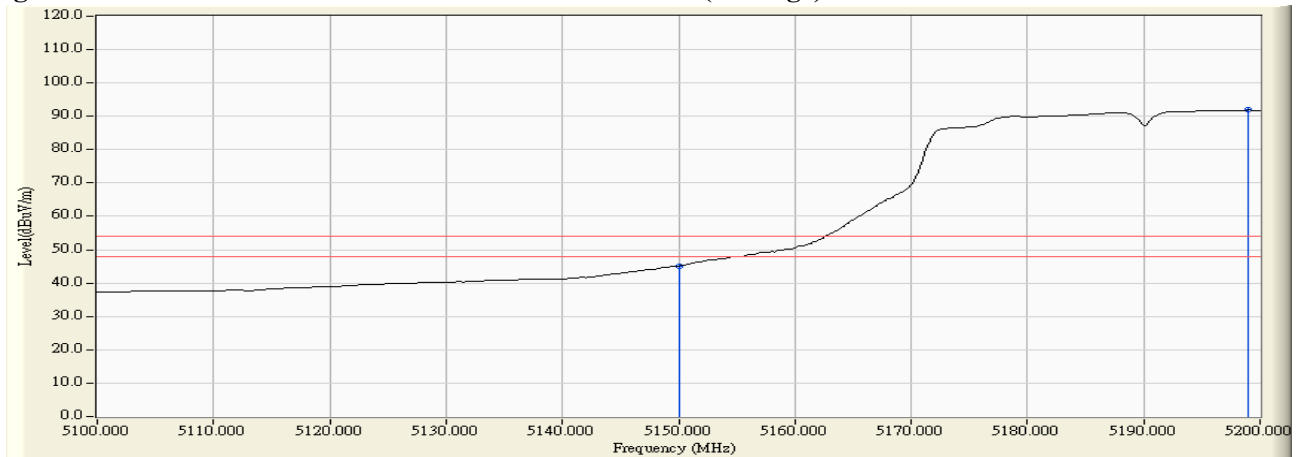

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 62


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5300.600	3.871	101.923	105.794	--	--	--
62 (Peak)	5350.000	3.716	61.142	64.859	74.00	54.00	Pass
62 (Peak)	5352.200	3.710	63.279	66.988	74.00	54.00	Pass
62 (Average)	5301.600	3.872	89.914	93.786	--	--	--
62 (Average)	5350.000	3.716	48.354	52.071	74.00	54.00	Pass

**Figure Channel 62: Horizontal (Peak)**

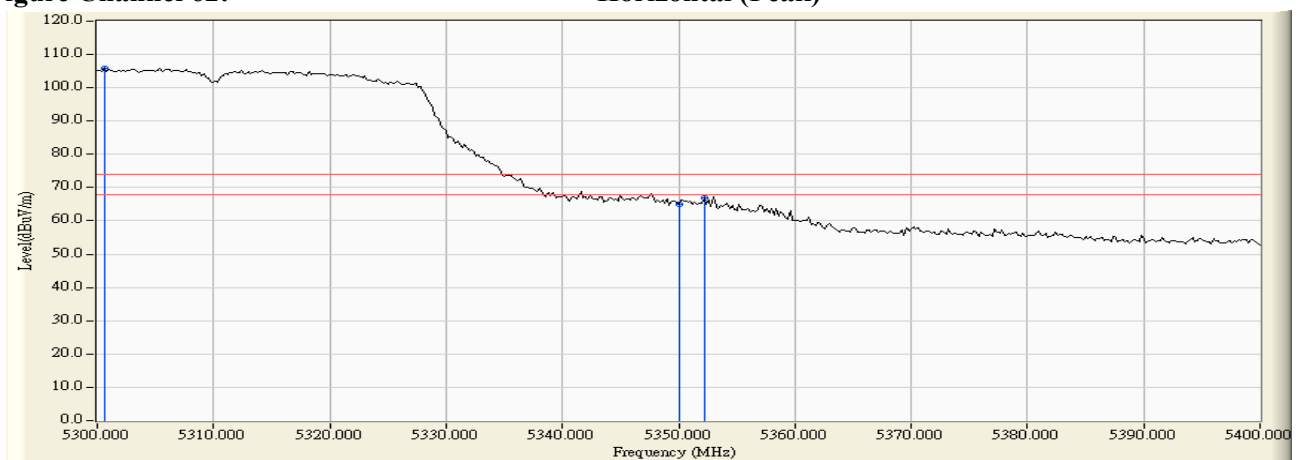

**Figure Channel 62: Horizontal (Average)**

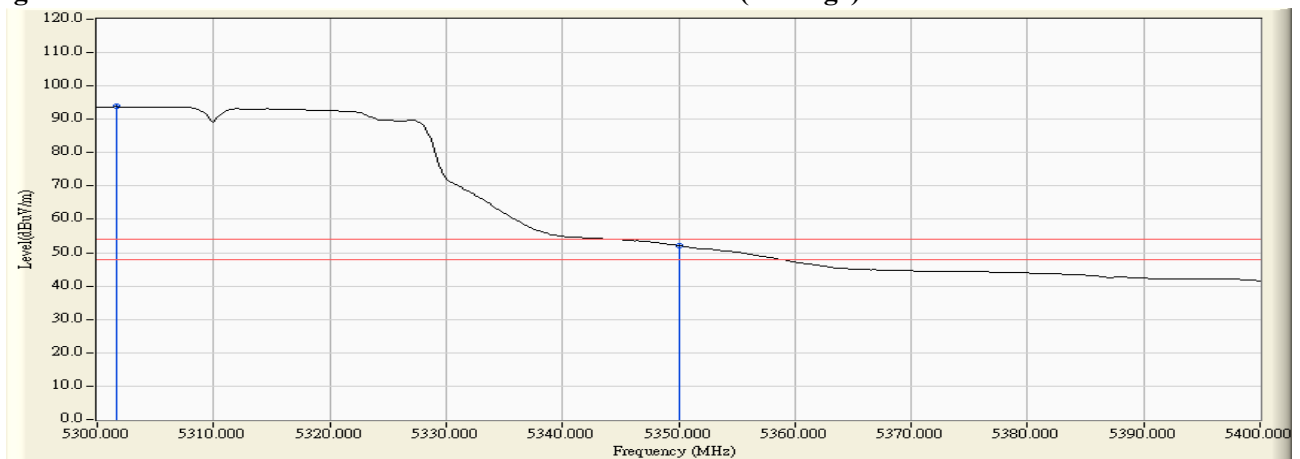

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 62


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5305.800	5.748	97.170	102.918	--	--	--
62 (Peak)	5350.000	5.691	55.096	60.788	74.00	54.00	Pass
62 (Peak)	5354.200	5.686	57.594	63.280	74.00	54.00	Pass
62 (Average)	5300.600	5.752	85.234	90.987	--	--	--
62 (Average)	5350.000	5.691	42.840	48.532	74.00	54.00	Pass

**Figure Channel 62: Vertical (Peak)**

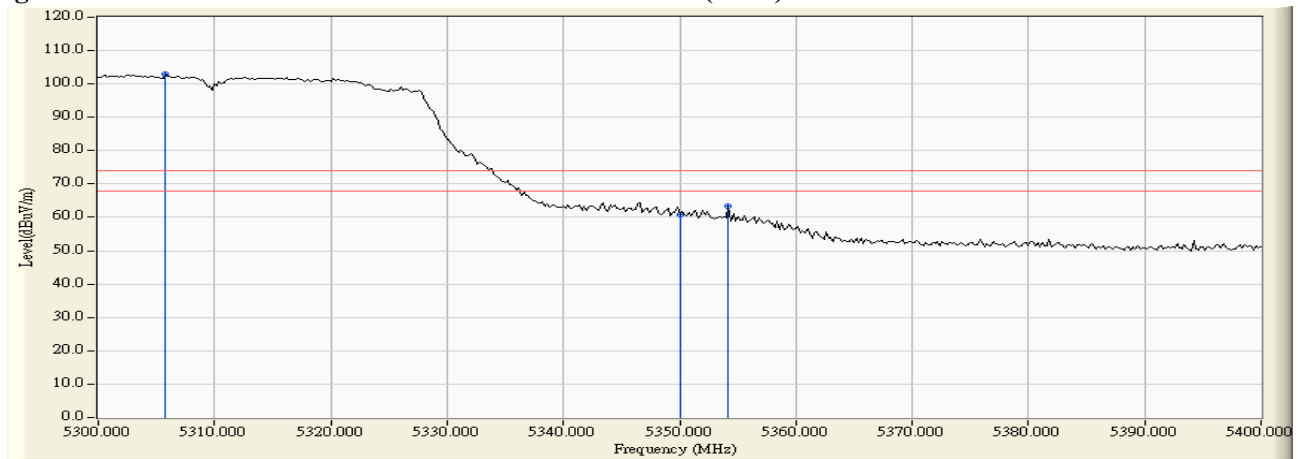

**Figure Channel 62: Vertical (Average)**

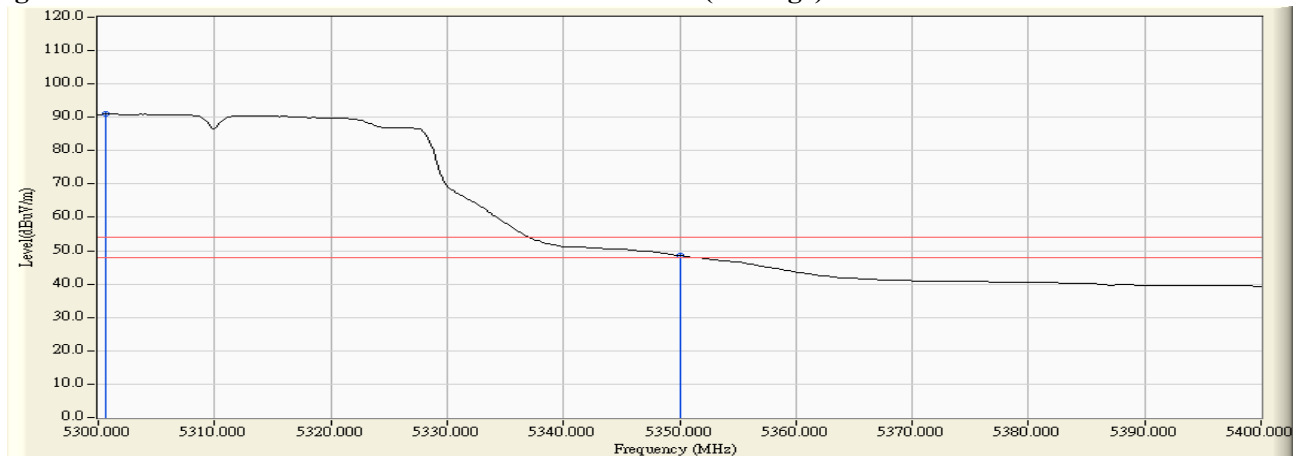

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 102


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.400	4.347	49.041	53.387	74.00	54.00	Pass
102 (Peak)	5460.000	4.354	47.310	51.664	74.00	54.00	Pass
102 (Peak)	5498.200	4.801	88.968	93.770	--	--	--
102 (Average)	5460.000	4.354	34.943	39.297	74.00	54.00	Pass
102 (Average)	5498.800	4.806	77.492	82.298	--	--	--

**Figure Channel 102: Horizontal (Peak)**

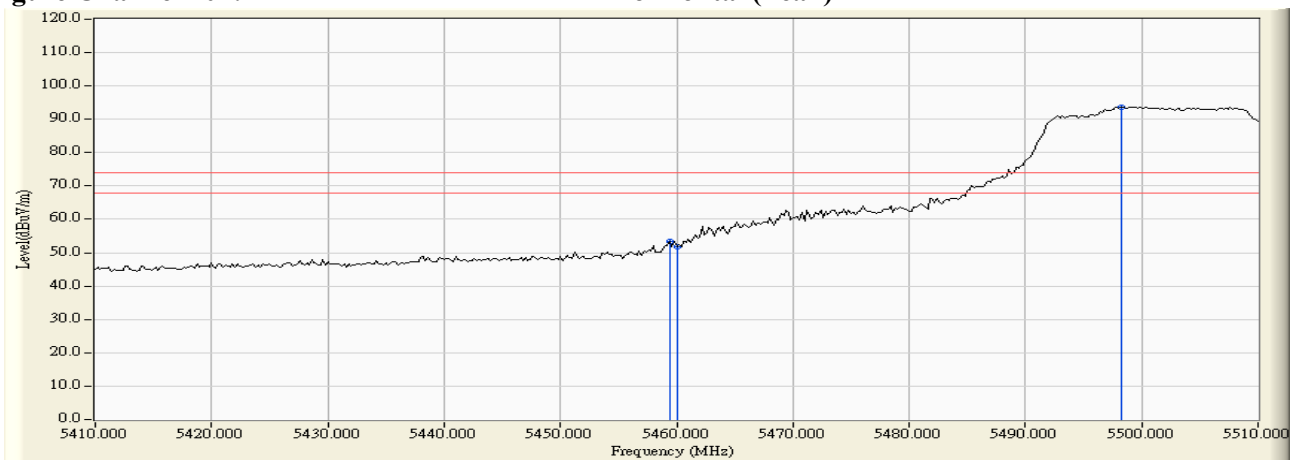

**Figure Channel 102: Horizontal (Average)**

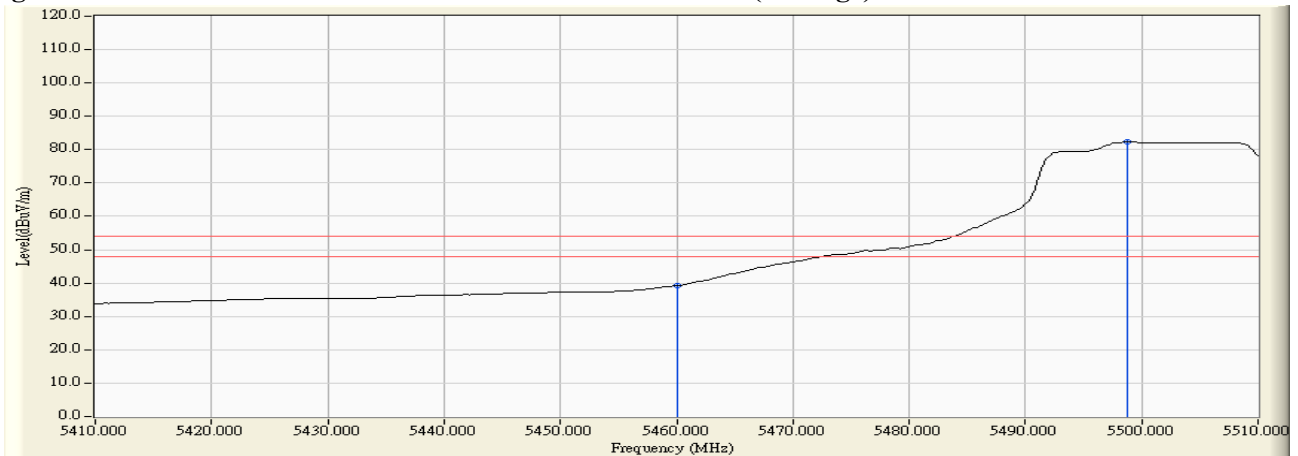

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 102


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.600	6.039	57.450	63.488	74.00	54.00	Pass
102 (Peak)	5460.000	6.041	57.203	63.244	74.00	54.00	Pass
102 (Peak)	5498.400	6.270	98.141	104.411	--	--	--
102 (Average)	5460.000	6.041	42.575	48.616	74.00	54.00	Pass
102 (Average)	5498.800	6.271	86.249	92.520	--	--	--

**Figure Channel 102: Vertical (Peak)**

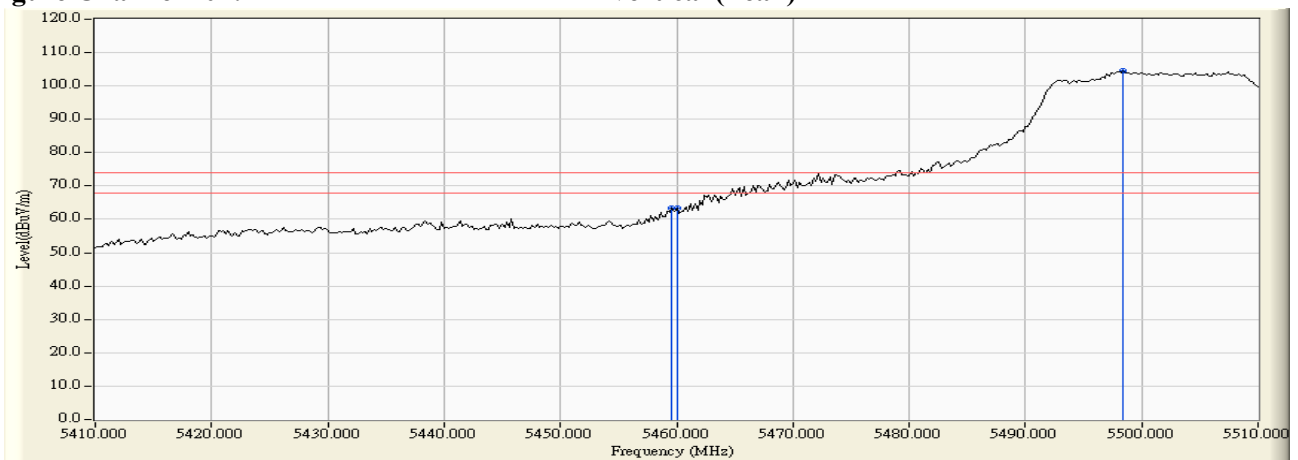

**Figure Channel 102: Vertical (Average)**

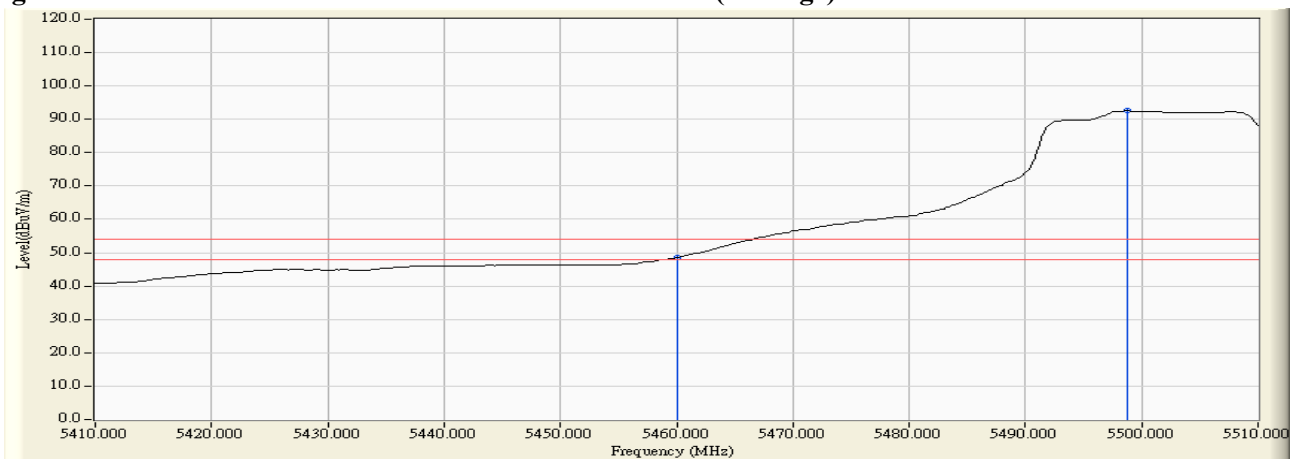

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 102

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5469.200	4.476	61.080	65.557	-2.663	68.220	Pass
Horizontal	5470.000	4.488	60.538	65.026	-3.194	68.220	Pass
Horizontal	5499.400	4.811	98.165	102.975	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5469.000	6.104	61.404	67.508	-0.712	68.220	Pass
Vertical	5470.000	6.112	60.325	66.436	-1.784	68.220	Pass
Vertical	5506.200	6.282	98.013	104.295	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW 15Mbps) -Channel 134

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5678.400	4.530	100.700	105.230	--	--	Pass
Horizontal	5725.000	4.654	59.851	64.505	-3.715	68.220	Pass
Horizontal	5726.000	4.654	61.582	66.236	-1.984	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5678.400	4.530	100.700	105.230	--	--	Pass
Vertical	5725.000	4.654	59.851	64.505	-3.715	68.220	Pass
Vertical	5726.000	4.654	61.582	66.236	-1.984	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-20BW-7.2Mbps) -Channel 44

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	50.728	55.692	-22.528	78.220	Pass
Horizontal	5856.400	5.002	50.793	55.794	-22.426	78.220	Pass
Horizontal	5860.000	5.023	49.884	54.907	-13.313	68.220	Pass
Horizontal	5874.000	5.106	52.229	57.335	-10.885	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	51.727	57.764	-20.456	78.220	Pass
Vertical	5852.200	6.040	52.101	58.140	-20.080	78.220	Pass
Vertical	5860.000	6.047	50.598	56.645	-11.575	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-40BW-15Mbps) -Channel 42

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	51.497	56.461	-21.759	78.220	Pass
Horizontal	5857.600	5.008	51.984	56.993	-21.227	78.220	Pass
Horizontal	5860.000	5.023	51.134	56.157	-12.063	68.220	Pass
Horizontal	5863.800	5.044	51.813	56.858	-11.362	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	54.899	60.936	-17.284	78.220	Pass
Vertical	5852.800	6.040	55.278	61.318	-16.902	78.220	Pass
Vertical	5860.000	6.047	52.734	58.781	-9.439	68.220	Pass
Vertical	5863.600	6.051	54.638	60.689	-7.531	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 42


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5148.600	3.345	66.558	69.903	74.00	54.00	Pass
42 (Peak)	5150.000	3.340	65.560	68.900	74.00	54.00	Pass
42 (Peak)	5194.000	3.179	101.636	104.814	--	--	--
42 (Average)	5150.000	3.340	48.551	51.891	74.00	54.00	Pass
42 (Average)	5197.600	3.162	87.386	90.548	--	--	--

**Figure Channel 42: Horizontal (Peak)**

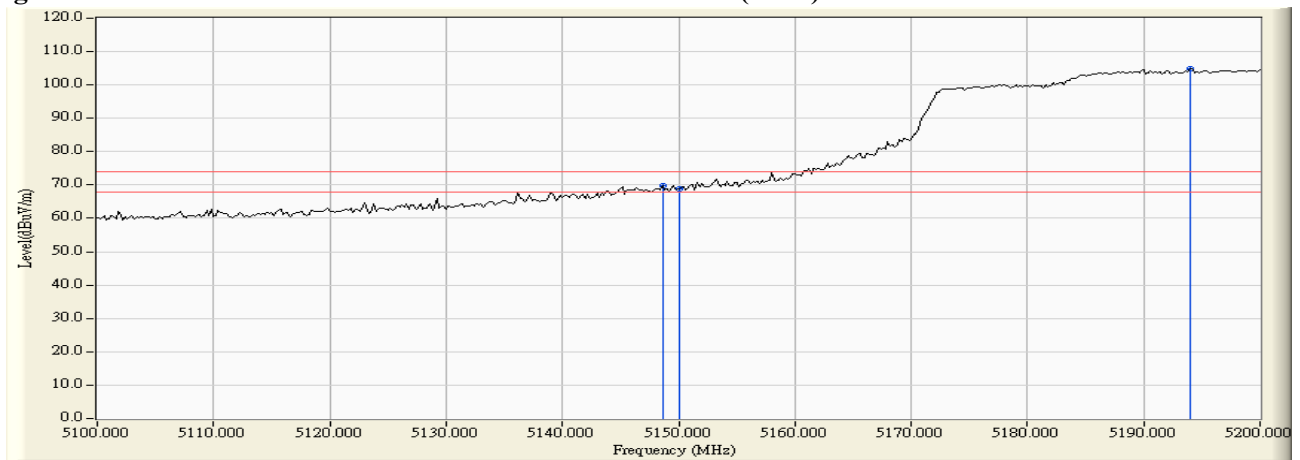

**Figure Channel 42: Horizontal (Average)**

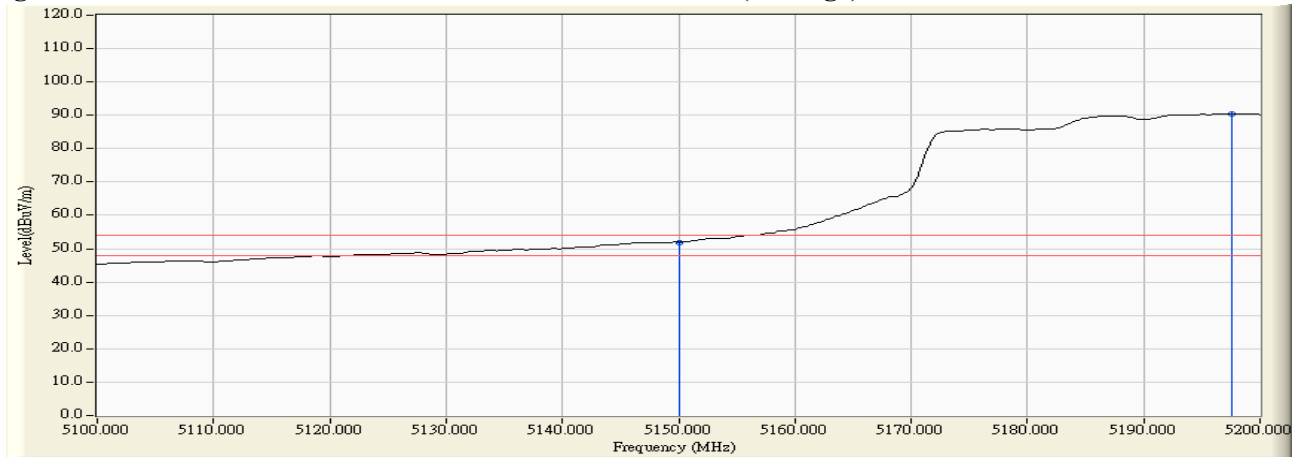

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 42


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5148.800	5.257	51.805	57.062	74.00	54.00	Pass
42 (Peak)	5150.000	5.260	51.663	56.923	74.00	54.00	Pass
42 (Peak)	5196.800	5.379	94.733	100.112	--	--	--
42 (Average)	5150.000	5.260	38.700	43.960	74.00	54.00	Pass
42 (Average)	5198.800	5.383	81.578	86.961	--	--	--

**Figure Channel 42: Vertical (Peak)**

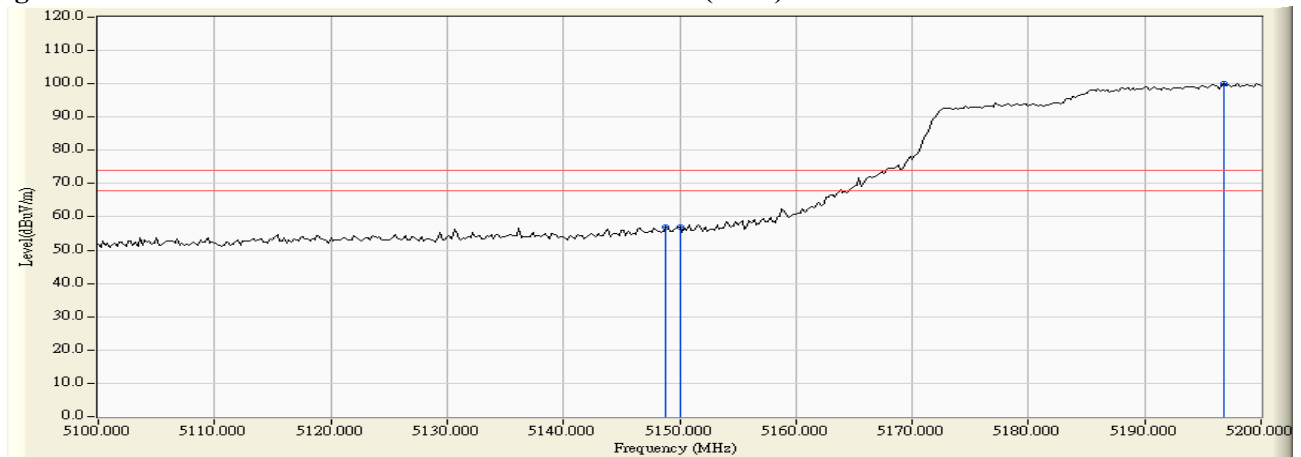

**Figure Channel 42: Vertical (Average)**

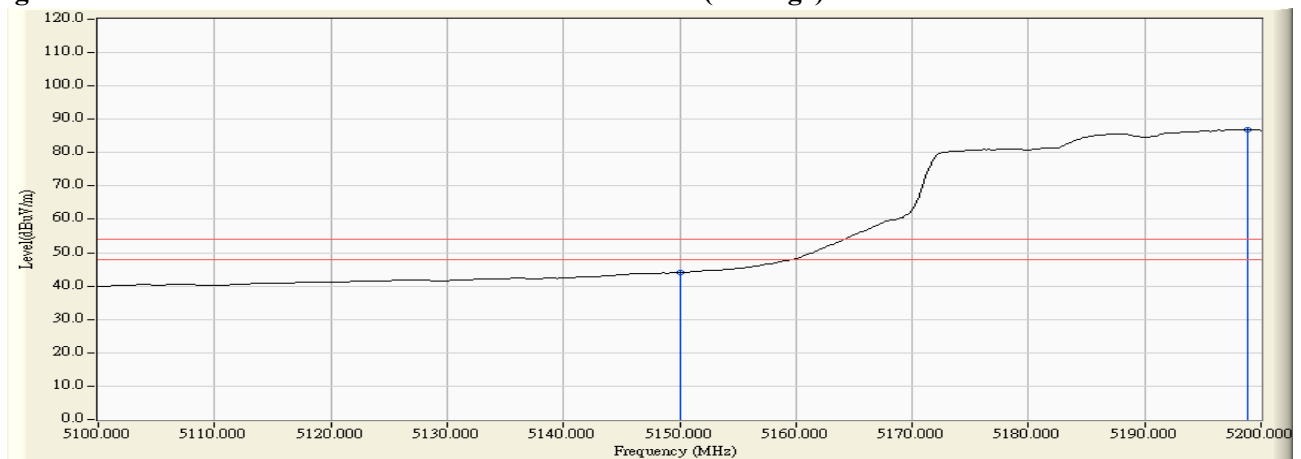

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 58


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5301.400	3.872	98.116	101.989	--	--	--
58 (Peak)	5350.000	3.716	59.594	63.311	74.00	54.00	Pass
58 (Peak)	5350.600	3.714	62.423	66.138	74.00	54.00	Pass
58 (Average)	5301.400	3.872	84.452	88.325	--	--	--
58 (Average)	5350.000	3.716	47.310	51.027	74.00	54.00	Pass

**Figure Channel 58: Horizontal (Peak)**

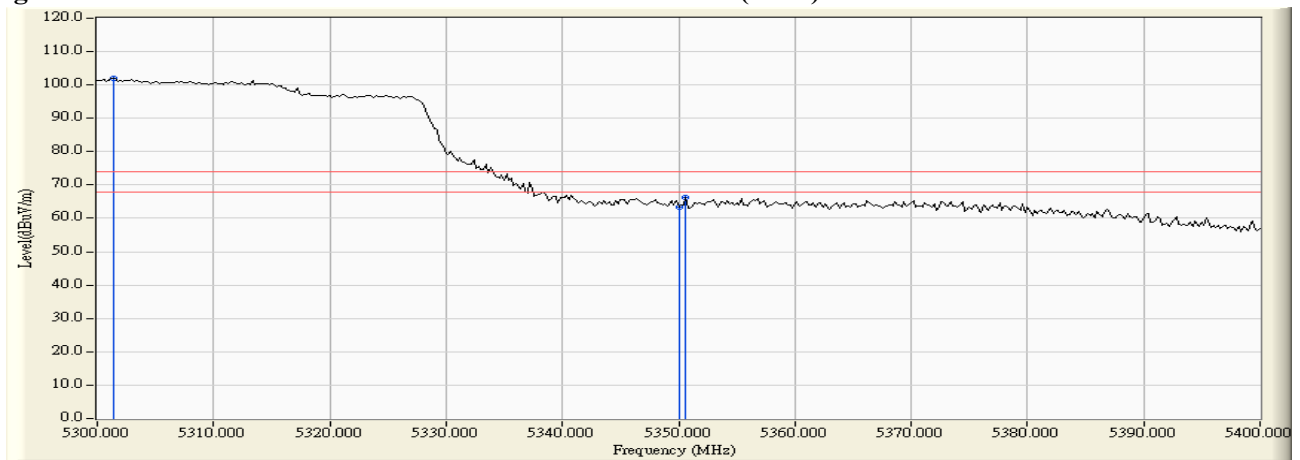

**Figure Channel 58: Horizontal (Average)**

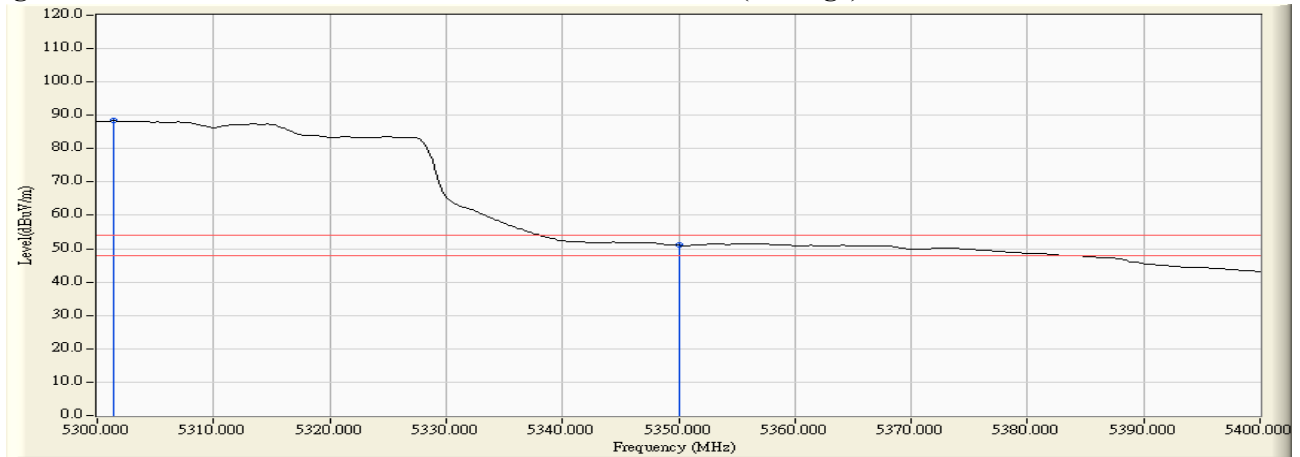

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 58

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5301.200	5.754	87.938	93.692	--	--	--
58 (Peak)	5350.000	5.691	49.836	55.528	74.00	54.00	Pass
58 (Peak)	5355.800	5.684	51.433	57.117	74.00	54.00	Pass
58 (Average)	5301.400	5.753	74.939	80.692	--	--	--
58 (Average)	5350.000	5.691	37.779	43.471	74.00	54.00	Pass

**Figure Channel 58: Vertical (Peak)**

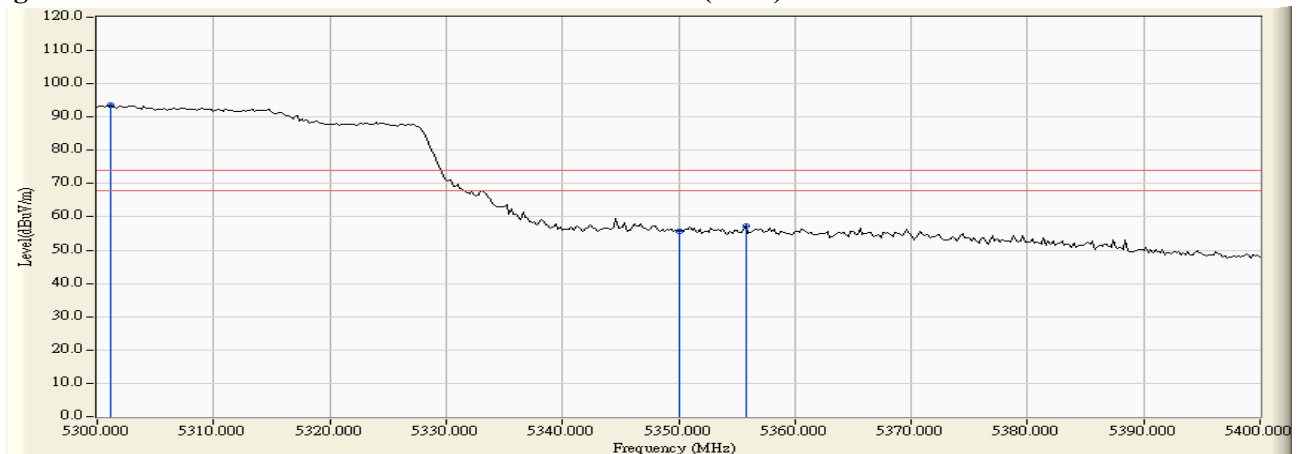

**Figure Channel 58: Vertical (Average)**



Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 106


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5455.800	4.298	64.445	68.743	74.00	54.00	Pass
106 (Peak)	5460.000	4.354	63.204	67.558	74.00	54.00	Pass
106 (Peak)	5508.800	4.818	96.647	101.466	--	--	--
106 (Average)	5460.000	4.354	48.526	52.880	74.00	54.00	Pass
106 (Average)	5507.400	4.830	82.790	87.620	--	--	--

**Figure Channel 106: Horizontal (Peak)**

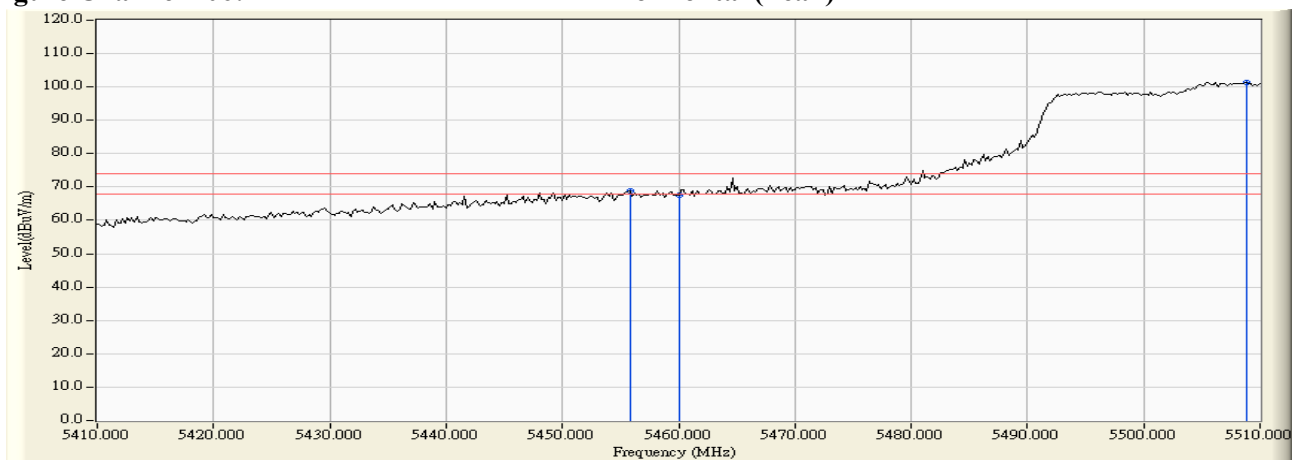

**Figure Channel 106: Horizontal (Average)**

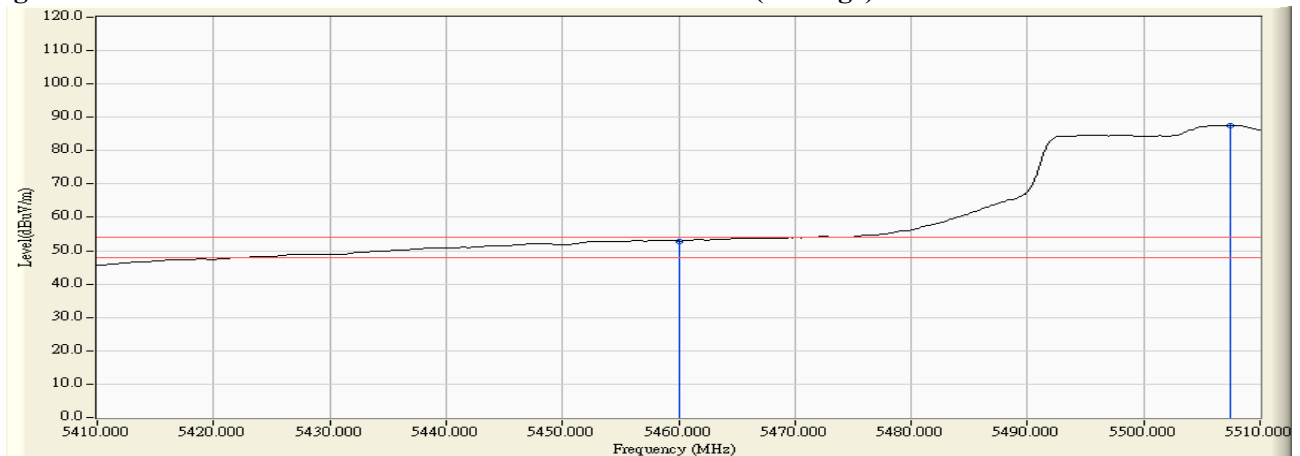

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 106


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5458.600	6.030	53.319	59.350	74.00	54.00	Pass
106 (Peak)	5460.000	6.041	52.334	58.375	74.00	54.00	Pass
106 (Peak)	5510.000	6.258	86.233	92.491	--	--	--
106 (Average)	5460.000	6.041	39.044	45.085	74.00	54.00	Pass
106 (Average)	5507.400	6.275	72.698	78.973	--	--	--

**Figure Channel 106: Vertical (Peak)**

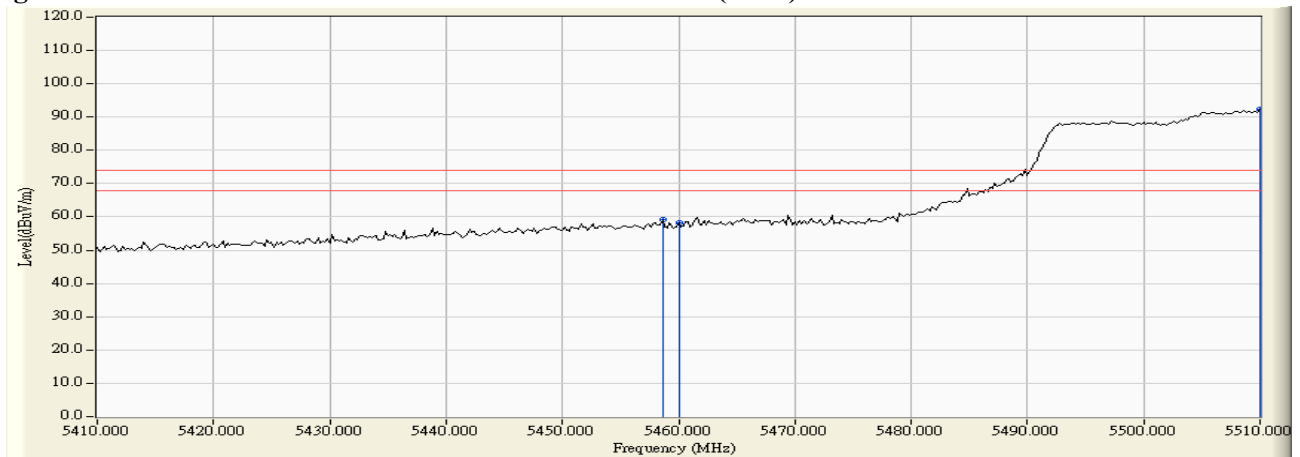

**Figure Channel 106: Vertical (Average)**

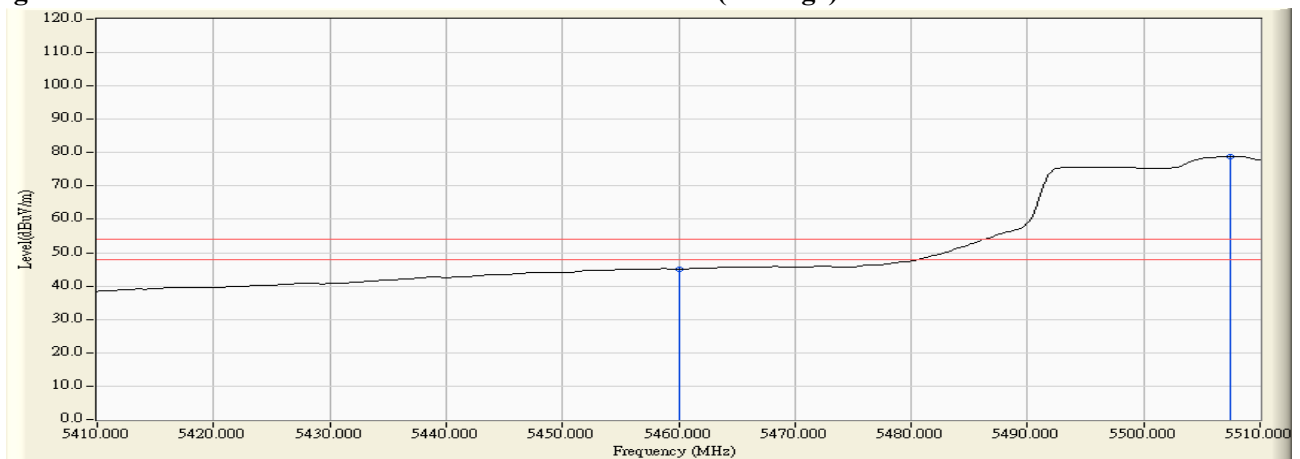

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW-32.5Mbps) -Channel 106

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5464.600	4.416	61.933	66.348	-1.872	68.220	Pass
Horizontal	5470.000	4.488	60.282	64.770	-3.450	68.220	Pass
Horizontal	5510.000	4.809	94.512	99.321	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5445.400	5.939	61.591	67.531	-0.689	68.220	Pass
Vertical	5470.000	6.112	60.145	66.256	-1.964	68.220	Pass
Vertical	5518.800	6.201	93.996	100.198	--	--	Pass


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 36

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5150.000	3.340	60.771	64.111	74.00	54.00	Pass
36 (Peak)	5183.600	3.221	107.018	110.239	--	--	--
36 (Average)	5150.000	3.340	44.273	47.613	74.00	54.00	Pass
36 (Average)	5184.000	3.220	93.745	96.965	--	--	--


**Figure Channel 36:**

**Horizontal (Peak)**

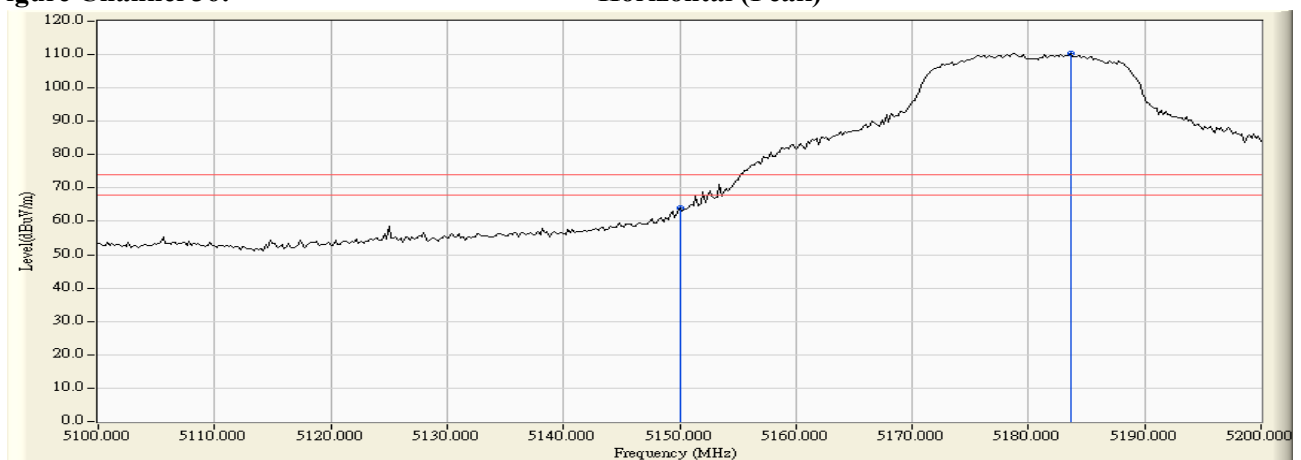

**Figure Channel 36:**

**Horizontal (Average)**

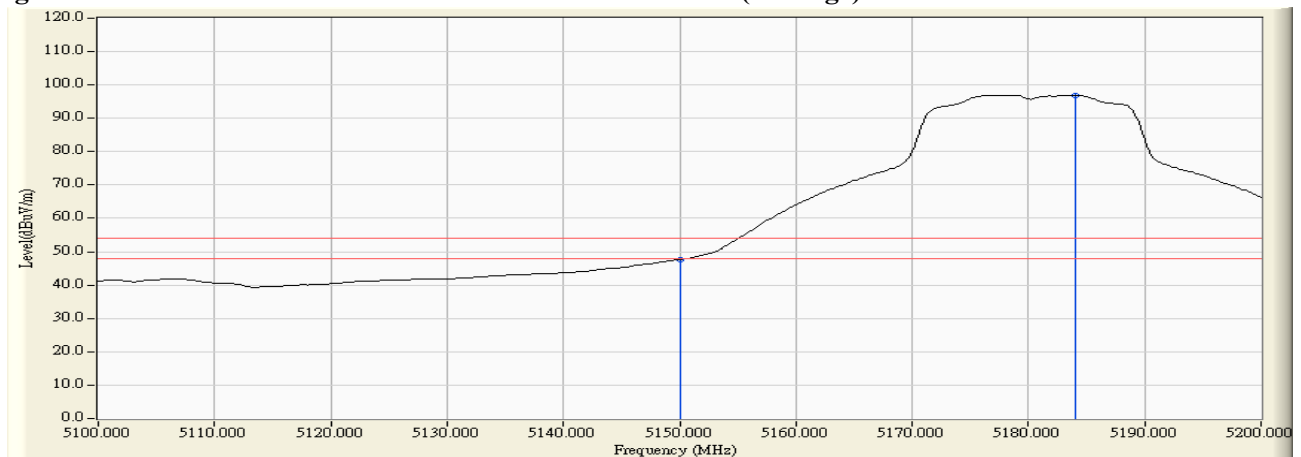

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 36


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5149.400	5.258	63.496	68.754	74.00	54.00	Pass
36 (Peak)	5150.000	5.260	62.928	68.188	74.00	54.00	Pass
36 (Peak)	5177.600	5.336	109.302	114.637	--	--	--
36 (Average)	5150.000	5.260	47.764	53.024	74.00	54.00	Pass
36 (Average)	5184.200	5.353	95.974	101.327	--	--	--

**Figure Channel 36: Vertical (Peak)**

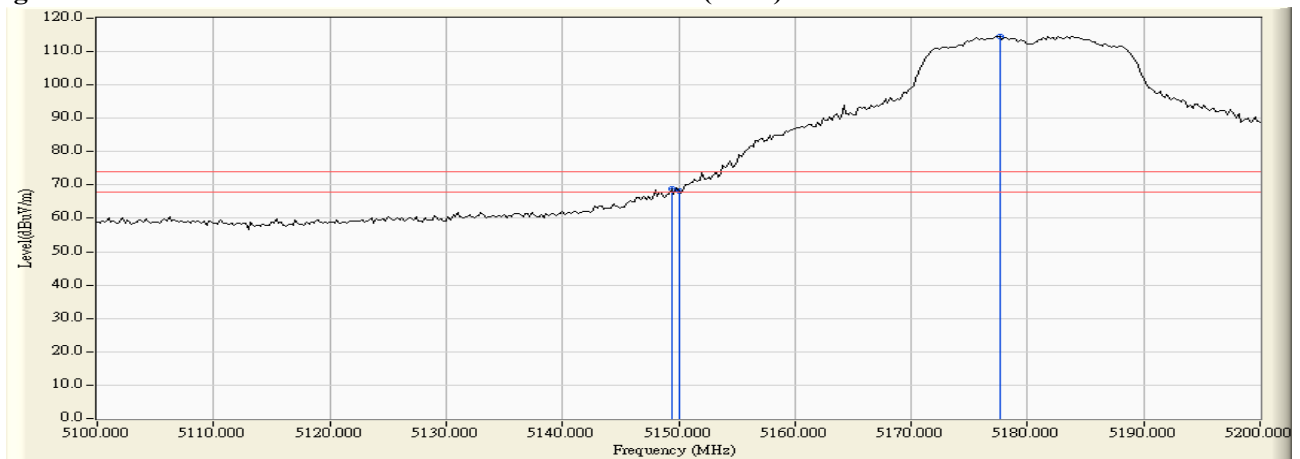

**Figure Channel 36: Vertical (Average)**

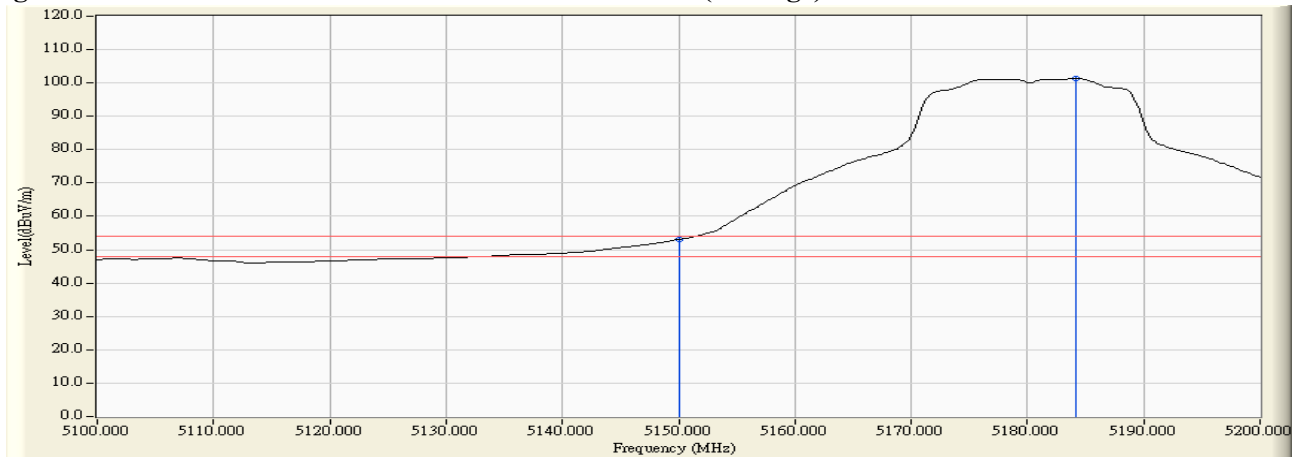

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 64

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5316.600	3.823	107.258	111.081	--	--	--
64 (Peak)	5350.000	3.716	63.313	67.030	74.00	54.00	Pass
64 (Average)	5316.400	3.823	93.699	97.523	--	--	--
64 (Average)	5350.000	3.716	47.185	50.902	74.00	54.00	Pass


**Figure Channel 64:**

**Horizontal (Peak)**

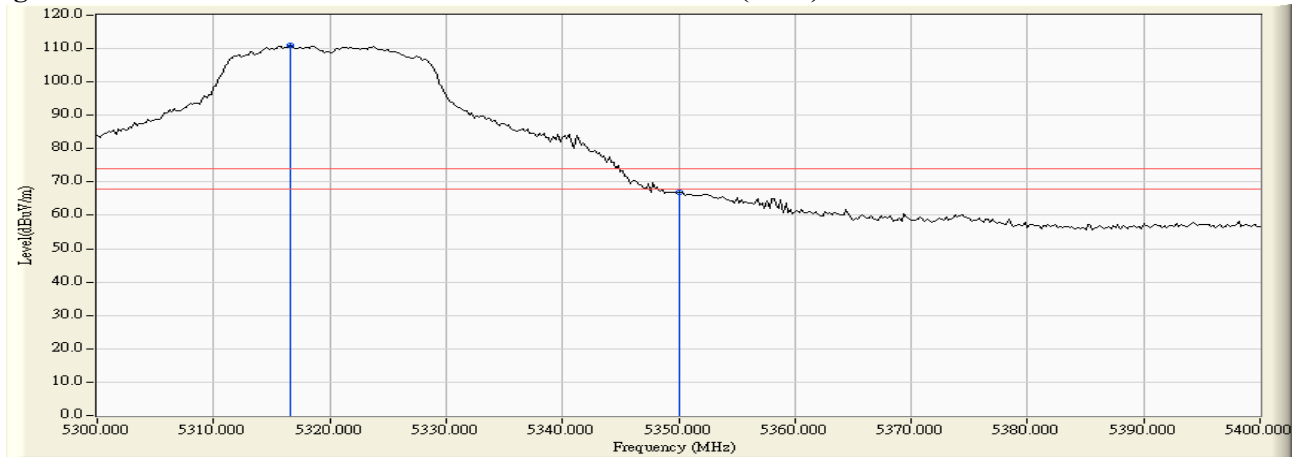

**Figure Channel 64:**

**Horizontal (Average)**

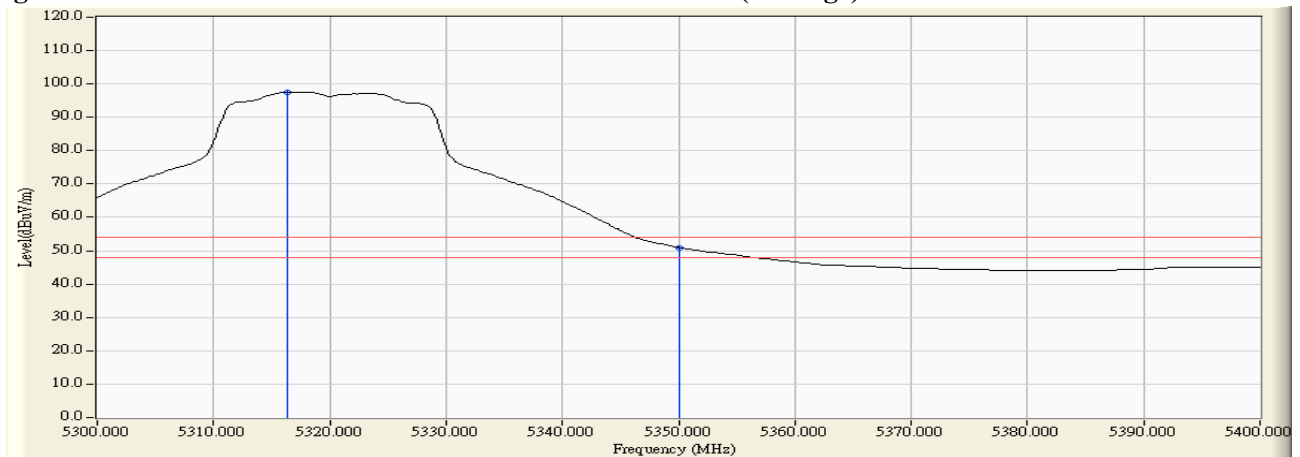

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 64


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5323.800	5.724	108.245	113.969	--	--	--
64 (Peak)	5350.000	5.691	62.593	68.285	74.00	54.00	Pass
64 (Peak)	5350.600	5.690	64.996	70.687	74.00	54.00	Pass
64 (Average)	5316.000	5.733	94.479	100.213	--	--	--
64 (Average)	5350.000	5.691	46.913	52.605	74.00	54.00	Pass

**Figure Channel 64: Vertical (Peak)**

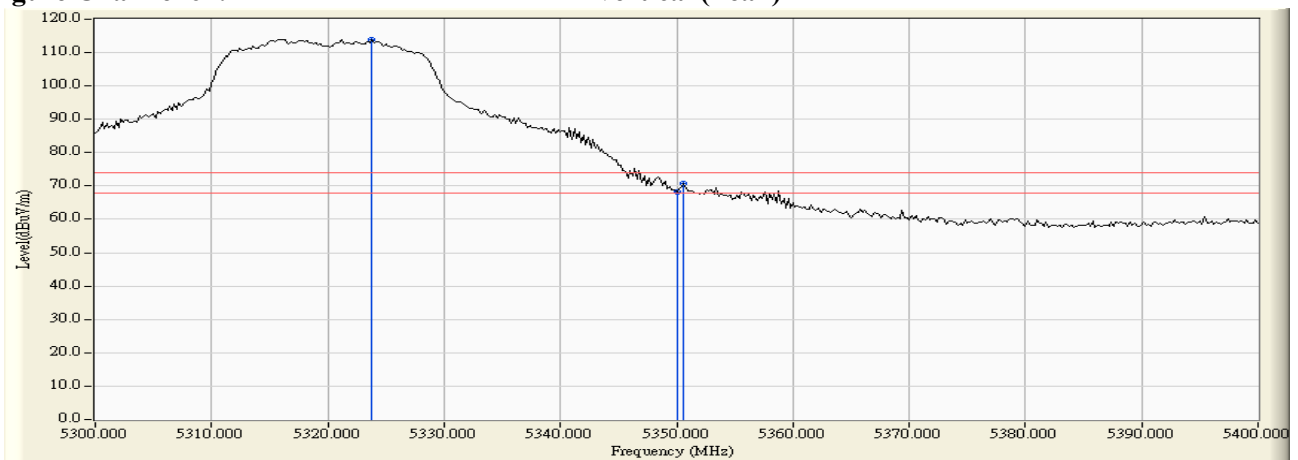

**Figure Channel 64: Vertical (Average)**

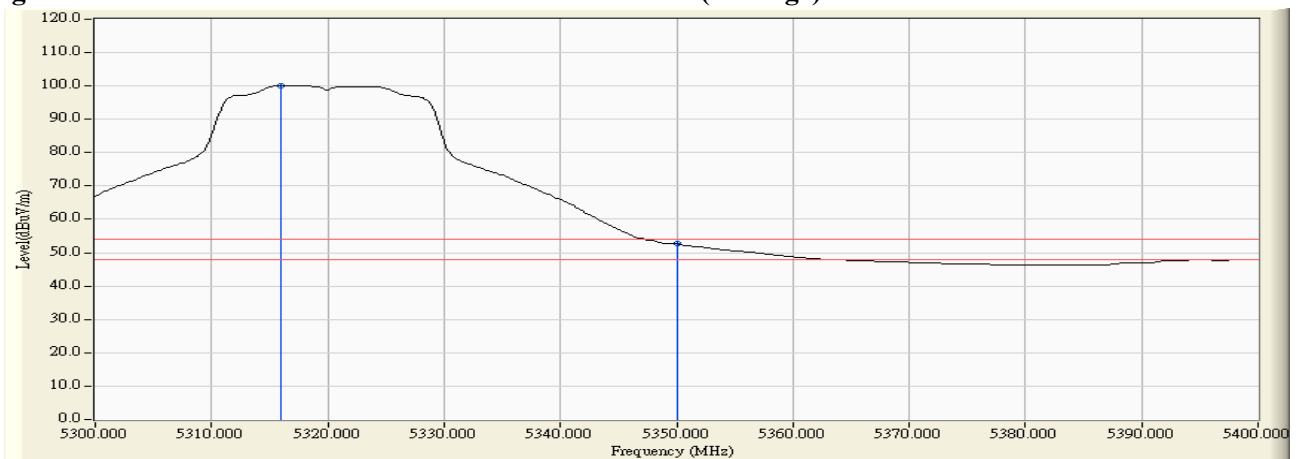

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 100


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5458.200	4.330	59.773	64.103	74.00	54.00	Pass
100 (Peak)	5460.000	4.354	58.022	62.376	74.00	54.00	Pass
100 (Peak)	5496.200	4.788	104.897	109.685	--	--	--
100 (Average)	5460.000	4.354	45.424	49.778	74.00	54.00	Pass
100 (Average)	5496.400	4.789	91.228	96.018	--	--	--

**Figure Channel 100: Horizontal (Peak)**

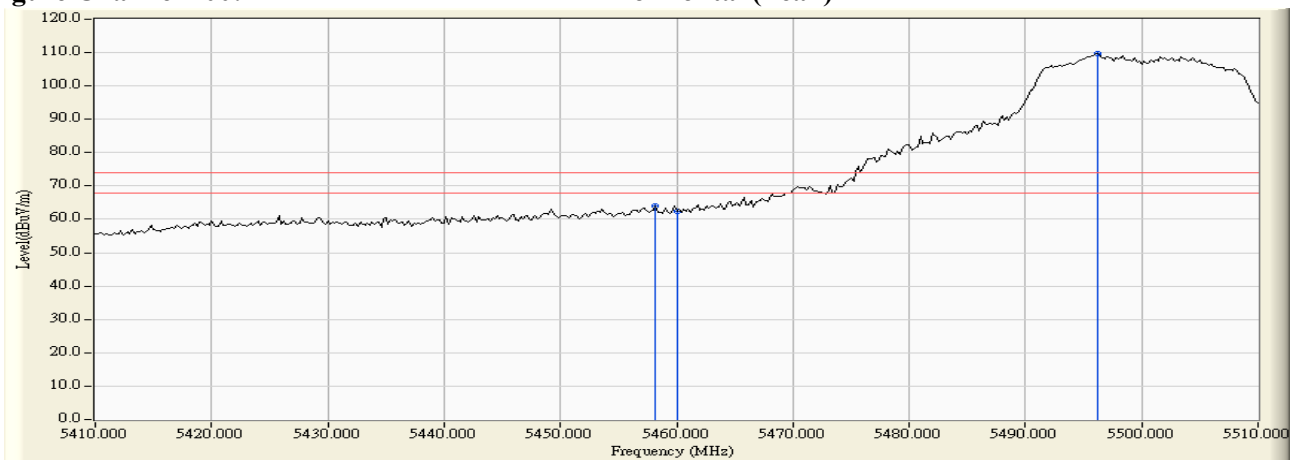

**Figure Channel 100: Horizontal (Average)**

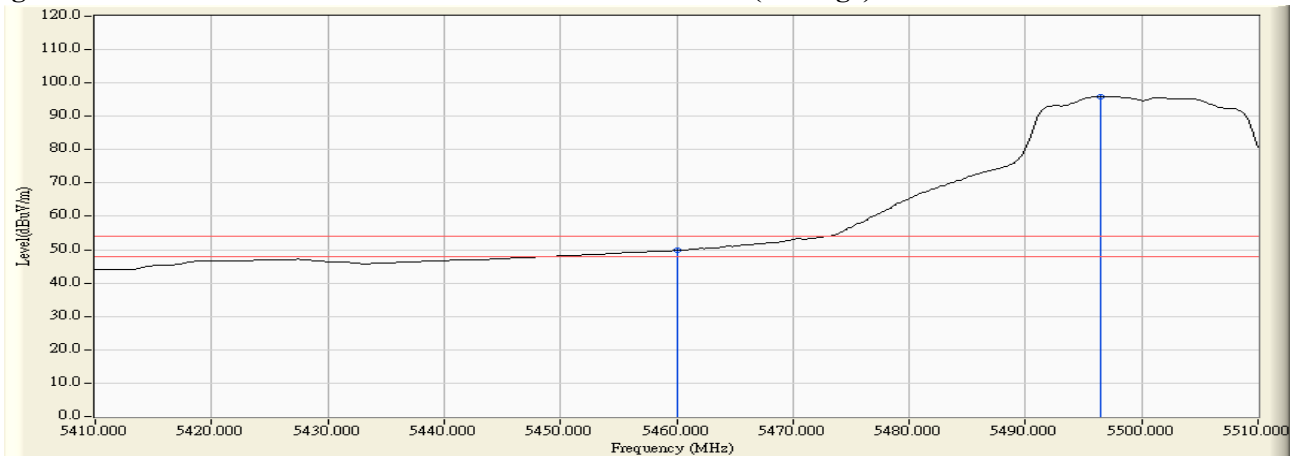

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 100


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5460.000	6.041	60.228	66.269	74.00	54.00	Pass
100 (Peak)	5497.200	6.267	106.042	112.308	--	--	--
100 (Average)	5460.000	6.041	46.143	52.184	74.00	54.00	Pass
100 (Average)	5498.600	6.271	92.919	99.190	--	--	--

**Figure Channel 100: Vertical (Peak)**

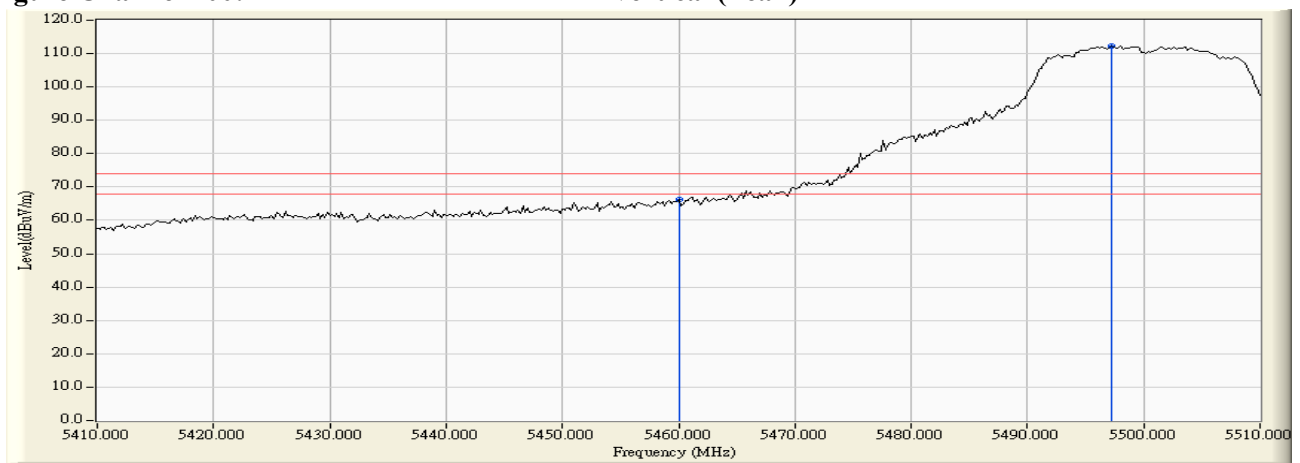

**Figure Channel 100: Vertical (Average)**

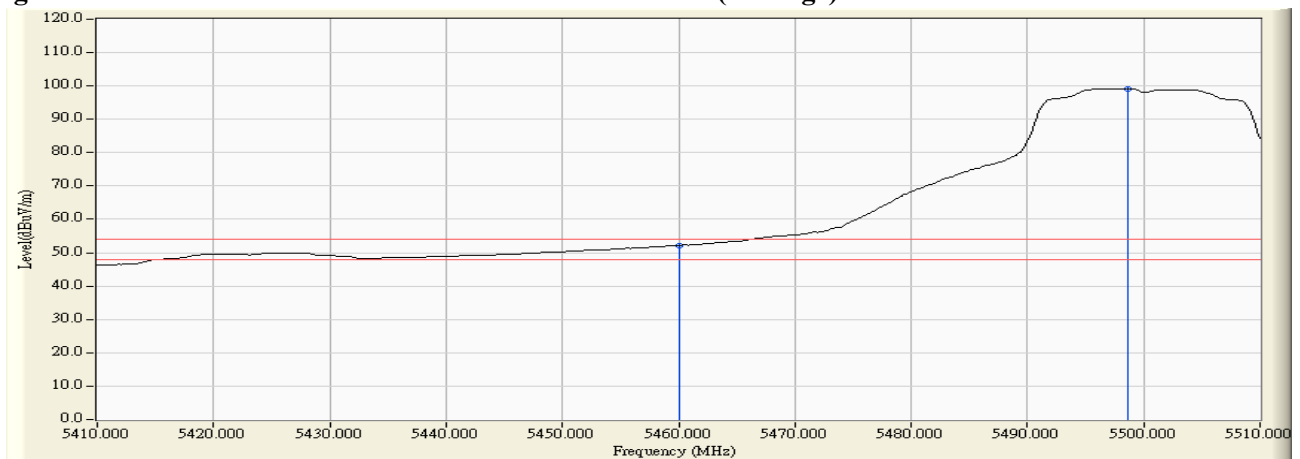

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 100

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5470.000	4.488	62.157	66.645	-1.575	68.220	Pass
Horizontal	5497.200	4.795	104.108	108.903	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5467.000	6.090	60.730	66.820	-1.400	68.220	Pass
Vertical	5470.000	6.112	59.280	65.391	-2.829	68.220	Pass
Vertical	5501.600	6.280	104.728	111.008	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW 14.4Mbps) -Channel 140

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5697.000	4.619	100.913	105.532	37.312	68.220	Pass
Horizontal	5725.000	4.654	58.436	63.090	-5.130	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5696.800	5.978	101.509	107.487	39.267	68.220	Pass
Vertical	5725.000	5.992	61.045	67.038	-1.182	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 38


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.600	3.342	61.682	65.024	74.00	54.00	Pass
38 (Peak)	5150.000	3.340	59.910	63.250	74.00	54.00	Pass
38 (Peak)	5198.000	3.160	102.856	106.016	--	--	--
38 (Average)	5150.000	3.340	46.297	49.637	74.00	54.00	Pass
38 (Average)	5195.000	3.173	87.916	91.090	--	--	--

**Figure Channel 38: Horizontal (Peak)**

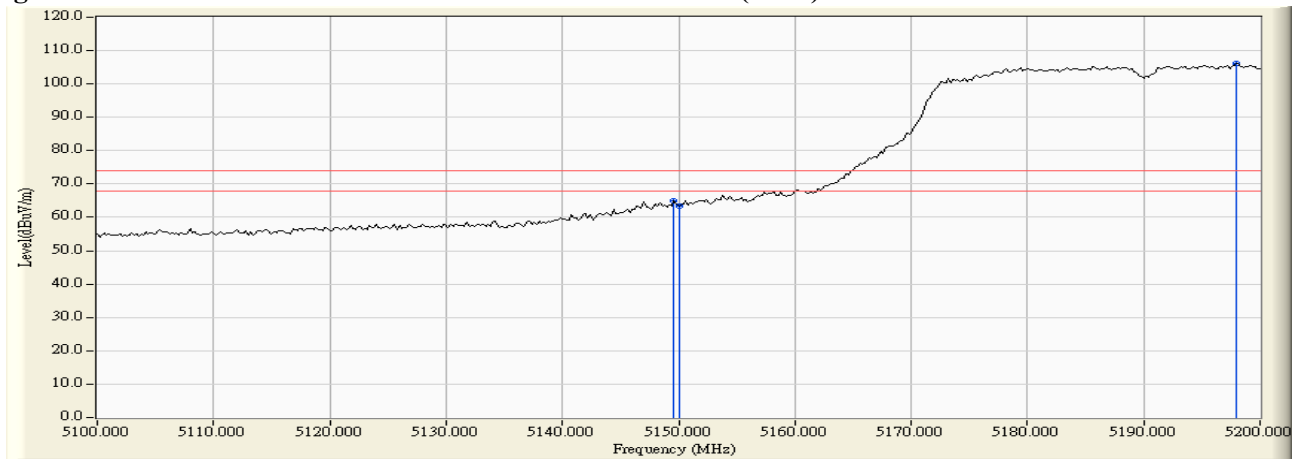

**Figure Channel 38: Horizontal (Average)**

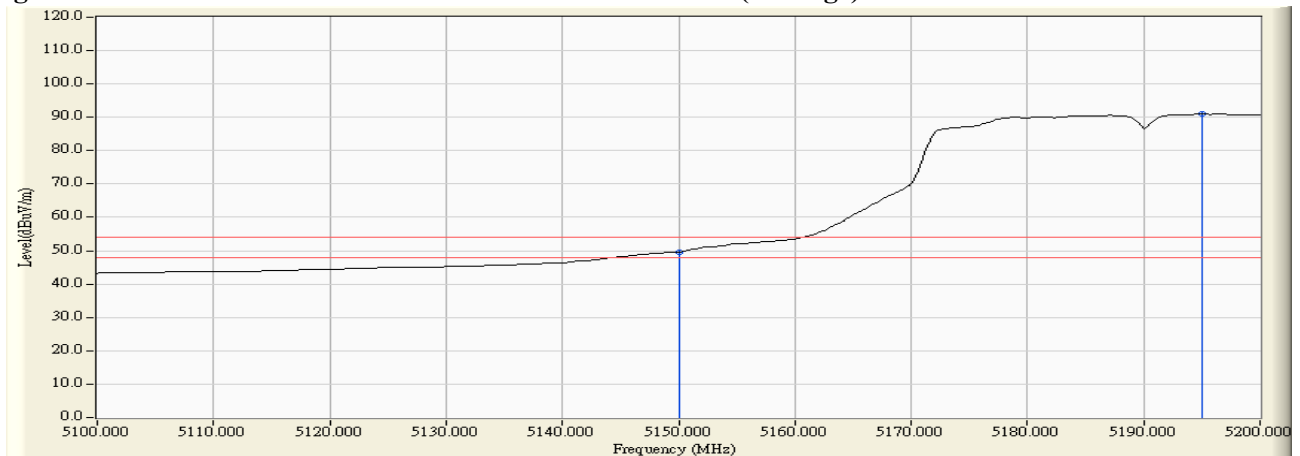

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 38


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5149.200	5.258	64.738	69.996	74.00	54.00	Pass
38 (Peak)	5150.000	5.260	63.318	68.578	74.00	54.00	Pass
38 (Peak)	5198.200	5.382	104.680	110.061	--	--	--
38 (Average)	5150.000	5.260	48.179	53.439	74.00	54.00	Pass
38 (Average)	5195.000	5.375	89.391	94.767	--	--	--

**Figure Channel 38: Vertical (Peak)**

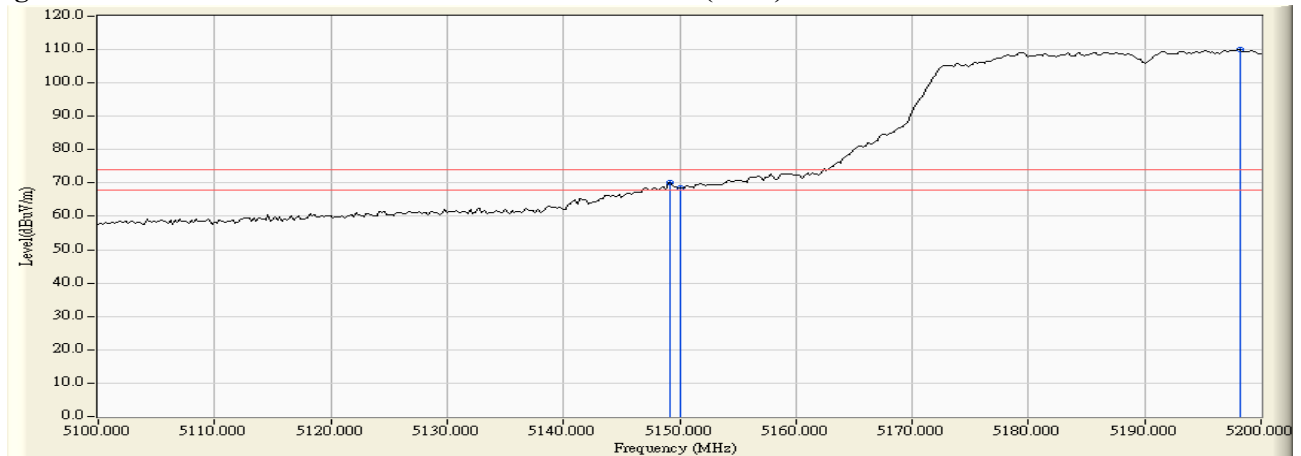

**Figure Channel 38: Vertical (Average)**

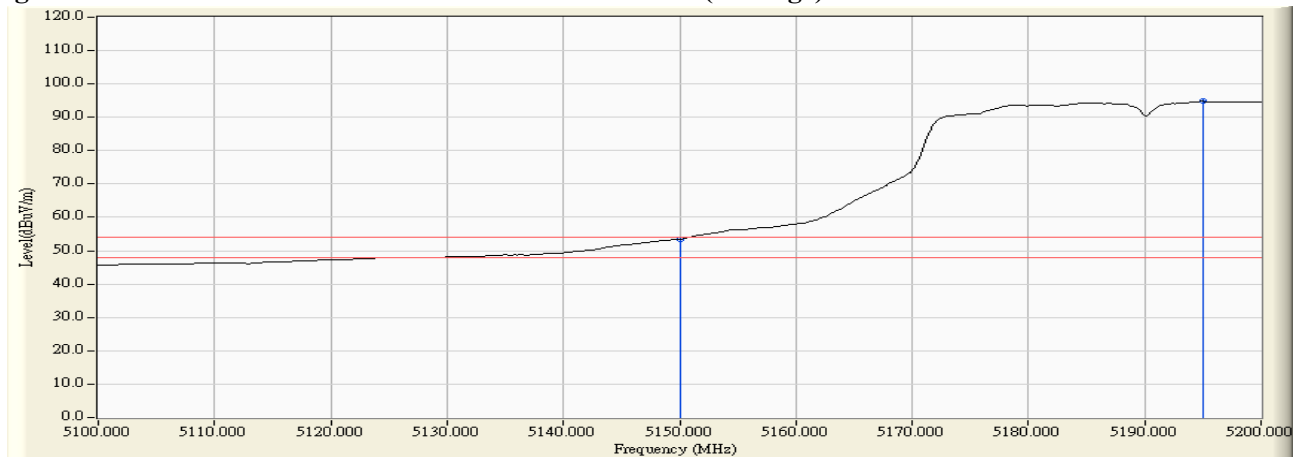

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 62


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5308.600	3.849	102.520	106.369	--	--	--
62 (Peak)	5350.000	3.716	60.968	64.685	74.00	54.00	Pass
62 (Average)	5303.200	3.867	87.335	91.202	--	--	--
62 (Average)	5350.000	3.716	46.210	49.927	74.00	54.00	Pass

**Figure Channel 62: Horizontal (Peak)**

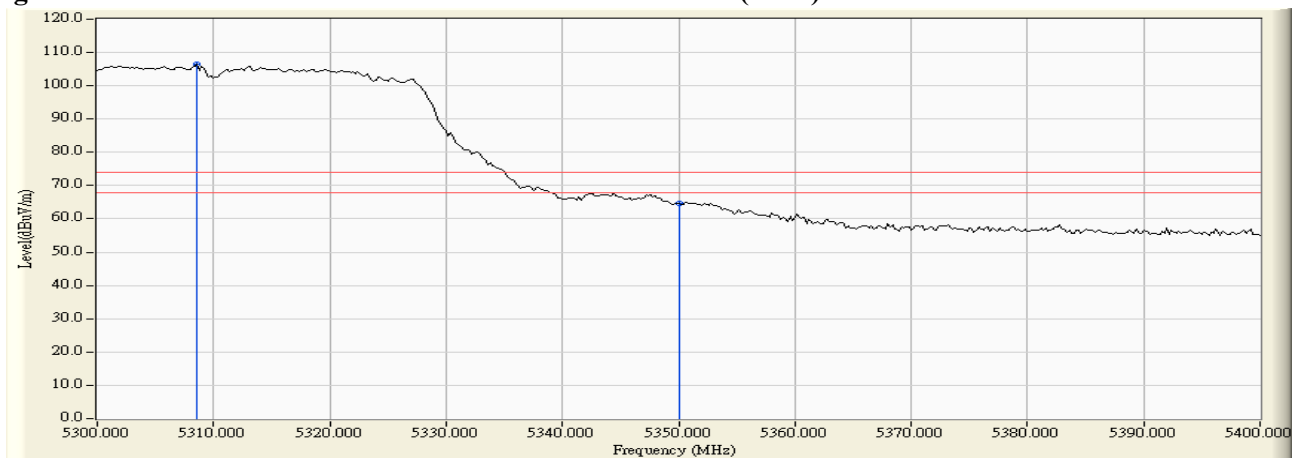

**Figure Channel 62: Horizontal (Average)**

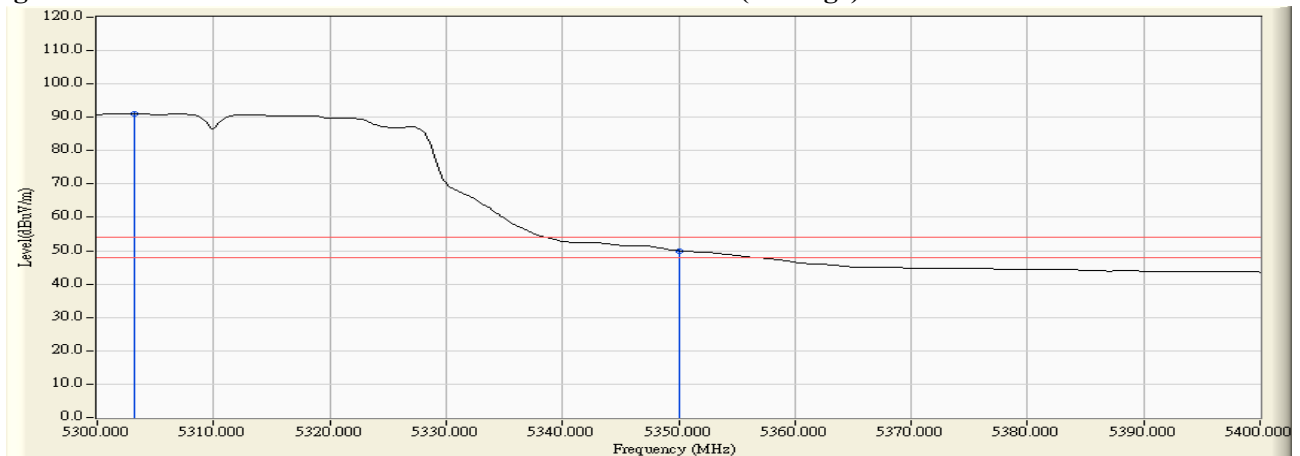

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 62


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5313.200	5.738	102.910	108.648	--	--	--
62 (Peak)	5350.000	5.691	61.937	67.629	74.00	54.00	Pass
62 (Peak)	5350.600	5.690	62.653	68.344	74.00	54.00	Pass
62 (Average)	5303.400	5.751	87.925	93.676	--	--	--
62 (Average)	5350.000	5.691	47.672	53.364	74.00	54.00	Pass

**Figure Channel 62: Vertical (Peak)**

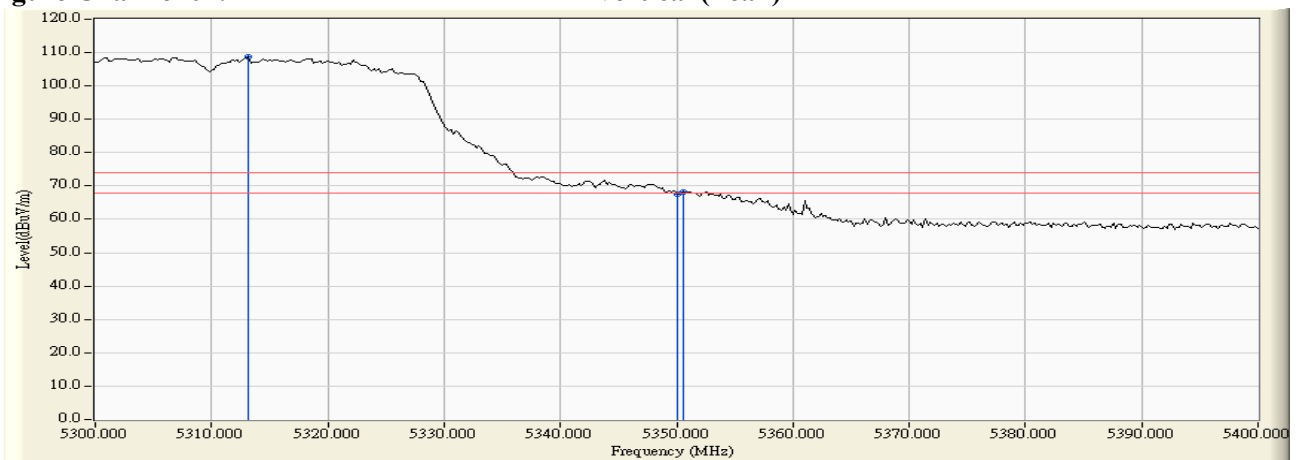

**Figure Channel 62: Vertical (Average)**

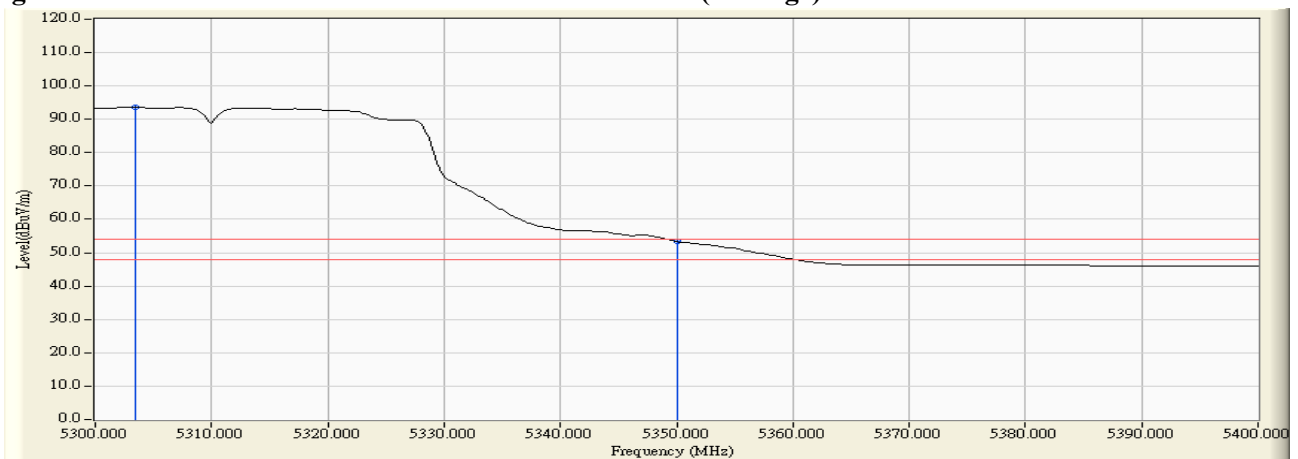

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 102


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5460.000	4.354	61.539	65.893	74.00	54.00	Pass
102 (Peak)	5500.000	4.814	100.175	104.989	--	--	--
102 (Average)	5460.000	4.354	46.195	50.549	74.00	54.00	Pass
102 (Average)	5501.400	4.825	85.431	90.255	--	--	--

**Figure Channel 102: Horizontal (Peak)**

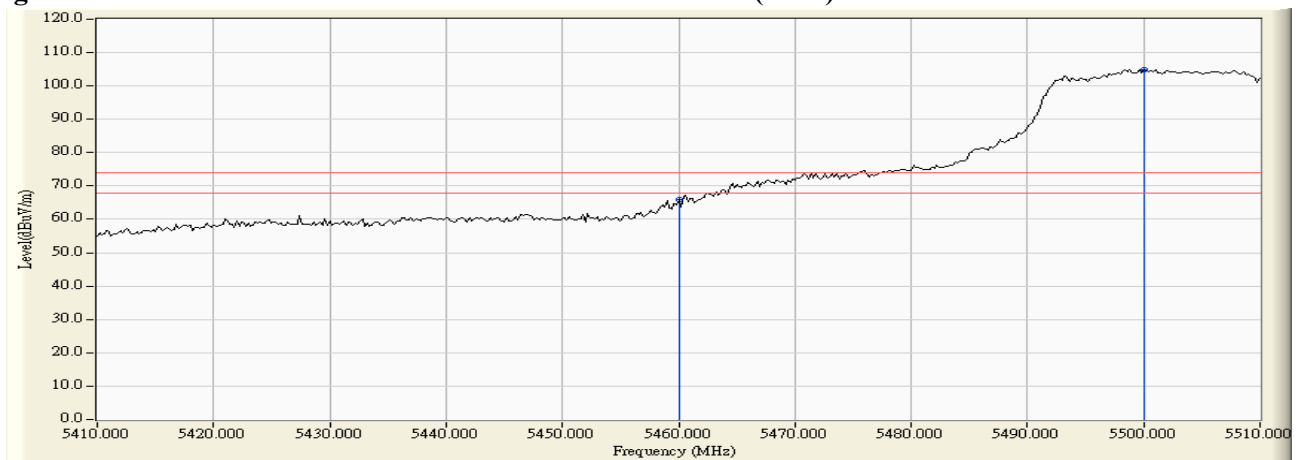

**Figure Channel 102: Horizontal (Average)**

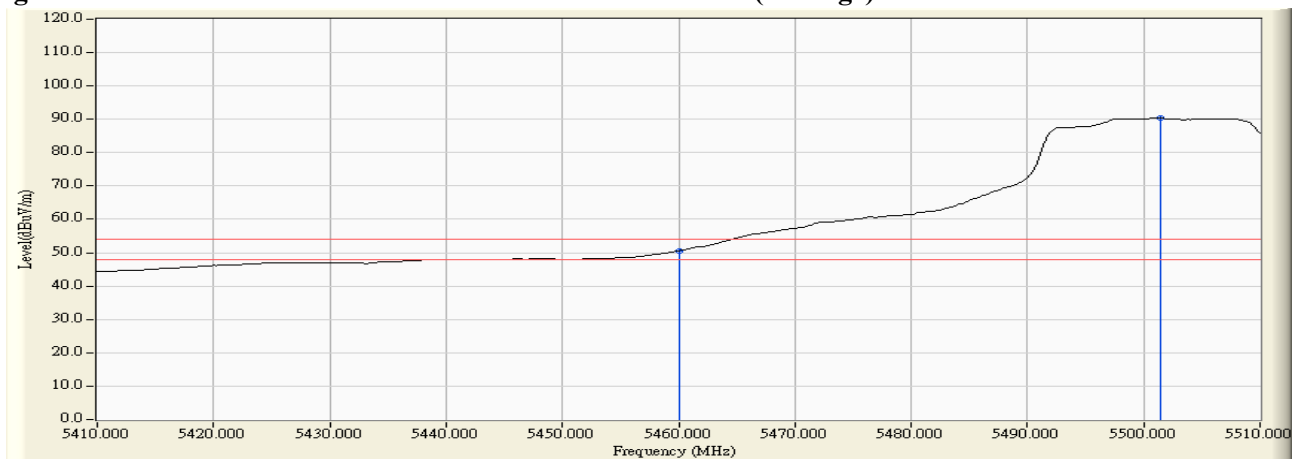

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 102


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5460.000	6.041	62.945	68.986	74.00	54.00	Pass
102 (Peak)	5508.800	6.266	102.415	108.681	--	--	--
102 (Average)	5460.000	6.041	47.104	53.145	74.00	54.00	Pass
102 (Average)	5507.400	6.275	87.414	93.689	--	--	--

**Figure Channel 102: Vertical (Peak)**

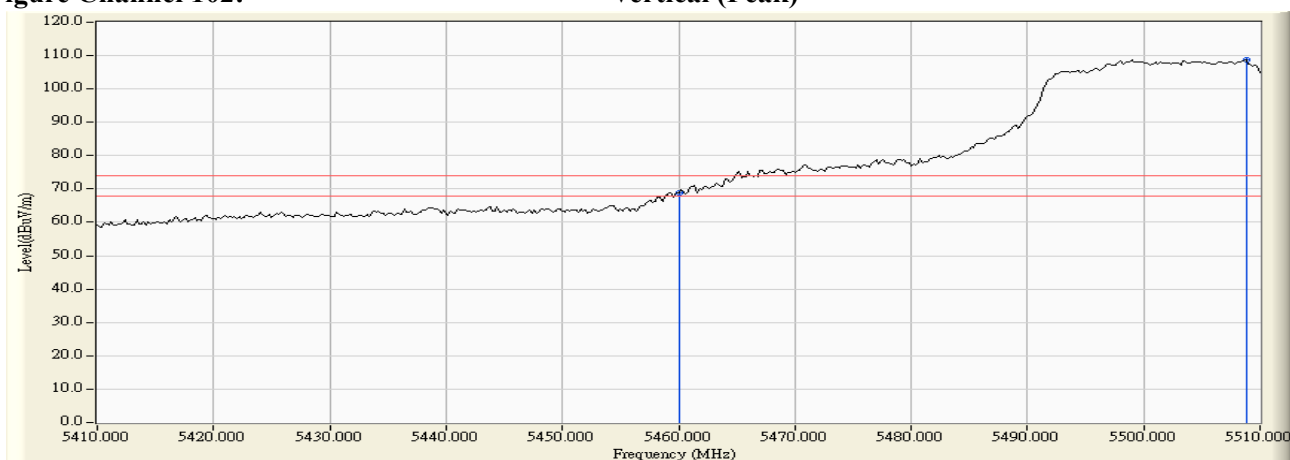

**Figure Channel 102: Vertical (Average)**

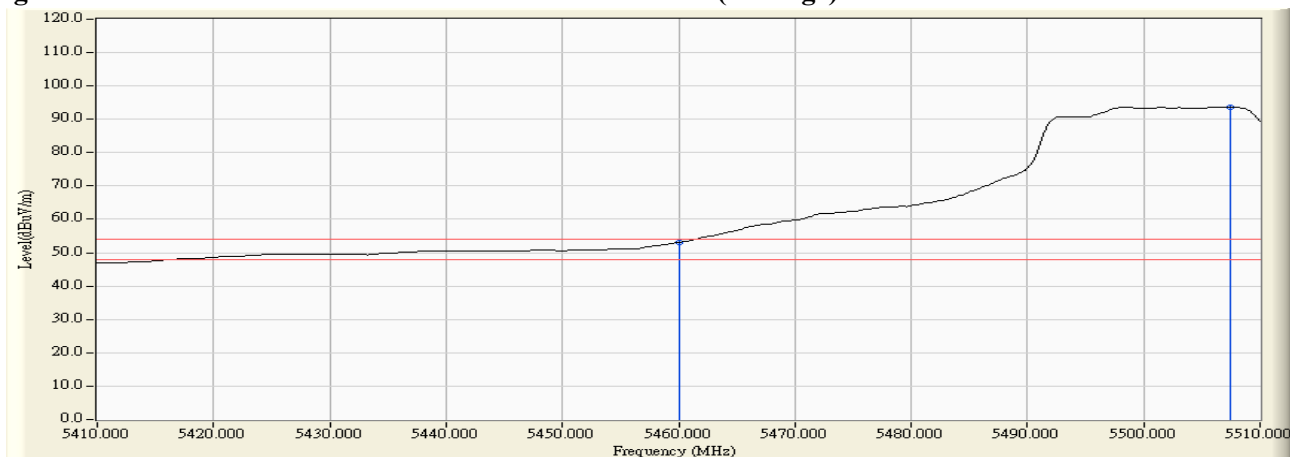

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 102

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5470.000	4.488	61.356	65.844	-2.376	68.220	Pass
Horizontal	5499.000	4.808	98.901	103.709	35.489	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5468.400	6.100	61.547	67.647	-0.573	68.220	Pass
Vertical	5470.000	6.112	60.986	67.097	-1.123	68.220	Pass
Vertical	5508.800	6.266	100.801	107.067	38.847	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW 30Mbps) -Channel 134

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5679.800	4.539	100.212	104.750	36.530	68.220	Pass
Horizontal	5725.000	4.654	57.216	61.870	-6.350	68.220	Pass
Horizontal	5728.000	4.655	59.570	64.225	-3.995	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5678.200	5.932	100.774	106.705	38.485	68.220	Pass
Vertical	5725.000	5.992	55.955	61.948	-6.272	68.220	Pass
Vertical	5728.200	5.992	57.288	63.280	-4.940	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-20BW-14.4Mbps) -Channel 44

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	49.670	54.634	-23.586	78.220	Pass
Horizontal	5854.800	4.992	51.656	56.648	-21.572	78.220	Pass
Horizontal	5860.000	5.023	50.155	55.178	-13.042	68.220	Pass
Horizontal	5862.600	5.038	51.674	56.712	-11.508	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	50.860	56.897	-21.323	78.220	Pass
Vertical	5860.000	6.047	51.024	57.071	-11.149	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-40BW-30Mbps) -Channel 42

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	51.852	56.816	-21.404	78.220	Pass
Horizontal	5852.200	4.977	54.238	59.215	-19.005	78.220	Pass
Horizontal	5860.000	5.023	51.276	56.299	-11.921	68.220	Pass
Horizontal	5863.000	5.041	52.295	57.335	-10.885	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	52.302	58.339	-19.881	78.220	Pass
Vertical	5851.400	6.038	54.288	60.326	-17.894	78.220	Pass
Vertical	5860.000	6.047	51.296	57.343	-10.877	68.220	Pass
Vertical	5866.800	6.055	53.032	59.087	-9.133	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 42


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5149.400	3.342	62.663	66.006	74.00	54.00	Pass
42 (Peak)	5150.000	3.340	60.997	64.337	74.00	54.00	Pass
42 (Peak)	5198.800	3.157	100.123	103.280	--	--	--
42 (Average)	5150.000	3.340	46.650	49.990	74.00	54.00	Pass
42 (Average)	5194.800	3.175	82.409	85.584	--	--	--

**Figure Channel 42: Horizontal (Peak)**

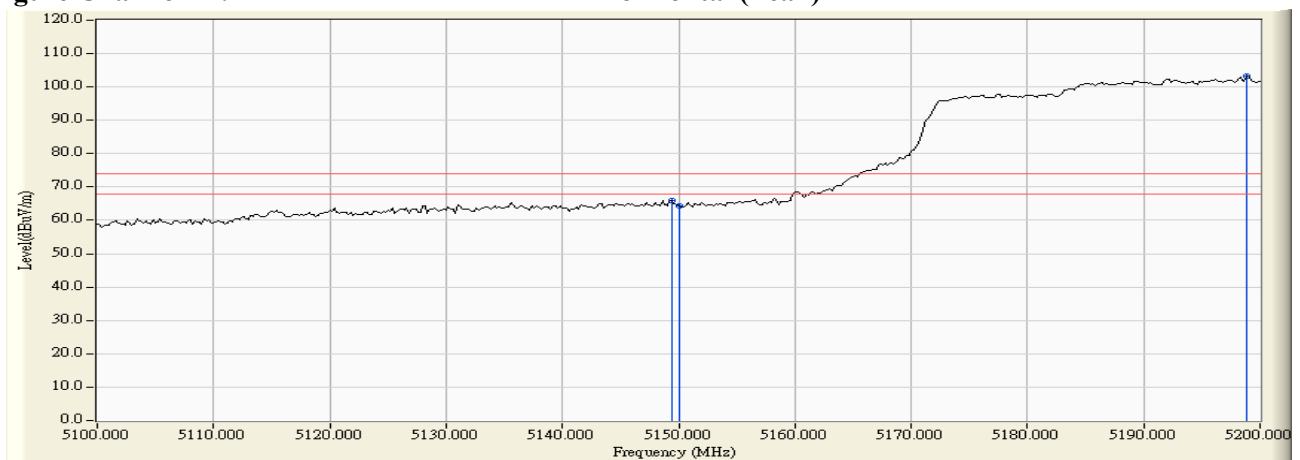

**Figure Channel 42: Horizontal (Average)**

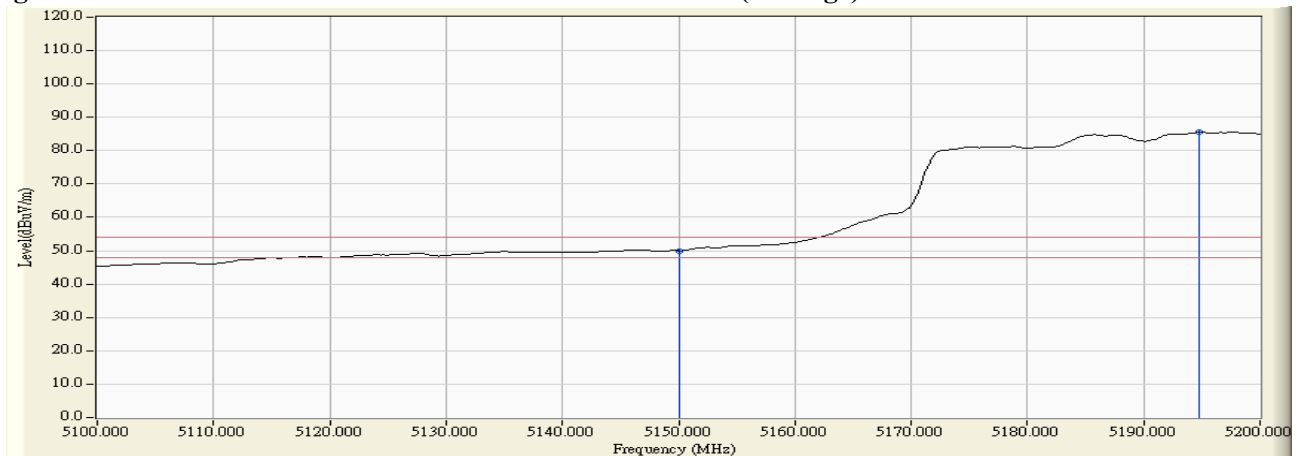

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 42


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5149.800	5.260	64.406	69.665	74.00	54.00	Pass
42 (Peak)	5150.000	5.260	63.142	68.402	74.00	54.00	Pass
42 (Peak)	5200.000	5.389	101.409	106.798	--	--	--
42 (Average)	5148.000	5.254	48.503	53.757	74.00	54.00	Pass
42 (Average)	5150.000	5.260	48.016	53.276	74.00	54.00	Pass
42 (Average)	5196.600	5.379	83.532	88.911	--	--	--

**Figure Channel 42: Vertical (Peak)**

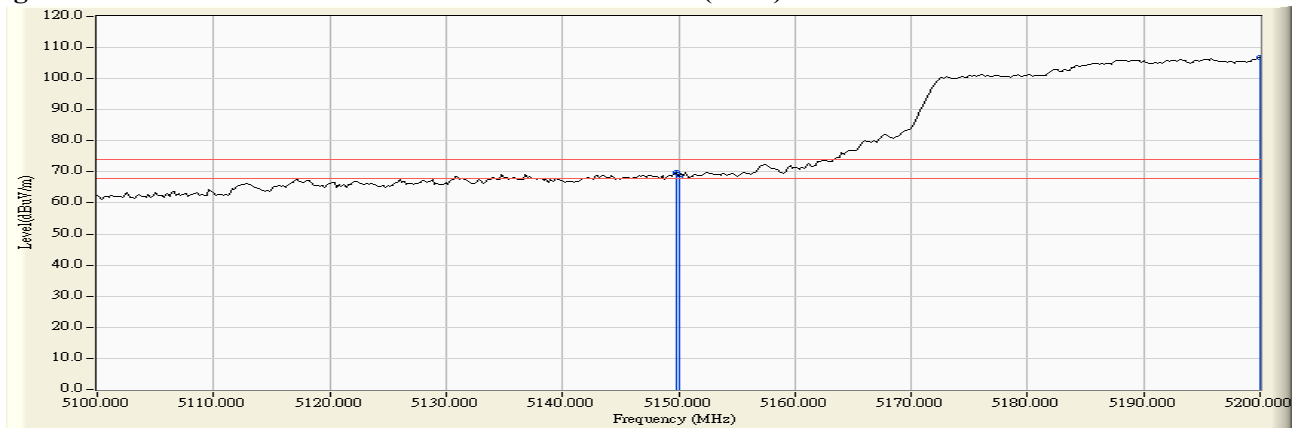

**Figure Channel 42: Vertical (Average)**

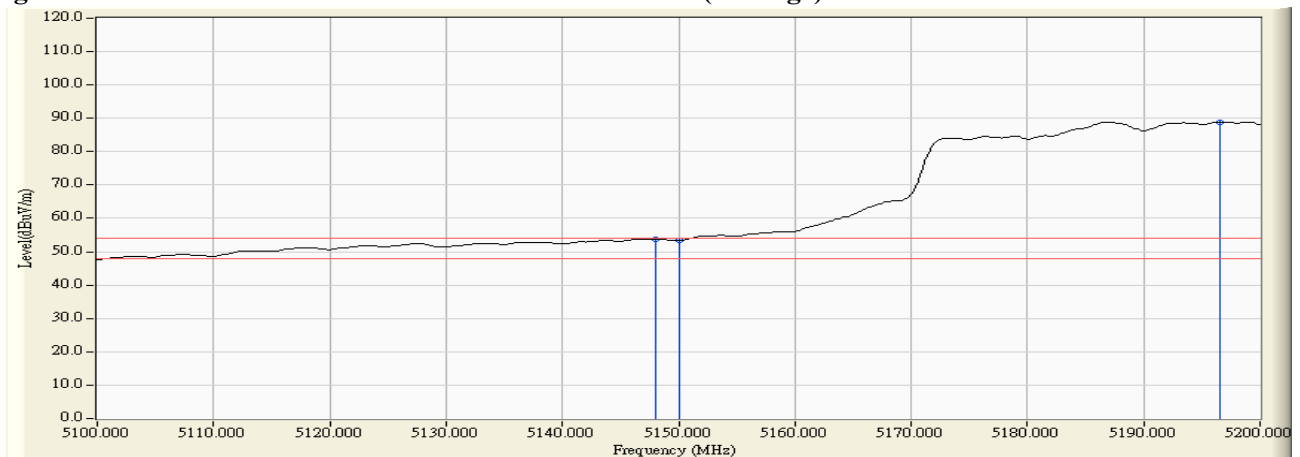

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 58


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5306.200	3.857	98.346	102.203	--	--	--
58 (Peak)	5350.000	3.716	59.014	62.731	74.00	54.00	Pass
58 (Peak)	5353.000	3.707	60.267	63.974	74.00	54.00	Pass
58 (Average)	5304.800	3.861	81.227	85.088	--	--	--
58 (Average)	5350.000	3.716	45.523	49.240	74.00	54.00	Pass
58 (Average)	5354.800	3.701	46.210	49.911	74.00	54.00	Pass

**Figure Channel 58: Horizontal (Peak)**

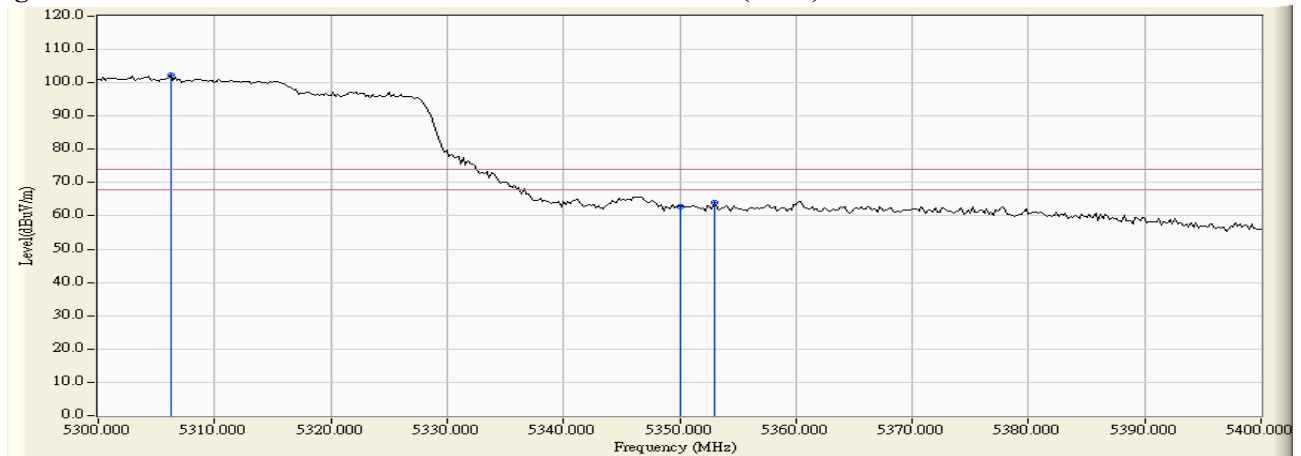

**Figure Channel 58: Horizontal (Average)**

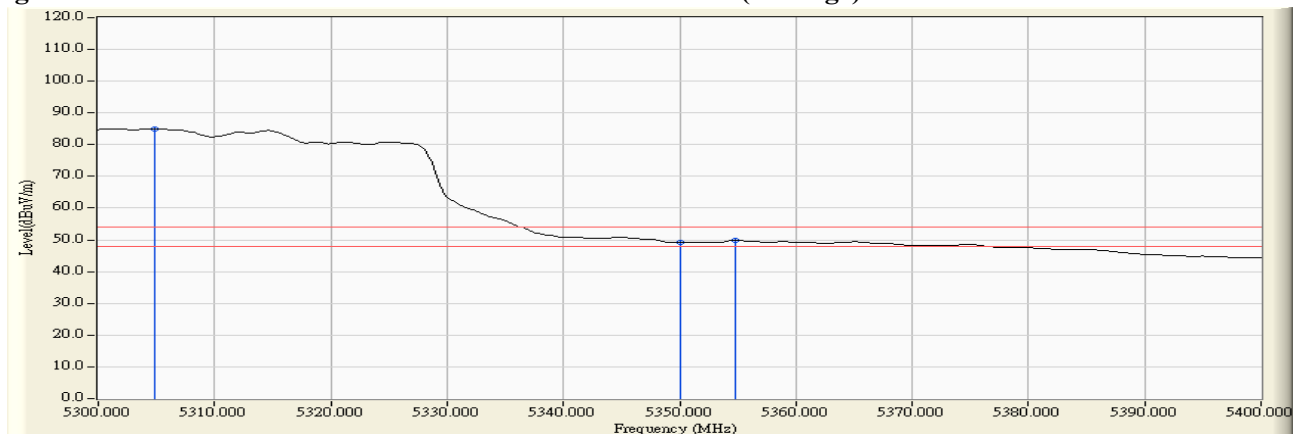

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 58


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5303.000	5.752	98.799	104.550	--	--	--
58 (Peak)	5350.000	5.691	60.617	66.309	74.00	54.00	Pass
58 (Peak)	5350.400	5.690	62.350	68.041	74.00	54.00	Pass
58 (Average)	5303.400	5.751	81.920	87.671	--	--	--
58 (Average)	5350.000	5.691	46.767	52.459	74.00	54.00	Pass
58 (Average)	5353.800	5.686	47.884	53.570	74.00	54.00	Pass

**Figure Channel 58: Vertical (Peak)**

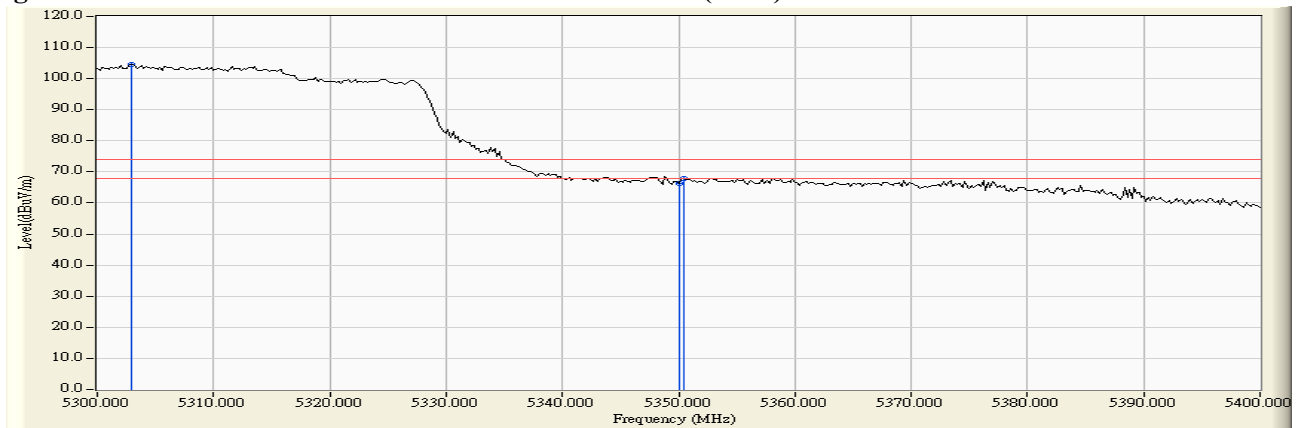

**Figure Channel 58: Vertical (Average)**

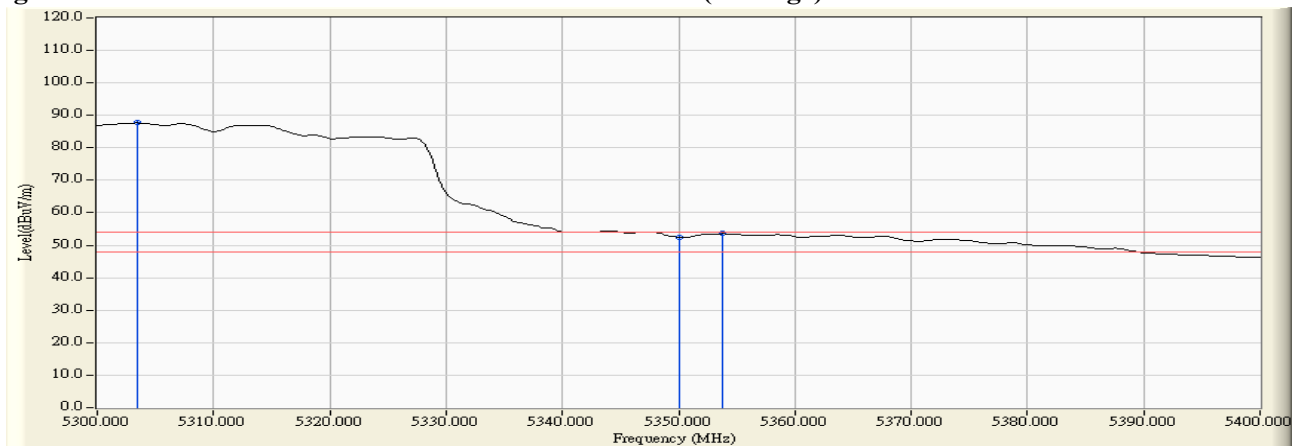

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 106


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5443.600	4.137	56.203	60.339	74.00	54.00	Pass
106 (Peak)	5460.000	4.354	53.945	58.299	74.00	54.00	Pass
106 (Peak)	5508.000	4.824	87.086	91.911	--	--	--
106 (Average)	5460.000	4.354	42.461	46.815	74.00	54.00	Pass
106 (Average)	5507.200	4.831	74.580	79.411	--	--	--

**Figure Channel 106: Horizontal (Peak)**

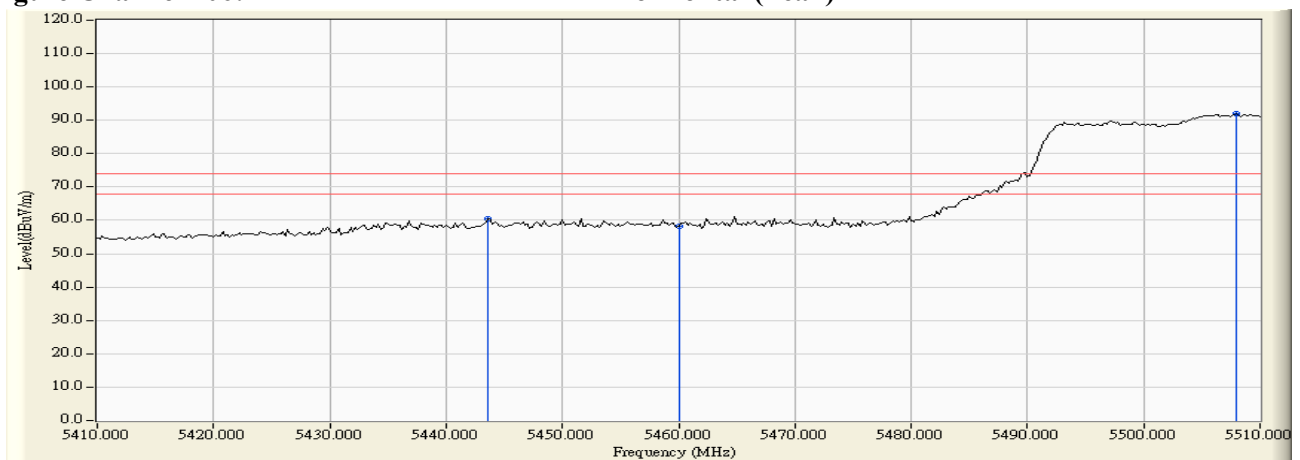

**Figure Channel 106: Horizontal (Average)**

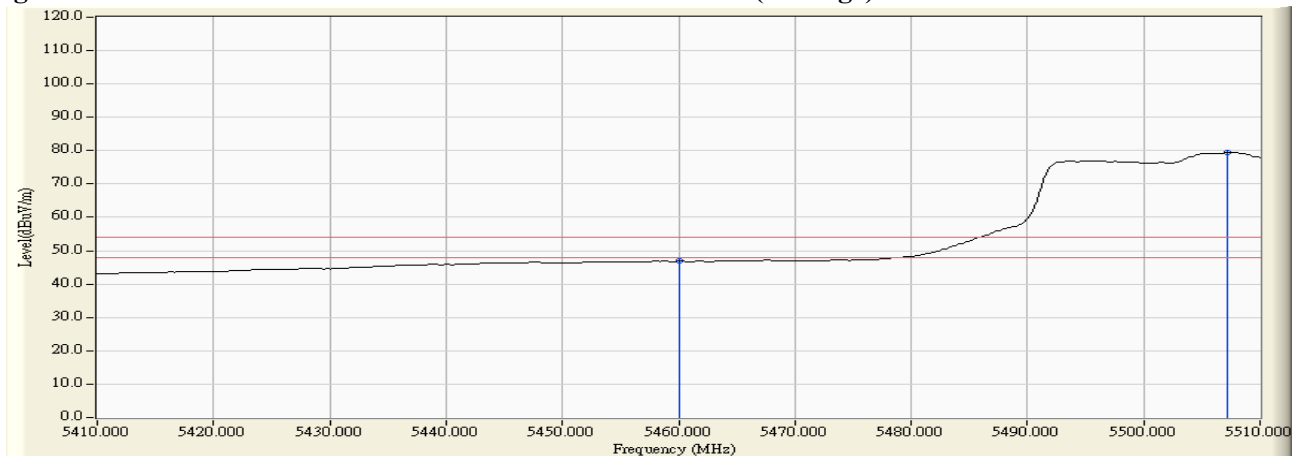

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 106


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5454.400	6.001	62.818	68.819	74.00	54.00	Pass
106 (Peak)	5460.000	6.041	61.581	67.622	74.00	54.00	Pass
106 (Peak)	5508.000	6.270	96.659	102.930	--	--	--
106 (Average)	5454.800	6.004	47.907	53.911	74.00	54.00	Pass
106 (Average)	5460.000	6.041	47.513	53.554	74.00	54.00	Pass
106 (Average)	5505.400	6.287	79.690	85.977	--	--	--

**Figure Channel 106: Vertical (Peak)**

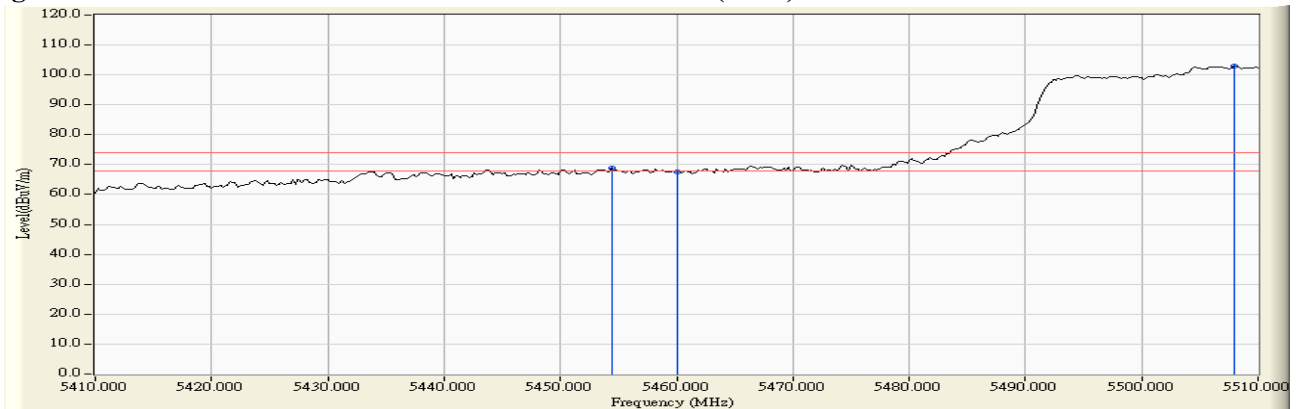

**Figure Channel 106: Vertical (Average)**

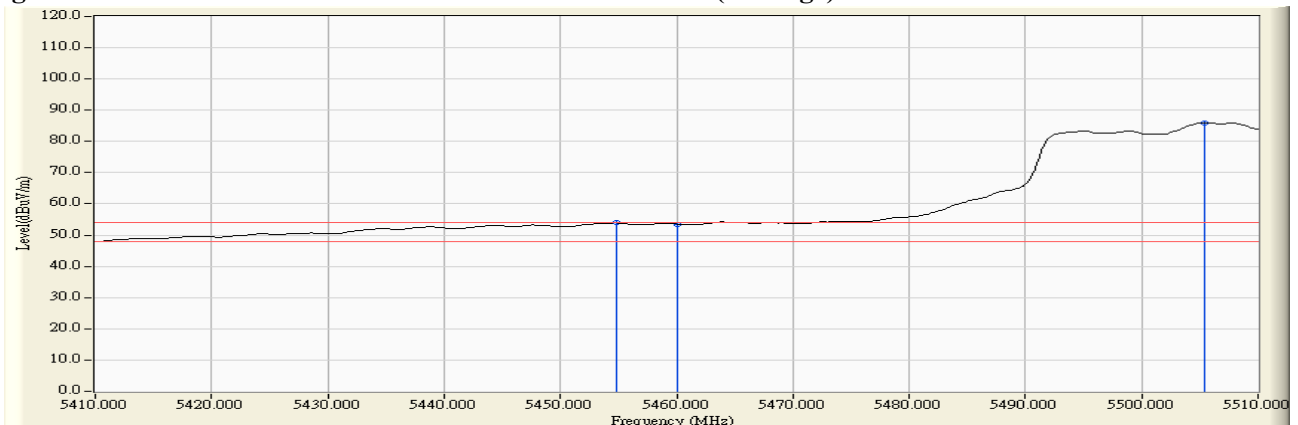

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW-65Mbps) -Channel 106

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5464.800	4.418	60.995	65.413	-2.807	68.220	Pass
Horizontal	5470.000	4.488	60.895	65.383	-2.837	68.220	Pass
Horizontal	5506.600	4.837	95.060	99.896	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5468.200	6.099	61.459	67.557	-0.663	68.220	Pass
Vertical	5470.000	6.112	59.669	65.780	-2.440	68.220	Pass
Vertical	5513.200	6.238	95.411	101.649	--	--	Pass


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 36

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5150.000	3.340	57.662	61.002	74.00	54.00	Pass
36 (Peak)	5178.200	3.240	107.170	110.411	--	--	--
36 (Average)	5150.000	3.340	43.079	46.419	74.00	54.00	Pass
36 (Average)	5184.200	3.220	96.009	99.228	--	--	--


**Figure Channel 36:**

**Horizontal (Peak)**

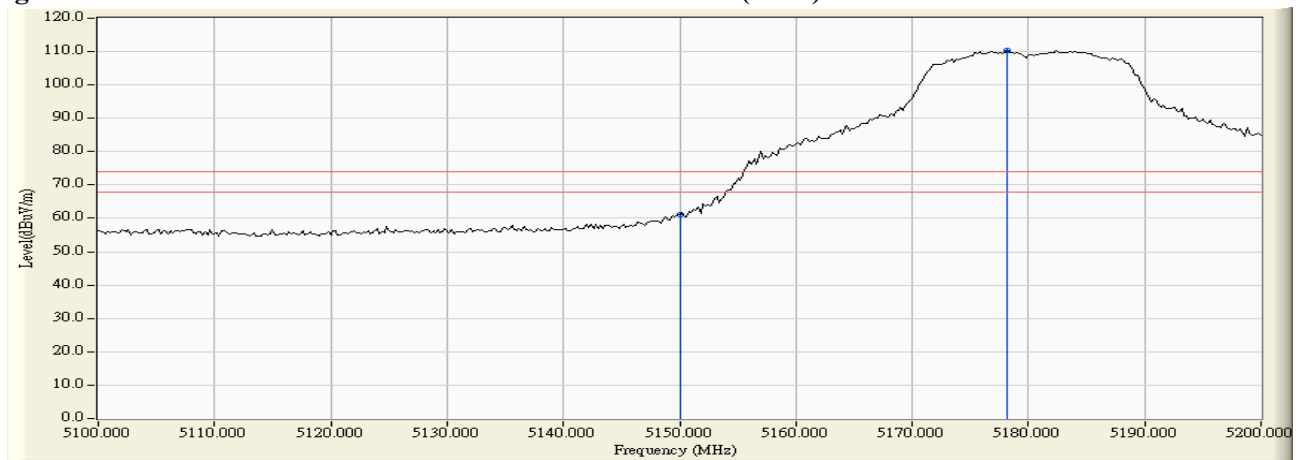

**Figure Channel 36:**

**Horizontal (Average)**

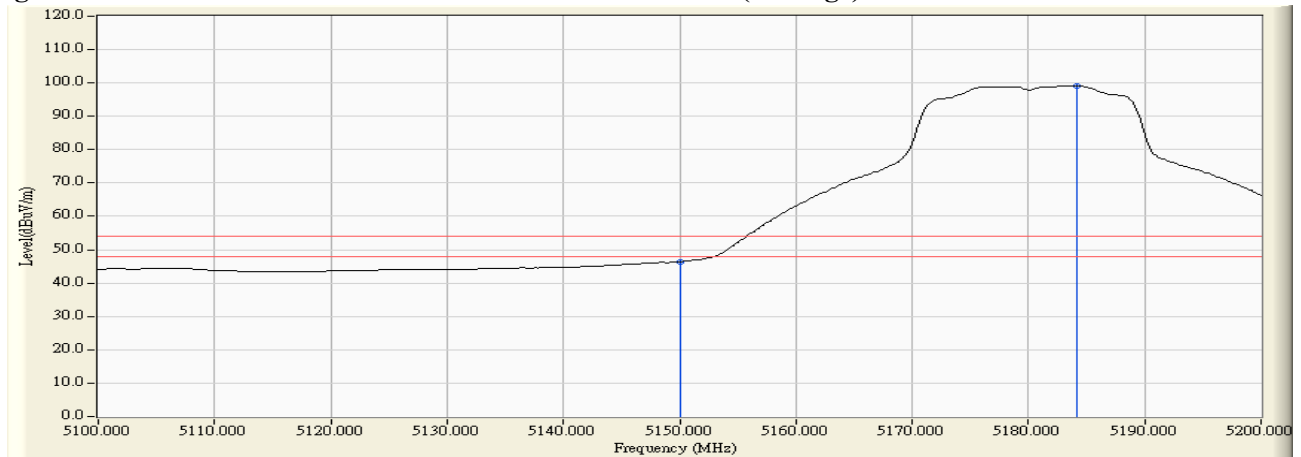

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 36


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
36 (Peak)	5148.200	5.255	64.508	69.763	74.00	54.00	Pass
36 (Peak)	5150.000	5.260	63.164	68.424	74.00	54.00	Pass
36 (Peak)	5183.400	5.351	109.777	115.128	--	--	--
36 (Average)	5150.000	5.260	47.010	52.270	74.00	54.00	Pass
36 (Average)	5184.200	5.353	98.824	104.177	--	--	--

**Figure Channel 36: Vertical (Peak)**

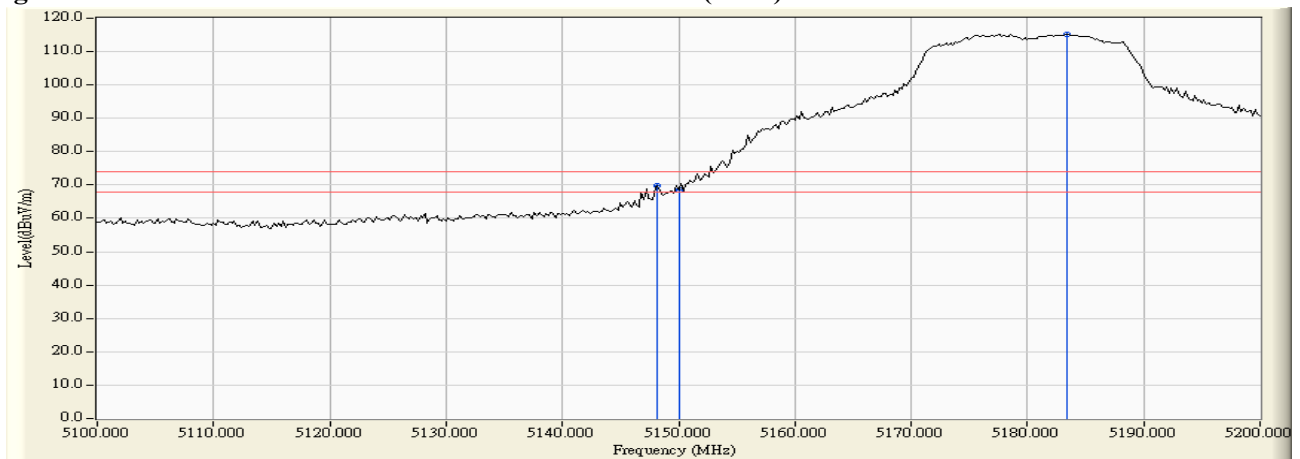

**Figure Channel 36: Vertical (Average)**

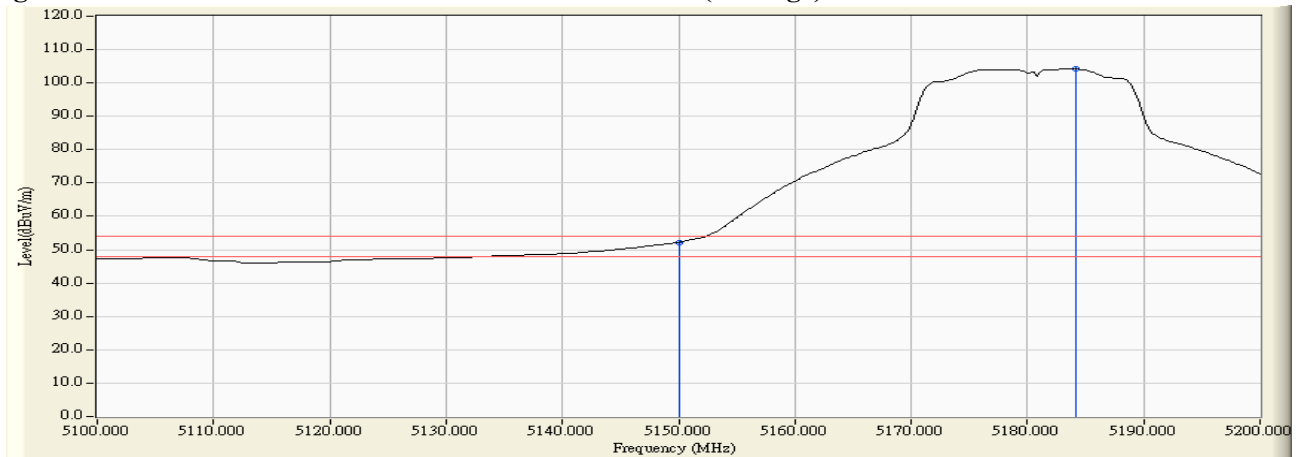

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 64


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5315.800	3.826	107.088	110.914	--	--	--
64 (Peak)	5350.000	3.716	65.615	69.332	74.00	54.00	Pass
64 (Average)	5316.000	3.824	96.166	99.991	--	--	--
64 (Average)	5350.000	3.716	49.109	52.826	74.00	54.00	Pass

**Figure Channel 64: Horizontal (Peak)**

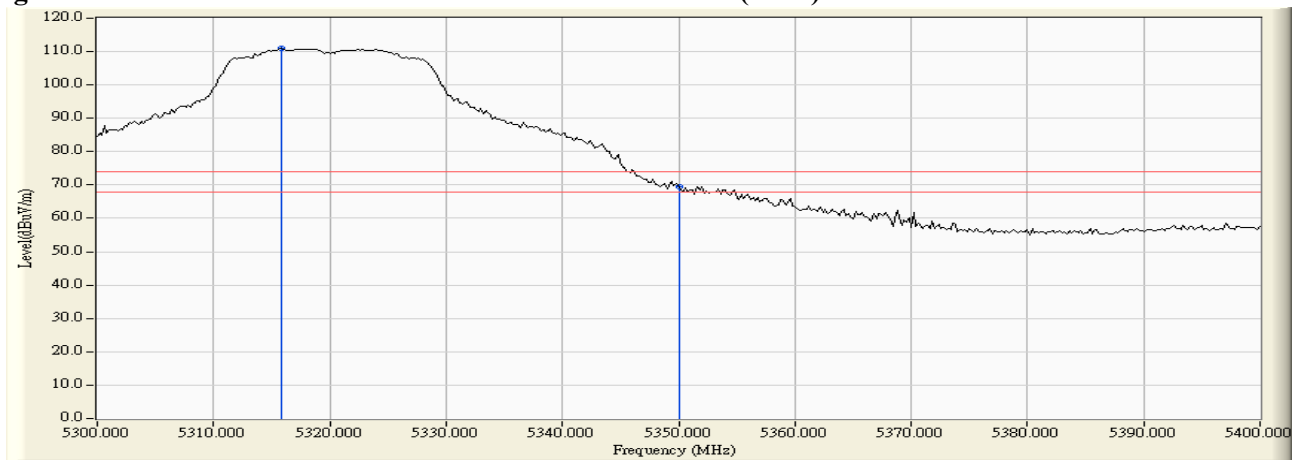

**Figure Channel 64: Horizontal (Average)**

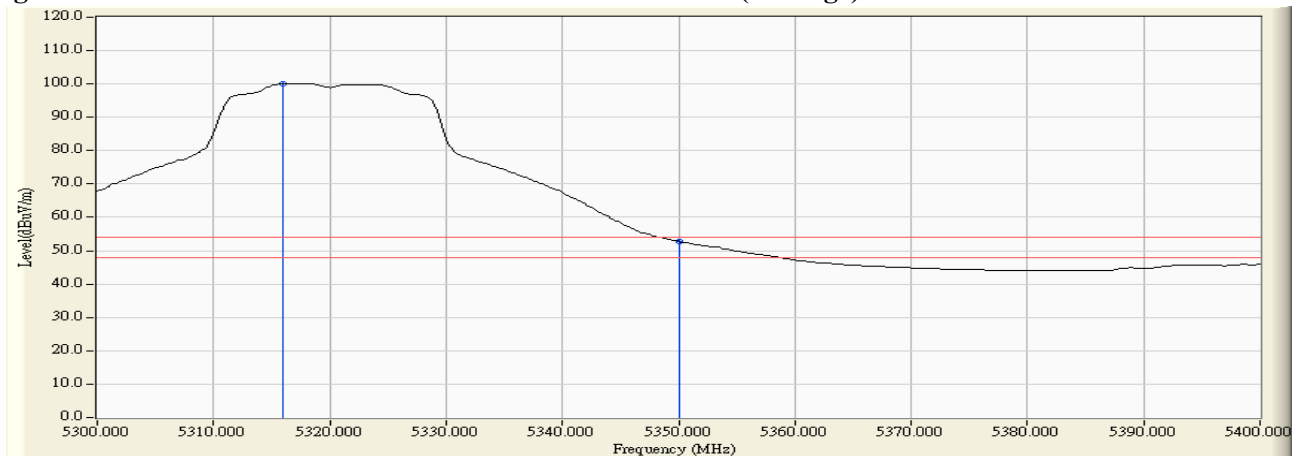

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 64


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
64 (Peak)	5323.400	5.725	106.583	112.308	--	--	--
64 (Peak)	5350.000	5.691	63.678	69.370	74.00	54.00	Pass
64 (Peak)	5354.800	5.685	64.645	70.330	74.00	54.00	Pass
64 (Average)	5316.000	5.733	96.629	102.363	--	--	--
64 (Average)	5350.000	5.691	47.947	53.639	74.00	54.00	Pass

**Figure Channel 64: Vertical (Peak)**

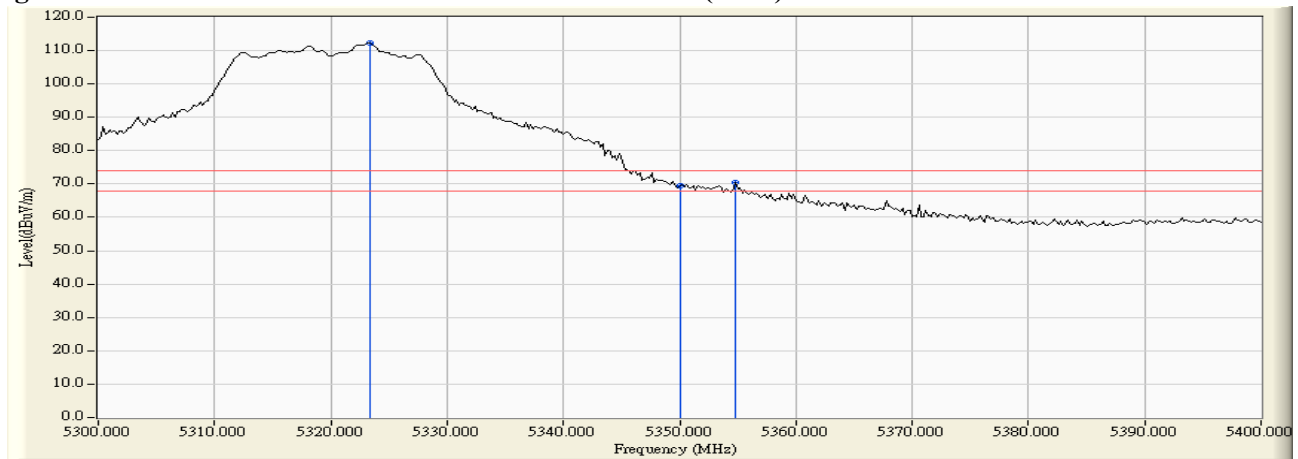

**Figure Channel 64: Vertical (Average)**

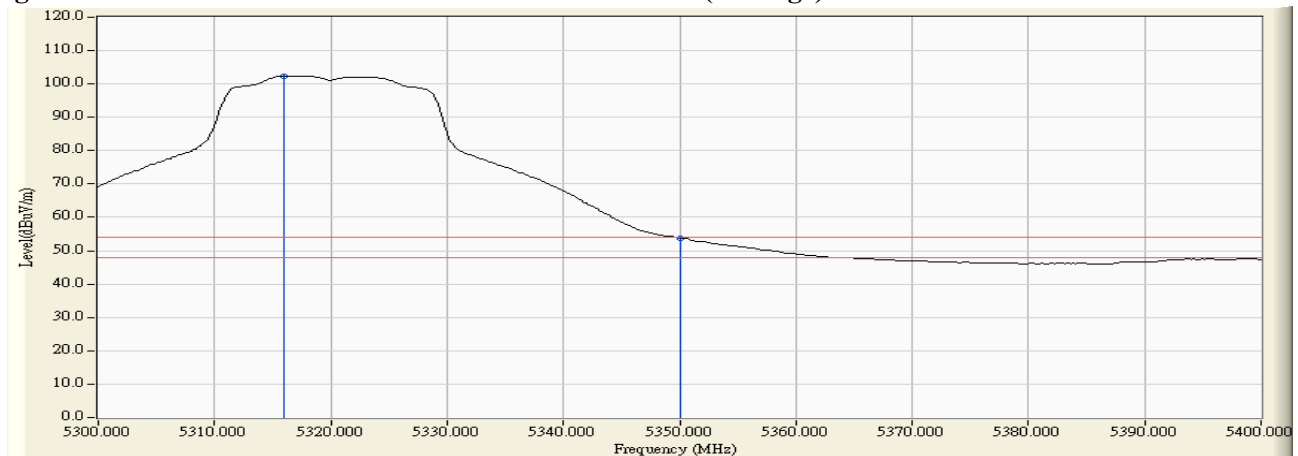

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 100


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5457.600	4.322	61.727	66.049	74.00	54.00	Pass
100 (Peak)	5460.000	4.354	60.754	65.108	74.00	54.00	Pass
100 (Peak)	5496.800	4.793	103.536	108.328	--	--	--
100 (Average)	5460.000	4.354	46.394	50.748	74.00	54.00	Pass
100 (Average)	5497.000	4.794	92.544	97.338	--	--	--

**Figure Channel 100: Horizontal (Peak)**

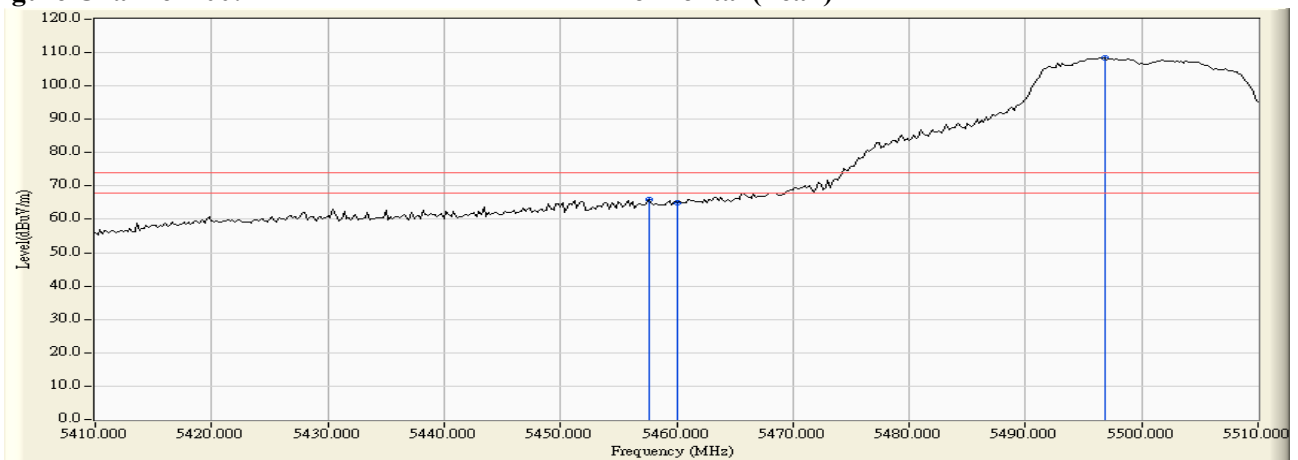

**Figure Channel 100: Horizontal (Average)**

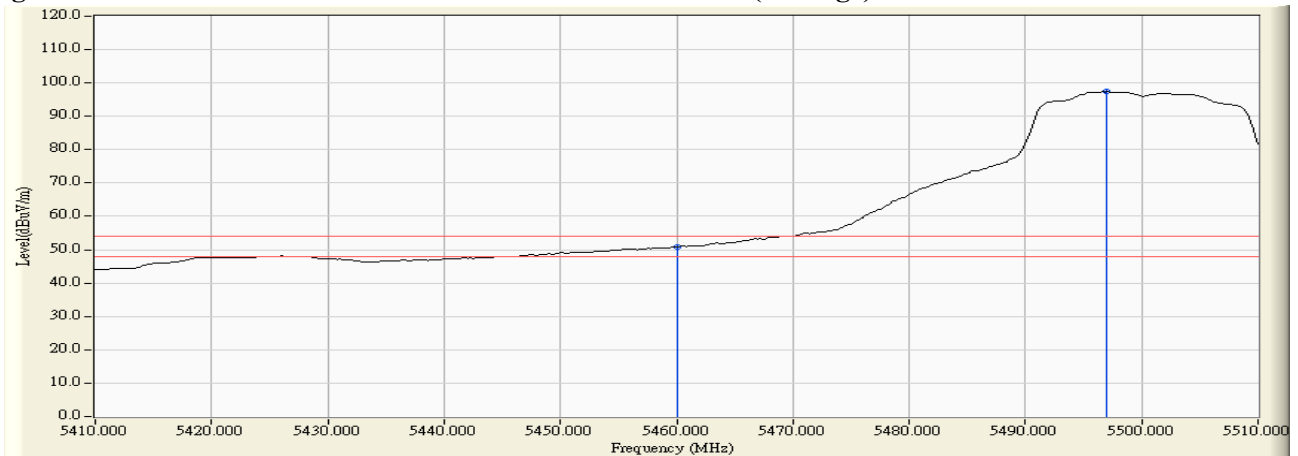

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 100


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
100 (Peak)	5450.600	5.976	60.906	66.881	74.00	54.00	Pass
100 (Peak)	5460.000	6.041	60.679	66.720	74.00	54.00	Pass
100 (Peak)	5502.400	6.282	105.661	111.943	--	--	--
100 (Average)	5460.000	6.041	45.694	51.735	74.00	54.00	Pass
100 (Average)	5497.200	6.267	90.411	96.677	--	--	--

**Figure Channel 100: Vertical (Peak)**

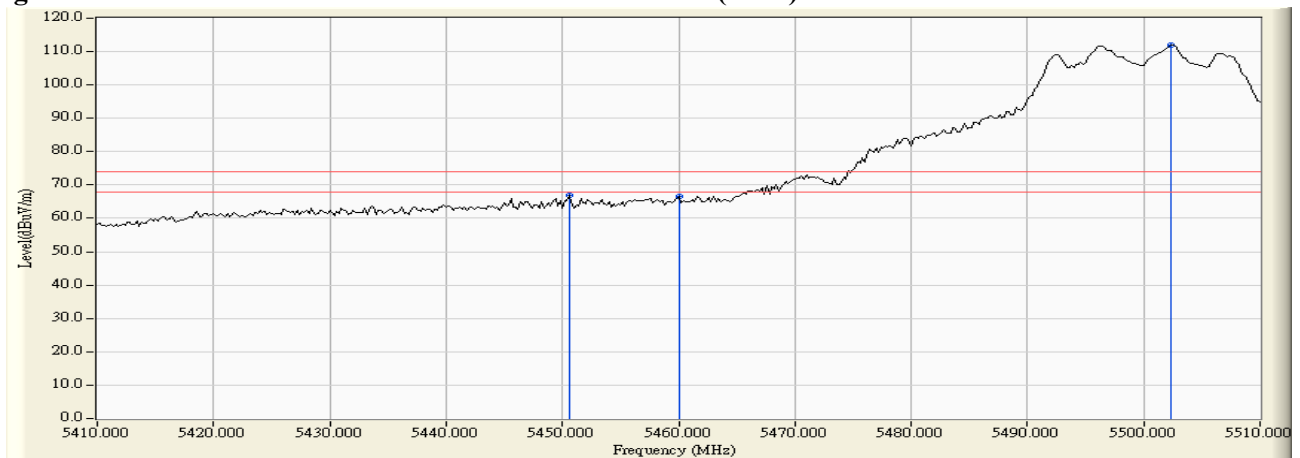

**Figure Channel 100: Vertical (Average)**

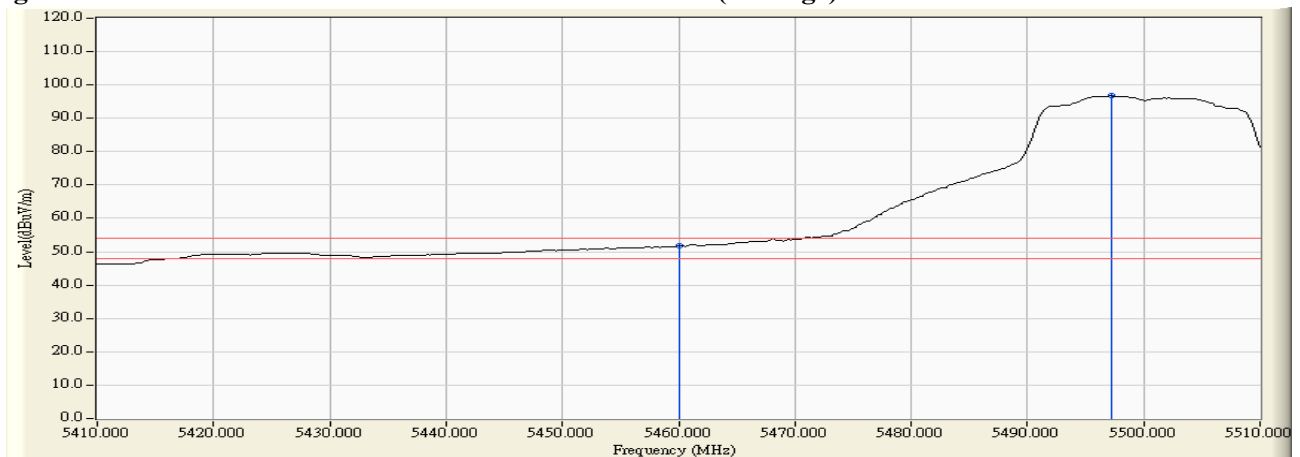

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 100

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5468.200	4.464	61.464	65.928	-2.292	68.220	Pass
Horizontal	5470.000	4.488	58.805	63.293	-4.927	68.220	Pass
Horizontal	5496.800	4.793	104.918	109.710	41.490	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5469.400	6.106	61.358	67.465	-0.755	68.220	Pass
Vertical	5470.000	6.112	61.192	67.303	-0.917	68.220	Pass
Vertical	5498.600	6.271	106.374	112.645	44.425	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11n-20BW 14.4Mbps) -Channel 140

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5696.000	4.617	100.358	104.974	--	--	Pass
Horizontal	5725.000	4.654	55.181	59.835	-8.385	68.220	Pass
Horizontal	5732.200	4.656	58.062	62.717	-5.503	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5702.400	5.986	100.764	106.750	--	--	Pass
Vertical	5725.000	5.992	61.766	67.759	-0.461	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 38


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5150.000	3.340	48.474	51.814	74.00	54.00	Pass
38 (Peak)	5196.600	3.167	83.419	86.586	--	--	--
38 (Average)	5150.000	5.260	63.932	69.192	74.00	54.00	Pass
38 (Average)	5197.600	5.380	105.110	110.490	--	--	--

**Figure Channel 38: Horizontal (Peak)**

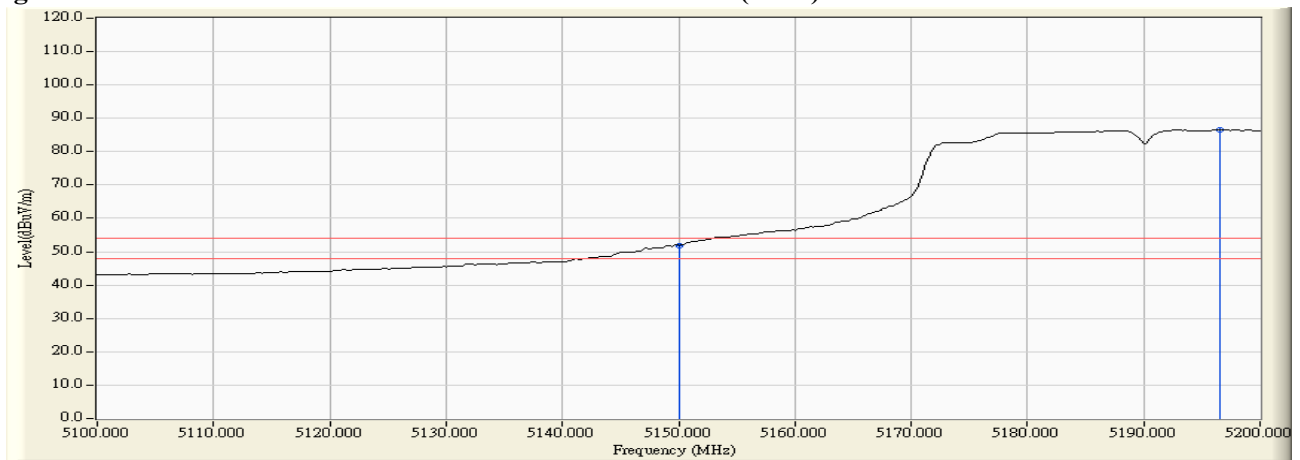

**Figure Channel 38: Horizontal (Average)**

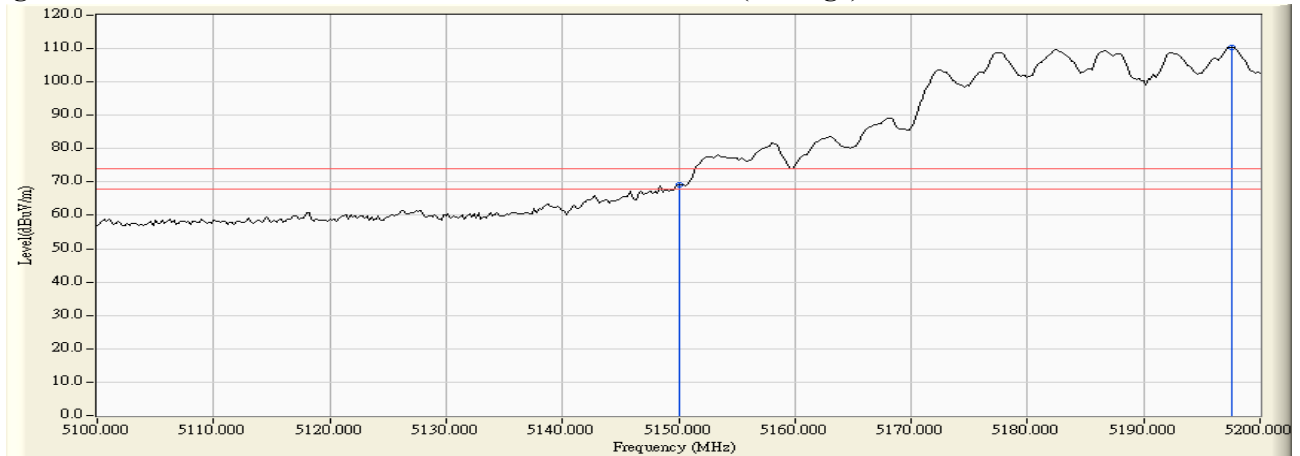

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 38


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
38 (Peak)	5150.000	5.260	63.932	69.192	74.00	54.00	Pass
38 (Peak)	5197.600	5.380	105.110	110.490	--	--	--
38 (Average)	5150.000	5.260	48.108	53.368	74.00	54.00	Pass
38 (Average)	5198.800	5.383	86.154	91.537	--	--	--

**Figure Channel 38: Vertical (Peak)**

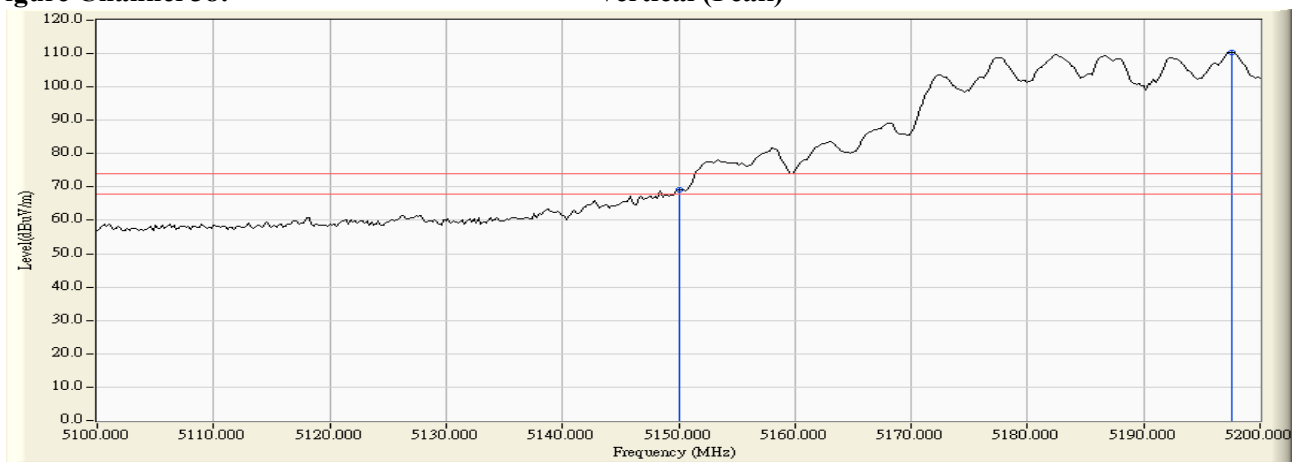

**Figure Channel 38: Vertical (Average)**

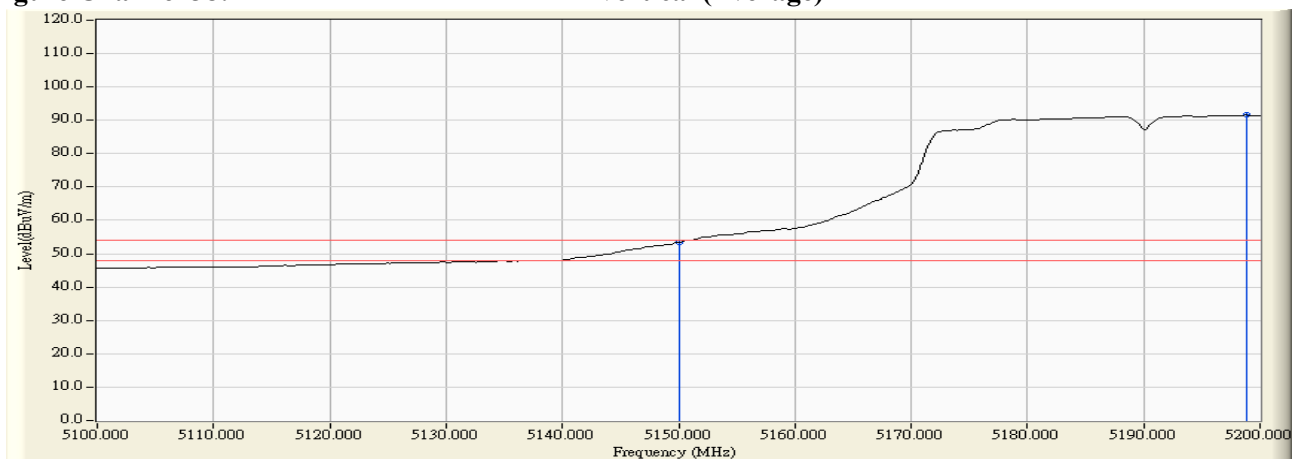

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 62


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5317.400	3.820	98.826	102.647	--	--	--
62 (Peak)	5350.000	3.716	59.150	62.867	74.00	54.00	Pass
62 (Peak)	5352.000	3.710	60.090	63.800	74.00	54.00	Pass
62 (Average)	5303.400	3.867	78.372	82.238	--	--	--
62 (Average)	5350.000	3.716	41.324	45.041	74.00	54.00	Pass

**Figure Channel 62: Horizontal (Peak)**

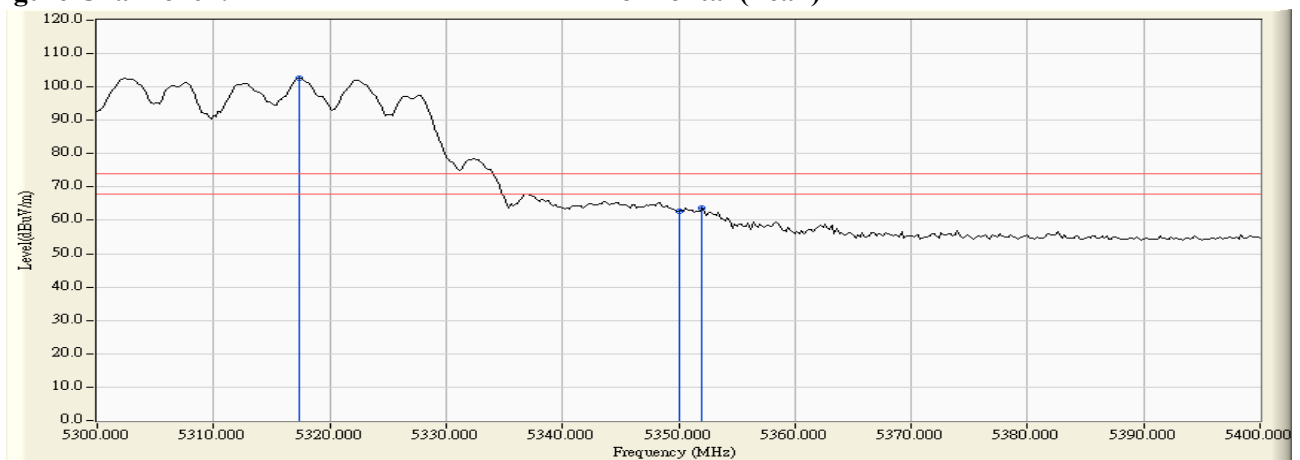

**Figure Channel 62: Horizontal (Average)**

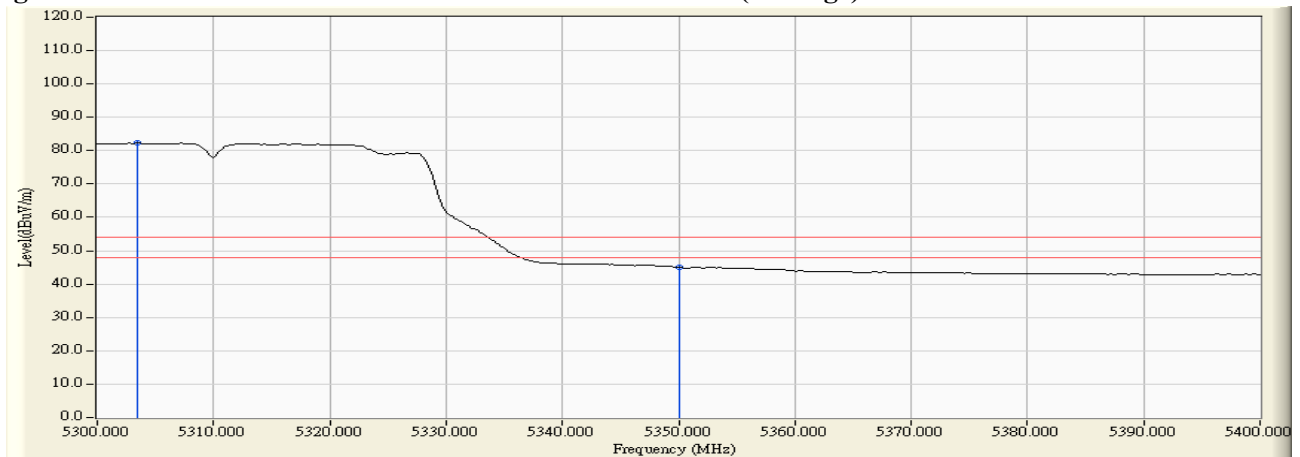

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 62


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
62 (Peak)	5306.000	5.747	102.047	107.794	--	--	--
62 (Peak)	5350.000	5.691	62.619	68.311	74.00	54.00	Pass
62 (Peak)	5352.400	5.689	63.314	69.002	74.00	54.00	Pass
62 (Average)	5301.400	5.753	89.684	95.437	--	--	--
62 (Average)	5350.000	5.691	47.398	53.090	74.00	54.00	Pass

**Figure Channel 62: Vertical (Peak)**

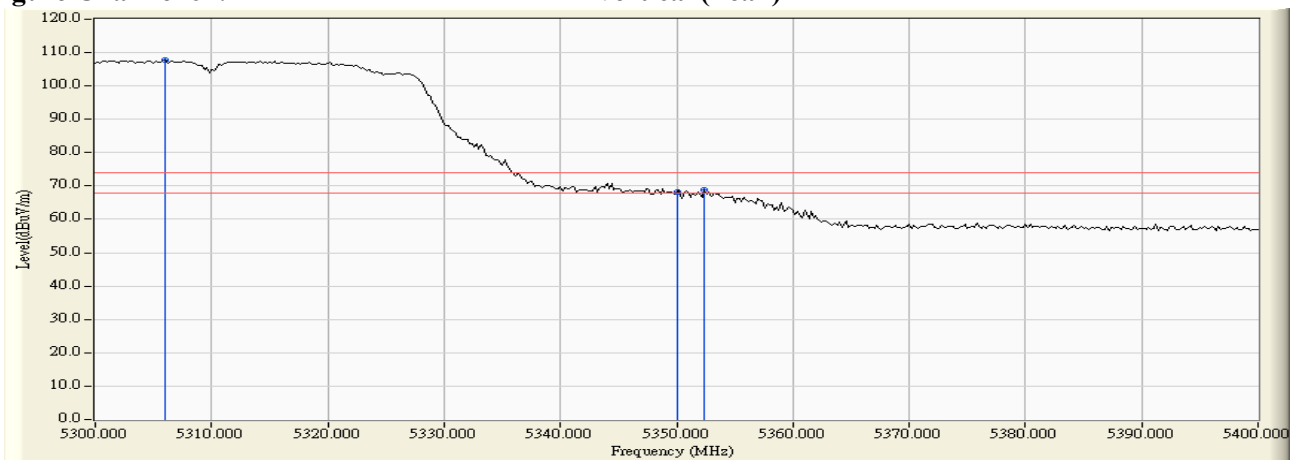

**Figure Channel 62: Vertical (Average)**

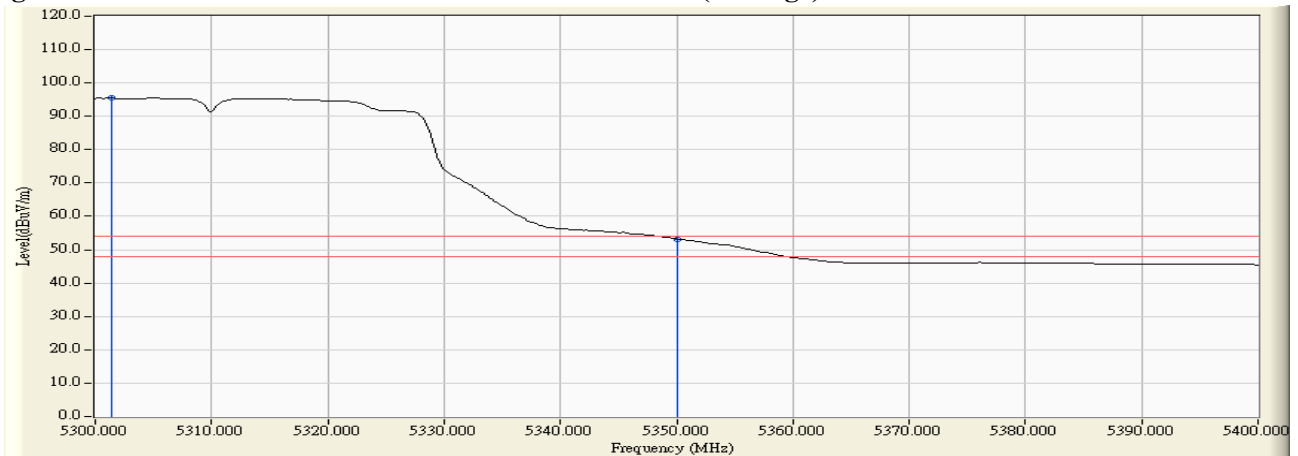

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 102


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.800	4.352	67.233	71.584	74.00	54.00	Pass
102 (Peak)	5460.000	4.354	65.732	70.086	74.00	54.00	Pass
102 (Peak)	5502.400	4.831	99.644	104.475	--	--	--
102 (Average)	5460.000	4.354	49.269	53.623	74.00	54.00	Pass
102 (Average)	5498.600	4.805	87.440	92.245	--	--	--

**Figure Channel 102: Horizontal (Peak)**

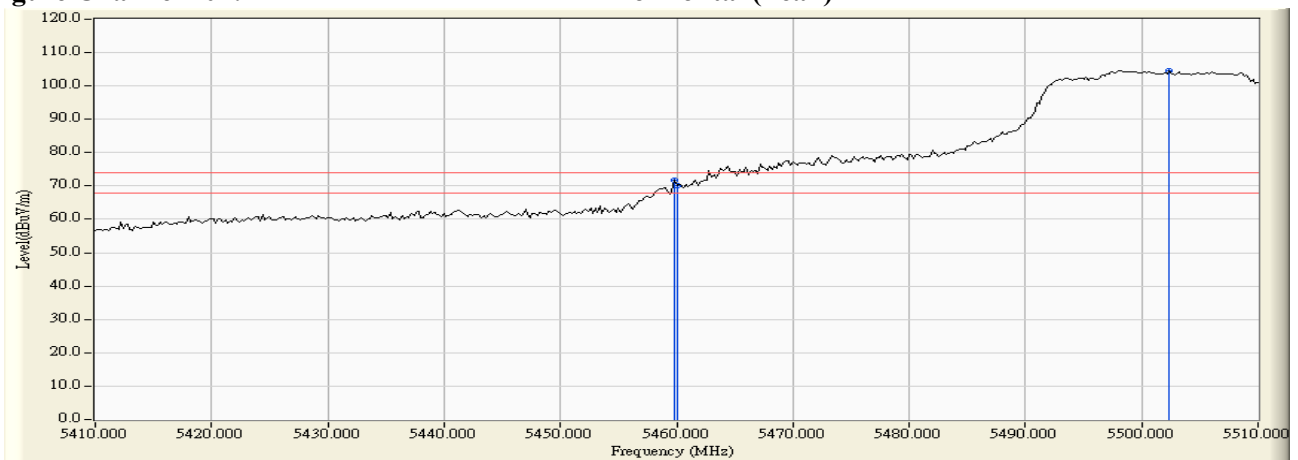

**Figure Channel 102: Horizontal (Average)**

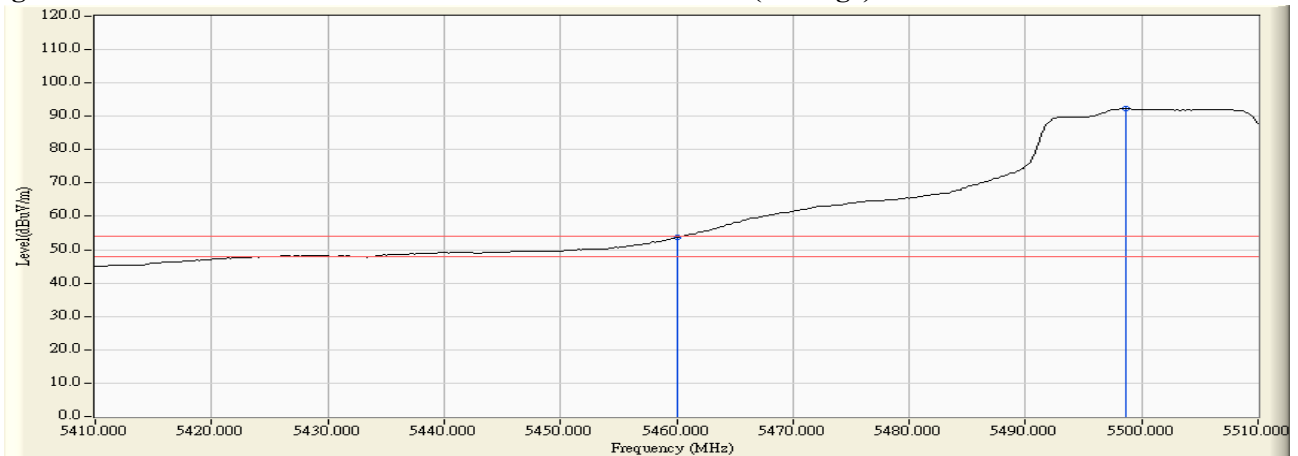

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 102


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
102 (Peak)	5459.600	6.039	66.629	72.667	74.00	54.00	Pass
102 (Peak)	5460.000	6.041	64.900	70.941	74.00	54.00	Pass
102 (Peak)	5506.600	6.280	102.062	108.342	--	--	--
102 (Average)	5460.000	6.041	46.968	53.009	74.00	54.00	Pass
102 (Average)	5498.400	6.270	85.605	91.875	--	--	--

**Figure Channel 102: Vertical (Peak)**

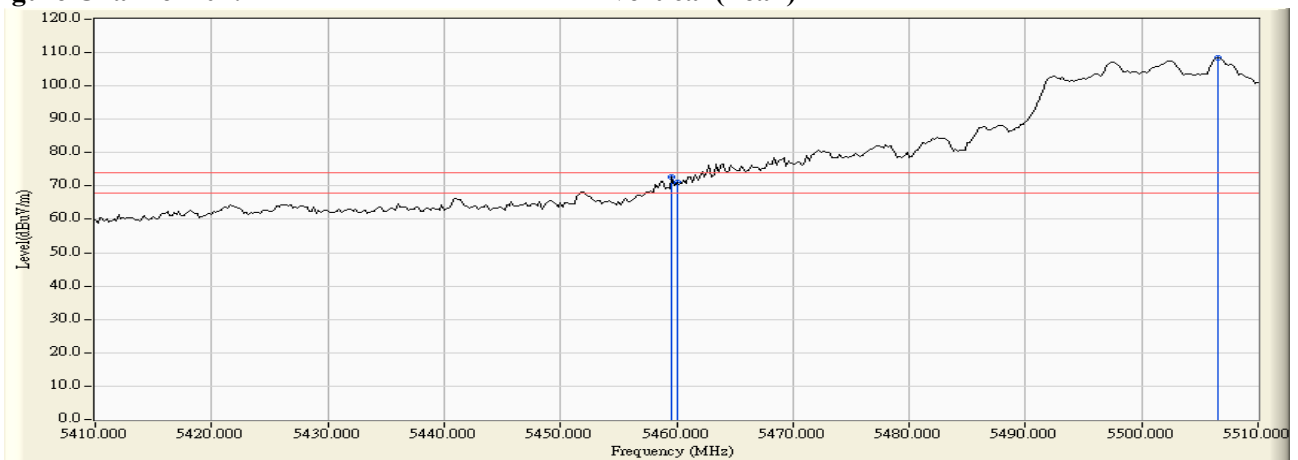

**Figure Channel 102: Vertical (Average)**

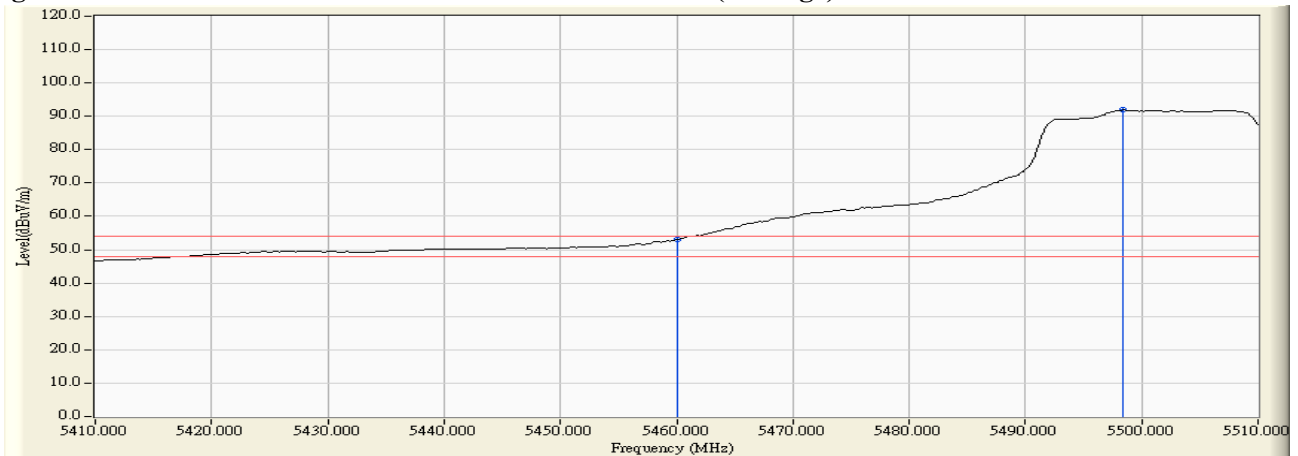

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 102

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5469.400	4.479	57.270	61.750	-6.470	68.220	Pass
Horizontal	5470.000	4.488	56.539	61.027	-7.193	68.220	Pass
Horizontal	5502.400	4.831	97.809	102.640	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5469.800	6.110	61.749	67.859	-0.361	68.220	Pass
Vertical	5470.000	6.112	60.252	66.363	-1.857	68.220	Pass
Vertical	5502.400	6.282	98.888	105.170	--	--	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11n-40BW 30Mbps) -Channel 134

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5679.200	4.535	101.121	105.656	--	--	Pass
Horizontal	5725.000	4.654	57.440	62.094	-6.126	68.220	Pass
Horizontal	5731.000	4.656	58.489	63.144	-5.076	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5675.600	5.923	99.384	105.307	--	--	Pass
Vertical	5725.000	5.992	57.315	63.308	-4.912	68.220	Pass
Vertical	5726.400	5.992	58.199	64.191	-4.029	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11ac-20BW-14.4Mbps) -Channel 44

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	50.645	55.609	-22.611	78.220	Pass
Horizontal	5860.000	5.023	50.293	55.316	-12.904	68.220	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	50.746	56.783	-21.437	78.220	Pass
Vertical	5852.600	6.039	51.730	57.769	-20.451	78.220	Pass
Vertical	5860.000	6.047	51.354	57.401	-10.819	68.220	Pass
Vertical	5868.800	6.057	52.276	58.333	-9.887	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11ac-40BW-30Mbps) -Channel 42

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5850.000	4.964	54.322	59.286	-18.934	78.220	Pass
Horizontal	5852.400	4.978	55.178	60.156	-18.064	78.220	Pass
Horizontal	5860.000	5.023	51.886	56.909	-11.311	68.220	Pass
Horizontal	5868.400	5.073	53.233	58.305	-9.915	68.220	Pass


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5850.000	6.037	57.349	63.386	-14.834	78.220	Pass
Vertical	5852.000	6.039	60.090	66.129	-12.091	78.220	Pass
Vertical	5860.000	6.047	56.076	62.123	-6.097	68.220	Pass
Vertical	5862.200	6.050	57.012	63.062	-5.158	68.220	Pass

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 42


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5147.200	3.350	58.913	62.263	74.00	54.00	Pass
42 (Peak)	5150.000	3.340	57.561	60.901	74.00	54.00	Pass
42 (Peak)	5198.600	3.157	97.686	100.844	--	--	--
42 (Average)	5150.000	3.340	44.553	47.893	74.00	54.00	Pass
42 (Average)	5195.000	3.173	80.839	84.013	--	--	--

**Figure Channel 42: Horizontal (Peak)**

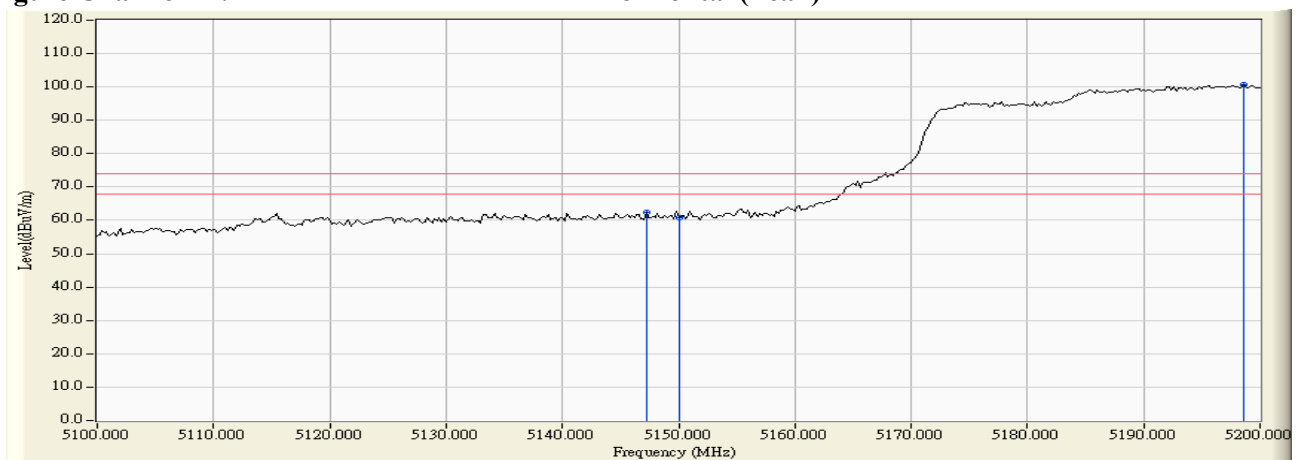

**Figure Channel 42: Horizontal (Average)**

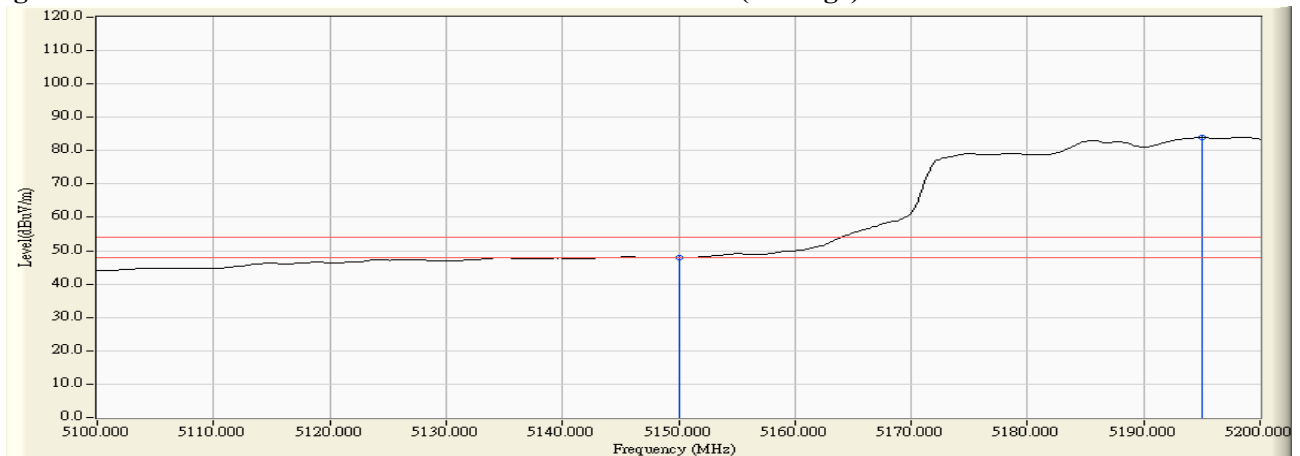

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 42


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
42 (Peak)	5150.000	5.260	63.715	68.975	74.00	54.00	Pass
42 (Peak)	5198.800	5.383	101.309	106.692	--	--	--
42 (Average)	5146.600	5.251	48.392	53.643	74.00	54.00	Pass
42 (Average)	5150.000	5.260	48.345	53.605	74.00	54.00	Pass
42 (Average)	5195.000	5.375	83.640	89.016	--	--	--

**Figure Channel 42: Vertical (Peak)**

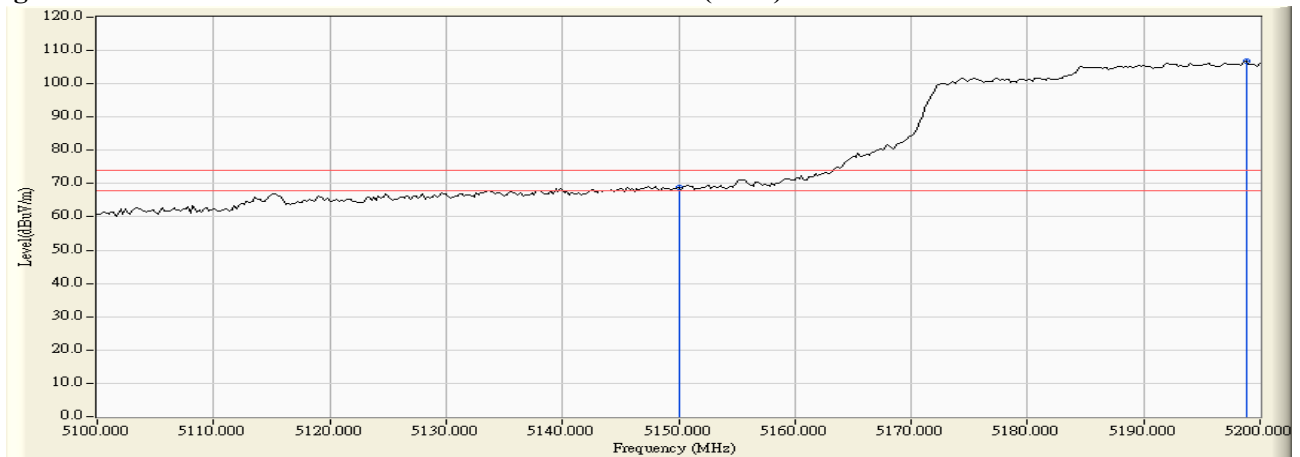

**Figure Channel 42: Vertical (Average)**

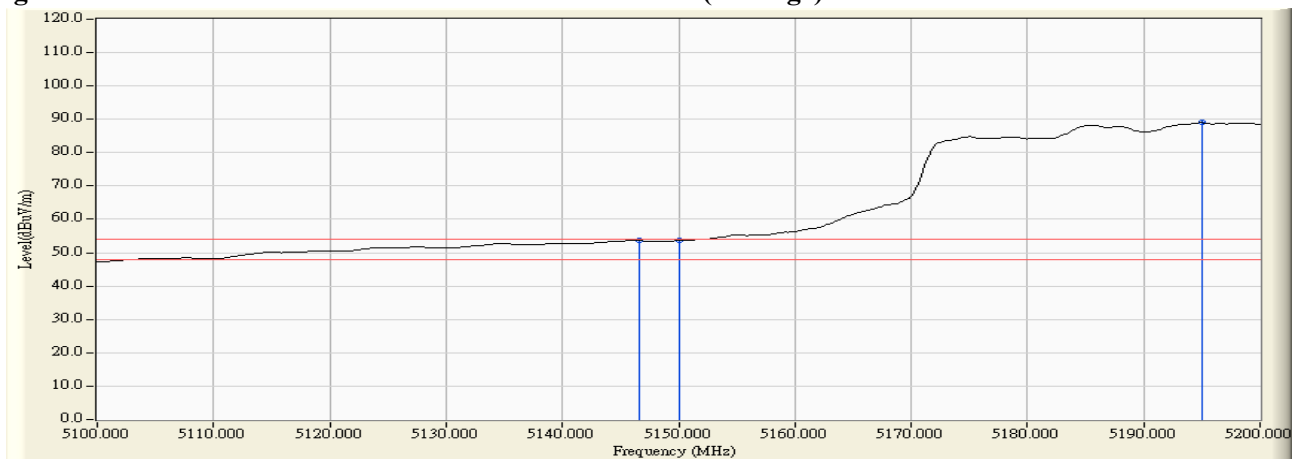

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 58


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5306.800	3.855	96.904	100.759	--	--	--
58 (Peak)	5350.000	3.716	58.371	62.088	74.00	54.00	Pass
58 (Peak)	5358.000	3.690	59.849	63.539	74.00	54.00	Pass
58 (Average)	5313.400	3.834	80.200	84.034	--	--	--
58 (Average)	5350.000	3.716	44.985	48.702	74.00	54.00	Pass
58 (Average)	5353.600	3.705	45.962	49.667	74.00	54.00	Pass

**Figure Channel 58: Horizontal (Peak)**

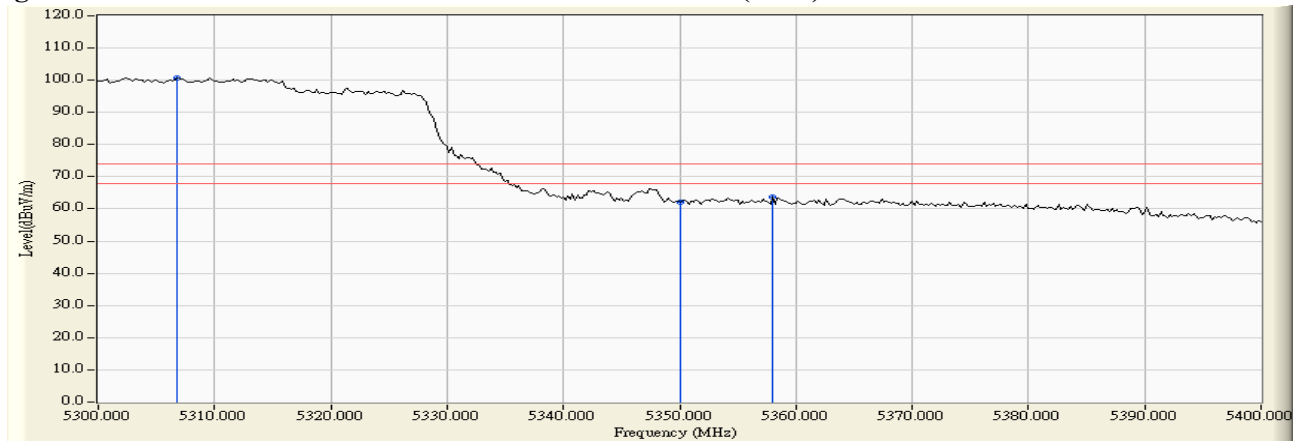

**Figure Channel 58: Horizontal (Average)**

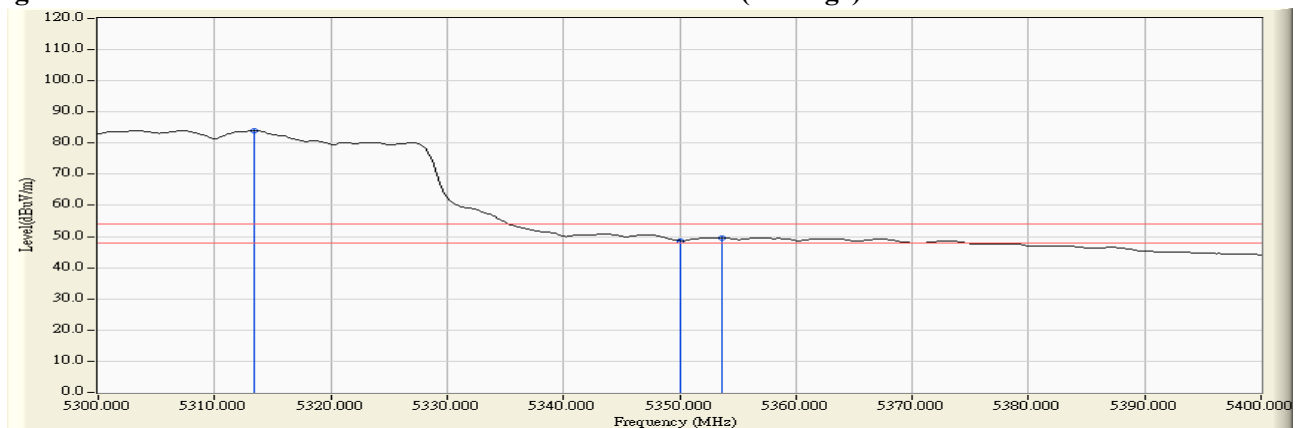

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 58

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
58 (Peak)	5303.000	5.752	98.695	104.446	--	--	--
58 (Peak)	5350.000	5.691	60.595	66.287	74.00	54.00	Pass
58 (Peak)	5354.200	5.686	63.331	69.017	74.00	54.00	Pass
58 (Average)	5303.400	5.751	81.860	87.611	--	--	--
58 (Average)	5350.000	5.691	47.094	52.786	74.00	54.00	Pass
58 (Average)	5353.600	5.687	48.157	53.844	74.00	54.00	Pass


**Figure Channel 58:**

**Vertical (Peak)**

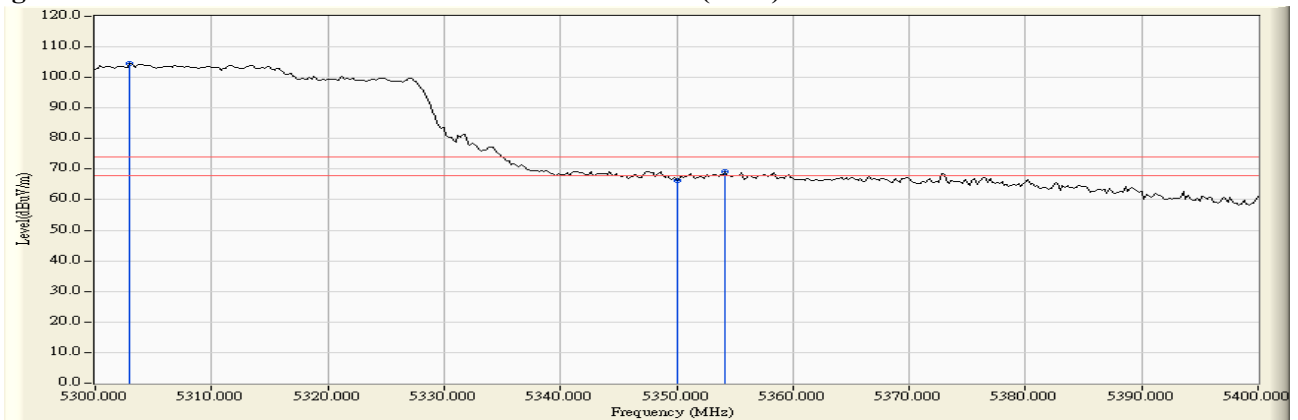

**Figure Channel 58:**

**Vertical (Average)**

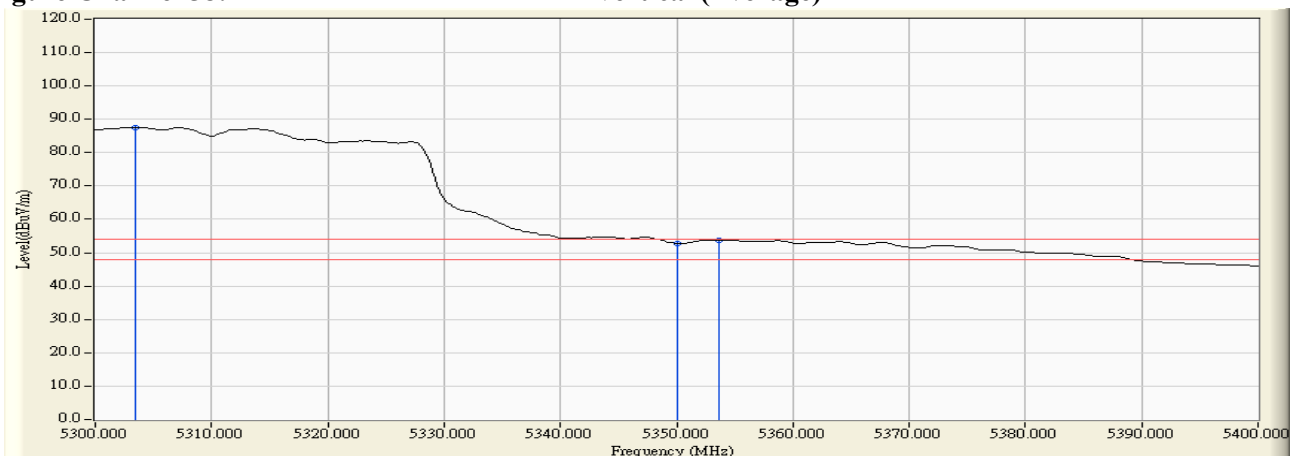

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 106


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5455.200	4.290	60.747	65.037	74.00	54.00	Pass
106 (Peak)	5460.000	4.354	60.027	64.381	74.00	54.00	Pass
106 (Peak)	5508.400	4.822	93.434	98.256	--	--	--
106 (Average)	5457.200	4.317	46.591	50.907	74.00	54.00	Pass
106 (Average)	5460.000	4.354	46.119	50.473	74.00	54.00	Pass
106 (Average)	5507.000	4.833	77.643	82.476	--	--	--

**Figure Channel 106: Horizontal (Peak)**

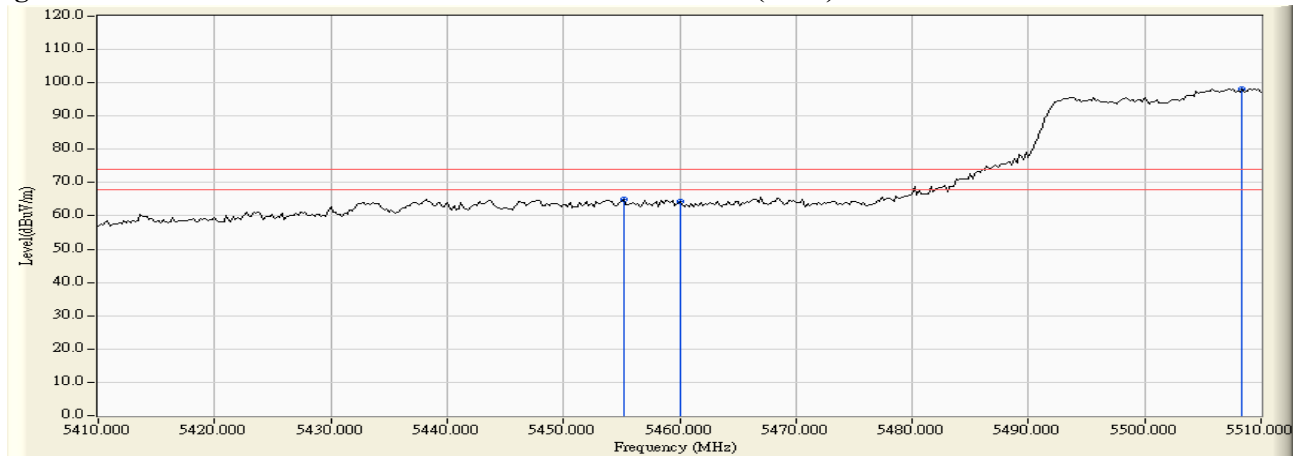

**Figure Channel 106: Horizontal (Average)**

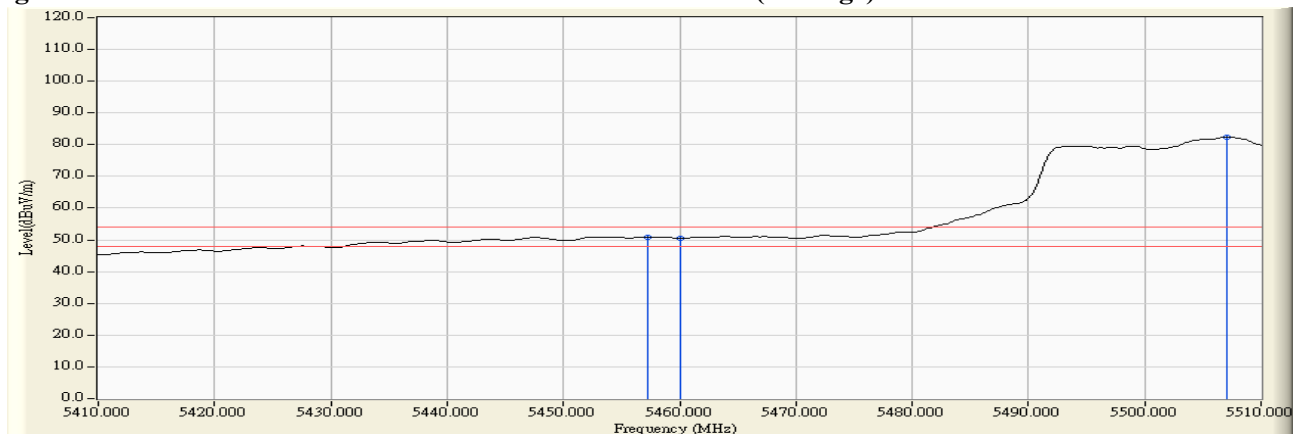

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Band Edge Data  
Test Site : No.3 OATS  
Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 106

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Peak Limit (dBμV/m)	Average Limit (dBμV/m)	Result
106 (Peak)	5460.000	6.041	61.334	67.375	74.00	54.00	Pass
106 (Peak)	5508.600	6.267	96.919	103.186	--	--	--
106 (Average)	5456.400	6.015	47.699	53.714	74.00	54.00	Pass
106 (Average)	5460.000	6.041	47.132	53.173	74.00	54.00	Pass
106 (Average)	5507.400	6.275	80.244	86.519	--	--	--


**Figure Channel 106:**

**Vertical (Peak)**

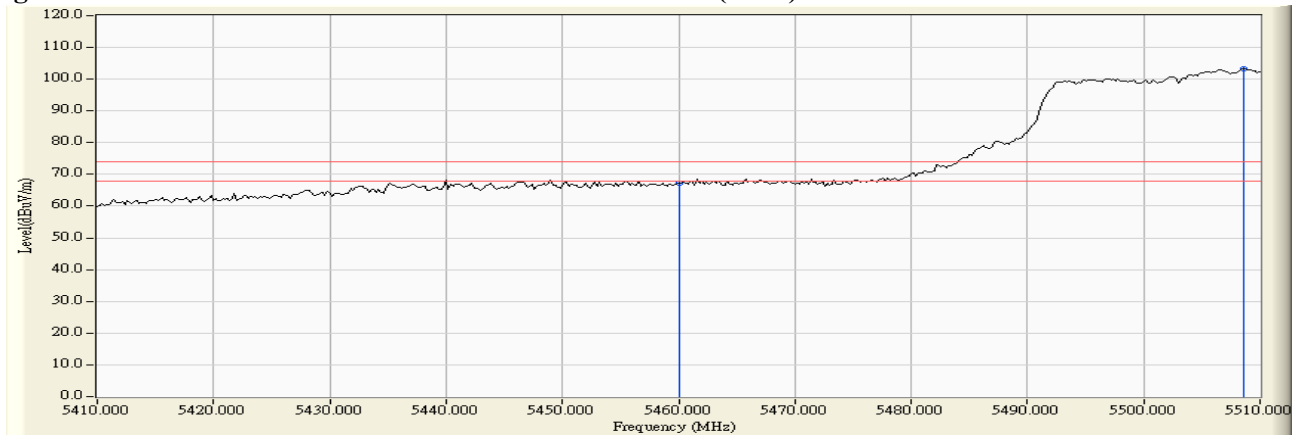

**Figure Channel 106:**

**Vertical (Average)**

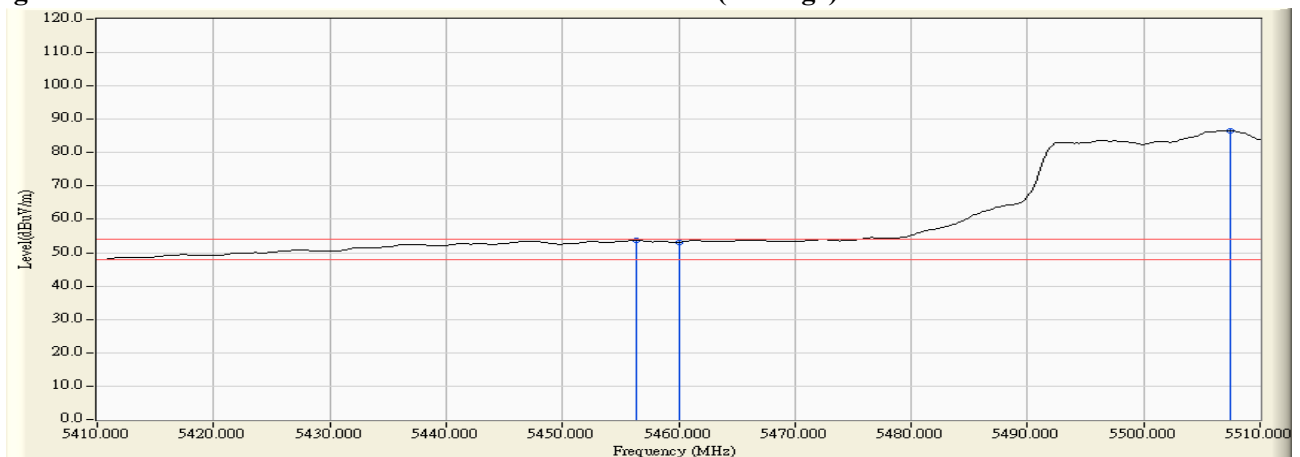

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Dual Band Wireless-AC 8260  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4 Beamforming: Transmit (802.11ac-80BW-65Mbps) -Channel 106

**RF Radiated Measurement:**

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Horizontal	5455.200	4.290	62.732	67.022	-1.198	68.220	Pass
Horizontal	5470.000	4.488	62.145	66.633	-1.587	68.220	Pass
Horizontal	5506.800	4.835	95.178	100.013	--	--	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Result
Vertical	5463.400	6.064	62.110	68.174	-0.046	68.220	Pass
Vertical	5470.000	6.112	60.350	66.461	-1.759	68.220	Pass
Vertical	5518.800	6.201	95.956	102.158	--	--	Pass

## 7. Frequency Stability


### 7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 7.2. Test Setup

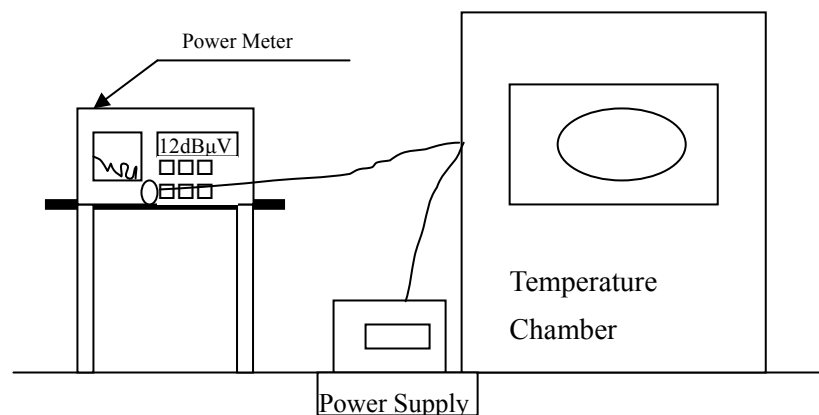

### 7.3. Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

### 7.4. Test Procedure

The EUT was tested to procedure of ANSI C63.10: 2009 Section 6.8 for compliance to FCC 47 CFR Subpart E requirements.

### 7.5. Uncertainty

± 150 Hz

## 7.6. Test Result of Frequency Stability

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Frequency Stability  
Test Site : Temperature Chamber  
Test Mode : Carrier Wave (SISO A)

### Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) oC	Vnom (110)V	36	5180.0000	5180.0068	-0.0068
		38	5190.0000	5190.0043	-0.0043
		44	5220.0000	5220.0082	-0.0082
		46	5230.0000	5230.0069	-0.0069
		48	5240.0000	5240.0077	-0.0077
		52	5260.0000	5260.0088	-0.0088
		54	5270.0000	5270.0081	-0.0081
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0058	-0.0058
		64	5320.0000	5320.0032	-0.0032
		100	5500.0000	5500.0093	-0.0093
		102	5510.0000	5510.0102	-0.0102
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0095	-0.0095
		134	5670.0000	5670.0082	-0.0082
		140	5700.0000	5700.0087	-0.0087
Tmax (50) oC	Vmax (126.5)V	36	5180.0000	5180.0070	-0.0070
		38	5190.0000	5190.0040	-0.0040
		44	5220.0000	5220.0080	-0.0080
		46	5230.0000	5230.0070	-0.0070
		48	5240.0000	5240.0071	-0.0071
		52	5260.0000	5260.0083	-0.0083
		54	5270.0000	5270.0079	-0.0079
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0088	-0.0088
		64	5320.0000	5320.0073	-0.0073
		100	5500.0000	5500.0074	-0.0074
		102	5510.0000	5510.0069	-0.0069
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0081	-0.0081
		140	5700.0000	5700.0077	-0.0077



Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tmax (50) °C	Vmin (93.5)V	36	5180.0000	5180.0069	-0.0069
		38	5190.0000	5190.0077	-0.0077
		44	5220.0000	5220.0088	-0.0088
		46	5230.0000	5230.0074	-0.0074
		48	5240.0000	5240.0066	-0.0066
		52	5260.0000	5260.0079	-0.0079
		54	5270.0000	5270.0092	-0.0092
		60	5300.0000	5300.0086	-0.0086
		62	5310.0000	5310.0061	-0.0061
		64	5320.0000	5320.0074	-0.0074
		100	5500.0000	5500.0073	-0.0073
		102	5510.0000	5510.0079	-0.0079
		110	5550.0000	5550.0099	-0.0099
		116	5580.0000	5580.0091	-0.0091
		134	5670.0000	5670.0088	-0.0088
Tnom (-10) oC	Vnom (126.5)V	140	5700.0000	5700.0080	-0.0080
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0090	-0.0090
Tmax (-10) oC	Vmax (93.5)V	134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0090	-0.0090
		134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) °C	Vnom (110)V	42	5210.0000	5210.0037	-0.0037
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0024	-0.0024
		122	5610.0000	5610.0024	-0.0024
		138	5690.0000	5690.0074	-0.0074
		142	5710.0000	5710.0029	-0.0029
		144	5720.0000	5720.0064	-0.0064
Tmax (50) °C	Vmax (126.5)V	42	5210.0000	5210.0053	-0.0053
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0016	-0.0016
		122	5610.0000	5610.0074	-0.0074
		138	5690.0000	5690.0064	-0.0064
		142	5710.0000	5710.0044	-0.0044
		144	5720.0000	5720.0037	-0.0037
Tmax (50) °C	Vmin (93.5)V	42	5210.0000	5210.0074	-0.0074
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0036	-0.0036
		122	5610.0000	5610.0014	-0.0014
		138	5690.0000	5690.0027	-0.0027
		142	5710.0000	5710.0046	-0.0046
		144	5720.0000	5720.0031	-0.0031
Tmin (-10) °C	Vmax (126.5)V	42	5210.0000	5210.0014	-0.0014
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0056	-0.0056
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0011	-0.0011
Tmin (-10) °C	Vmin (93.5)V	42	5210.0000	5210.0027	-0.0027
		58	5290.0000	5290.0045	-0.0045
		106	5530.0000	5530.0021	-0.0021
		122	5610.0000	5610.0027	-0.0027
		138	5690.0000	5690.0021	-0.0021
		142	5710.0000	5710.0033	-0.0033
		144	5720.0000	5720.0039	-0.0039

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Frequency Stability  
Test Site : Temperature Chamber  
Test Mode : Carrier Wave (SISO B)

**Chain A**

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) oC	Vnom (110)V	36	5180.0000	5180.0068	-0.0068
		38	5190.0000	5190.0043	-0.0043
		44	5220.0000	5220.0082	-0.0082
		46	5230.0000	5230.0069	-0.0069
		48	5240.0000	5240.0077	-0.0077
		52	5260.0000	5260.0088	-0.0088
		54	5270.0000	5270.0081	-0.0081
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0058	-0.0058
		64	5320.0000	5320.0032	-0.0032
		100	5500.0000	5500.0093	-0.0093
		102	5510.0000	5510.0102	-0.0102
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0095	-0.0095
		134	5670.0000	5670.0082	-0.0082
		140	5700.0000	5700.0087	-0.0087
Tmax (50) oC	Vmax (126.5)V	36	5180.0000	5180.0070	-0.0070
		38	5190.0000	5190.0040	-0.0040
		44	5220.0000	5220.0080	-0.0080
		46	5230.0000	5230.0070	-0.0070
		48	5240.0000	5240.0071	-0.0071
		52	5260.0000	5260.0083	-0.0083
		54	5270.0000	5270.0079	-0.0079
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0088	-0.0088
		64	5320.0000	5320.0073	-0.0073
		100	5500.0000	5500.0074	-0.0074
		102	5510.0000	5510.0069	-0.0069
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0081	-0.0081
		140	5700.0000	5700.0077	-0.0077

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tmax (50) °C	Vmin (93.5)V	36	5180.0000	5180.0069	-0.0069
		38	5190.0000	5190.0077	-0.0077
		44	5220.0000	5220.0088	-0.0088
		46	5230.0000	5230.0074	-0.0074
		48	5240.0000	5240.0066	-0.0066
		52	5260.0000	5260.0079	-0.0079
		54	5270.0000	5270.0092	-0.0092
		60	5300.0000	5300.0086	-0.0086
		62	5310.0000	5310.0061	-0.0061
		64	5320.0000	5320.0074	-0.0074
		100	5500.0000	5500.0073	-0.0073
		102	5510.0000	5510.0079	-0.0079
		110	5550.0000	5550.0099	-0.0099
		116	5580.0000	5580.0091	-0.0091
		134	5670.0000	5670.0088	-0.0088
Tnom (-10) oC	Vnom (126.5)V	140	5700.0000	5700.0080	-0.0080
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0090	-0.0090
Tmax (-10) oC	Vmax (93.5)V	134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0090	-0.0090
		134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) °C	Vnom (110)V	42	5210.0000	5210.0075	-0.0075
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0024	-0.0024
		122	5610.0000	5610.0058	-0.0058
		138	5690.0000	5690.0089	-0.0089
		142	5710.0000	5710.0029	-0.0029
		144	5720.0000	5720.0006	-0.0006
Tmax (50) °C	Vmax (126.5)V	42	5210.0000	5210.0036	-0.0036
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0016	-0.0016
		122	5610.0000	5610.0058	-0.0058
		138	5690.0000	5690.0064	-0.0064
		142	5710.0000	5710.0058	-0.0058
		144	5720.0000	5720.0037	-0.0037
Tmax (50) °C	Vmin (93.5)V	42	5210.0000	5210.0099	-0.0099
		58	5290.0000	5290.0096	-0.0096
		106	5530.0000	5530.0036	-0.0036
		122	5610.0000	5610.0058	-0.0058
		138	5690.0000	5690.0027	-0.0027
		142	5710.0000	5710.0074	-0.0074
		144	5720.0000	5720.0033	-0.0033
Tmin (-10) °C	Vmax (126.5)V	42	5210.0000	5210.0087	-0.0087
		58	5290.0000	5290.0043	-0.0043
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0058	-0.0058
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0047	-0.0047
Tmin (-10) °C	Vmin (93.5)V	42	5210.0000	5210.0087	-0.0087
		58	5290.0000	5290.0043	-0.0043
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0058	-0.0058
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0047	-0.0047

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Frequency Stability  
Test Site : Temperature Chamber  
Test Mode : Carrier Wave (MIMO)

**Chain A**

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) oC	Vnom (110)V	36	5180.0000	5180.0068	-0.0068
		38	5190.0000	5190.0043	-0.0043
		44	5220.0000	5220.0082	-0.0082
		46	5230.0000	5230.0069	-0.0069
		48	5240.0000	5240.0077	-0.0077
		52	5260.0000	5260.0088	-0.0088
		54	5270.0000	5270.0081	-0.0081
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0058	-0.0058
		64	5320.0000	5320.0032	-0.0032
		100	5500.0000	5500.0093	-0.0093
		102	5510.0000	5510.0102	-0.0102
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0095	-0.0095
		134	5670.0000	5670.0082	-0.0082
		140	5700.0000	5700.0087	-0.0087
Tmax (50) oC	Vmax (126.5)V	36	5180.0000	5180.0070	-0.0070
		38	5190.0000	5190.0040	-0.0040
		44	5220.0000	5220.0080	-0.0080
		46	5230.0000	5230.0070	-0.0070
		48	5240.0000	5240.0071	-0.0071
		52	5260.0000	5260.0083	-0.0083
		54	5270.0000	5270.0079	-0.0079
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0088	-0.0088
		64	5320.0000	5320.0073	-0.0073
		100	5500.0000	5500.0074	-0.0074
		102	5510.0000	5510.0069	-0.0069
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0081	-0.0081
		140	5700.0000	5700.0077	-0.0077

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tmax (50) °C	Vmin (93.5)V	36	5180.0000	5180.0069	-0.0069
		38	5190.0000	5190.0077	-0.0077
		44	5220.0000	5220.0088	-0.0088
		46	5230.0000	5230.0074	-0.0074
		48	5240.0000	5240.0066	-0.0066
		52	5260.0000	5260.0079	-0.0079
		54	5270.0000	5270.0092	-0.0092
		60	5300.0000	5300.0086	-0.0086
		62	5310.0000	5310.0061	-0.0061
		64	5320.0000	5320.0074	-0.0074
		100	5500.0000	5500.0073	-0.0073
		102	5510.0000	5510.0079	-0.0079
		110	5550.0000	5550.0099	-0.0099
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0088	-0.0088
Tnom (-10) oC	Vnom (126.5)V	140	5700.0000	5700.0080	-0.0080
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0093	-0.0093
Tmax (-10) oC	Vmax (93.5)V	134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) °C	Vnom (110)V	42	5210.0000	5210.0220	-0.0220
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0024	-0.0024
		122	5610.0000	5610.0057	-0.0057
		138	5690.0000	5690.0046	-0.0046
		142	5710.0000	5710.0029	-0.0029
		144	5720.0000	5720.0064	-0.0064
Tmax (50) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0016	-0.0016
		122	5610.0000	5610.0085	-0.0085
		138	5690.0000	5690.0064	-0.0064
		142	5710.0000	5710.0044	-0.0044
		144	5720.0000	5720.0037	-0.0037
Tmax (50) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0036	-0.0036
		122	5610.0000	5610.0026	-0.0026
		138	5690.0000	5690.0027	-0.0027
		142	5710.0000	5710.0046	-0.0046
		144	5720.0000	5720.0033	-0.0033
Tmin (-10) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0086	-0.0086
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0047	-0.0047
Tmin (-10) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0026	-0.0026
		122	5610.0000	5610.0012	-0.0012
		138	5690.0000	5690.0021	-0.0021
		142	5710.0000	5710.0036	-0.0036
		144	5720.0000	5720.0039	-0.0039



**Chain B**

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) oC	Vnom (110)V	36	5180.0000	5180.0065	-0.0065
		38	5190.0000	5190.0040	-0.0040
		44	5220.0000	5220.0077	-0.0077
		46	5230.0000	5230.0067	-0.0067
		48	5240.0000	5240.0074	-0.0074
		52	5260.0000	5260.0084	-0.0084
		54	5270.0000	5270.0077	-0.0077
		60	5300.0000	5300.0059	-0.0059
		62	5310.0000	5310.0057	-0.0057
		64	5320.0000	5320.0030	-0.0030
		100	5500.0000	5500.0090	-0.0090
		102	5510.0000	5510.0100	-0.0100
		110	5550.0000	5550.0098	-0.0098
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0080	-0.0080
		140	5700.0000	5700.0086	-0.0086
Tmax (50) oC	Vmax (126.5)V	36	5180.0000	5180.0069	-0.0069
		38	5190.0000	5190.0041	-0.0041
		44	5220.0000	5220.0077	-0.0077
		46	5230.0000	5230.0069	-0.0069
		48	5240.0000	5240.0064	-0.0064
		52	5260.0000	5260.0078	-0.0041
		54	5270.0000	5270.0073	-0.0073
		60	5300.0000	5300.0060	-0.0060
		62	5310.0000	5310.0080	-0.0080
		64	5320.0000	5320.0069	-0.0069
		100	5500.0000	5500.0071	-0.0071
		102	5510.0000	5510.0061	-0.0061
		110	5550.0000	5550.0097	-0.0097
		116	5580.0000	5580.0093	-0.0093
		134	5670.0000	5670.0080	-0.0080
		140	5700.0000	5700.0074	-0.0074

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tmax (50) °C	Vmin (93.5)V	36	5180.0000	5180.0063	-0.0063
		38	5190.0000	5190.0074	-0.0074
		44	5220.0000	5220.0087	-0.0087
		46	5230.0000	5230.0070	-0.0070
		48	5240.0000	5240.0063	-0.0063
		52	5260.0000	5260.0077	-0.0077
		54	5270.0000	5270.0090	-0.0090
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0060	-0.0060
		64	5320.0000	5320.0072	-0.0072
		100	5500.0000	5500.0072	-0.0072
		102	5510.0000	5510.0077	-0.0077
		110	5550.0000	5550.0097	-0.0097
		116	5580.0000	5580.0098	-0.0098
		134	5670.0000	5670.0087	-0.0087
		140	5700.0000	5700.0079	-0.0079
Tnom (-10) oC	Vnom (126.5)V	36	5180.0000	5180.0061	-0.0061
		38	5190.0000	5190.0077	-0.0077
		44	5220.0000	5220.0091	-0.0091
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0080	-0.0080
		52	5260.0000	5260.0071	-0.0071
		54	5270.0000	5270.0090	-0.0090
		60	5300.0000	5300.0081	-0.0081
		62	5310.0000	5310.0094	-0.0094
		64	5320.0000	5320.0094	-0.0094
		100	5500.0000	5500.0065	-0.0065
		102	5510.0000	5510.0071	-0.0071
		110	5550.0000	5550.0087	-0.0087
		116	5580.0000	5580.0098	-0.0098
		134	5670.0000	5670.0083	-0.0083
		140	5700.0000	5700.0085	-0.0085
Tmax (-10) oC	Vmax (93.5)V	36	5180.0000	5180.6300	-0.6300
		38	5190.0000	5190.0075	-0.0075
		44	5220.0000	5220.0084	-0.0084
		46	5230.0000	5230.0080	-0.0080
		48	5240.0000	5240.0087	-0.0087
		52	5260.0000	5260.0075	-0.0075
		54	5270.0000	5270.0089	-0.0089
		60	5300.0000	5300.7700	-0.7700
		62	5310.0000	5310.0090	-0.0090
		64	5320.0000	5320.0097	-0.0097
		100	5500.0000	5500.0079	-0.0079
		102	5510.0000	5510.0066	-0.0066
		110	5550.0000	5550.0074	-0.0074
		116	5580.0000	5580.0098	-0.0098
		134	5670.0000	5670.0077	-0.0077
		140	5700.0000	5700.0086	-0.0086

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) °C	Vnom (110)V	42	5210.0000	5210.0220	-0.0220
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0024	-0.0024
		122	5610.0000	5610.0095	-0.0095
		138	5690.0000	5690.0046	-0.0046
		142	5710.0000	5710.0029	-0.0029
		144	5720.0000	5720.0064	-0.0064
Tmax (50) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0016	-0.0016
		122	5610.0000	5610.0032	-0.0032
		138	5690.0000	5690.0064	-0.0064
		142	5710.0000	5710.0044	-0.0044
		144	5720.0000	5720.0037	-0.0037
Tmax (50) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0036	-0.0036
		122	5610.0000	5610.0096	-0.0096
		138	5690.0000	5690.0027	-0.0027
		142	5710.0000	5710.0046	-0.0046
		144	5720.0000	5720.0033	-0.0033
Tmin (-10) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0065	-0.0065
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0047	-0.0047
Tmin (-10) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0026	-0.0026
		122	5610.0000	5610.0085	-0.0085
		138	5690.0000	5690.0021	-0.0021
		142	5710.0000	5710.0036	-0.0036
		144	5720.0000	5720.0039	-0.0039

Product : Intel® Dual Band Wireless-AC 8260  
Test Item : Frequency Stability  
Test Site : Temperature Chamber  
Test Mode : Carrier Wave (Beamforming)

**Chain A**

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) oC	Vnom (110)V	36	5180.0000	5180.0068	-0.0068
		38	5190.0000	5190.0043	-0.0043
		44	5220.0000	5220.0082	-0.0082
		46	5230.0000	5230.0069	-0.0069
		48	5240.0000	5240.0077	-0.0077
		52	5260.0000	5260.0088	-0.0088
		54	5270.0000	5270.0081	-0.0081
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0058	-0.0058
		64	5320.0000	5320.0032	-0.0032
		100	5500.0000	5500.0093	-0.0093
		102	5510.0000	5510.0102	-0.0102
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0094	-0.0094
		134	5670.0000	5670.0082	-0.0082
		140	5700.0000	5700.0087	-0.0087
Tmax (50) oC	Vmax (126.5)V	36	5180.0000	5180.0070	-0.0070
		38	5190.0000	5190.0040	-0.0040
		44	5220.0000	5220.0080	-0.0080
		46	5230.0000	5230.0070	-0.0070
		48	5240.0000	5240.0071	-0.0071
		52	5260.0000	5260.0083	-0.0083
		54	5270.0000	5270.0079	-0.0079
		60	5300.0000	5300.0062	-0.0062
		62	5310.0000	5310.0088	-0.0088
		64	5320.0000	5320.0073	-0.0073
		100	5500.0000	5500.0074	-0.0074
		102	5510.0000	5510.0069	-0.0069
		110	5550.0000	5550.0100	-0.0100
		116	5580.0000	5580.0094	-0.0094
		134	5670.0000	5670.0081	-0.0081
		140	5700.0000	5700.0077	-0.0077

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tmax (50) °C	Vmin (93.5)V	36	5180.0000	5180.0069	-0.0069
		38	5190.0000	5190.0077	-0.0077
		44	5220.0000	5220.0088	-0.0088
		46	5230.0000	5230.0074	-0.0074
		48	5240.0000	5240.0066	-0.0066
		52	5260.0000	5260.0079	-0.0079
		54	5270.0000	5270.0092	-0.0092
		60	5300.0000	5300.0086	-0.0086
		62	5310.0000	5310.0061	-0.0061
		64	5320.0000	5320.0074	-0.0074
		100	5500.0000	5500.0073	-0.0073
		102	5510.0000	5510.0079	-0.0079
		110	5550.0000	5550.0099	-0.0099
		116	5580.0000	5580.0094	-0.0094
		134	5670.0000	5670.0088	-0.0088
Tnom (-10) oC	Vnom (126.5)V	140	5700.0000	5700.0080	-0.0080
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0094	-0.0094
Tmax (-10) oC	Vmax (93.5)V	134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086
		36	5180.0000	5180.0064	-0.0064
		38	5190.0000	5190.0078	-0.0078
		44	5220.0000	5220.0094	-0.0094
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0082	-0.0082
		52	5260.0000	5260.0076	-0.0076
		54	5270.0000	5270.0093	-0.0093
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0097	-0.0097
		64	5320.0000	5320.0100	-0.0100
		100	5500.0000	5500.0067	-0.0067
		102	5510.0000	5510.0074	-0.0074
		110	5550.0000	5550.0088	-0.0088
		116	5580.0000	5580.0094	-0.0094
		134	5670.0000	5670.0084	-0.0084
		140	5700.0000	5700.0086	-0.0086

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) °C	Vnom (110)V	42	5210.0000	5210.0220	-0.0220
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0024	-0.0024
		122	5610.0000	5610.0029	-0.0029
		138	5690.0000	5690.0046	-0.0046
		142	5710.0000	5710.0029	-0.0029
		144	5720.0000	5720.0064	-0.0064
Tmax (50) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0016	-0.0016
		122	5610.0000	5610.0074	-0.0074
		138	5690.0000	5690.0064	-0.0064
		142	5710.0000	5710.0044	-0.0044
		144	5720.0000	5720.0037	-0.0037
Tmax (50) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0036	-0.0036
		122	5610.0000	5610.0041	-0.0041
		138	5690.0000	5690.0027	-0.0027
		142	5710.0000	5710.0046	-0.0046
		144	5720.0000	5720.0033	-0.0033
Tmin (-10) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0012	-0.0012
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0047	-0.0047
Tmin (-10) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0026	-0.0026
		122	5610.0000	5610.0078	-0.0078
		138	5690.0000	5690.0021	-0.0021
		142	5710.0000	5710.0036	-0.0036
		144	5720.0000	5720.0039	-0.0039

**Chain B**

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) oC	Vnom (110)V	36	5180.0000	5180.0065	-0.0065
		38	5190.0000	5190.0040	-0.0040
		44	5220.0000	5220.0077	-0.0077
		46	5230.0000	5230.0067	-0.0067
		48	5240.0000	5240.0074	-0.0074
		52	5260.0000	5260.0084	-0.0084
		54	5270.0000	5270.0077	-0.0077
		60	5300.0000	5300.0059	-0.0059
		62	5310.0000	5310.0057	-0.0057
		64	5320.0000	5320.0030	-0.0030
		100	5500.0000	5500.0090	-0.0090
		102	5510.0000	5510.0100	-0.0100
		110	5550.0000	5550.0098	-0.0098
		116	5580.0000	5580.0092	-0.0092
		134	5670.0000	5670.0080	-0.0080
		140	5700.0000	5700.0086	-0.0086
Tmax (50) oC	Vmax (126.5)V	36	5180.0000	5180.0069	-0.0069
		38	5190.0000	5190.0041	-0.0041
		44	5220.0000	5220.0077	-0.0077
		46	5230.0000	5230.0069	-0.0069
		48	5240.0000	5240.0064	-0.0064
		52	5260.0000	5260.0078	-0.0041
		54	5270.0000	5270.0073	-0.0073
		60	5300.0000	5300.0060	-0.0060
		62	5310.0000	5310.0080	-0.0080
		64	5320.0000	5320.0069	-0.0069
		100	5500.0000	5500.0071	-0.0071
		102	5510.0000	5510.0061	-0.0061
		110	5550.0000	5550.0097	-0.0097
		116	5580.0000	5580.0092	-0.0092
		134	5670.0000	5670.0080	-0.0080
		140	5700.0000	5700.0074	-0.0074

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tmax (50) °C	Vmin (93.5)V	36	5180.0000	5180.0063	-0.0063
		38	5190.0000	5190.0074	-0.0074
		44	5220.0000	5220.0087	-0.0087
		46	5230.0000	5230.0070	-0.0070
		48	5240.0000	5240.0063	-0.0063
		52	5260.0000	5260.0077	-0.0077
		54	5270.0000	5270.0090	-0.0090
		60	5300.0000	5300.0084	-0.0084
		62	5310.0000	5310.0060	-0.0060
		64	5320.0000	5320.0072	-0.0072
		100	5500.0000	5500.0072	-0.0072
		102	5510.0000	5510.0077	-0.0077
		110	5550.0000	5550.0097	-0.0097
		116	5580.0000	5580.0092	-0.0092
		134	5670.0000	5670.0087	-0.0087
Tnom (-10) oC	Vnom (126.5)V	140	5700.0000	5700.0079	-0.0079
		36	5180.0000	5180.0061	-0.0061
		38	5190.0000	5190.0077	-0.0077
		44	5220.0000	5220.0091	-0.0091
		46	5230.0000	5230.0077	-0.0077
		48	5240.0000	5240.0080	-0.0080
		52	5260.0000	5260.0071	-0.0071
		54	5270.0000	5270.0090	-0.0090
		60	5300.0000	5300.0081	-0.0081
		62	5310.0000	5310.0094	-0.0094
		64	5320.0000	5320.0094	-0.0094
		100	5500.0000	5500.0065	-0.0065
		102	5510.0000	5510.0071	-0.0071
		110	5550.0000	5550.0087	-0.0087
		116	5580.0000	5580.0092	-0.0092
Tmax (-10) oC	Vmax (93.5)V	134	5670.0000	5670.0083	-0.0083
		140	5700.0000	5700.0085	-0.0085
		36	5180.0000	5180.6300	-0.6300
		38	5190.0000	5190.0075	-0.0075
		44	5220.0000	5220.0084	-0.0084
		46	5230.0000	5230.0080	-0.0080
		48	5240.0000	5240.0087	-0.0087
		52	5260.0000	5260.0075	-0.0075
		54	5270.0000	5270.0089	-0.0089
		60	5300.0000	5300.7700	-0.7700
		62	5310.0000	5310.0090	-0.0090
		64	5320.0000	5320.0097	-0.0097
		100	5500.0000	5500.0079	-0.0079
		102	5510.0000	5510.0066	-0.0066
		110	5550.0000	5550.0074	-0.0074
		116	5580.0000	5580.0092	-0.0092
		134	5670.0000	5670.0077	-0.0077
		140	5700.0000	5700.0086	-0.0086



Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	$\Delta F$ (MHz)
Tnom (20) °C	Vnom (110)V	42	5210.0000	5210.0220	-0.0220
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0024	-0.0024
		122	5610.0000	5610.0054	-0.0054
		138	5690.0000	5690.0046	-0.0046
		142	5710.0000	5710.0029	-0.0029
		144	5720.0000	5720.0064	-0.0064
Tmax (50) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0016	-0.0016
		122	5610.0000	5610.0036	-0.0036
		138	5690.0000	5690.0064	-0.0064
		142	5710.0000	5710.0044	-0.0044
		144	5720.0000	5720.0037	-0.0037
Tmax (50) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0036	-0.0036
		122	5610.0000	5610.0096	-0.0096
		138	5690.0000	5690.0027	-0.0027
		142	5710.0000	5710.0046	-0.0046
		144	5720.0000	5720.0033	-0.0033
Tmin (-10) °C	Vmax (126.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0025	-0.0025
		122	5610.0000	5610.0068	-0.0068
		138	5690.0000	5690.0017	-0.0017
		142	5710.0000	5710.0039	-0.0039
		144	5720.0000	5720.0047	-0.0047
Tmin (-10) °C	Vmin (93.5)V	42	5210.0000	5210.0024	-0.0024
		58	5290.0000	5290.0046	-0.0046
		106	5530.0000	5530.0026	-0.0026
		122	5610.0000	5610.0052	-0.0052
		138	5690.0000	5690.0021	-0.0021
		142	5710.0000	5710.0036	-0.0036
		144	5720.0000	5720.0039	-0.0039

## **8. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

## Attachment 1: EUT Test Photographs

## Attachment 2: EUT Detailed Photographs