

品名：KH-GX1961-LTE-F

History List

[illegible]

KH-GX1961-LTE-F Specification

1. Explanation of part number :

$$\frac{\text{KH}}{(1)} - \frac{\text{GX1961}}{(2)} - \frac{\text{LTE}}{(3)} - \frac{\text{F}}{(4)}$$

(1) Supplier: KH

(2) Model Name: GX1961

(3) Frequency : 699-960Mhz, 1710-2170Mhz, 2300-2690 Mhz

(4) Material :FPC

2. Electrical Specification :

2-1. Frequency Band:

Frequency Band	MHz
LTE	699-960Mhz, 1710-2170Mhz, 2300-2690 Mhz

2-2. Impedance

50 ohm nominal

2-3. VSWR, Efficiency, Matching and Active Data :

2-3.1 VSWR:

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES = $\pm$

HOLEDIA = $\pm$



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY：黄土勇

CHECKED BY: 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN
HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT
BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR
SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : KX-GX1961-LTE-FSpecification

DOCUMENT NO.

PAGE	REV.
------	------

A0

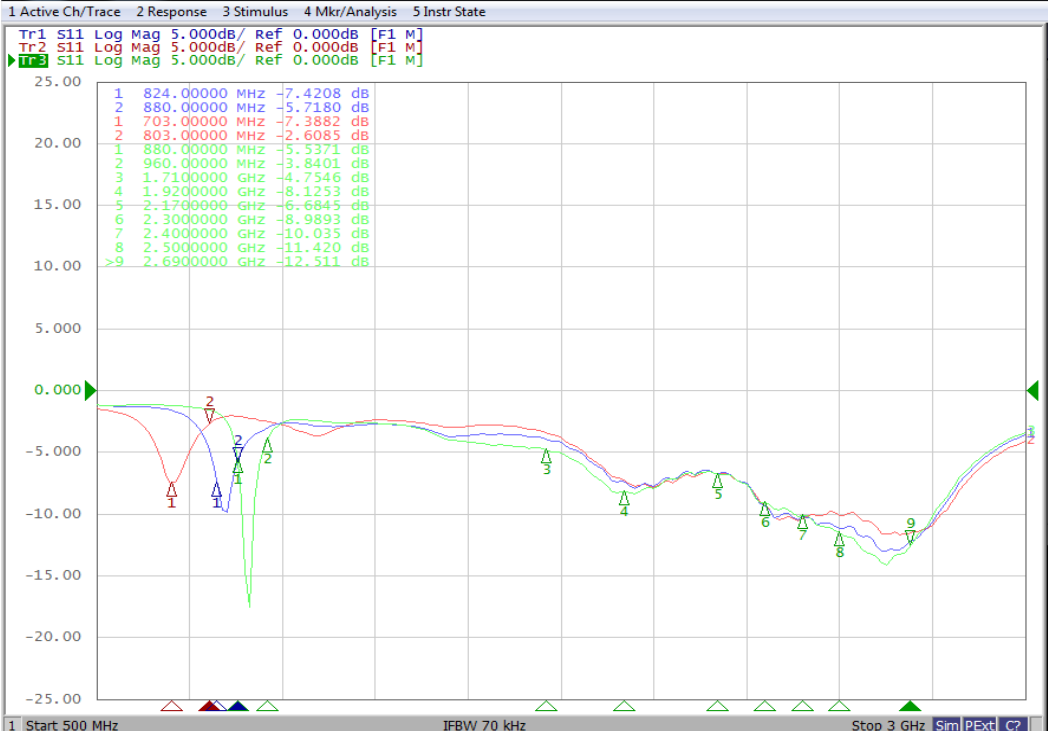Frequency Band	704	960	1710	2170	2500	2690
2-3-1. Typical Value:	-7.8	-3.8	-4.7	--6.6	--11.42	-12.5
2-3-2Measuring Method	1. A 50 Ω coaxial cable is connected to the fpcb antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm.					
2-3-3Picture						

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟

TITLE : **KX-GX1961-LTE-F**Specification



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.


PAGE REV.
A0

2-4. Measure and Chamber

2-4-1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset jig
- 2. Fixed this handset jig on chamber's rotator plane
- 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

2-4-2 Chamber definition

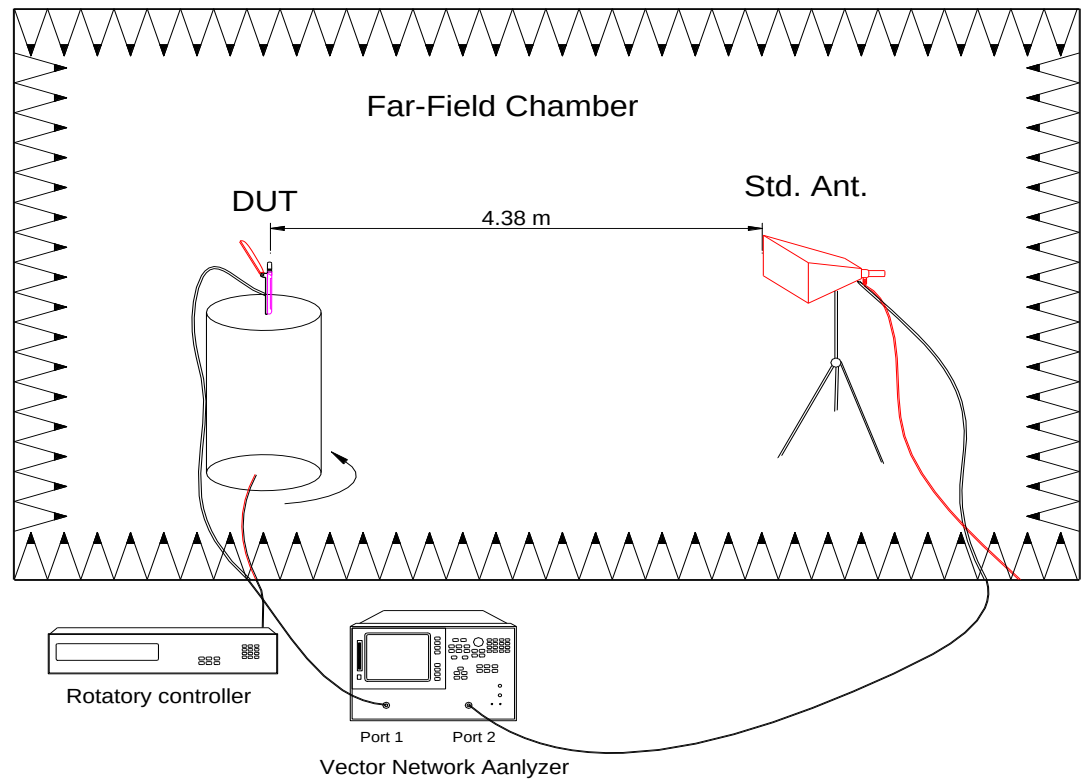

- 1. An anechoic chamber (8mx4mx3.5m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- 4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON : X=±2 X.X=±0.1 X.XX=±0.05 ANGLES=± HOLEDIA=±		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 徐俊	APPROVED BY : 王伟		
TITLE : <u>KX-GX1961-LTE-F</u> Specification		DOCUMENT NO.	PAGE REV. A0

2-4-3 DIV Antenna Efficiency

Frequency (MHz)	Peak Gain (dB)	Average Gain (dB)	Efficiency (%)
700	-6.86	-11.22	0.08
710	-6.45	-10.62	0.09
720	-6.12	-10.06	0.10
730	-5.55	-9.49	0.11
740	-5.03	-9.14	0.12
750	-4.56	-8.86	0.13
760	-4.43	-8.71	0.13
770	-4.90	-8.70	0.13
780	-5.21	-8.58	0.14
790	-5.10	-8.48	0.14
800	-5.01	-8.35	0.15
820	-1.86	-6.9	20.43
830	-1.05	-5.99	25.17
840	-0.55	-5.37	29.02
850	-0.21	-5.14	30.6
860	-0.12	-5.15	30.55
870	-0.20	-5.49	28.27
880	-0.11	-6.23	23.85
890	-0.54	-7.25	18.86
900	-0.40	-7.62	17.29
880	-1.23	-4.88	0.32
890	-0.54	-4.41	0.36
900	-0.40	-4.37	0.37
910	-0.74	-4.63	0.34
920	-1.08	-5.64	0.27
930	-2.32	-7.63	0.17
940	-3.93	-9.24	0.12
950	-5.36	-10.06	0.10
960	-6.29	-10.61	0.09
1710	-0.30	-5.9	25.69
1720	-0.46	-5.52	28.06
1730	-0.43	-5.47	28.37
1740	-0.31	-5.37	29.01

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟

TITLE : KX-GX1961-LTE-FSpecification



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.

A0

1750	-0.46	-5.49	28.24
1760	-0.27	-5.39	28.87
1770	0.37	-5.17	30.44
1780	0.55	-4.92	32.2
1790	0.62	-4.72	33.76
1800	0.86	-4.7	33.86
1810	0.88	-4.83	32.85
1820	0.60	-5.07	31.1
1830	0.67	-5.26	29.81
1840	1.07	-5.12	30.74
1850	1.22	-4.99	31.67
1860	1.13	-5.03	31.42
1870	1.23	-5.23	30
1880	1.31	-5.51	28.09
1890	1.24	-5.79	26.37
1900	1.31	-4.95	31.95
1910	1.34	-4.55	35.05
1920	1.27	-4.23	37.73
1930	0.97	-4.43	36.05
1940	0.95	-4.72	33.75
1950	1.10	-4.9	32.33
1960	1.18	-5.09	31
1970	1.23	-5.28	29.65
1980	1.50	-5.41	28.76
1990	1.45	-5.53	27.96
2000	1.48	-5.65	27.25
2010	1.92	-5.69	26.99
2020	2.11	-5.78	26.45
2030	1.99	-5.81	26.23
2040	2.06	-5.83	26.12
2050	2.01	-5.83	26.09
2060	1.68	-5.93	25.52
2070	1.73	-5.99	25.16
2080	2.01	-6.04	24.87
2090	2.06	-6.07	24.71
2100	2.12	-6.06	24.78
2110	2.37	-6.12	24.46
2120	2.20	-6.12	24.43
2130	2.04	-6.07	24.69
2140	2.13	-6.17	24.16

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : KX-GX1961-LTE-FSpecification

DOCUMENT
NO.

PAGE REV.

A0

2150	2. 24	-6.18	24.08
2160	2. 25	-6.08	24.65
2170	2. 45	-5.99	25.19
2300	2. 19	-4.92	32.22
2310	2. 04	-4.86	32.67
2320	2. 36	-4.8	33.14
2330	2. 06	-4.69	33.93
2340	1. 73	-4.66	34.18
2350	2. 08	-4.68	34.07
2360	1. 86	-4.61	34.59
2370	1. 42	-4.5	35.46
2380	1. 79	-4.47	35.72
2390	2. 04	-4.43	36.03
2400	1. 44	-4.32	36.99
2410	1. 64	-4.24	37.68
2420	2. 07	-4.23	37.73
2430	1. 47	-4.15	38.44
2440	1. 44	-4.07	39.14
2450	2. 04	-4.07	39.18
2460	1. 91	-4.09	38.95
2470	1. 79	-4.1	38.87
2480	2. 43	-4.09	39.02
2490	2. 33	-4.07	39.17
2500	2. 23	-4.06	39.23
2510	2. 33	-4.09	38.96
2520	2. 62	-4.12	38.73
2530	2. 55	-4.17	38.27
2540	2. 47	-4.22	37.8
2550	2. 56	-4.29	37.22
2560	2. 40	-4.38	36.5
2570	2. 38	-4.47	35.7
2580	2. 49	-4.58	34.82
2590	2. 31	-4.71	33.83
2600	2. 19	-4.75	33.47
2610	2. 13	-4.78	33.3
2620	2. 03	-4.8	33.15
2630	1. 89	-4.83	32.91
2640	1. 80	-4.85	32.7
2650	1. 77	-4.91	32.29

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : KX-GX1961-LTE-FSpecification

DOCUMENT
NO.

PAGE REV.
A0

2660	2.37	-4.92	32.23
2670	2.42	-3.25	0.47
2680	2.15	-3.40	0.46
2690	2.74	-3.12	0.49

2-4-4 PCB BT Antenna Efficiency

Frequency (MHz)	Peak Gain (dB)	Average Gain (dB)	Efficiency (%)
2400	-1.01	-5.14	31%
2410	-1.25	-5.19	30%
2420	-1.32	-5.14	31%
2430	-1.54	-5.08	31%
2440	-1.33	-5.06	31%
2450	-1.29	-5.04	31%
2460	-1.21	-4.97	32%
2470	-1.32	-5.08	31%
2480	-1.25	-5.19	30%
2490	-1.17	-5.40	29%
2500	-1.48	-5.65	27%

3-1 DIV Antenna Dimensions (mm) :

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊


APPROVED BY : 王伟

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : KX-GX1961-LTE-FSpecification

DOCUMENT
NO.

PAGE REV.
A0

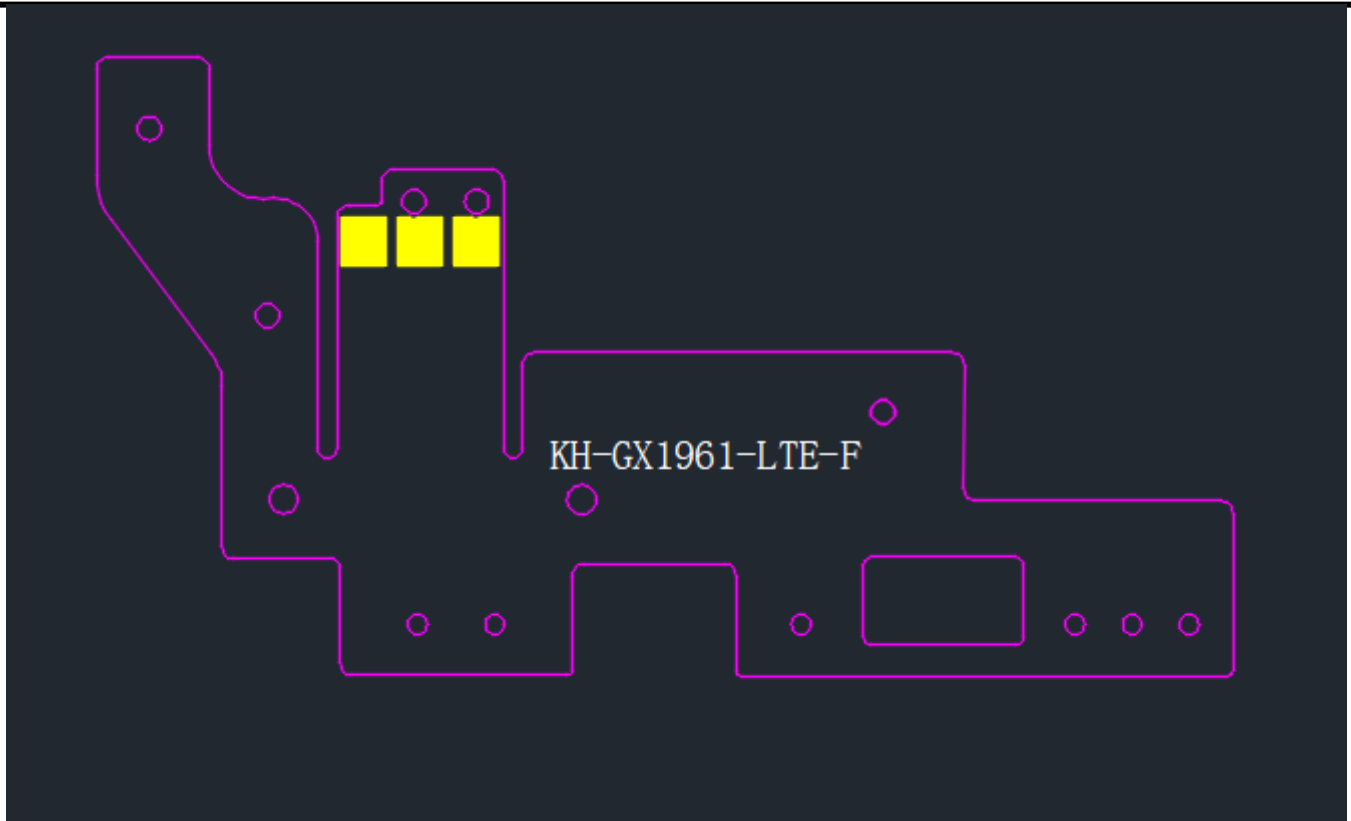


3-3 PCB BT Antenna Dimensions (mm)

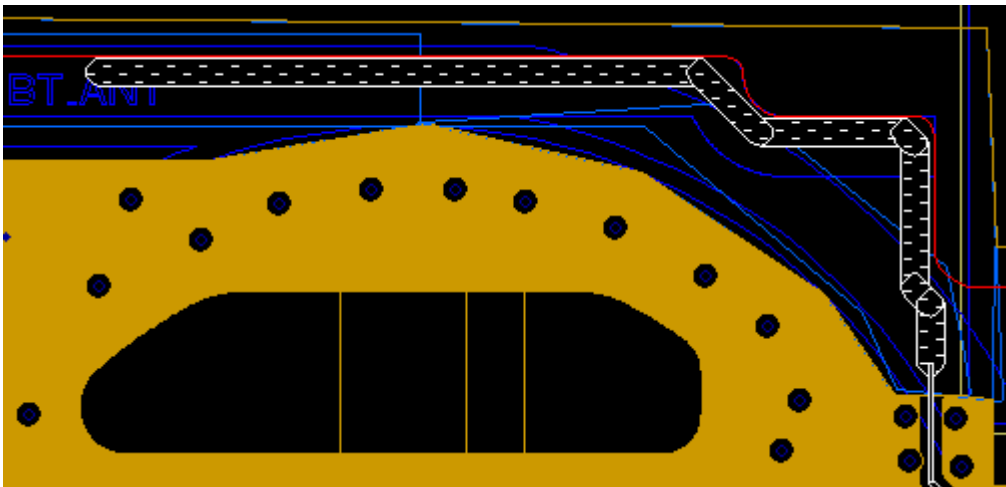


3-3 Testing Environment

Passive Test

UNLESS OTHER SPECIFIED TOLERANCES ON : $X = \pm 2$ $X.X = \pm 0.1$ $X.XX = \pm 0.05$ ANGLES = $\pm$ HOLEDIA = $\pm$		 KEXIN HUACHENG 可信华成 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 徐俊	APPROVED BY : 王伟		
TITLE : <u>KX-GX1961-LTE-F</u> Specification		DOCUMENT NO.	PAGE REV. A0

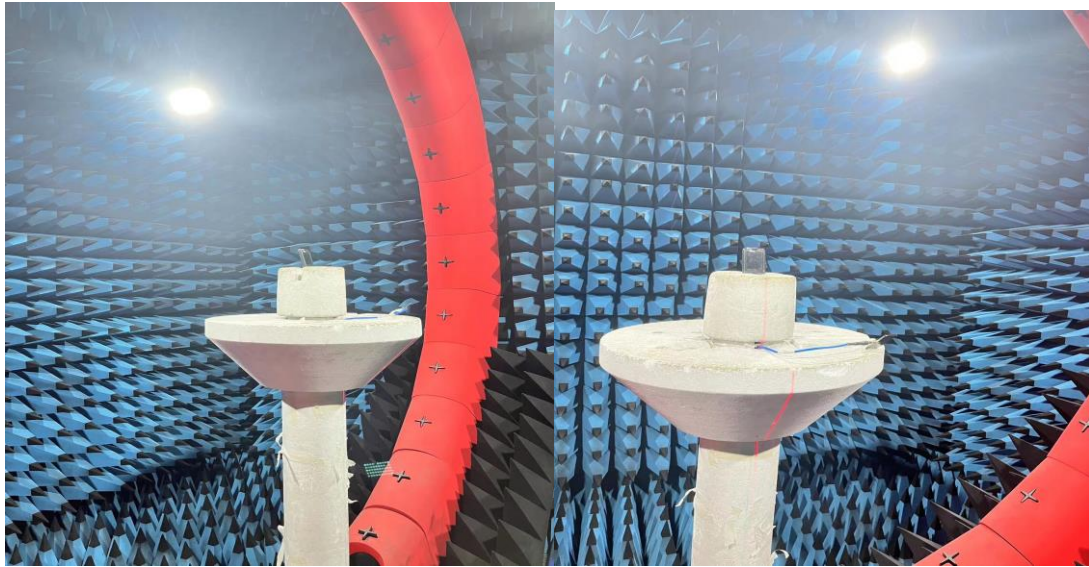

Active Test

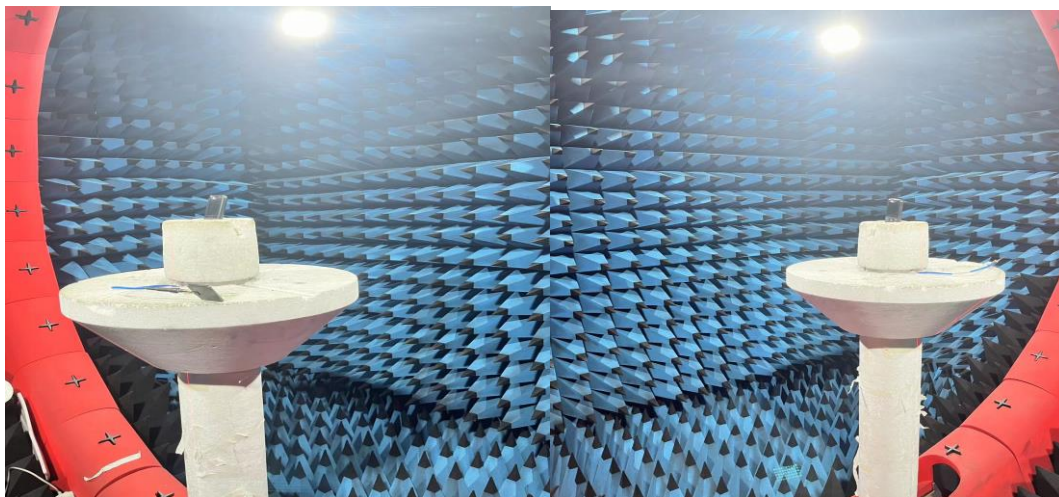


4.3D Radiation Pattern


- LTE B28

[703MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON : $X=\pm 2$ $X.X=\pm 0.1$ $X.XX=\pm 0.05$ ANGLES= $\pm$ HOLEDIA= $\pm$		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 徐俊	APPROVED BY : 王伟		
TITLE : <u>KX-GX1961-LTE-F</u> Specification		DOCUMENT NO.	PAGE REV. A0

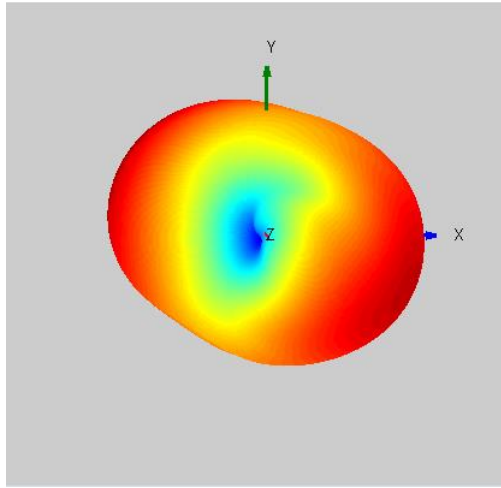

[803MHz]

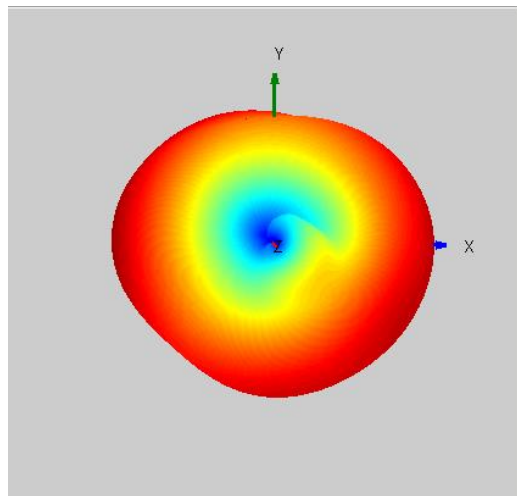


5.


- WCDMA B5 LTE B5/20

[791MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON :		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
X=±2	X.X=±0.1		
ANGLES=±		HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 徐俊	APPROVED BY : 王伟		
TITLE : <u>KX-GX1961-LTE-F</u> Specification		DOCUMENT NO.	PAGE REV. A0

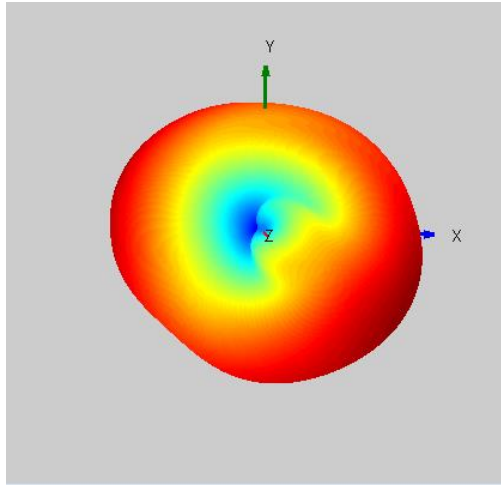


[894MHz]

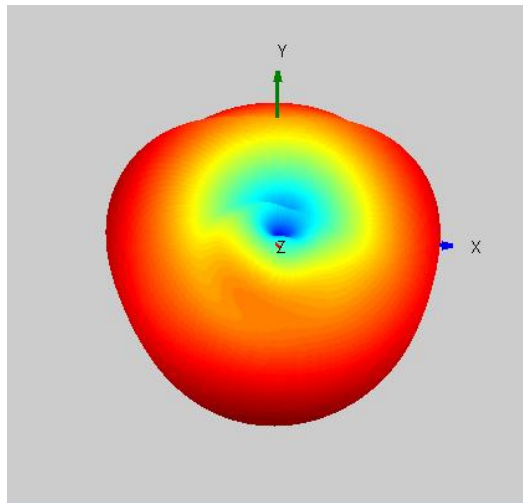


-GSM 900 WCDMA B8 LTE B8

[880MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON : $X=\pm 2$ $X.X=\pm 0.1$ $X.XX=\pm 0.05$ ANGLES= $\pm$ HOLEDIA= $\pm$		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 徐俊	APPROVED BY : 王伟		
TITLE : <u>KX-GX1961-LTE-F</u> Specification		DOCUMENT NO.	PAGE REV. A0

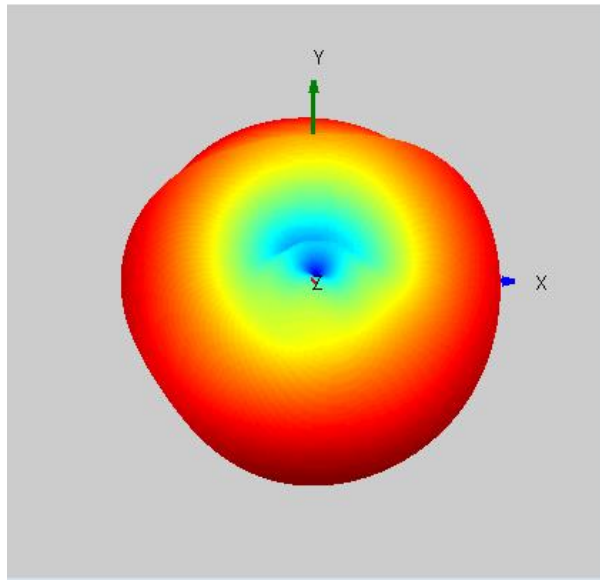


[960MHz]

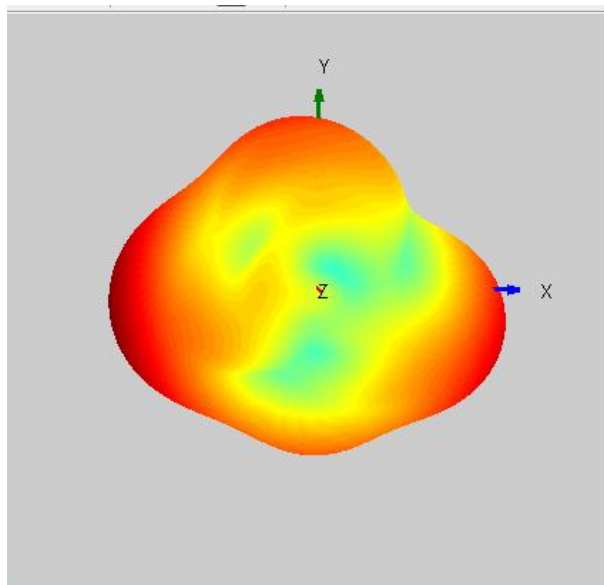


-GSM1800 LTE B3

[1710MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON :		 深圳市可信华成通信科技有限公司 SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD	
X=±2	X.X=±0.1		
ANGLES=±		HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY : 黄土勇	CHECKED BY : 肖坤雄		
DESIGNED BY : 徐俊	APPROVED BY : 王伟		
TITLE : <u>KX-GX1961-LTE-F</u> Specification		DOCUMENT NO.	PAGE REV. A0

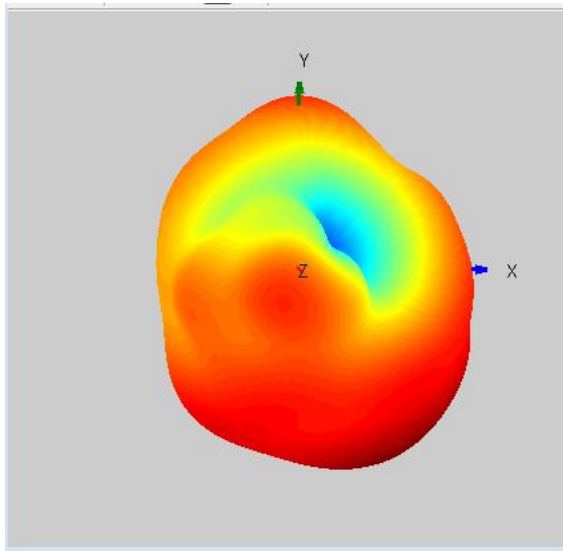

[1880MHz]

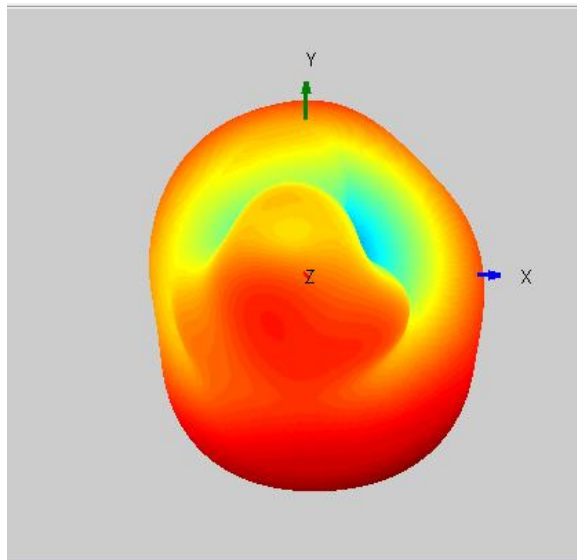

-WCDMA B1 LTE B1

[1920MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟

TITLE : KX-GX1961-LTE-FSpecification



深圳市可信华成通信科技有限公司


SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

PAGE REV.

A0

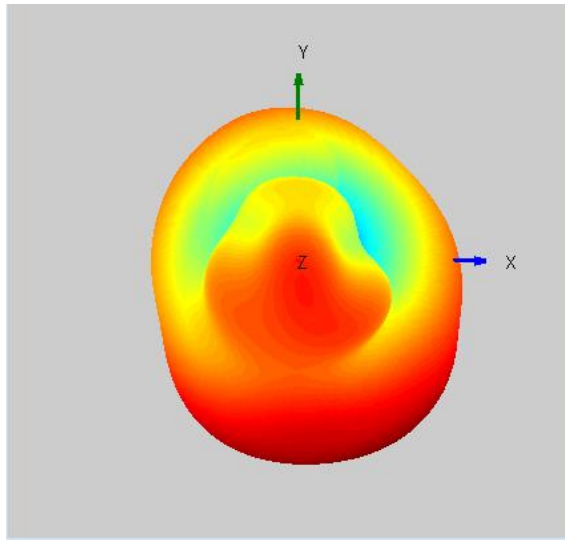

[2170MHz]

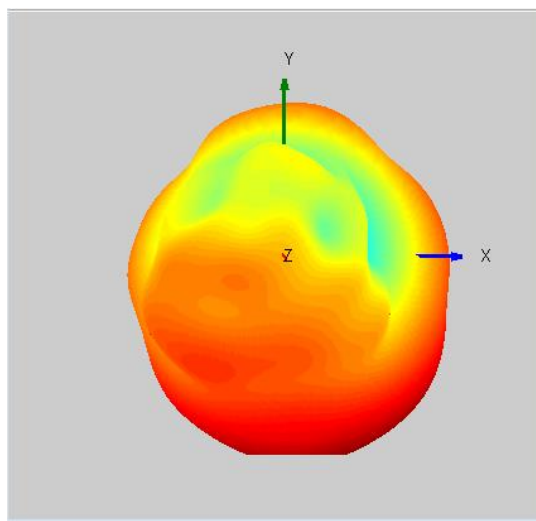

- LTE B40

[2300MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY : 黄土勇 CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊 APPROVED BY : 王伟

TITLE : KX-GX1961-LTE-FSpecification




深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0

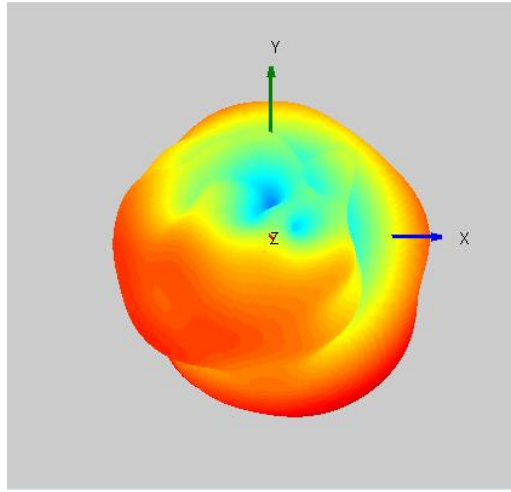

[2400MHz]

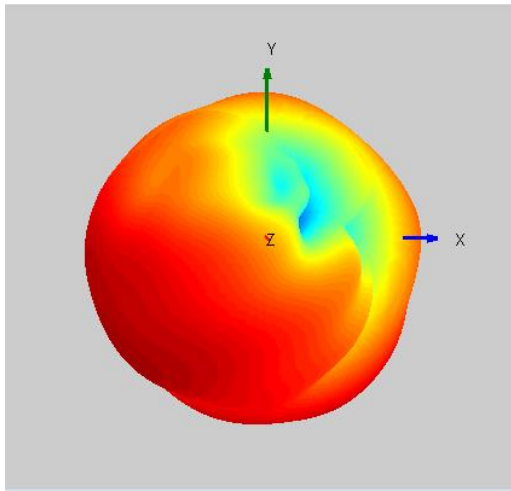

- LTE B7/38/41

[2496MHz]

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=±

HOLEDIA=±

SCALE :

UNIT : mm

DRAWN BY : 黄土勇

CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊

APPROVED BY : 王伟

TITLE : KX-GX1961-LTE-FSpecification




深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0

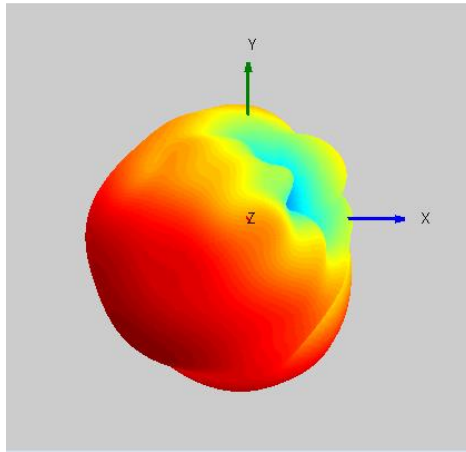

[2690MHz]

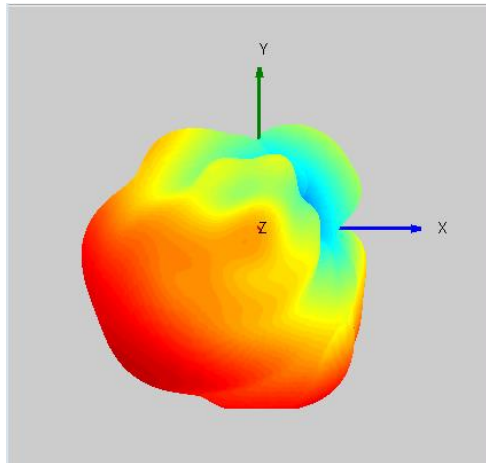

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=±2 X.X=±0.1 X.XX=±0.05

ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY : 黄土勇 CHECKED BY : 肖坤雄

DESIGNED BY : 徐俊 APPROVED BY : 王伟

TITLE : KX-GX1961-LTE-FSpecification



深圳市可信华成通信科技有限公司

SHENZHEN CITY KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KEXIN HUACHENG COMMUNICATION TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT
NO.

PAGE REV.
A0