


FCC Test Report (Part 15 Subpart C)

FCC ID : 2AM8R-D210Client Information:Applicant: Netradyne Inc.Applicant add.: 9191 Towne Centre Drive, Suite 200, San Diego, CA 92122Manufacturer: Netradyne Inc.Manufacturer add.: 9191 Towne Centre Drive, Suite 200, San Diego, CA 92122Product Information:Product Name: DriveriModel No.: D-210Derivative model No.: D-210A, D-211Brand Name: NetradyneApplied Standard:

FCC PART 15 Subpart C section 15.247

Prepared By:Anshul TyagiLaboratory Details:

AA Electro Magnetic Test Laboratory Private Limited

Plot No174, Udyog Vihar-Phase4, Sector18, Gurgaon, Haryana, India

Date of Receipt: Jun. 23, 2020Date of Test: Jun. 25, 2020Date of Issue: Jul. 13, 2020Test Result: **In Compliance/Pass**

This device has been tested and found to comply with the stated standard(s) and indicated in the test report and are applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of AA Electro Magnetic Test Laboratory Private Limited, this document may be altered or revised by AA Electro Magnetic Test Laboratory Private Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:

(Dr R Lenin Raja) (Authorized Representative) (/ lenin83/)

Approved by:

(Steven Wu)

Page 1 of 113

Plot 174, Udyog Vihar Phase 4, Sector -18, Gurgaon, Haryana, India.

Contact:0124-4235350,4145343;e-mail:info@aaemtlabs.com;Website: www.aaemtlabs.com

An ISO 17025: 2017, Accredited Laboratory, VCCI (support member - #4053), ISED#: 26046, FCC #137777 CE #800058_00



1 Contents

	Page
COVER PAGE	
1 CONTENTS	2
2 VERSION	3
3 TEST SUMMARY	4
3.1 COMPLIANCE WITH FCC PART 15 SUBPART C	4
3.2 MEASUREMENT UNCERTAINTY	5
3.3 TEST LOCATION	5
4 TEST FACILITY	6
4.1 DEVIATION FROM STANDARD	6
4.2 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 GENERAL INFORMATION	7
5.1 GENERAL DESCRIPTION OF EUT	7
5.2 EUT PERIPHERAL LIST	9
5.3 TEST PERIPHERAL LIST	9
6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
7 TEST RESULT	12
7.1 DESCRIPTION OF TEST CONDITIONS	12
7.2 ANTENNA REQUIREMENT	13
7.3 CONDUCTION EMISSIONS MEASUREMENT	14
7.4 RADIATED EMISSIONS MEASUREMENT	19
7.5 6 dB BANDWIDTH	58
7.6 MAXIMUM PEAK OUTPUT POWER	66
7.7 PEAK POWER SPECTRAL DENSITY	68
7.8 BAND EDGES REQUIREMENT	77
7.9 CONDUCTED SPURIOUS EMISSIONS	83
8 PHOTOGRAPHS	108
8.1 RADIATED SPURIOUS EMISSION TEST SETUP	108
8.2 CONDUCTED EMISSION TEST SETUP	109
9 APPENDIX	110
9.1 EUT PHOTOGRAPHS	110
9.2 ACCESSORIES PHOTOGRAPHS	111

Page 2 of 113

Plot 174, Udyog Vihar Phase 4, Sector -18, Gurgaon, Haryana, India.

Contact:0124-4235350,4145343;e-mail:info@aaemtlabs.com;Website: www.aaemtlabs.com

An ISO 17025: 2017, Accredited Laboratory ,VCCI (support member – #4053),ISED#: 26046, FCC #137777 CE #800058_00



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	--	Jun. 25, 2020	--	--

3 Test Summary

3.1 Compliance with FCC Part 15 subpart C

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS
Radiated Spurious Emission 30 MHz to 25 GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
6 dB Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10: Clause 6.9.1	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	FCC/KDB-558074 D01 v03r01 Clause 9.1.2	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10: Clause 6.11.2.3	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	FCC/KDB-558074 D01 v03r01 Clause 13.3.1	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.7	PASS

N/A is an abbreviation for Not Applicable.

Model description: D-210 : Intelligent Driver Monitoring System Smart Dash-cam

D-210A : Intelligent Driver Monitoring System Smart Dash-cam Series 1

D-211 : Intelligent Driver Monitoring System Smart Dash-cam WA

Driveri is an AI powered vision based IoT system, sold as an aftermarket product to fleets. The device is installed in trucks/cars behind the rear-view mirror, and the power is supplied from the car battery through a custom power cable. When the vehicle is being driven, the road facing camera is enabled by default, records and generates real time safety alerts to assist the driver. The camera facing the driver / passenger's optional due to privacy requirements and enabled at customers' request. The recorded videos are processed (using our patented machine learning algorithms) on the device together with the other sensor data and can detect any events related to driving behavior and driver behavior. The device has 2 buttons on the bottom side of the device, when pressed creates alerts which are user generated. 2 LEDs on driver facing side indicate the current operational state of device & also indicate privacy setting (driver facing camera recording status).

Remark: ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, the following measurements uncertainty Levels have estimated based on standards, the maximum value of the uncertainty as below:

No.	Item	Uncertainty
1	Conducted Emission Test	2.82dB
2	Radiated Emission Test	2.79dB

3.3 Test Location

All tests were performed at:

AA Electro Magnetic Test Laboratory Private Limited

Plot No 174, Udyog Vihar - Phase 4, Sector 18, Gurgaon, Haryana, India

Tel.: +91-0124-4235350

4 Test Facility

AA Electro Magnetic Test Laboratory is an ISO 17025:2017 certified lab by NABL, Certification No.TC-8597, CE Marking Certificate from Phoenix Germany #800058_00 and ILC-MRA #0366.

We are also accredited ISO17025:2017 by A2LA(American association for laboratory accreditation) #5593.01 , FCC Recognized #137777, ISED recognized for wireless product #26046, VCCI(Japan) supporting member #4053.

4.1 Deviation from standard

None

4.2 Abnormalities from standard conditions

None

5 General Information

5.1 General Description of EUT

Manufacturer:	Netradyne Inc.
Manufacturer Address:	9191 Towne Centre Drive, Suite 200, San Diego, CA 92122
EUT Name:	Driveri
Model No:	D-210
Brand Name:	Netradyne
Derivative model No.:	D-210A, D-211
Operation frequency:	2412 MHz to 2462 MHz for 802.11b/g/n(HT20) 2422 MHz to 2452 MHz for 802.11n(HT40)
Number of Channels:	11 Channels for 802.11b/g/n(HT20) 7 Channels for 802.11n(HT40)
Modulation Technology:	802.11b: CCK/QPSK/BPSK 802.11g/n: BPSK/QPSK/16QAM/64QAM
Transmit Data Rate:	802.11b : 1/2/5.5/11 Mbps 802.11g : 6/9/12/18/24/36/48/54 Mbps 802.11n(HT20): 7.2/14.4/21.7/28.9/43.3/57.8/65/72.2 Mbps 802.11n(HT40): 15/30/45/60/90/120/135/150 Mbps
Channel Separation:	5 MHz
Antenna Gain(dBi):	3dBi
H/W No.:	501-1-00908_B1
S/W No.:	2.4.9.rc.2
Power Supply Range:	Input : 12VDC, 3A
Note:	
1.	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

EUT channels and frequencies list:

1. Test frequencies are lowest channel: 2412 MHz, middle channel: 2437 MHz and highest channel: 2462 MHz for 802.11b/g/n(HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

2. Test frequencies are lowest channel: 2422 MHz, middle channel: 2437 MHz and highest channel: 2452 MHz for 802.11n(HT40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

5.2 EUT Peripheral List

No .	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	N/A	N/A	N/A	N/A	N/A	N/A

5.3 Test Peripheral List

No .	Equipment	Manufacturer	FCC ID	Model No.	Power cord	signal cable
1	DriverI/DCM LTE Module	Netradyne Inc.	2AM8R-DCM -NA1-100	DriverI/DCM	N/A	N/A
2	CAN Adaptor Board	Netradyne Inc.	N/A	A1 version : D-210-AD1 A2 version : D-210-AD2 A3 Version : D-210-AD3	N/A	N/A

6 Equipments List for All Test Items


No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	EMI TEST Receiver	Rohde and Schwarz	ESIB26	838786/010	2020/01/28	2021/01/27
2	Loop antenna	DAZE Beijing	ZN30900C	18052	2020/01/29	2021/01/28
3	Hi power horn antenna	DAZE Beijing	ZN30700	18012	2020/01/30	2021/01/29
4	Horn antenna	DAZE Beijing	ZN30702	18006	2020/01/30	2021/01/29
5	Horn antenna	DAZE Beijing	ZN30703	18005	2020/01/30	2021/01/29
6	Preamplifier	KELIANDA	LNA-0009295	-	2020/01/28	2021/01/29
7	Preamplifier	KELIANDA	CF-00218	-	2020/01/28	2021/01/27
8	Bi conical Antenna	DAZE Beijing	ZN30505C	17038	2020/01/28	2021/01/29
9	EMI-RECEIVER	Schwarzbeck	FCKL	1528194	2020/01/28	2021/01/27
10	Spectrum Analyzer	ADVANTEST	R3361	-	2019/05/15	2021/05/14
11	LISN	Kyoritsu	KNW-407	8-1789-5	2020/01/28	2021/01/27
12	Network-LISN	Schwarzbeck	NNBM8125	81251314	2020/01/28	2021/01/27
13	Network-LISN	Schwarzbeck	NNBM8125	81251315	2020/01/28	2021/01/27
14	PULSELIMITER	Rohde and Schwarz	ESH3-Z2	100681	2019/05/13	2021/05/12
15	50ΩCoaxialSwitch	DAIWA	1565157	-	2019/05/13	2021/05/12

16	50ΩCoaxialSwitch	-	-	-	2019/05/13	2021/05/12
17	Wireless signal power meter	DARE!!	RPR3006W	RFSW190220	2020/01/29	2021/01/28
18	Signal Generator	KEYSIGHT	N5181A	512071	2020/01/29	2021/01/28
19	RF Vector Signal Generator	Keysight	N5182B	512094	2020/01/29	2021/01/28
20	Spectrum analyzer	R&S	FSV-40N	101385	2020/01/29	2021/01/28
21	Radio Communication Tester	R&S	CMW 500	124589	2019/5/15	2021/5/14
22	Signal Generator	R&S	SMP02	837017/004 836593/005	2019/5/15	2021/5/14
23	DC Power Supply	Guanker	JK15040K	TNC/ET/C/0 01/15	2020/2/2	2021/2/1
24	Pro. Temp & Humi. chamber	MENTEK	MHP-150-1C	MAA081125 01	2020/2/2	2021/2/1
25	Attenuators	AGILENT	8494B	-	-	-
26	Attenuators	AGILENT	8495B	-	-	-

7 Test Result

7.1 Description of Test conditions

- (1) EUT was tested in normal configuration (Please See following Block diagram)

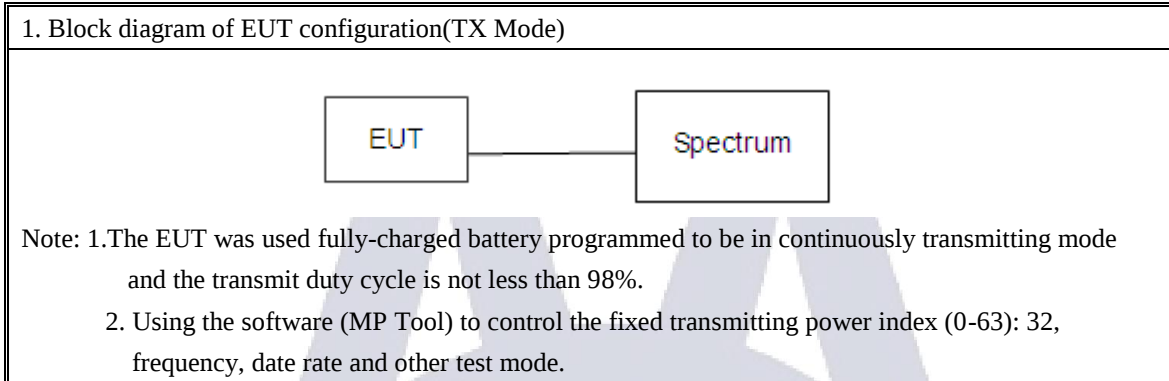

- (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.

- (3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

- (4) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

- (5) Pre-test the EUT in all transmitting mode at the lowest, middle and highest channel with different data rate and conducted to determine the worst-case mode, only the worst-case results are recorded in this report.

7.2 Antenna Requirement

7.2.1 Standard requirement

15.203 requirements: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

7.2.2 EUT Antenna

The antenna is internal antenna (Using pogo pin connector to touch the metal area of antenna) and no consideration of replacement. Antenna gain is maximum 3 dBi from 2.4GHz to 2.5GHz.

7.3 Conduction Emissions Measurement

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9kHz Resolution Bandwidth)
Test Limit

Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit (dBuV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test procedure

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was

placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8m from LISN 2.

Test setup

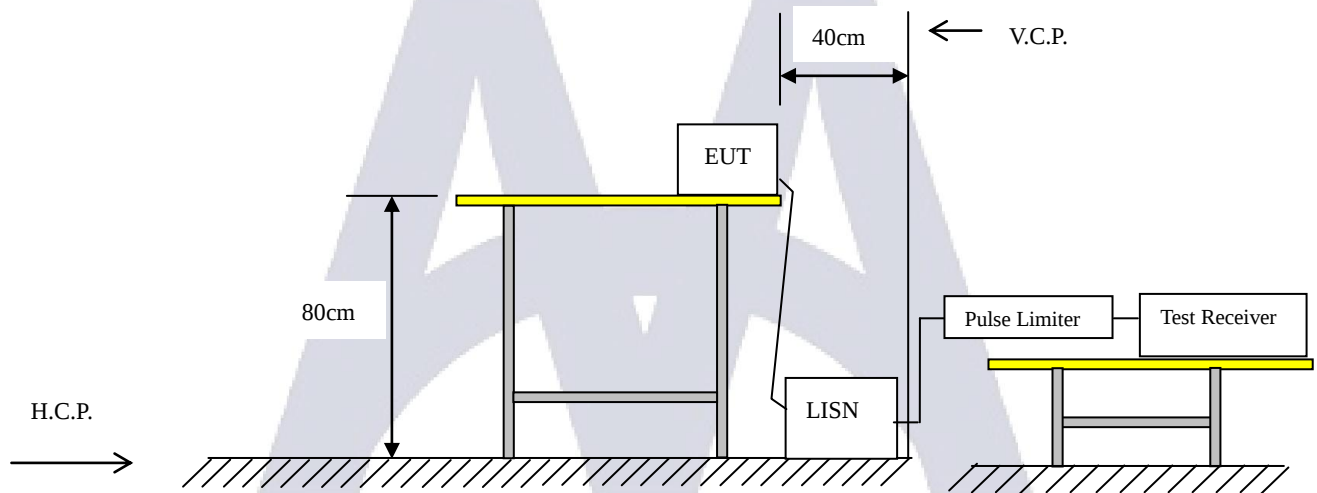


7.3.1 Test results

EUT:	Driveri	Model Name. :	D-210
Temperature:	25 °C	Relative Humidity:	51%
Pressure:	1010hPa	Test Date :	2020-07-02
Test Mode:	TX (11Mbps) CH1 (worst case)	Phase :	Ambient
Test Voltage :	DC 12V		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV	dBuV	dB Detector
1		0.2042	6.27	1.27	7.54	63.43	-55.89 peak
2		0.2210	6.34	1.26	7.60	62.78	-55.18 peak
3		0.2942	4.12	1.25	5.37	60.40	-55.03 peak
4		1.0175	-0.73	0.90	0.17	56.00	-55.83 peak
5		1.4720	-1.20	0.85	-0.35	56.00	-56.35 peak
6	*	10.3500	7.36	0.85	8.21	60.00	-51.79 peak


Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

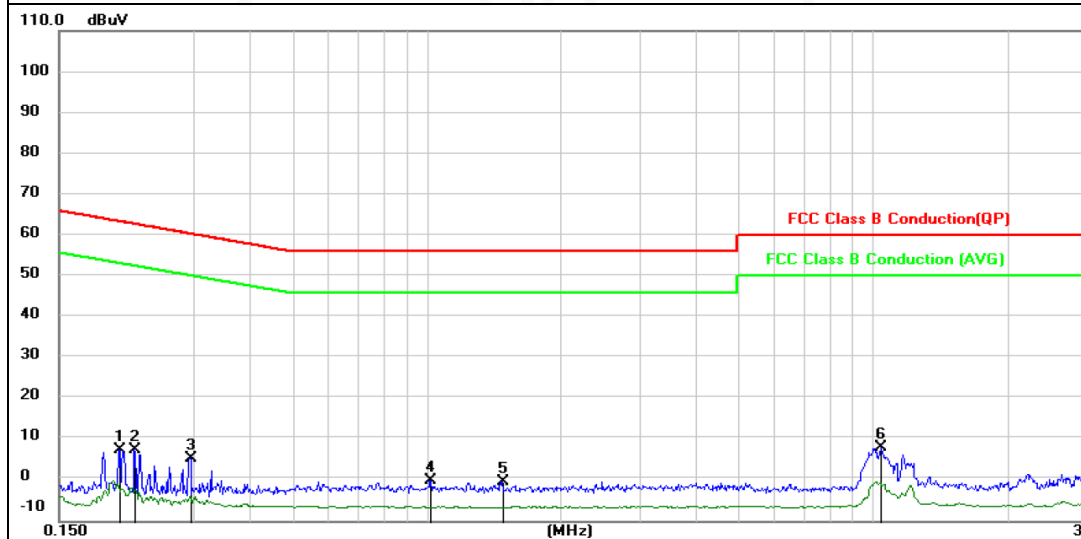

EUT:	Driveri	Model Name. :	D-210
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2020-06-23
Test Mode:	TX (11Mbps) CH1 (worst case)	Phase :	Line
Test Voltage :	DC 12V		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2268	32.81	15.46	48.27	62.56	-14.29	QP
2		0.2280	28.72	15.46	44.18	52.52	-8.34	AVG
3	*	1.0305	39.42	15.40	54.82	56.00	-1.18	QP
4		1.0354	21.87	15.40	37.27	46.00	-8.73	AVG
5		3.9020	23.36	15.41	38.77	56.00	-17.23	QP
6		3.9110	10.99	15.41	26.40	46.00	-19.60	AVG
7		12.3000	40.78	15.35	56.13	60.00	-3.87	QP
8		12.3000	21.39	15.35	36.74	50.00	-13.26	AVG
9		12.9000	35.61	15.35	50.96	60.00	-9.04	QP
10		12.9000	16.68	15.35	32.03	50.00	-17.97	AVG
11		13.5000	28.54	15.34	43.88	60.00	-16.12	QP
12		13.5746	13.10	15.35	28.45	50.00	-21.55	AVG


Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

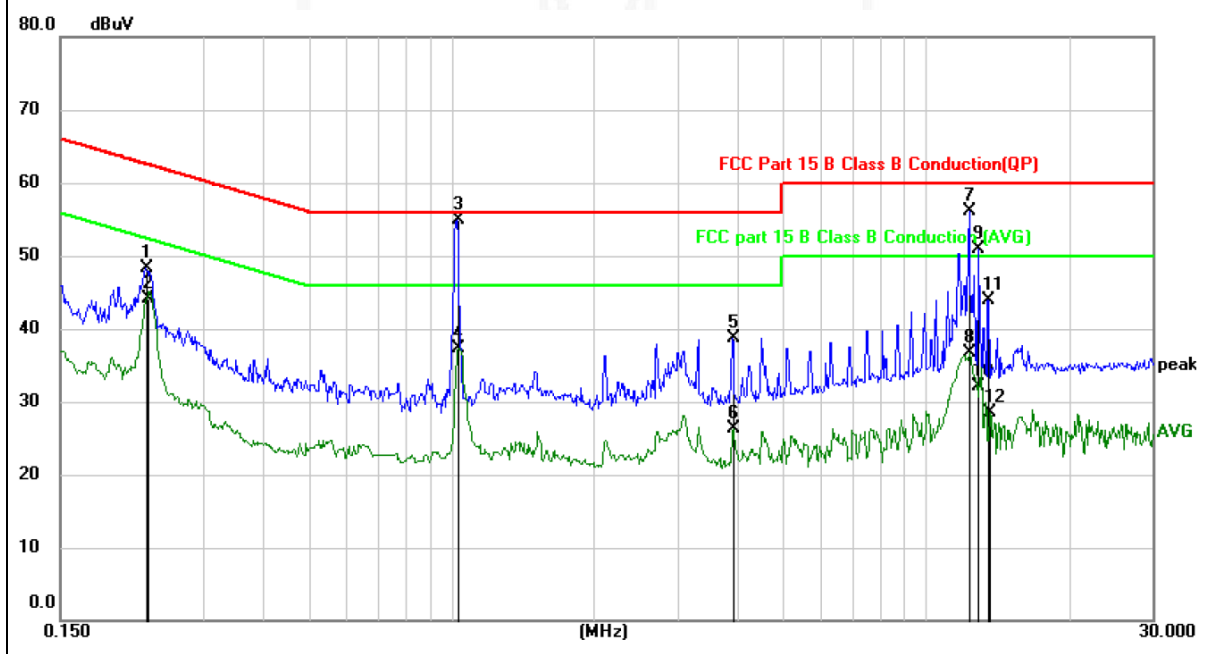

EUT:	Driveri	Model Name. :	D-210
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2020-06-23
Test Mode:	TX (11Mbps) CH1 (worst case)	Phase :	Neutral
Test Voltage :	DC 12V		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		1.0305	35.86	15.40	51.26	56.00	-4.74	peak
2		1.0354	19.88	15.40	35.28	46.00	-10.72	AVG
3		1.3459	25.51	15.40	40.91	56.00	-15.09	peak
4		1.3548	15.94	15.40	31.34	46.00	-14.66	AVG
5	*	12.3246	41.07	15.35	56.42	60.00	-3.58	peak
6		12.3246	23.28	15.35	38.63	50.00	-11.37	AVG
7		12.9250	38.00	15.35	53.35	60.00	-6.65	peak
8		12.9250	20.38	15.35	35.73	50.00	-14.27	AVG
9		13.5000	31.71	15.34	47.05	60.00	-12.95	peak
10		13.5000	12.99	15.34	28.33	50.00	-21.67	AVG
11		15.6500	31.70	15.34	47.04	60.00	-12.96	peak
12		15.7248	21.49	15.34	36.83	50.00	-13.17	AVG

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

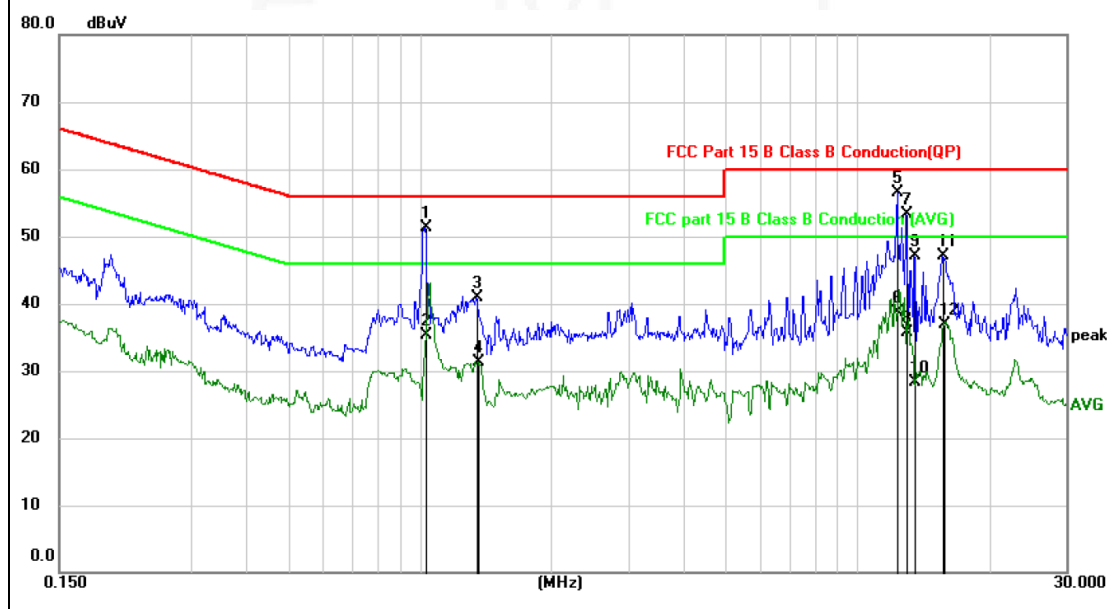


7.4 Radiated Emissions Measurement


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below. Pre-test the EUT under 2 modes: power-supplied by using the AC adapter and power-supplied by using internal battery. After pre-testing, we found the worst case is the test mode of EUT power-supplied by using internal battery.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dBμV/m between 30MHz & 88MHz 43.5 dBμV/m between 88MHz & 216MHz 46.0 dBμV/m between 216MHz & 960MHz 54.0 dBμV/m above 960MHz

Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

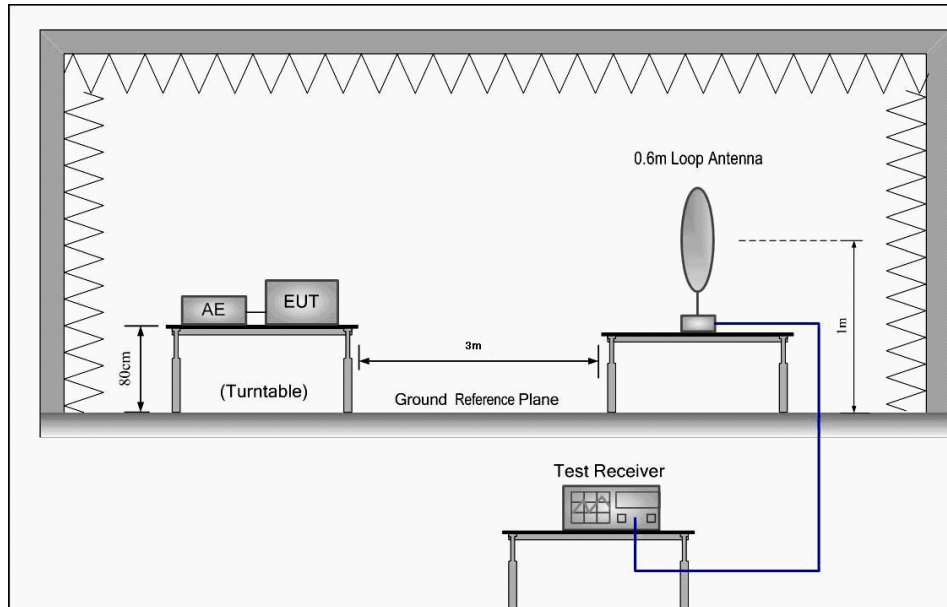

- 2) 30 MHz to 1 GHz emissions:

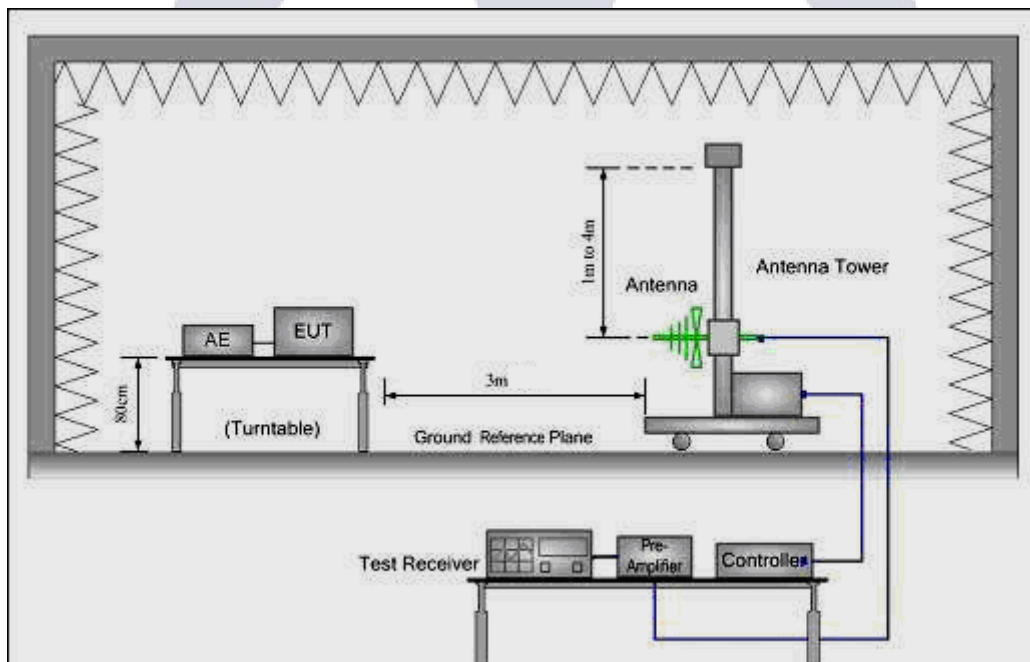

3) 1 GHz to 40 GHz emissions:

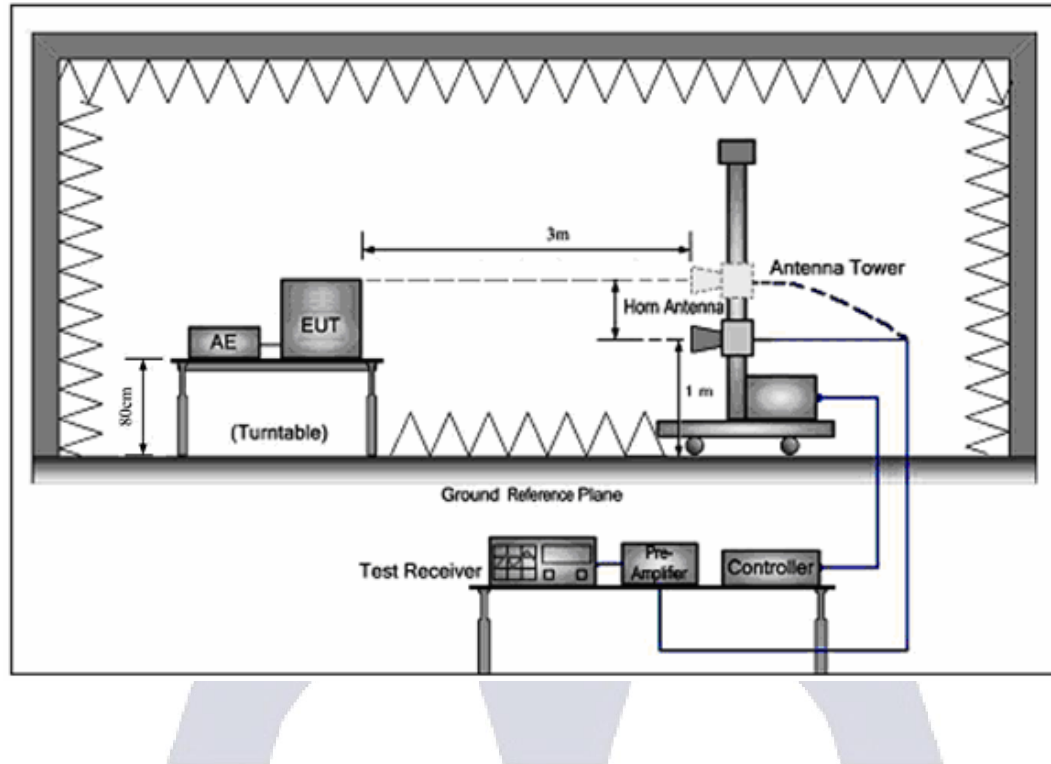

Test procedure:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

From 30MHz to 1GHz, read the Quasi-Peak field strength of the emissions with receiver QP detector RBW=120KHz.

Above 1GHz, read the Peak field strength and Average field strength.

Read the Peak field strength through RBW=1MHz, VBW=3MHz in spectrum analyzer setting;

Read the Average field strength through RBW=1MHz, VBW=10Hz in spectrum analyzer setting;

For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

While maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the average field strength reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

7.4.1 Test Result

7.4.1.1 Radiated Emissions Test Data Below 30MHz

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1005 hPa	Relative Humidity:	60%
Test Mode :	TX	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	9KHz to 30MHz
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP		

No emission found between lowest internal used/generated frequencies to 30MHz.

7.4.1.2 Radiated Emissions Test Data 30MHz-1000MHz

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1005 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11b 2.412 GHz 11Mbps(worst-case)	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP		


Test at Channel 00 (2.402 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Ambient:

Peak scan

Level (dBμV/m)

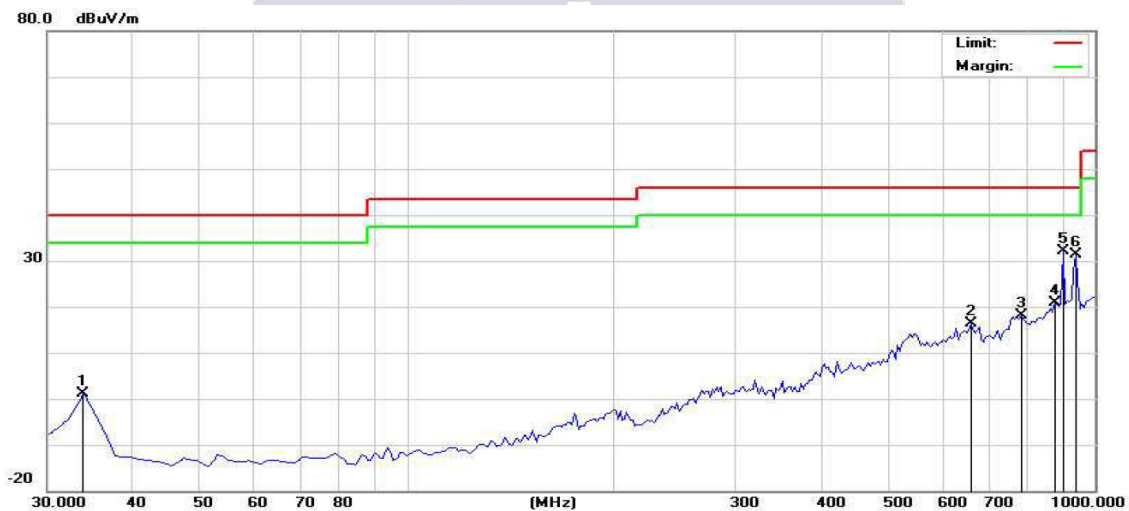

Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1		33.8878	16.77	-15.52	1.25	40.00	-38.75	peak
2		661.7635	23.16	-6.75	16.41	46.00	-29.59	peak
3		782.2846	22.88	-4.78	18.10	46.00	-27.90	peak
4		877.5351	25.54	-4.61	20.93	46.00	-25.07	peak
5	*	902.8056	36.60	-4.49	32.11	46.00	-13.89	peak
6		941.6834	34.74	-3.31	31.43	46.00	-14.57	peak

Note: '*' means the worst case

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Test at Channel 1 (2.412 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)



Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1		35.8316	62.54	-30.79	31.75	40.00	-8.25	peak
2		53.3265	62.05	-33.73	28.32	40.00	-11.68	peak
3		82.4848	59.78	-29.63	30.15	40.00	-9.85	peak
4		101.9235	61.08	-25.68	35.40	43.50	-8.10	peak
5	*	115.5310	64.73	-24.50	40.23	43.50	-3.27	peak
6		142.7452	59.95	-22.65	37.30	43.50	-6.20	peak

Horizontal:

Peak scan

Level (dBμV/m)



Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1		35.8316	62.25	-30.79	31.46	40.00	-8.54	peak
2	!	84.4287	63.50	-29.19	34.31	40.00	-5.69	peak
3	!	101.9235	65.94	-25.68	40.26	43.50	-3.24	peak
4	*	115.5310	65.92	-24.50	41.42	43.50	-2.08	peak
5	!	133.0260	61.27	-23.25	38.02	43.50	-5.48	peak
6		144.6893	59.26	-22.51	36.75	43.50	-6.75	peak

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11b 2.437 GHz 11Mbps(worst-case)	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

Test at Channel 6 (2.437 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions ,Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)




Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1		30.0000	57.07	-28.29	28.78	40.00	-11.22	peak
2	*	37.7754	65.88	-31.64	34.24	40.00	-5.76	peak
3		82.4848	62.78	-29.63	33.15	40.00	-6.85	peak
4		115.5310	61.73	-24.50	37.23	43.50	-6.27	peak
5		142.7452	56.95	-22.65	34.30	43.50	-9.20	peak
6		902.8056	39.29	-5.29	34.00	46.00	-12.00	peak

Horizontal:

Peak scan

Level (dBμV/m)

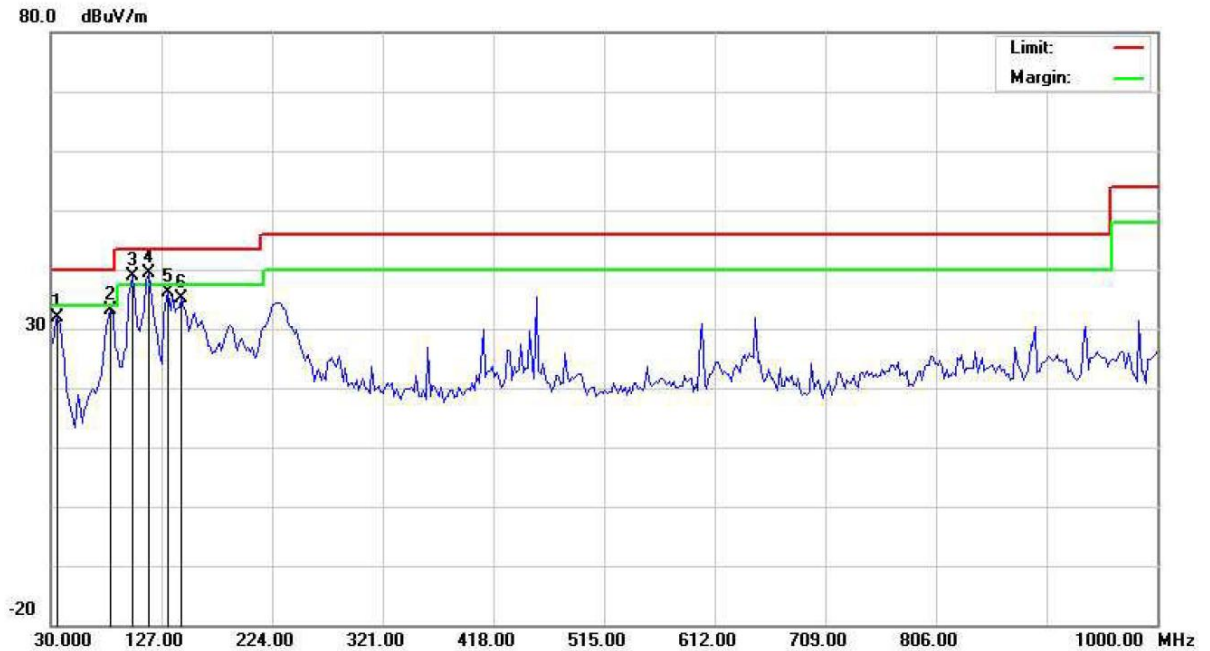

Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1		35.8316	62.75	-30.79	31.96	40.00	-8.04	peak
2		82.4848	62.73	-29.63	33.10	40.00	-6.90	peak
3	!	101.9235	64.44	-25.68	38.76	43.50	-4.74	peak
4	*	115.5310	63.92	-24.50	39.42	43.50	-4.08	peak
5		133.0260	59.27	-23.25	36.02	43.50	-7.48	peak
6		144.6893	57.76	-22.51	35.25	43.50	-8.25	peak

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11b 2.462 GHz 11Mbps(worst-case)	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

Test at Channel 11 (2.462 GHz) in transmitting status

30 MHz~1 GHz Spurious Emissions ,Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)




Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1		30.0000	58.57	-28.29	30.28	40.00	-9.72	peak
2	!	37.7754	66.88	-31.64	35.24	40.00	-4.76	peak
3		53.3265	62.55	-33.73	28.82	40.00	-11.18	peak
4	!	82.4848	64.78	-29.63	35.15	40.00	-4.85	peak
5	*	115.5310	63.73	-24.50	39.23	43.50	-4.27	peak
6		142.7452	56.95	-22.65	34.30	43.50	-9.20	peak

Horizontal:

Peak scan

Level (dBμV/m)

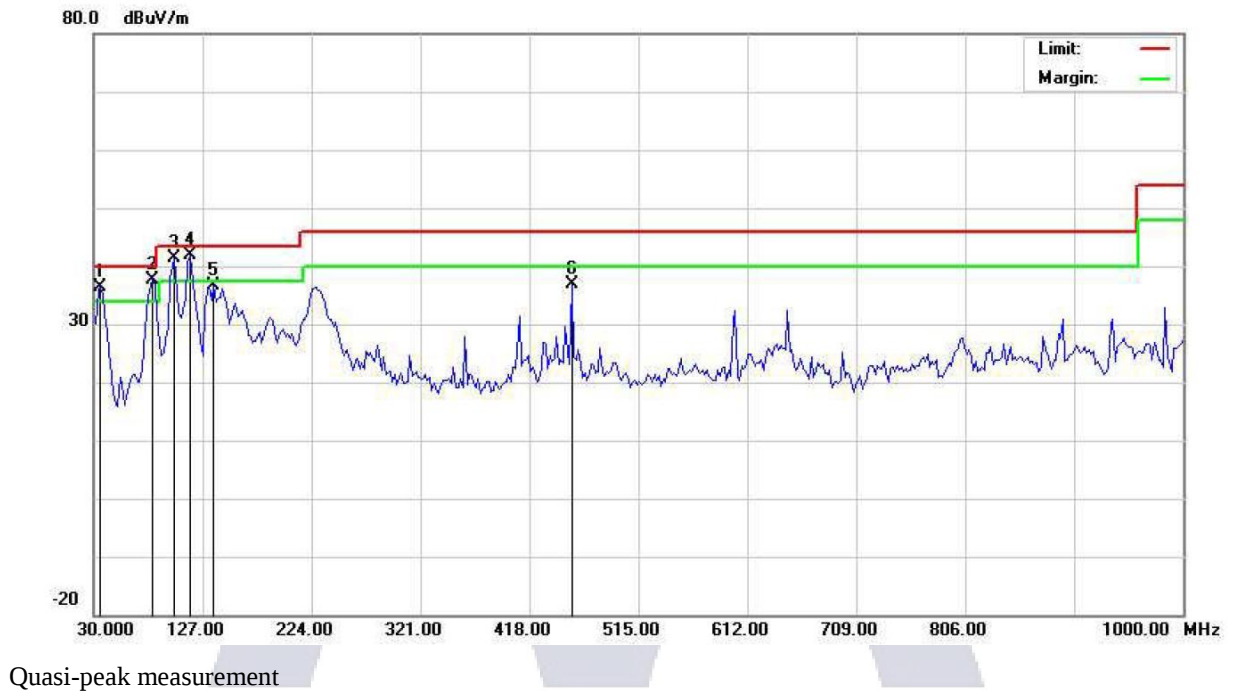

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dB/m	Over dB	Detector
1	!	35.8316	67.25	-30.79	36.46	40.00	-3.54	peak
2	!	82.4848	67.23	-29.63	37.60	40.00	-2.40	peak
3	!	101.9235	66.94	-25.68	41.26	43.50	-2.24	peak
4	*	115.5310	66.42	-24.50	41.92	43.50	-1.58	peak
5		136.9138	59.74	-23.02	36.72	43.50	-6.78	peak
6		455.7114	47.56	-10.72	36.84	46.00	-9.16	peak

7.4.1.3 Radiated Emissions Test Data above 1GHz

802.11b mode with 11Mbps data rate (Worst case)

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11b 2.412 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4824.000	55.13	5.08	60.28	74.00	46.49	PEAK
4824.000	44.39	5.08	49.32	54.00	44.79	AVERAGE
7236.000	48.61	7.16	55.64	74.00	37.41	PEAK
7236.000	37.96	7.16	45.28	54.00	36.40	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4824.000	55.08	5.08	60.17	74.00	46.33	PEAK
4824.000	43.84	5.08	48.71	54.00	43.63	AVERAGE
7236.000	47.54	7.16	55.13	74.00	35.83	PEAK
7236.000	38.39	7.16	45.34	54.00	36.89	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11b 2.437 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement
(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	54.97	5.13	60.11	74.00	46.21	PEAK
4874.000	44.17	5.13	49.42	54.00	44.72	AVERAGE
7311.000	48.46	7.49	55.89	74.00	37.84	PEAK
7311.000	38.20	7.49	45.81	54.00	37.50	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	54.47	5.13	59.72	74.00	45.32	PEAK
4874.000	43.27	5.13	48.81	54.00	43.21	AVERAGE
7311.000	47.91	7.49	55.07	74.00	36.47	PEAK
7311.000	37.74	7.49	45.42	54.00	36.65	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11b 2.462 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4924.000	54.89	5.18	60.04	74.00	46.11	PEAK
4924.000	43.47	5.18	49.05	54.00	43.70	AVERAGE
7386.000	48.17	7.82	55.78	74.00	37.77	PEAK
7386.000	38.23	7.82	45.57	54.00	37.62	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4924.000	55.44	5.18	60.60	74.00	47.22	PEAK
4924.000	43.90	5.18	49.44	54.00	44.52	AVERAGE
7386.000	48.34	7.82	55.89	74.00	38.05	PEAK
7386.000	38.09	7.82	45.91	54.00	37.82	AVERAGE

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

No any other emissions level which are attenuated less than 20dB below the limit. According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.

802.11g mode with 54Mbps data rate(Worst case)

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11g 2.412 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement
(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4824.000	54.61	5.08	60.19	74.00	45.88	PEAK
4824.000	43.99	5.08	48.93	54.00	44.00	AVERAGE
7236.000	48.13	7.16	54.95	74.00	36.24	PEAK
7236.000	38.04	7.16	44.79	54.00	35.99	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4824.000	54.98	5.08	60.23	74.00	46.29	PEAK
4824.000	44.37	5.08	48.97	54.00	44.42	AVERAGE
7236.000	48.33	7.16	55.29	74.00	36.78	PEAK
7236.000	37.52	7.16	45.13	54.00	35.81	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11g 2.437 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	55.79	5.13	60.44	74.00	47.36	PEAK
4874.000	44.00	5.13	49.22	54.00	44.35	AVERAGE
7311.000	48.31	7.49	55.92	74.00	37.72	PEAK
7311.000	38.51	7.49	45.88	54.00	37.88	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	55.33	5.13	60.00	74.00	46.46	PEAK
4874.000	44.71	5.13	49.53	54.00	45.37	AVERAGE
7311.000	48.14	7.49	55.83	74.00	37.46	PEAK
7311.000	37.83	7.49	45.54	54.00	36.86	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11g 2.462 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement
(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4924.000	55.02	5.18	59.93	74.00	46.13	PEAK
4924.000	43.71	5.18	49.11	54.00	44.00	AVERAGE
7386.000	48.08	7.82	55.41	74.00	37.31	PEAK
7386.000	38.41	7.82	45.80	54.00	38.03	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4924.000	55.60	5.18	60.67	74.00	47.45	PEAK
4924.000	44.35	5.18	49.55	54.00	45.08	AVERAGE
7386.000	47.72	7.82	55.67	74.00	37.21	PEAK
7386.000	38.05	7.82	46.31	54.00	38.18	AVERAGE

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

802.11n(HT20) mode with 72.2Mbps data rate (Worst case)

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11n(HT20) 2.412 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement
(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4824.000	54.53	5.08	59.59	74.00	45.20	PEAK
4824.000	44.03	5.08	48.68	54.00	43.79	AVERAGE
7236.000	48.09	7.16	55.43	74.00	36.68	PEAK
7236.000	37.80	7.16	44.71	54.00	35.67	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4824.000	54.86	5.08	59.81	74.00	45.75	PEAK
4824.000	43.29	5.08	48.83	54.00	43.20	AVERAGE
7236.000	47.24	7.16	54.89	74.00	35.29	PEAK
7236.000	37.54	7.16	44.78	54.00	35.48	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11n(HT20) 2.437 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	54.74	5.13	59.71	74.00	45.58	PEAK
4874.000	44.03	5.13	48.99	54.00	44.15	AVERAGE
7311.000	48.22	7.49	55.24	74.00	36.95	PEAK
7311.000	38.42	7.49	45.73	54.00	37.64	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	54.81	5.13	59.88	74.00	45.82	PEAK
4874.000	43.89	5.13	49.26	54.00	44.28	AVERAGE
7311.000	47.98	7.49	55.85	74.00	37.32	PEAK
7311.000	37.47	7.49	45.22	54.00	36.18	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11n(HT20) 2.437 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4924.000	55.14	5.18	60.17	74.00	46.49	PEAK
4924.000	43.05	5.18	48.68	54.00	42.91	AVERAGE
7386.000	48.03	7.82	55.56	74.00	37.41	PEAK
7386.000	38.60	7.82	45.96	54.00	38.38	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4924.000	54.44	5.18	59.93	74.00	45.55	PEAK
4924.000	43.56	5.18	48.98	54.00	43.72	AVERAGE
7386.000	48.73	7.82	56.27	74.00	38.82	PEAK
7386.000	38.40	7.82	45.97	54.00	38.19	AVERAGE

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

No any other emissions level which are attenuated less than 20dB below the limit. According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.

802.11n(HT40) mode with 150Mbps data rate (Worst case)

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11n(HT40) 2.422 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement
(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4844.000	52.00	5.11	56.67	74.00	39.78	PEAK
4844.000	37.98	5.11	43.23	54.00	32.32	AVERAGE
7266.000	41.93	7.29	48.95	74.00	24.17	PEAK
7266.000	32.01	7.29	39.61	54.00	24.91	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4844.000	51.78	5.11	56.82	74.00	39.71	PEAK
4844.000	37.51	5.11	42.93	54.00	31.55	AVERAGE
7266.000	41.69	7.29	49.08	74.00	24.06	PEAK
7266.000	32.60	7.29	39.75	54.00	25.64	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11n(HT40) 2.437 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	52.12	5.13	57.32	74.00	40.57	PEAK
4874.000	38.03	5.13	42.79	54.00	31.95	AVERAGE
7311.000	42.34	7.49	49.80	74.00	25.63	PEAK
7311.000	32.21	7.49	39.80	54.00	25.50	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4874.000	51.95	5.13	57.34	74.00	40.42	PEAK
4874.000	37.58	5.13	43.02	54.00	31.73	AVERAGE
7311.000	41.20	7.49	49.12	74.00	23.81	PEAK
7311.000	31.79	7.49	39.64	54.00	24.92	AVERAGE

EUT:	Driveri	Model Name :	D-210
Temperature:	25 °C	Test Data	2020-06-23
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX:802.11n(HT40) 2.452 GHz	Test Voltage :	DC 12V
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4904.000	52.43	5.16	57.54	74.00	41.13	PEAK
4904.000	37.48	5.16	42.98	54.00	31.62	AVERAGE
7356.000	41.50	7.69	49.37	74.00	24.56	PEAK
7356.000	32.10	7.69	40.10	54.00	25.89	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4904.000	51.89	5.16	57.23	74.00	40.28	PEAK
4904.000	38.56	5.16	43.65	54.00	33.37	AVERAGE
7356.000	42.32	7.69	50.09	74.00	26.10	PEAK
7356.000	31.56	7.69	39.61	54.00	24.86	AVERAGE

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.Hence there no other emissions have been reported.

Remark:
1) .For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3 rd harmonic.
2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.
Test result: The unit does meet the FCC requirements.

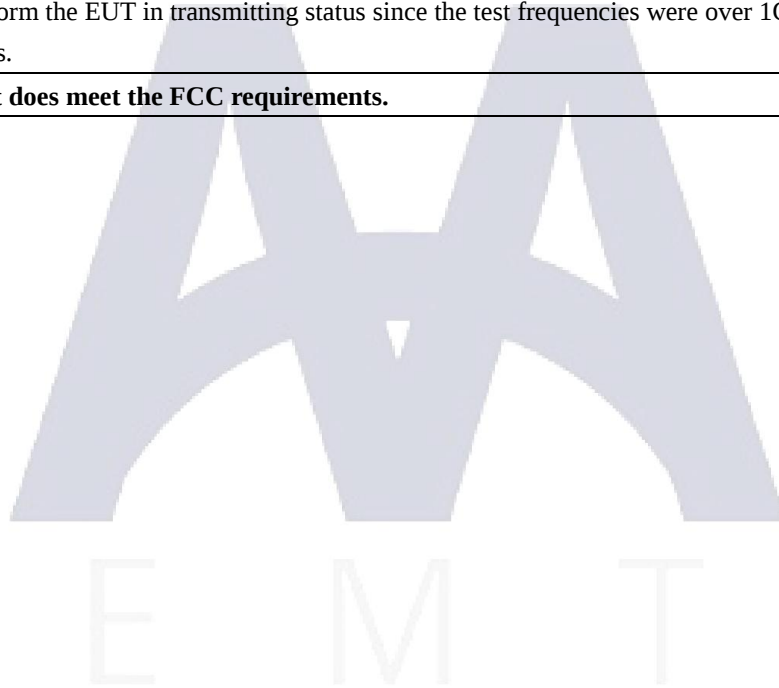

7.4.2 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below. Pre-test the EUT under 2 modes: power-supplied by using the AC adapter and power-supplied by using internal battery. After pre-testing, we found the worst case is the test mode of EUT power-supplied by using internal battery.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

Test Result:
7.4.2.1 802.11b mode with 11Mbps data rate (Worst case)

Test at Channel 1 (2.412 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	55.08	27.93	4.74	35.09	52.66	74.00	Vertical
2390.000	53.75	27.63	4.96	35.05	51.29	74.00	V
2483.500	53.69	27.55	4.90	34.99	51.15	74.00	V
2500.000	54.69	27.55	5.00	34.98	52.26	74.00	V
2310.000	53.71	27.93	4.74	35.09	51.29	74.00	Horizontal
2390.000	53.40	27.63	4.96	35.05	50.94	74.00	H
2483.500	54.25	27.55	4.90	34.99	51.71	74.00	H
2500.000	54.33	27.55	5.00	34.98	51.90	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	42.17	27.93	4.74	35.09	39.75	54.00	Vertical
2390.000	42.71	27.63	4.96	35.05	40.25	54.00	V
2483.500	44.23	27.55	4.90	34.99	41.69	54.00	V
2500.000	43.63	27.55	5.00	34.98	41.20	54.00	V
2310.000	43.41	27.93	4.74	35.09	40.99	54.00	Horizontal
2390.000	43.69	27.63	4.96	35.05	41.23	54.00	H
2483.500	42.34	27.55	4.90	34.99	39.80	54.00	H
2500.000	44.22	27.55	5.00	34.98	41.79	54.00	H

Test at Channel 6 (2.437 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	55.82	27.93	4.74	35.09	53.40	74.00	Vertical
2390.000	54.43	27.63	4.96	35.05	51.97	74.00	V
2483.500	54.59	27.55	4.90	34.99	52.05	74.00	V
2500.000	54.24	27.55	5.00	34.98	51.81	74.00	V
2310.000	55.25	27.93	4.74	35.09	52.83	74.00	Horizontal
2390.000	53.77	27.63	4.96	35.05	51.31	74.00	H
2483.500	54.40	27.55	4.90	34.99	51.86	74.00	H
2500.000	53.93	27.55	5.00	34.98	51.50	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	42.99	27.93	4.74	35.09	40.57	54.00	Vertical
2390.000	43.90	27.63	4.96	35.05	41.44	54.00	V
2483.500	43.83	27.55	4.90	34.99	41.29	54.00	V
2500.000	42.49	27.55	5.00	34.98	40.06	54.00	V
2310.000	44.59	27.93	4.74	35.09	42.17	54.00	Horizontal
2390.000	43.48	27.63	4.96	35.05	41.02	54.00	H
2483.500	43.50	27.55	4.90	34.99	40.96	54.00	H
2500.000	42.50	27.55	5.00	34.98	40.07	54.00	H

Test at Channel 11 (2.462 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	54.48	27.93	4.74	35.09	52.06	74.00	Vertical
2390.000	53.59	27.63	4.96	35.05	51.13	74.00	V
2483.500	54.60	27.55	4.90	34.99	52.06	74.00	V
2500.000	53.28	27.55	5.00	34.98	50.85	74.00	V
2310.000	55.00	27.93	4.74	35.09	52.58	74.00	Horizontal
2390.000	54.22	27.63	4.96	35.05	51.76	74.00	H
2483.500	54.05	27.55	4.90	34.99	51.51	74.00	H
2500.000	55.71	27.55	5.00	34.98	53.28	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	43.99	27.93	4.74	35.09	41.57	54.00	Vertical
2390.000	42.94	27.63	4.96	35.05	40.48	54.00	V
2483.500	43.90	27.55	4.90	34.99	41.36	54.00	V
2500.000	44.45	27.55	5.00	34.98	42.02	54.00	V
2310.000	43.91	27.93	4.74	35.09	41.49	54.00	Horizontal
2390.000	43.88	27.63	4.96	35.05	41.42	54.00	H
2483.500	43.89	27.55	4.90	34.99	41.35	54.00	H
2500.000	43.37	27.55	5.00	34.98	40.94	54.00	H

7.4.2.2 802.11g mode with 54Mbps data rate (Worst case)

Test at Channel 1 (2.412 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	55.17	27.93	4.74	35.09	52.75	74.00	Vertical
2390.000	53.64	27.63	4.96	35.05	51.18	74.00	V
2483.500	54.20	27.55	4.90	34.99	51.66	74.00	V
2500.000	54.44	27.55	5.00	34.98	52.01	74.00	V
2310.000	55.31	27.93	4.74	35.09	52.89	74.00	Horizontal
2390.000	54.40	27.63	4.96	35.05	51.94	74.00	H
2483.500	54.86	27.55	4.90	34.99	52.32	74.00	H
2500.000	55.18	27.55	5.00	34.98	52.75	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	44.60	27.93	4.74	35.09	42.18	54.00	Vertical
2390.000	43.67	27.63	4.96	35.05	41.21	54.00	V
2483.500	43.45	27.55	4.90	34.99	40.91	54.00	V
2500.000	44.64	27.55	5.00	34.98	42.21	54.00	V
2310.000	43.54	27.93	4.74	35.09	41.12	54.00	Horizontal
2390.000	43.64	27.63	4.96	35.05	41.18	54.00	H
2483.500	42.32	27.55	4.90	34.99	39.78	54.00	H
2500.000	42.62	27.55	5.00	34.98	40.19	54.00	H

Test at Channel 6 (2.437 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	54.15	27.93	4.74	35.09	51.73	74.00	Vertical
2390.000	54.32	27.63	4.96	35.05	51.86	74.00	V
2483.500	54.50	27.55	4.90	34.99	51.96	74.00	V
2500.000	55.57	27.55	5.00	34.98	53.14	74.00	V
2310.000	54.48	27.93	4.74	35.09	52.06	74.00	Horizontal
2390.000	54.42	27.63	4.96	35.05	51.96	74.00	H
2483.500	54.57	27.55	4.90	34.99	52.03	74.00	H
2500.000	55.28	27.55	5.00	34.98	52.85	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	43.94	27.93	4.74	35.09	41.52	54.00	Vertical
2390.000	42.80	27.63	4.96	35.05	40.34	54.00	V
2483.500	43.71	27.55	4.90	34.99	41.17	54.00	V
2500.000	43.08	27.55	5.00	34.98	40.65	54.00	V
2310.000	42.68	27.93	4.74	35.09	40.26	54.00	Horizontal
2390.000	43.19	27.63	4.96	35.05	40.73	54.00	H
2483.500	44.29	27.55	4.90	34.99	41.75	54.00	H
2500.000	42.40	27.55	5.00	34.98	39.97	54.00	H

Test at Channel 11 (2.462 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	53.96	27.93	4.74	35.09	51.54	74.00	Vertical
2390.000	54.32	27.63	4.96	35.05	51.86	74.00	V
2483.500	55.91	27.55	4.90	34.99	53.37	74.00	V
2500.000	54.47	27.55	5.00	34.98	52.04	74.00	V
2310.000	53.74	27.93	4.74	35.09	51.32	74.00	Horizontal
2390.000	54.79	27.63	4.96	35.05	52.33	74.00	H
2483.500	53.98	27.55	4.90	34.99	51.44	74.00	H
2500.000	54.45	27.55	5.00	34.98	52.02	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	43.41	27.93	4.74	35.09	40.99	54.00	Vertical
2390.000	42.51	27.63	4.96	35.05	40.05	54.00	V
2483.500	44.84	27.55	4.90	34.99	42.30	54.00	V
2500.000	43.59	27.55	5.00	34.98	41.16	54.00	V
2310.000	43.36	27.93	4.74	35.09	40.94	54.00	Horizontal
2390.000	43.92	27.63	4.96	35.05	41.46	54.00	H
2483.500	43.21	27.55	4.90	34.99	40.67	54.00	H
2500.000	43.36	27.55	5.00	34.98	40.93	54.00	H

7.4.2.3 802.11n(HT20) mode with 72.2Mbps data rate (Worst case)

Test at Channel 1 (2.412 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	54.80	27.93	4.74	35.09	52.38	74.00	Vertical
2390.000	55.45	27.63	4.96	35.05	52.99	74.00	V
2483.500	53.80	27.55	4.90	34.99	51.26	74.00	V
2500.000	55.15	27.55	5.00	34.98	52.72	74.00	V
2310.000	54.33	27.93	4.74	35.09	51.91	74.00	Horizontal
2390.000	55.13	27.63	4.96	35.05	52.67	74.00	H
2483.500	54.13	27.55	4.90	34.99	51.59	74.00	H
2500.000	55.48	27.55	5.00	34.98	53.05	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	42.88	27.93	4.74	35.09	40.46	54.00	Vertical
2390.000	43.25	27.63	4.96	35.05	40.79	54.00	V
2483.500	42.50	27.55	4.90	34.99	39.96	54.00	V
2500.000	42.64	27.55	5.00	34.98	40.21	54.00	V
2310.000	44.29	27.93	4.74	35.09	41.87	54.00	Horizontal
2390.000	42.36	27.63	4.96	35.05	39.90	54.00	H
2483.500	42.69	27.55	4.90	34.99	40.15	54.00	H
2500.000	43.57	27.55	5.00	34.98	41.14	54.00	H

Test at Channel 6 (2.437 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	54.94	27.93	4.74	35.09	52.52	74.00	Vertical
2390.000	53.61	27.63	4.96	35.05	51.15	74.00	V
2483.500	55.10	27.55	4.90	34.99	52.56	74.00	V
2500.000	54.90	27.55	5.00	34.98	52.47	74.00	V
2310.000	55.00	27.93	4.74	35.09	52.58	74.00	Horizontal
2390.000	54.35	27.63	4.96	35.05	51.89	74.00	H
2483.500	54.81	27.55	4.90	34.99	52.27	74.00	H
2500.000	54.47	27.55	5.00	34.98	52.04	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	44.32	27.93	4.74	35.09	41.90	54.00	Vertical
2390.000	42.65	27.63	4.96	35.05	40.19	54.00	V
2483.500	43.37	27.55	4.90	34.99	40.83	54.00	V
2500.000	43.30	27.55	5.00	34.98	40.87	54.00	V
2310.000	43.18	27.93	4.74	35.09	40.76	54.00	Horizontal
2390.000	42.41	27.63	4.96	35.05	39.95	54.00	H
2483.500	42.73	27.55	4.90	34.99	40.19	54.00	H
2500.000	44.71	27.55	5.00	34.98	42.28	54.00	H

Test at Channel 11 (2.462 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	55.41	27.93	4.74	35.09	52.99	74.00	Vertical
2390.000	55.25	27.63	4.96	35.05	52.79	74.00	V
2483.500	54.08	27.55	4.90	34.99	51.54	74.00	V
2500.000	54.48	27.55	5.00	34.98	52.05	74.00	V
2310.000	54.20	27.93	4.74	35.09	51.78	74.00	Horizontal
2390.000	53.02	27.63	4.96	35.05	50.56	74.00	H
2483.500	53.95	27.55	4.90	34.99	51.41	74.00	H
2500.000	55.42	27.55	5.00	34.98	52.99	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	42.80	27.93	4.74	35.09	40.38	54.00	Vertical
2390.000	44.34	27.63	4.96	35.05	41.88	54.00	V
2483.500	43.84	27.55	4.90	34.99	41.30	54.00	V
2500.000	43.02	27.55	5.00	34.98	40.59	54.00	V
2310.000	42.25	27.93	4.74	35.09	39.83	54.00	Horizontal
2390.000	43.50	27.63	4.96	35.05	41.04	54.00	H
2483.500	44.46	27.55	4.90	34.99	41.92	54.00	H
2500.000	43.91	27.55	5.00	34.98	41.48	54.00	H

7.4.2.4 802.11n(HT40) mode with 150Mbps data rate (Worst case)

Test at Channel 3 (2.422 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	54.50	27.93	4.74	35.09	52.08	74.00	Vertical
2390.000	53.33	27.63	4.96	35.05	50.87	74.00	V
2483.500	54.52	27.55	4.90	34.99	51.98	74.00	V
2500.000	54.01	27.55	5.00	34.98	51.58	74.00	V
2310.000	54.19	27.93	4.74	35.09	51.77	74.00	Horizontal
2390.000	55.07	27.63	4.96	35.05	52.61	74.00	H
2483.500	54.85	27.55	4.90	34.99	52.31	74.00	H
2500.000	54.41	27.55	5.00	34.98	51.98	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	42.10	27.93	4.74	35.09	39.68	54.00	Vertical
2390.000	42.61	27.63	4.96	35.05	40.15	54.00	V
2483.500	43.17	27.55	4.90	34.99	40.63	54.00	V
2500.000	44.00	27.55	5.00	34.98	41.57	54.00	V
2310.000	43.23	27.93	4.74	35.09	40.81	54.00	Horizontal
2390.000	42.62	27.63	4.96	35.05	40.16	54.00	H
2483.500	43.04	27.55	4.90	34.99	40.50	54.00	H
2500.000	43.43	27.55	5.00	34.98	41.00	54.00	H

Test at Channel 6 (2.437 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	53.97	27.93	4.74	35.09	51.55	74.00	Vertical
2390.000	54.65	27.63	4.96	35.05	52.19	74.00	V
2483.500	54.26	27.55	4.90	34.99	51.72	74.00	V
2500.000	54.07	27.55	5.00	34.98	51.64	74.00	V
2310.000	55.25	27.93	4.74	35.09	52.83	74.00	Horizontal
2390.000	54.67	27.63	4.96	35.05	52.21	74.00	H
2483.500	54.14	27.55	4.90	34.99	51.60	74.00	H
2500.000	54.87	27.55	5.00	34.98	52.44	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	44.28	27.93	4.74	35.09	41.86	54.00	Vertical
2390.000	42.97	27.63	4.96	35.05	40.51	54.00	V
2483.500	42.70	27.55	4.90	34.99	40.16	54.00	V
2500.000	43.39	27.55	5.00	34.98	40.96	54.00	V
2310.000	43.73	27.93	4.74	35.09	41.31	54.00	Horizontal
2390.000	43.31	27.63	4.96	35.05	40.85	54.00	H
2483.500	44.26	27.55	4.90	34.99	41.72	54.00	H
2500.000	42.30	27.55	5.00	34.98	39.87	54.00	H

Test at Channel 9 (2.452 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	54.52	27.93	4.74	35.09	52.10	74.00	Vertical
2390.000	55.03	27.63	4.96	35.05	52.57	74.00	V
2483.500	53.46	27.55	4.90	34.99	50.92	74.00	V
2500.000	53.86	27.55	5.00	34.98	51.43	74.00	V
2310.000	53.84	27.93	4.74	35.09	51.42	74.00	Horizontal
2390.000	54.37	27.63	4.96	35.05	51.91	74.00	H
2483.500	53.45	27.55	4.90	34.99	50.91	74.00	H
2500.000	55.64	27.55	5.00	34.98	53.21	74.00	H

Average Measurement:

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
2310.000	43.09	27.93	4.74	35.09	40.67	54.00	Vertical
2390.000	44.16	27.63	4.96	35.05	41.70	54.00	V
2483.500	44.17	27.55	4.90	34.99	41.63	54.00	V
2500.000	42.87	27.55	5.00	34.98	40.44	54.00	V
2310.000	44.05	27.93	4.74	35.09	41.63	54.00	Horizontal
2390.000	43.34	27.63	4.96	35.05	40.88	54.00	H
2483.500	43.14	27.55	4.90	34.99	40.60	54.00	H
2500.000	43.51	27.55	5.00	34.98	41.08	54.00	H

7.5 6 dB Bandwidth

Test Requirement:

FCC Part 15 C section 15.247

(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method:


ANSI C63.10: Clause 6.9.1

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Pre-test the EUT under 2 modes: power-supplied by using the AC adapter and power-supplied by using internal battery. After pre-testing, we found the worst case is the test mode of EUT power-supplied by using internal battery.

Test Configuration:

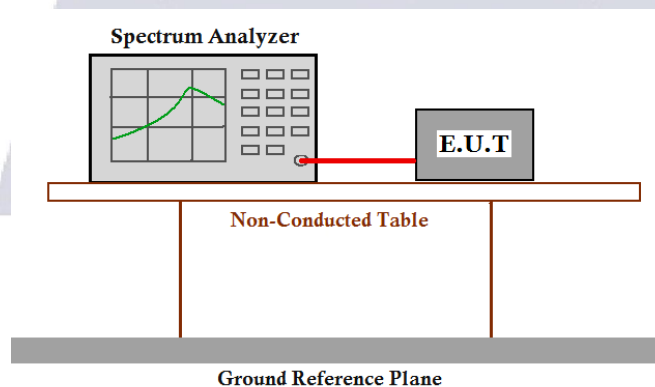

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.5dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
Sweep = auto; Detector Function = Peak; ace = Max Hold
RBW: 1%~5% OBW; VBW: $\geq 3 \times$ RBW
Span: two times and five times the OBW.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worse case.


Channel No.	Frequency (MHz)	Mode	Data Rate	Measured 6dB bandwidth (MHz)	Limit	Result
1	2412	802.11b	11 Mbps	9.030	≥500KHz	Pass
6	2437		11 Mbps	8.336		Pass
11	2462		11 Mbps	8.336		Pass
1	2412	802.11g	54 Mbps	16.440	≥500KHz	Pass
6	2437		54 Mbps	15.803		Pass
11	2462		54 Mbps	15.220		Pass
1	2412	802.11n (HT20)	72.2 Mbps	17.308	≥500KHz	Pass
6	2437		72.2 Mbps	16.440		Pass
11	2462		72.2 Mbps	15.977		Pass
3	2422	802.11n (HT40)	150 Mbps	31.260	≥500KHz	Pass
6	2437		150 Mbps	35.660		Pass
9	2452		150 Mbps	35.080		Pass

Test result: The unit does meet the FCC requirements.


Result plot as follows:

802.11b mode with 11Mbps data rate (Worst case)


Channel 1: 2.412GHz:

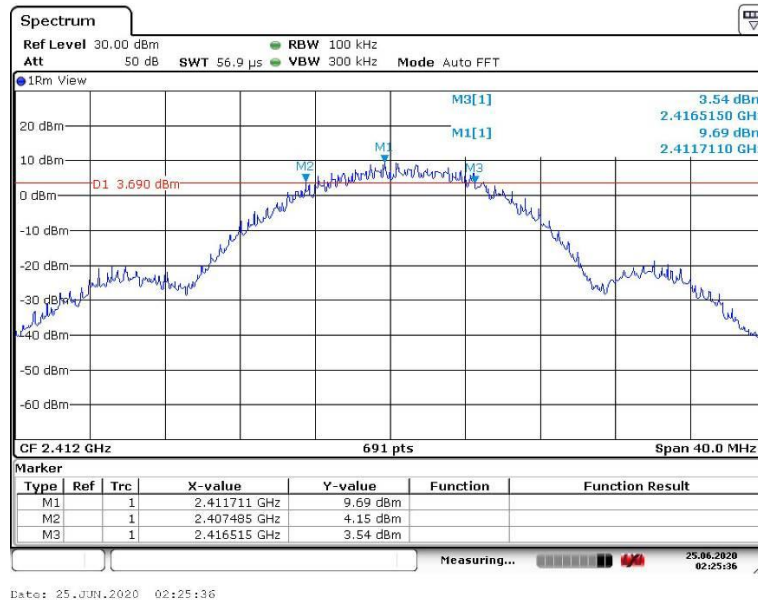

Channel 6: 2.437GHz:

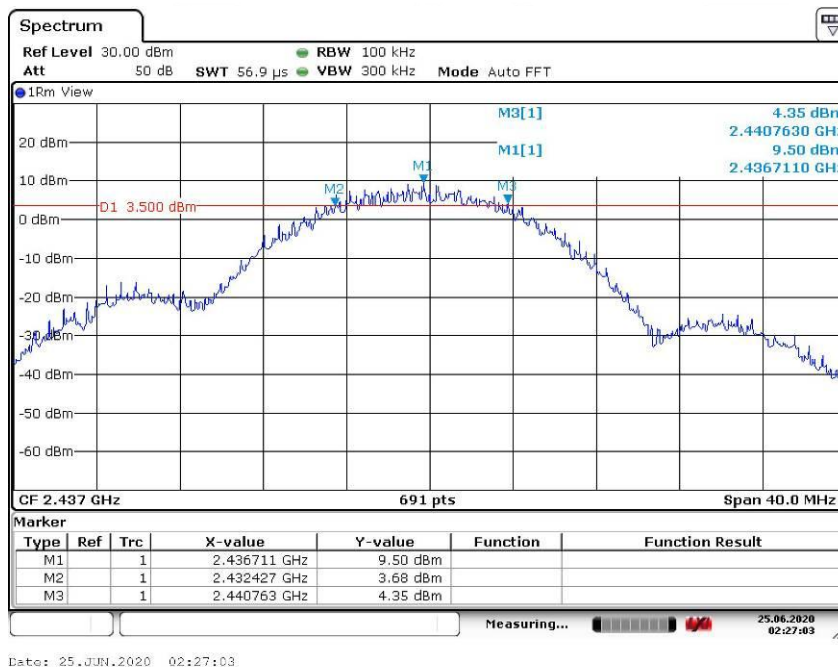


Channel 11: 2.462GHz:

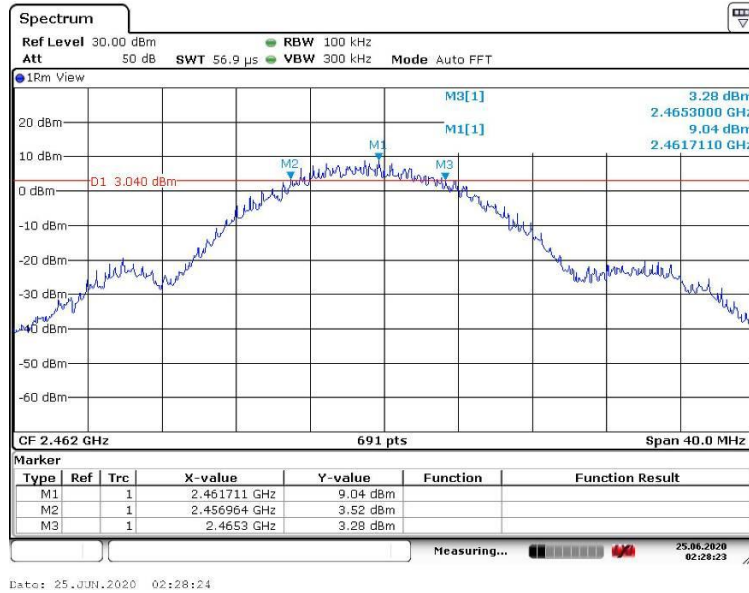


802.11g mode with 54Mbps data rate (Worst case)


Channel 1: 2.412GHz:

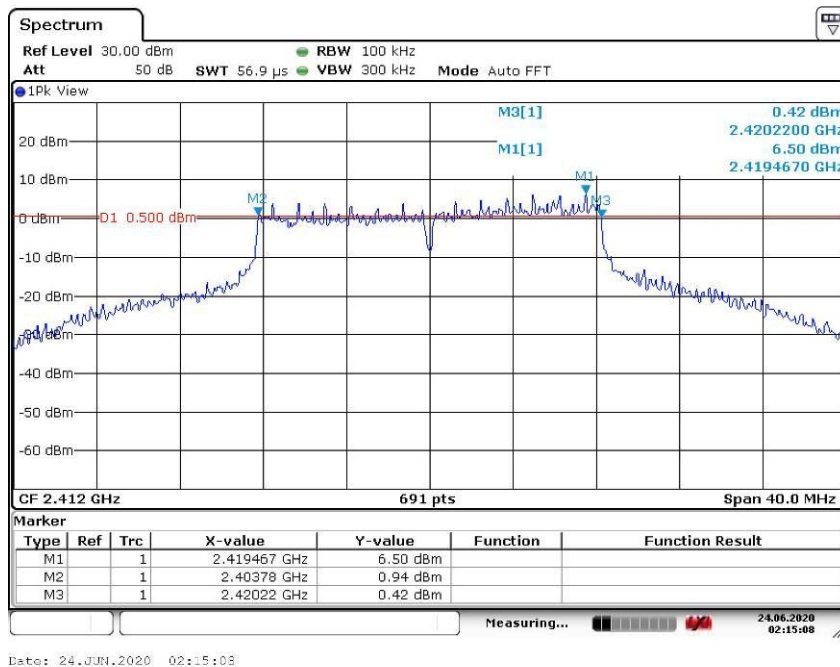

Channel 6: 2.437GHz:

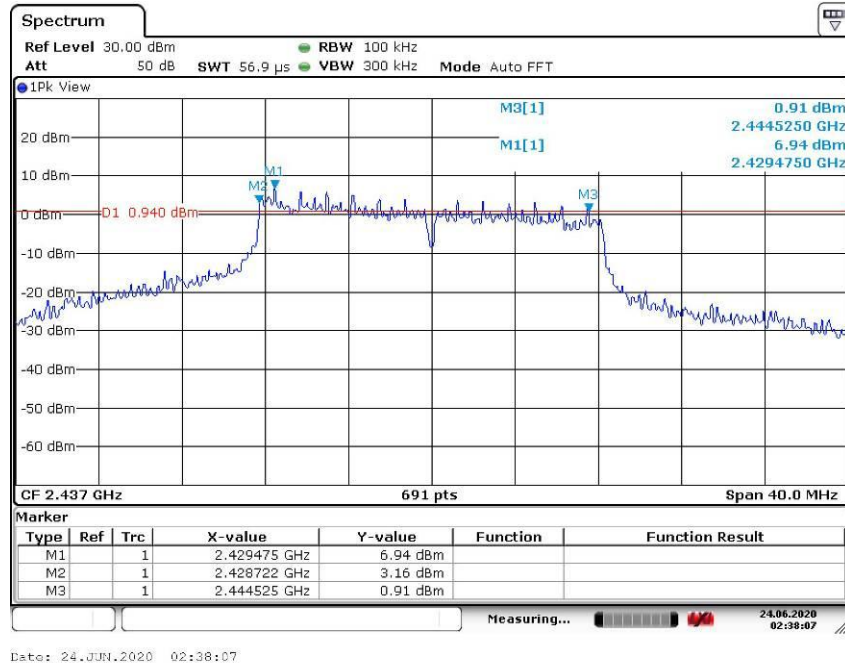


Channel 11: 2.462GHz:

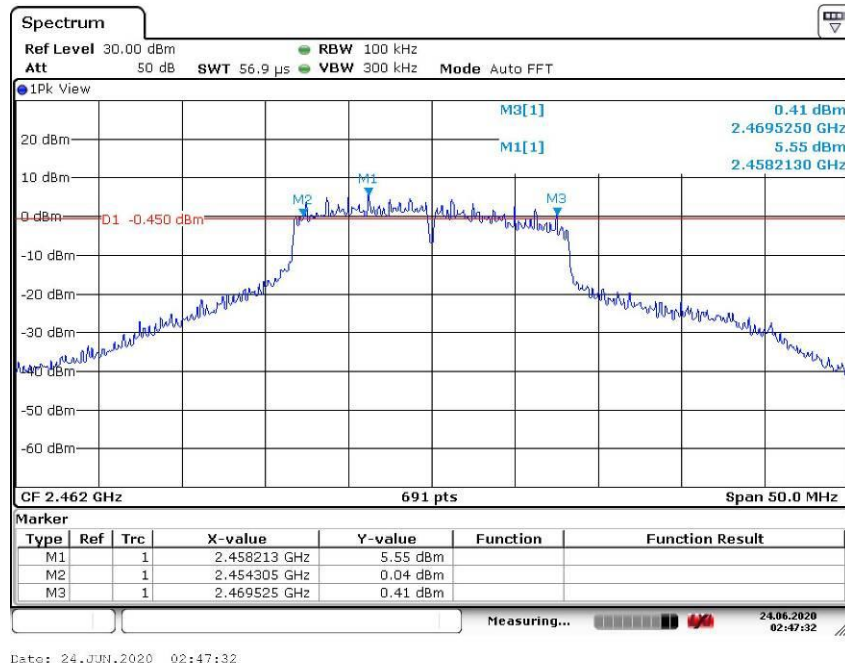


802.11n(HT20) mode with 72.2Mbps data rate (Worst case)


Channel 1: 2.412GHz:

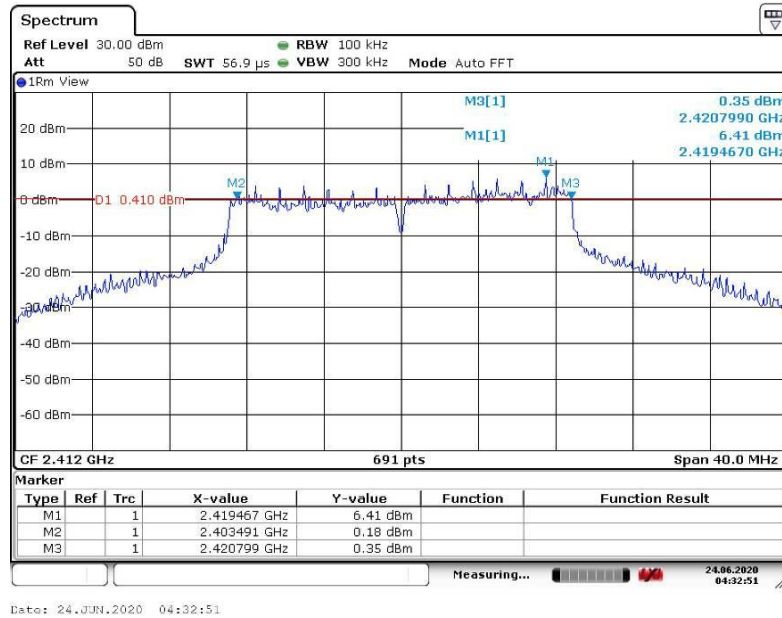

Channel 6: 2.437GHz:

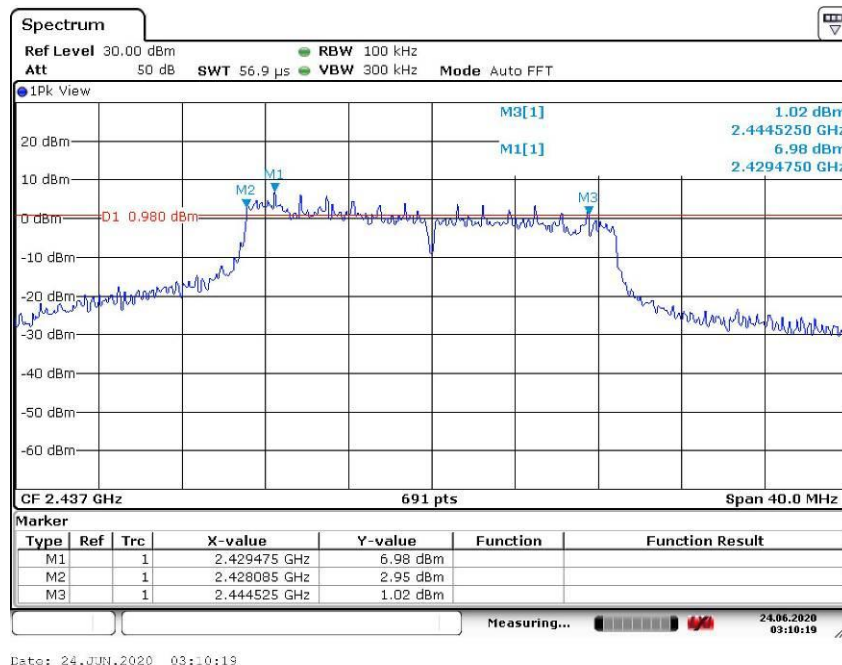


Channel 11: 2.462GHz:

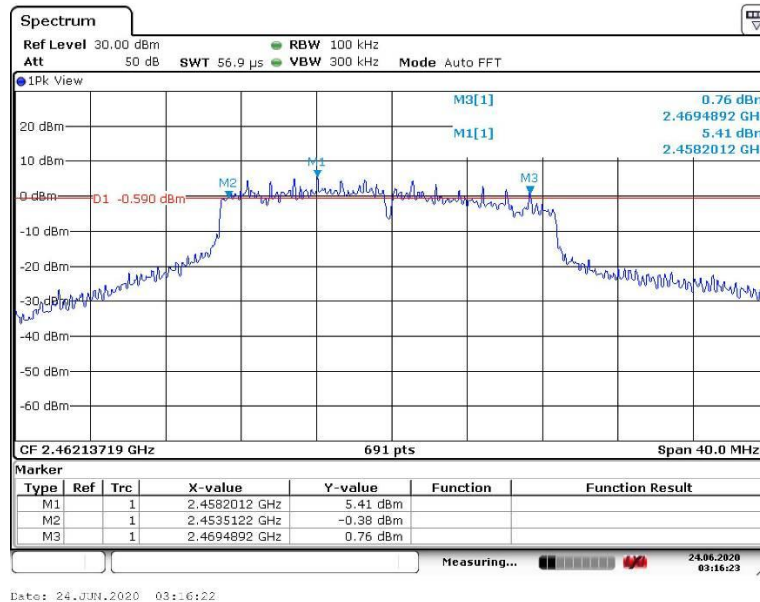


802.11n(HT40) mode with 150Mbps data rate (Worst case)


Channel 3: 2.422GHz:

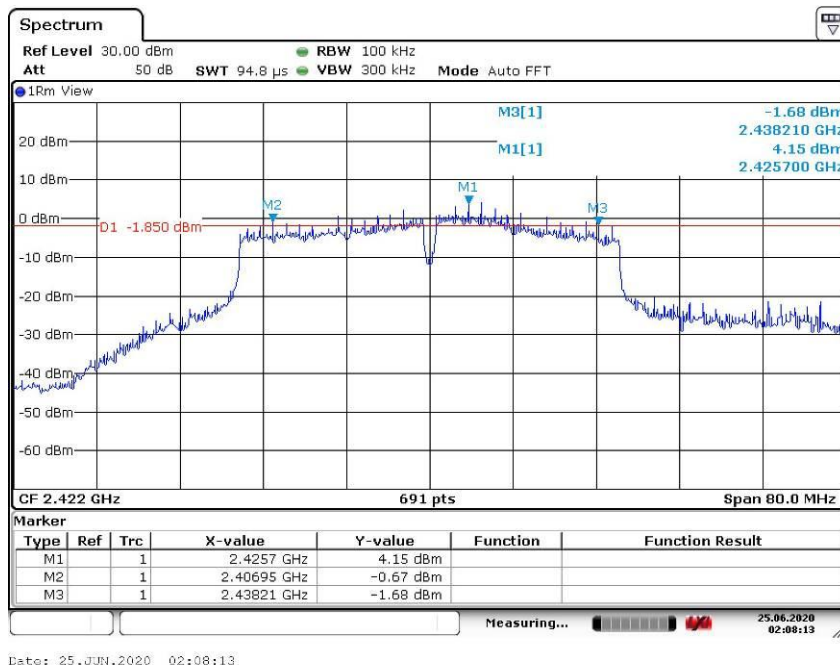

Channel 6: 2.437GHz:

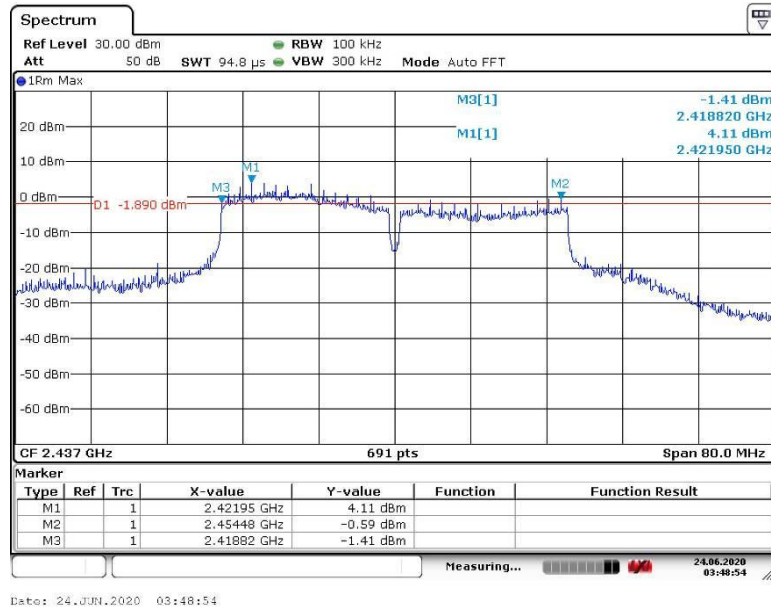

Channel 9: 2.452GHz:

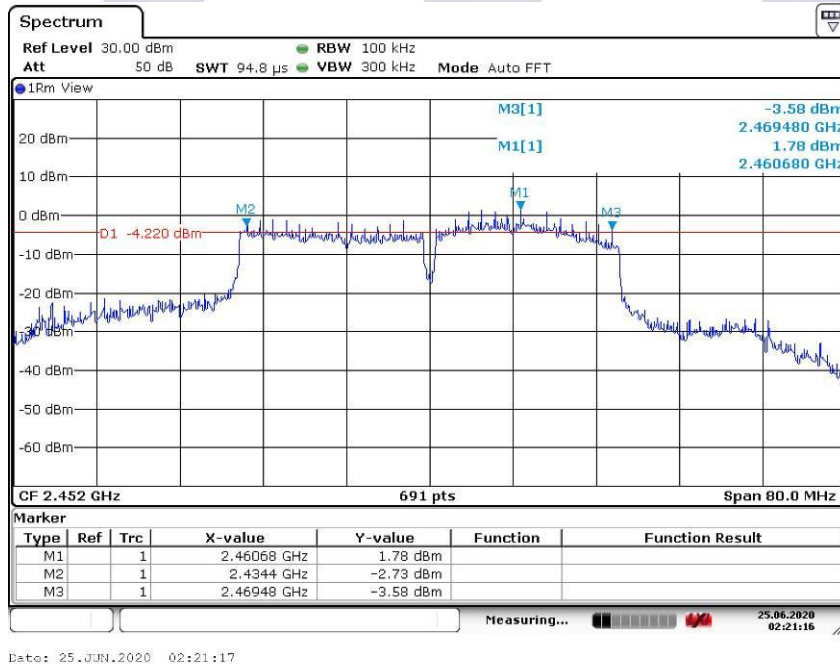

7.6 Maximum Peak Output Power

Test Requirement:

FCC Part 15 C section 15.247

(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method:


FCC/KDB-558074 D01 v03r03 9.1.1 RBW $\geq$ DTS bandwidth

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Pre-test the EUT under 2 modes: power-supplied by using the AC adapter and power-supplied by using internal battery. After pre-testing, we found the worst case is the test mode of EUT power-supplied by using internal battery.

Test Configuration:

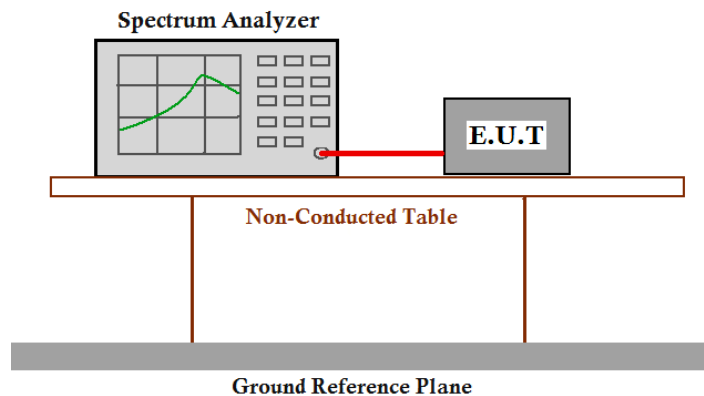

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable
(Cable loss =1.0dB) from the antenna port to the spectrum.
2. Set the RBW $\geq$ DTS bandwidth
3. Set the VBW $\geq 3 \times$ RBW
4. Set the span $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Use peak marker function to determine the peak amplitude level.
9. Report the worse case.

Test result (Worst case):

Channel No.	Frequency (MHz)	Mode	Data Rate	Measured Channel Power (dBm)	Limit	Result
1	2412	802.11b	11 Mbps	25.75	1W(30dBm)	Pass
6	2437		11 Mbps	25.58		Pass
11	2462		11 Mbps	25.02		Pass
1	2412	802.11g	54 Mbps	23.15		Pass
6	2437		54 Mbps	23.20		Pass
11	2462		54 Mbps	22.50		Pass
1	2412	802.11n (HT20)	72.2 Mbps	23.12		Pass
6	2437		72.2 Mbps	23.18		Pass
11	2462		72.2 Mbps	22.77		Pass
3	2422	802.11n (HT40)	150 Mbps	23.24		Pass
6	2437		150 Mbps	23.06		Pass
9	2452		150 Mbps	21.75		Pass

Remark: Level = Read Level + Cable Loss.

The unit does meet the FCC requirements.

Page 67 of 113

Plot 174, Udyog Vihar Phase 4, Sector -18, Gurgaon, Haryana, India.

Contact:0124-4235350,4145343;e-mail:info@aaemtlabs.com;Website: www.aaemtlabs.com

An ISO 17025: 2017, Accredited Laboratory ,VCCI (support member – #4053),ISED#: 26046, FCC #137777 CE #800058_00



7.7 Peak Power Spectral Density

Test Requirement:

FCC Part 15 C section 15.247

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Method:


ANSI C63.10: Clause 6.11.2.3

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Pre-test the EUT under 2 modes: power-supplied by using the AC adapter and power-supplied by using internal battery. After pre-testing, we found the worst case is the test mode of EUT power-supplied by using internal battery.

Test Configuration:

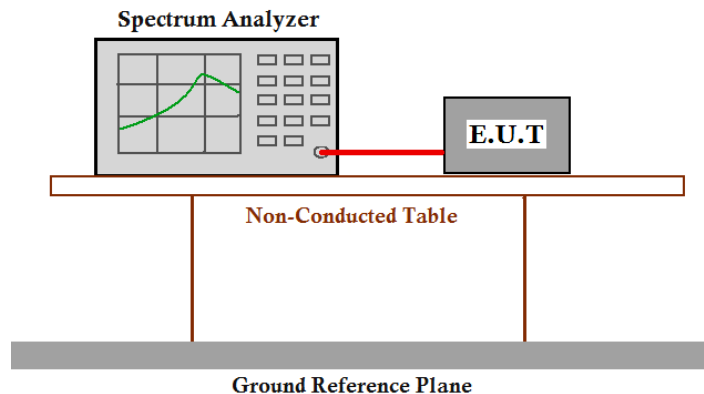

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.0 dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set CENTER FREQUENCY = Frequency from Power Spectral Density Test Matrix (see 6.10.2)
 - b) Set SPAN = 20 MHz (For devices with a nominal 40 MHz BW, 50 MHz span will be needed)
 - c) Set REFERENCE LEVEL = 20 dBm
 - d) Set ATTENUATION = 0 dB (add internal attenuation, if necessary)
 - e) Set SWEEP TIME = Coupled
 - f) Set RBW = 3 kHz
 - g) Set VBW = 10 kHz
 - h) Set DETECTOR = Peak
 - i) Set MKR = Center Frequency
 - j) Set TRACE = CLEAR WRITE

Place the radio in continuous transmit mode. Set the TRACE to MAX HOLD, and after the trace stabilizes, the TRACE to VIEW. Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency.

After viewing the EUT waveform on the spectrum analyzer, perform the following spectrum analyzer functions to capture the trace:

Set SPAN = 300 kHz

Set SWEEP TIME = 100 s

Set TRACE = MAX HOLD

Set MKR = PEAK SEARCH

3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.

Channel No.	Frequency (MHz)	Mode	Data Rate	Measured Peak Power Spectral Density (dBm/3KHz)	Limit	Result
1	2412	802.11b	11 Mbps	-4.69	8dBm/3KHz	Pass
6	2437		11 Mbps	-5.16		Pass
11	2462		11 Mbps	-5.88		Pass
1	2412	802.11g	54 Mbps	-18.33		Pass
6	2437		54 Mbps	-18.33		Pass
11	2462		54 Mbps	-17.01		Pass
1	2412	802.11n (HT20)	72.2 Mbps	-17.49		Pass
6	2437		72.2 Mbps	-17.83		Pass
11	2462		72.2 Mbps	-16.08		Pass
3	2422	802.11n (HT40)	150 Mbps	-24.52		Pass
6	2437		150 Mbps	-28.58		Pass
9	2452		150 Mbps	-29.94		Pass


Test result: Level = Read Level + Cable Loss.

The unit does meet the FCC requirements.


Result plot as follows:

802.11b mode with 11Mbps data rate (Worst case)


Channel 1: 2.412GHz:

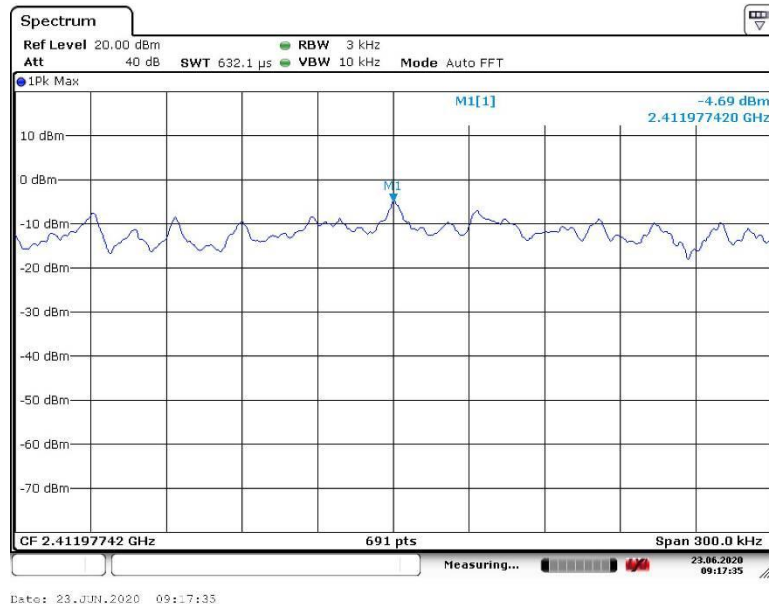

Channel 6: 2.437GHz:

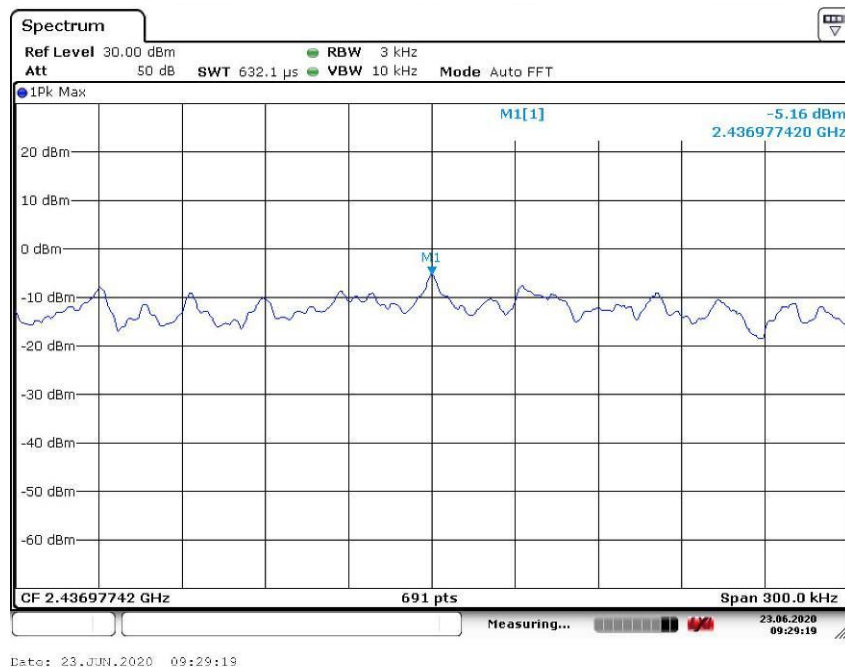


Channel 11: 2.462GHz:

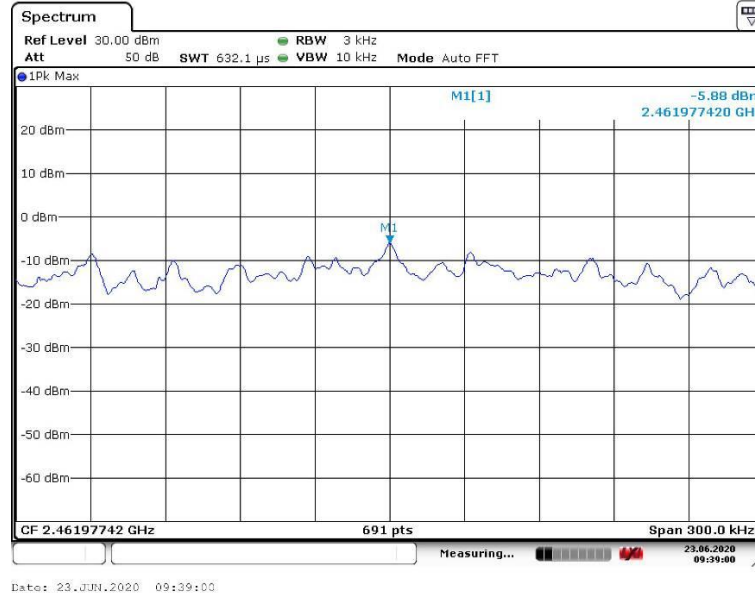


802.11g mode with 54Mbps data rate (Worst case)


Channel 1: 2.412GHz:

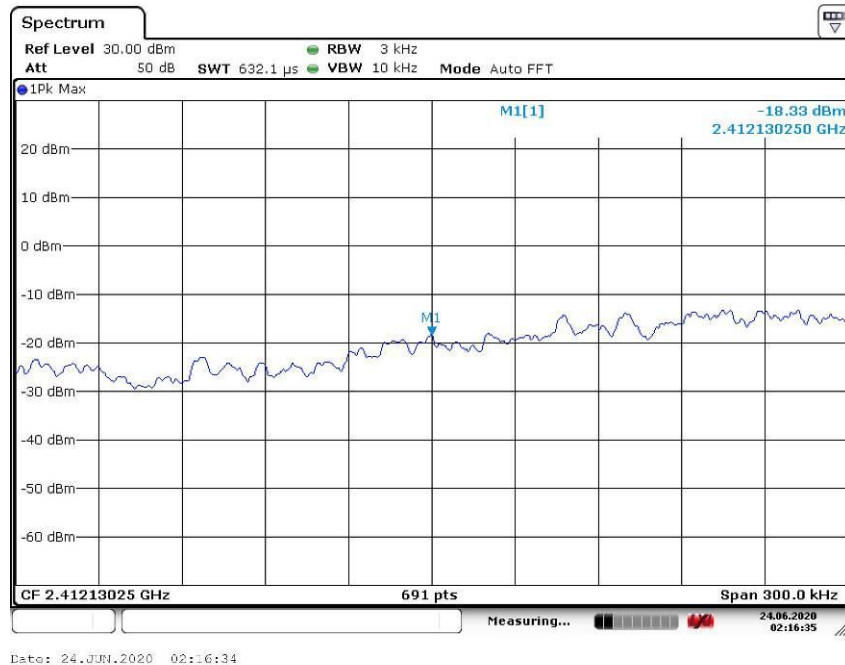

Channel 6: 2.437GHz:

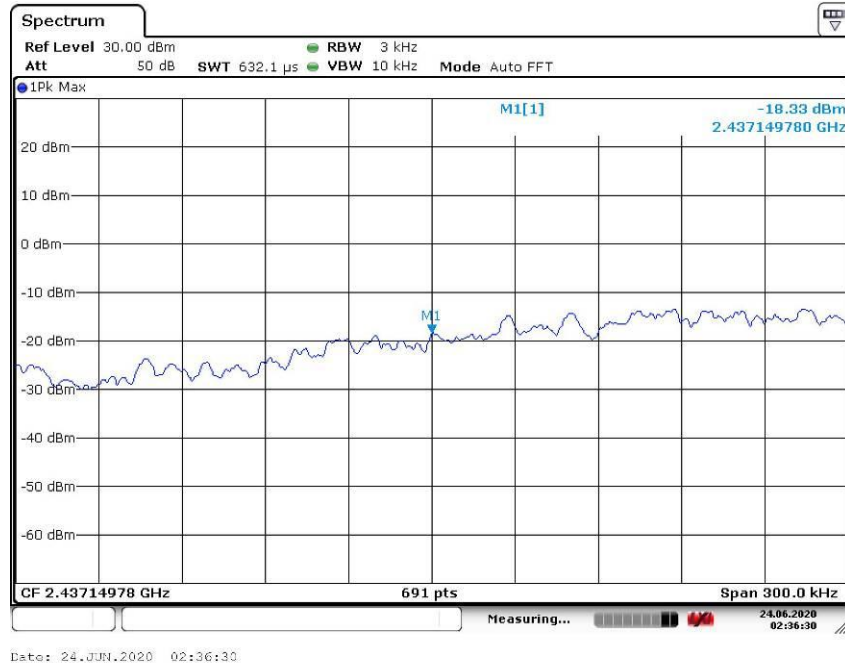


Channel 11: 2.462GHz:

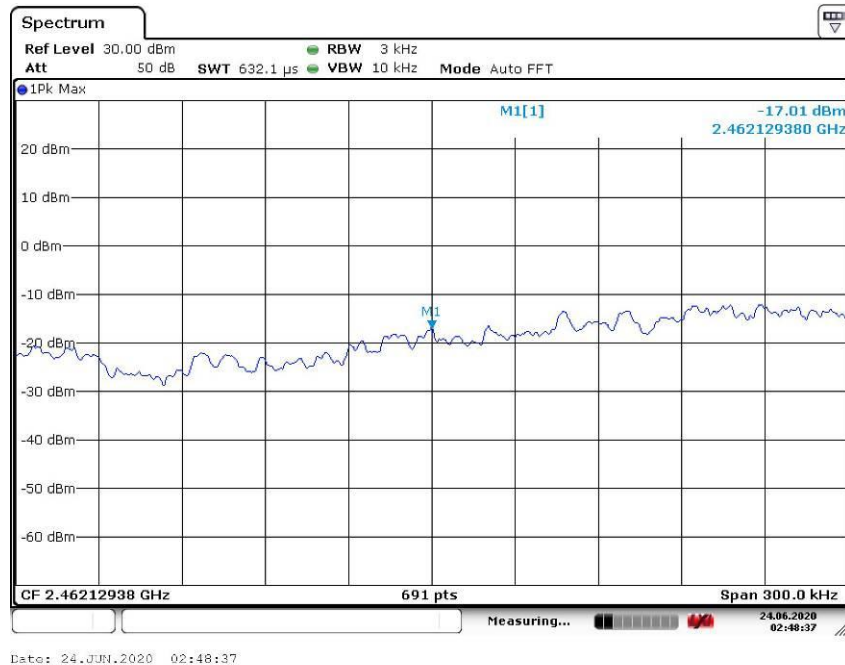


802.11n(HT20) mode with 72.2Mbps data rate (Worst case)


Channel 1: 2.412GHz:

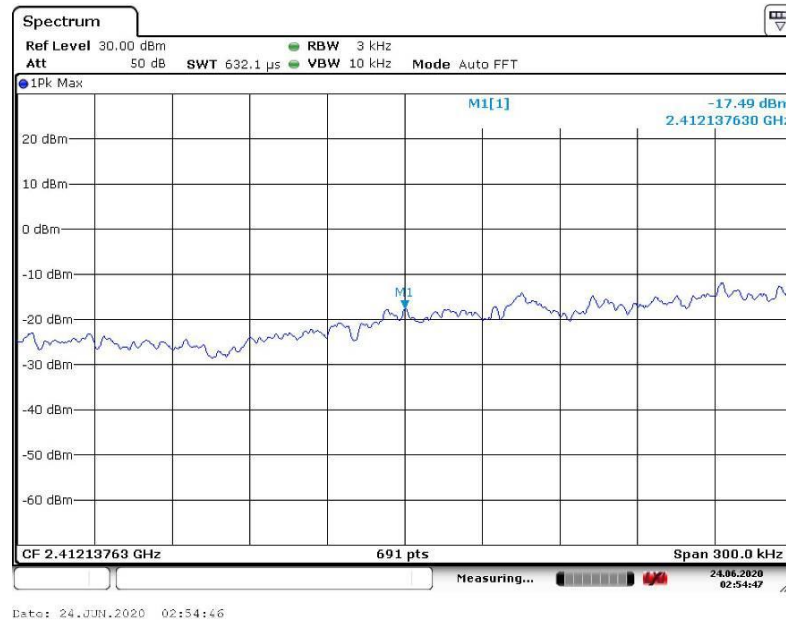

Channel 6: 2.437GHz:

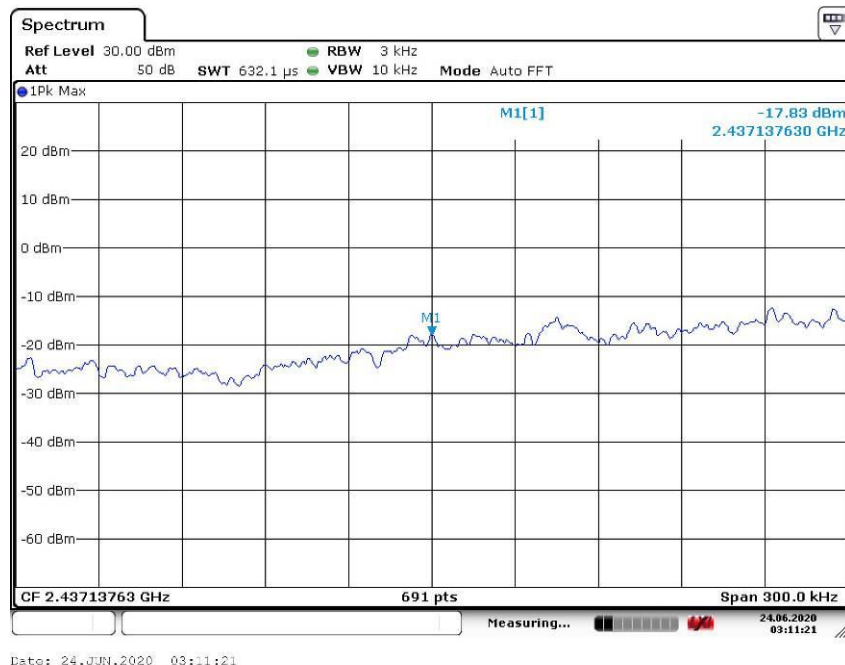


Channel 11: 2.462GHz:

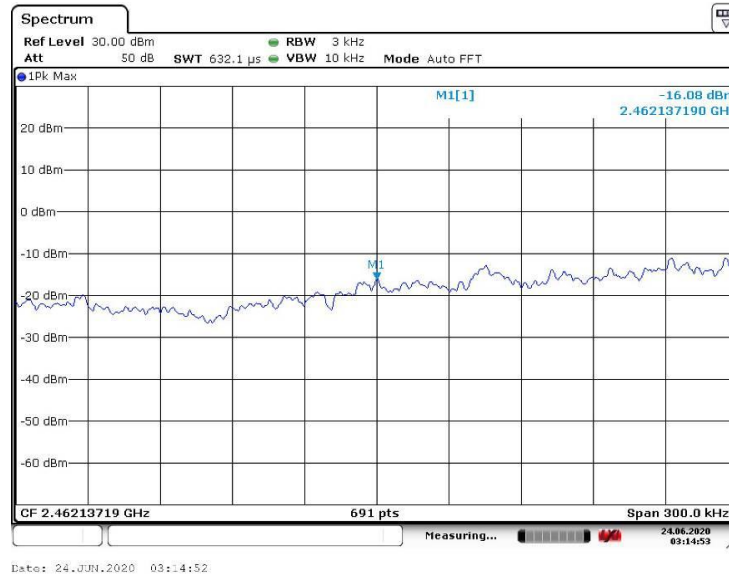


802.11n(HT40) mode with 150Mbps data rate (Worst case)


Channel 3: 2.422GHz:

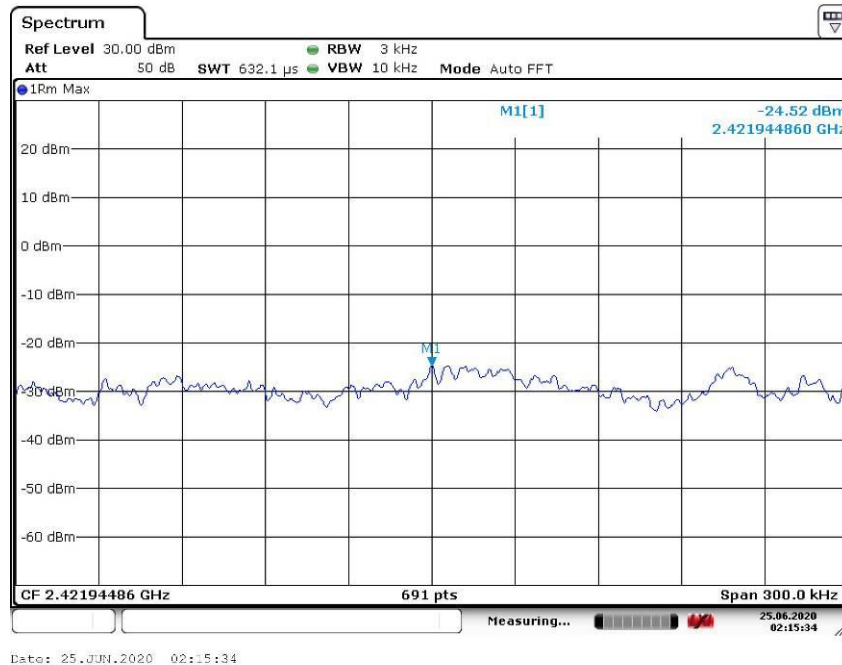

Channel 6: 2.437GHz:

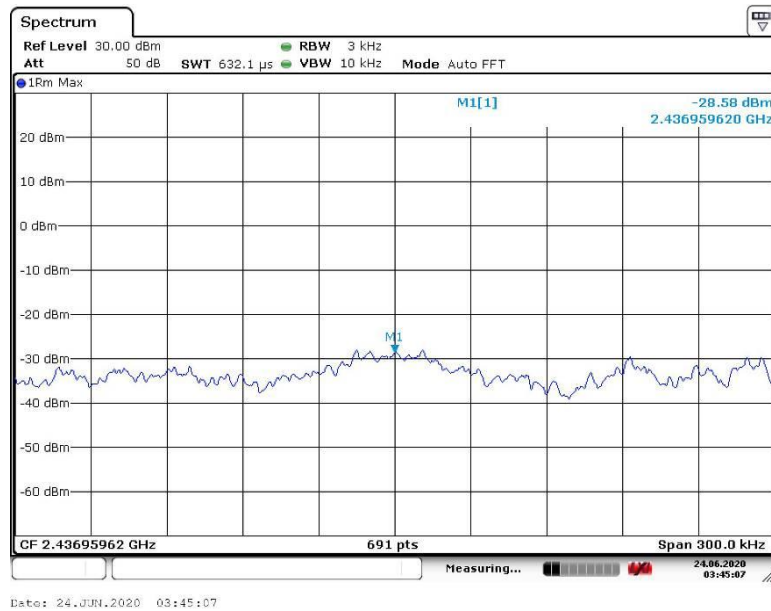


Channel 9: 2.452GHz:

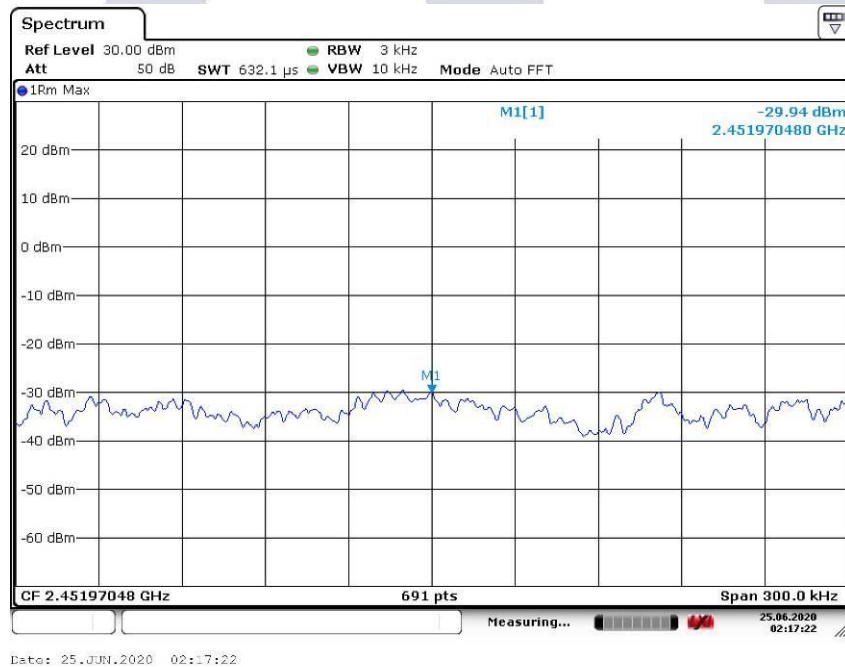

7.8 Band Edges Requirement


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	FCC/KDB-558074 D01 v03r01 Clause 13.3.1
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below. Pre-test the EUT under 2 modes: power-supplied by using the AC adapter and power-supplied by using internal battery. After pre-testing, we found the worst case is the test mode of EUT power-supplied by using internal battery.
Test Configuration:	

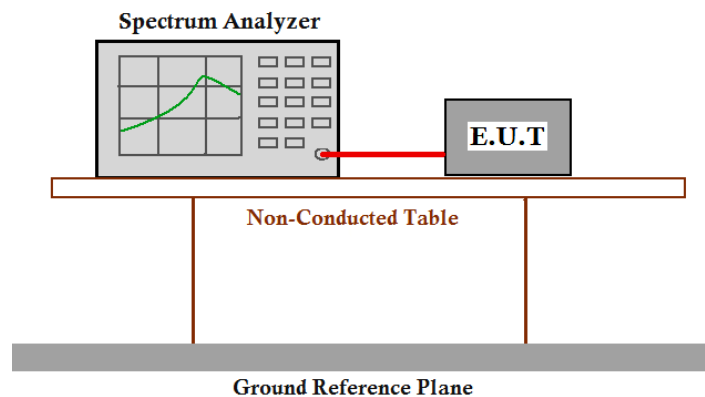

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).

3. Set span to 2MHz,
4. RBW=100kHz,
5. VBW $\geq 3 \times$ RBW
6. Detector=peak
7. Sweep time =auto,
8. Trace mode=max hold.
9. Allow sweep to continue until the trace stabilizes(required measurement time may increase for low duty cycle applications)
10. Compute the power by integrating the spectrum over 1MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency($f_{\text{emission}} \pm 0.5\text{MHz}$). If the instrument does not have a band power function, the sum the amplitude levels(in power units) at 100kHz intervals extending across the 1MHz spectrum defined by $f_{\text{emission}} \pm 0.5\text{MHz}$.

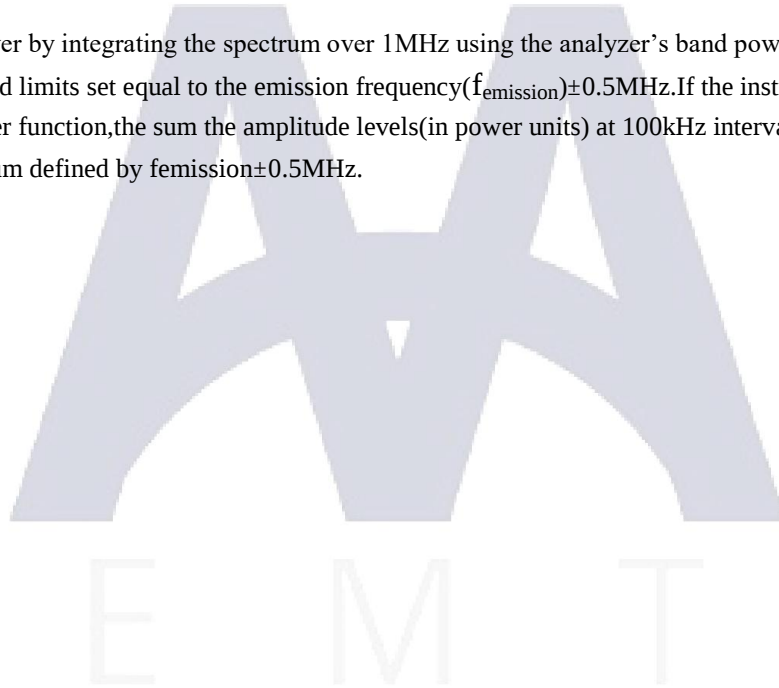


Test result with plots as follows:

Compare with the output power of the lowest frequency, the Lower Edges attenuated more than 20dB

Compare with the output power of the highest frequency, the Upper Edges attenuated more than 20dB.


802.11b mode with 11 Mbps data rate (Worst case)

Channel1: 2.412 GHz

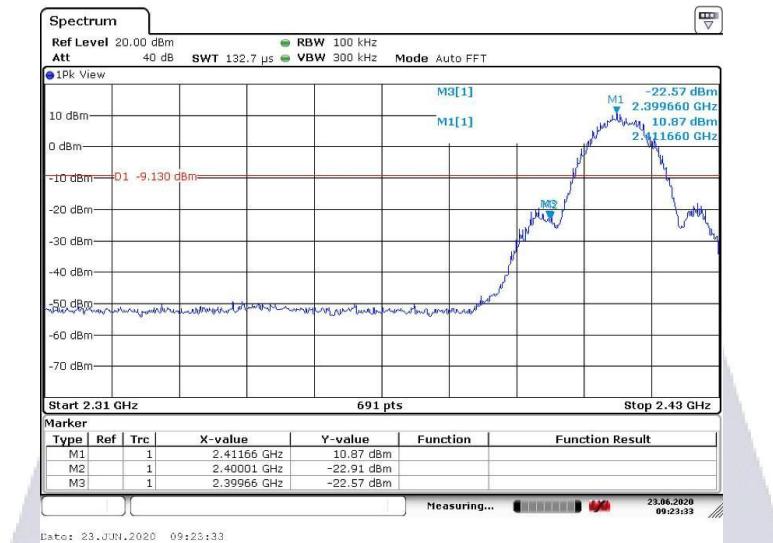


802.11b mode with 11 Mbps data rate (Worst case)

Channel11: 2.462 GHz

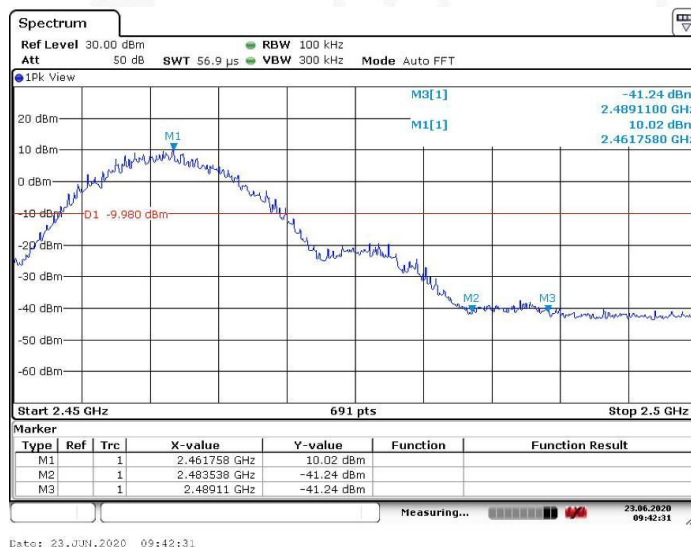

802.11g mode with 54 Mbps data rate (Worst case)


Channel1: 2.412 GHz

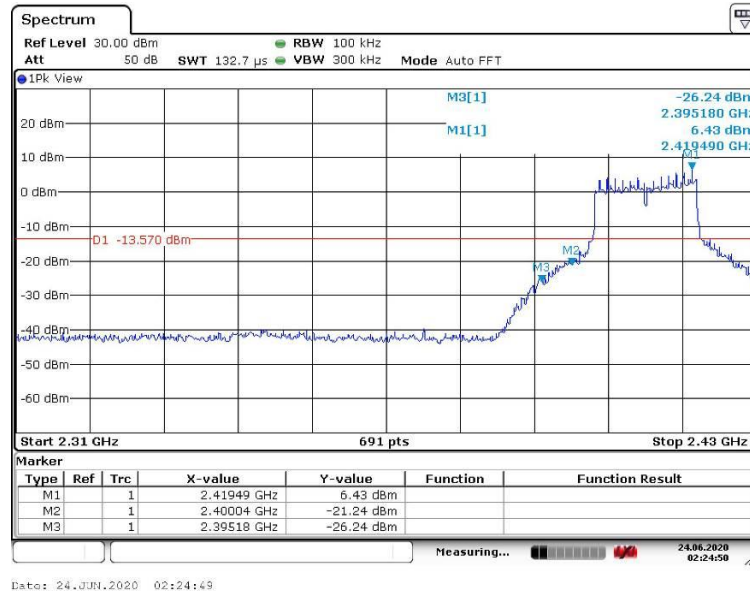

Date: 24.JUN.2020 02:24:49

802.11g mode with 54 Mbps data rate (Worst case)

Channel1: 2.462 GHz

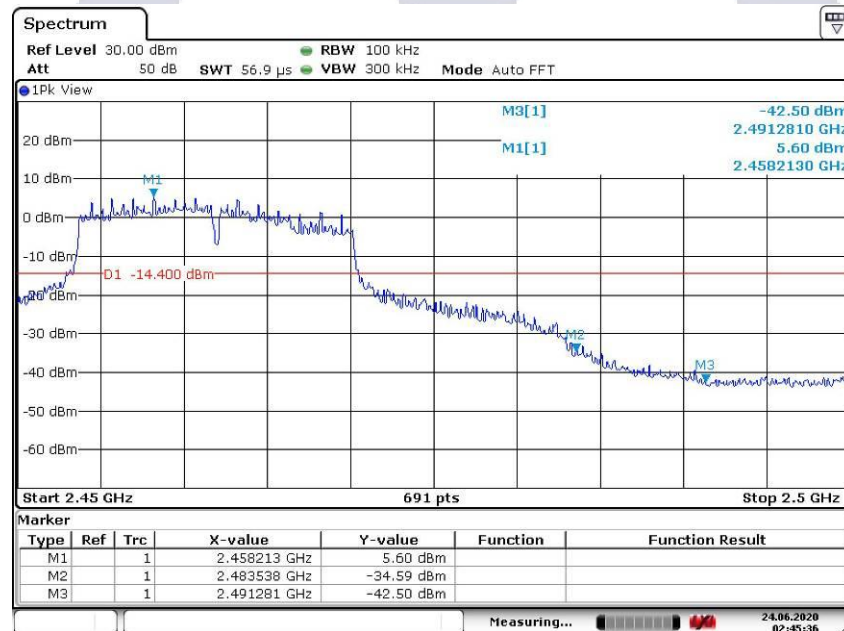

Date: 24.JUN.2020 02:45:36