


Report No.: TMWK2309003421KR

Page: 128 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

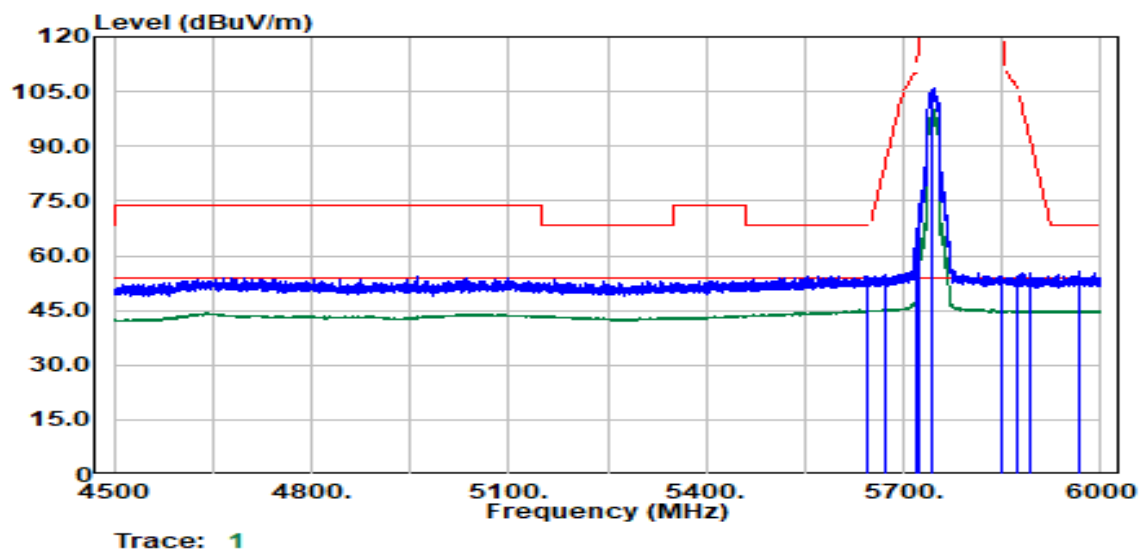


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5644.19	Peak	42.83	11.68	54.51	68.20	-13.69
5672.70	Peak	42.99	11.91	54.90	85.03	-30.13
5718.95	Peak	51.15	12.26	63.42	110.51	-47.09
5723.70	Peak	58.75	12.29	71.04	119.25	-48.21
5745.00	Peak	93.50	12.40	105.90	--	--
5745.00	Average	87.61	12.40	100.01	--	--
5850.23	Peak	41.51	12.47	53.98	121.69	-67.71
5871.73	Peak	41.89	12.42	54.31	106.11	-51.81
5892.48	Peak	42.85	12.38	55.23	92.23	-37.00
5967.50	Peak	43.17	12.36	55.53	68.20	-12.67

Report No.: TMWK2309003421KR

Page: 129 / 221
Rev.: 01

Project No. : TM-2309000356P
Operation Band : 802.11n20/Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2023-10-06
Temp./Humi. : 25.0/61
Antenna Pol. : HORIZONTAL
Engineer : Czerny Lin
Test Chamber : 966D

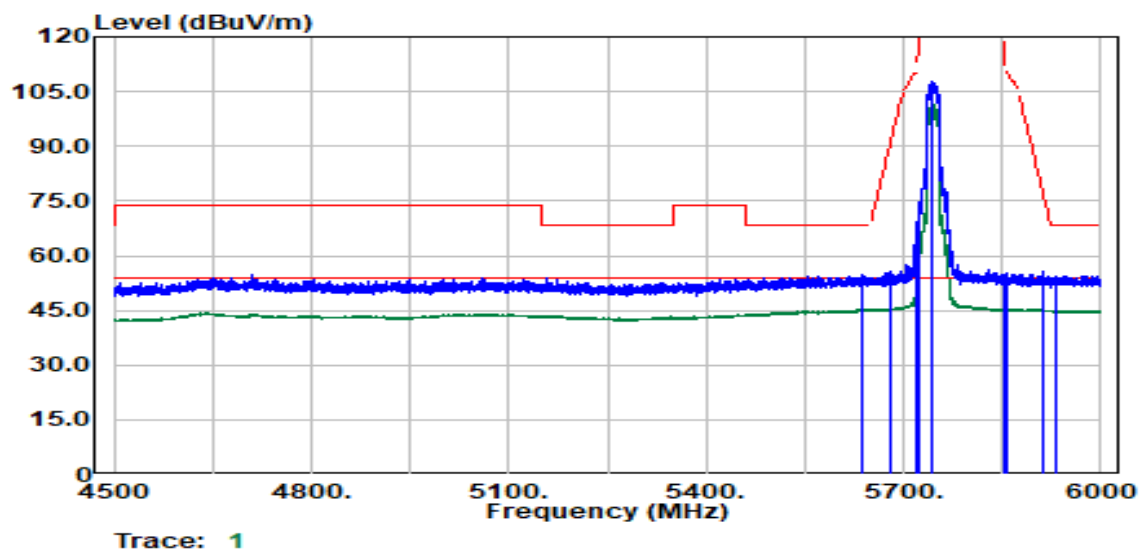


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5636.19	Peak	43.22	11.64	54.86	68.20	-13.34
5678.70	Peak	43.95	11.97	55.92	89.48	-33.56
5719.70	Peak	55.81	12.27	68.08	110.72	-42.64
5724.70	Peak	61.34	12.29	73.63	121.53	-47.89
5745.00	Peak	95.55	12.40	107.95	--	--
5745.00	Average	89.23	12.40	101.63	--	--
5852.98	Peak	42.22	12.46	54.68	115.41	-60.73
5858.73	Peak	42.71	12.45	55.16	109.76	-54.60
5910.24	Peak	43.28	12.36	55.63	79.09	-23.46
5931.99	Peak	42.01	12.35	54.36	68.20	-13.84

Report No.: TMWK2309003421KR

Page: 130 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

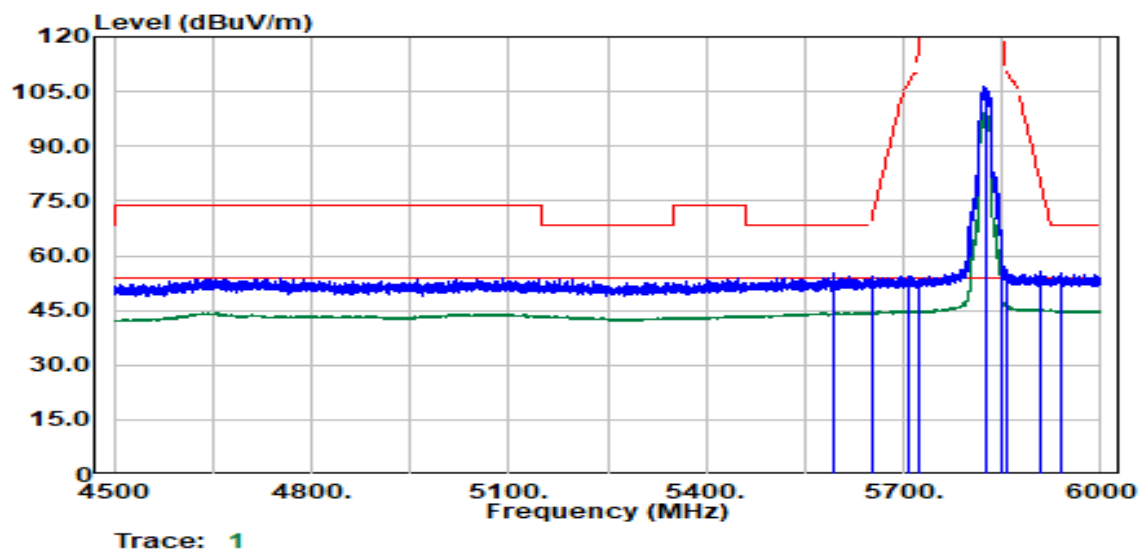


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5592.68	Peak	43.62	11.41	55.03	68.20	-13.17
5654.44	Peak	42.55	11.75	54.29	71.50	-17.21
5707.20	Peak	42.29	12.20	54.49	107.22	-52.72
5723.70	Peak	41.26	12.29	53.55	119.25	-65.69
5825.00	Peak	93.84	12.57	106.41	--	--
5825.00	Average	87.03	12.57	99.60	--	--
5850.00	Peak	49.13	12.47	61.60	122.20	-60.60
5857.73	Peak	43.83	12.45	56.28	110.04	-53.76
5909.99	Peak	43.32	12.36	55.68	79.28	-23.60
5941.24	Peak	43.11	12.35	55.46	68.20	-12.74

Report No.: TMWK2309003421KR

Page: 131 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

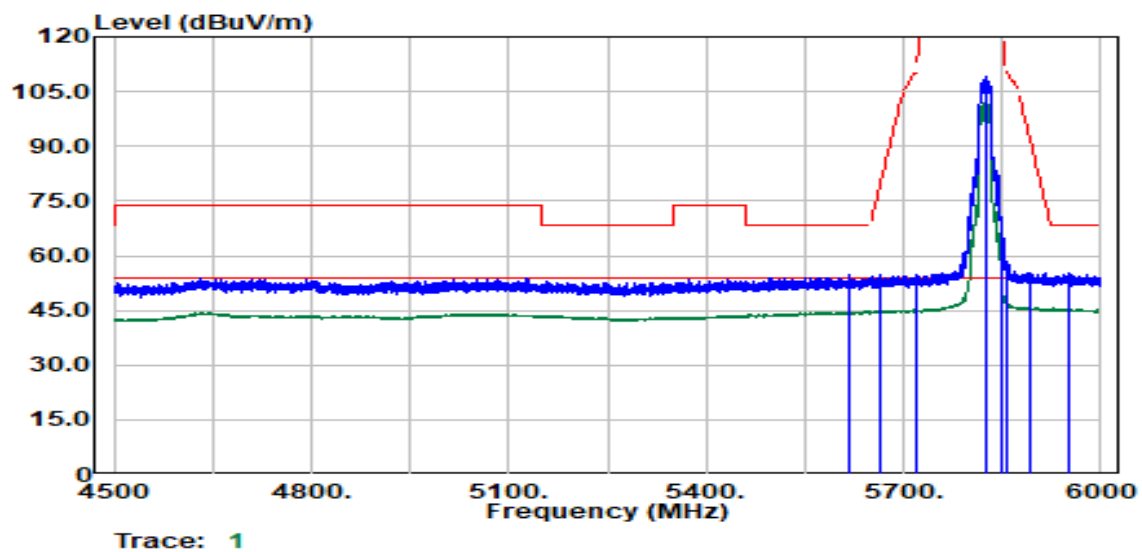


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5617.44	Peak	43.21	11.54	54.75	68.20	-13.45
5665.19	Peak	42.82	11.85	54.66	79.48	-24.81
5719.95	Peak	42.69	12.27	54.96	110.79	-55.83
5720.20	Peak	42.73	12.27	54.99	111.26	-56.27
5825.00	Peak	96.68	12.57	109.25	--	--
5825.00	Average	90.41	12.57	102.98	--	--
5850.00	Peak	54.16	12.47	66.63	122.20	-55.57
5856.23	Peak	46.04	12.46	58.50	110.46	-51.96
5891.73	Peak	43.06	12.38	55.43	92.78	-37.35
5950.99	Peak	43.03	12.35	55.38	68.20	-12.82

Report No.: TMWK2309003421KR

Page: 132 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

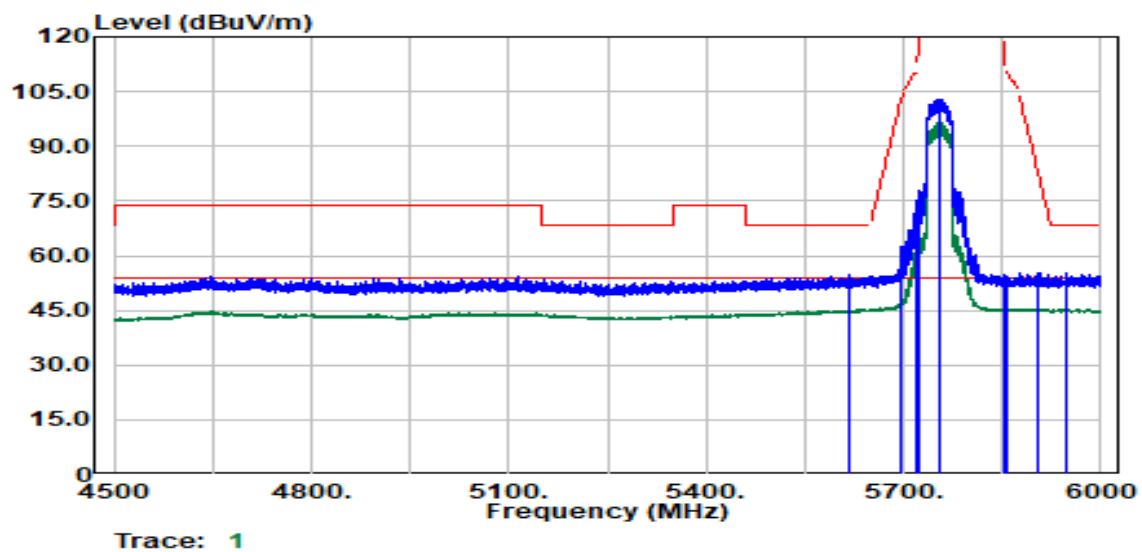


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5616.94	Peak	43.26	11.54	54.80	68.20	-13.40
5697.70	Peak	50.16	12.14	62.30	103.50	-41.20
5719.95	Peak	61.40	12.27	73.67	110.79	-37.11
5722.70	Peak	64.89	12.28	77.17	116.97	-39.79
5755.00	Peak	90.51	12.45	102.96	--	--
5755.00	Average	84.01	12.45	96.47	--	--
5852.73	Peak	42.13	12.46	54.59	115.98	-61.39
5858.23	Peak	41.77	12.45	54.22	109.90	-55.67
5903.73	Peak	43.04	12.36	55.40	83.90	-28.50
5946.49	Peak	42.80	12.35	55.15	68.20	-13.05

Report No.: TMWK2309003421KR

Page: 133 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

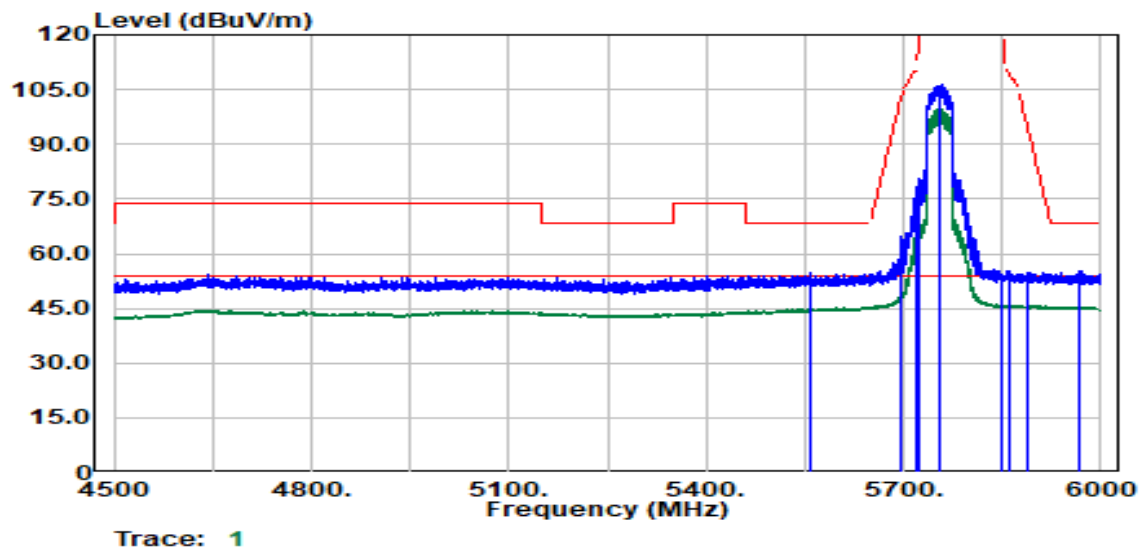


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5557.93	Peak	43.50	11.23	54.73	68.20	-13.47
5697.45	Peak	52.73	12.14	64.87	103.32	-38.45
5719.95	Peak	64.60	12.27	76.87	110.79	-33.92
5724.95	Peak	67.41	12.29	79.71	122.10	-42.39
5755.00	Peak	93.98	12.45	106.43	--	--
5755.00	Average	87.33	12.45	99.79	--	--
5850.23	Peak	42.09	12.47	54.56	121.69	-67.12
5861.48	Peak	42.83	12.44	55.27	108.98	-53.71
5887.48	Peak	42.47	12.39	54.85	95.93	-41.08
5967.00	Peak	42.87	12.36	55.24	68.20	-12.96

Report No.: TMWK2309003421KR

Page: 134 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

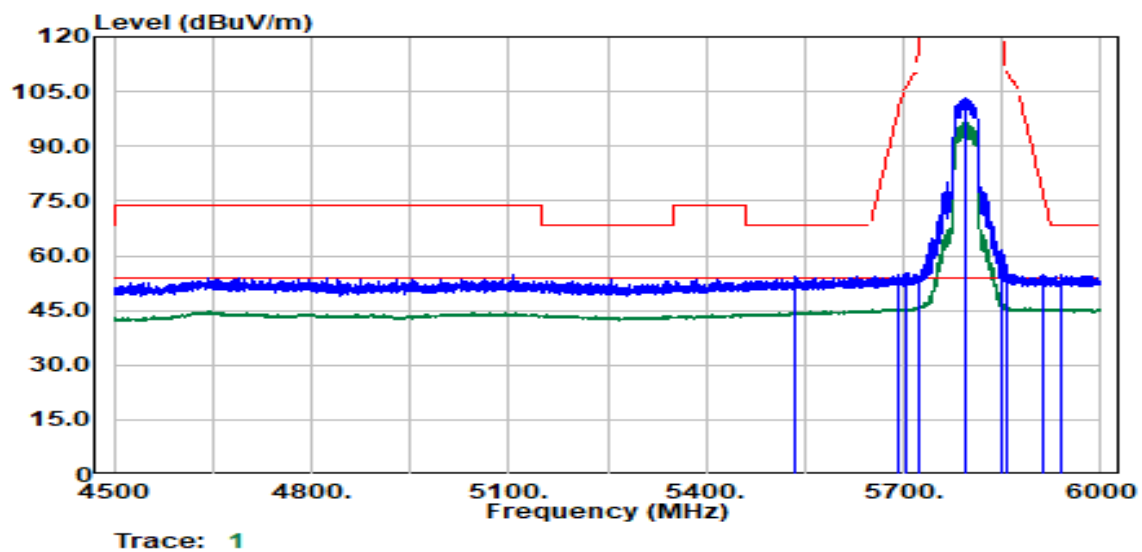


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
5534.42	Peak	43.45	11.10	54.55	68.20	-13.65
5693.95	Peak	42.64	12.11	54.74	100.74	-46.00
5702.70	Peak	42.93	12.17	55.10	105.96	-50.86
5722.95	Peak	42.23	12.28	54.51	117.54	-63.03
5795.00	Peak	90.74	12.65	103.39	--	--
5795.00	Average	84.19	12.65	96.83	--	--
5850.98	Peak	48.31	12.47	60.77	119.98	-59.20
5855.98	Peak	44.87	12.46	57.33	110.53	-53.20
5910.49	Peak	42.29	12.36	54.65	78.91	-24.26
5938.49	Peak	42.31	12.35	54.66	68.20	-13.54

Report No.: TMWK2309003421KR

Page: 135 / 221
Rev.: 01

Project No. : TM-2309000356P
Operation Band : 802.11n40/Band4
Frequency : 5795 MHz
Operation Mode : Bandedge
EUT Pol : H
Setting : 15.5

Test Date : 2023-10-06
Temp./Humi. : 25.0/61
Antenna Pol. : HORIZONTAL
Engineer : Czerny Lin
Test Chamber : 966D

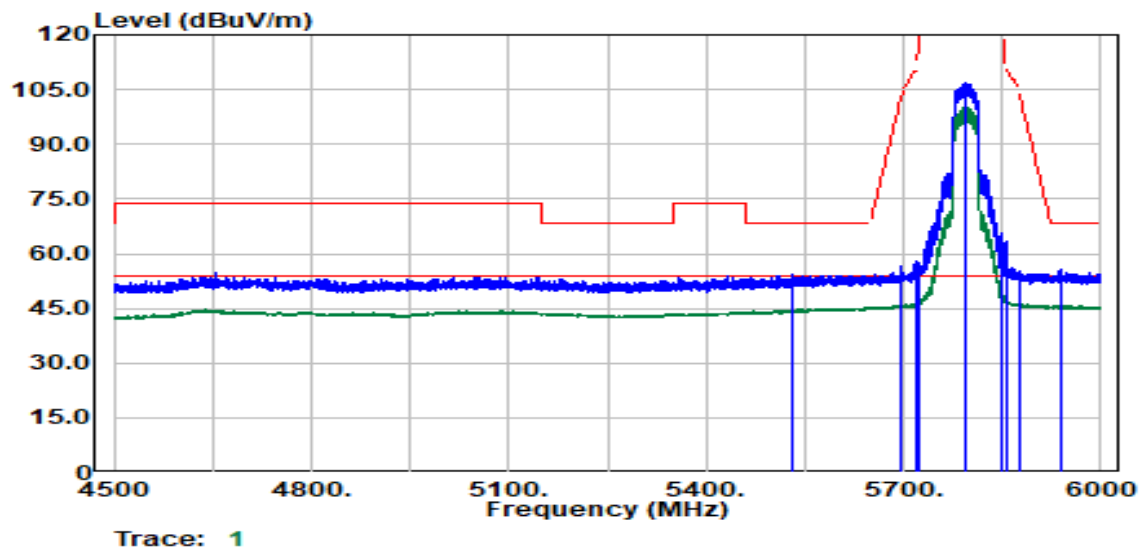


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5531.67	Peak	43.14	11.08	54.23	68.20	-13.97
5695.45	Peak	44.52	12.12	56.64	101.85	-45.20
5719.70	Peak	45.65	12.27	57.91	110.72	-52.80
5722.95	Peak	43.91	12.28	56.19	117.54	-61.34
5795.00	Peak	94.17	12.65	106.82	--	--
5795.00	Average	87.72	12.65	100.36	--	--
5850.73	Peak	52.10	12.47	64.57	120.55	-55.97
5855.73	Peak	50.72	12.46	63.18	110.60	-47.42
5876.73	Peak	42.67	12.41	55.08	103.91	-48.83
5940.24	Peak	43.26	12.35	55.61	68.20	-12.59

Report No.: TMWK2309003421KR

Page: 136 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :16

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

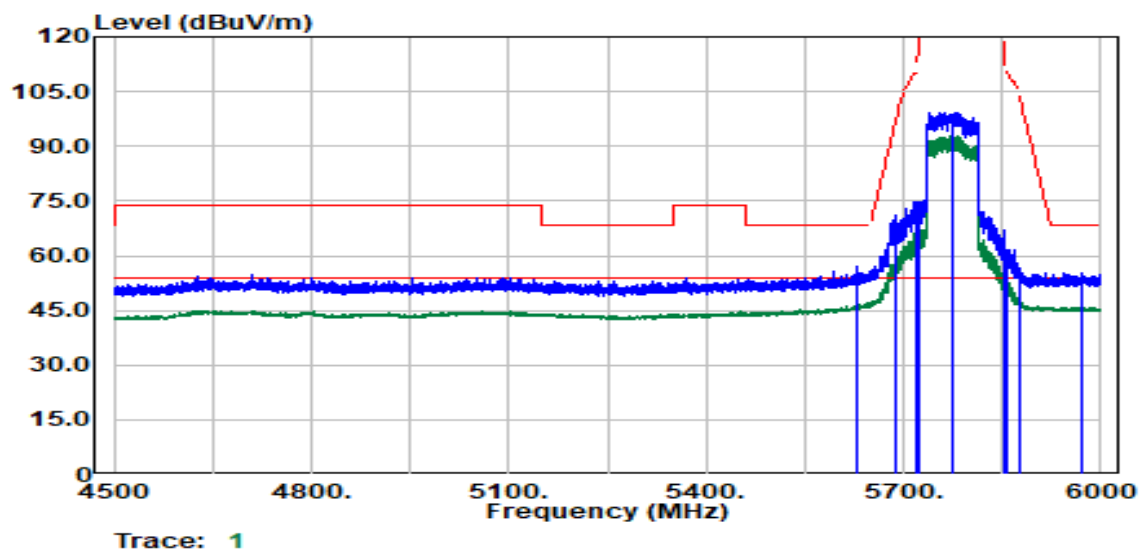


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5628.94	Peak	45.43	11.60	57.03	68.20	-11.17
5689.45	Peak	59.16	12.07	71.23	97.42	-26.19
5719.45	Peak	62.66	12.27	74.93	110.65	-35.72
5723.95	Peak	62.50	12.29	74.79	119.82	-45.03
5775.00	Peak	86.83	12.55	99.38	--	--
5775.00	Average	80.16	12.55	92.71	--	--
5851.98	Peak	54.66	12.47	67.13	117.70	-50.57
5856.98	Peak	48.99	12.45	61.44	110.25	-48.80
5877.23	Peak	44.22	12.41	56.63	103.54	-46.92
5970.50	Peak	42.95	12.37	55.31	68.20	-12.89

Report No.: TMWK2309003421KR

Page: 137 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :H
Setting :16

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

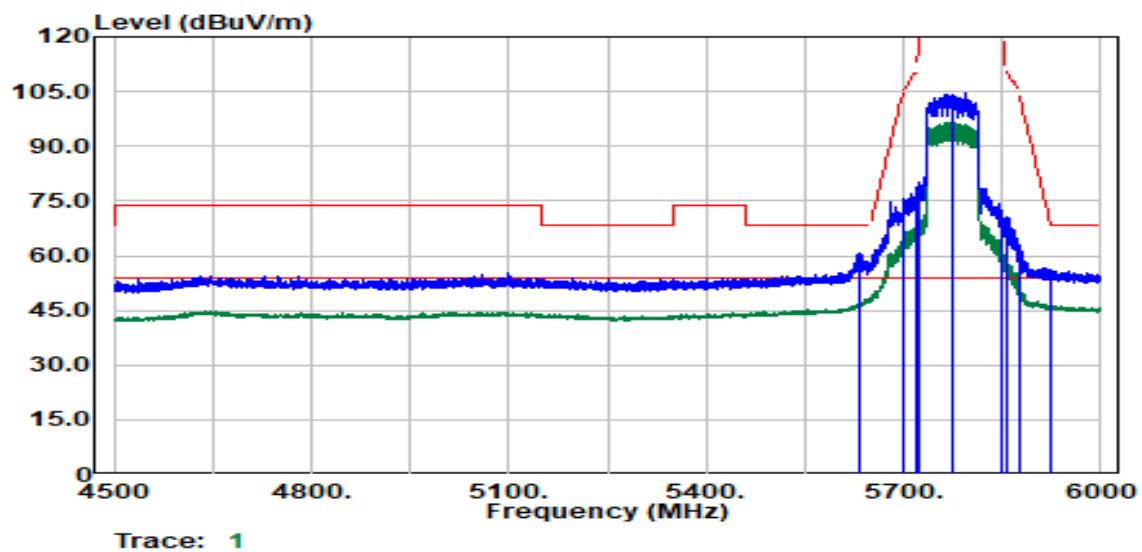

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5632.69	Peak	49.15	11.62	60.77	68.20	-7.43
5699.95	Peak	62.64	12.16	74.80	105.16	-30.36
5719.95	Peak	65.69	12.27	77.96	110.79	-32.83
5724.95	Peak	67.32	12.29	79.61	122.10	-42.48
5775.00	Peak	92.17	12.55	104.72	--	--
5775.00	Average	84.06	12.55	96.61	--	--
5850.00	Peak	58.55	12.47	71.02	122.20	-51.18
5855.23	Peak	58.00	12.46	70.46	110.74	-40.27
5875.48	Peak	50.69	12.41	63.10	104.84	-41.74
5925.24	Peak	43.99	12.35	56.35	68.20	-11.85




Report No.: TMWK2309003421KR

Page: 138 / 221
Rev.: 01

TX Test Data

Project No. :TM-2309000356P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

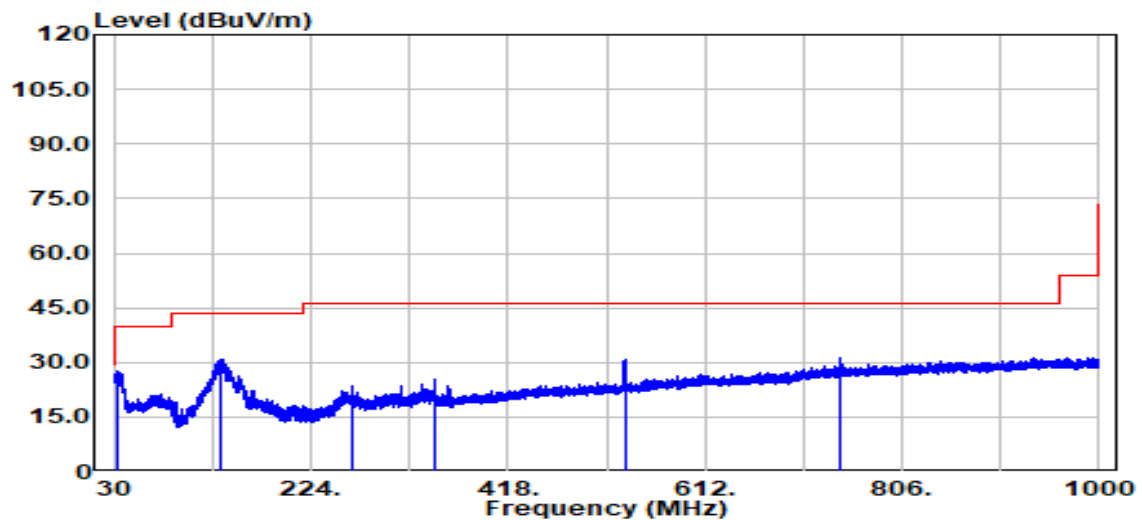


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
34.07	Peak	41.59	-14.03	27.56	40.00	-12.44
134.86	Peak	45.04	-14.07	30.97	43.50	-12.53
263.96	Peak	37.04	-13.53	23.51	46.00	-22.49
345.64	Peak	36.35	-11.18	25.17	46.00	-20.83
532.95	Peak	37.80	-6.85	30.95	46.00	-15.05
745.47	Peak	33.59	-2.40	31.20	46.00	-14.80

Report No.: TMWK2309003421KR

Page: 139 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

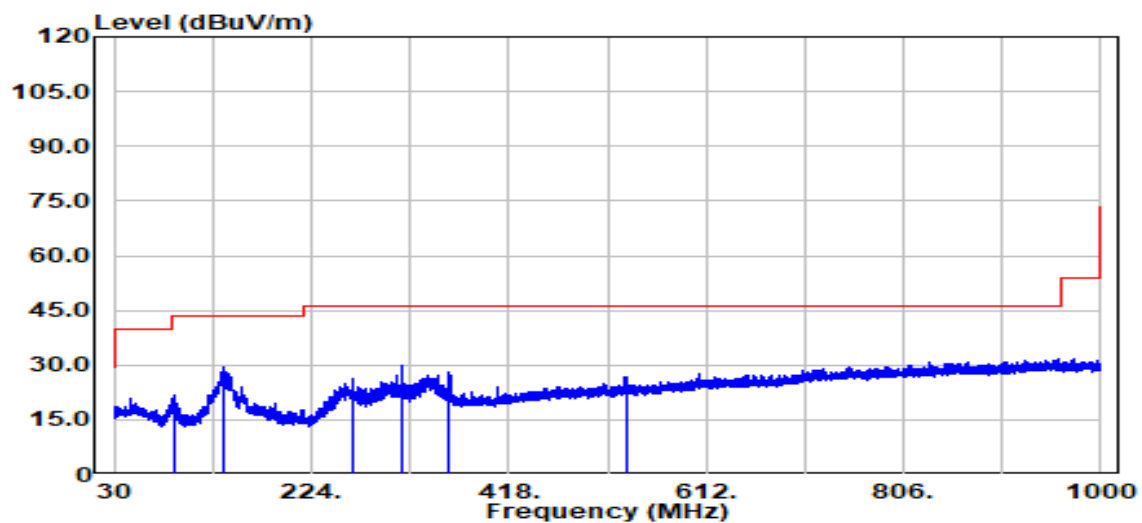

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
89.36	Peak	40.57	-18.72	21.85	43.50	-21.65
137.86	Peak	43.19	-13.77	29.41	43.50	-14.09
263.96	Peak	39.62	-13.53	26.09	46.00	-19.91
312.08	Peak	41.80	-11.91	29.89	46.00	-16.11
359.99	Peak	39.11	-11.10	28.01	46.00	-17.99
532.85	Peak	33.46	-6.85	26.62	46.00	-19.38




Report No.: TMWK2309003421KR

Page: 140 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

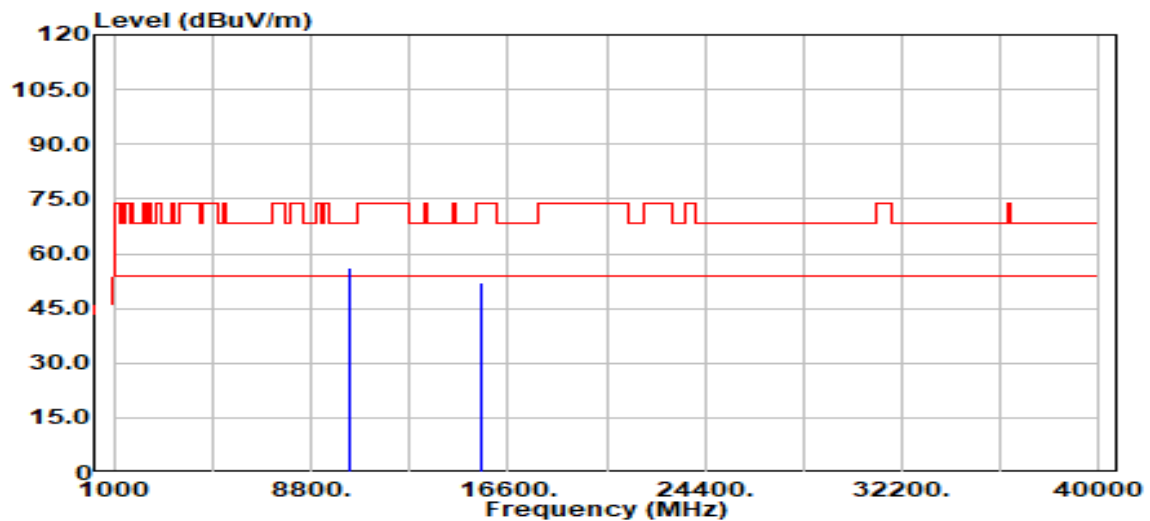

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	51.48	4.45	55.93	68.20	-12.27
15540.00	Peak	45.12	7.11	52.24	74.00	-21.76
15540.00	Average	35.86	7.11	42.98	54.00	-11.02




Report No.: TMWK2309003421KR

Page: 141 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

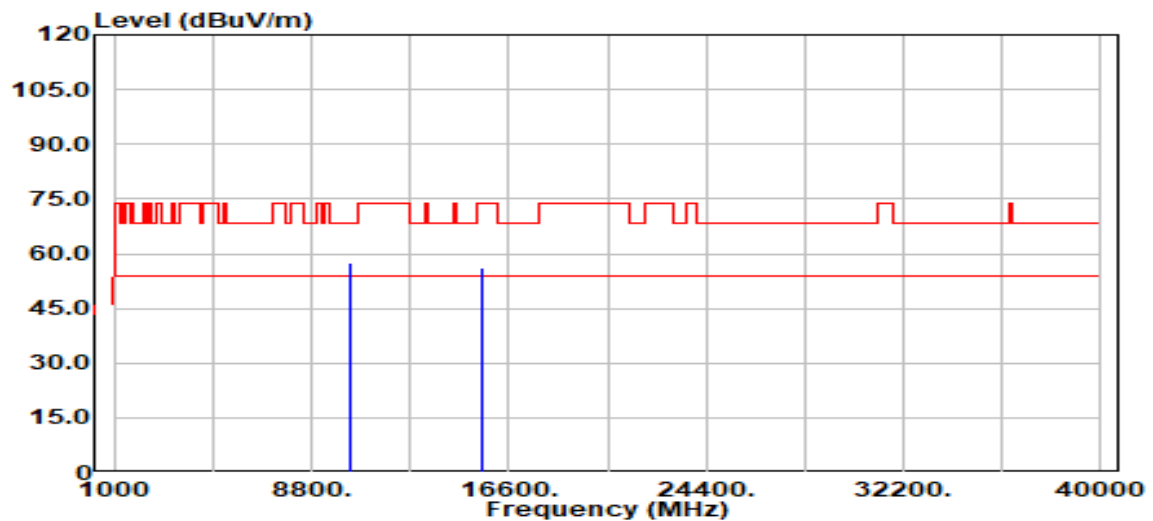

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	52.85	4.45	57.29	68.20	-10.91
15540.00	Peak	49.14	7.11	56.26	74.00	-17.75
15540.00	Average	36.25	7.11	43.36	54.00	-10.64




Report No.: TMWK2309003421KR

Page: 142 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :H
Setting :12

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

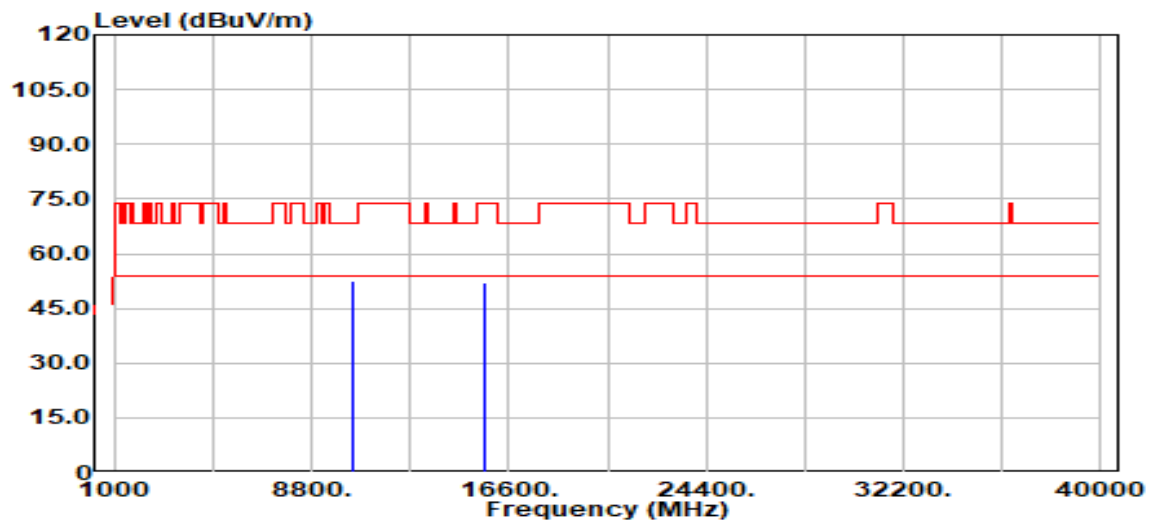

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	48.16	4.15	52.31	68.20	-15.89
15660.00	Peak	44.54	7.33	51.88	74.00	-22.12
15660.00	Average	35.16	7.33	42.49	54.00	-11.51




Report No.: TMWK2309003421KR

Page: 143 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :H
Setting :12

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

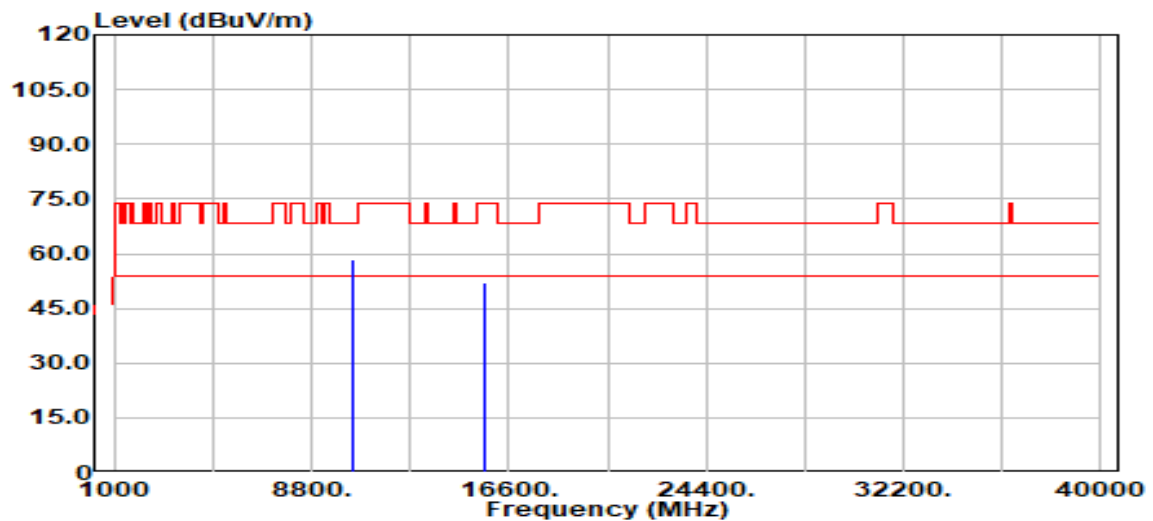

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	54.13	4.15	58.28	68.20	-9.92
15660.00	Peak	44.55	7.33	51.88	74.00	-22.12
15660.00	Average	35.48	7.33	42.82	54.00	-11.18




Report No.: TMWK2309003421KR

Page: 144 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :H
Setting :12

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

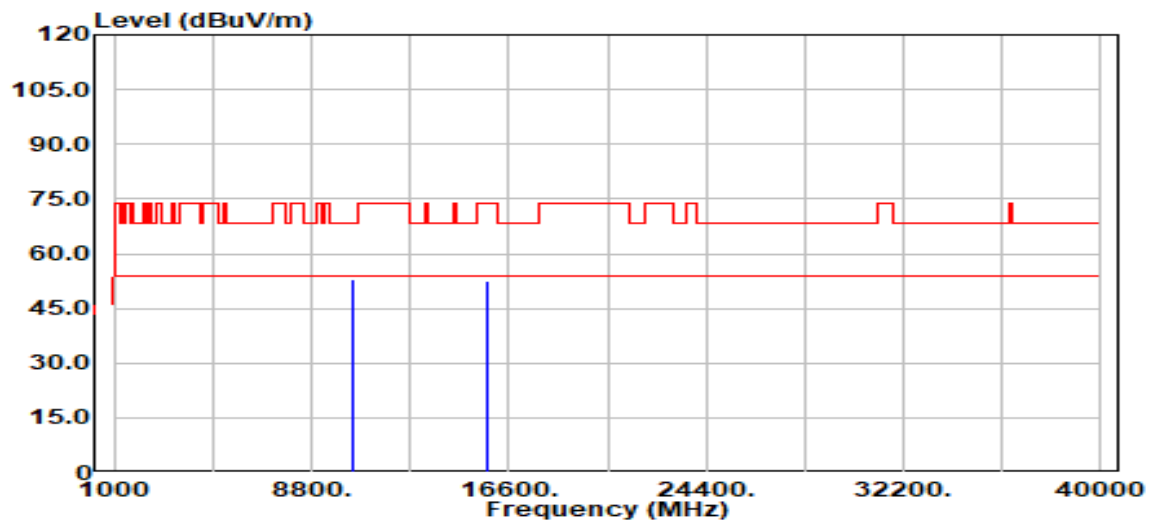

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	49.16	4.05	53.21	68.20	-14.99
15720.00	Peak	44.85	7.53	52.39	74.00	-21.61
15720.00	Average	35.51	7.53	43.04	54.00	-10.96




Report No.: TMWK2309003421KR

Page: 145 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :H
Setting :12

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

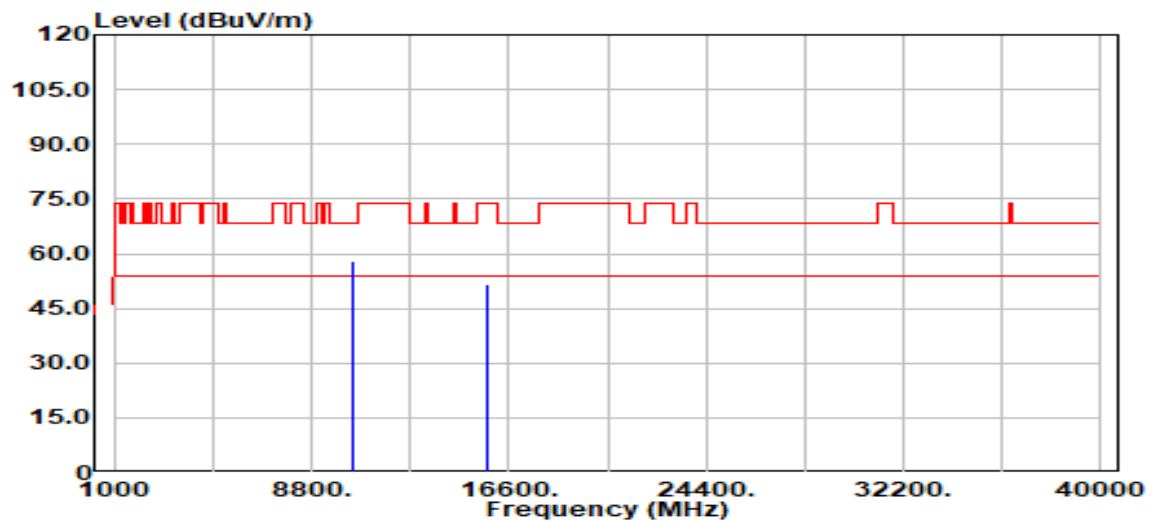

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	53.88	4.05	57.93	68.20	-10.27
15720.00	Peak	43.96	7.53	51.49	74.00	-22.51
15720.00	Average	35.19	7.53	42.72	54.00	-11.28




Report No.: TMWK2309003421KR

Page: 146 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

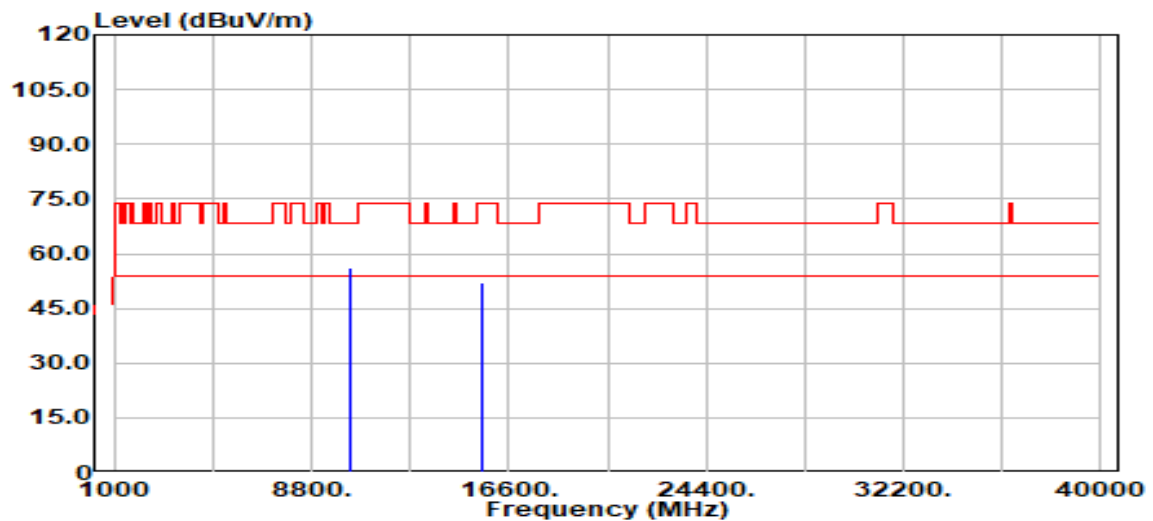

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	51.51	4.45	55.96	68.20	-12.24
15540.00	Peak	45.12	7.11	52.24	74.00	-21.77
15540.00	Average	35.89	7.11	43.00	54.00	-11.00




Report No.: TMWK2309003421KR

Page: 147 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

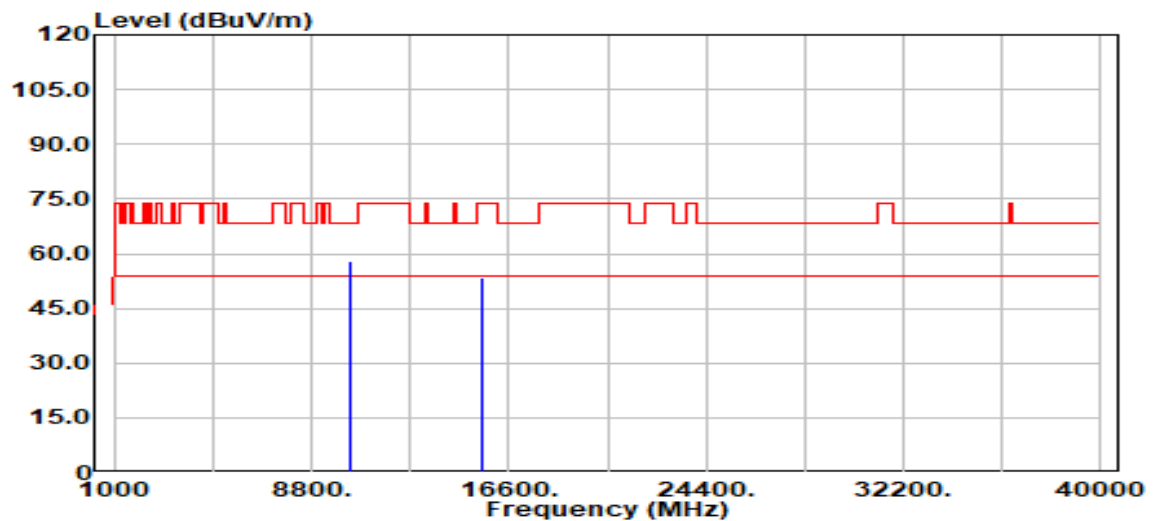

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	53.68	4.45	58.13	68.20	-10.07
15540.00	Peak	46.14	7.11	53.25	74.00	-20.75
15540.00	Average	36.13	7.11	43.25	54.00	-10.75




Report No.: TMWK2309003421KR

Page: 148 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

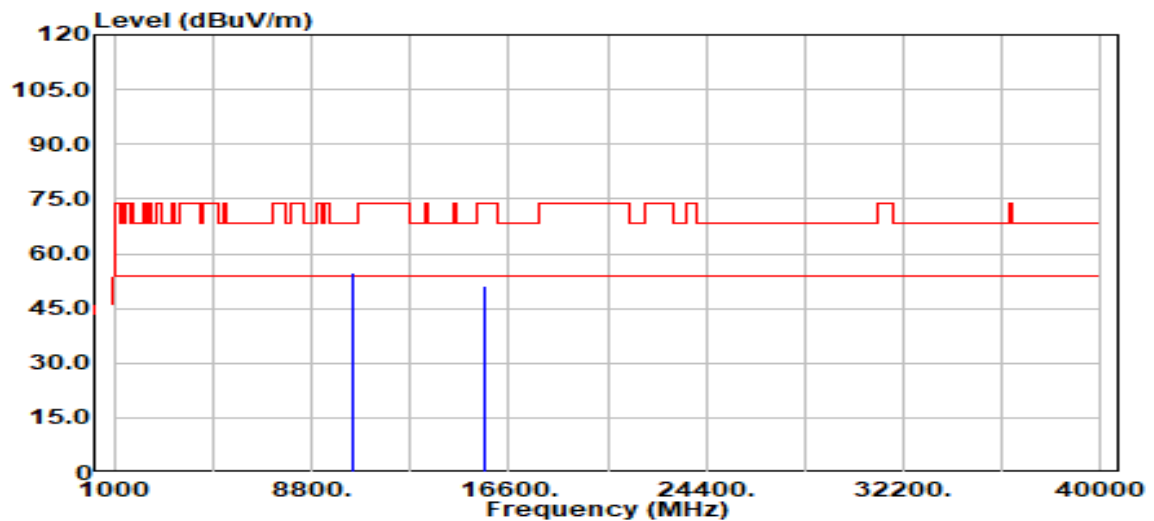

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	50.56	4.15	54.71	68.20	-13.49
15660.00	Peak	43.97	7.33	51.30	74.00	-22.70
15660.00	Average	35.86	7.33	43.19	54.00	-10.81




Report No.: TMWK2309003421KR

Page: 149 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band1
Frequency :5220 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

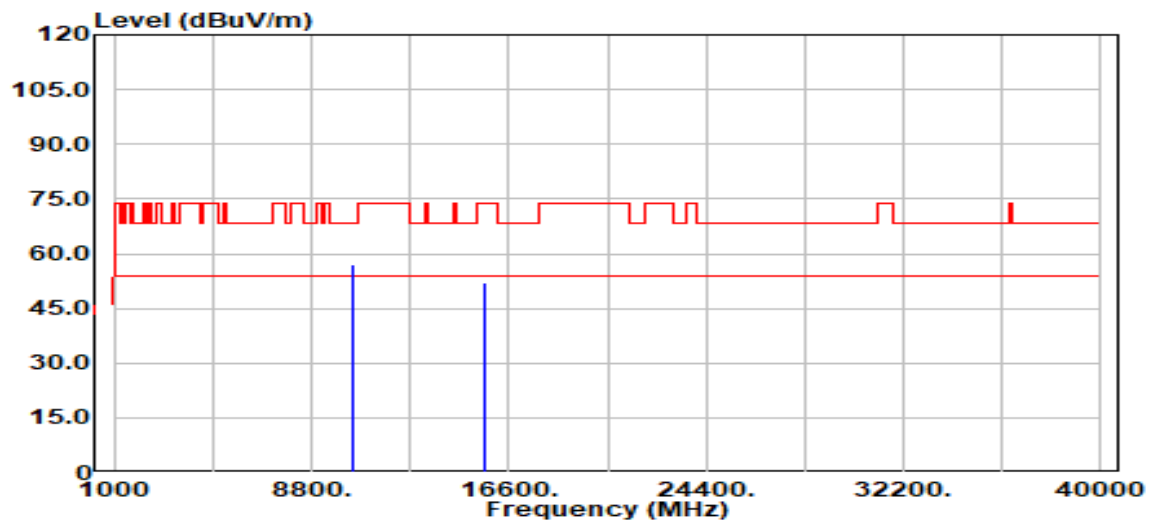

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10440.00	Peak	52.89	4.15	57.04	68.20	-11.16
15660.00	Peak	44.85	7.33	52.19	74.00	-21.82
15660.00	Average	36.00	7.33	43.33	54.00	-10.67




Report No.: TMWK2309003421KR

Page: 150 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

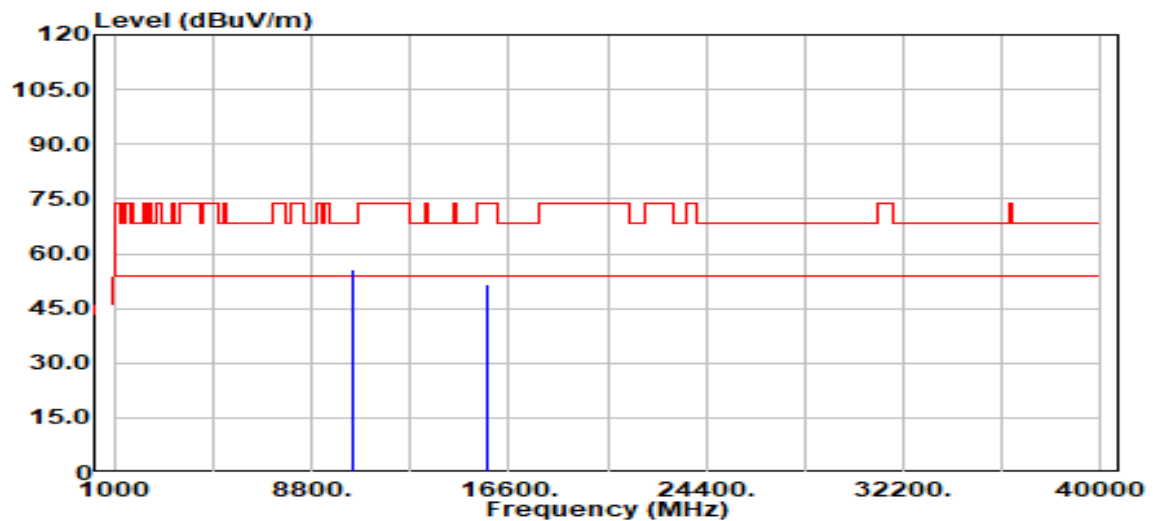

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	51.56	4.05	55.61	68.20	-12.59
15720.00	Peak	44.12	7.53	51.66	74.00	-22.34
15720.00	Average	35.15	7.53	42.69	54.00	-11.31




Report No.: TMWK2309003421KR

Page: 151 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

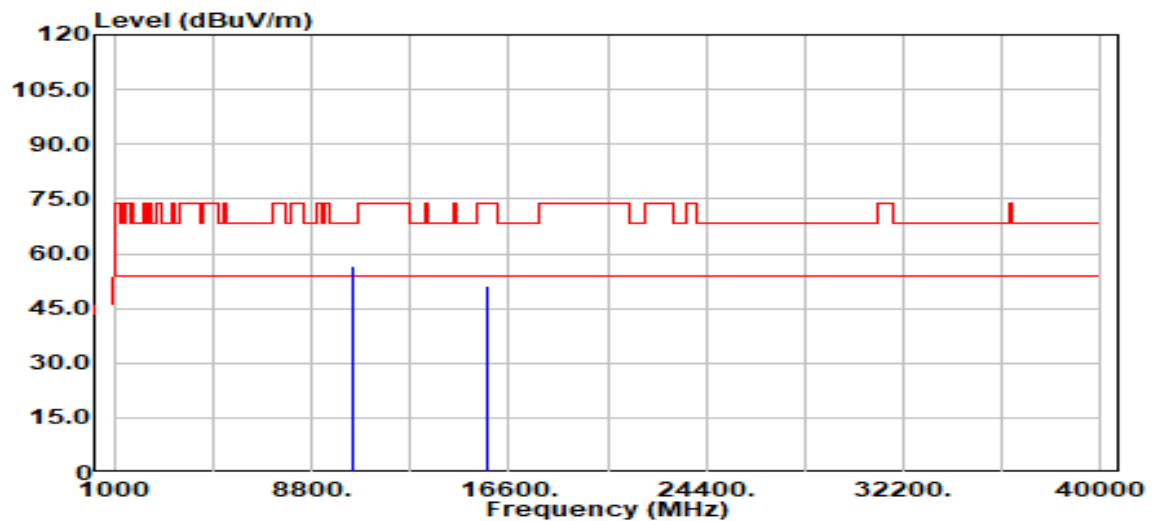

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	52.52	4.05	56.57	68.20	-11.63
15720.00	Peak	43.85	7.53	51.39	74.00	-22.61
15720.00	Average	35.33	7.53	42.87	54.00	-11.13




Report No.: TMWK2309003421KR

Page: 152 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

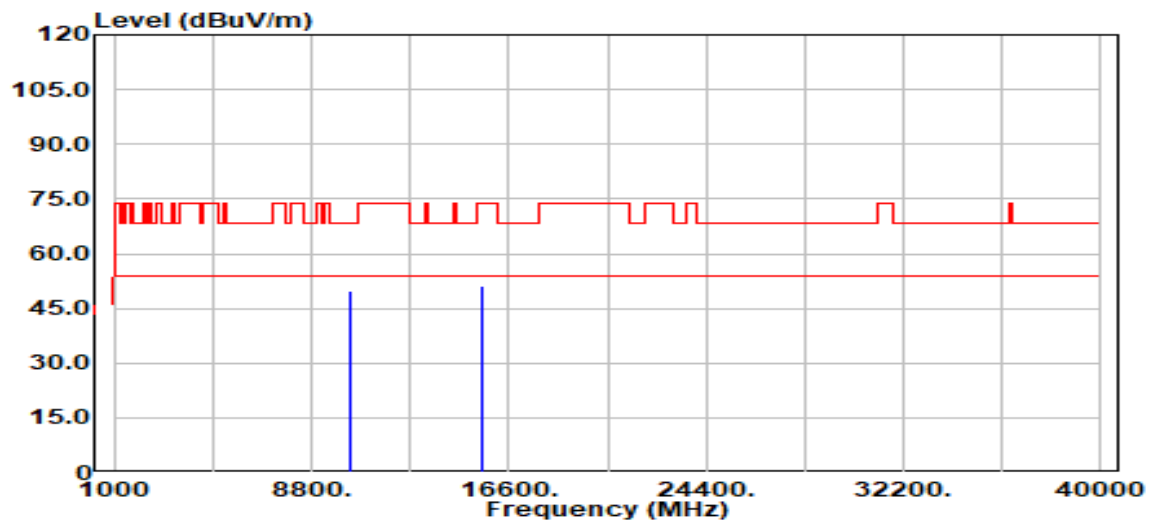

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	45.26	4.44	49.70	68.20	-18.50
15570.00	Peak	44.17	7.11	51.28	74.00	-22.72
15570.00	Average	35.70	7.11	42.81	54.00	-11.19




Report No.: TMWK2309003421KR

Page: 153 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

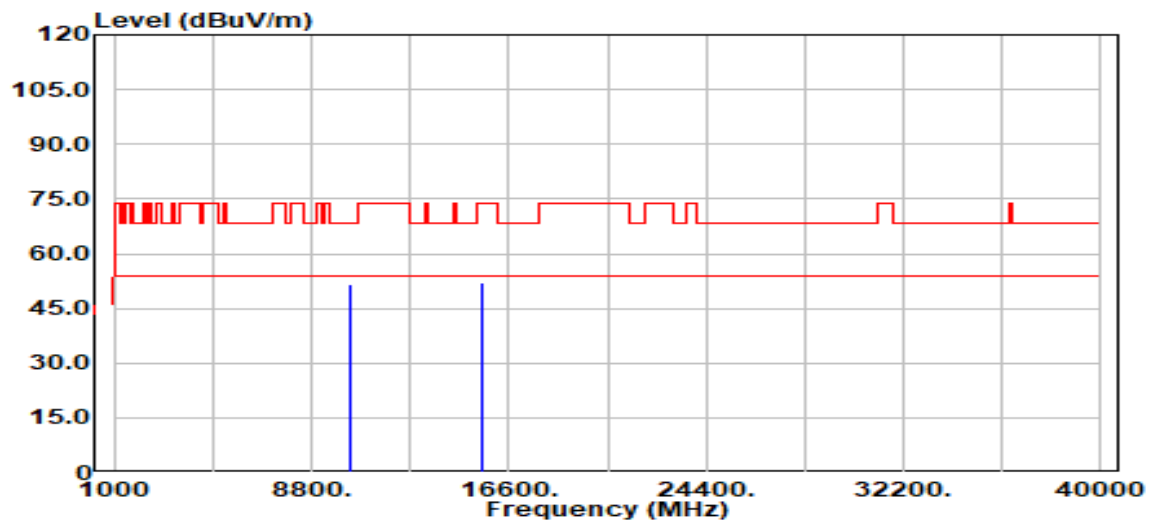

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	47.33	4.44	51.77	68.20	-16.43
15570.00	Peak	44.91	7.11	52.02	74.00	-21.98
15570.00	Average	35.76	7.11	42.88	54.00	-11.12




Report No.: TMWK2309003421KR

Page: 154 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

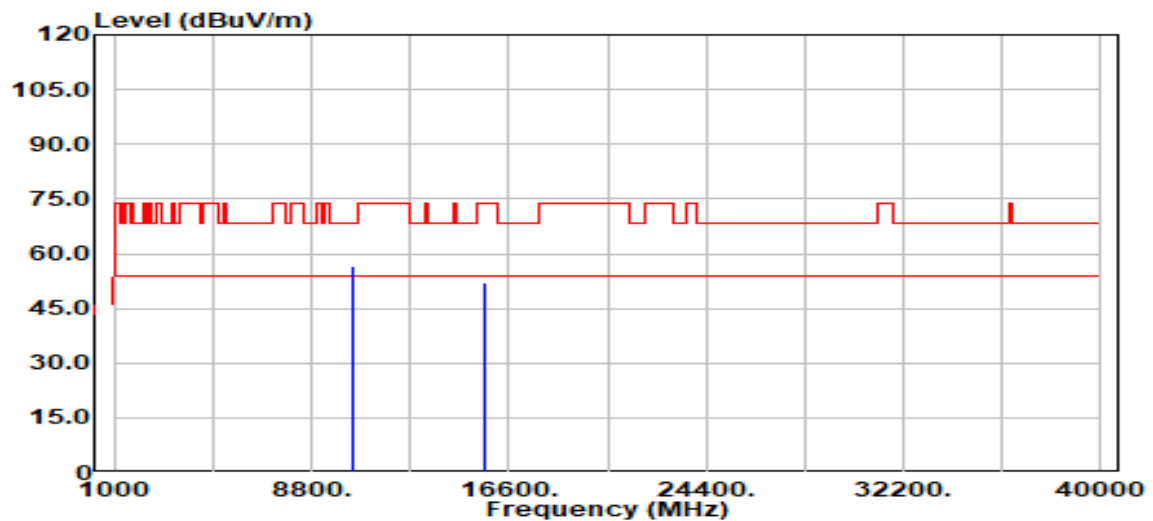

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	52.61	4.07	56.68	68.20	-11.52
15690.00	Peak	44.79	7.29	52.08	74.00	-21.92
15690.00	Average	36.32	7.29	43.60	54.00	-10.40




Report No.: TMWK2309003421KR

Page: 155 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

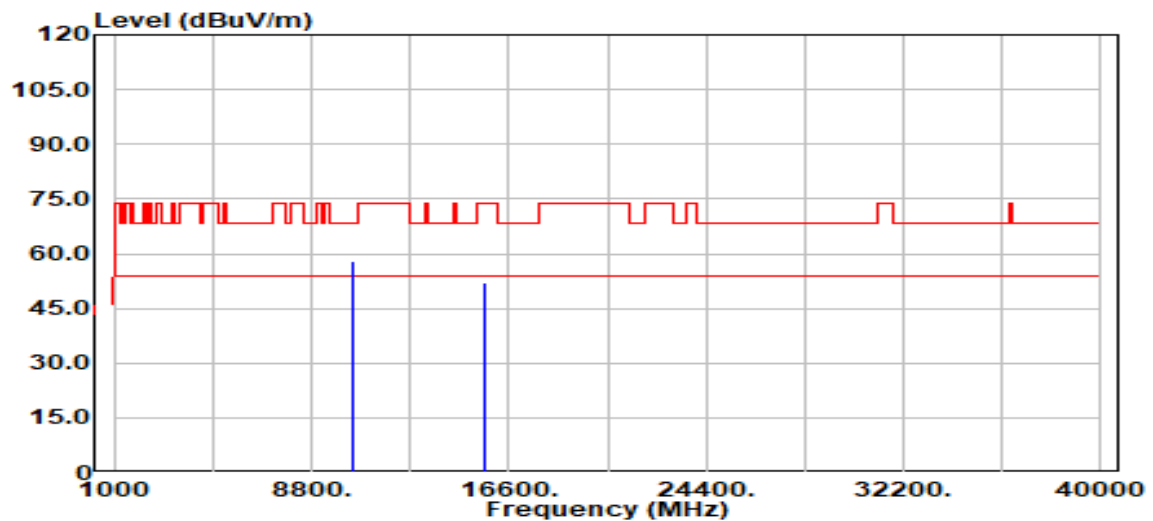

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	53.73	4.07	57.80	68.20	-10.40
15690.00	Peak	44.76	7.29	52.05	74.00	-21.95
15690.00	Average	36.26	7.29	43.55	54.00	-10.45




Report No.: TMWK2309003421KR

Page: 156 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :H
Setting :9.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

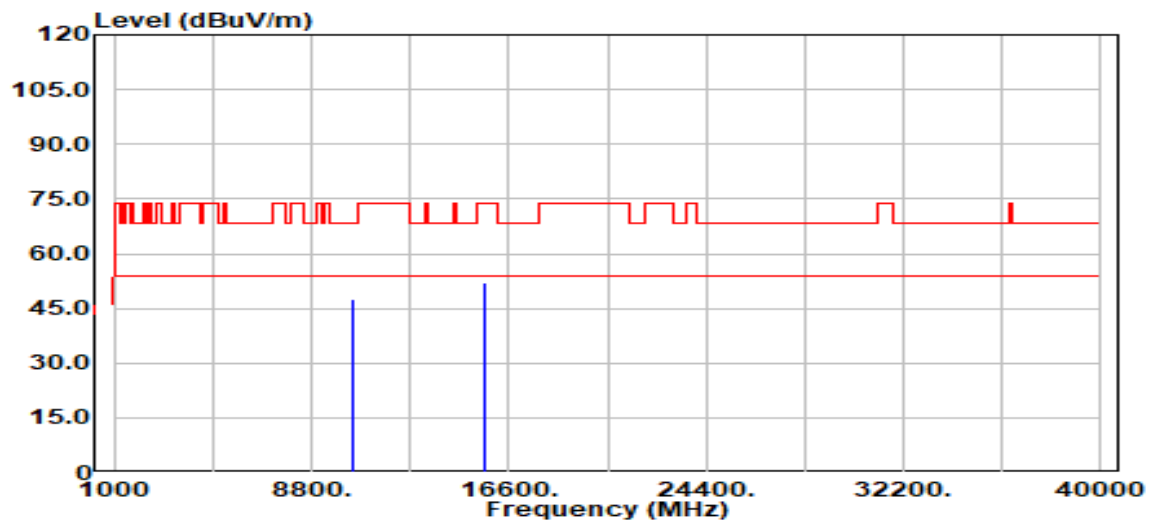

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	43.42	4.29	47.71	68.20	-20.49
15630.00	Peak	44.63	7.27	51.90	74.00	-22.10
15630.00	Average	36.66	7.27	43.93	54.00	-10.07




Report No.: TMWK2309003421KR

Page: 157 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :H
Setting :9.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

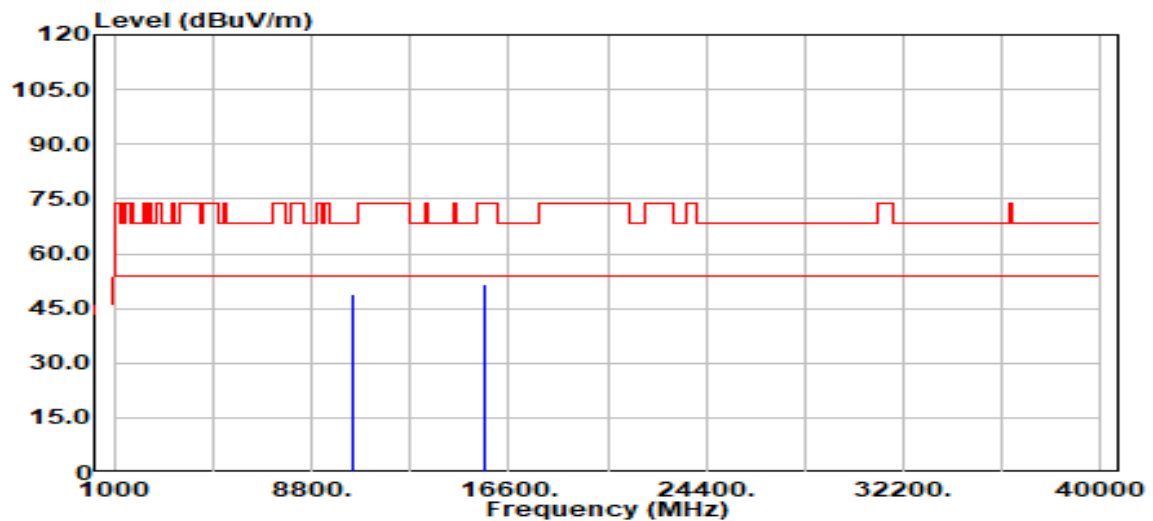


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	44.40	4.29	48.69	68.20	-19.51
15630.00	Peak	44.51	7.27	51.78	74.00	-22.22
15630.00	Average	36.62	7.27	43.89	54.00	-10.12

Report No.: TMWK2309003421KR

Page: 158 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

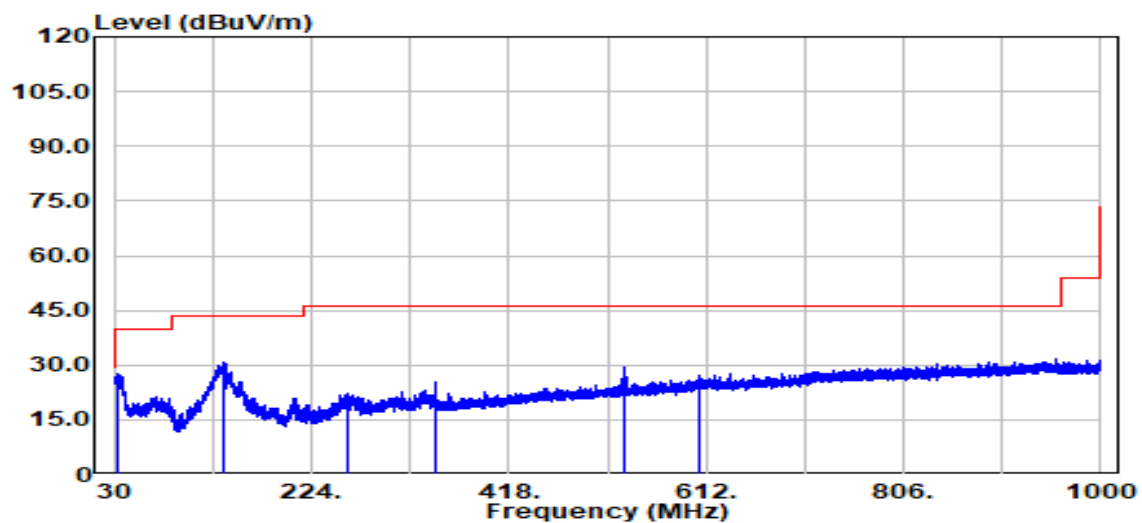


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
34.17	Peak	41.76	-14.01	27.75	40.00	-12.25
138.25	Peak	44.63	-13.72	30.92	43.50	-12.58
258.53	Peak	35.75	-13.71	22.04	46.00	-23.96
345.64	Peak	36.47	-11.18	25.29	46.00	-20.71
531.68	Peak	36.48	-6.87	29.61	46.00	-16.39
604.82	Peak	32.09	-4.85	27.24	46.00	-18.76

Report No.: TMWK2309003421KR

Page: 159 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

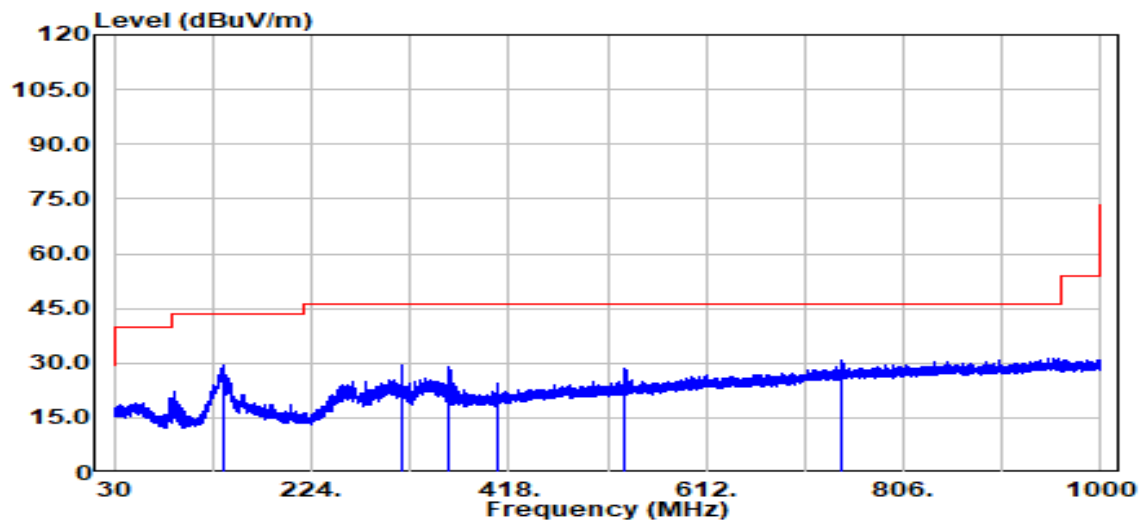

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
137.67	Peak	43.34	-13.81	29.53	43.50	-13.98
311.98	Peak	41.56	-11.92	29.64	46.00	-16.36
359.99	Peak	40.29	-11.10	29.19	46.00	-16.81
408.01	Peak	33.99	-9.59	24.40	46.00	-21.60
530.81	Peak	35.19	-6.89	28.30	46.00	-17.70
744.99	Peak	33.01	-2.41	30.60	46.00	-15.40




Report No.: TMWK2309003421KR

Page: 160 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

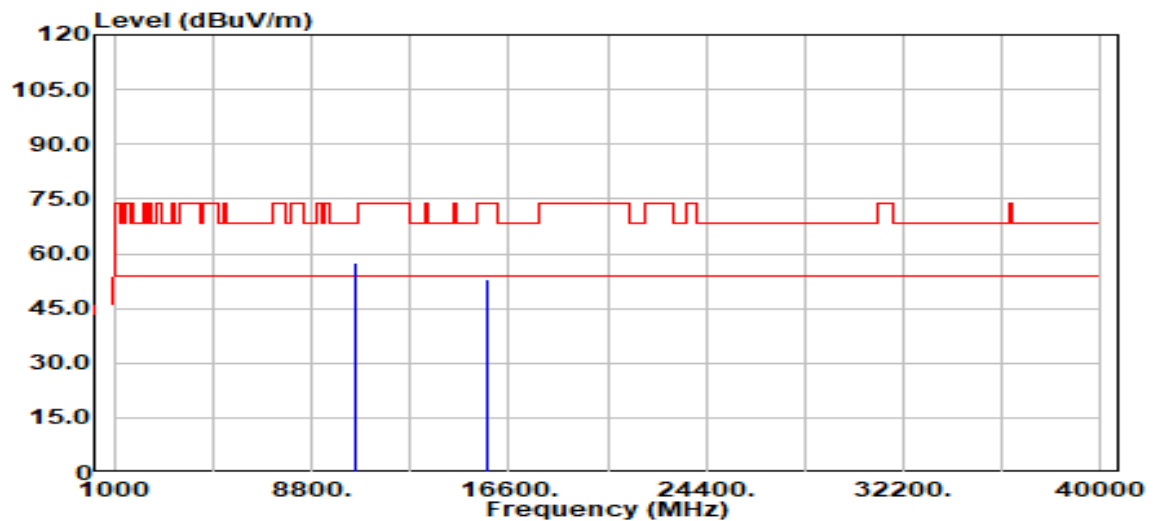

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	53.64	4.04	57.68	68.20	-10.52
15780.00	Peak	44.89	7.89	52.78	74.00	-21.22
15780.00	Average	36.49	7.89	44.38	54.00	-9.62




Report No.: TMWK2309003421KR

Page: 161 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

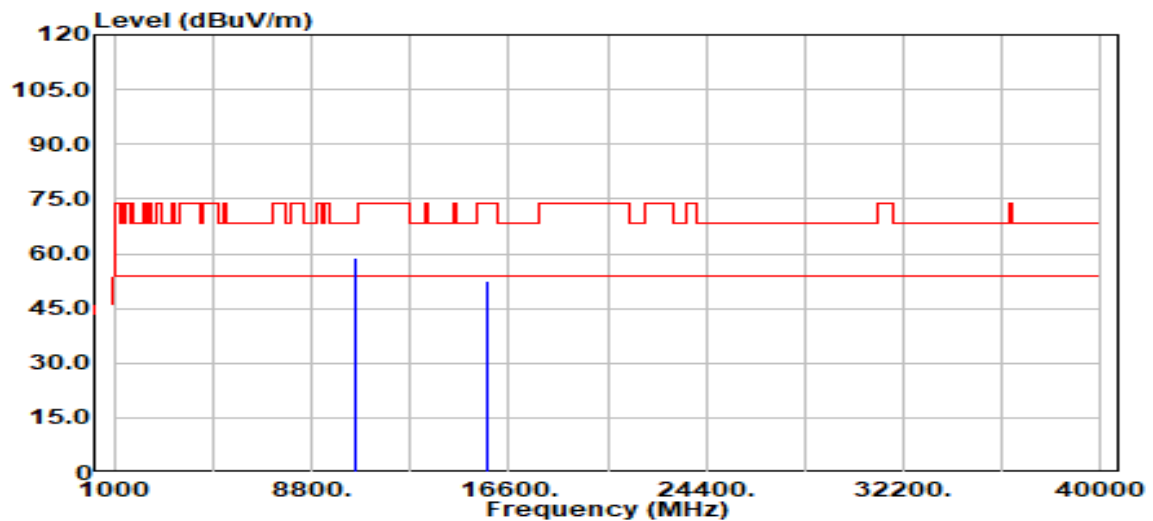

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	54.67	4.04	58.71	68.20	-9.49
15780.00	Peak	44.86	7.89	52.75	74.00	-21.25
15780.00	Average	36.88	7.89	44.76	54.00	-9.24




Report No.: TMWK2309003421KR

Page: 162 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

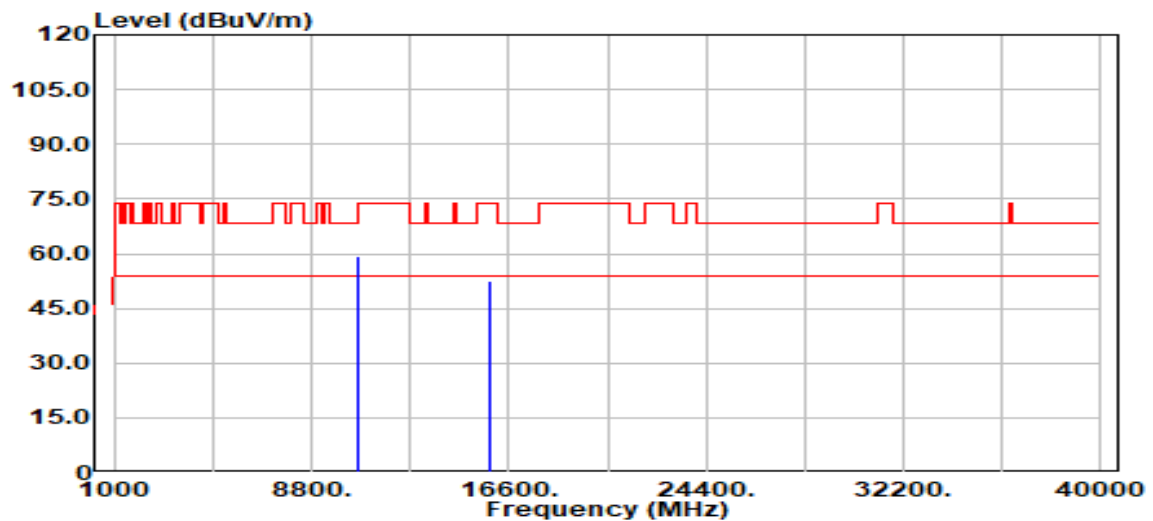

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10600.00	Peak	55.06	4.12	59.18	74.00	-14.82
10600.00	Average	44.72	4.12	48.84	54.00	-5.16
15900.00	Peak	44.34	7.99	52.33	74.00	-21.67
15900.00	Average	35.68	7.99	43.67	54.00	-10.33




Report No.: TMWK2309003421KR

Page: 163 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

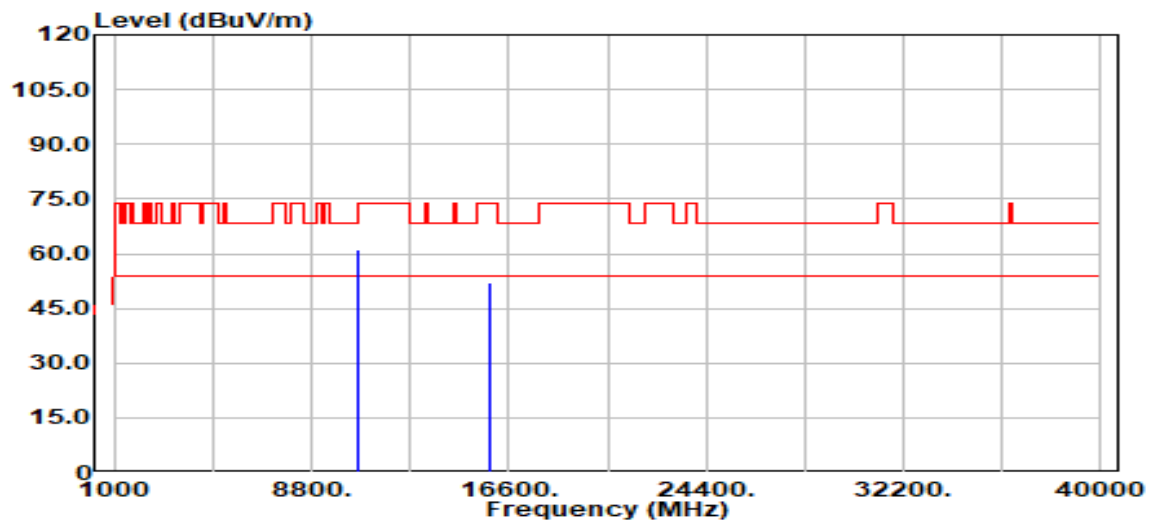

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	56.96	4.12	61.08	74.00	-12.92
10600.00	Average	46.71	4.12	50.83	54.00	-3.17
15900.00	Peak	43.92	7.99	51.91	74.00	-22.09
15900.00	Average	35.98	7.99	43.97	54.00	-10.03




Report No.: TMWK2309003421KR

Page: 164 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

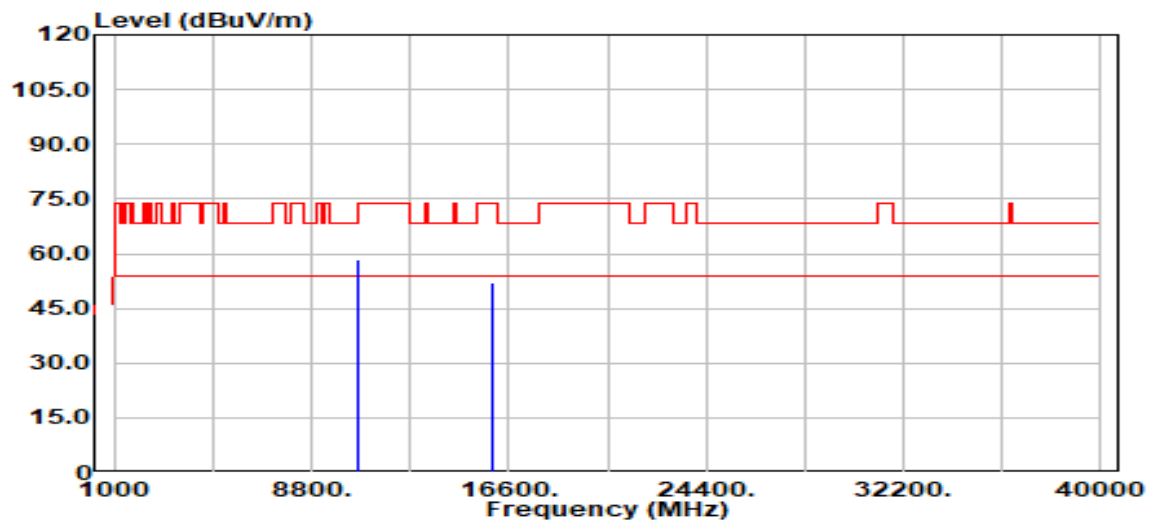

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	54.41	4.10	58.52	74.00	-15.48
10640.00	Average	44.81	4.10	48.92	54.00	-5.08
15960.00	Peak	44.30	7.59	51.89	74.00	-22.11
15960.00	Average	35.31	7.59	42.90	54.00	-11.10




Report No.: TMWK2309003421KR

Page: 165 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

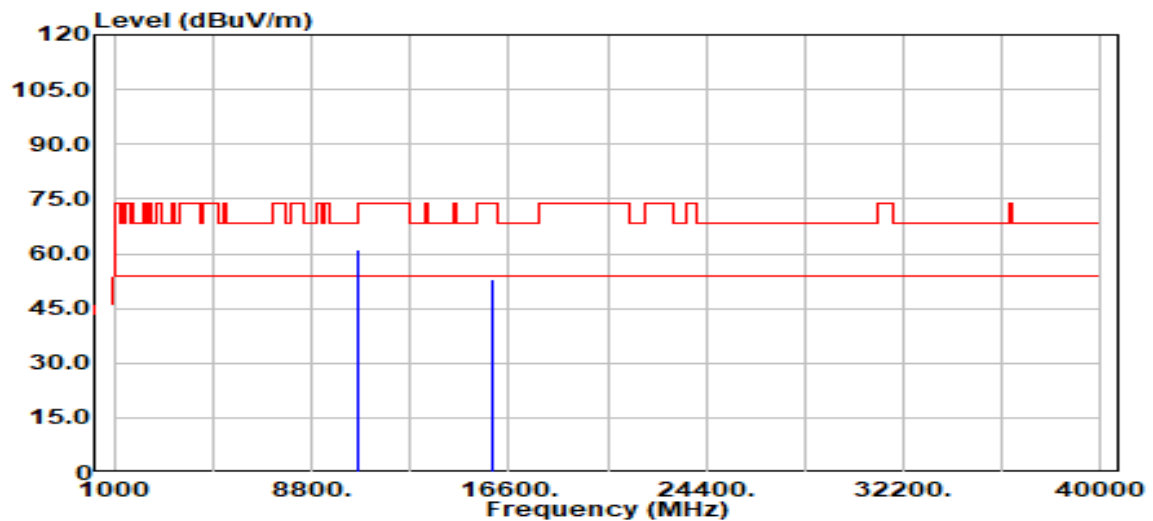


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	56.86	4.10	60.96	74.00	-13.04
10640.00	Average	46.27	4.10	50.38	54.00	-3.62
15960.00	Peak	45.59	7.59	53.18	74.00	-20.82
15960.00	Average	35.44	7.59	43.03	54.00	-10.97

Report No.: TMWK2309003421KR

Page: 166 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

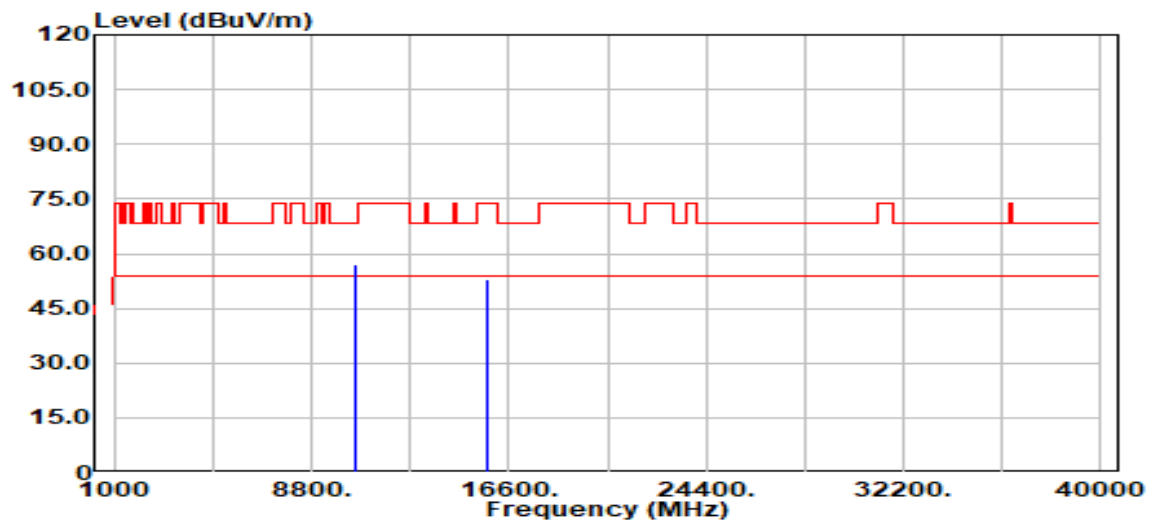

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	53.04	4.04	57.08	68.20	-11.12
15780.00	Peak	45.22	7.89	53.11	74.00	-20.89
15780.00	Average	36.14	7.89	44.03	54.00	-9.97




Report No.: TMWK2309003421KR

Page: 167 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band2
Frequency :5260 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

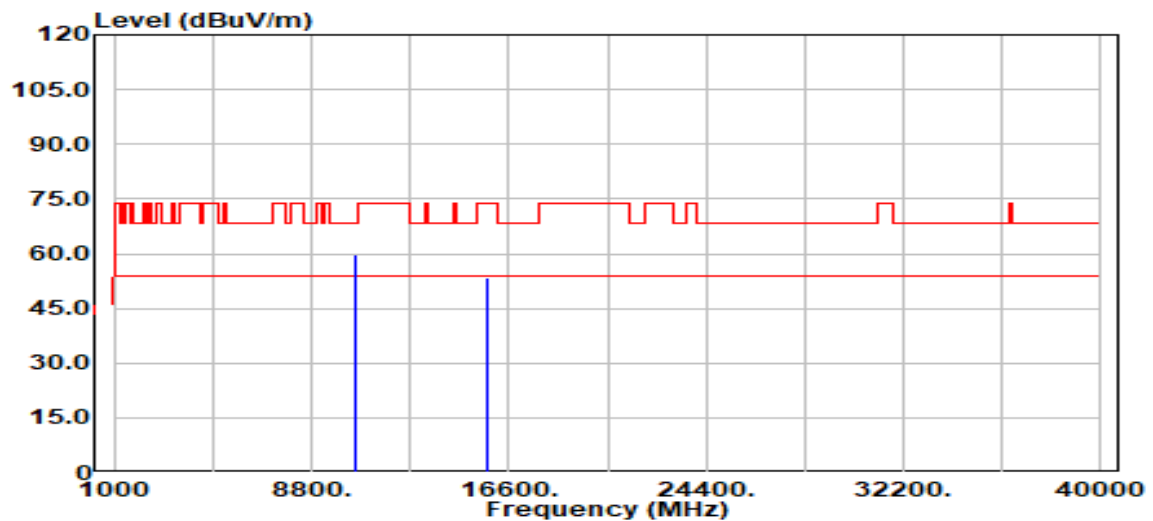

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	55.78	4.04	59.82	68.20	-8.38
15780.00	Peak	45.52	7.89	53.40	74.00	-20.60
15780.00	Average	36.49	7.89	44.37	54.00	-9.63




Report No.: TMWK2309003421KR

Page: 168 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

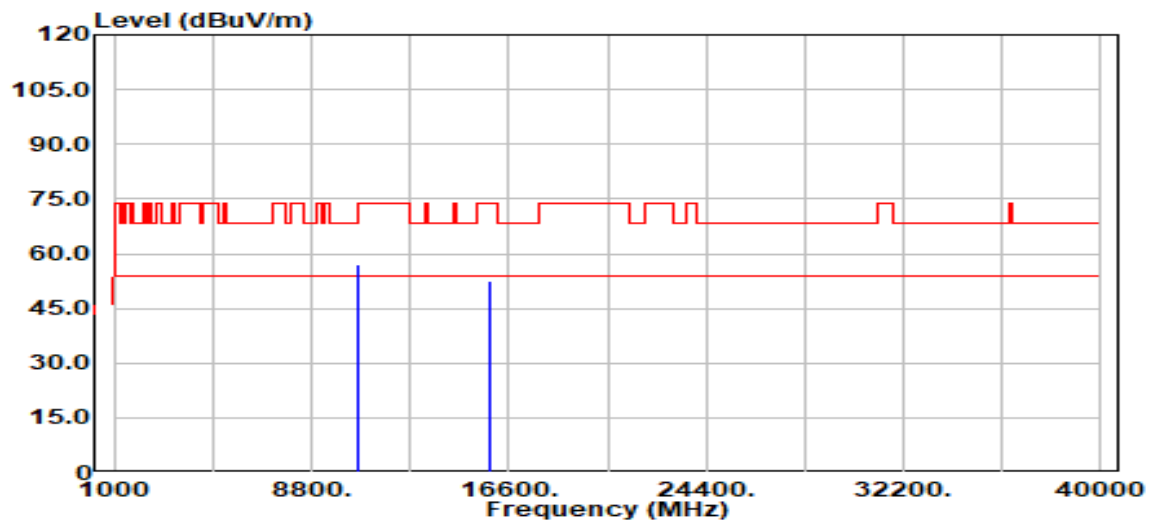

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	52.84	4.12	56.96	74.00	-17.04
10600.00	Average	42.75	4.12	46.87	54.00	-7.13
15900.00	Peak	44.43	7.99	52.42	74.00	-21.58
15900.00	Average	35.56	7.99	43.55	54.00	-10.45




Report No.: TMWK2309003421KR

Page: 169 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band2
Frequency :5300 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

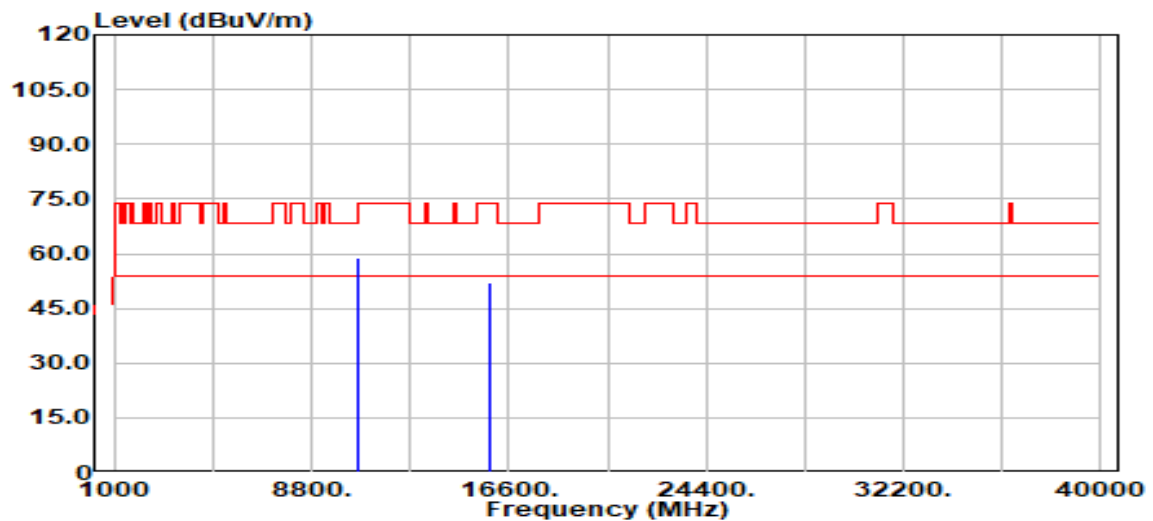

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10600.00	Peak	54.89	4.12	59.01	74.00	-14.99
10600.00	Average	44.79	4.12	48.91	54.00	-5.09
15900.00	Peak	44.12	7.99	52.11	74.00	-21.89
15900.00	Average	36.06	7.99	44.05	54.00	-9.95




Report No.: TMWK2309003421KR

Page: 170 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

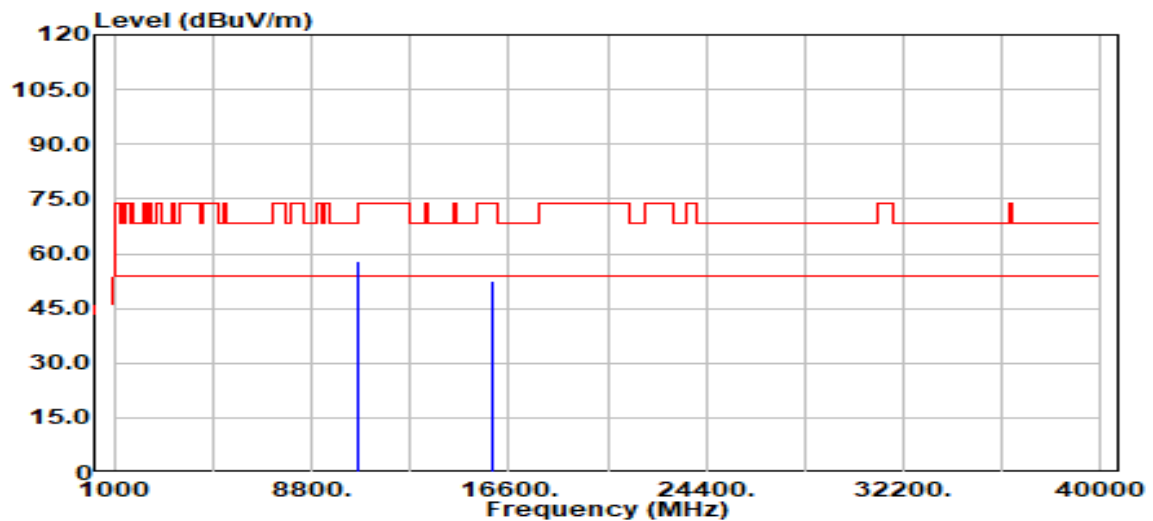

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	53.76	4.10	57.87	74.00	-16.13
10640.00	Average	43.82	4.10	47.93	54.00	-6.07
15960.00	Peak	45.07	7.59	52.66	74.00	-21.34
15960.00	Average	35.06	7.59	42.65	54.00	-11.35




Report No.: TMWK2309003421KR

Page: 171 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

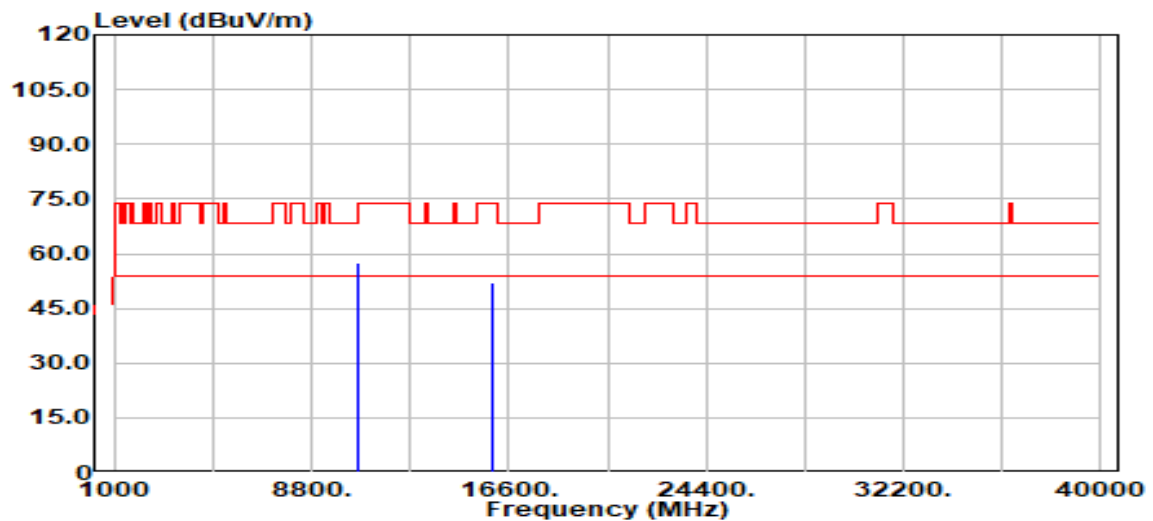

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10640.00	Peak	53.38	4.10	57.48	74.00	-16.52
10640.00	Average	46.31	4.10	50.42	54.00	-3.58
15960.00	Peak	44.69	7.59	52.28	74.00	-21.72
15960.00	Average	35.27	7.59	42.86	54.00	-11.14




Report No.: TMWK2309003421KR

Page: 172 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band2
Frequency :5270 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

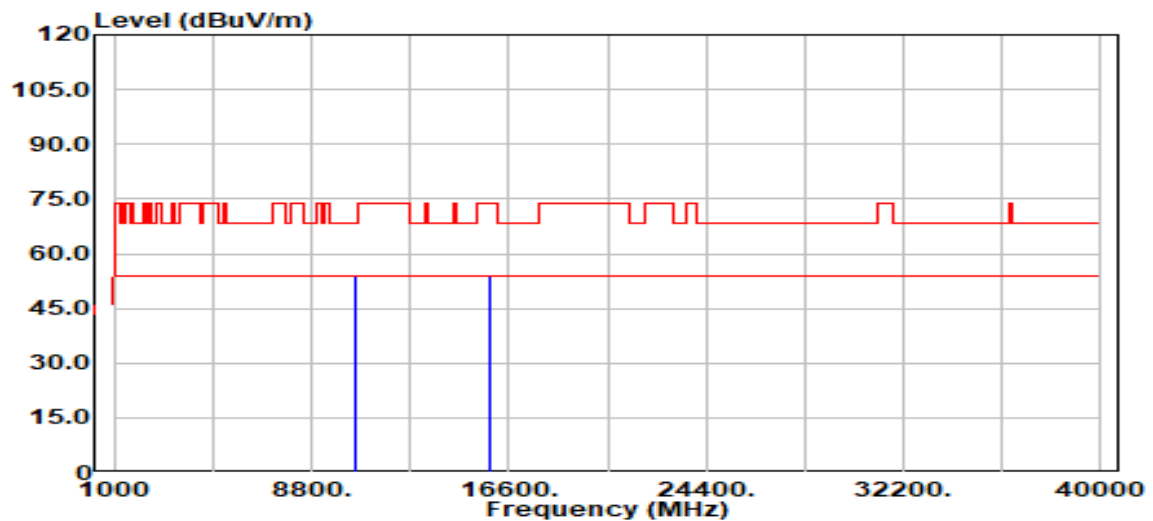

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	49.81	4.05	53.86	68.20	-14.34
15810.00	Peak	46.12	7.91	54.03	74.00	-19.97
15810.00	Average	36.15	7.91	44.06	54.00	-9.94




Report No.: TMWK2309003421KR

Page: 173 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band2
Frequency :5270 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

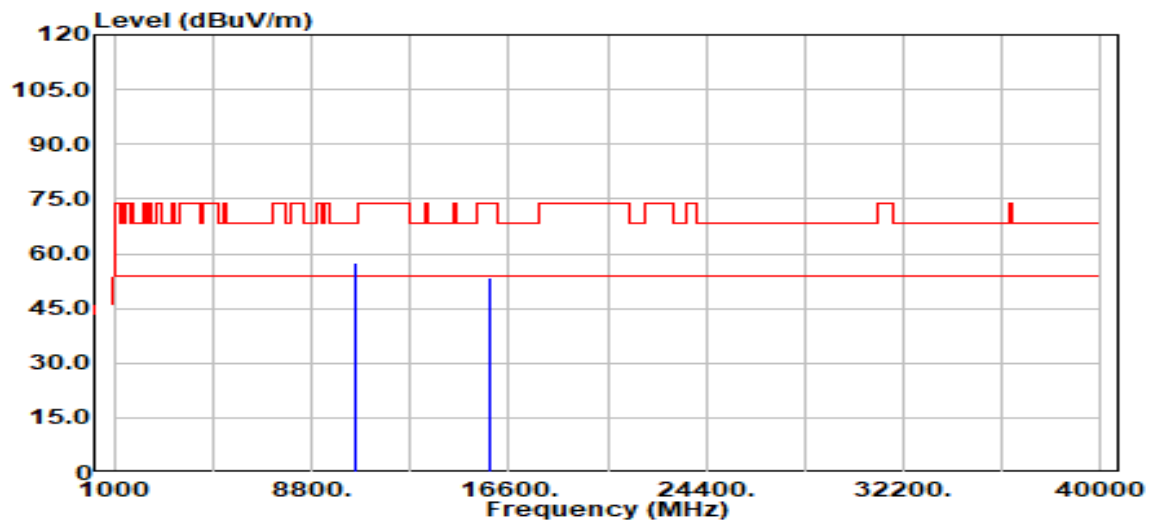

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	53.57	4.05	57.62	68.20	-10.58
15810.00	Peak	45.43	7.91	53.34	74.00	-20.66
15810.00	Average	36.18	7.91	44.09	54.00	-9.91




Report No.: TMWK2309003421KR

Page: 174 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :TX
EUT Pol :H
Setting :14

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

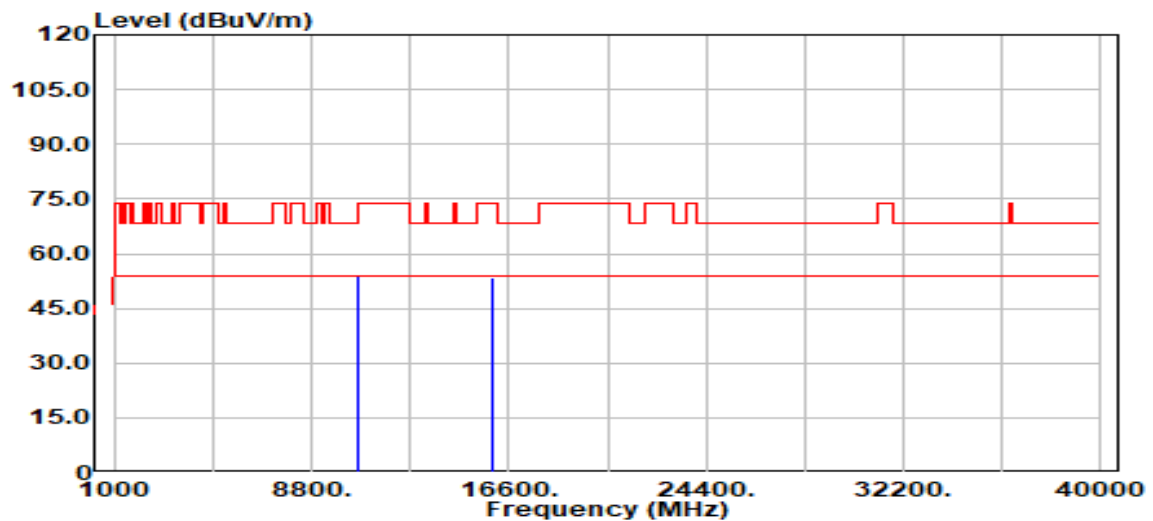

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit dB μ V/m	Margin dB
10620.00	Peak	49.60	4.11	53.71	74.00	-20.29
10620.00	Average	40.00	4.11	44.11	54.00	-9.89
15930.00	Peak	45.49	7.75	53.24	74.00	-20.76
15930.00	Average	35.90	7.75	43.65	54.00	-10.35




Report No.: TMWK2309003421KR

Page: 175 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band2
Frequency :5310 MHz
Operation Mode :TX
EUT Pol :H
Setting :14

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

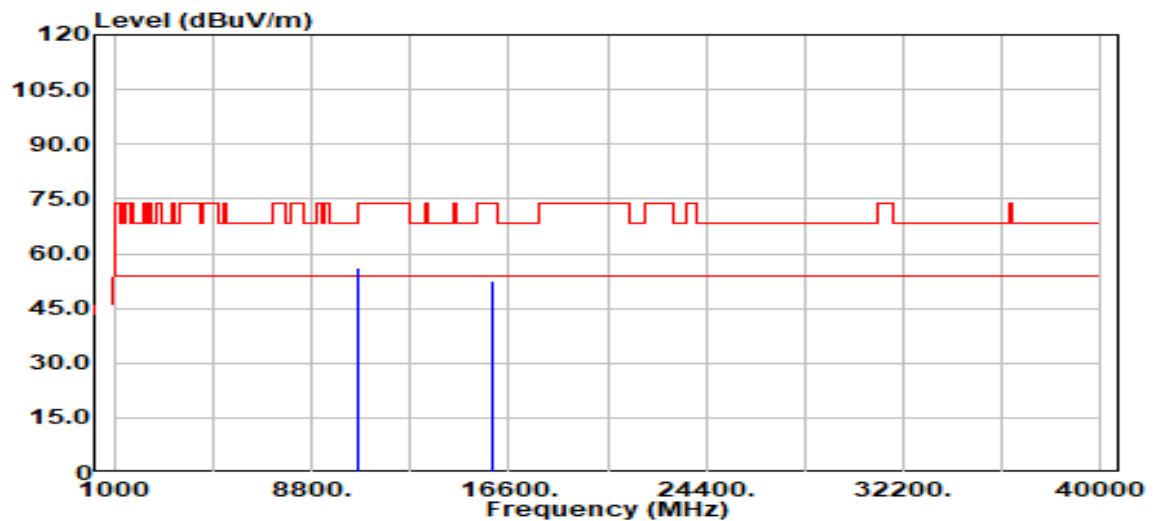

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	52.20	4.11	56.32	74.00	-17.68
10620.00	Average	42.43	4.11	46.54	54.00	-7.46
15930.00	Peak	44.92	7.75	52.67	74.00	-21.33
15930.00	Average	35.21	7.75	42.96	54.00	-11.05




Report No.: TMWK2309003421KR

Page: 176 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

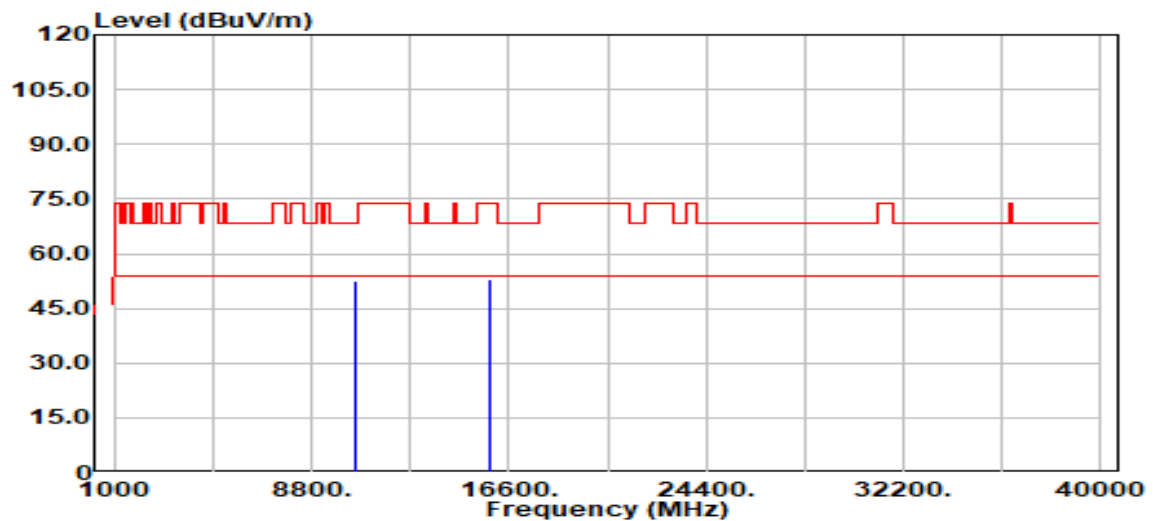

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.00	Peak	48.30	4.10	52.39	68.20	-15.81
15870.00	Peak	44.80	8.06	52.86	74.00	-21.14
15870.00	Average	36.76	8.06	44.82	54.00	-9.18




Report No.: TMWK2309003421KR

Page: 177 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :H
Setting :13

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

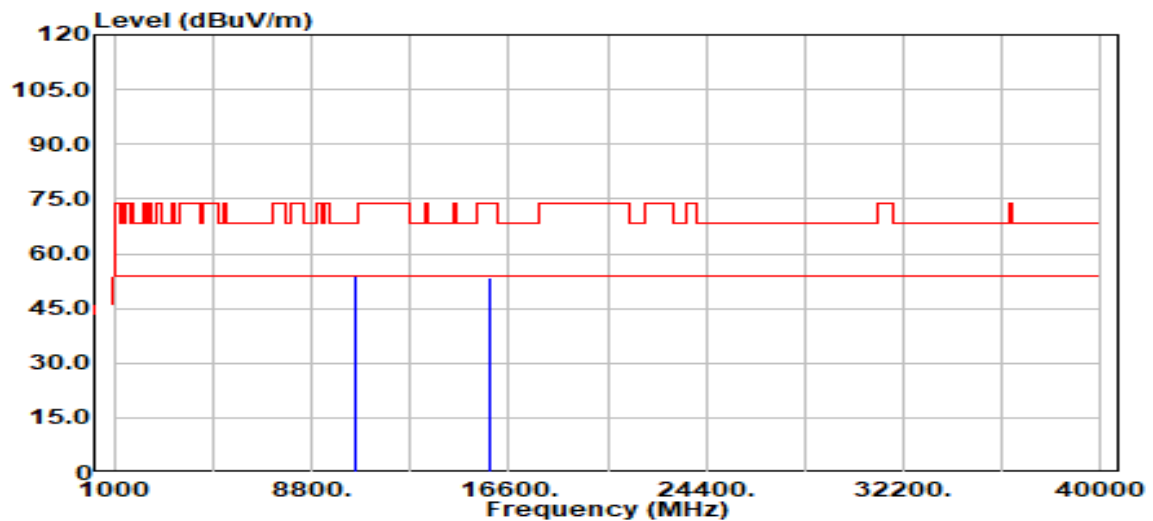


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.00	Peak	49.99	4.10	54.08	68.20	-14.12
15870.00	Peak	45.47	8.06	53.53	74.00	-20.47
15870.00	Average	36.65	8.06	44.71	54.00	-9.29

Report No.: TMWK2309003421KR

Page: 178 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :H
Setting :15

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

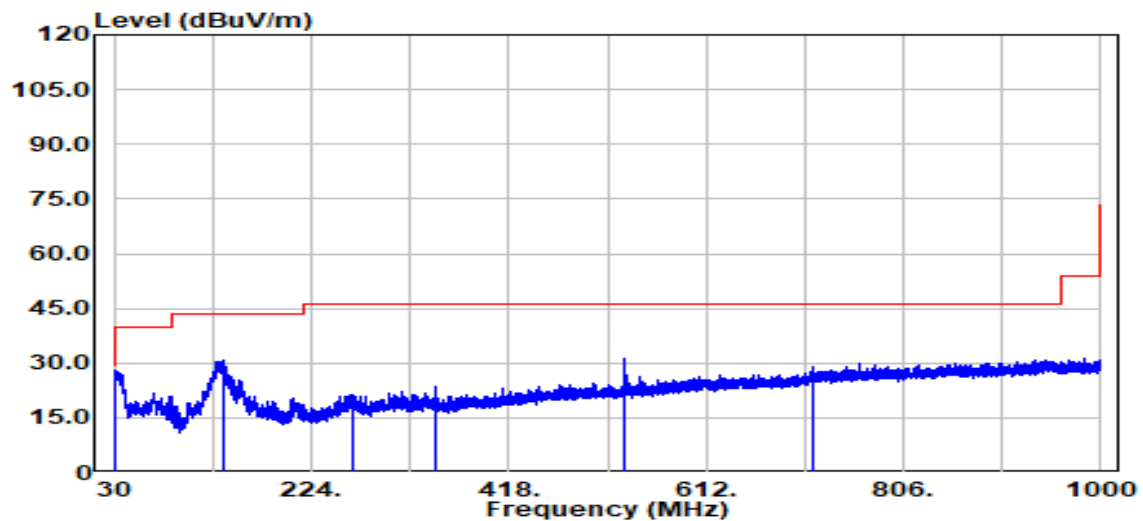


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
31.75	Peak	42.06	-14.12	27.94	40.00	-12.06
138.45	Peak	44.31	-13.70	30.61	43.50	-12.89
265.71	Peak	34.72	-13.47	21.24	46.00	-24.76
345.64	Peak	34.53	-11.18	23.35	46.00	-22.65
531.20	Peak	38.26	-6.88	31.37	46.00	-14.63
717.05	Peak	31.96	-2.87	29.10	46.00	-16.90

Report No.: TMWK2309003421KR

Page: 179 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :H
Setting :15

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

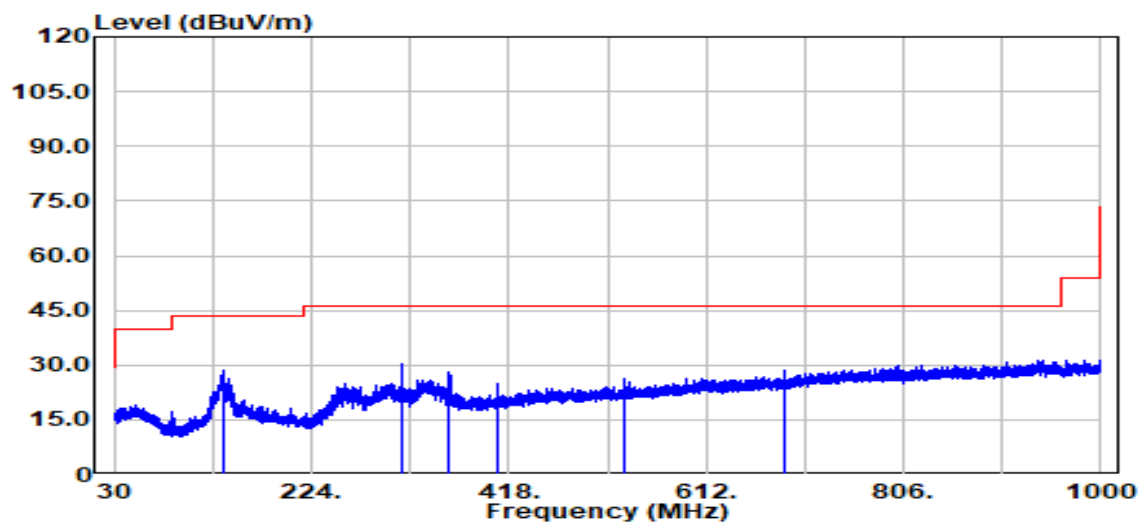

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
137.67	Peak	42.29	-13.81	28.47	43.50	-15.03
311.98	Peak	42.46	-11.92	30.55	46.00	-15.45
359.99	Peak	39.25	-11.10	28.15	46.00	-17.85
408.01	Peak	34.29	-9.59	24.70	46.00	-21.30
532.75	Peak	33.26	-6.85	26.41	46.00	-19.59
689.99	Peak	32.31	-3.88	28.43	46.00	-17.57




Report No.: TMWK2309003421KR

Page: 180 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :H
Setting :14

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

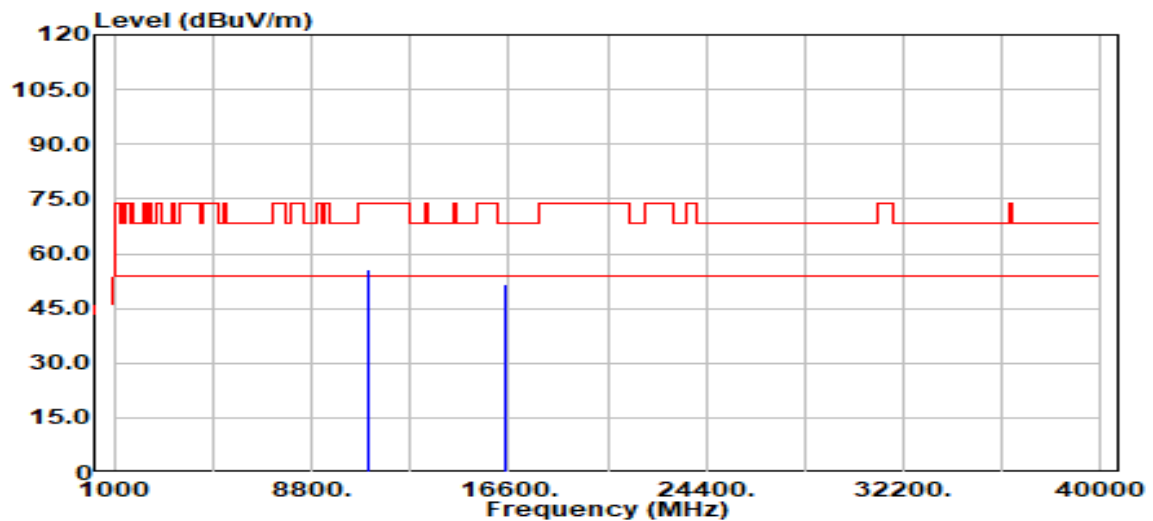

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	51.35	4.50	55.85	74.00	-18.15
11000.00	Average	44.25	4.50	48.75	54.00	-5.25
16500.00	Peak	45.08	6.45	51.53	68.20	-16.67




Report No.: TMWK2309003421KR

Page: 181 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :H
Setting :14

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

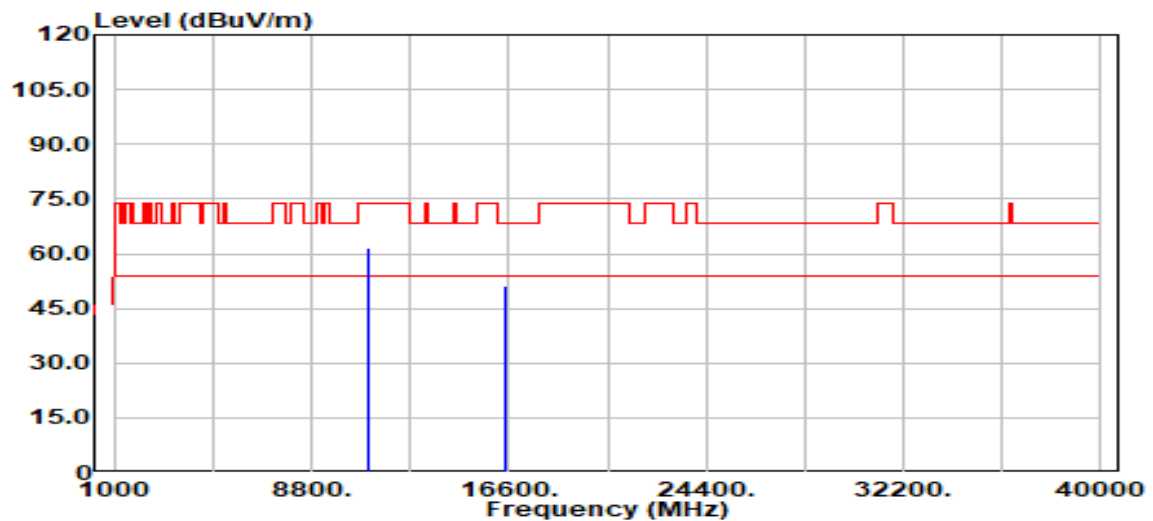


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	56.94	4.50	61.44	74.00	-12.56
11000.00	Average	46.55	4.50	51.05	54.00	-2.95
16500.00	Peak	44.57	6.45	51.02	68.20	-17.18

Report No.: TMWK2309003421KR

Page: 182 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

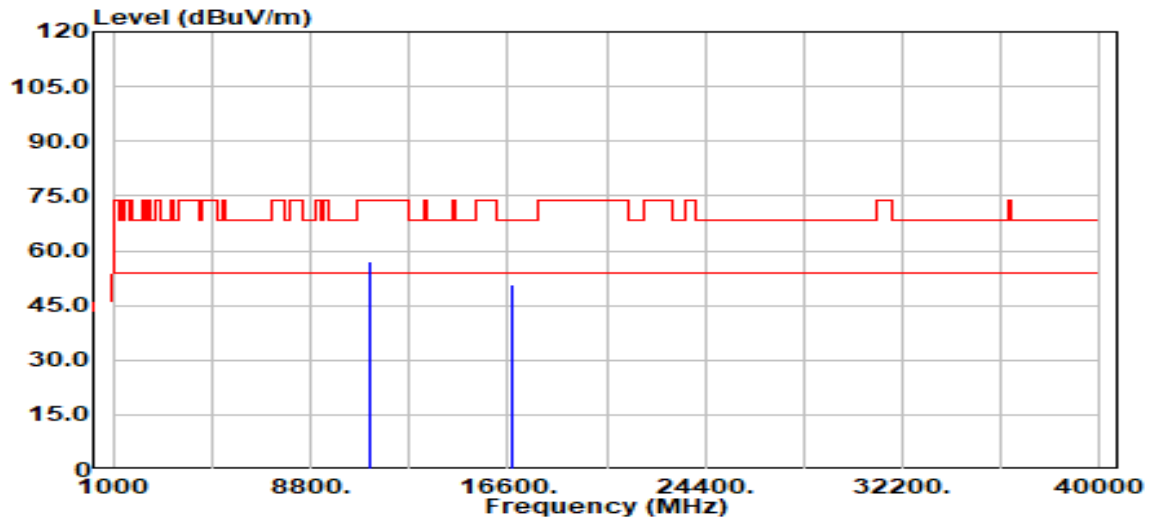


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11160.00	Peak	52.10	4.78	56.88	74.00	-17.12
11160.00	Average	43.26	4.78	48.04	54.00	-5.96
16740.00	Peak	44.92	5.74	50.66	68.20	-17.54

Report No.: TMWK2309003421KR

Page: 183 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :H
Setting :13.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

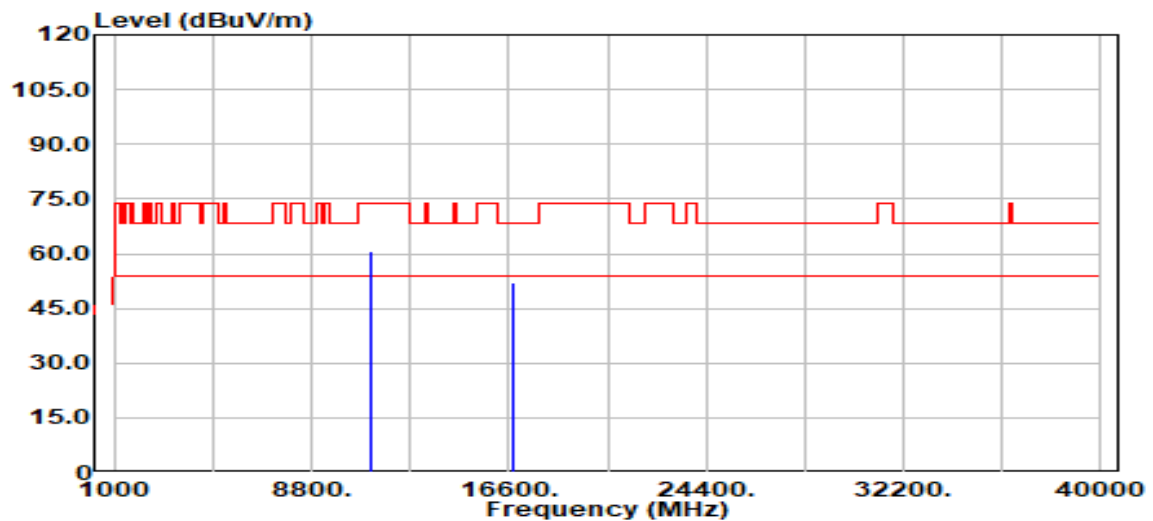

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	55.69	4.78	60.46	74.00	-13.54
11160.00	Average	46.18	4.78	50.96	54.00	-3.04
16740.00	Peak	46.49	5.74	52.23	68.20	-15.97




Report No.: TMWK2309003421KR

Page: 184 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

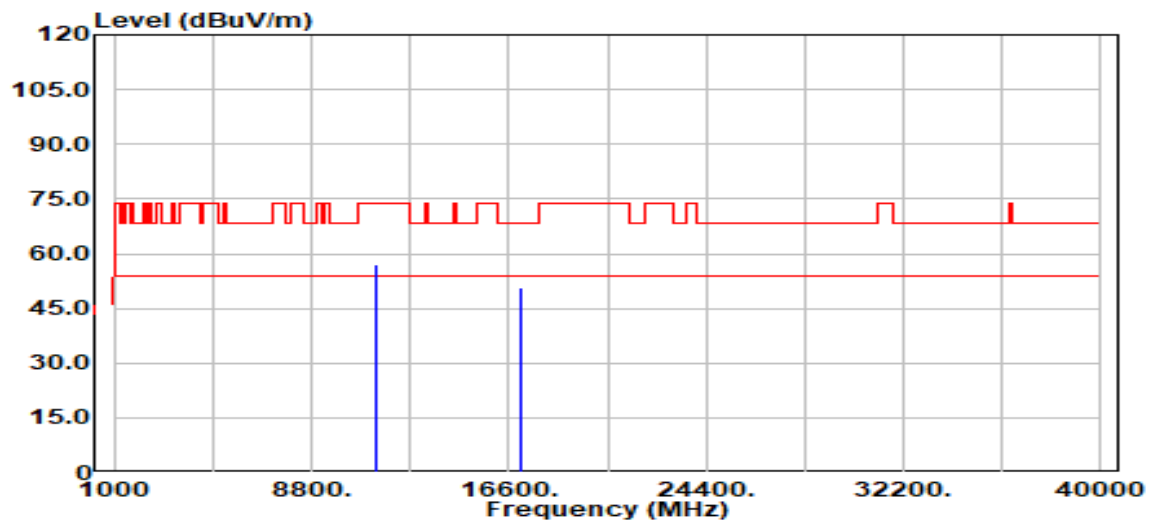


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	52.30	4.97	57.27	74.00	-16.73
11400.00	Average	43.08	4.97	48.05	54.00	-5.95
17100.00	Peak	46.15	4.69	50.84	68.20	-17.36

Report No.: TMWK2309003421KR

Page: 185 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

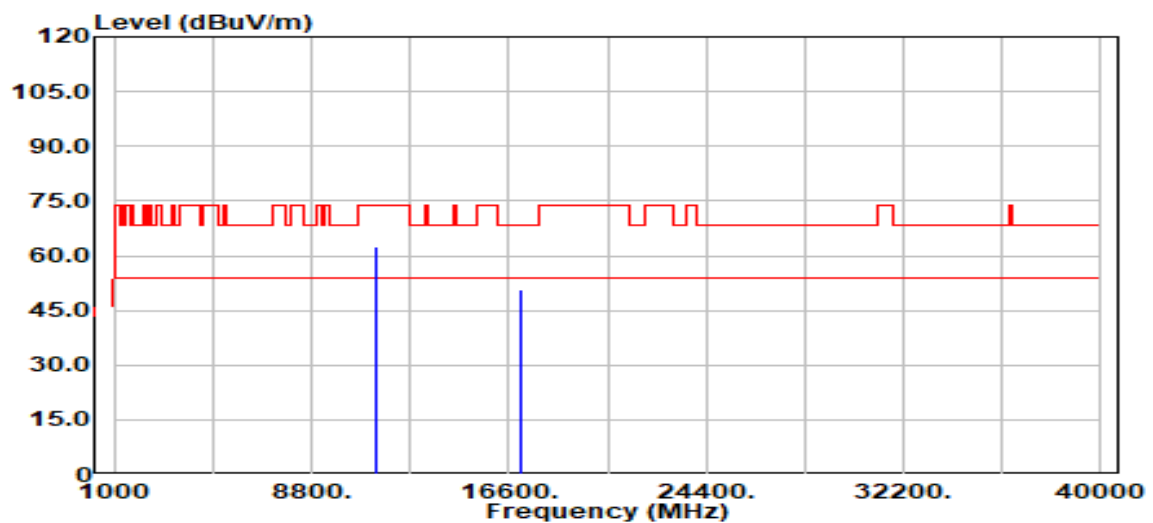

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	57.54	4.97	62.51	74.00	-11.49
11400.00	Average	47.03	4.97	52.00	54.00	-2.00
17100.00	Peak	46.21	4.69	50.90	68.20	-17.30




Report No.: TMWK2309003421KR

Page: 186 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

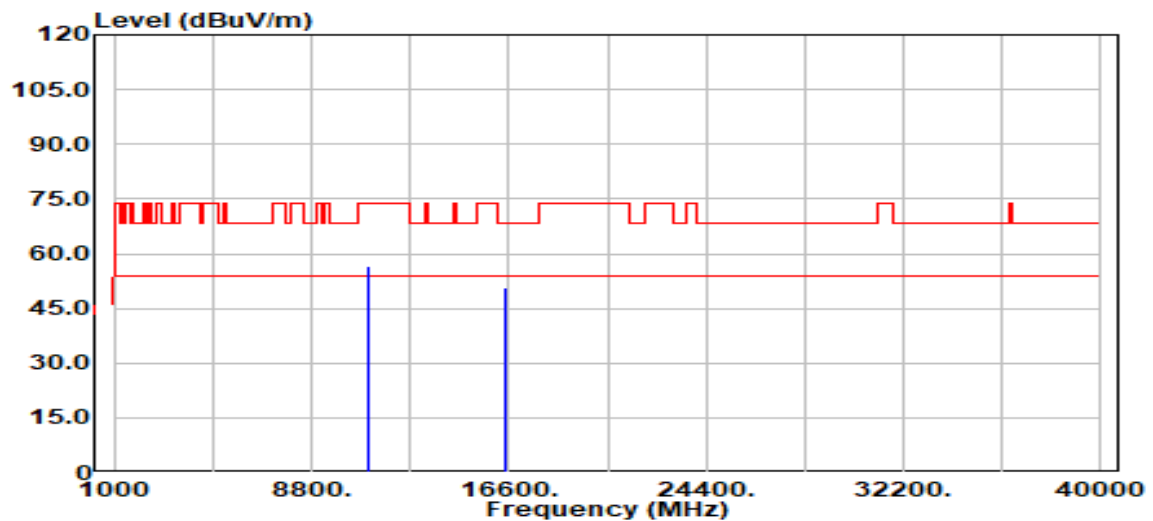


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	52.01	4.50	56.51	74.00	-17.49
11000.00	Average	43.24	4.50	47.74	54.00	-6.26
16500.00	Peak	44.49	6.45	50.94	68.20	-17.26

Report No.: TMWK2309003421KR

Page: 187 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

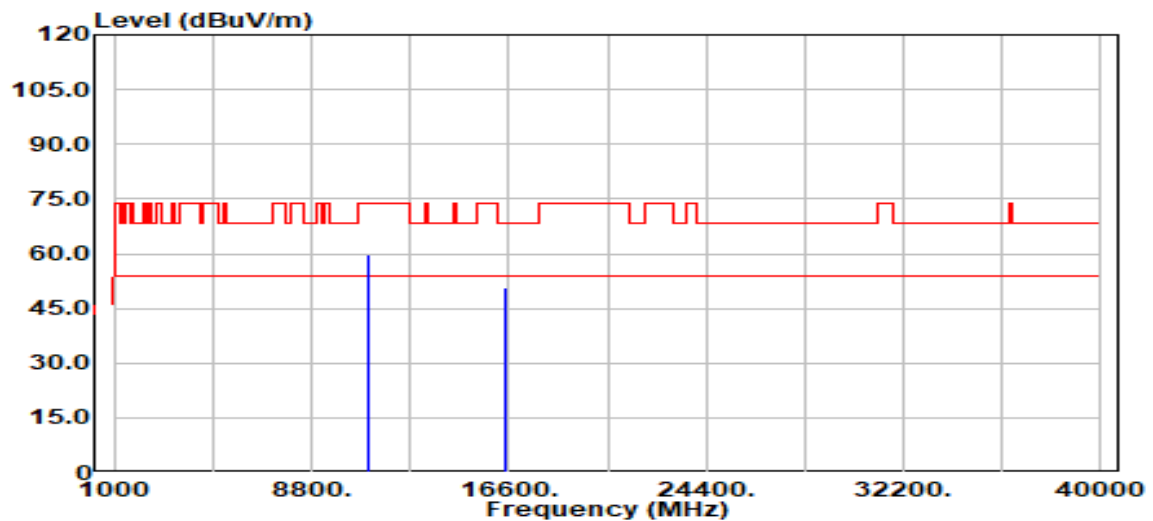


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	55.16	4.50	59.66	74.00	-14.34
11000.00	Average	46.20	4.50	50.70	54.00	-3.30
16500.00	Peak	44.35	6.45	50.80	68.20	-17.40

Report No.: TMWK2309003421KR

Page: 188 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

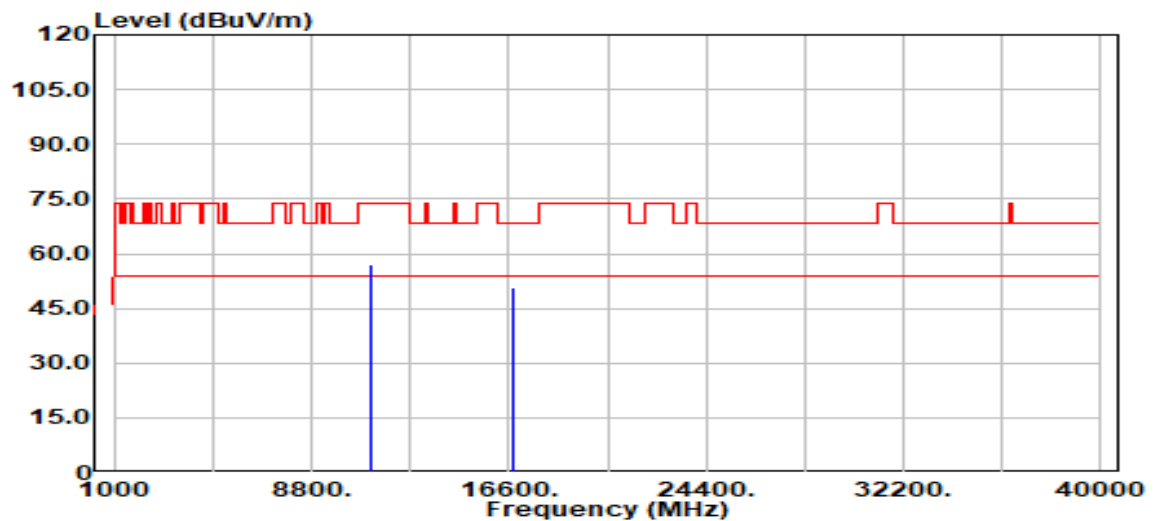


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	52.12	4.78	56.89	74.00	-17.11
11160.00	Average	42.52	4.78	47.29	54.00	-6.71
16740.00	Peak	45.00	5.74	50.75	68.20	-17.45

Report No.: TMWK2309003421KR

Page: 189 / 221
Rev.: 01

Project No. : TM-2309000356P
Operation Band : 802.11n20/Band3
Frequency : 5580 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14.5

Test Date : 2023-10-06
Temp./Humi. : 25.0/61
Antenna Pol. : HORIZONTAL
Engineer : Czerny Lin
Test Chamber : 966D

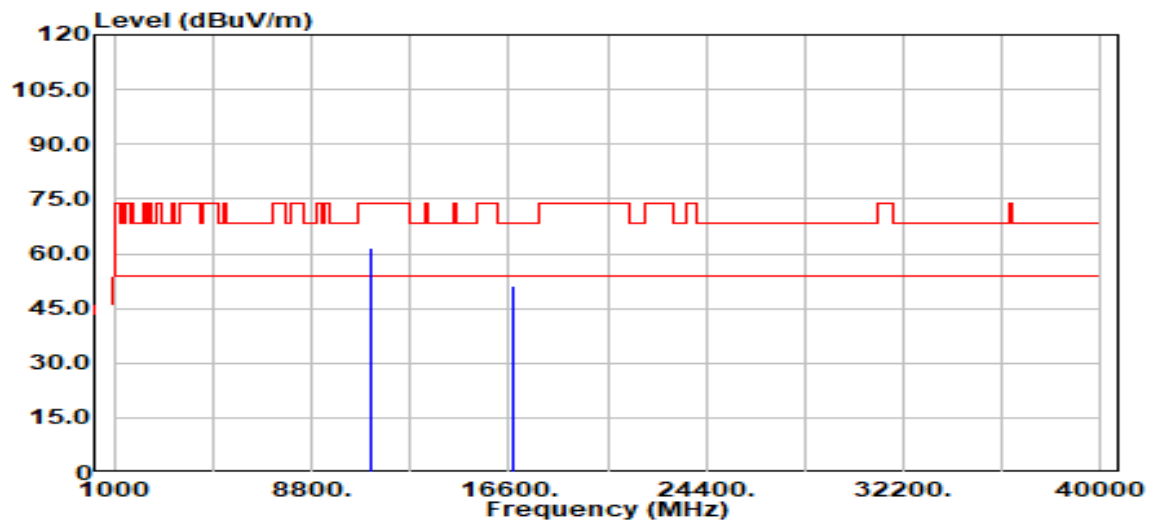

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	56.73	4.78	61.50	74.00	-12.50
11160.00	Average	47.07	4.78	51.84	54.00	-2.16
16740.00	Peak	45.23	5.74	50.97	68.20	-17.23




Report No.: TMWK2309003421KR

Page: 190 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :H
Setting :15

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

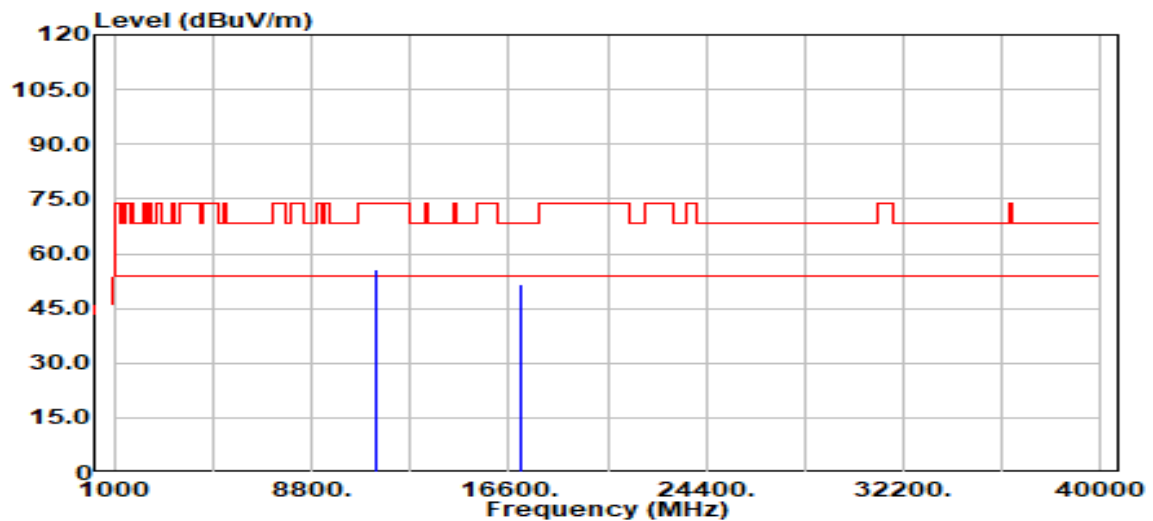


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11400.00	Peak	50.84	4.97	55.81	74.00	-18.19
11400.00	Average	41.09	4.97	46.06	54.00	-7.94
17100.00	Peak	46.74	4.69	51.43	68.20	-16.77

Report No.: TMWK2309003421KR

Page: 191 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :H
Setting :15

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

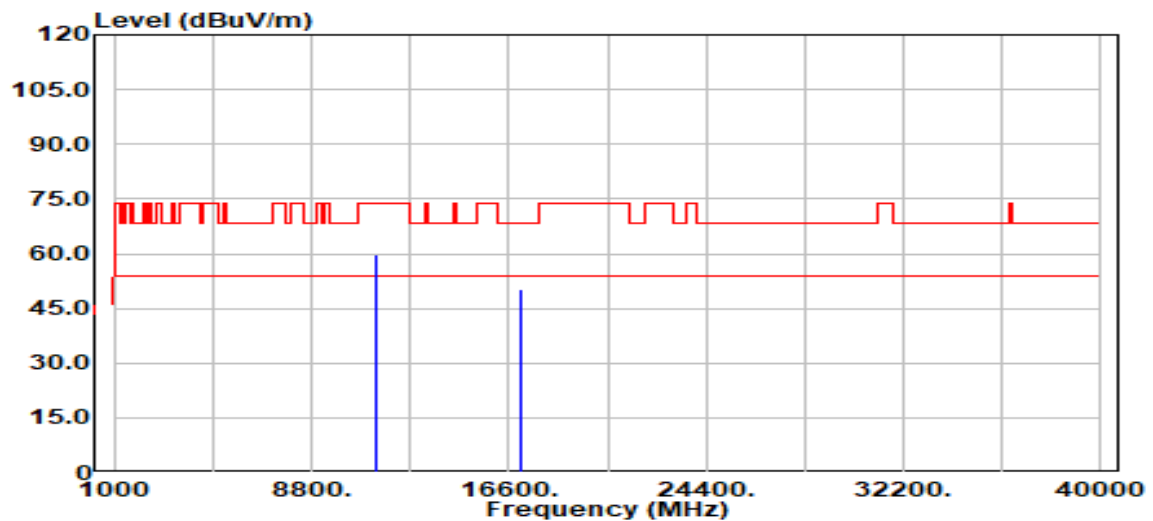

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	54.89	4.97	59.86	74.00	-14.14
11400.00	Average	45.33	4.97	50.30	54.00	-3.70
17100.00	Peak	45.46	4.69	50.15	68.20	-18.05




Report No.: TMWK2309003421KR

Page: 192 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :H
Setting :12

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

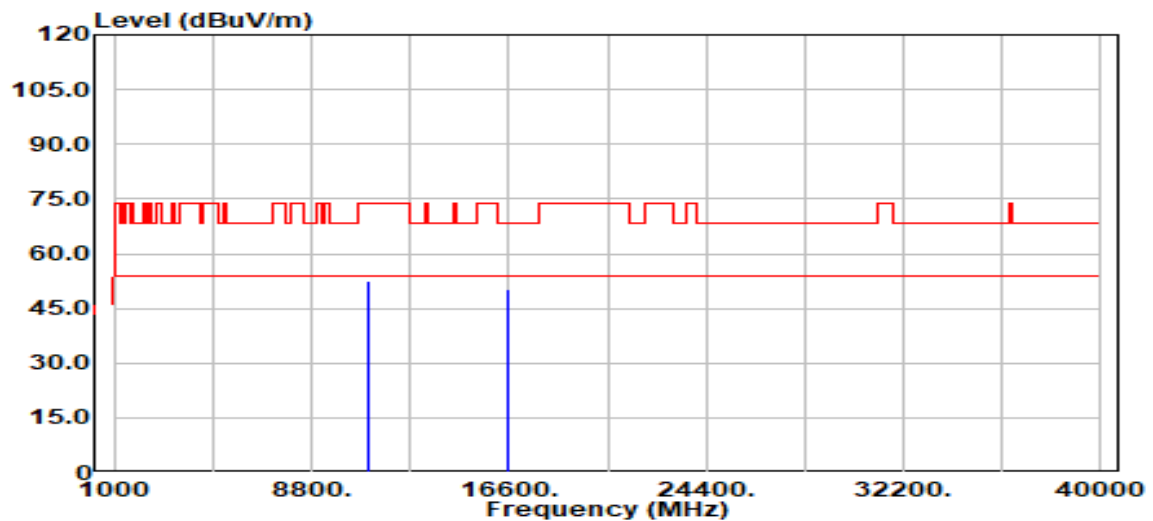


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11020.00	Peak	48.16	4.54	52.70	74.00	-21.30
11020.00	Average	38.24	4.54	42.78	54.00	-11.22
16530.00	Peak	44.22	6.24	50.46	68.20	-17.74

Report No.: TMWK2309003421KR

Page: 193 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :H
Setting :12

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

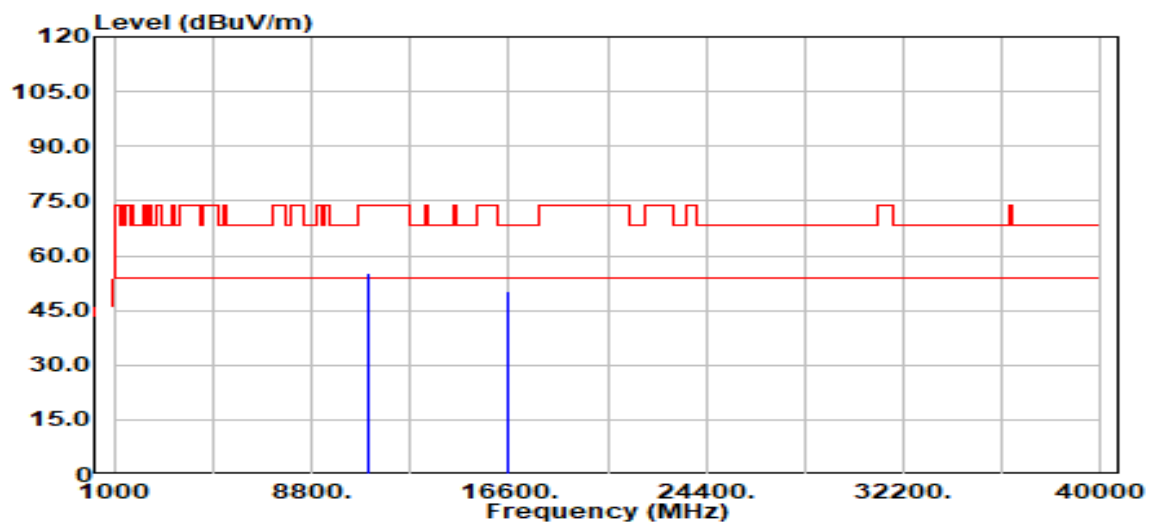

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	50.68	4.54	55.22	74.00	-18.78
11020.00	Average	40.41	4.54	44.95	54.00	-9.05
16530.00	Peak	44.24	6.24	50.48	68.20	-17.72

Report No.: TMWK2309003421KR

Page: 194 / 221
Rev.: 01

Project No. : TM-2309000356P
Operation Band : 802.11n40/Band3
Frequency : 5550 MHz
Operation Mode : TX
EUT Pol : H
Setting : 14.5

Test Date : 2023-10-06
Temp./Humi. : 25.0/61
Antenna Pol. : VERTICAL
Engineer : Czerny Lin
Test Chamber : 966D



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11100.00	Peak	49.90	4.54	54.44	74.00	-19.56
11100.00	Average	41.12	4.54	45.66	54.00	-8.34
16650.00	Peak	45.34	5.92	51.26	68.20	-16.94



Report No.: TMWK2309003421KR

Page: 195 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band3
Frequency :5550 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11100.00	Peak	51.77	4.54	56.31	74.00	-17.69
11100.00	Average	43.14	4.54	47.68	54.00	-6.32
16650.00	Peak	44.84	5.92	50.76	68.20	-17.44




Report No.: TMWK2309003421KR

Page: 196 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :H
Setting :14

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

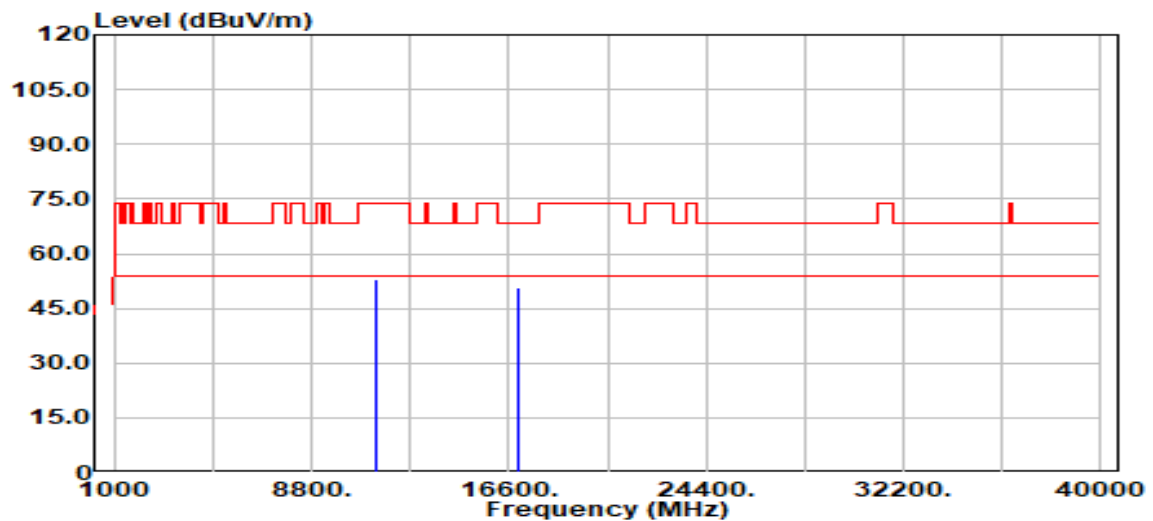

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	48.29	4.68	52.97	74.00	-21.03
11340.00	Average	39.38	4.68	44.06	54.00	-9.94
17010.00	Peak	45.40	5.33	50.74	68.20	-17.46




Report No.: TMWK2309003421KR

Page: 197 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :H
Setting :14

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

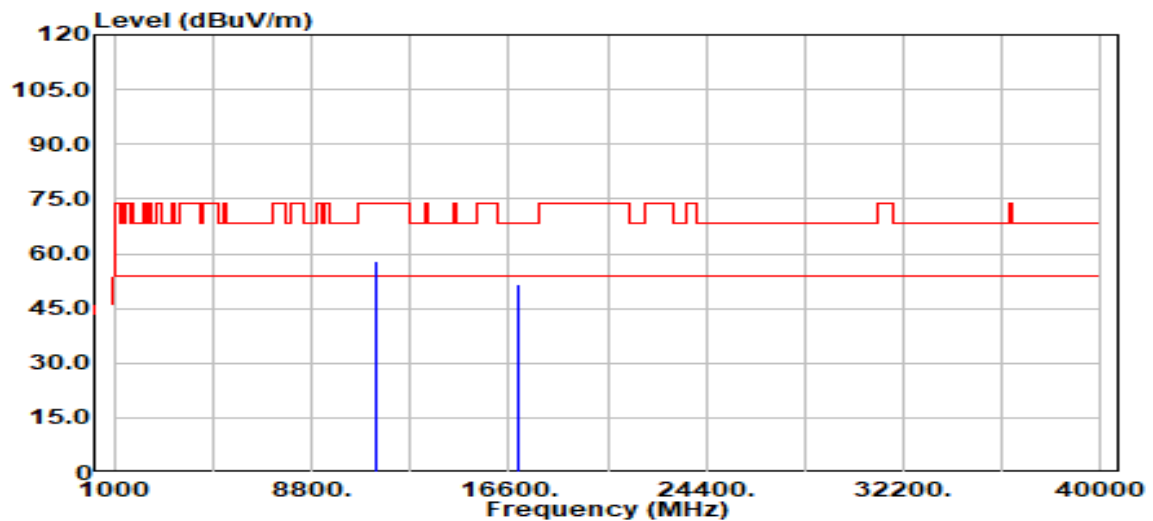

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11340.00	Peak	53.33	4.68	58.01	74.00	-15.99
11340.00	Average	44.04	4.68	48.73	54.00	-5.27
17010.00	Peak	46.44	5.33	51.78	68.20	-16.42




Report No.: TMWK2309003421KR

Page: 198 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :H
Setting :12.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

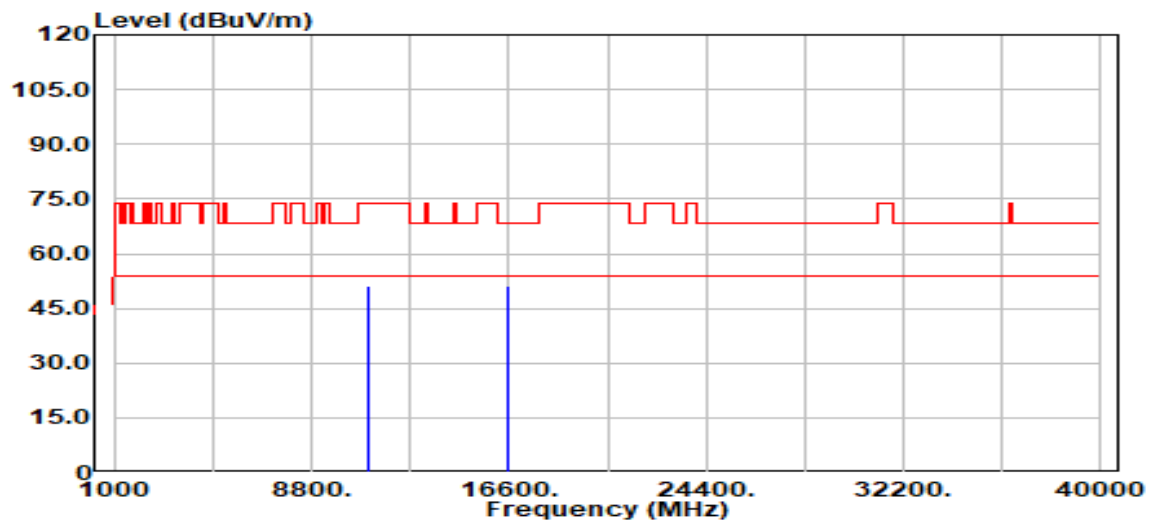

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	46.49	4.60	51.09	74.00	-22.91
11060.00	Average	37.65	4.60	42.25	54.00	-11.75
16590.00	Peak	44.84	6.28	51.12	68.20	-17.08




Report No.: TMWK2309003421KR

Page: 199 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :H
Setting :12.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

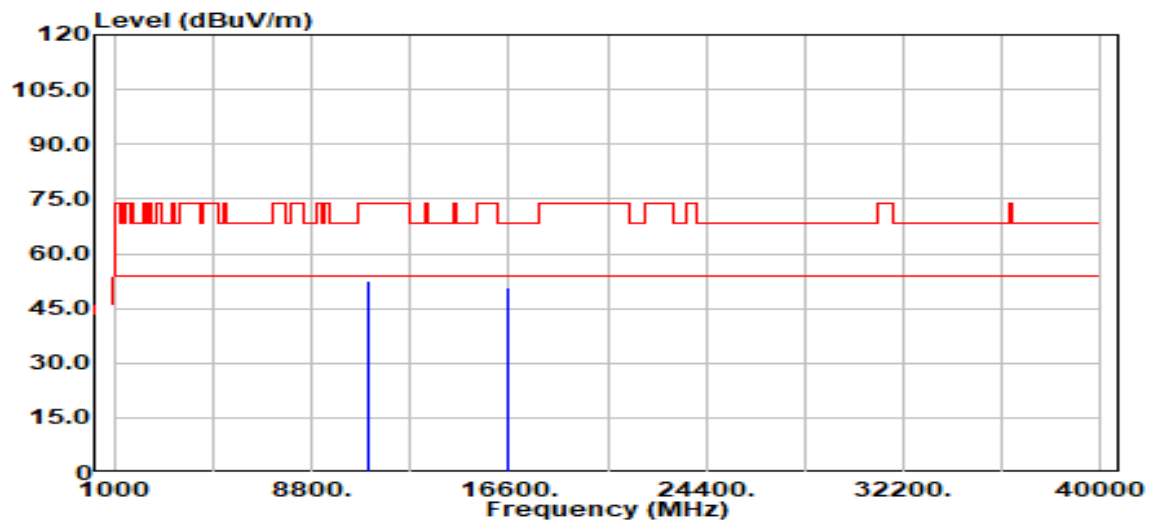

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	47.90	4.60	52.49	74.00	-21.51
11060.00	Average	38.78	4.60	43.38	54.00	-10.62
16590.00	Peak	44.25	6.28	50.53	68.20	-17.67




Report No.: TMWK2309003421KR

Page: 200 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

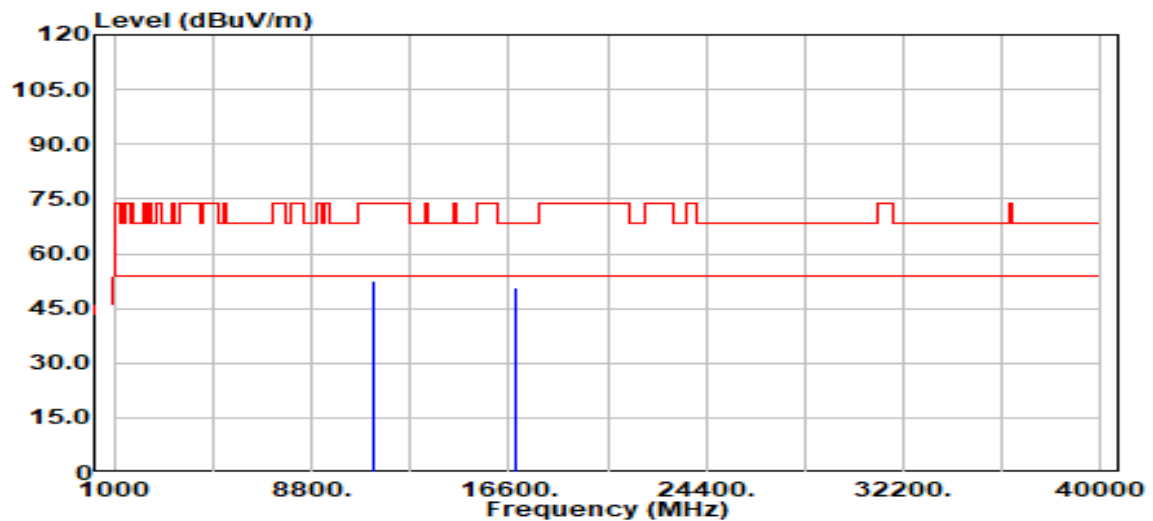

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.00	Peak	48.17	4.56	52.73	74.00	-21.27
11220.00	Average	39.34	4.56	43.91	54.00	-10.09
16830.00	Peak	45.11	5.47	50.59	68.20	-17.61




Report No.: TMWK2309003421KR

Page: 201 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band3
Frequency :5610 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

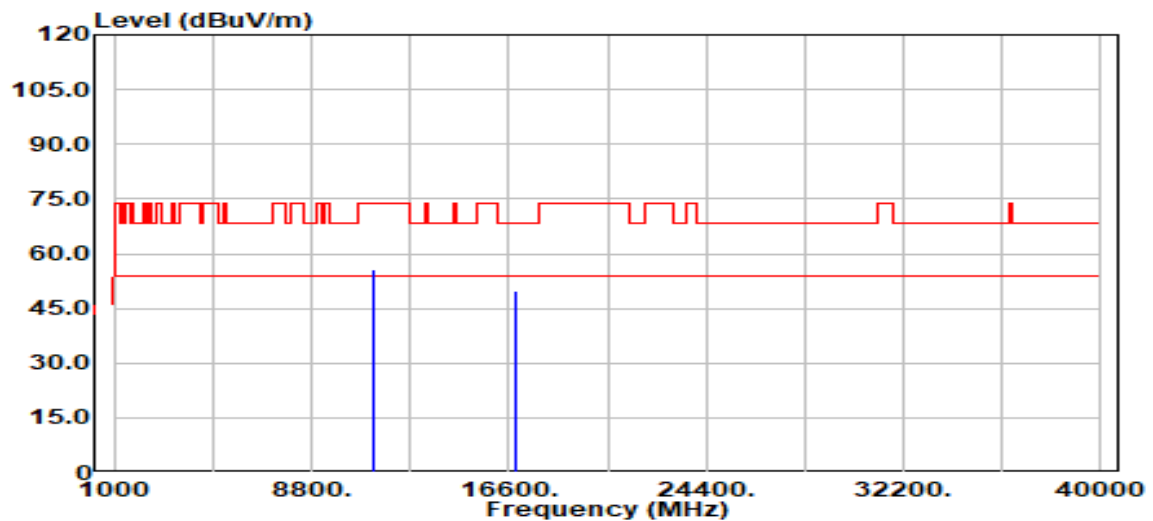

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11220.00	Peak	50.94	4.56	55.51	74.00	-18.49
11220.00	Average	41.47	4.56	46.03	54.00	-7.97
16830.00	Peak	44.52	5.47	50.00	68.20	-18.20




Report No.: TMWK2309003421KR

Page: 202 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

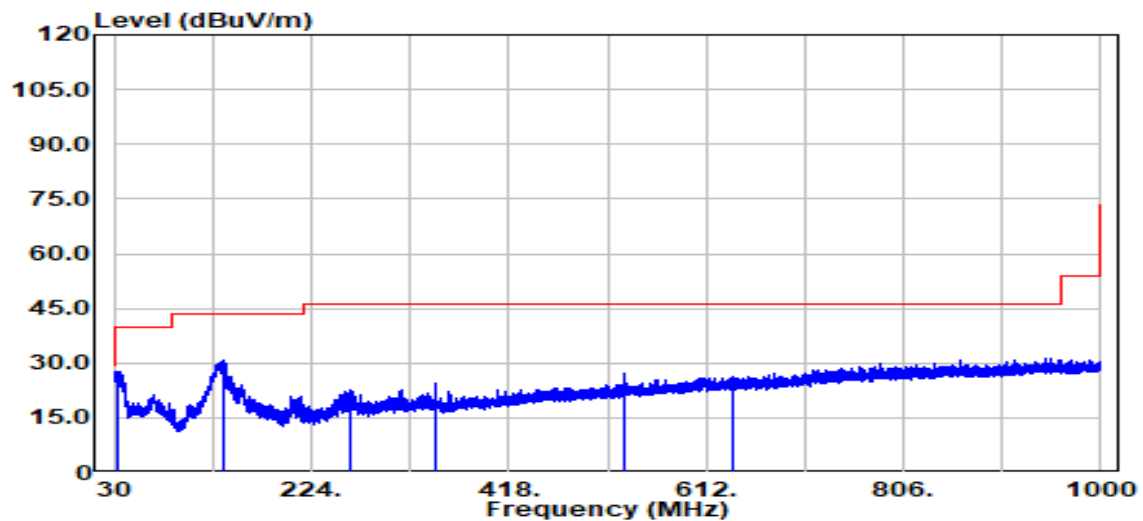

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
33.78	Peak	41.90	-14.10	27.80	40.00	-12.20
137.96	Peak	44.34	-13.75	30.58	43.50	-12.92
261.15	Peak	36.42	-13.59	22.83	46.00	-23.17
345.64	Peak	35.42	-11.18	24.24	46.00	-21.76
531.20	Peak	33.84	-6.88	26.96	46.00	-19.04
637.61	Peak	30.71	-4.48	26.22	46.00	-19.78




Report No.: TMWK2309003421KR

Page: 203 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-12
Temp./Humi. :25.9/57
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

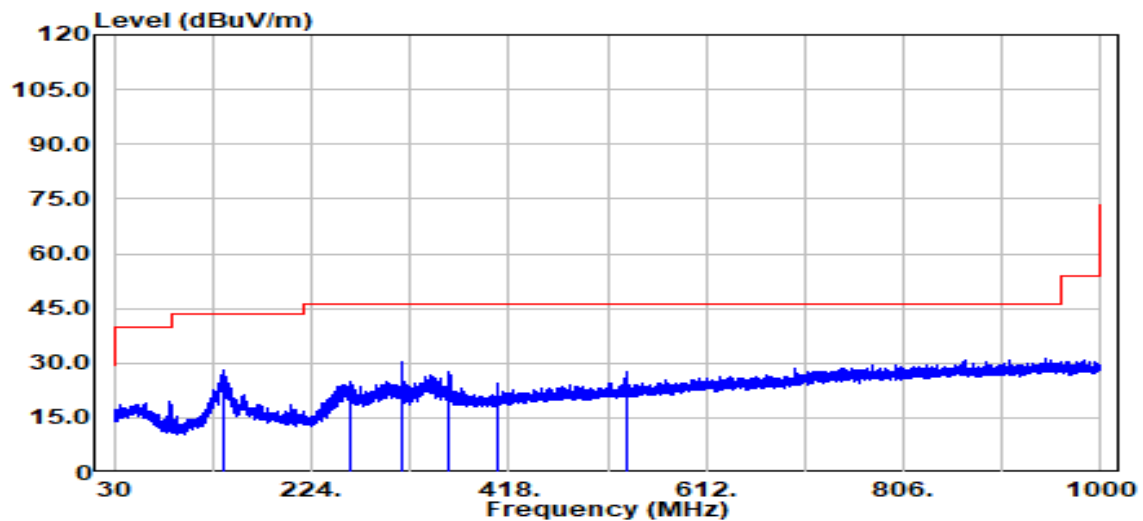

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
137.67	Peak	41.99	-13.81	28.17	43.50	-15.33
261.93	Peak	38.29	-13.58	24.71	46.00	-21.29
311.98	Peak	42.24	-11.92	30.32	46.00	-15.68
359.99	Peak	38.93	-11.10	27.83	46.00	-18.17
408.01	Peak	34.17	-9.59	24.58	46.00	-21.42
532.85	Peak	34.29	-6.85	27.44	46.00	-18.56




Report No.: TMWK2309003421KR

Page: 204 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

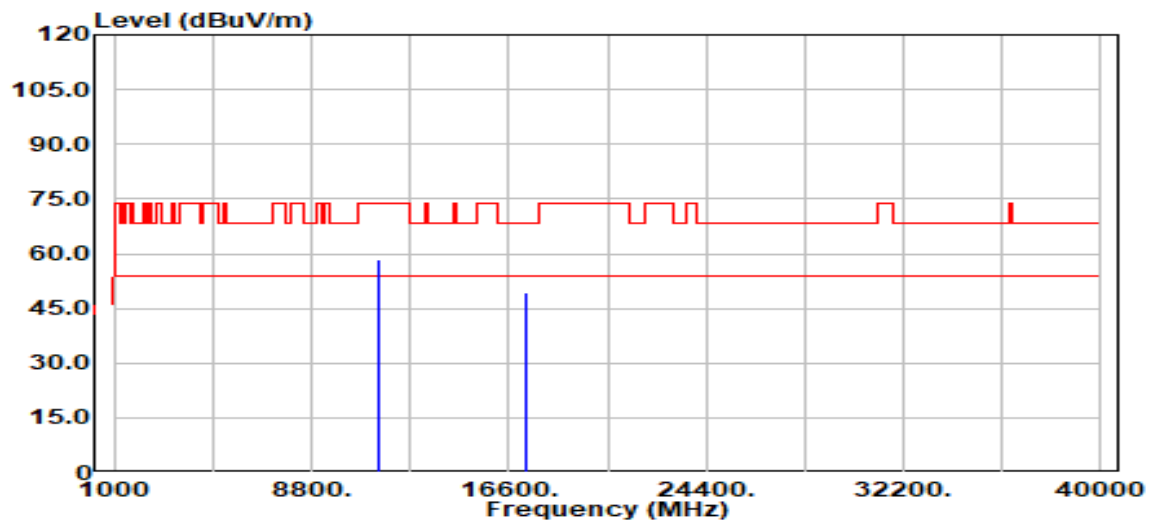

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	53.53	4.99	58.53	74.00	-15.47
11490.00	Average	43.25	4.99	48.24	54.00	-5.76
17235.00	Peak	45.01	4.52	49.53	68.20	-18.67




Report No.: TMWK2309003421KR

Page: 205 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

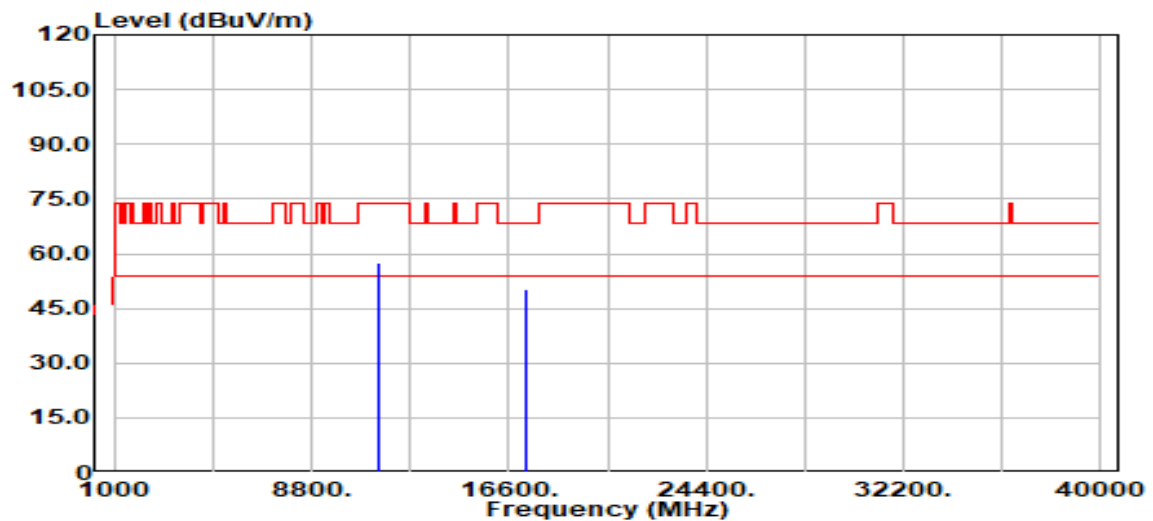

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11490.00	Peak	52.56	4.99	57.56	74.00	-16.44
11490.00	Average	45.72	4.99	50.71	54.00	-3.29
17235.00	Peak	45.93	4.52	50.45	68.20	-17.75




Report No.: TMWK2309003421KR

Page: 206 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

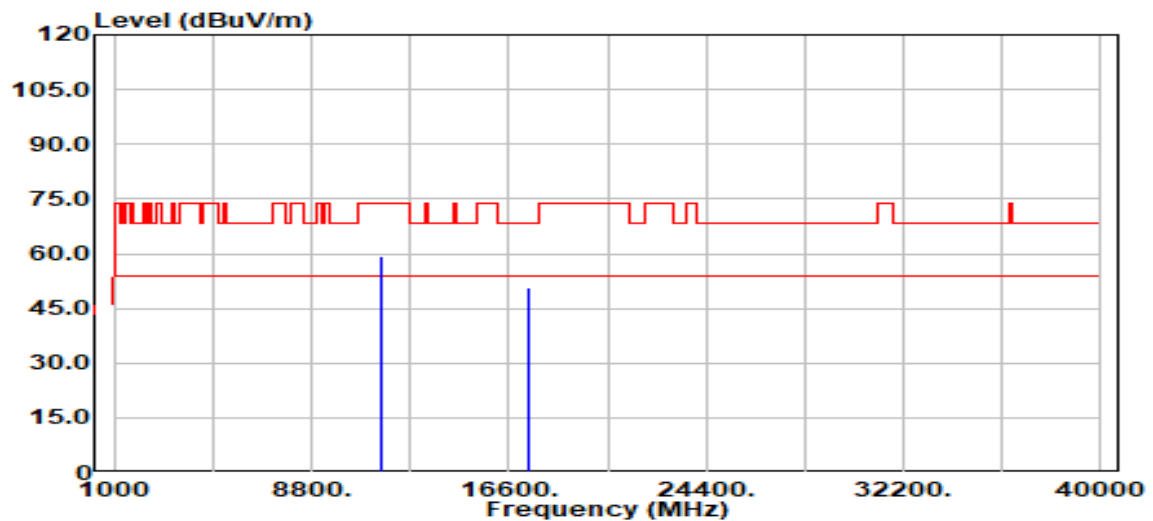

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	54.50	5.05	59.55	74.00	-14.45
11570.00	Average	45.50	5.05	50.55	54.00	-3.45
17355.00	Peak	46.32	4.61	50.93	68.20	-17.27




Report No.: TMWK2309003421KR

Page: 207 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

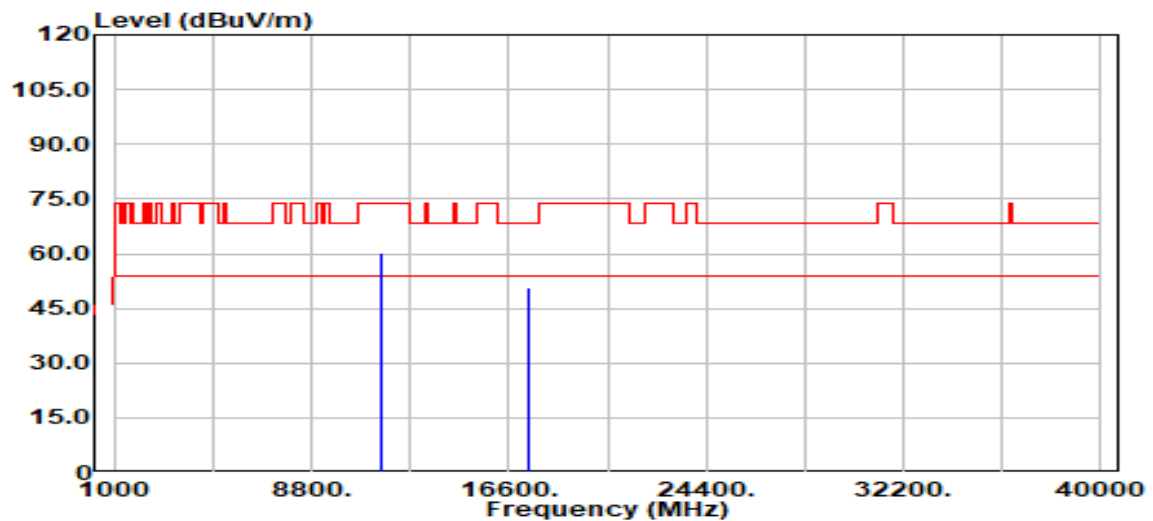


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	55.09	5.05	60.14	74.00	-13.86
11570.00	Average	46.19	5.05	51.24	54.00	-2.76
17355.00	Peak	45.95	4.61	50.56	68.20	-17.64

Report No.: TMWK2309003421KR

Page: 208 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

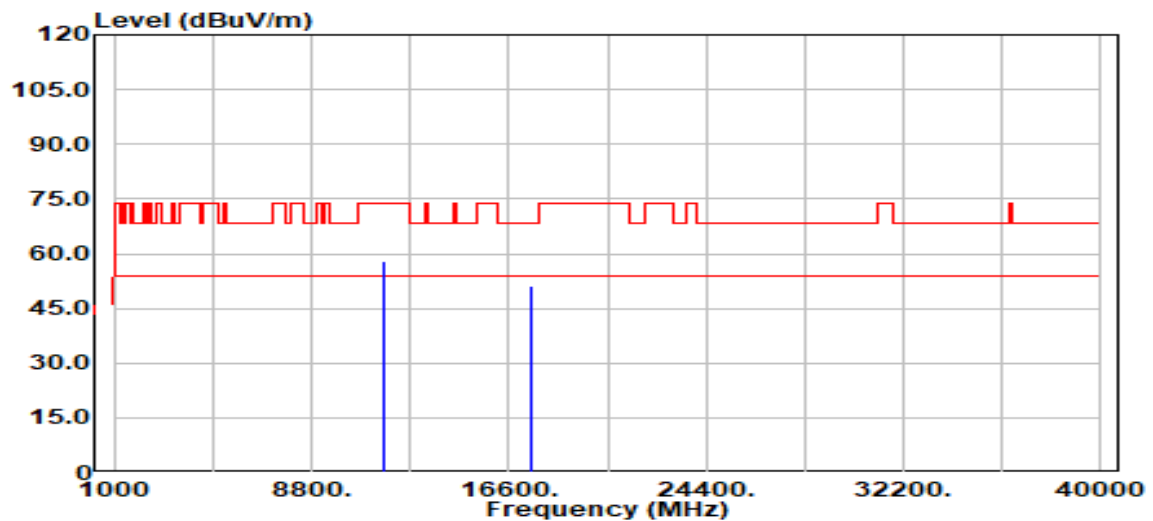

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	52.78	5.03	57.81	74.00	-16.19
11650.00	Average	46.42	5.03	51.45	54.00	-2.55
17475.00	Peak	46.62	4.37	50.99	68.20	-17.21




Report No.: TMWK2309003421KR

Page: 209 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11a/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :H
Setting :14.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

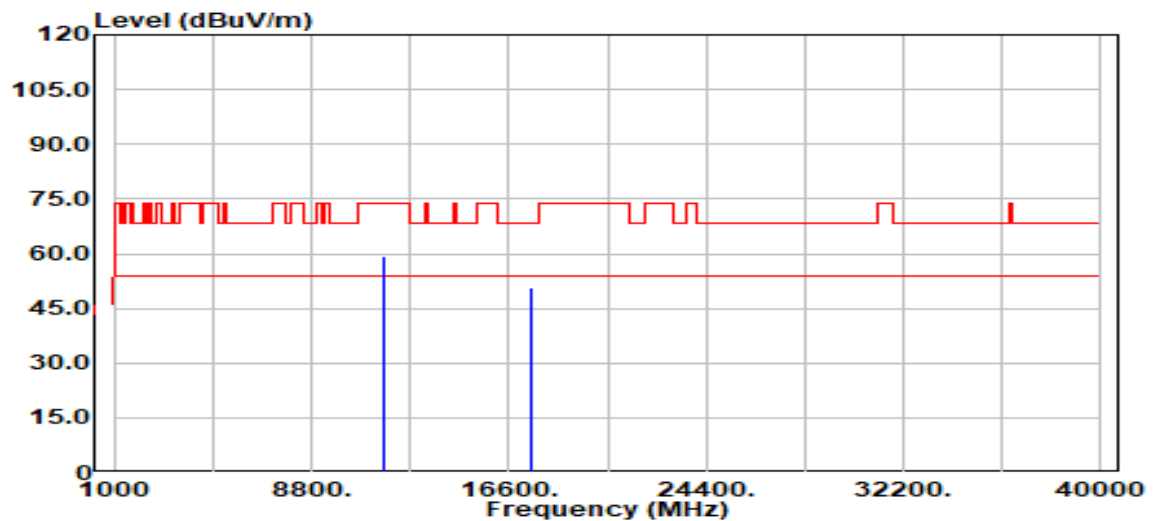

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	54.36	5.03	59.39	74.00	-14.61
11650.00	Average	45.61	5.03	50.64	54.00	-3.36
17475.00	Peak	46.49	4.37	50.86	68.20	-17.34




Report No.: TMWK2309003421KR

Page: 210 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

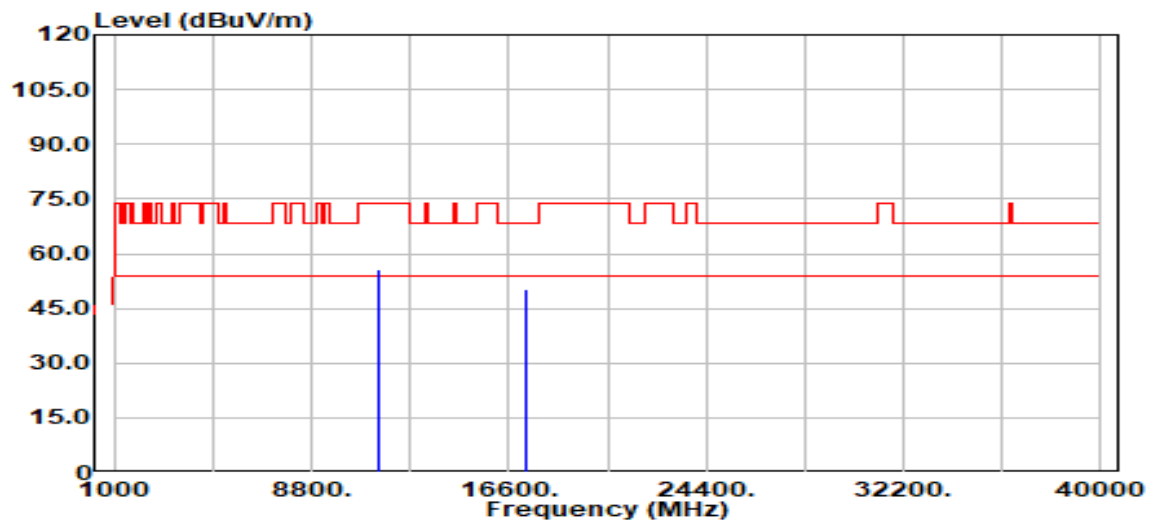


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11490.00	Peak	50.52	4.99	55.51	74.00	-18.49
11490.00	Average	42.15	4.99	47.14	54.00	-6.86
17235.00	Peak	45.78	4.52	50.30	68.20	-17.90

Report No.: TMWK2309003421KR

Page: 211 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

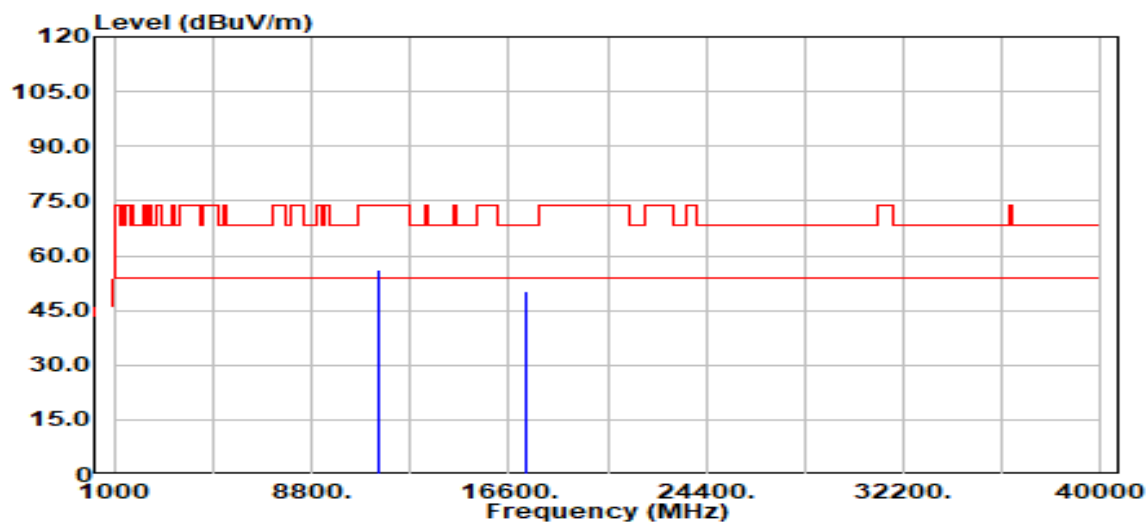

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	51.06	4.99	56.06	74.00	-17.94
11490.00	Average	43.91	4.99	48.90	54.00	-5.10
17235.00	Peak	45.87	4.52	50.39	68.20	-17.81




Report No.: TMWK2309003421KR

Page: 212 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

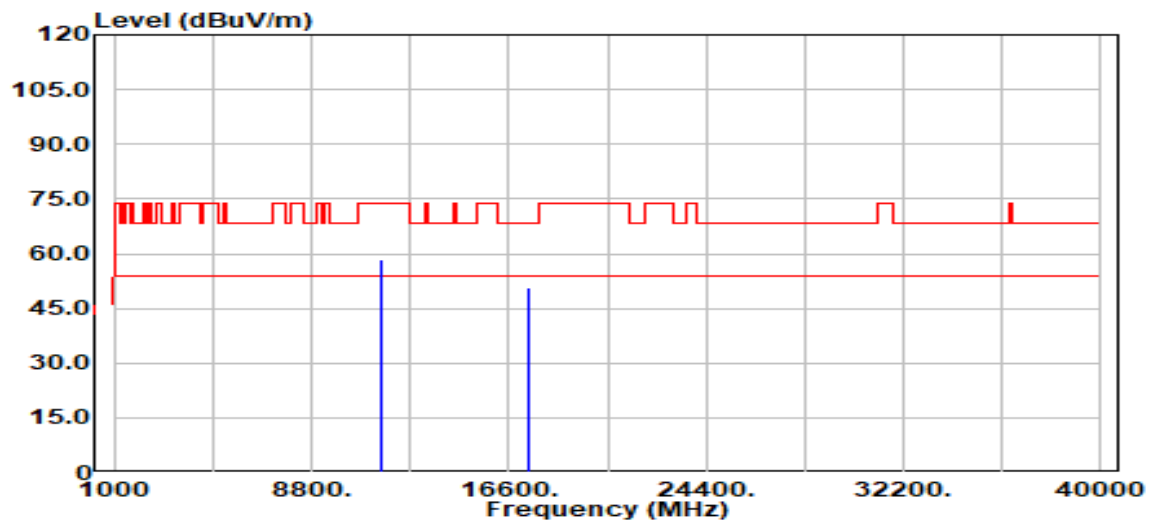

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	53.36	5.05	58.41	74.00	-15.59
11570.00	Average	44.29	5.05	49.34	54.00	-4.66
17355.00	Peak	45.89	4.61	50.50	68.20	-17.70




Report No.: TMWK2309003421KR

Page: 213 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

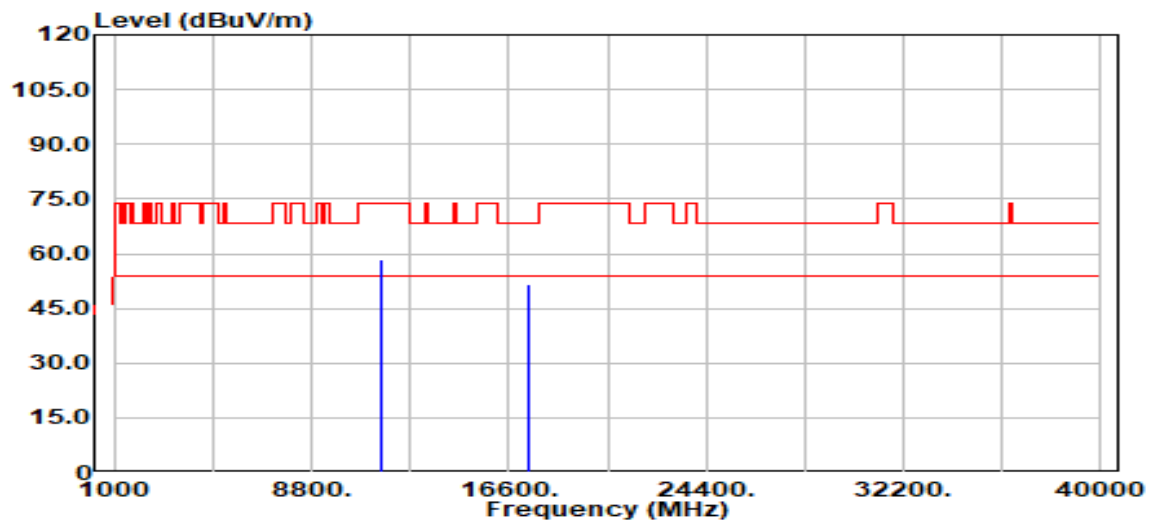

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11570.00	Peak	53.46	5.05	58.51	74.00	-15.49
11570.00	Average	44.65	5.05	49.70	54.00	-4.30
17355.00	Peak	46.93	4.61	51.53	68.20	-16.67




Report No.: TMWK2309003421KR

Page: 214 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

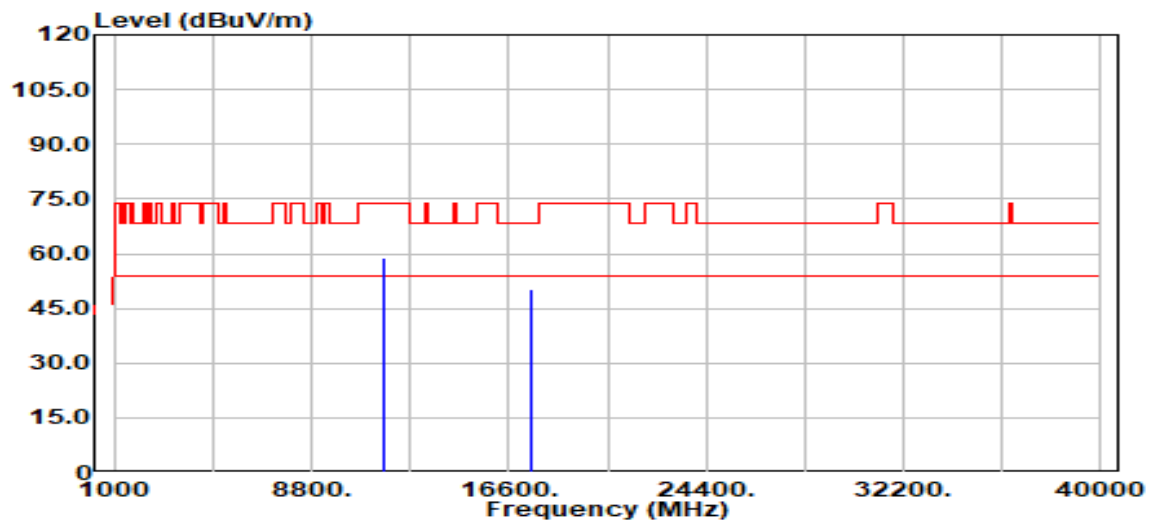

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11650.00	Peak	53.64	5.03	58.67	74.00	-15.33
11650.00	Average	45.52	5.03	50.55	54.00	-3.45
17475.00	Peak	45.98	4.37	50.35	68.20	-17.85




Report No.: TMWK2309003421KR

Page: 215 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

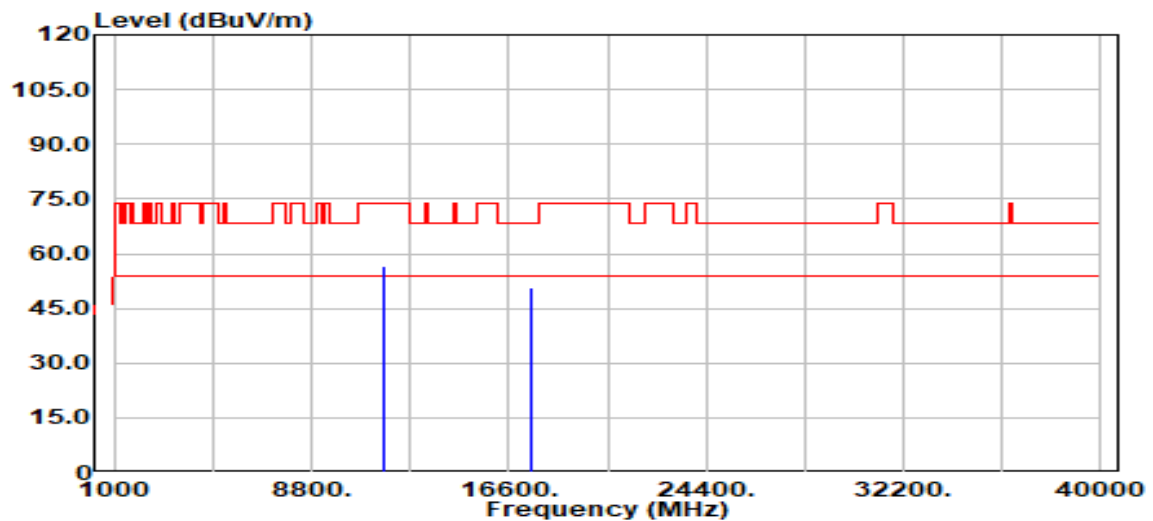

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	51.70	5.03	56.73	74.00	-17.27
11650.00	Average	44.50	5.03	49.53	54.00	-4.47
17475.00	Peak	46.13	4.37	50.50	68.20	-17.70




Report No.: TMWK2309003421KR

Page: 216 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

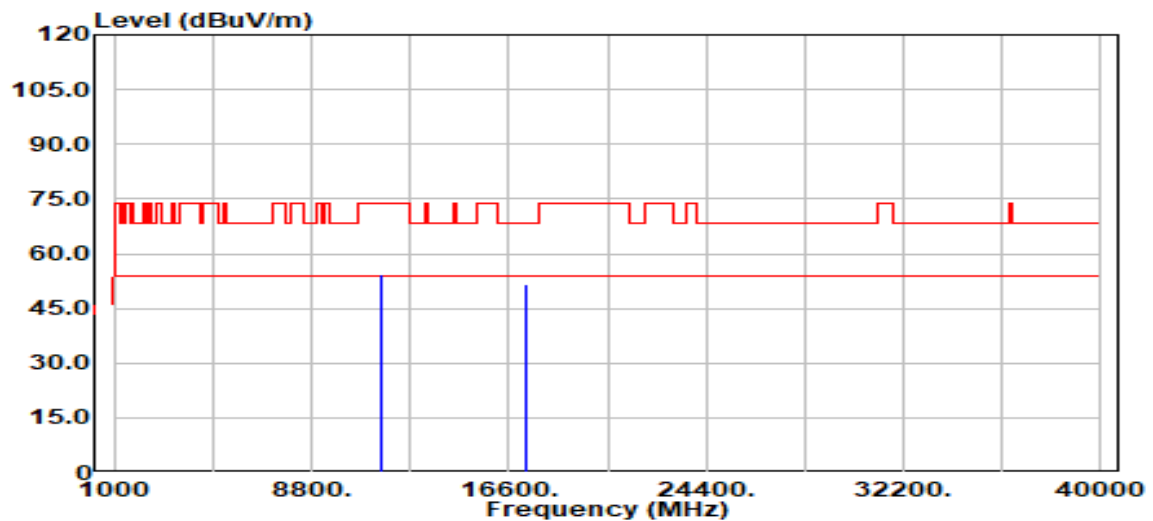

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11510.00	Peak	49.36	5.00	54.36	74.00	-19.64
11510.00	Average	40.55	5.00	45.55	54.00	-8.45
17265.00	Peak	46.92	4.53	51.45	68.20	-16.75




Report No.: TMWK2309003421KR

Page: 217 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

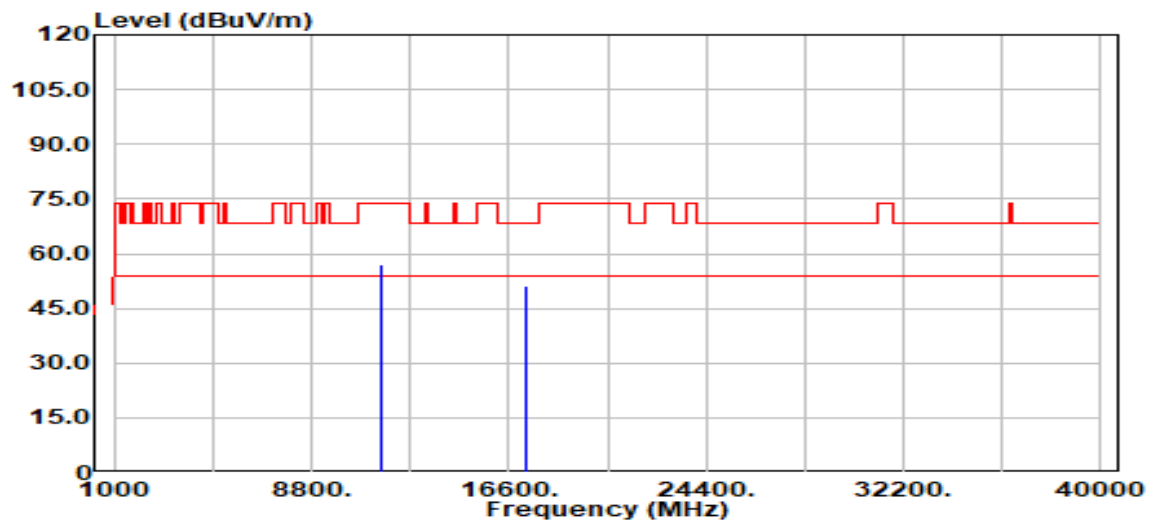

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11510.00	Peak	51.87	5.00	56.87	74.00	-17.13
11510.00	Average	42.88	5.00	47.88	54.00	-6.12
17265.00	Peak	46.46	4.53	50.98	68.20	-17.22




Report No.: TMWK2309003421KR

Page: 218 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

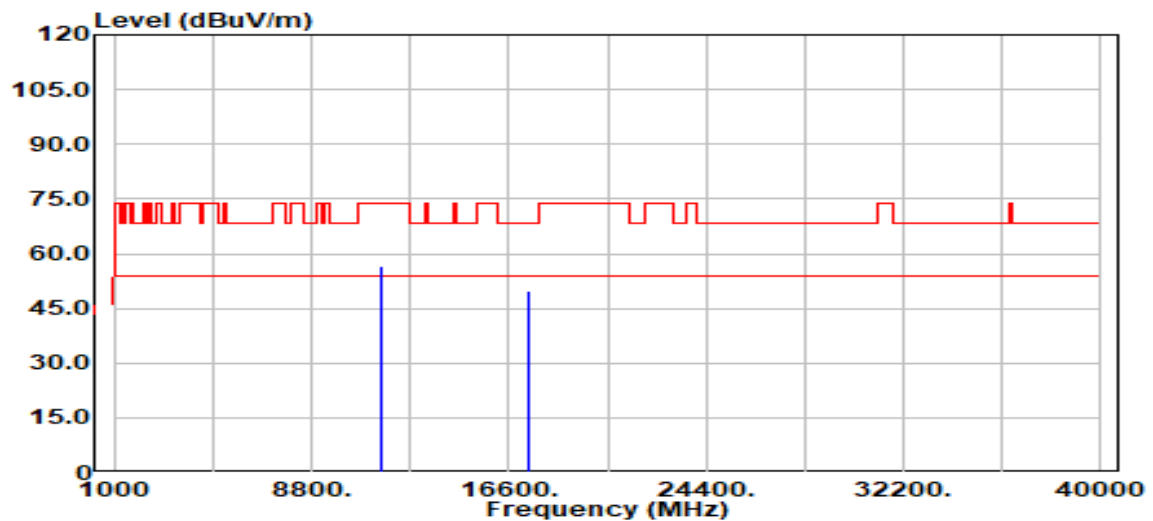

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.00	Peak	51.33	5.10	56.42	74.00	-17.58
11590.00	Average	42.81	5.10	47.90	54.00	-6.10
17385.00	Peak	45.46	4.54	50.00	68.20	-18.20




Report No.: TMWK2309003421KR

Page: 219 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :H
Setting :15.5

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

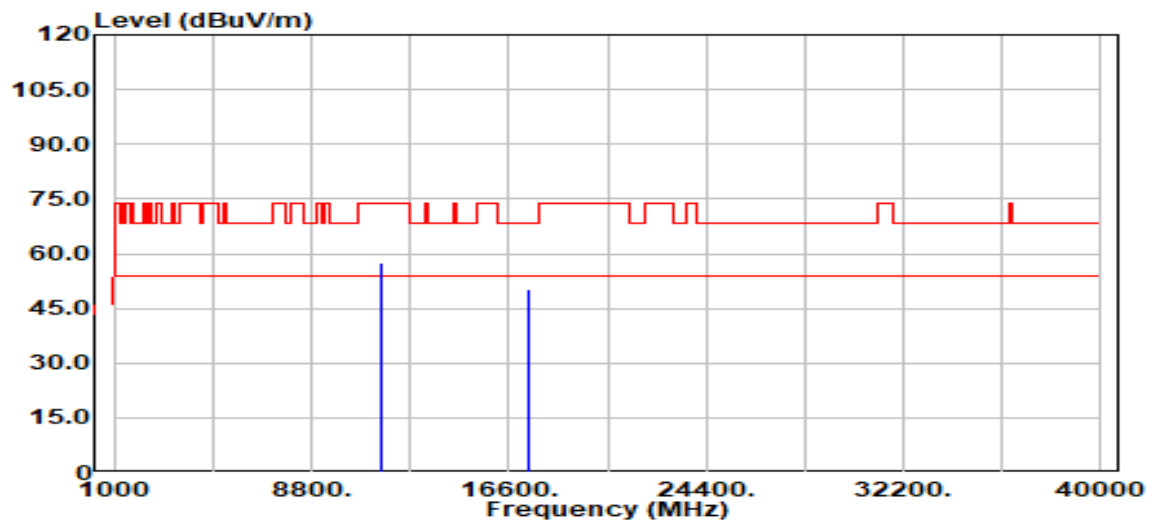

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11590.00	Peak	52.46	5.10	57.56	74.00	-16.44
11590.00	Average	43.14	5.10	48.24	54.00	-5.76
17385.00	Peak	45.55	4.54	50.09	68.20	-18.11




Report No.: TMWK2309003421KR

Page: 220 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :H
Setting :16

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966D

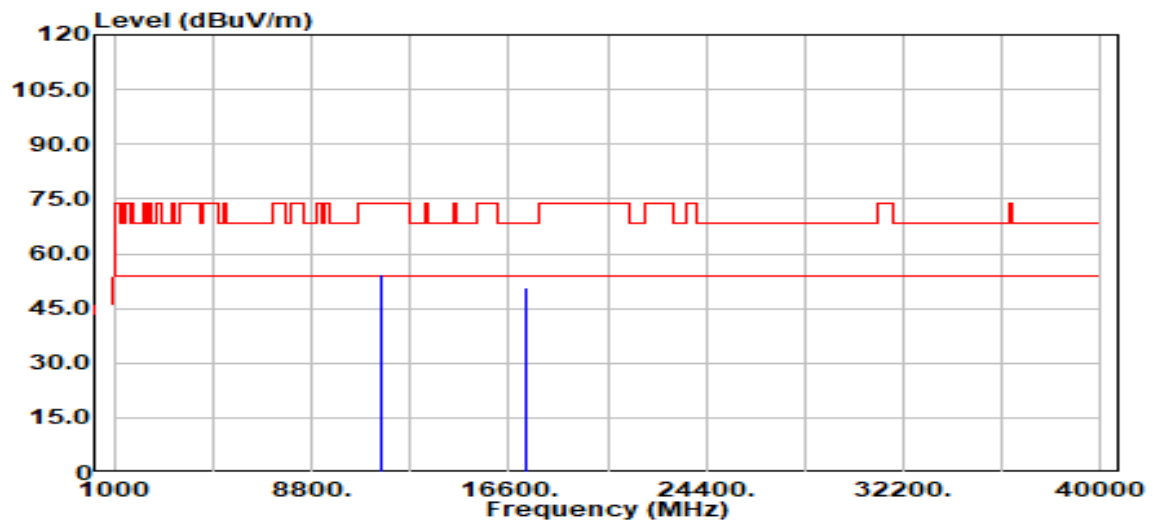


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.00	Peak	49.55	5.00	54.55	74.00	-19.45
11550.00	Average	40.73	5.00	45.73	54.00	-8.27
17325.00	Peak	46.22	4.52	50.74	68.20	-17.46

Report No.: TMWK2309003421KR

Page: 221 / 221
Rev.: 01

Project No. :TM-2309000356P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :H
Setting :16

Test Date :2023-10-06
Temp./Humi. :25.0/61
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966D

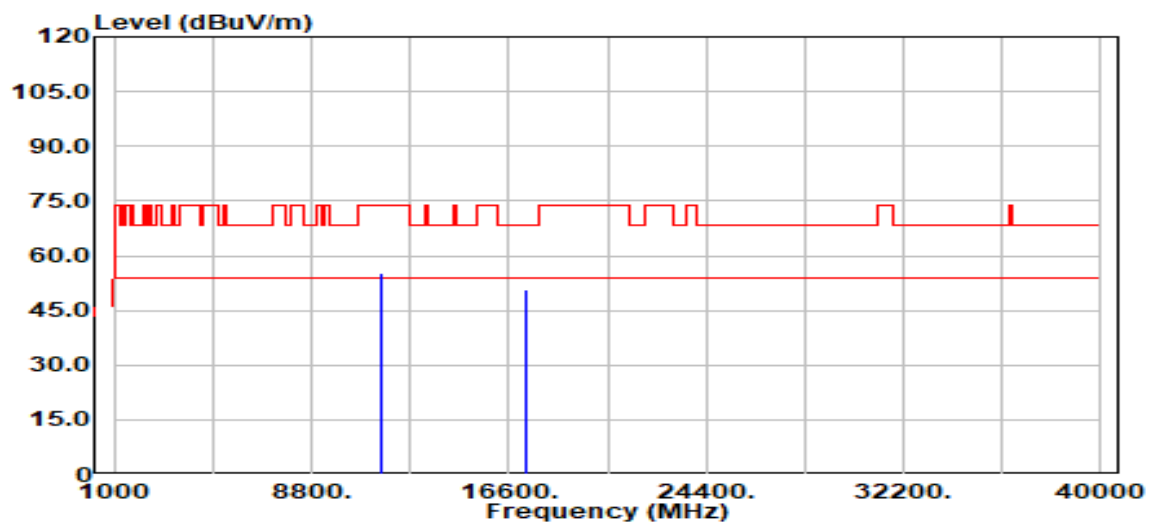

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11550.00	Peak	50.30	5.00	55.30	74.00	-18.70
11550.00	Average	41.95	5.00	46.95	54.00	-7.05
17325.00	Peak	46.00	4.52	50.52	68.20	-17.68

--End of Test Report--