

Antenna Specification

Antenna Type	Metal Loop Antenna
Antenna Peak Gain	3.26 dBi
Operating Band	2400 MHz ~ 2483.5 MHz
Test laboratory name and Address	IoT Antenna Test Laboratory, 3 / A, LEEDARSON LIGHTING CO., LTD. Xingtai Industrial Park, Changtai Economic Development Zone, Zhangzhou, 363900, China
Antenna Manufacturer	LEEDARSON LIGHTING CO., LTD.
Model name	Cync Tile
Test Date	2024-12-24
Test Conductor	Yuxing Lin

OTA measurement

Test System

The SY-16 OTA system and RayZone2800 OTA system are anechoic chambers, which can measure antenna passive data such as antenna efficiency, antenna gain, and 2D&3D pattern. The systems are shown as follows:



Figure 1 SY-16 OTA system

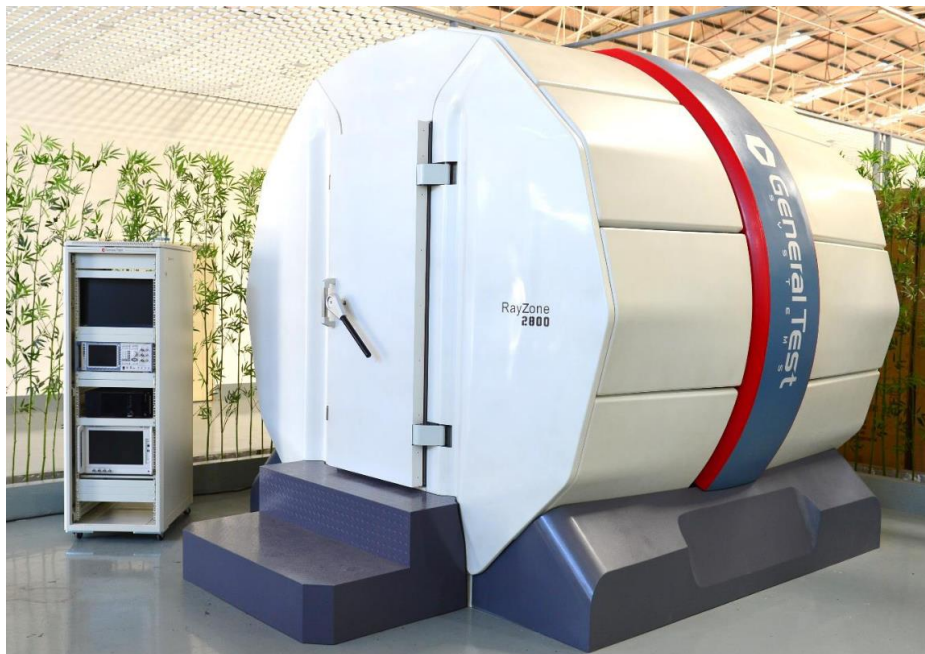


Figure 2 RayZone2800 OTA system

Equipment List

Table 1 Equipment List

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
☒	Network Analyzer	Keysight	E5071C	MY46527808	2024/1/9	2025/1/8
☐	Network Analyzer	Keysight	E5071C	MY46108051	2024/4/19	2025/4/18
☒	Anechoic Chamber	Sunyield	SY-16	SI1727	2024/4/28	2025/4/27
☐	Anechoic Chamber	General Test System	RayZone2800	CT10121244 B5079	2024/5/10	2025/5/9

Test Method

Table 2 Test Method

Name	Antenna Performance				
Parameter	Radiation Efficiency				
Test Method	IEEE Standard Test Procedures for Antennas				
Standard No.	ANSI/IEEE Std 149-2021				
Test Software	PMS-V2.8.5	☒	MaxSign-V1.4.3	☐	

Test Result

Efficiency and Gain

Table 3 Antenna Efficiency and Gain

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	2.87	-1.94	63.94
2410	3.12	-1.79	66.19
2420	3.13	-1.86	65.11
2430	3.11	-1.96	63.69
2440	3.24	-1.81	65.98
2450	3.26	-1.95	63.88
2460	3.12	-2.12	61.44
2470	3.07	-2.18	60.55
2480	3.09	-2.16	60.77
2490	2.97	-2.28	59.16
2500	2.82	-2.42	57.31

Radiation Pattern

Table 5 3D radiation pattern

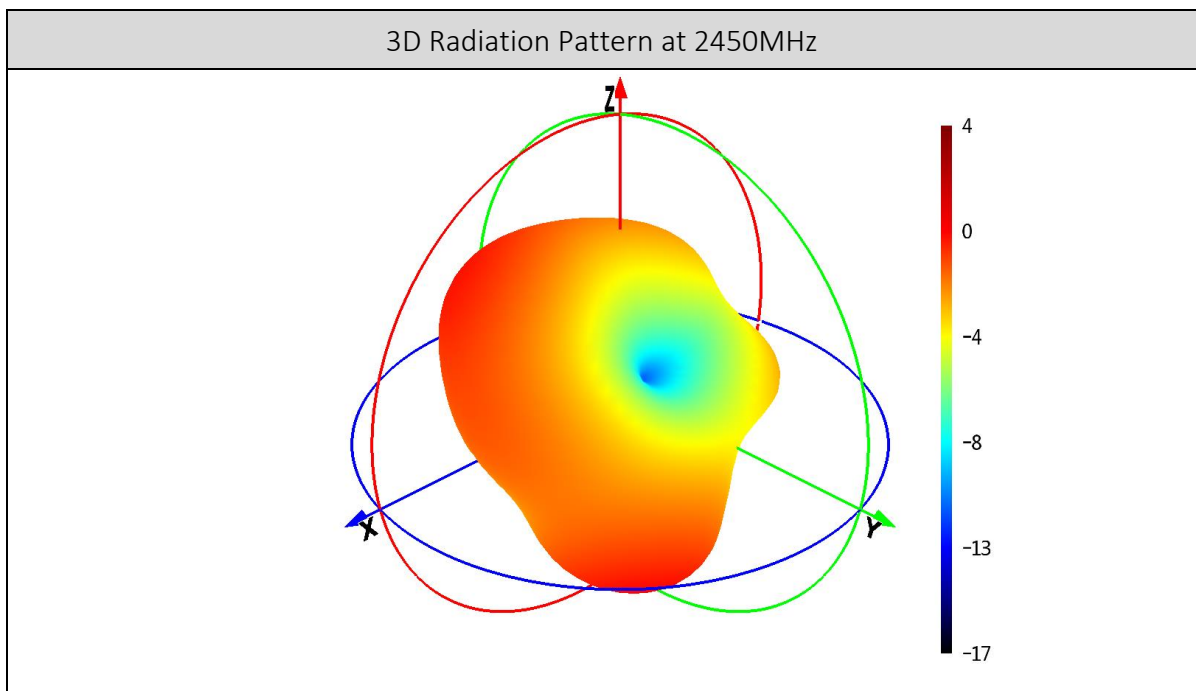


Table 6 Radiation pattern in XY Plane

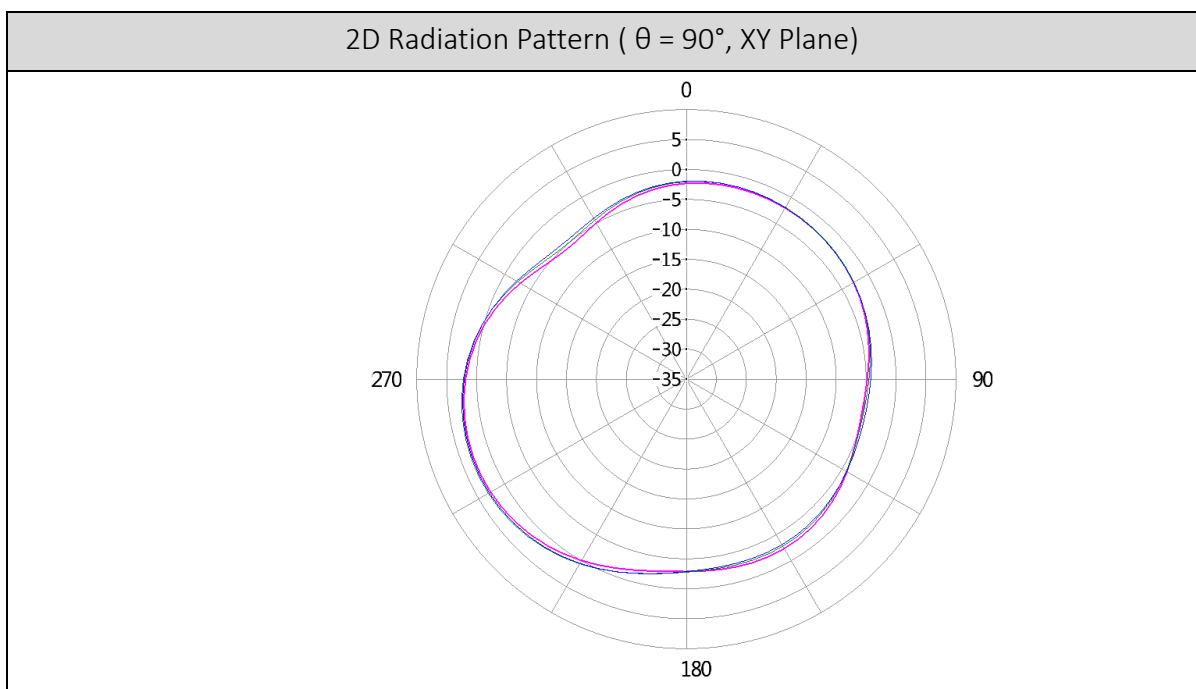


Table 7 Radiation pattern in XZ Plane

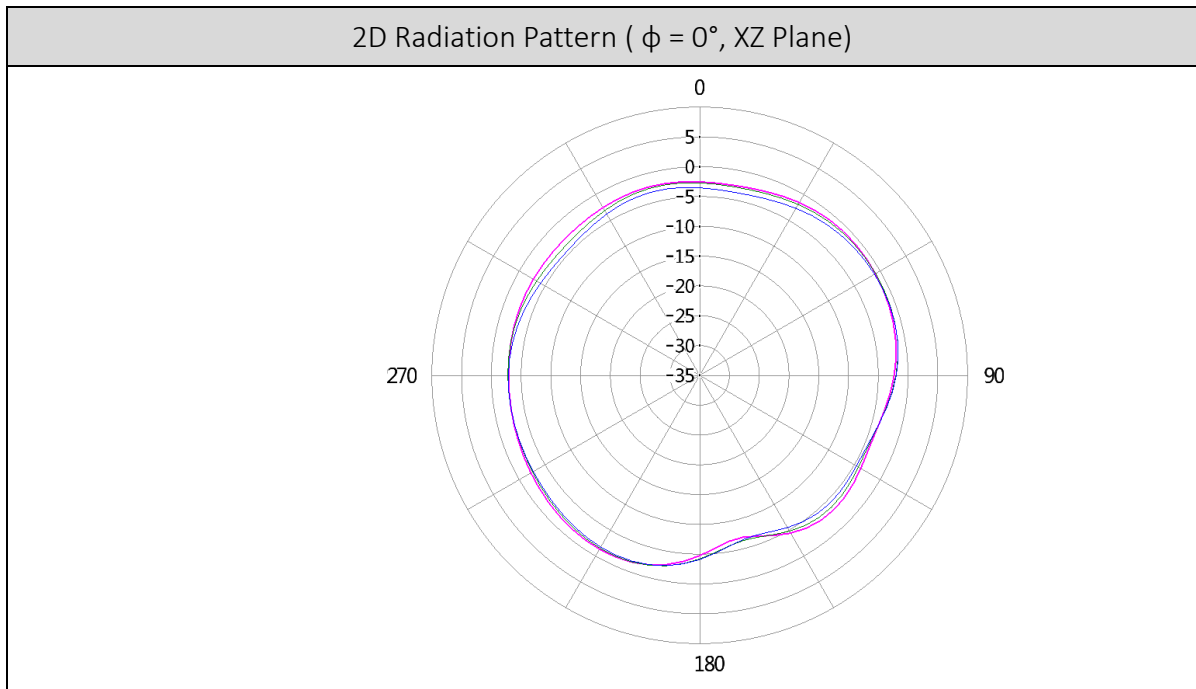


Table 8 Radiation pattern in YZ Plane

