



FCC Test Report

FCC Part 24 / RSS 133

FOR:

TRI-BAND GSM MOBILE PHONE WITH BLUETOOTH

MODEL #: SL75

**SIEMENS COMMUNICATIONS
HAIDENAUPLATZ 1
81667 MUNCHEN
GERMANY**

**FCC ID: PWX-SL75
IC ID: 267E-SL75**

**TEST REPORT #: EMC_1053_2005_FCC24_REV2
DATE: OCTOBER 18, 2005**



TTI-P-G 081/94-A0

Accredited according to **ISO/IEC 17025**



**Bluetooth Qualification
Test Facility
(BQTF)**



**FCC listed # 101450
IC recognized # 3925**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

Table of Contents

1	ASSESSMENT	4
2	ADMINISTRATIVE DATA.....	5
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	5
2.2	IDENTIFICATION OF THE CLIENT	5
2.3	IDENTIFICATION OF THE MANUFACTURER.....	5
3	EQUIPMENT UNDER TEST (EUT).....	6
3.1	IDENTIFICATION OF THE EQUIPMENT UNDER TEST	6
4	SUBJECT OF INVESTIGATION.....	7
5	MEASUREMENTS.....	8
5.1	RF POWER OUTPUT	8
5.1.1	<i>FCC 2.1046 Measurements required: RF power output.....</i>	8
5.1.2	<i>Limits:</i>	8
5.1.2.1	<i>FCC 24.232 (b)(c) Power limits.....</i>	8
5.1.3	<i>Conducted Output Power Measurement procedure:.....</i>	8
5.1.4	<i>Results 1900 MHz band(conducted):</i>	9
5.1.5	<i>Radiated Output Power Measurement procedure:.....</i>	10
5.1.6	<i>EIRP Results 1900 MHz band:.....</i>	11
5.2	OCCUPIED BANDWIDTH/EMISSION BANDWIDTH	12
5.2.1	<i>FCC 2.1049 Measurements required: Occupied bandwidth.....</i>	12
5.2.2	<i>Occupied / emission bandwidth measurement procedure:.....</i>	12
5.2.3	<i>Occupied / Emission bandwidth results 1900 MHz band (GMSK):.....</i>	13
5.2.4	<i>Occupied / Emission bandwidth results 1900 MHz band (8PSK):.....</i>	13
5.3	FREQUENCY STABILITY	26
5.3.1	<i>Limit</i>	26
5.3.2	<i>FREQUENCY STABILITY (PCS-1900)</i>	27
5.4	SPURIOUS EMISSIONS CONDUCTED.....	28
5.4.1	<i>FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.</i>	28
5.4.2	<i>Limits:</i>	28
5.4.2.1	<i>FCC 24.238 Emission limitations for Broadband PCS equipment.</i>	28
5.4.3	<i>Conducted out of band emissions measurement procedure:.....</i>	28
5.4.4	<i>Bandedge Results PCS-1900.....</i>	30
5.4.5	<i>Conducted Spurious Results PCS-1900</i>	32
5.5	SPURIOUS EMISSIONS RADIATED	36
5.5.1	<i>FCC 2.1053 Measurements required: Field strength of spurious radiation.....</i>	36
5.5.2	<i>Limits:</i>	36
5.5.2.1	<i>FCC 24.238 Emission limitations for Broadband PCS equipment.</i>	36
5.5.3	<i>Radiated out of band measurement procedure:</i>	37
5.6	RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-133	54
5.6.1	<i>Receiver Spurious on EUT.....</i>	55
5.7	CO-LOCATION.....	60
5.7.1	<i>RESULTS (PCS AND BLUETOOTH).....</i>	61
5.8	AC POWERLINE CONDUCTED EMISSIONS § 15.107/207.....	67
5.8.1	<i>Results EUT.....</i>	68
6	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	69



7 **REFERENCES** 70

1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS133.

Company	Description	Model #
SIEMENS COMMUNICATIONS	TRI-BAND GSM MOBILE PHONE WITH BLUETOOTH	SL75



2005-10-18
Neelesh Raj
Project Leader



2005-10-18
Lothar Schmidt
Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Neelesh Raj
Date of test:	2005-09-23 to 2005-10-17

2.2 Identification of the Client

Applicant's Name:	SIEMENS COMMUNICATIONS
Street Address:	HAIDENAUPLATZ 1
City/Zip Code	81667 MUCHEM
Country	GERMANY
Contact Person:	MARTIN WEINBERGER
Phone No.	+49 89 722 37148
Fax:	--
e-mail:	Martin.weinberger@siemens.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	SIEMENS AG
Manufacturers Address:	SUDSTR. 9
City/Zip Code	D-47475 KAMP-LINTFORD
Country	GERMANY

3 Equipment under Test (EUT)

3.1 Identification of the Equipment under Test

Marketing Name:	SL75
Description:	TRI-BAND GSM MOBILE PHONE WITH BLUETOOTH
Model No:	SL75
FCC ID:	PWX-SL75
IC ID:	267E-SL75
Frequency Range:	1850.2MHz – 1909.8MHz for PCS 1900
Type(s) of Modulation:	GMSK, 8PSK
Number of Channels:	299 for PCS-1900
Antenna Type:	EXTERNAL
Output Power:	FCC 24: 0.685W EIRP@1850.2MHz (GMSK) FCC 24: 0.187W <u>EIRP@1909.8MHz</u> (8PSK)

4 Subject of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the SL75 referred to as EUT as specified by requirements listed in FCC rules Parts 2, and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS133.

5 Measurements

5.1 RF Power Output

5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

5.1.2 Limits:

5.1.2.1 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603B November 2002

2.2.1 Conducted Carrier Output Power Rating



1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.1.4 Results 1900 MHz band(conducted):

Conducted power measurements are provided by SIEMENS (*see attachment*)

REPORT: EMC_SL75 “Conducted Output power GSM 1900”

PAGE 3, SECTION 2.1


Siemens SL75, (B2.2 7278) Silver IMEI: 004400009253657

Frequency (MHz)	Conducted Output Power (dBm) (GMSK)	Conducted Output Power (dBm) (8PSK)
1850.2	30.55	24.52
1880.0	30.33	24.59
1909.8	30.29	24.8

5.1.5 Radiated Output Power Measurement procedure:

Based on TIA-603B November 2002

2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

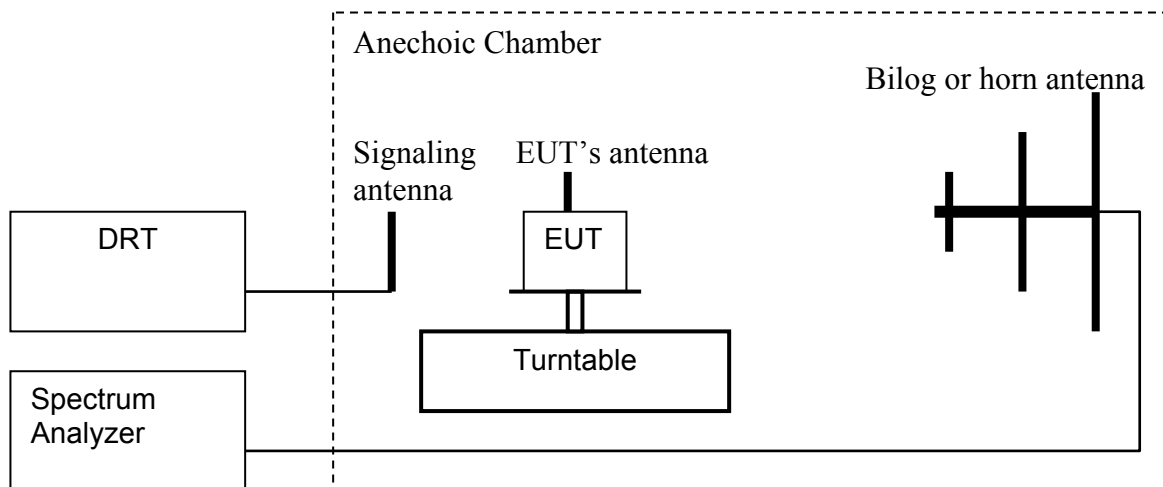

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
 2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
 4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 7. Determine the ERP using the following equation:

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
 8. Determine the EIRP using the following equation:

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
 9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

5.1.6 EIRP Results 1900 MHz band:

Power Control Level	Burst Peak EIRP
0	≤33dBm (1W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm) (GMSK)
1850.2	28.359
1880.0	27.711
1909.8	28.198

Frequency (MHz)	Effective Isotropic Radiated Power (dBm) (8PSK)
1850.2	22.329
1880.0	21.971
1909.8	22.708

Note: No plots are available because all readings were performed in the antenna lab.


5.2 Occupied Bandwidth/Emission Bandwidth

5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

5.2.2 Occupied / emission bandwidth measurement procedure:

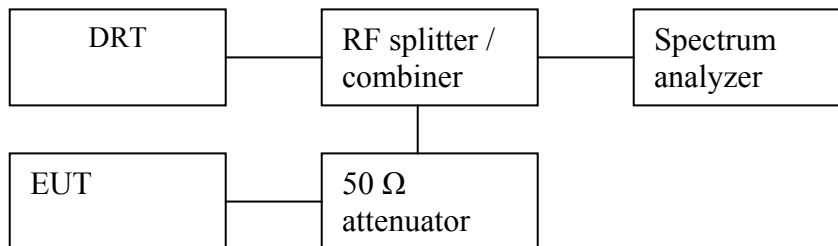

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.2.3 Occupied / Emission bandwidth results 1900 MHz band (GMSK):

Frequency (MHz)	Occupied B/W -20 dB (KHz)	Emission B/W -26 dB (KHz)
1850.2	264.529	306.613
1880.0	274.549	314.629
1909.8	272.545	310.621

5.2.4 Occupied / Emission bandwidth results 1900 MHz band (8PSK):

Frequency (MHz)	Occupied B/W -20 dB (KHz)	Emission B/W -26 dB (KHz)
1850.2	266.533	308.617
1880.0	264.529	300.601
1909.8	278.557	308.617

GMSK**-20dB (PCS-1900)****CHANNEL 512**

Max/Ref Lvl

Delta 2 [T1]

RBW

3 kHz

RF Att

20 dB

30 dBm

0.46 dB

VBW 3 kHz

20 dBm


264.52905812 kHz

SWT

280 ms

Unit

dBm

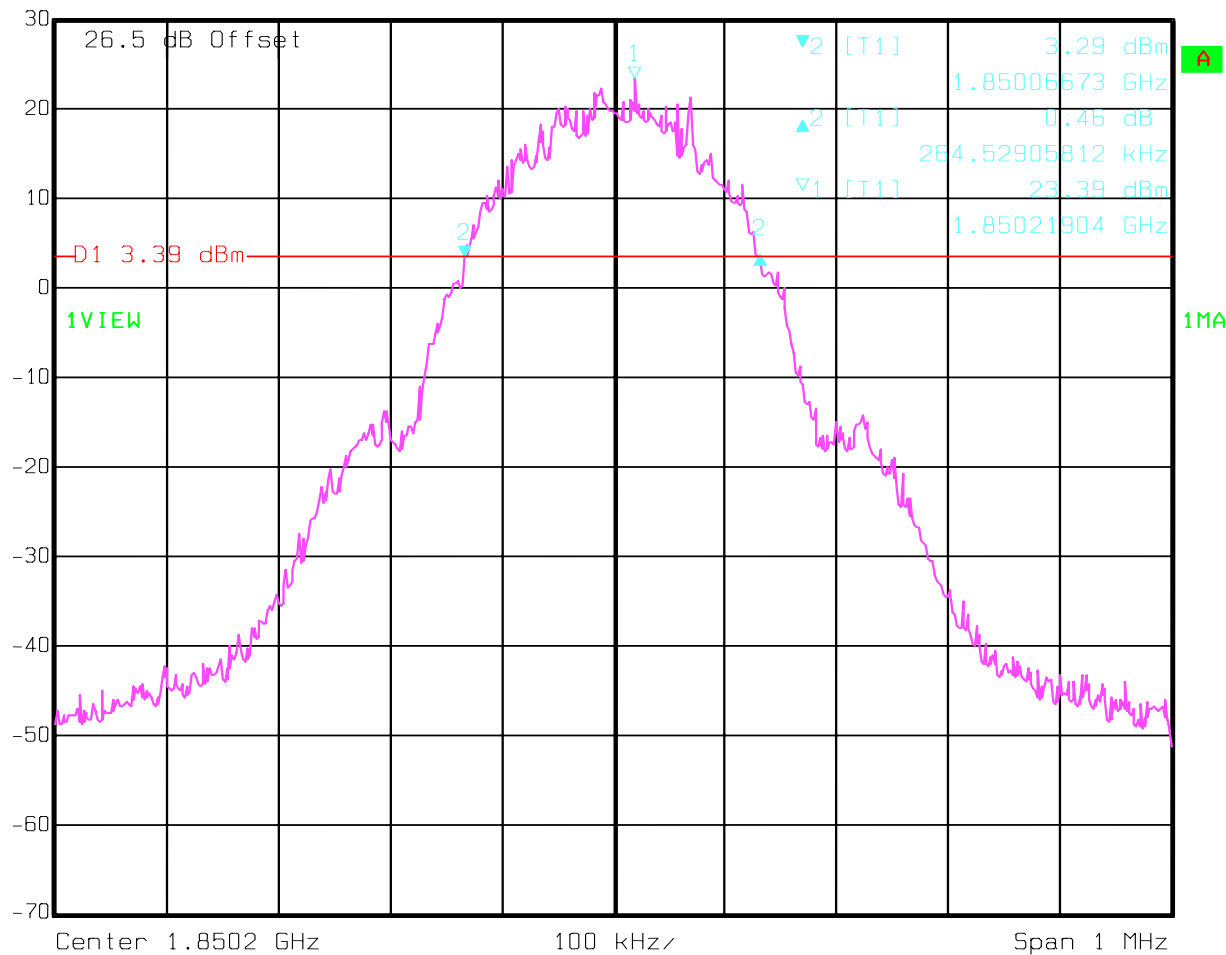

Date: 29.SEP.2005 18:02:40

-20dB (PCS-1900)**CHANNEL 661**

Max/Ref Lvl

Delta 2 [T1]

RBW

3 kHz

RF Att

20 dB

30 dBm

-1.94 dB

VBW 3 kHz

20 dBm


274.54909820 kHz

SWT

280 ms

Unit


dBm

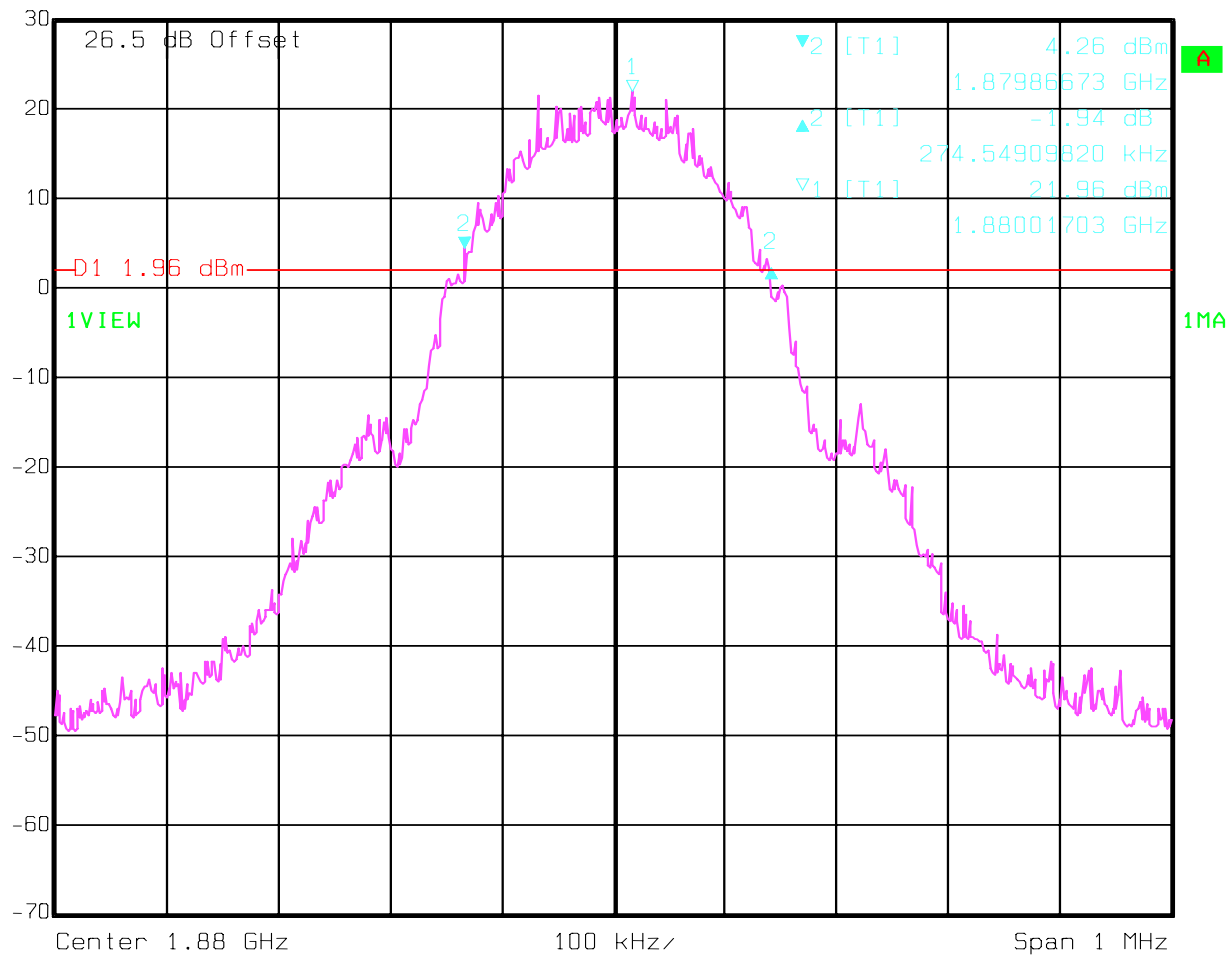

Date: 29.SEP.2005 18:06:45

-20dB (PCS-1900)**CHANNEL 810**


 Max/Ref Lvl Delta 2 [T1] RBW 3 kHz RF Att 20 dB
30 dBm 2.27 dB VBW 3 kHz
20 dBm 272.54509018 kHz SWT 280 ms Unit dBm

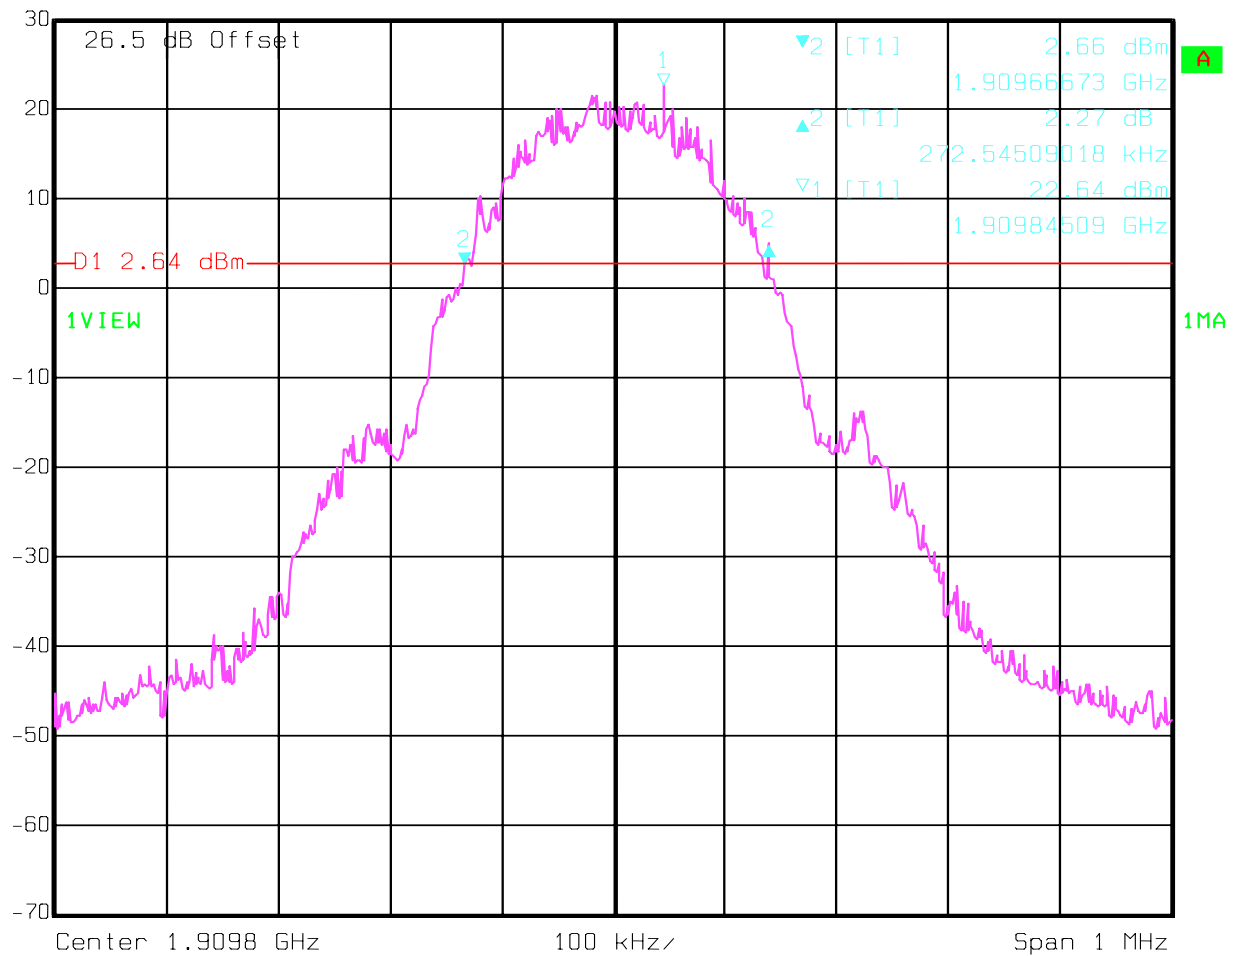

Date: 29.SEP.2005 18:13:27

-26dB (PCS-1900)**CHANNEL 512**


 Max/Ref Lvl Delta 2 [T1] RBW 3 kHz RF Att 20 dB
30 dBm -1.24 dB VBW 3 kHz
20 dBm 306.61322645 kHz SWT 280 ms Unit dBm

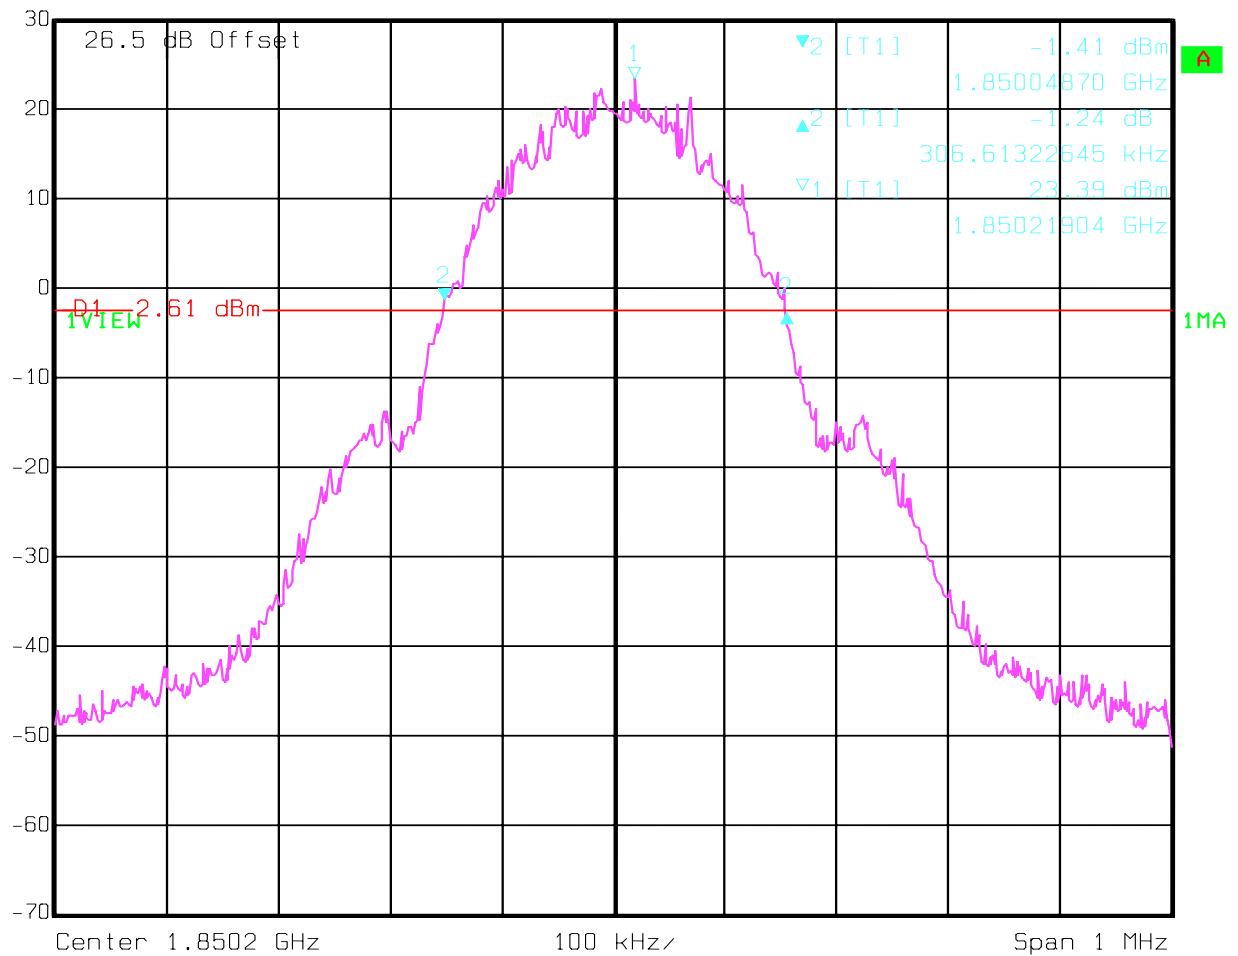

Date: 29.SEP.2005 18:03:56

-26dB (PCS-1900)**CHANNEL 661**


Max/Ref Lvl Delta 2 [T1] RBW 3 kHz RF Att 20 dB
30 dBm -1.34 dB VBW 3 kHz
20 dBm 314.62925852 kHz SWT 280 ms Unit dBm

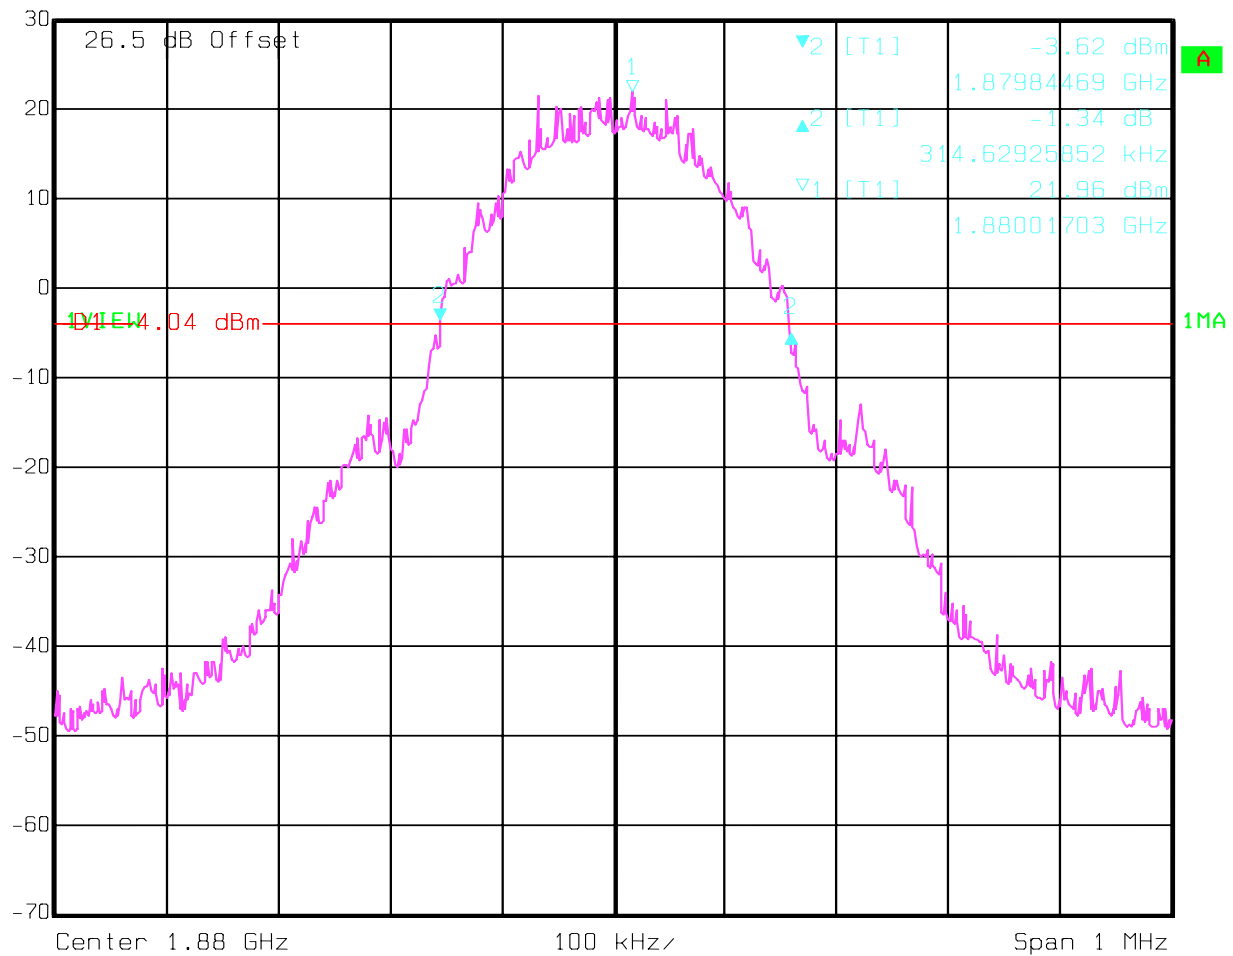

Date: 29.SEP.2005 18:07:37

-26dB (PCS-1900)**CHANNEL 810**


 Max/Ref Lvl **Delta 2 [T1]** RBW 3 kHz RF Att 20 dB
30 dBm 0.33 dB VBW 3 kHz
20 dBm 310.62124248 kHz SWT 280 ms Unit dBm

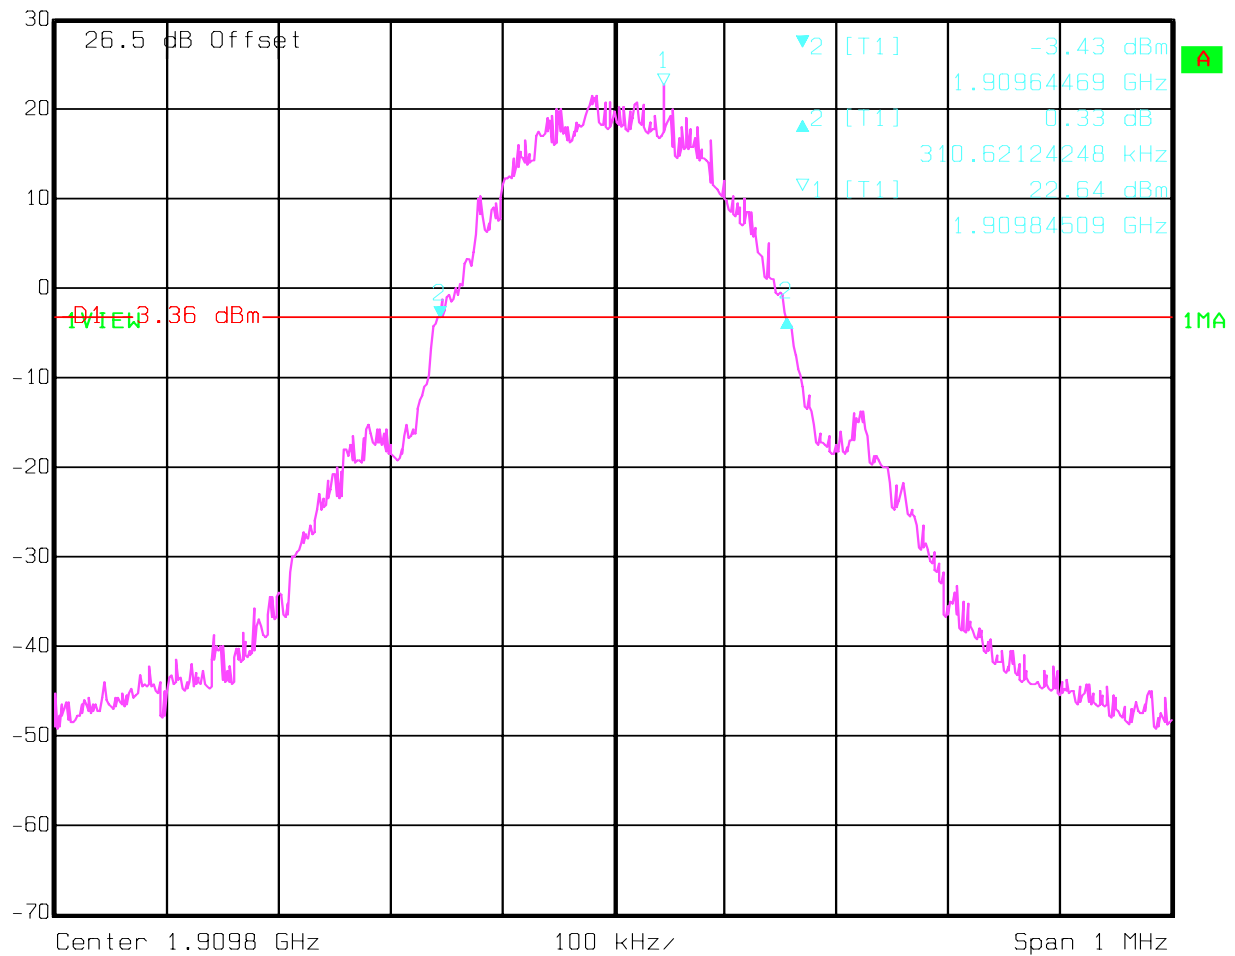

Date: 29.SEP.2005 18:12:18

8PSK**-26dB (PCS-1900)****CHANNEL 810**


Delta 2 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl 1.00 dB VBW 3 kHz
30 dBm 308.61723447 kHz SWT 280 ms Unit dBm

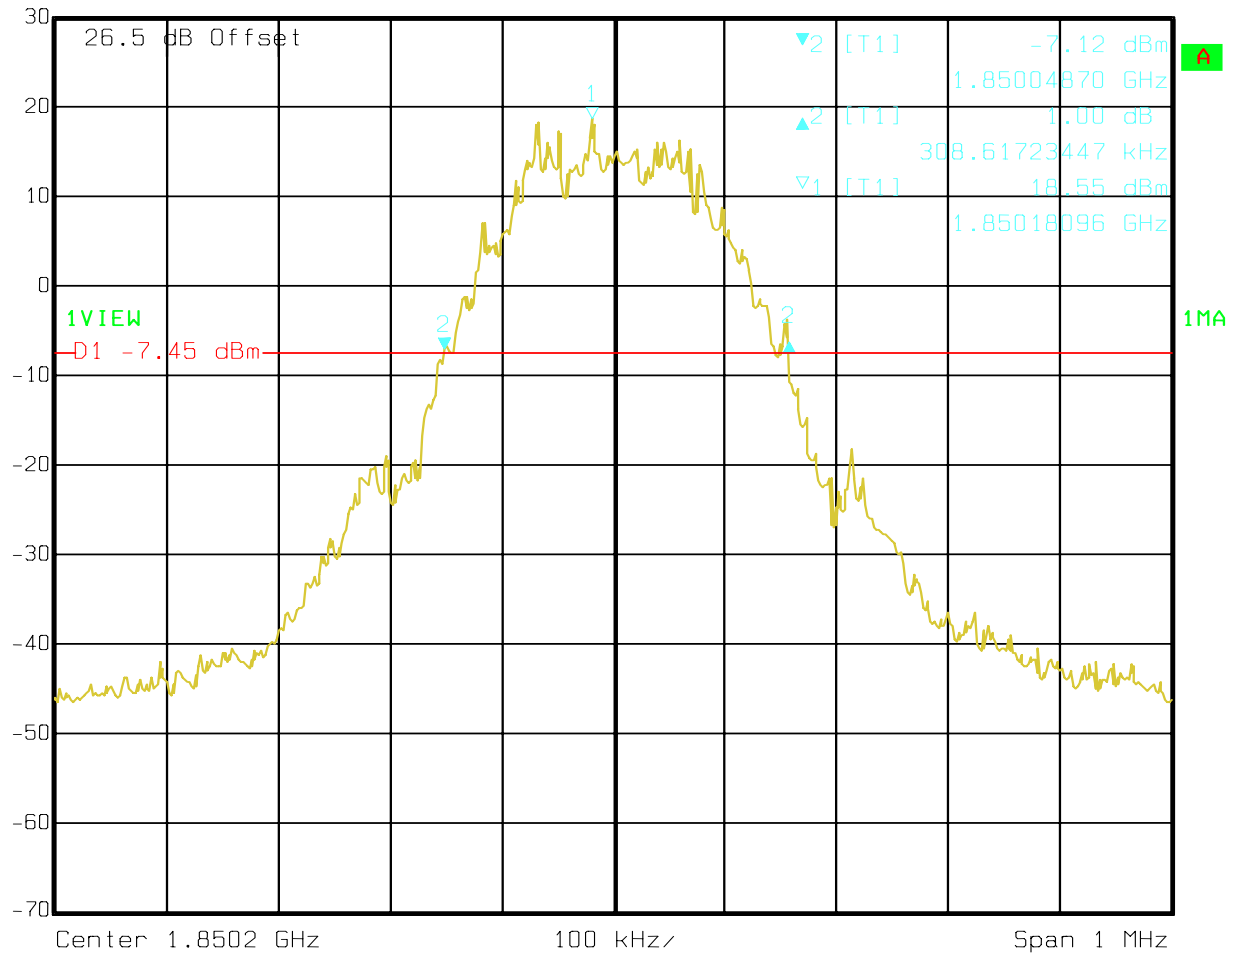

Date: 28.OCT.2005 12:58:08

-26dB (PCS-1900)**CHANNEL 661**


Delta 2 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl 0.89 dB VBW 3 kHz
30 dBm 300.60120240 kHz SWT 280 ms Unit dBm

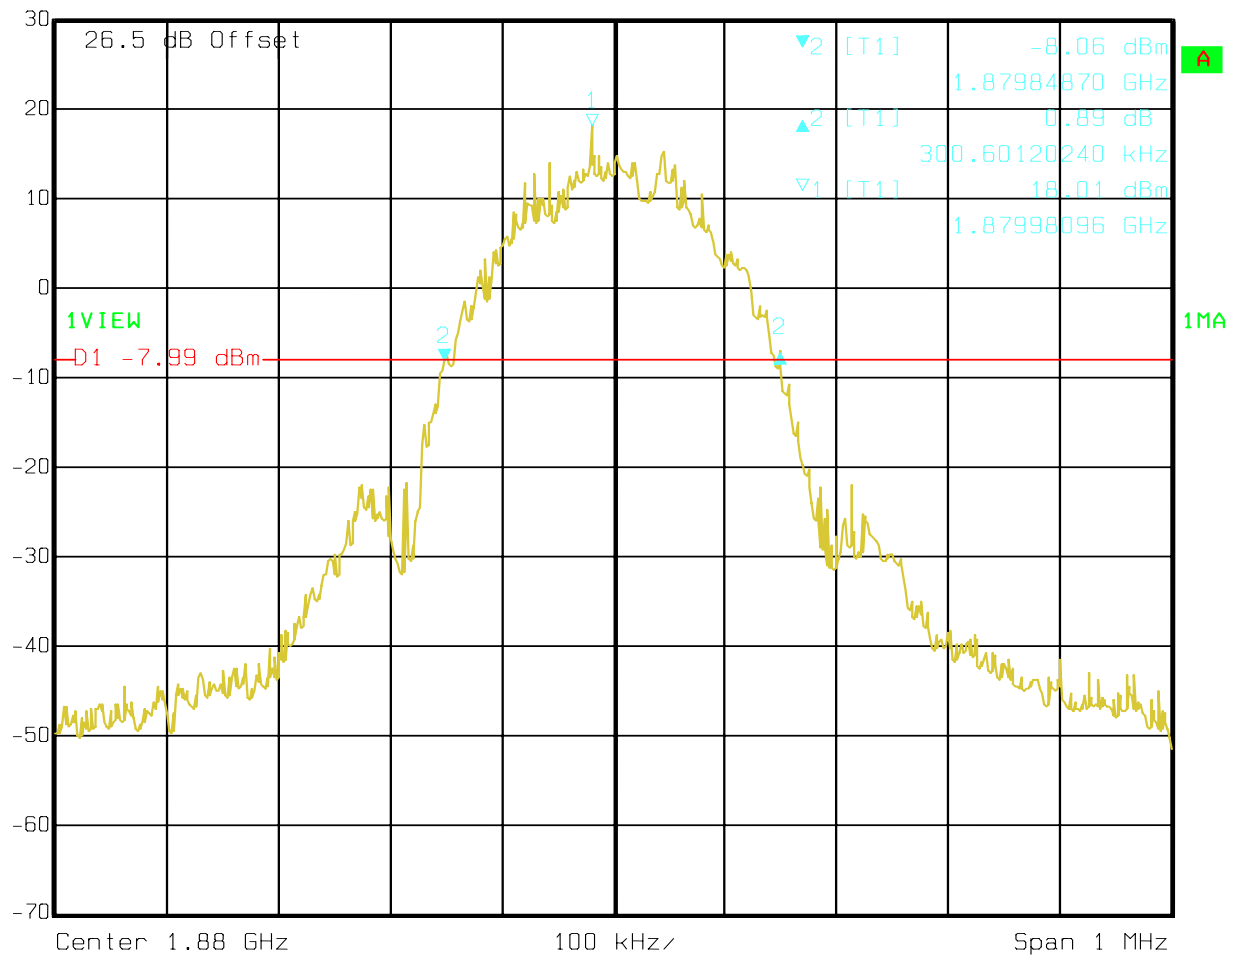

Date: 28.OCT.2005 12:09:24


-26dB (PCS-1900)**CHANNEL 512**

Delta 2 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl -0.39 dB VBW 3 kHz
30 dBm 308.61723447 kHz SWT 280 ms Unit dBm

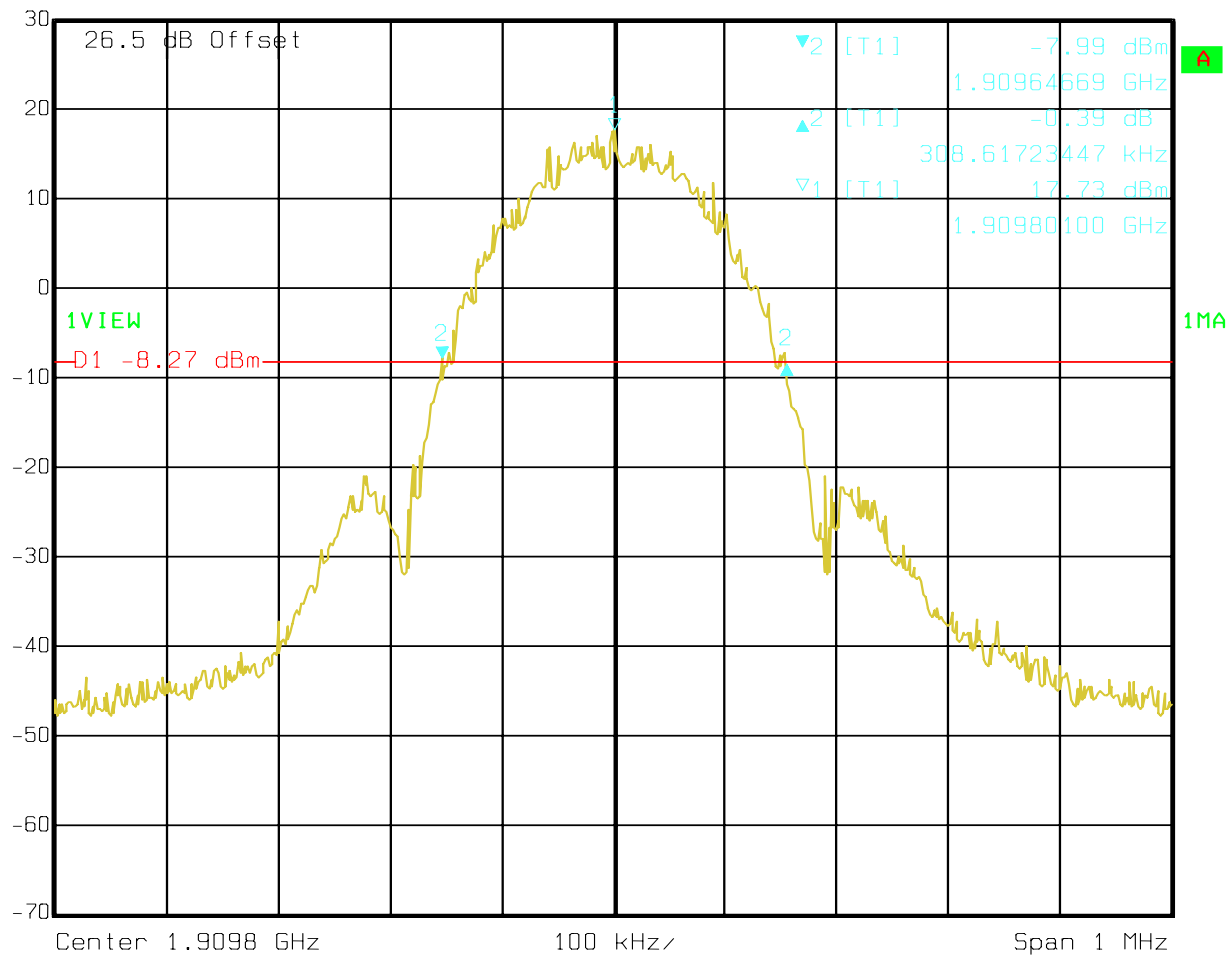

Date: 28.OCT.2005 14:11:48


-20dB (PCS-1900)
CHANNEL 810

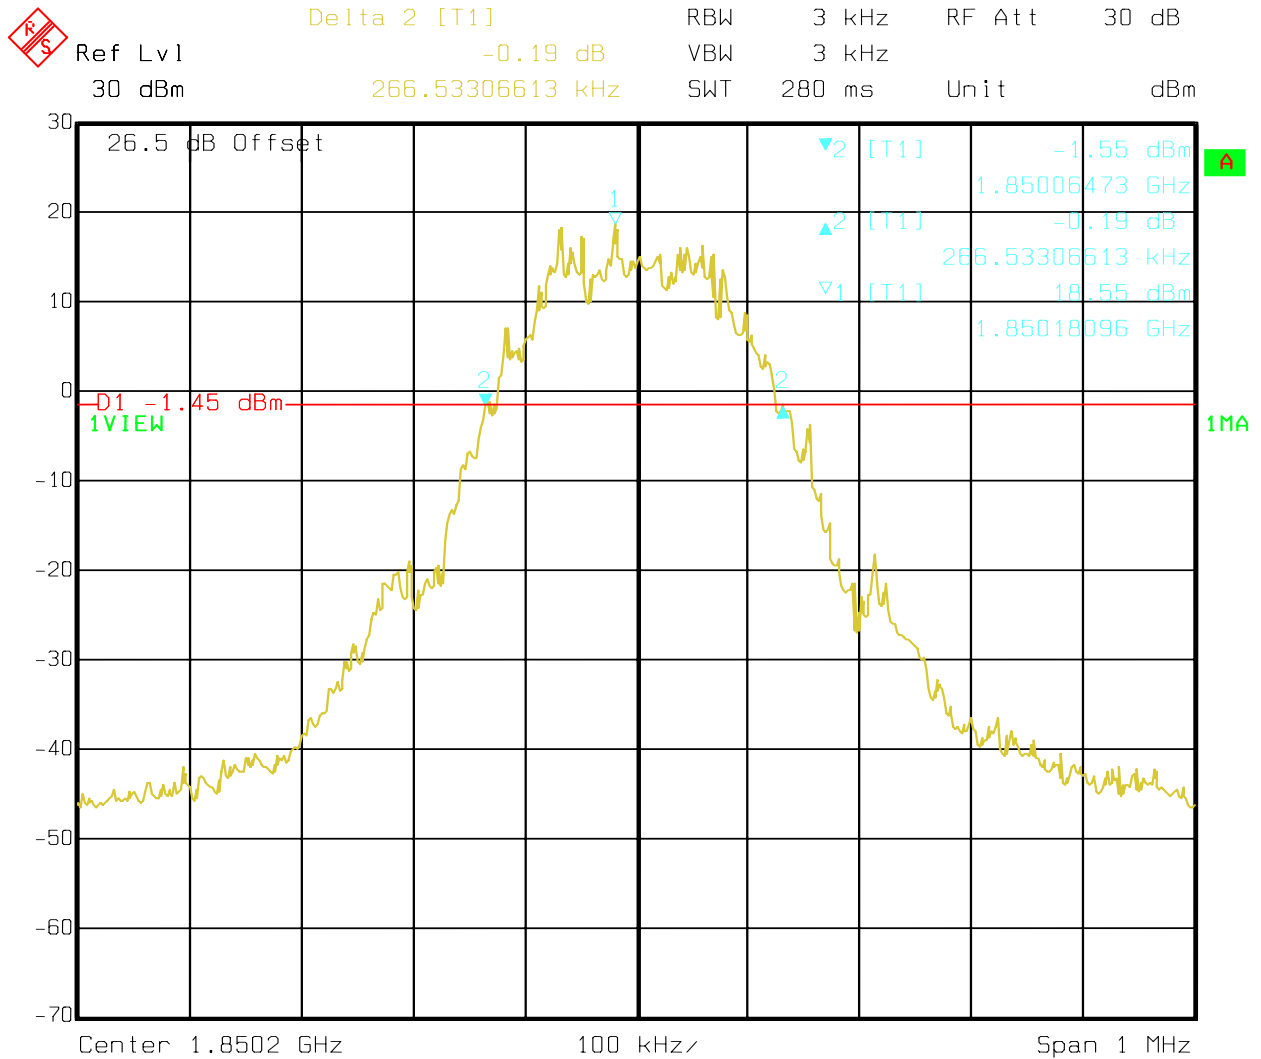

Date: 28.OCT.2005 12:57:20

-20dB (PCS-1900)**CHANNEL 661**


Delta 2 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl -0.41 dB VBW 3 kHz
30 dBm 264.52905812 kHz SWT 280 ms Unit dBm

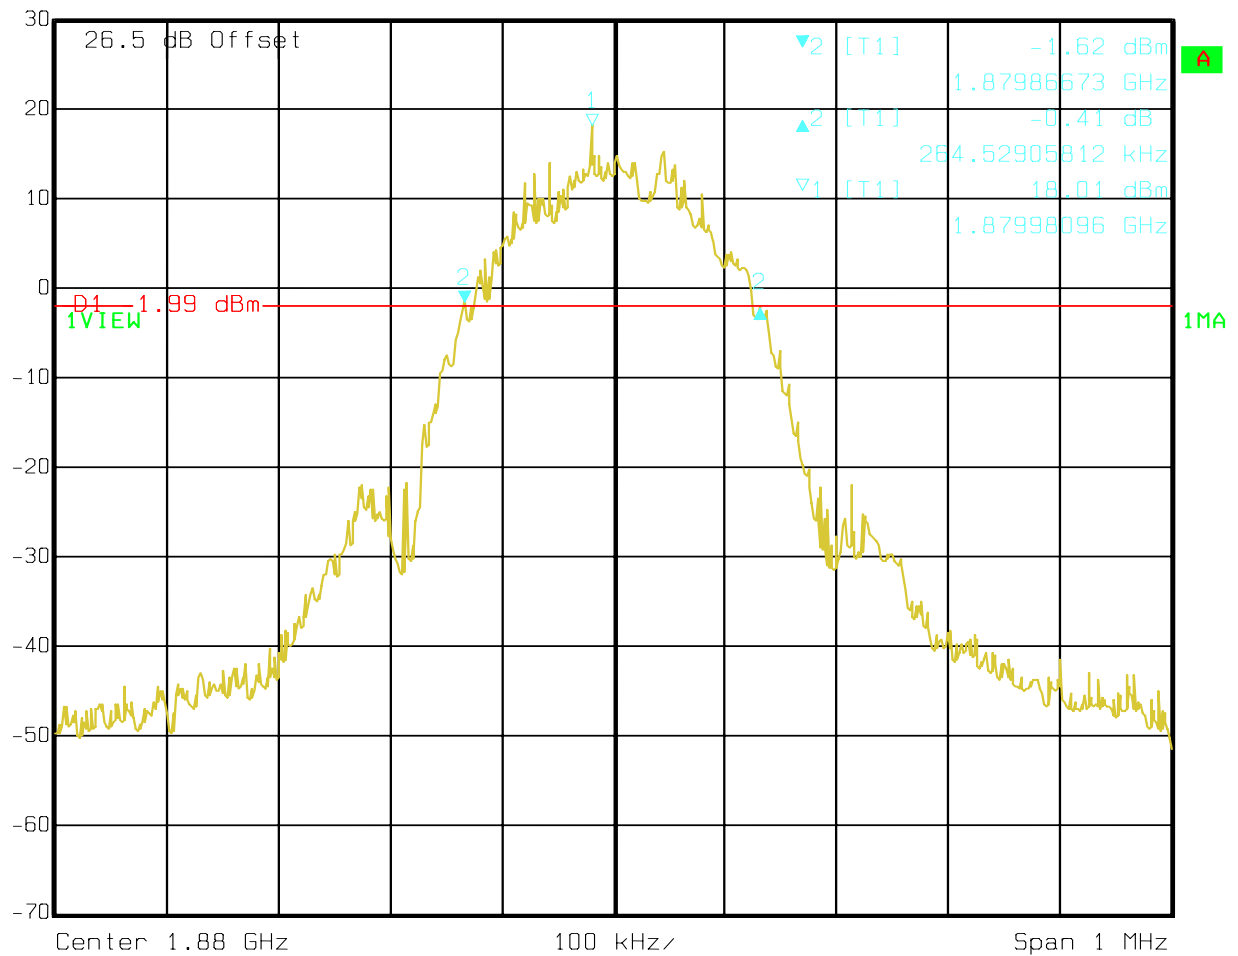

Date: 28.OCT.2005 12:08:46

-20dB (PCS-1900)**CHANNEL 512**

Delta 2 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl 0.85 dB VBW 3 kHz
30 dBm 278.55711423 kHz SWT 280 ms Unit dBm

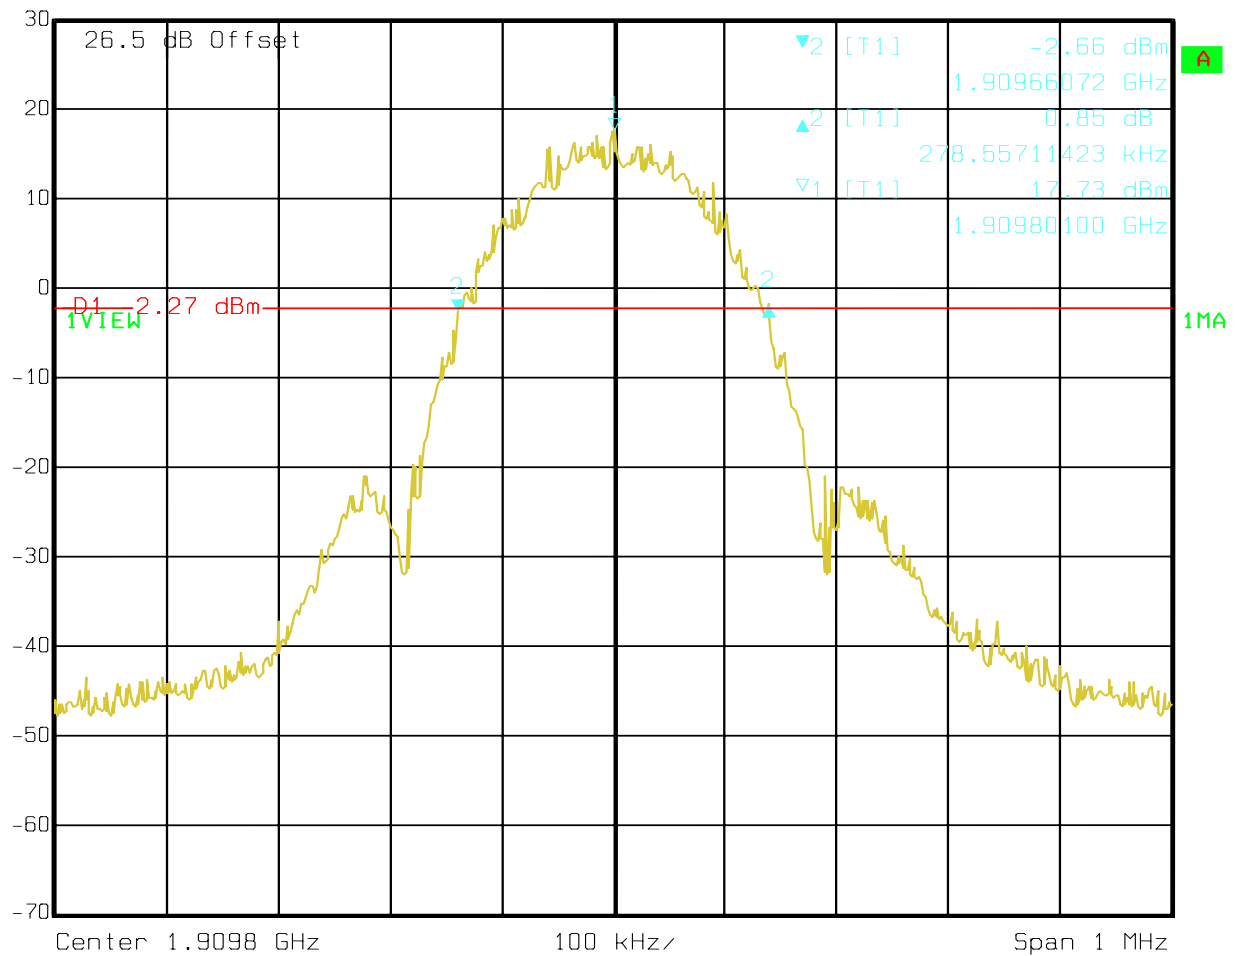

Date: 28.OCT.2005 14:11:06

5.3 Frequency Stability

5.3.1 Limit

For Hand carried battery powered equipment:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 661 for PCS-1900), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 661 for PCS-1900), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

For equipment powered by primary supply voltage:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

5.3.2 FREQUENCY STABILITY (PCS-1900)**AFC FREQ ERROR vs. VOLTAGE**

Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
3.6	54	0.064546976
4.5	49	0.058570404

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	59	0.070523548
-20	57	0.068132919
-10	43	0.051398518
0	54	0.064546976
+10	51	0.060961033
+20	52	0.062156347
+30	61	0.072914176
+40	55	0.06574229
+50	49	0.058570404

5.4 Spurious Emissions Conducted

5.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

5.4.2 Limits:

5.4.2.1 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.4.3 Conducted out of band emissions measurement procedure:

Based on TIA-603B November 2002

2.2.13 Unwanted Emissions: Conducted Spurious

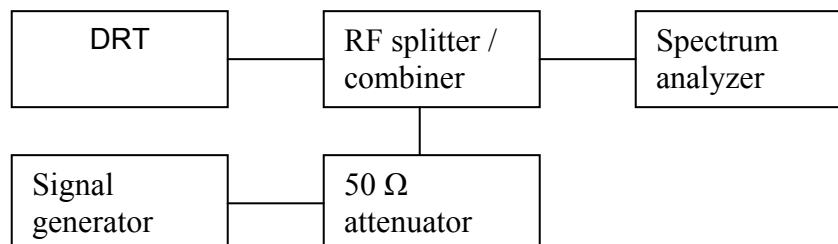


1. Connect the equipment as shown in the above diagram.
2. Set the spectrum analyzer to measure peak hold with the required settings.

3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT's carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 4. Replace the signal generator with the EUT.
 5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
 7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
 8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
 9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.
- (**note:** Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

5.4.4 Bandedge Results PCS-1900**PCS-1900 (Channel 512)**

 Ref Lvl 30 dBm Marker 1 [T1] -17.27 dBm RBW 3 kHz RF Att 30 dB
1.84999800 GHz VBW 3 kHz Unit dBm
SWT 280 ms

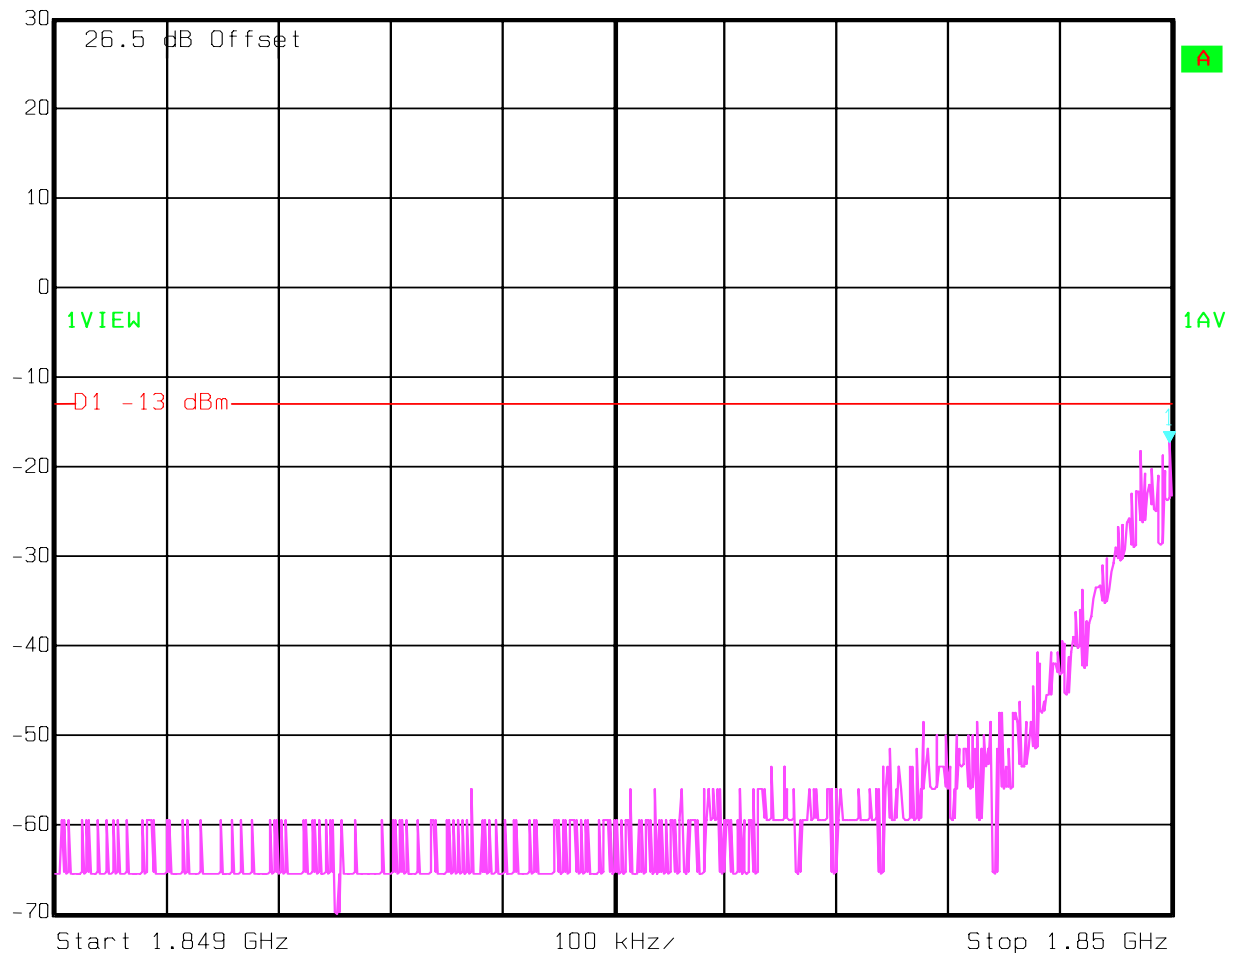

Date: 29.SEP.2005 18:40:56

PCS-1900 (Channel 810)

Ref Lvl

30 dBm

Marker 1 [T1]

-18.07 dBm

1.91002004 GHz

RBW

3 kHz

RF Att

30 dB

VBW


3 kHz

SWT

280 ms

Unit


dBm

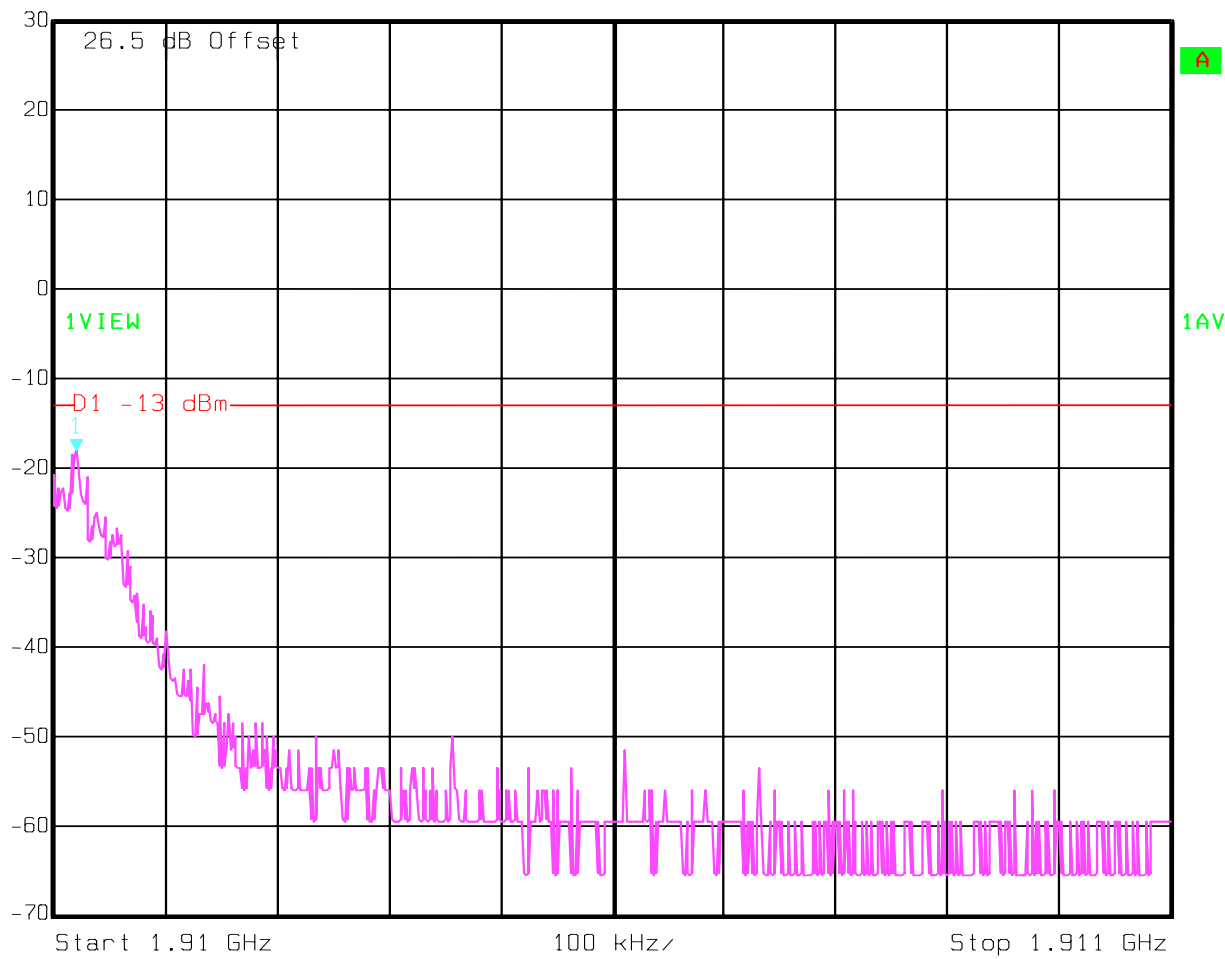

Date: 29.SEP.2005 18:40:03

5.4.5 Conducted Spurious Results PCS-1900**CHANNEL 512 (PCS-1900)****30MHz – 20GHz****Note: The peak above the limit line is the carrier freq. at ch-512**


 Max/Ref Lvl Marker 1 [T1] RBW 1 MHz RF Att 20 dB
30 dBm -28.70 dBm VBW 1 MHz
20 dBm 6.83340681 GHz SWT 115 ms Unit dBm

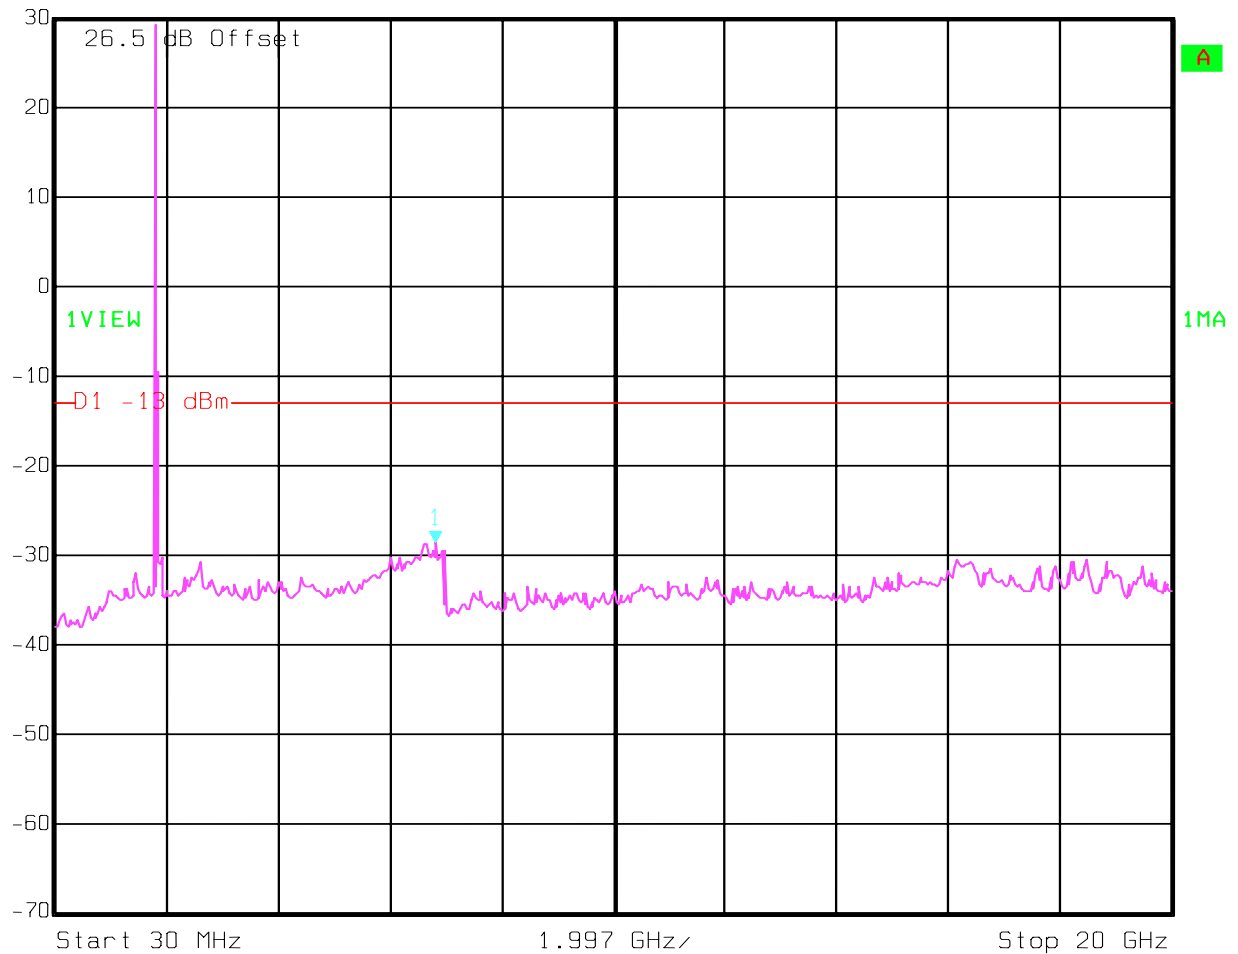

Date: 29.SEP.2005 17:52:48

CHANNEL 661 (PCS-1900)
30MHz – 20GHz**Note: The peak above the limit line is the carrier freq. at ch-661**


	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
	30 dBm	-28.46 dBm	VBW	1 MHz		
	20 dBm	6.67332665 GHz	SWT	115 ms	Unit	dBm

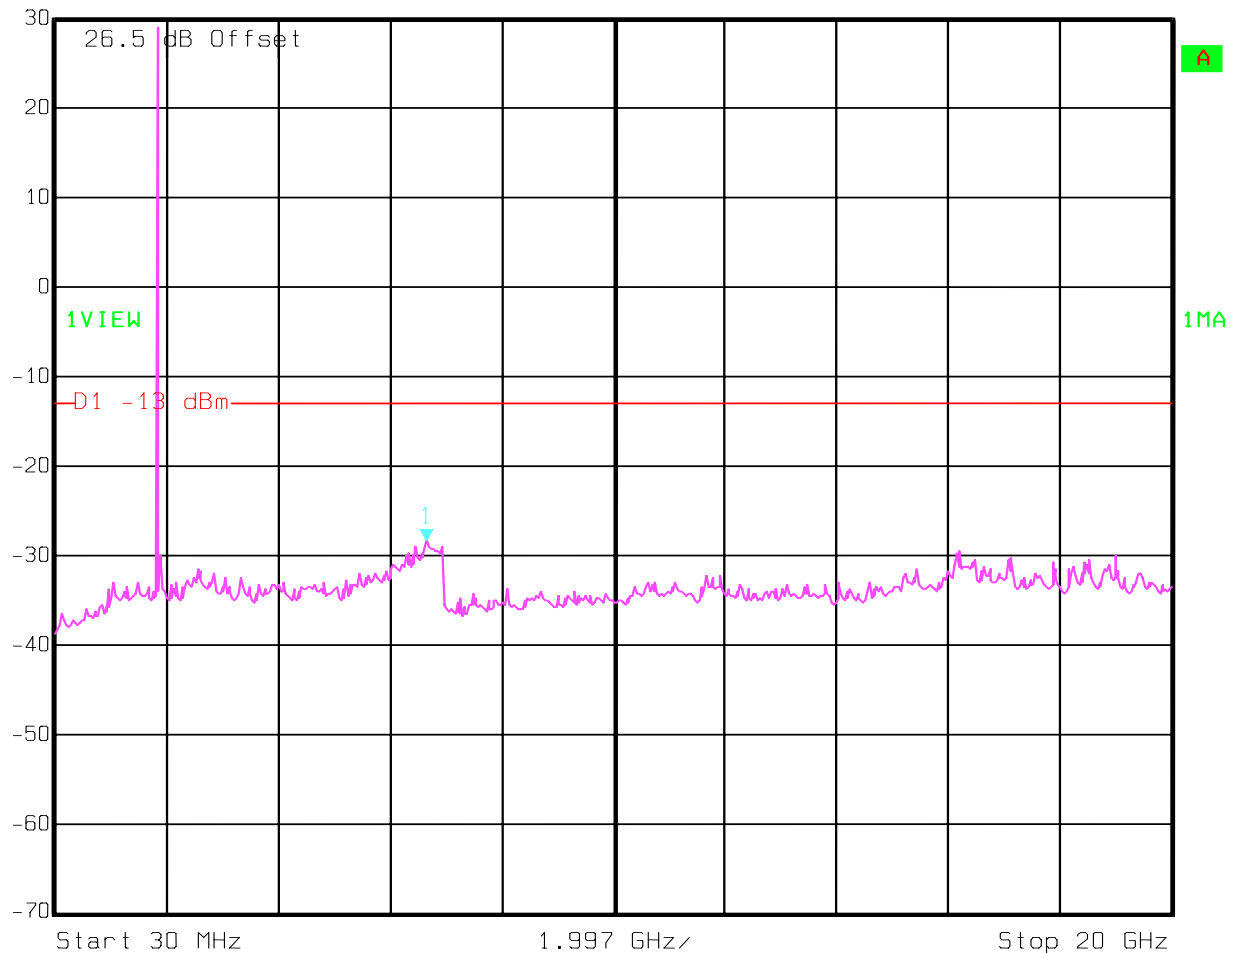

Date: 29.SEP.2005 17:53:28

CHANNEL 810 (PCS-1900)
30MHz – 20GHz**Note: The peak above the limit line is the carrier freq. at ch-810**


	Max/Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
	30 dBm	-28.29 dBm	VBW	1 MHz		
	20 dBm	6.71334669 GHz	SWT	115 ms	Unit	dBm

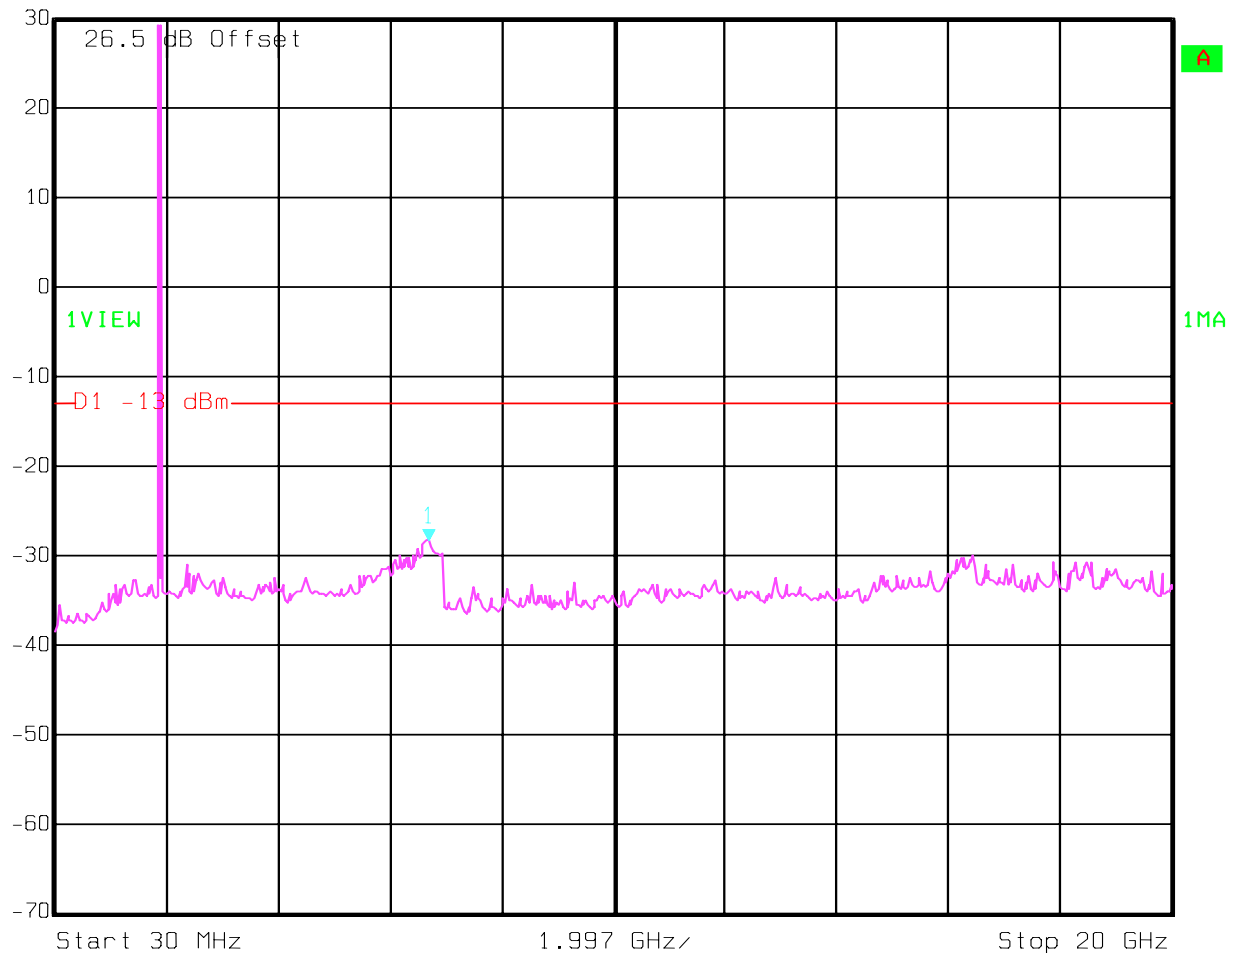

Date: 29.SEP.2005 17:59:57

IDLE (PCS-1900)**30MHz – 20GHz**

Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -36.75 dBm VBW 1 MHz
10 dBm 30.00000000 MHz SWT 115 ms Unit dBm

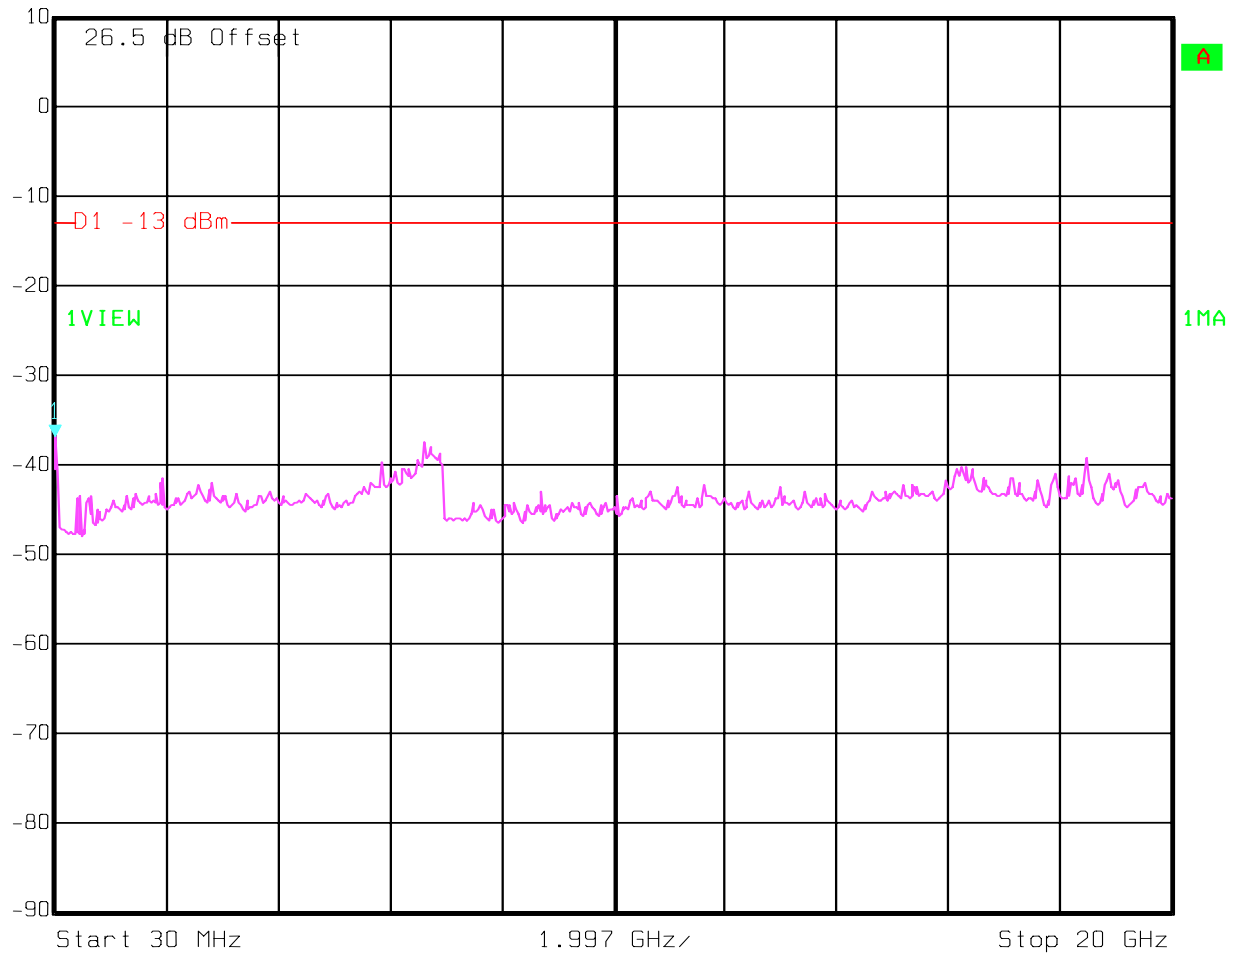

Date: 29.SEP.2005 17:57:23

5.5 Spurious Emissions Radiated

5.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.5.2 Limits:

5.5.2.1 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.


- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

- (b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.3 Radiated out of band measurement procedure:

Based on TIA-603B November 2002

2.2.12 Unwanted emissions: Radiated Spurious

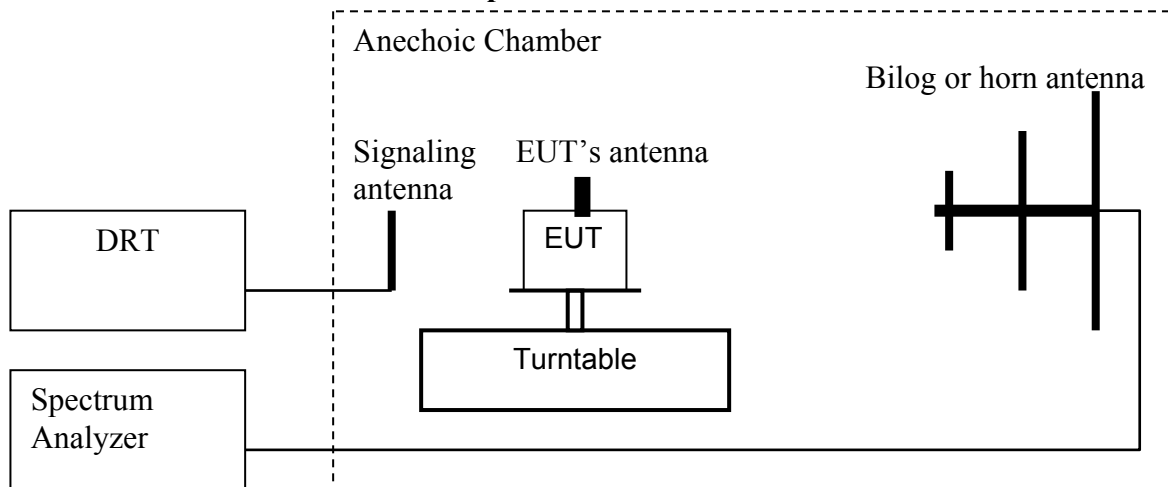

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF RADIATED TESTS PCS-1900:


Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	-52.12	3760	-54.49	3819.6	-53.00
3	5550.6	NF	5640	-37.76	5729.4	-39.63
4	7400.8	-35.06	7520	-30.94	7639.2	-27.95
5	9251	-28.34	9400	-29.55	9549	-23.14
6	11101.2	-36.79	11280	-31.11	11458.8	-33.72
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = NOISE FLOOR						

RADIATED SPURIOUS EMISSIONS(PCS 1900)**TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

Antenna: vertical***SWEEP TABLE: "FCC 24 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

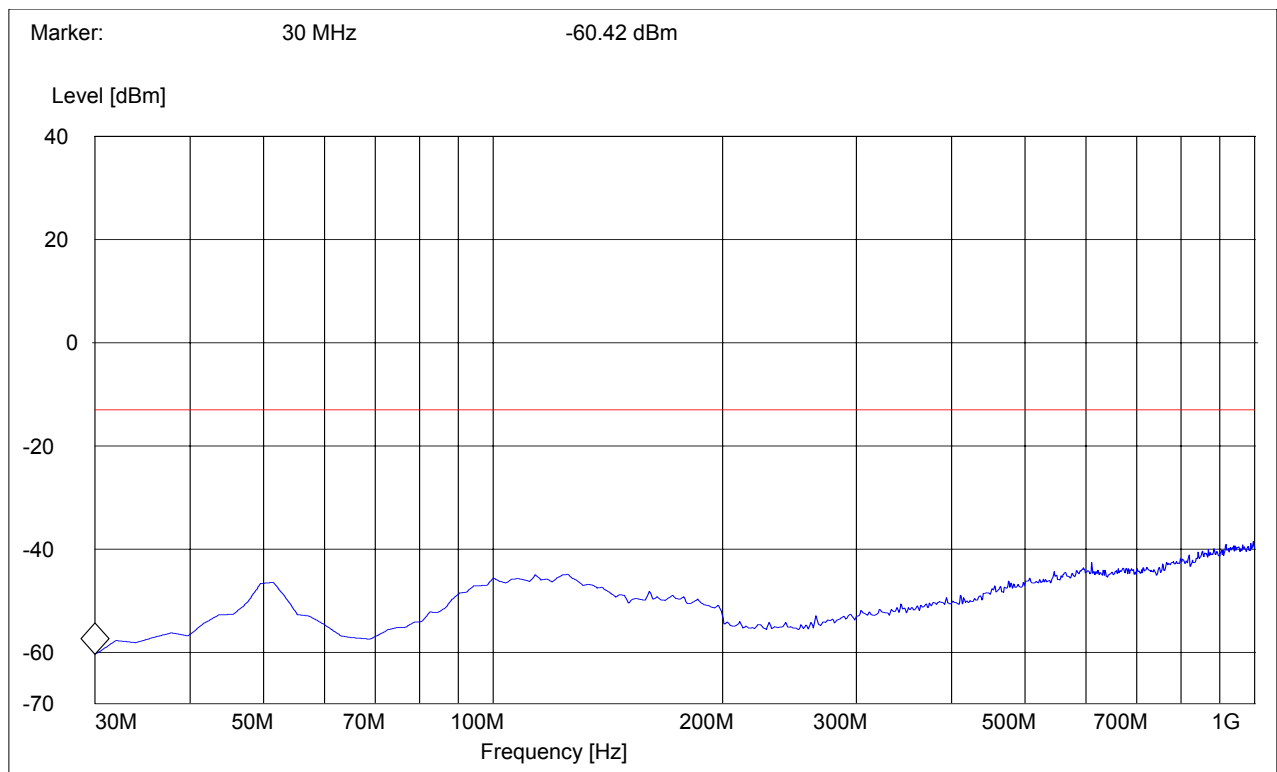
Note: This plot is valid for low, mid & high channels (worst-case plot)

RADIATED SPURIOUS EMISSIONS(PCS 1900)**TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

Antenna: horizontal***SWEEP TABLE: "FCC 24 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

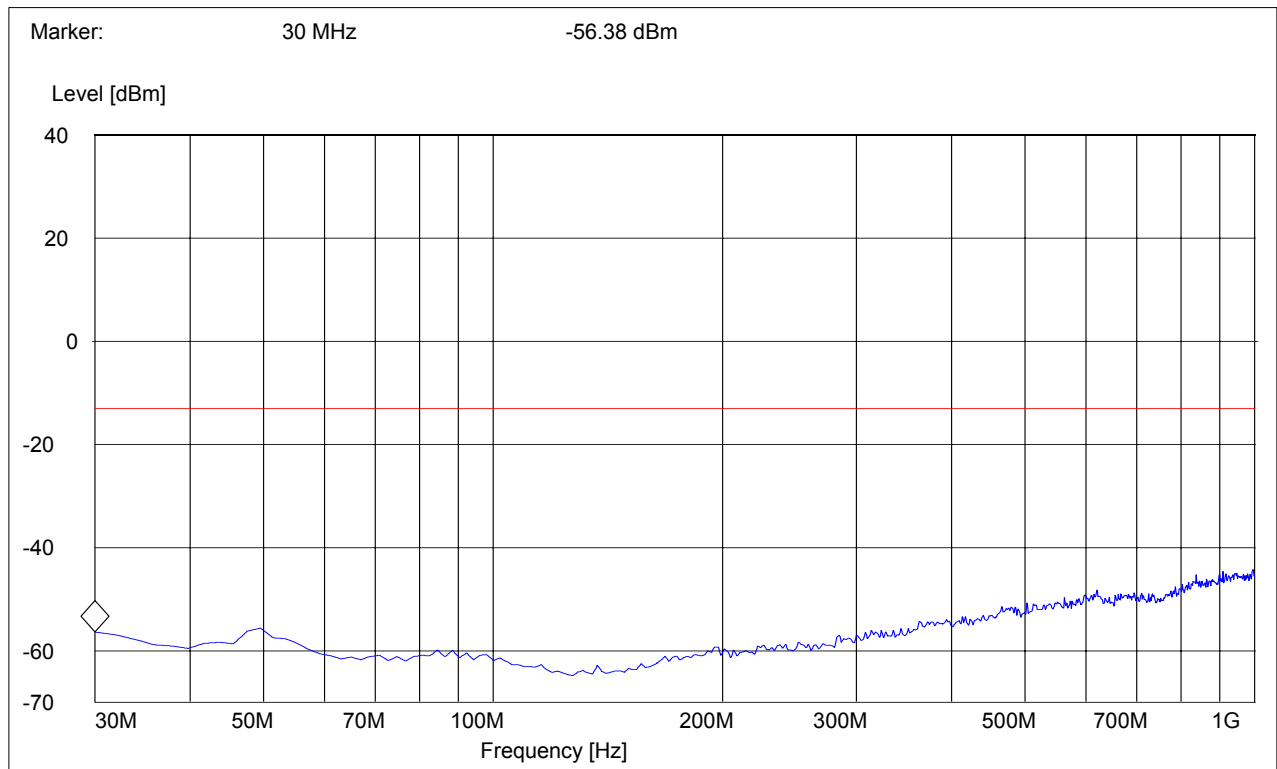
Note: This plot is valid for low, mid & high channels (worst-case plot)

RADIATED SPURIOUS EMISSIONS(PCS 1900)**Tx @ 1850.2MHz: 1GHz – 3GHz**

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

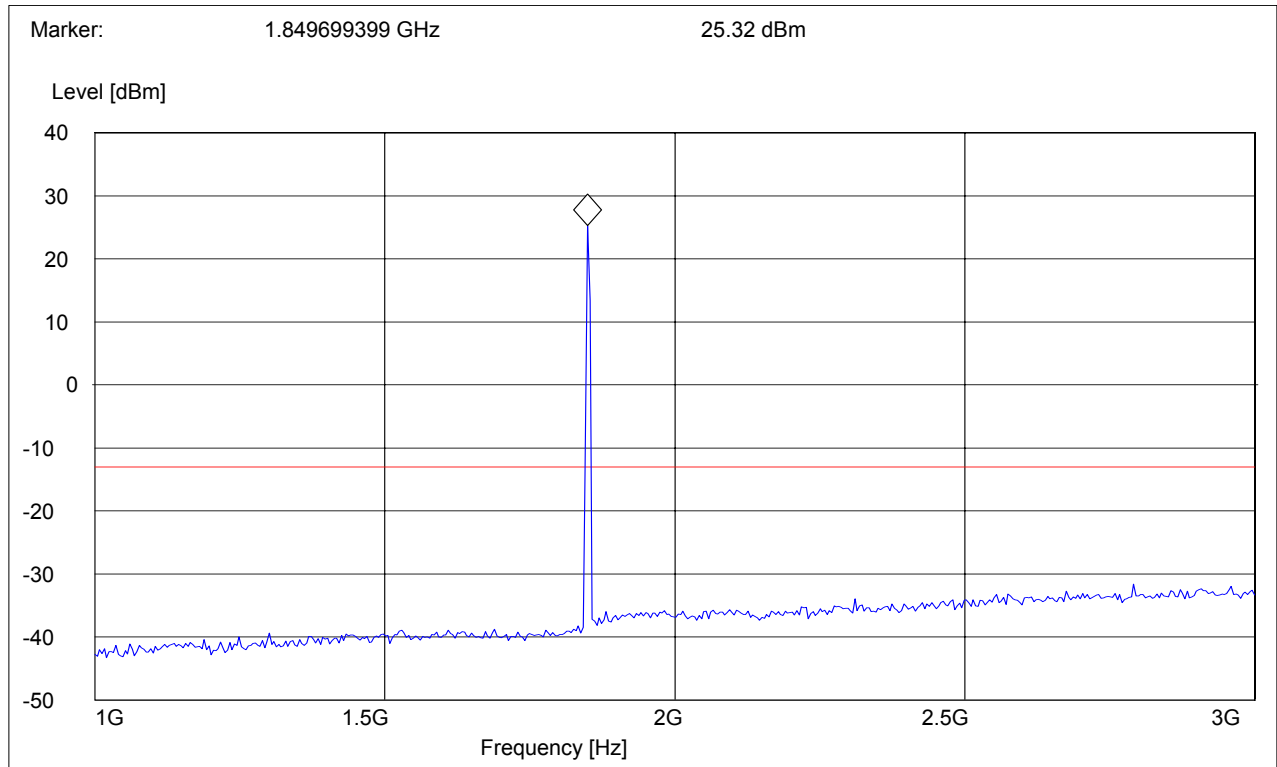
Note: The peak above the limit line is the carrier freq. at ch-512.

RADIATED SPURIOUS EMISSIONS(PCS 1900)**Tx @ 1850.2MHz: 3GHz – 18GHz**

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

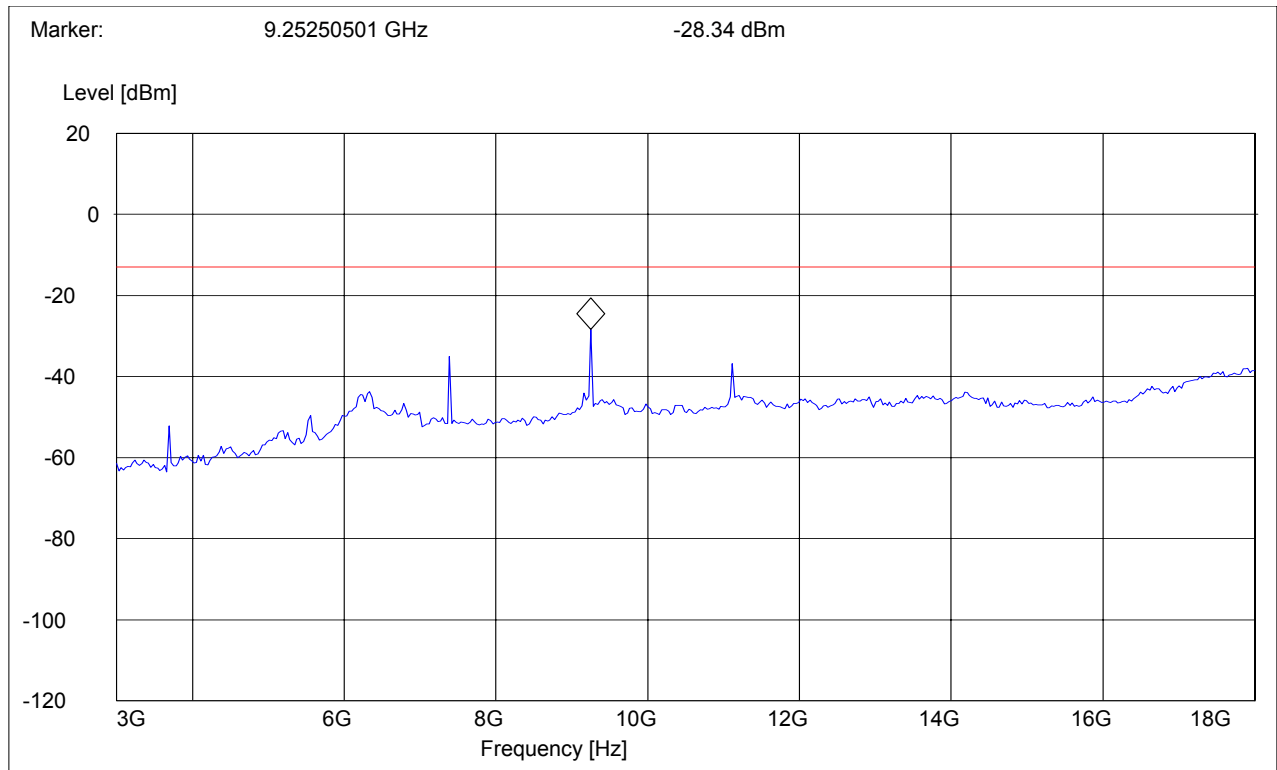


RADIATED SPURIOUS EMISSIONS(PCS 1900)**Tx @ 1880.0MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

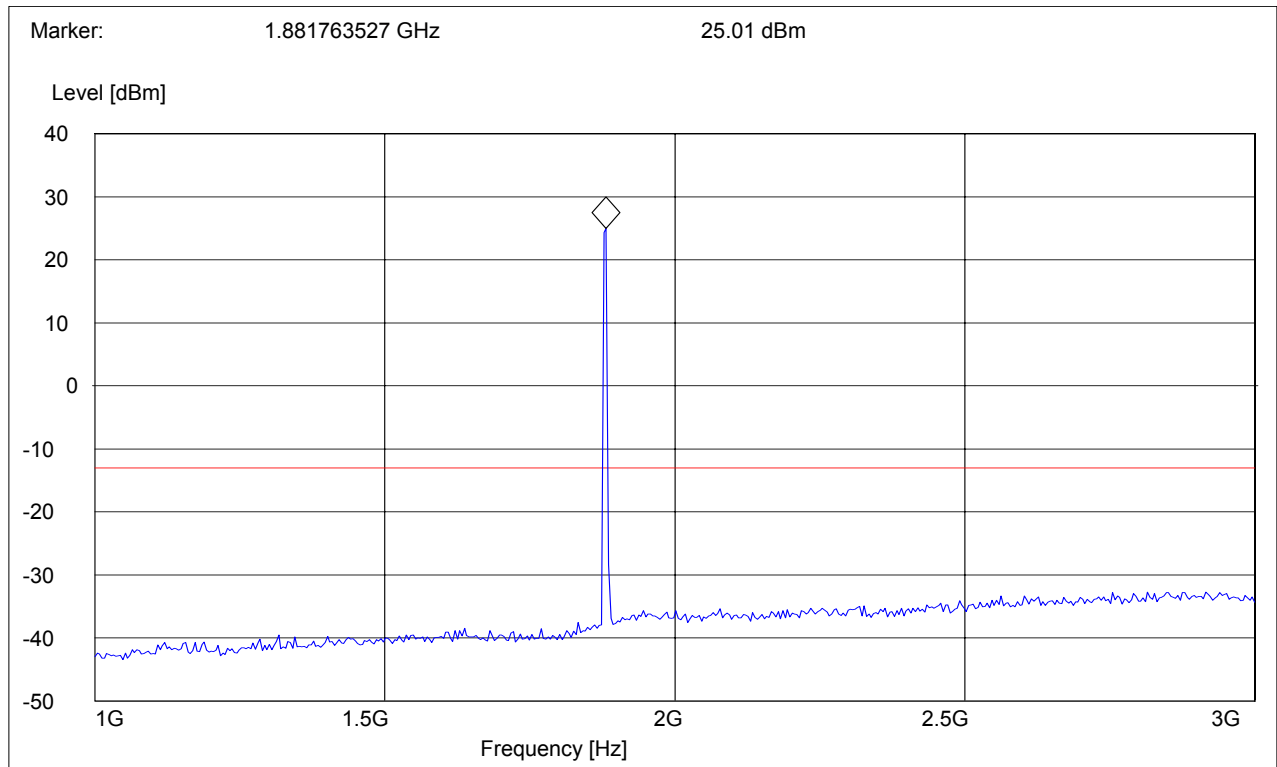
Note: The peak above the limit line is the carrier freq. at ch-661.

RADIATED SPURIOUS EMISSIONS(PCS 1900)**Tx @ 1880.0MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

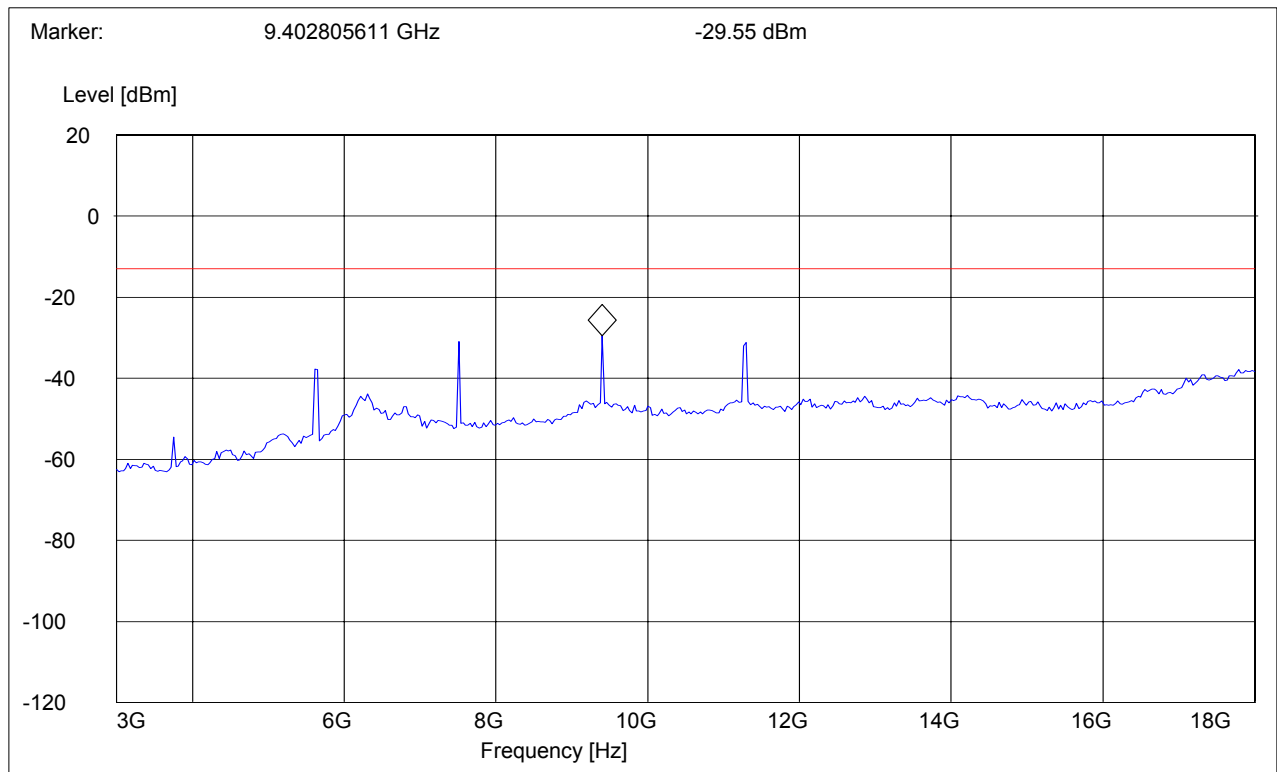


RADIATED SPURIOUS EMISSIONS(PCS 1900)**Tx @ 1909.8MHz: 1GHz – 3GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

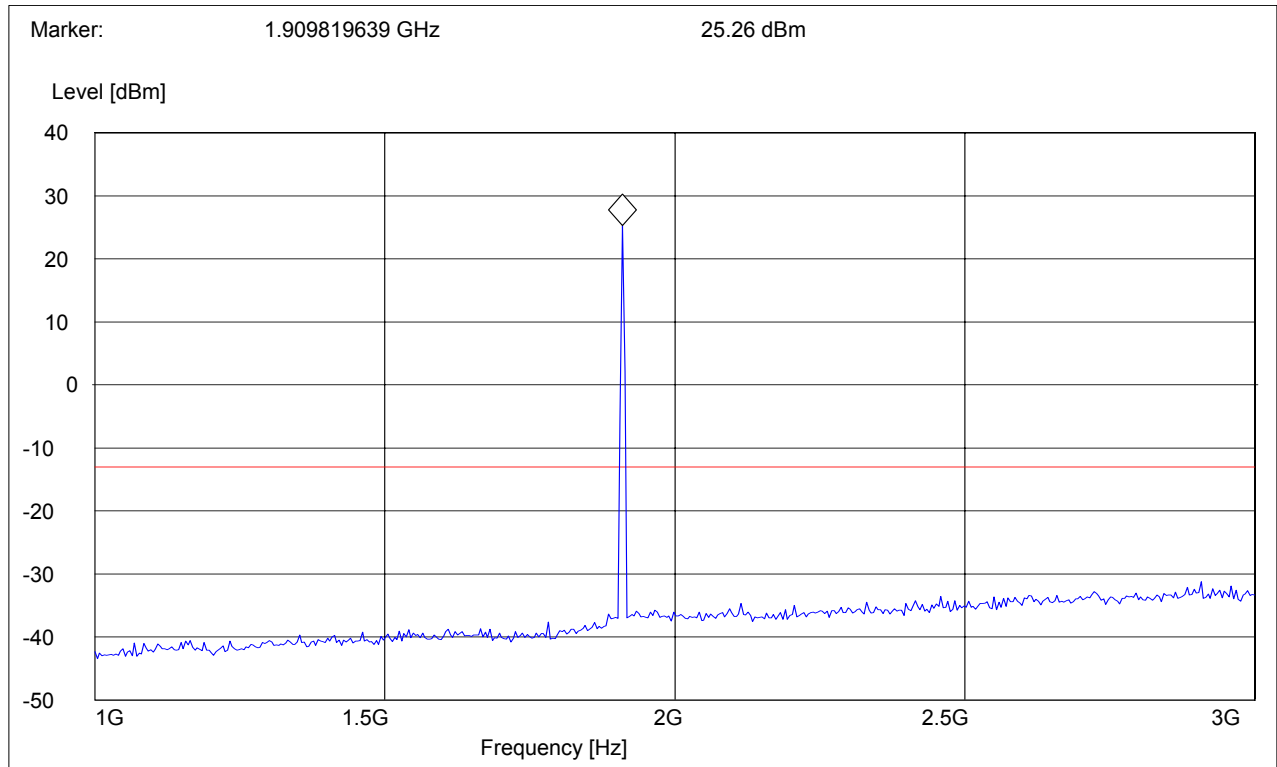
Note: The peak above the limit line is the carrier freq. at ch-810.

RADIATED SPURIOUS EMISSIONS(PCS 1900)**Tx @ 1909.8MHz: 3GHz – 18GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

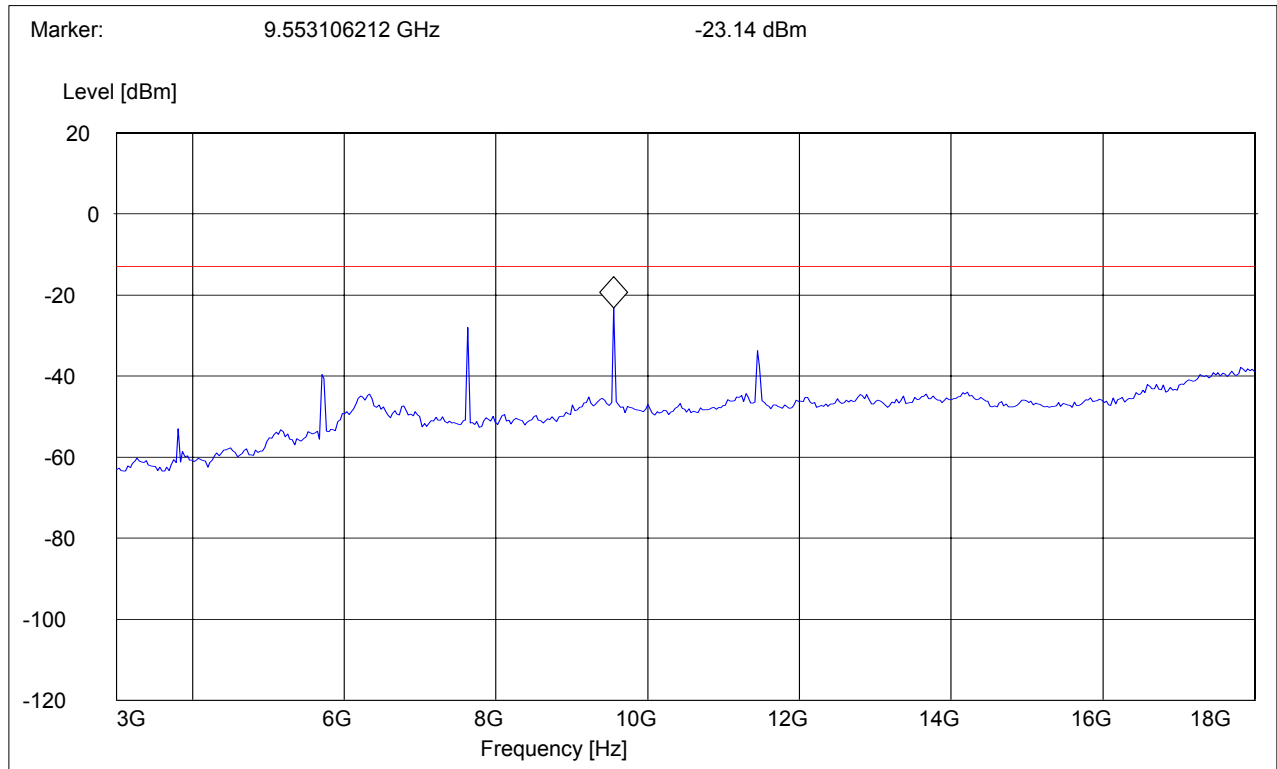


RADIATED SPURIOUS EMISSIONS(PCS 1900)**18GHz – 19.1GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

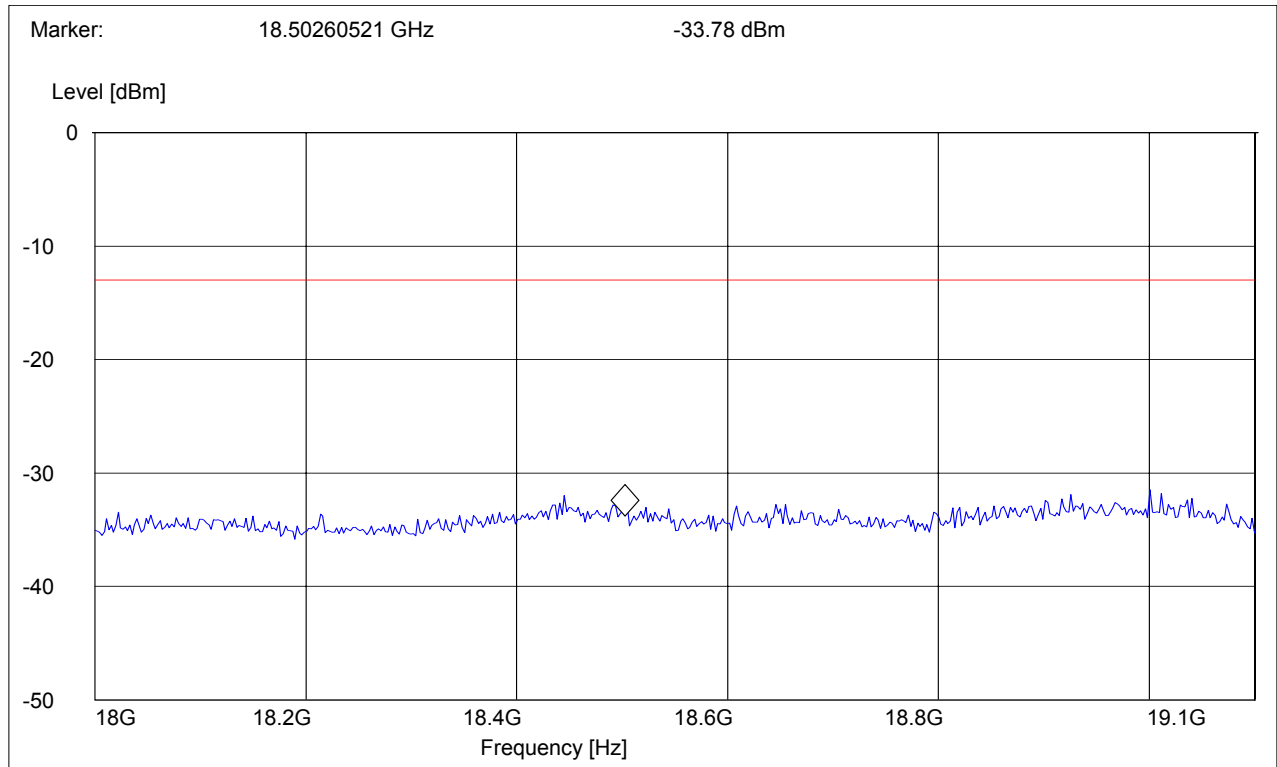
Note: This plot is valid for low, mid & high channels (worst-case plot)

RADIATED SPURIOUS EMISSIONS (IDLE MODE)**EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit –13dBm

Antenna: vertical***SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

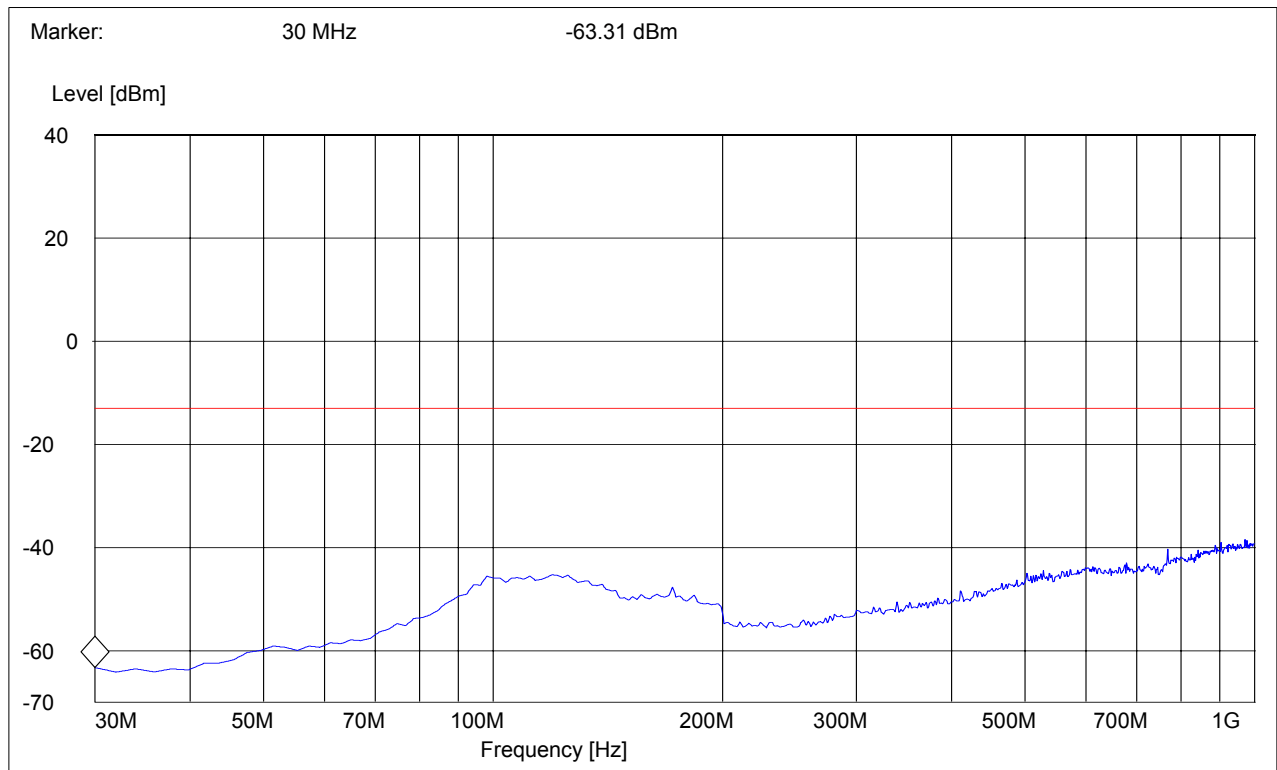


RADIATED SPURIOUS EMISSIONS (IDLE MODE)**EUT in Idle Mode: 30MHz – 1GHz**

Spurious emission limit –13dBm

Antenna: horizontal***SWEEP TABLE: "FCC 22 Spur 30M-1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	1 MHz	1 MHz

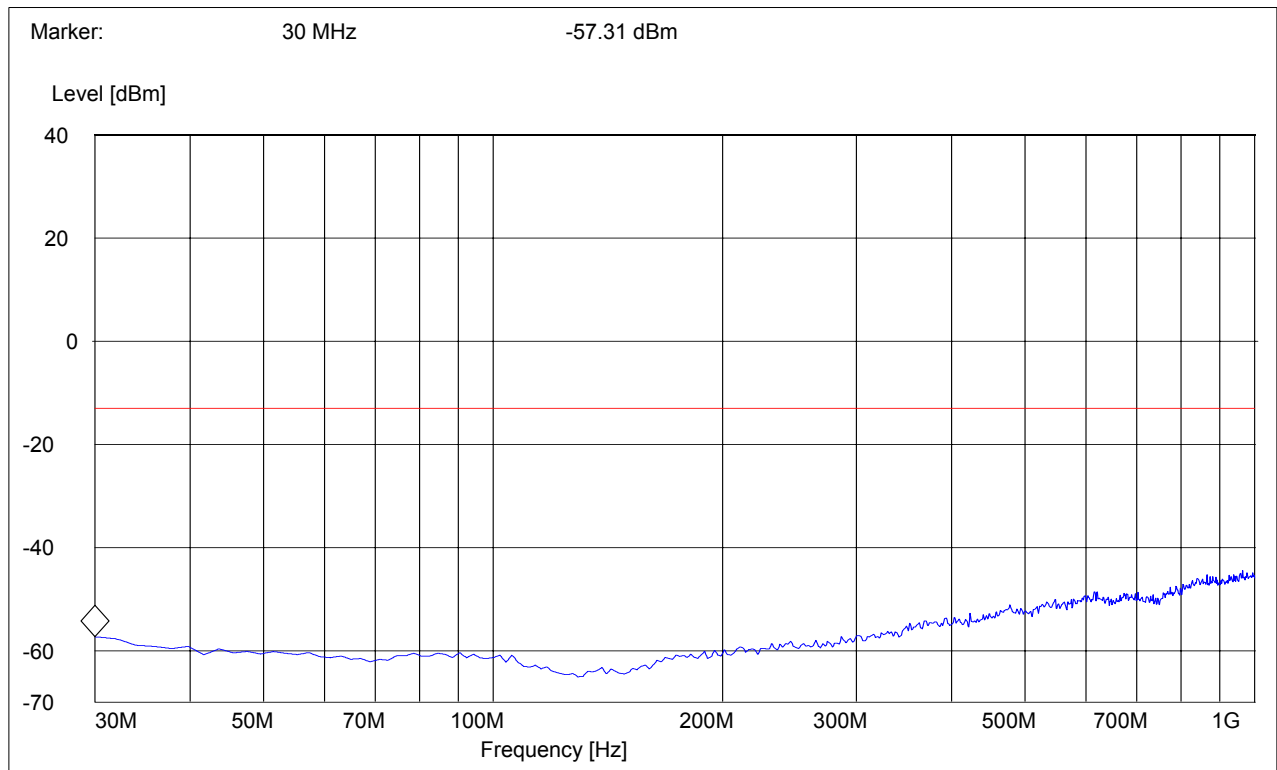


RADIATED SPURIOUS EMISSIONS (IDLE MODE)**EUT in Idle Mode: 1GHz – 3GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

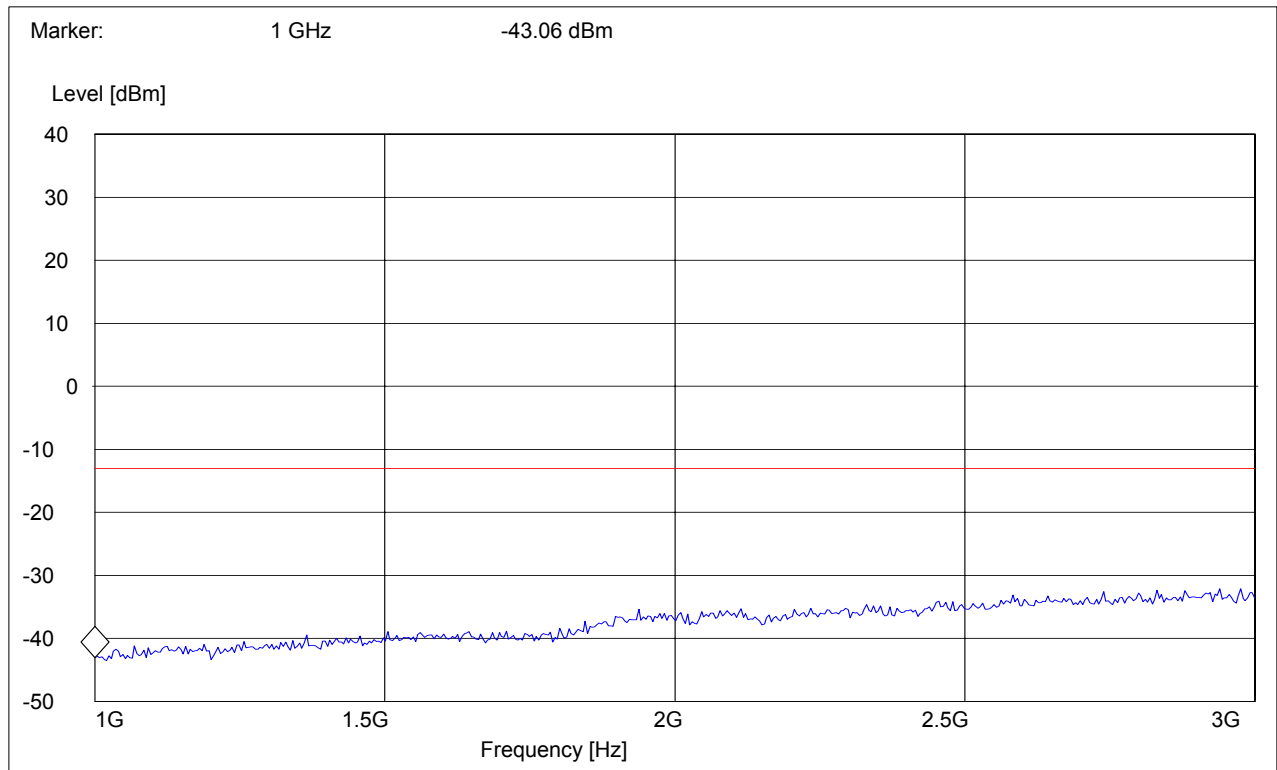


RADIATED SPURIOUS EMISSIONS (IDLE MODE)**EUT in Idle Mode: 3GHz – 18GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

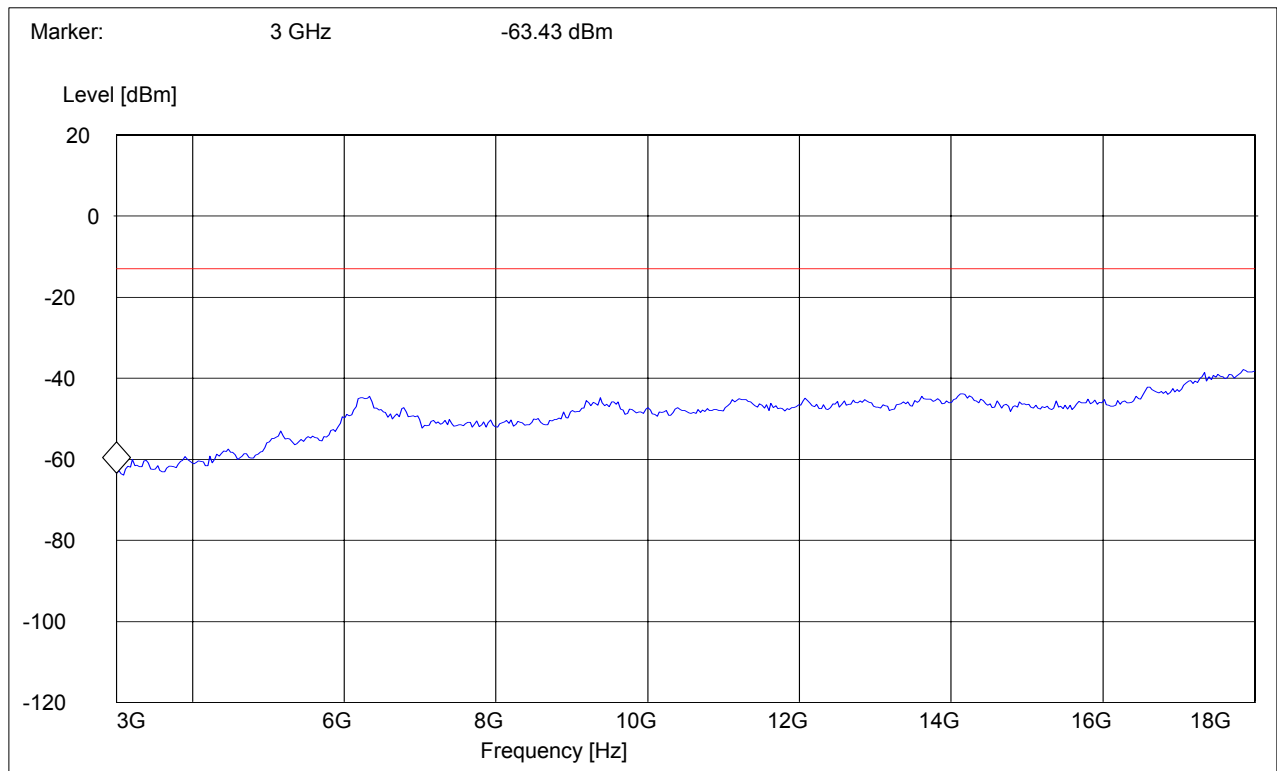


RADIATED SPURIOUS EMISSIONS (IDLE MODE)**EUT in Idle Mode: 18GHz – 19.1GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

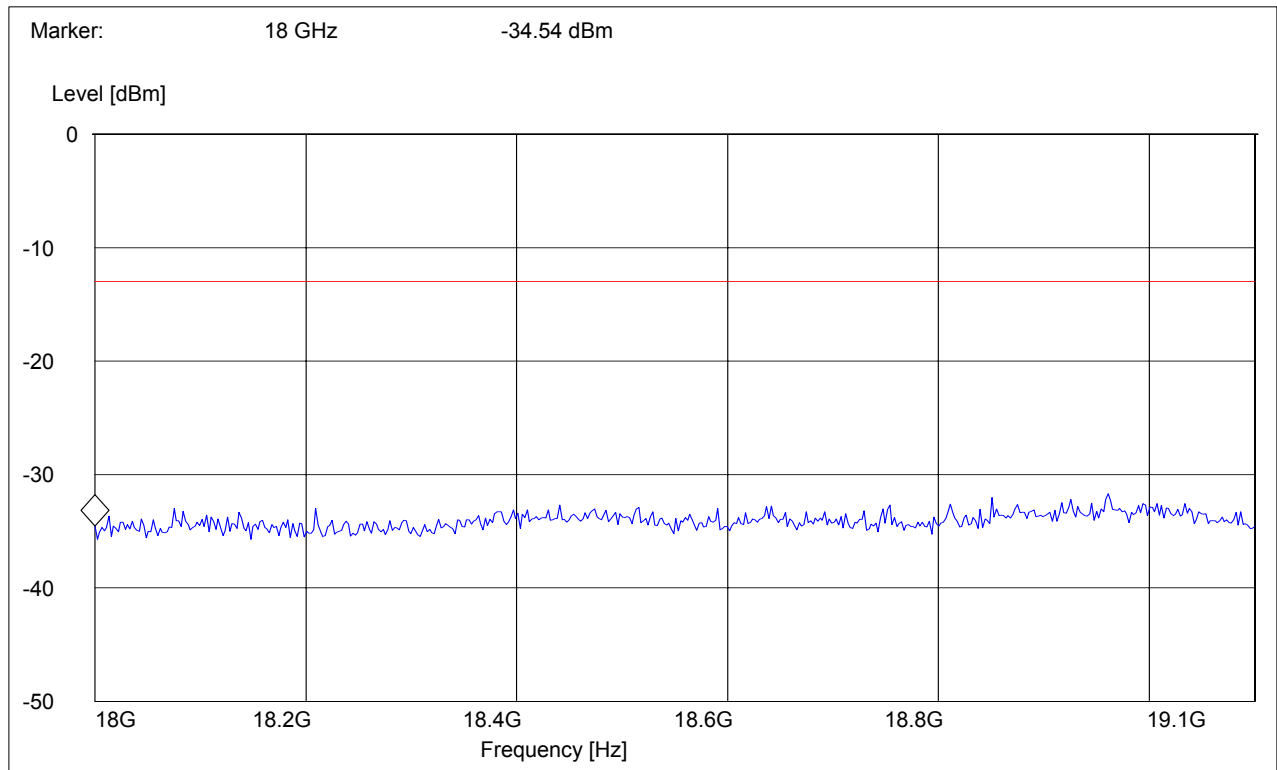

5.6 RECEIVER RADIATED EMISSIONS**§ 2.1053 / RSS-133****NOTE:**


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


5.6.1 Receiver Spurious on EUT**RECEIVER RADIATED EMISSIONS****EUT in Idle Mode: 30MHz – 1GHz****Antenna: vertical****SWEEP TABLE: "FCC Spur 30M-1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

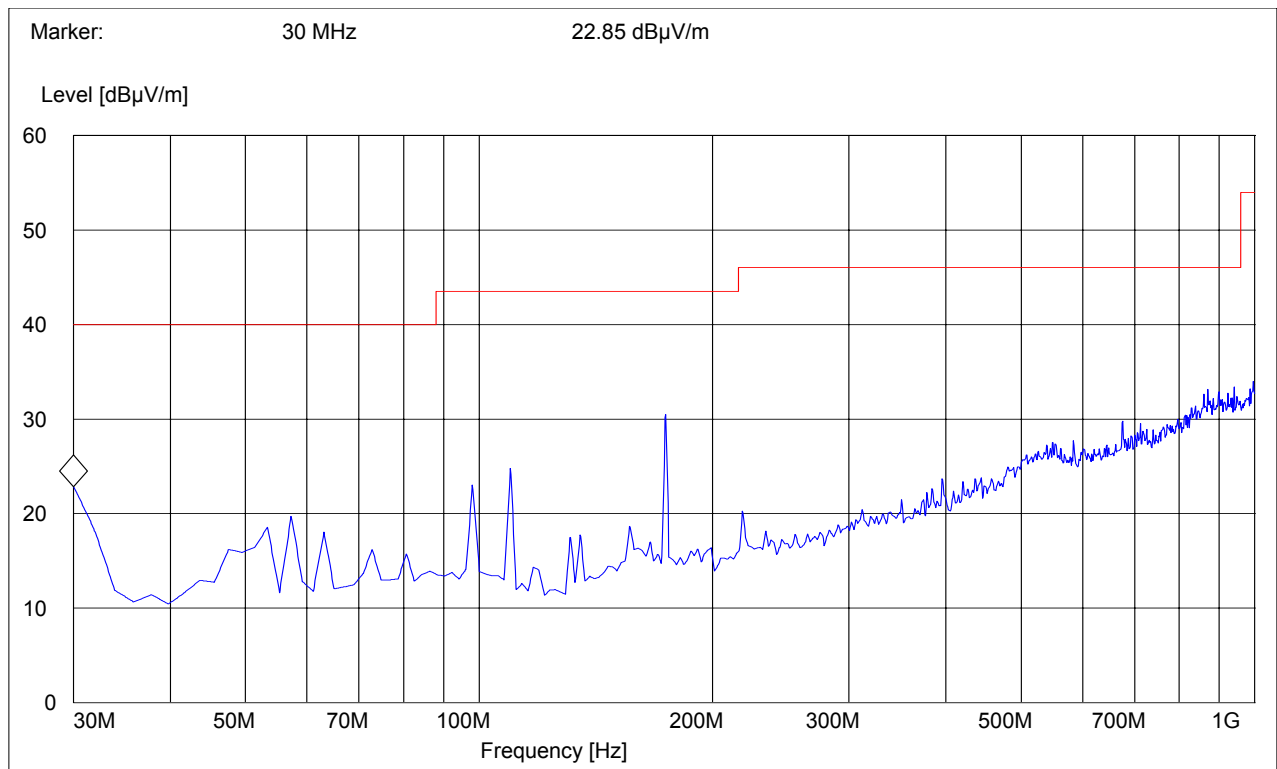


RECEIVER RADIATED EMISSIONS**EUT in Idle Mode: 30MHz – 1GHz****Antenna: horizontal****SWEEP TABLE: "FCC Spur 30M-1G"**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

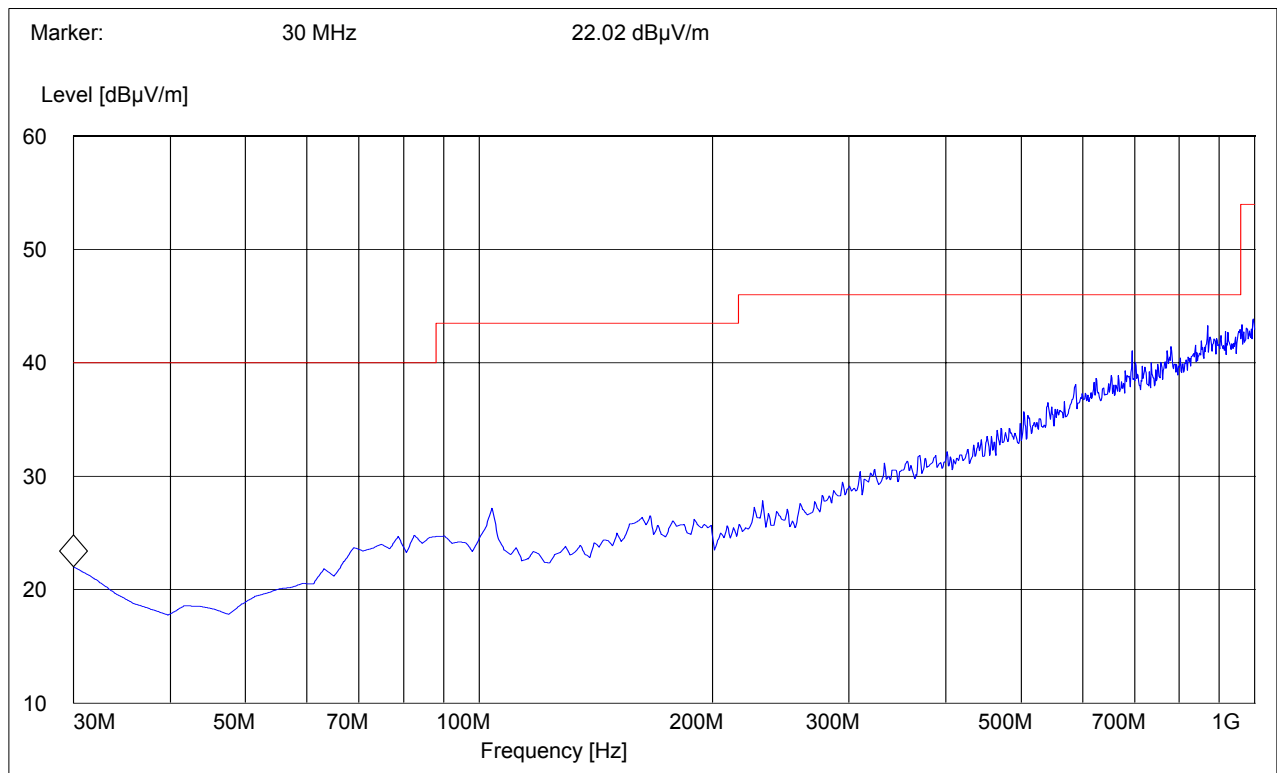


RECEIVER RADIATED EMISSIONS**EUT in Idle Mode: 1GHz – 3GHz****Note: marked peak is downlink from the base station*****SWEEP TABLE: "FCC Spuri 1-3G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

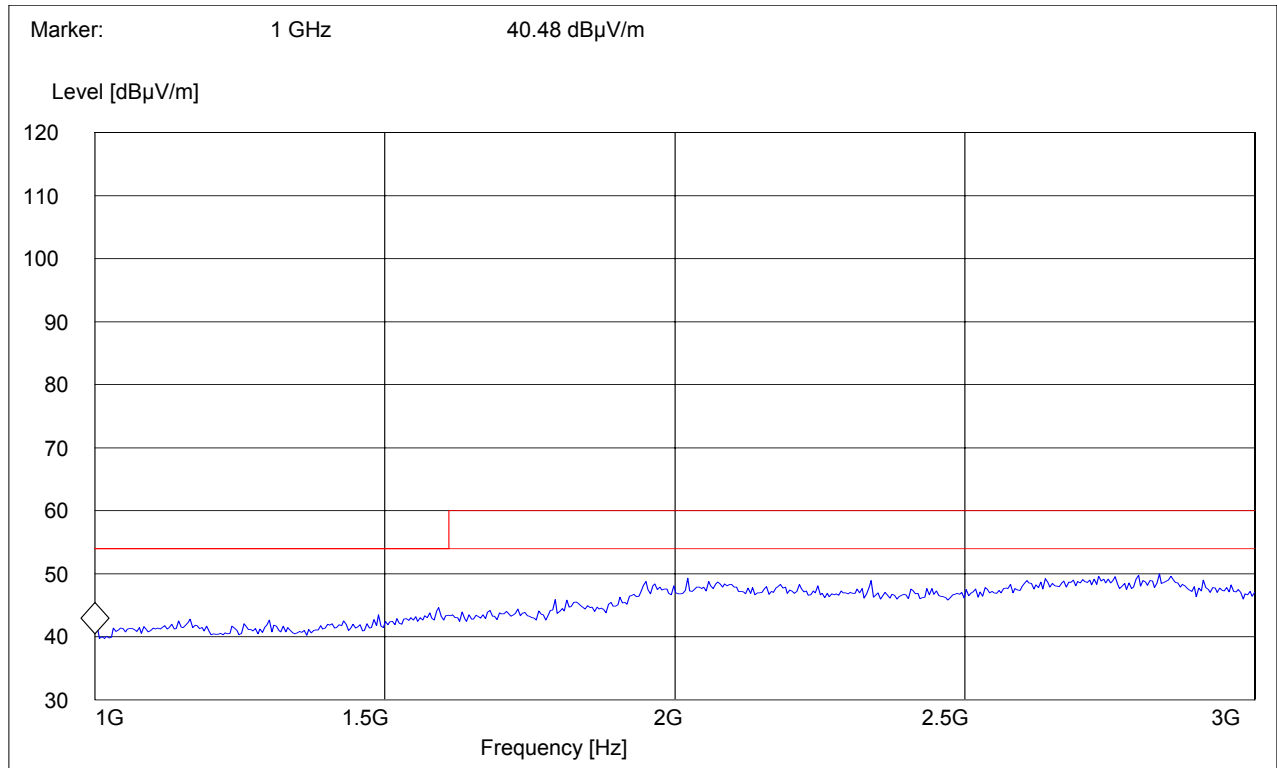


RECEIVER RADIATED EMISSIONS**EUT in Idle Mode: 3GHz – 18GHz*****SWEEP TABLE: "FCC spuri 3-18G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

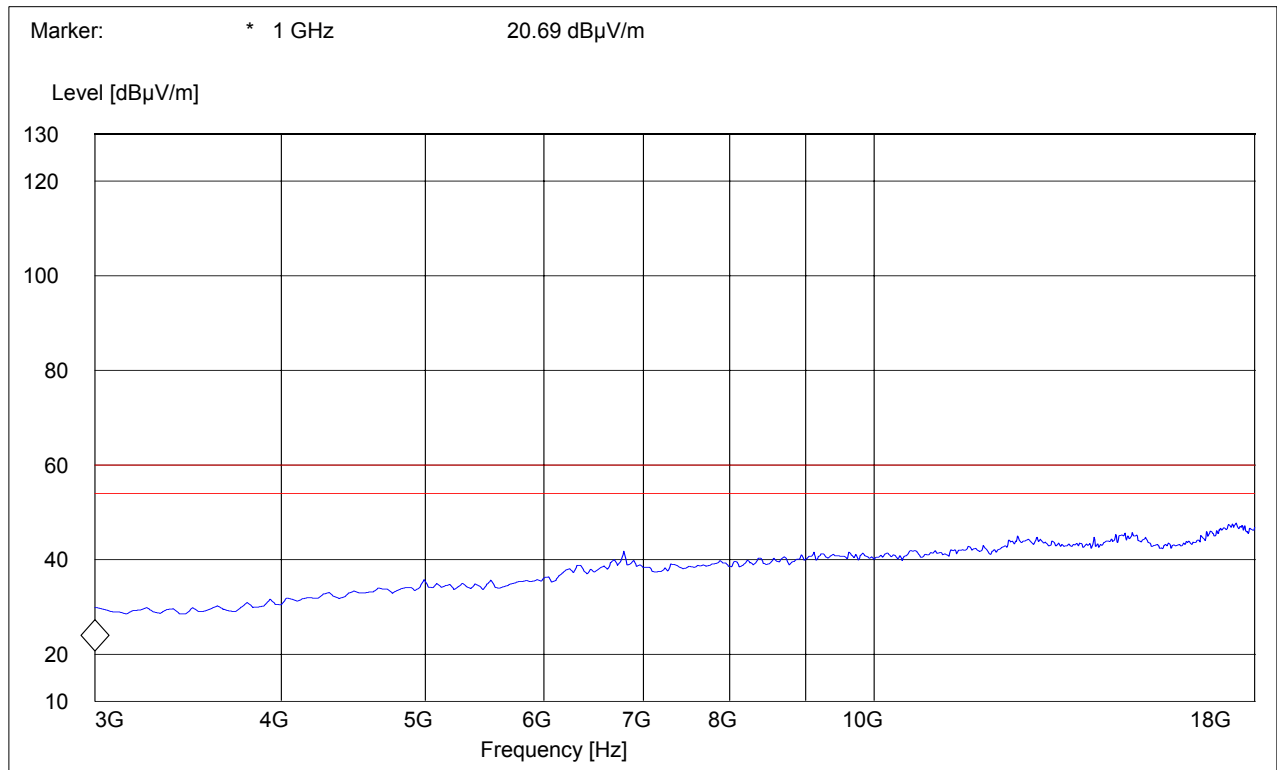

RECEIVER RADIATED EMISSIONS**EUT in Idle Mode: 18GHz – 19.1GHz*****SWEEP TABLE: "FCC spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	19.1GHz	Max Peak	Coupled	1 MHz	1 MHz

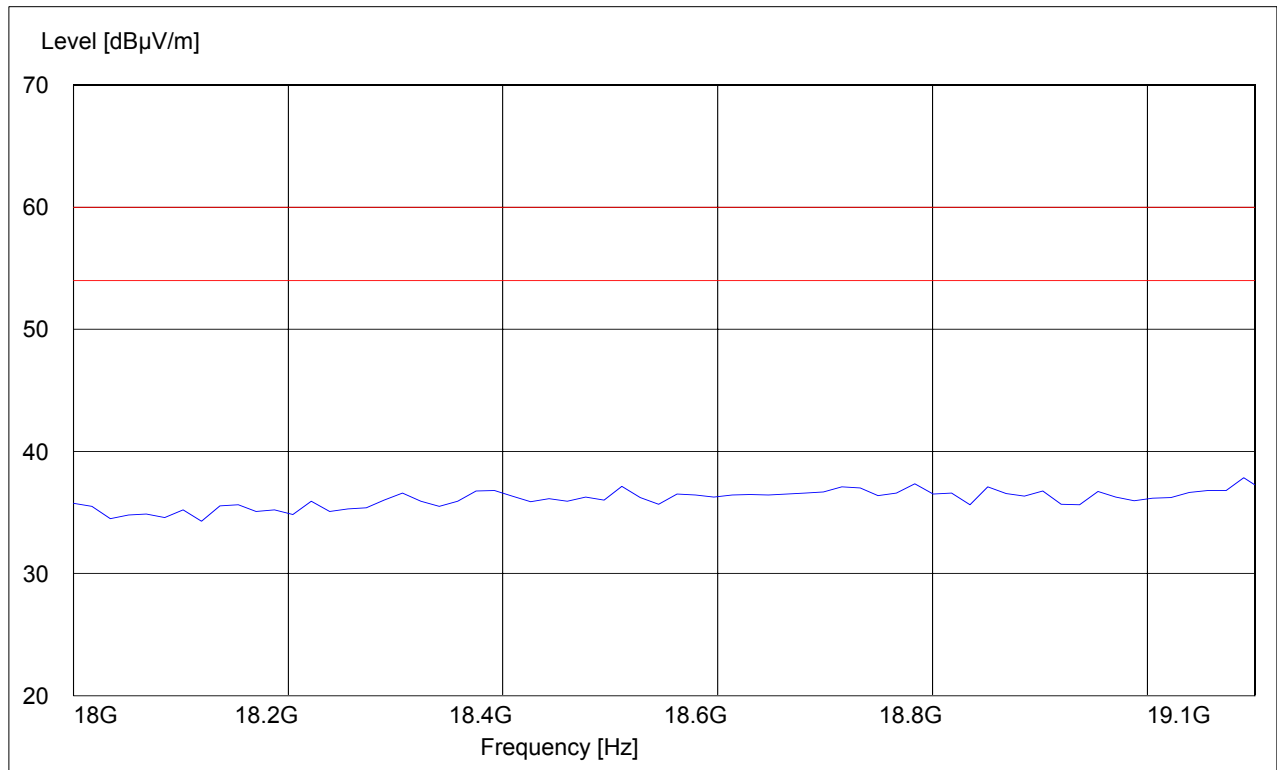


5.7 CO-LOCATION

All Co-location testing was also performed with the EUT transmitting in the PCS band (1850.2MHz) and the EUT transmitting in Bluetooth mode(2402MHz).

These channels were deemed worst case due to there EIRP readings. All testing was performed using FCC 15.247 procedures/limits.


5.7.1 RESULTS (PCS AND BLUETOOTH)**30MHz – 1GHz****Antenna: vertical**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

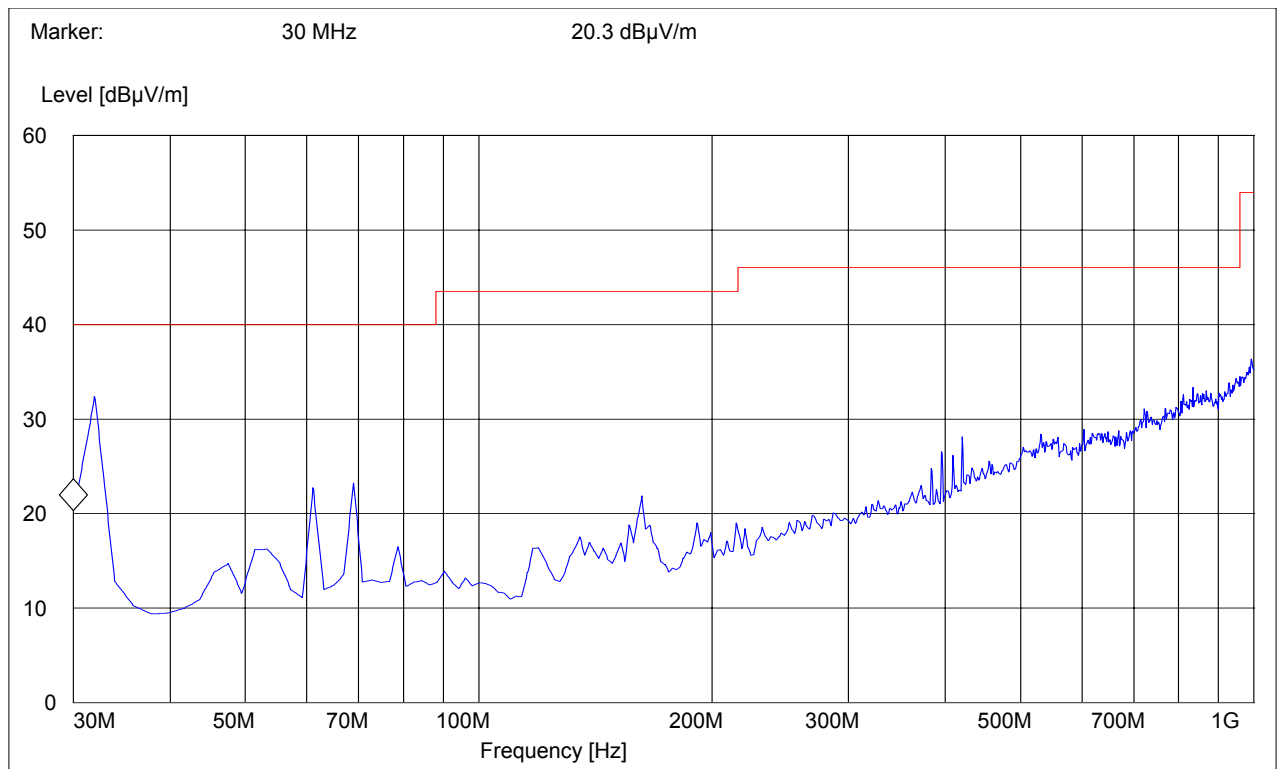Note: Peak Reading vs. Quasi-Peak limit

30MHz – 1GHz**Antenna: horizontal**

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

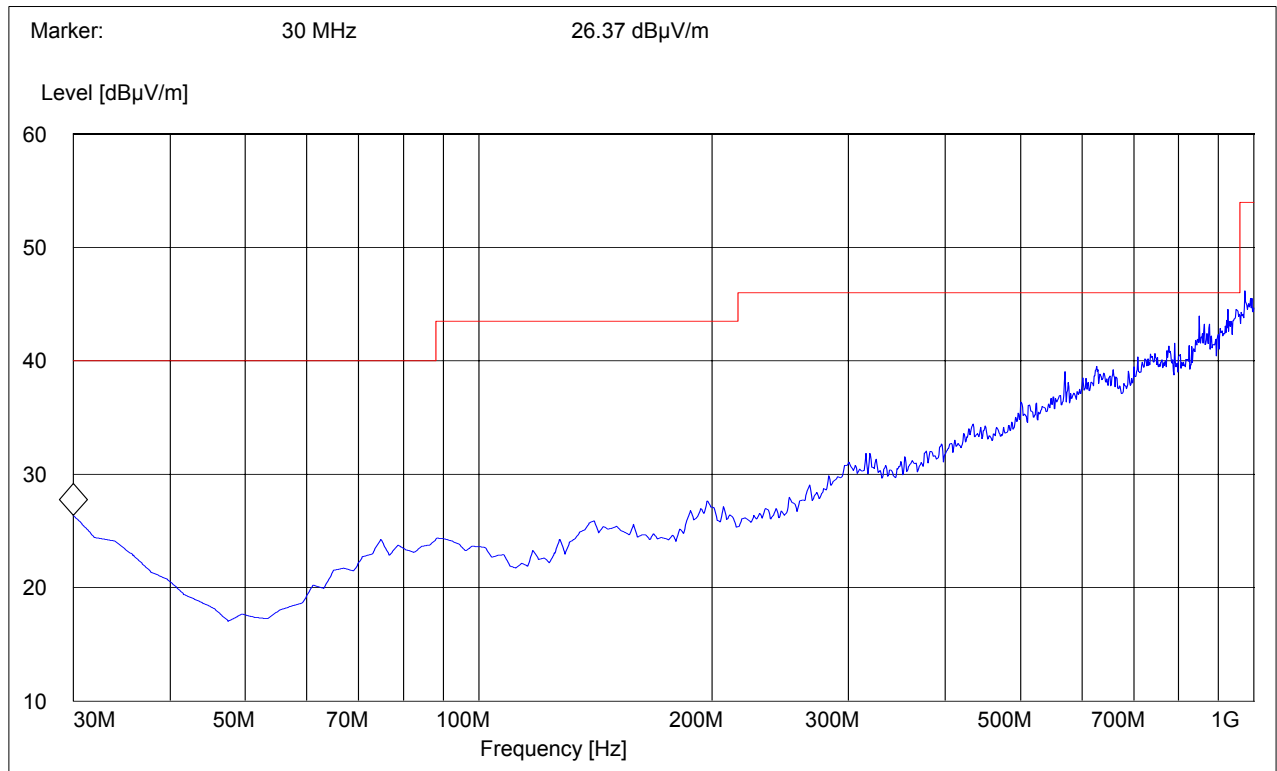
Note: Peak Reading vs. Quasi-Peak limit

1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq of the Bluetooth and PCS transmitter.


Note: Peak Reading vs. Average limit

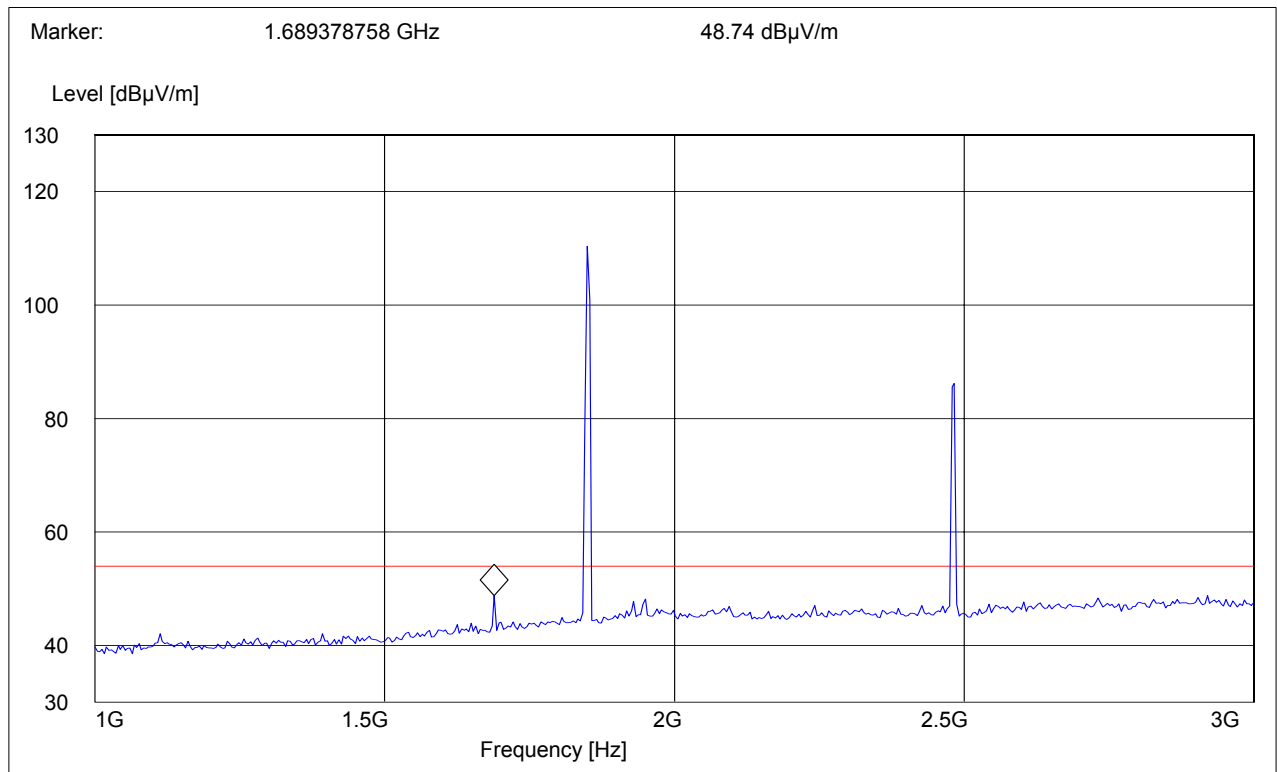

3-18GHz


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit, see next page for Average Reading vs. Average Limit

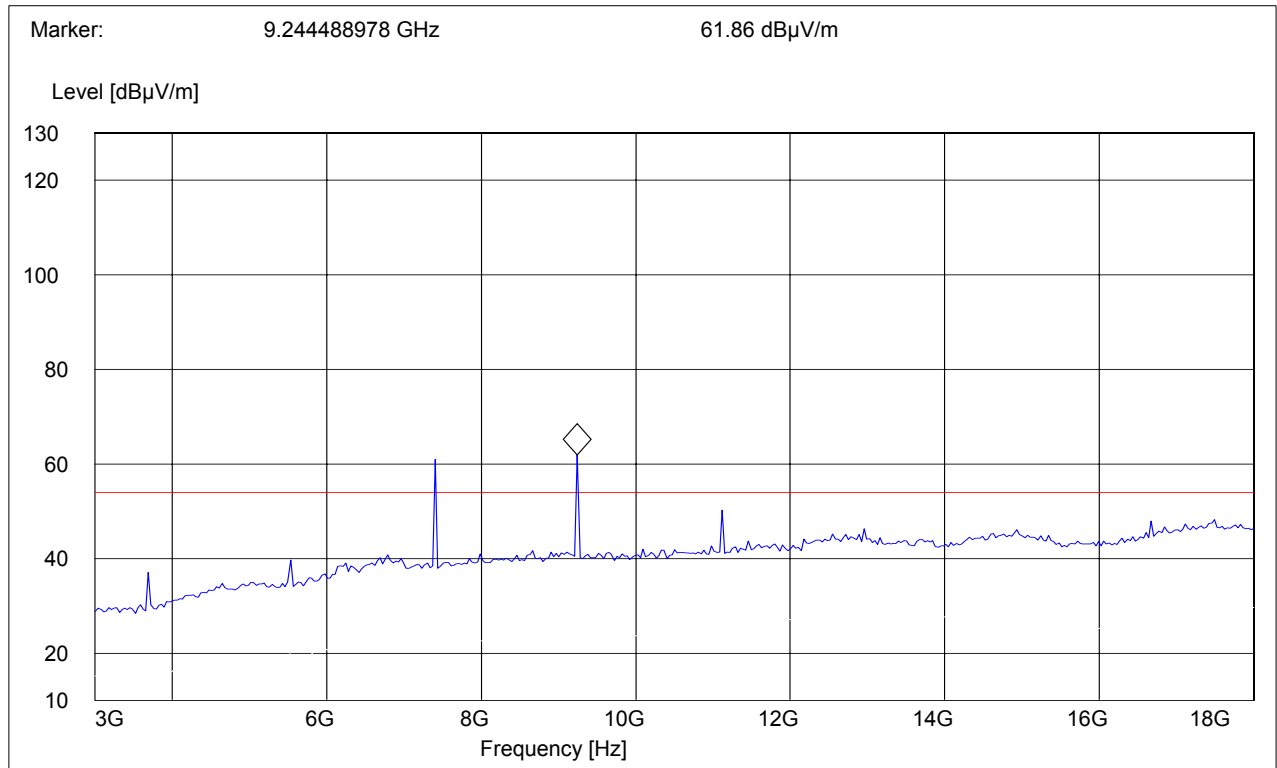


3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

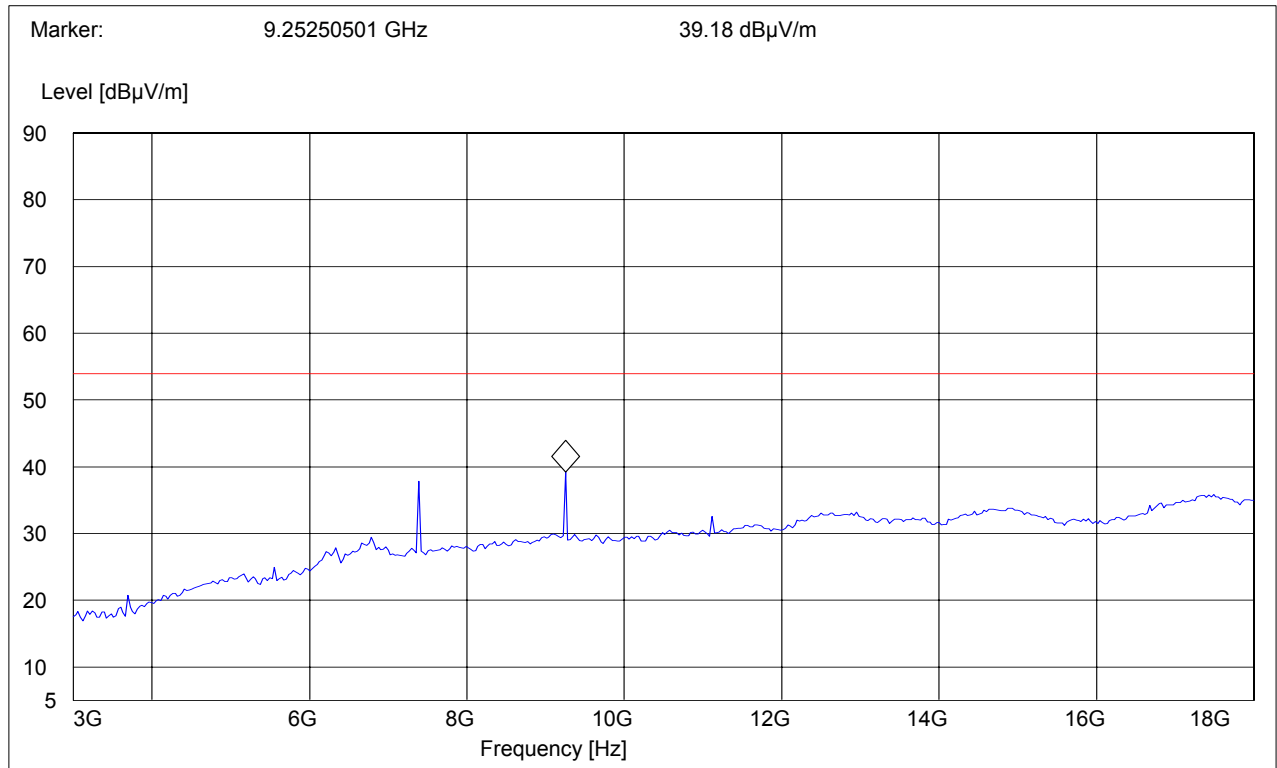Note: Average Reading vs. Average limit

18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

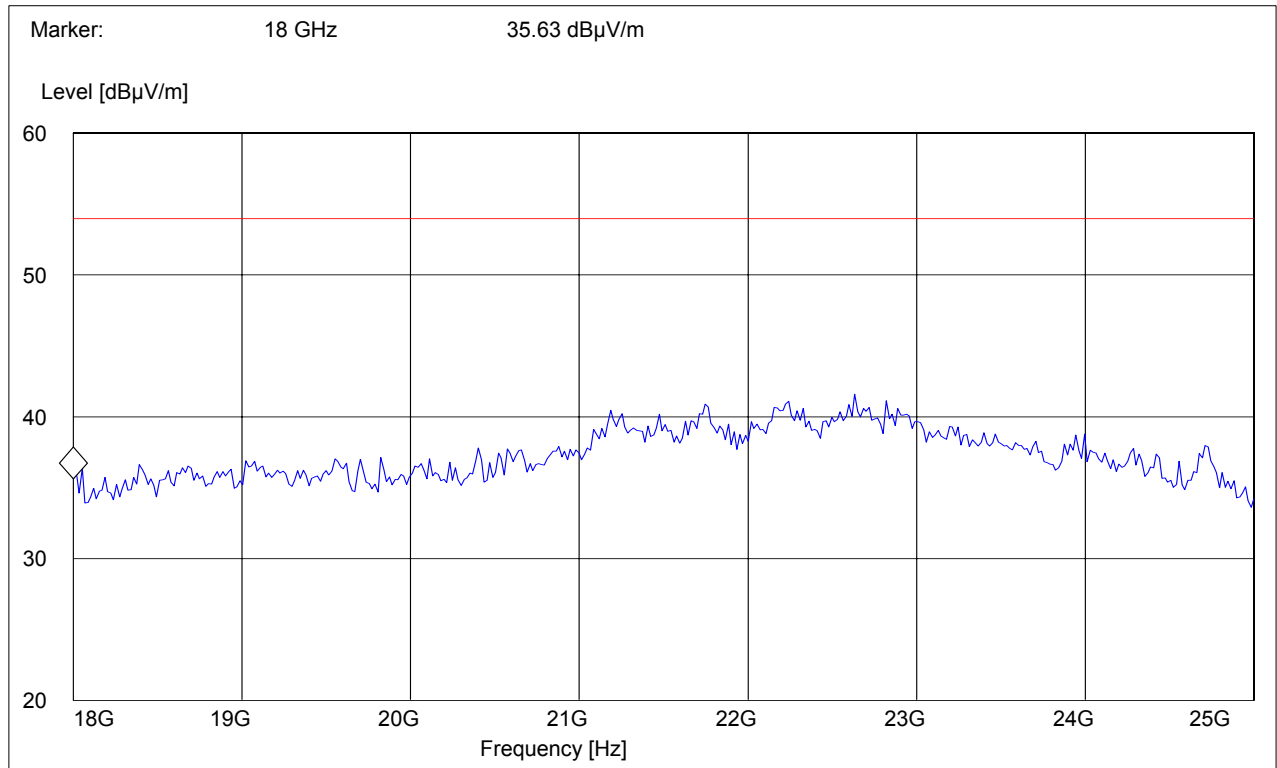Note: Peak Reading vs. Average limit

5.8 AC POWERLINE CONDUCTED EMISSIONS § 15.107/207

Measured with

AC/DC power adapter (travel charger: DA2-3101US-(L) model:A5BHTNOO102471)

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

Note: data was taken as per co-location


5.8.1 Results EUT**LISN****411 Dixon Landing Road, CA 95035**

EUT / Description: SL75
Manufacturer: SIEMENS
Test mode: TX co-location
Test Engineer: mark
Phase: L & N
Comment: 110 volt

Start of Test: 9/29/2005 / 5:19:07PM

SCAN TABLE: "EN 55022 Voltage"

Short Description:			EN 55022 Voltage			
Start	Stop	Step	Detector	Meas.	IF	
Transducer						
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
Average						

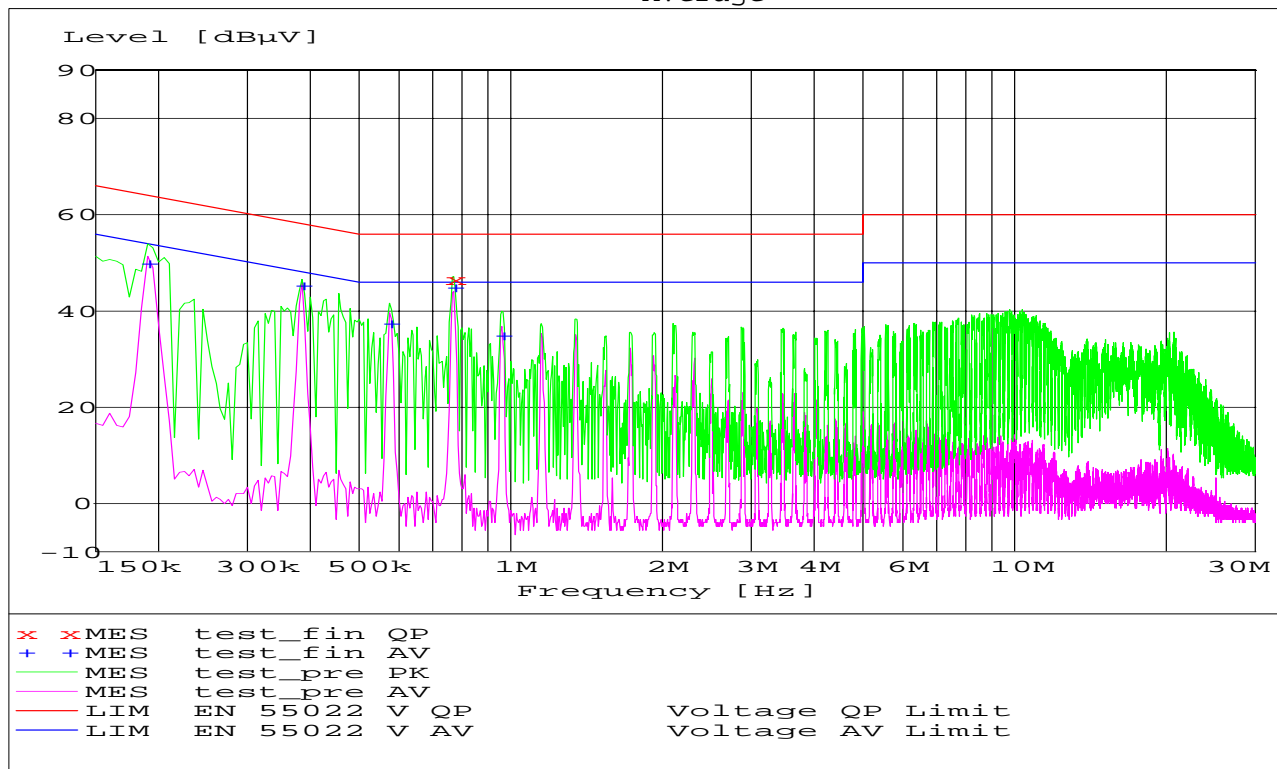

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
05	Biconilog Antenna	3141	EMCO	0005-1186
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Voltsch	G1115
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307
12	Pre-Amplifier	JS4-00102600	Miteq	00616
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06

7 References

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-B-2003 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.