


Label location:



NOTES:


- 1.Material:50u Top-coated Polyester Film,Thickness: $0.052 \pm 0.002\text{mm}$
Glue Type:Embossed white glassine liner,Thickness: $0.033 \pm 0.003\text{mm}$
材質：表面處理50番白色特多龍商標紙+格子膠
- 2.Dimension:64.4*74.4mm
- 3.Graphic color Pantone Black C
文字印刷黑色
- 4.The materials are compliant with the limits of
ROHS Directive 2002/95/EC and its subsequent amendments
- 5.In duplicate,Roll up
一式一份，整捲進料
- 6.Font : min 5.5pt Arial font
- 7.Barcode:must not be smaller than 1/8inch high

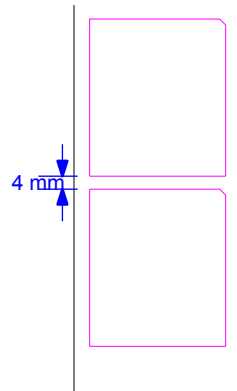

廠內列印示意圖
虛線部分為廠內列印區域


	Device Type: XB3V2 Model:DPC3941 DOCSIS 3.0 VOICE GATEWAY Rating:100-120 Vac, 50-60 Hz, 1.1A	FCC ID: VUIDPC3941 TAN: 74-101094-01
P/N	DPC3941-AMC14-K9	
S/N	267763034	
CM MAC	68EE96D70046	
Network Name (SSID 1):	HOME-0046-2.4	
Network Name (SSID 2):	HOME-0046-5	
Network Key(Password):	CCHWD7AATTAHH94R	
Encryption:	WPAWPA2-PSK(TKIP/AES)	
WPS Pin: 00702157	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.	
RFPI:026BEABF58		
URL: http://10.0.0.1		
SW Ver.:dpc3941-P20-18-v303r204216-140109a-CMCST		
HW Ver.:1.0		
Date of Mfg:01/14	Factory ID:F2	Made in China

REV.	LTR	DATE	UPDATE DESCRIPTION	REMARK	SIGN	APPROVER
1						

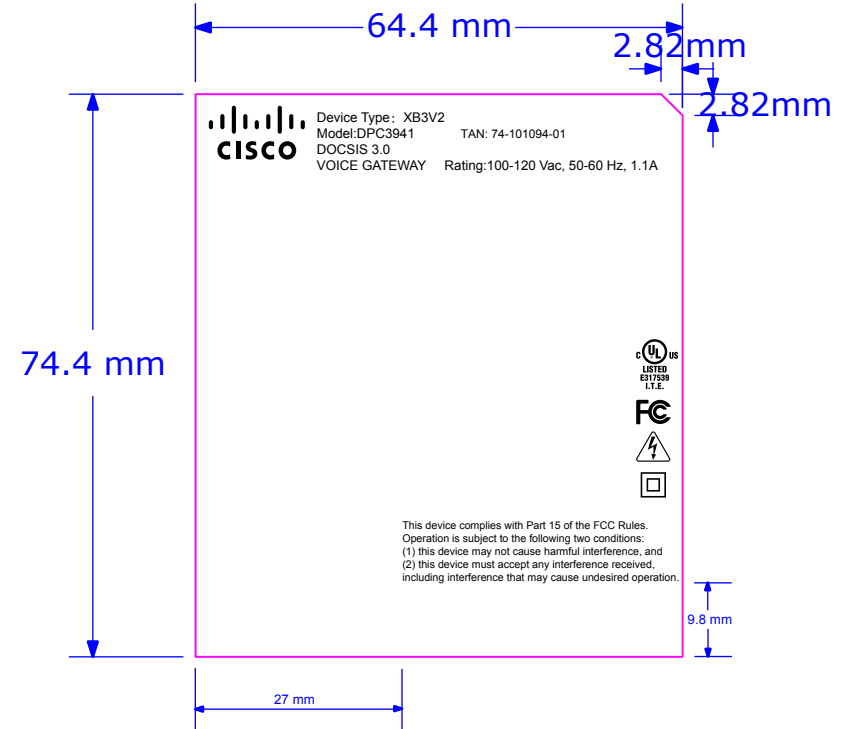


SCALE 1:1

Material Made



Roll Up



Example Of Factory Printing Location:

虛線部分為廠內列印區域

ITEM.	PART NAME	PART NO.	Q'TY /SET	MATERIAL (SPEC.)	REMARK
MATERIAL (SPEC.)	參照Notes標示	QUANTITY /SET	1/1	UniHan® UNIHAN CORPORATION	
FINISH	SCALE	1:1	DESCRIPTION	DEVICE LABEL DPC3941	
SELECT v		UNIT	MM	SIZE	A4
DIM.	TOL.	A	B	C	V EXTRA
~50	± 0.05	0.10	0.20		
50~100	± 0.10	0.20	0.30		± 0.20
100~150	± 0.20	0.30	0.40		
150~	± 0.20	0.40	0.50		
		DATE	2014/02/26		
		DESIGNED	Belinda	CHECKED	Sujing Tsai
		APPROVED	Sujing Tsai		