

# **FCC Test Report**

Report No.: AGC00210210705FE05

FCC ID : 2AVUHVA-SP003

**APPLICATION PURPOSE** : Original Equipment

PRODUCT DESIGNATION : VAVA Chroma 4K UST Triple Laser Projector

**BRAND NAME** : VAVA

MODEL NAME : VA-SP003

APPLICANT

Shenzhen NearbyExpress Technology Development

Company Limited

**DATE OF ISSUE** : Apr. 01, 2022

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15.247

**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 120


## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Apr. 01, 2022	Valid	Initial Release	




# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. IEEE 802.11N MODULATION SCHEME	ε
2.4. RELATED SUBMITTAL(S) / GRANT (S)	8
2.5. TEST METHODOLOGY	8
2.6. SPECIAL ACCESSORIES	8
2.7. EQUIPMENT MODIFICATIONS	
2.8. ANTENNA REQUIREMENT	
2.9. DESCRIPTION OF AVAILABLE ANTENNAS	g
3. MEASUREMENT UNCERTAINTY	10
4. DESCRIPTION OF TEST MODES	11
5. SYSTEM TEST CONFIGURATION	12
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN EUT SYSTEM	12
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	13
7. OUTPUT POWER	14
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	15
8. BANDWIDTH	17
8.1. MEASUREMENT PROCEDURE	17
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
8.3. LIMITS AND MEASUREMENT RESULTS	18
9. CONDUCTED SPURIOUS EMISSION	43
9.1. MEASUREMENT PROCEDURE	43
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	43
9.3 MEASUREMENT FOUIPMENT USED IN	43





9.4. LIMITS AND MEASUREMENT RESULT	43
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	59
10.1 MEASUREMENT PROCEDURE	59
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	59
10.3 MEASUREMENT EQUIPMENT USED	59
10.4 LIMITS AND MEASUREMENT RESULT	59
11. RADIATED EMISSION	73
11.1. MEASUREMENT PROCEDURE	73
11.2. TEST SETUP	74
11.3. LIMITS AND MEASUREMENT RESULT	75
11.4. TEST RESULT	75
12. LINE CONDUCTED EMISSION TEST	110
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	110
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	110
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	111
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	111
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	112
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	120
APPENDIX B: PHOTOGRAPHS OF EUT	120





# 1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen NearbyExpress Technology Development Company Limited
Address	Room 701, 702, 703, 705, 706, 708, 709, Building E, Galaxy World Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, Guangdong, China 518000
manufacturer	Shenzhen NearbyExpress Technology Development Company Limited
Address	Room 701, 702, 703, 705, 706, 708, 709, Building E, Galaxy World Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, Guangdong, China 518000
Factory	Appotronics Co., Ltd Bao'an Branch
Address	301, 1 Block &101 and 301, 3 Block, Yaochuan Industrial Park, Tangwei Community, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, P.R.China
Product Designation	VAVA Chroma 4K UST Triple Laser Projector
Brand Name	VAVA
Test Model	VA-SP003
Date of test	Jul. 19, 2021 to Apr. 01, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

# We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Cool cheny	
	Cool Cheng (Project Engineer)	Apr. 01, 2022
Reviewed By	Calin Li	и
	Calvin Liu (Reviewer)	Apr. 01, 2022
Approved By	Max Zhang	,
	Max Zhang (Authorized Officer)	Apr. 01, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 6 of 120

# 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

The EUT is designed as "VAVA Chroma 4K UST Triple Laser Projector". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:13.75dBm; IEEE 802.11g:13.79dBm;
Output i Ower (Average)	IEEE 802.11n(20):13.65dBm; IEEE 802.11n(40):13.64dBm
Output Power (Peak)	IEEE 802.11b:16.44dBm; IEEE 802.11g:21.48dBm;
Cutput i Gwei (i Guit)	IEEE 802.11n(20):20.46dBm; IEEE 802.11n(40):21.18dBm
Output Power (MIMO)	IEEE 802.11n(20):16.22dBm; IEEE 802.11n(40):16.39dBm
Modulation	802.11b:DQPSK, DBPSK, CCK
Wiodulation	802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK
	802.11b: 1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	VER:1.0
Software Version	V1.0
Antenna Designation	Dipole Balun Antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	Refer to Chapter 2.9 of the report.
Number of transmit chain	2(802.11b/g/n all used two antennas,802.11b/g/n support MIMO)
Power Supply	AC 100-240V, 4A, 50/60Hz
Test Voltage	AC 120V/60Hz



Page 7 of 120

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	1	2412 MHZ	
	2	2417 MHZ	
	3	2422 MHZ	
	4	2427 MHZ	
	5	2432 MHZ	
2400~2483.5MHZ	6	2437 MHZ	
	7	2442 MHZ	
	8	2447 MHZ	
	9	2452 MHZ	
	10	2457 MHZ	
	11	2462 MHZ	

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Report No.: AGC00210210705FE05 Page 8 of 120

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps) 800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

# 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AVUHVA-SP003** filing to comply with the FCC Part 15 requirements.

# 2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

## 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

# 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Report No.: AGC00210210705FE05 Page 9 of 120

## 2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

## 2.9. DESCRIPTION OF AVAILABLE ANTENNAS

An	itenna	Frequency	TX	Bandwidth	Max Peal	k Gain (dBi)	Max Directional Gain
Т	Гуре	Band (MHz)	Paths	(MHz)	Ant 1	Ant 2	(dBi)
2.4	GWIFI [	Dipole Balun Ante	enna List	(2.4GHz 2*2	2 MIMO)		
В	ipole salun itenna	2400~2483.5	2	20, 40	3.06	3.03	6.07

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11n mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, Gant, Directional gain = Gant + Array Gain, where Array Gain is as follows.

• For power spectral density (PSD) measurements on devices:

Array Gain =  $10 \log (N_{ANT}/N_{SS}) dB = 3.01$ ;

• For power measurements on IEEE 802.1devices:

Array Gain = 0 dB for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any NANT;

Array Gain = 5 log(Nant/Nss) dB or 3 dB, whichever is less, for 20 MHz channel widths with Nant ≥ 5.

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with Gant set equal to the gain of the antenna having the highest gain.




Page 10 of 120

# 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel transmitting (TX)
2	Middle channel transmitting (TX)
3	High channel transmitting (TX)

## Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.

## Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

#### MT7668 QA 0.0.1.90 TX/RX | EEPROM | MAC \_BBP | RF Page | About | RF Type MT7668 :: 2 T 2 SingleBand 🔻 Normal Mode System BW Per-Pkt Prin Mode Primary 6 2437-1 ▼ SP 11 ▼ 20 CCK ▼ TX/RXO ▼ TX/RX1 leset counter RX ▼ TSSI ▼ DPD □ STBC □ LDPC □ SGI ✓ Nate rower TX frame setting FC (2) Dur (2) Address1 (6)Dest Address2 (6)SourceAddress3 (6)BSSID Seq (2) DEESAL OFF Calibration Bypass FFFFFFFFF 00000000000 001122334455 0000 0. RC\_CAL 1. RX\_RSSI\_DCOC\_CAL 2. RX DCOC CAL 3. TX\_DPD\_RX\_FI\_FD\_MPM 0 LoopBack AIFS (4~100 50 Start TX Transmitted: 0 Conti. O: NORMAL MODE Transmitted: ☐ TX Tone Single ▼ DC Power 1db (0~15) TX Path MCS PayloadLen PacketCo MPS Add

# Software Setting



Page 12 of 120

# 5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM

Configure:

EUT
-----

## **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	VAVA Chroma 4K UST Triple Laser Projector	VA-SP003	2AVUHVA-SP003	EUT

## 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247(b)(3)	Output Power	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247(e)	Maximum Conducted Output Power Spectral Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247(d)	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

Note: All models will be sold with power board A (MPL\_360-FM-3S) or power board B (MPL\_360-FM-3TH), and both power boards have been tested Radiated Emission and Conducted Emission and recorded in this report (The only difference between the two power boards is the red and green laser constant current driver IC, and t he product supply voltage is the same. The above changes will not cause any difference in the RF of the Bluet ooth and wifi parts, so the RF part does not need to be re-evaluated.).



Page 13 of 120

# 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

# **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2021	May 14, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

## **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2021	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Fliter	Micro-tronics	087	N/A	Mar. 23, 2020	Mar. 22, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	Weinachel Corp	58-30-33	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	May 22, 2020	May 21, 2022
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2020	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 14 of 120

# 7. OUTPUT POWER


# 7.1. MEASUREMENT PROCEDURE


For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

**Note**: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)








## 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power-antenna 1					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	12.17	14.67	≤30	Pass
802.11b	2437	12.66	15.11	≤30	Pass
	2462	13.26	15.76	≤30	Pass
	2412	12.23	19.85	≤30	Pass
802.11g	2437	12.63	20.25	≤30	Pass
	2462	13.79	21.48	≤30	Pass
	2412	12.42	19.90	≤30	Pass
802.11n20	2437	13.01	20.46	≤30	Pass
	2462	12.71	20.16	≤30	Pass
802.11n40	2422	12.56	20.17	≤30	Pass
	2437	12.94	20.58	≤30	Pass
	2452	13.64	21.18	≤30	Pass

Test Data of Conducted Output Power-antenna 2					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	12.17	14.65	≤30	Pass
802.11b	2437	12.69	15.19	≤30	Pass
	2462	13.75	16.44	≤30	Pass
	2412	12.73	20.38	≤30	Pass
802.11g	2437	13.13	20.75	≤30	Pass
	2462	13.30	20.94	≤30	Pass
	2412	12.44	19.90	≤30	Pass
802.11n20	2437	13.01	20.47	≤30	Pass
	2462	13.65	21.15	≤30	Pass
802.11n40	2422	12.03	19.72	≤30	Pass
	2437	12.42	20.06	≤30	Pass
	2452	13.11	20.66	≤30	Pass





Test Data of Conducted Output Power-antenna 1+2					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2412	15.44	23.05	≤30	Pass
802.11n20	2437	16.02	23.53	≤30	Pass
	2462	16.22	23.71	≤30	Pass
	2422	15.31	22.82	≤30	Pass
802.11n40	2437	15.70	23.28	≤30	Pass
	2452	16.39	23.92	≤30	Pass



Page 17 of 120

## 8. BANDWIDTH

## **8.1. MEASUREMENT PROCEDURE**

#### 6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.


# Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

# 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

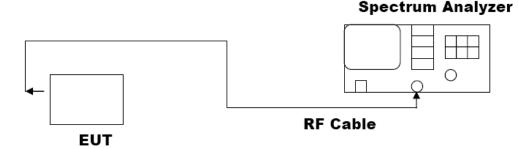






## 8.3. LIMITS AND MEASUREMENT RESULTS

	Test Data of Occupied Bandwidth and DTS Bandwidth-antenna 1					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	2412	13.818	8.572	≥0.5	Pass	
802.11b	2437	13.564	8.575	≥0.5	Pass	
	2462	13.452	8.577	≥0.5	Pass	
	2412	16.612	15.12	≥0.5	Pass	
802.11g	2437	16.554	15.11	≥0.5	Pass	
	2462	16.579	15.11	≥0.5	Pass	
	2412	17.599	15.12	≥0.5	Pass	
802.11n20	2437	17.572	15.11	≥0.5	Pass	
	2462	17.585	15.11	≥0.5	Pass	
802.11n40	2422	36.130	35.11	≥0.5	Pass	
	2437	36.056	35.66	≥0.5	Pass	
	2452	35.974	33.85	≥0.5	Pass	

	Test Data of Occupied Bandwidth and DTS Bandwidth-antenna 2					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail	
	2412	13.812	8.557	≥0.5	Pass	
802.11b	2437	13.568	8.805	≥0.5	Pass	
	2462	13.481	8.589	≥0.5	Pass	
	2412	16.616	15.12	≥0.5	Pass	
802.11g	2437	16.552	15.11	≥0.5	Pass	
	2462	16.583	15.11	≥0.5	Pass	
	2412	17.596	15.12	≥0.5	Pass	
802.11n20	2437	17.577	15.11	≥0.5	Pass	
	2462	17.587	15.10	≥0.5	Pass	
802.11n40	2422	36.117	35.67	≥0.5	Pass	
	2437	36.062	35.66	≥0.5	Pass	
	2452	35.980	33.85	≥0.5	Pass	




# Test Graphs of Occupied Bandwidth

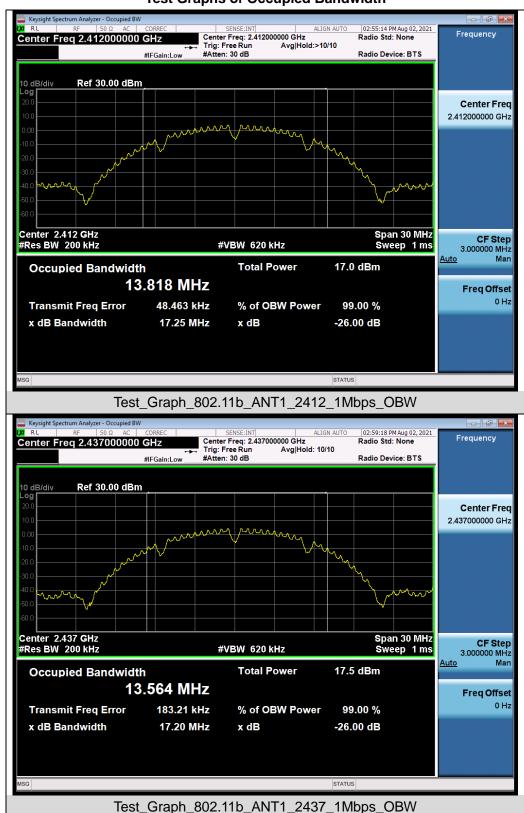









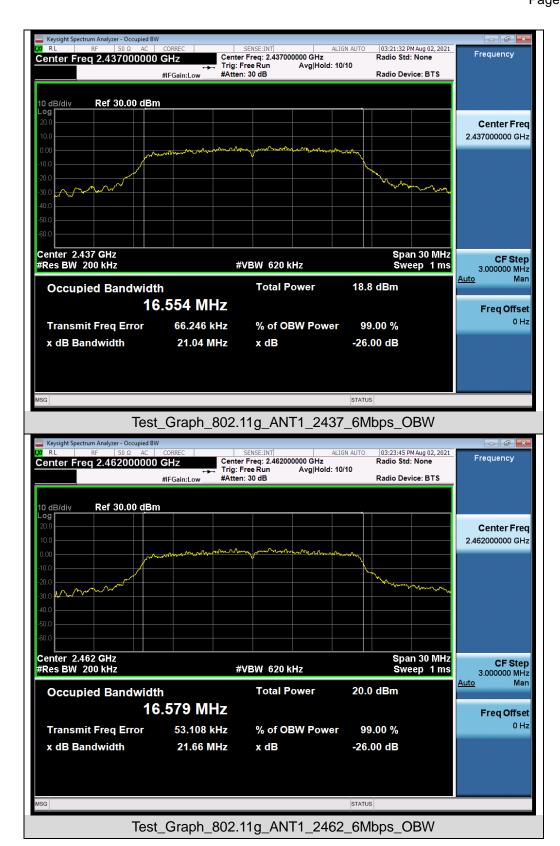




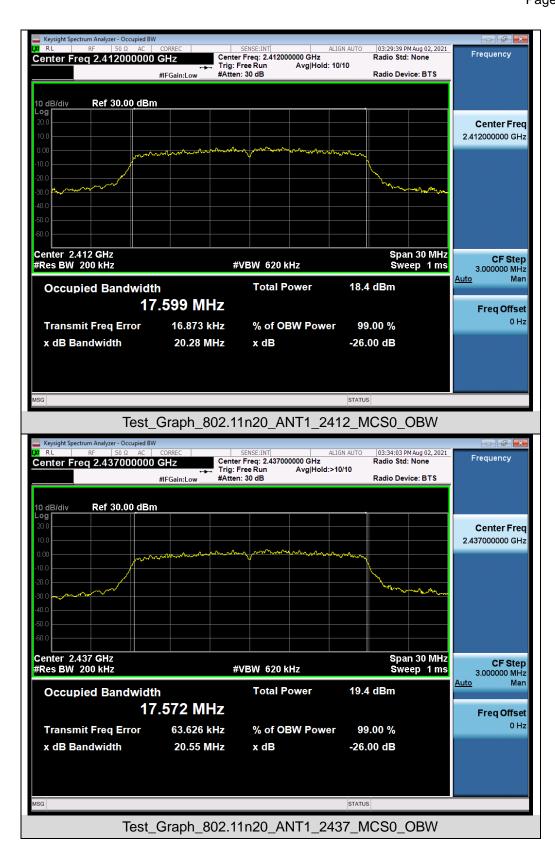



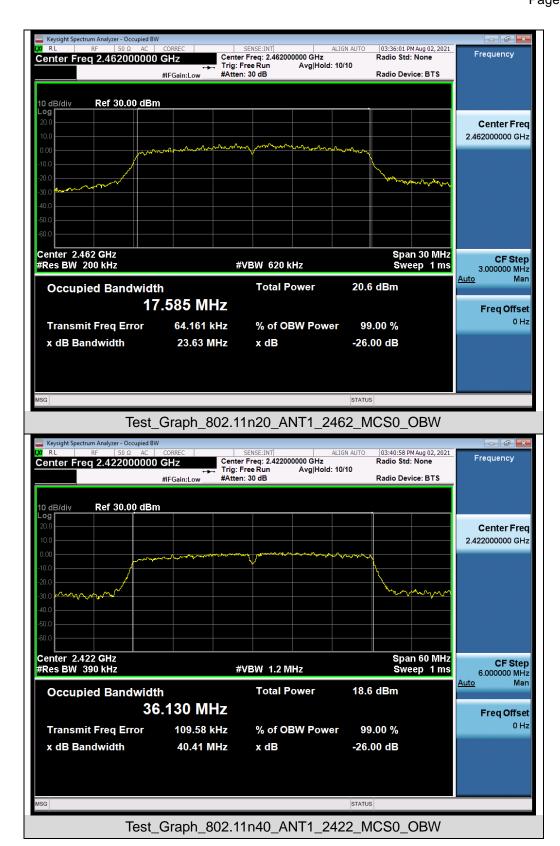



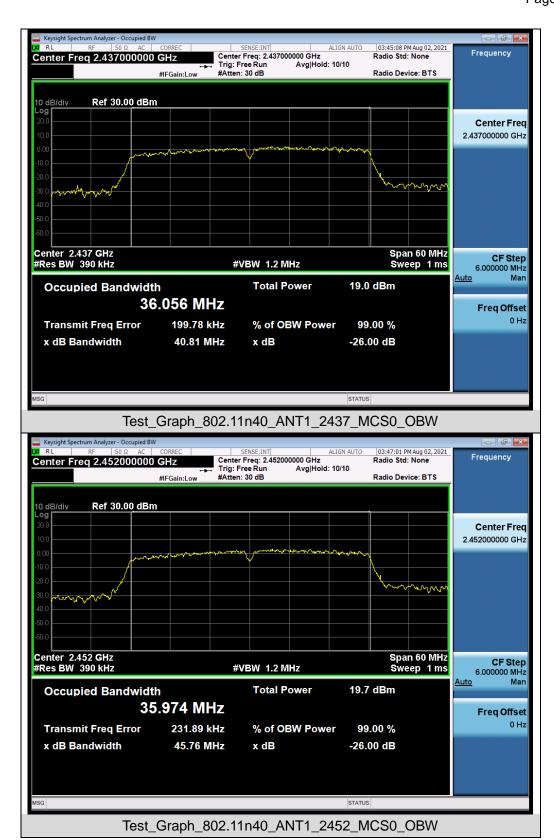














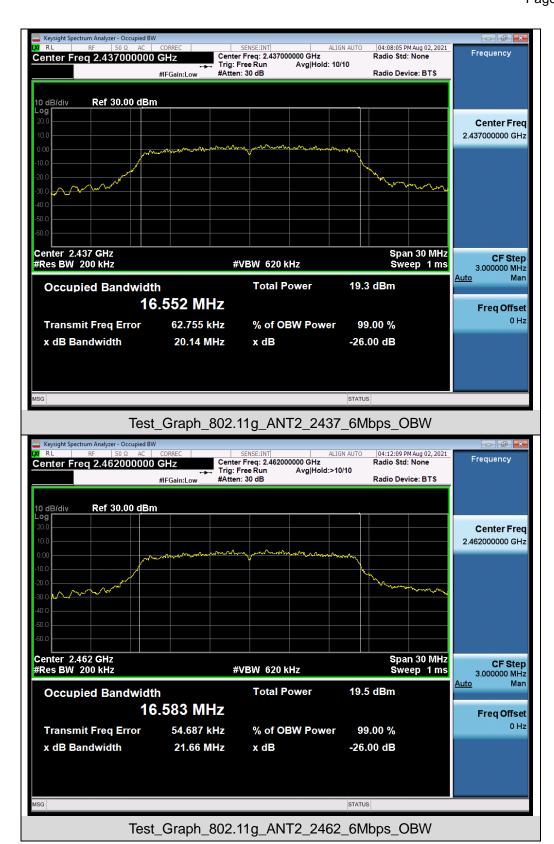




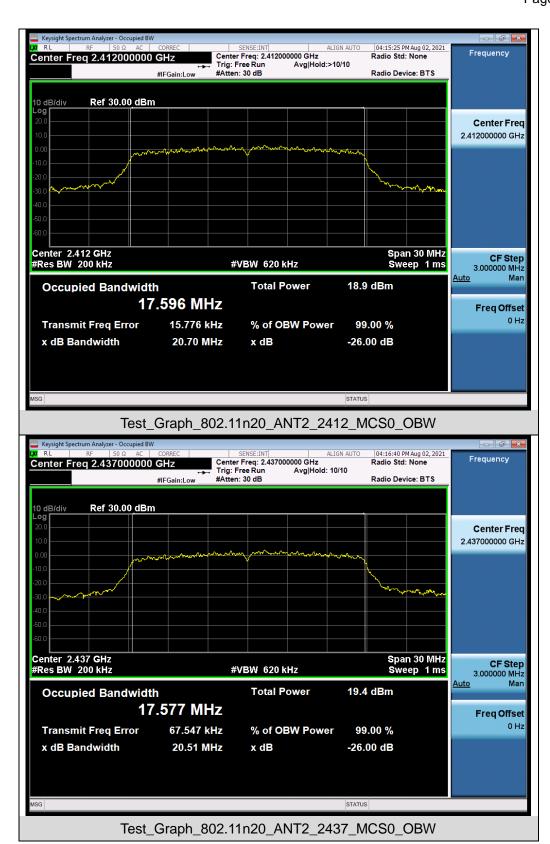



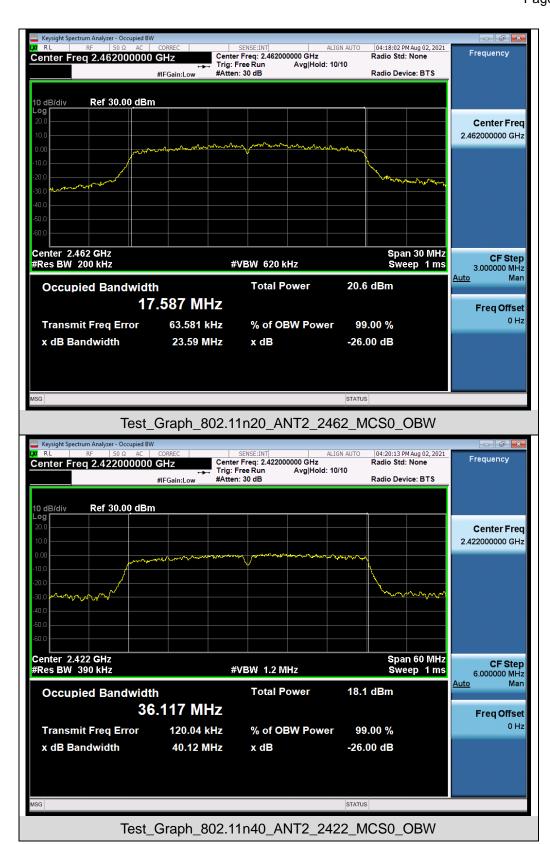




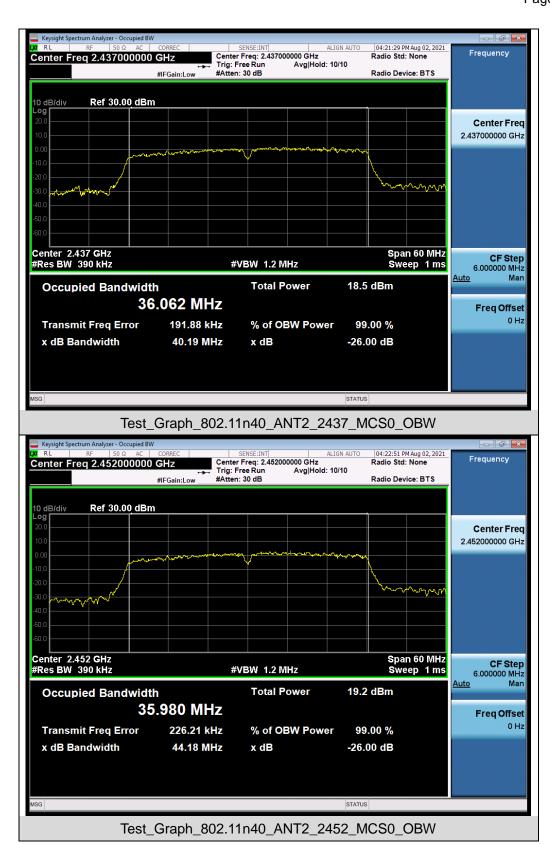



# Test Graphs of DTS Bandwidth

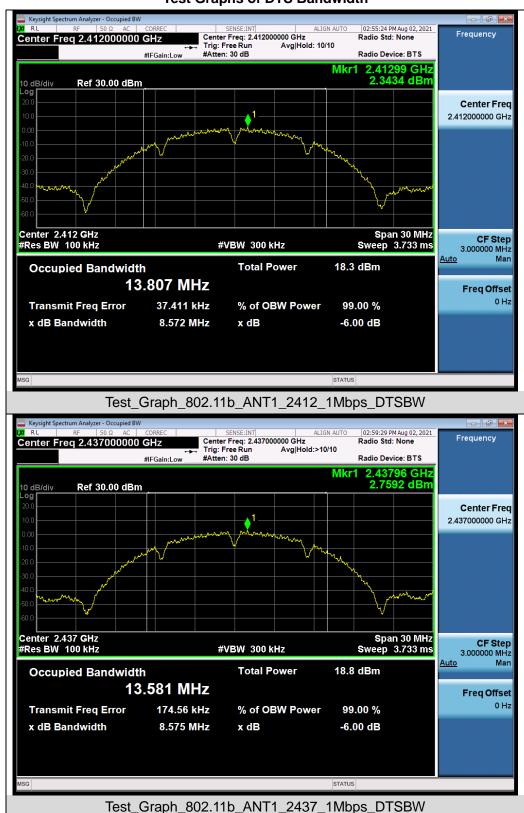


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.









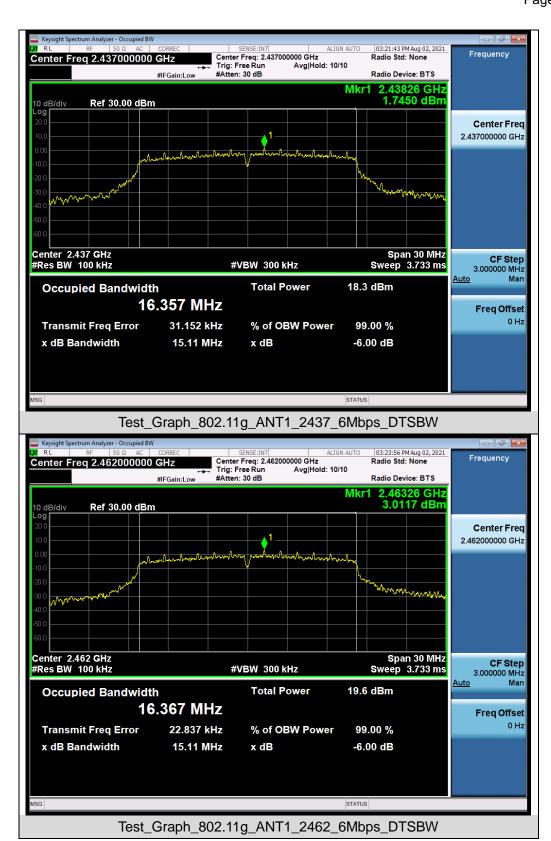




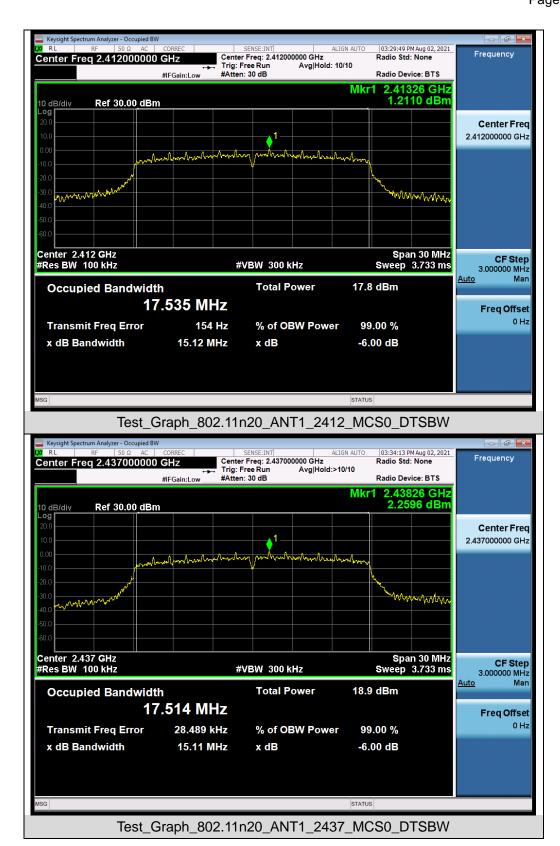



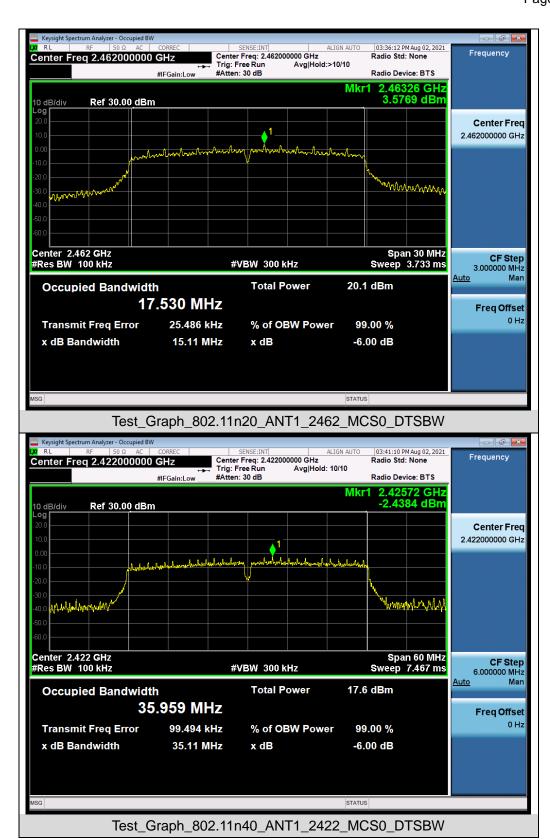




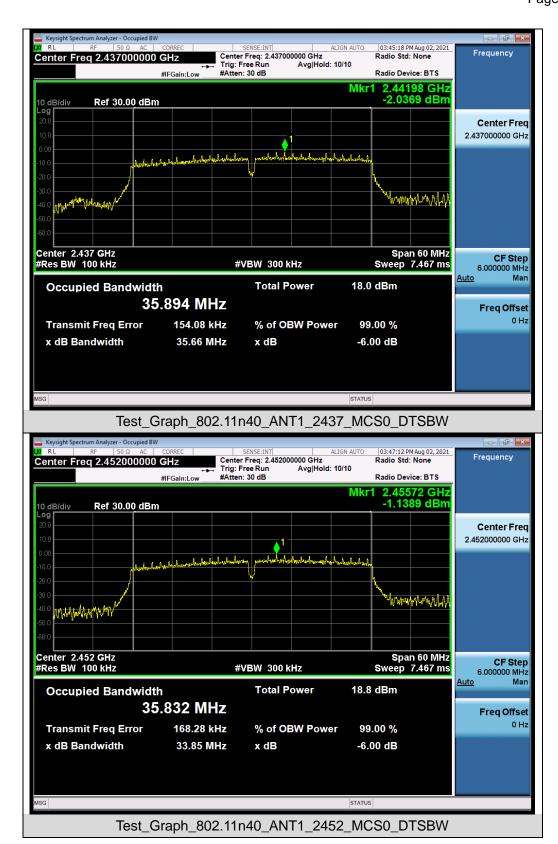









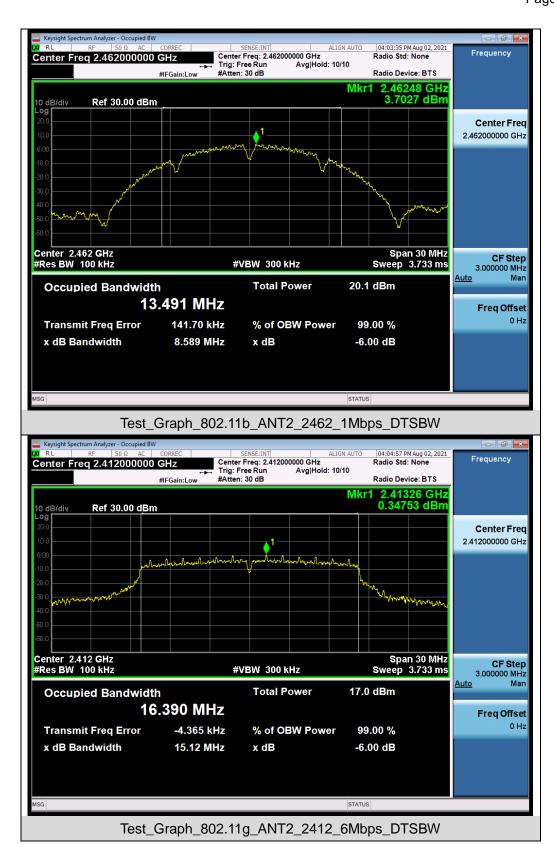




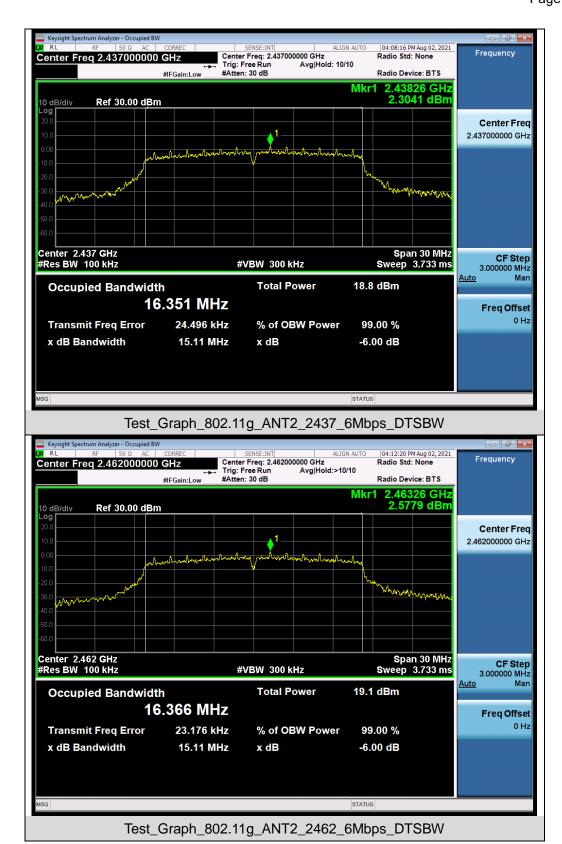




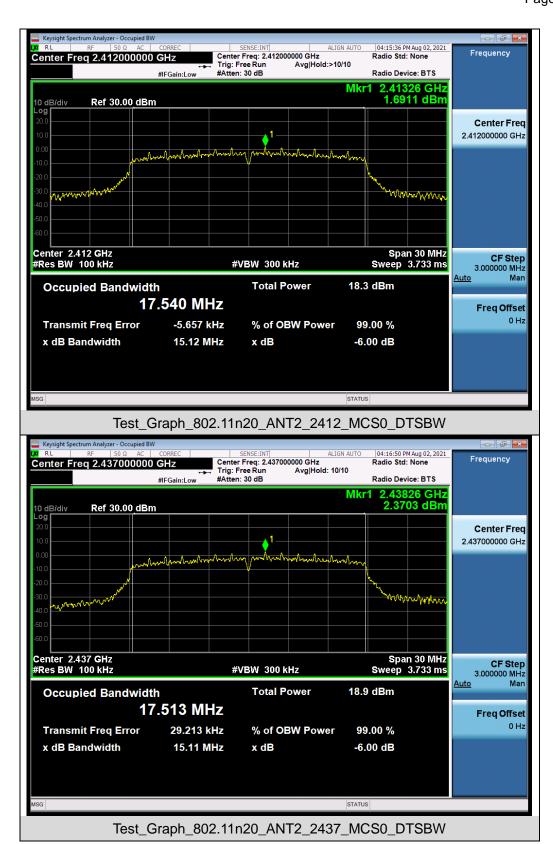



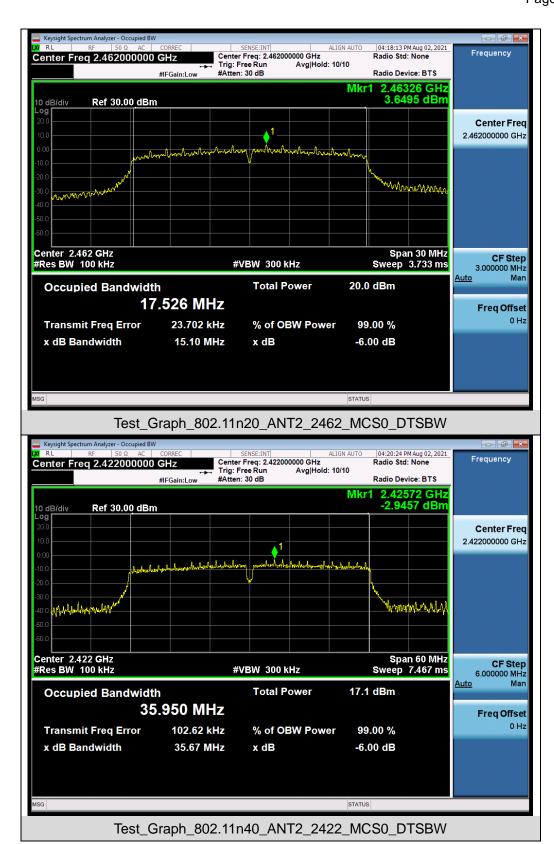



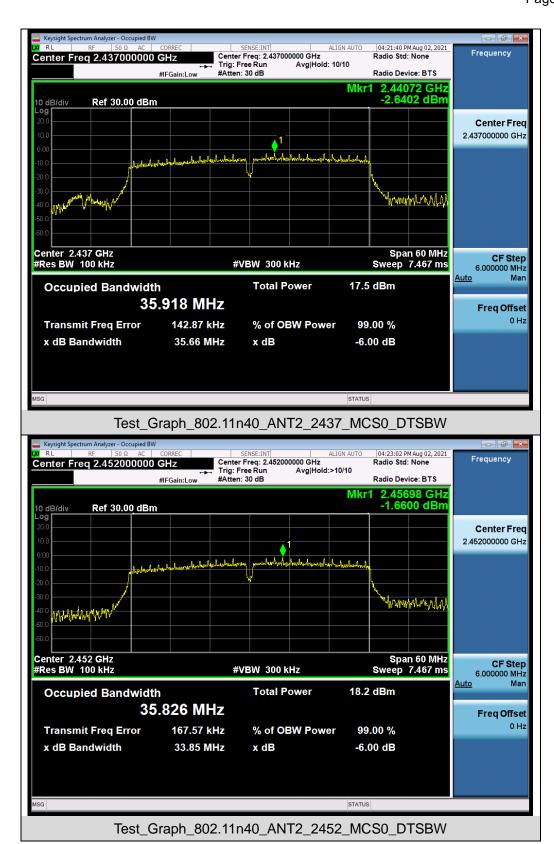



Page 43 of 120

## 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

# 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.


#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Applicable Limite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit	PASS		
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	Specified on the TOP Channel	FAGG		

Note: The limits reference level is according to the test plot of -6dB bandwidth.




# Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

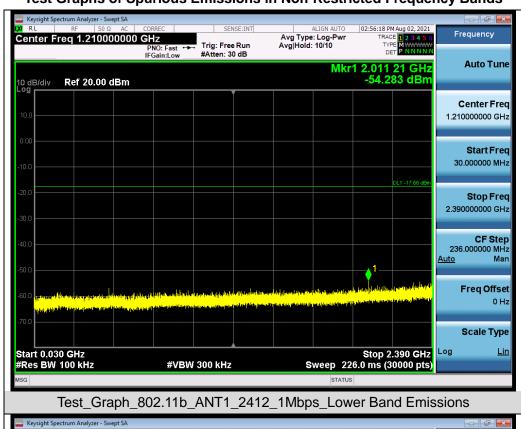



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



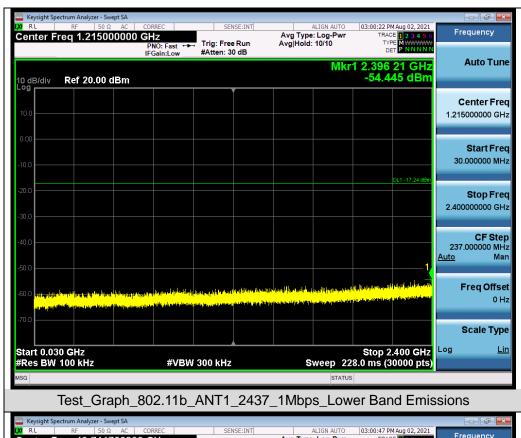









0 Hz


<u>Lin</u>

Scale Type

Log

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



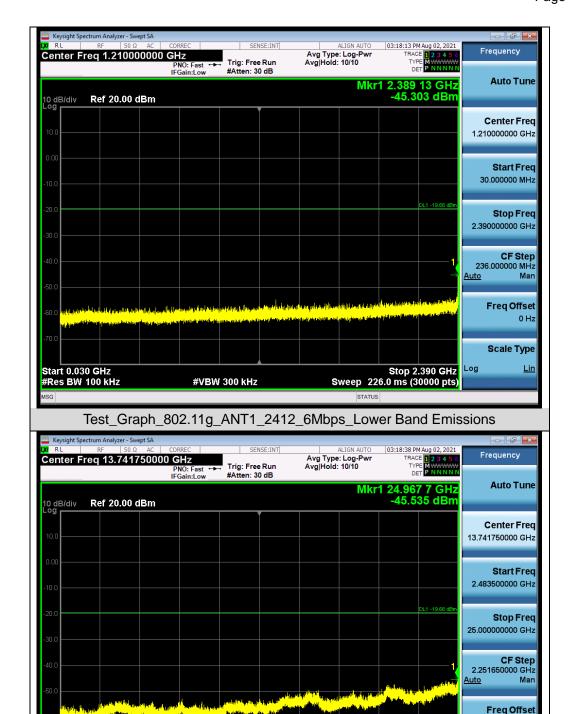

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Higher Band Emissions

**#VBW** 300 kHz

Start 2.48 GHz #Res BW 100 kHz