
FCC Test Report

Report No.: AGC10516200603FE03

FCC ID : 2AWM4KLIMDONGLE
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : chroma wl keyboard dongle
BRAND NAME : KLIM
MODEL NAME : KLIM CHROMA WL dongle, KLIM Light V2 Dongle, KLIM WL Dongle C1, KLIM WL Dongle
APPLICANT : Marcus Excelsior Limited
DATE OF ISSUE : Jun. 29, 2020
STANDARD(S)
TEST PROCEDURE(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | / | Jun. 29, 2020 | Valid | Initial Release |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. VERIFICATION OF CONFORMITY | 4 |
| 2. GENERAL INFORMATION..... | 5 |
| 2.1. PRODUCT DESCRIPTION | 5 |
| 2.2. TABLE OF CARRIER FREQUENCY | 5 |
| 3. MEASUREMENT UNCERTAINTY | 6 |
| 4. DESCRIPTION OF TEST MODES..... | 7 |
| 5. SYSTEM TEST CONFIGURATION | 8 |
| 5.1. CONFIGURATION OF EUT SYSTEM | 8 |
| 5.2 EQUIPMENT USED IN TESTED SYSTEM..... | 8 |
| 5.3. SUMMARY OF TEST RESULTS..... | 8 |
| 6. TEST FACILITY | 9 |
| 7. RADIATED EMISSION..... | 10 |
| 7.1TEST LIMIT | 10 |
| 7.2. MEASUREMENT PROCEDURE | 11 |
| 7.3. TEST SETUP..... | 13 |
| 7.4. TEST RESULT..... | 14 |
| 8. BAND EDGE EMISSION | 20 |
| 8.1. MEASUREMENT PROCEDURE | 20 |
| 8.2 TEST SETUP..... | 20 |
| 8.3 RADIATED TEST RESULT | 20 |
| 9. 20DB BANDWIDTH | 25 |
| 9.1. MEASUREMENT PROCEDURE | 25 |
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 25 |
| 9.3. MEASUREMENT RESULTS..... | 26 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP | 32 |
| APPENDIX B: PHOTOGRAPHS OF THE EUT | 34 |

1. VERIFICATION OF CONFORMITY

| | |
|---------------------------------|--|
| Applicant | Marcus Excelsior Limited |
| Address | 2512, Langham Place Office Tower, 8 Mongkok KOWLOON HONG KONG |
| Manufacturer | Shenzhen WINOMOKO KLIM technology Co., Ltd. |
| Address | 511-514 B building Zhihui Creative building, xihuan road, shajing town, bao an district, shenzhen city, Guangdong province, 518101, China. |
| Factory | Shenzhen WINOMOKO KLIM technology Co., Ltd. |
| Address | 511-514 B building Zhihui Creative building, xihuan road, shajing town, bao an district, shenzhen city, Guangdong province, 518101, China. |
| Product Designation | chroma wl keyboard dongle |
| Brand Name | KLIM |
| Test Model | KLIM CHROMA WL dongle |
| Series Model | KLIM Light V2 Dongle, KLIM WL Dongle C1, KLIM WL Dongle |
| Model Difference | All the same except for the model name, appearance pattern and color |
| Date of test | Jun. 11, 2020 to Jun. 29, 2020 |
| Deviation | None any deviation from the test method |
| Condition of Test Sample | Normal |
| Test Result | Pass |
| Report Template | AGCRT-US-BR/RF |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Prepared By

Sky Dong

Sky Dong
(Project Engineer)

Jun. 29, 2020

Reviewed By

Max Zhang

Max Zhang
(Reviewer)

Jun. 29, 2020

Approved By

Forrest Lei

Forrest Lei
(Authorized Officer)

Jun. 29, 2020

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

| | |
|-------------------------------|--|
| Operation Frequency | 2.403GHz ~ 2.480GHz |
| Maximum field strength | 78.03dBuV/m(Average)@3m |
| Modulation | GFSK |
| Number of Channels | 16 |
| Antenna Gain | -0.71dBi |
| Antenna Designation | PCB Antenna (Met 15.203 Antenna requirement) |
| Hardware Version | V1.1 |
| Software Version | V1.5 |
| Power Supply | DC 5V by PC |

2.2. TABLE OF CARRIER FREQUENCY

| Frequency Band | Channel Number | Frequency |
|-------------------|----------------|-----------|
| 2400MHZ~2483.5MHZ | 1 | 2403MHZ |
| | 2 | 2407MHZ |
| | 3 | 2414MHZ |
| | 4 | 2419MHZ |
| | 5 | 2422MHZ |
| | 6 | 2426MHZ |
| | 7 | 2436MHZ |
| | 8 | 2439MHZ |
| | 9 | 2441MHZ |
| | 10 | 2445MHZ |
| | 11 | 2453MHZ |
| | 12 | 2459MHZ |
| | 13 | 2463MHZ |
| | 14 | 2466MHZ |
| | 15 | 2473MHZ |
| | 16 | 2480MHZ |

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, $U_c = \pm 3.1$ dB
- Uncertainty of Radiated Emission below 1GHz, $U_c = \pm 4.0$ dB
- Uncertainty of Radiated Emission above 1GHz, $U_c = \pm 4.8$ dB


4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------|
| 1 | Low channel GFSK |
| 2 | Middle channel GFSK |
| 3 | High channel GFSK |

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.


Software Setting

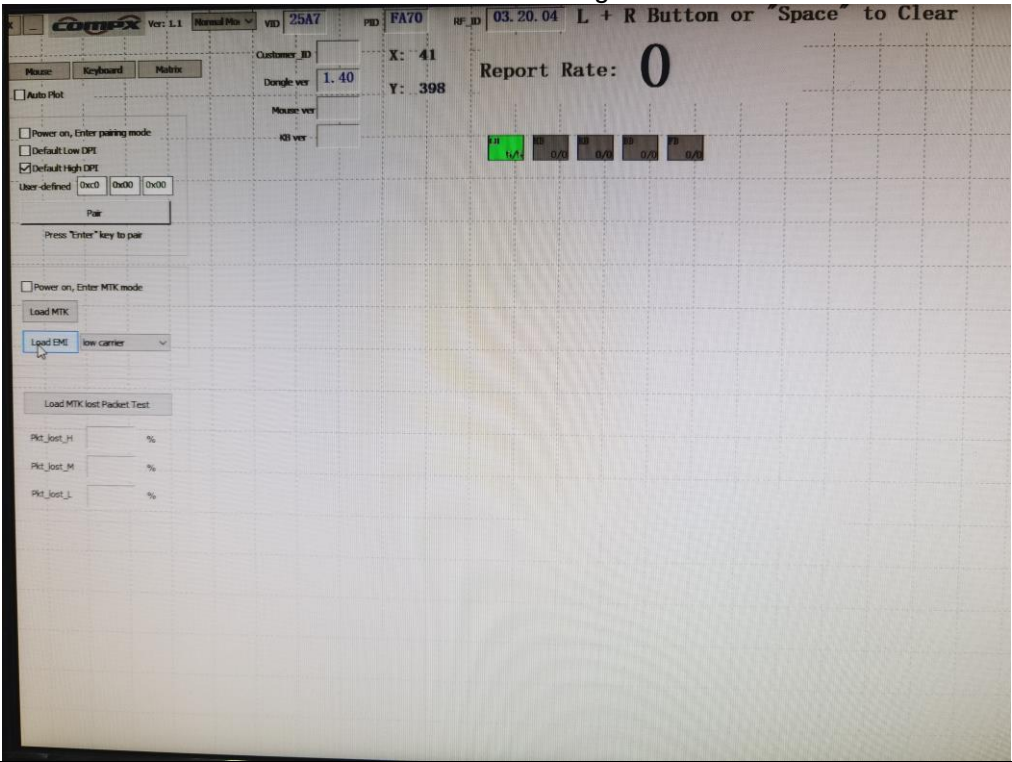

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure :

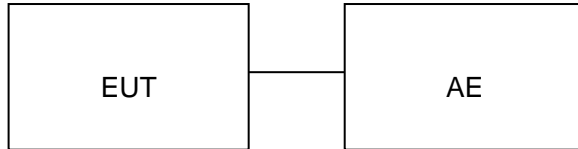

Conducted Emission Configure :



5.2. EQUIPMENT USED IN TESTED SYSTEM

| Item | Equipment | Model No. | ID or Specification | Remark |
|------|---------------------------|-----------------------|---------------------|-----------|
| 1 | chroma wl keyboard dongle | KLIM CHROMA WL dongle | 2AWM4KLIMDONGLE | EUT |
| 2 | PC | 16301-01 | N/A | Accessory |
| 3 | PC Adapter | ADC6501TM | N/A | Accessory |

5.3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST | RESULT |
|----------------|---------------------|-----------|
| §15.249&15.209 | Radiated Emission | Compliant |
| §15.249 | Band Edges | Compliant |
| §15.215 | 20dB bandwidth | Compliant |
| §15.207 | Conducted Emission | Compliant |

6. TEST FACILITY

| | |
|--|--|
| Test Site | Attestation of Global Compliance (Shenzhen) Co., Ltd |
| Location | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Designation Number | CN1259 |
| FCC Test Firm Registration Number | 975832 |
| A2LA Cert. No. | 5054.02 |
| Description | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA |

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|---------------|--------------|----------------------|--------|---------------|---------------|
| TEST RECEIVER | R&S | ESPI | 101206 | May 15, 2020 | May 14, 2022 |
| LISN | R&S | ESH2-Z5 | 100086 | Aug. 26, 2019 | Aug. 25, 2020 |
| Test software | R&S | ES-K1 (Ver V1.71) | N/A | N/A | N/A |

TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|-----------------------------------|-----------------|------------------------|------------|---------------|---------------|
| TEST RECEIVER | R&S | ESCI | 10096 | May 15, 2020 | May 14, 2022 |
| EXA Signal Analyzer | Aglient | N9010A | MY53470504 | Dec. 12, 2019 | Dec. 11, 2020 |
| 2.4G Band Fliter | EM Electronics | 2400-2500 | N/A | Mar. 23, 2020 | Mar. 22, 2022 |
| Attenuator | ZHINAN | E-002 | N/A | Sep. 09, 2019 | Sep. 08, 2020 |
| Horn antenna | SCHWARZBECK | BBHA 9170 | #768 | Sep. 21, 2019 | Sep. 20, 2021 |
| Active loop antenna (9K-30MHz) | ZHINAN | ZN30900C | 18051 | May 22, 2020 | May 21, 2022 |
| Double-Ridged Waveguide Horn | ETS LINDGREN | 3117 | 00154520 | Oct. 26, 2019 | Oct. 25, 2021 |
| Broadband Preamplifier | ETS LINDGREN | 3117PA | 00225134 | Oct. 15, 2019 | Oct. 16, 2020 |
| ANTENNA | SCHWARZBECK | VULB9168 | 494 | Sep. 20, 2019 | Sep. 19, 2021 |
| Test software | FARA | EZ-EMC (Ver RA-03A) | N/A | N/A | N/A |

7. RADIATED EMISSION

7.1 TEST LIMIT

Standard FCC15.249

| Fundamental Frequency | Field Strength of Fundamental (millivolts/meter) | Field Strength of Harmonics (microvolts/meter) |
|-----------------------|---|---|
| 900-928MHz | 50 | 500 |
| 2400-2483.5MHz | 50 | 500 |
| 5725-5875MHz | 50 | 500 |
| 24.0-24.25GHz | 250 | 2500 |

Standard FCC 15.209

| Frequency (MHz) | Distance Meters | Field Strengths Limit | |
|--------------------|--------------------|---|----------------|
| | | μ V/m | dB(μ V)/m |
| 0.009 ~ 0.490 | 300 | 2400/F(kHz) | --- |
| 0.490 ~ 1.705 | 30 | 24000/F(kHz) | --- |
| 1.705 ~ 30 | 30 | 30 | --- |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average) | |

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|-----------------------|---|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |
| Start ~Stop Frequency | 1GHz~26.5GHz RBW 2.4MHz/ VBW 8MHz for Peak, RBW 2.4MHz/10Hz for Average |


| Receiver Parameter | Setting |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |

7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

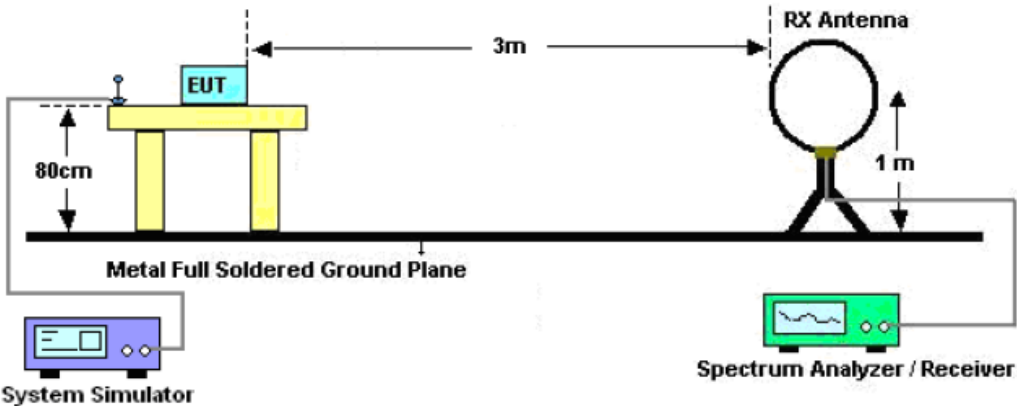

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

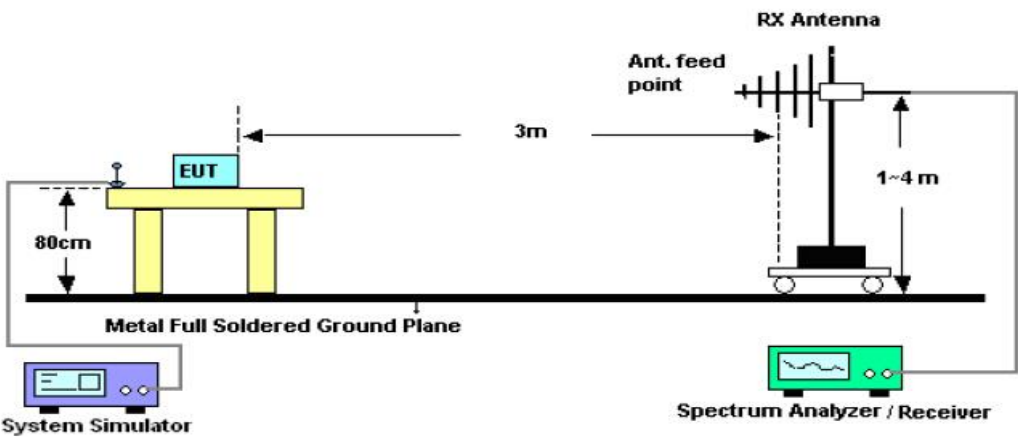

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

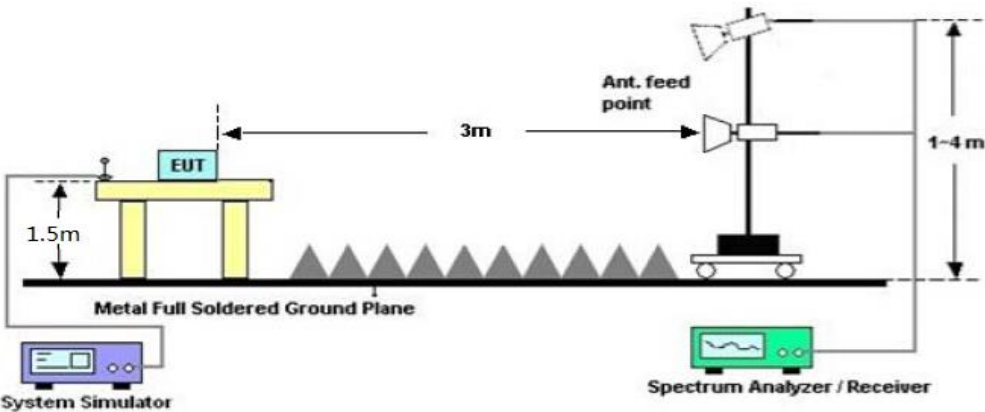

7.4. TEST RESULT


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION 30MHz- 1GHZ

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 1 | Polarization | Horizontal |


66.9 dBuV/m

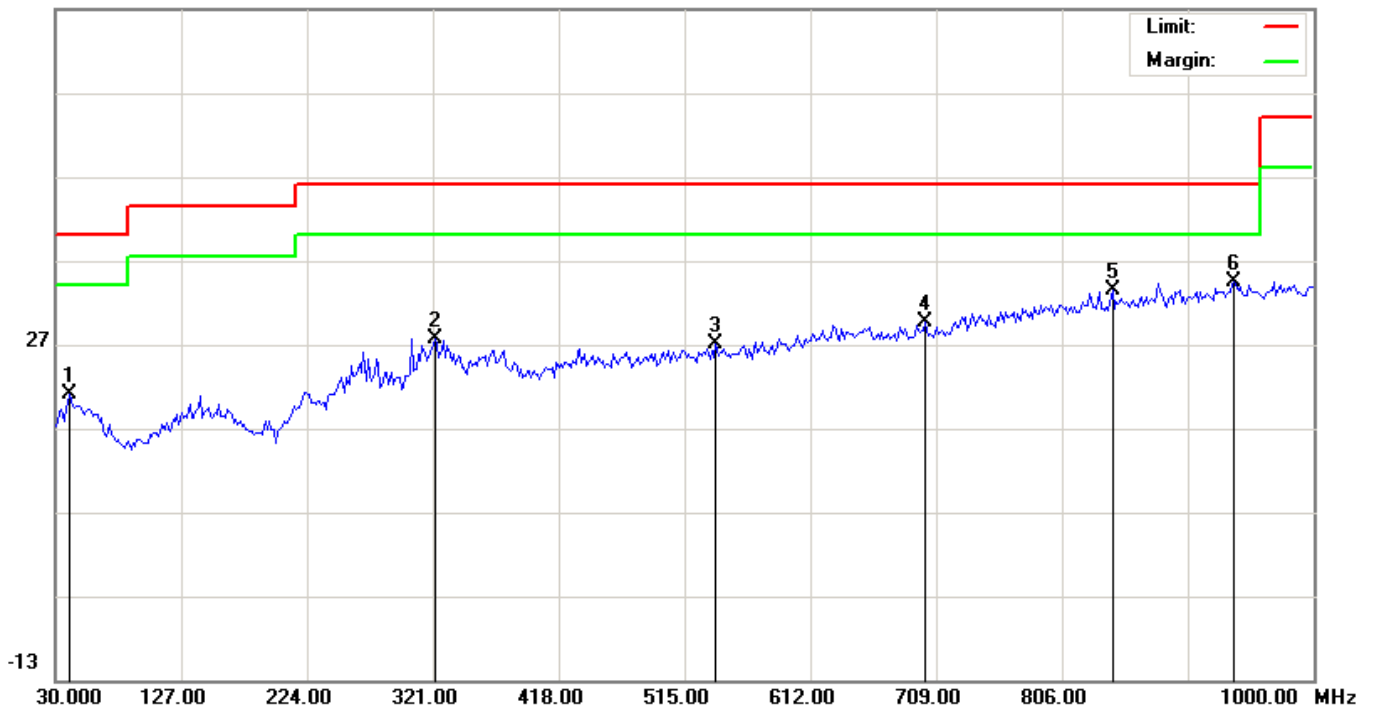

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | | 41.3167 | 0.98 | 20.04 | 21.02 | 40.00 | -18.98 | peak |
| 2 | | 322.6167 | 7.43 | 20.26 | 27.69 | 46.00 | -18.31 | peak |
| 3 | | 539.2500 | 1.18 | 25.76 | 26.94 | 46.00 | -19.06 | peak |
| 4 | | 700.9167 | 1.48 | 28.17 | 29.65 | 46.00 | -16.35 | peak |
| 5 | | 844.8000 | 2.45 | 30.99 | 33.44 | 46.00 | -12.56 | peak |
| 6 | * | 938.5667 | 2.32 | 32.03 | 34.35 | 46.00 | -11.65 | peak |

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 1 | Polarization | Vertical |

66.9 dBuV/m

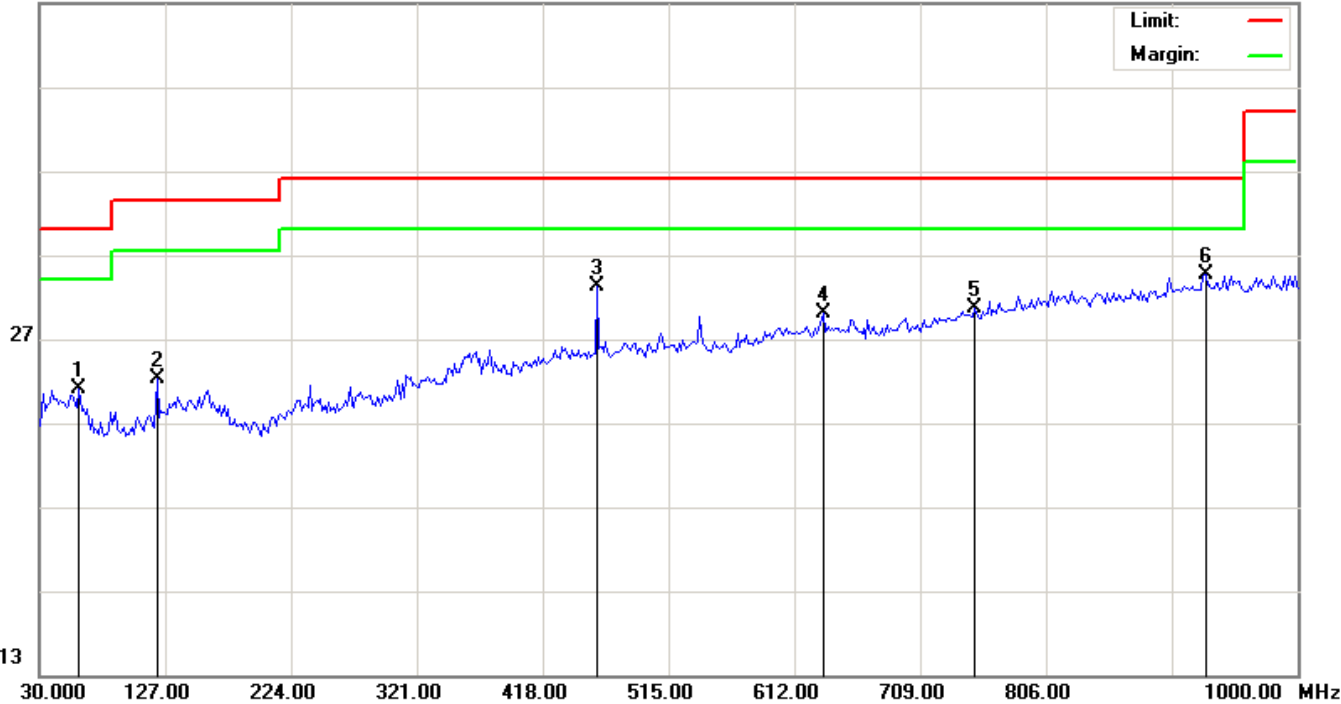

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | | 60.7167 | 2.28 | 18.74 | 21.02 | 40.00 | -18.98 | peak |
| 2 | | 120.5333 | 4.23 | 18.00 | 22.23 | 43.50 | -21.27 | peak |
| 3 | | 460.0333 | 9.07 | 24.19 | 33.26 | 46.00 | -12.74 | peak |
| 4 | | 634.6332 | 2.72 | 27.37 | 30.09 | 46.00 | -15.91 | peak |
| 5 | | 751.0333 | 1.29 | 29.30 | 30.59 | 46.00 | -15.41 | peak |
| 6 | * | 928.8667 | 2.73 | 31.95 | 34.68 | 46.00 | -11.32 | peak |

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

FIELD STRENGTH OF FUNDAMENTAL

| | | | |
|-----------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Modulation | GFSK | Polarization | Horizontal |

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 2403 | 103.49 | -9.61 | 93.88 | 114.00 | -20.12 | peak |
| 2403 | 87.64 | -9.61 | 78.03 | 94.00 | -15.97 | AVG |
| 2441 | 101.78 | -9.61 | 92.17 | 114.00 | -21.83 | peak |
| 2441 | 87.03 | -9.61 | 77.42 | 94.00 | -16.58 | AVG |
| 2480 | 102.19 | -9.61 | 92.58 | 114.00 | -21.42 | peak |
| 2480 | 86.81 | -9.61 | 77.2 | 94.00 | -16.80 | AVG |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| | | | |
|-----------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Modulation | GFSK | Polarization | Vertical |

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 2403 | 101.54 | -9.61 | 91.93 | 114.00 | -22.07 | peak |
| 2403 | 86.72 | -9.61 | 77.11 | 94.00 | -16.89 | AVG |
| 2441 | 100.26 | -9.61 | 90.65 | 114.00 | -23.35 | peak |
| 2441 | 85.63 | -9.61 | 76.02 | 94.00 | -17.98 | AVG |
| 2480 | 100.85 | -9.61 | 91.24 | 114.00 | -22.76 | peak |
| 2480 | 85.67 | -9.61 | 76.06 | 94.00 | -17.94 | AVG |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RADIATED EMISSION ABOVE 1GHZ

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 1 | Polarization | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4806 | 55.25 | 0.08 | 55.33 | 74.00 | -18.67 | peak |
| 4806 | 41.26 | 0.08 | 41.34 | 54.00 | -12.66 | AVG |
| 7209 | 50.97 | 2.21 | 53.18 | 74.00 | -20.82 | peak |
| 7209 | 37.33 | 2.21 | 39.54 | 54.00 | -14.46 | AVG |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 1 | Polarization | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4806 | 54.37 | 0.08 | 54.45 | 74.00 | -19.55 | peak |
| 4806 | 40.56 | 0.08 | 40.64 | 54.00 | -13.36 | AVG |
| 7209 | 50.92 | 2.21 | 53.13 | 74.00 | -20.87 | peak |
| 7209 | 36.84 | 2.21 | 39.05 | 54.00 | -14.95 | AVG |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 2 | Polarization | Horizontal |

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882 | 55.30 | 0.14 | 55.44 | 74.00 | -18.56 | peak |
| 4882 | 41.57 | 0.14 | 41.71 | 54.00 | -12.29 | AVG |
| 7323 | 49.14 | 2.36 | 51.50 | 74.00 | -22.50 | peak |
| 7323 | 34.44 | 2.36 | 36.80 | 54.00 | -17.20 | AVG |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 2 | Polarization | Vertical |

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Value Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4882 | 54.22 | 0.14 | 54.36 | 74.00 | -19.64 | peak |
| 4882 | 40.71 | 0.14 | 40.85 | 54.00 | -13.15 | AVG |
| 7323 | 49.05 | 2.36 | 51.41 | 74.00 | -22.59 | peak |
| 7323 | 36.64 | 2.36 | 39.00 | 54.00 | -15.00 | AVG |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 3 | Polarization | Horizontal |

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Value Type |
|---|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960 | 55.94 | 0.22 | 56.16 | 74.00 | -17.84 | peak |
| 4960 | 41.11 | 0.22 | 41.33 | 54.00 | -12.67 | AVG |
| 7440 | 50.67 | 2.64 | 53.31 | 74.00 | -20.69 | peak |
| 7440 | 37.82 | 2.64 | 40.46 | 54.00 | -13.54 | AVG |
| Remark: | | | | | | |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 3 | Polarization | Vertical |

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Value Type |
|---|-------------------------|----------------|----------------------------|--------------------|----------------|------------|
| 4960 | 55.06 | 0.22 | 55.28 | 74.00 | -18.72 | peak |
| 4960 | 40.20 | 0.22 | 40.42 | 54.00 | -13.58 | AVG |
| 7440 | 49.82 | 2.64 | 52.46 | 74.00 | -21.54 | peak |
| 7440 | 36.68 | 2.64 | 39.32 | 54.00 | -14.68 | AVG |
| Remark: | | | | | | |
| Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

The GFSK modulation was the worst case and only the data of worst recorded in this report.


8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
(a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO
3. Other procedures refer to clause 7.2.

8.2 TEST SETUP

RADIATED EMISSION TEST SETUP

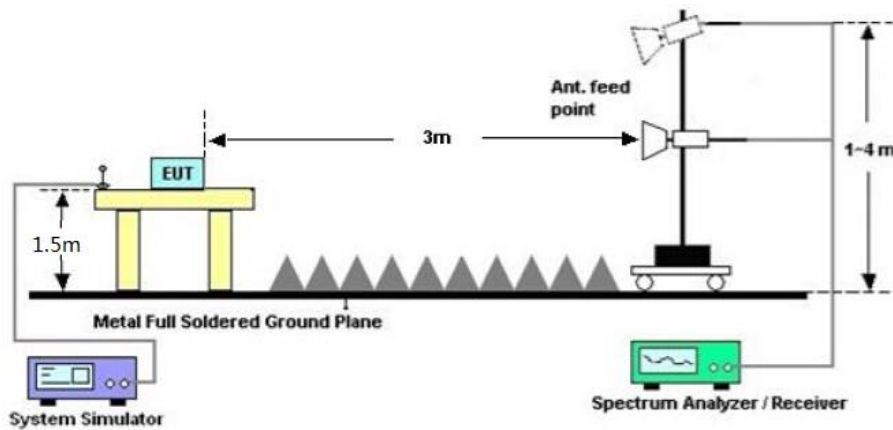


8.3 RADIATED TEST RESULT

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.

| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 1 | Polarization | Horizontal |

Peak Value

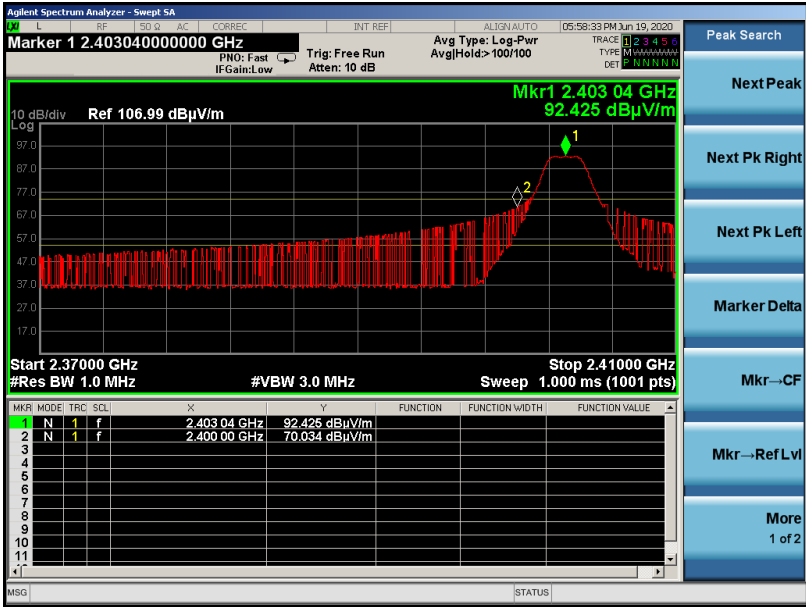


Average Value



| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 1 | Polarization | Vertical |

Peak Value

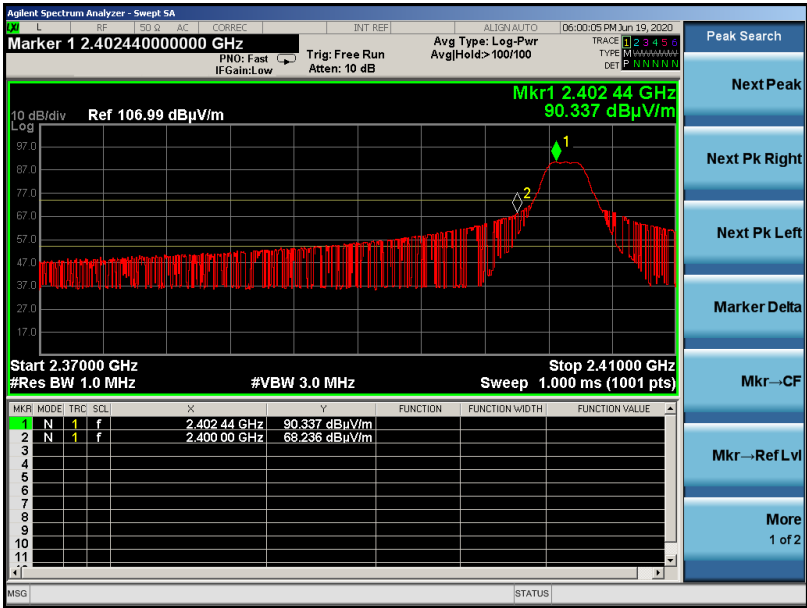


Average Value



| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 3 | Polarization | Horizontal |

Peak Value

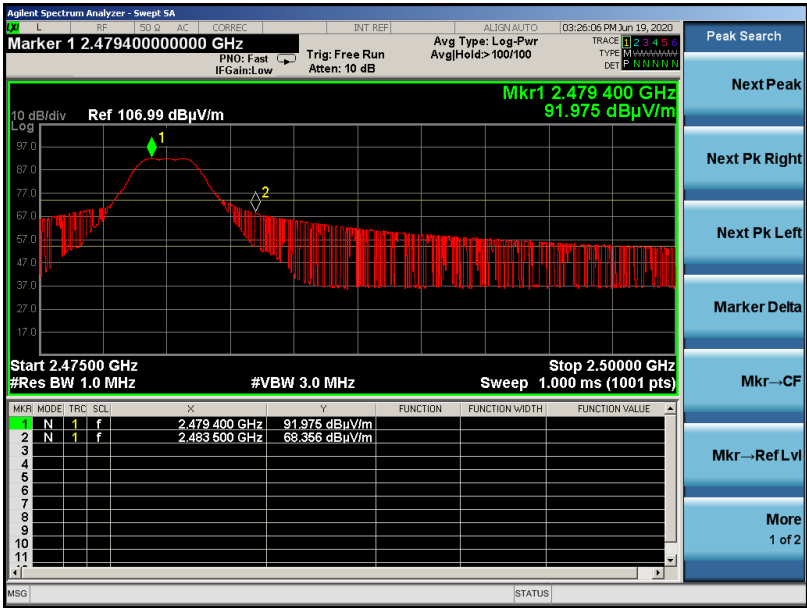

Average Value



| | | | |
|-------------|---------------------------|-------------------|-----------------------|
| EUT | chroma wl keyboard dongle | Model Name | KLIM CHROMA WL dongle |
| Temperature | 20°C | Relative Humidity | 48% |
| Pressure | 1010 hPa | Test Voltage | DC 5V |
| Test Mode | Mode 3 | Polarization | Vertical |

Peak Value



Average Value




9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set SPA Centre Frequency = Operation Frequency, RBW= 30 KHz, VBW $\geq 3 \times$ RBW.
3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

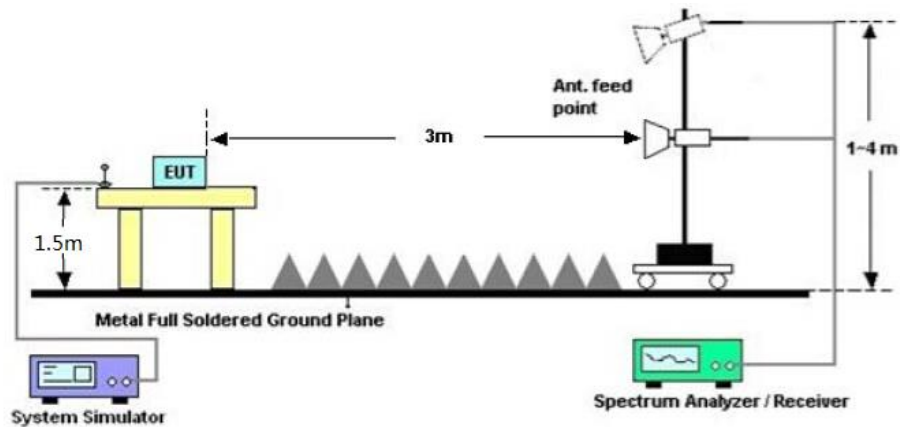


9.3. MEASUREMENT RESULTS


| | |
|-----------------|----------------|
| TEST ITEM | 20DB BANDWIDTH |
| TEST MODULATION | GFSK |

| Test Data (MHz) | | Criteria |
|-----------------|-------|----------|
| Low Channel | 2.095 | PASS |
| Middle Channel | 2.054 | PASS |
| High Channel | 2.056 | PASS |


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

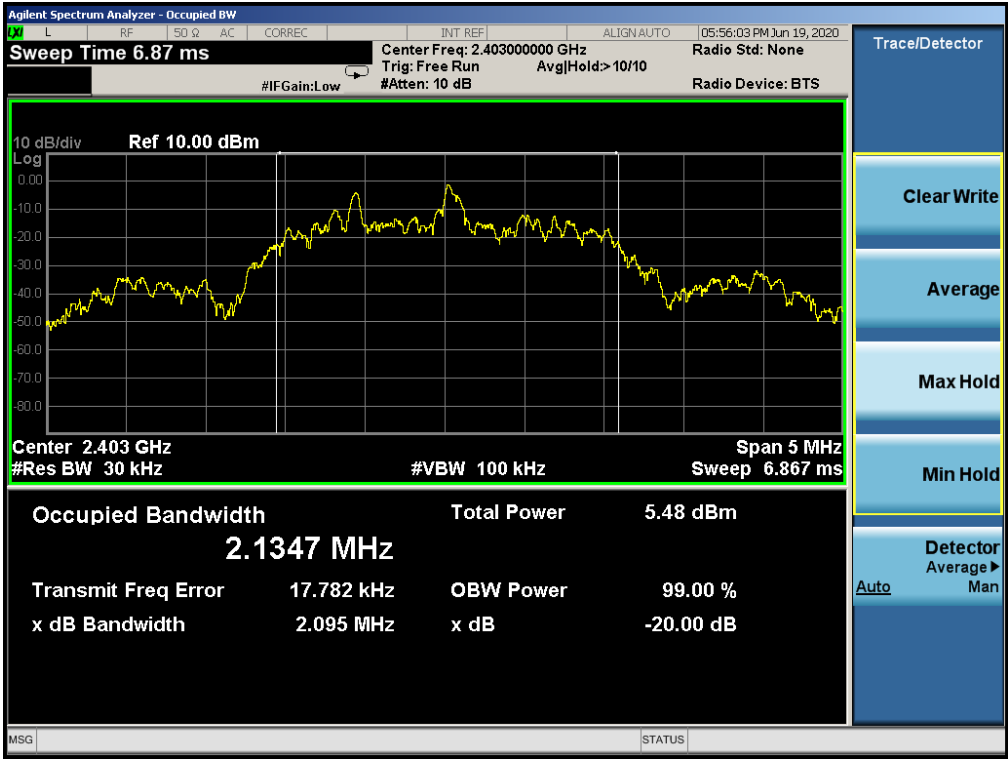

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

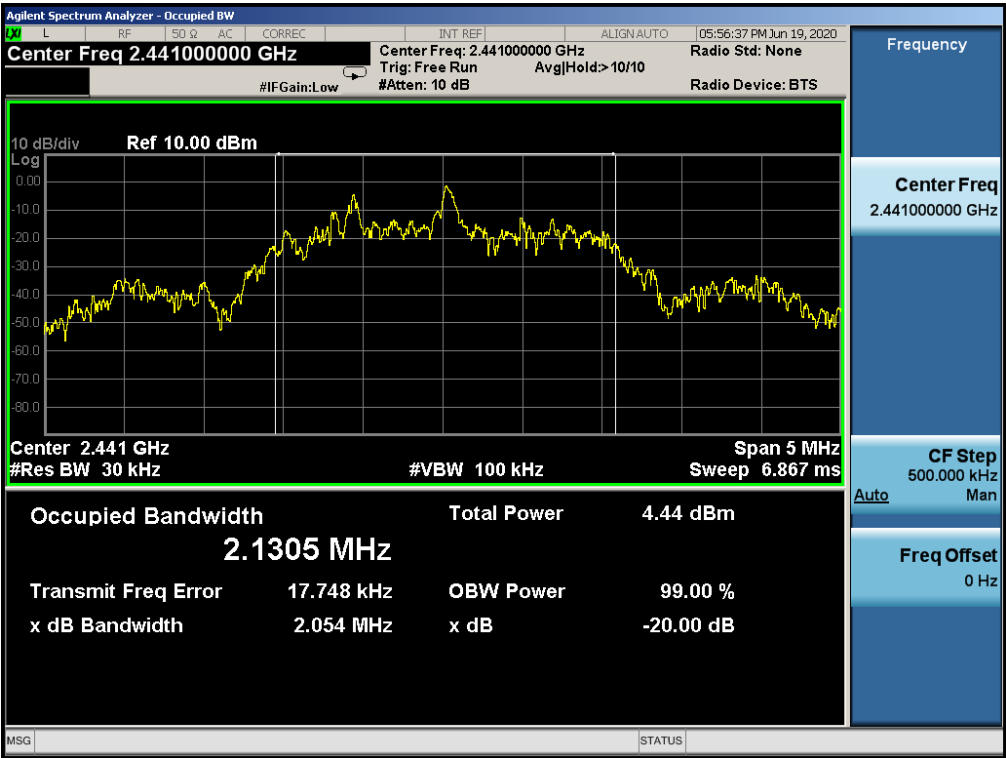

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

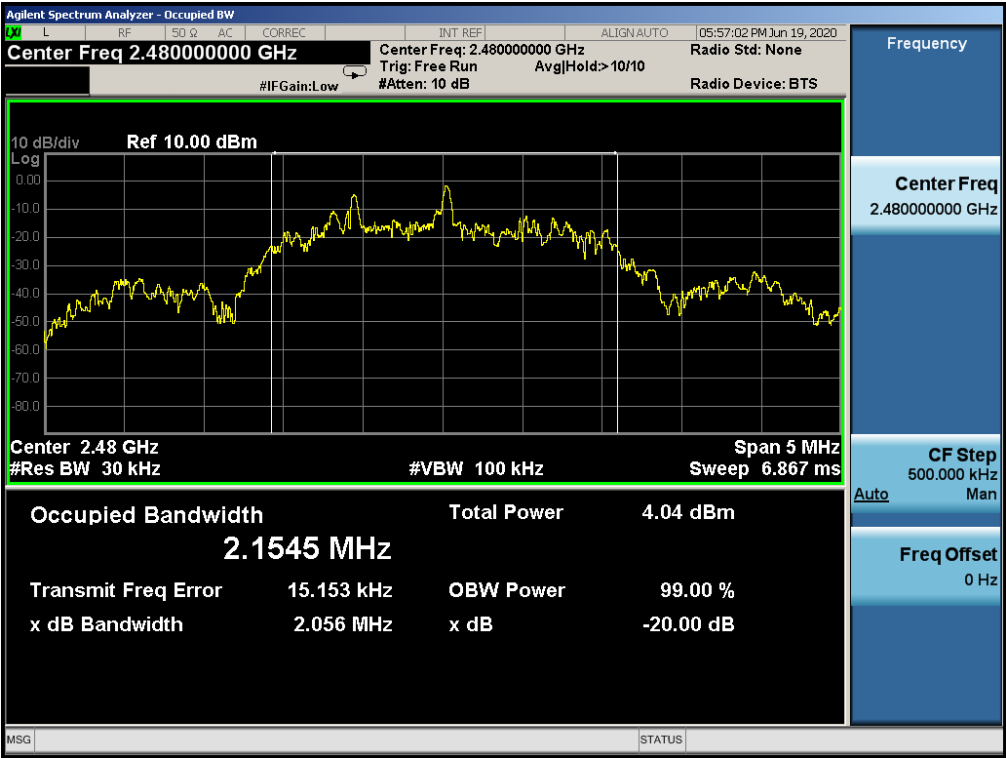

10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| Frequency | Maximum RF Line Voltage | |
|---------------|-------------------------|----------------|
| | Q.P.(dBuV) | Average(dBuV) |
| 150kHz~500kHz | 66-56 | 56-46 |
| 500kHz~5MHz | 56 | 46 |
| 5MHz~30MHz | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

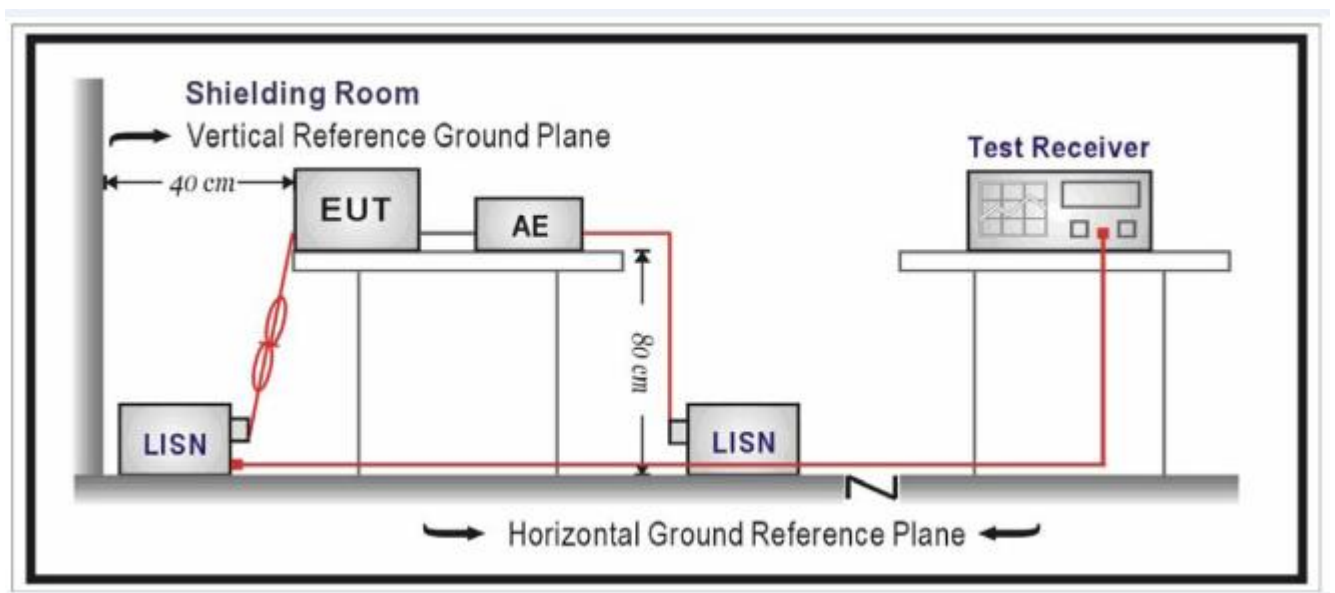

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power by adapter which received AC120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

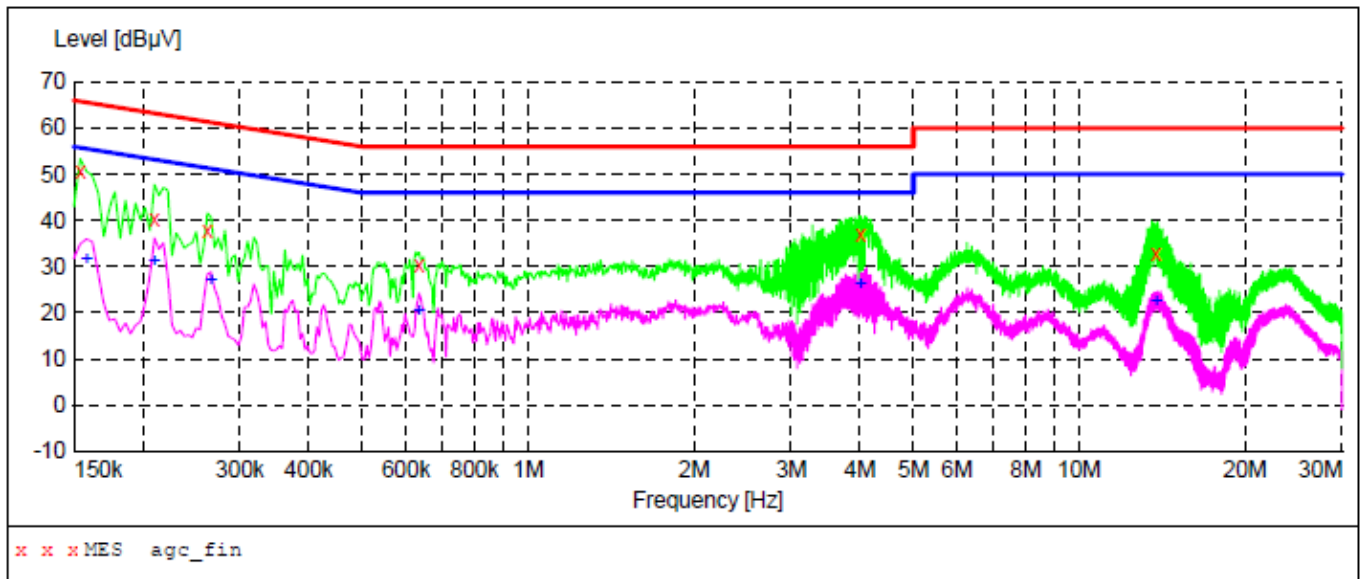**MEASUREMENT RESULT: "agc_fin"**

2020/6/23 9:54


| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154000 | 50.50 | 9.3 | 66 | 15.3 | QP | L1 | FLO |
| 0.210000 | 40.30 | 9.3 | 63 | 22.9 | QP | L1 | FLO |
| 0.262000 | 37.70 | 9.3 | 61 | 23.7 | QP | L1 | FLO |
| 0.634000 | 30.50 | 9.3 | 56 | 25.5 | QP | L1 | FLO |
| 4.006000 | 36.80 | 9.4 | 56 | 19.2 | QP | L1 | FLO |
| 13.758000 | 32.60 | 10.7 | 60 | 27.4 | QP | L1 | FLO |

MEASUREMENT RESULT: "agc_fin2"

2020/6/23 9:54

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.158000 | 31.70 | 9.3 | 56 | 23.9 | AV | L1 | FLO |
| 0.210000 | 31.00 | 9.3 | 53 | 22.2 | AV | L1 | FLO |
| 0.266000 | 27.20 | 9.3 | 51 | 24.0 | AV | L1 | FLO |
| 0.634000 | 20.20 | 9.3 | 46 | 25.8 | AV | L1 | FLO |
| 4.006000 | 26.30 | 9.4 | 46 | 19.7 | AV | L1 | FLO |
| 13.786000 | 22.50 | 10.7 | 50 | 27.5 | AV | L1 | FLO |

Line Conducted Emission Test Line 2-N

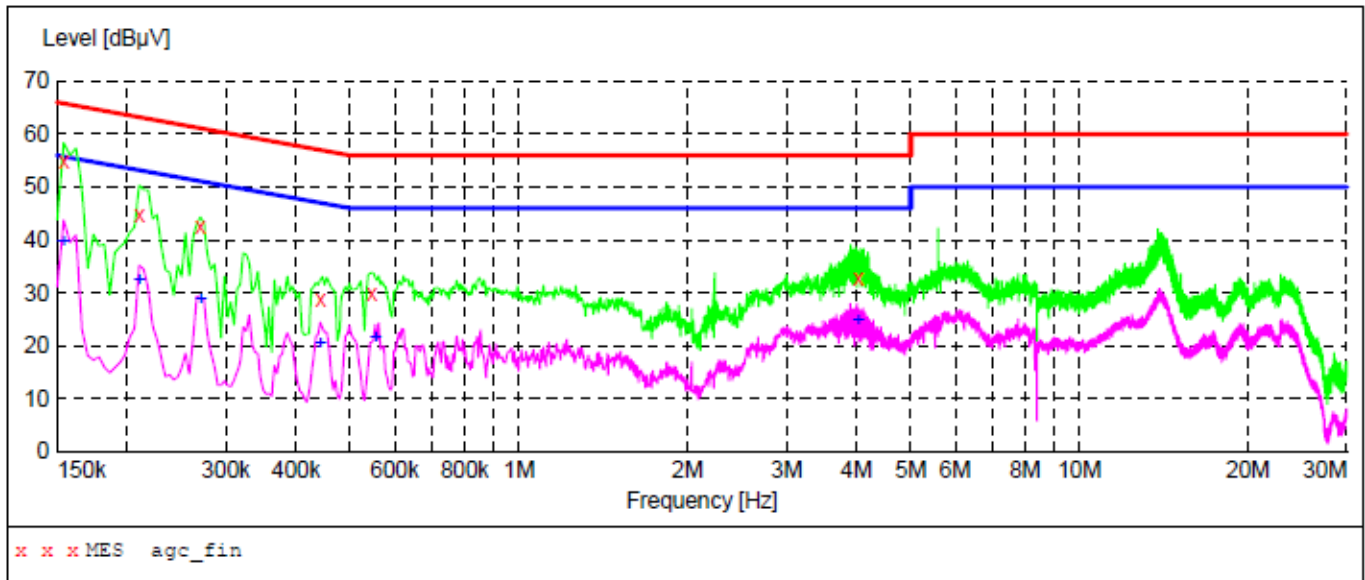**MEASUREMENT RESULT: "agc_fin"**

2020/6/23 9:50

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154000 | 55.00 | 9.3 | 66 | 10.8 | QP | N | FLO |
| 0.210000 | 44.90 | 9.3 | 63 | 18.3 | QP | N | FLO |
| 0.270000 | 42.40 | 9.3 | 61 | 18.7 | QP | N | FLO |
| 0.442000 | 28.80 | 9.3 | 57 | 28.2 | QP | N | FLO |
| 0.546000 | 29.80 | 9.3 | 56 | 26.2 | QP | N | FLO |
| 4.030000 | 32.90 | 9.4 | 56 | 23.1 | QP | N | FLO |

MEASUREMENT RESULT: "agc_fin2"

2020/6/23 9:49

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.154000 | 39.50 | 9.3 | 56 | 16.3 | AV | N | FLO |
| 0.210000 | 32.50 | 9.3 | 53 | 20.7 | AV | N | FLO |
| 0.270000 | 28.90 | 9.3 | 51 | 22.2 | AV | N | FLO |
| 0.442000 | 20.40 | 9.3 | 47 | 26.6 | AV | N | FLO |
| 0.554000 | 21.60 | 9.3 | 46 | 24.4 | AV | N | FLO |
| 4.030000 | 24.80 | 9.4 | 46 | 21.2 | AV | N | FLO |

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ




FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



CONDUCTED EMISSION TEST SETUP




CONDUCTED TEST SETUP

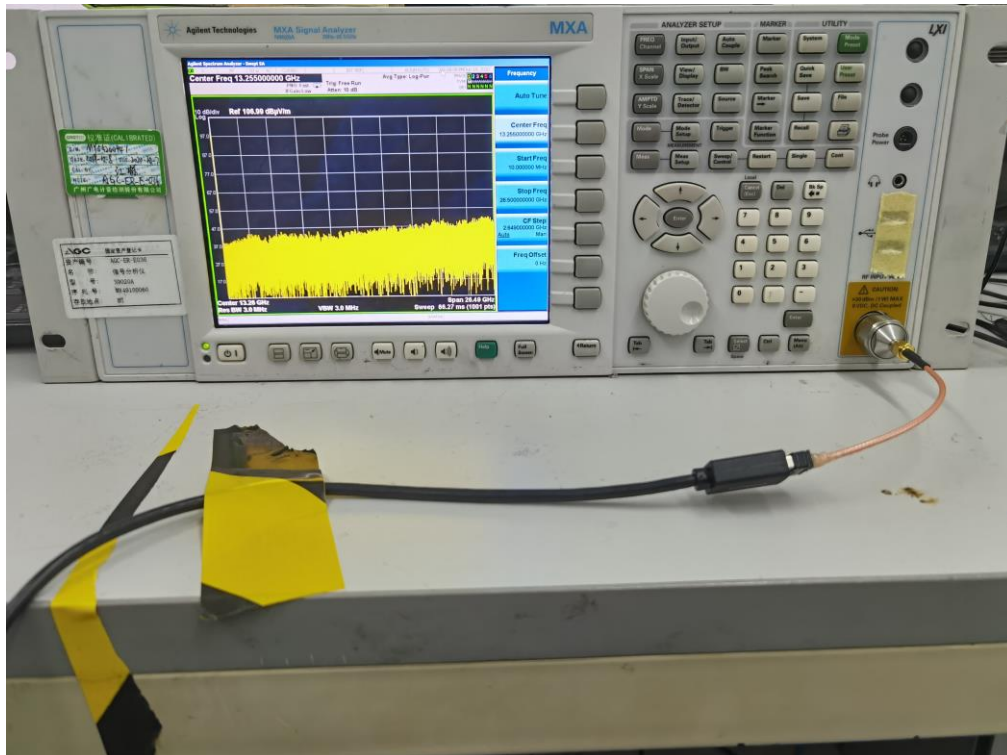


APPENDIX B: PHOTOGRAPHS OF THE EUT


TOP VIEW OF EUT

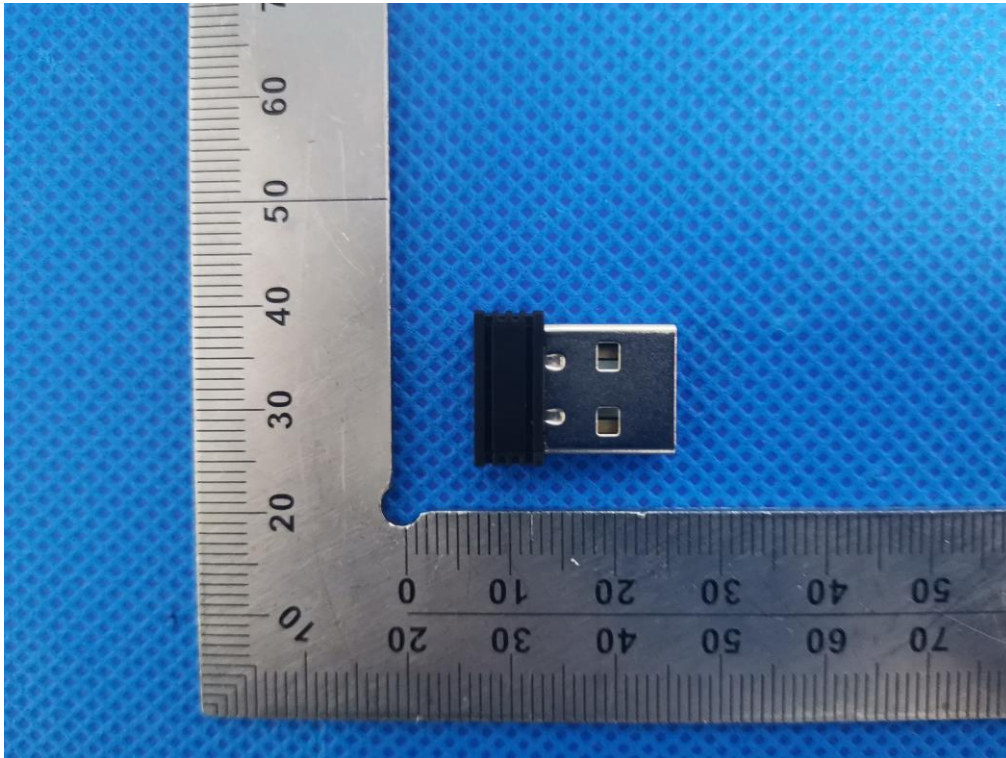


BOTTOM VIEW OF EUT

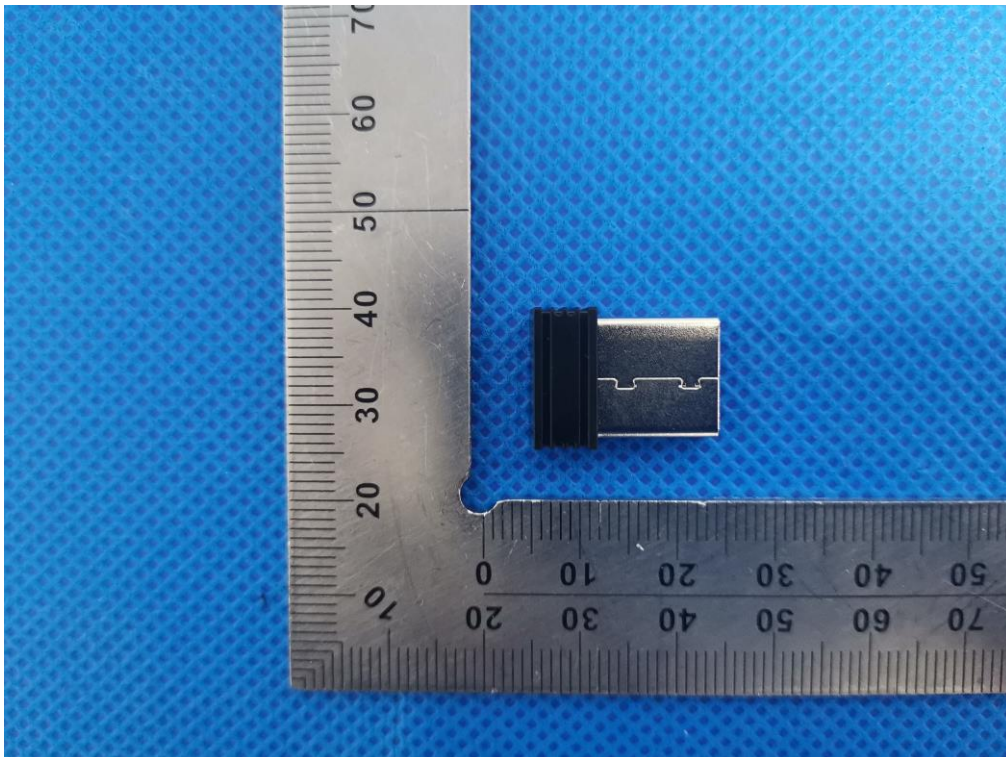


FRONT VIEW OF EUT

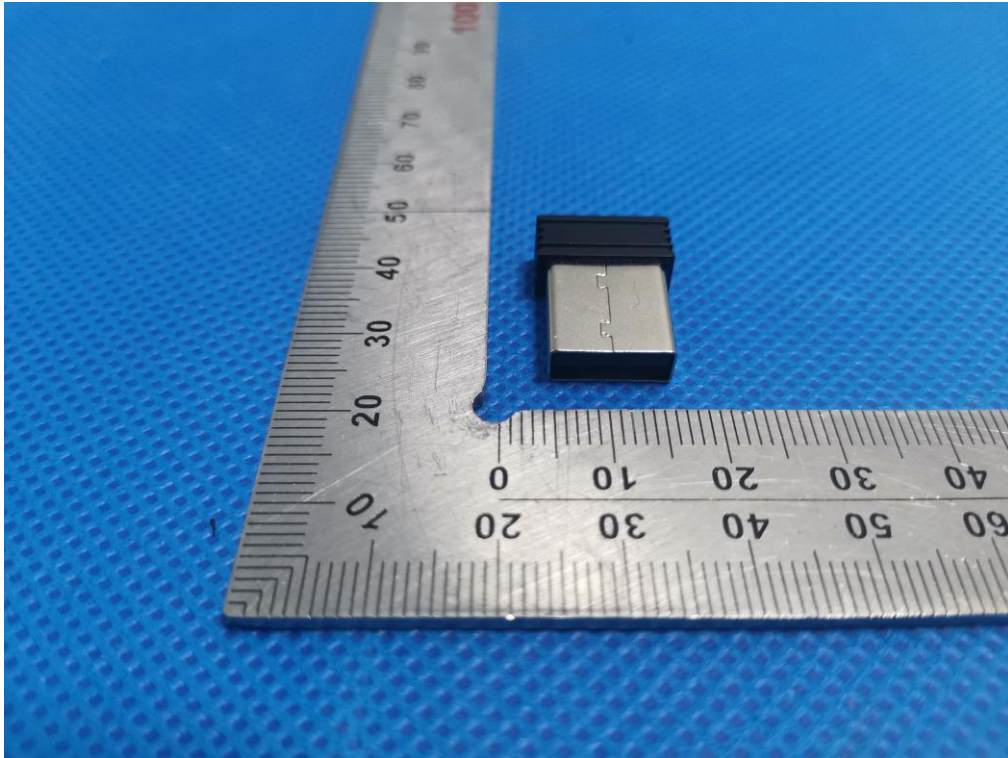


BACK VIEW OF EUT

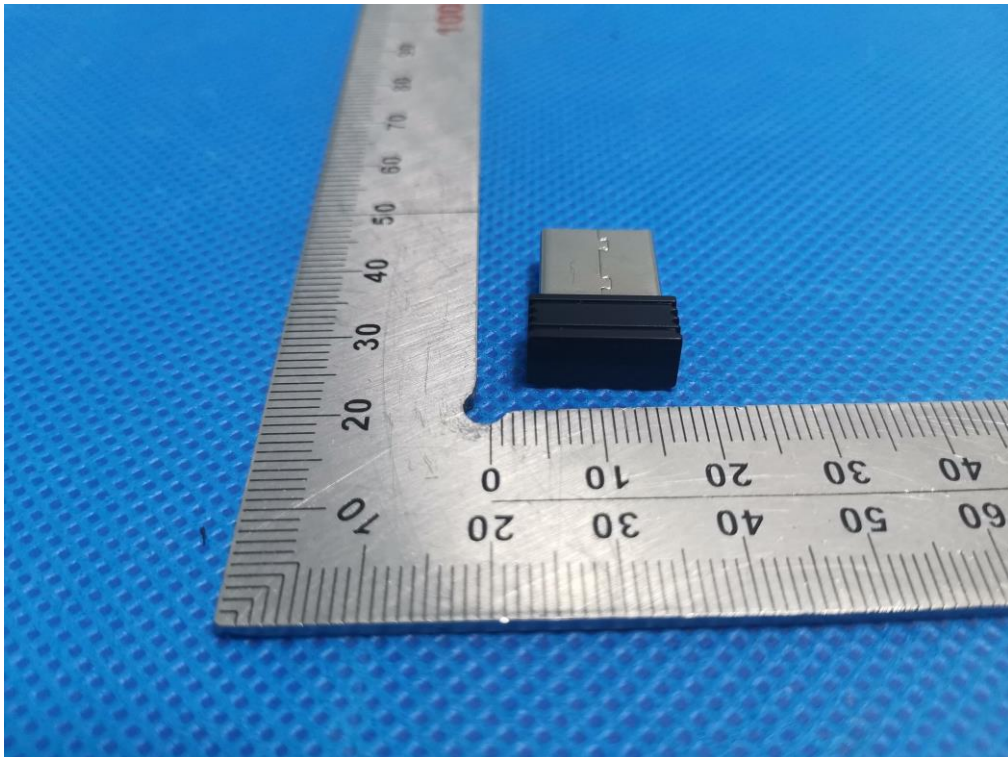


LEFT VIEW OF EUT

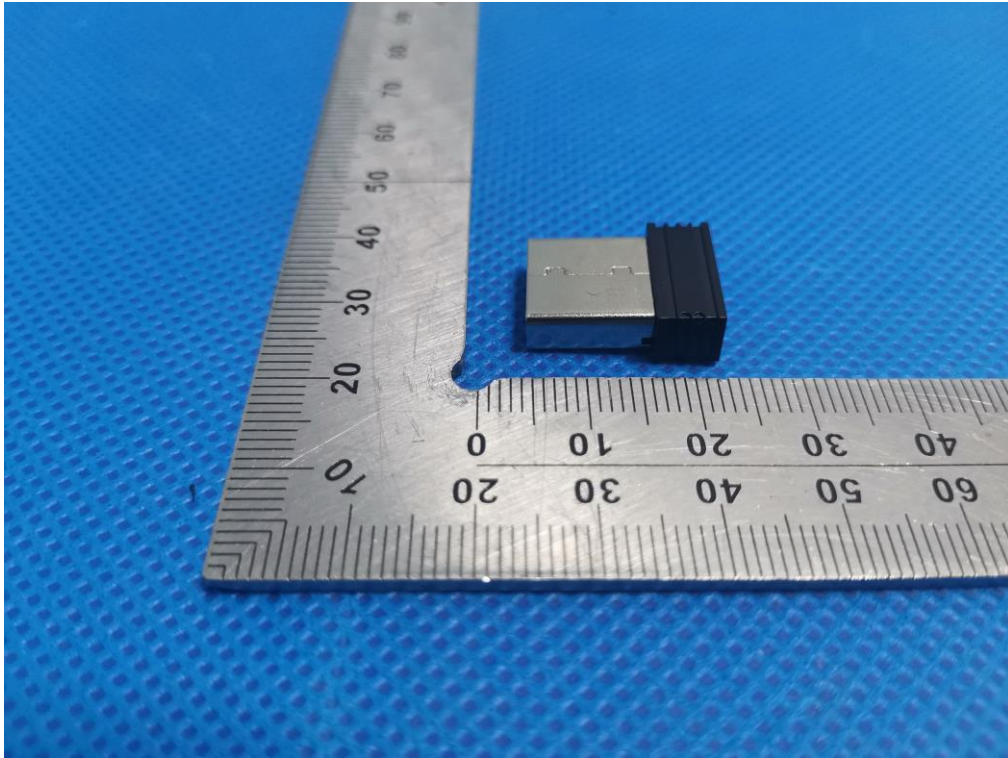


RIGHT VIEW OF EUT

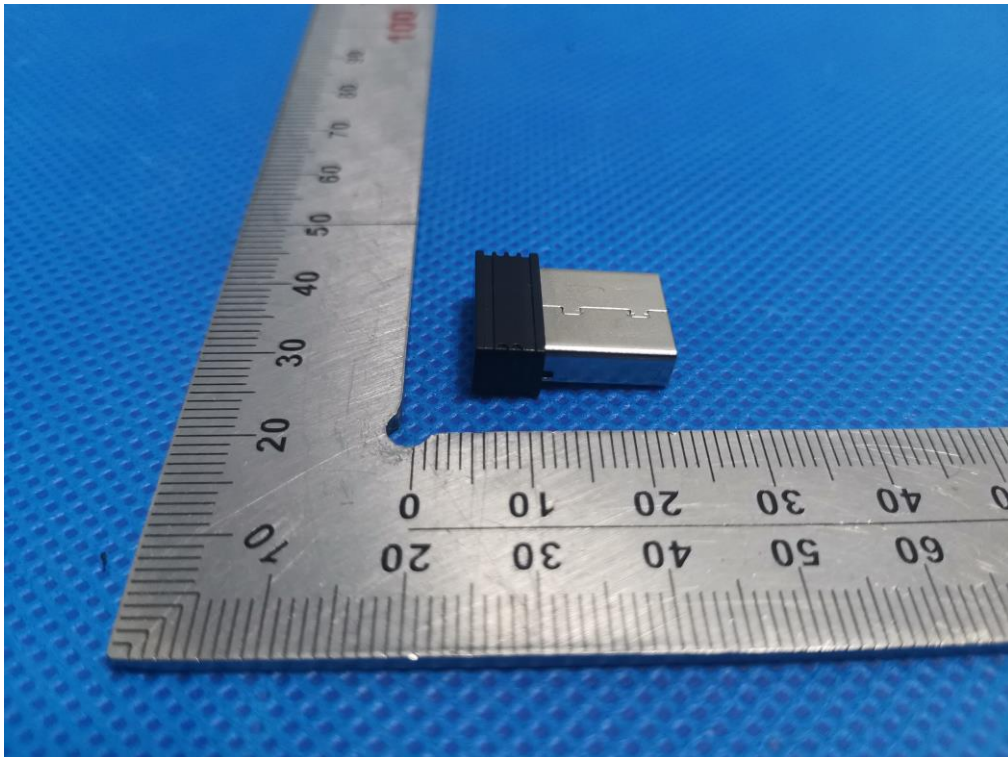


OPEN VIEW OF EUT-1

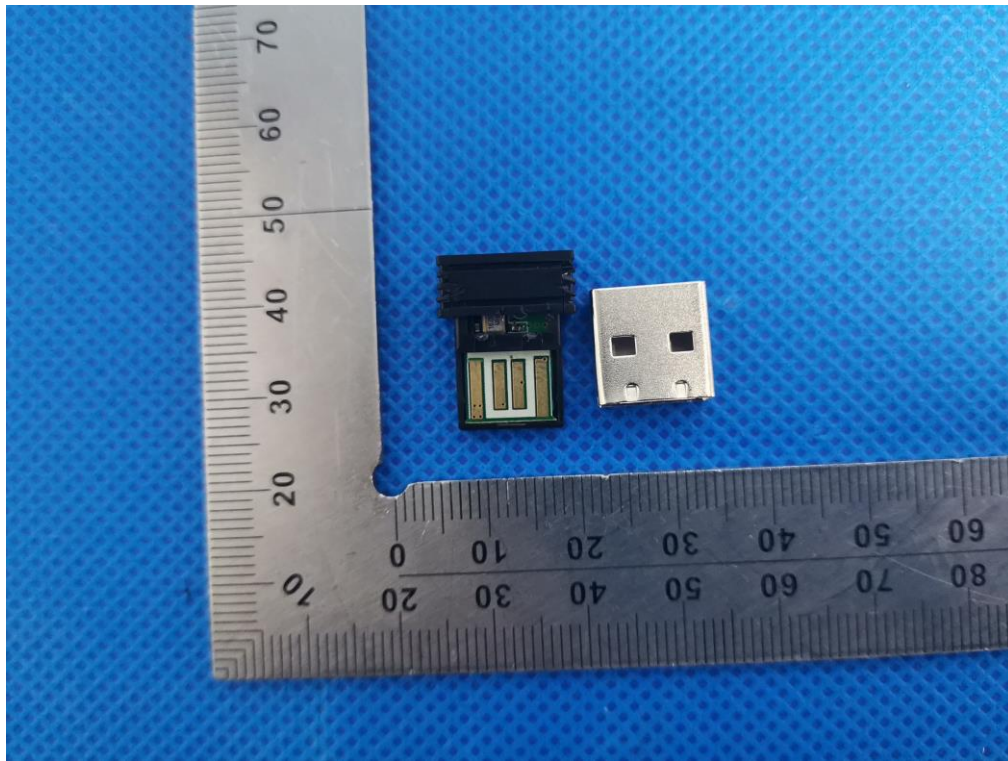


OPEN VIEW OF EUT-2

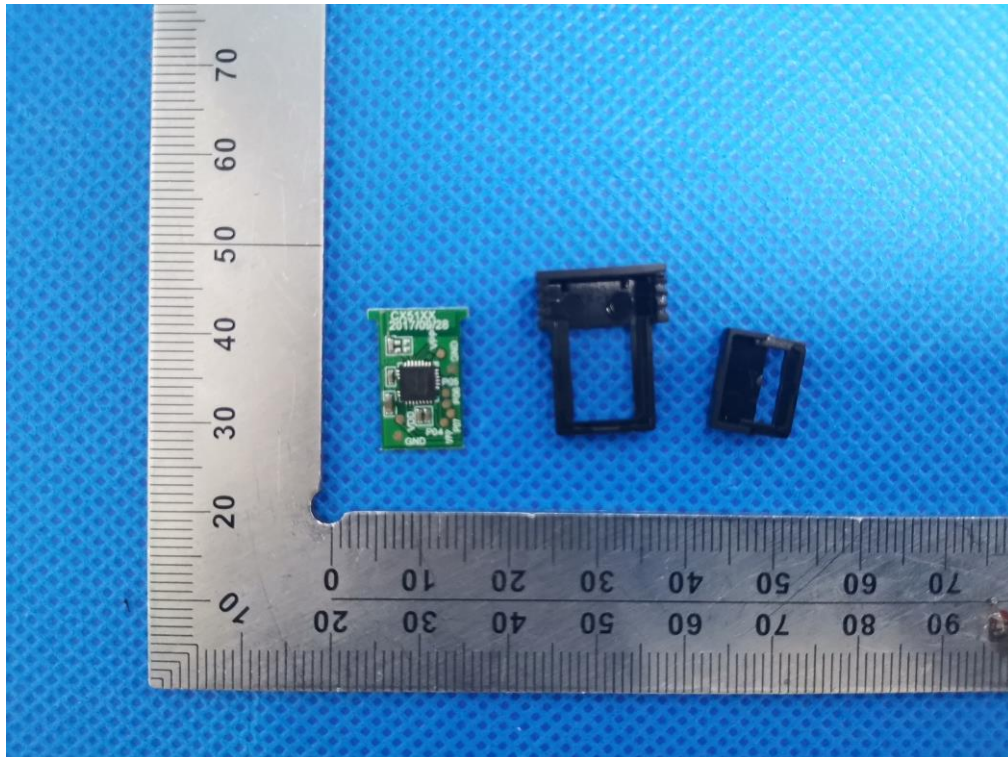


INTERNAL VIEW OF EUT-1

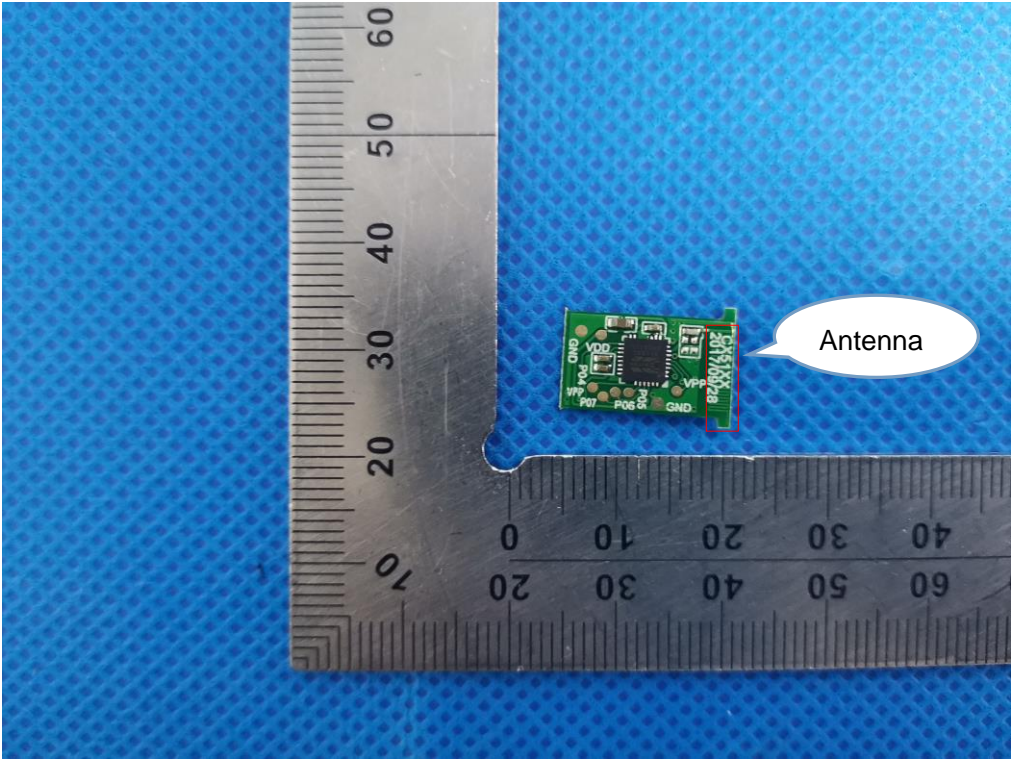

INTERNAL VIEW OF EUT-2

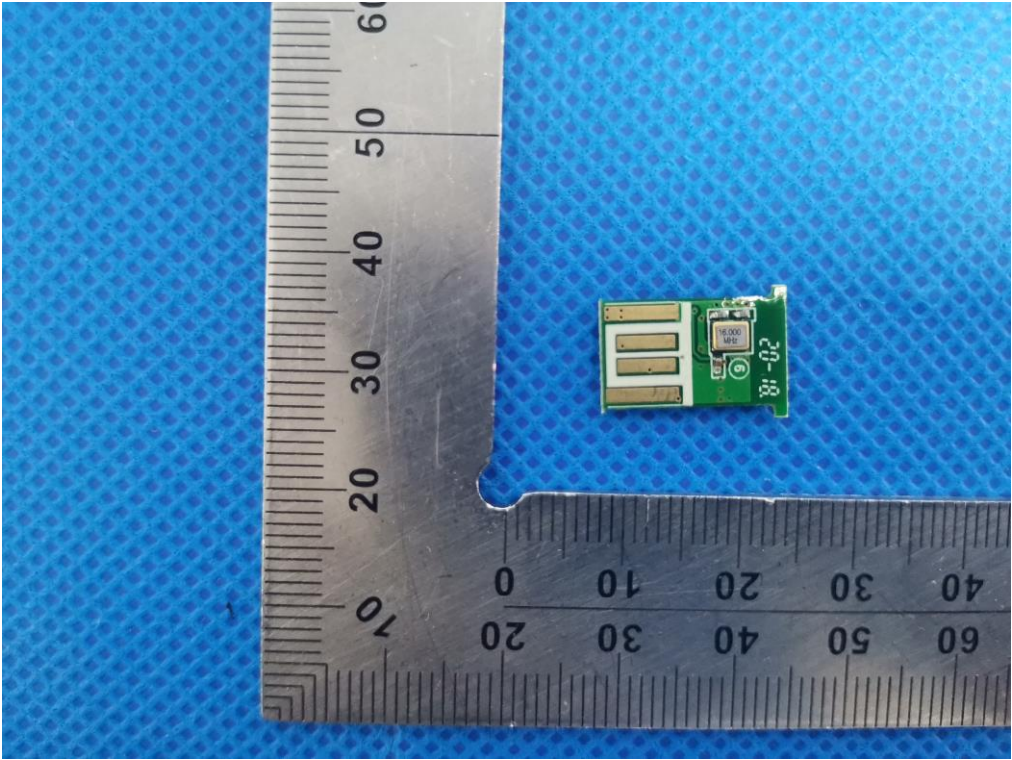

INTERNAL VIEW OF EUT-3

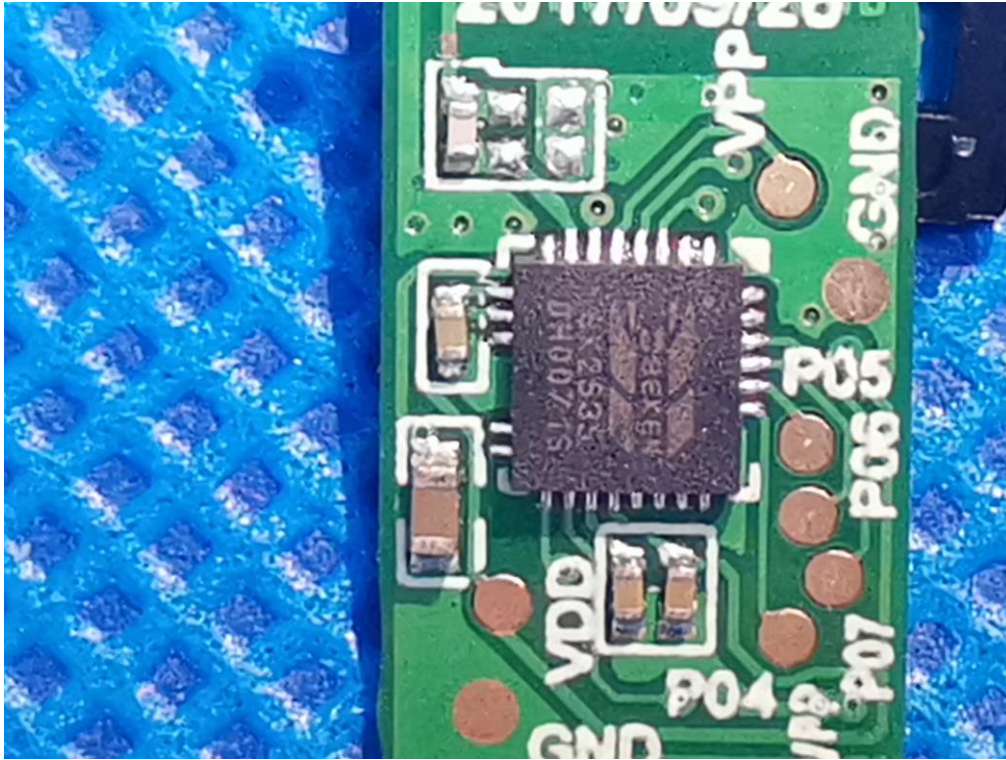

INTERNAL VIEW OF EUT-4



----END OF REPORT----