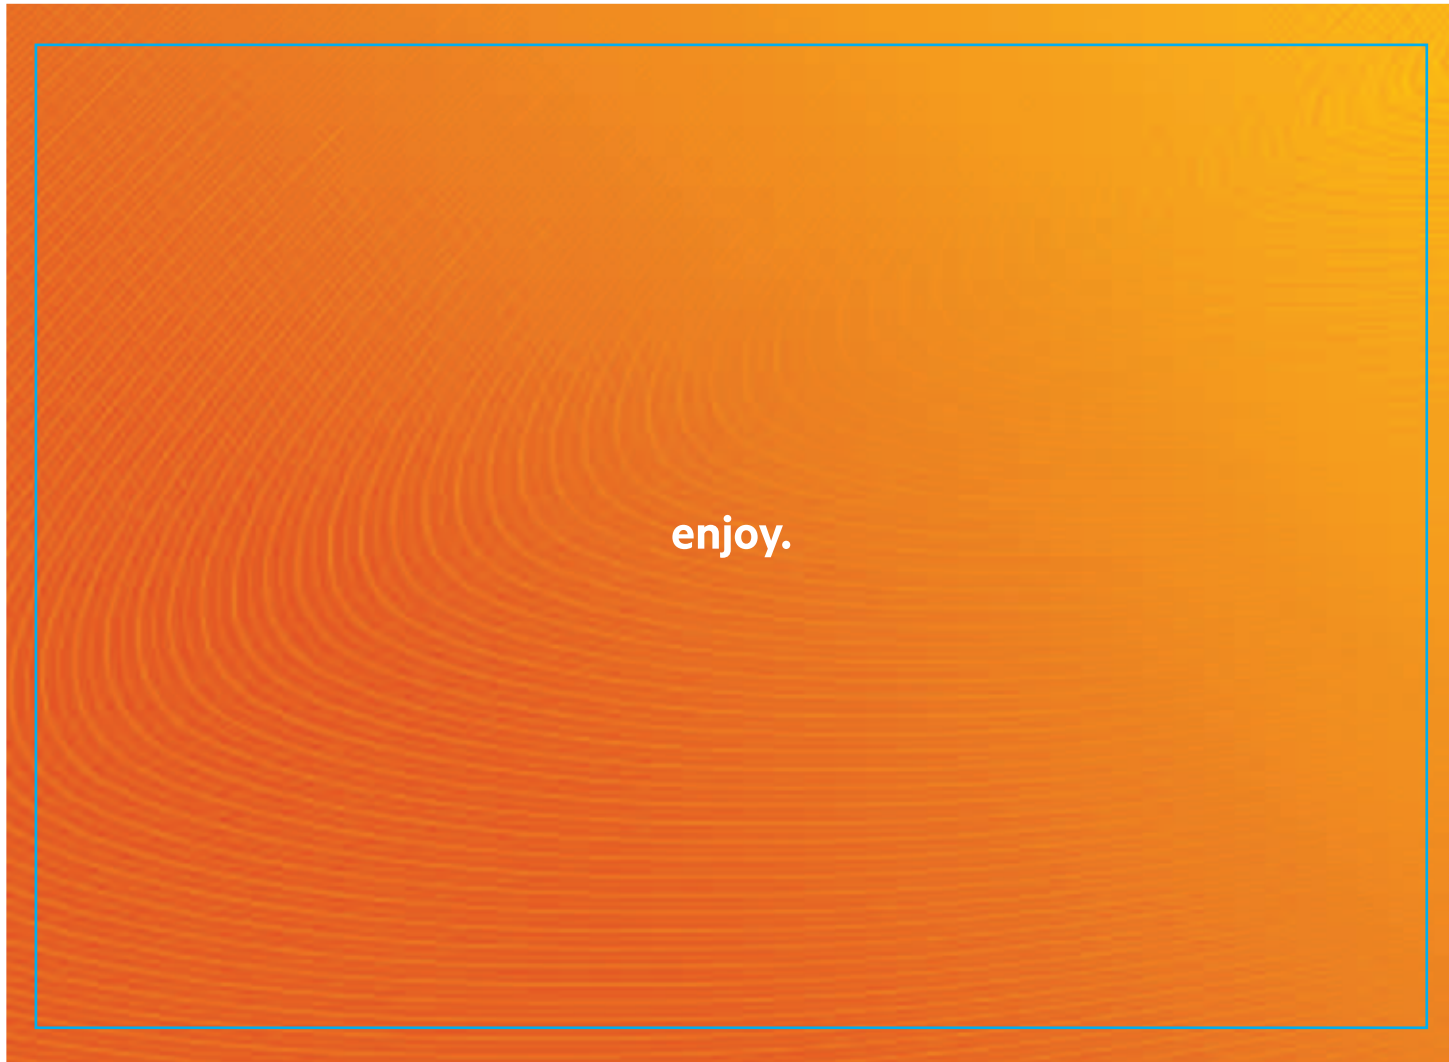


A	1	2	3	4	5	6																																																																																																																																			
					Remark	Description		Editor	Date																																																																																																																																
B																																																																																																																																									
C																																																																																																																																									
D	NOTES(技术要求): 1.External dimension(外尺寸): 184*130mm. 2.Printing color(印刷颜色): 4 colour printing(四色). 3.Material(材质):128g copperplate paper(128g铜版纸) . 4.Coating(表面处理): Varnishing(过光油)——双面过光油. 5.Output Ipi(输出网线): 200 Ipi. 6.Tolerance(公差): L(长)*W(宽):±1mm. 7.Raw materials and the corresponding post processing should meet requirements defined in the T&W Environmental Protection Technical Standards (原材料及后处理工艺均能满足我司《环保技术标准》要求.)				<table><tr><td rowspan="2">DIM \ TOL±</td><td></td><td></td><td></td><td></td><td rowspan="2"></td><td colspan="2">CUSTOMER: Belkin</td><td colspan="3">T&W 同维 SHENZHEN GONGJIN ELECTRONICS CO., LTD.</td></tr><tr><td>RANGE</td><td>C1</td><td>C2</td><td>C3</td><td>C4</td><td colspan="2">TITLE: QUICK INSTALLATION GUIDE</td><td colspan="2">MODEL: N150 (F9K1009us)</td><td>PART NO: 610000000xxxx</td></tr><tr><td></td><td>0~6</td><td>0.1</td><td>0.1</td><td>0.15</td><td>0.2</td><td>UNIT'S</td><td>mm</td><td>VER:</td><td>A0</td><td>DRAW</td><td>饶鸿</td><td>DATE: 140422</td></tr><tr><td></td><td>6~30</td><td>0.2</td><td>0.3</td><td>0.4</td><td>0.5</td><td>MAT'L</td><td>/</td><td>SCALE</td><td>N/A</td><td>CHECK</td><td colspan="2">林沛盛</td></tr><tr><td></td><td>30~80</td><td>0.25</td><td>0.5</td><td>0.9</td><td>1.2</td><td>FINISH</td><td>/</td><td>SHEET</td><td>1/1</td><td>PDE</td><td colspan="2" rowspan="6">N/A</td></tr><tr><td></td><td>80~180</td><td>0.3</td><td>0.8</td><td>1.2</td><td>1.5</td><td colspan="7"></td></tr><tr><td></td><td>180~315</td><td>0.5</td><td>1.3</td><td>1.8</td><td>3</td><td colspan="7"></td></tr><tr><td></td><td>315~500</td><td>0.7</td><td>1.5</td><td>2.5</td><td>4</td><td colspan="7"></td></tr><tr><td></td><td>500~800</td><td>0.9</td><td>1.8</td><td>3</td><td>5</td><td colspan="7" rowspan="2"></td></tr><tr><td></td><td>ANG.TOL±</td><td>0°~30°/0.1°</td><td>30°~60°/0.3°</td><td>60°~90°/0.5°</td><td colspan="8"></td></tr></table>				DIM \ TOL±						CUSTOMER: Belkin		T&W 同维 SHENZHEN GONGJIN ELECTRONICS CO., LTD.			RANGE	C1	C2	C3	C4	TITLE: QUICK INSTALLATION GUIDE		MODEL: N150 (F9K1009us)		PART NO: 610000000xxxx		0~6	0.1	0.1	0.15	0.2	UNIT'S	mm	VER:	A0	DRAW	饶鸿	DATE: 140422		6~30	0.2	0.3	0.4	0.5	MAT'L	/	SCALE	N/A	CHECK	林沛盛			30~80	0.25	0.5	0.9	1.2	FINISH	/	SHEET	1/1	PDE	N/A			80~180	0.3	0.8	1.2	1.5									180~315	0.5	1.3	1.8	3									315~500	0.7	1.5	2.5	4									500~800	0.9	1.8	3	5									ANG.TOL±	0°~30°/0.1°	30°~60°/0.3°	60°~90°/0.5°												
DIM \ TOL±						CUSTOMER: Belkin		T&W 同维 SHENZHEN GONGJIN ELECTRONICS CO., LTD.																																																																																																																																	
	RANGE	C1	C2	C3		C4	TITLE: QUICK INSTALLATION GUIDE		MODEL: N150 (F9K1009us)		PART NO: 610000000xxxx																																																																																																																														
	0~6	0.1	0.1	0.15	0.2	UNIT'S	mm	VER:	A0	DRAW	饶鸿	DATE: 140422																																																																																																																													
	6~30	0.2	0.3	0.4	0.5	MAT'L	/	SCALE	N/A	CHECK	林沛盛																																																																																																																														
	30~80	0.25	0.5	0.9	1.2	FINISH	/	SHEET	1/1	PDE	N/A																																																																																																																														
	80~180	0.3	0.8	1.2	1.5																																																																																																																																				
	180~315	0.5	1.3	1.8	3																																																																																																																																				
	315~500	0.7	1.5	2.5	4																																																																																																																																				
	500~800	0.9	1.8	3	5																																																																																																																																				
	ANG.TOL±	0°~30°/0.1°	30°~60°/0.3°	60°~90°/0.5°																																																																																																																																					
	1	2	3	4	5	6																																																																																																																																			