

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

13.2. Result



The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


14. Radiated Emission

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	2 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31	1 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	2 Year

14.2. Block diagram of test setup

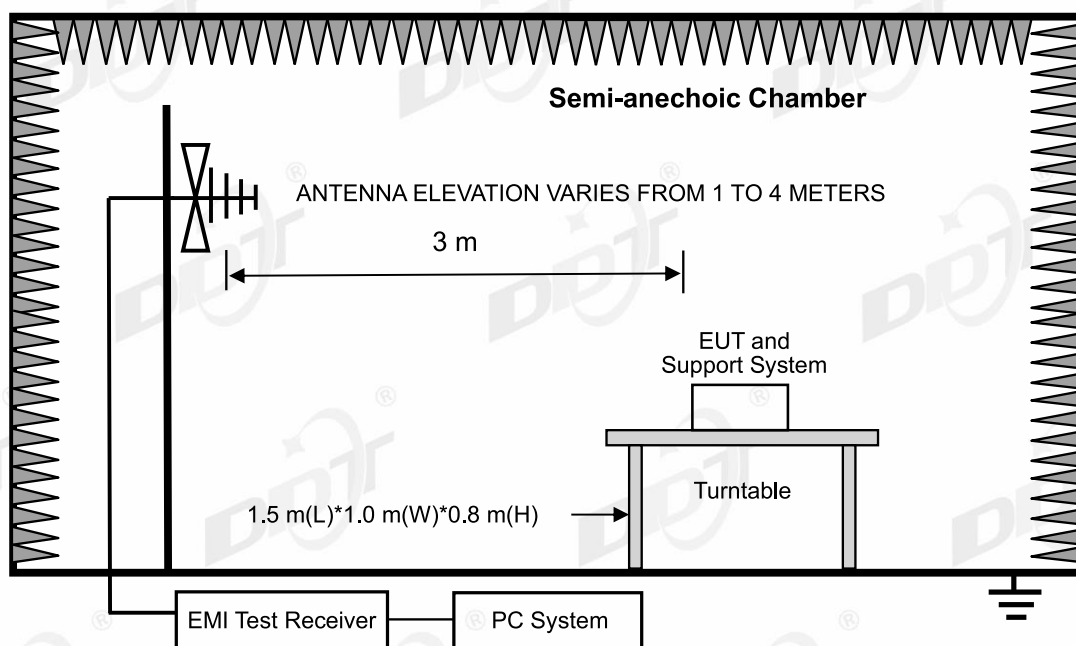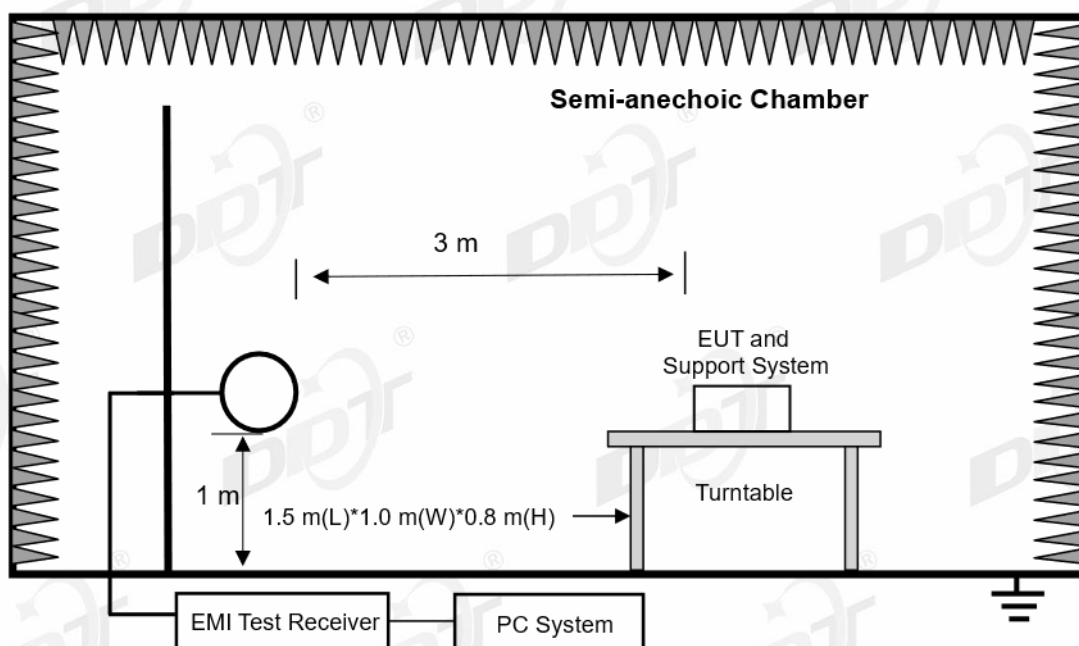

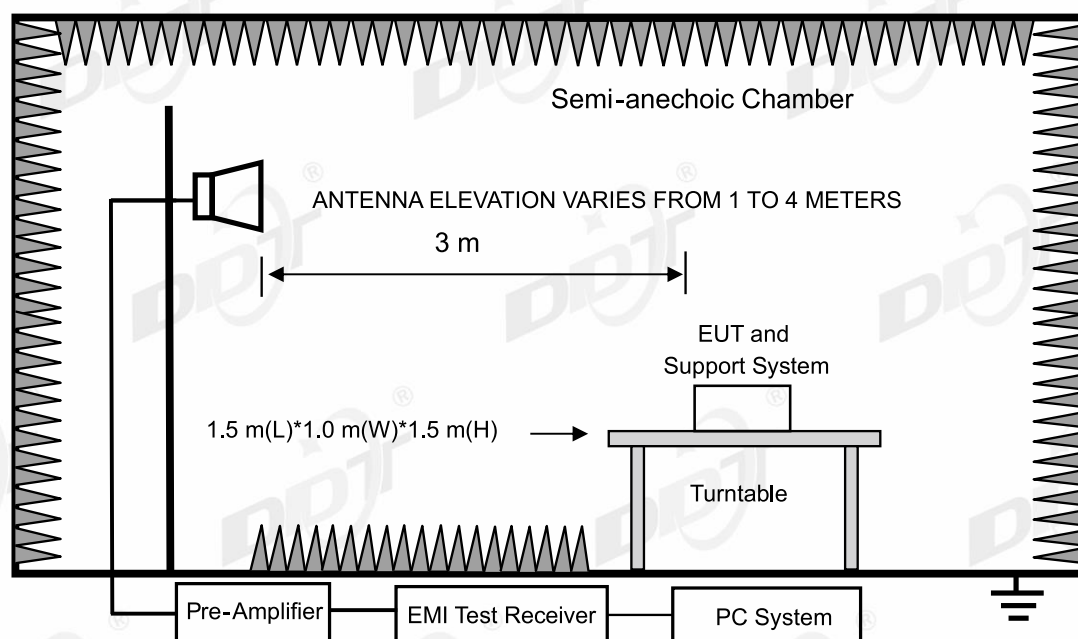

14.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		mV/m	dB(mV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(mV)/m (Peak) 54.0 dB(mV)/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(9) For 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK, the worst case is record and reported)

(10) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-214339_H

Memo:

Sample Numble:S24072701-007 Power Setting:0

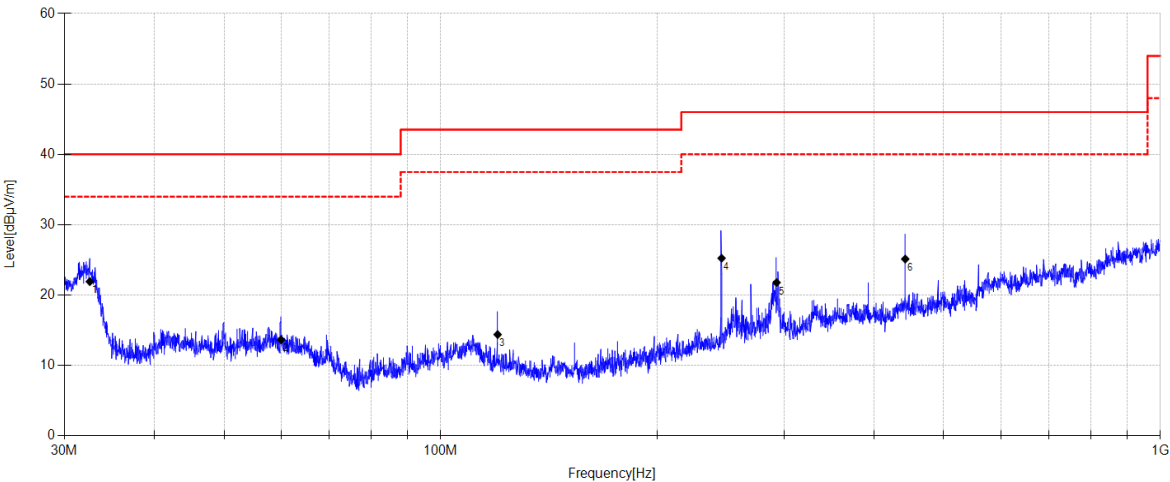

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.542	36.45	10.53	3.78	21.92	40.00	18.08	QP	Horizontal
2	60.019	25.66	12.79	3.96	13.64	40.00	26.36	QP	Horizontal
3	119.991	28.59	10.00	4.33	14.39	43.50	29.11	QP	Horizontal
4	245.675	36.83	11.53	4.97	25.24	46.00	20.76	QP	Horizontal
5	292.951	31.61	12.90	5.19	21.78	46.00	24.22	QP	Horizontal
6	442.125	32.19	15.97	5.78	25.12	46.00	20.88	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-214422_V

Memo:

Sample Numble:S24072701-007 Power Setting:0

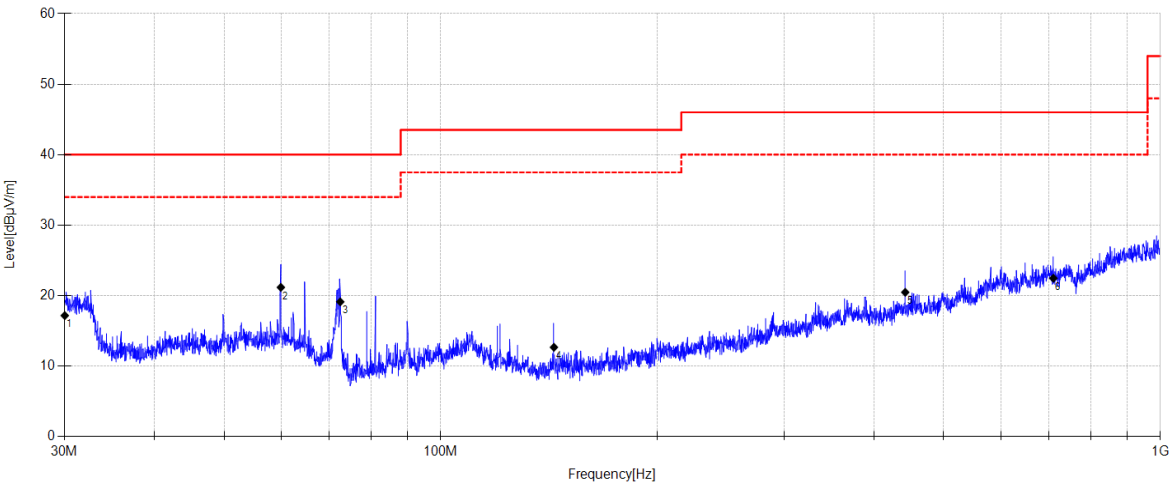

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.042	31.96	10.30	3.76	17.17	40.00	22.83	QP	Vertical
2	59.977	33.19	12.79	3.96	21.17	40.00	18.83	QP	Vertical
3	72.528	34.41	9.39	4.04	19.12	40.00	20.88	QP	Vertical
4	143.684	27.42	9.24	4.46	12.67	43.50	30.83	QP	Vertical
5	442.125	27.54	15.97	5.78	20.47	46.00	25.53	QP	Vertical
6	710.226	25.66	19.01	6.72	22.47	46.00	23.53	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-215325_H

Memo:

Sample Numble:S24072701-007 Power Setting:0

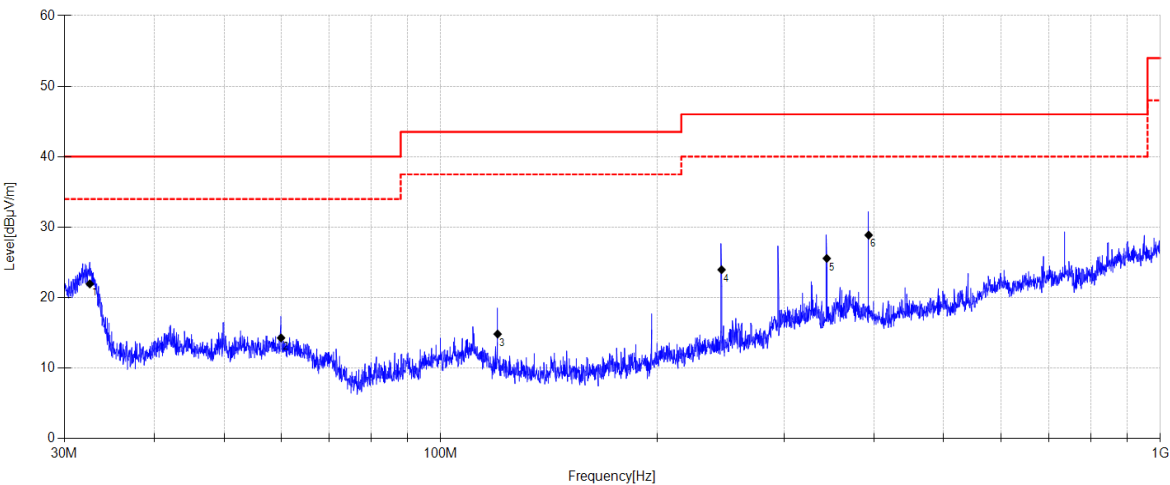

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.542	36.48	10.53	3.78	21.95	40.00	18.05	QP	Horizontal
2	60.019	26.31	12.79	3.96	14.29	40.00	25.71	QP	Horizontal
3	119.991	29.03	10.00	4.33	14.83	43.50	28.67	QP	Horizontal
4	245.675	35.55	11.53	4.97	23.96	46.00	22.04	QP	Horizontal
5	343.976	34.11	14.24	5.40	25.56	46.00	20.44	QP	Horizontal
6	393.270	36.45	15.34	5.59	28.87	46.00	17.13	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-215413_V

Memo:

Sample Numble:S24072701-007 Power Setting:0

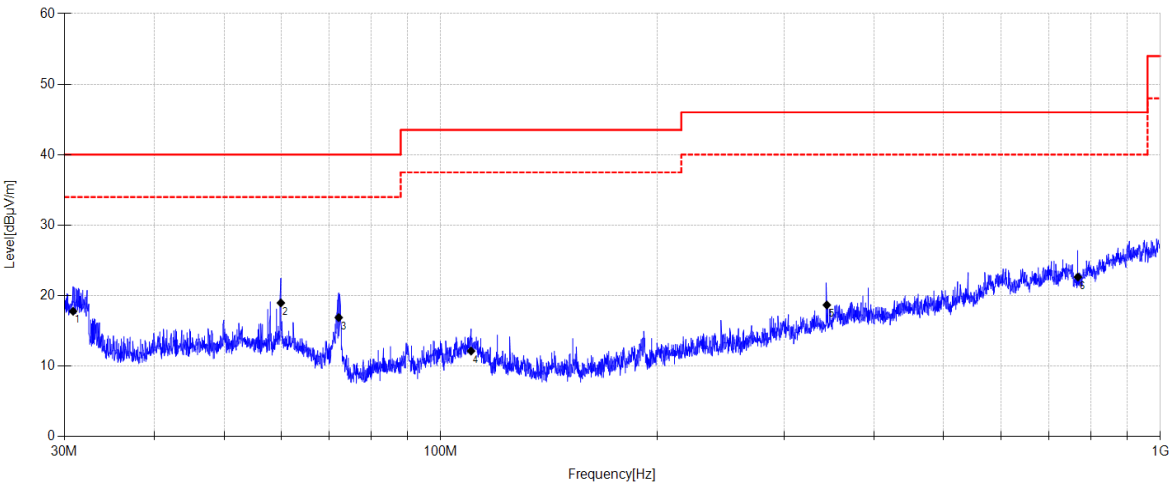

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.853	32.47	10.39	3.77	17.78	40.00	22.22	QP	Vertical
2	59.977	30.99	12.79	3.96	18.97	40.00	21.03	QP	Vertical
3	72.173	32.05	9.53	4.04	16.89	40.00	23.11	QP	Vertical
4	110.230	24.37	12.05	4.28	12.14	43.50	31.36	QP	Vertical
5	343.976	27.22	14.24	5.40	18.67	46.00	27.33	QP	Vertical
6	768.250	25.99	18.62	6.87	22.64	46.00	23.36	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-220039_H

Memo:

Sample Numble:S24072701-007 Power Setting:0

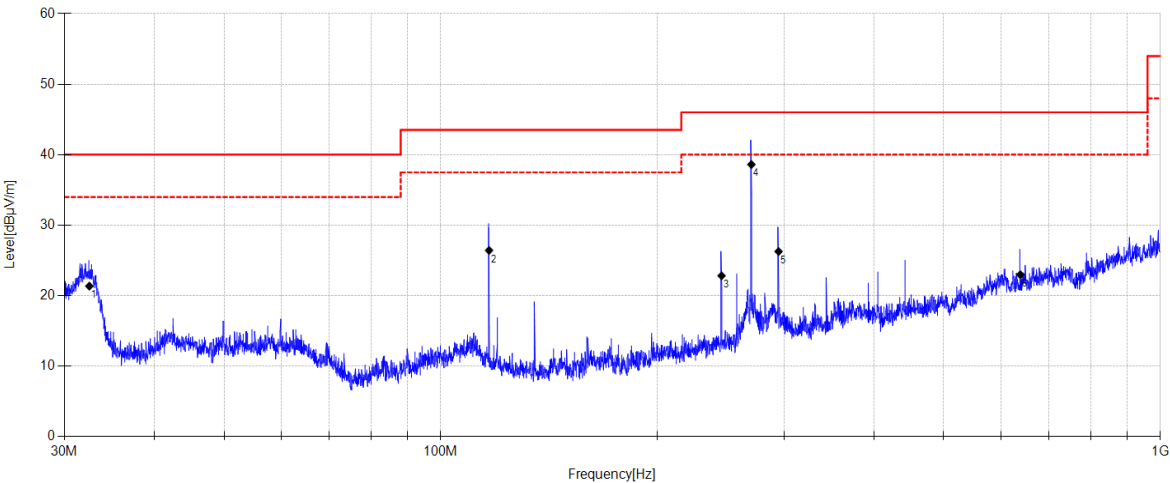

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.496	35.92	10.50	3.77	21.35	40.00	18.65	QP	Horizontal
2	116.754	40.18	10.47	4.31	26.42	43.50	17.08	QP	Horizontal
3	245.675	34.41	11.53	4.97	22.82	46.00	23.18	QP	Horizontal
4	270.256	49.03	12.50	5.08	38.61	46.00	7.39	QP	Horizontal
5	294.805	36.26	12.72	5.20	26.26	46.00	19.74	QP	Horizontal
6	638.874	26.97	18.52	6.49	22.97	46.00	23.03	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-220126_V

Memo:

Sample Numble:S24072701-007 Power Setting:0

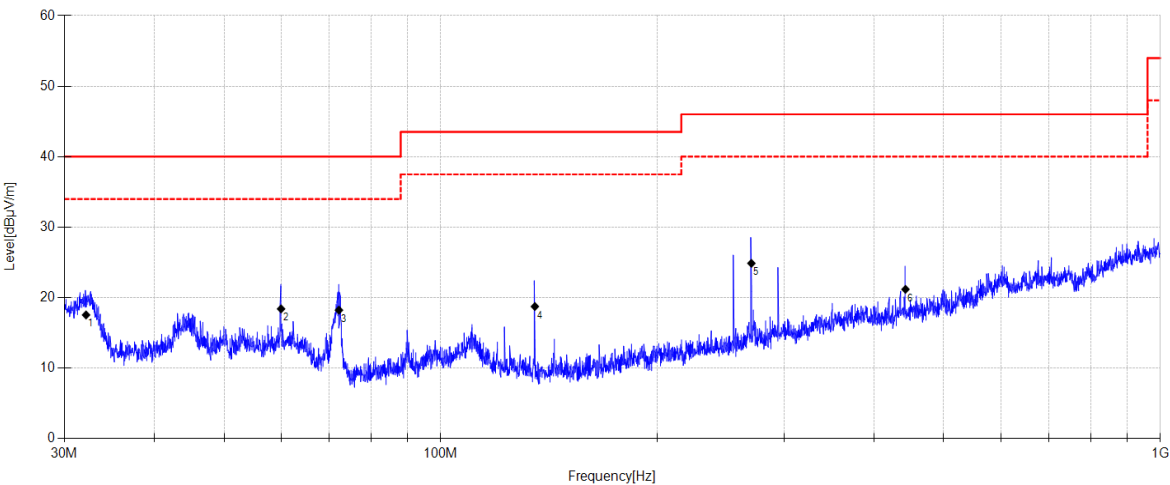

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.156	32.38	10.23	3.77	17.54	40.00	22.46	QP	Vertical
2	60.019	30.42	12.79	3.96	18.40	40.00	21.60	QP	Vertical
3	72.223	33.41	9.51	4.04	18.23	40.00	21.77	QP	Vertical
4	135.181	34.36	8.45	4.41	18.74	43.50	24.76	QP	Vertical
5	270.256	35.29	12.50	5.08	24.87	46.00	21.13	QP	Vertical
6	442.435	28.28	15.95	5.78	21.18	46.00	24.82	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-221042_H

Memo:

Sample Numble:S24072701-007 Power Setting:0

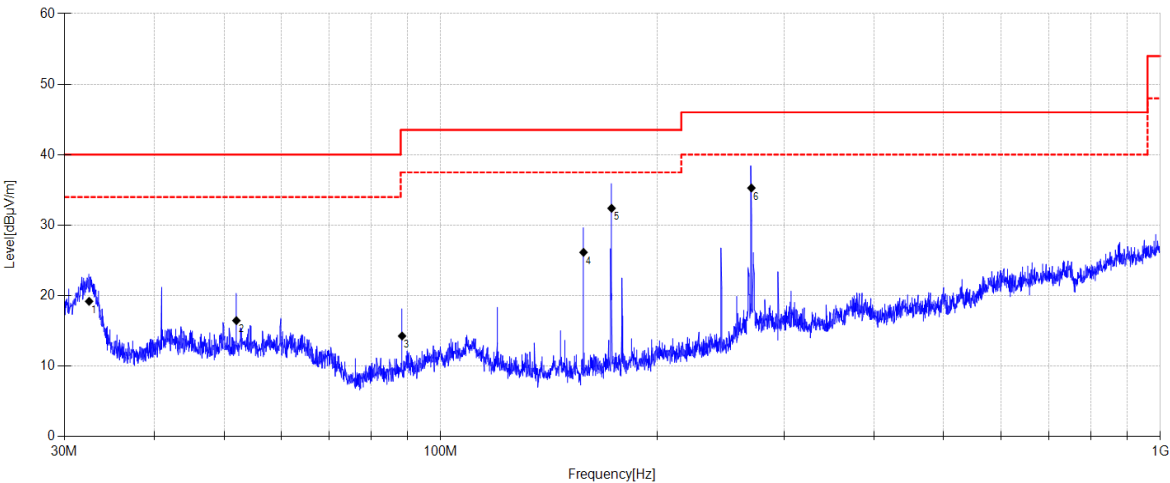

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.474	33.78	10.48	3.77	19.19	40.00	20.81	QP	Horizontal
2	52.019	28.44	12.91	3.90	16.46	40.00	23.54	QP	Horizontal
3	88.385	29.74	9.05	4.14	14.27	43.50	29.23	QP	Horizontal
4	157.949	41.61	8.40	4.53	26.14	43.50	17.36	QP	Horizontal
5	172.781	46.62	9.51	4.61	32.39	43.50	11.11	QP	Horizontal
6	270.256	45.69	12.50	5.08	35.27	46.00	10.73	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24072701-1E\FCC RE Below 1G\20241113-221128_V

Memo:

Sample Numble:S24072701-007 Power Setting:0

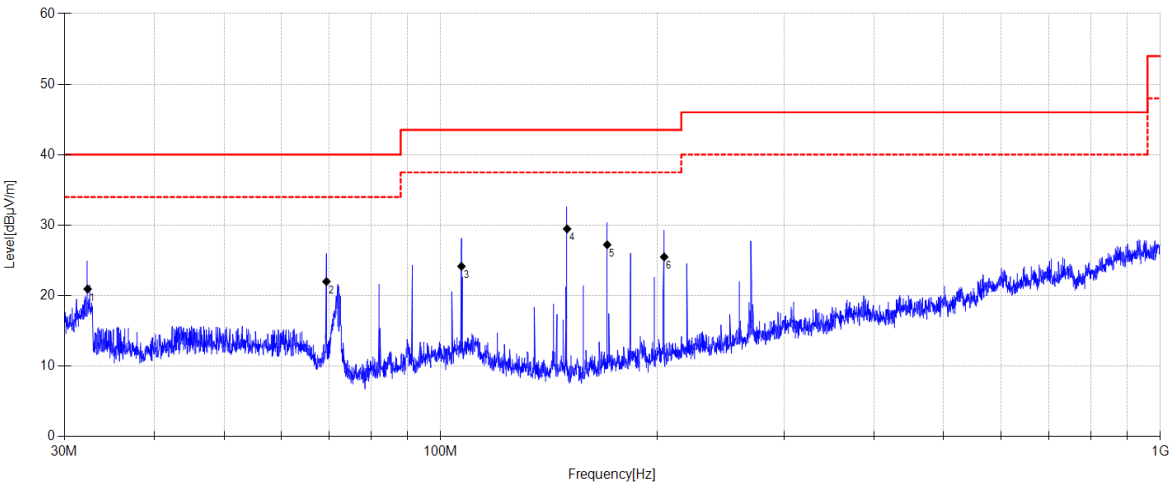

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.315	35.66	10.35	3.77	20.94	40.00	19.06	QP	Vertical
2	69.394	36.49	10.22	4.02	21.99	40.00	18.01	QP	Vertical
3	106.881	37.18	11.30	4.26	24.16	43.50	19.34	QP	Vertical
4	149.857	45.22	8.19	4.49	29.47	43.50	14.03	QP	Vertical
5	170.374	41.62	9.35	4.60	27.22	43.50	16.28	QP	Vertical
6	204.446	38.32	10.62	4.78	25.49	43.50	18.01	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\41

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

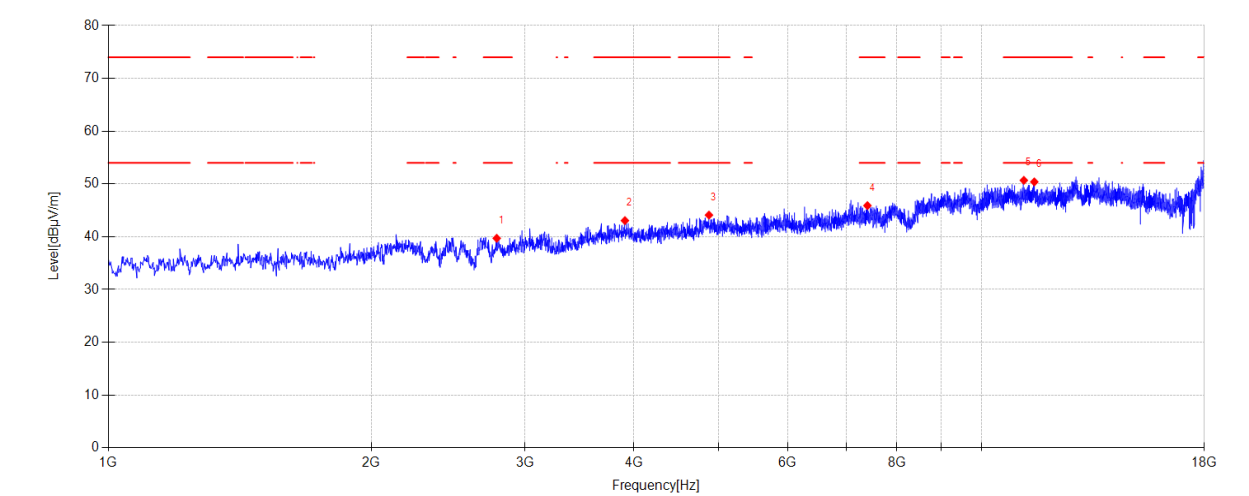

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2785.000	46.34	27.46	5.08	-39.17	39.71	74.00	34.29	PK	Horizontal
2	3905.300	46.46	31.19	5.07	-39.66	43.06	74.00	30.94	PK	Horizontal
3	4874.300	44.73	33.41	5.57	-39.61	44.10	74.00	29.90	PK	Horizontal
4	7402.200	43.19	36.70	6.65	-40.64	45.90	74.00	28.10	PK	Horizontal
5	11183.000	42.40	39.22	8.25	-39.18	50.69	74.00	23.31	PK	Horizontal
6	11495.800	42.25	39.20	8.44	-39.50	50.39	74.00	23.61	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\42

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

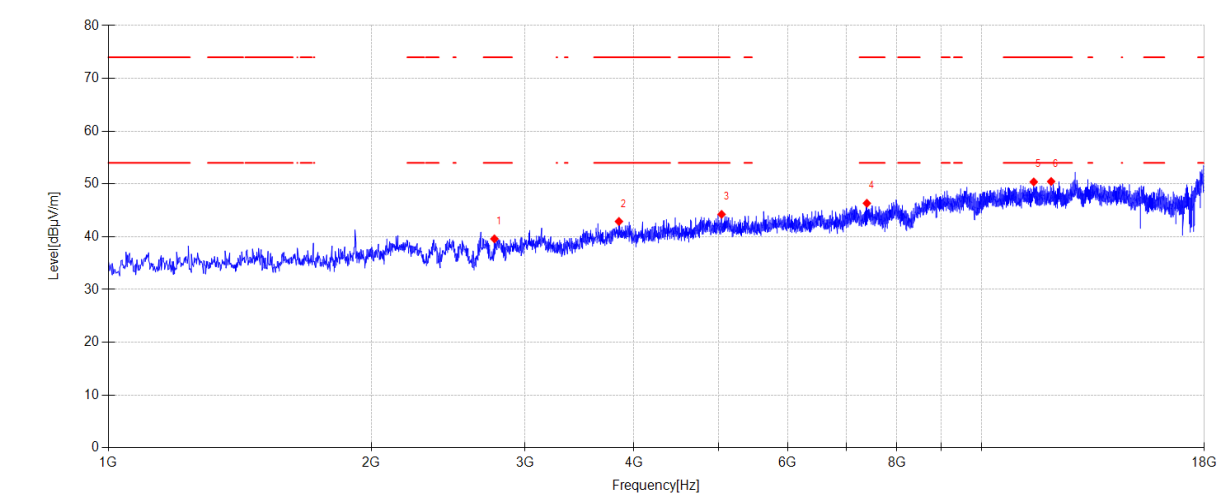

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2768.000	46.15	27.53	5.07	-39.15	39.60	74.00	34.40	PK	Vertical
2	3844.100	46.57	30.88	5.08	-39.64	42.89	74.00	31.11	PK	Vertical
3	5039.200	44.89	33.28	5.67	-39.60	44.24	74.00	29.76	PK	Vertical
4	7392.000	43.62	36.72	6.65	-40.65	46.34	74.00	27.66	PK	Vertical
5	11478.800	42.21	39.22	8.43	-39.48	50.38	74.00	23.62	PK	Vertical
6	12017.700	42.48	39.22	8.77	-40.00	50.47	74.00	23.53	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\43

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

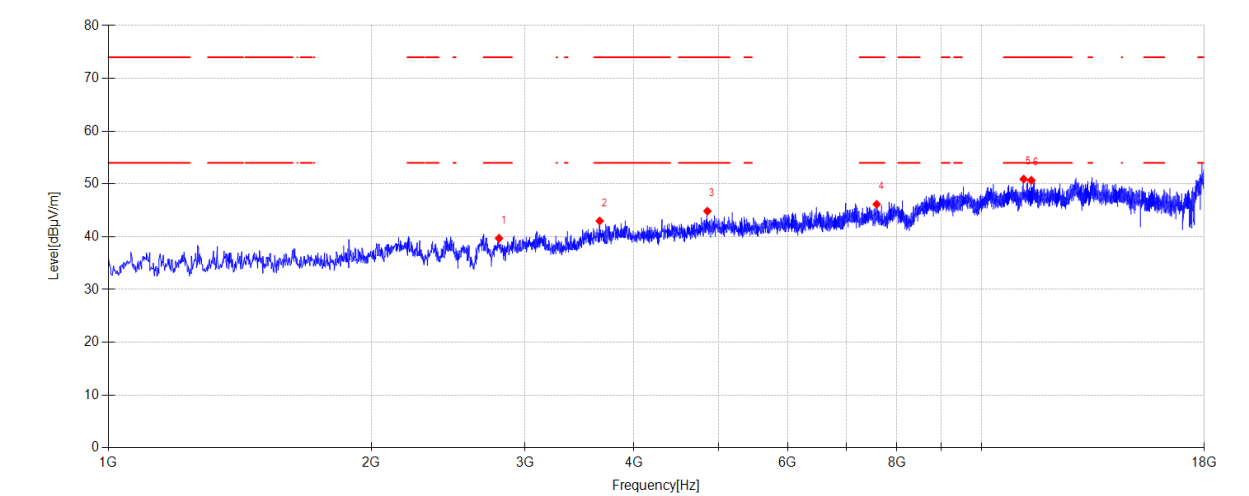

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2802.000	46.37	27.42	5.10	-39.19	39.70	74.00	34.30	PK	Horizontal
2	3653.700	47.27	30.21	5.11	-39.60	42.99	74.00	31.01	PK	Horizontal
3	4853.900	45.16	33.74	5.56	-39.61	44.85	74.00	29.15	PK	Horizontal
4	7585.800	43.40	36.47	6.75	-40.47	46.15	74.00	27.85	PK	Horizontal
5	11177.900	42.64	39.22	8.24	-39.18	50.92	74.00	23.08	PK	Horizontal
6	11405.700	42.43	39.29	8.39	-39.41	50.70	74.00	23.30	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\44

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

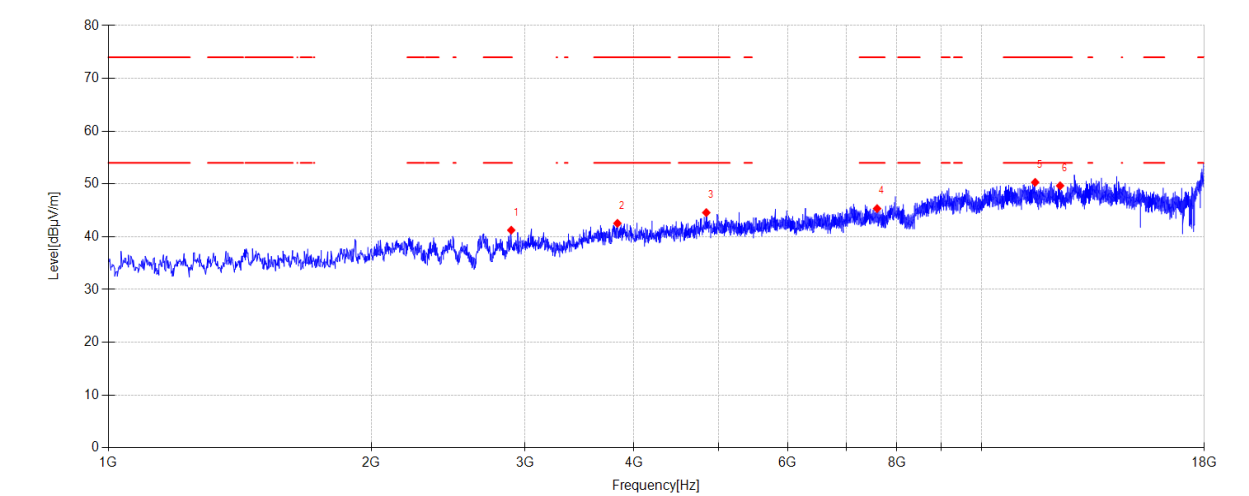

Data List											
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2893.800	47.25	28.15	5.15	-39.31	41.24	74.00	32.76	PK	Vertical	
2	3828.800	46.28	30.82	5.08	-39.64	42.54	74.00	31.46	PK	Vertical	
3	4840.300	45.08	33.55	5.55	-39.61	44.57	74.00	29.43	PK	Vertical	
4	7594.300	42.56	36.49	6.75	-40.47	45.33	74.00	28.67	PK	Vertical	
5	11521.300	42.21	39.16	8.46	-39.52	50.31	74.00	23.69	PK	Vertical	
6	12305.000	41.38	39.30	8.92	-39.94	49.66	74.00	24.34	PK	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\45

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

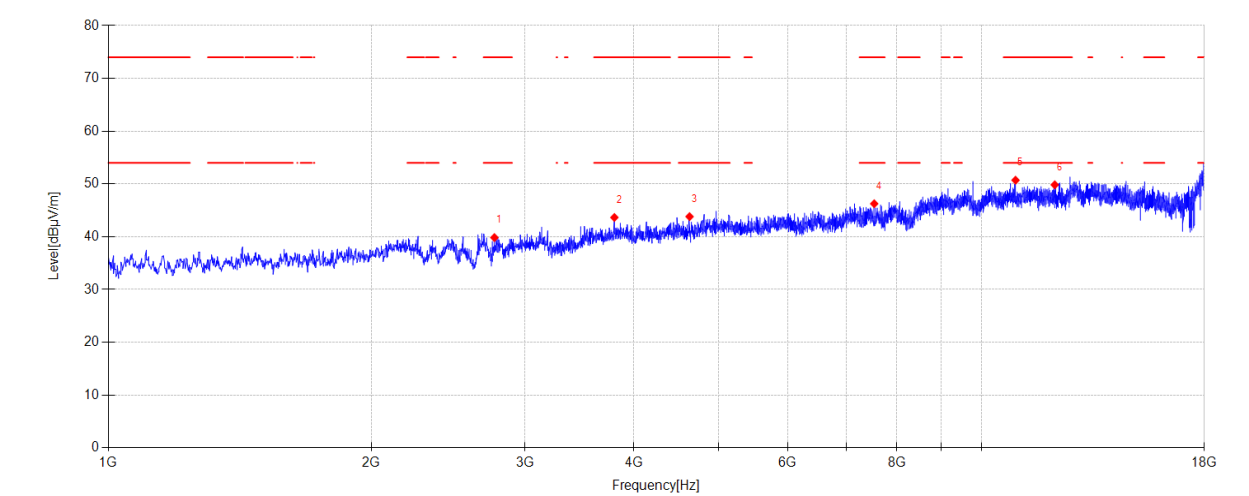

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2768.000	46.39	27.53	5.07	-39.15	39.84	74.00	34.16	PK	Horizontal
2	3798.200	47.51	30.69	5.08	-39.63	43.65	74.00	30.35	PK	Horizontal
3	4631.200	46.05	31.96	5.43	-39.63	43.81	74.00	30.19	PK	Horizontal
4	7536.500	43.62	36.43	6.72	-40.52	46.25	74.00	27.75	PK	Horizontal
5	10939.900	42.35	39.30	8.10	-39.04	50.71	74.00	23.29	PK	Horizontal
6	12133.300	41.68	39.30	8.83	-39.97	49.84	74.00	24.16	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\46

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

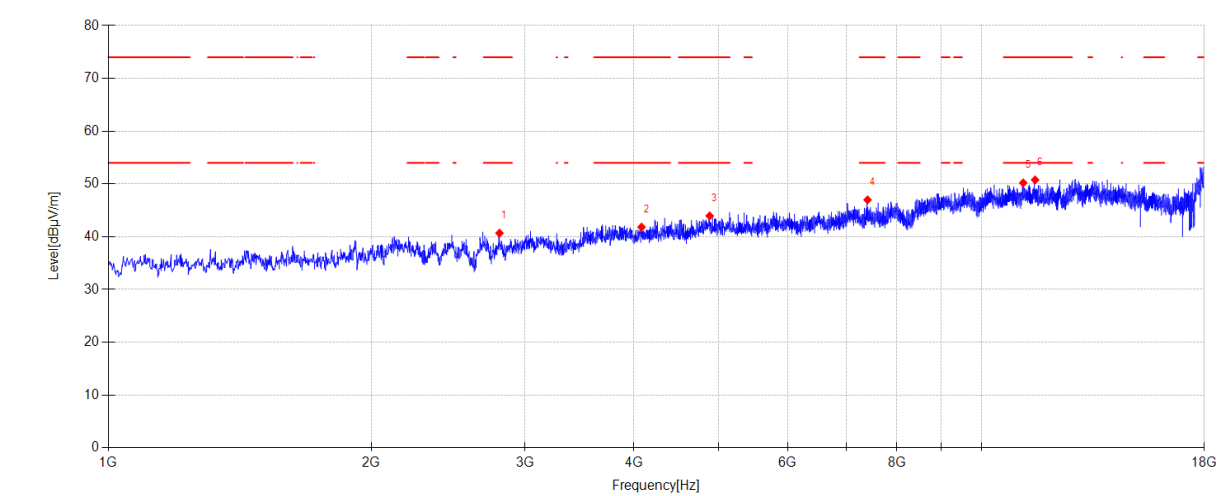

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2805.400	47.33	27.44	5.10	-39.19	40.68	74.00	33.32	PK	Vertical
2	4080.400	45.34	31.06	5.10	-39.67	41.83	74.00	32.17	PK	Vertical
3	4882.800	44.70	33.28	5.58	-39.61	43.95	74.00	30.05	PK	Vertical
4	7405.600	44.27	36.69	6.65	-40.63	46.98	74.00	27.02	PK	Vertical
5	11166.000	41.91	39.23	8.23	-39.17	50.20	74.00	23.80	PK	Vertical
6	11519.600	42.67	39.16	8.46	-39.52	50.77	74.00	23.23	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\1

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

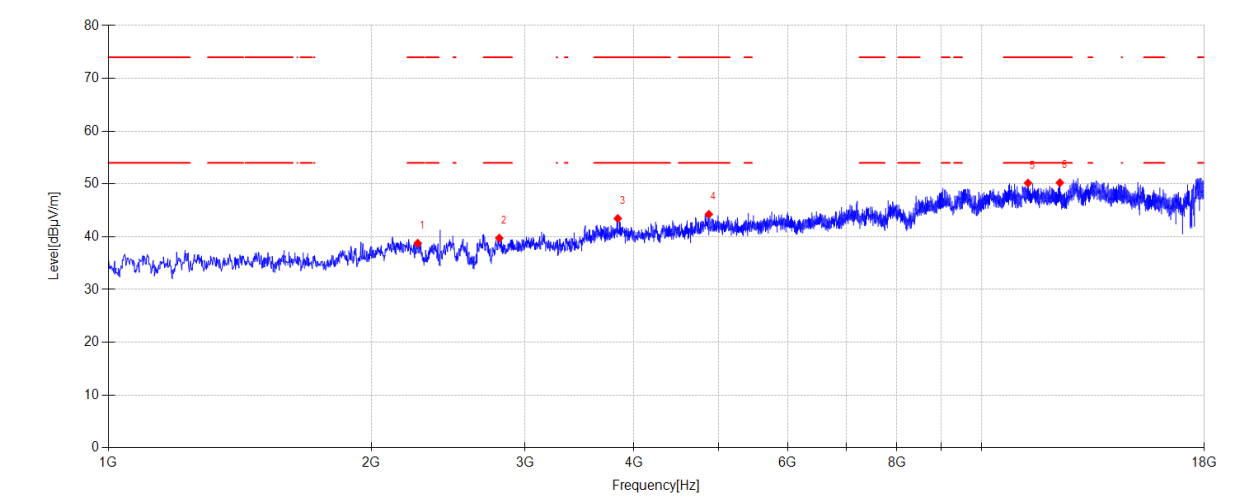

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2261.400	45.34	27.19	4.75	-38.51	38.77	74.00	35.23	PK	Horizontal
2	2803.700	46.40	27.43	5.10	-39.19	39.74	74.00	34.26	PK	Horizontal
3	3832.200	47.18	30.83	5.08	-39.64	43.45	74.00	30.55	PK	Horizontal
4	4872.600	44.85	33.44	5.57	-39.61	44.25	74.00	29.75	PK	Horizontal
5	11305.400	41.95	39.21	8.32	-39.31	50.17	74.00	23.83	PK	Horizontal
6	12296.500	41.96	39.30	8.91	-39.94	50.23	74.00	23.77	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\2

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

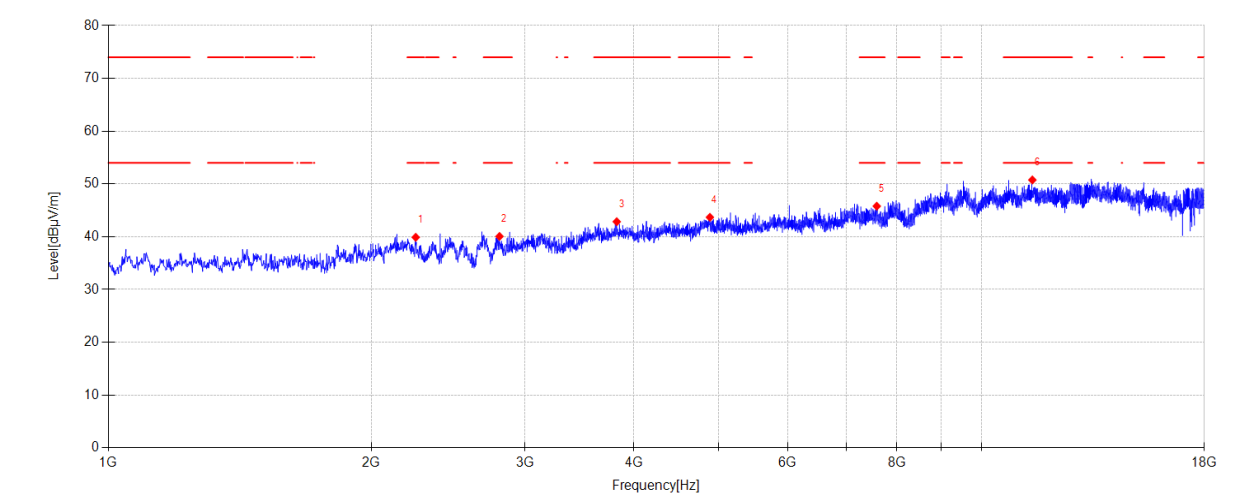

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2249.500	46.32	27.31	4.75	-38.49	39.89	74.00	34.11	PK	Vertical
2	2805.400	46.71	27.44	5.10	-39.19	40.06	74.00	33.94	PK	Vertical
3	3822.000	46.62	30.79	5.08	-39.64	42.85	74.00	31.15	PK	Vertical
4	4886.200	44.50	33.22	5.58	-39.61	43.69	74.00	30.31	PK	Vertical
5	7587.500	43.03	36.48	6.75	-40.47	45.79	74.00	28.21	PK	Vertical
6	11436.300	42.54	39.26	8.40	-39.44	50.76	74.00	23.24	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\3

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

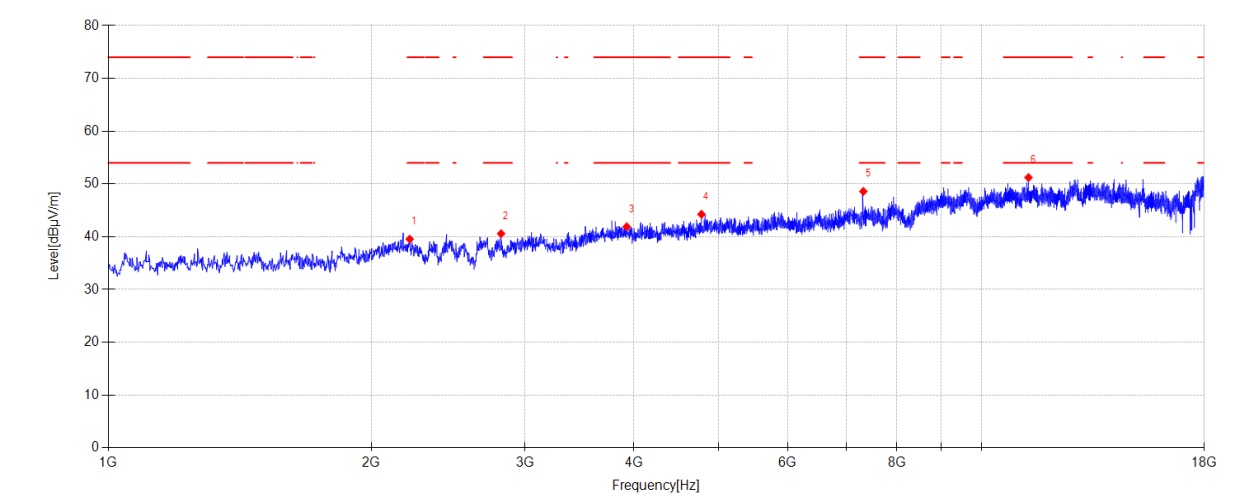

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2213.800	45.62	27.66	4.72	-38.45	39.55	74.00	34.45	PK	Horizontal
2	2817.300	47.15	27.54	5.10	-39.21	40.58	74.00	33.42	PK	Horizontal
3	3924.000	45.34	31.15	5.06	-39.66	41.89	74.00	32.11	PK	Horizontal
4	4779.100	45.93	32.42	5.52	-39.62	44.25	74.00	29.75	PK	Horizontal
5	7324.000	45.84	36.85	6.61	-40.71	48.59	74.00	25.41	PK	Horizontal
6	11320.700	42.99	39.22	8.33	-39.32	51.22	74.00	22.78	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\4

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

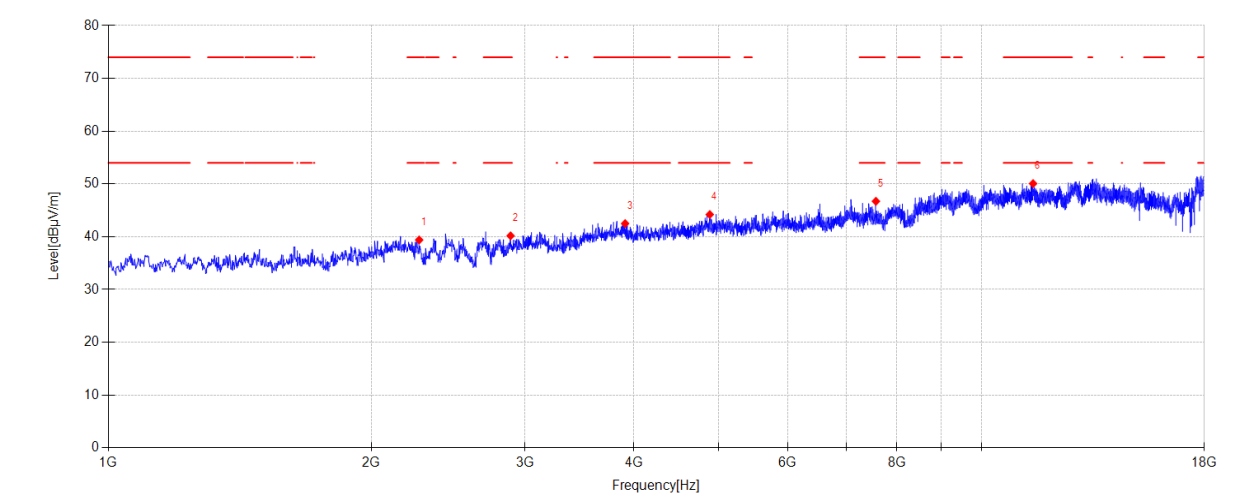

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2269.900	46.05	27.10	4.76	-38.52	39.39	74.00	34.61	PK	Vertical
2	2888.700	46.21	28.11	5.15	-39.30	40.17	74.00	33.83	PK	Vertical
3	3907.000	45.89	31.19	5.07	-39.66	42.49	74.00	31.51	PK	Vertical
4	4884.500	44.99	33.25	5.58	-39.61	44.21	74.00	29.79	PK	Vertical
5	7570.500	44.03	36.44	6.74	-40.49	46.72	74.00	27.28	PK	Vertical
6	11458.400	41.87	39.24	8.42	-39.46	50.07	74.00	23.93	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\5

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

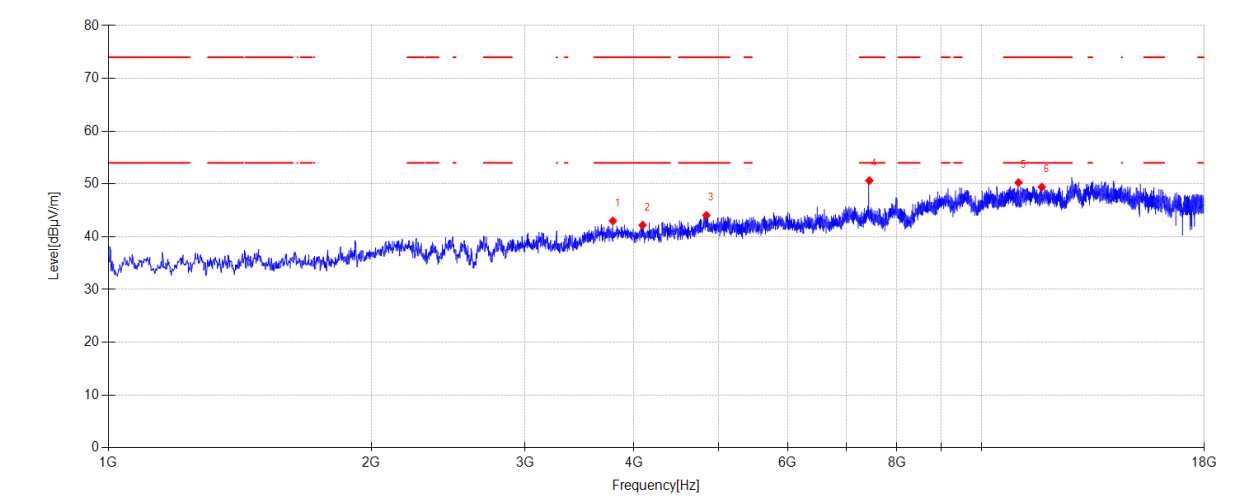

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3782.900	46.90	30.63	5.09	-39.63	42.99	74.00	31.01	PK	Horizontal
2	4092.300	45.68	31.08	5.11	-39.67	42.20	74.00	31.80	PK	Horizontal
3	4840.300	44.57	33.55	5.55	-39.61	44.06	74.00	29.94	PK	Horizontal
4	7439.600	47.94	36.62	6.67	-40.60	50.63	74.00	23.37	PK	Horizontal
5	11026.600	41.84	39.30	8.15	-39.03	50.26	74.00	23.74	PK	Horizontal
6	11723.600	41.56	38.98	8.59	-39.72	49.41	74.00	24.59	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\6

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

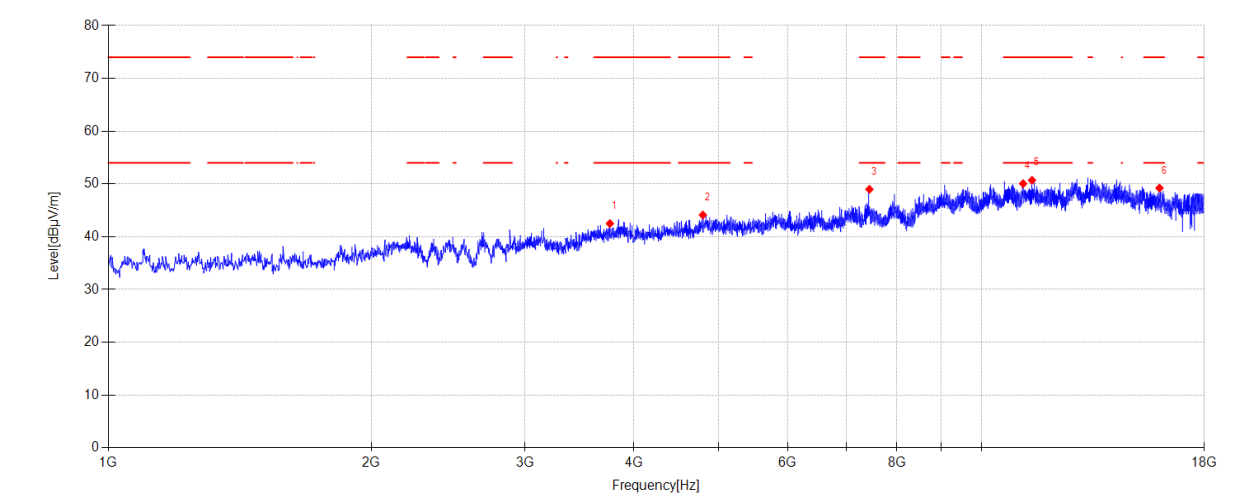

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3754.000	46.51	30.52	5.09	-39.62	42.50	74.00	31.50	PK	Vertical
2	4796.100	45.73	32.48	5.53	-39.62	44.12	74.00	29.88	PK	Vertical
3	7441.300	46.30	36.62	6.67	-40.60	48.99	74.00	25.01	PK	Vertical
4	11162.600	41.75	39.24	8.23	-39.16	50.06	74.00	23.94	PK	Vertical
5	11426.100	42.46	39.27	8.40	-39.43	50.70	74.00	23.30	PK	Vertical
6	15992.300	40.47	38.01	10.14	-39.40	49.22	74.00	24.78	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\21

Memo:

Sample Numbel:S24072701-007 Power Setting:0

Test Graph

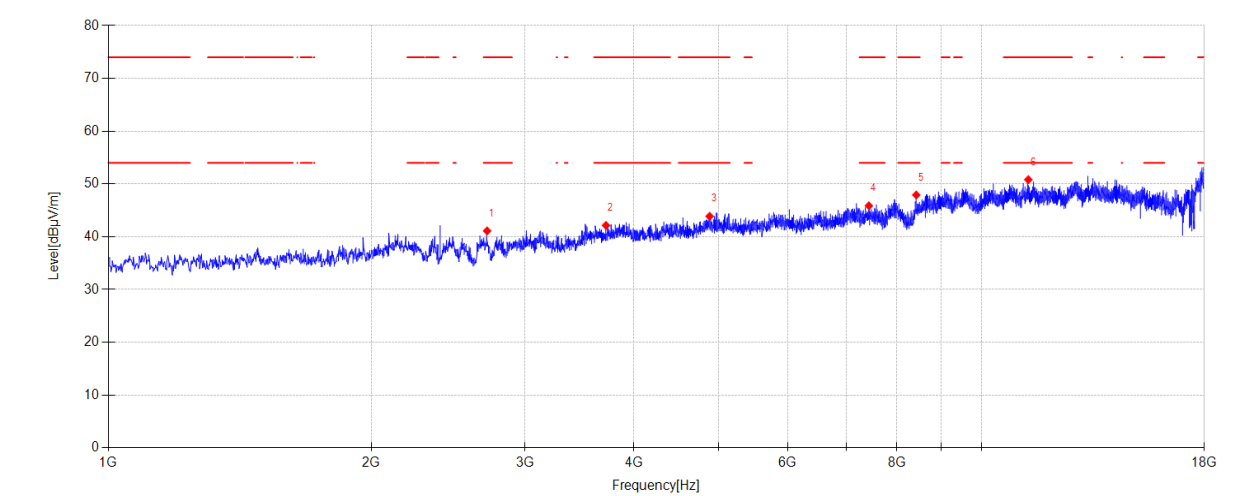

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2715.300	47.61	27.53	5.04	-39.08	41.10	74.00	32.90	PK	Horizontal
2	3714.900	46.23	30.43	5.10	-39.61	42.15	74.00	31.85	PK	Horizontal
3	4882.800	44.62	33.28	5.58	-39.61	43.87	74.00	30.13	PK	Horizontal
4	7431.100	43.16	36.64	6.67	-40.61	45.86	74.00	28.14	PK	Horizontal
5	8420.500	42.86	37.50	7.11	-39.55	47.92	74.00	26.08	PK	Horizontal
6	11315.600	42.59	39.22	8.33	-39.32	50.82	74.00	23.18	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\22

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

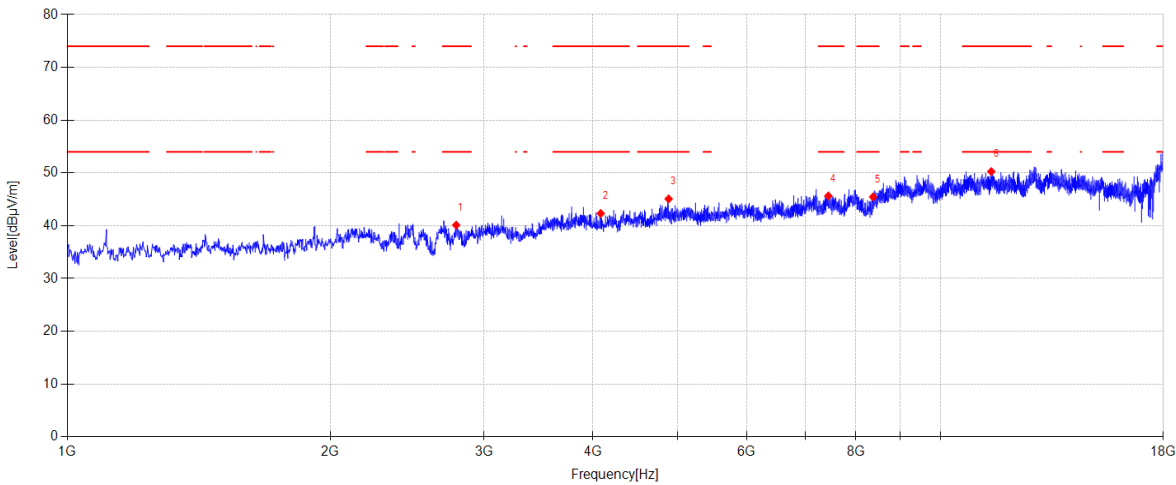

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2788.400	46.74	27.45	5.09	-39.17	40.11	74.00	33.89	PK	Vertical
2	4082.100	45.84	31.06	5.10	-39.67	42.33	74.00	31.67	PK	Vertical
3	4882.800	45.84	33.28	5.58	-39.61	45.09	74.00	28.91	PK	Vertical
4	7439.600	42.95	36.62	6.67	-40.60	45.64	74.00	28.36	PK	Vertical
5	8372.900	40.61	37.39	7.09	-39.62	45.47	74.00	28.53	PK	Vertical
6	11434.600	42.03	39.27	8.40	-39.43	50.27	74.00	23.73	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\23

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

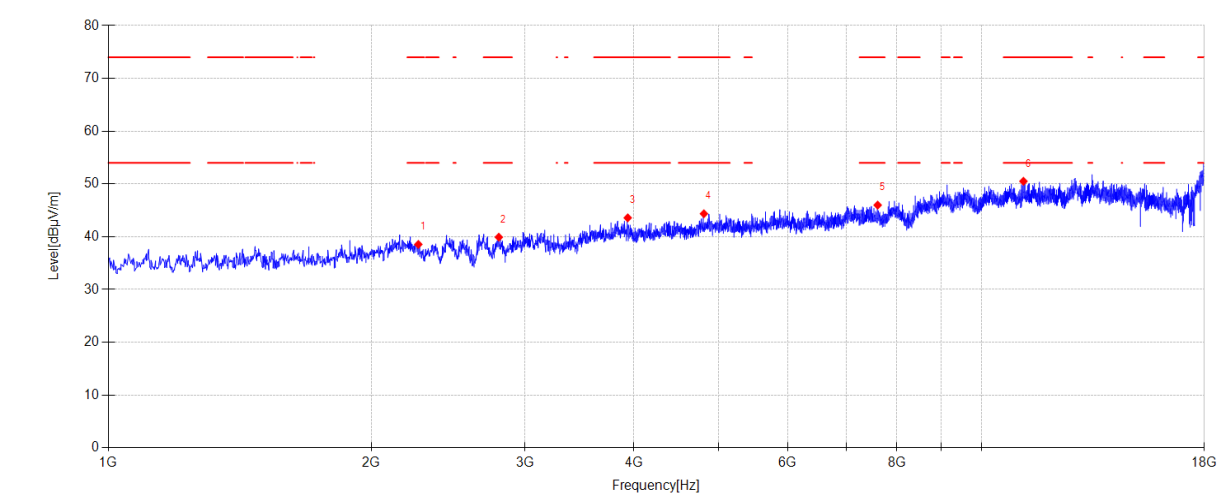

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2264.800	45.15	27.15	4.76	-38.51	38.55	74.00	35.45	PK	Horizontal
2	2800.300	46.62	27.40	5.09	-39.19	39.92	74.00	34.08	PK	Horizontal
3	3934.200	47.05	31.13	5.06	-39.66	43.58	74.00	30.42	PK	Horizontal
4	4809.700	45.69	32.75	5.54	-39.62	44.36	74.00	29.64	PK	Horizontal
5	7606.200	43.17	36.51	6.76	-40.45	45.99	74.00	28.01	PK	Horizontal
6	11171.100	42.20	39.23	8.24	-39.17	50.50	74.00	23.50	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\24

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

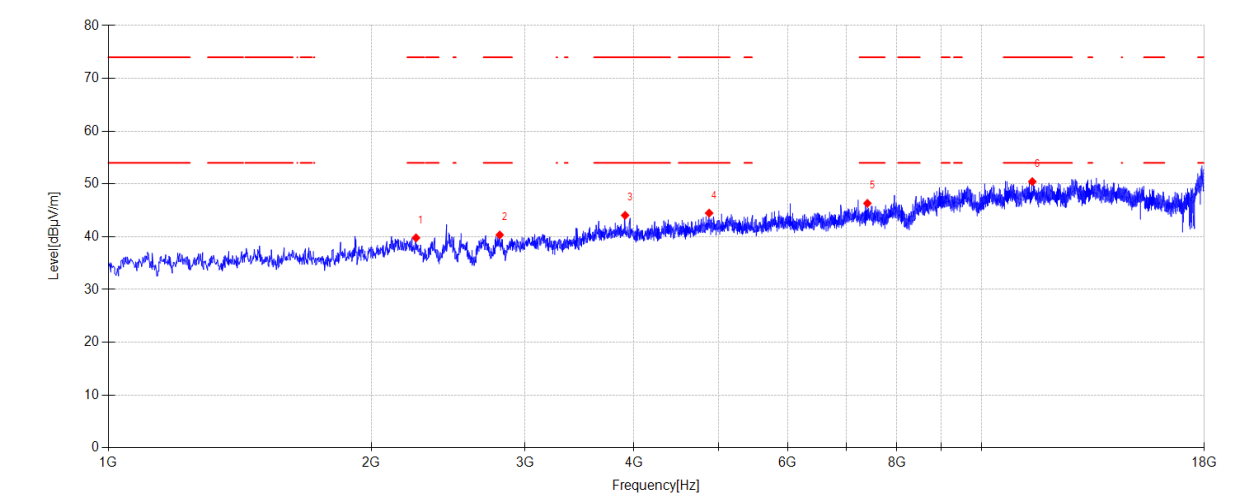

Data List											
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2251.200	46.25	27.29	4.75	-38.50	39.79	74.00	34.21	PK	Vertical	
2	2807.100	46.97	27.46	5.10	-39.20	40.33	74.00	33.67	PK	Vertical	
3	3907.000	47.46	31.19	5.07	-39.66	44.06	74.00	29.94	PK	Vertical	
4	4876.000	45.13	33.38	5.58	-39.61	44.48	74.00	29.52	PK	Vertical	
5	7402.200	43.62	36.70	6.65	-40.64	46.33	74.00	27.67	PK	Vertical	
6	11434.600	42.20	39.27	8.40	-39.43	50.44	74.00	23.56	PK	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\25

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

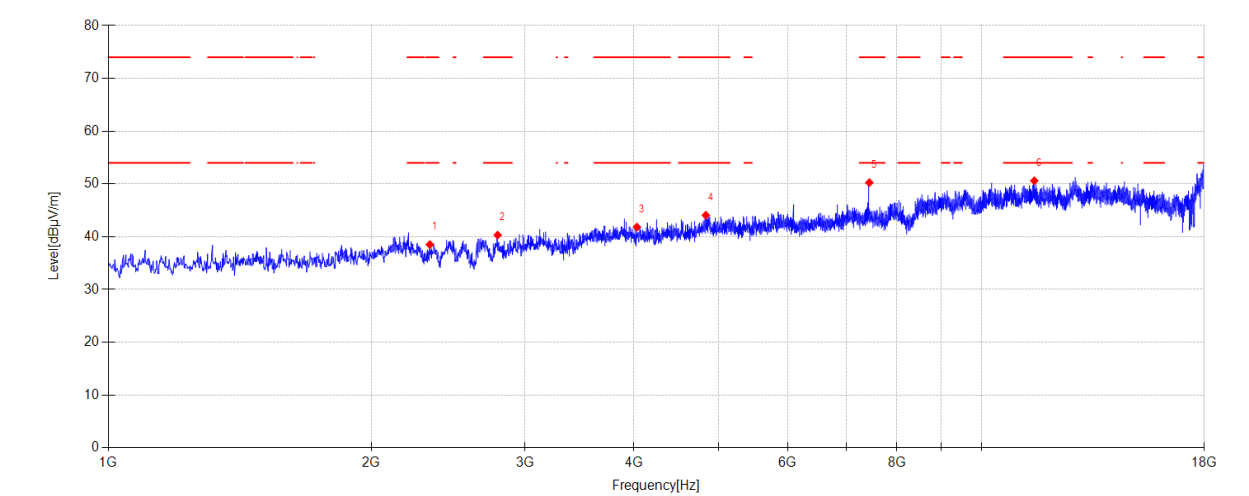

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2334.500	45.30	27.01	4.80	-38.60	38.51	74.00	35.49	PK	Horizontal
2	2791.800	46.97	27.43	5.09	-39.18	40.31	74.00	33.69	PK	Horizontal
3	4031.100	45.48	30.96	5.07	-39.68	41.83	74.00	32.17	PK	Horizontal
4	4833.500	44.76	33.37	5.55	-39.61	44.07	74.00	29.93	PK	Horizontal
5	7439.600	47.56	36.62	6.67	-40.60	50.25	74.00	23.75	PK	Horizontal
6	11495.800	42.47	39.20	8.44	-39.50	50.61	74.00	23.39	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\26

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

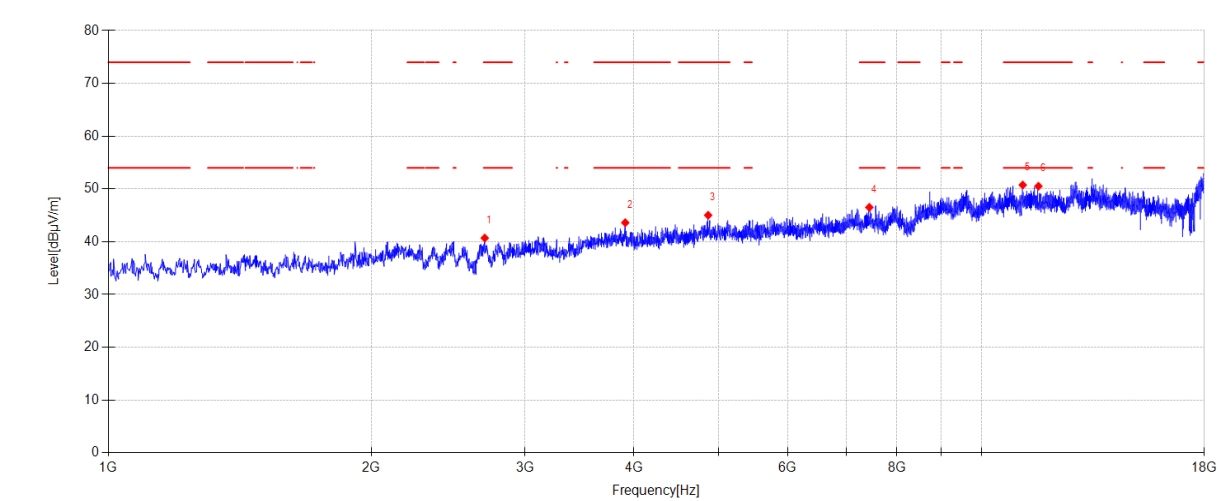

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2698.300	47.23	27.50	5.03	-39.06	40.70	74.00	33.30	PK	Vertical
2	3908.700	47.02	31.18	5.07	-39.66	43.61	74.00	30.39	PK	Vertical
3	4864.100	45.49	33.57	5.57	-39.61	45.02	74.00	28.98	PK	Vertical
4	7439.600	43.83	36.62	6.67	-40.60	46.52	74.00	27.48	PK	Vertical
5	11150.700	42.43	39.25	8.22	-39.15	50.75	74.00	23.25	PK	Vertical
6	11621.600	42.63	39.00	8.52	-39.62	50.53	74.00	23.47	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\69

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

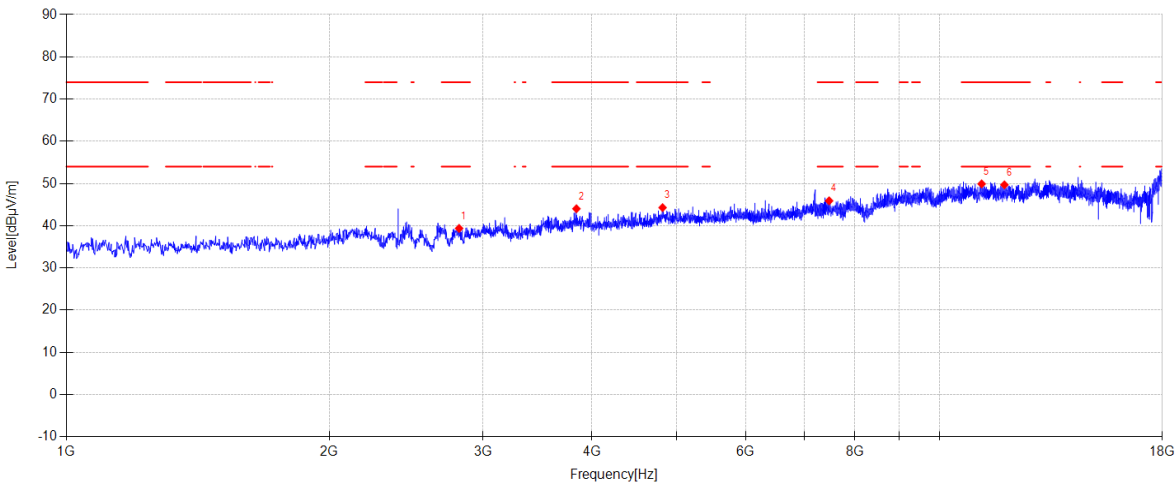

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2817.300	45.94	27.54	5.10	-39.21	39.37	74.00	34.63	PK	Horizontal
2	3839.000	47.72	30.86	5.08	-39.64	44.02	74.00	29.98	PK	Horizontal
3	4818.200	45.39	32.97	5.54	-39.61	44.29	74.00	29.71	PK	Horizontal
4	7475.300	43.23	36.55	6.69	-40.57	45.90	74.00	28.10	PK	Horizontal
5	11176.200	41.63	39.22	8.24	-39.18	49.91	74.00	24.09	PK	Horizontal
6	11868.100	41.97	38.90	8.68	-39.87	49.68	74.00	24.32	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\70

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

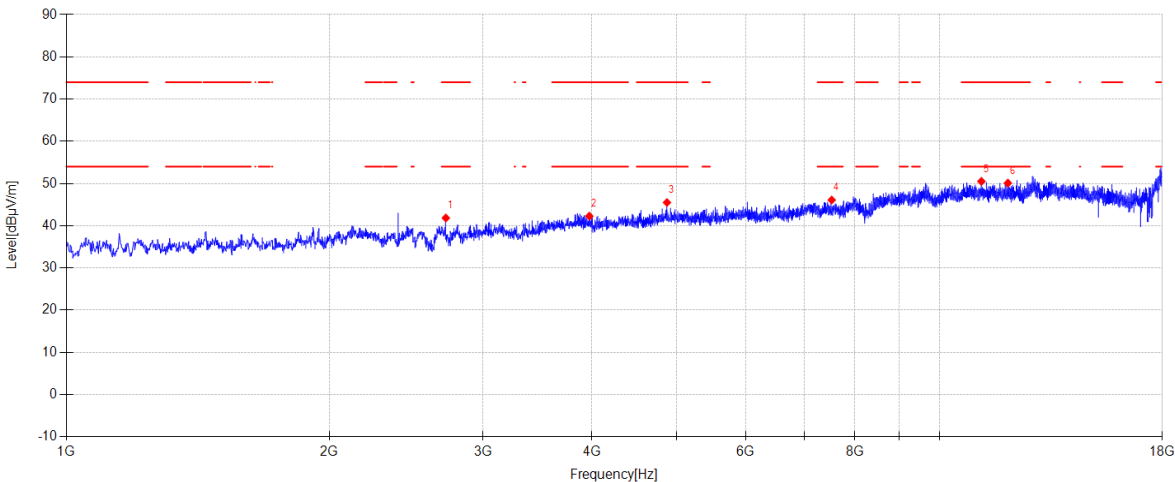

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2720.400	48.35	27.54	5.04	-39.09	41.84	74.00	32.16	PK	Vertical
2	3971.600	45.88	31.01	5.05	-39.67	42.27	74.00	31.73	PK	Vertical
3	4874.300	46.13	33.41	5.57	-39.61	45.50	74.00	28.50	PK	Vertical
4	7526.300	43.45	36.45	6.72	-40.53	46.09	74.00	27.91	PK	Vertical
5	11169.400	42.21	39.23	8.24	-39.17	50.51	74.00	23.49	PK	Vertical
6	11976.900	42.20	39.13	8.75	-39.98	50.10	74.00	23.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\71

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

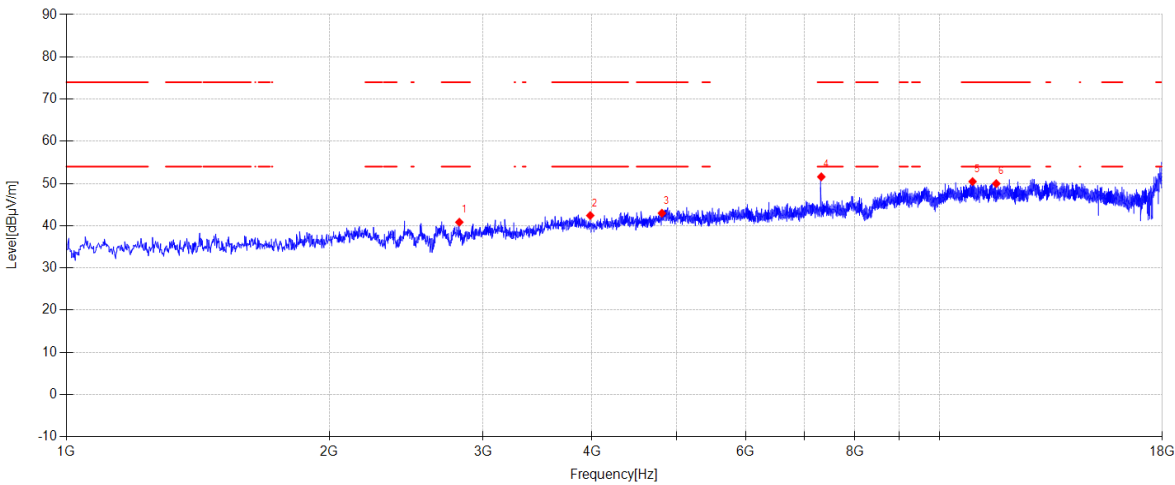

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2819.000	47.38	27.55	5.11	-39.21	40.83	74.00	33.17	PK	Horizontal
2	3981.800	46.08	30.97	5.05	-39.68	42.42	74.00	31.58	PK	Horizontal
3	4809.700	44.30	32.75	5.54	-39.62	42.97	74.00	31.03	PK	Horizontal
4	7322.300	48.83	36.86	6.61	-40.71	51.59	74.00	22.41	PK	Horizontal
5	10912.700	42.12	39.30	8.09	-39.05	50.46	74.00	23.54	PK	Horizontal
6	11614.800	42.06	39.00	8.52	-39.61	49.97	74.00	24.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2441 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\72

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

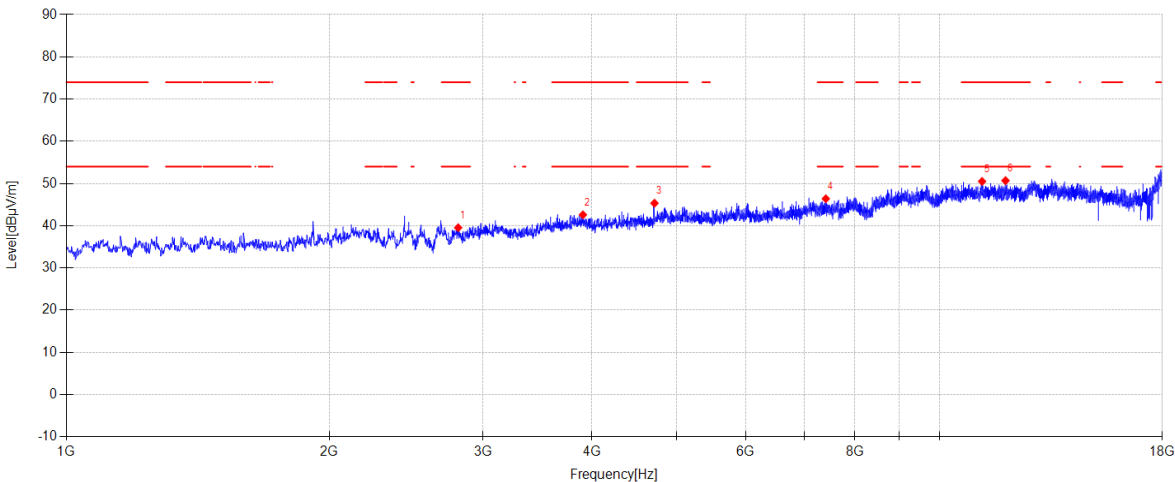

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2810.500	46.16	27.48	5.10	-39.20	39.54	74.00	34.46	PK	Vertical
2	3905.300	45.99	31.19	5.07	-39.66	42.59	74.00	31.41	PK	Vertical
3	4716.200	47.24	32.23	5.48	-39.62	45.33	74.00	28.67	PK	Vertical
4	7410.700	43.69	36.68	6.66	-40.63	46.40	74.00	27.60	PK	Vertical
5	11189.800	42.23	39.21	8.25	-39.19	50.50	74.00	23.50	PK	Vertical
6	11902.100	42.97	38.91	8.70	-39.90	50.68	74.00	23.32	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\73

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

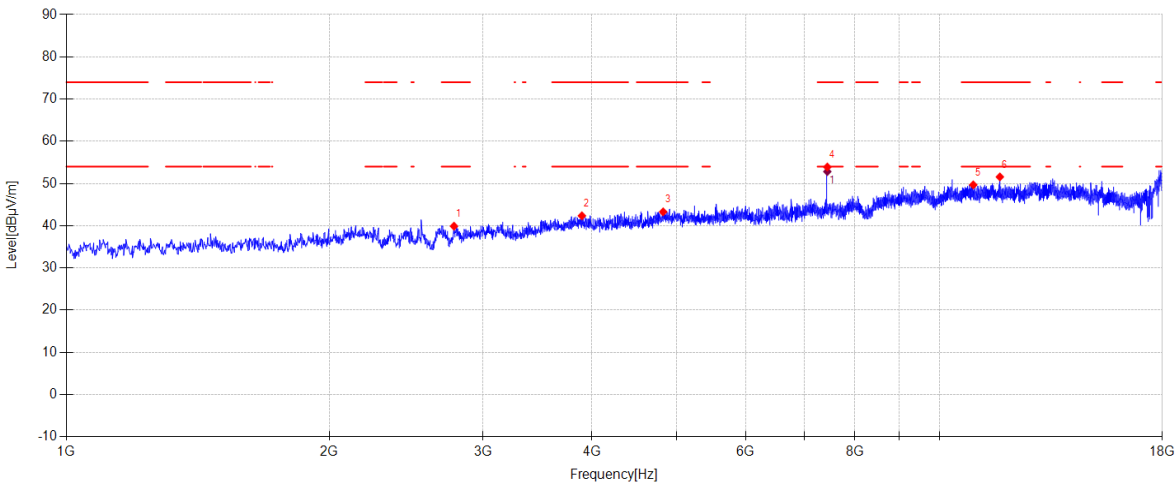

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2779.900	46.49	27.48	5.08	-39.16	39.89	74.00	34.11	PK	Horizontal
2	3895.100	45.76	31.17	5.07	-39.65	42.35	74.00	31.65	PK	Horizontal
3	4825.000	44.19	33.15	5.55	-39.61	43.28	74.00	30.72	PK	Horizontal
4	7439.600	51.22	36.62	6.67	-40.60	53.91	74.00	20.09	PK	Horizontal
5	10933.100	41.31	39.30	8.10	-39.04	49.67	74.00	24.33	PK	Horizontal
6	11727.000	43.73	38.97	8.59	-39.73	51.56	74.00	22.44	PK	Horizontal

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7439.915	50.14	36.62	6.67	52.83	54.00	1.17	AV	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\74

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

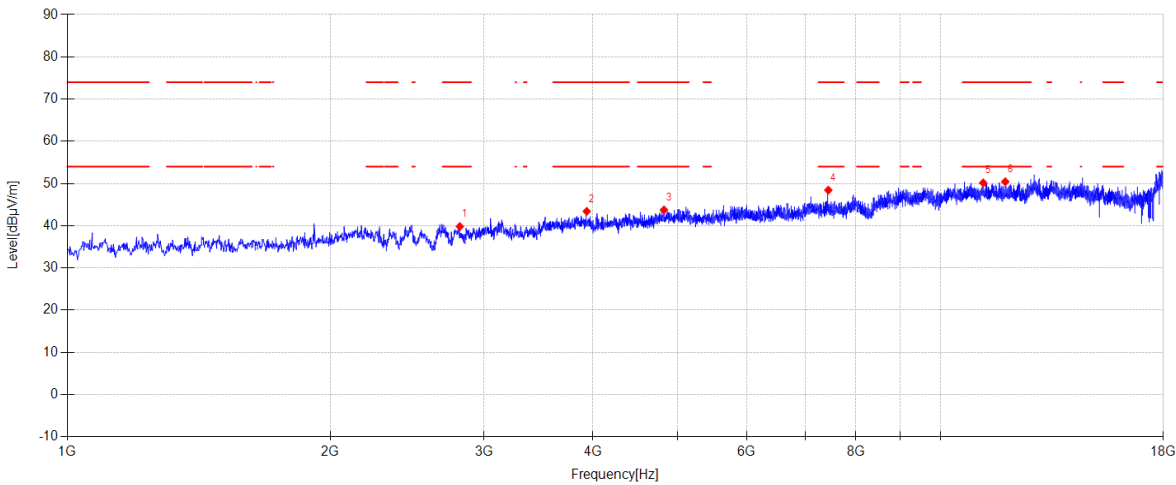

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2815.600	46.41	27.52	5.10	-39.21	39.82	74.00	34.18	PK	Vertical
2	3934.200	46.88	31.13	5.06	-39.66	43.41	74.00	30.59	PK	Vertical
3	4823.300	44.70	33.11	5.54	-39.61	43.74	74.00	30.26	PK	Vertical
4	7439.600	45.73	36.62	6.67	-40.60	48.42	74.00	25.58	PK	Vertical
5	11194.900	41.88	39.21	8.25	-39.19	50.15	74.00	23.85	PK	Vertical
6	11864.700	42.72	38.90	8.67	-39.86	50.43	74.00	23.57	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Band Edge Compliance

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08	1 Year
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	2 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31	1 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	2 Year

15.2. Block diagram of test setup

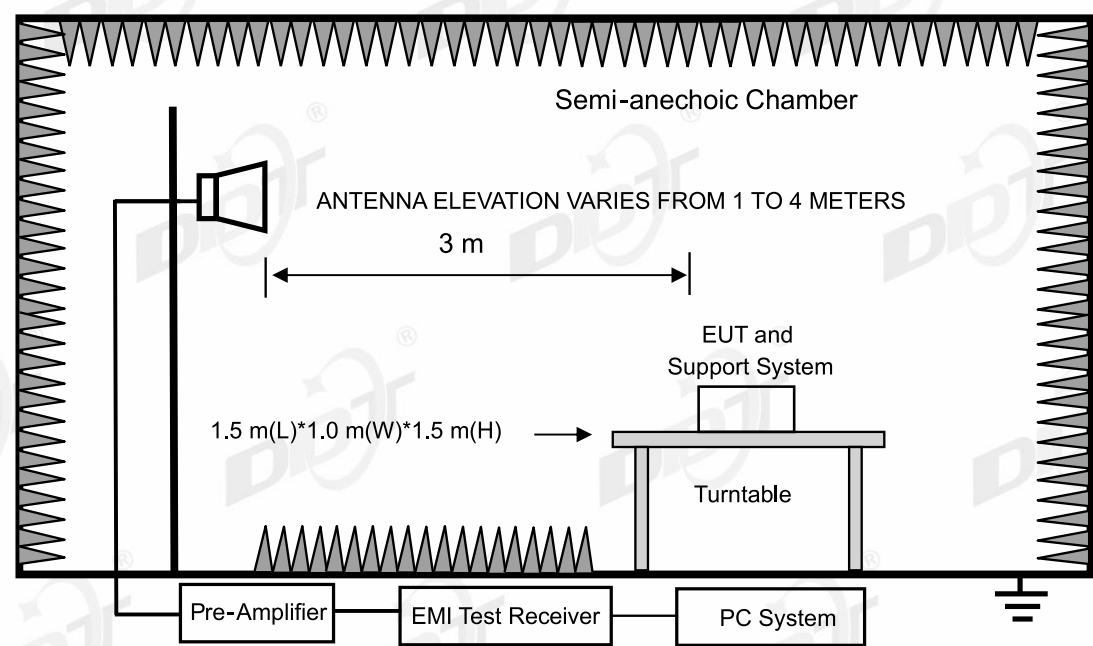

15.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

15.6. Test result

PASS. (See below detailed test result)

Note: Both Vertical and Horizontal Polarity have been tested, only recorded the worst case in this report.

15.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\47

Memo:

Sample Numbel:S24072701-007 Power Setting:0

Test Graph

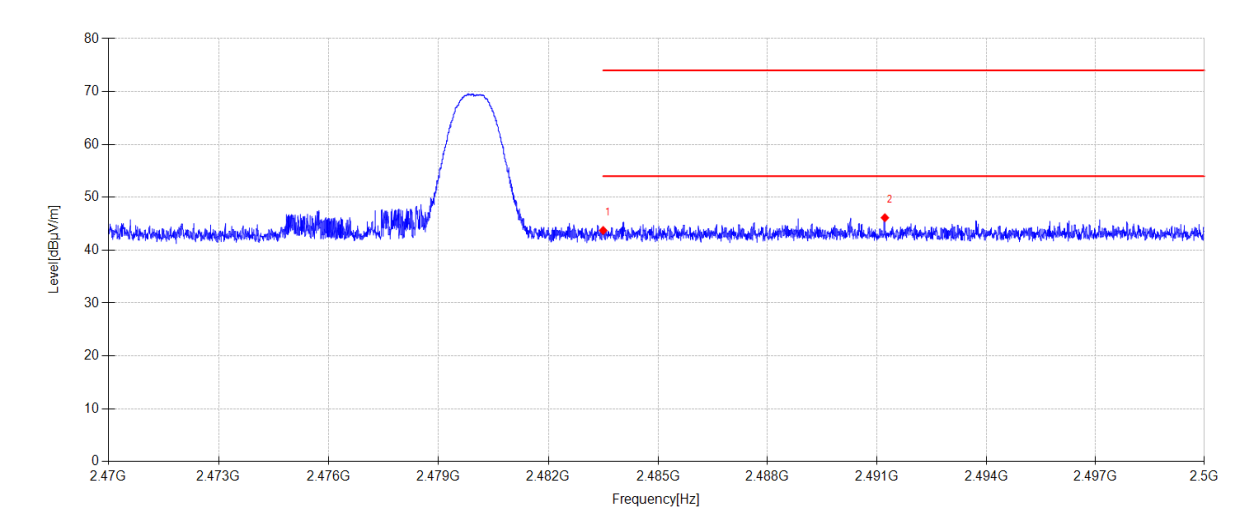

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.58	27.53	3.62	0.00	43.73	74.00	30.27	PK	Horizontal
2	2491.219	14.95	27.56	3.63	0.00	46.14	74.00	27.86	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

2DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\48

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

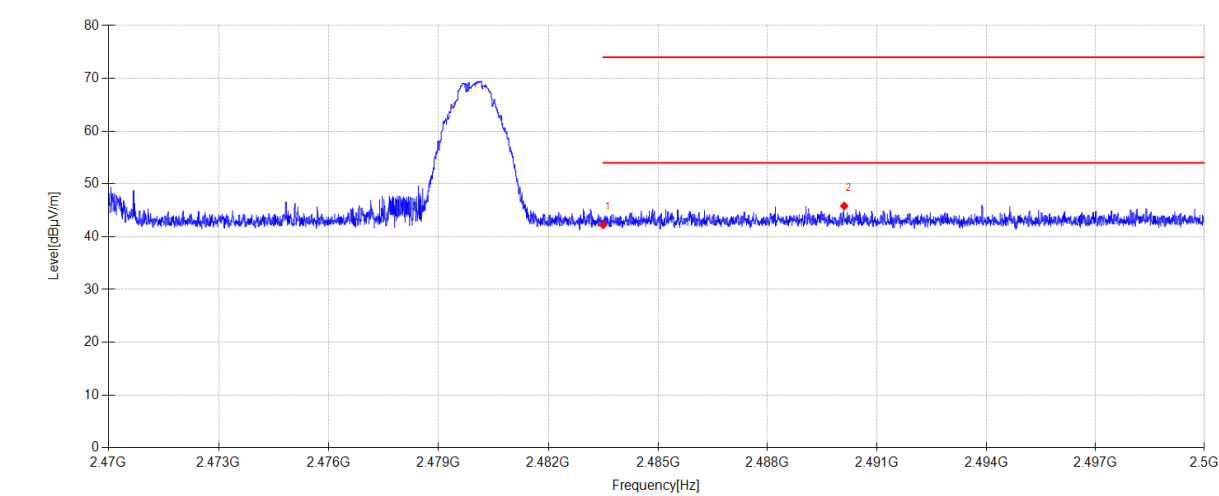

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.10	27.53	3.62	0.00	42.25	74.00	31.75	PK	Horizontal
2	2490.103	14.65	27.56	3.62	0.00	45.83	74.00	28.17	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

3DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\49

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

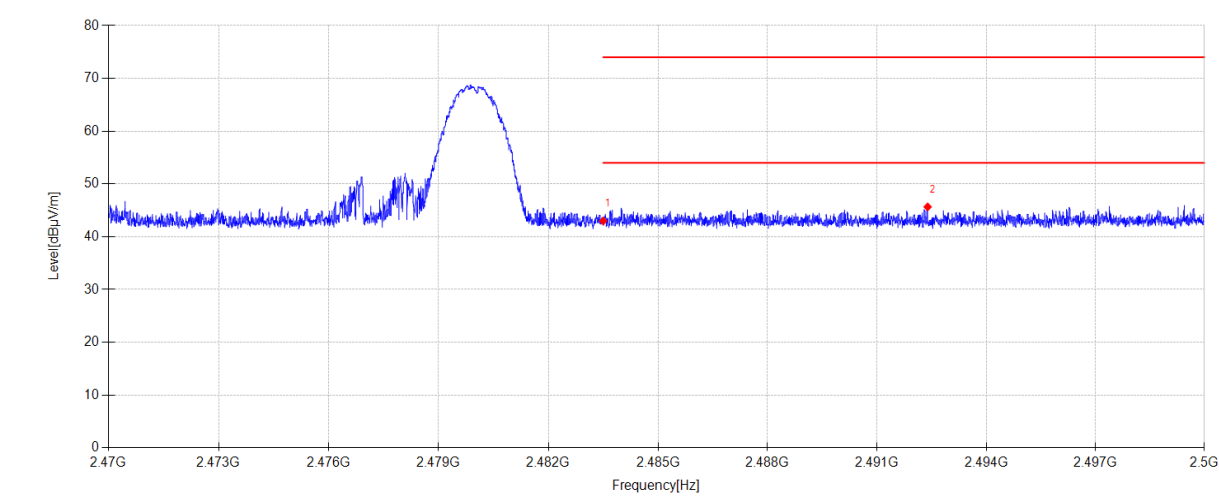

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.84	27.53	3.62	0.00	42.99	74.00	31.01	PK	Horizontal
2	2492.392	14.45	27.57	3.63	0.00	45.65	74.00	28.35	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

3DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\50

Memo:

Sample Numbre:S24072701-007 Power Setting:0

Test Graph

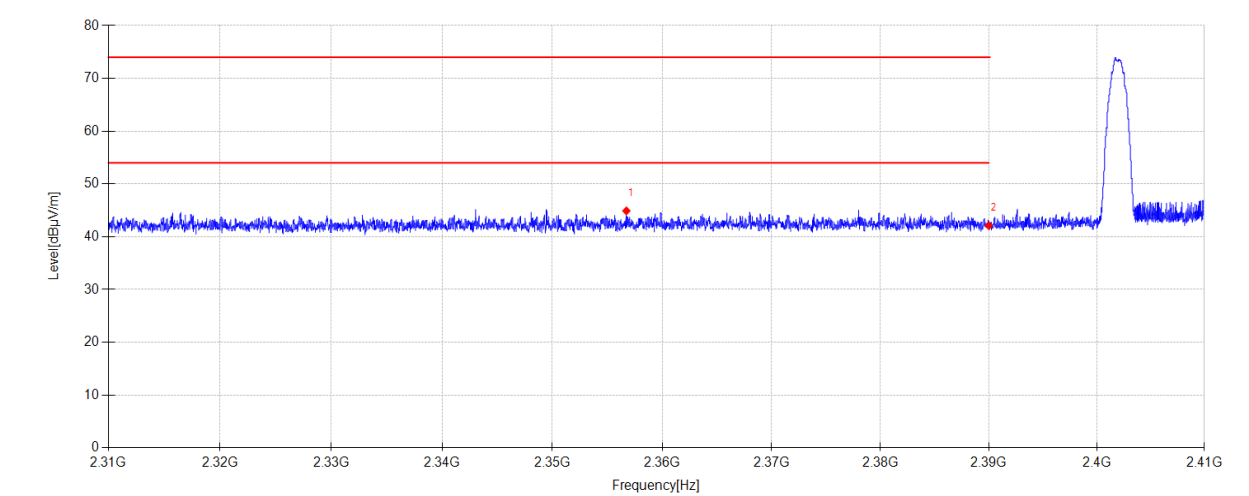

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2356.740	14.22	27.13	3.55	0.00	44.90	74.00	29.10	PK	Horizontal
2	2390.000	11.26	27.26	3.57	0.00	42.09	74.00	31.91	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

2DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\51

Memo:

Sample Numbre:S24072701-007 Power Setting:0

Test Graph

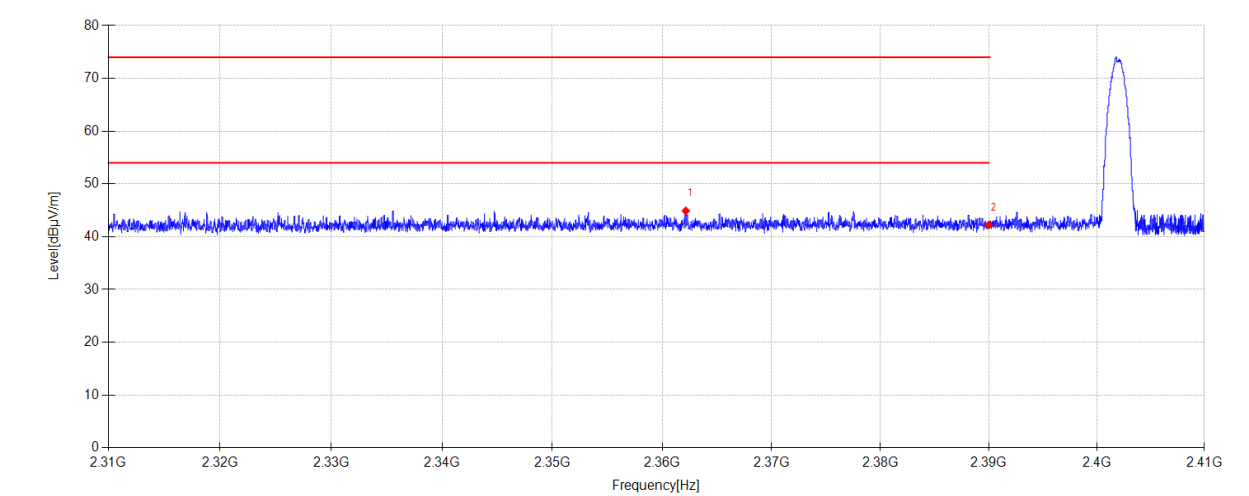

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2362.160	14.20	27.15	3.55	0.00	44.90	74.00	29.10	PK	Horizontal
2	2390.000	11.40	27.26	3.57	0.00	42.23	74.00	31.77	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-13

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 1100BH

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\52

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

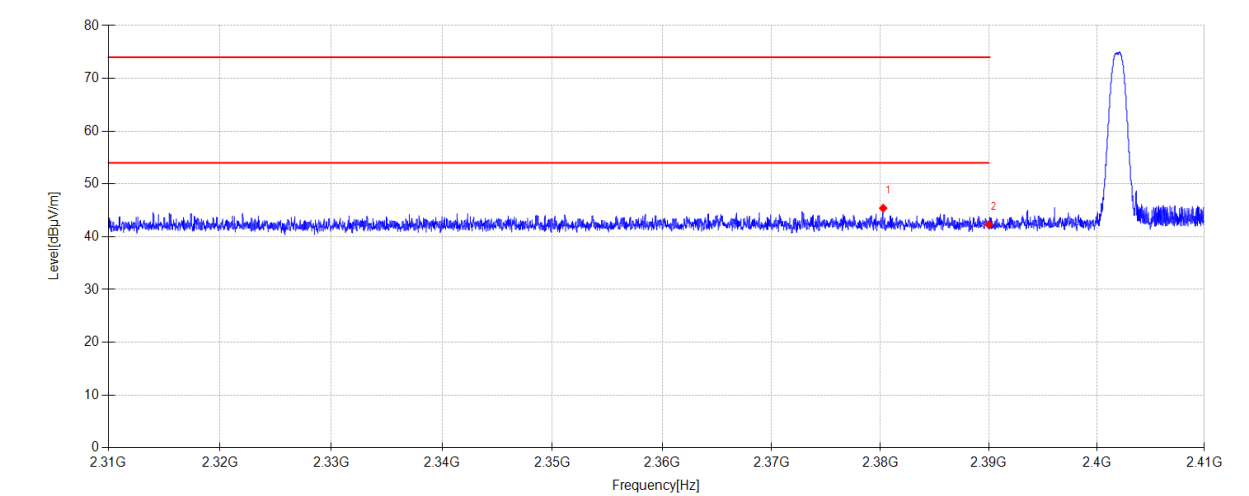

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2380.260	14.63	27.22	3.56	0.00	45.41	74.00	28.59	PK	Horizontal
2	2390.000	11.48	27.26	3.57	0.00	42.31	74.00	31.69	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-07

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\7

Memo:

Sample Numbler:Power Setting:0

Test Graph

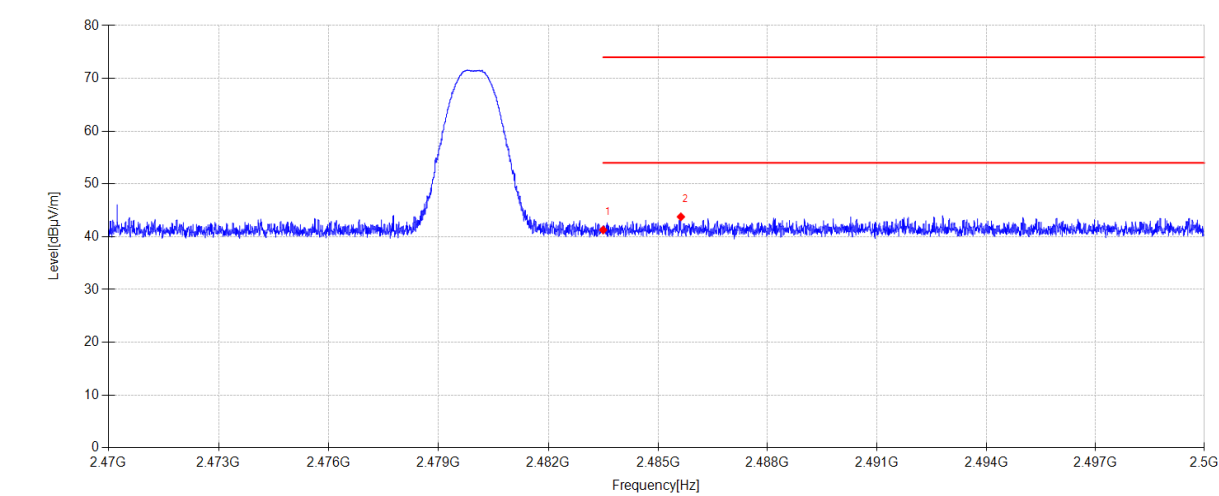

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.13	27.53	3.62	0.00	41.28	74.00	32.72	PK	Horizontal
2	2485.627	12.61	27.54	3.62	0.00	43.77	74.00	30.23	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

2DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\8

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

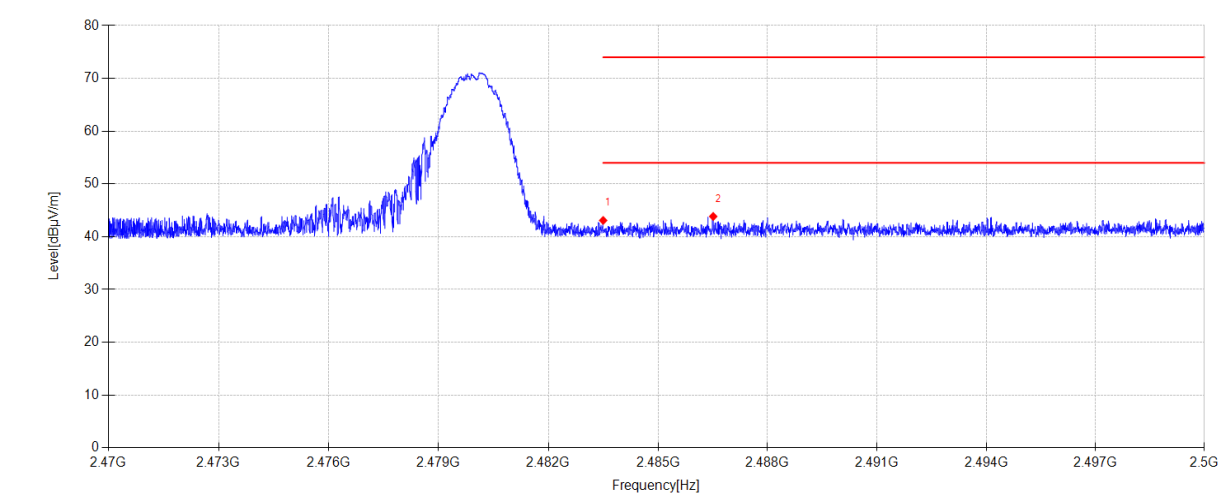

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.94	27.53	3.62	0.00	43.09	74.00	30.91	PK	Horizontal
2	2486.512	12.67	27.55	3.62	0.00	43.84	74.00	30.16	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

3DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\9

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

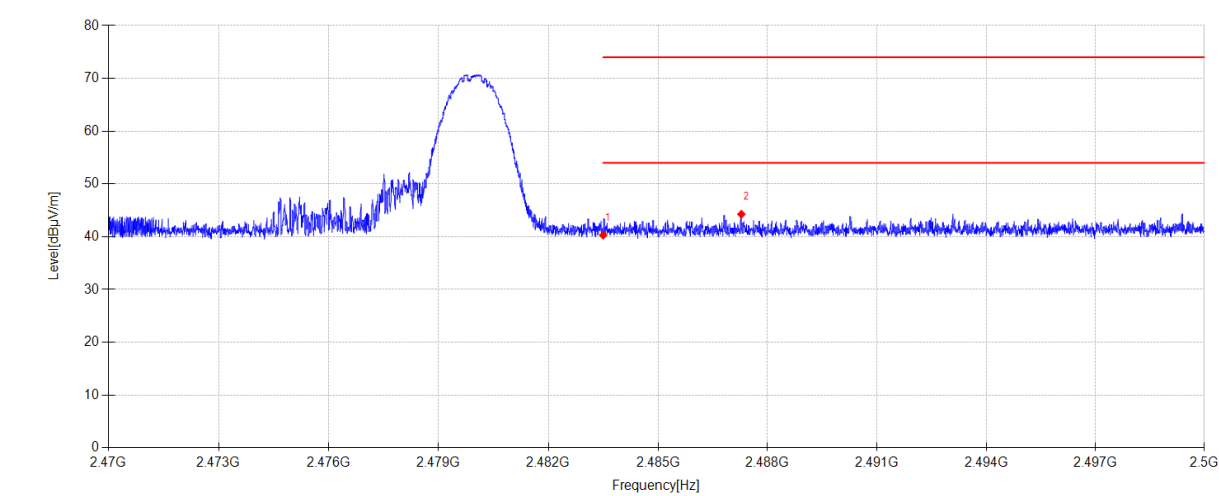

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	9.14	27.53	3.62	0.00	40.29	74.00	33.71	PK	Horizontal
2	2487.283	13.09	27.55	3.62	0.00	44.26	74.00	29.74	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

3DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\10

Memo:

Sample Numble:S24072701-007 Power Setting:0

Test Graph

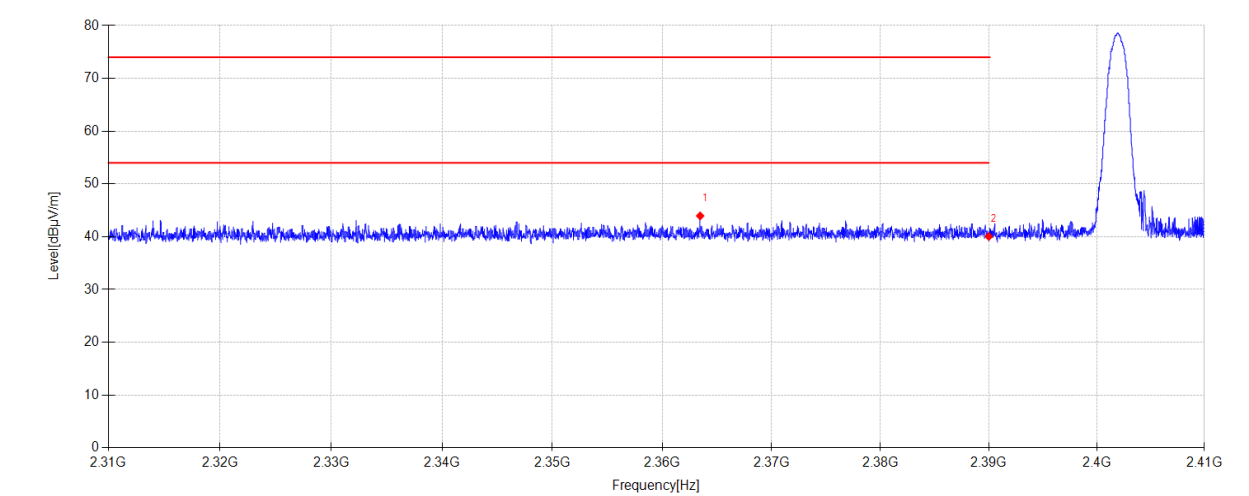

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2363.470	13.25	27.15	3.55	0.00	43.95	74.00	30.05	PK	Horizontal
2	2390.000	9.21	27.26	3.57	0.00	40.04	74.00	33.96	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

2DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\11

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

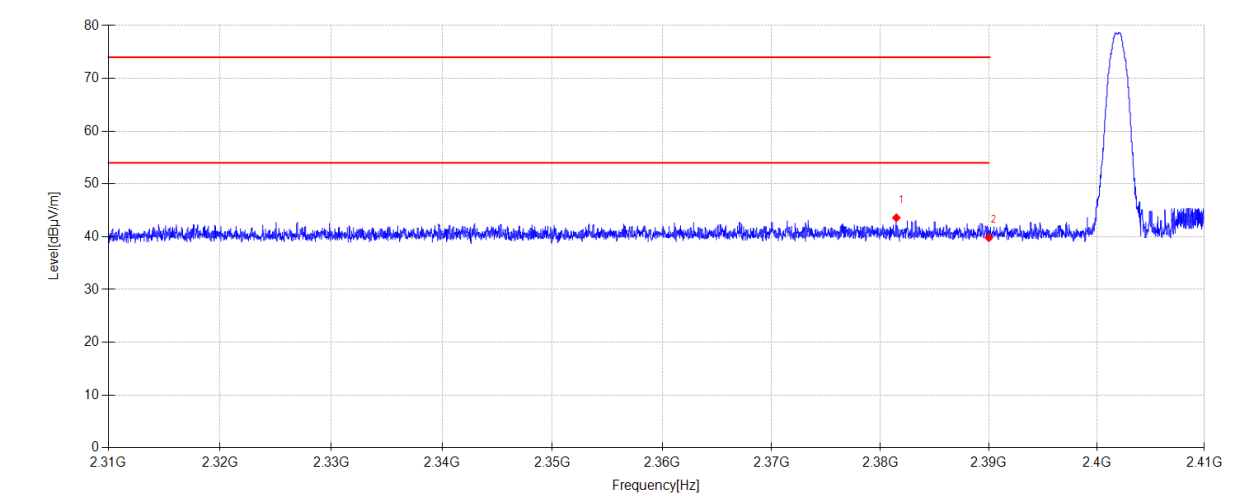

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.470	12.80	27.23	3.56	0.00	43.59	74.00	30.41	PK	Horizontal
2	2390.000	8.98	27.26	3.57	0.00	39.81	74.00	34.19	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-08

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 250BL

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\12

Memo:

Sample Numbre:S24072701-007 Power Setting:0

Test Graph

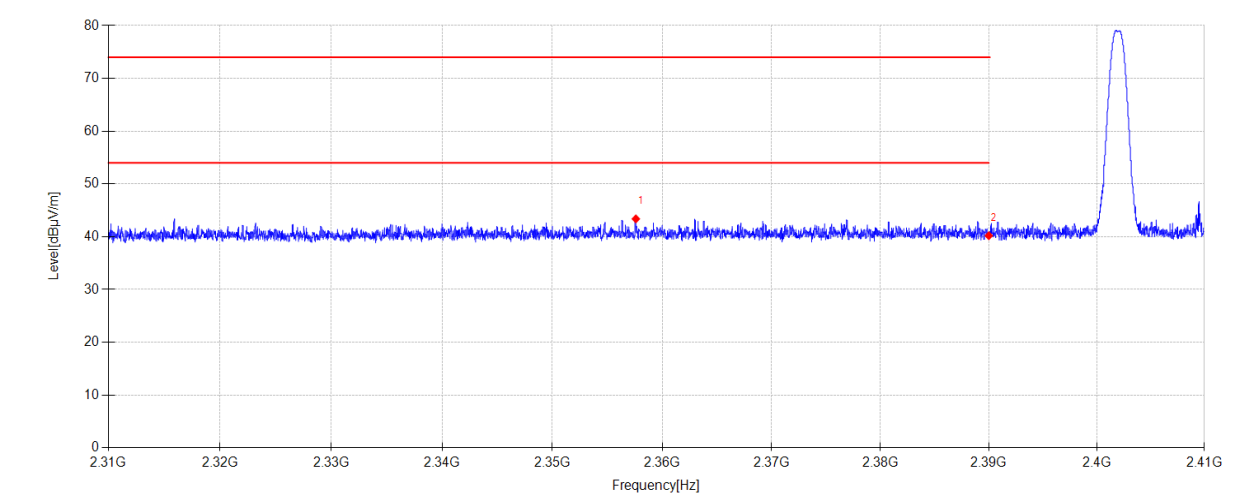

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2357.600	12.70	27.13	3.55	0.00	43.38	74.00	30.62	PK	Horizontal
2	2390.000	9.37	27.26	3.57	0.00	40.20	74.00	33.80	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\27

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

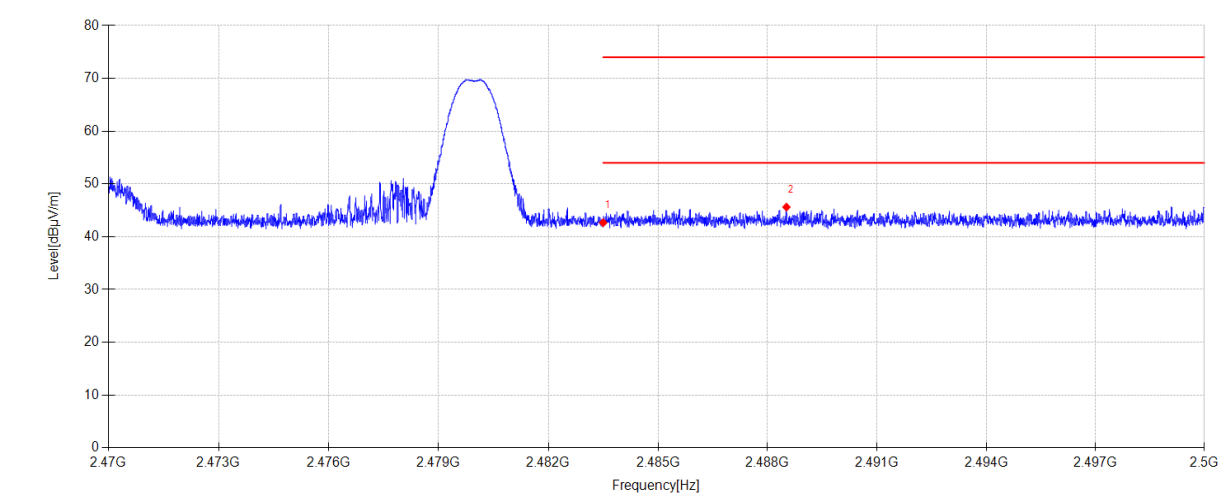

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.52	27.53	3.62	0.00	42.67	74.00	31.33	PK	Horizontal
2	2488.519	14.44	27.55	3.62	0.00	45.61	74.00	28.39	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

2DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\28

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

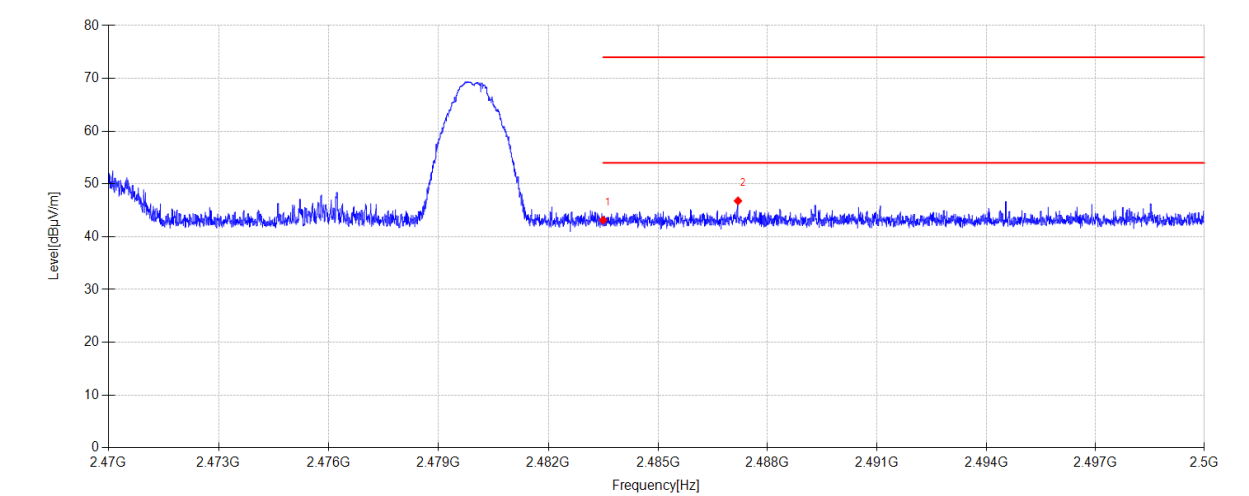

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.99	27.53	3.62	0.00	43.14	74.00	30.86	PK	Horizontal
2	2487.190	15.62	27.55	3.62	0.00	46.79	74.00	27.21	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

3DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\29

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

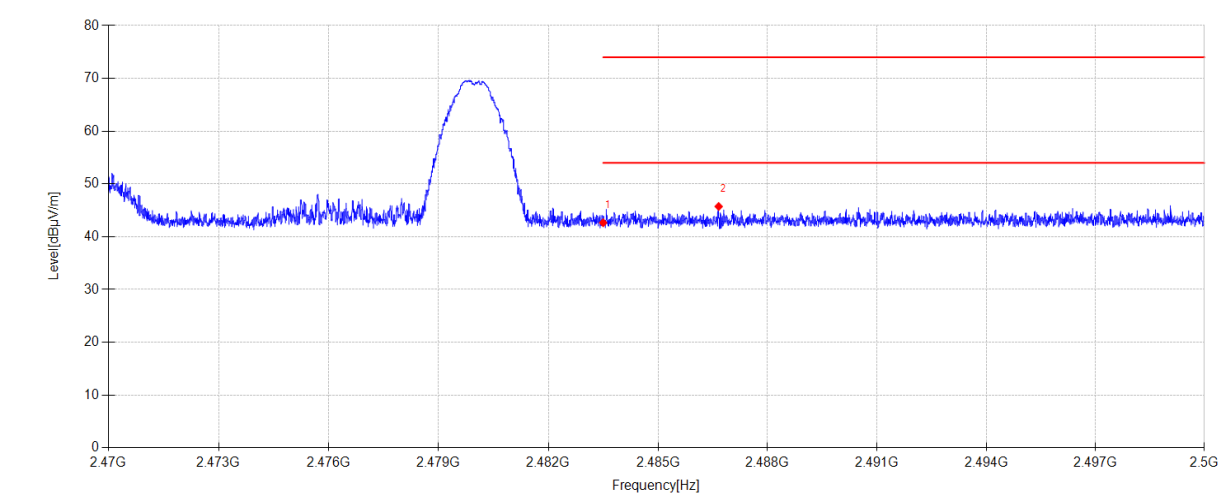

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.50	27.53	3.62	0.00	42.65	74.00	31.35	PK	Horizontal
2	2486.662	14.56	27.55	3.62	0.00	45.73	74.00	28.27	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

3DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\30

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

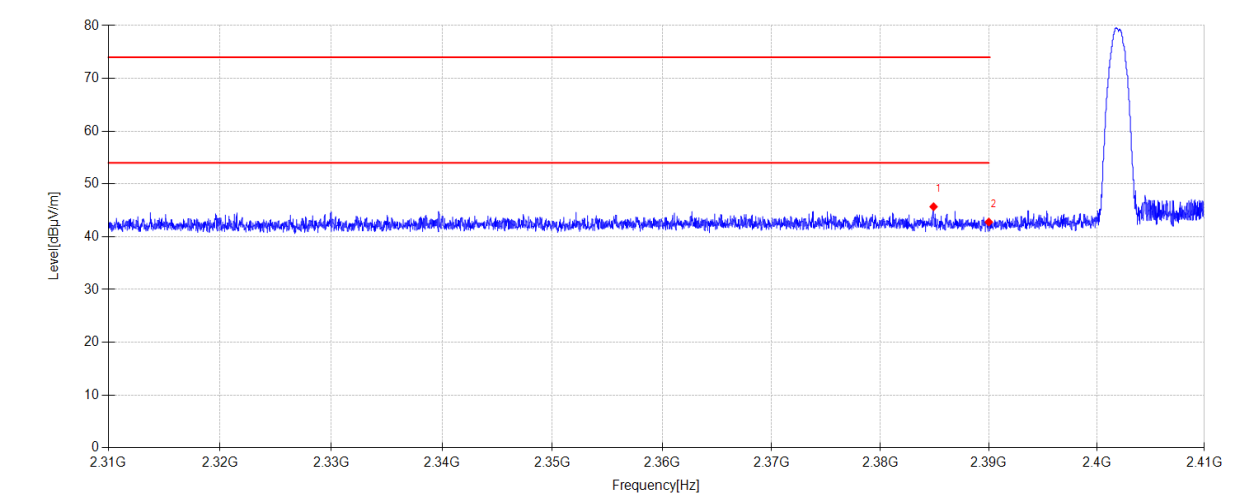

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.900	14.88	27.24	3.57	0.00	45.69	74.00	28.31	PK	Horizontal
2	2390.000	11.95	27.26	3.57	0.00	42.78	74.00	31.22	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

2DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\31

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

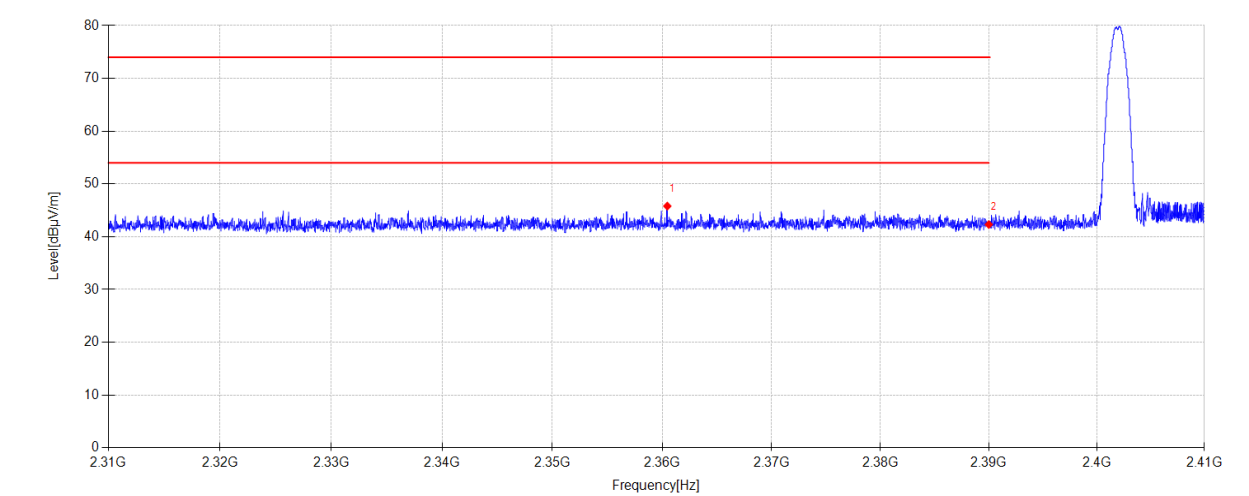

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2360.470	15.11	27.14	3.55	0.00	45.80	74.00	28.20	PK	Horizontal
2	2390.000	11.49	27.26	3.57	0.00	42.32	74.00	31.68	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-12

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BH

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\32

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

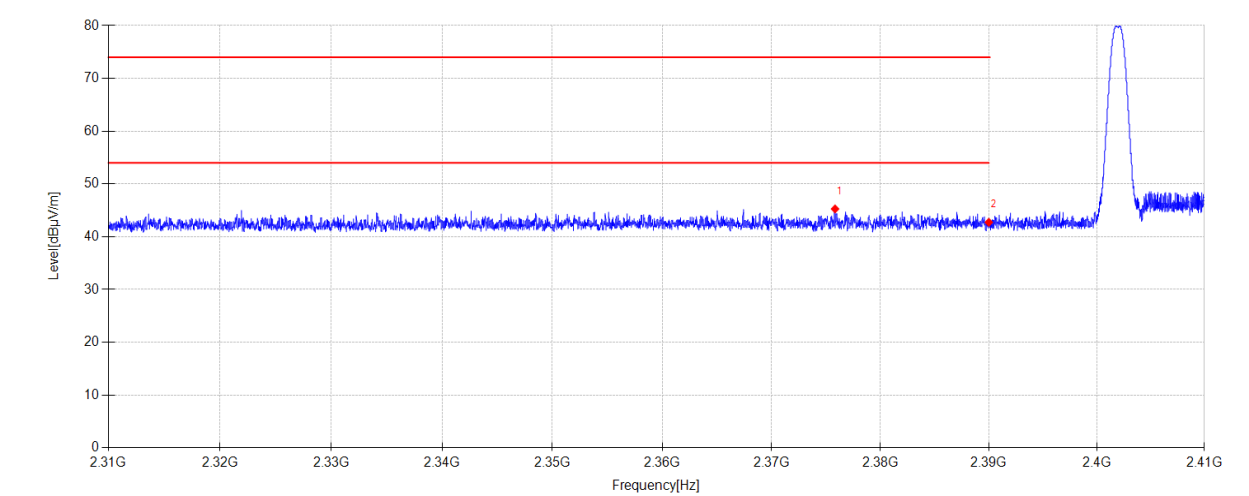

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.830	14.51	27.20	3.56	0.00	45.27	74.00	28.73	PK	Horizontal
2	2390.000	11.90	27.26	3.57	0.00	42.73	74.00	31.27	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\75

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

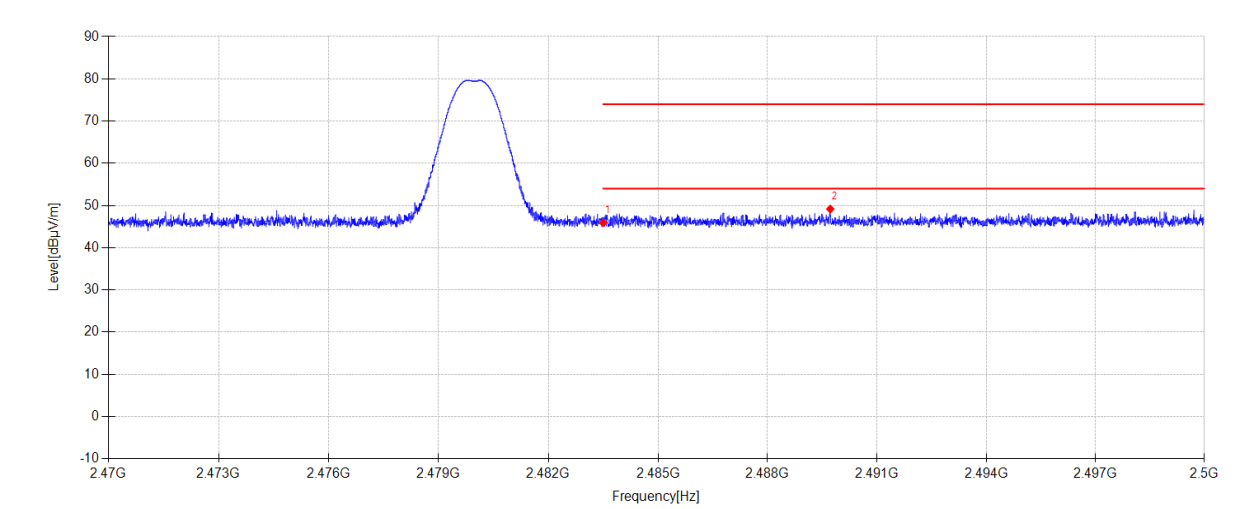

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	14.75	27.53	3.62	0.00	45.90	74.00	28.10	PK	Horizontal
2	2489.719	17.98	27.56	3.62	0.00	49.16	74.00	24.84	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

2DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\76

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

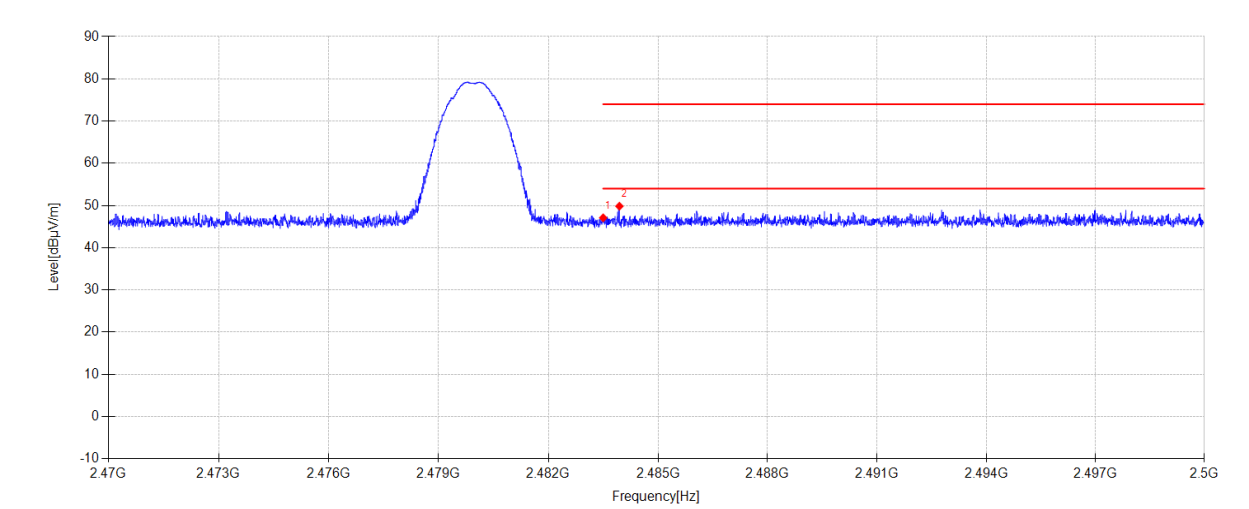

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.93	27.53	3.62	0.00	47.08	74.00	26.92	PK	Horizontal
2	2483.944	18.67	27.54	3.62	0.00	49.83	74.00	24.17	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

3DH5 2480 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\77

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

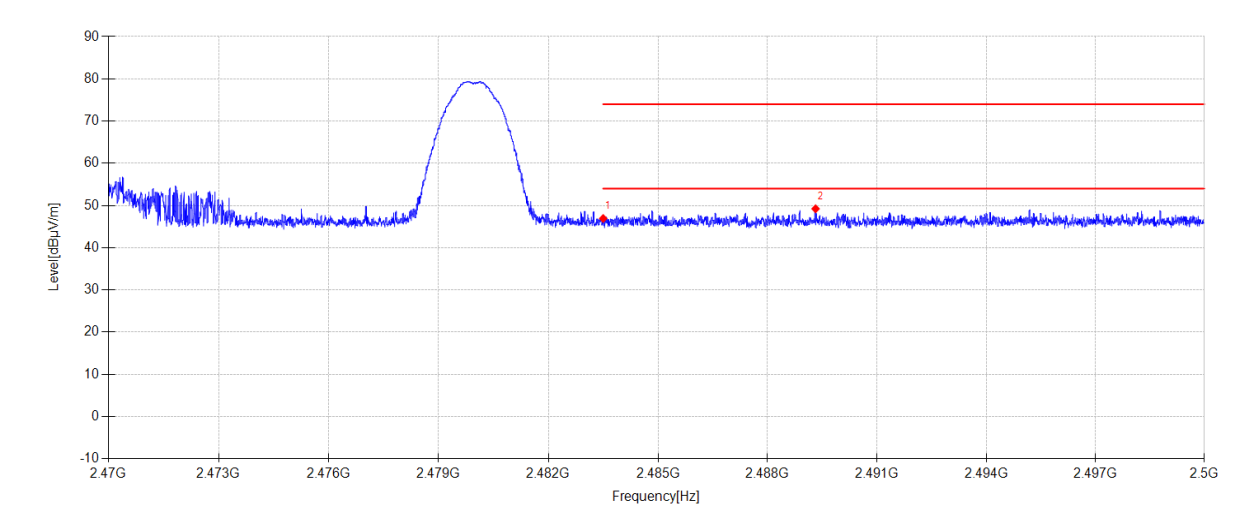

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	15.78	27.53	3.62	0.00	46.93	74.00	27.07	PK	Horizontal
2	2489.317	18.04	27.56	3.62	0.00	49.22	74.00	24.78	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

3DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\78

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

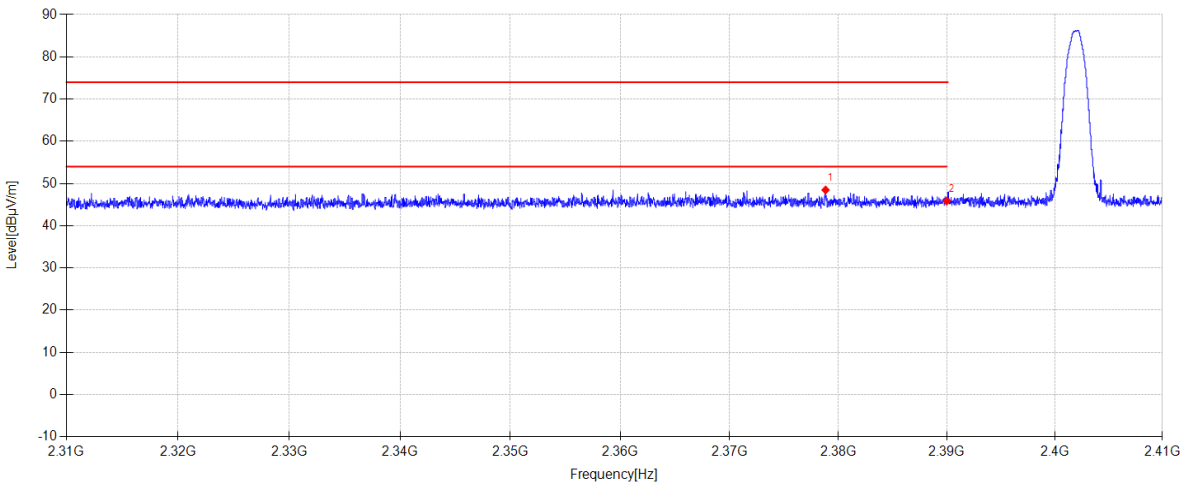

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.820	17.68	27.22	3.56	0.00	48.46	74.00	25.54	PK	Horizontal
2	2390.000	15.03	27.26	3.57	0.00	45.86	74.00	28.14	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

2DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\79

Memo:

Sample Numbre:S24072701-007 Power Setting:0

Test Graph

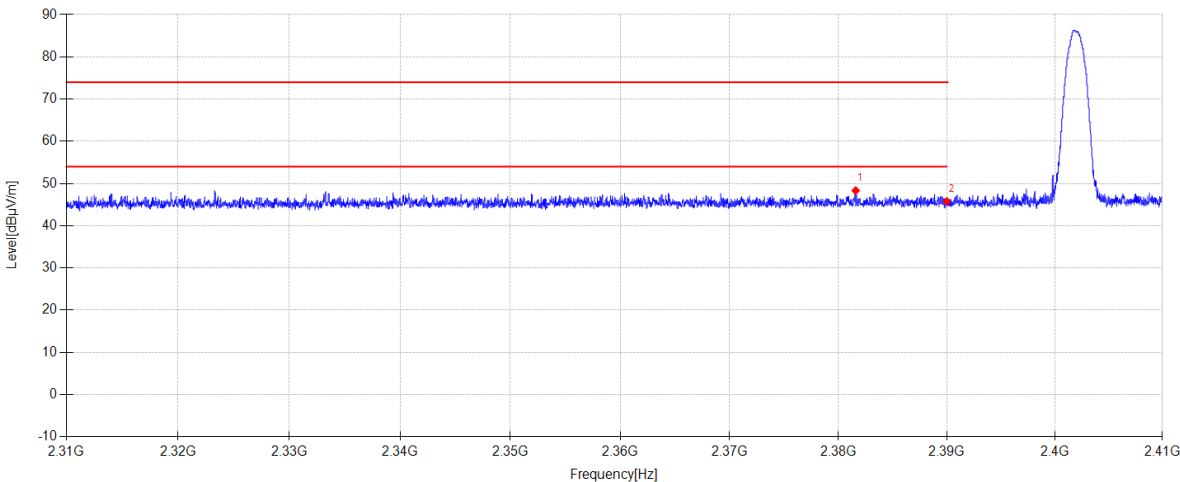

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.590	17.53	27.23	3.56	0.00	48.32	74.00	25.68	PK	Horizontal
2	2390.000	14.93	27.26	3.57	0.00	45.76	74.00	28.24	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Veritas

Model Number:

Veritas 2160BL

Test Mode:

DH5 2402 MHz TX

Power Supply:

AC 120/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24072701-1E\1107\80

Memo:

Sample Numbler:S24072701-007 Power Setting:0

Test Graph

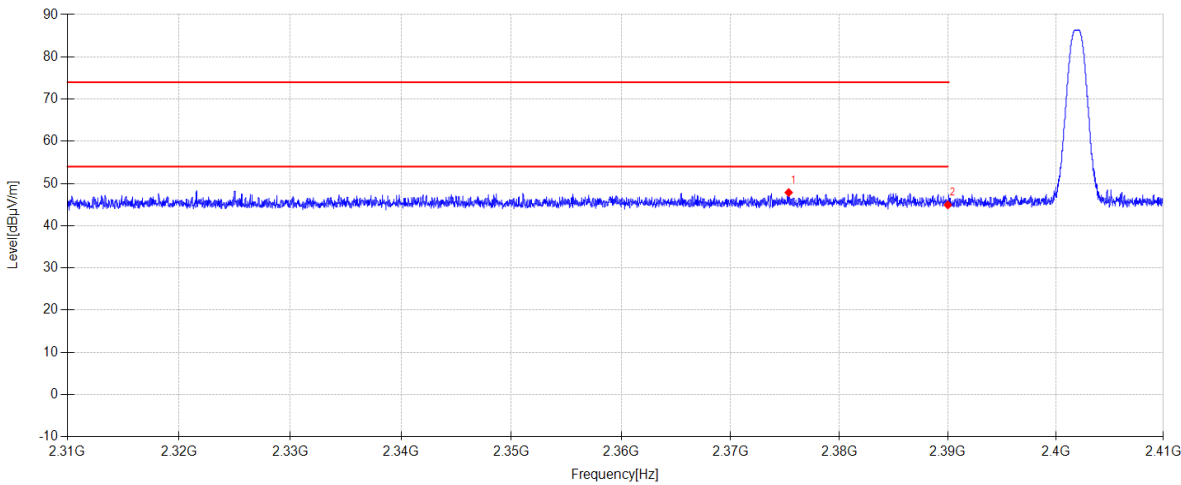

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.340	17.11	27.20	3.56	0.00	47.87	74.00	26.13	PK	Horizontal
2	2390.000	14.11	27.26	3.57	0.00	44.94	74.00	29.06	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

16. Power Line Conducted Emissions

16.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2025/07/08	1 Year
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2025/07/08	1 Year
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2025/07/08	1 Year
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2025/07/08	1 Year
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2025/07/08	1 Year
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/	/

16.2. Block diagram of test setup

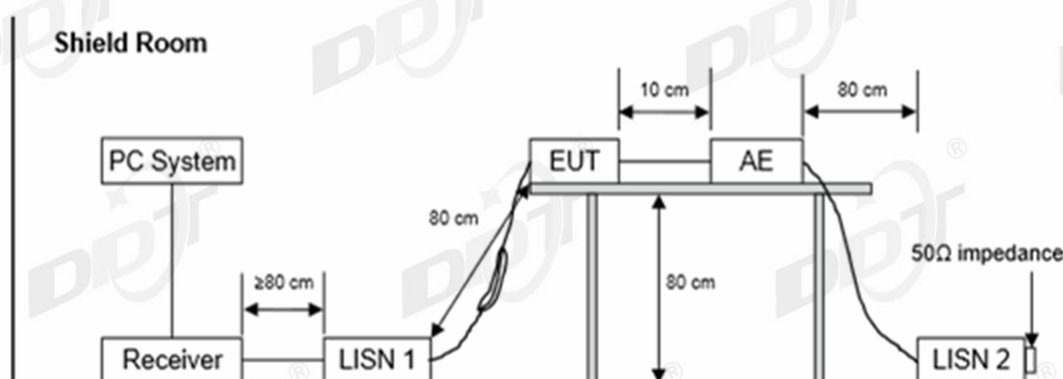

16.3. Limits

Frequency	Quasi-Peak Level dB(mV)	Average Level dB(mV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-05

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.6°C,Humi:51.7%

Memo

: S24072701-005

D:\2024 Report Date\Q24072701-1E\1105 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 2160BL


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/NEUTRAL

Data: 2

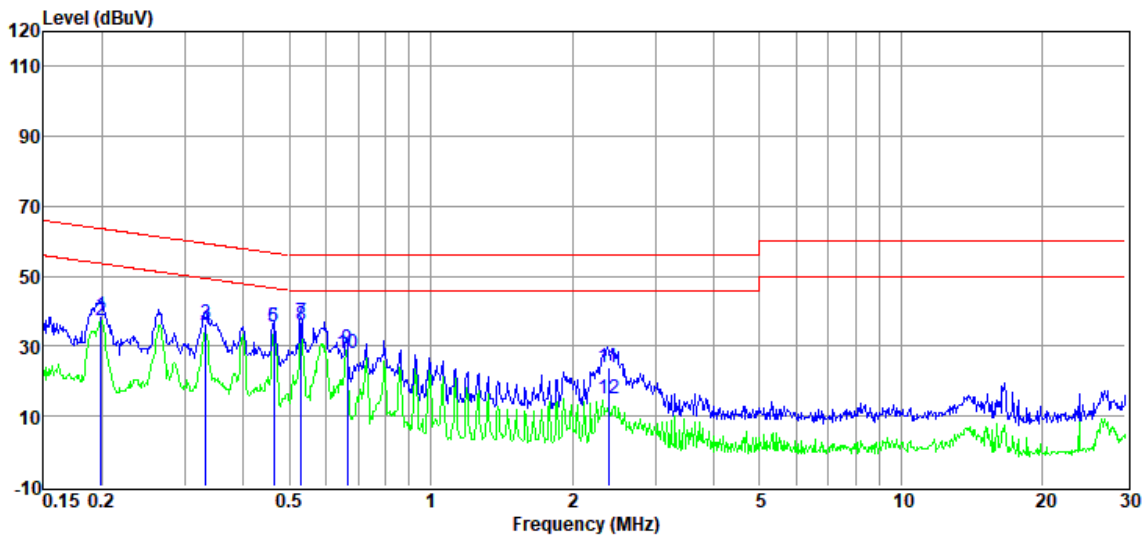

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.20	19.27	9.76	0.06	9.83	38.92	63.67	-24.75	QP	NEUTRAL
2	0.20	17.90	9.76	0.06	9.83	37.55	53.67	-16.12	Average	NEUTRAL
3	0.33	16.64	9.75	0.07	9.83	36.29	59.40	-23.11	QP	NEUTRAL
4	0.33	15.65	9.75	0.07	9.83	35.30	49.40	-14.10	Average	NEUTRAL
5	0.46	15.85	9.77	0.10	9.83	35.55	56.63	-21.08	QP	NEUTRAL
6	0.46	15.69	9.77	0.10	9.83	35.39	46.63	-11.24	Average	NEUTRAL
7	0.53	17.00	9.76	0.10	9.83	36.69	56.00	-19.31	QP	NEUTRAL
8	0.53	16.39	9.76	0.10	9.83	36.08	46.00	-9.92	Average	NEUTRAL
9	0.66	9.77	9.75	0.07	9.83	29.42	56.00	-26.58	QP	NEUTRAL
10	0.66	8.30	9.75	0.07	9.83	27.95	46.00	-18.05	Average	NEUTRAL
11	2.38	4.30	9.77	0.11	9.84	24.02	56.00	-31.98	QP	NEUTRAL
12	2.38	-4.58	9.77	0.11	9.84	15.14	46.00	-30.86	Average	NEUTRAL

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-05

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.6°C,Humi:51.7%

Memo

: S24072701-005

D:\2024 Report Date\Q24072701-1E\1105 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 2160BL


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/LINE

Data: 4

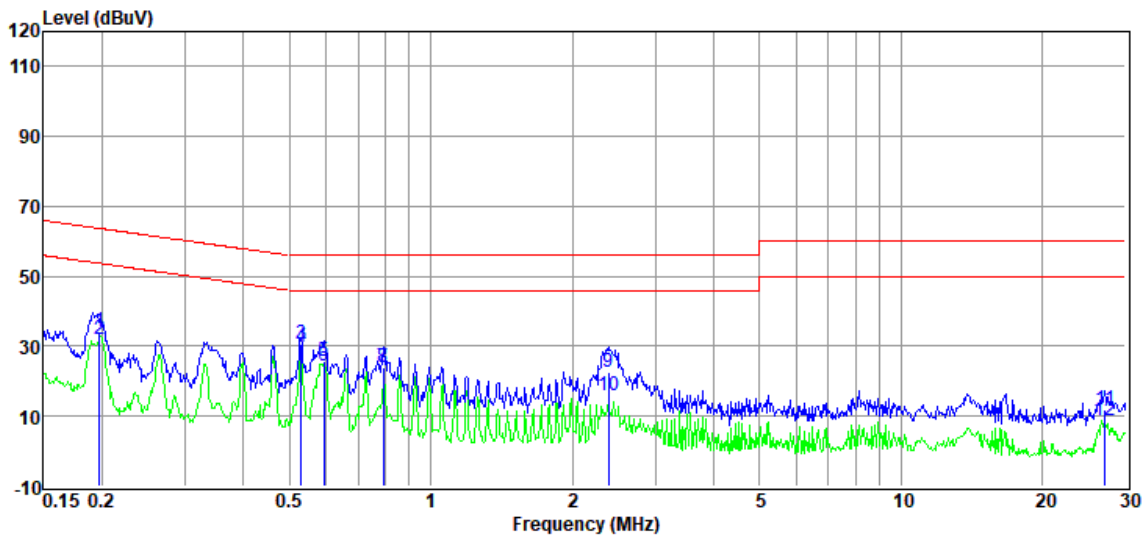

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.20	14.36	9.77	0.06	9.83	34.02	63.71	-29.69	QP	LINE
2	0.20	12.52	9.77	0.06	9.83	32.18	53.71	-21.53	Average	LINE
3	0.53	10.85	9.75	0.10	9.83	30.53	56.00	-25.47	QP	LINE
4	0.53	10.04	9.75	0.10	9.83	29.72	46.00	-16.28	Average	LINE
5	0.59	6.02	9.75	0.09	9.83	25.69	56.00	-30.31	QP	LINE
6	0.59	4.56	9.75	0.09	9.83	24.23	46.00	-21.77	Average	LINE
7	0.79	4.53	9.75	0.05	9.84	24.17	56.00	-31.83	QP	LINE
8	0.79	4.31	9.75	0.05	9.84	23.95	46.00	-22.05	Average	LINE
9	2.38	3.08	9.76	0.11	9.84	22.79	56.00	-33.21	QP	LINE
10	2.38	-4.01	9.76	0.11	9.84	15.70	46.00	-30.30	Average	LINE
11	27.13	-8.73	10.18	0.31	9.96	11.72	60.00	-48.28	QP	LINE
12	27.13	-11.76	10.18	0.31	9.96	8.69	50.00	-41.31	Average	LINE

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-05

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.6°C,Humi:51.7%

Memo

: S24072701-007

D:\2024 Report Date\Q24072701-1E\1105 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 1100BH


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/LINE

Data: 14

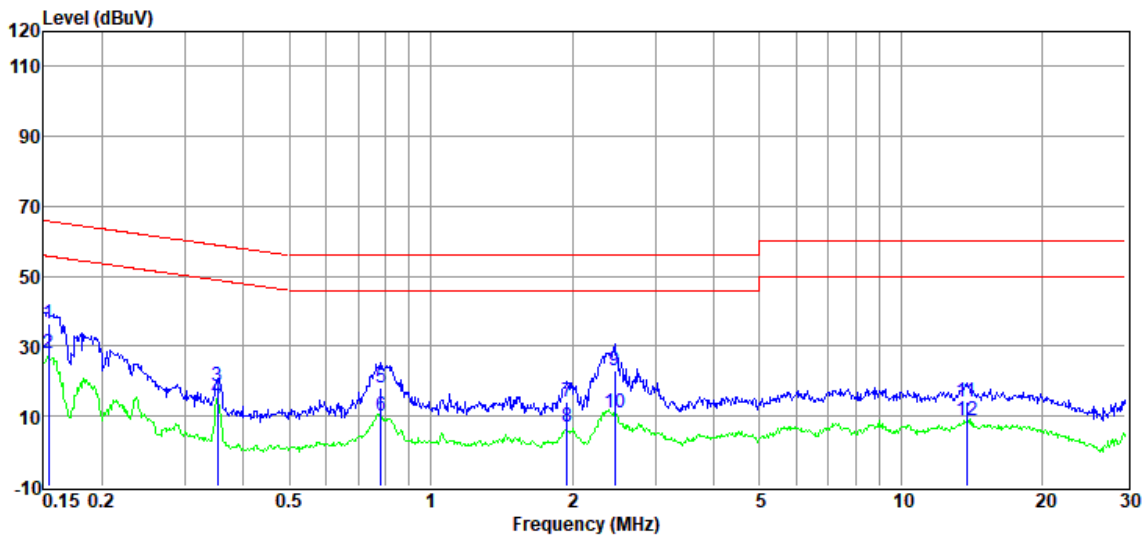

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	16.58	9.78	0.07	9.83	36.26	65.78	-29.52	QP	LINE
2	0.15	8.12	9.78	0.07	9.83	27.80	55.78	-27.98	Average	LINE
3	0.35	-0.98	9.76	0.08	9.83	18.69	58.91	-40.22	QP	LINE
4	0.35	-4.73	9.76	0.08	9.83	14.94	48.91	-33.97	Average	LINE
5	0.78	-1.59	9.75	0.05	9.84	18.05	56.00	-37.95	QP	LINE
6	0.78	-9.65	9.75	0.05	9.84	9.99	46.00	-36.01	Average	LINE
7	1.95	-5.77	9.75	0.11	9.84	13.93	56.00	-42.07	QP	LINE
8	1.95	-12.91	9.75	0.11	9.84	6.79	46.00	-39.21	Average	LINE
9	2.46	3.19	9.76	0.11	9.84	22.90	56.00	-33.10	QP	LINE
10	2.46	-8.73	9.76	0.11	9.84	10.98	46.00	-35.02	Average	LINE
11	13.77	-5.79	9.89	0.23	9.90	14.23	60.00	-45.77	QP	LINE
12	13.77	-11.24	9.89	0.23	9.90	8.78	50.00	-41.22	Average	LINE

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-05

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.6°C,Humi:51.7%

Memo

: S24072701-007

D:\2024 Report Date\Q24072701-1E\1105 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 1100BH


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/NEUTRAL

Data: 16

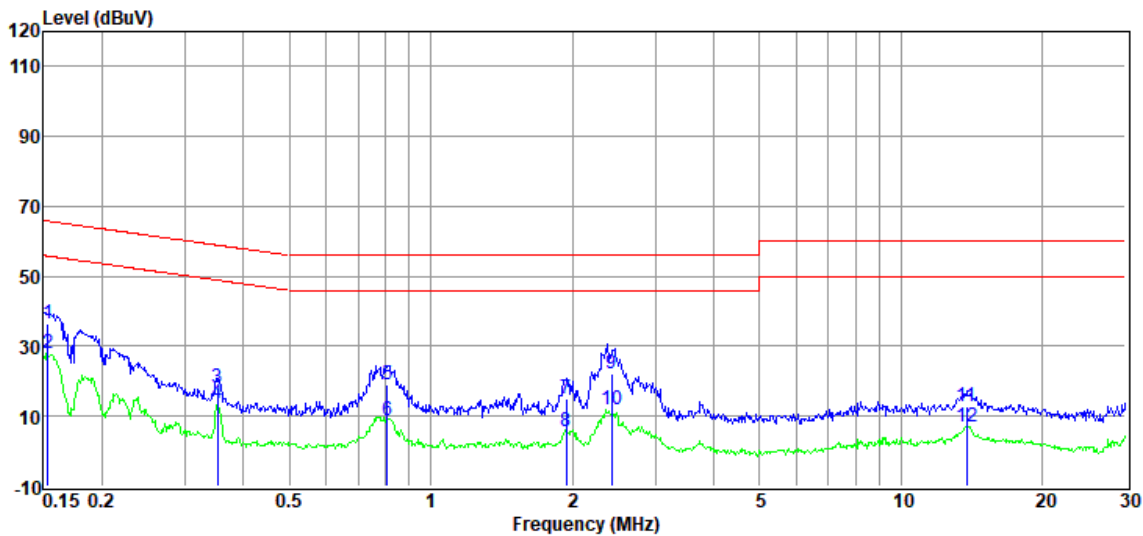

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	16.90	9.78	0.07	9.83	36.58	65.82	-29.24	QP	NEUTRAL
2	0.15	8.12	9.78	0.07	9.83	27.80	55.82	-28.02	Average	NEUTRAL
3	0.35	-1.61	9.75	0.08	9.83	18.05	58.91	-40.86	QP	NEUTRAL
4	0.35	-6.11	9.75	0.08	9.83	13.55	48.91	-35.36	Average	NEUTRAL
5	0.81	-0.75	9.75	0.05	9.84	18.89	56.00	-37.11	QP	NEUTRAL
6	0.81	-10.67	9.75	0.05	9.84	8.97	46.00	-37.03	Average	NEUTRAL
7	1.94	-4.83	9.77	0.11	9.84	14.89	56.00	-41.11	QP	NEUTRAL
8	1.94	-13.98	9.77	0.11	9.84	5.74	46.00	-40.26	Average	NEUTRAL
9	2.42	2.34	9.77	0.11	9.84	22.06	56.00	-33.94	QP	NEUTRAL
10	2.42	-8.05	9.77	0.11	9.84	11.67	46.00	-34.33	Average	NEUTRAL
11	13.77	-7.05	9.90	0.23	9.90	12.98	60.00	-47.02	QP	NEUTRAL
12	13.77	-12.91	9.90	0.23	9.90	7.12	50.00	-42.88	Average	NEUTRAL

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-22

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.8°C,Humi:51.9%

Memo

:

D:\2024 Report Date\Q24072701-1E\1122 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 2160BH


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/LINE

Data: 14

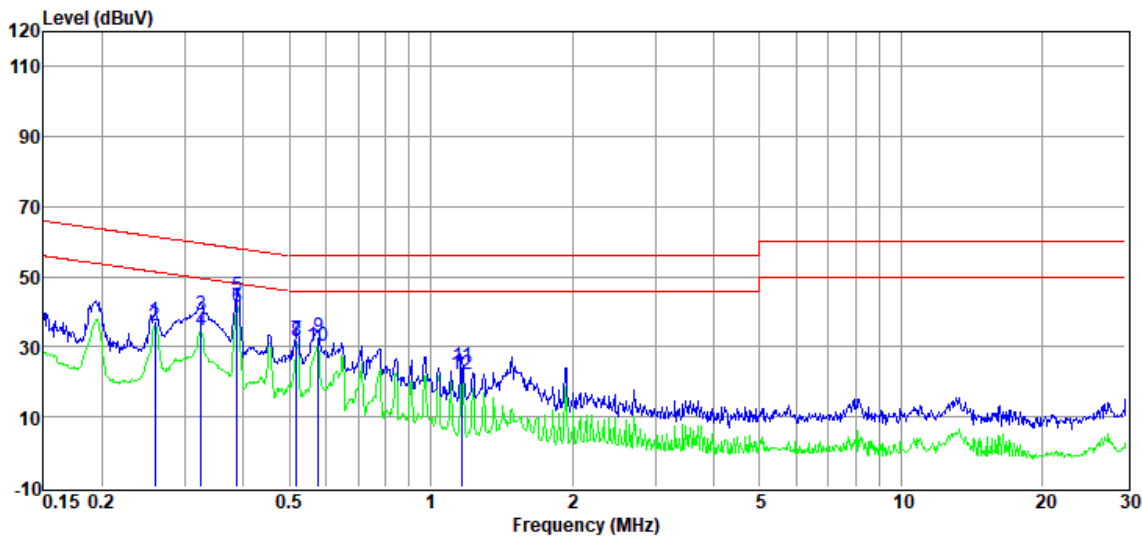

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.26	17.70	9.76	0.06	9.83	37.35	61.47	-24.12	QP	LINE
2	0.26	16.50	9.76	0.06	9.83	36.15	51.47	-15.32	Average	LINE
3	0.33	19.50	9.76	0.07	9.83	39.16	59.57	-20.41	QP	LINE
4	0.33	15.08	9.76	0.07	9.83	34.74	49.57	-14.83	Average	LINE
5	0.39	24.83	9.77	0.08	9.83	44.51	58.12	-13.61	QP	LINE
6	0.39	21.90	9.77	0.08	9.83	41.58	48.12	-6.54	Average	LINE
7	0.52	12.41	9.75	0.11	9.83	32.10	56.00	-23.90	QP	LINE
8	0.52	11.74	9.75	0.11	9.83	31.43	46.00	-14.57	Average	LINE
9	0.58	13.20	9.75	0.09	9.83	32.87	56.00	-23.13	QP	LINE
10	0.58	10.39	9.75	0.09	9.83	30.06	46.00	-15.94	Average	LINE
11	1.17	4.56	9.74	0.12	9.84	24.26	56.00	-31.74	QP	LINE
12	1.17	2.55	9.74	0.12	9.84	22.25	46.00	-23.75	Average	LINE

- Note:
1. Result Level = Read Level +LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-22

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.8°C,Humi:51.9%

Memo

:

D:\2024 Report Date\Q24072701-1E\1122 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 2160BH


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/NEUTRAL

Data: 16

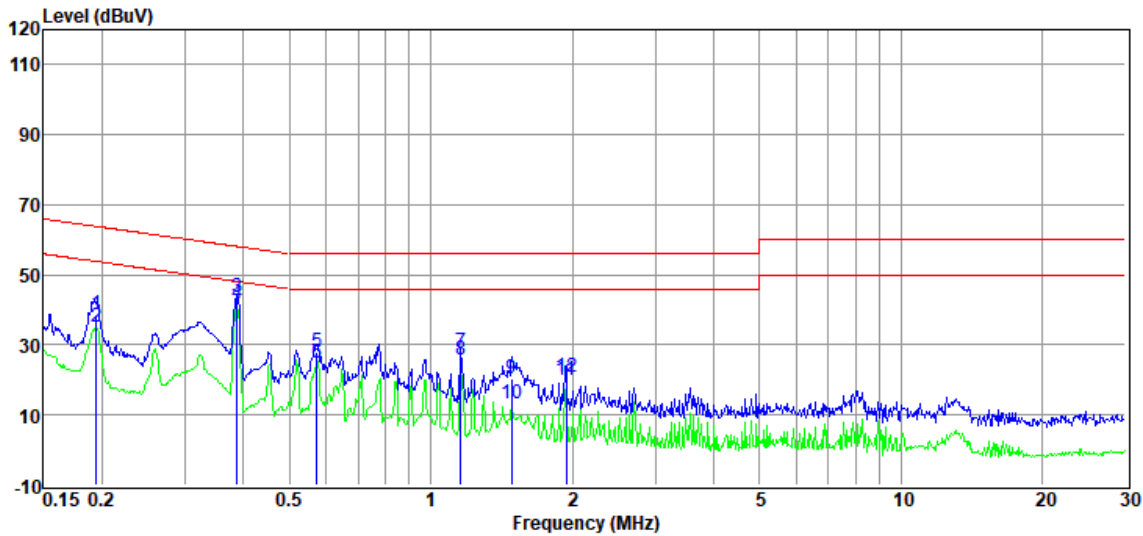

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	18.93	9.76	0.06	9.83	38.58	63.84	-25.26	QP	NEUTRAL
2	0.19	15.30	9.76	0.06	9.83	34.95	53.84	-18.89	Average	NEUTRAL
3	0.39	24.10	9.77	0.08	9.83	43.78	58.12	-14.34	QP	NEUTRAL
4	0.39	22.20	9.77	0.08	9.83	41.88	48.12	-6.24	Average	NEUTRAL
5	0.57	8.48	9.76	0.09	9.83	28.16	56.00	-27.84	QP	NEUTRAL
6	0.57	5.12	9.76	0.09	9.83	24.80	46.00	-21.20	Average	NEUTRAL
7	1.16	8.43	9.76	0.12	9.84	28.15	56.00	-27.85	QP	NEUTRAL
8	1.16	6.24	9.76	0.12	9.84	25.96	46.00	-20.04	Average	NEUTRAL
9	1.49	0.70	9.77	0.12	9.84	20.43	56.00	-35.57	QP	NEUTRAL
10	1.49	-6.38	9.77	0.12	9.84	13.35	46.00	-32.65	Average	NEUTRAL
11	1.94	0.14	9.77	0.11	9.84	19.86	56.00	-36.14	QP	NEUTRAL
12	1.94	1.10	9.77	0.11	9.84	20.82	46.00	-25.18	Average	NEUTRAL

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-06

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.6°C,Humi:51.7%

Memo

: S24072701-006

D:\2024 Report Date\Q24072701-1E\1105 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 250BL


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/LINE

Data: 26

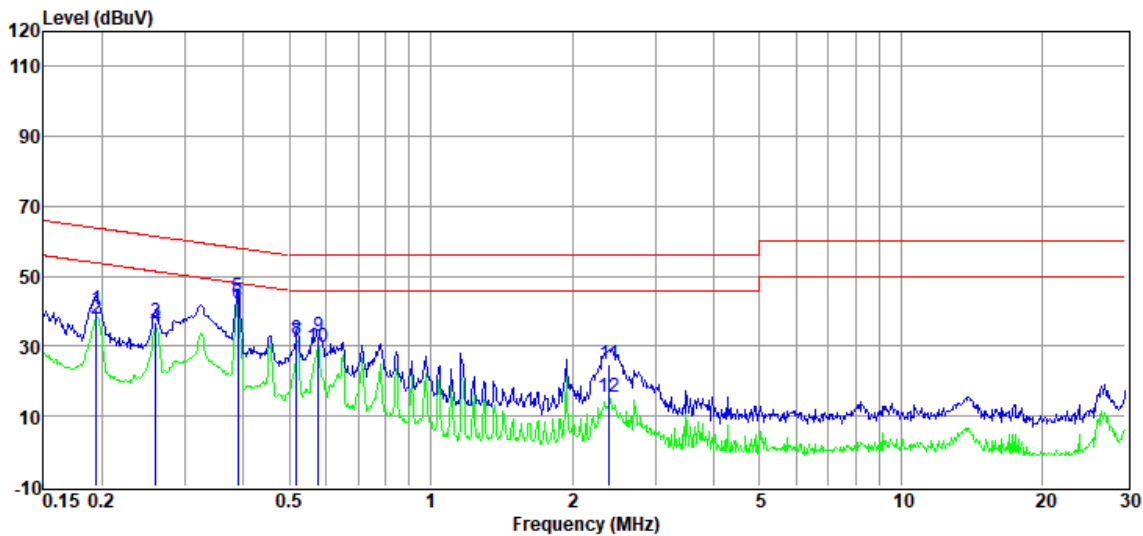

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.19	20.74	9.77	0.06	9.83	40.40	63.84	-23.44	QP	LINE
2	0.19	18.16	9.77	0.06	9.83	37.82	53.84	-16.02	Average	LINE
3	0.26	17.39	9.76	0.06	9.83	37.04	61.42	-24.38	QP	LINE
4	0.26	16.04	9.76	0.06	9.83	35.69	51.42	-15.73	Average	LINE
5	0.39	24.37	9.77	0.09	9.83	44.06	58.08	-14.02	QP	LINE
6	0.39	22.39	9.77	0.09	9.83	42.08	48.08	-6.00	Average	LINE
7	0.52	11.47	9.75	0.11	9.83	31.16	56.00	-24.84	QP	LINE
8	0.52	12.48	9.75	0.11	9.83	32.17	46.00	-13.83	Average	LINE
9	0.58	13.35	9.75	0.09	9.83	33.02	56.00	-22.98	QP	LINE
10	0.58	10.25	9.75	0.09	9.83	29.92	46.00	-16.08	Average	LINE
11	2.40	5.05	9.76	0.11	9.84	24.76	56.00	-31.24	QP	LINE
12	2.40	-4.39	9.76	0.11	9.84	15.32	46.00	-30.68	Average	LINE

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site

: DDT 6# Shield Room

Test Date

: 2024-11-06

EUT

: Veritas

Power Supply

: AC 120V/60Hz

Condition

: Temp:21.6°C,Humi:51.7%

Memo

: S24072701-006

D:\2024 Report Date\Q24072701-1E\1105 CE.EM6

Tested By

: Zhong Nan

Model Number

: Veritas 250BL


Test Mode

: BT Mode

LISN

: 2024 ENV216 3#/NEUTRAL

Data: 28

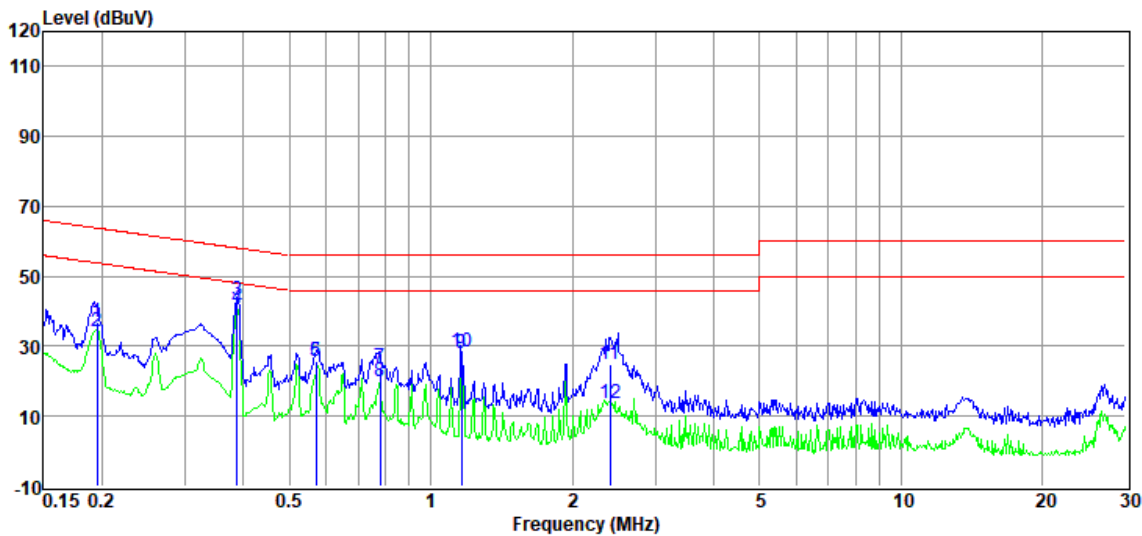

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.20	17.48	9.76	0.06	9.83	37.13	63.80	-26.67	QP	NEUTRAL
2	0.20	14.56	9.76	0.06	9.83	34.21	53.80	-19.59	Average	NEUTRAL
3	0.39	23.57	9.77	0.08	9.83	43.25	58.12	-14.87	QP	NEUTRAL
4	0.39	21.42	9.77	0.08	9.83	41.10	48.12	-7.02	Average	NEUTRAL
5	0.57	6.17	9.76	0.09	9.83	25.85	56.00	-30.15	QP	NEUTRAL
6	0.57	6.19	9.76	0.09	9.83	25.87	46.00	-20.13	Average	NEUTRAL
7	0.78	4.37	9.75	0.05	9.84	24.01	56.00	-31.99	QP	NEUTRAL
8	0.78	0.25	9.75	0.05	9.84	19.89	46.00	-26.11	Average	NEUTRAL
9	1.16	8.28	9.76	0.12	9.84	28.00	56.00	-28.00	QP	NEUTRAL
10	1.16	8.83	9.76	0.12	9.84	28.55	46.00	-17.45	Average	NEUTRAL
11	2.41	4.91	9.77	0.11	9.84	24.63	56.00	-31.37	QP	NEUTRAL
12	2.41	-6.16	9.77	0.11	9.84	13.56	46.00	-32.44	Average	NEUTRAL

- Note:
- Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 - If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 - Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

18. Photos of the EUT

Please refer to appendix I

-----End Report-----