

FCC TEST REPORT

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	SerComm Corporation
Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Equipment	Wireless ADSL Modem Router
Model No.	IP806GA/GBv2
FCC ID	P27IP806GAV2
Trade Name	Sercomm

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

1.	Report of Measurements and Examinations.....	4
1.1.	List of Measurements and Examinations	4
1.2.	Antenna Requirements.....	5
1.3.	Test of Conducted Emission	6
1.4.	Test of Radiated Emission.....	8
1.5.	6dB Bandwidth.....	9
1.6.	Maximum Peak Output Power	9
1.7.	Band Edges Measurement	10
1.8.	Power Spectral Density.....	10
1.9.	Restricted Bands of Operation.....	11
1.10.	Labeling Requirement	11
1.11.	RF Exposure	12
2.	Test Configuration of Equipment under Test.....	14
2.1.	Test Mode and Test Software.....	14
2.2.	Description of Test System	14
2.3.	Connection Diagram of Test System	15
2.4.	Feature of Equipment under Test	15
2.5.	RF Module Specifications	16
2.6.	History of this test report	16
3.	General Information of Test	17
4.	Test Result and Data.....	18
4.1.	Antenna Requirement	18
4.2.	Test Result of Conducted Emission	19
4.3.	RF Portion.....	45
4.4.	6dB Bandwidth Measurement Data.....	65
4.5.	Peak Output Power Measurement Data	72
4.6.	Band Edges Measurement Data	79
4.7.	Restrict band emission Measurement Data.....	88
4.8.	Power Spectral Density Measurement Data.....	98
5.	List of Measuring Equipment Used.....	105
	Appendix A. Photographs of EUT.....	A1 ~ A8

CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	SerComm Corporation
Address	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Equipment	Wireless ADSL Modem Router
Model No.	IP806GA/GBv2
FCC ID	P27IP806GAV2

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4**. The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2003)**. The test was carried out on Dec. 15, 2004 at *Exclusive Certification Corp.*

Signature


Anson Chou / Manager Dec. 30, 2004

1. Report of Measurements and Examinations

1.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(c)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

Test by: Jerry Dec. 15, 2004

1.2. Antenna Requirements

1.2.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


1.3. Test of Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

1.3.1. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

1.3.2. Typical Test Setup Layout of Conducted Emission

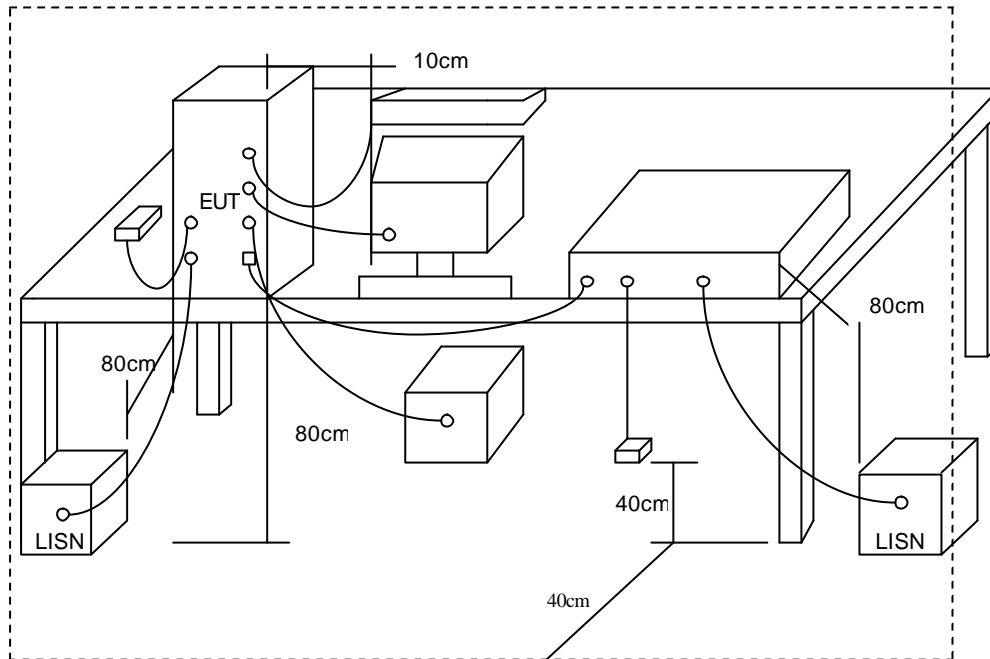

1.3.3. Conducted Emission Requirement

Except for A digital devices, for equipment that is designed to be connected to the public utility (AC) power line on any frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150KHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the Radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


1.4. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1.4.1. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

1.4.2. Typical Test Setup Layout of Radiated Emission

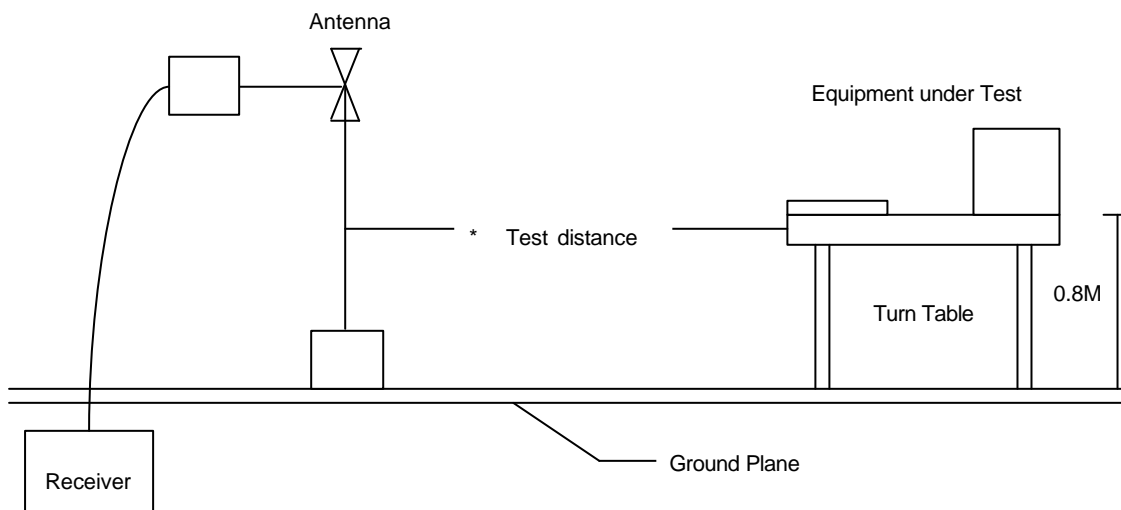


1.5. 6dB Bandwidth

1.5.1. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

1.5.2. Test Setup Layout :

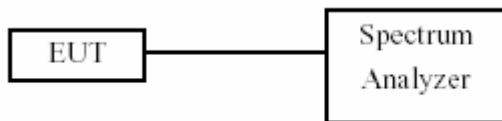


1.6. Maximum Peak Output Power

1.6.1. Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a spectrum analyzer. Power was read directly from the spectrum analyzer and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

1.6.2. Test Setup Layout :

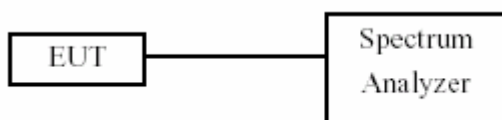

1.7. Band Edges Measurement

1.7.1. Test Procedure :


1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 MHz bandwidth from band edge.
3. The band edges was measured and recorded.

1.8. Power Spectral Density

1.8.1. Test Procedure :

1. The transmitter output was connected to spectrum analyzer.
2. The spectrum analyzer' s resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

1.8.2. Test Setup Layout :

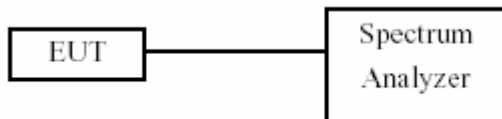

1.9. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

1.10. Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

1.11. RF Exposure

FCC Rules and Regulations Part 1.1307, 1.1310, 2.1091, 2.1093:

RF Exposure Compliance

1.11.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

*Plane-wave equivalent power density

1.11.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \cdot P \cdot G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

E = Electric field (V/m)

P = Peak output power (W)

G = Antenna numeric gain (numeric)

d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 10 W/m². We can change the formula to:

$$d = \sqrt{\frac{30 \cdot P \cdot G}{3770}}$$

1.11.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

2. Test Configuration of Equipment under Test

2.1. Test Mode and Test Software

The following test mode and test software was performed for conduction and radiation test:

- 802.11b (CH LO: 2412MHz) • 802.11b (CH MID: 2437MHz) • 802.11b (CH HI: 2462MHz)
- 802.11g (CH LO: 2412MHz) • 802.11g (CH MID: 2437MHz) • 802.11g (CH HI: 2462MHz)
- An executive programs, "Radio Scope.exe" Application under WIN XP.
- The test mode including two kind of antenna

Test mode 1: Antenna type 1: Integral dipole

Test mode 2: Antenna type 2: Reverse SMA connector, dipole antenna


2.2. Description of Test System

Device	Manufacturer	Model No.	Description
Device	Manufacturer	Model No.	Description
PC	IBM	IGV	Power Cable, Unshielding 1.8 m
Monitor	SlimAGE	510A	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA shielding 1.35 m
Keyboard	IBM	KB-0225	Data Cable, PS2 shielding 1.85 m
Mouse	IBM	MO28VO	Data Cable, USB shielding 1.85 m
Printer	HP	Desk Jet400	Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT Shielding 1.6 m
Monitor	IBM	90B88M6	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA Shielding 1..5 m
Notebook (Remote Site)	IBM	R40(2723-BV1)	Power Cable, Adapter Unshielding 1.8 m
C.O. (Remote Site)	PREMIER	MKCORO8X	Power Cable, Unshielding 1.8 m

Use Cable:

Cable	Description
RJ-45*3	Unshielding, 0.5m
RJ-11	Unshielding, 10m
RJ-45	Unshielding, 1m

2.3. Connection Diagram of Test System

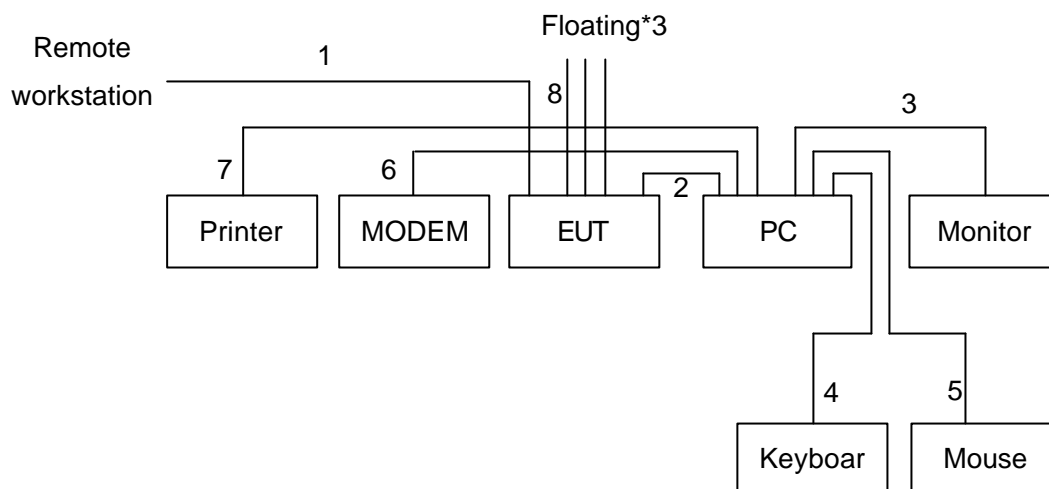

1. The RJ11 cable is connected form remote workstation to the EUT.
2. The RJ45 cable is connected form PC to the EUT.
3. The I/O cable is connected from PC to the Monitor.
4. The I/O cable is connected from PC to the Keyboard.
5. The I/O cable is connected from PC to the Mouse.
6. The I/O cable is connected from PC to the MODEM
7. The I/O cable is connected from PC to the Printer.
8. These RJ45 cables are floating.

2.4. Feature of Equipment under Test

ADSL Interface	T1.413, G.DMT, G.lite, multi-mode
Dimensions	189mm(W) * 122mm(D) * 33mm(H)
Operating Temperature	0° C to 40° C
Storage Temperature	-10° C to 70° C
Network Protocol:	TCP/IP
Network Interface:	4 * 10/100BaseT (RJ45) LAN connection 1 * RJ11 for ADSL line
LEDs	12
Power Adapter	12 V DC External

2.5. RF Module Specifications

Standard	IEEE 802.11b, IEEE 802.11g Standard
Chipset	TI TNETTW1130 MAC with Baseband processor
RF Chip	Transceiver, RADIA, RC2422 ; ISM, RADIA, RC2326
Host Interface	VLINQ Interface
Wireless system power	3.3V, 1.8V I/O Supply, 2.85V, RF Supply, 1.5V Core Supply, +/-5%
Frequency Range	2.412GHz-2.4835GHz
Modulation	<ul style="list-style-type: none"> ◆ 11g: Orthogonal Frequency Division Multiplexing (OFDM) ◆ 54Mbps/48Mbps: QAM-64 ◆ 36Mbps/24Mbps: QAM-16 ◆ 18Mbps/12Mbps: QPSK ◆ 9Mbps/6Mbps: BPSK ◆ 11b+: Packet Binary Convolution Coding (PBCC) ◆ 22Mbps/11Mbps/5.5Mbps: PBCC ◆ 11b: Direct Sequence Spread Spectrum (DSSS) ◆ 11Mbps/5.5Mbps: CCK ◆ 2Mbps: DQPSK ◆ 1Mbps: DBPSK
Number of Selectable Channels	<ul style="list-style-type: none"> ◆ USA, Canada (FCC): 11 channels (2.412GHz~2.462GHz) ◆ Europe (CE): 13 channels (2.412GHz~2.472GHz) ◆ Japan (TELEC): 14 channels (2.412GHz~2.4835GHz)
Preamble	<ul style="list-style-type: none"> ◆ 802.11b: Both Short and Long preamble ◆ 802.11g: Long preamble only
Throughput	TX: 15Mbps(minimum) and RX: 18Mbps (minimum) at 54Mbps
Security	Hardware-Based Encryption/Decryption Using 64-, 128-, and 256-Bit Wired-Equivalent Privacy (WEP) Keys
Output Power	54Mbps OFDM: +12~ 14dBm; 11Mbps CCK: 18dBm
Receiver Sensitivity	<ul style="list-style-type: none"> ◆ -72dBm at 54Mbps, 10% PER ◆ -72dBm at 48Mbps, 10% PER ◆ -75dBm at 36Mbps, 10% PER ◆ -79dBm at 24Mbps, 10% PER ◆ -82dBm at 18Mbps, 10% PER ◆ -83dBm at 22Mbps, 8% PER ◆ -84dBm at 12Mbps, 10% PER ◆ -82dBm at 11Mbps, 8% PER ◆ -87dBm at 9Mbps, 10% PER ◆ -88dBm at 6Mbps, 10% PER ◆ -85dBm at 5.5Mbps, 8% PER ◆ -86dBm at 2Mbps, 8% PER ◆ -89dBm at 1Mbps, 8% PER
Range	Indoors: up to 100meters; Outdoors: up to 400meters
Media Access Protocol	Media Access Protocol
Physical Specifications	Weight : 10g Dimension : 59.75 (L) x 44.6(W) mm
Environment Specifications	<ul style="list-style-type: none"> ◆ Operating Temperature : -5~60 ambient temperature ◆ Storage Temperature : -5~60 ambient temperature ◆ Operating humidity : 90% maximum (non-condensing) ◆ Storage humidity : 90% maximum (non-condensing)

2.6. History of this test report

ORIGINAL.

3. General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei County 223, Taiwan, R.O.C.
Test Voltage:	AC 110V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24620MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

4. Test Result and Data

4.1. Antenna Requirement

4.1.1. Antenna Construction and Directional Gain

Antenna type 1: Integral, dipole antenna

Antenna Gain: 2 dBi.

Antenna type 2: Reverse SMA connector, dipole antenna.

Antenna Gain: 2 dBi


4.2. Test Result of Conducted Emission

The test result including two kind of antenna

Test mode 1:

EUT : IP806GA/GB V2
Power : 110V 60Hz
Test Mode : 802.11b CH L0
Memo : antenna 1

Pol/Phase : NEUTRAL
Temperature : 25 °C
Humidity : 61 %

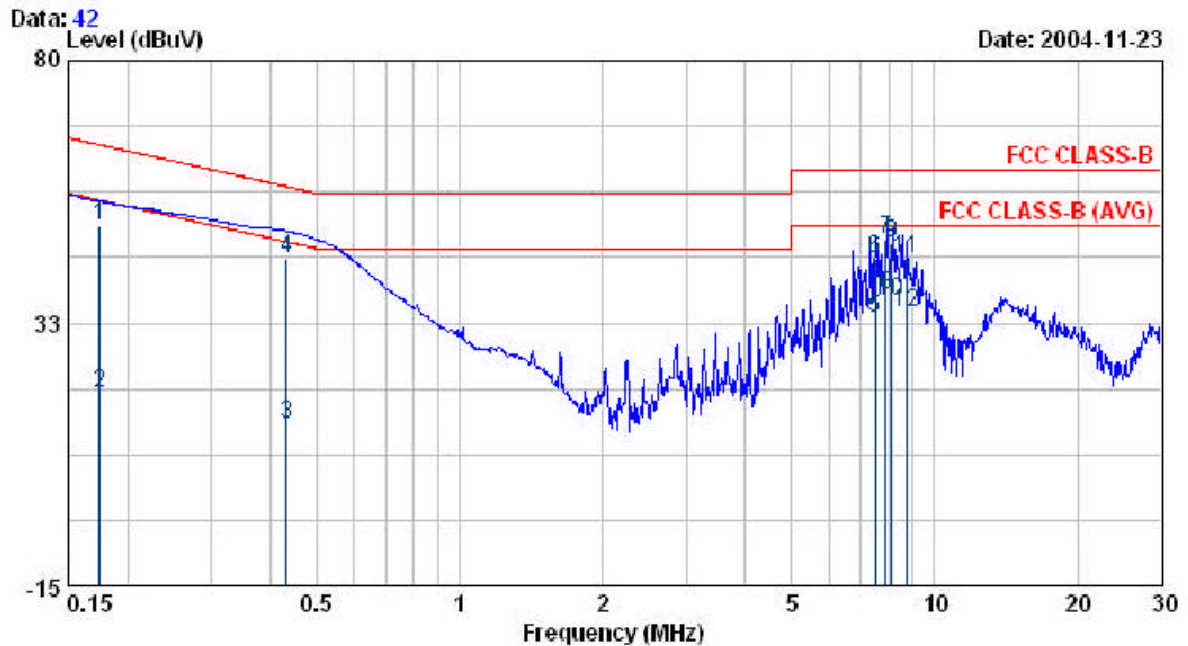

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.175	49.72	0.24	49.96	64.74	-14.78	QP
0.175	19.41	0.24	19.65	54.74	-35.09	AVERAGE
0.433	13.74	0.49	14.23	47.20	-32.97	AVERAGE
0.433	43.64	0.49	44.13	57.20	-13.07	QP
7.510	32.91	0.50	33.41	50.00	-16.59	AVERAGE
7.510	43.72	0.50	44.22	60.00	-15.78	QP
7.914	47.27	0.50	47.77	60.00	-12.23	QP
7.914	37.21	0.50	37.71	50.00	-12.29	AVERAGE
8.119	46.51	0.50	47.01	60.00	-12.99	QP
8.119	36.03	0.50	36.53	50.00	-13.47	AVERAGE
8.728	43.74	0.50	44.24	60.00	-15.76	QP
8.728	33.90	0.50	34.40	50.00	-15.60	AVERAGE


EUT : IP806GA/GB V2
 Power : 110V 60Hz
 Test Mode : 802.11b CH L0
 Memo : antenna 1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 61 %

Data: 44

Level (dBuV)

Date: 2004-11-23

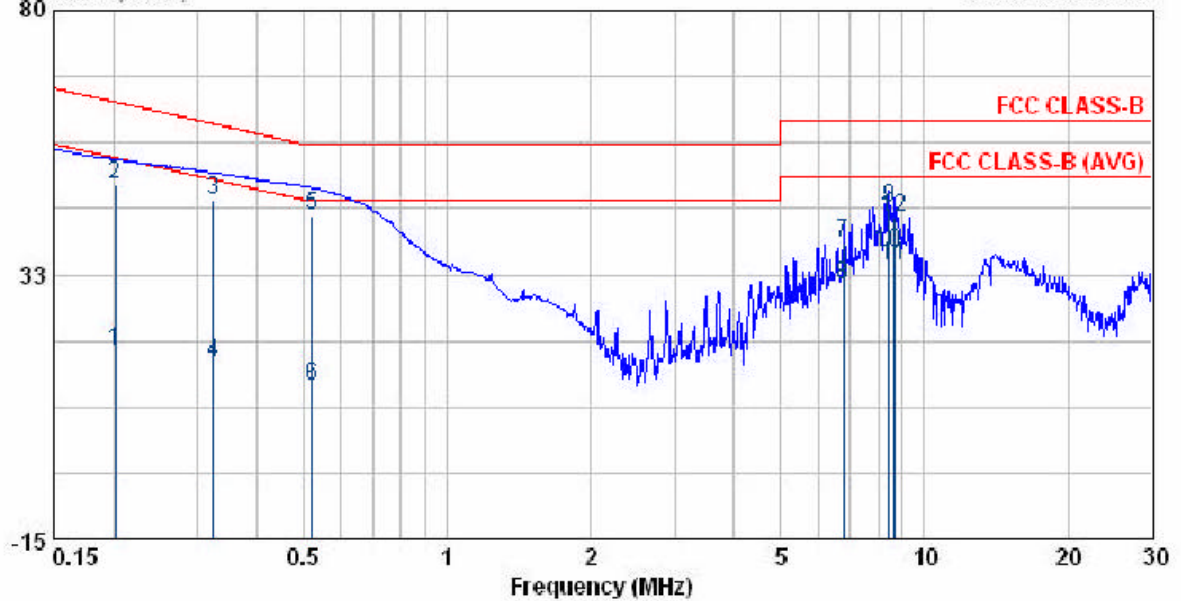

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	Limit	
0.202	18.59	0.20	18.79	53.54	-34.74	AVERAGE
0.202	48.62	0.20	48.82	63.54	-14.71	QP
0.323	45.45	0.41	45.86	59.63	-13.77	QP
0.323	16.09	0.41	16.50	49.63	-33.13	AVERAGE
0.521	42.69	0.47	43.16	56.00	-12.84	QP
0.521	12.12	0.47	12.59	46.00	-33.41	AVERAGE
6.783	37.69	0.44	38.13	60.00	-21.87	QP
6.783	30.27	0.44	30.71	50.00	-19.29	AVERAGE
8.429	44.13	0.42	44.55	60.00	-15.45	QP
8.429	36.14	0.42	36.56	50.00	-13.44	AVERAGE
8.638	33.57	0.42	33.99	50.00	-16.01	AVERAGE
8.638	42.28	0.42	42.70	60.00	-17.30	QP


EUT : IP806GA/GB V2
 Power : 110V 60Hz
 Test Mode : 802.11b CH MID
 Memo : antenna 1

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 61 %

Data: 45

Level (dBuV)

Date: 2004-11-23

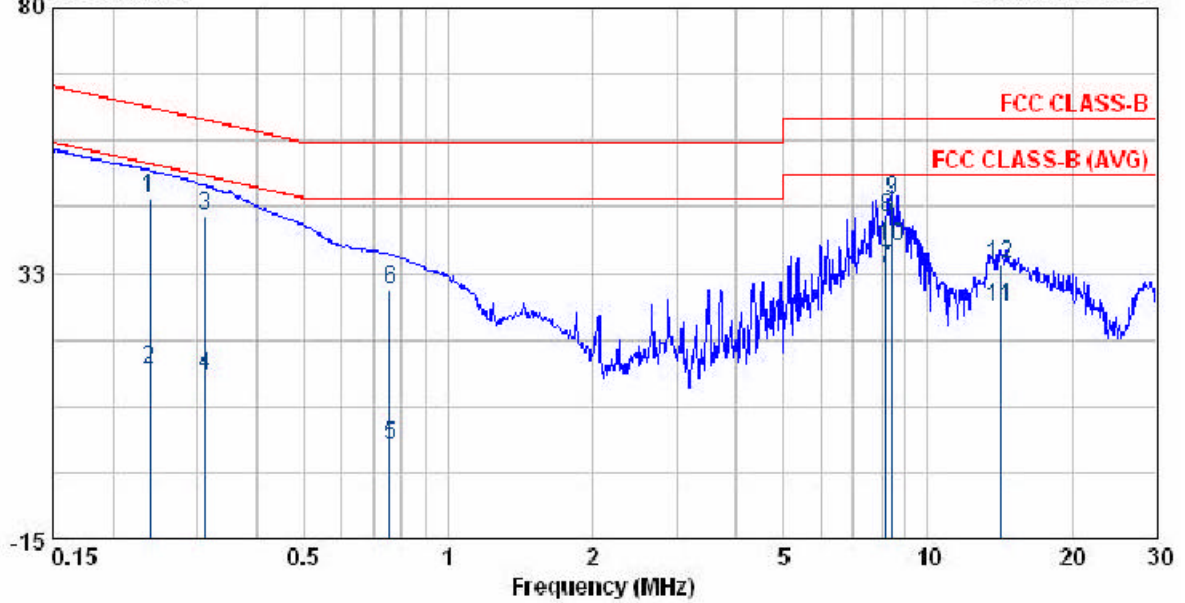

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.239	45.47	0.28	45.75	62.13	-16.38	QP
0.239	14.98	0.28	15.26	52.13	-36.87	AVERAGE
0.312	42.31	0.39	42.70	59.93	-17.23	QP
0.312	13.86	0.39	14.25	49.93	-35.68	AVERAGE
0.759	1.10	0.43	1.53	46.00	-44.47	AVERAGE
0.759	29.26	0.43	29.69	56.00	-26.31	QP
8.219	32.97	0.50	33.47	50.00	-16.53	AVERAGE
8.219	42.01	0.50	42.51	60.00	-17.49	QP
8.433	45.22	0.50	45.72	60.00	-14.28	QP
8.433	36.58	0.50	37.08	50.00	-12.92	AVERAGE
14.227	25.74	0.76	26.50	50.00	-23.50	AVERAGE
14.227	33.25	0.76	34.01	60.00	-25.99	QP


EUT : IP806GA/GB V2
 Power : 110V 60Hz
 Test Mode : 802.11b CH MID
 Memo : antenna 1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 61 %

Data: 43

Level (dBuV)

Date: 2004-11-23

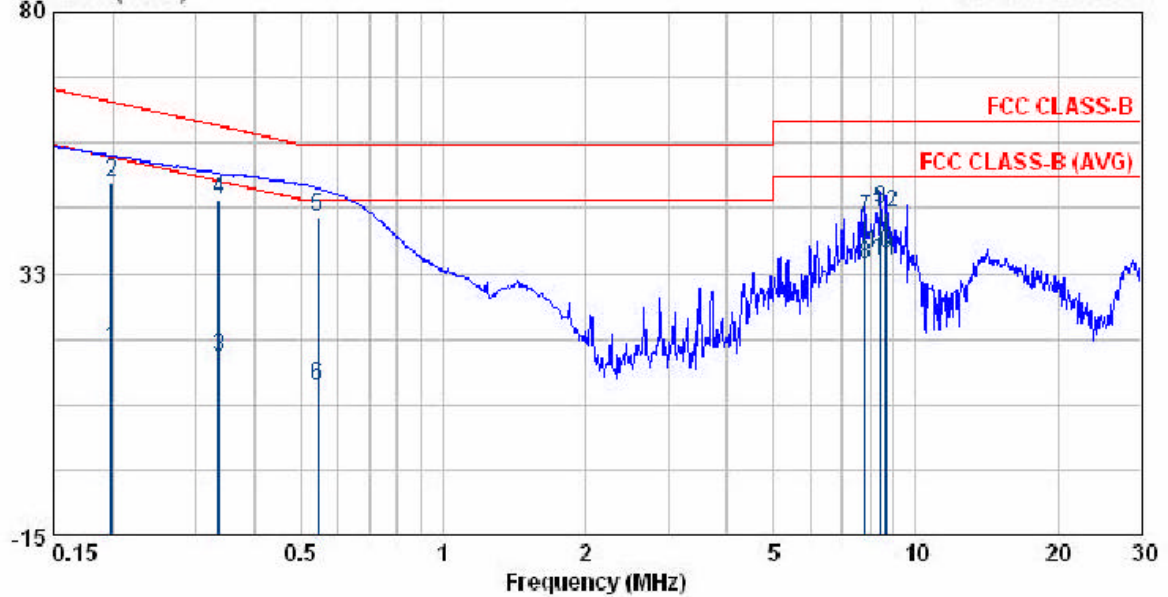

Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.199	18.59	0.20	18.79	53.67	-34.88	AVERAGE
0.199	48.83	0.20	49.03	53.67	-14.64	QP
0.336	17.10	0.42	17.52	49.31	-31.79	AVERAGE
0.336	45.34	0.42	45.76	49.31	-13.55	QP
0.544	42.35	0.47	42.82	56.00	-13.18	QP
0.544	11.53	0.47	12.00	46.00	-34.00	AVERAGE
7.814	41.90	0.43	42.33	60.00	-17.67	QP
7.814	33.47	0.43	33.90	50.00	-16.10	AVERAGE
8.429	43.65	0.42	44.07	60.00	-15.93	QP
8.429	35.71	0.42	36.13	50.00	-13.87	AVERAGE
8.637	34.31	0.42	34.73	50.00	-15.27	AVERAGE
8.637	43.07	0.42	43.49	60.00	-16.51	QP


EUT : IP806GA/GB V2
 Power : 110V 60Hz
 Test Mode : 802.11b CH HI
 Memo : antenna 1

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 61 %

Data: 46

Level (dBuV)

Date: 2004-11-23

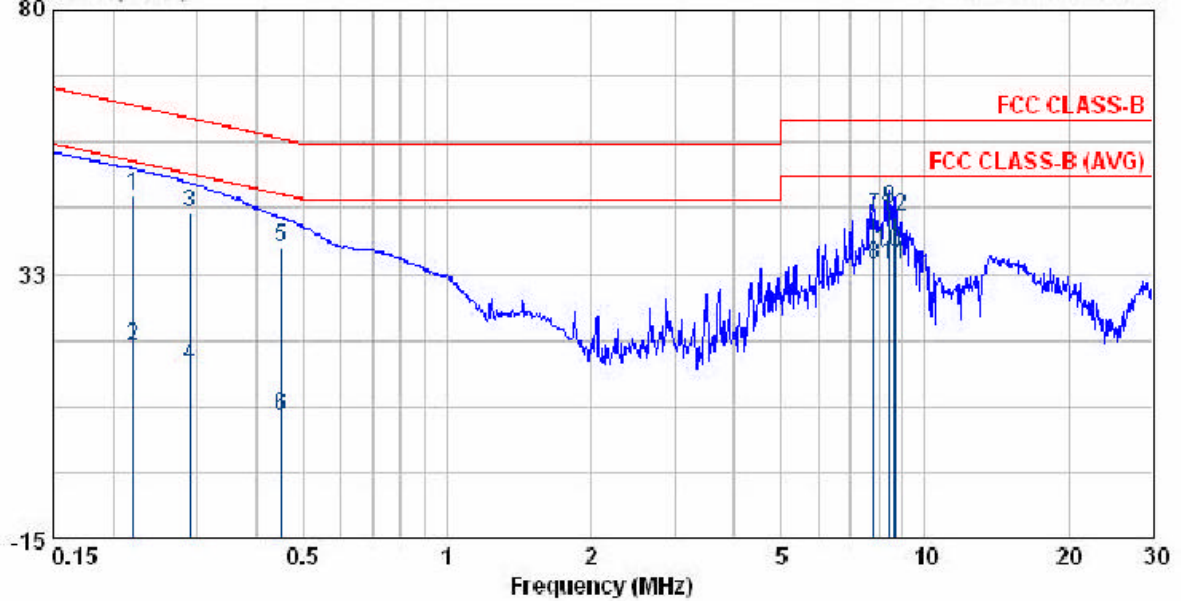

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.221	46.28	0.24	46.52	62.79	-16.27	QP
0.221	19.26	0.24	19.50	52.79	-33.29	AVERAGE
0.291	43.16	0.36	43.52	60.50	-16.98	QP
0.291	15.68	0.36	16.04	50.50	-34.46	AVERAGE
0.452	36.57	0.49	37.06	56.85	-19.79	QP
0.452	6.35	0.49	6.84	46.85	-40.01	AVERAGE
7.816	42.15	0.50	42.65	60.00	-17.35	QP
7.816	33.48	0.50	33.98	50.00	-16.02	AVERAGE
8.429	43.82	0.50	44.32	60.00	-15.68	QP
8.429	35.92	0.50	36.42	50.00	-13.58	AVERAGE
8.639	33.63	0.50	34.13	50.00	-15.87	AVERAGE
8.639	42.21	0.50	42.71	60.00	-17.29	QP


EUT : IP806GA/GB V2
 Power : 110V 60Hz
 Test Mode : 802.11b CH HI
 Memo : antenna 1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 61 %

Data: 47

Level (dBuV)

Date: 2004-11-23

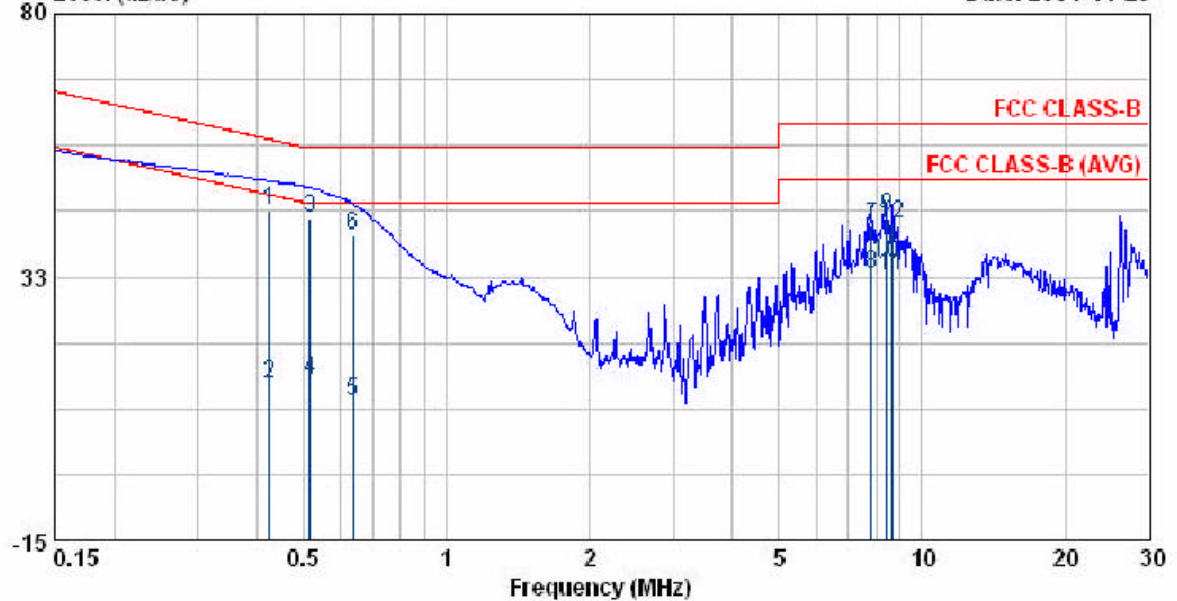

Freq	Read	Factor	Level	Limit	Over	Remark
MHz	dBuV	dB	dBuV	dBuV	Limit	dBuV
0.424	43.84	0.49	44.33	57.38	-13.04	QP
0.424	12.79	0.49	13.28	47.38	-34.09	AVERAGE
0.516	42.70	0.47	43.17	56.00	-12.83	QP
0.516	13.56	0.47	14.03	46.00	-31.97	AVERAGE
0.637	9.47	0.45	9.92	46.00	-36.08	AVERAGE
0.637	39.60	0.45	40.05	56.00	-15.95	QP
7.817	41.27	0.43	41.70	60.00	-18.30	QP
7.817	32.56	0.43	32.99	50.00	-17.01	AVERAGE
8.431	43.07	0.42	43.49	60.00	-16.51	QP
8.431	34.83	0.42	35.25	50.00	-14.75	AVERAGE
8.638	32.40	0.42	32.82	50.00	-17.18	AVERAGE
8.638	41.53	0.42	41.95	60.00	-18.05	QP