

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	236
A.2.3 Emissions in Non-restricted Frequency Bands.....	260
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	261
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	261
A.3.2 Measurement Plots	287
A.4 POWER SPECTRAL DENSITY	336
A.4.1 Power Spectral Density Result	336
A.4.2 Measurement Plots	359
A.5 FREQUENCY STABILITY	398
A.5.1 Frequency stability Result	398
A.6 BAND EDGE	399

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

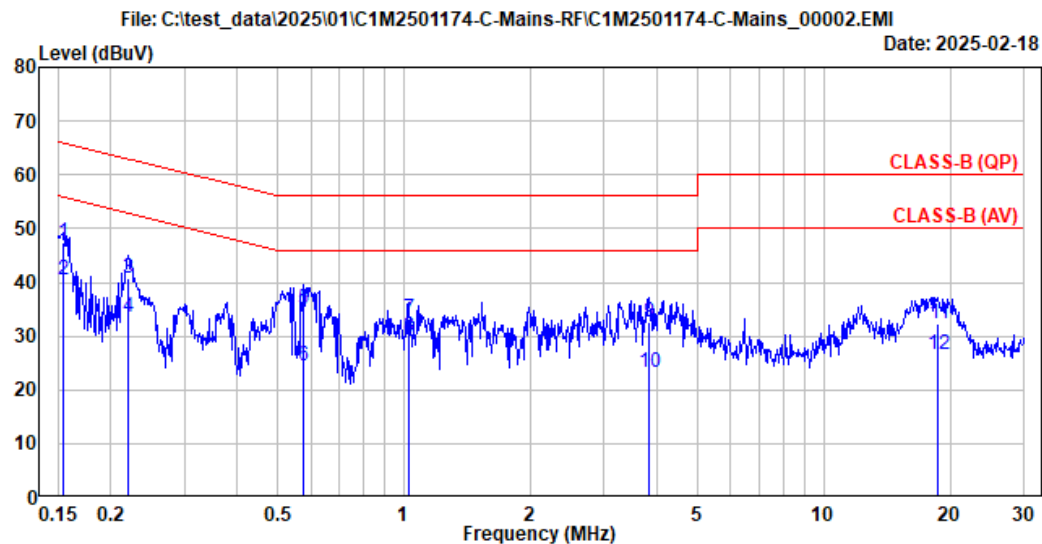

Site No. : No.8 Shielded Room Data No. : 2
Instrument 1 : Receiver ESR(774)
Instrument 2 : ENV432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B (QP) Phase : Neutral
Environment : 20°C/52% Test Rating : 120Vac/60Hz
EUT Model : 17Z90TR Engineer : Nick Du
Test Mode : OPERATING


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.27	0.03	9.87	27.19	47.36	65.79	18.43	QP
2	0.154	10.27	0.03	9.87	20.40	40.57	55.79	15.22	Average
3	0.220	10.26	0.03	9.86	20.73	40.88	62.81	21.93	QP
4	0.220	10.26	0.03	9.86	13.36	33.51	52.81	19.30	Average
5	0.576	10.26	0.03	9.88	14.88	35.05	56.00	20.95	QP
6	0.576	10.26	0.03	9.88	4.14	24.31	46.00	21.69	Average
7	1.027	10.27	0.04	9.89	12.88	33.08	56.00	22.92	QP
8	1.027	10.27	0.04	9.89	9.55	29.75	46.00	16.25	Average
9	3.829	10.34	0.08	9.90	12.36	32.68	56.00	23.32	QP
10	3.829	10.34	0.08	9.90	2.89	23.21	46.00	22.79	Average
11	18.778	10.86	0.19	10.00	11.25	32.30	60.00	27.70	QP
12	18.778	10.86	0.19	10.00	5.55	26.60	50.00	23.40	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/02/18	Temp./Hum.	20°C/52%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Nick Du

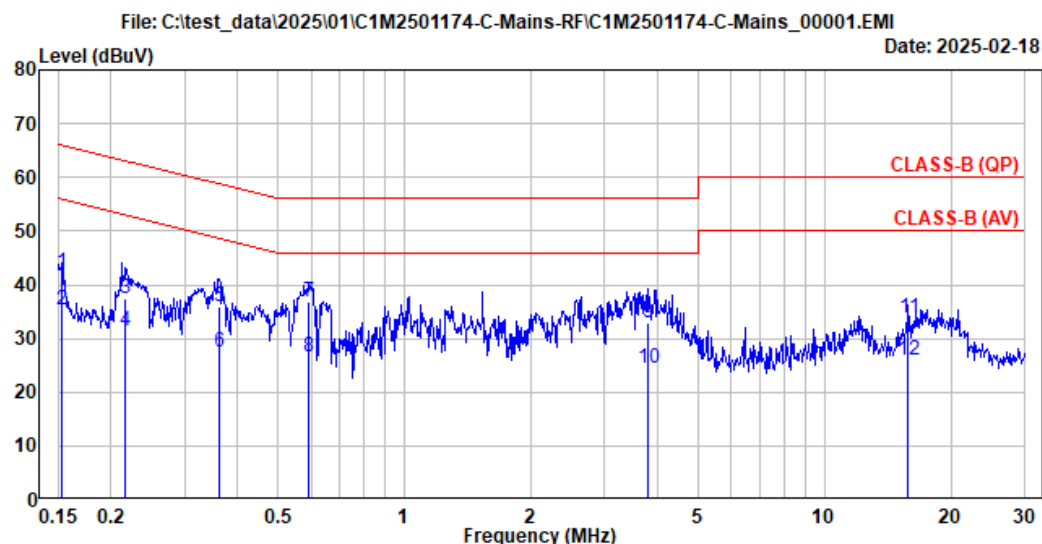

Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 20°C/52%	Test Rating	: 120Vac/60Hz
EUT Model	: 17Z90TR	Engineer	: Nick Du
Test Mode	: OPERATING		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	10.26	0.03	9.87	22.05	42.21	65.83	23.62	QP
2	0.153	10.26	0.03	9.87	15.28	35.44	55.83	20.39	Average
3	0.217	10.25	0.03	9.86	17.37	37.51	62.94	25.43	QP
4	0.217	10.25	0.03	9.86	11.32	31.46	52.94	21.48	Average
5	0.362	10.25	0.03	9.88	15.69	35.85	58.67	22.82	QP
6	0.362	10.25	0.03	9.88	7.30	27.46	48.67	21.21	Average
7	0.594	10.25	0.03	9.88	16.77	36.93	56.00	19.07	QP
8	0.594	10.25	0.03	9.88	6.47	26.63	46.00	19.37	Average
9	3.810	10.31	0.08	9.90	12.68	32.97	56.00	23.03	QP
10	3.810	10.31	0.08	9.90	4.26	24.55	46.00	21.45	Average
11	15.851	10.57	0.18	9.99	13.01	33.75	60.00	26.25	QP
12	15.851	10.57	0.18	9.99	5.10	25.84	50.00	24.16	Average

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/02/08 ~ 18	Temp./Hum.	20~25°C/51~56%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.1n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	23.36	1.39	26.47	28.51	26.79	40.00	13.21	Peak
151.500	16.18	3.08	25.98	35.41	28.69	43.50	14.81	Peak
445.500	21.93	6.20	26.73	38.08	39.48	46.00	6.52	Peak
594.000	24.00	6.80	27.36	32.55	35.99	46.00	10.01	Peak
742.500	24.75	7.53	27.32	38.03	42.98	46.00	3.02	Peak
989.500	26.91	8.95	26.73	27.22	36.35	54.00	17.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.500	22.05	1.43	26.46	40.99	38.01	40.00	1.99	Peak
162.500	15.48	3.19	25.93	38.37	31.12	43.50	12.38	Peak
445.500	21.93	6.20	26.73	35.26	36.66	46.00	9.34	Peak
594.000	24.00	6.80	27.36	31.86	35.30	46.00	10.70	Peak
742.500	24.75	7.53	27.32	36.18	41.13	46.00	4.87	Peak
979.500	26.83	8.90	26.76	27.13	36.10	54.00	17.90	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

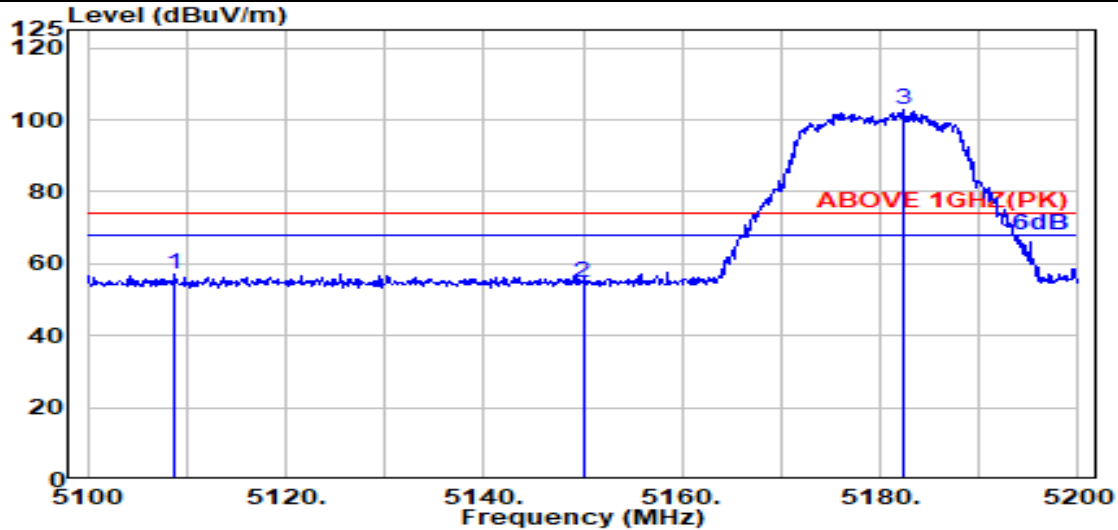

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5108.800	33.42	8.33	39.20	54.49	57.04	74.00	16.96	Peak
5150.000	33.50	8.37	39.19	52.25	54.93	74.00	19.07	Peak
@ 5182.300	33.69	8.41	39.19	99.78	102.69	---	---	Peak

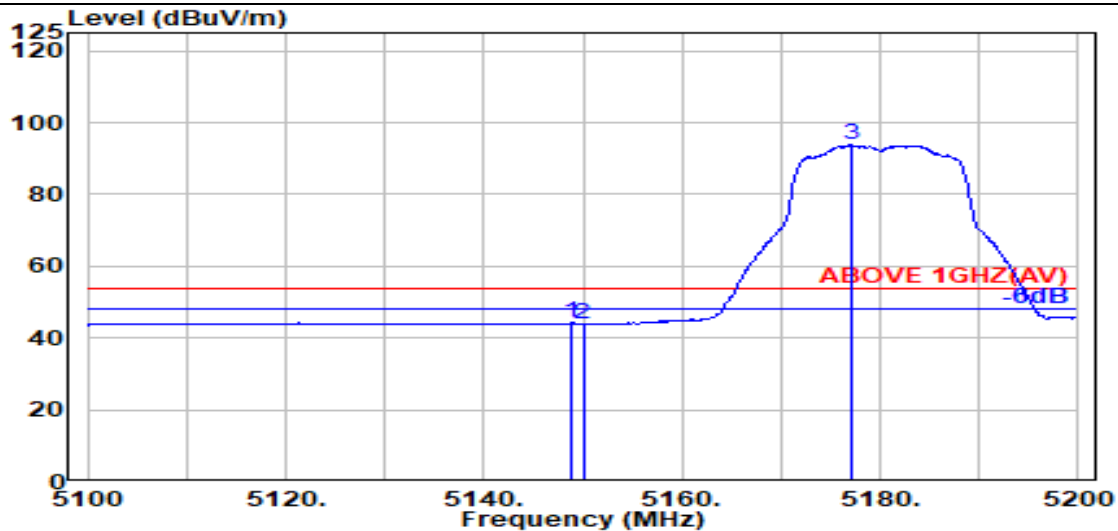

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.19	41.49	44.17	54.00	9.83	Average
5150.000	33.50	8.37	39.19	41.39	44.07	54.00	9.93	Average
@ 5177.000	33.66	8.40	39.19	90.86	93.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

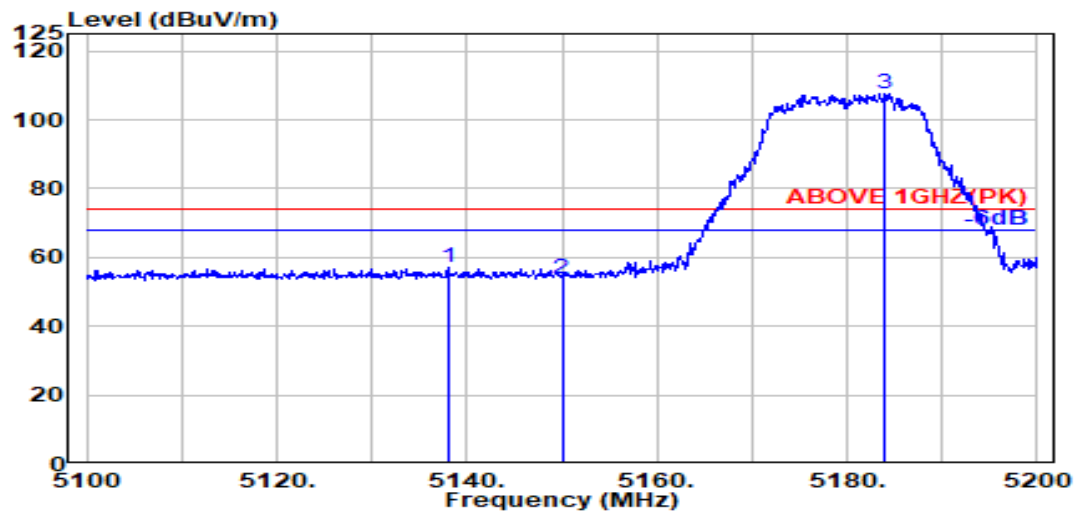

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.000	33.48	8.36	39.19	54.28	56.92	74.00	17.08	Peak
5150.000	33.50	8.37	39.19	51.31	53.99	74.00	20.01	Peak
@ 5183.900	33.70	8.41	39.19	104.73	107.66	---	---	Peak

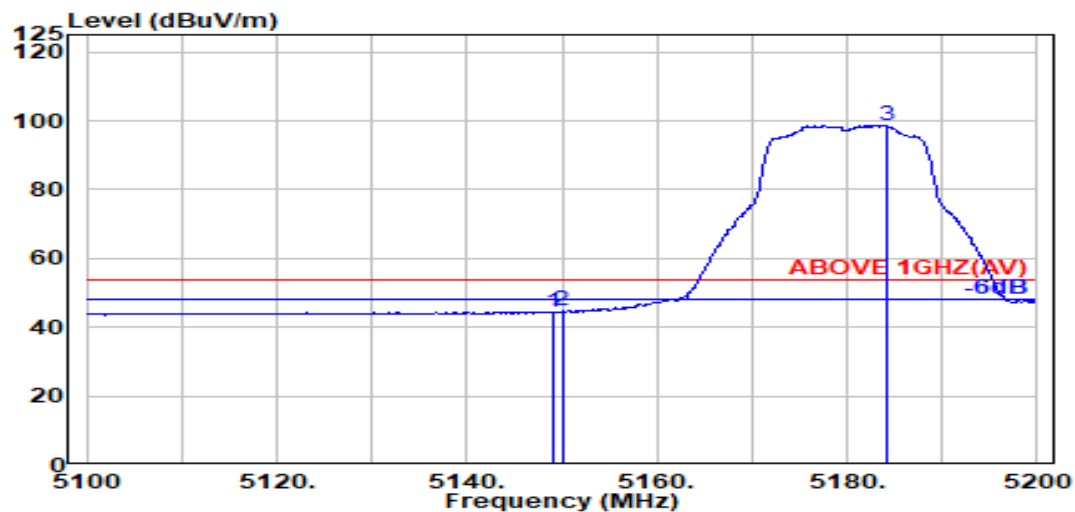

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	41.80	44.48	54.00	9.52	Average
5150.000	33.50	8.37	39.19	41.99	44.67	54.00	9.33	Average
@ 5184.200	33.71	8.41	39.19	95.85	98.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

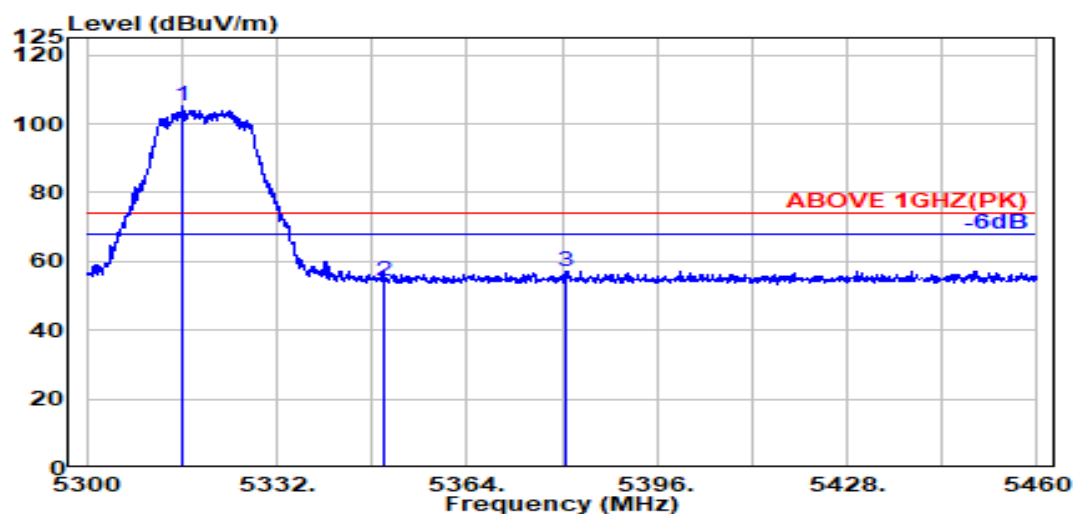

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.900	33.77	8.54	39.17	102.05	105.18	---	---	Peak
5350.000	33.70	8.57	39.17	50.91	54.02	74.00	19.98	Peak
5380.800	33.82	8.60	39.16	54.02	57.29	74.00	16.71	Peak

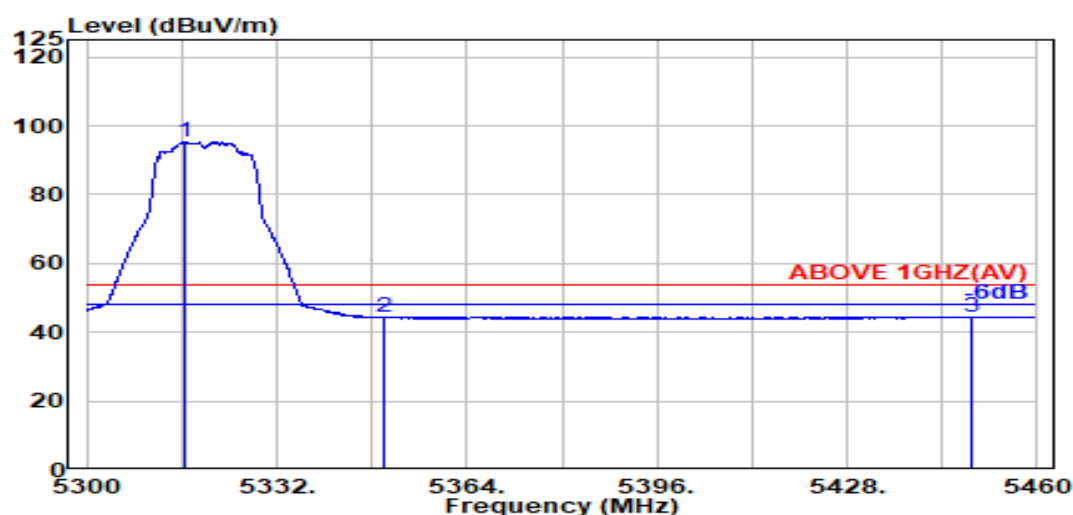

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.700	33.77	8.54	39.17	92.20	95.34	---	---	Average
5350.000	33.70	8.57	39.17	41.09	44.20	54.00	9.80	Average
5448.800	34.00	8.67	39.16	41.01	44.52	54.00	9.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

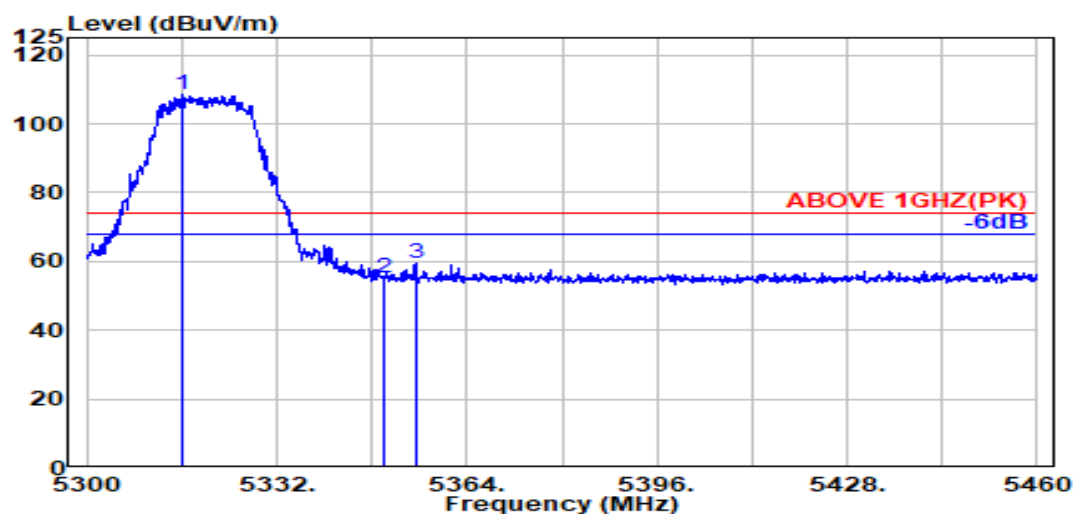

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.100	33.77	8.54	39.17	105.16	108.30	---	---	Peak
5350.000	33.70	8.57	39.17	52.27	55.38	74.00	18.62	Peak
5355.300	33.72	8.58	39.17	56.53	59.67	74.00	14.33	Peak

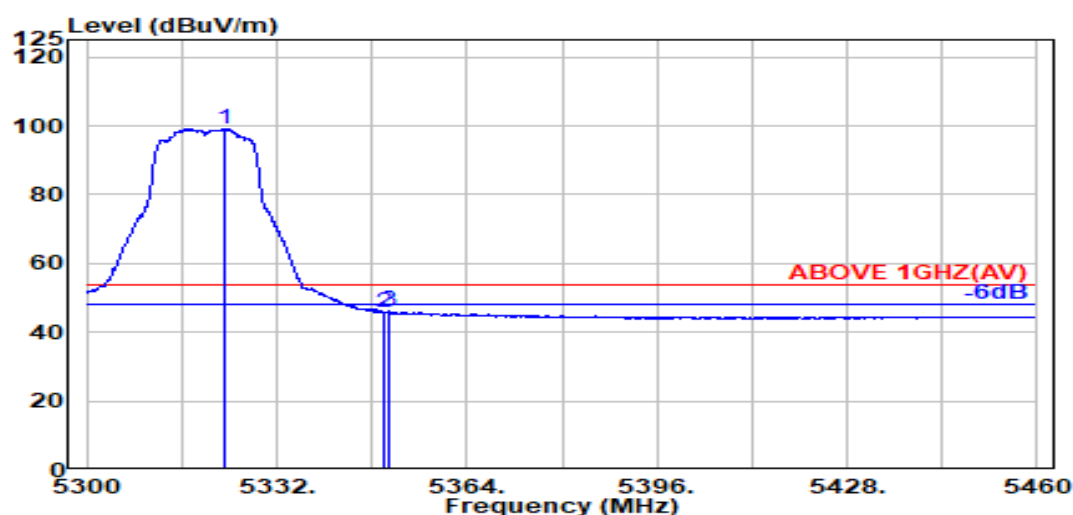


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.400	33.75	8.55	39.17	96.05	99.18	---	---	Average
5350.000	33.70	8.57	39.17	42.82	45.93	54.00	8.07	Average
5350.800	33.70	8.57	39.17	42.99	46.10	54.00	7.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

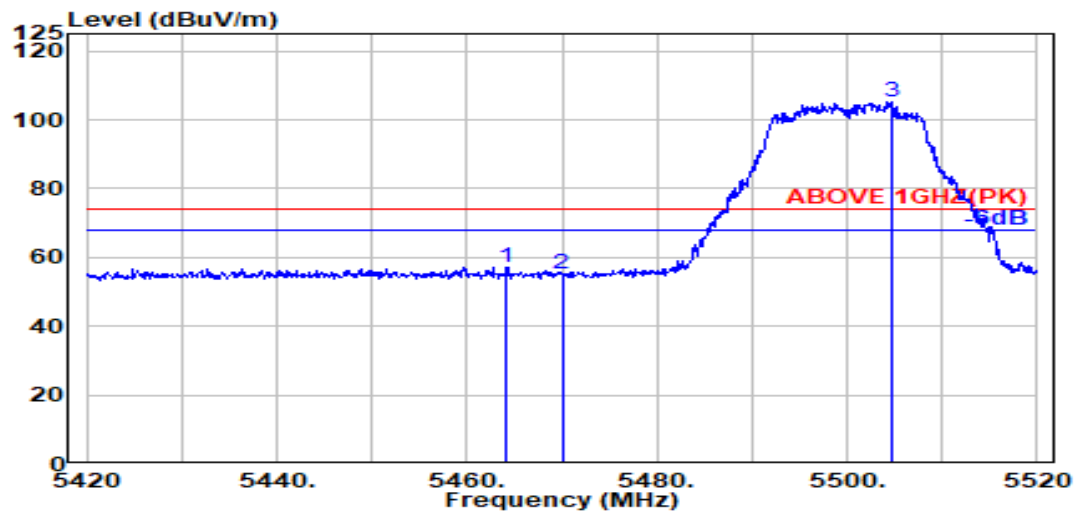

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.03	8.68	39.15	53.64	57.20	74.00	16.80	Peak
5470.000	34.04	8.69	39.15	51.42	54.99	74.00	19.01	Peak
@ 5504.600	34.09	8.72	39.15	101.65	105.31	---	---	Peak

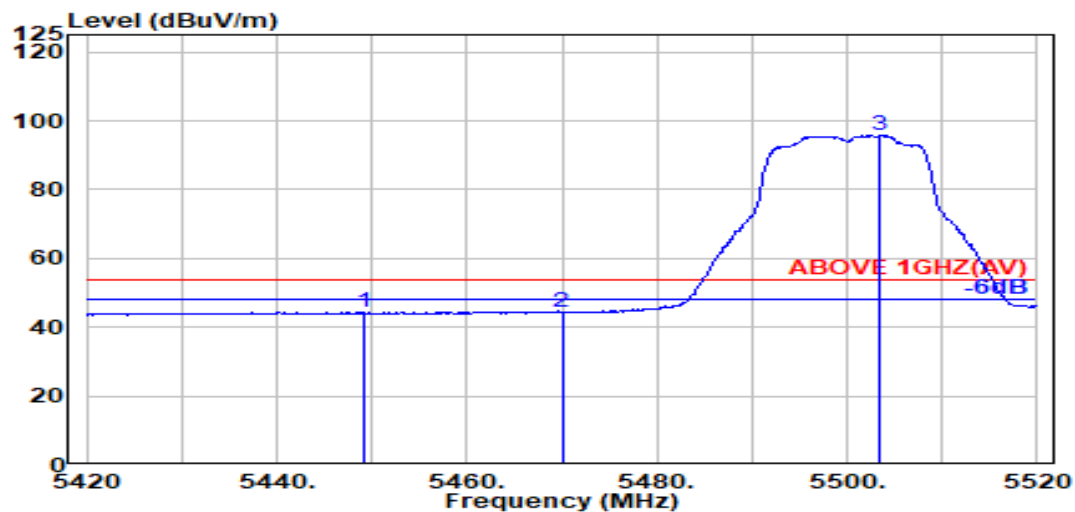


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.100	34.00	8.67	39.16	40.96	44.47	54.00	9.53	Average
5470.000	34.04	8.69	39.15	40.79	44.37	54.00	9.63	Average
@ 5503.500	34.09	8.72	39.15	92.14	95.80	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

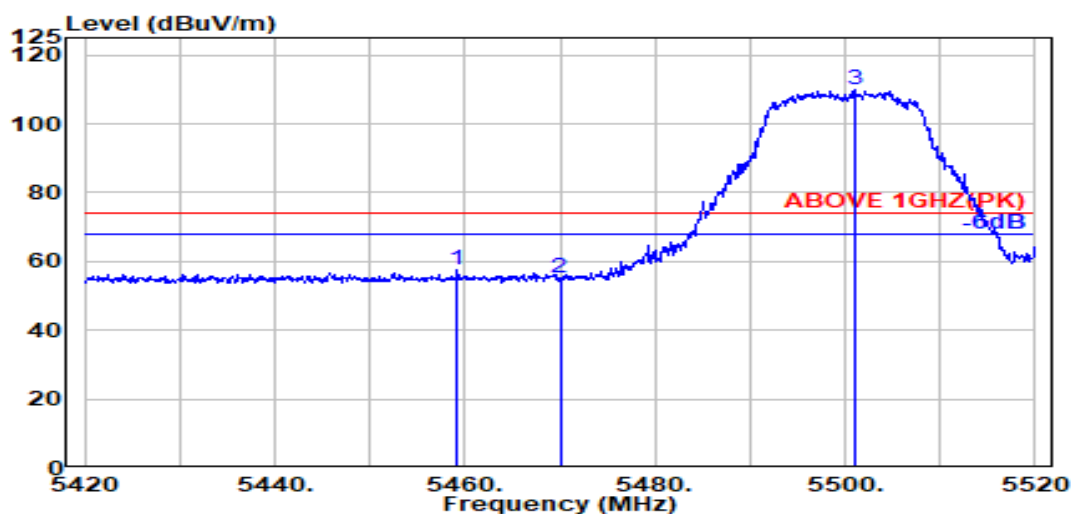

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.02	8.68	39.15	54.22	57.76	74.00	16.24	Peak
5470.000	34.04	8.69	39.15	51.66	55.23	74.00	18.77	Peak
@ 5501.000	34.10	8.72	39.15	106.21	109.88	---	---	Peak

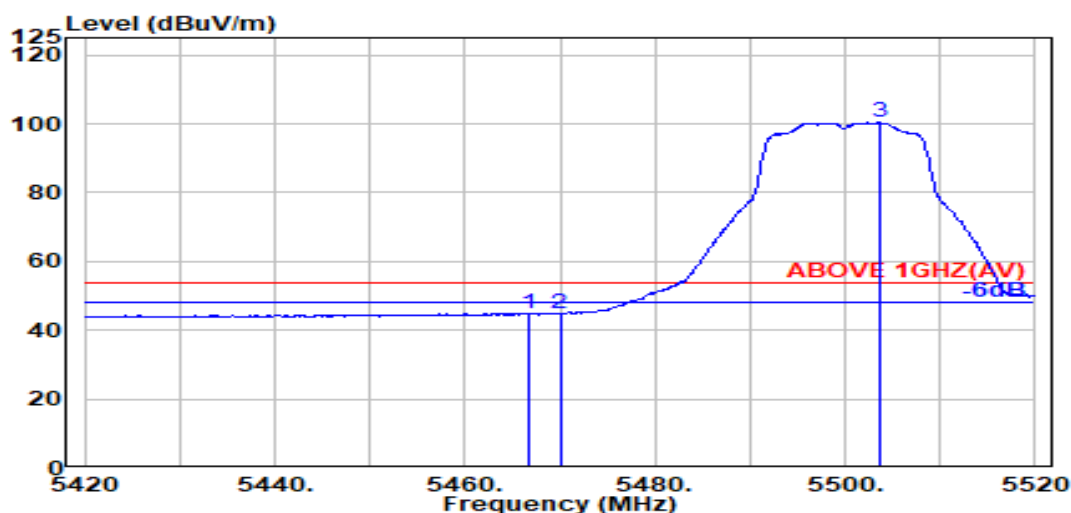

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.800	34.03	8.69	39.15	41.40	44.97	54.00	9.03	Average
5470.000	34.04	8.69	39.15	41.31	44.88	54.00	9.12	Average
@ 5503.600	34.09	8.72	39.15	96.63	100.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

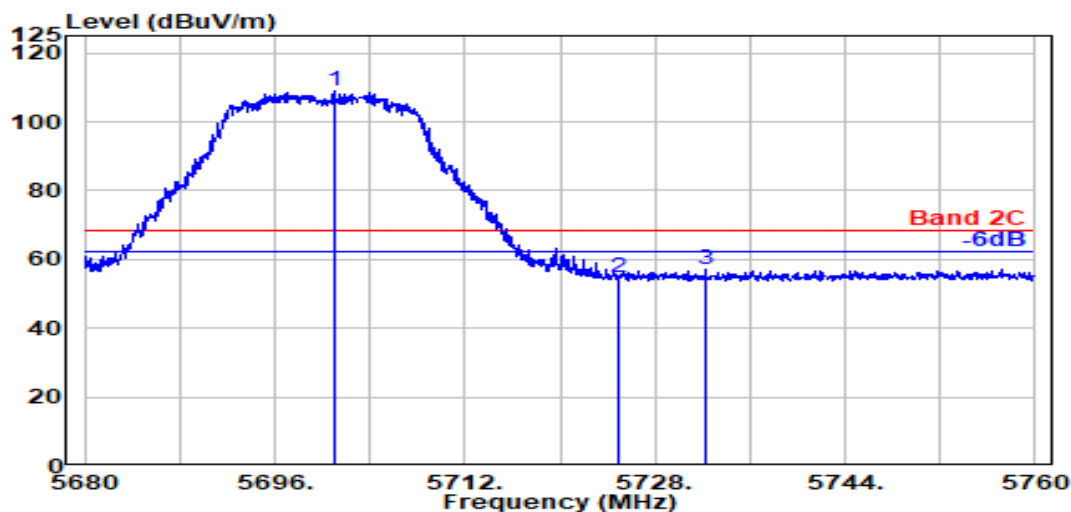

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.950	33.60	8.90	39.19	105.47	108.78	---	---	Peak
5725.000	33.60	8.93	39.20	51.60	54.93	68.20	13.27	Peak
5732.250	33.60	8.93	39.20	53.83	57.17	68.20	11.03	Peak

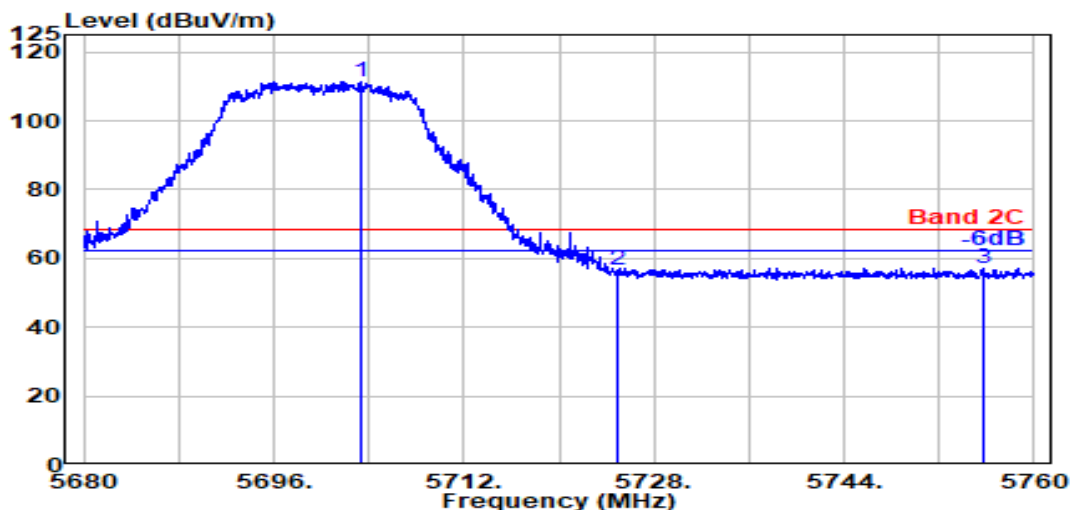

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.250	33.60	8.91	39.19	107.99	111.31	---	---	Peak
5725.000	33.60	8.93	39.20	53.42	56.75	68.20	11.45	Peak
5755.650	33.62	8.95	39.20	53.89	57.26	68.20	10.94	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

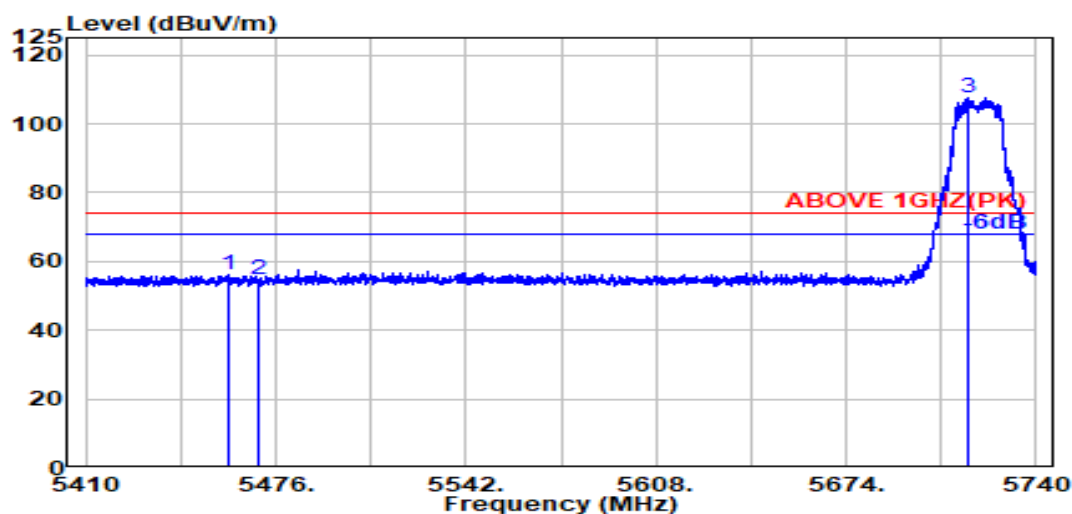

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.02	8.68	39.15	52.65	56.19	74.00	17.81	Peak
5470.000	34.04	8.69	39.15	51.32	54.90	74.00	19.10	Peak
@ 5716.500	33.60	8.92	39.19	104.11	107.44	---	---	Peak

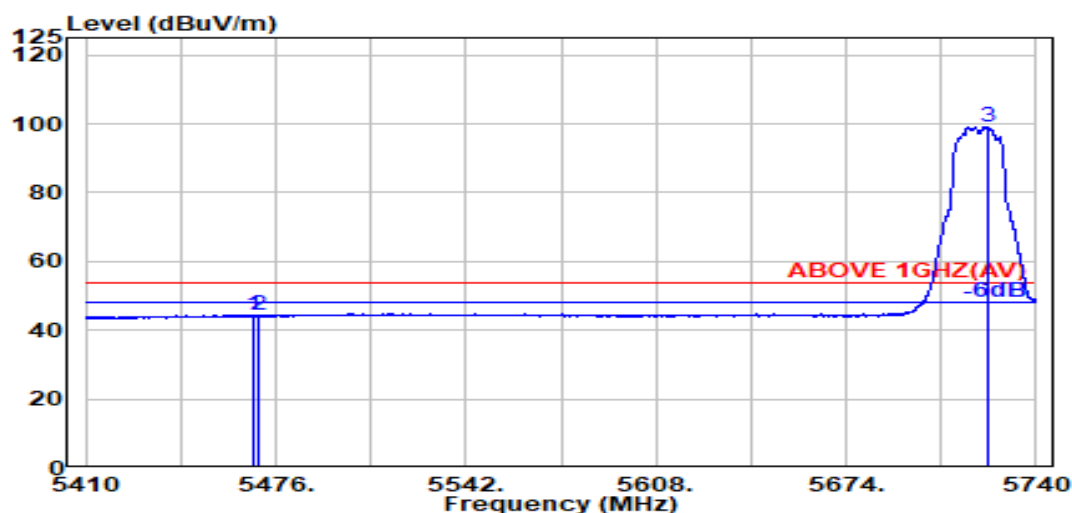

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	40.68	44.25	54.00	9.75	Average
5470.000	34.04	8.69	39.15	40.57	44.15	54.00	9.85	Average
@ 5722.900	33.60	8.92	39.20	95.87	99.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

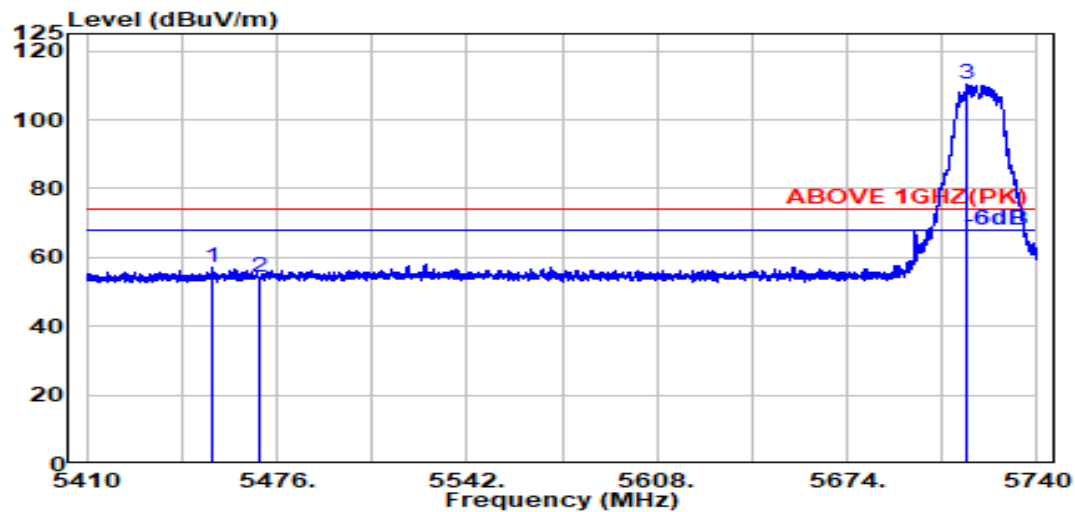

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.600	34.01	8.67	39.16	53.34	56.87	74.00	17.13	Peak
5470.000	34.04	8.69	39.15	50.87	54.45	74.00	19.55	Peak
@ 5715.500	33.60	8.92	39.19	107.14	110.46	---	---	Peak

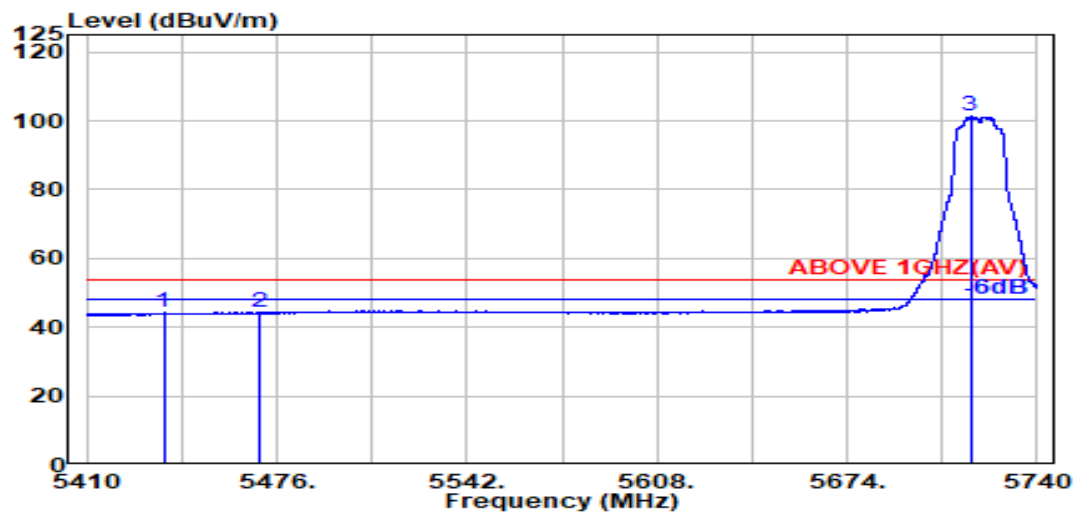

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.700	33.97	8.66	39.16	40.75	44.22	54.00	9.78	Average
5470.000	34.04	8.69	39.15	40.60	44.17	54.00	9.83	Average
@ 5716.800	33.60	8.92	39.19	97.97	101.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

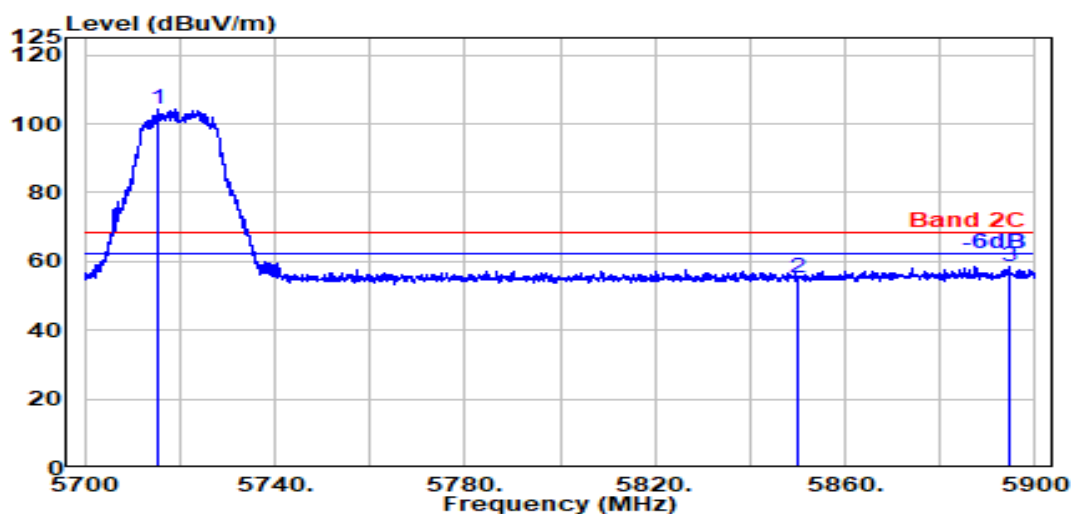

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.600	33.60	8.92	39.19	100.76	104.08	---	---	Peak
5850.000	33.90	9.04	39.22	51.42	55.13	68.20	13.07	Peak
5894.700	34.08	9.08	39.23	54.77	58.70	68.20	9.50	Peak

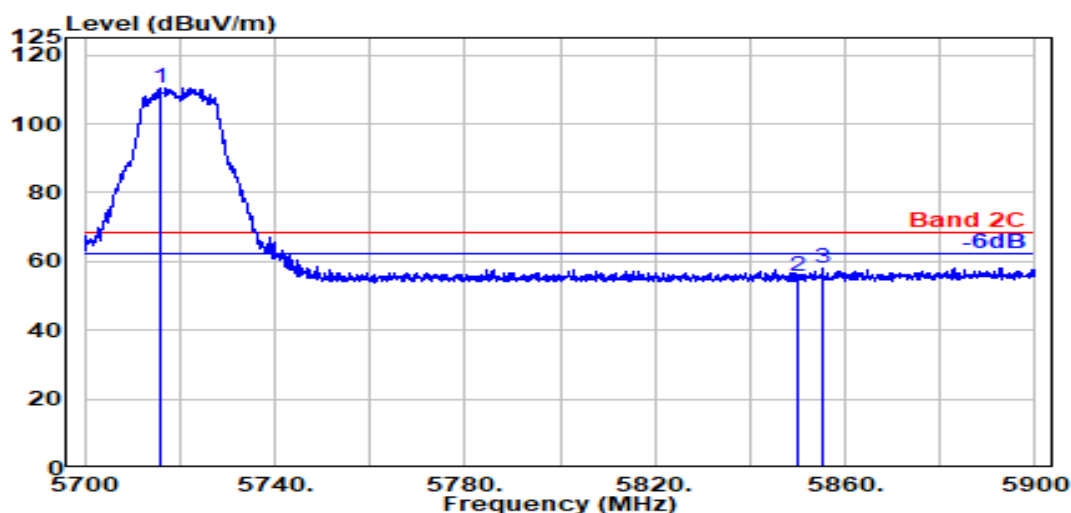

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.900	33.60	8.92	39.19	107.24	110.56	---	---	Peak
5850.000	33.90	9.04	39.22	51.75	55.47	68.20	12.73	Peak
5855.400	33.92	9.04	39.22	54.32	58.07	68.20	10.13	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

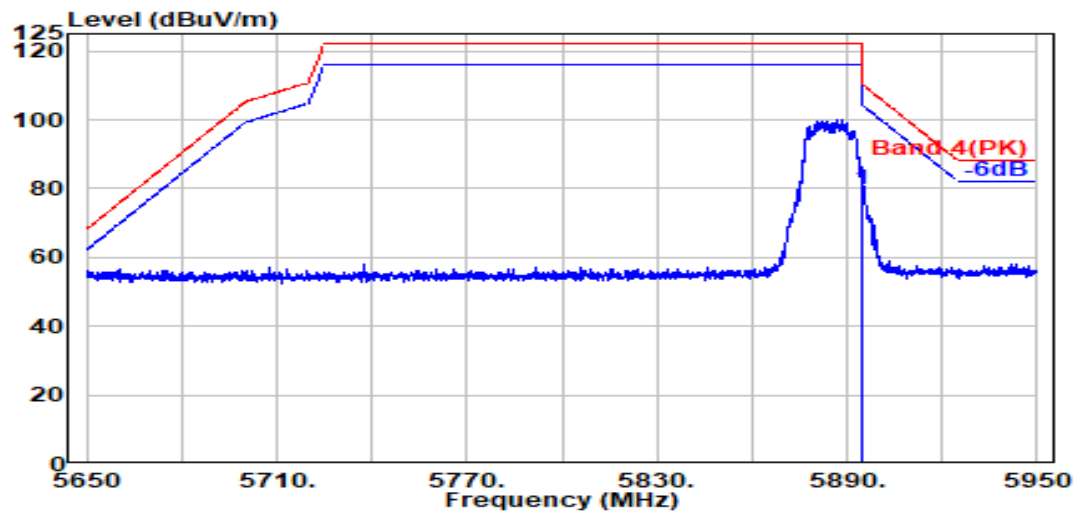

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	76.02	79.95	110.20	30.25	Peak

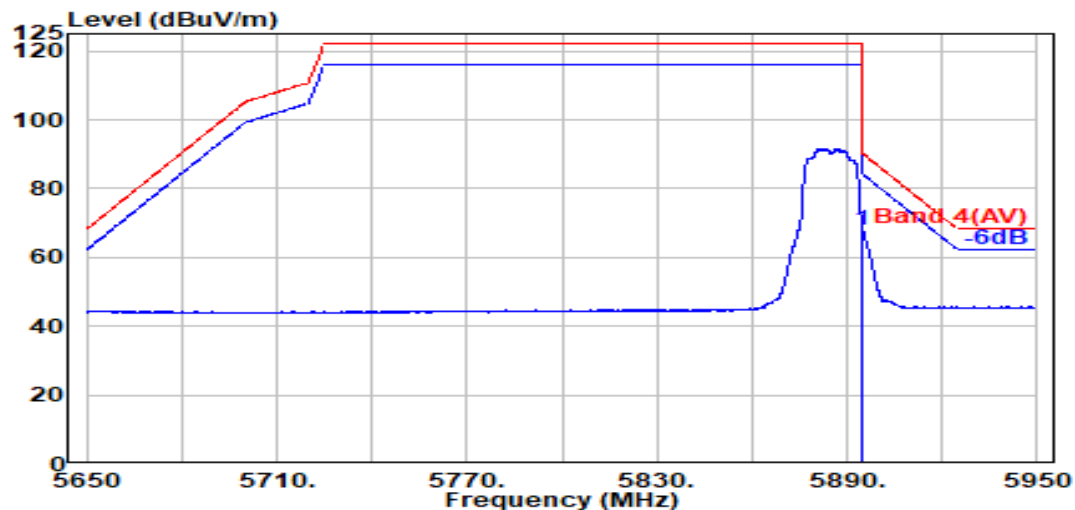

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	64.16	68.09	90.20	22.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

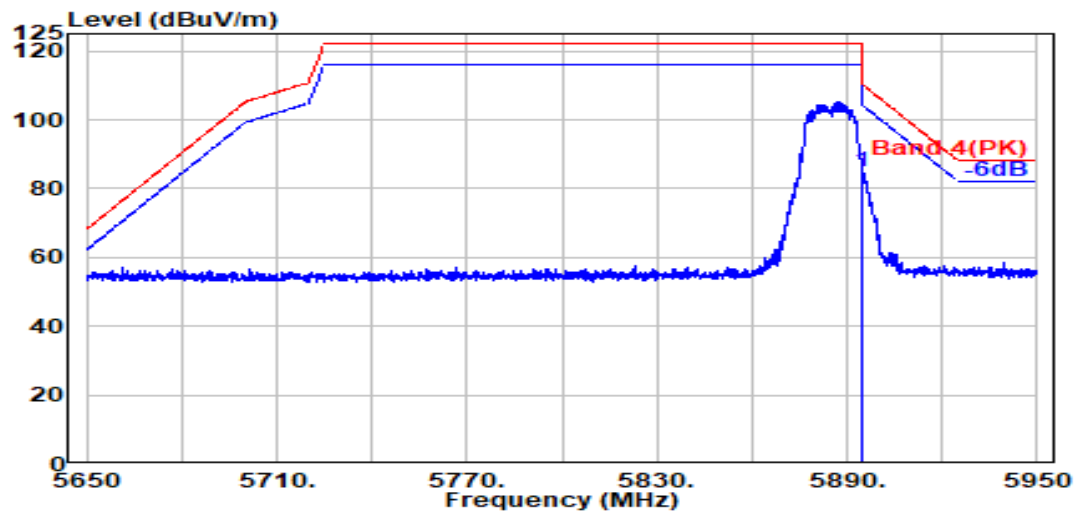

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	80.94	84.87	110.20	25.33	Peak

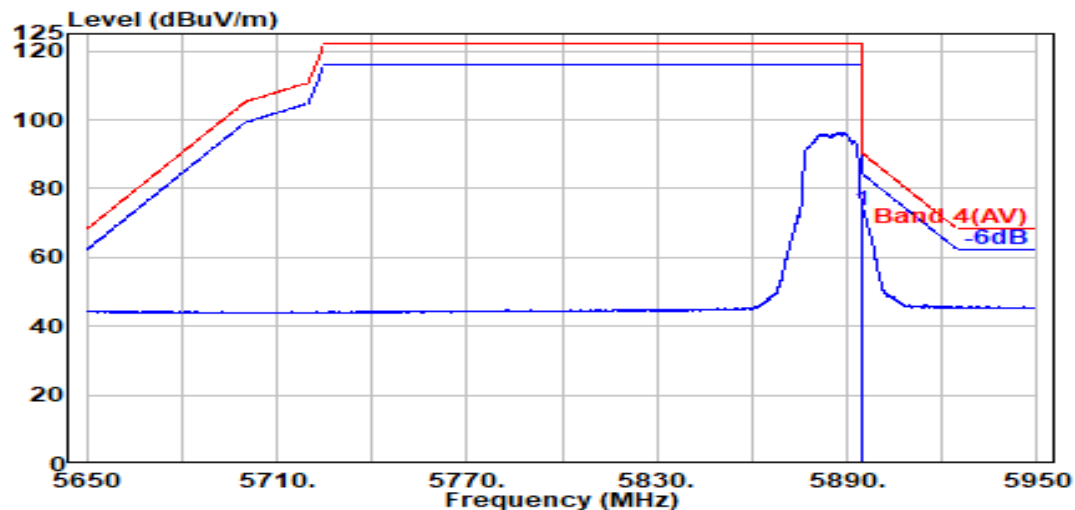

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	69.68	73.60	90.20	16.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

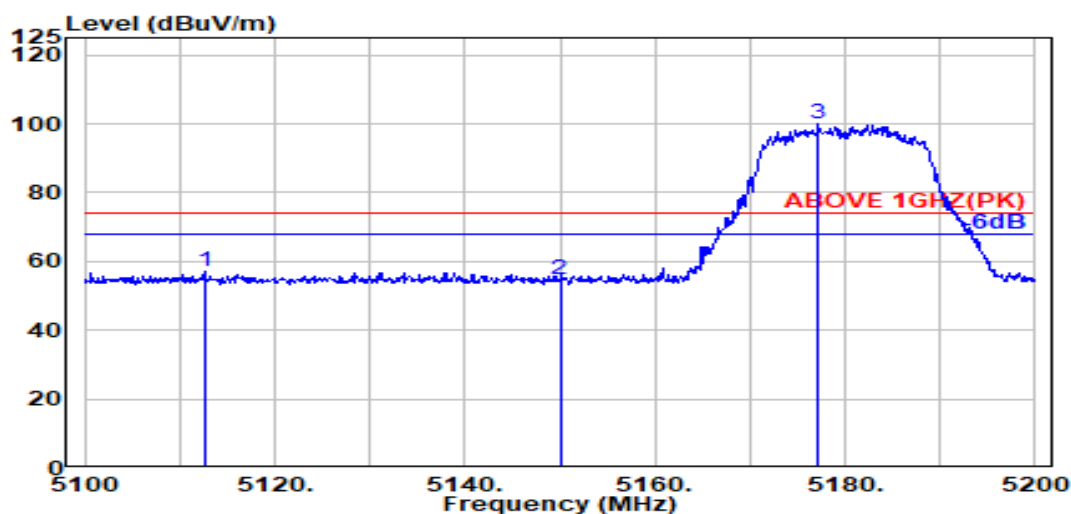

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5112.600	33.43	8.34	39.20	54.35	56.92	74.00	17.08	Peak
5150.000	33.50	8.37	39.19	52.19	54.88	74.00	19.12	Peak
@ 5177.200	33.66	8.40	39.19	97.07	99.95	---	---	Peak

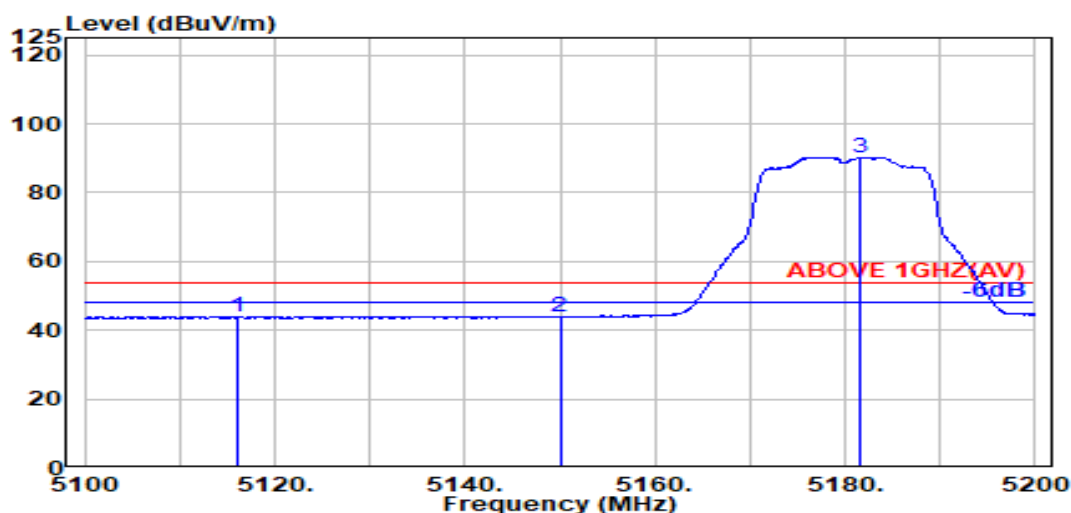

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5116.200	33.43	8.34	39.20	41.41	43.98	54.00	10.02	Average
5150.000	33.50	8.37	39.19	41.24	43.92	54.00	10.08	Average
@ 5181.500	33.69	8.41	39.19	87.35	90.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

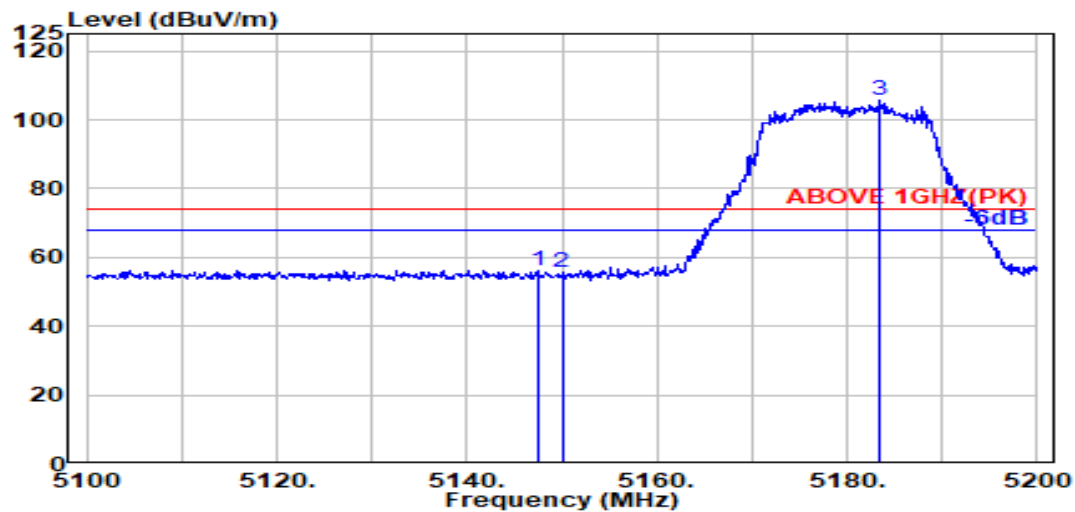

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.400	33.49	8.37	39.19	53.68	56.35	74.00	17.65	Peak
5150.000	33.50	8.37	39.19	52.98	55.66	74.00	18.34	Peak
@ 5183.300	33.70	8.41	39.19	102.51	105.43	---	---	Peak

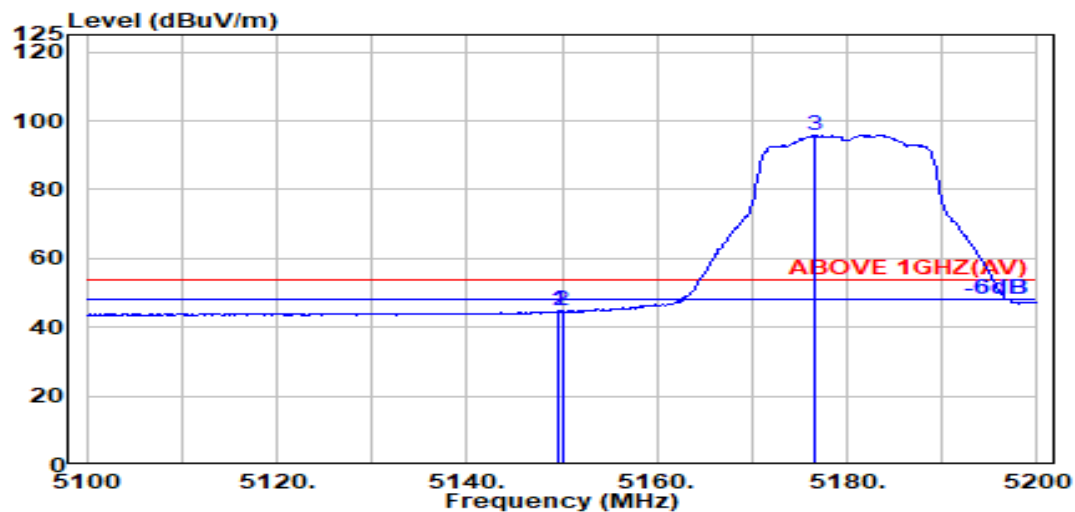

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	41.98	44.66	54.00	9.34	Average
5150.000	33.50	8.37	39.19	42.00	44.68	54.00	9.32	Average
@ 5176.600	33.66	8.40	39.19	92.99	95.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

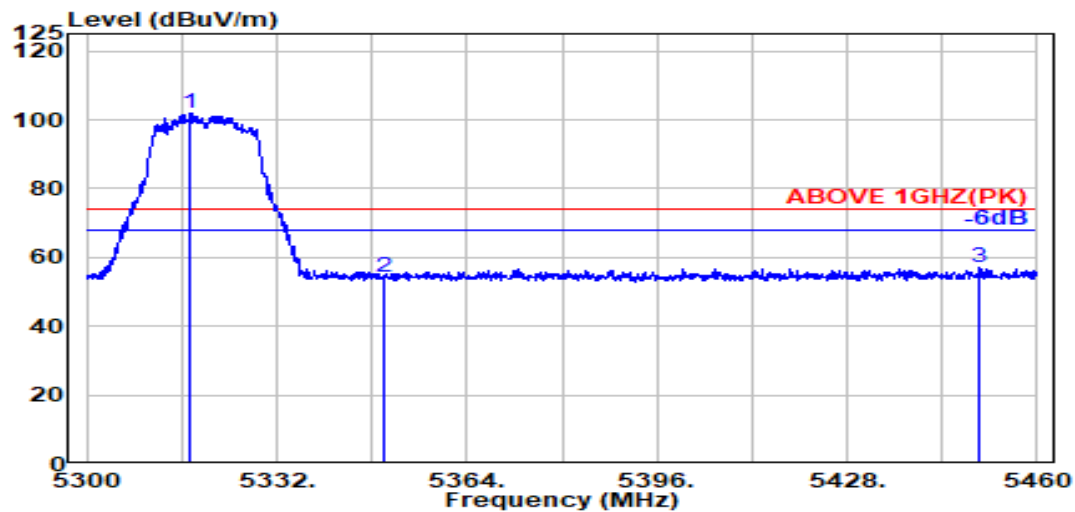

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.500	33.76	8.54	39.17	98.83	101.96	---	---	Peak
5350.000	33.70	8.57	39.17	50.93	54.03	74.00	19.97	Peak
5450.400	34.00	8.67	39.16	53.56	57.07	74.00	16.93	Peak

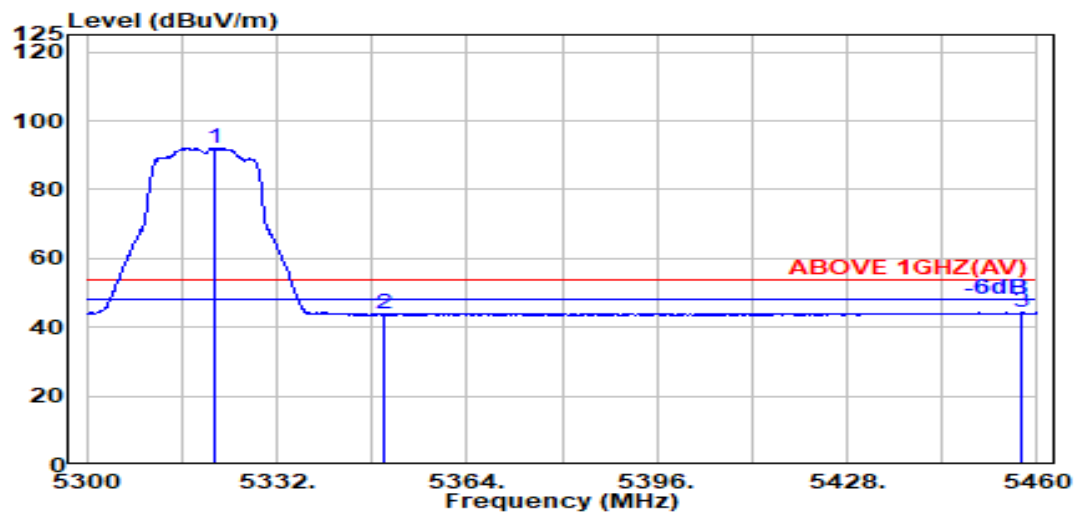

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.500	33.76	8.54	39.17	89.08	92.21	---	---	Average
5350.000	33.70	8.57	39.17	40.55	43.66	54.00	10.34	Average
5457.300	34.01	8.68	39.15	40.60	44.13	54.00	9.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

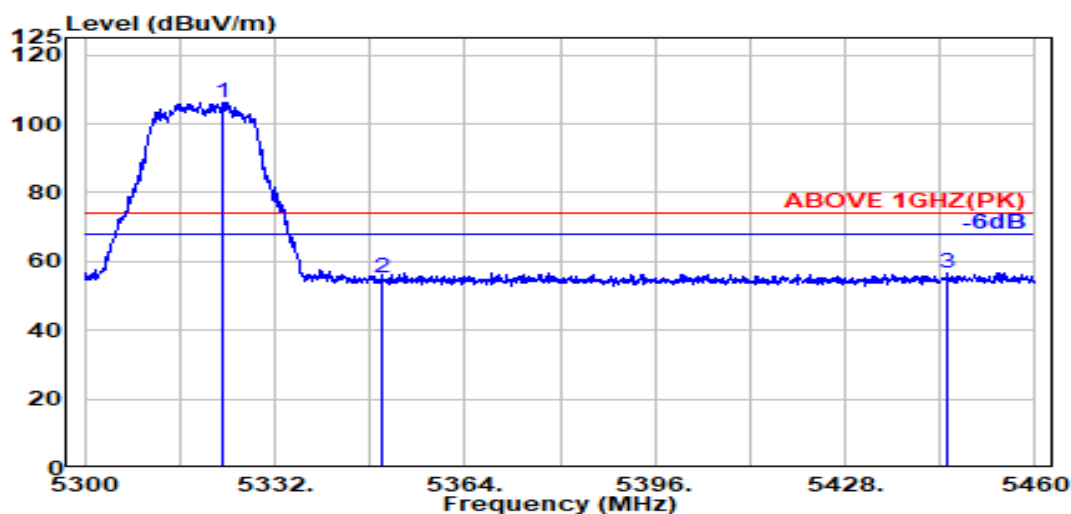

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.200	33.75	8.55	39.17	103.21	106.34	---	---	Peak
5350.000	33.70	8.57	39.17	52.10	55.21	74.00	18.79	Peak
5445.100	33.99	8.66	39.16	53.26	56.76	74.00	17.24	Peak

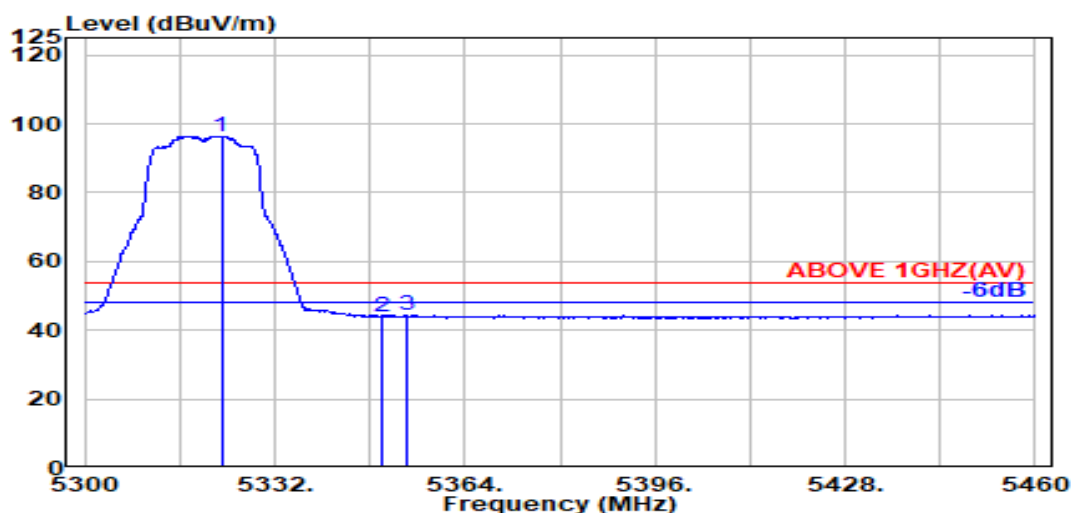

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.000	33.75	8.55	39.17	93.24	96.37	---	---	Average
5350.000	33.70	8.57	39.17	40.90	44.00	54.00	10.00	Average
5354.100	33.72	8.58	39.17	41.28	44.41	54.00	9.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

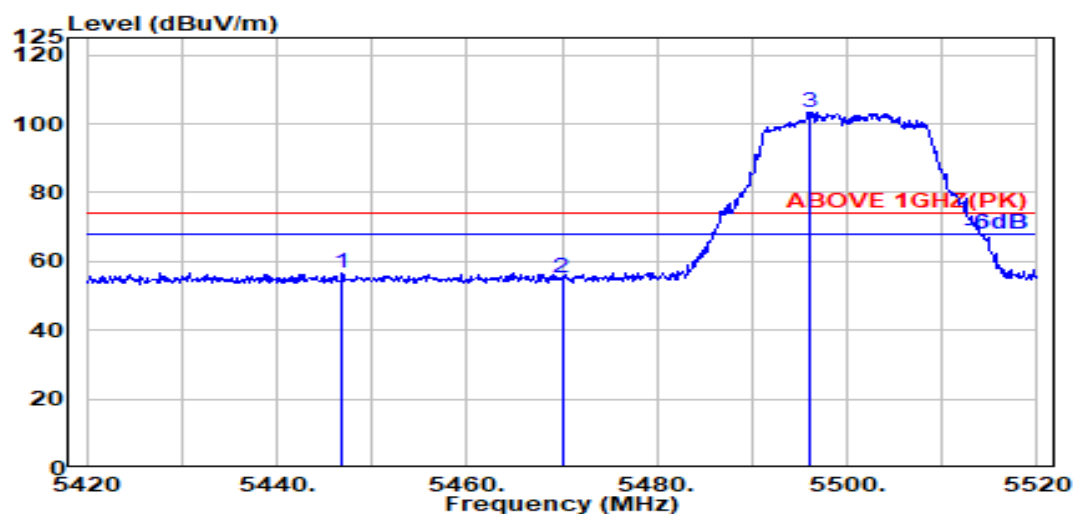

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.800	33.99	8.67	39.16	53.16	56.66	74.00	17.34	Peak
5470.000	34.04	8.69	39.15	51.67	55.24	74.00	18.76	Peak
@ 5496.100	34.09	8.71	39.15	99.87	103.52	---	---	Peak

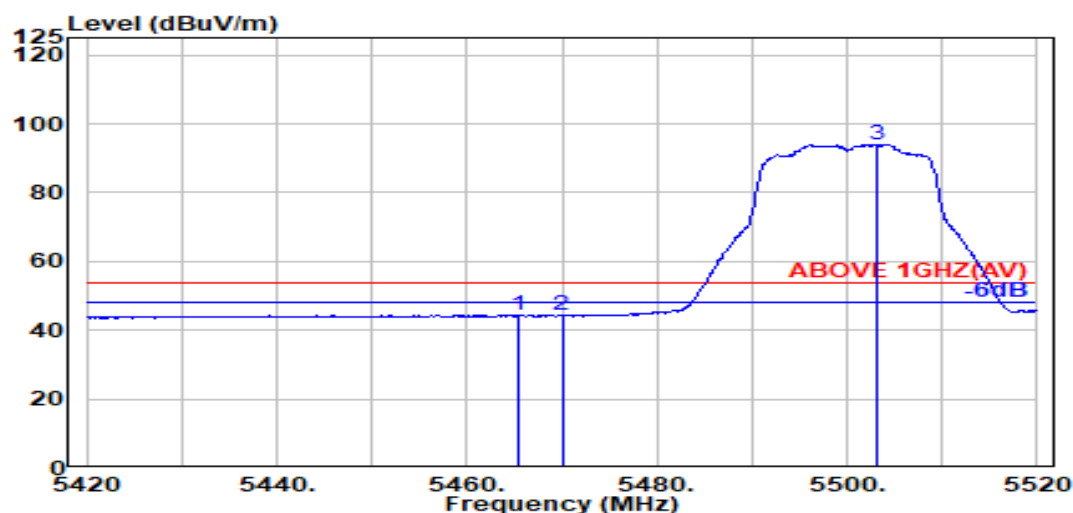

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.300	34.03	8.68	39.15	40.81	44.38	54.00	9.62	Average
5470.000	34.04	8.69	39.15	40.68	44.25	54.00	9.75	Average
@ 5503.100	34.09	8.72	39.15	90.26	93.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

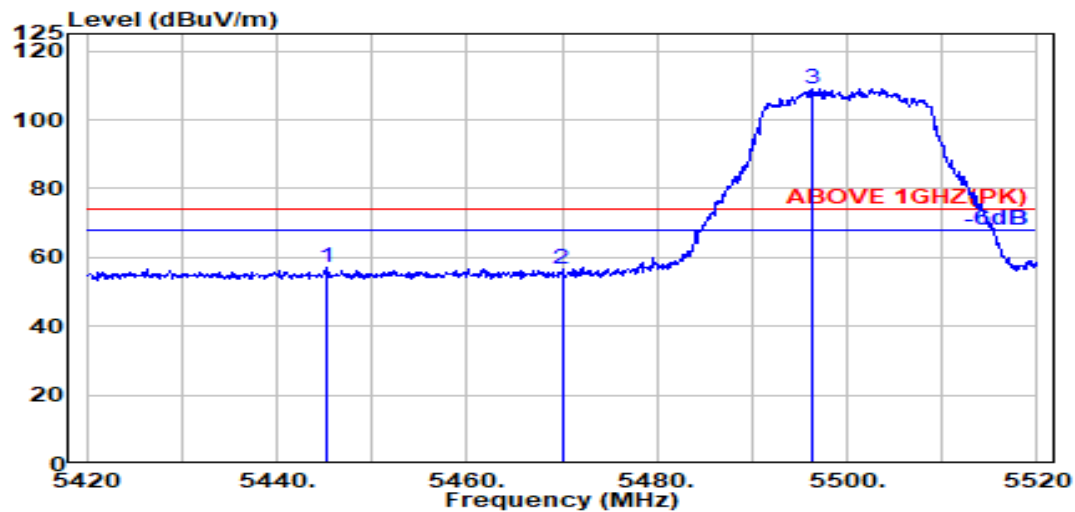

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.200	33.99	8.66	39.16	53.36	56.86	74.00	17.14	Peak
5470.000	34.04	8.69	39.15	53.20	56.78	74.00	17.22	Peak
@ 5496.400	34.09	8.71	39.15	105.54	109.20	---	---	Peak

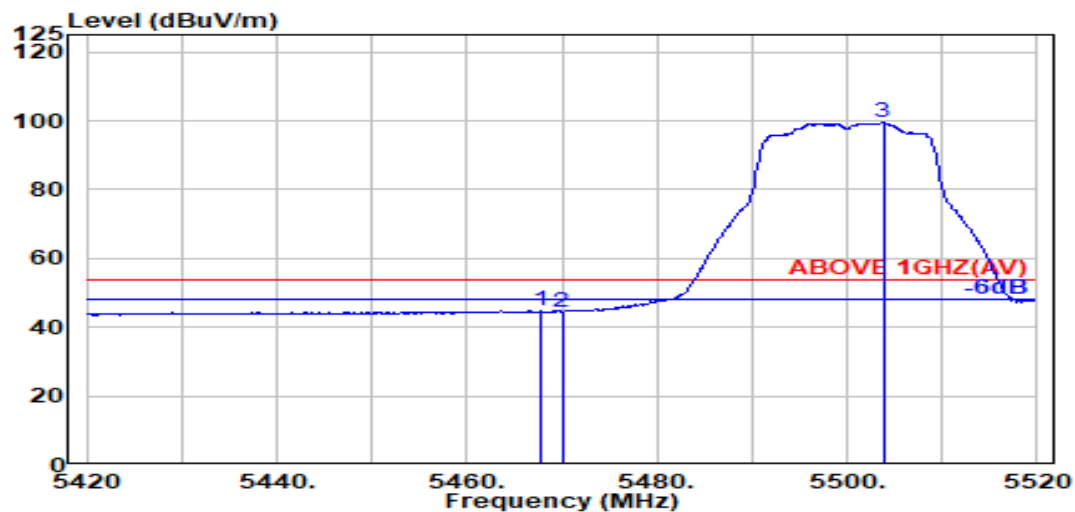

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	41.35	44.92	54.00	9.08	Average
5470.000	34.04	8.69	39.15	40.96	44.54	54.00	9.46	Average
@ 5503.800	34.09	8.72	39.15	95.77	99.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

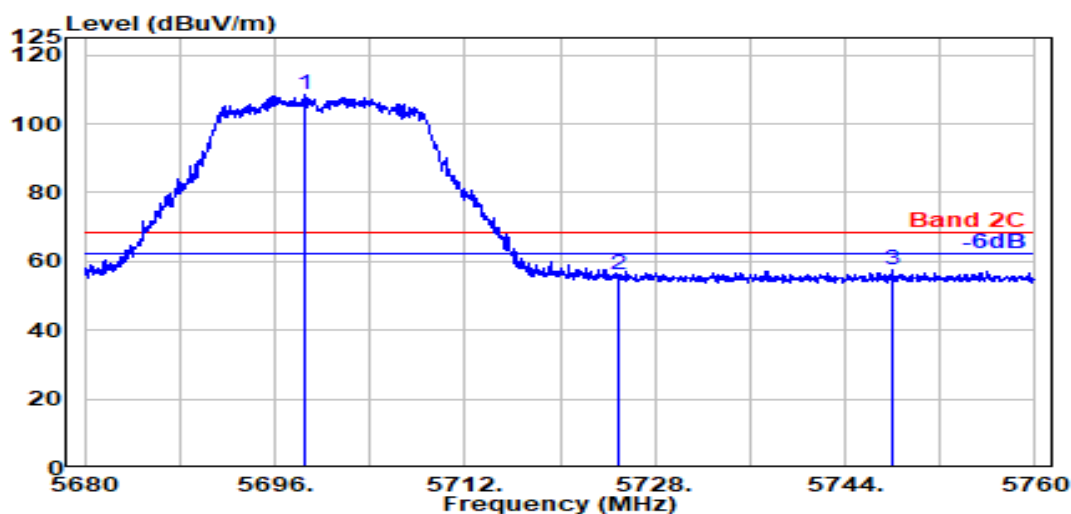

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.500	33.61	8.90	39.19	105.20	108.52	---	---	Peak
5725.000	33.60	8.93	39.20	52.87	56.20	68.20	12.00	Peak
5747.950	33.60	8.95	39.20	54.04	57.39	68.20	10.81	Peak

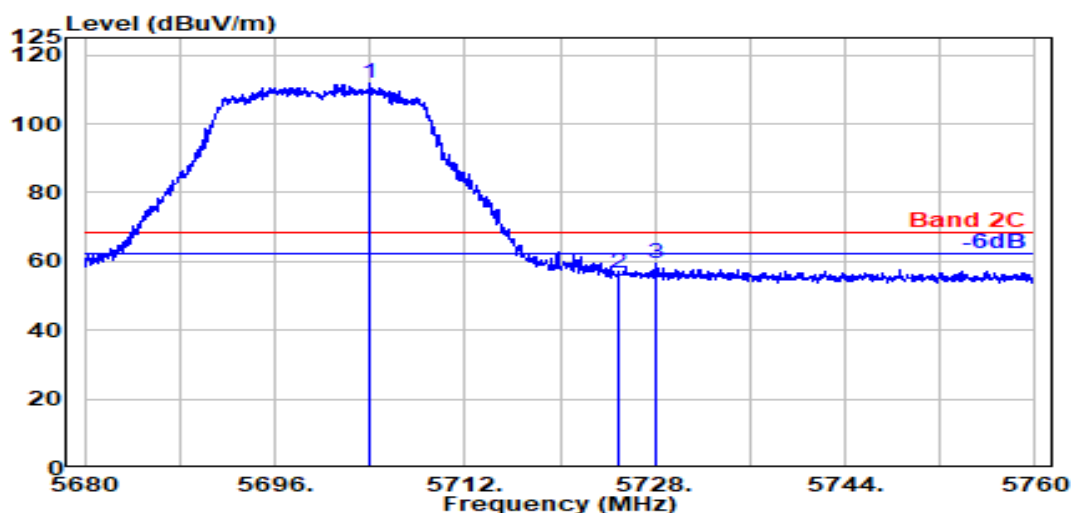

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.000	33.60	8.91	39.19	108.29	111.61	---	---	Peak
5725.000	33.60	8.93	39.20	53.07	56.40	68.20	11.80	Peak
5728.100	33.60	8.93	39.20	55.97	59.31	68.20	8.89	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

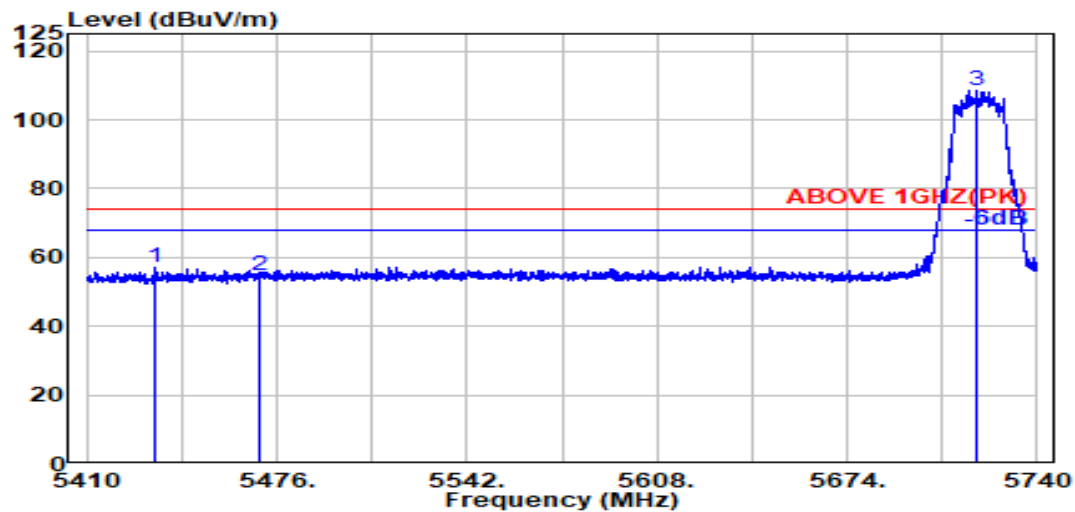

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.000	33.97	8.65	39.16	53.38	56.84	74.00	17.16	Peak
5470.000	34.04	8.69	39.15	50.91	54.48	74.00	19.52	Peak
@ 5719.000	33.60	8.92	39.19	105.15	108.48	---	---	Peak

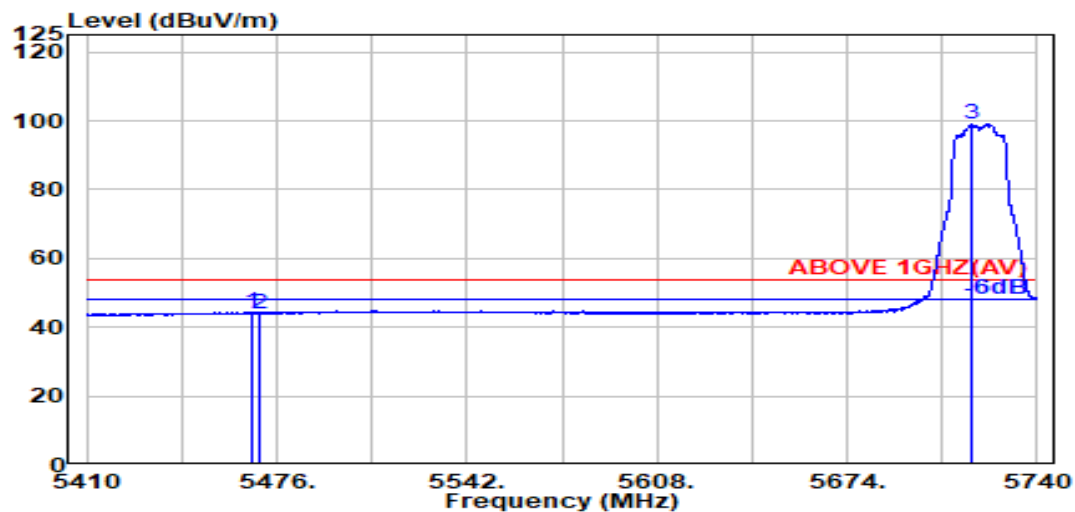

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	40.89	44.46	54.00	9.54	Average
5470.000	34.04	8.69	39.15	40.46	44.03	54.00	9.97	Average
@ 5717.000	33.60	8.92	39.19	95.60	98.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

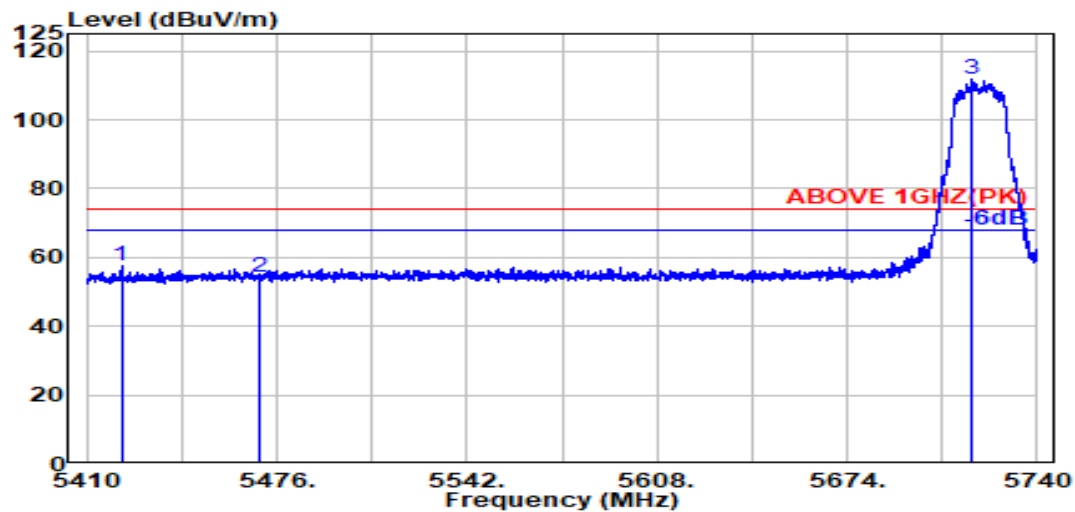

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.000	33.94	8.64	39.16	53.90	57.33	74.00	16.67	Peak
5470.000	34.04	8.69	39.15	50.85	54.42	74.00	19.58	Peak
@ 5717.500	33.60	8.92	39.19	108.67	111.99	---	---	Peak

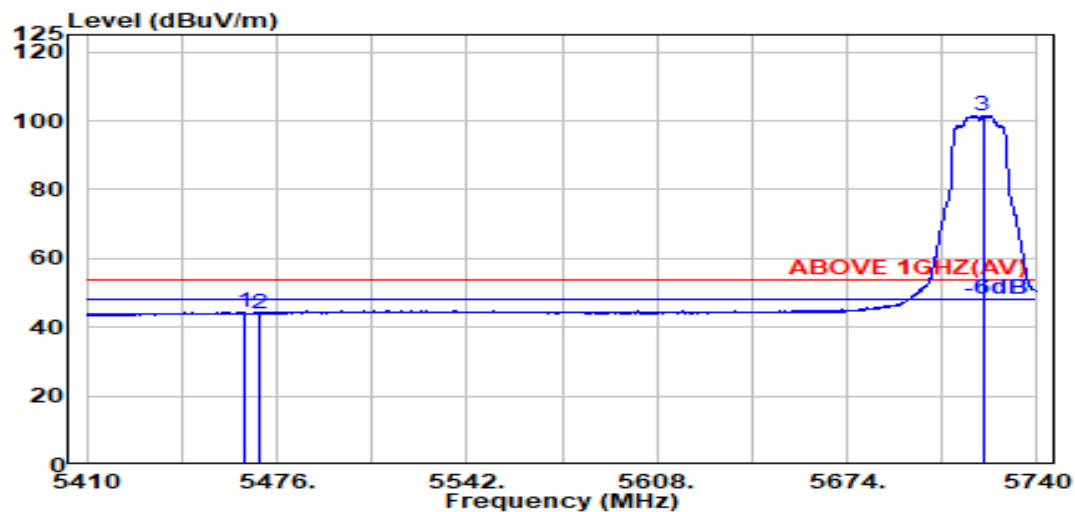

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.000	34.03	8.68	39.15	40.71	44.27	54.00	9.73	Average
5470.000	34.04	8.69	39.15	40.39	43.96	54.00	10.04	Average
@ 5721.100	33.60	8.92	39.20	98.12	101.45	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

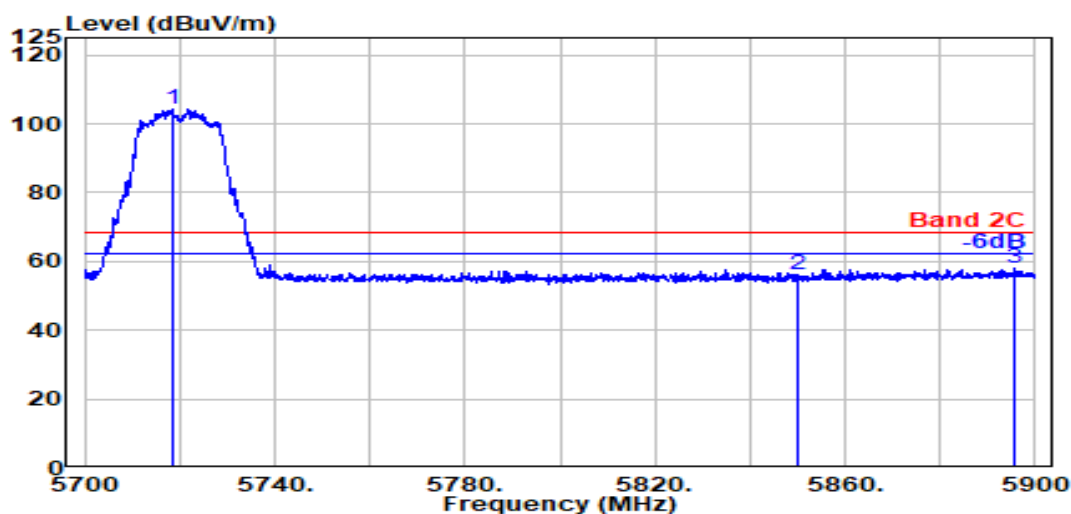

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.600	33.60	8.92	39.19	101.10	104.43	---	---	Peak
5850.000	33.90	9.04	39.22	52.45	56.17	68.20	12.03	Peak
5895.500	34.08	9.08	39.23	54.19	58.12	68.20	10.08	Peak

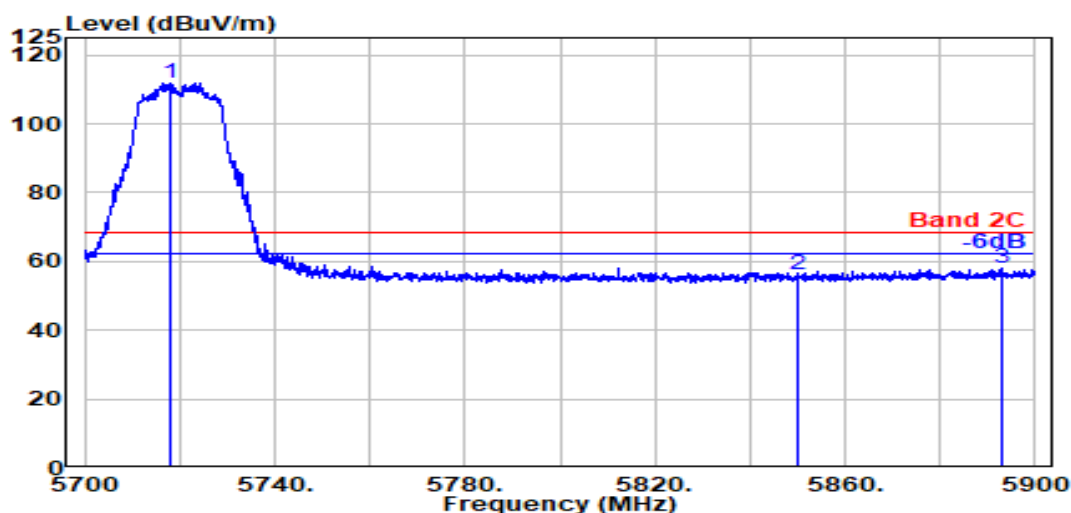

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.100	33.60	8.92	39.19	108.46	111.79	---	---	Peak
5850.000	33.90	9.04	39.22	52.44	56.15	68.20	12.05	Peak
5892.800	34.07	9.08	39.23	54.04	57.96	68.20	10.24	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

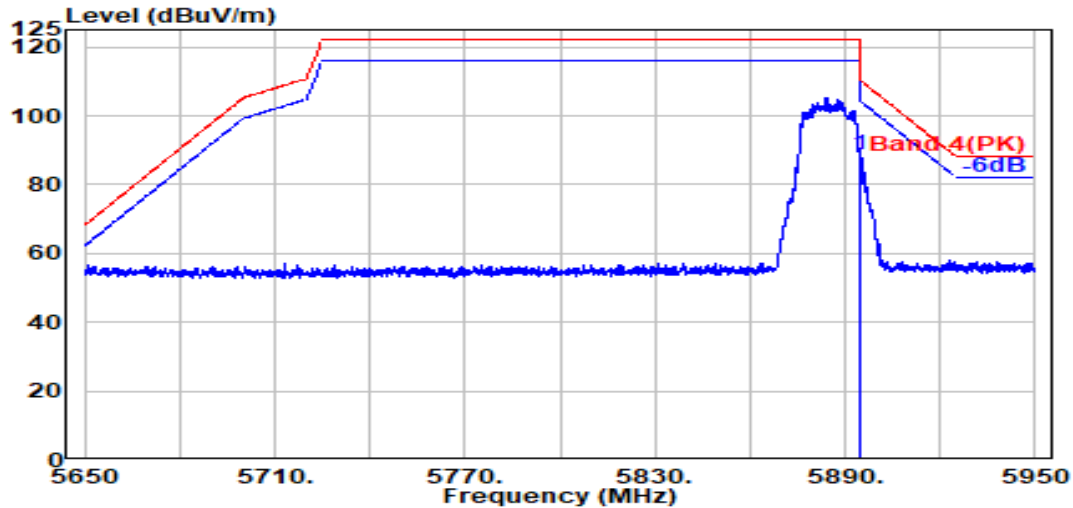

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	84.52	88.45	110.20	21.75	Peak

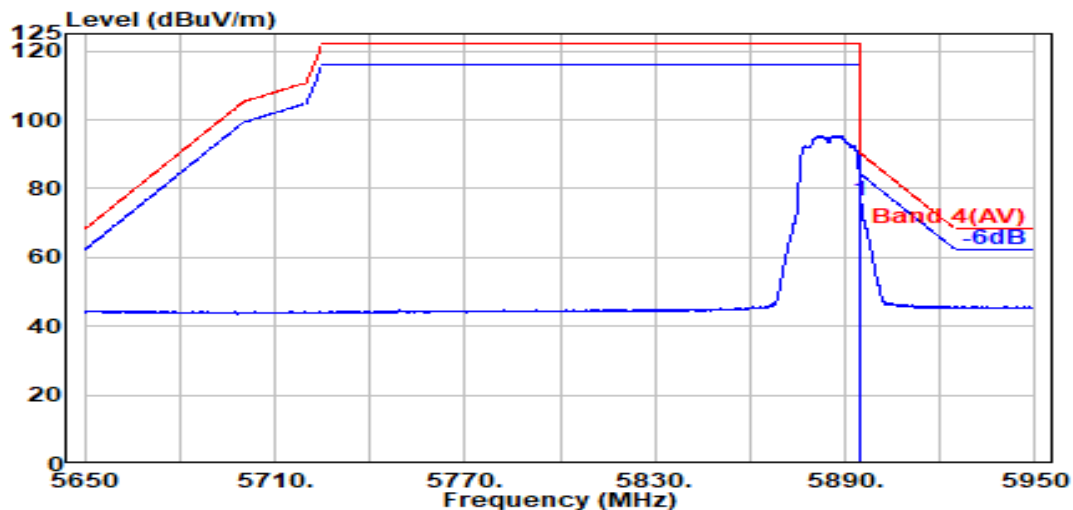

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	72.27	76.20	90.20	14.00	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

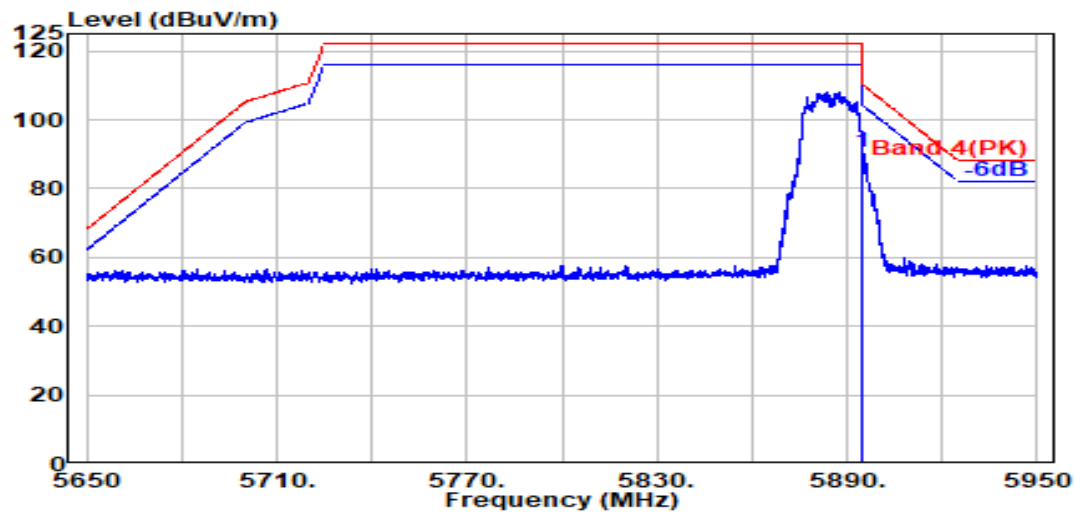

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	86.51	90.44	110.20	19.76	Peak

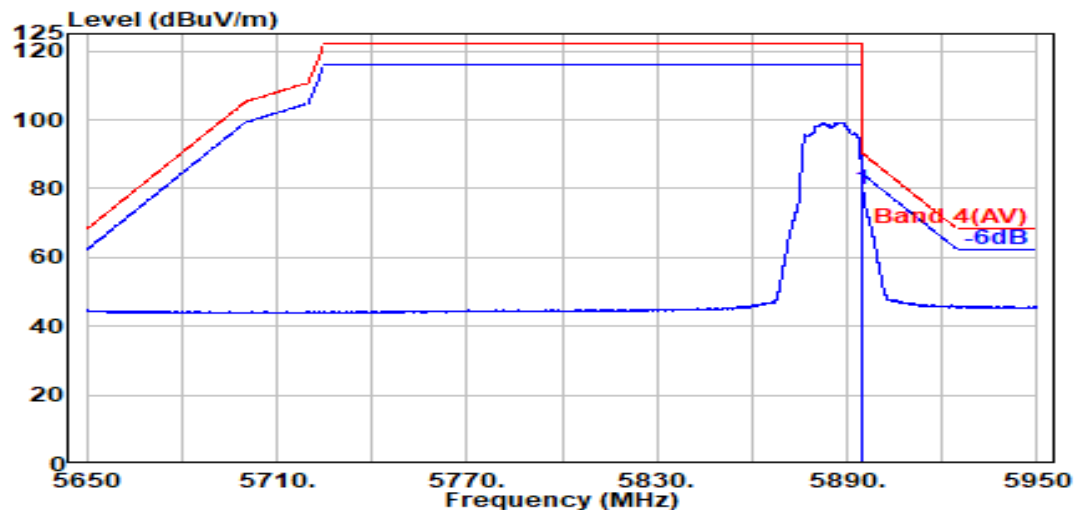

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	75.97	79.90	90.20	10.30	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

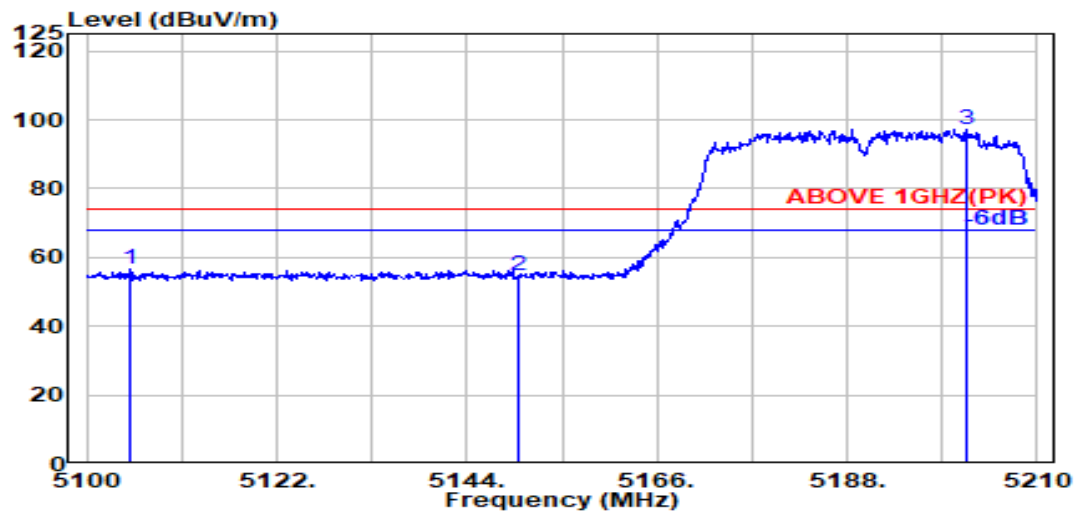

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5105.060	33.41	8.33	39.20	54.14	56.68	74.00	17.32	Peak
5150.000	33.50	8.37	39.19	52.03	54.71	74.00	19.29	Peak
@ 5201.750	33.80	8.43	39.19	94.28	97.32	---	---	Peak

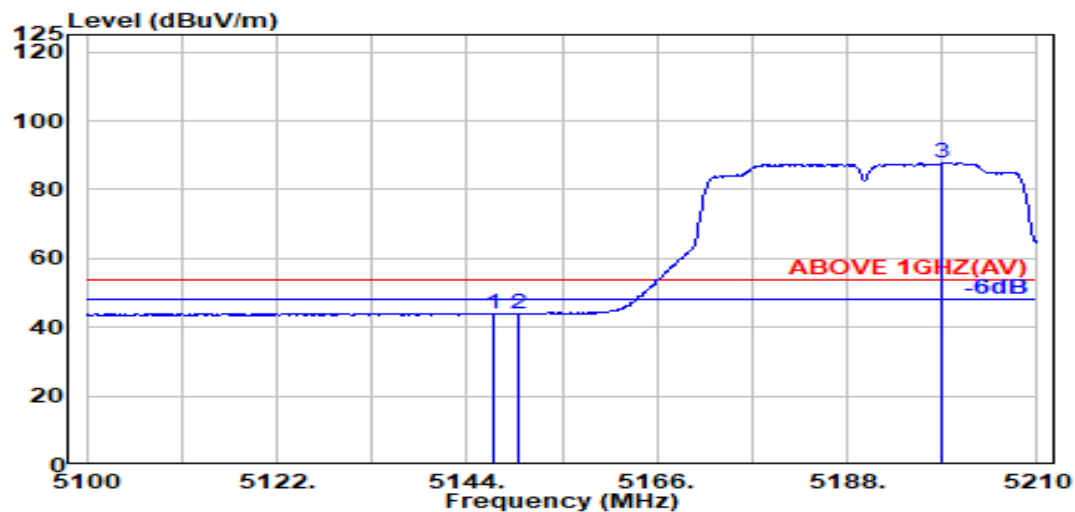

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.970	33.49	8.37	39.19	41.31	43.98	54.00	10.02	Average
5150.000	33.50	8.37	39.19	41.20	43.89	54.00	10.11	Average
@ 5199.000	33.79	8.42	39.19	84.84	87.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

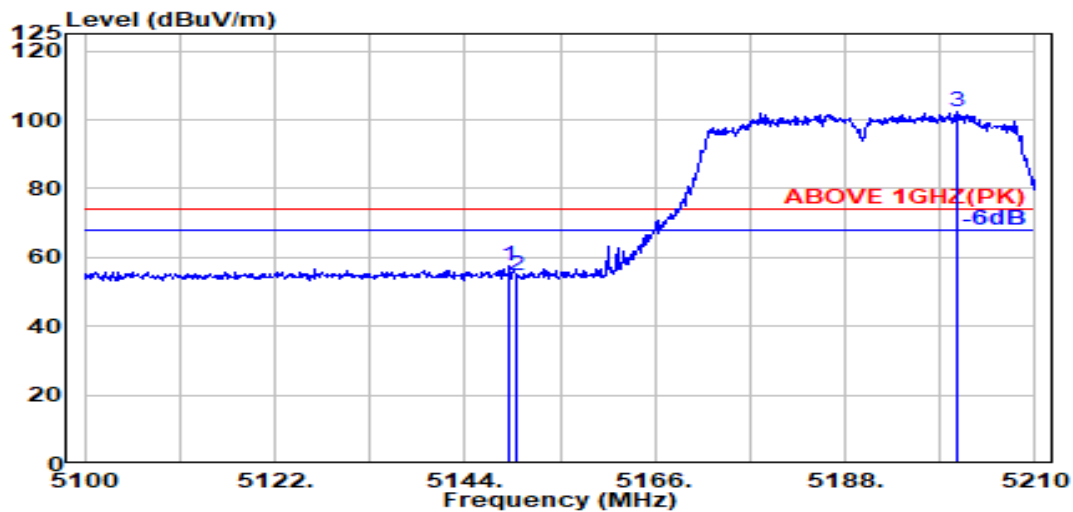

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.50	8.37	39.19	55.05	57.73	74.00	16.27	Peak
5150.000	33.50	8.37	39.19	51.92	54.60	74.00	19.40	Peak
@ 5201.090	33.80	8.43	39.19	99.36	102.40	---	---	Peak

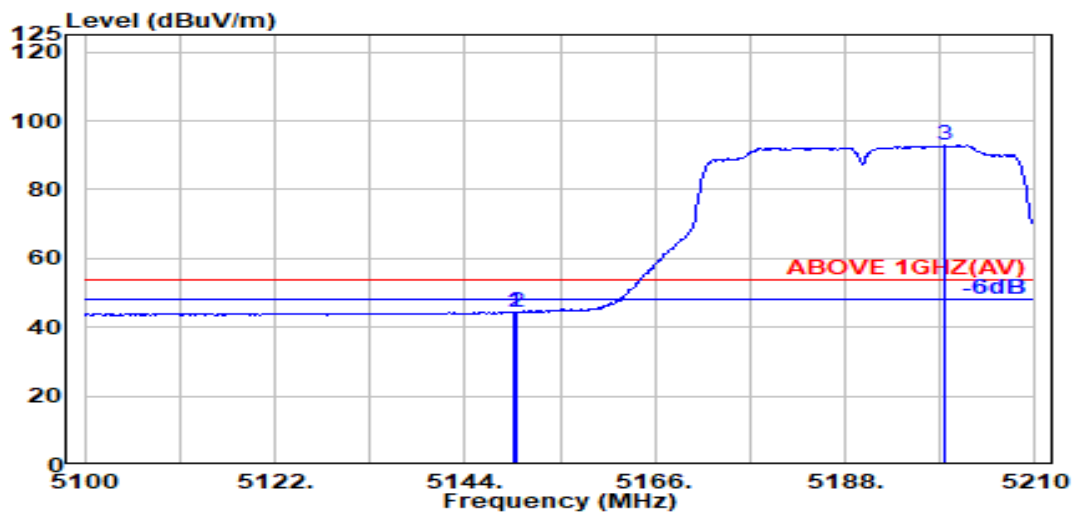

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	33.50	8.37	39.19	41.85	44.54	54.00	9.46	Average
5150.000	33.50	8.37	39.19	41.62	44.30	54.00	9.70	Average
@ 5199.550	33.80	8.42	39.19	89.83	92.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

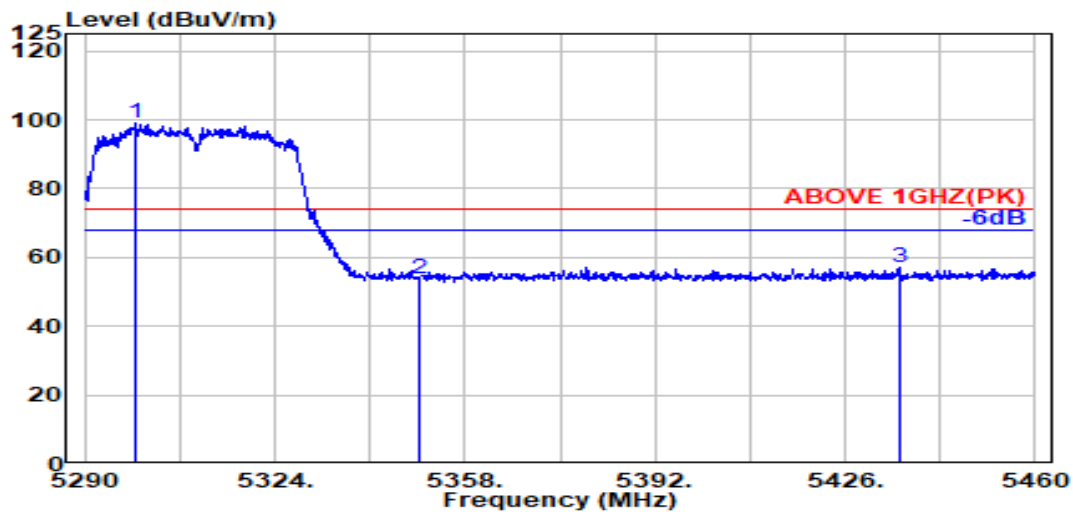

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.000	33.80	8.52	39.17	95.83	98.98	---	---	Peak
5350.000	33.70	8.57	39.17	50.85	53.96	74.00	20.04	Peak
5435.600	33.97	8.66	39.16	53.54	57.01	74.00	16.99	Peak

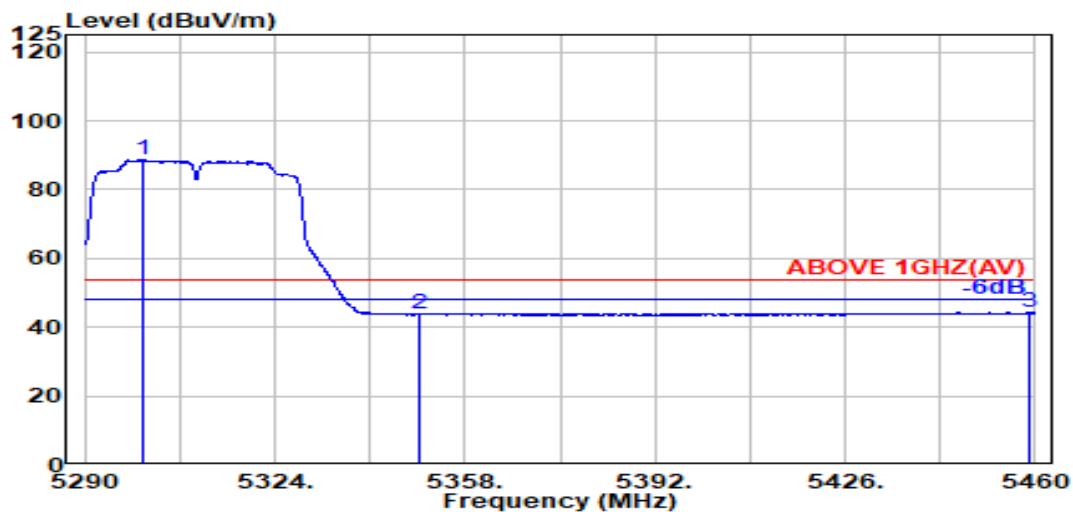

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5300.500	33.80	8.52	39.17	85.67	88.82	---	---	Average
5350.000	33.70	8.57	39.17	40.73	43.83	54.00	10.17	Average
5459.000	34.02	8.68	39.15	40.73	44.27	54.00	9.73	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

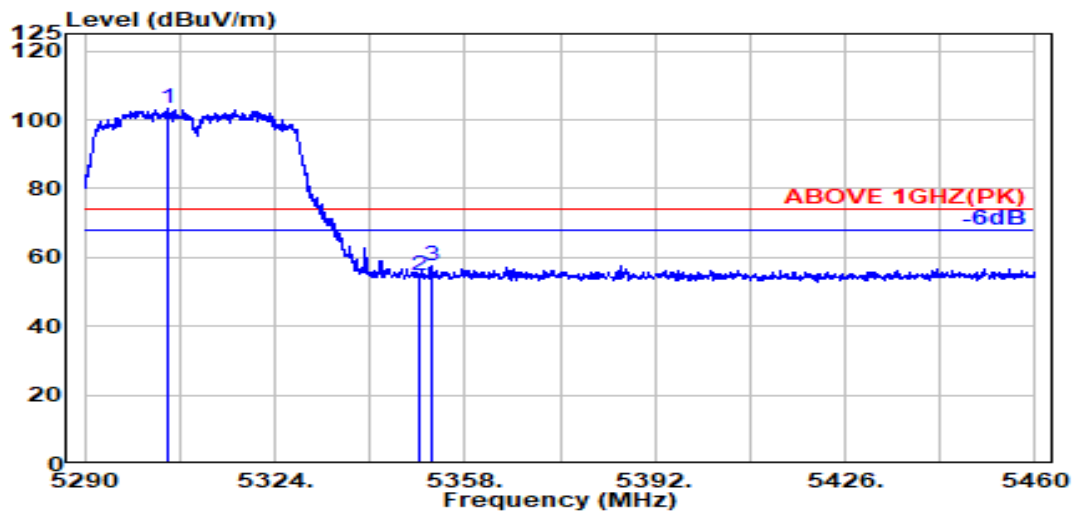

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.000	33.79	8.53	39.17	100.21	103.35	---	---	Peak
5350.000	33.70	8.57	39.17	51.54	54.64	74.00	19.36	Peak
5351.900	33.71	8.57	39.17	54.50	57.62	74.00	16.38	Peak

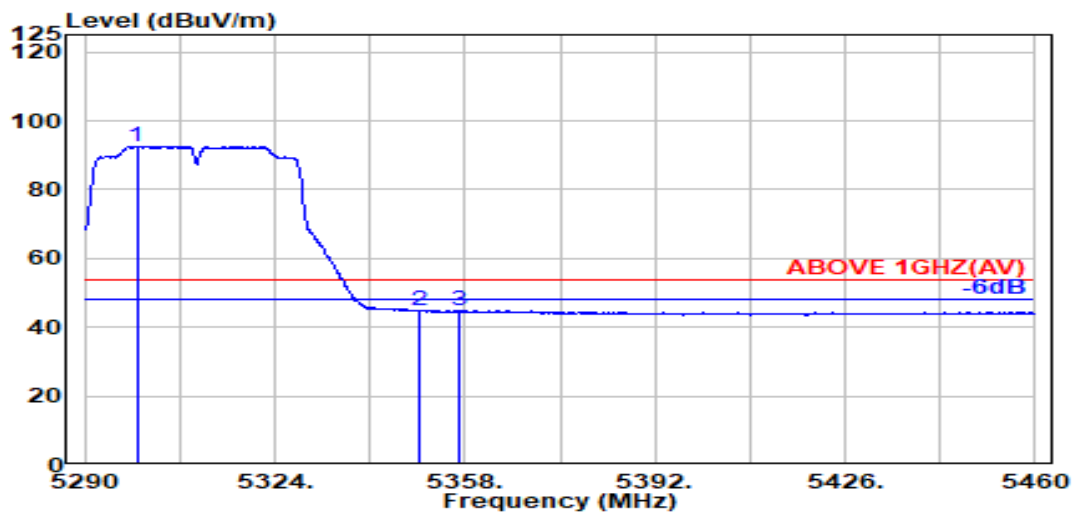

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.300	33.80	8.52	39.17	89.51	92.66	---	---	Average
5350.000	33.70	8.57	39.17	41.61	44.72	54.00	9.28	Average
5356.900	33.73	8.58	39.17	41.68	44.82	54.00	9.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

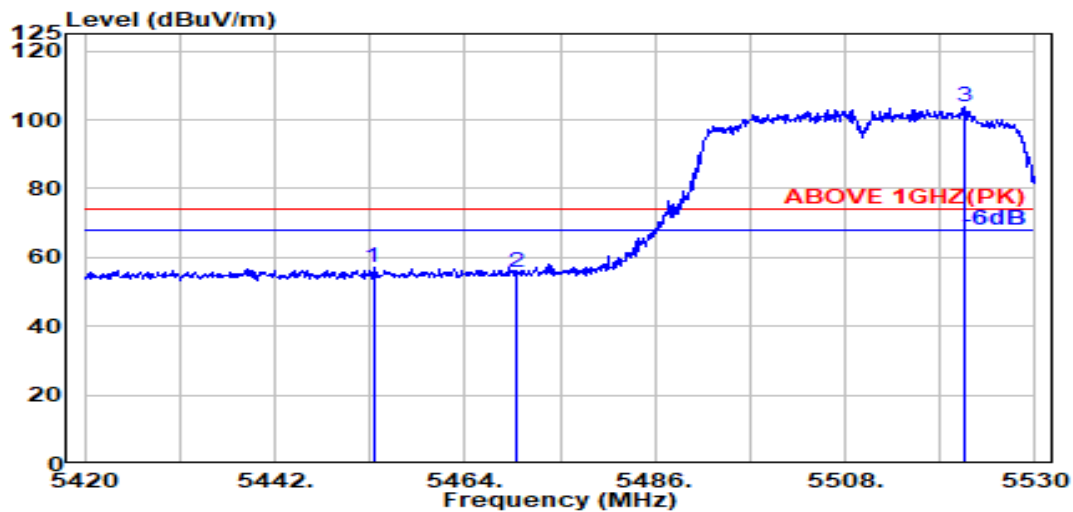

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.400	34.01	8.67	39.16	53.34	56.86	74.00	17.14	Peak
5470.000	34.04	8.69	39.15	52.24	55.81	74.00	18.19	Peak
@ 5521.900	34.06	8.74	39.15	100.01	103.64	---	---	Peak

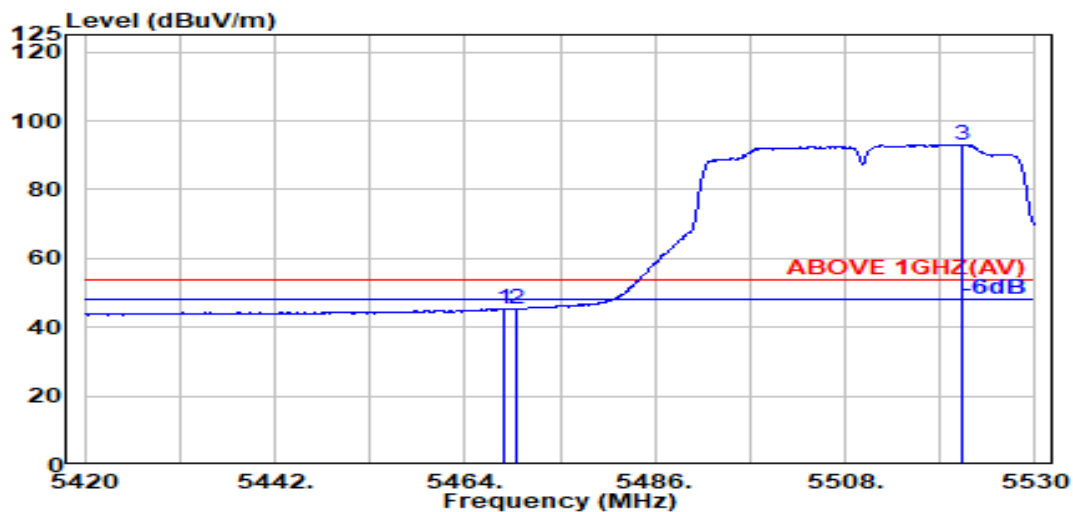

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.04	8.69	39.15	41.91	45.48	54.00	8.52	Average
5470.000	34.04	8.69	39.15	41.79	45.37	54.00	8.63	Average
@ 5521.500	34.06	8.74	39.15	89.39	93.03	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

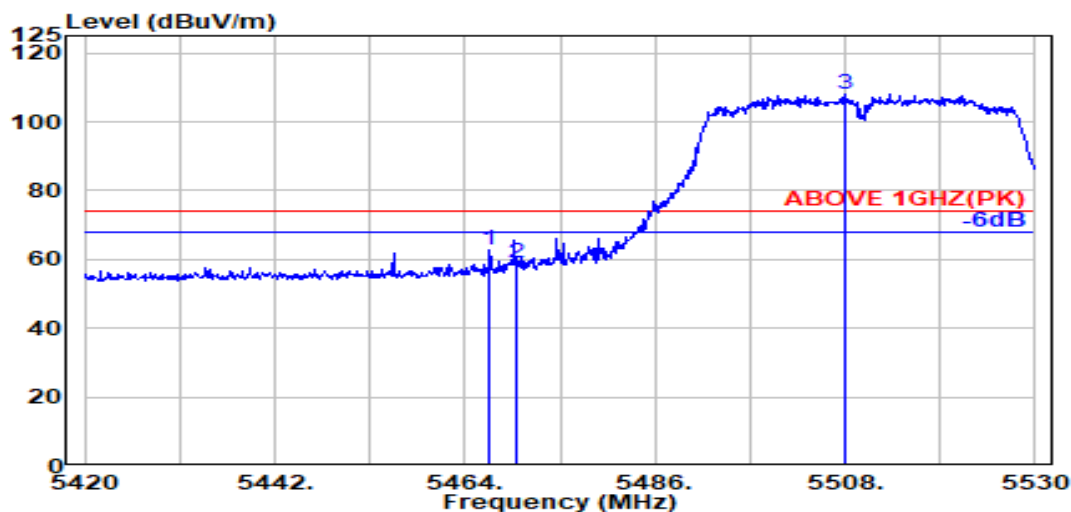

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.15	59.20	62.76	74.00	11.24	Peak
5470.000	34.04	8.69	39.15	55.38	58.95	74.00	15.05	Peak
@ 5508.000	34.08	8.72	39.15	104.46	108.12	---	---	Peak

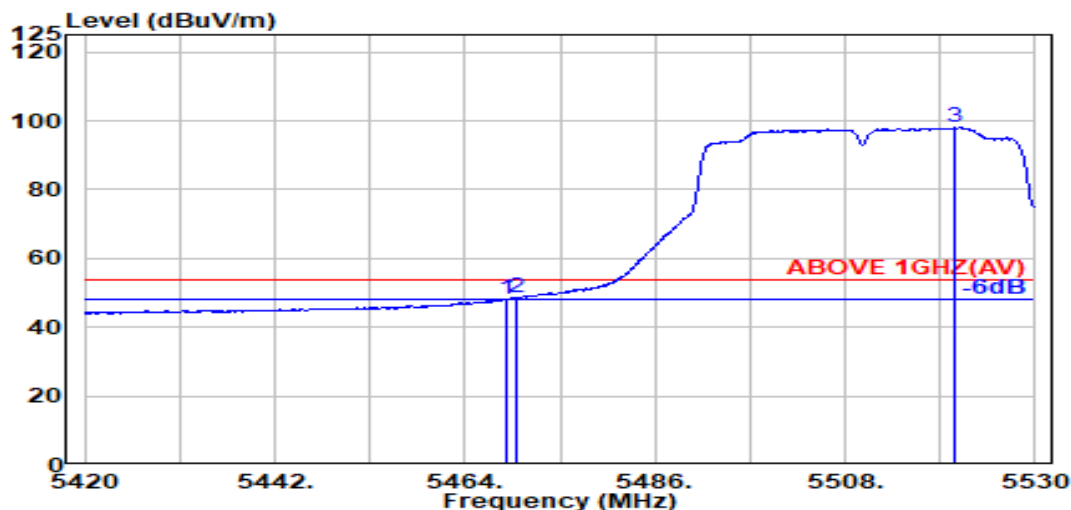

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	44.65	48.22	54.00	5.78	Average
5470.000	34.04	8.69	39.15	45.07	48.65	54.00	5.35	Average
@ 5520.800	34.06	8.74	39.15	94.26	97.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

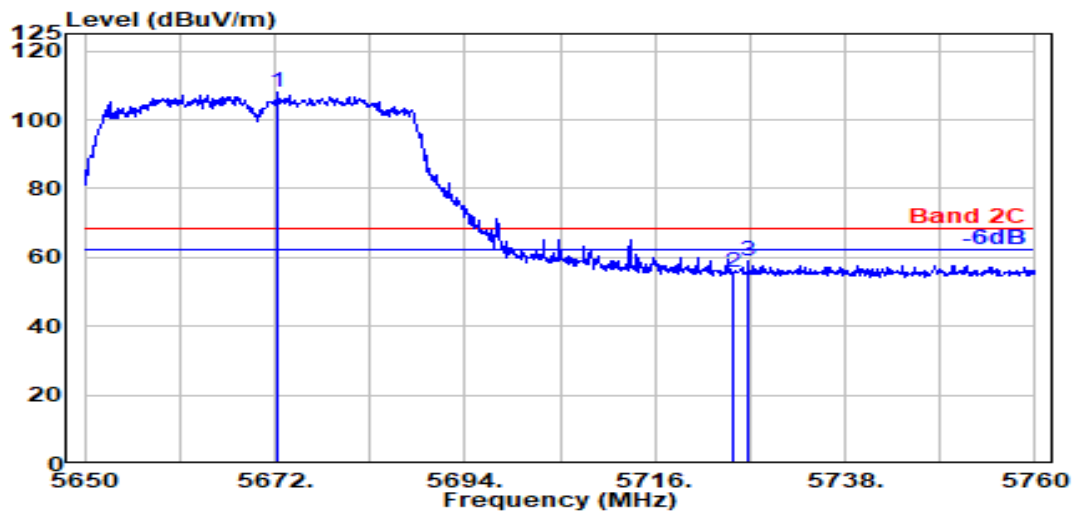

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.400	33.71	8.88	39.19	104.66	108.07	---	---	Peak
5725.000	33.60	8.93	39.20	52.34	55.67	68.20	12.53	Peak
5726.800	33.60	8.93	39.20	55.63	58.96	68.20	9.24	Peak

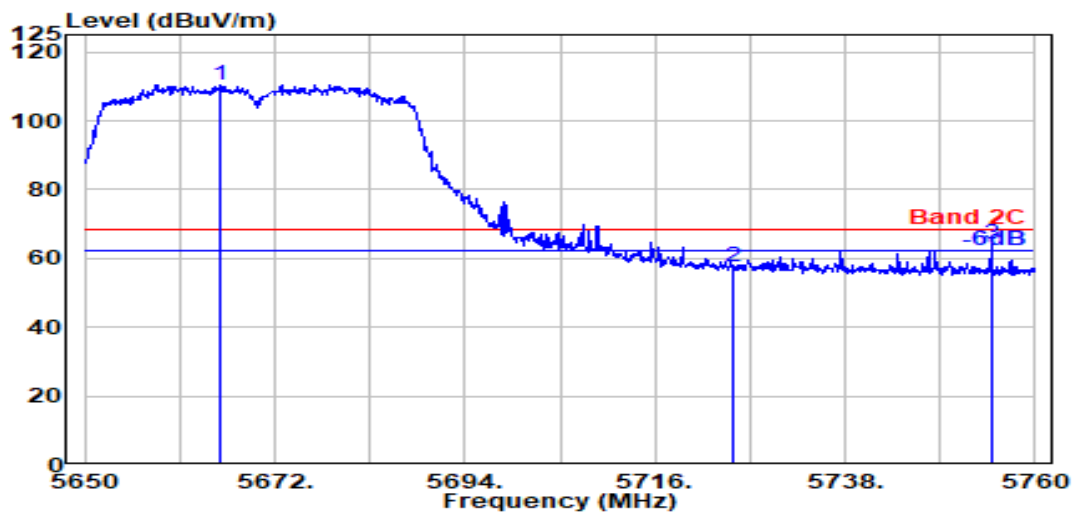

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5665.800	33.74	8.87	39.18	107.08	110.51	---	---	Peak
5725.000	33.60	8.93	39.20	54.24	57.57	68.20	10.63	Peak
5754.900	33.62	8.95	39.20	60.86	64.23	68.20	3.97	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

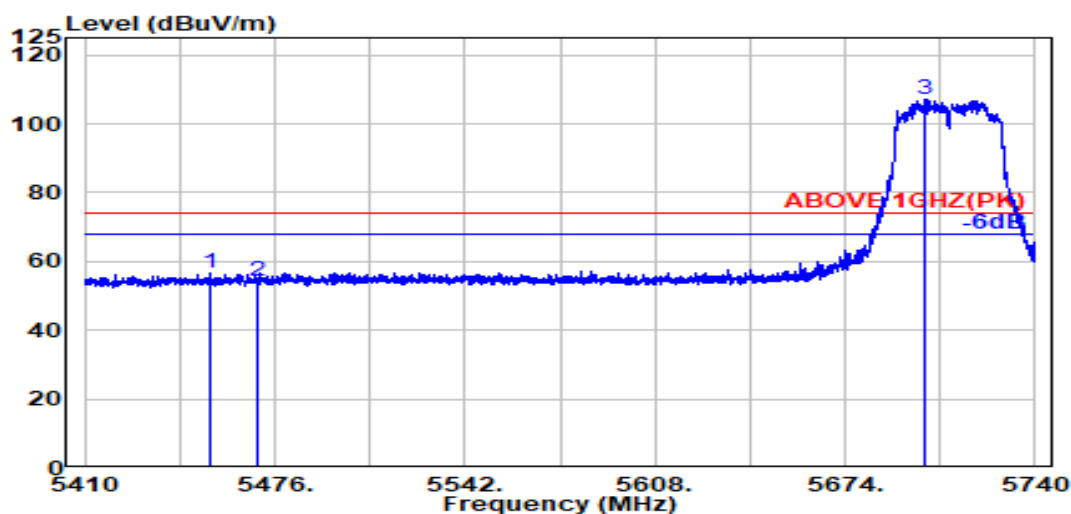

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.500	34.01	8.67	39.16	52.93	56.45	74.00	17.55	Peak
5470.000	34.04	8.69	39.15	50.67	54.24	74.00	19.76	Peak
@ 5701.900	33.60	8.90	39.19	103.64	106.95	---	---	Peak

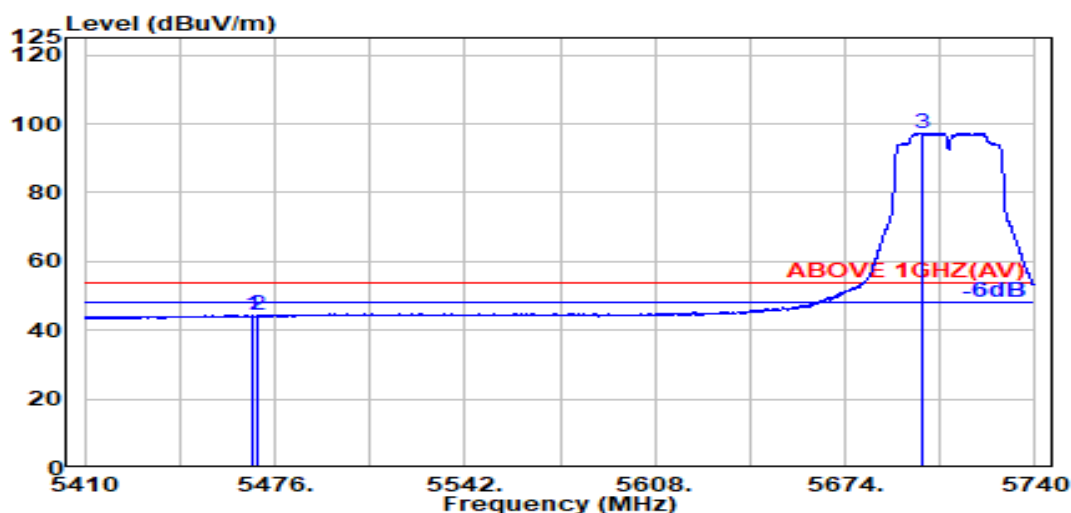

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	40.77	44.34	54.00	9.66	Average
5470.000	34.04	8.69	39.15	40.59	44.16	54.00	9.84	Average
@ 5701.200	33.60	8.90	39.19	94.05	97.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

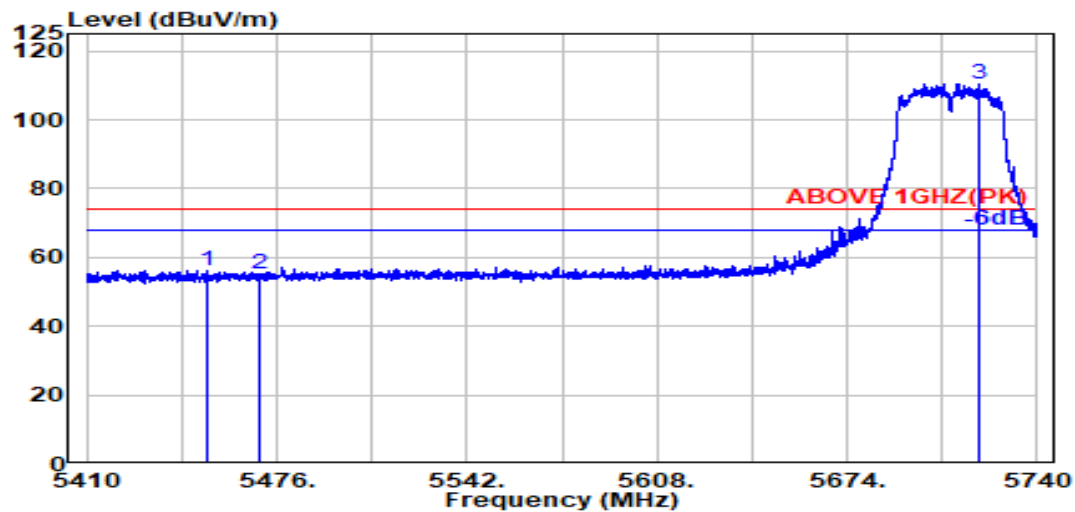

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.600	34.00	8.67	39.16	52.83	56.34	74.00	17.66	Peak
5470.000	34.04	8.69	39.15	51.45	55.03	74.00	18.97	Peak
@ 5719.600	33.60	8.92	39.20	107.22	110.55	---	---	Peak

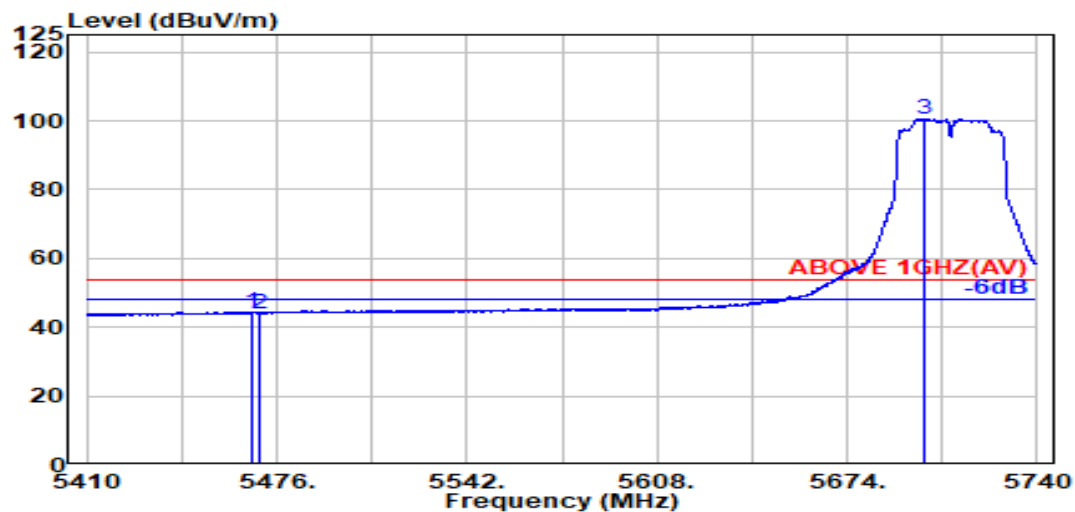

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	40.84	44.41	54.00	9.59	Average
5470.000	34.04	8.69	39.15	40.49	44.07	54.00	9.93	Average
@ 5700.400	33.60	8.90	39.19	97.05	100.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

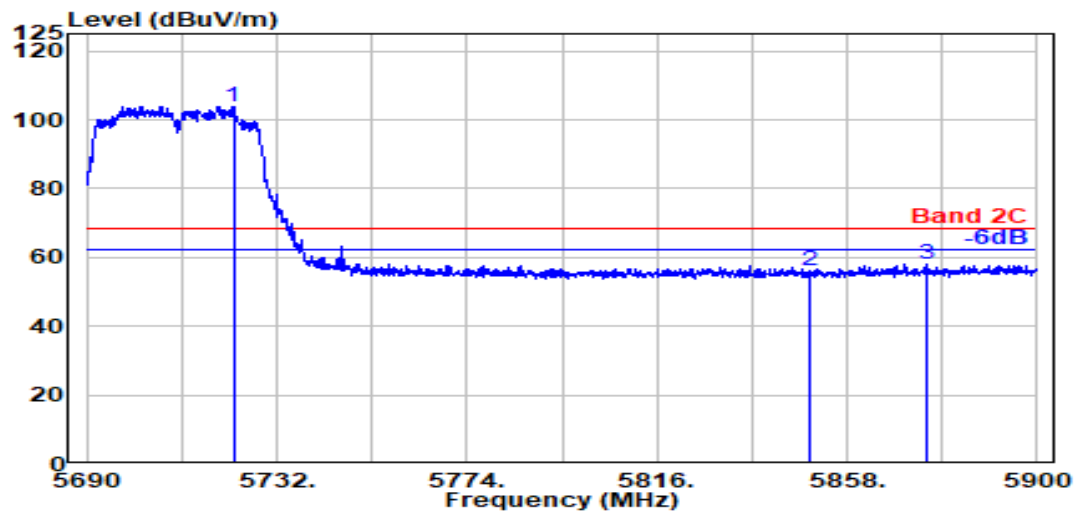

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.400	33.60	8.92	39.20	100.65	103.98	---	---	Peak
5850.000	33.90	9.04	39.22	52.22	55.93	68.20	12.27	Peak
5875.500	34.00	9.06	39.23	54.35	58.19	68.20	10.01	Peak

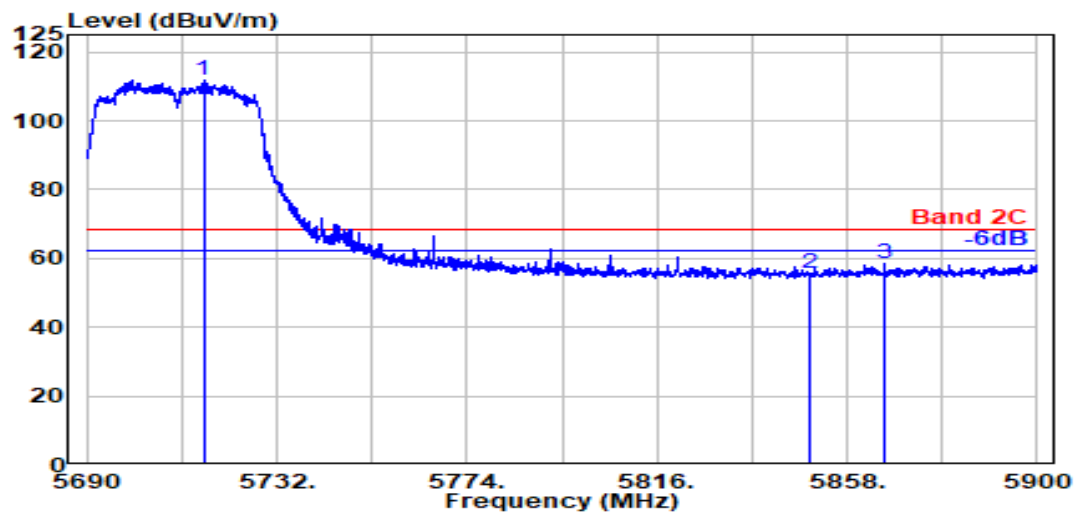

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.800	33.60	8.92	39.19	108.47	111.79	---	---	Peak
5850.000	33.90	9.04	39.22	51.74	55.45	68.20	12.75	Peak
5866.300	33.97	9.05	39.22	54.61	58.41	68.20	9.79	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

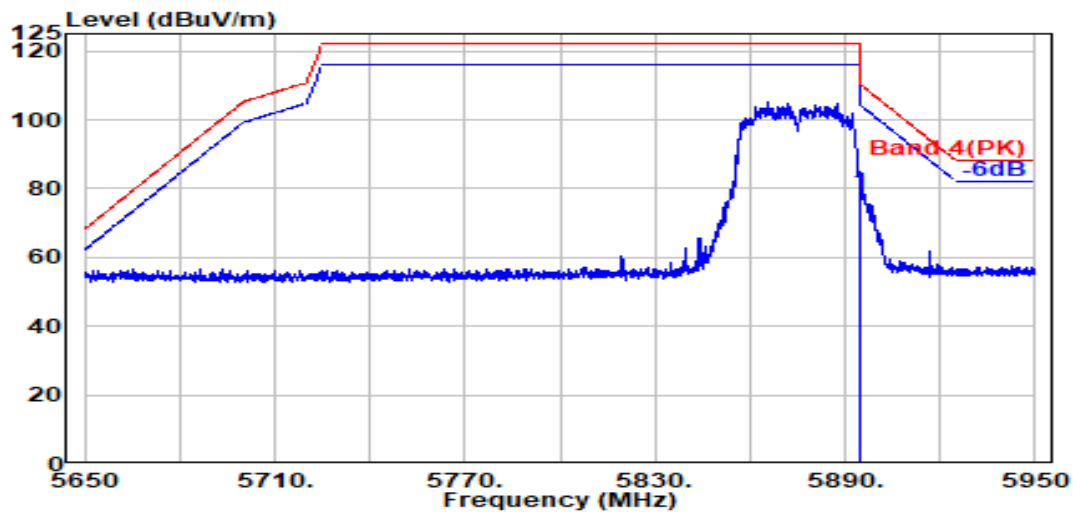

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	74.66	78.59	110.20	31.61	Peak

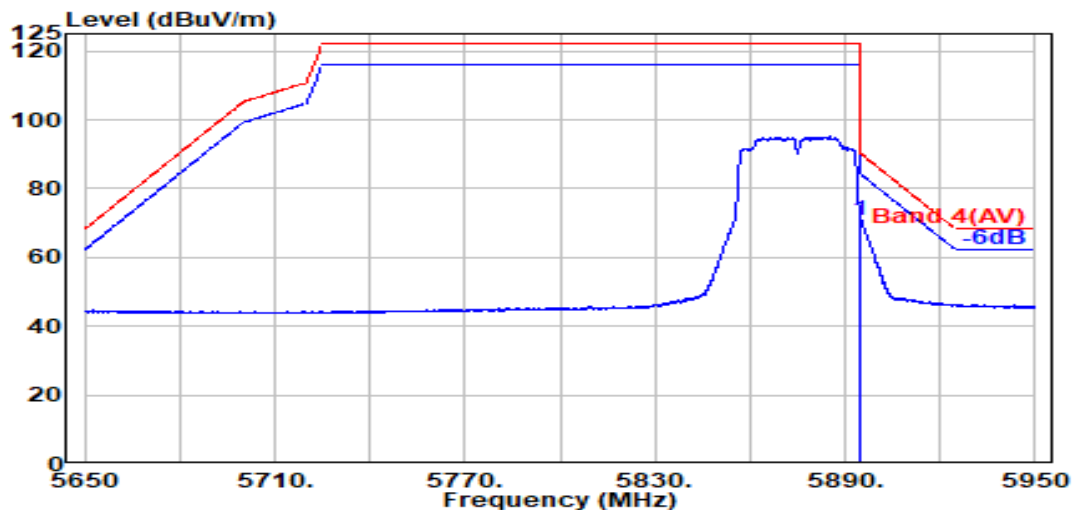


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	66.99	70.92	90.20	19.28	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

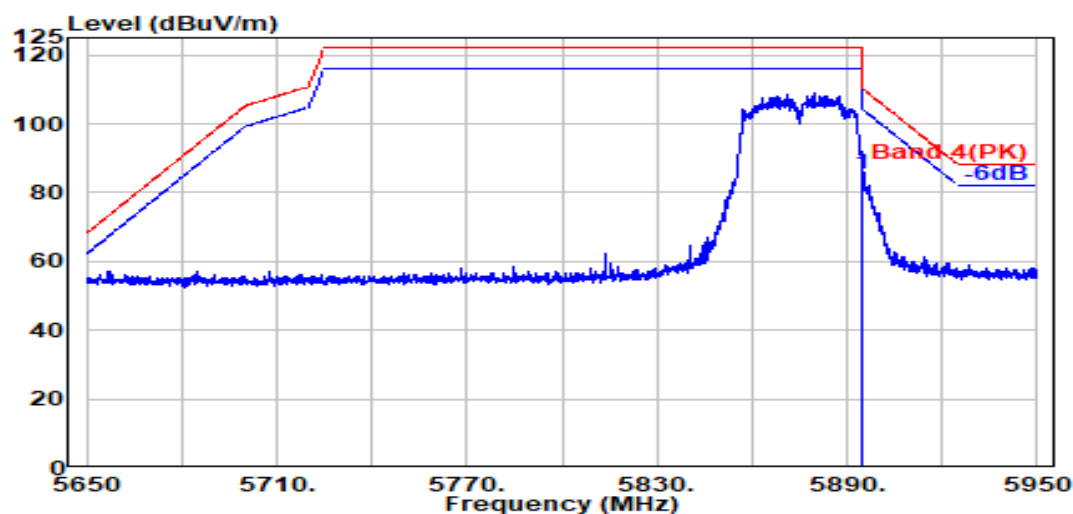

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	81.55	85.48	110.20	24.72	Peak

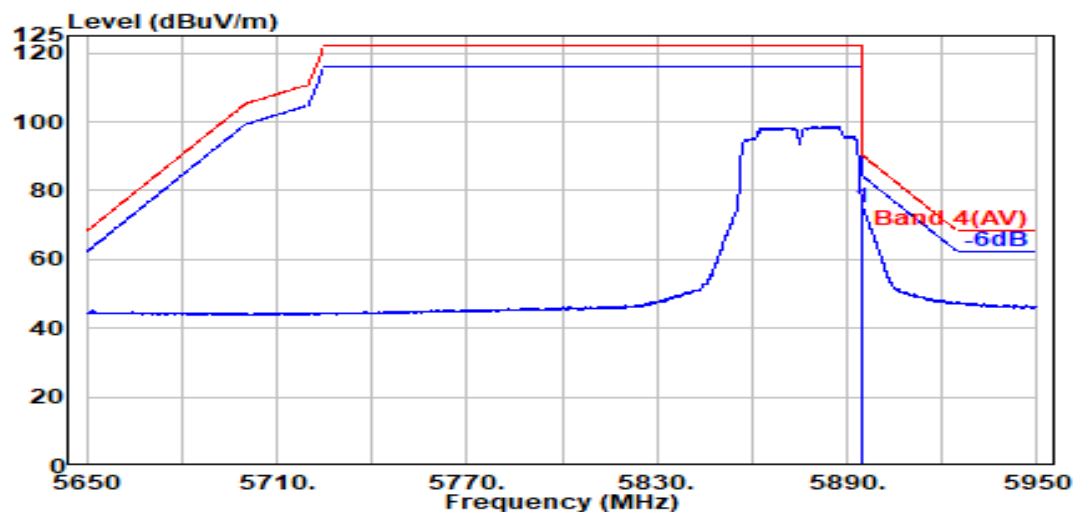


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	71.05	74.98	90.20	15.22	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

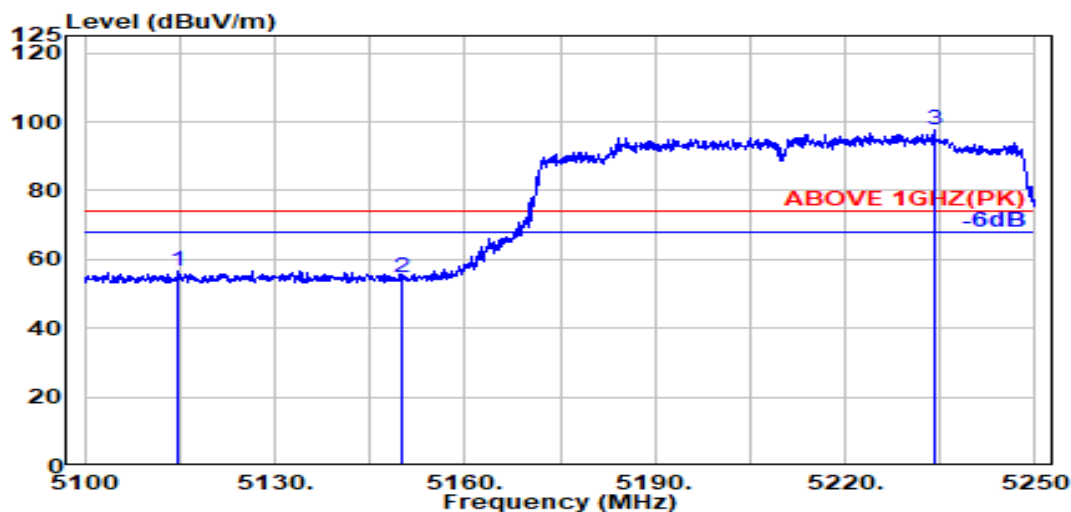

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.600	33.43	8.34	39.20	54.07	56.64	74.00	17.36	Peak
5150.000	33.50	8.37	39.19	51.90	54.59	74.00	19.41	Peak
@ 5234.100	33.73	8.46	39.18	94.53	97.54	---	---	Peak

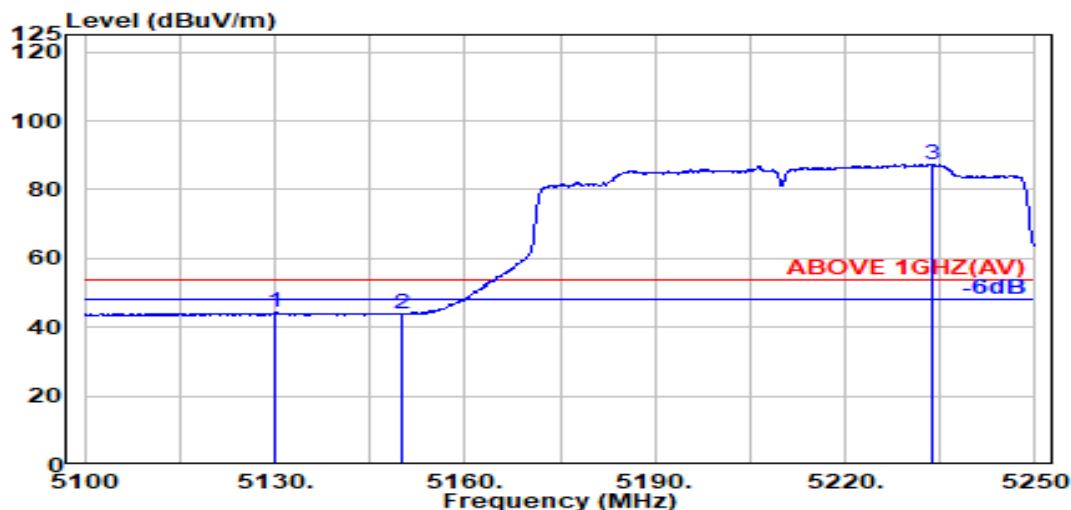

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5130.200	33.46	8.35	39.19	41.67	44.29	54.00	9.71	Average
5150.000	33.50	8.37	39.19	41.12	43.80	54.00	10.20	Average
@ 5233.600	33.73	8.46	39.18	84.35	87.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

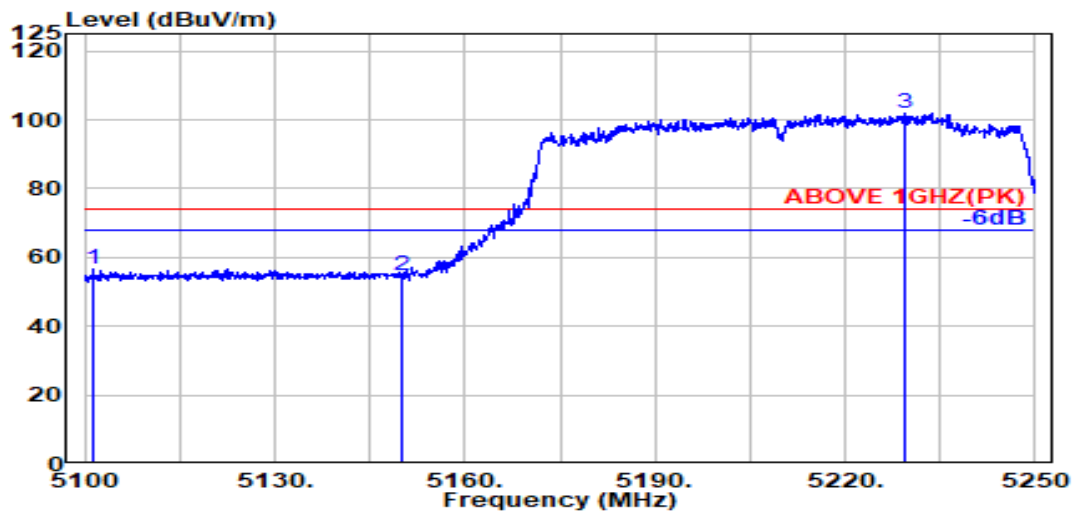

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.400	33.40	8.32	39.20	54.22	56.75	74.00	17.25	Peak
5150.000	33.50	8.37	39.19	52.11	54.79	74.00	19.21	Peak
@ 5229.500	33.74	8.45	39.18	99.07	102.08	---	---	Peak

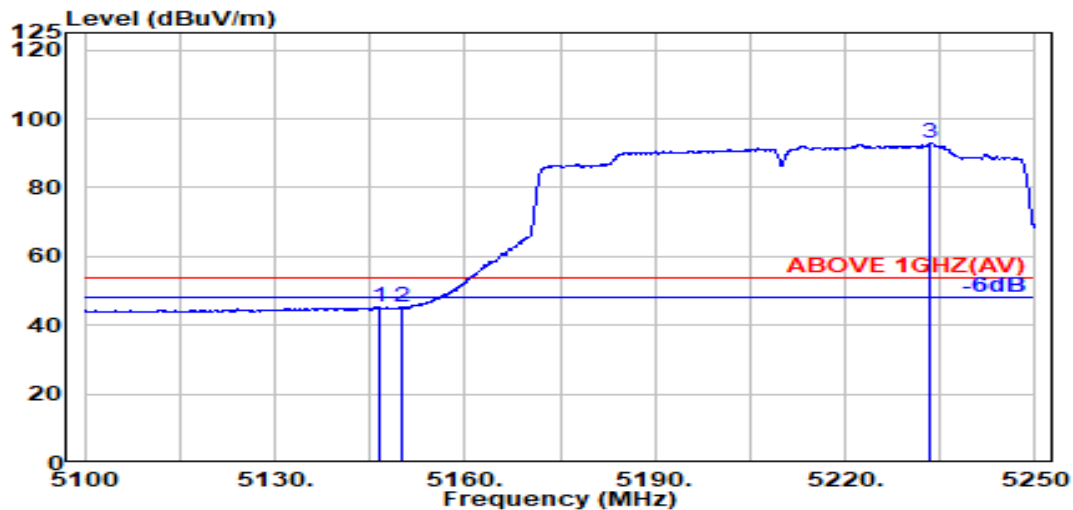

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.49	8.37	39.19	42.43	45.10	54.00	8.90	Average
5150.000	33.50	8.37	39.19	42.48	45.17	54.00	8.83	Average
@ 5233.500	33.73	8.46	39.18	89.88	92.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

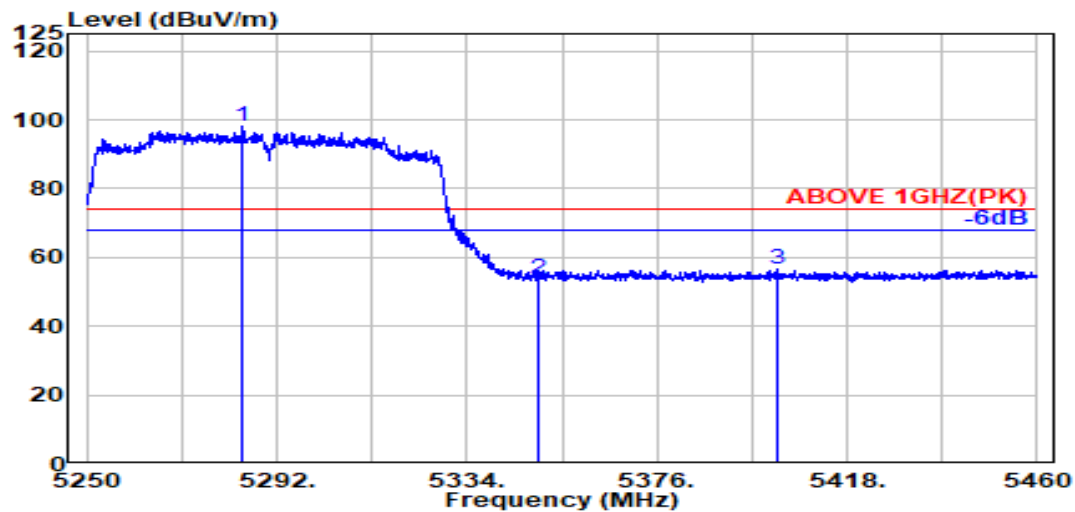

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5284.400	33.77	8.51	39.18	94.83	97.93	---	---	Peak
5350.000	33.70	8.57	39.17	50.70	53.81	74.00	20.19	Peak
5402.700	33.91	8.62	39.16	53.18	56.55	74.00	17.45	Peak

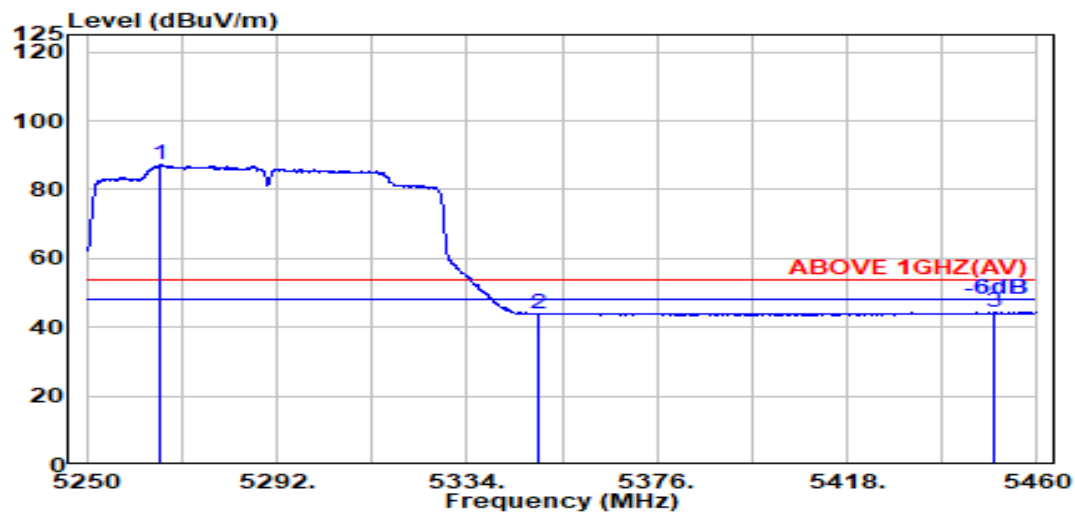

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.100	33.73	8.49	39.18	84.03	87.08	---	---	Average
5350.000	33.70	8.57	39.17	40.63	43.74	54.00	10.26	Average
5450.600	34.00	8.67	39.16	40.81	44.32	54.00	9.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

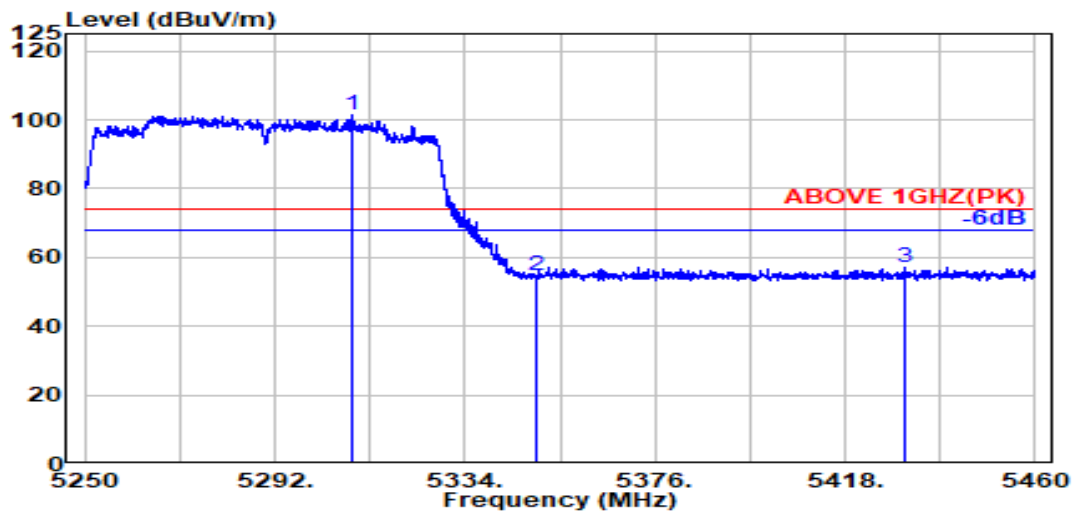

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.300	33.78	8.53	39.17	98.38	101.52	---	---	Peak
5350.000	33.70	8.57	39.17	51.43	54.54	74.00	19.46	Peak
5431.000	33.96	8.65	39.16	53.74	57.19	74.00	16.81	Peak

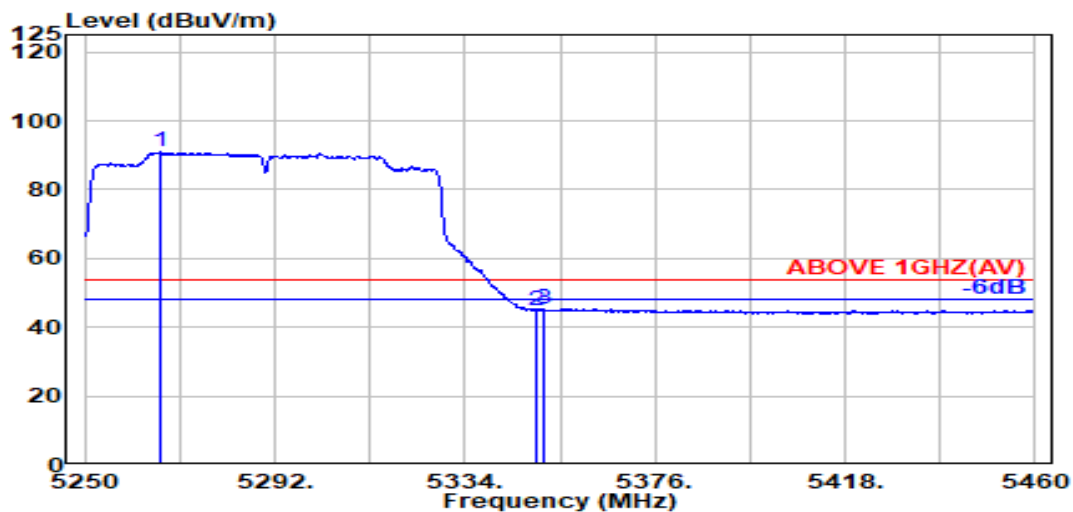

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.700	33.73	8.49	39.18	87.82	90.87	---	---	Average
5350.000	33.70	8.57	39.17	41.81	44.92	54.00	9.08	Average
5351.400	33.71	8.57	39.17	42.16	45.28	54.00	8.72	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

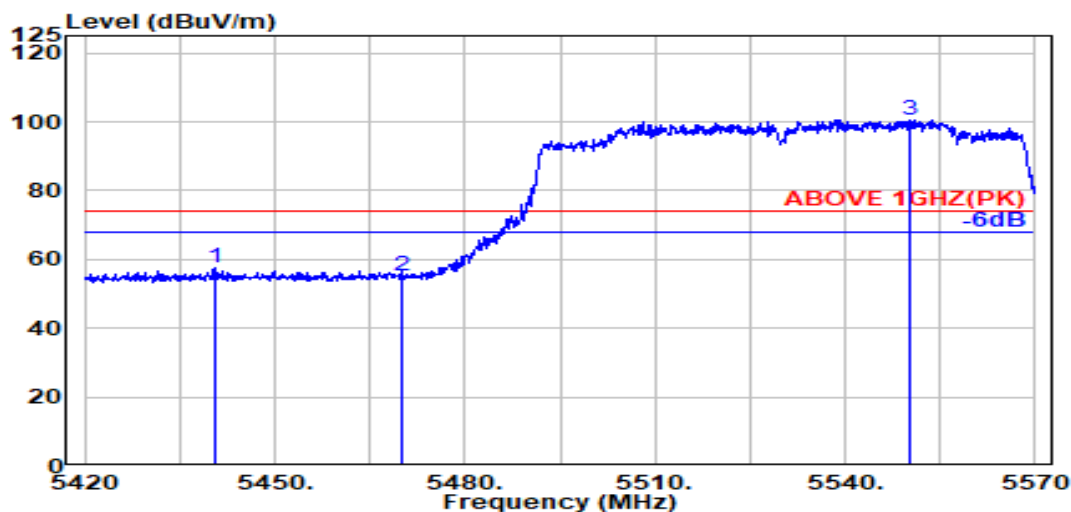

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.400	33.98	8.66	39.16	53.97	57.45	74.00	16.55	Peak
5470.000	34.04	8.69	39.15	51.75	55.33	74.00	18.67	Peak
@ 5550.100	34.00	8.76	39.16	97.07	100.68	---	---	Peak

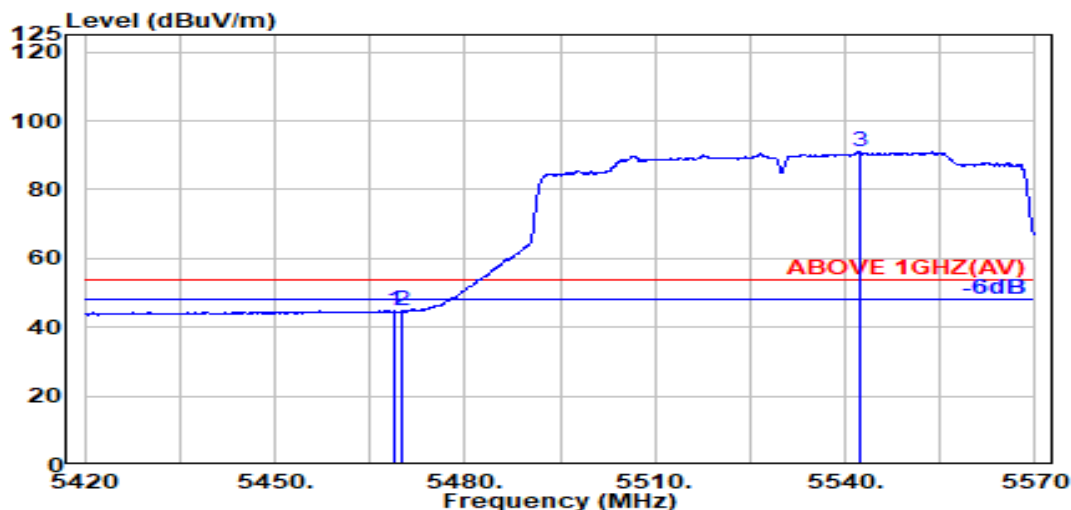


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	41.12	44.69	54.00	9.31	Average
5470.000	34.04	8.69	39.15	41.02	44.59	54.00	9.41	Average
@ 5542.400	34.02	8.76	39.16	87.54	91.15	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

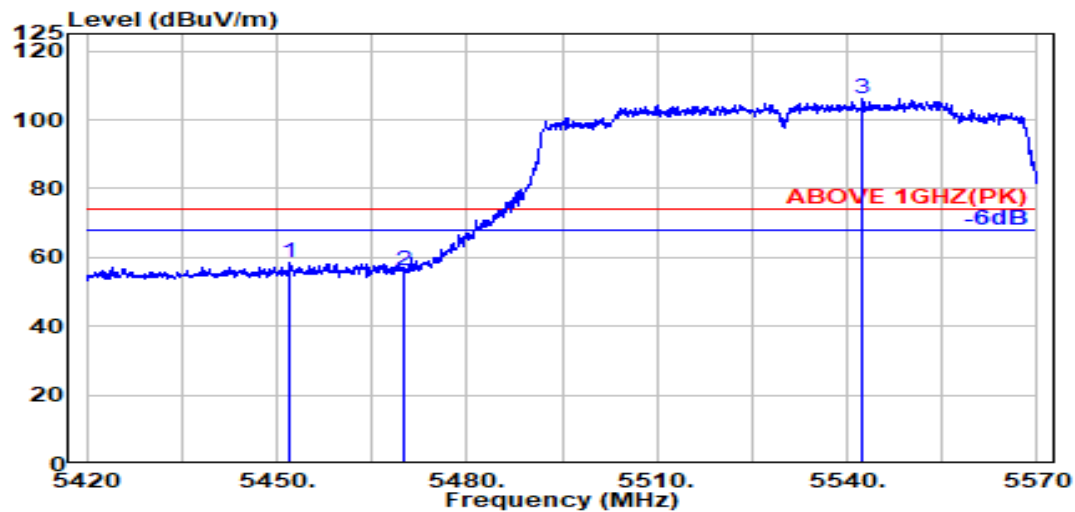

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.900	34.00	8.67	39.16	54.86	58.38	74.00	15.62	Peak
5470.000	34.04	8.69	39.15	52.38	55.95	74.00	18.05	Peak
@ 5542.300	34.02	8.76	39.16	102.64	106.26	---	---	Peak

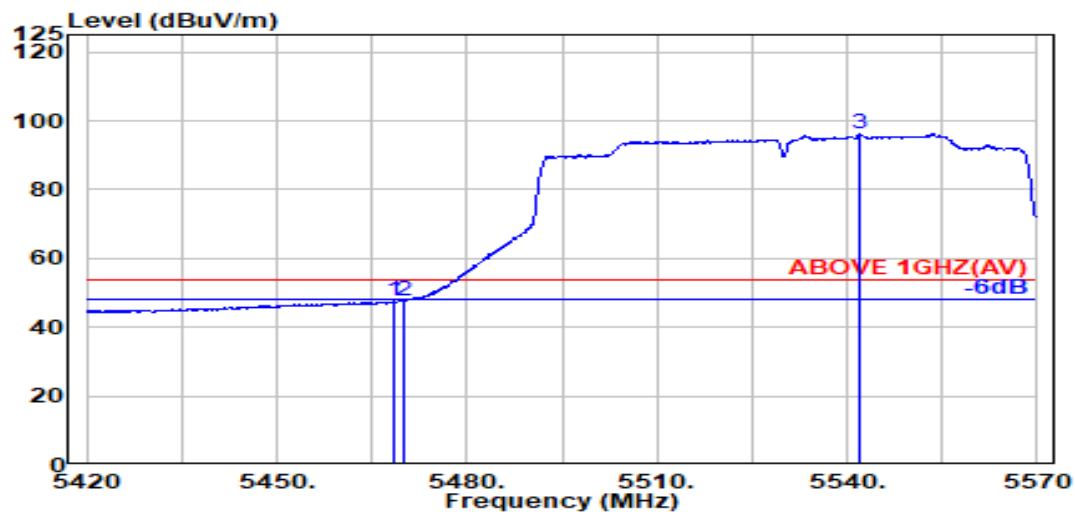


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	43.99	47.56	54.00	6.44	Average
5470.000	34.04	8.69	39.15	43.87	47.44	54.00	6.56	Average
@ 5542.000	34.02	8.76	39.16	92.60	96.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

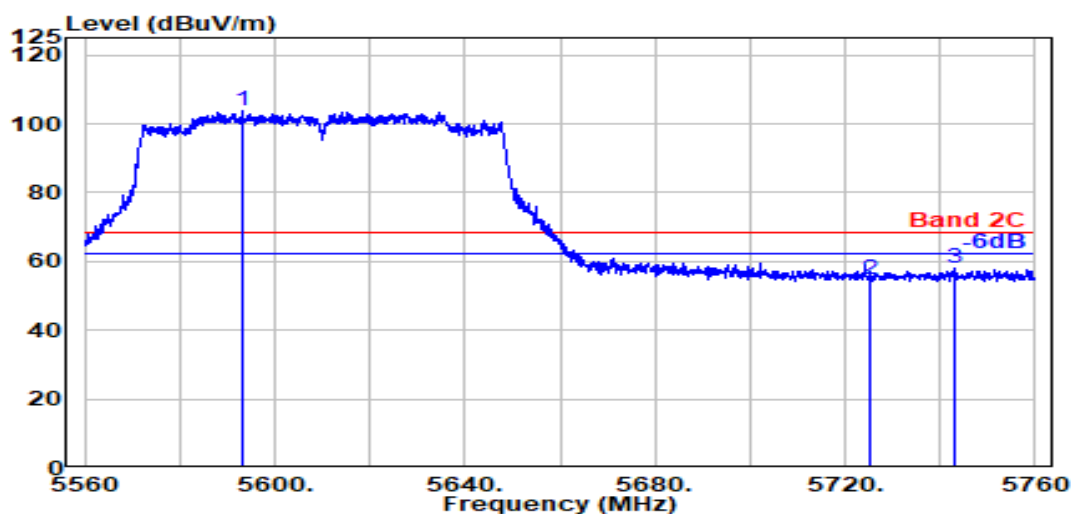

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5593.200	33.83	8.80	39.17	100.09	103.55	---	---	Peak
5725.000	33.60	8.93	39.20	51.18	54.51	68.20	13.69	Peak
5743.300	33.60	8.94	39.20	54.66	58.00	68.20	10.20	Peak

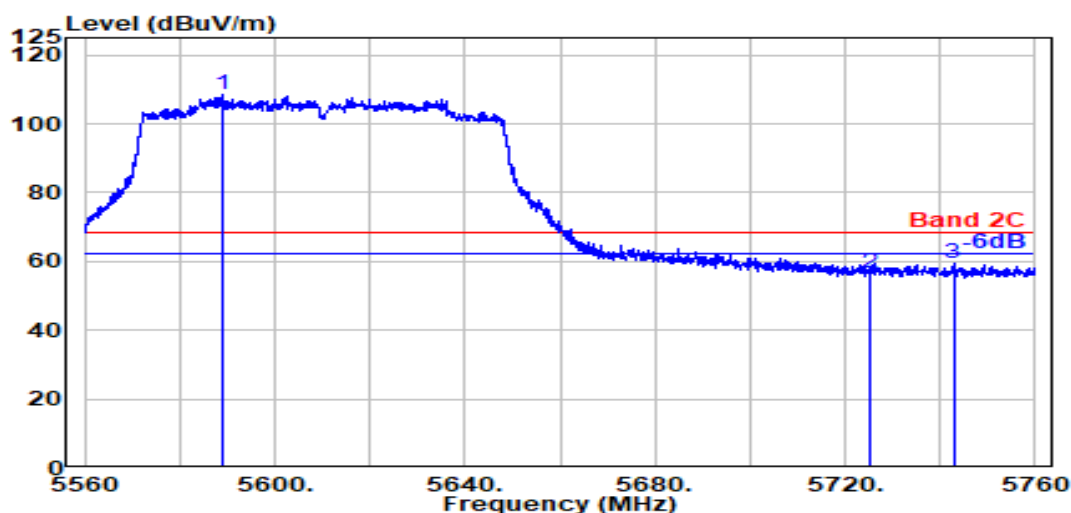


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.900	33.84	8.80	39.17	105.04	108.51	---	---	Peak
5725.000	33.60	8.93	39.20	53.44	56.77	68.20	11.43	Peak
5742.800	33.60	8.94	39.20	56.31	59.65	68.20	8.55	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

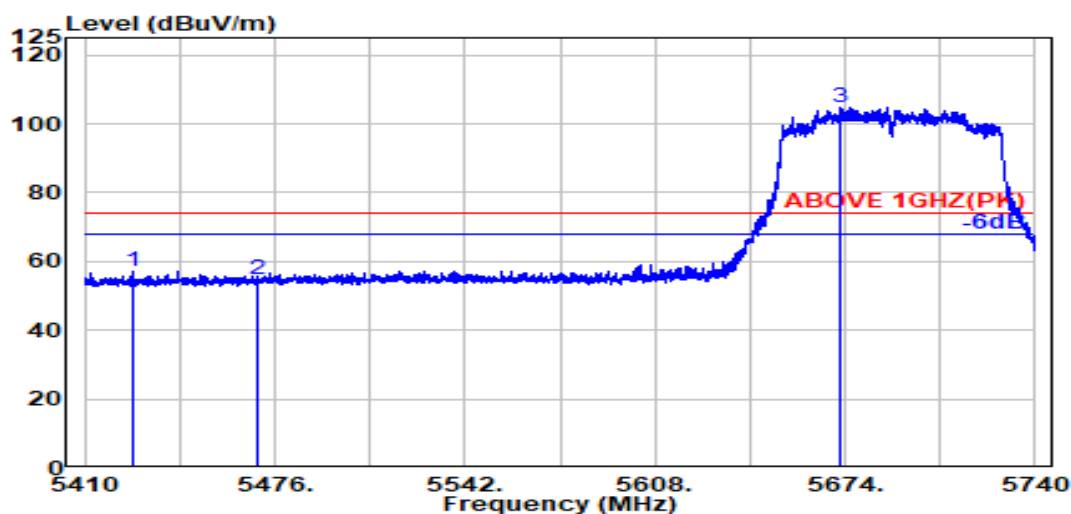

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.500	33.95	8.65	39.16	53.70	57.14	74.00	16.86	Peak
5470.000	34.04	8.69	39.15	51.02	54.60	74.00	19.40	Peak
@ 5672.500	33.71	8.88	39.19	101.53	104.93	---	---	Peak

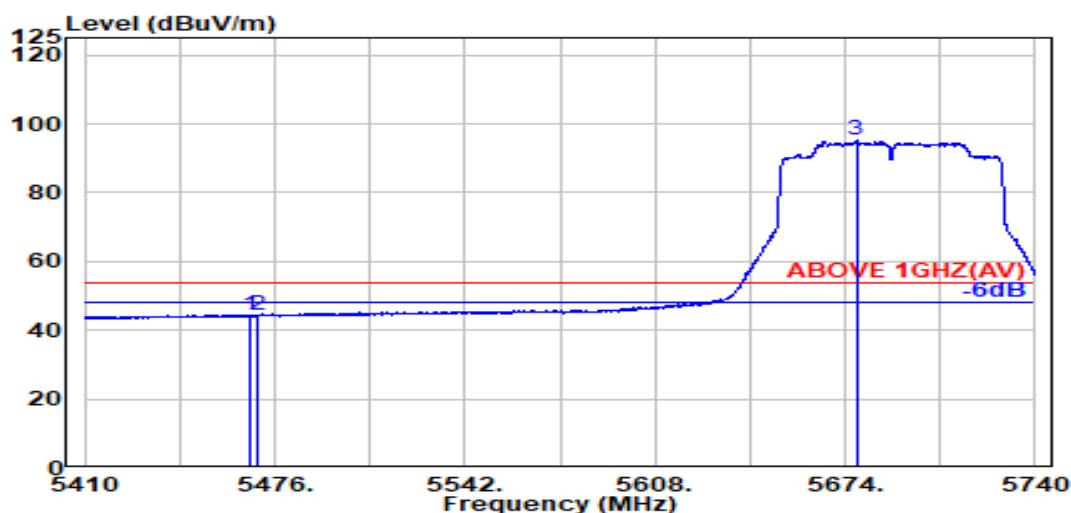


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	40.90	44.47	54.00	9.53	Average
5470.000	34.04	8.69	39.15	40.53	44.11	54.00	9.89	Average
@ 5677.900	33.69	8.88	39.19	91.67	95.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

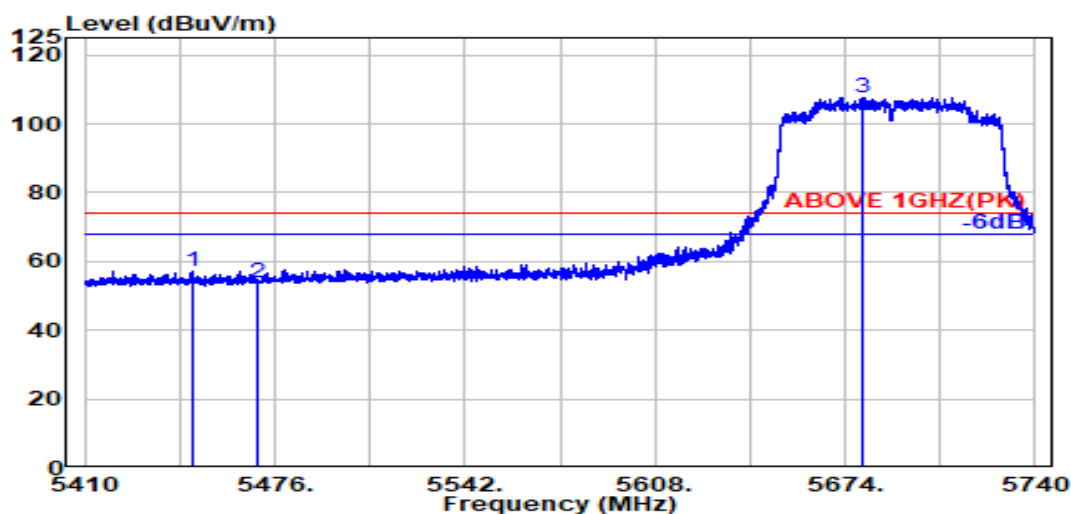

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.800	34.00	8.67	39.16	53.63	57.14	74.00	16.86	Peak
5470.000	34.04	8.69	39.15	50.01	53.58	74.00	20.42	Peak
@ 5680.400	33.68	8.88	39.19	104.25	107.63	---	---	Peak

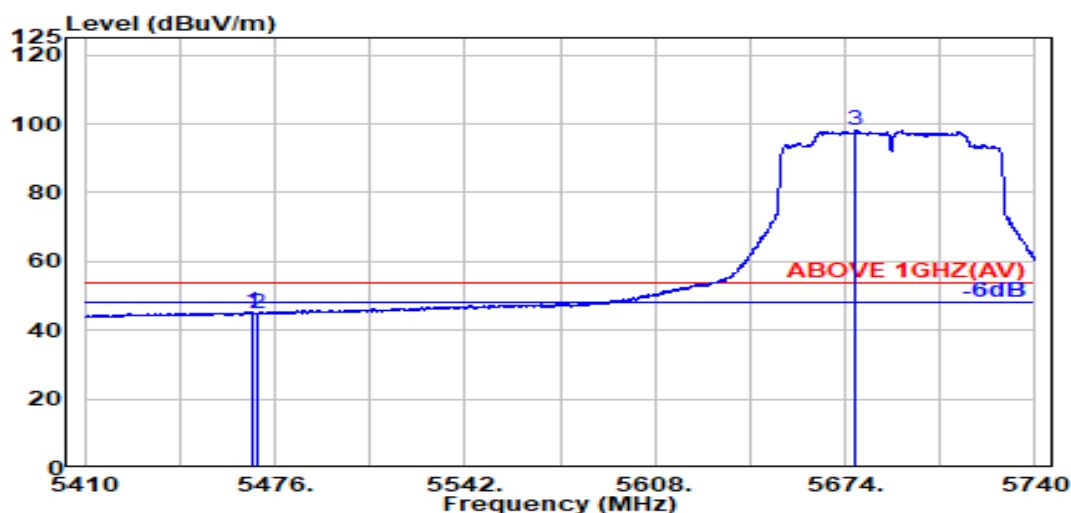


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	41.77	45.34	54.00	8.66	Average
5470.000	34.04	8.69	39.15	41.32	44.90	54.00	9.10	Average
@ 5677.500	33.69	8.88	39.19	94.83	98.22	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

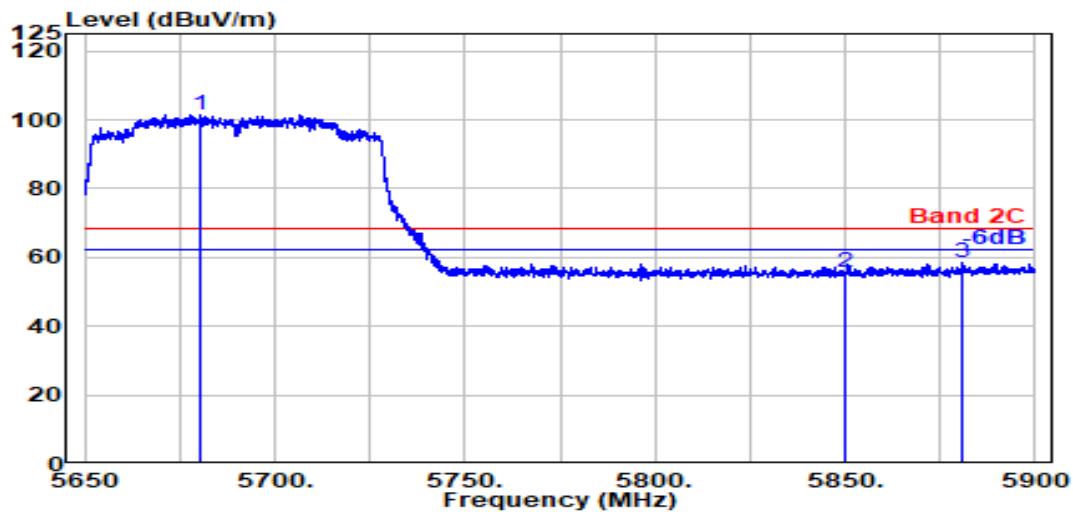

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5680.500	33.68	8.88	39.19	97.98	101.36	---	---	Peak
5850.000	33.90	9.04	39.22	51.74	55.46	68.20	12.74	Peak
5880.900	34.02	9.07	39.23	54.53	58.39	68.20	9.81	Peak

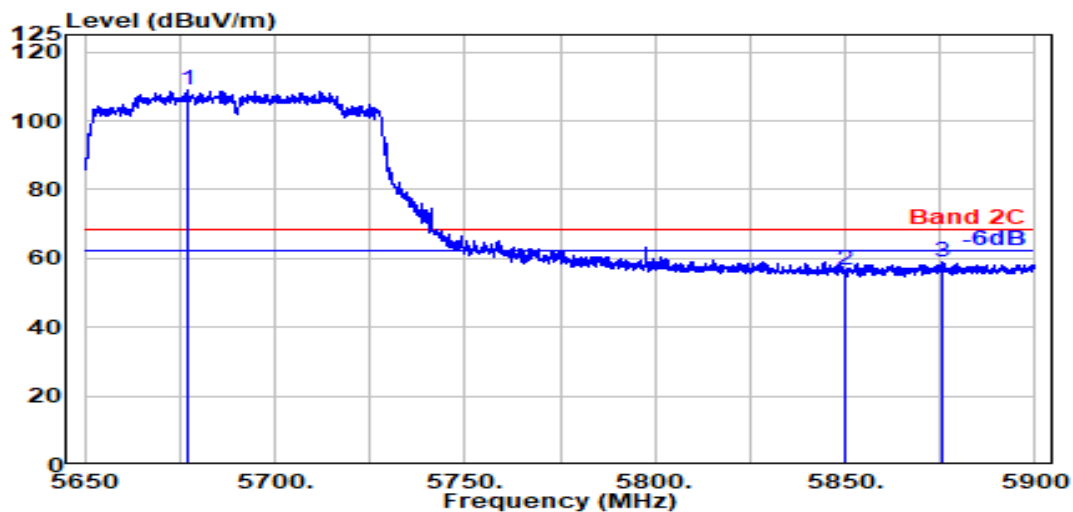


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.100	33.69	8.88	39.19	105.37	108.75	---	---	Peak
5850.000	33.90	9.04	39.22	53.11	56.82	68.20	11.38	Peak
5875.800	34.00	9.06	39.23	54.96	58.80	68.20	9.40	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

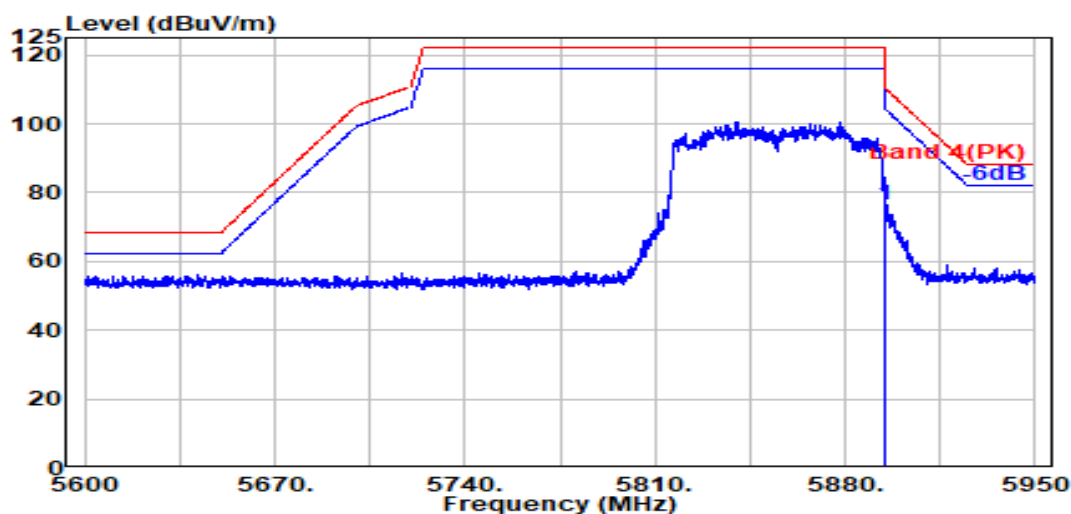

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	72.35	76.28	110.16	33.89	Peak

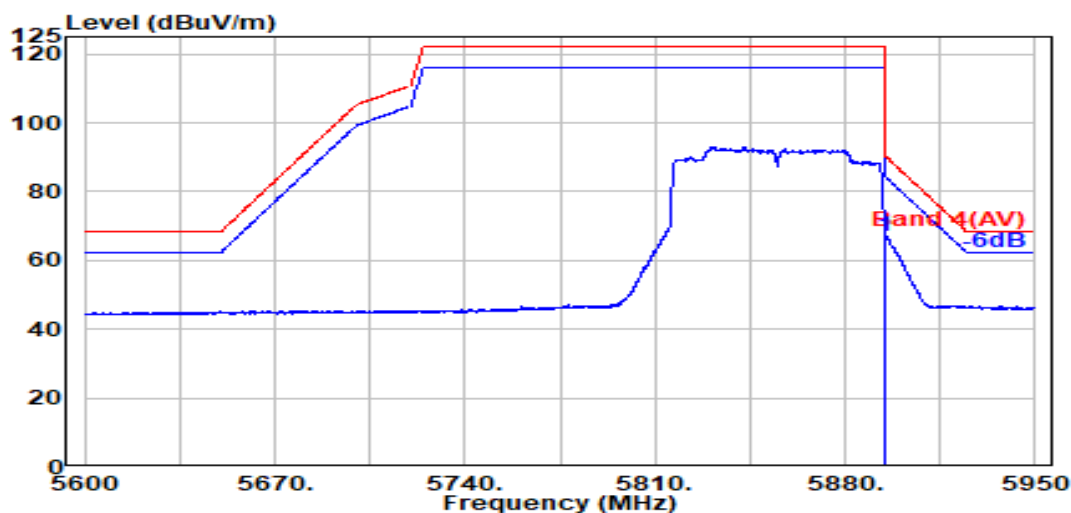

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	63.11	67.04	90.16	23.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

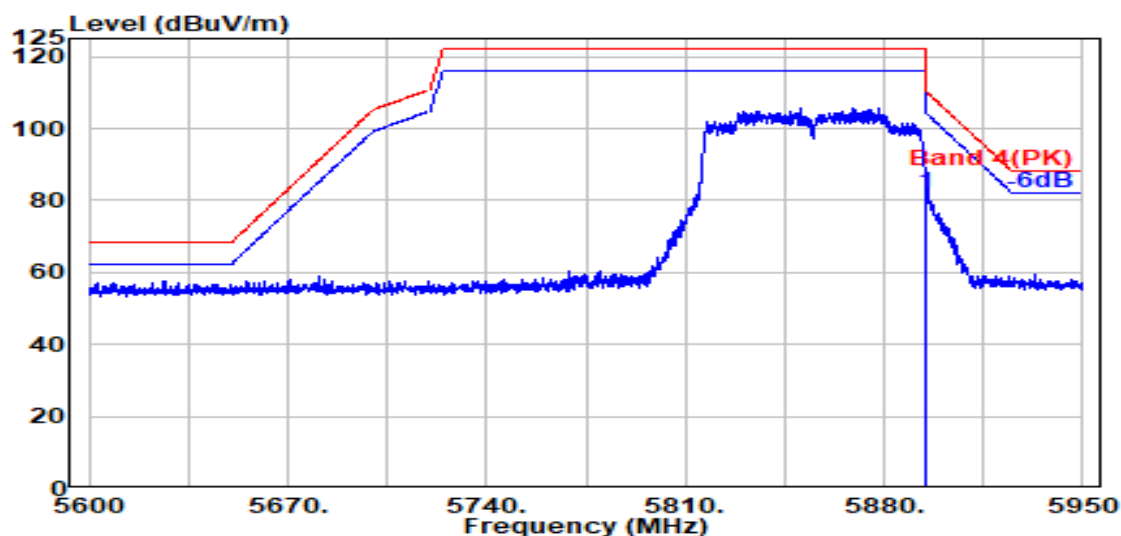

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	77.92	81.84	110.16	28.32	Peak

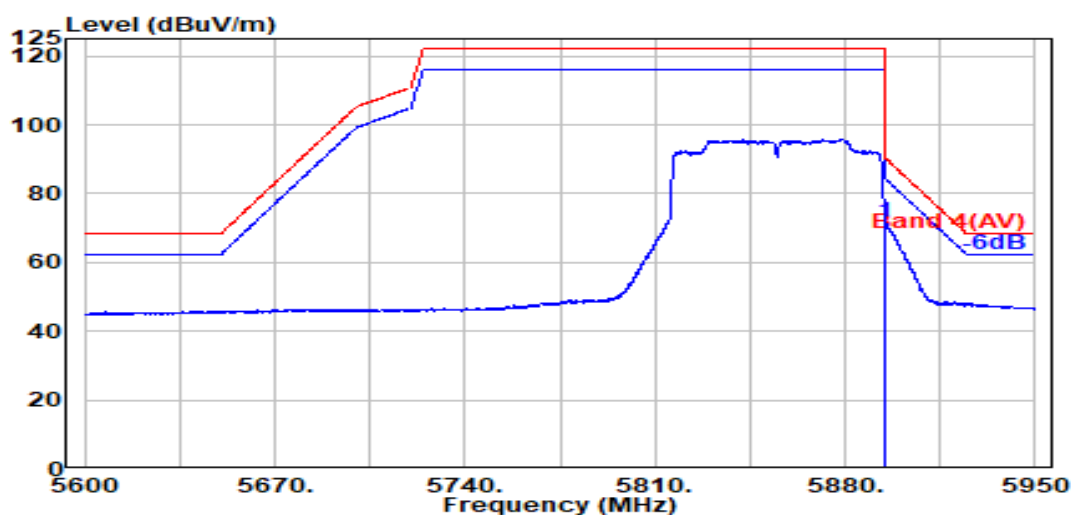

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	67.96	71.88	90.16	18.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

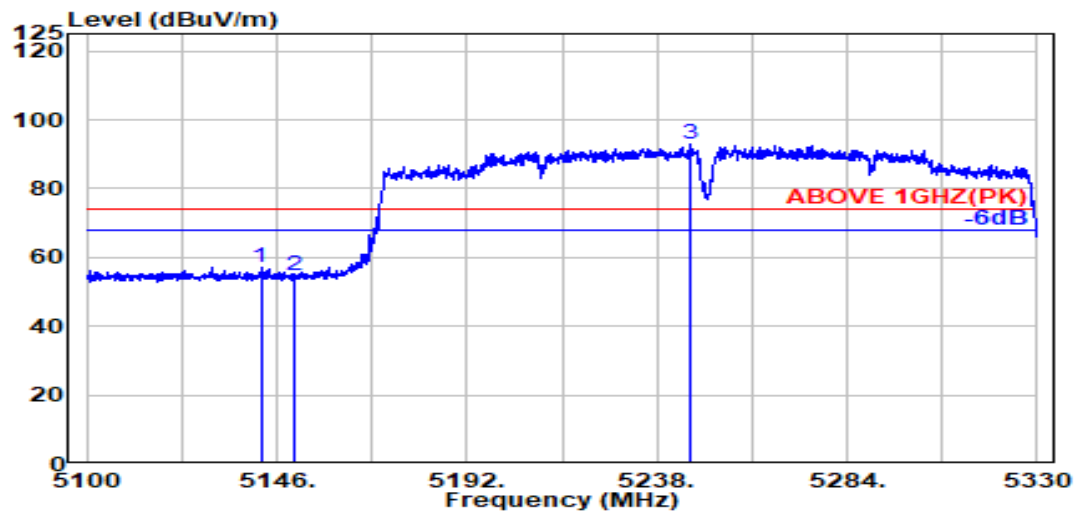

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.100	33.48	8.37	39.19	54.59	57.24	74.00	16.76	Peak
5150.000	33.50	8.37	39.19	51.91	54.59	74.00	19.41	Peak
@ 5245.800	33.71	8.47	39.18	89.86	92.86	---	---	Peak

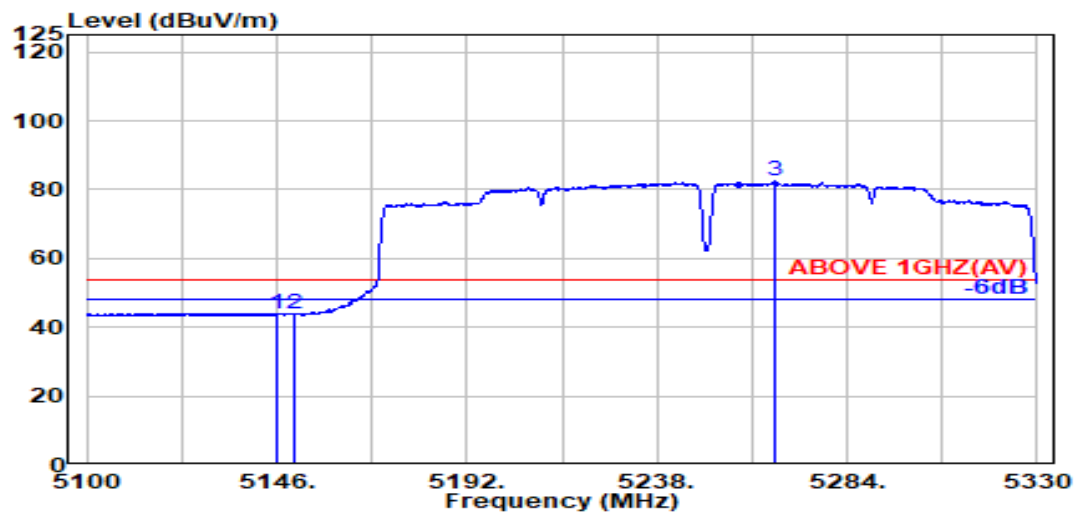

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.49	8.37	39.19	41.34	44.01	54.00	9.99	Average
5150.000	33.50	8.37	39.19	41.25	43.93	54.00	10.07	Average
@ 5266.600	33.73	8.49	39.18	79.28	82.33	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

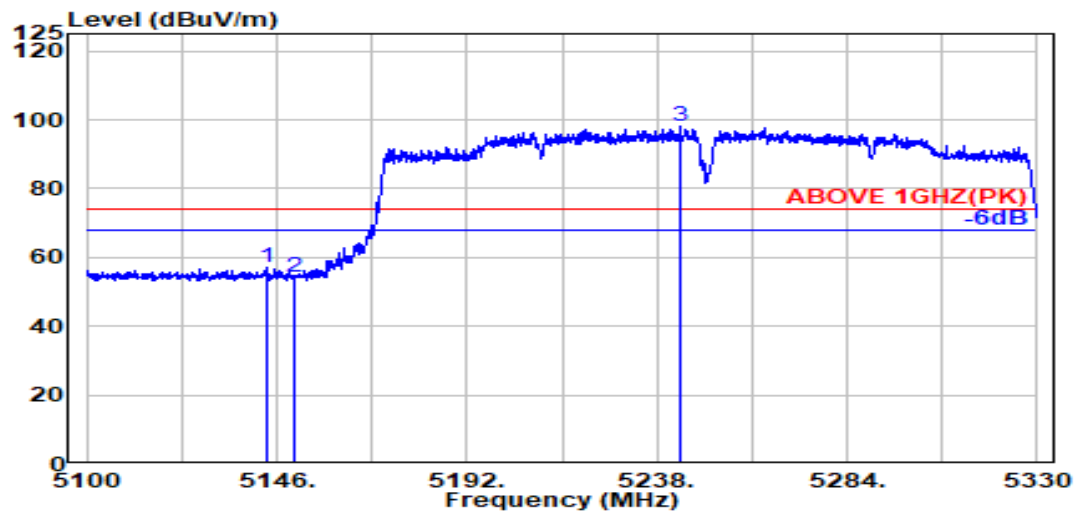

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.400	33.49	8.37	39.19	54.26	56.92	74.00	17.08	Peak
5150.000	33.50	8.37	39.19	51.69	54.37	74.00	19.63	Peak
@ 5243.800	33.71	8.47	39.18	94.88	97.89	---	---	Peak

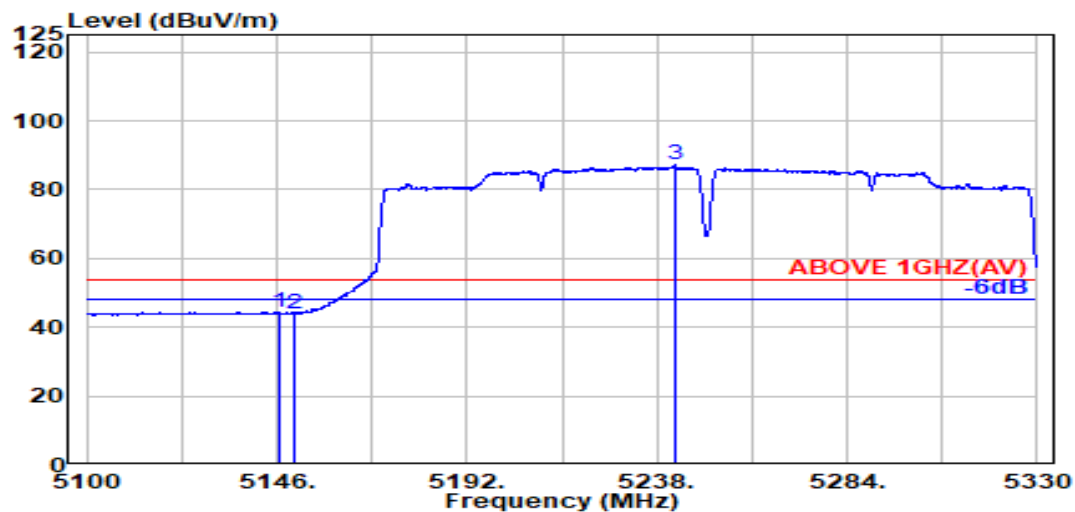


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	33.49	8.37	39.19	41.88	44.55	54.00	9.45	Average
5150.000	33.50	8.37	39.19	41.34	44.03	54.00	9.97	Average
@ 5242.500	33.71	8.47	39.18	84.26	87.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

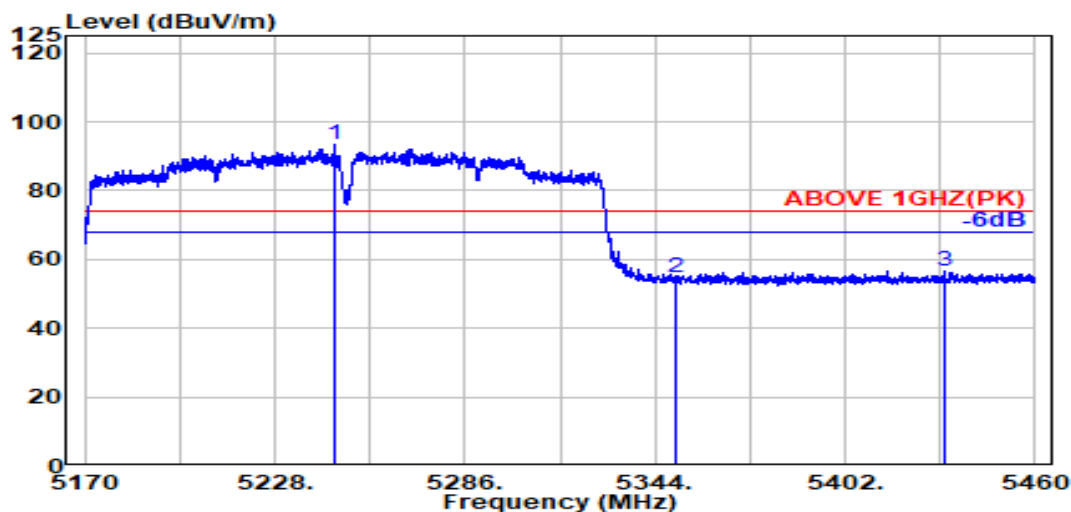

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5246.300	33.71	8.47	39.18	90.28	93.28	---	---	Peak
5350.000	33.70	8.57	39.17	51.55	54.65	74.00	19.35	Peak
5432.100	33.96	8.65	39.16	53.08	56.54	74.00	17.46	Peak

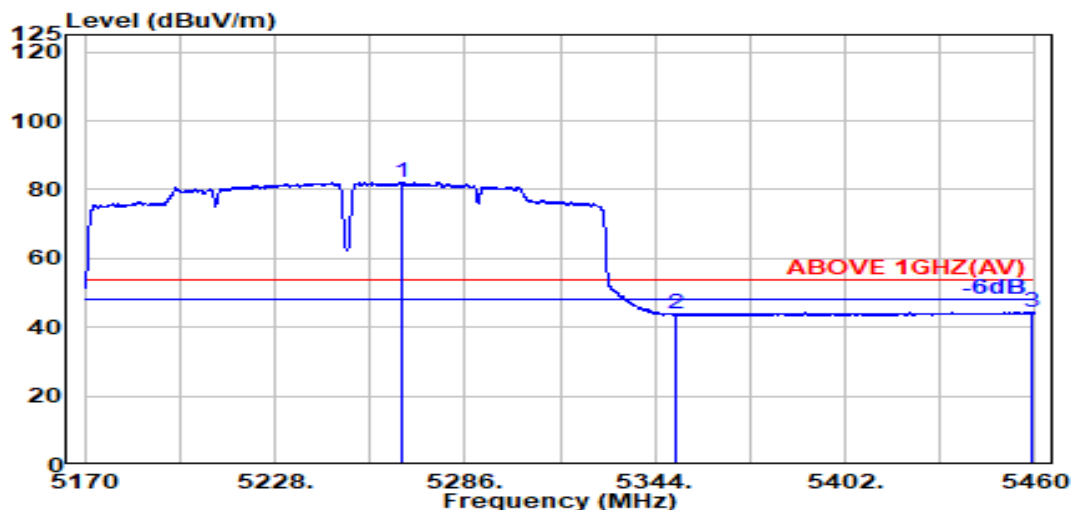

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5266.700	33.73	8.49	39.18	79.22	82.27	---	---	Average
5350.000	33.70	8.57	39.17	40.64	43.75	54.00	10.25	Average
5459.200	34.02	8.68	39.15	40.84	44.38	54.00	9.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

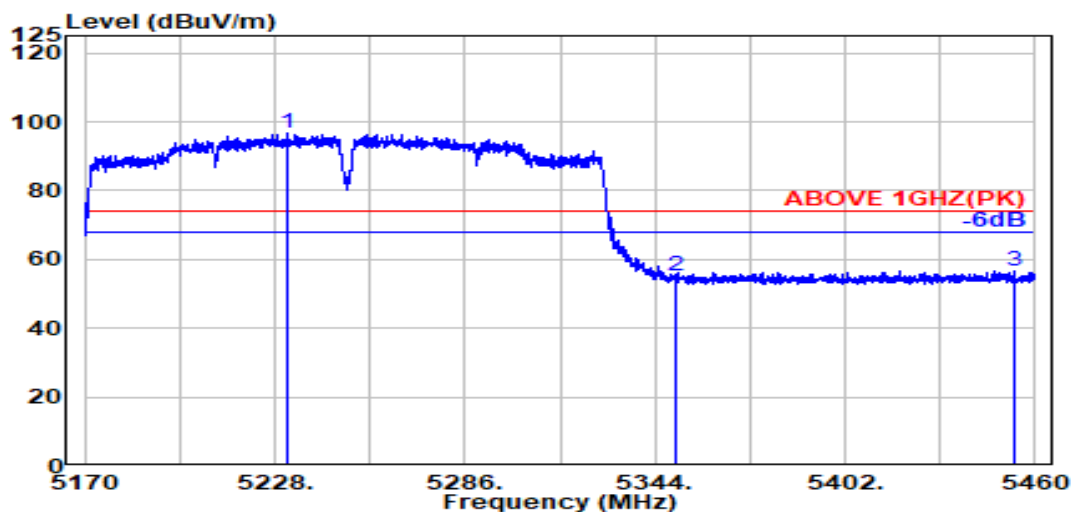

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5231.800	33.74	8.46	39.18	93.52	96.53	---	---	Peak
5350.000	33.70	8.57	39.17	51.87	54.97	74.00	19.03	Peak
5453.800	34.01	8.67	39.16	53.12	56.64	74.00	17.36	Peak

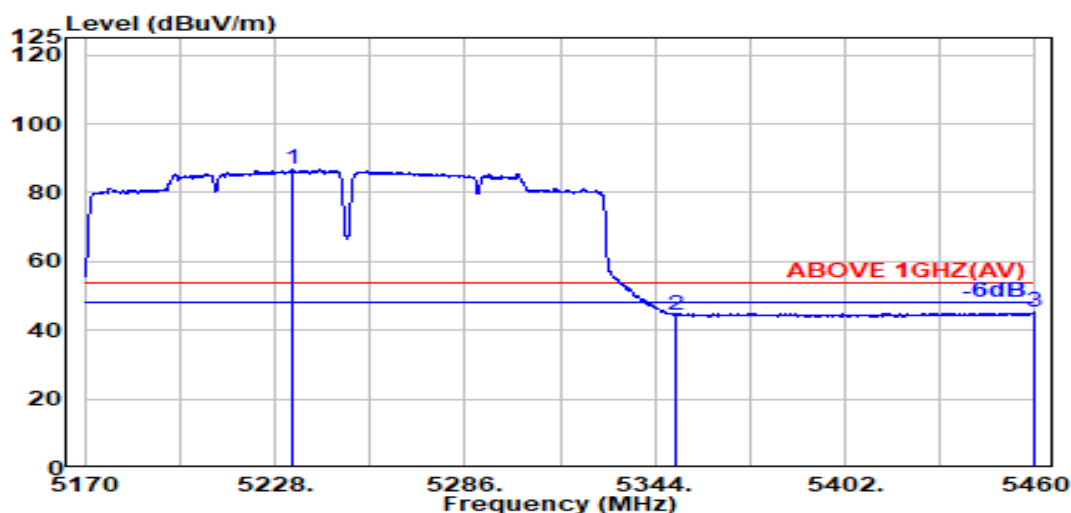

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5233.200	33.73	8.46	39.18	83.82	86.83	---	---	Average
5350.000	33.70	8.57	39.17	41.36	44.46	54.00	9.54	Average
5459.700	34.02	8.68	39.15	41.58	45.12	54.00	8.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

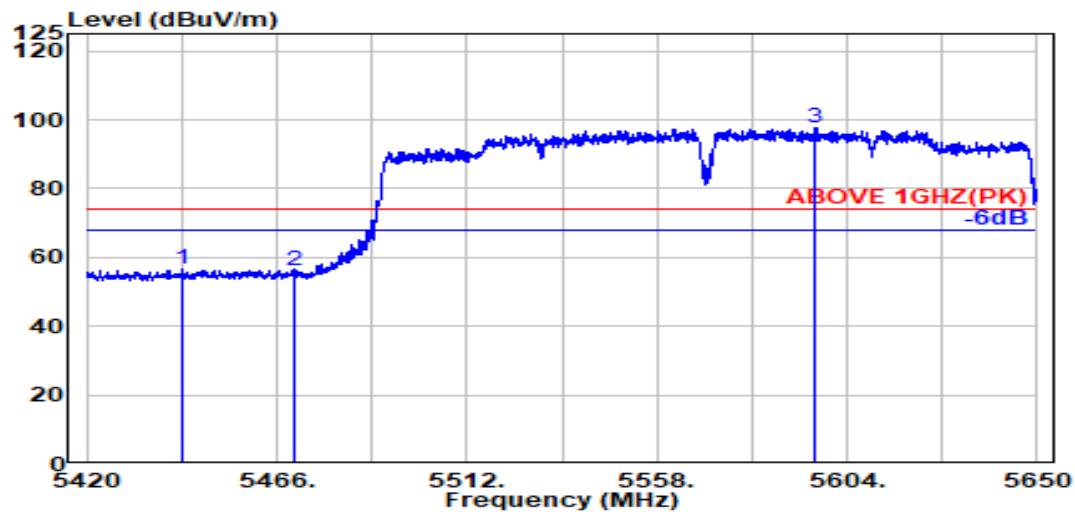

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5443.100	33.99	8.66	39.16	53.30	56.79	74.00	17.21	Peak
5470.000	34.04	8.69	39.15	52.45	56.02	74.00	17.98	Peak
@ 5596.400	33.81	8.81	39.17	94.30	97.75	---	---	Peak

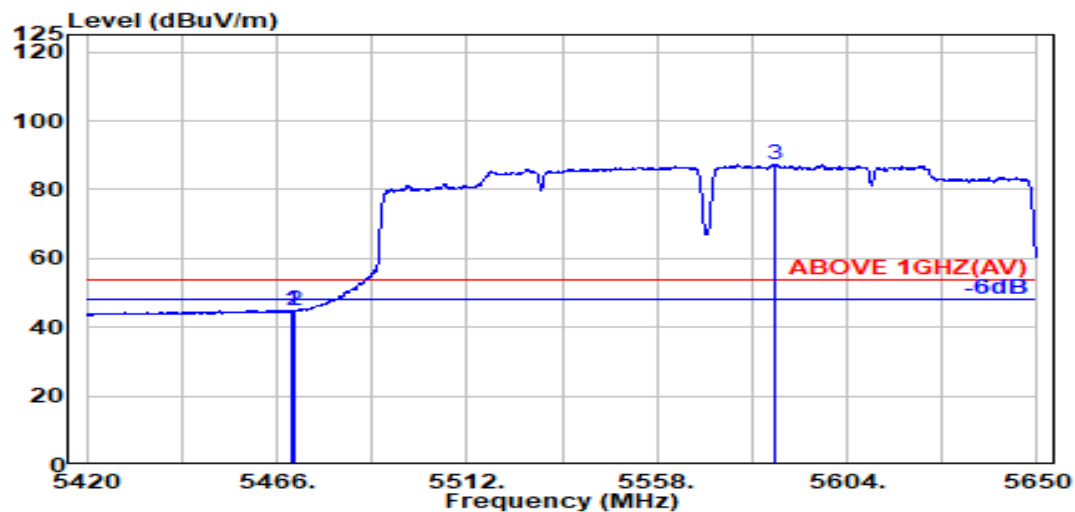


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.400	34.04	8.69	39.15	41.32	44.89	54.00	9.11	Average
5470.000	34.04	8.69	39.15	41.47	45.04	54.00	8.96	Average
@ 5586.300	33.85	8.80	39.17	83.87	87.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

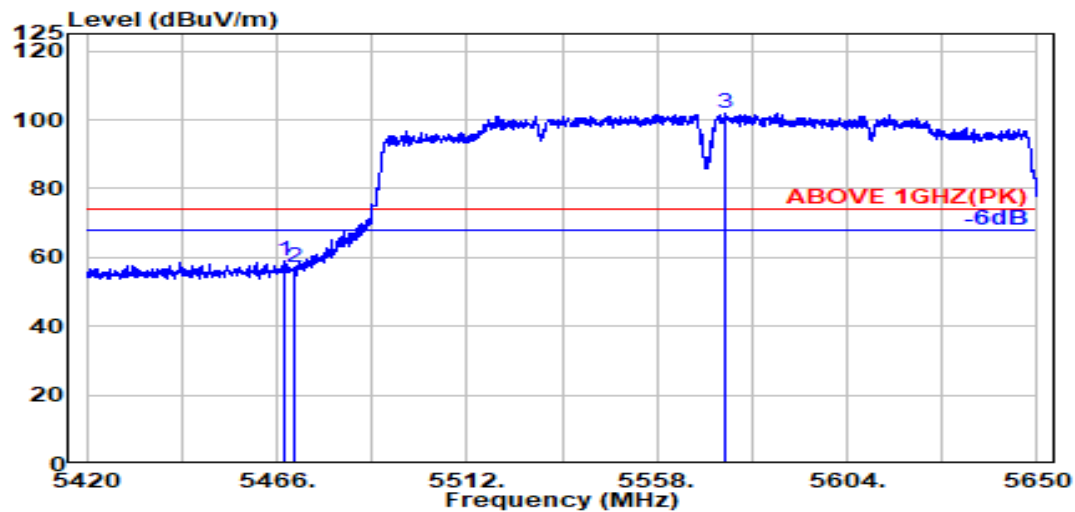

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	55.26	58.83	74.00	15.17	Peak
5470.000	34.04	8.69	39.15	53.36	56.93	74.00	17.07	Peak
@ 5574.700	33.90	8.79	39.17	98.44	101.97	---	---	Peak

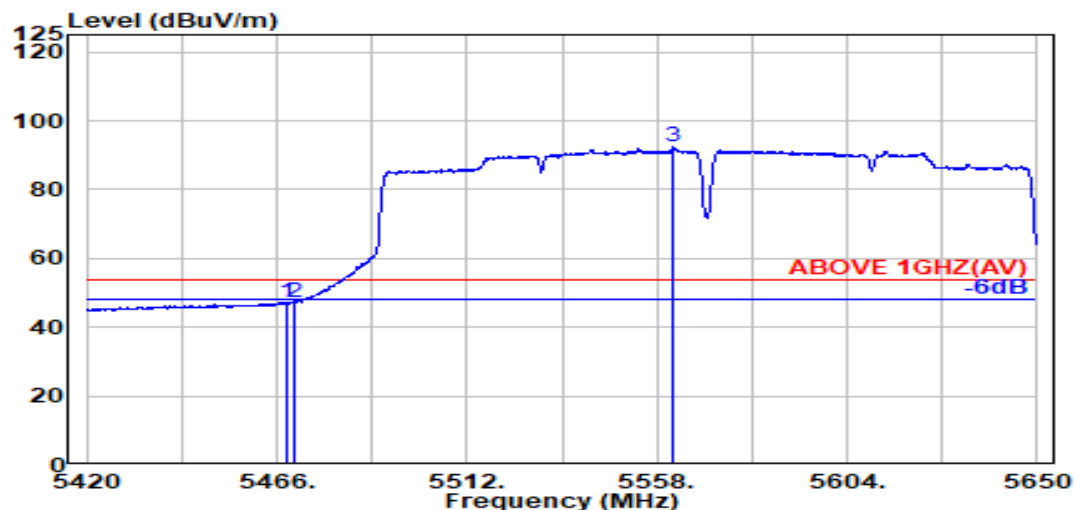


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.600	34.04	8.69	39.15	43.64	47.21	54.00	6.79	Average
5470.000	34.04	8.69	39.15	43.81	47.39	54.00	6.61	Average
@ 5562.100	33.95	8.78	39.16	88.70	92.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

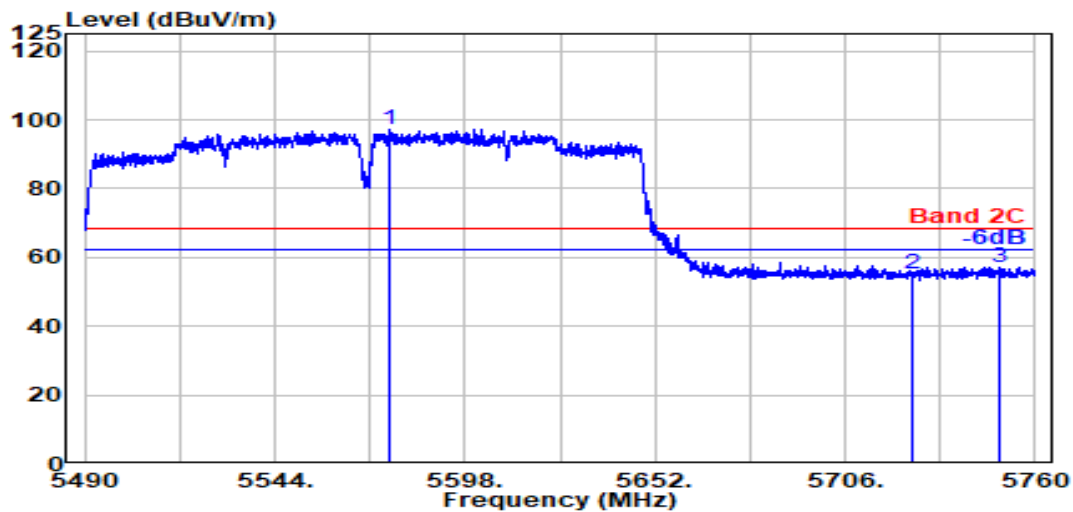

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5576.500	33.89	8.79	39.17	93.56	97.08	---	---	Peak
5725.000	33.60	8.93	39.20	51.88	55.21	68.20	12.99	Peak
5749.800	33.60	8.95	39.20	53.93	57.28	68.20	10.92	Peak

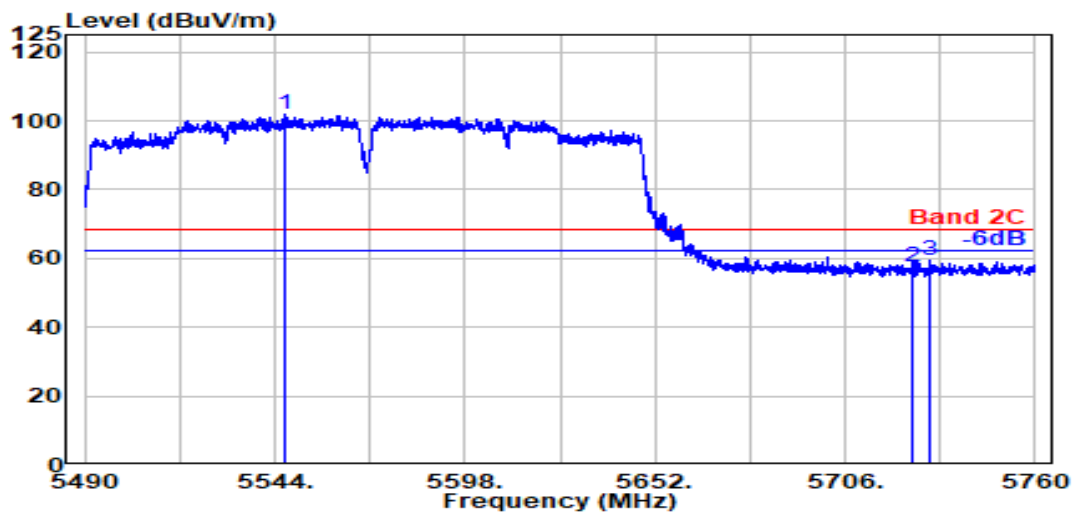


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5547.100	34.01	8.76	39.16	98.07	101.67	---	---	Peak
5725.000	33.60	8.93	39.20	54.29	57.62	68.20	10.58	Peak
5730.100	33.60	8.93	39.20	56.05	59.38	68.20	8.82	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

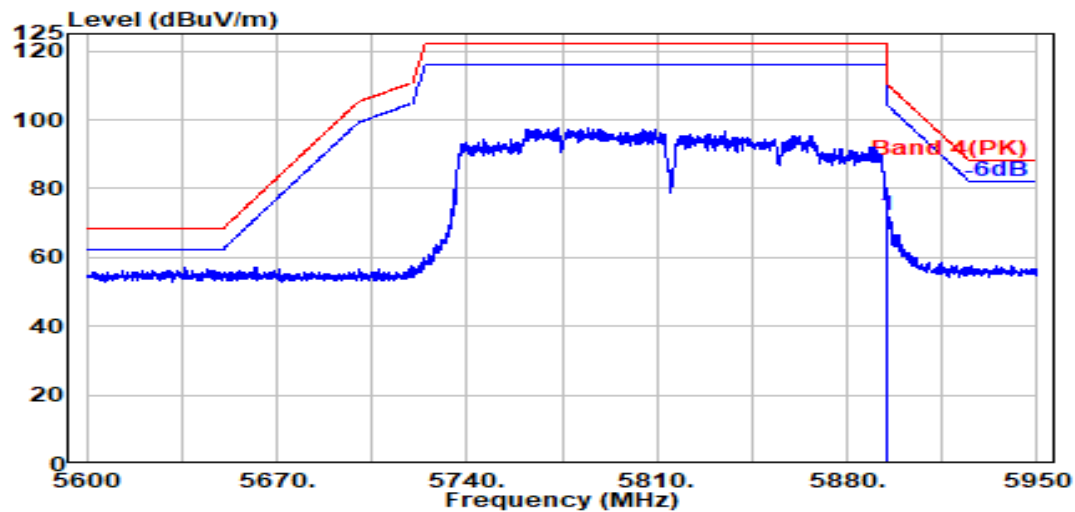

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	68.05	71.98	110.16	38.19	Peak

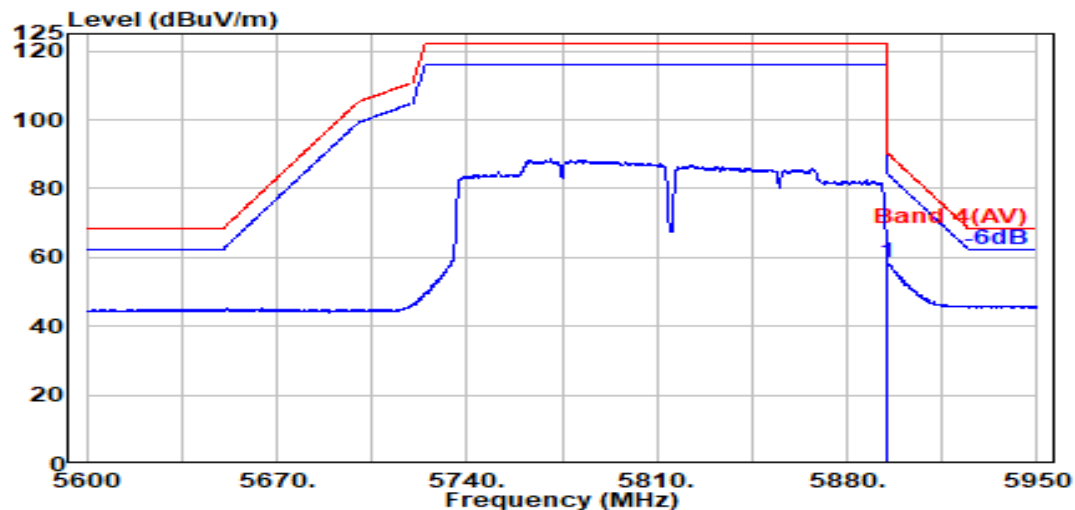


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	54.36	58.29	90.16	31.87	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

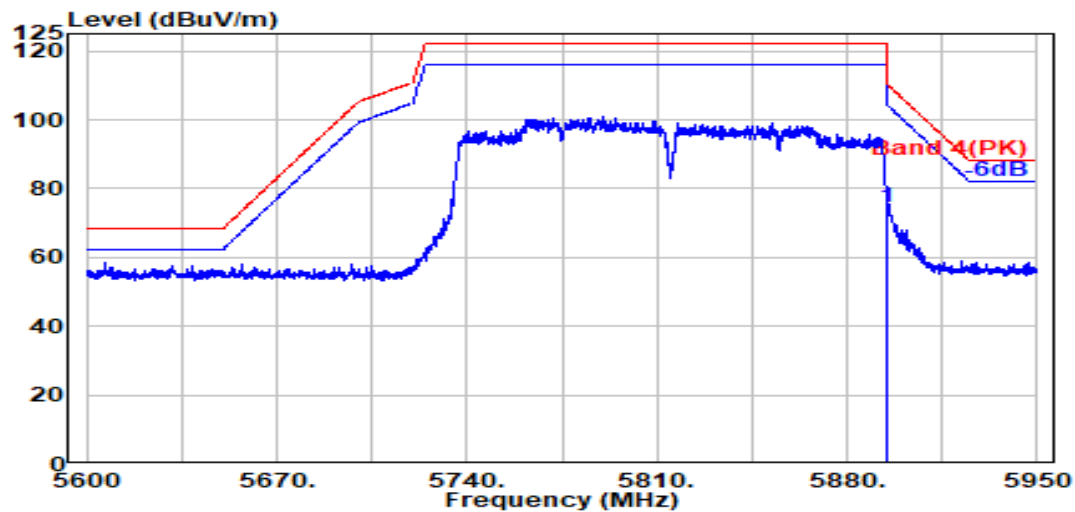

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	70.41	74.34	110.16	35.82	Peak

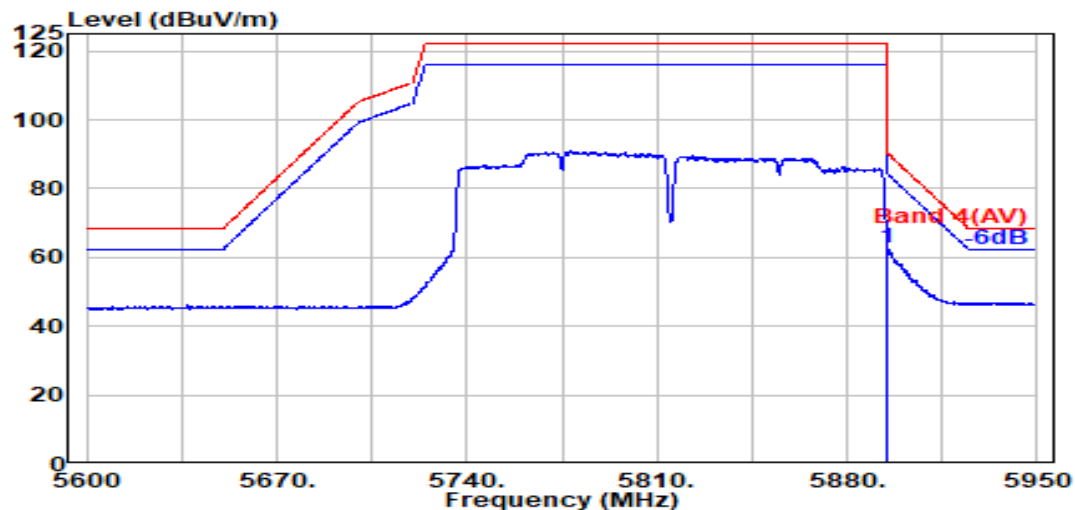

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	58.59	62.52	90.16	27.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

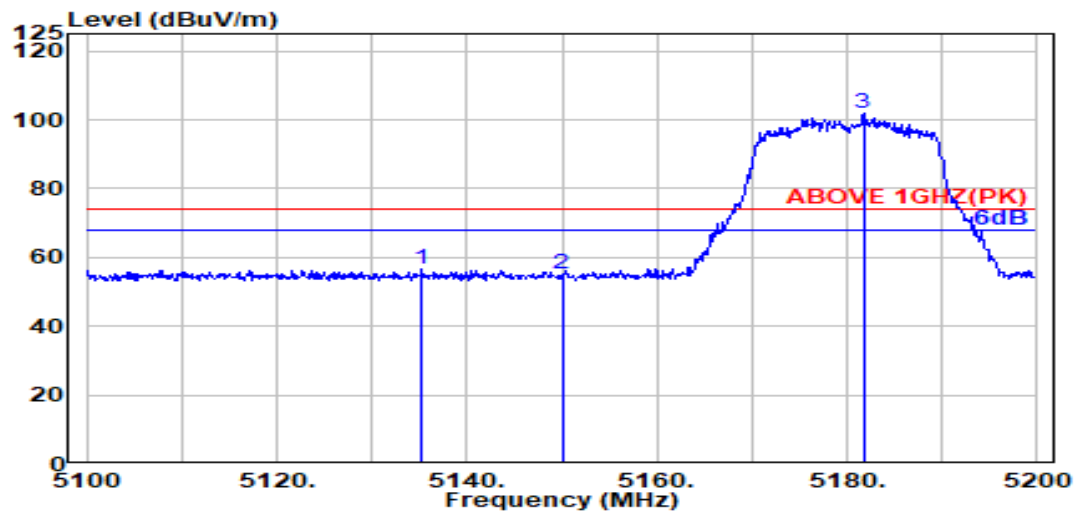

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.300	33.47	8.36	39.19	53.76	56.40	74.00	17.60	Peak
5150.000	33.50	8.37	39.19	52.49	55.18	74.00	18.82	Peak
@ 5181.700	33.69	8.41	39.19	99.09	102.00	---	---	Peak

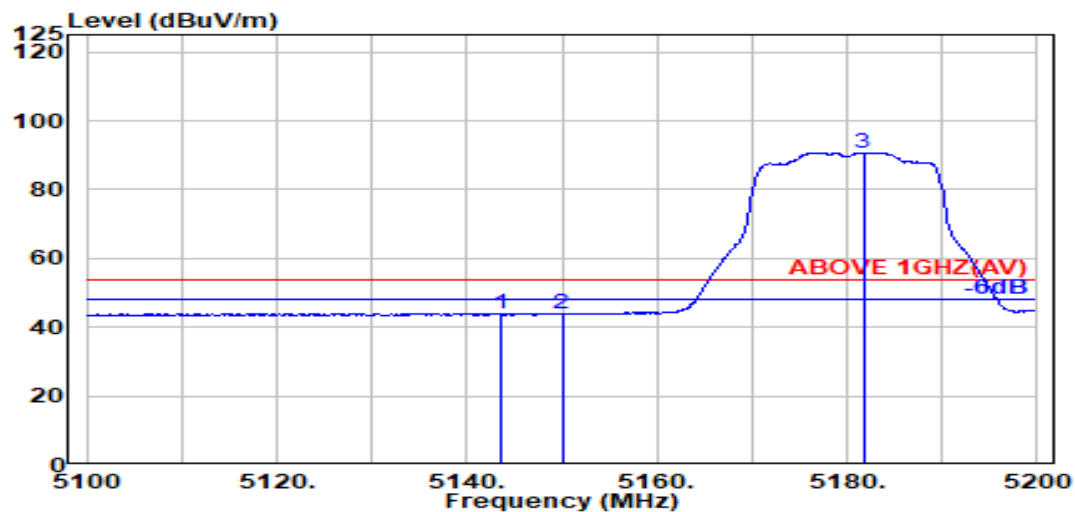

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.600	33.49	8.37	39.19	41.27	43.94	54.00	10.06	Average
5150.000	33.50	8.37	39.19	41.07	43.75	54.00	10.25	Average
@ 5181.700	33.69	8.41	39.19	87.87	90.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

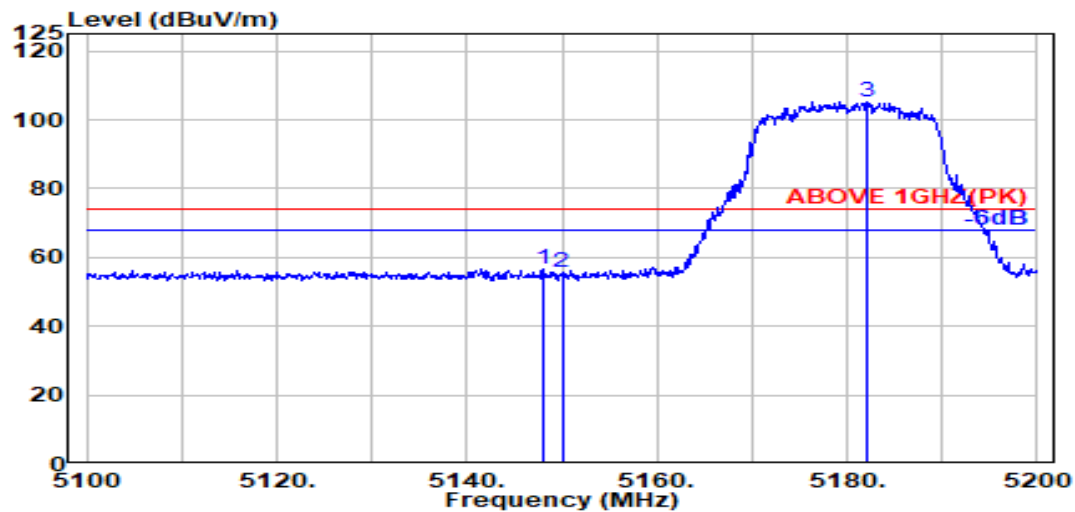

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	33.50	8.37	39.19	54.05	56.72	74.00	17.28	Peak
5150.000	33.50	8.37	39.19	52.75	55.44	74.00	18.56	Peak
@ 5182.100	33.69	8.41	39.19	102.24	105.15	---	---	Peak

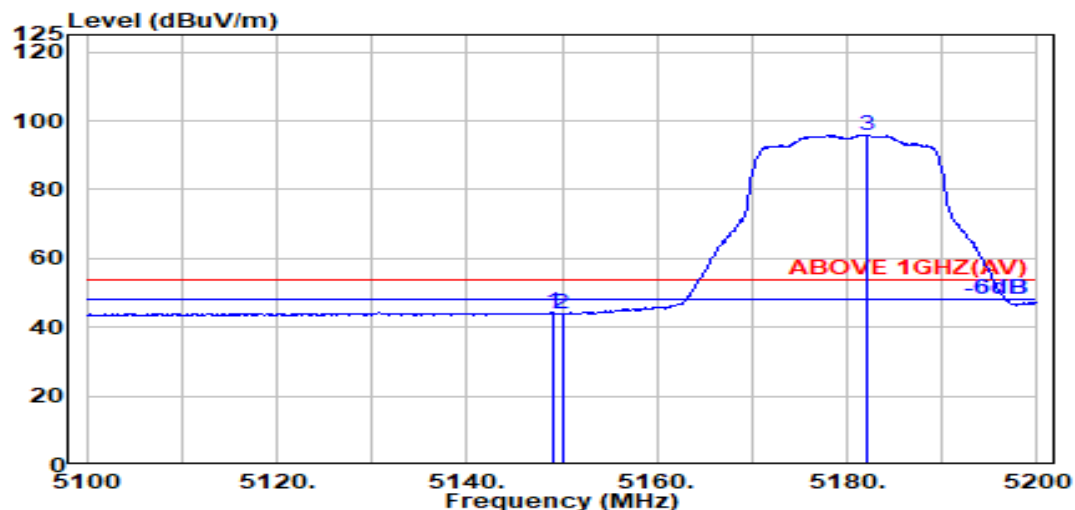

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.50	8.37	39.19	41.60	44.28	54.00	9.72	Average
5150.000	33.50	8.37	39.19	41.24	43.92	54.00	10.08	Average
@ 5182.100	33.69	8.41	39.19	92.96	95.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

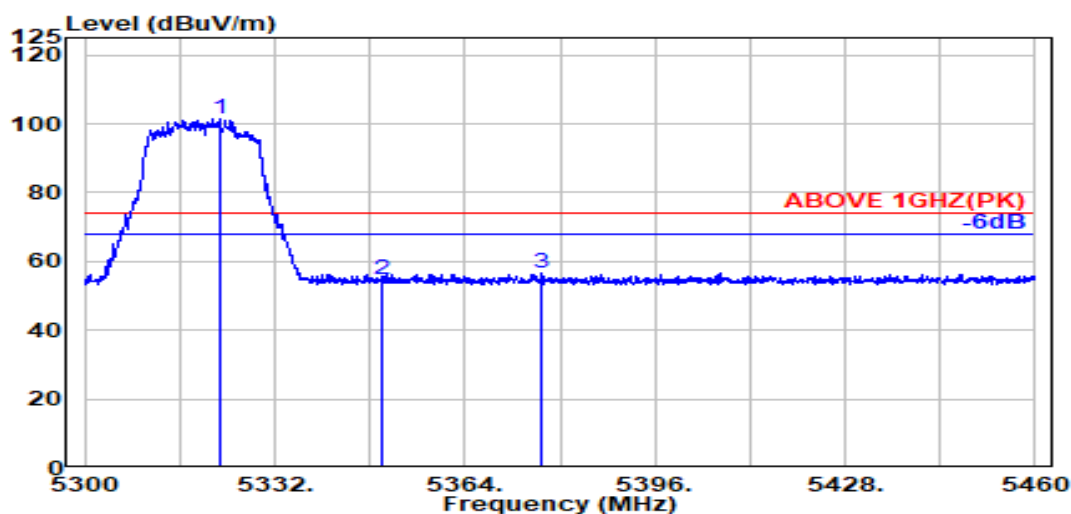

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.600	33.75	8.55	39.17	98.46	101.59	---	---	Peak
5350.000	33.70	8.57	39.17	51.77	54.88	74.00	19.12	Peak
5376.800	33.81	8.60	39.16	53.17	56.41	74.00	17.59	Peak

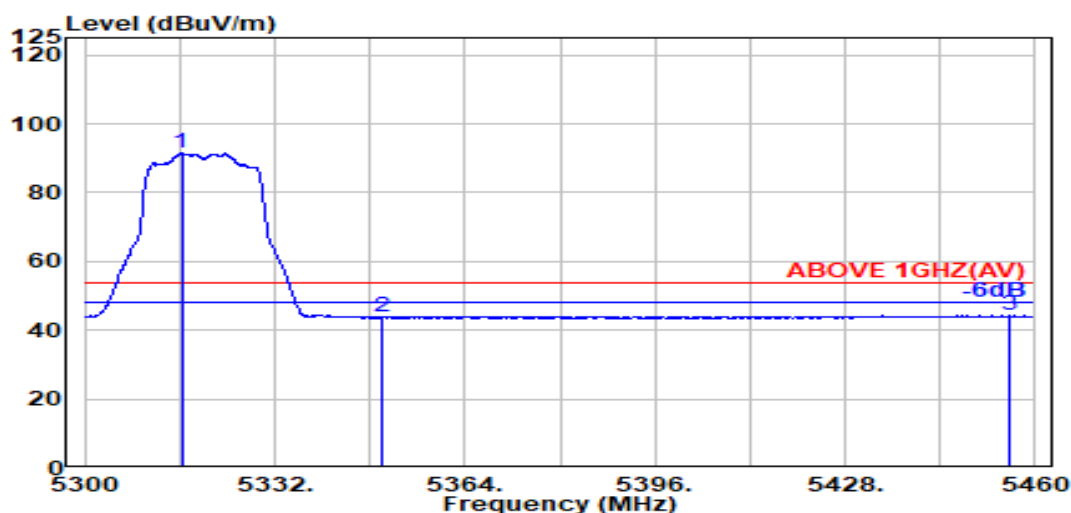

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.300	33.77	8.54	39.17	88.44	91.58	---	---	Average
5350.000	33.70	8.57	39.17	40.56	43.66	54.00	10.34	Average
5455.600	34.01	8.67	39.16	40.69	44.22	54.00	9.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

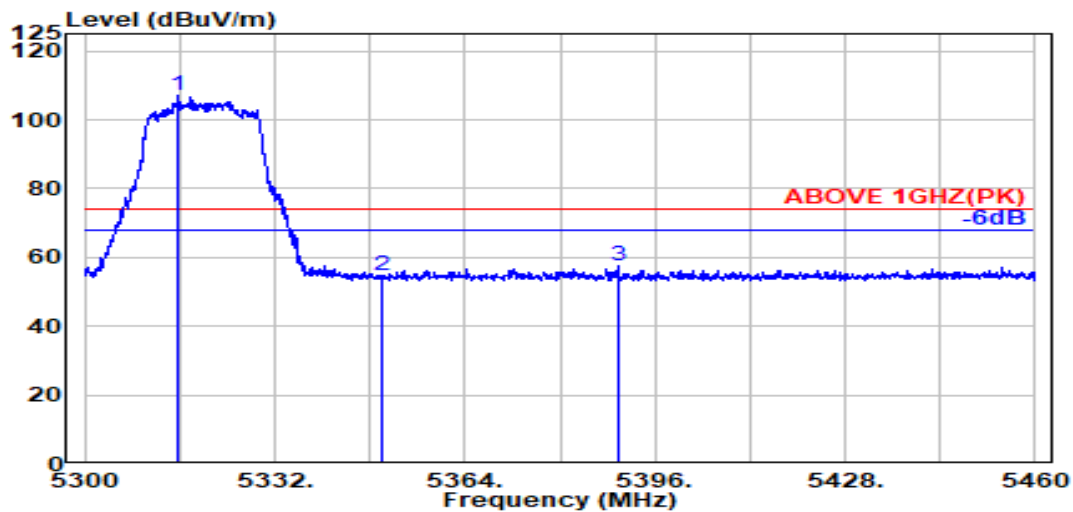

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.700	33.77	8.54	39.17	104.17	107.31	---	---	Peak
5350.000	33.70	8.57	39.17	51.81	54.92	74.00	19.08	Peak
5389.700	33.86	8.61	39.16	54.06	57.37	74.00	16.63	Peak

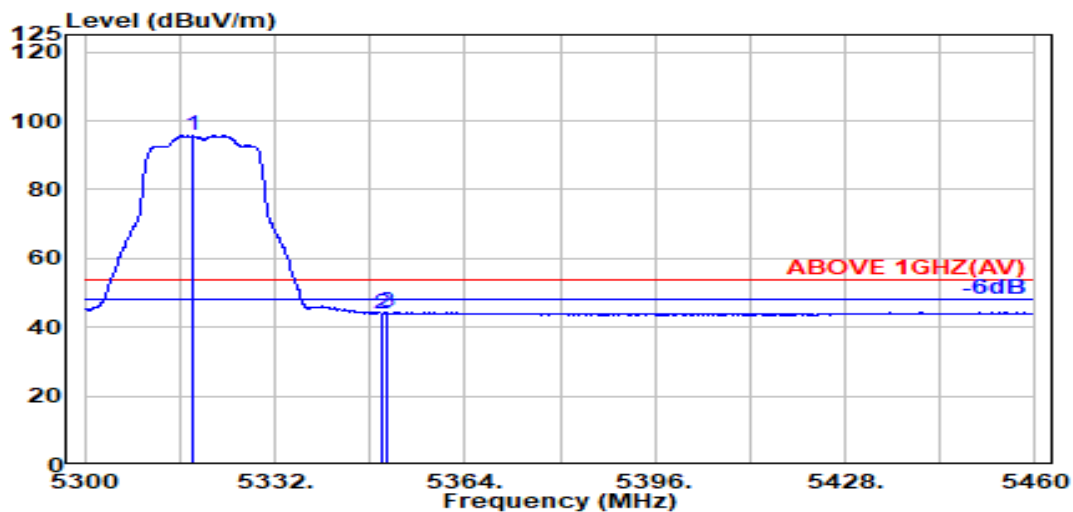

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.200	33.76	8.54	39.17	92.54	95.68	---	---	Average
5350.000	33.70	8.57	39.17	40.84	43.95	54.00	10.05	Average
5350.900	33.70	8.57	39.17	41.37	44.47	54.00	9.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

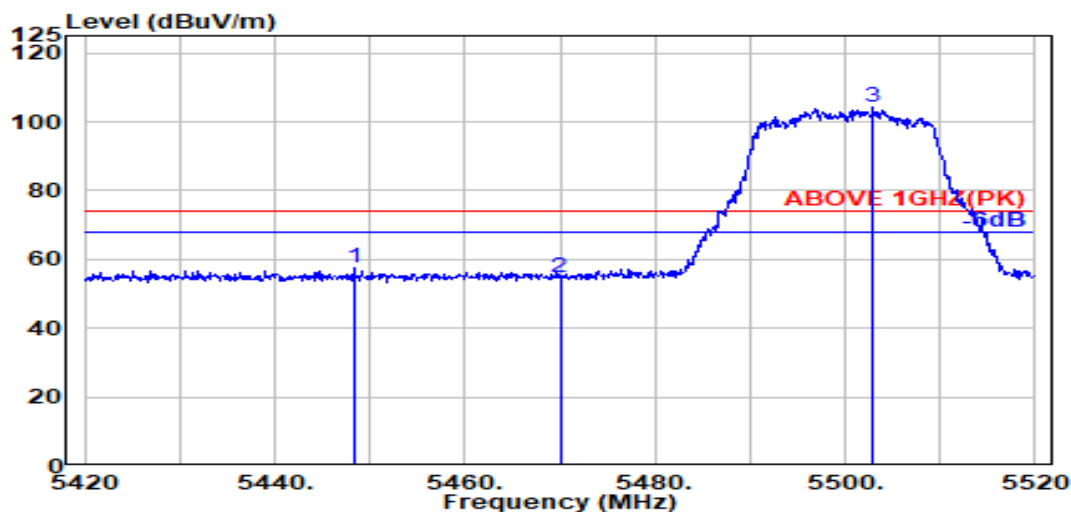

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.300	34.00	8.67	39.16	53.87	57.38	74.00	16.62	Peak
5470.000	34.04	8.69	39.15	50.98	54.55	74.00	19.45	Peak
@ 5502.900	34.09	8.72	39.15	100.46	104.13	---	---	Peak

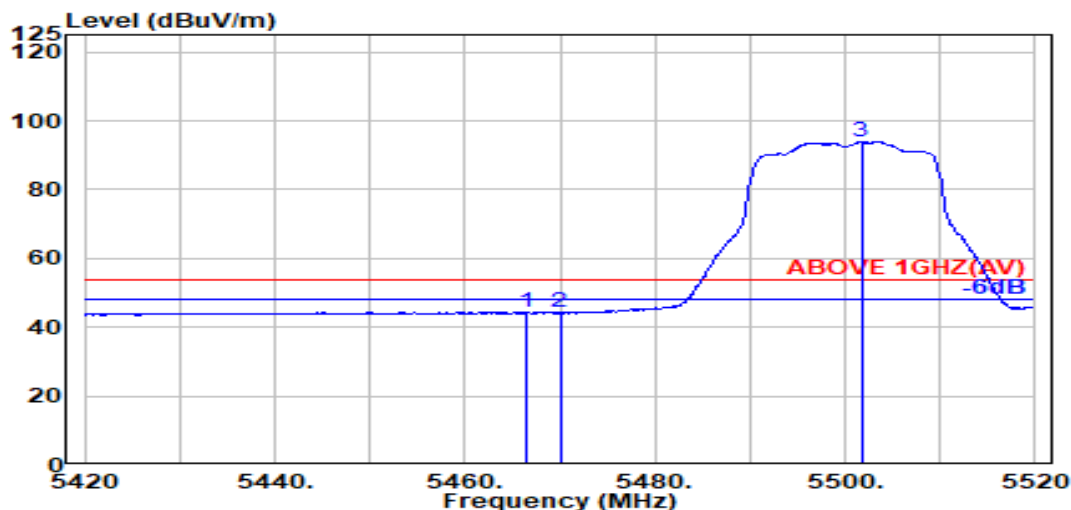

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.03	8.68	39.15	40.78	44.34	54.00	9.66	Average
5470.000	34.04	8.69	39.15	40.53	44.10	54.00	9.90	Average
@ 5501.700	34.10	8.72	39.15	90.22	93.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

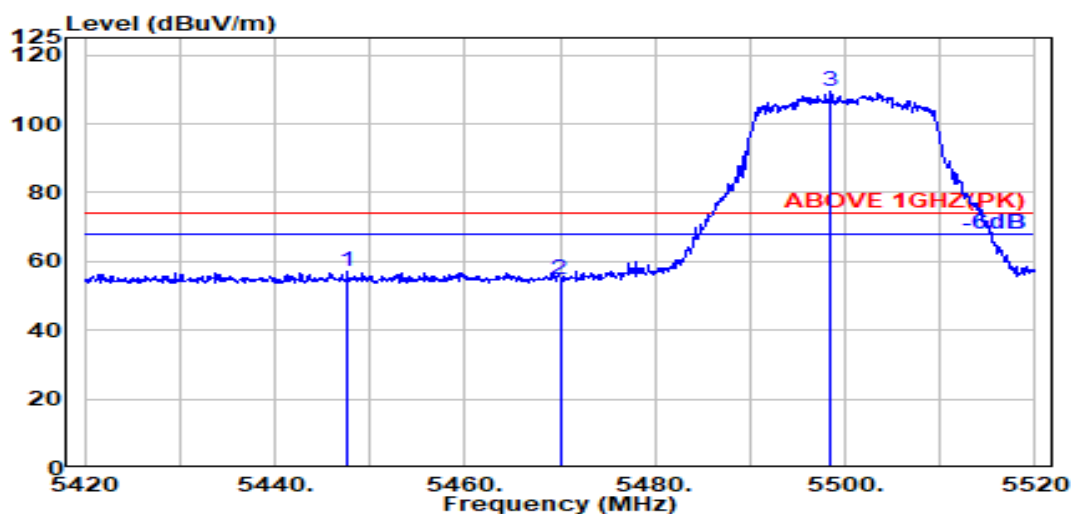

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.700	34.00	8.67	39.16	53.68	57.19	74.00	16.81	Peak
5470.000	34.04	8.69	39.15	51.26	54.84	74.00	19.16	Peak
@ 5498.500	34.10	8.72	39.15	105.72	109.38	---	---	Peak

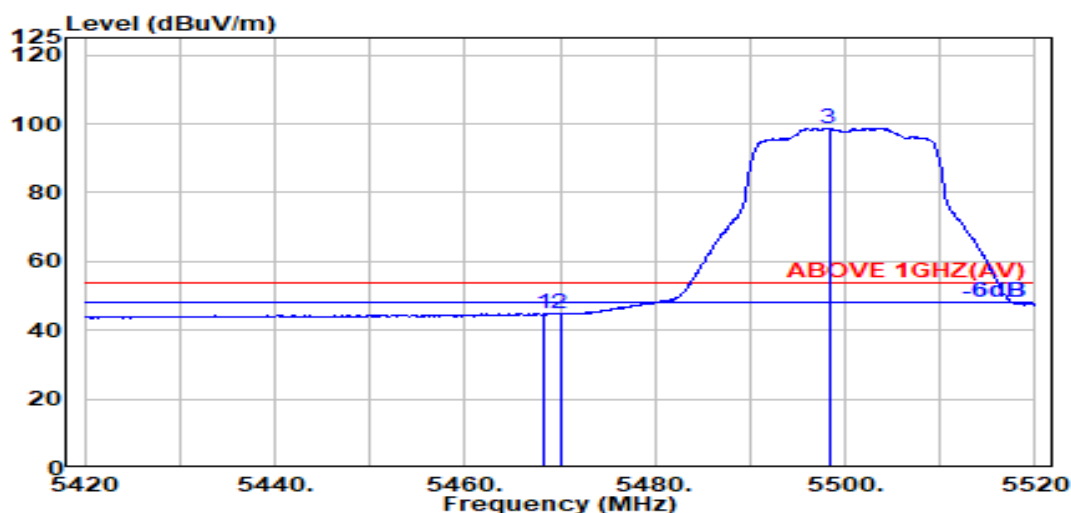

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	41.21	44.78	54.00	9.22	Average
5470.000	34.04	8.69	39.15	41.06	44.64	54.00	9.36	Average
@ 5498.300	34.10	8.72	39.15	95.11	98.77	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

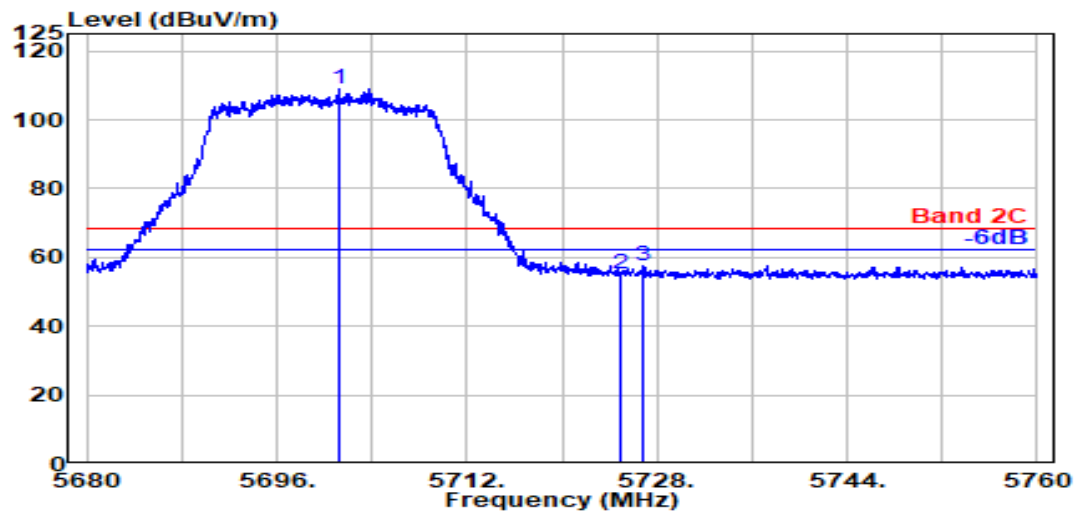

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.150	33.60	8.90	39.19	105.66	108.98	---	---	Peak
5725.000	33.60	8.93	39.20	52.07	55.40	68.20	12.80	Peak
5726.900	33.60	8.93	39.20	54.28	57.62	68.20	10.58	Peak

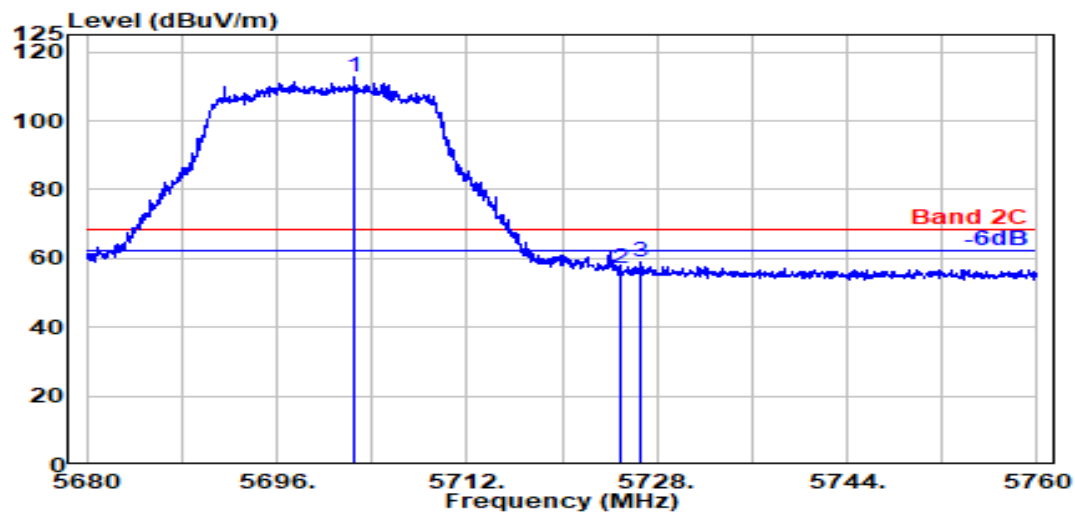

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.550	33.60	8.91	39.19	109.49	112.80	---	---	Peak
5725.000	33.60	8.93	39.20	53.79	57.12	68.20	11.08	Peak
5726.600	33.60	8.93	39.20	55.40	58.73	68.20	9.47	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

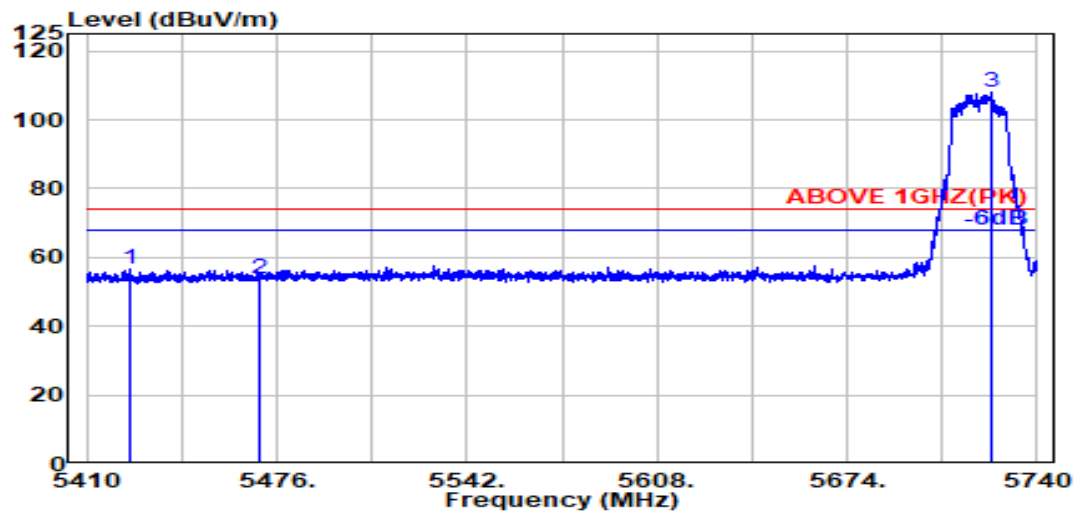

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5424.800	33.95	8.64	39.16	52.99	56.43	74.00	17.57	Peak
5470.000	34.04	8.69	39.15	50.01	53.58	74.00	20.42	Peak
@ 5724.100	33.60	8.92	39.20	104.47	107.80	---	---	Peak

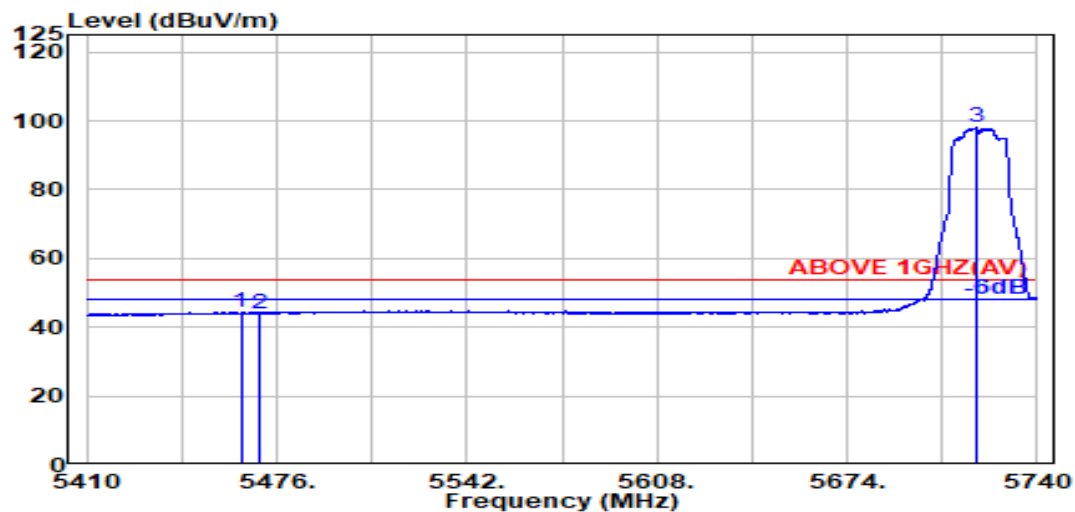

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.03	8.68	39.15	40.70	44.26	54.00	9.74	Average
5470.000	34.04	8.69	39.15	40.51	44.09	54.00	9.91	Average
@ 5718.900	33.60	8.92	39.19	94.62	97.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

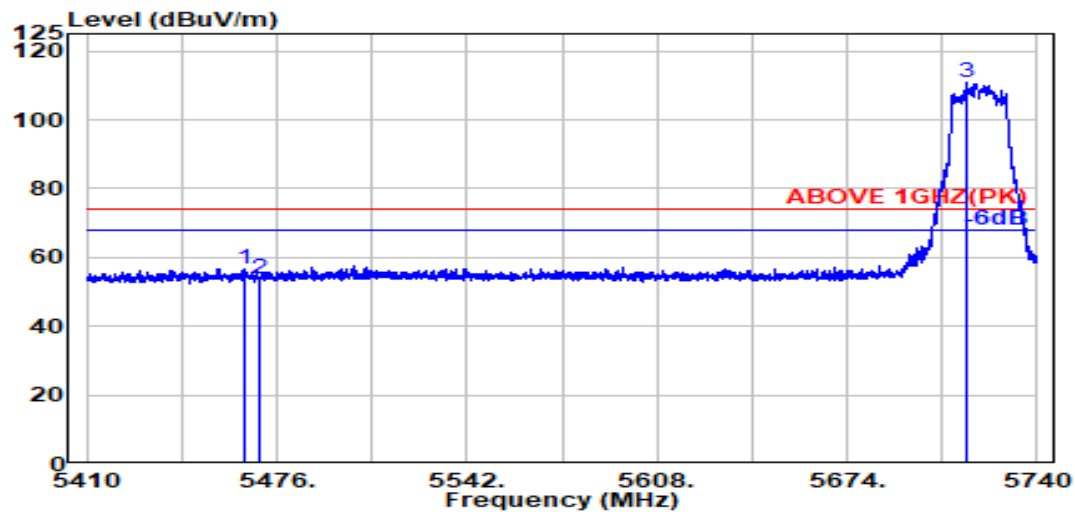

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.03	8.68	39.15	53.02	56.58	74.00	17.42	Peak
5470.000	34.04	8.69	39.15	50.08	53.66	74.00	20.34	Peak
@ 5715.300	33.60	8.92	39.19	107.70	111.03	---	---	Peak

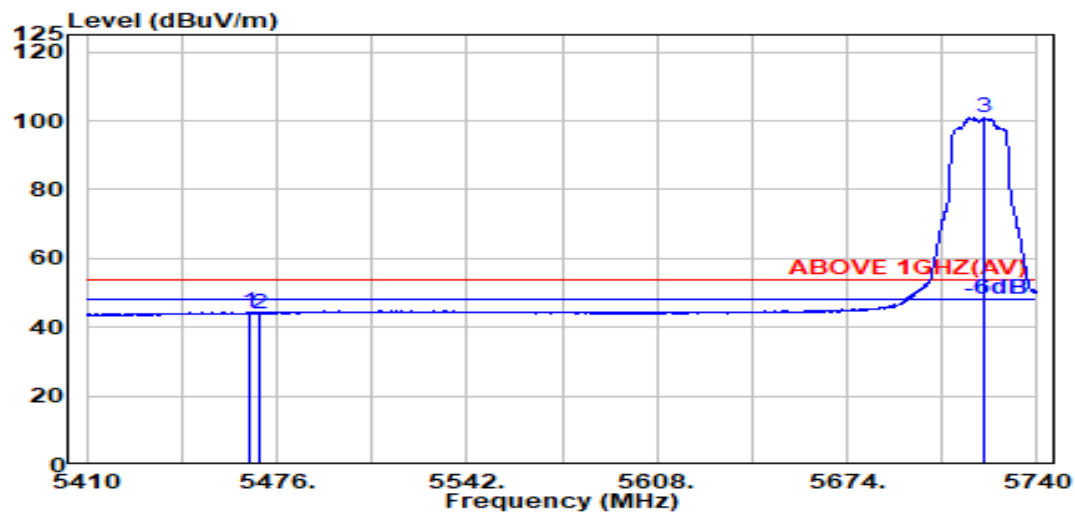

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.03	8.68	39.15	40.69	44.25	54.00	9.75	Average
5470.000	34.04	8.69	39.15	40.39	43.97	54.00	10.03	Average
@ 5721.800	33.60	8.92	39.20	97.70	101.02	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

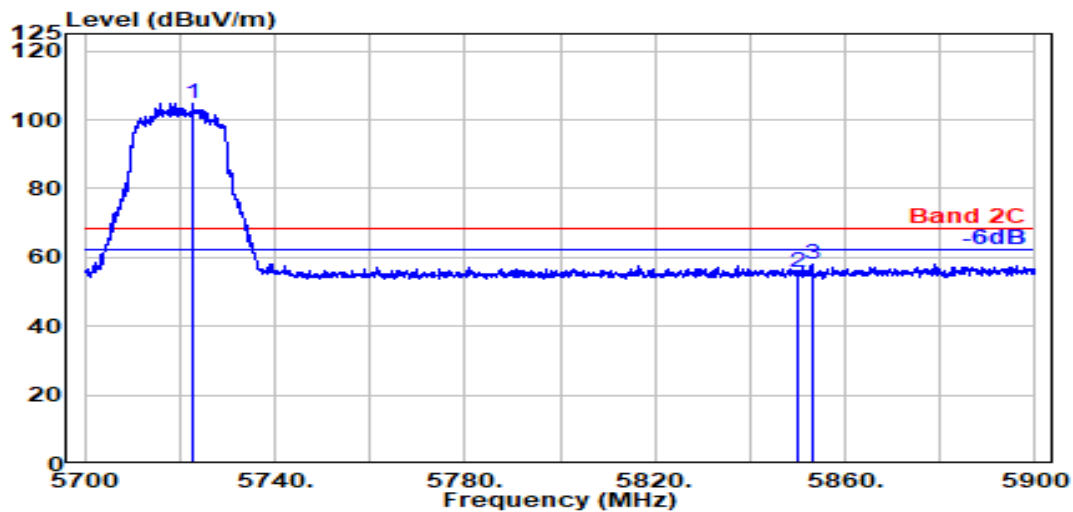

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.800	33.60	8.92	39.20	101.42	104.75	---	---	Peak
5850.000	33.90	9.04	39.22	52.17	55.88	68.20	12.32	Peak
5853.300	33.91	9.04	39.22	54.08	57.82	68.20	10.38	Peak

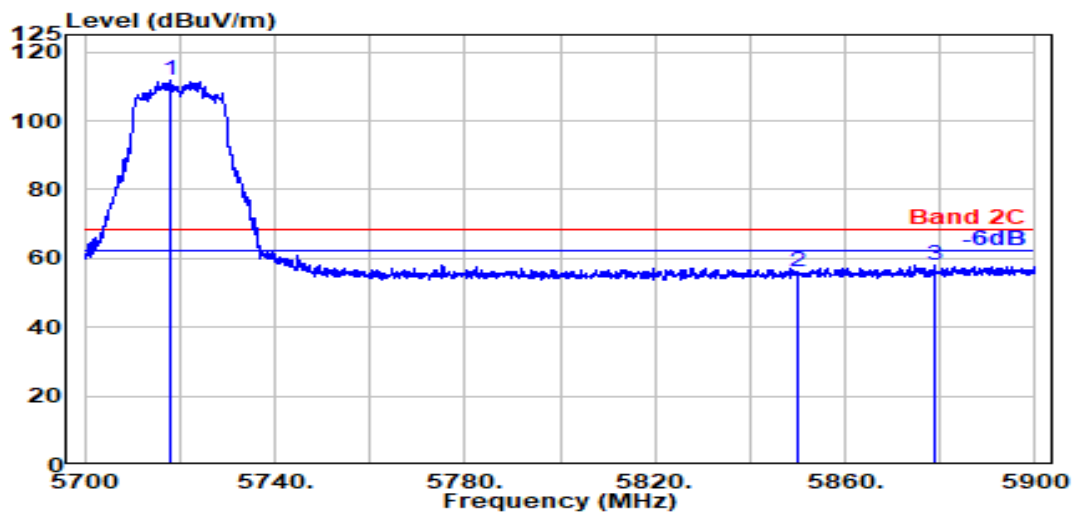

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.200	33.60	8.92	39.19	108.46	111.79	---	---	Peak
5850.000	33.90	9.04	39.22	52.30	56.01	68.20	12.19	Peak
5879.000	34.02	9.06	39.23	54.26	58.11	68.20	10.09	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

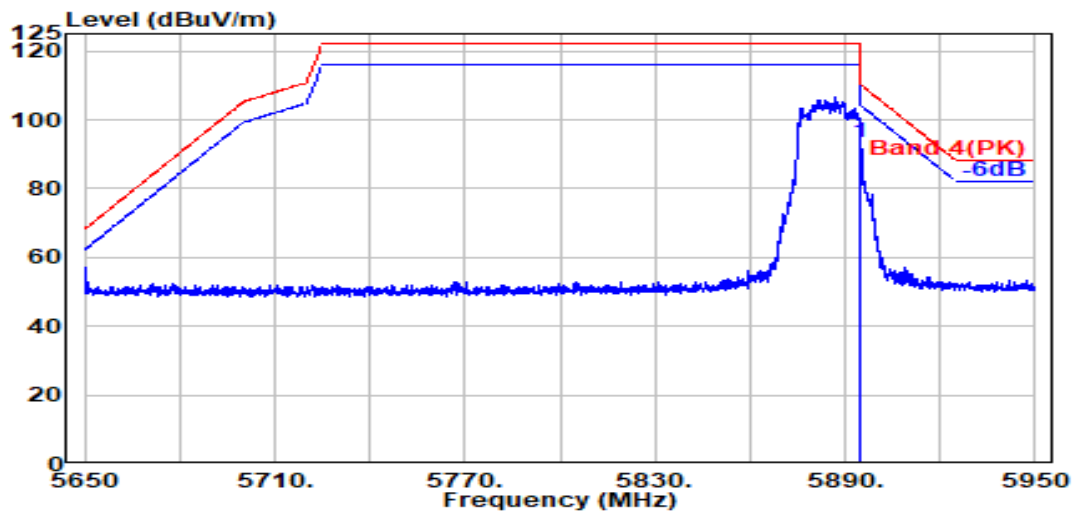

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	89.46	93.38	110.20	16.82	Peak

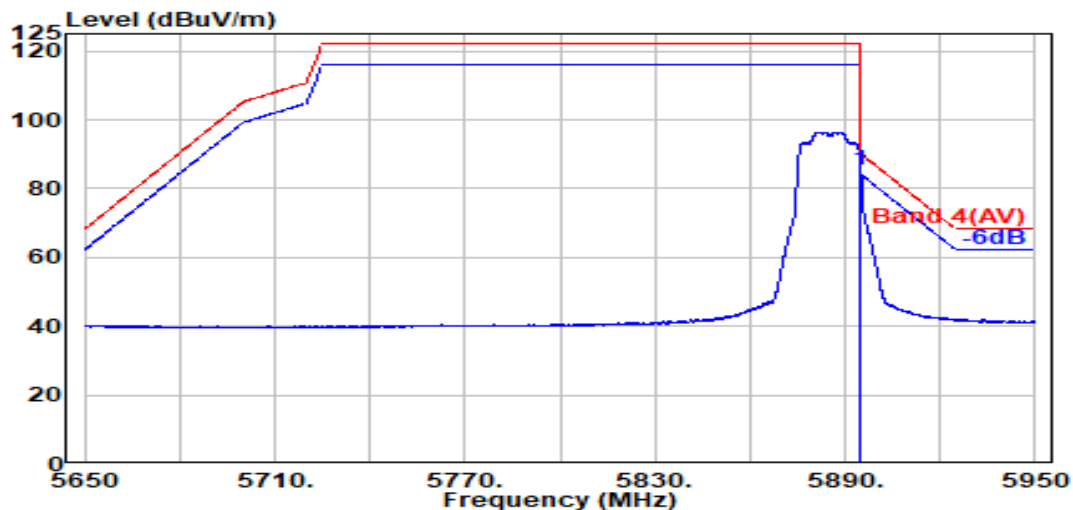

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	81.36	85.29	90.20	4.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

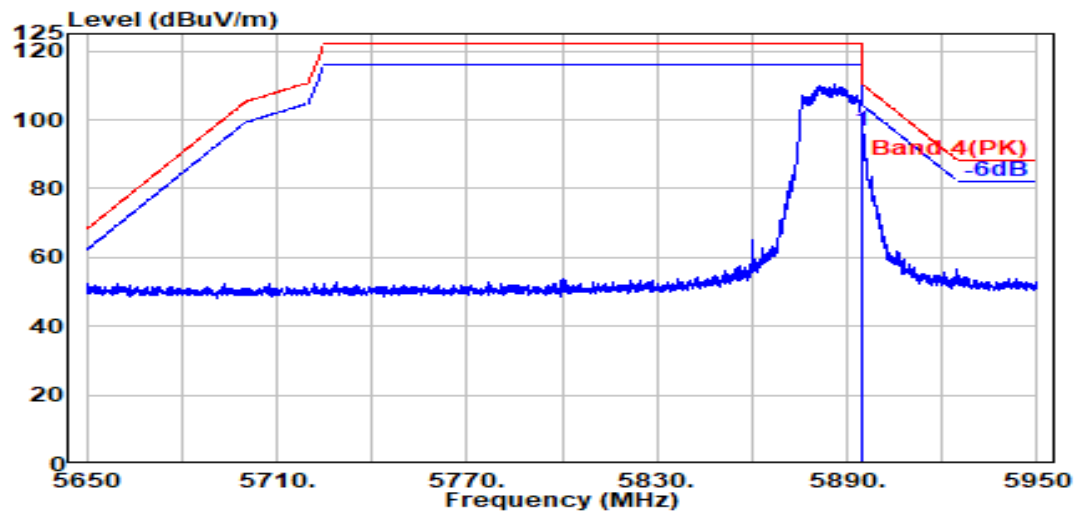

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	92.54	96.47	110.20	13.73	Peak

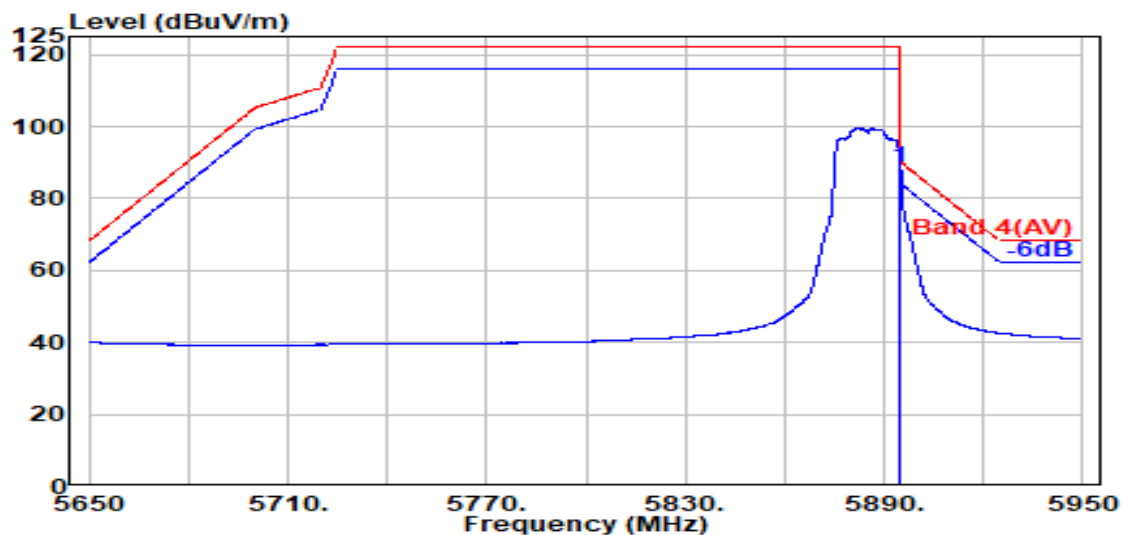

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	84.56	88.49	90.20	1.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

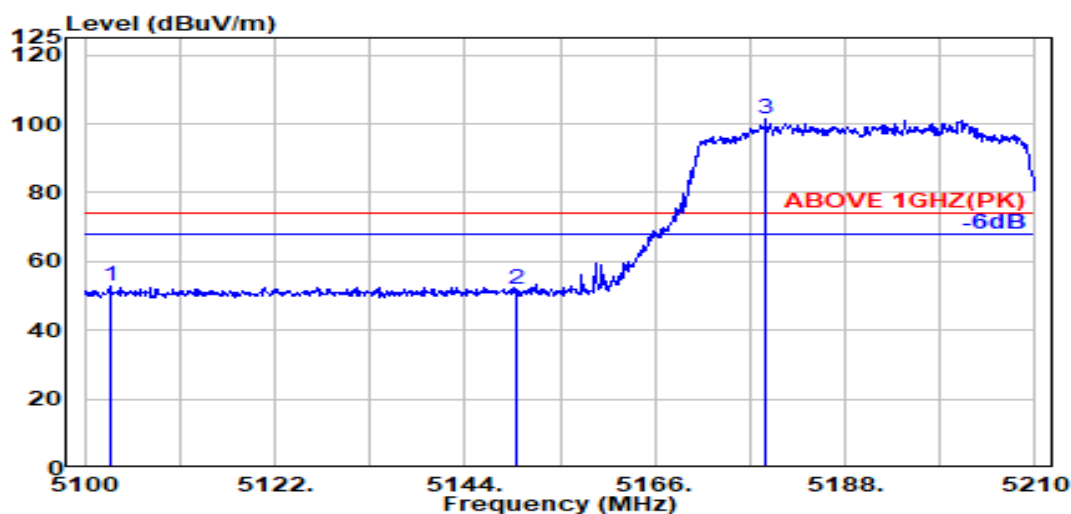

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5102.860	33.41	8.33	39.20	50.22	52.76	74.00	21.24	Peak
5150.000	33.50	8.37	39.19	48.99	51.67	74.00	22.33	Peak
@ 5178.870	33.67	8.40	39.19	98.36	101.25	---	---	Peak

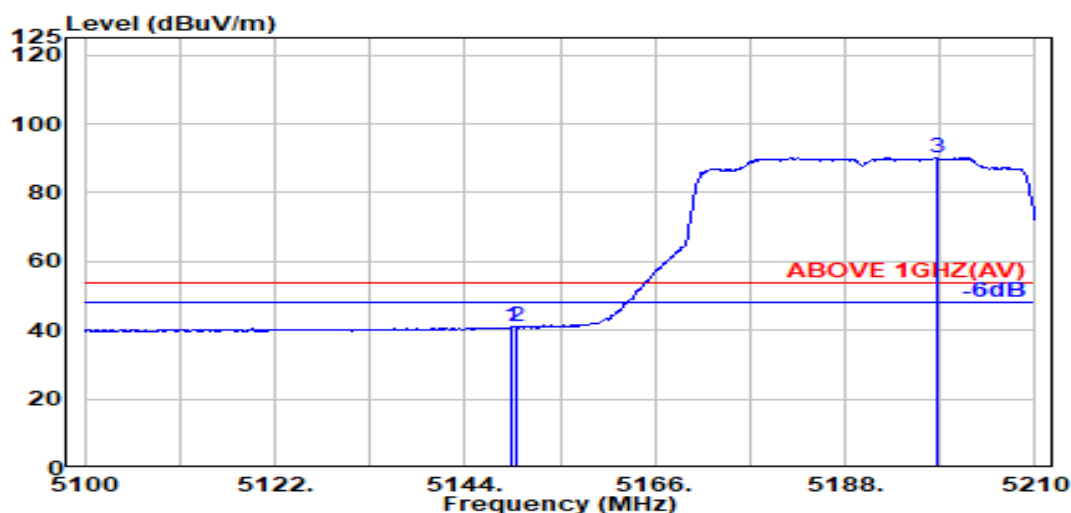

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.280	33.50	8.37	39.19	38.19	40.87	54.00	13.13	Average
5150.000	33.50	8.37	39.19	38.14	40.82	54.00	13.18	Average
@ 5198.560	33.79	8.42	39.19	87.11	90.14	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

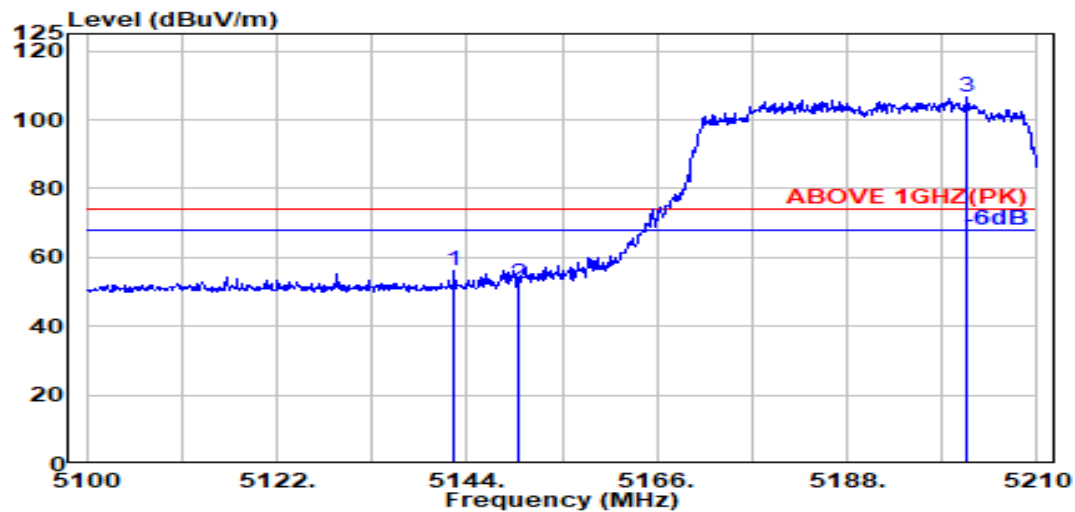

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.570	33.49	8.37	39.19	53.62	56.28	74.00	17.72	Peak
5150.000	33.50	8.37	39.19	49.48	52.16	74.00	21.84	Peak
@ 5201.860	33.80	8.43	39.19	103.74	106.78	---	---	Peak

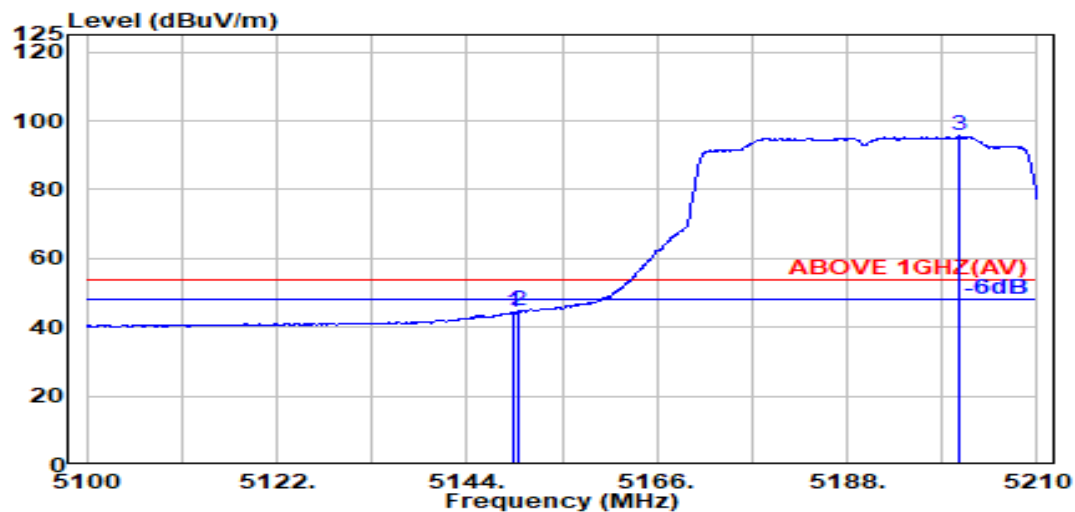

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	33.50	8.37	39.19	41.49	44.17	54.00	9.83	Average
5150.000	33.50	8.37	39.19	41.91	44.59	54.00	9.41	Average
@ 5200.870	33.80	8.43	39.19	92.49	95.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

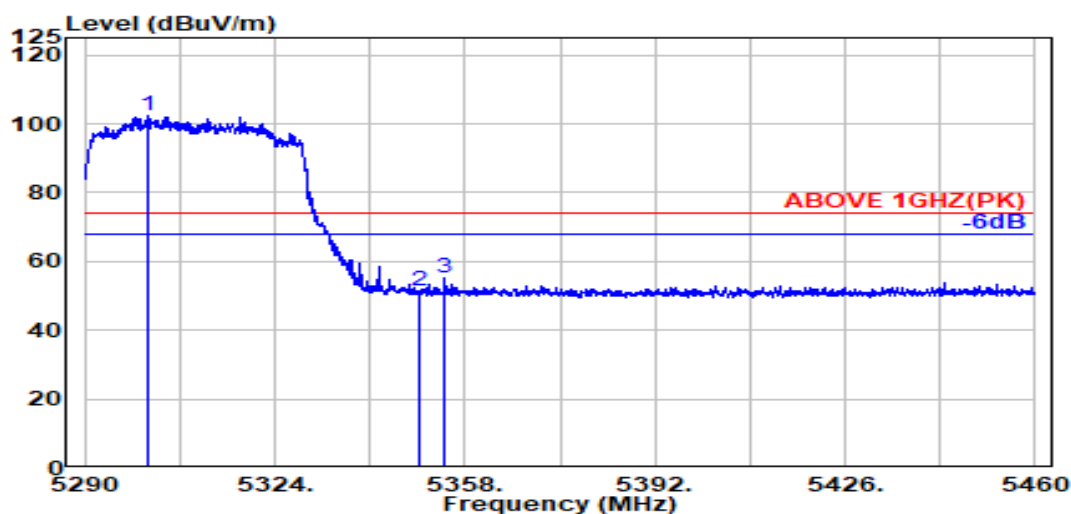

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.500	33.80	8.53	39.17	99.06	102.21	---	---	Peak
5350.000	33.70	8.57	39.17	48.31	51.42	74.00	22.58	Peak
5354.500	33.72	8.58	39.17	51.98	55.10	74.00	18.90	Peak

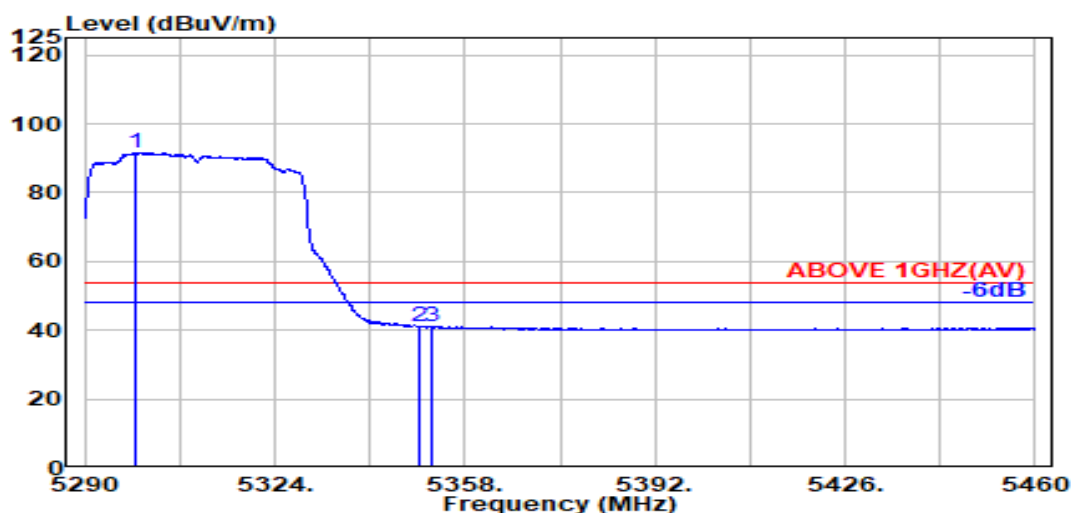

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.100	33.80	8.52	39.17	88.45	91.59	---	---	Average
5350.000	33.70	8.57	39.17	38.15	41.25	54.00	12.75	Average
5352.200	33.71	8.57	39.17	37.98	41.09	54.00	12.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

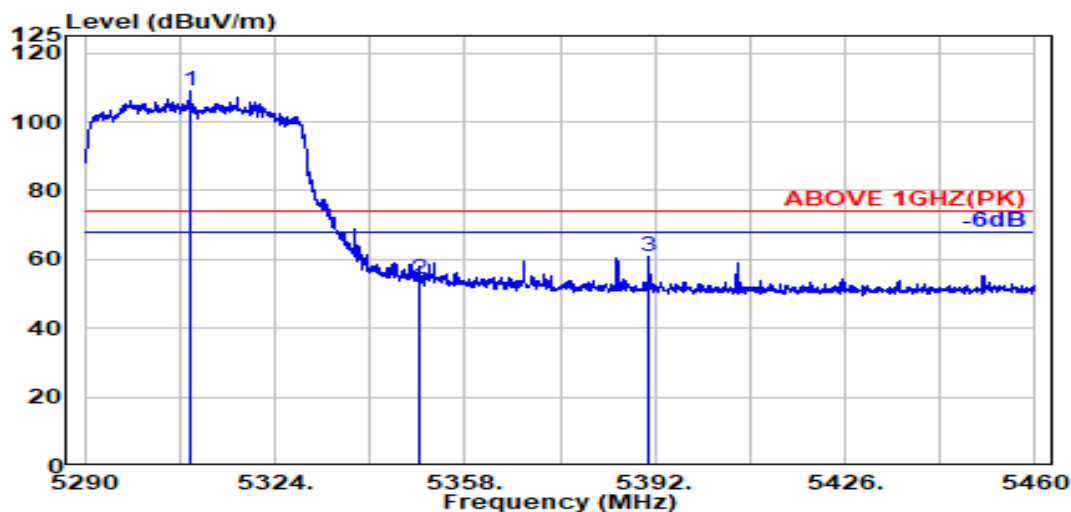

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.800	33.78	8.53	39.17	105.90	109.04	---	---	Peak
5350.000	33.70	8.57	39.17	51.26	54.36	74.00	19.64	Peak
5391.000	33.86	8.61	39.16	57.47	60.78	74.00	13.22	Peak

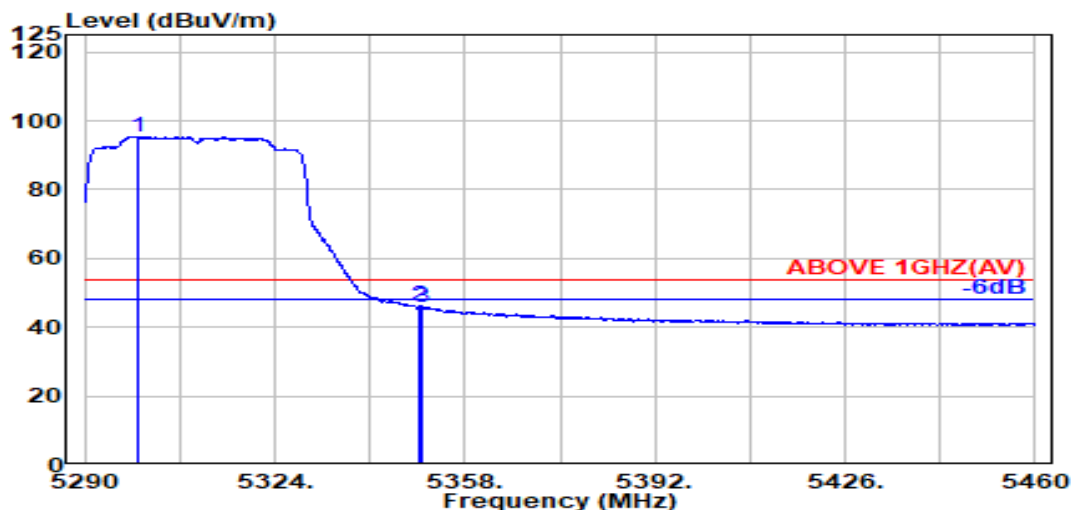

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.500	33.80	8.52	39.17	92.27	95.42	---	---	Average
5350.000	33.70	8.57	39.17	43.33	46.44	54.00	7.56	Average
5350.500	33.70	8.57	39.17	42.68	45.79	54.00	8.21	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

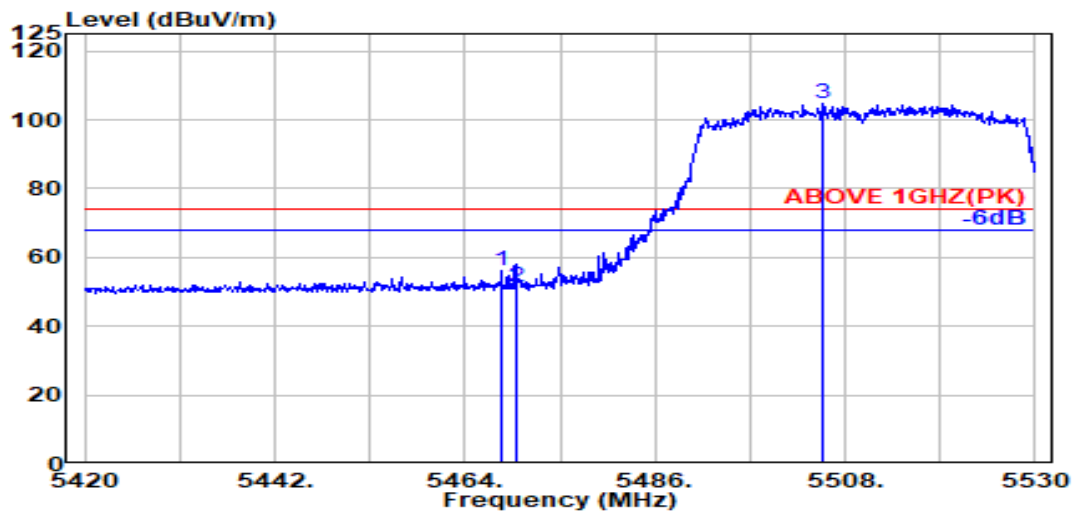

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.15	52.54	56.11	74.00	17.89	Peak
5470.000	34.04	8.69	39.15	47.74	51.31	74.00	22.69	Peak
@ 5505.500	34.09	8.72	39.15	100.88	104.54	---	---	Peak

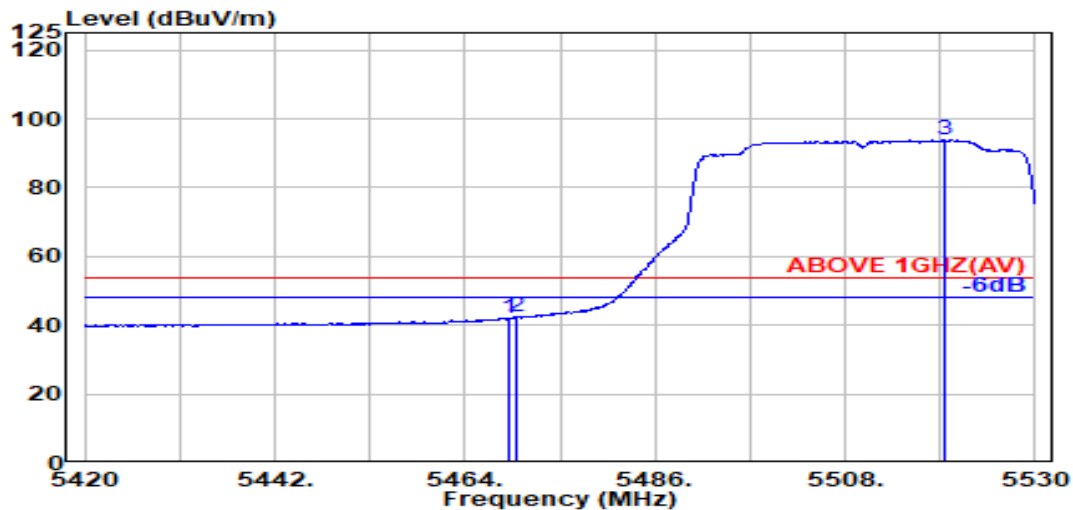

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	38.46	42.04	54.00	11.96	Average
5470.000	34.04	8.69	39.15	38.81	42.39	54.00	11.61	Average
@ 5519.500	34.06	8.74	39.15	90.26	93.90	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

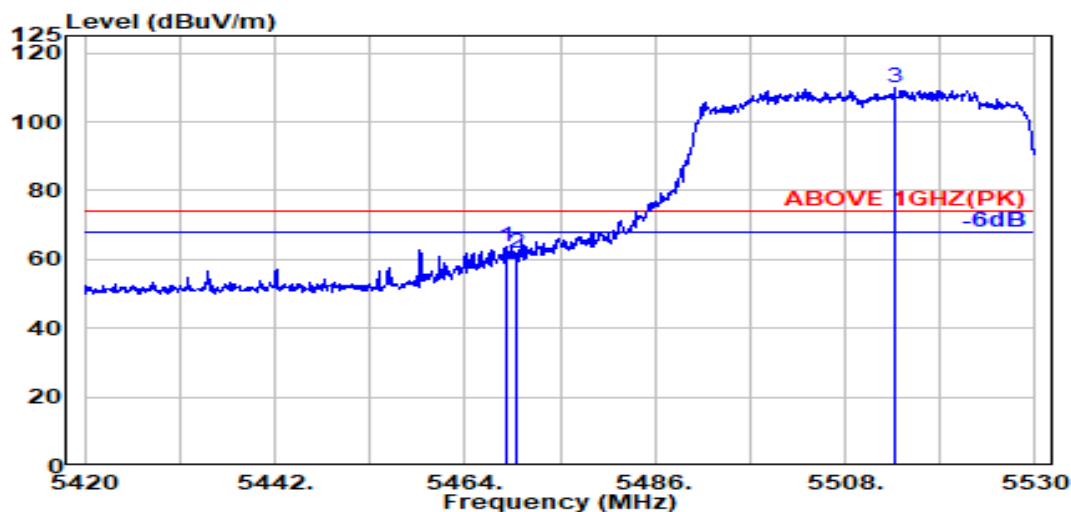

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	60.15	63.72	74.00	10.28	Peak
5470.000	34.04	8.69	39.15	58.21	61.78	74.00	12.22	Peak
@ 5513.800	34.07	8.73	39.15	106.20	109.85	---	---	Peak

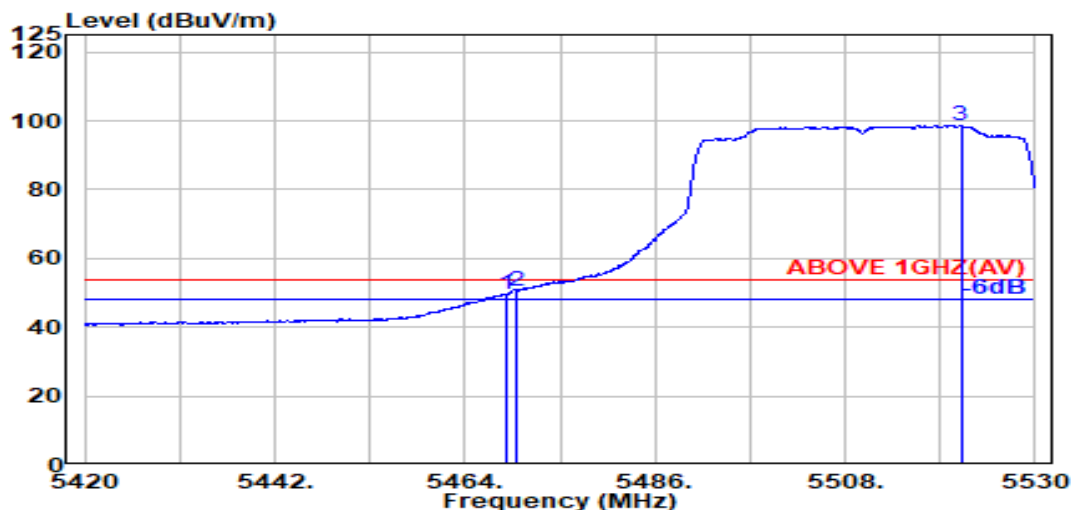

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	46.19	49.76	54.00	4.24	Average
5470.000	34.04	8.69	39.15	46.76	50.34	54.00	3.66	Average
@ 5521.400	34.06	8.74	39.15	94.96	98.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

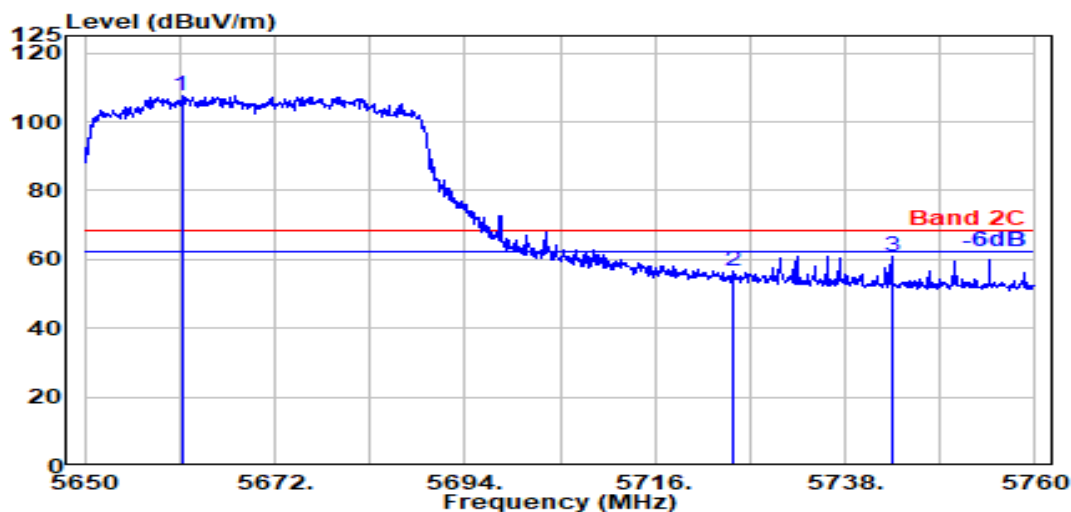

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5661.200	33.76	8.87	39.18	104.09	107.53	---	---	Peak
5725.000	33.60	8.93	39.20	53.04	56.37	68.20	11.83	Peak
5743.500	33.60	8.94	39.20	57.49	60.84	68.20	7.36	Peak

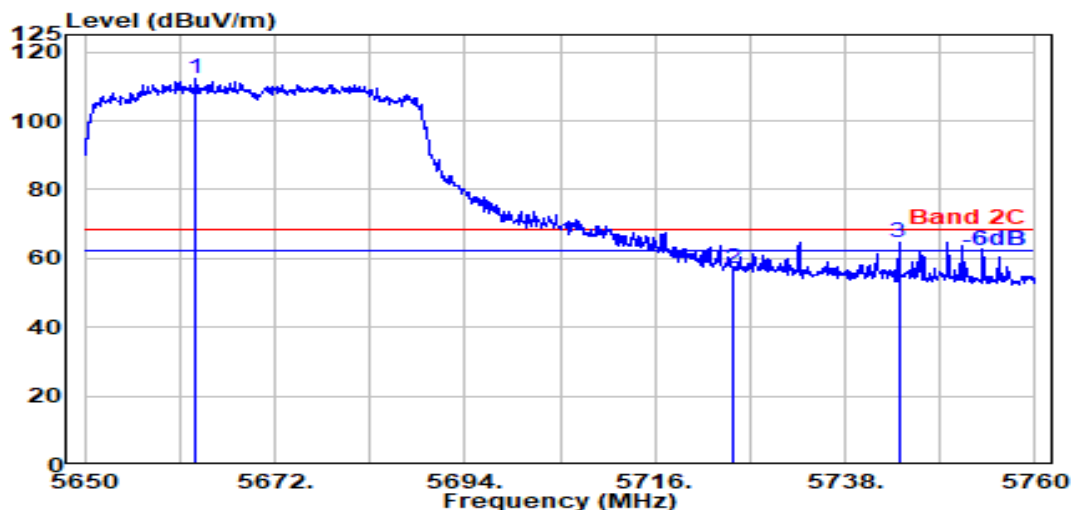

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5662.800	33.75	8.87	39.18	108.80	112.23	---	---	Peak
5725.000	33.60	8.93	39.20	53.92	57.25	68.20	10.95	Peak
5744.200	33.60	8.94	39.20	61.45	64.79	68.20	3.41	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

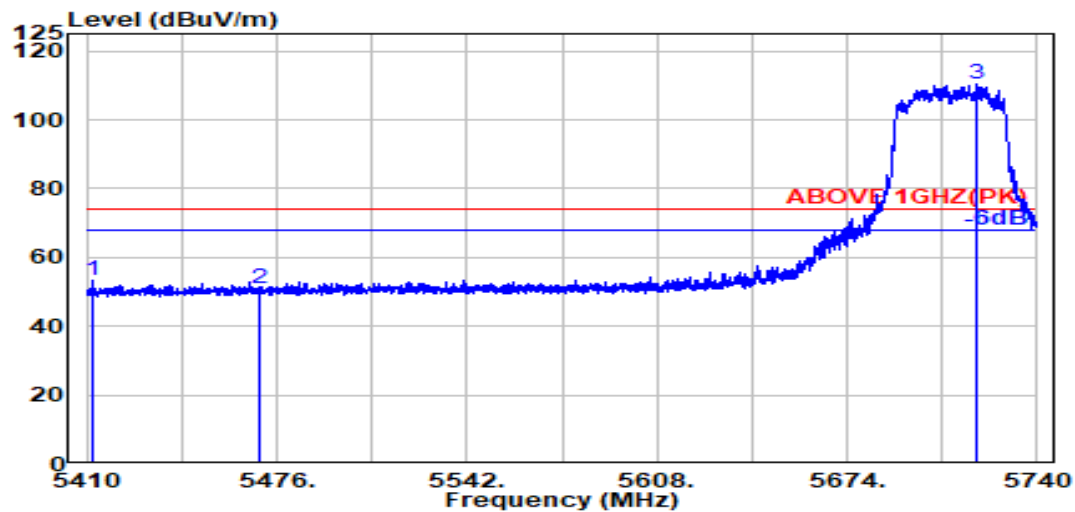

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5412.100	33.92	8.63	39.16	49.80	53.20	74.00	20.80	Peak
5470.000	34.04	8.69	39.15	47.36	50.93	74.00	23.07	Peak
@ 5719.200	33.60	8.92	39.19	106.93	110.26	---	---	Peak

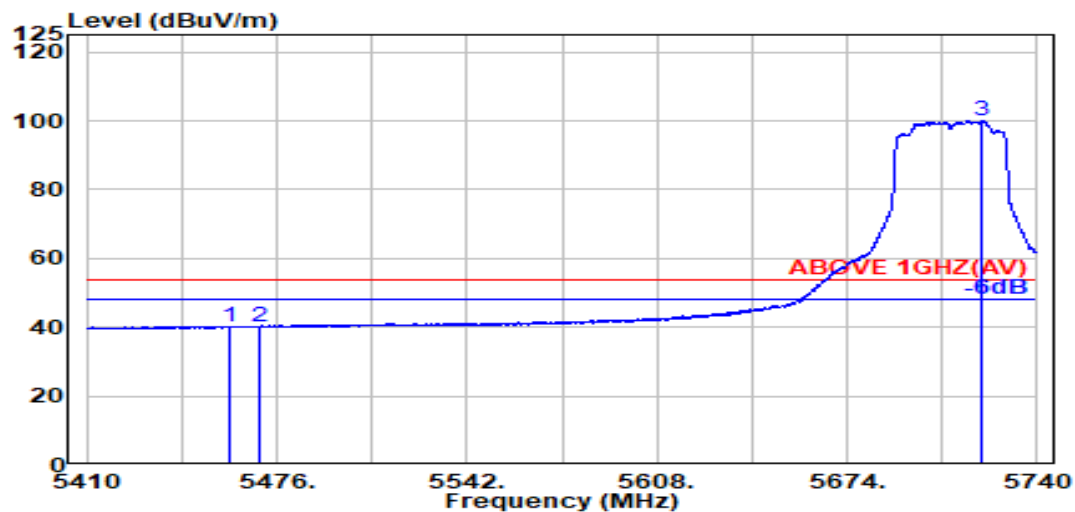

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.000	34.02	8.68	39.15	36.76	40.30	54.00	13.70	Average
5470.000	34.04	8.69	39.15	36.54	40.12	54.00	13.88	Average
@ 5720.700	33.60	8.92	39.20	96.80	100.12	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

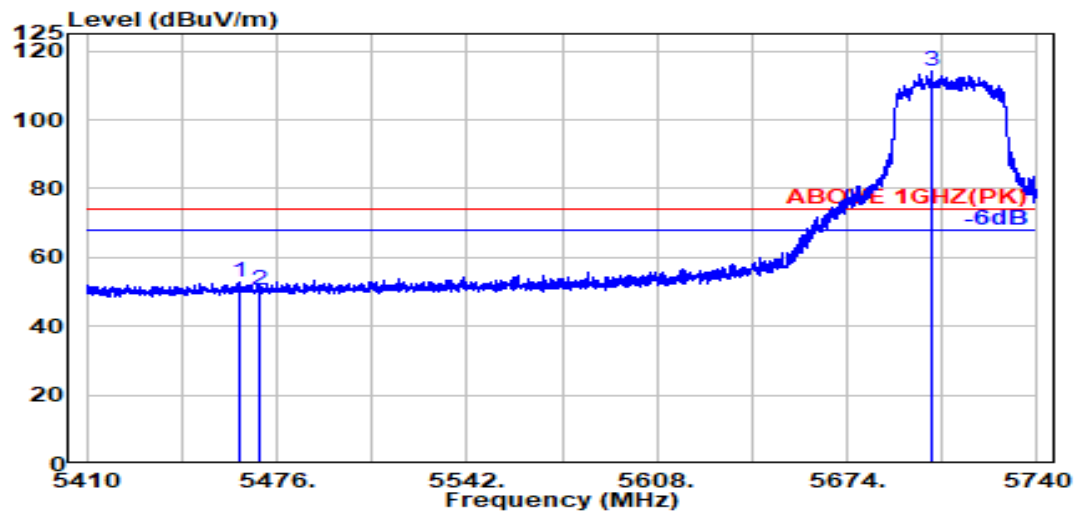

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.03	8.68	39.15	49.13	52.68	74.00	21.32	Peak
5470.000	34.04	8.69	39.15	47.02	50.59	74.00	23.41	Peak
@ 5703.400	33.60	8.91	39.19	110.75	114.07	---	---	Peak

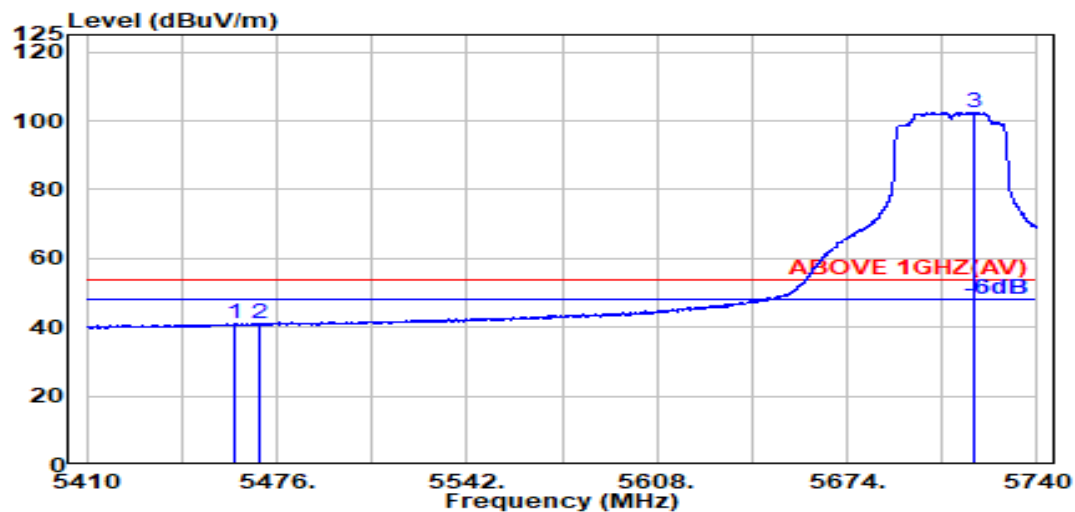

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.400	34.02	8.68	39.15	37.56	41.11	54.00	12.89	Average
5470.000	34.04	8.69	39.15	37.36	40.94	54.00	13.06	Average
@ 5718.100	33.60	8.92	39.19	99.17	102.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

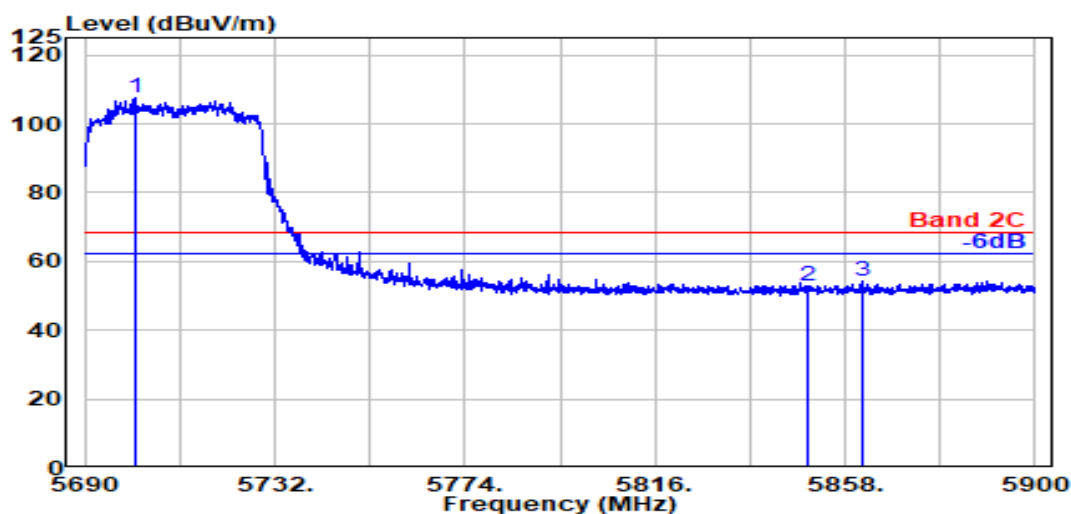

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.000	33.60	8.90	39.19	104.05	107.36	---	---	Peak
5850.000	33.90	9.04	39.22	48.99	52.71	68.20	15.49	Peak
5861.600	33.95	9.05	39.22	50.59	54.37	68.20	13.83	Peak

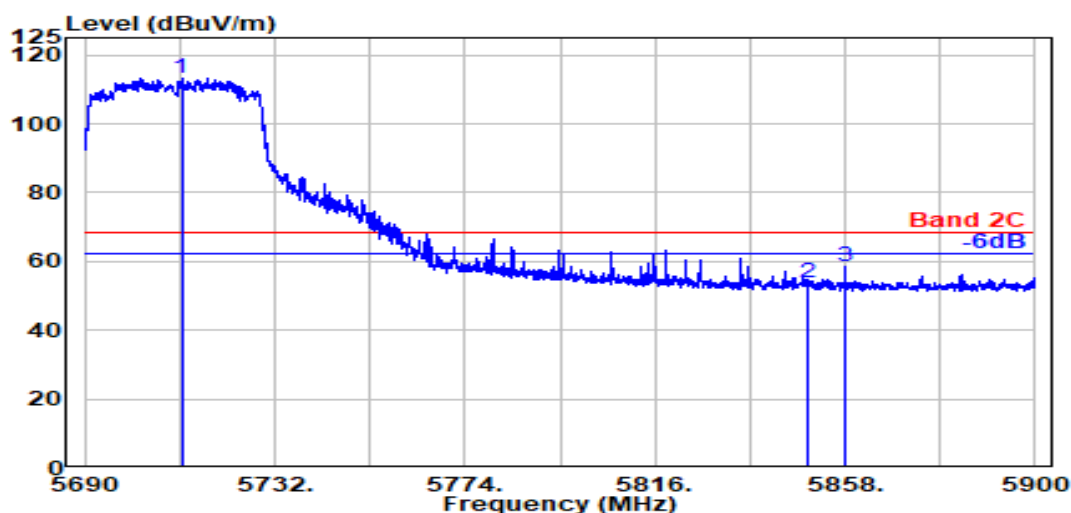

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.400	33.60	8.91	39.19	109.90	113.22	---	---	Peak
5850.000	33.90	9.04	39.22	50.23	53.95	68.20	14.25	Peak
5857.900	33.93	9.05	39.22	54.67	58.42	68.20	9.78	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

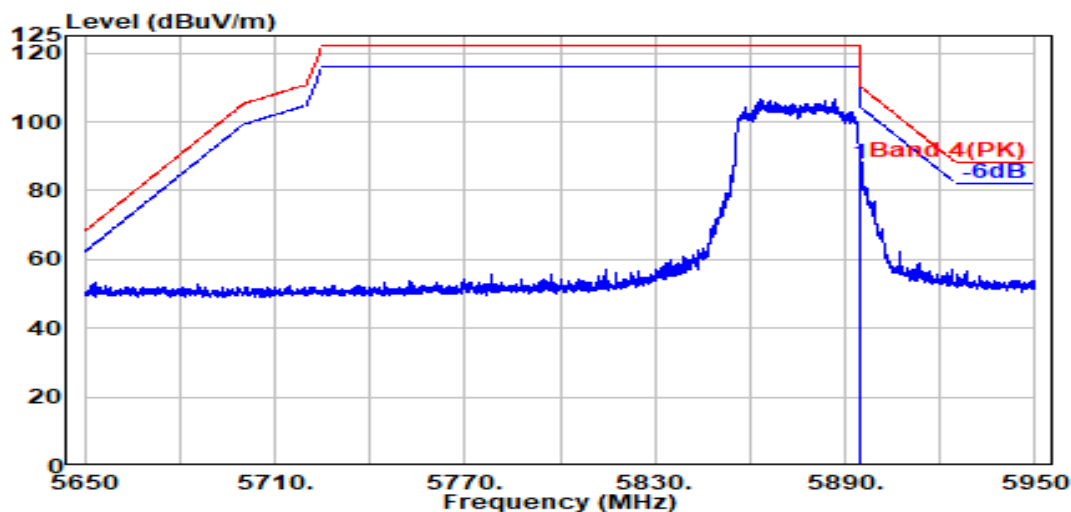

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	83.98	87.91	110.20	22.29	Peak

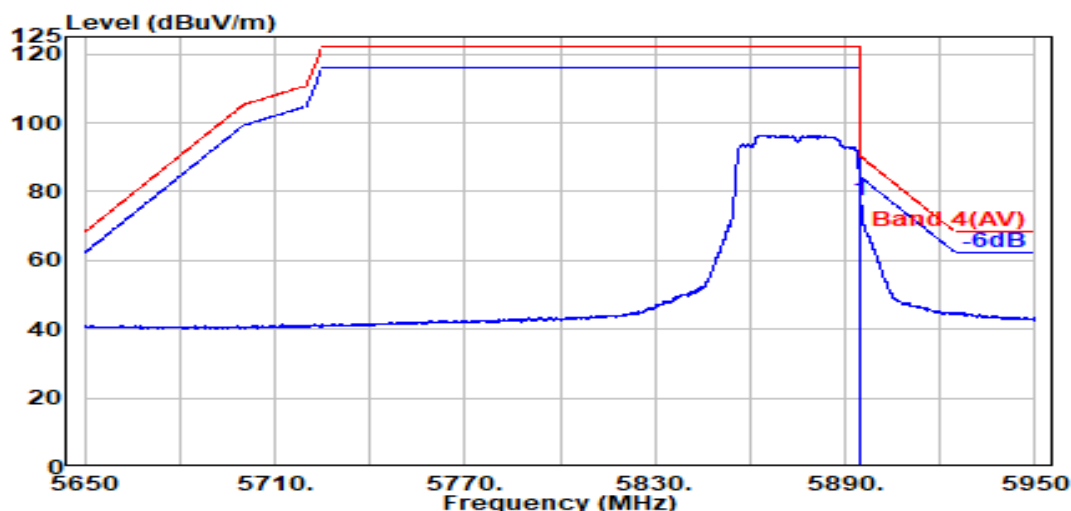

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	73.30	77.23	90.20	12.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

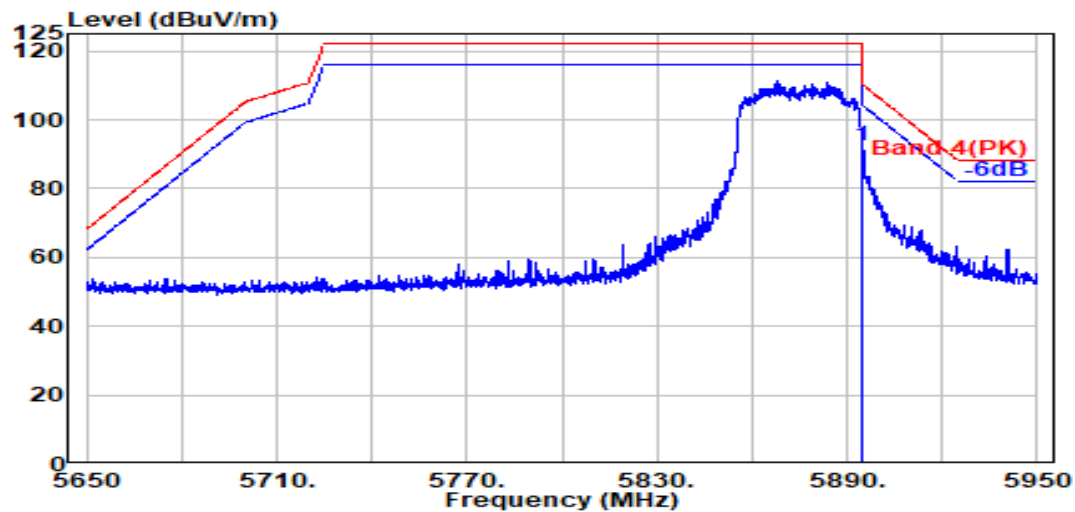

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	88.74	92.67	110.20	17.53	Peak

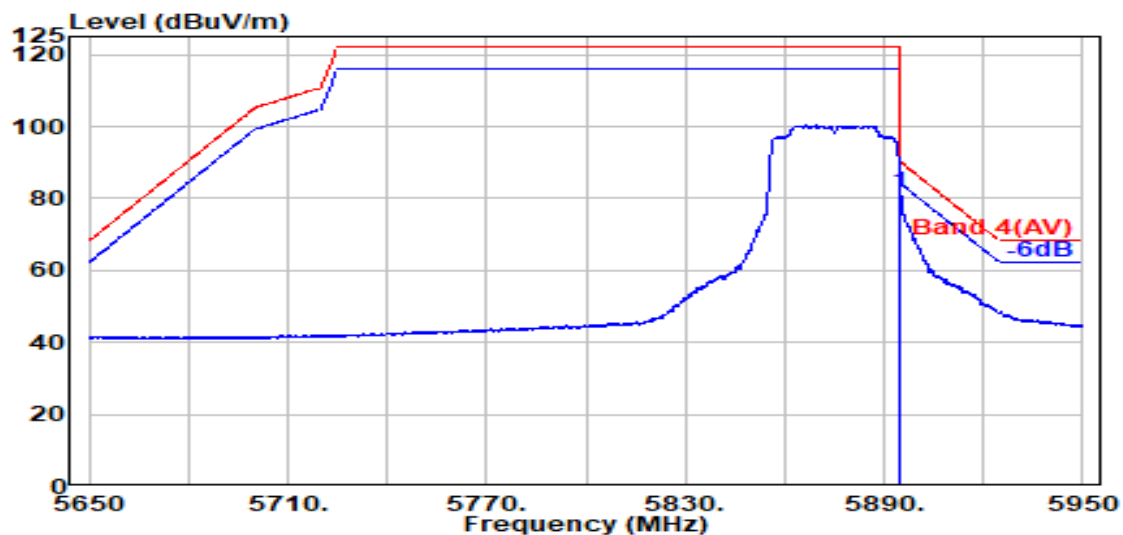

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	77.83	81.76	90.20	8.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

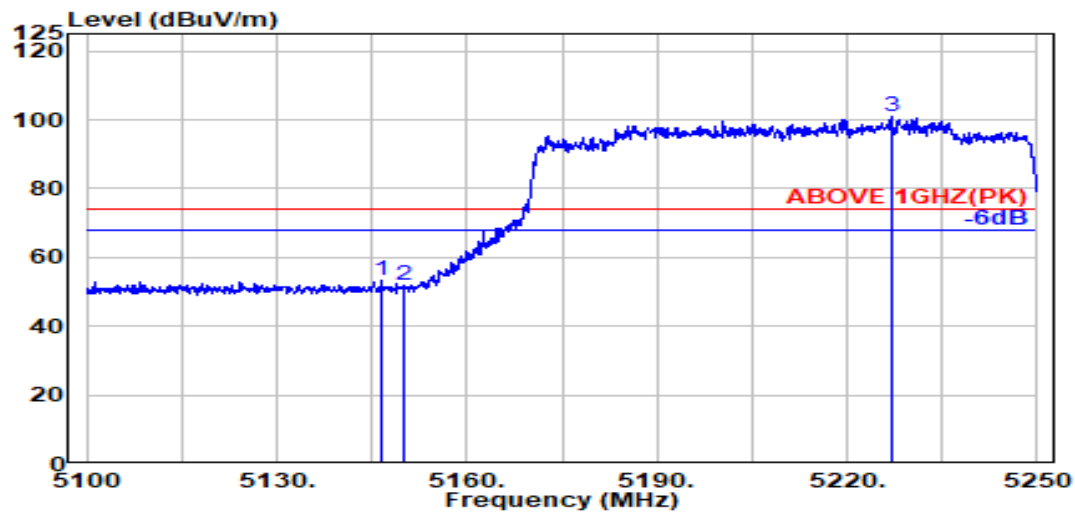

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.600	33.49	8.37	39.19	50.80	53.47	74.00	20.53	Peak
5150.000	33.50	8.37	39.19	49.14	51.82	74.00	22.18	Peak
@ 5226.900	33.75	8.45	39.18	98.12	101.13	---	---	Peak

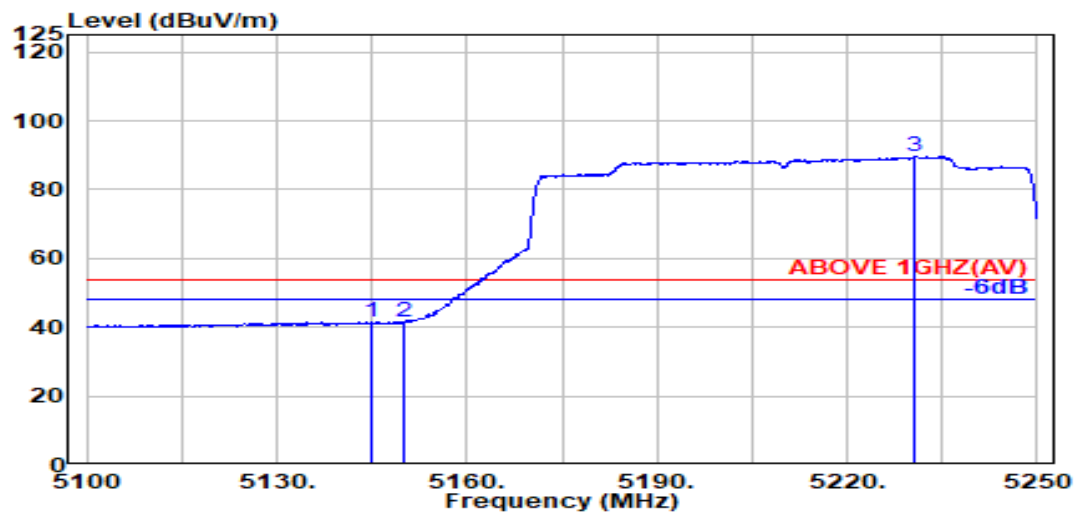

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.49	8.37	39.19	38.89	41.55	54.00	12.45	Average
5150.000	33.50	8.37	39.19	38.95	41.63	54.00	12.37	Average
@ 5230.600	33.74	8.45	39.18	86.55	89.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

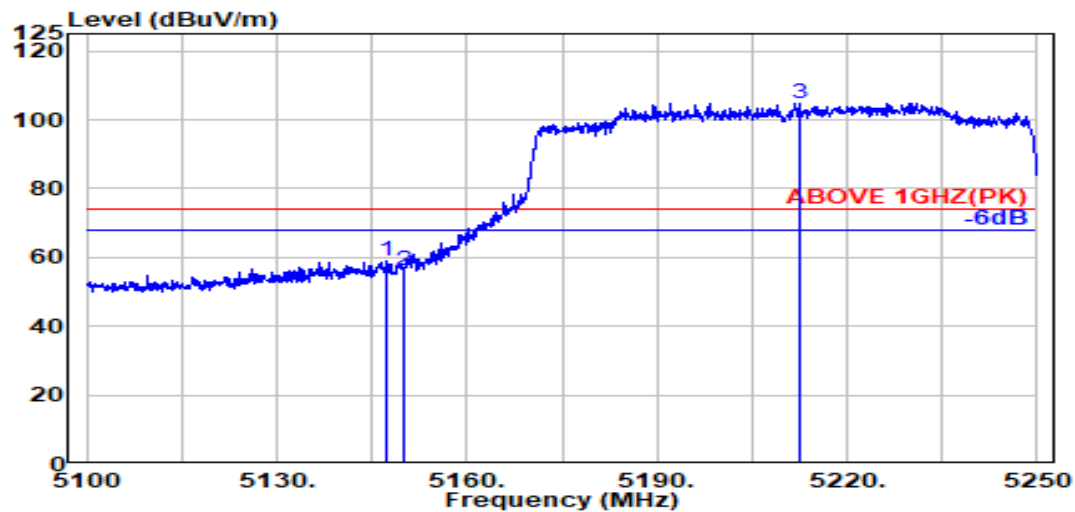

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.300	33.49	8.37	39.19	56.36	59.04	74.00	14.96	Peak
5150.000	33.50	8.37	39.19	53.66	56.34	74.00	17.66	Peak
@ 5212.600	33.77	8.44	39.18	101.81	104.83	---	---	Peak

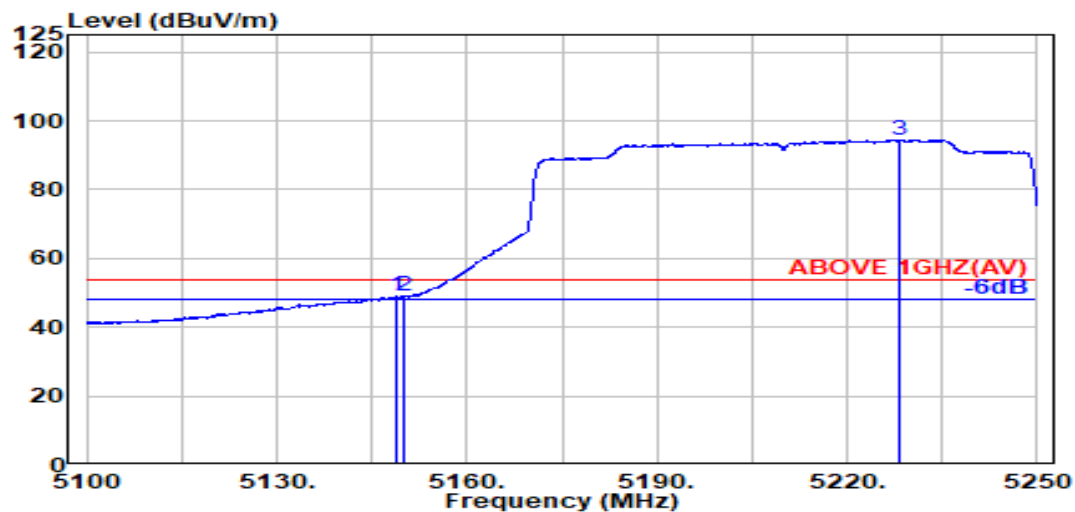

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.800	33.50	8.37	39.19	46.15	48.83	54.00	5.17	Average
5150.000	33.50	8.37	39.19	46.51	49.19	54.00	4.81	Average
@ 5228.400	33.74	8.45	39.18	91.53	94.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

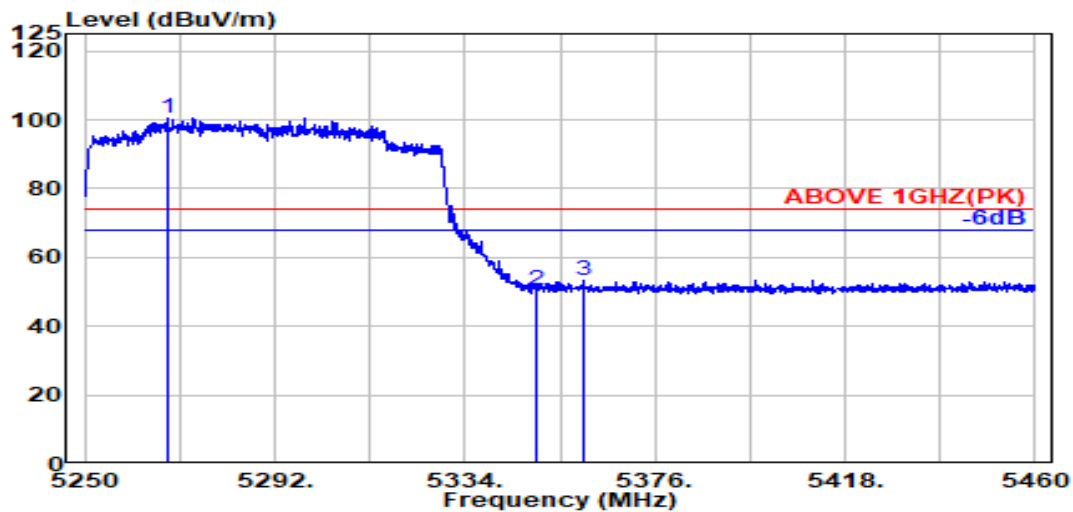

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5268.200	33.74	8.49	39.18	97.51	100.56	---	---	Peak
5350.000	33.70	8.57	39.17	47.41	50.52	74.00	23.48	Peak
5360.100	33.74	8.58	39.17	50.25	53.41	74.00	20.59	Peak

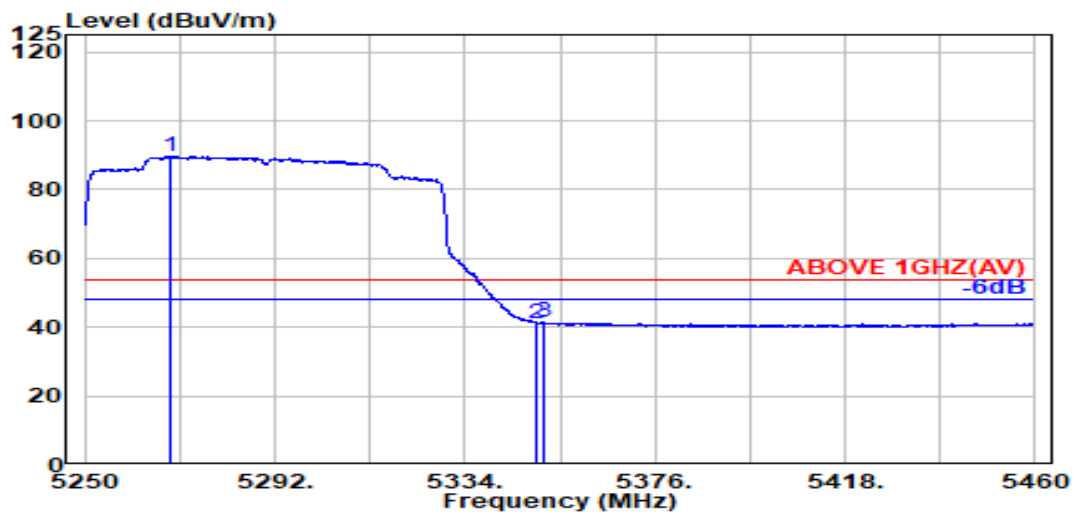

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.100	33.74	8.49	39.18	86.75	89.81	---	---	Average
5350.000	33.70	8.57	39.17	38.16	41.27	54.00	12.73	Average
5351.400	33.71	8.57	39.17	38.61	41.72	54.00	12.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

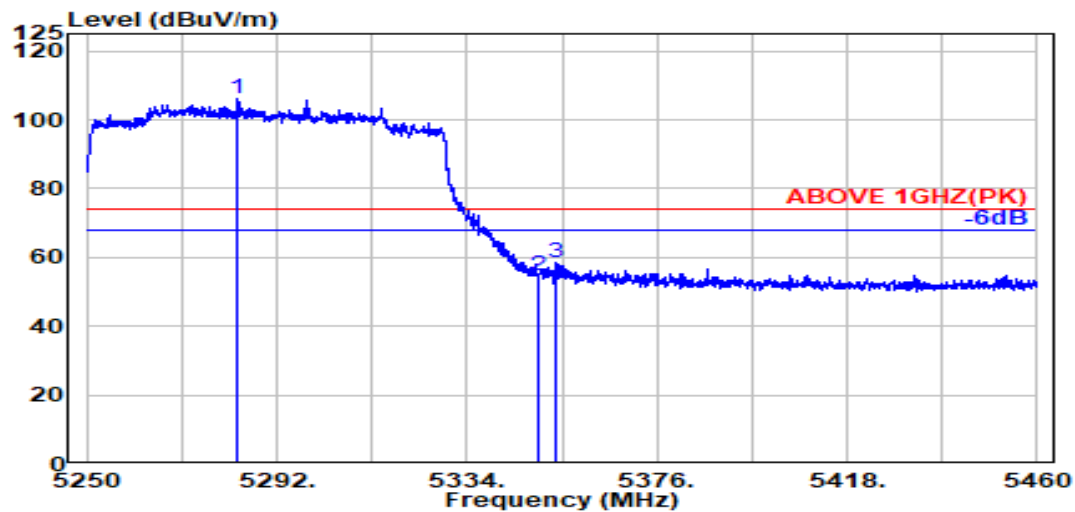

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.400	33.77	8.51	39.18	102.83	105.93	---	---	Peak
5350.000	33.70	8.57	39.17	51.57	54.67	74.00	19.33	Peak
5353.400	33.71	8.58	39.17	55.17	58.29	74.00	15.71	Peak

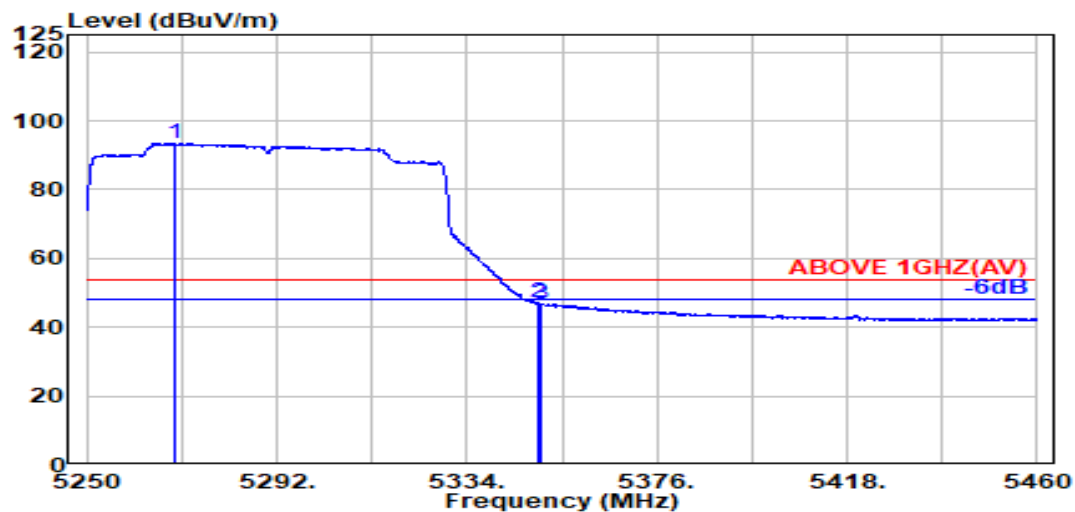

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.500	33.74	8.49	39.18	90.42	93.47	---	---	Average
5350.000	33.70	8.57	39.17	43.93	47.03	54.00	6.97	Average
5350.500	33.70	8.57	39.17	43.77	46.88	54.00	7.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

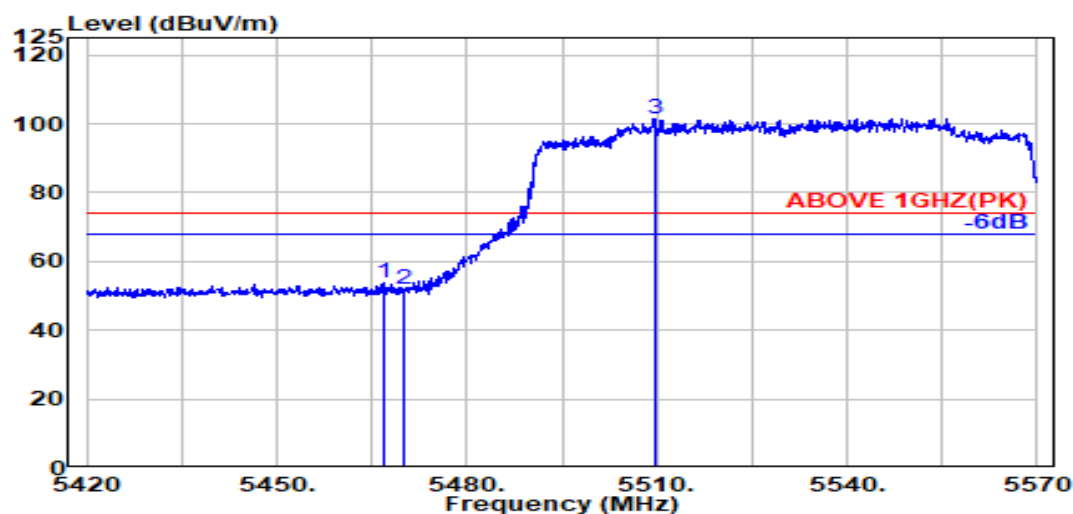

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.900	34.03	8.69	39.15	50.16	53.73	74.00	20.27	Peak
5470.000	34.04	8.69	39.15	48.13	51.71	74.00	22.29	Peak
@ 5509.700	34.08	8.73	39.15	97.99	101.64	---	---	Peak

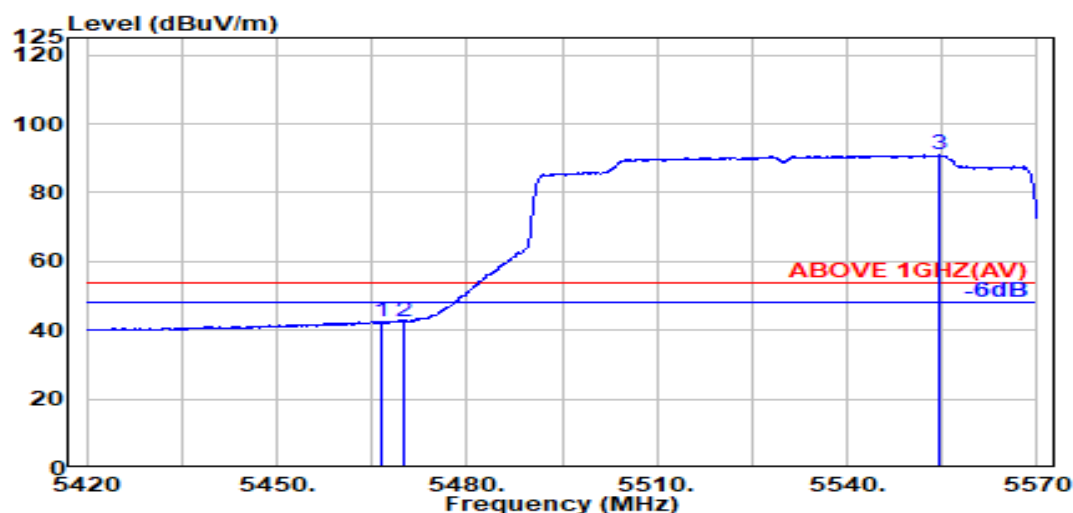

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.600	34.03	8.68	39.15	39.11	42.68	54.00	11.32	Average
5470.000	34.04	8.69	39.15	39.11	42.68	54.00	11.32	Average
@ 5554.400	33.98	8.77	39.16	87.28	90.87	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

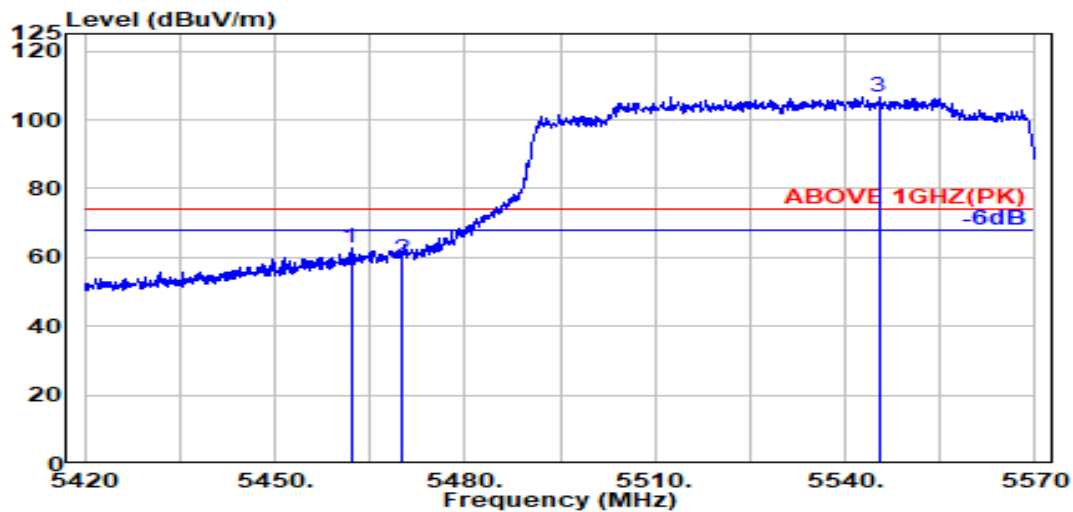

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	34.02	8.68	39.15	59.18	62.73	74.00	11.27	Peak
5470.000	34.04	8.69	39.15	55.87	59.44	74.00	14.56	Peak
@ 5545.300	34.01	8.76	39.16	103.22	106.83	---	---	Peak

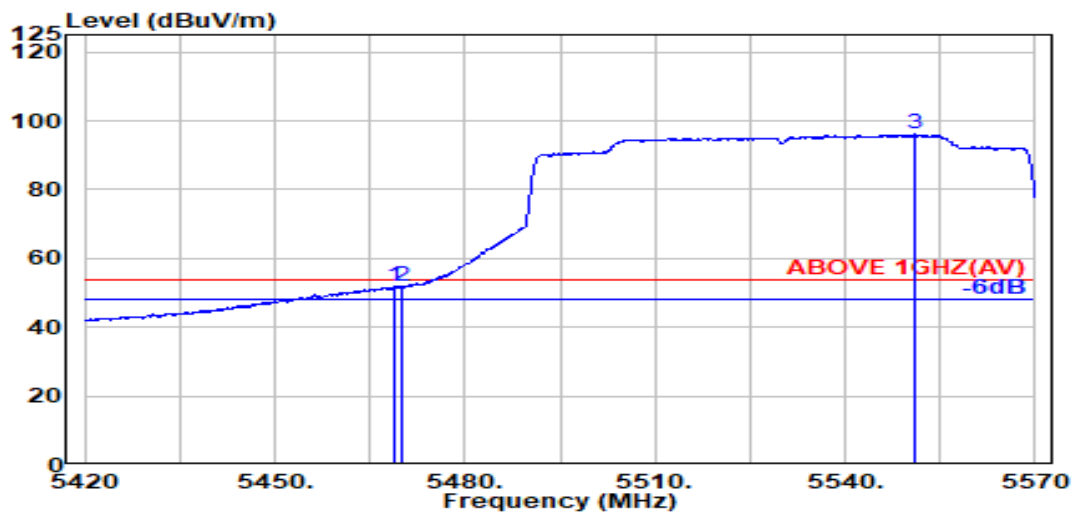

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	48.24	51.81	54.00	2.19	Average
5470.000	34.04	8.69	39.15	48.33	51.90	54.00	2.10	Average
@ 5550.900	34.00	8.76	39.16	92.47	96.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

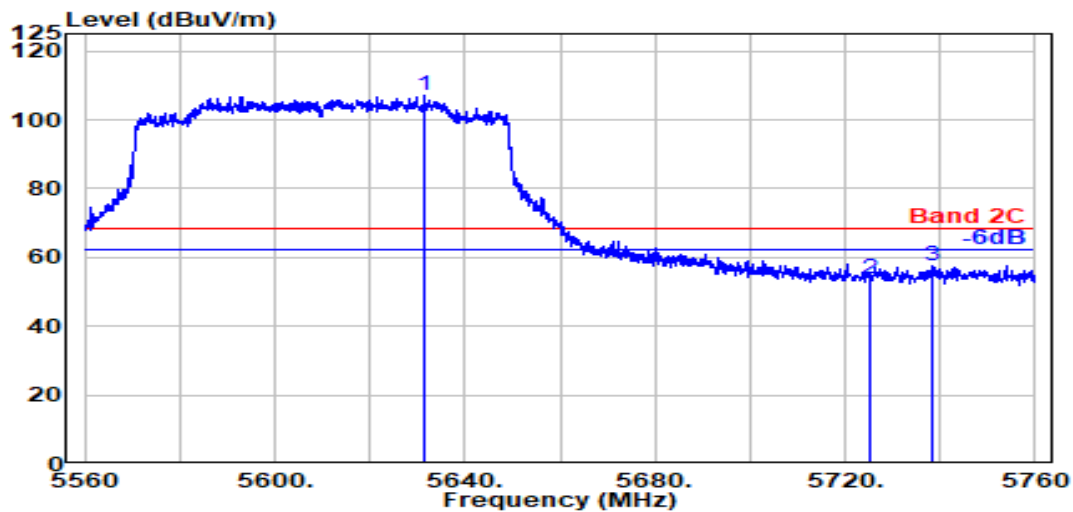

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.500	33.80	8.84	39.18	103.58	107.04	---	---	Peak
5725.000	33.60	8.93	39.20	50.63	53.96	68.20	14.24	Peak
5738.500	33.60	8.94	39.20	54.20	57.54	68.20	10.66	Peak

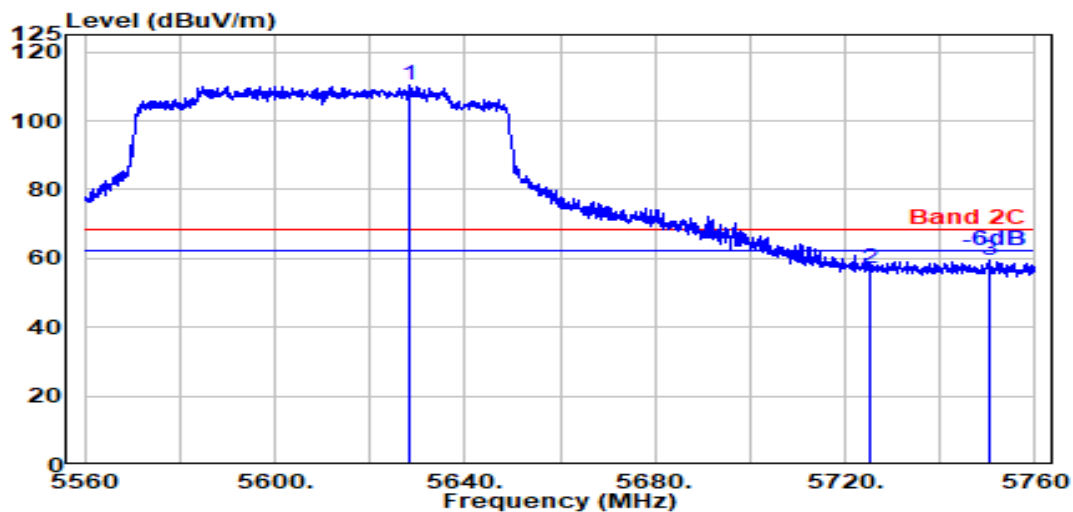

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5628.200	33.80	8.84	39.18	106.74	110.20	---	---	Peak
5725.000	33.60	8.93	39.20	53.52	56.85	68.20	11.35	Peak
5750.200	33.60	8.95	39.20	56.02	59.36	68.20	8.84	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

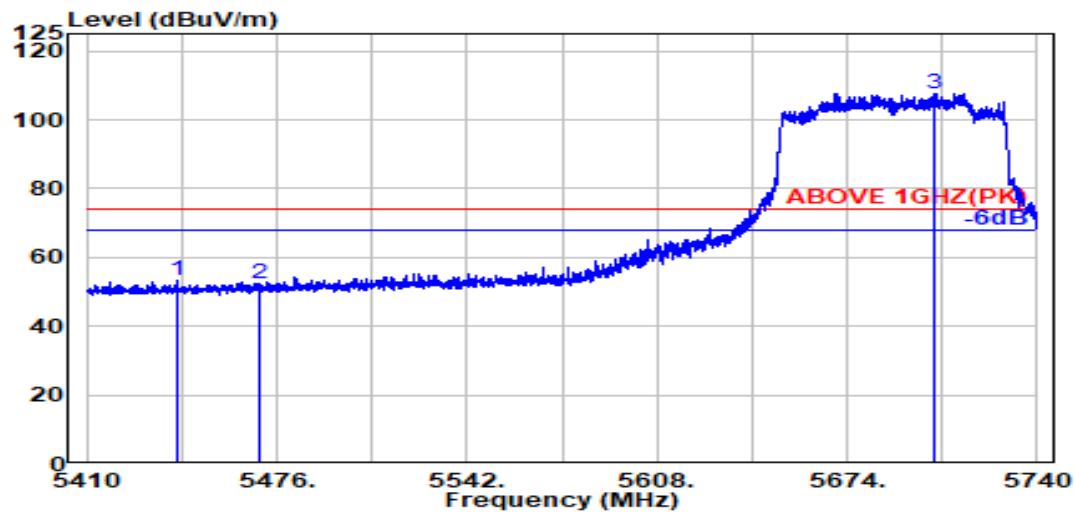

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.300	33.98	8.66	39.16	49.80	53.29	74.00	20.71	Peak
5470.000	34.04	8.69	39.15	48.56	52.13	74.00	21.87	Peak
@ 5704.600	33.60	8.91	39.19	104.45	107.76	---	---	Peak

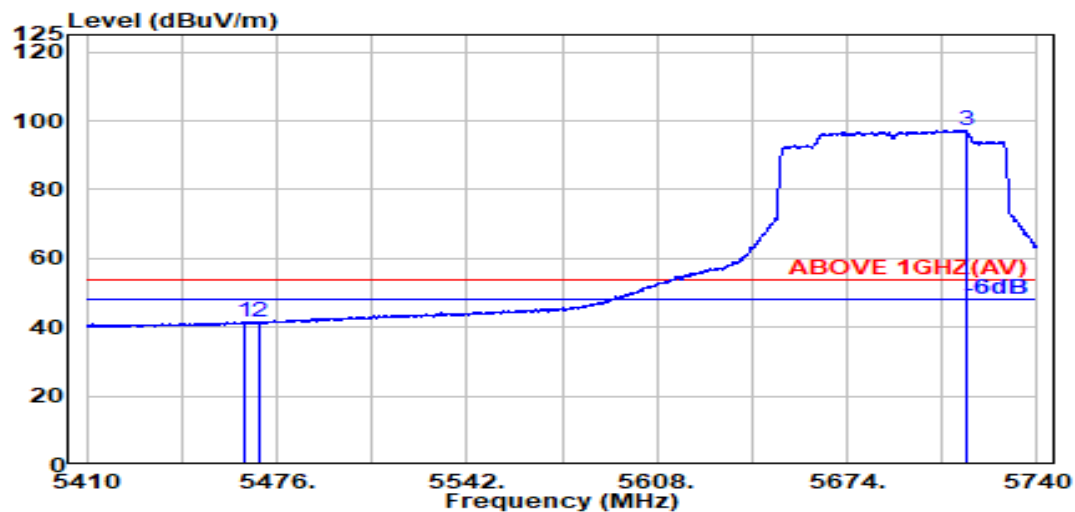


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.500	34.03	8.68	39.15	38.14	41.70	54.00	12.30	Average
5470.000	34.04	8.69	39.15	37.81	41.38	54.00	12.62	Average
@ 5715.300	33.60	8.92	39.19	93.93	97.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

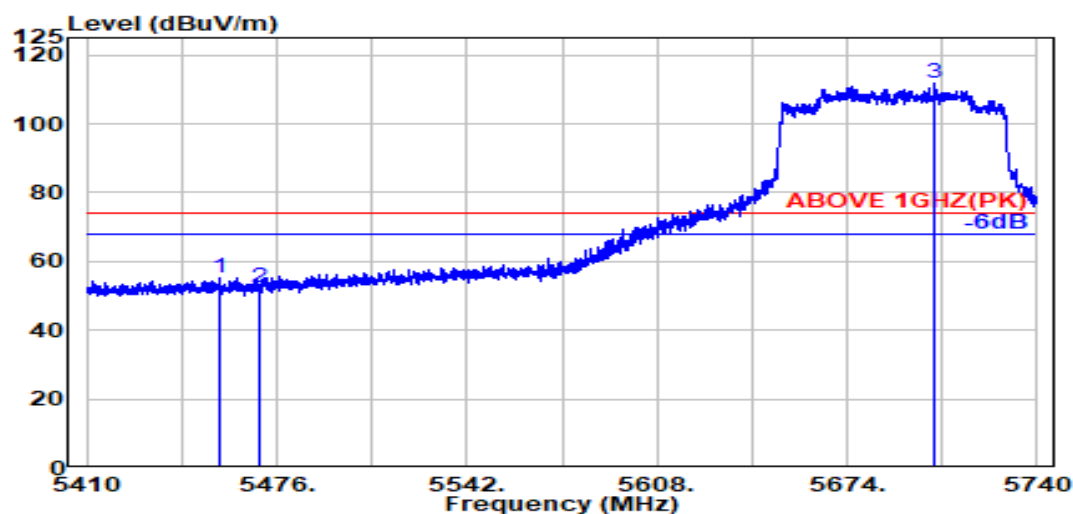

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.200	34.01	8.67	39.16	51.54	55.08	74.00	18.92	Peak
5470.000	34.04	8.69	39.15	48.55	52.12	74.00	21.88	Peak
@ 5704.300	33.60	8.91	39.19	108.66	111.97	---	---	Peak

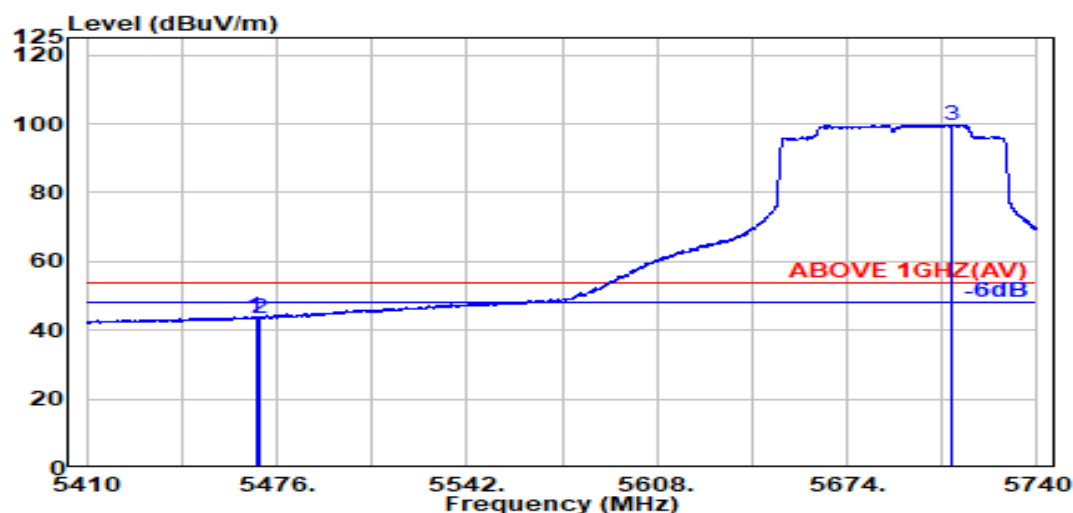

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	40.35	43.92	54.00	10.08	Average
5470.000	34.04	8.69	39.15	39.99	43.57	54.00	10.43	Average
@ 5710.600	33.60	8.91	39.19	96.44	99.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

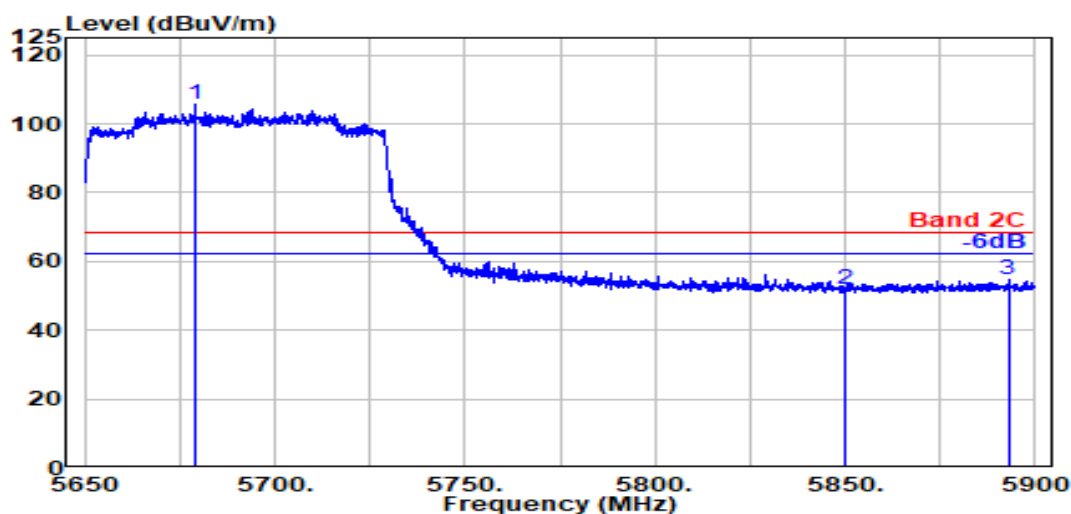

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5678.900	33.68	8.88	39.19	102.19	105.57	---	---	Peak
5850.000	33.90	9.04	39.22	48.00	51.72	68.20	16.48	Peak
5892.900	34.07	9.08	39.23	50.89	54.81	68.20	13.39	Peak

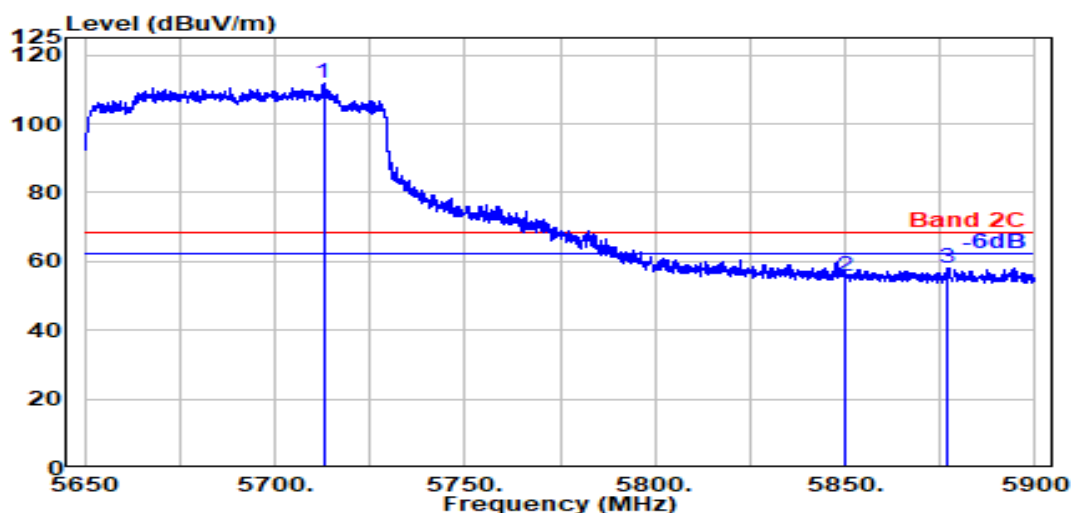

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.800	33.60	8.91	39.19	108.31	111.63	---	---	Peak
5850.000	33.90	9.04	39.22	51.71	55.43	68.20	12.77	Peak
5876.900	34.01	9.06	39.23	54.31	58.15	68.20	10.05	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

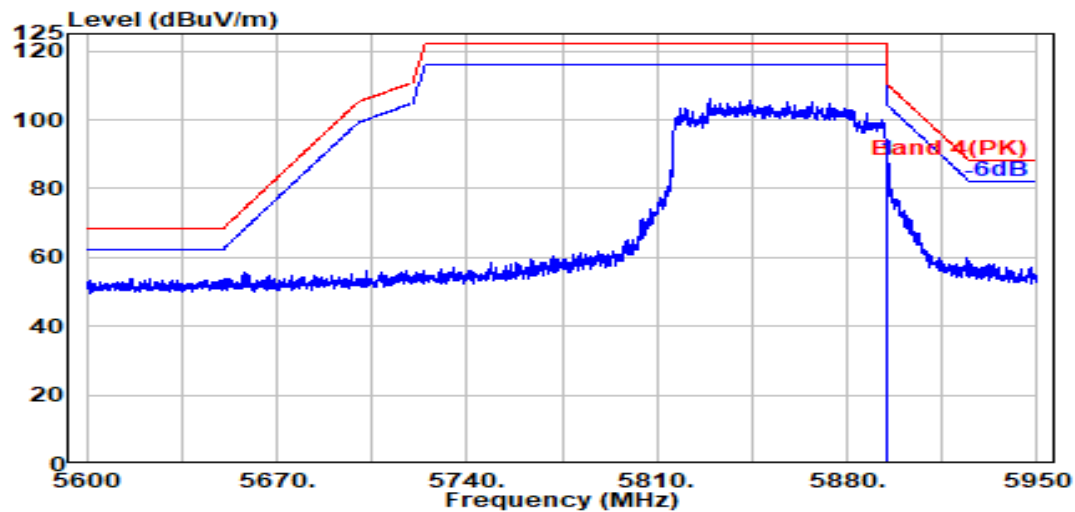

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	84.25	88.18	110.16	21.98	Peak

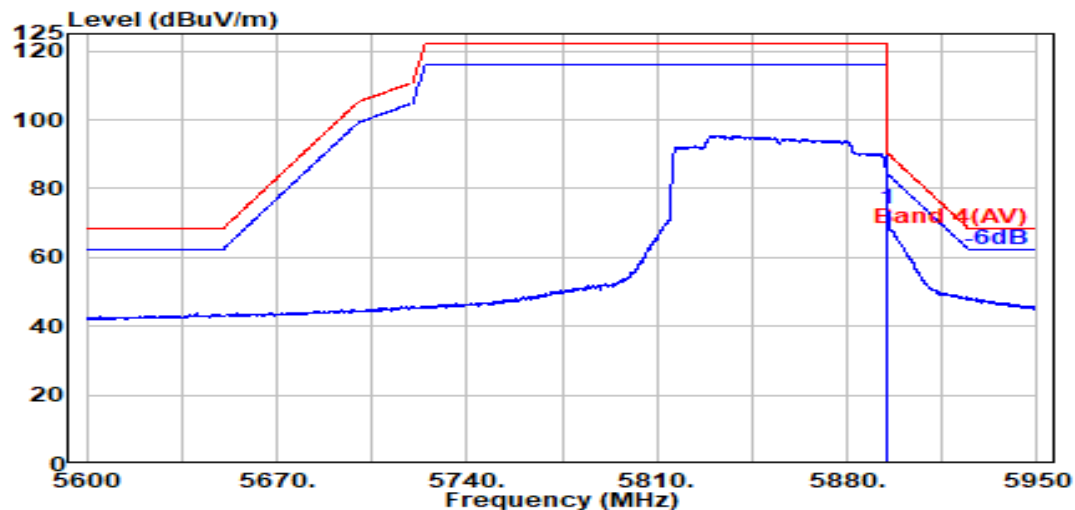

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	70.07	73.99	90.16	16.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

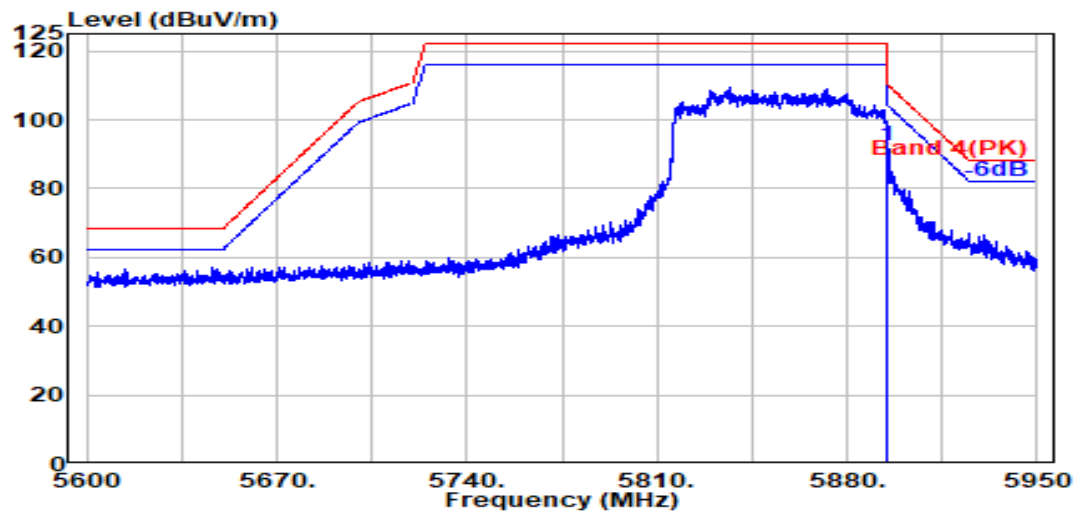

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	88.49	92.42	110.16	17.74	Peak

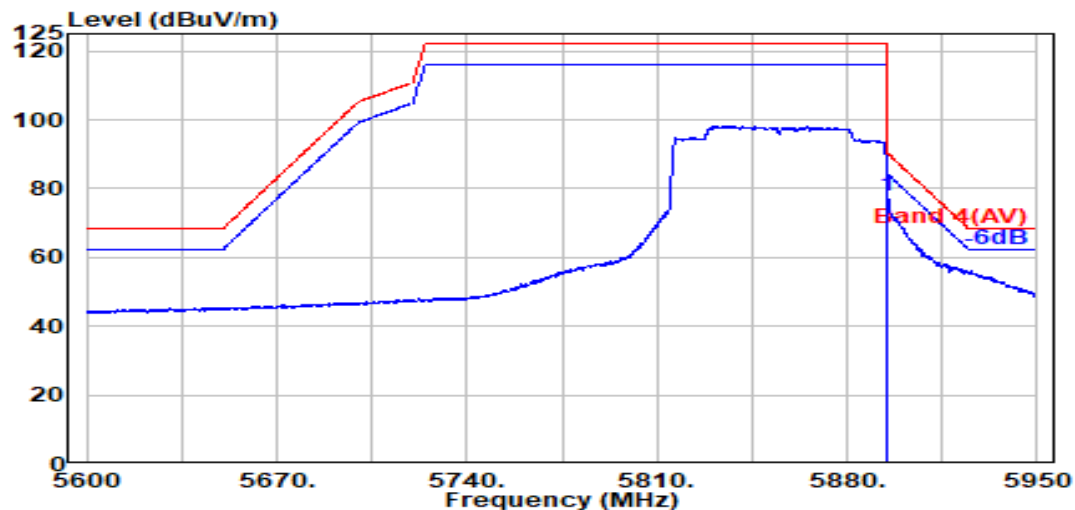

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	74.06	77.99	90.16	12.17	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

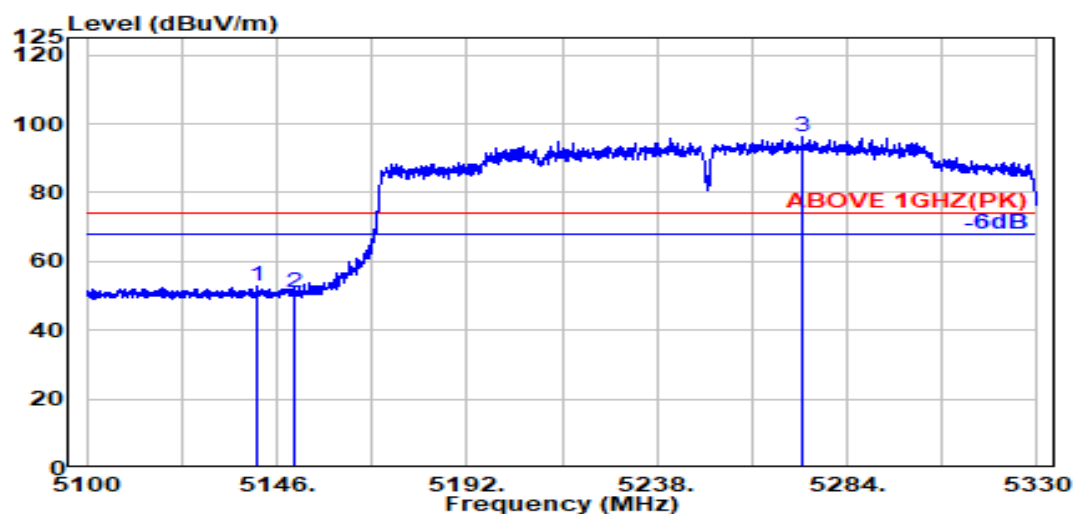

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.200	33.48	8.37	39.19	50.28	52.93	74.00	21.07	Peak
5150.000	33.50	8.37	39.19	48.47	51.15	74.00	22.85	Peak
@ 5273.200	33.75	8.50	39.18	92.95	96.01	---	---	Peak

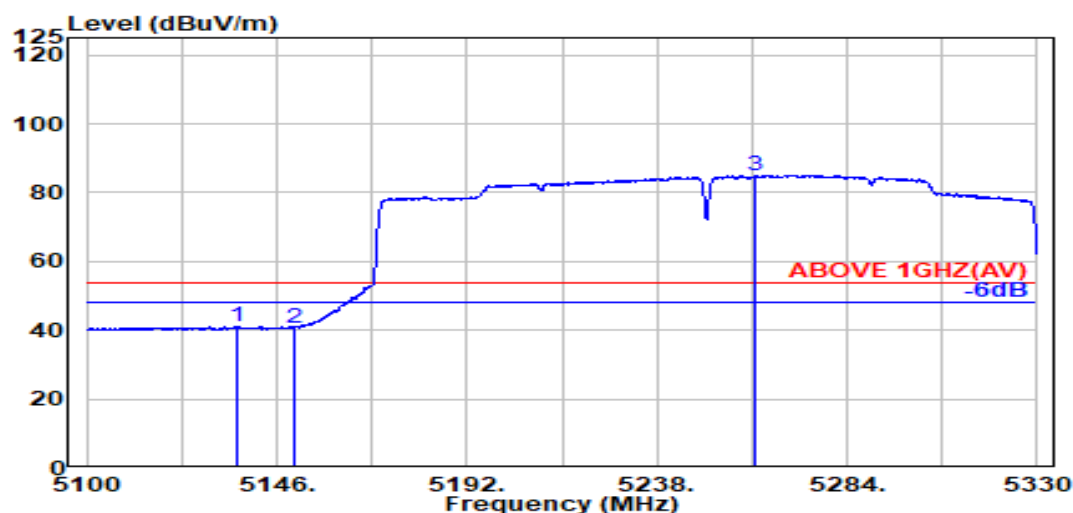

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.400	33.47	8.36	39.19	38.34	40.98	54.00	13.02	Average
5150.000	33.50	8.37	39.19	37.95	40.63	54.00	13.37	Average
@ 5261.900	33.72	8.49	39.18	82.01	85.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

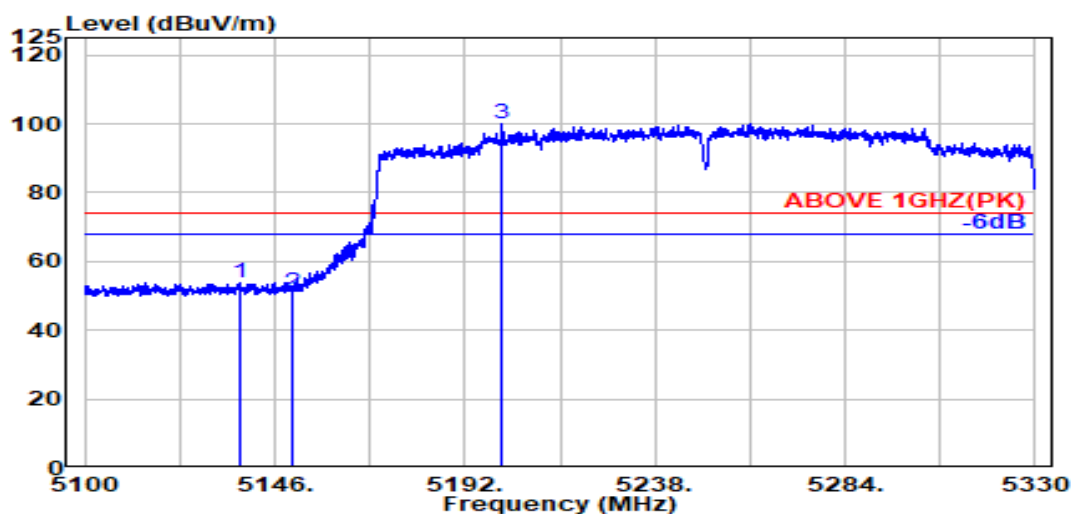

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.600	33.48	8.36	39.19	51.22	53.87	74.00	20.13	Peak
5150.000	33.50	8.37	39.19	48.30	50.99	74.00	23.01	Peak
@ 5201.000	33.80	8.43	39.19	96.92	99.95	---	---	Peak

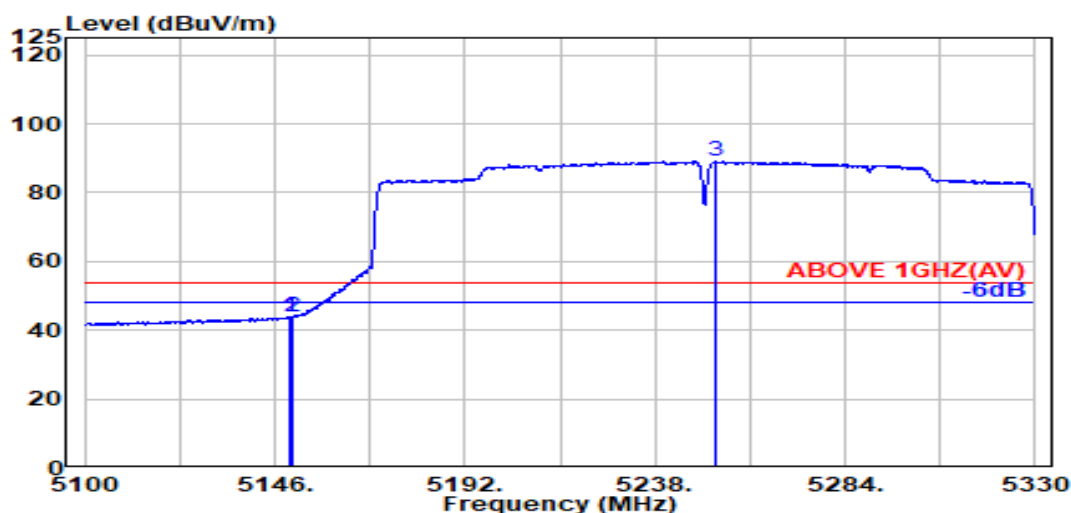

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	33.50	8.37	39.19	41.08	43.76	54.00	10.24	Average
5150.000	33.50	8.37	39.19	41.07	43.76	54.00	10.24	Average
@ 5252.500	33.71	8.48	39.18	85.97	88.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

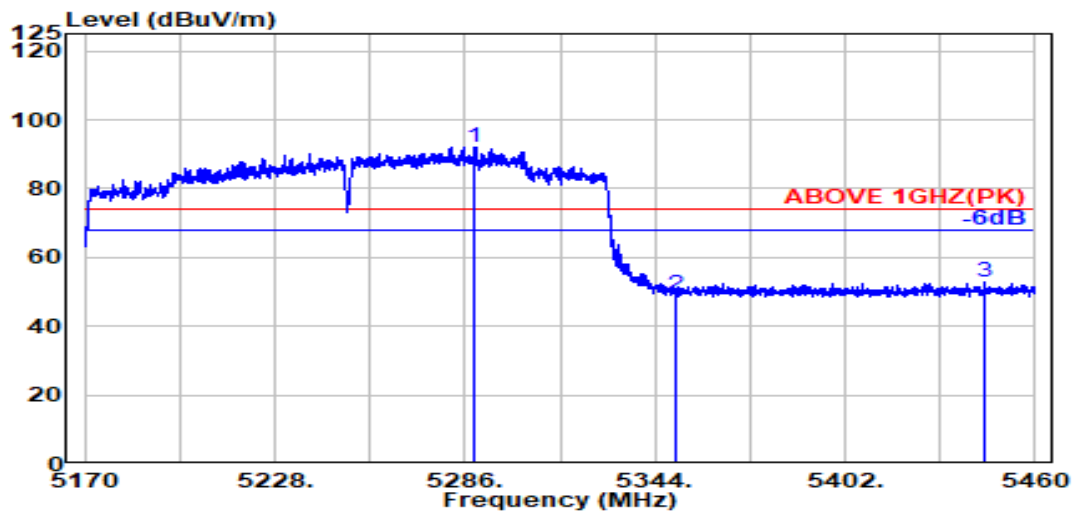

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5289.100	33.78	8.51	39.17	89.00	92.11	---	---	Peak
5350.000	33.70	8.57	39.17	46.08	49.19	74.00	24.81	Peak
5444.700	33.99	8.66	39.16	49.25	52.75	74.00	21.25	Peak

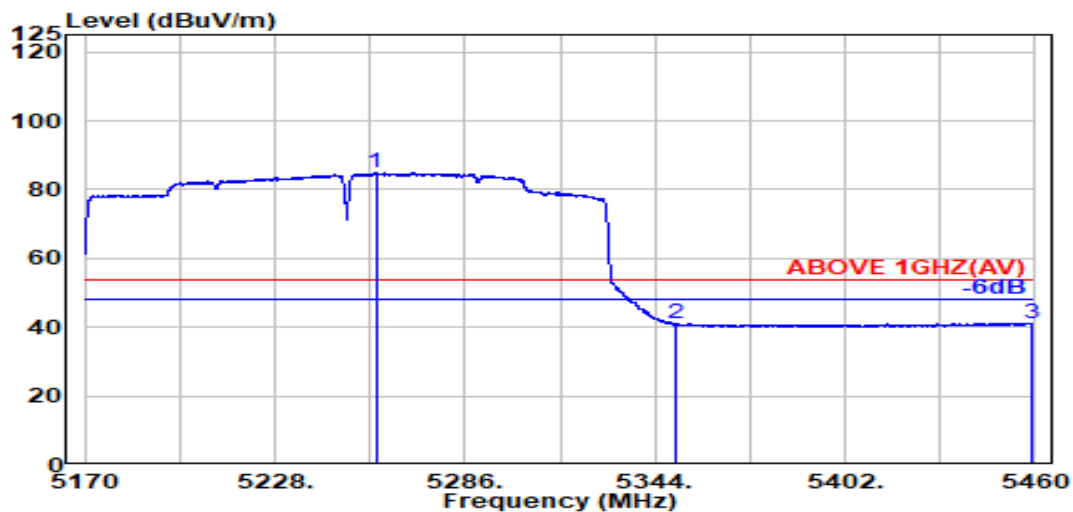

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5258.800	33.72	8.48	39.18	81.77	84.79	---	---	Average
5350.000	33.70	8.57	39.17	37.71	40.82	54.00	13.18	Average
5458.800	34.02	8.68	39.15	37.72	41.26	54.00	12.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

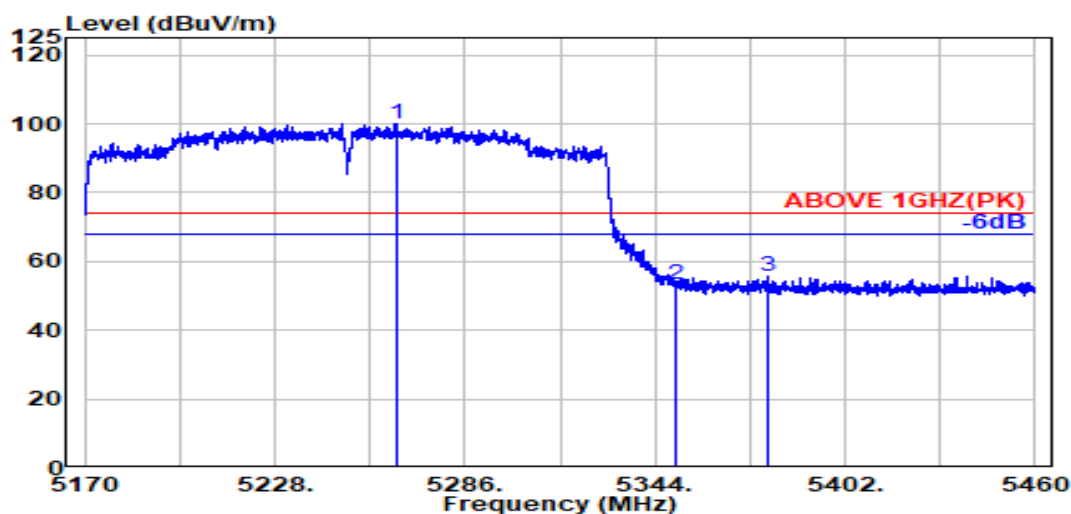

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5264.900	33.73	8.49	39.18	96.94	99.98	---	---	Peak
5350.000	33.70	8.57	39.17	50.19	53.29	74.00	20.71	Peak
5378.400	33.81	8.60	39.16	52.41	55.66	74.00	18.34	Peak

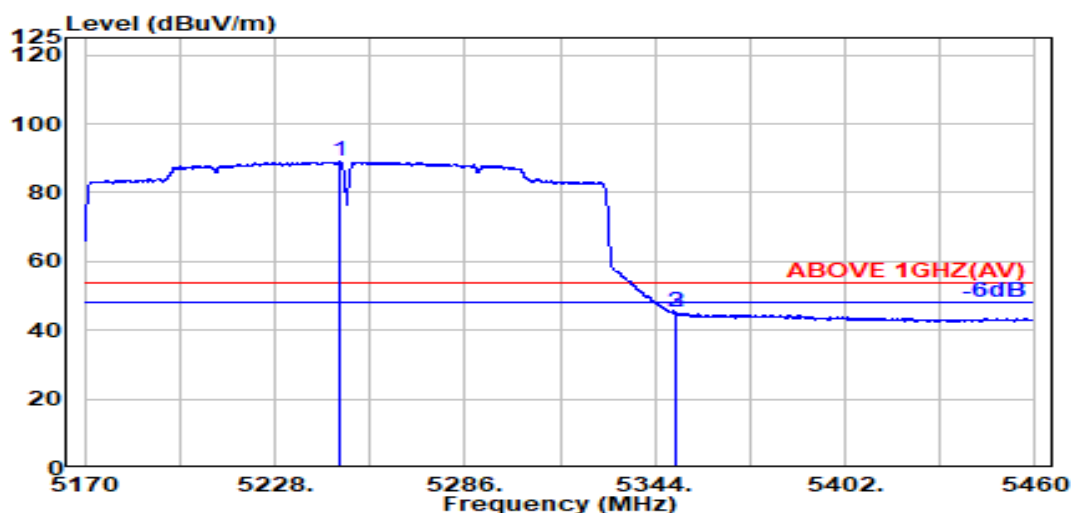

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5247.700	33.70	8.47	39.18	86.04	89.04	---	---	Average
5350.000	33.70	8.57	39.17	42.04	45.14	54.00	8.86	Average
5350.400	33.70	8.57	39.17	42.19	45.30	54.00	8.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

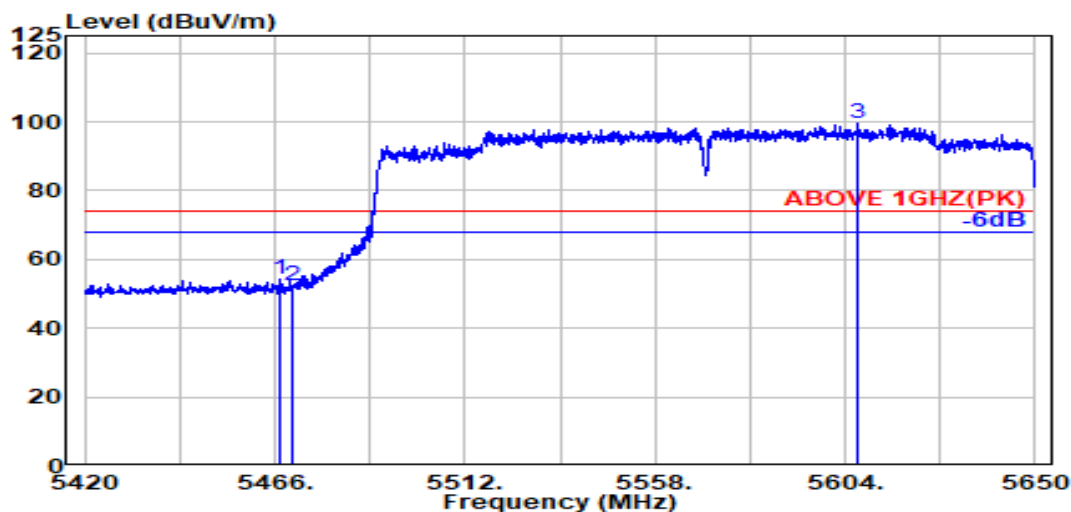

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.15	50.51	54.08	74.00	19.92	Peak
5470.000	34.04	8.69	39.15	48.70	52.28	74.00	21.72	Peak
@ 5607.200	33.80	8.82	39.17	96.12	99.56	---	---	Peak

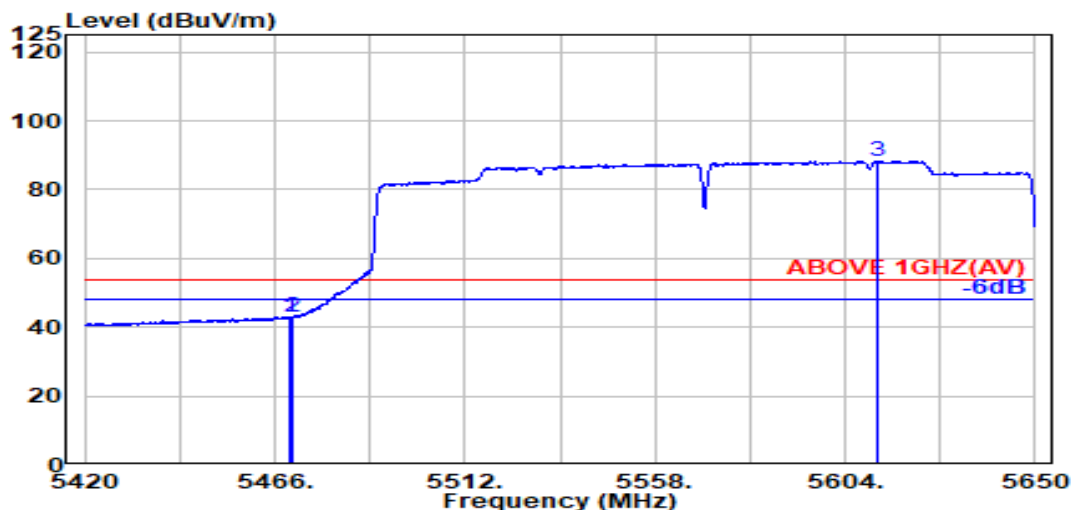

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.04	8.69	39.15	39.37	42.95	54.00	11.05	Average
5470.000	34.04	8.69	39.15	39.40	42.98	54.00	11.02	Average
@ 5611.800	33.80	8.82	39.17	84.91	88.36	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

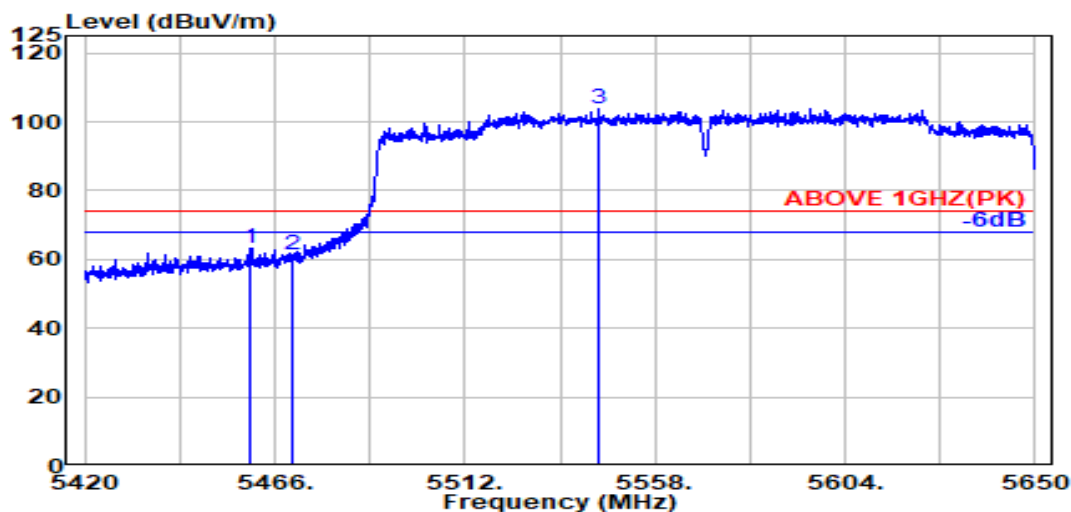

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.200	34.02	8.68	39.15	59.80	63.35	74.00	10.65	Peak
5470.000	34.04	8.69	39.15	57.68	61.26	74.00	12.74	Peak
@ 5544.200	34.01	8.76	39.16	100.19	103.80	---	---	Peak

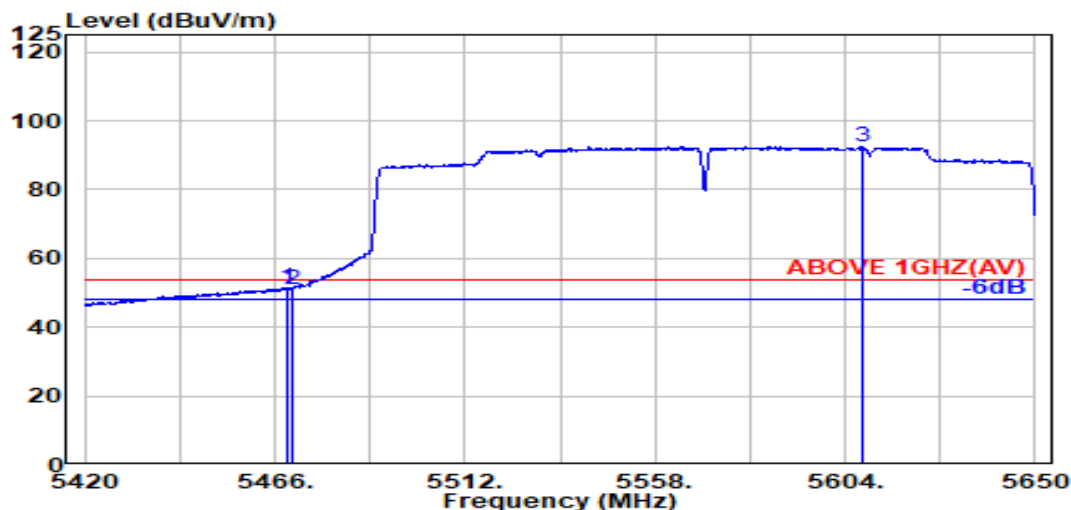

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.04	8.69	39.15	47.88	51.45	54.00	2.55	Average
5470.000	34.04	8.69	39.15	47.50	51.07	54.00	2.93	Average
@ 5608.000	33.80	8.82	39.17	88.94	92.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

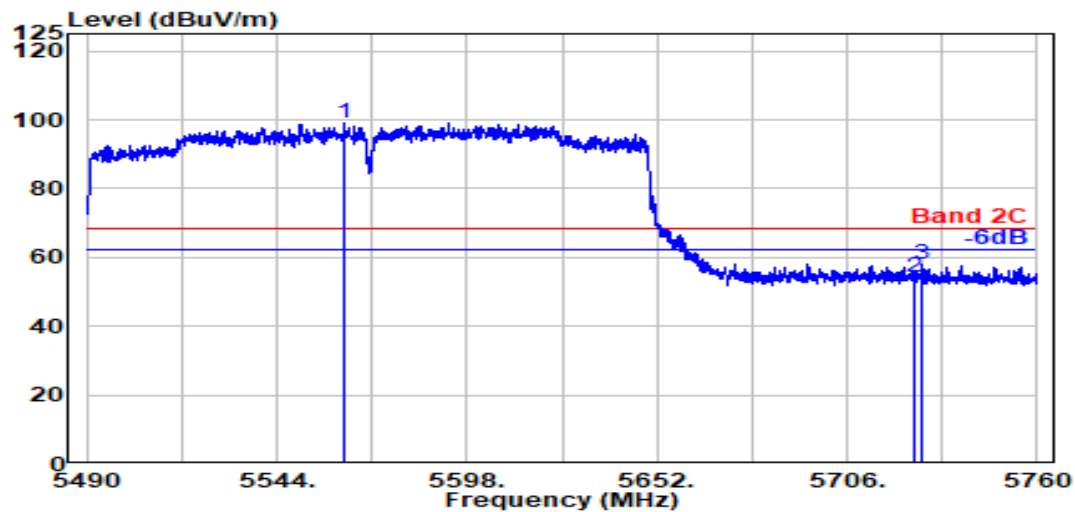

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5563.300	33.95	8.78	39.16	95.71	99.27	---	---	Peak
5725.000	33.60	8.93	39.20	50.98	54.31	68.20	13.89	Peak
5727.300	33.60	8.93	39.20	54.61	57.95	68.20	10.26	Peak

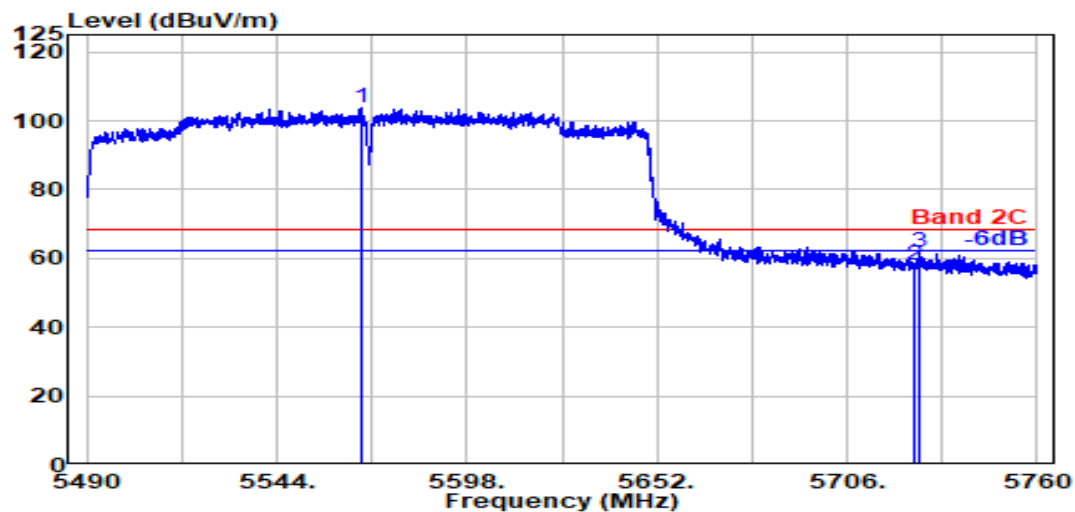

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5567.800	33.93	8.78	39.16	100.45	103.99	---	---	Peak
5725.000	33.60	8.93	39.20	54.65	57.98	68.20	10.22	Peak
5726.500	33.60	8.93	39.20	58.53	61.87	68.20	6.33	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

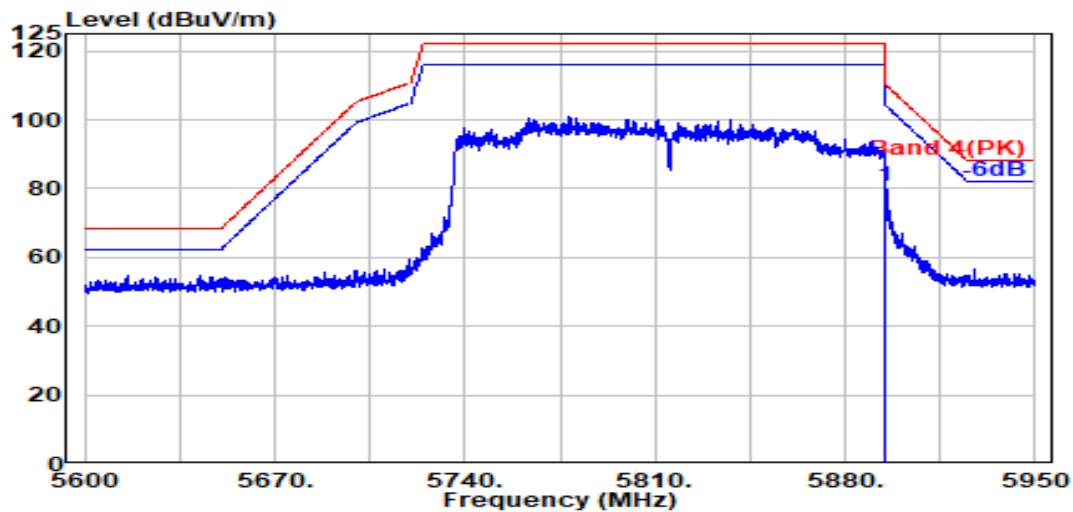

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	76.53	80.46	110.16	29.70	Peak

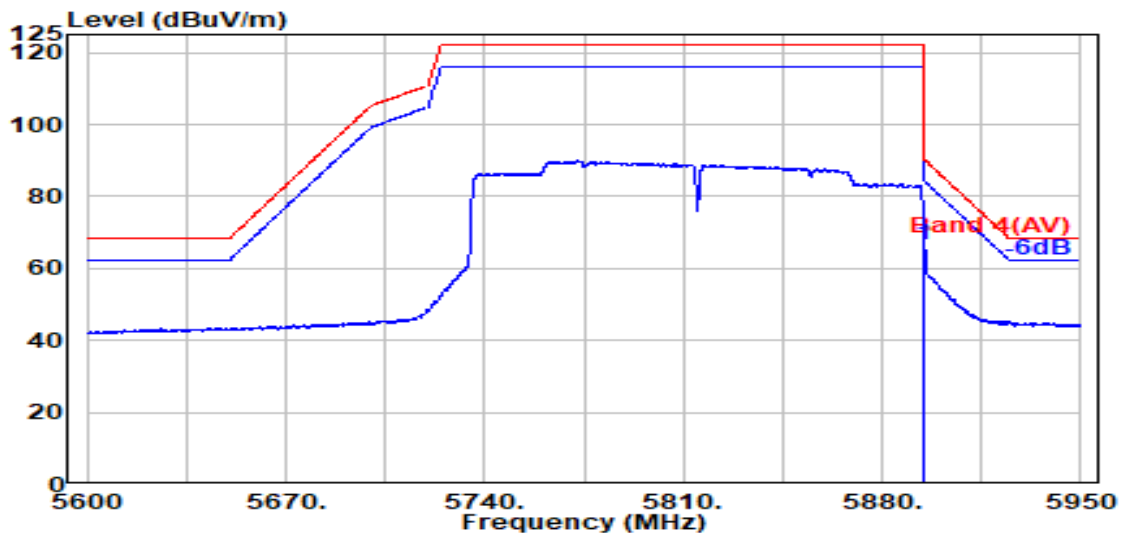


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	62.55	66.48	90.16	23.68	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

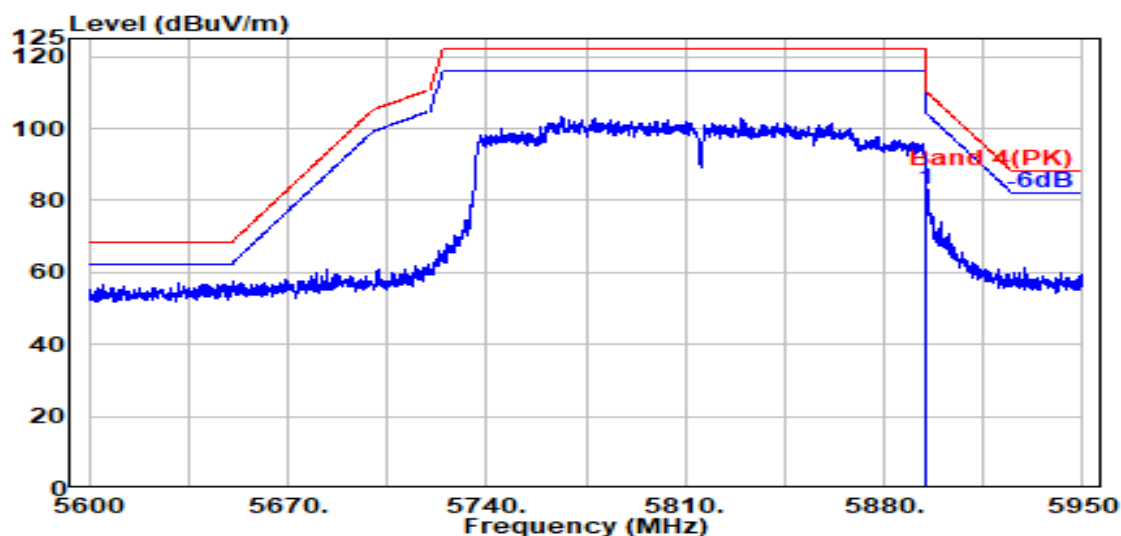

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	79.24	83.17	110.16	26.99	Peak

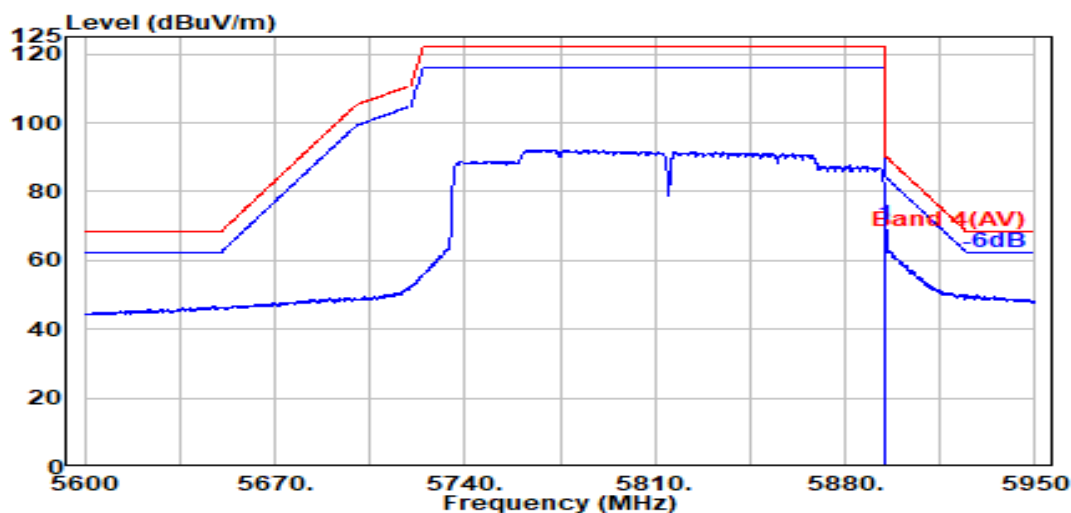

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	66.41	70.34	90.16	19.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

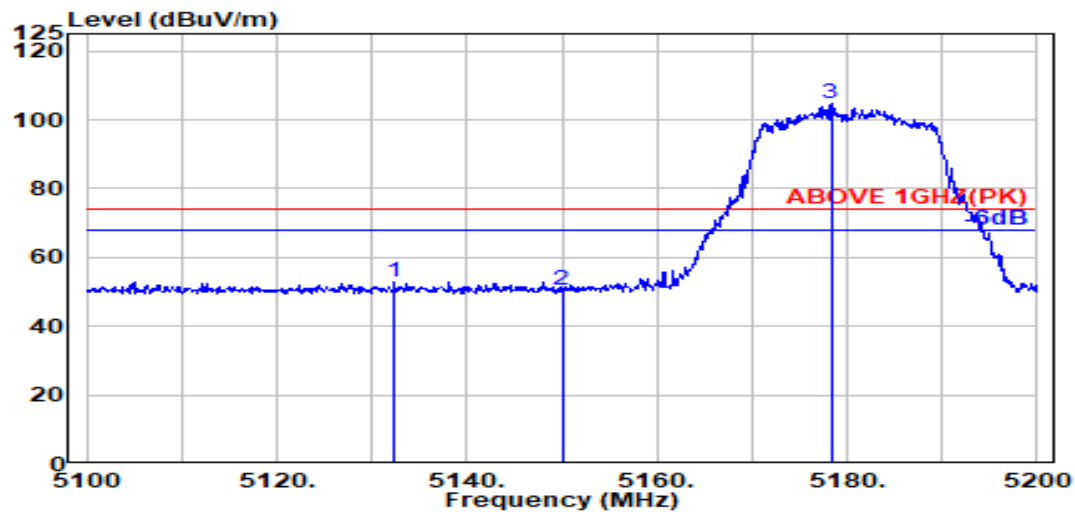

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.300	33.46	8.36	39.19	50.32	52.95	74.00	21.05	Peak
5150.000	33.50	8.37	39.19	47.61	50.29	74.00	23.71	Peak
@ 5178.300	33.67	8.40	39.19	101.67	104.55	---	---	Peak

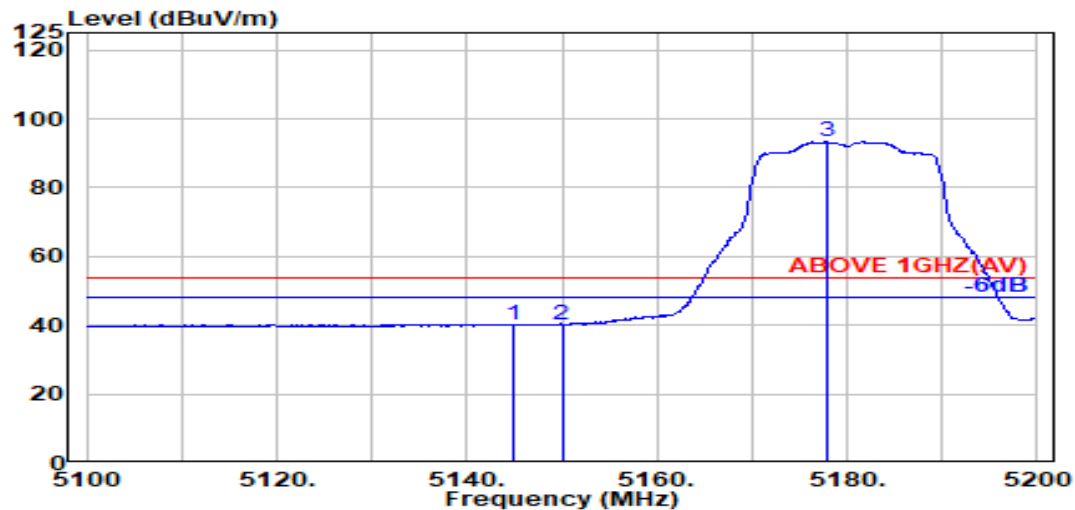

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.000	33.49	8.37	39.19	37.64	40.31	54.00	13.69	Average
5150.000	33.50	8.37	39.19	37.60	40.28	54.00	13.72	Average
@ 5178.000	33.67	8.40	39.19	90.39	93.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

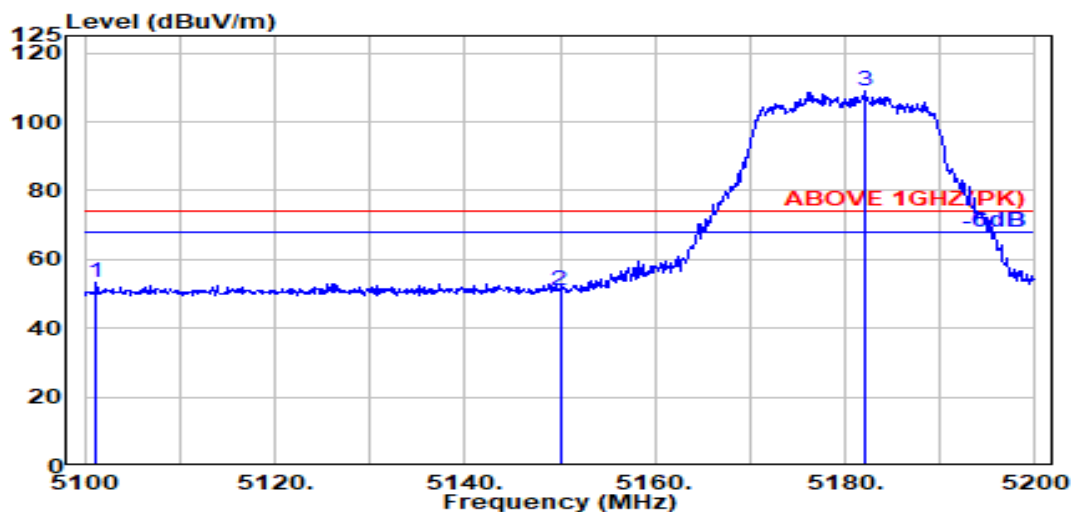

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5101.200	33.40	8.32	39.20	50.97	53.50	74.00	20.50	Peak
5150.000	33.50	8.37	39.19	48.45	51.13	74.00	22.87	Peak
@ 5182.200	33.69	8.41	39.19	105.98	108.89	---	---	Peak

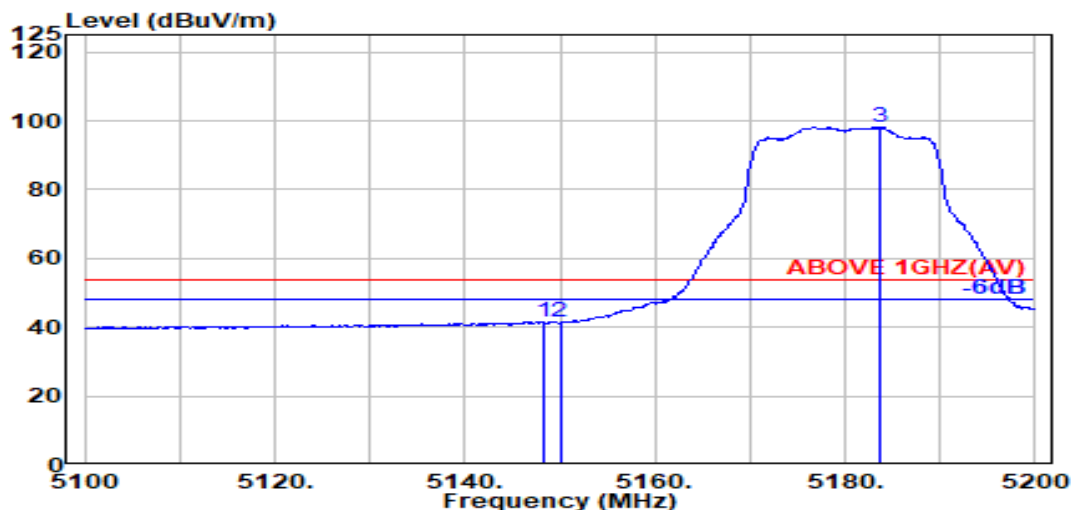

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.50	8.37	39.19	38.95	41.63	54.00	12.37	Average
5150.000	33.50	8.37	39.19	38.74	41.42	54.00	12.58	Average
@ 5183.600	33.70	8.41	39.19	95.26	98.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

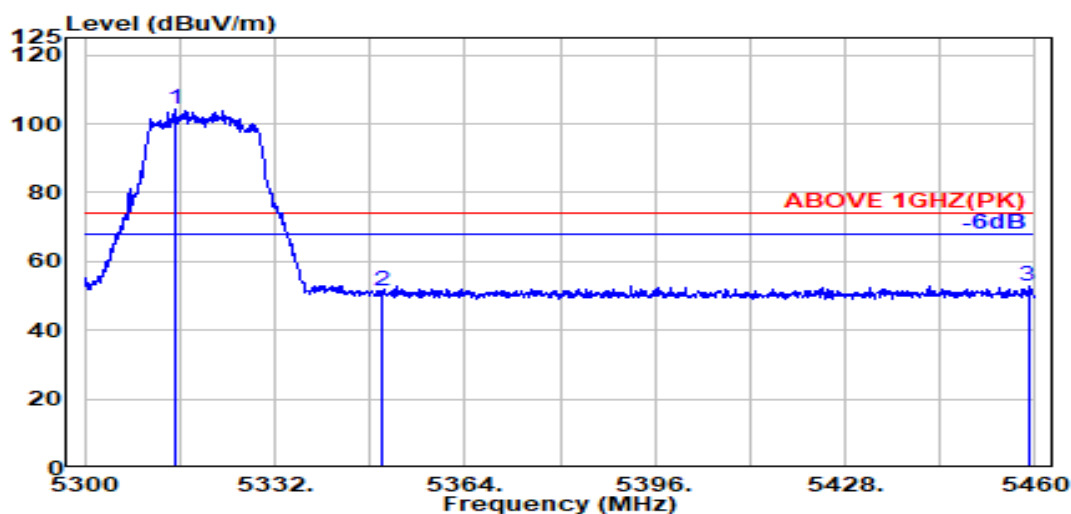

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.100	33.77	8.54	39.17	100.92	104.06	---	---	Peak
5350.000	33.70	8.57	39.17	48.18	51.29	74.00	22.71	Peak
5458.800	34.02	8.68	39.15	49.26	52.80	74.00	21.20	Peak

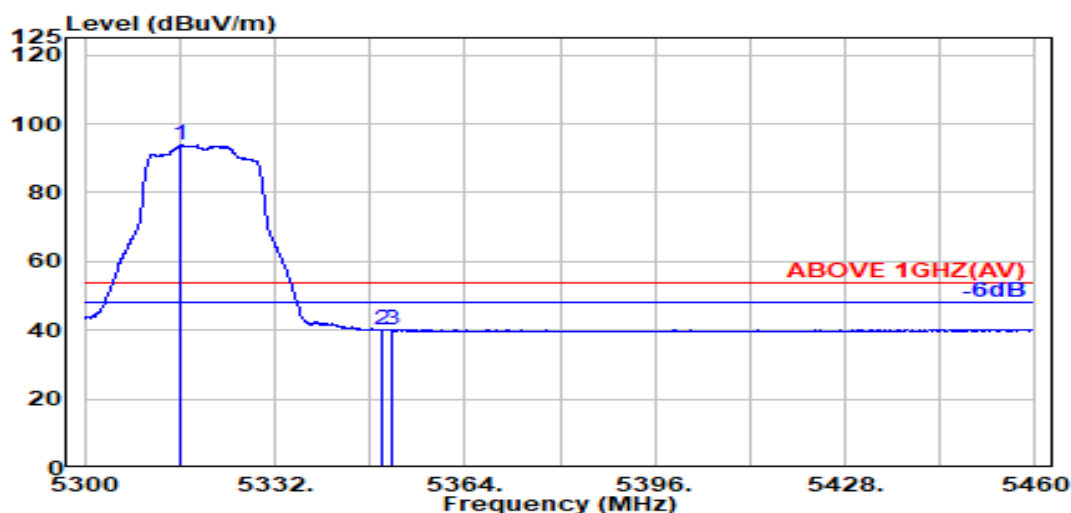

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.200	33.77	8.54	39.17	90.73	93.87	---	---	Average
5350.000	33.70	8.57	39.17	36.82	39.92	54.00	14.08	Average
5351.800	33.71	8.57	39.17	37.10	40.22	54.00	13.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

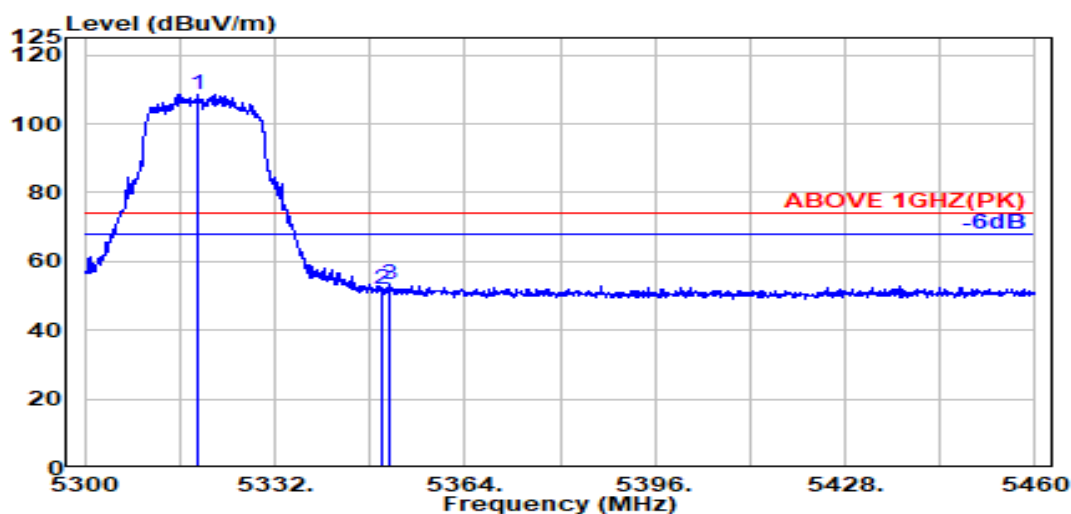

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.000	33.76	8.54	39.17	105.39	108.52	---	---	Peak
5350.000	33.70	8.57	39.17	48.67	51.78	74.00	22.22	Peak
5351.200	33.70	8.57	39.17	50.43	53.54	74.00	20.46	Peak

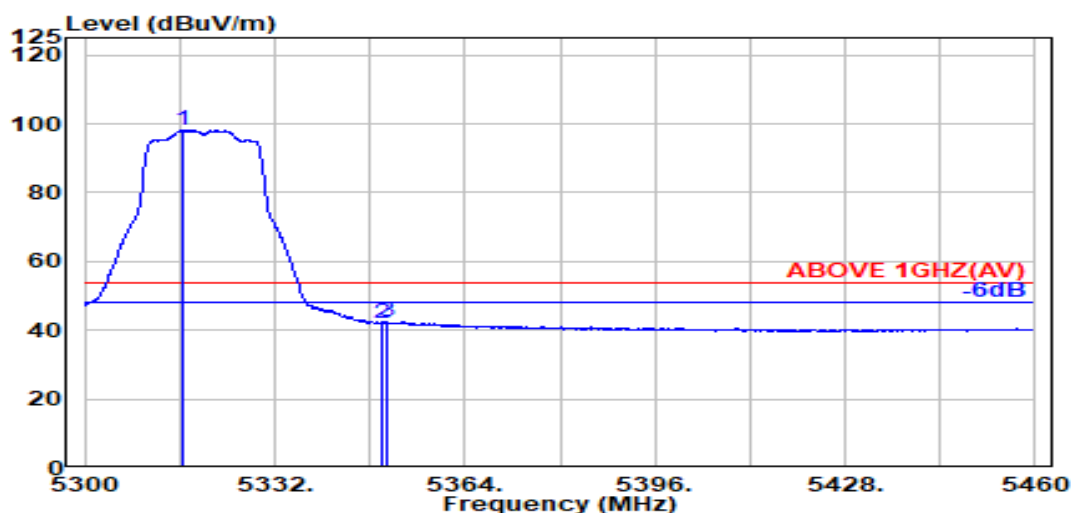

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.700	33.77	8.54	39.17	95.07	98.21	---	---	Average
5350.000	33.70	8.57	39.17	38.96	42.06	54.00	11.94	Average
5350.800	33.70	8.57	39.17	39.18	42.29	54.00	11.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

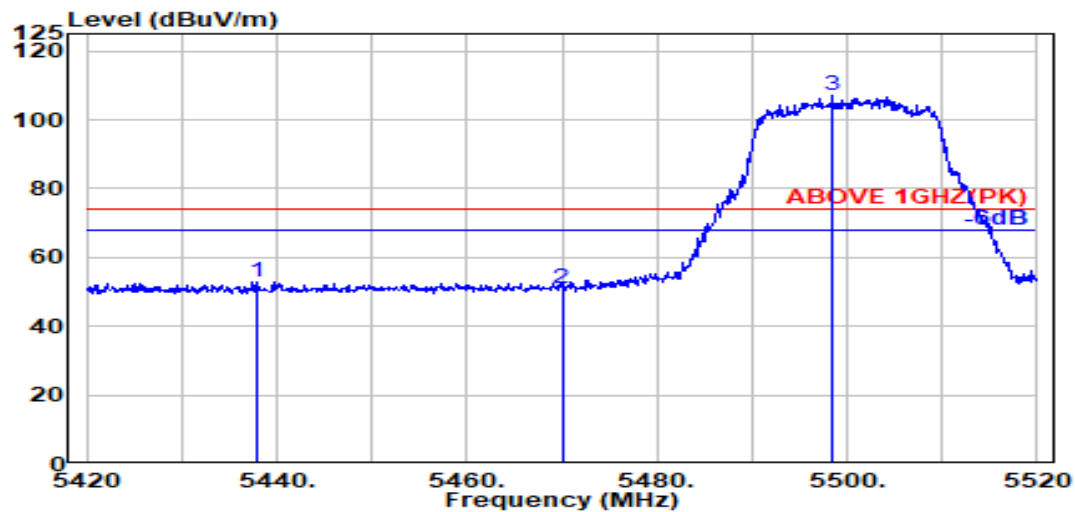

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.800	33.98	8.66	39.16	49.35	52.82	74.00	21.18	Peak
5470.000	34.04	8.69	39.15	47.14	50.71	74.00	23.29	Peak
@ 5498.500	34.10	8.72	39.15	103.29	106.96	---	---	Peak

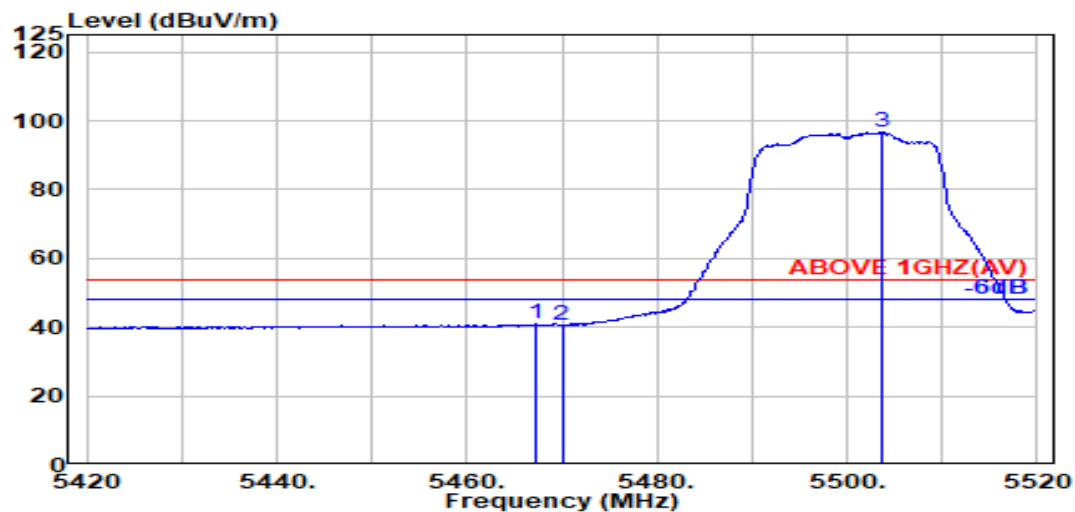

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.15	37.25	40.81	54.00	13.19	Average
5470.000	34.04	8.69	39.15	36.94	40.52	54.00	13.48	Average
@ 5503.700	34.09	8.72	39.15	93.03	96.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

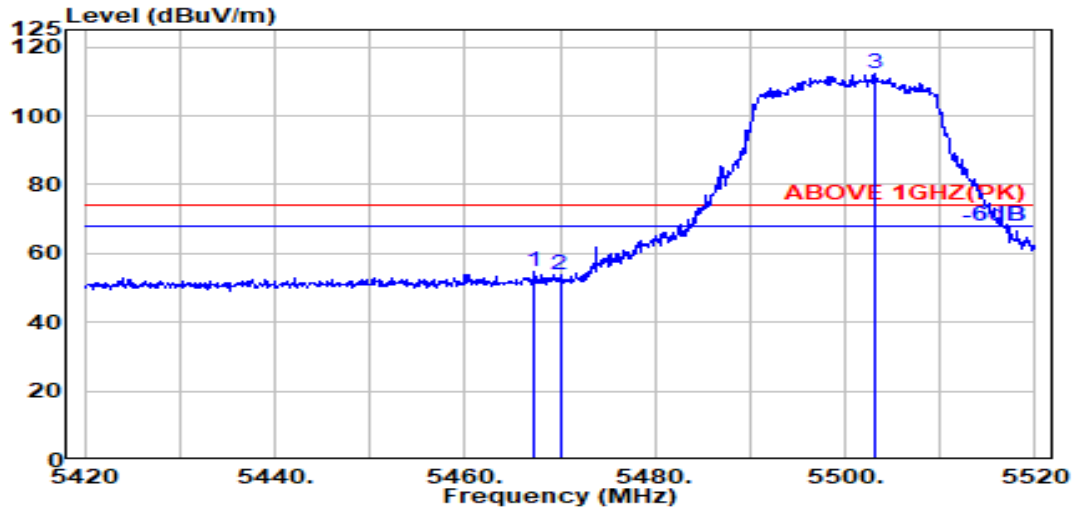

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.03	8.69	39.15	50.94	54.51	74.00	19.49	Peak
5470.000	34.04	8.69	39.15	50.35	53.93	74.00	20.07	Peak
@ 5503.100	34.09	8.72	39.15	108.71	112.37	---	---	Peak

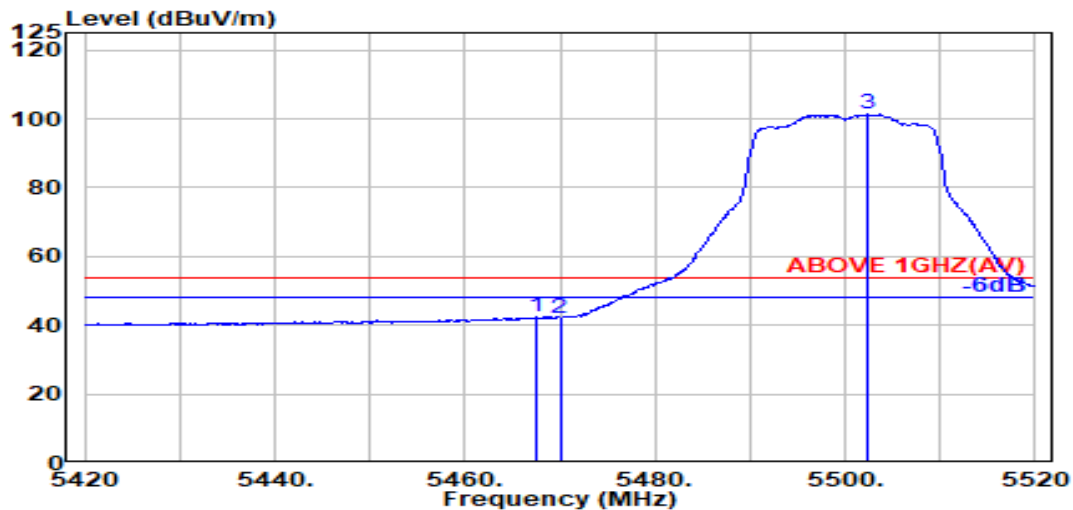

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	38.74	42.31	54.00	11.69	Average
5470.000	34.04	8.69	39.15	38.57	42.14	54.00	11.86	Average
@ 5502.300	34.10	8.72	39.15	97.67	101.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

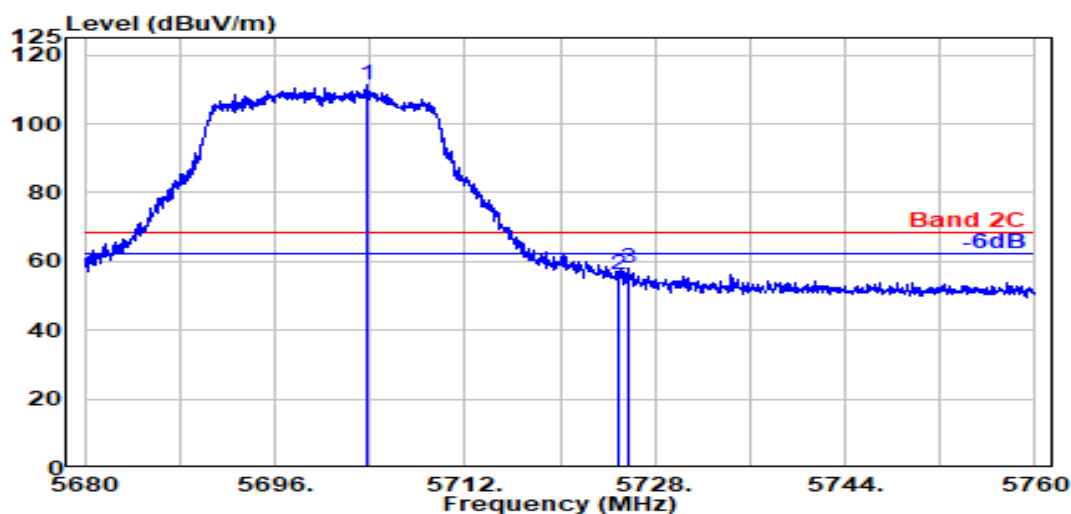

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5703.700	33.60	8.91	39.19	107.93	111.25	---	---	Peak
5725.000	33.60	8.93	39.20	52.77	56.10	68.20	12.10	Peak
5725.800	33.60	8.93	39.20	54.62	57.95	68.20	10.25	Peak

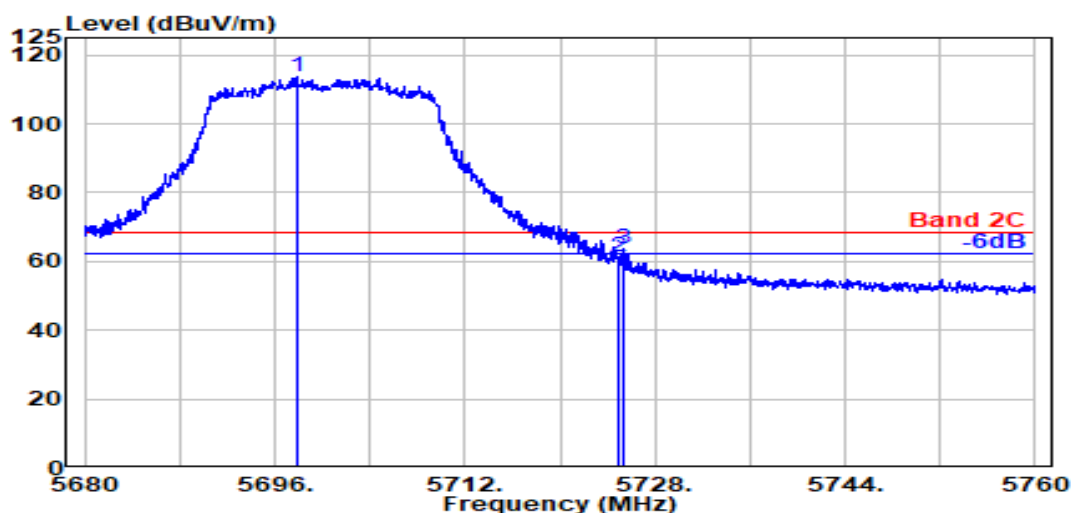

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.800	33.61	8.90	39.19	110.45	113.77	---	---	Peak
5725.000	33.60	8.93	39.20	57.82	61.15	68.20	7.05	Peak
5725.300	33.60	8.93	39.20	60.13	63.46	68.20	4.74	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

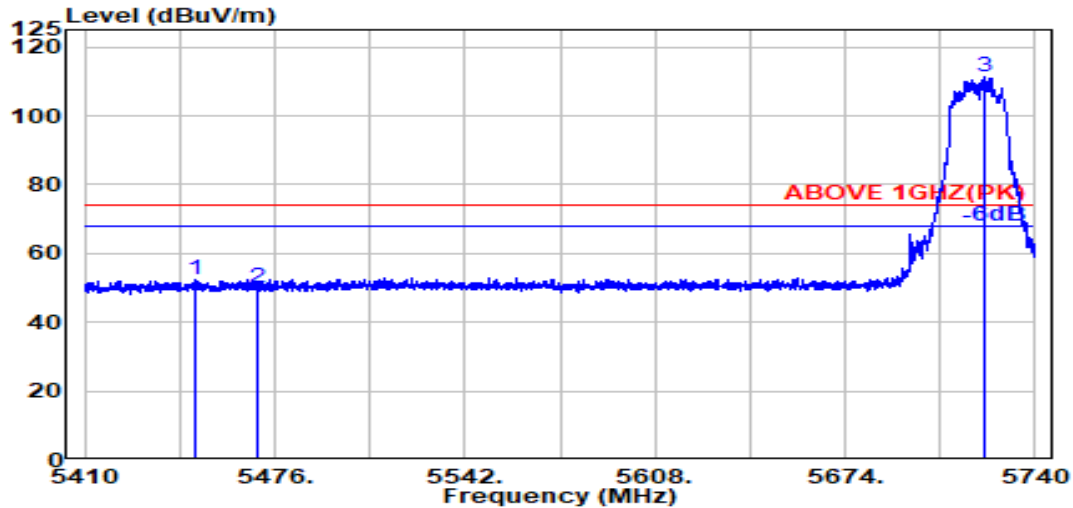

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.300	34.00	8.67	39.16	49.05	52.55	74.00	21.45	Peak
5470.000	34.04	8.69	39.15	46.51	50.08	74.00	23.92	Peak
@ 5722.700	33.60	8.92	39.20	108.19	111.51	---	---	Peak

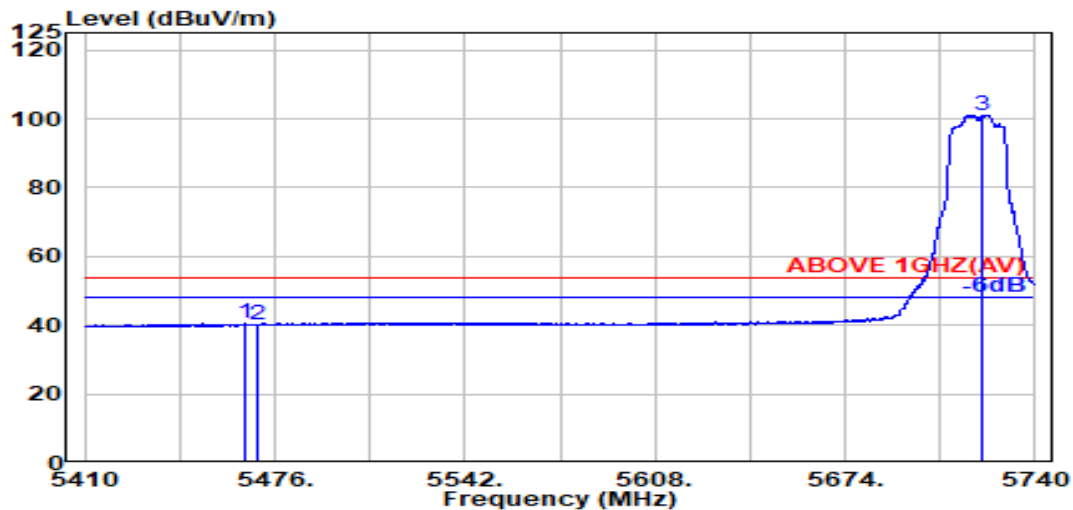

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.03	8.68	39.15	36.98	40.54	54.00	13.46	Average
5470.000	34.04	8.69	39.15	36.55	40.12	54.00	13.88	Average
@ 5721.900	33.60	8.92	39.20	97.81	101.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

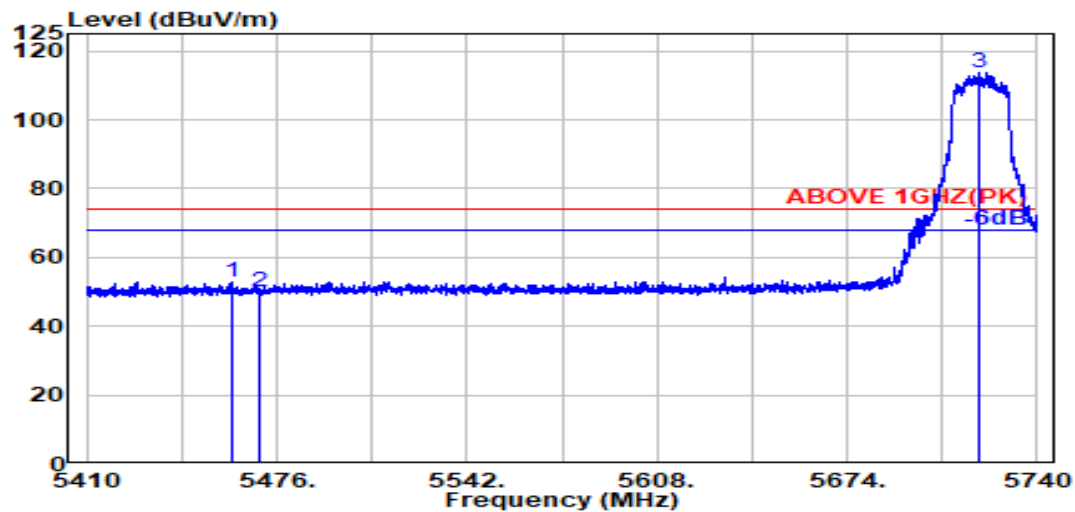

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.100	34.02	8.68	39.15	49.36	52.91	74.00	21.09	Peak
5470.000	34.04	8.69	39.15	46.61	50.19	74.00	23.81	Peak
@ 5719.500	33.60	8.92	39.19	110.21	113.54	---	---	Peak

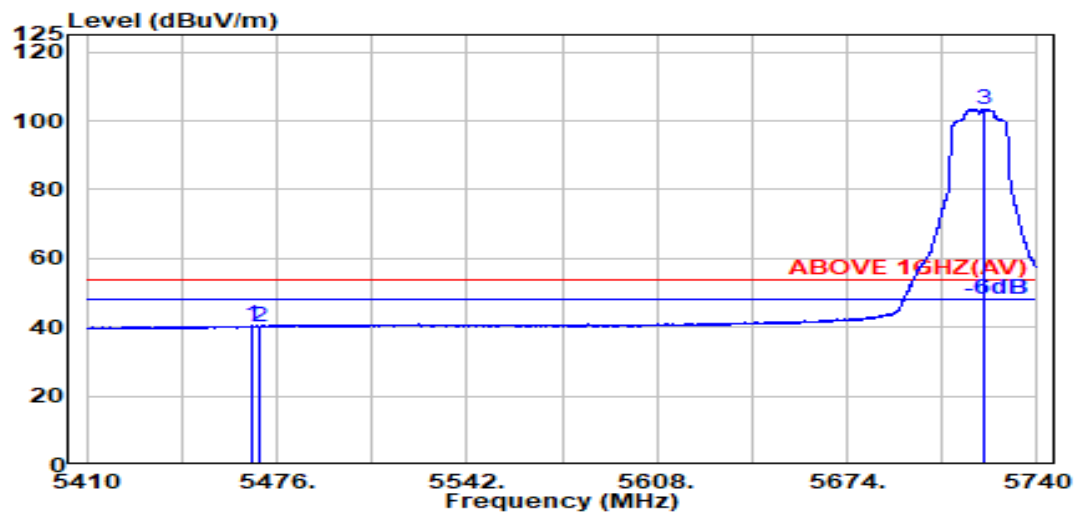

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	36.80	40.37	54.00	13.63	Average
5470.000	34.04	8.69	39.15	36.71	40.29	54.00	13.71	Average
@ 5721.400	33.60	8.92	39.20	100.11	103.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

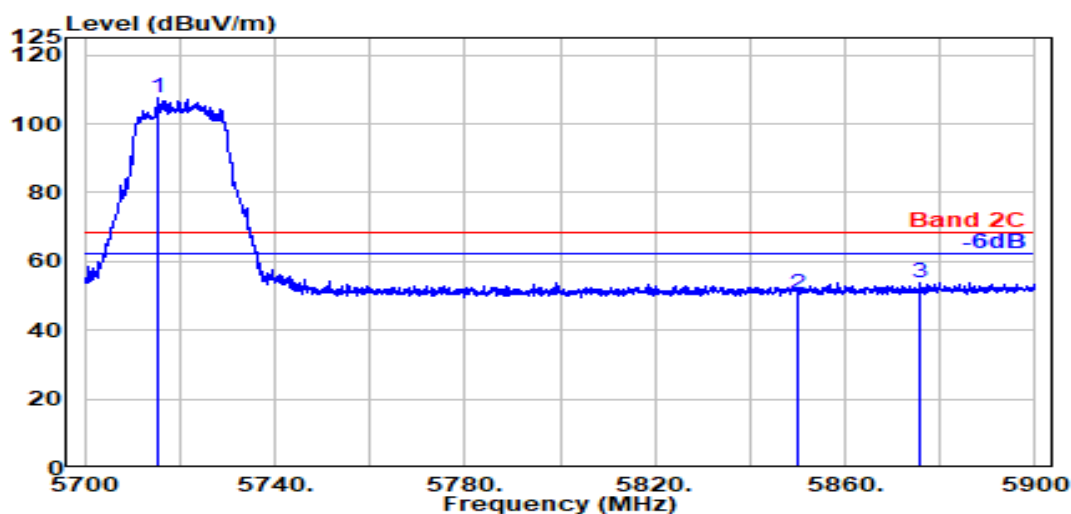

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5715.500	33.60	8.92	39.19	104.00	107.32	---	---	Peak
5850.000	33.90	9.04	39.22	46.92	50.64	68.20	17.56	Peak
5875.700	34.00	9.06	39.23	50.06	53.89	68.20	14.31	Peak

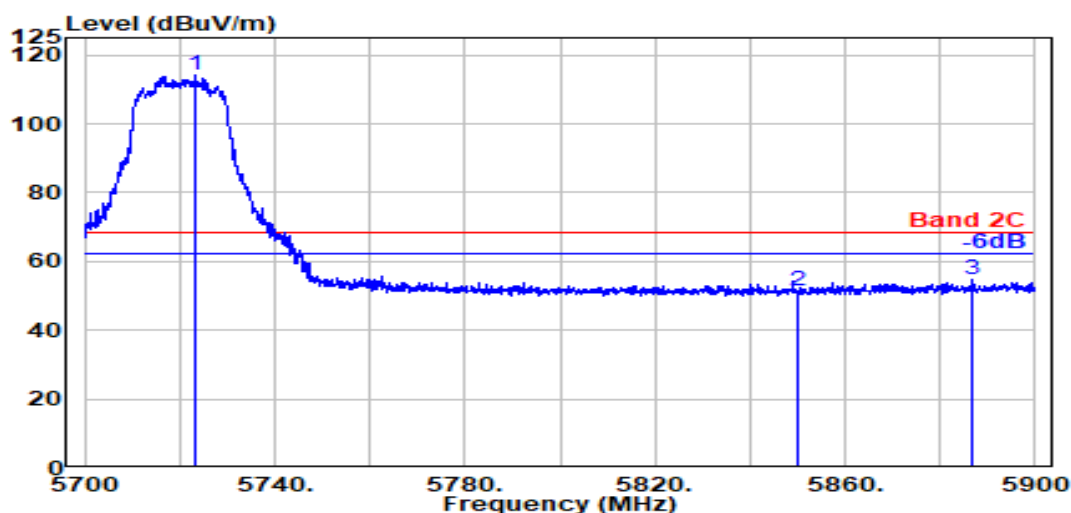


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.300	33.60	8.92	39.20	110.87	114.19	---	---	Peak
5850.000	33.90	9.04	39.22	47.58	51.30	68.20	16.90	Peak
5886.600	34.05	9.07	39.23	50.64	54.53	68.20	13.67	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

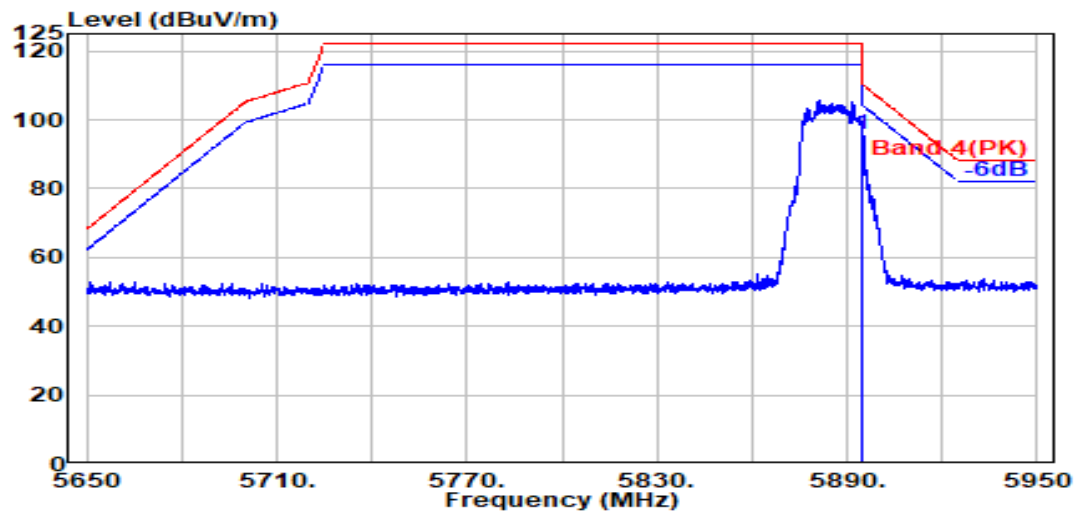

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	91.80	95.73	110.20	14.47	Peak

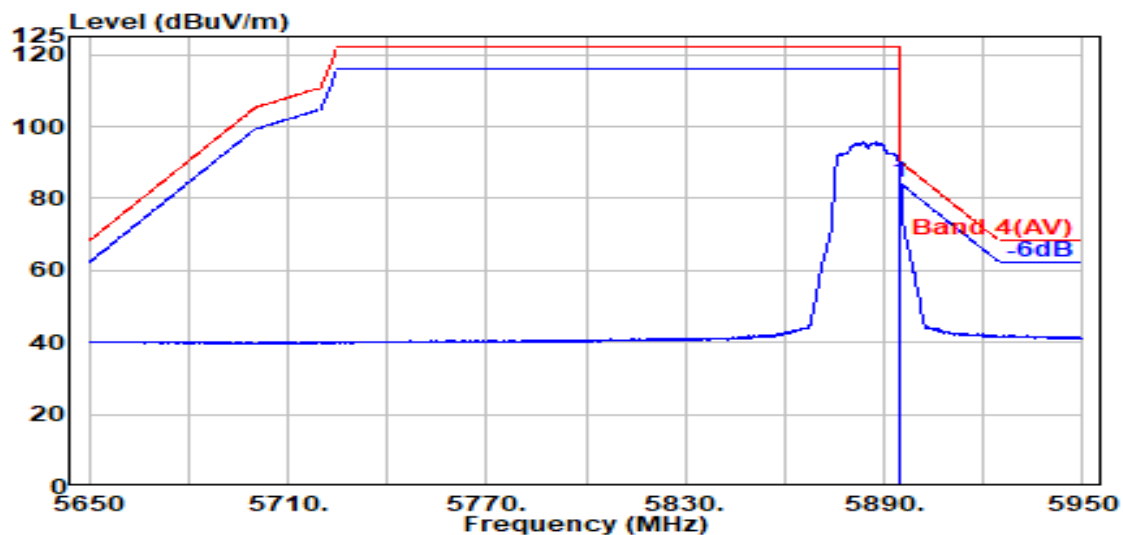

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	80.70	84.63	90.20	5.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

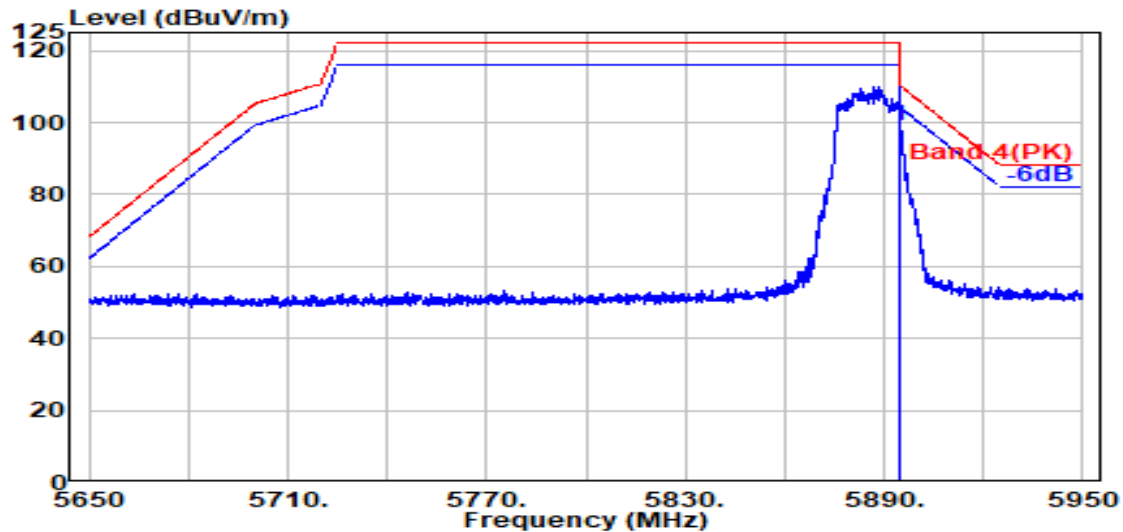

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	95.10	99.03	110.20	11.17	Peak

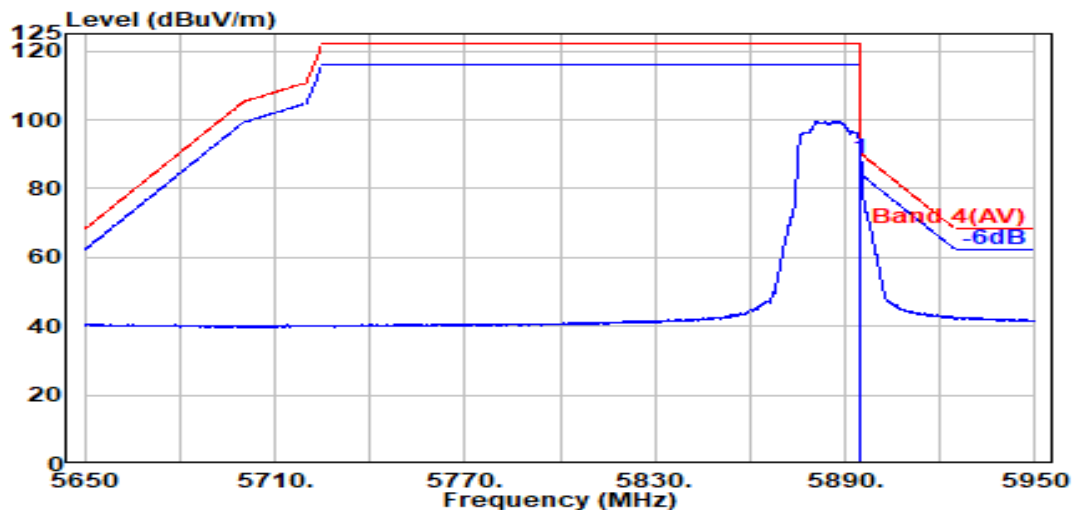

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	84.80	88.72	90.20	1.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

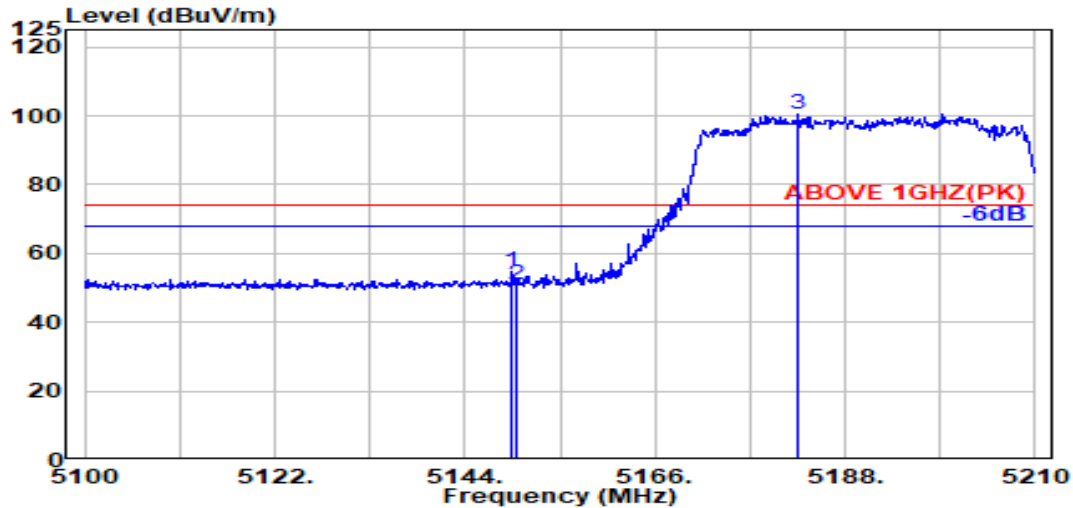

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	52.05	54.73	74.00	19.27	Peak
5150.000	33.50	8.37	39.19	48.33	51.02	74.00	22.98	Peak
@ 5182.610	33.70	8.41	39.19	97.60	100.52	---	---	Peak

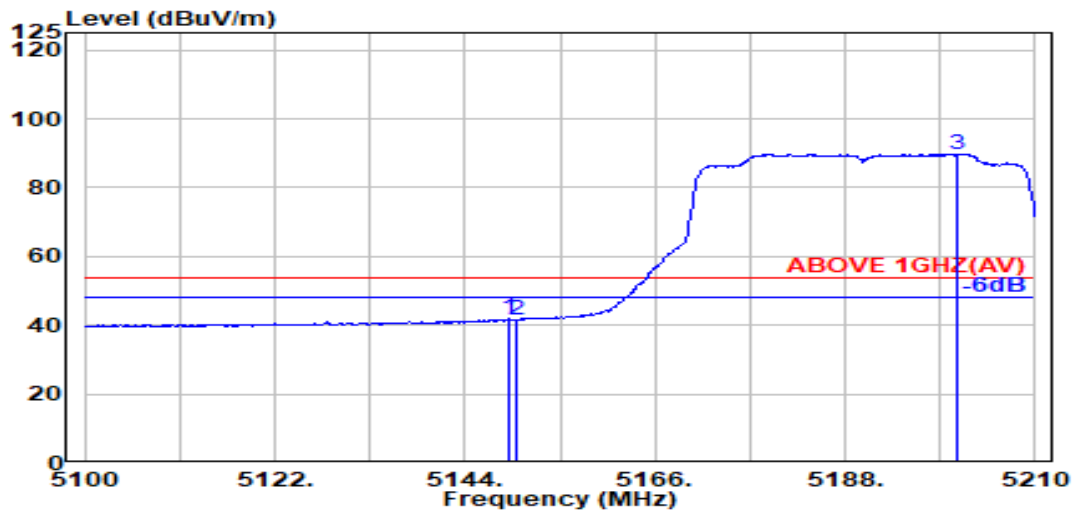

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	33.50	8.37	39.19	39.16	41.84	54.00	12.16	Average
5150.000	33.50	8.37	39.19	38.95	41.63	54.00	12.37	Average
@ 5201.090	33.80	8.43	39.19	86.69	89.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

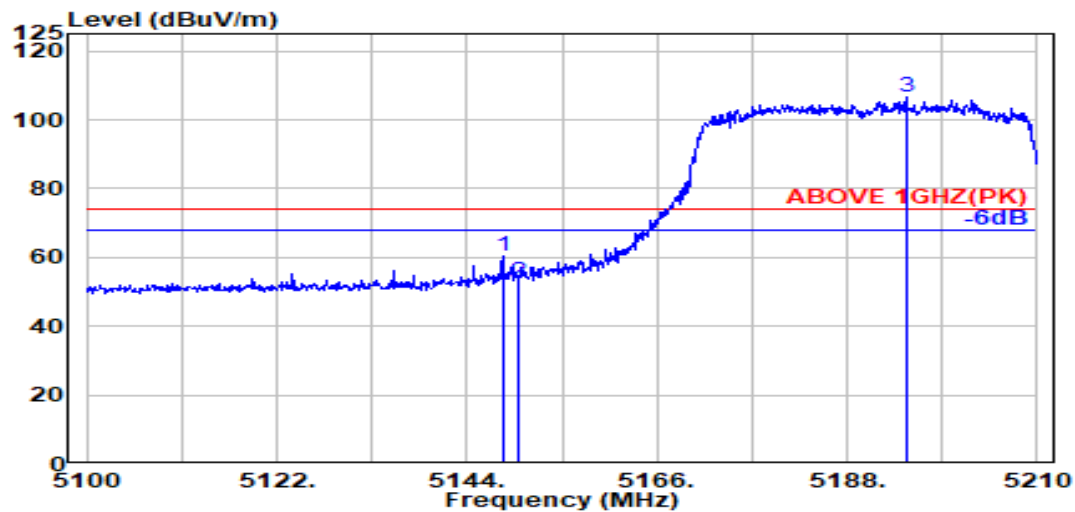

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.180	33.50	8.37	39.19	57.55	60.23	74.00	13.77	Peak
5150.000	33.50	8.37	39.19	50.34	53.02	74.00	20.98	Peak
@ 5194.820	33.77	8.42	39.19	103.47	106.48	---	---	Peak

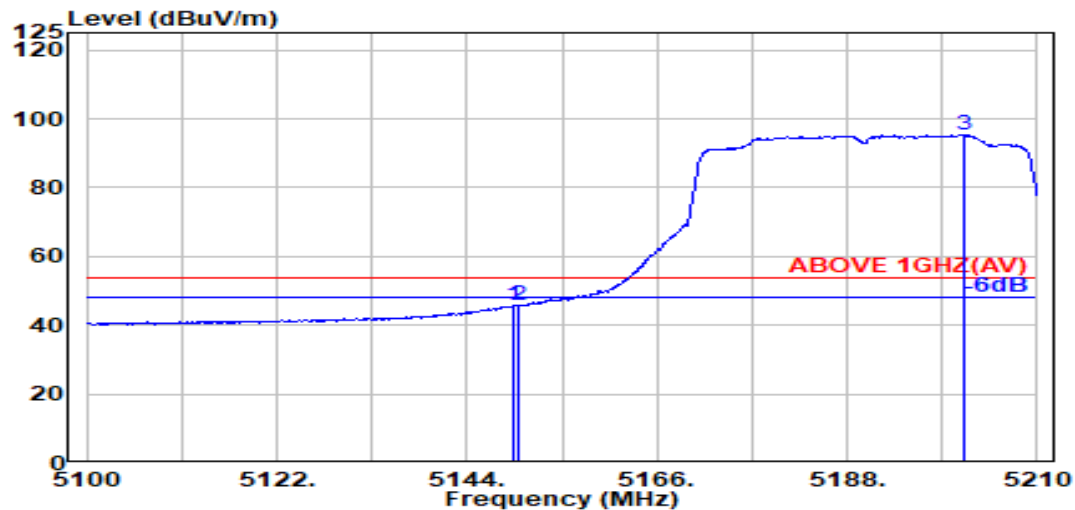

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	43.00	45.68	54.00	8.32	Average
5150.000	33.50	8.37	39.19	43.15	45.83	54.00	8.17	Average
@ 5201.530	33.80	8.43	39.19	92.34	95.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

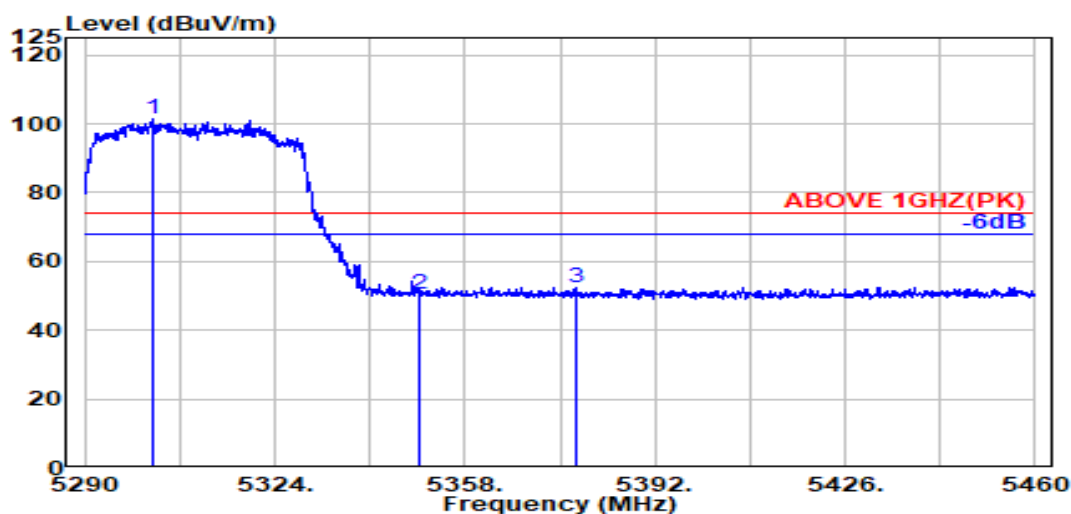

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	33.80	8.53	39.17	98.22	101.37	---	---	Peak
5350.000	33.70	8.57	39.17	47.46	50.57	74.00	23.43	Peak
5377.900	33.81	8.60	39.16	49.34	52.59	74.00	21.41	Peak

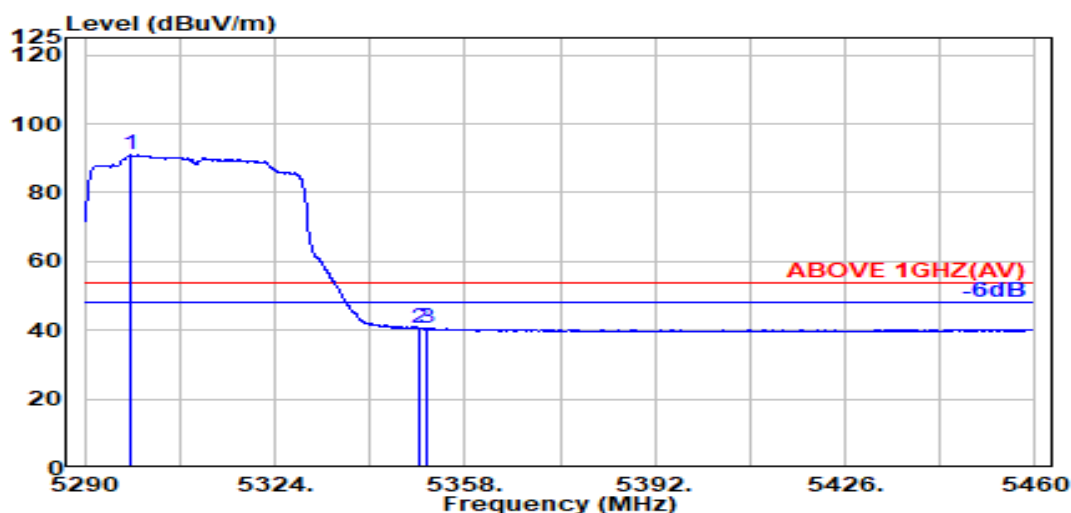

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.400	33.80	8.52	39.17	87.80	90.95	---	---	Average
5350.000	33.70	8.57	39.17	37.51	40.61	54.00	13.39	Average
5351.200	33.70	8.57	39.17	37.52	40.63	54.00	13.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

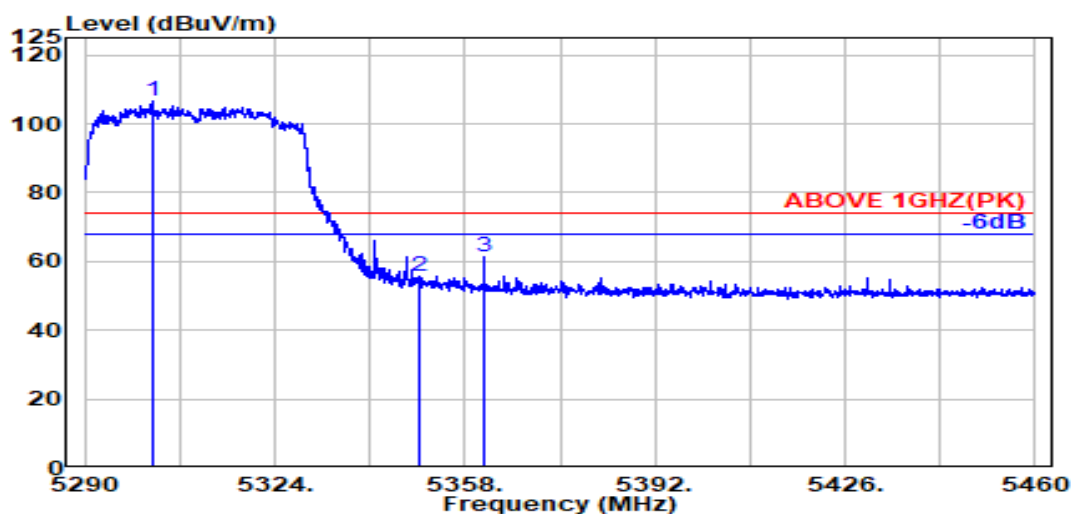

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.000	33.80	8.53	39.17	103.27	106.42	---	---	Peak
5350.000	33.70	8.57	39.17	52.36	55.47	74.00	18.53	Peak
5361.400	33.75	8.58	39.17	58.30	61.47	74.00	12.53	Peak

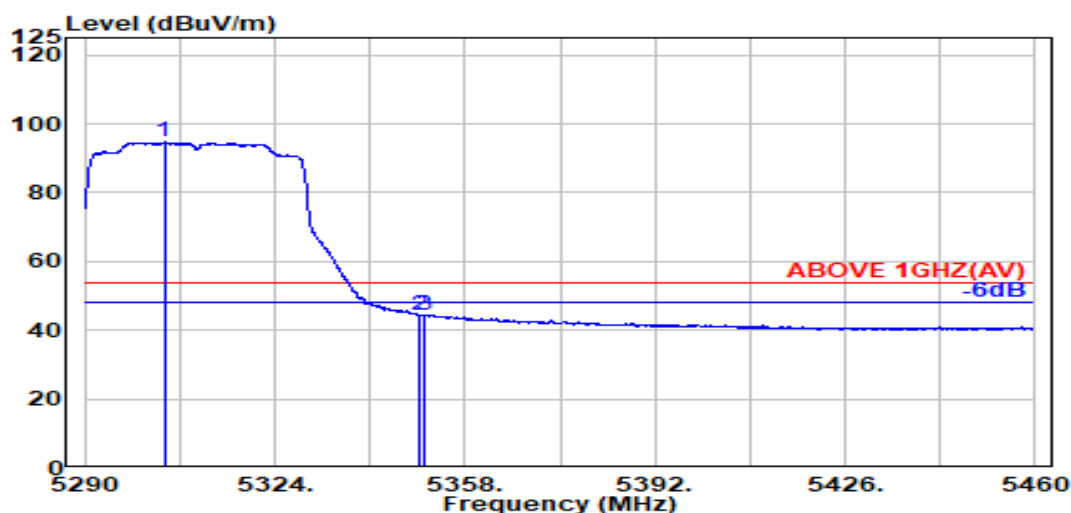

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5304.200	33.79	8.53	39.17	91.44	94.58	---	---	Average
5350.000	33.70	8.57	39.17	41.39	44.50	54.00	9.50	Average
5350.800	33.70	8.57	39.17	41.36	44.47	54.00	9.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

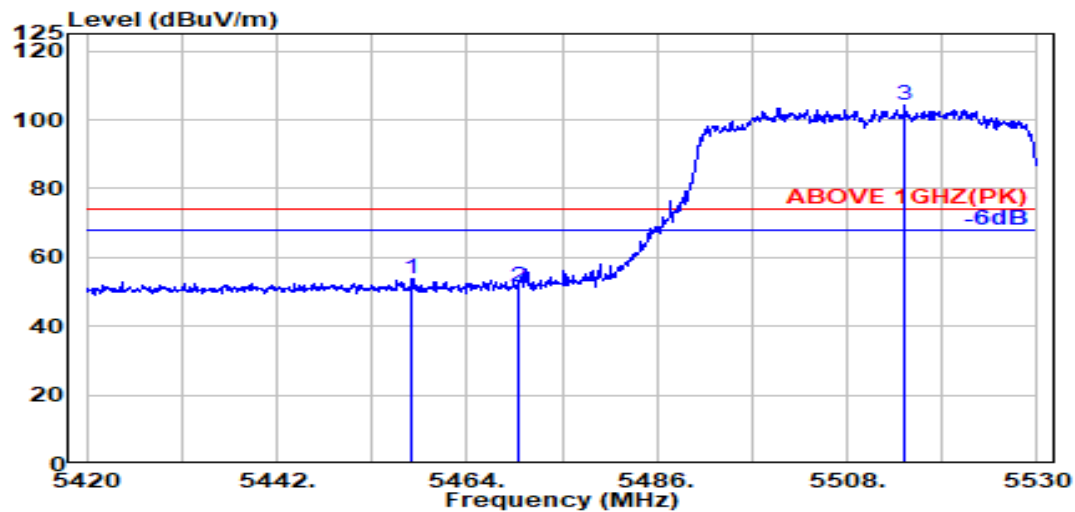

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.700	34.02	8.68	39.15	50.31	53.85	74.00	20.15	Peak
5470.000	34.04	8.69	39.15	47.76	51.34	74.00	22.66	Peak
@ 5514.700	34.07	8.73	39.15	100.46	104.10	---	---	Peak

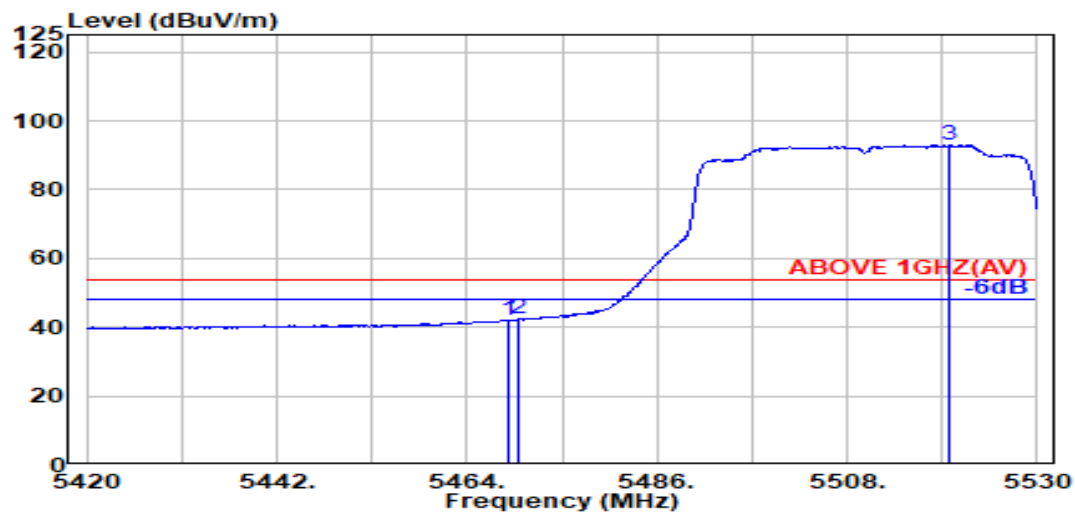

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	38.64	42.21	54.00	11.79	Average
5470.000	34.04	8.69	39.15	38.67	42.24	54.00	11.76	Average
@ 5519.900	34.06	8.74	39.15	89.34	92.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

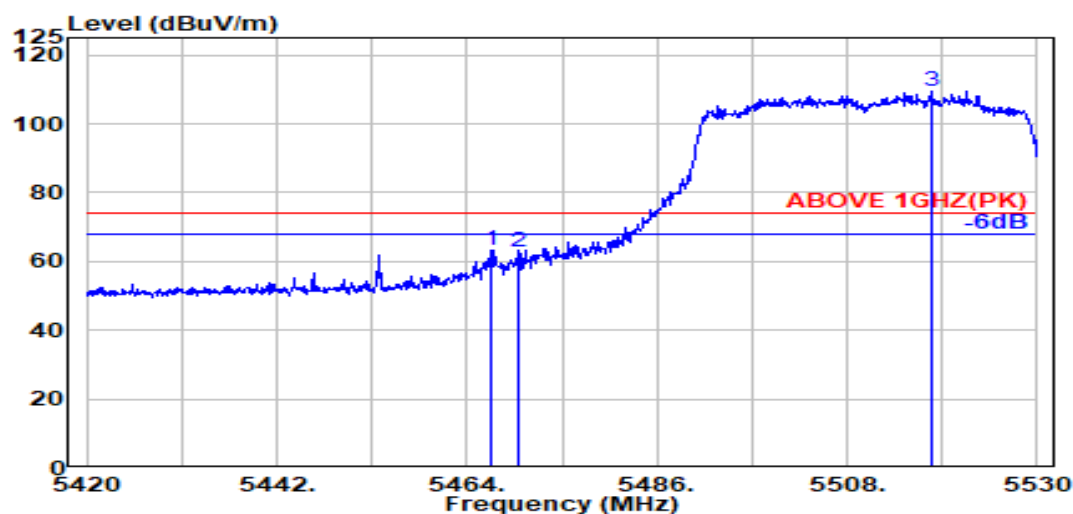

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.03	8.68	39.15	59.85	63.42	74.00	10.58	Peak
5470.000	34.04	8.69	39.15	58.96	62.54	74.00	11.46	Peak
@ 5517.700	34.06	8.73	39.15	105.66	109.31	---	---	Peak

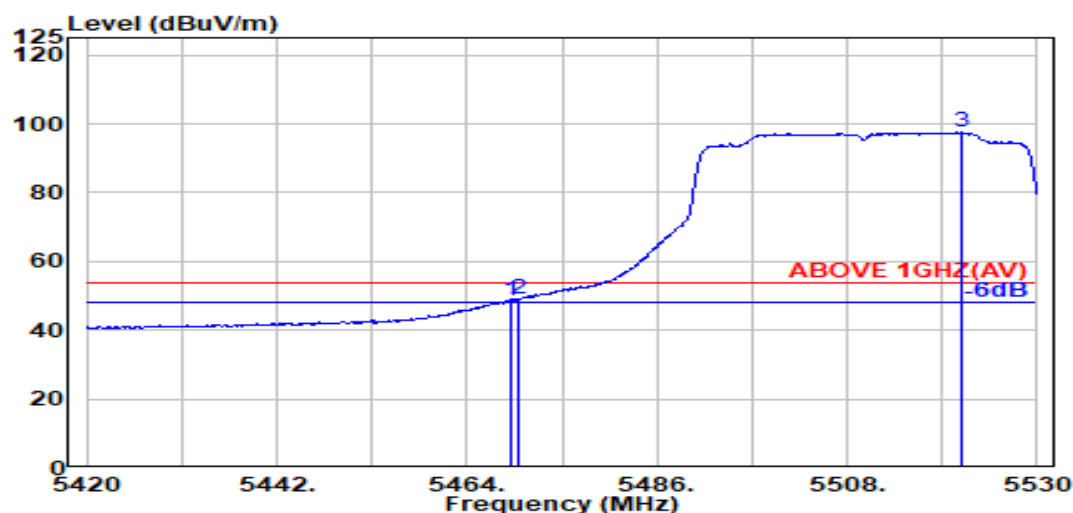

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	44.95	48.52	54.00	5.48	Average
5470.000	34.04	8.69	39.15	45.33	48.91	54.00	5.09	Average
@ 5521.200	34.06	8.74	39.15	93.80	97.44	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

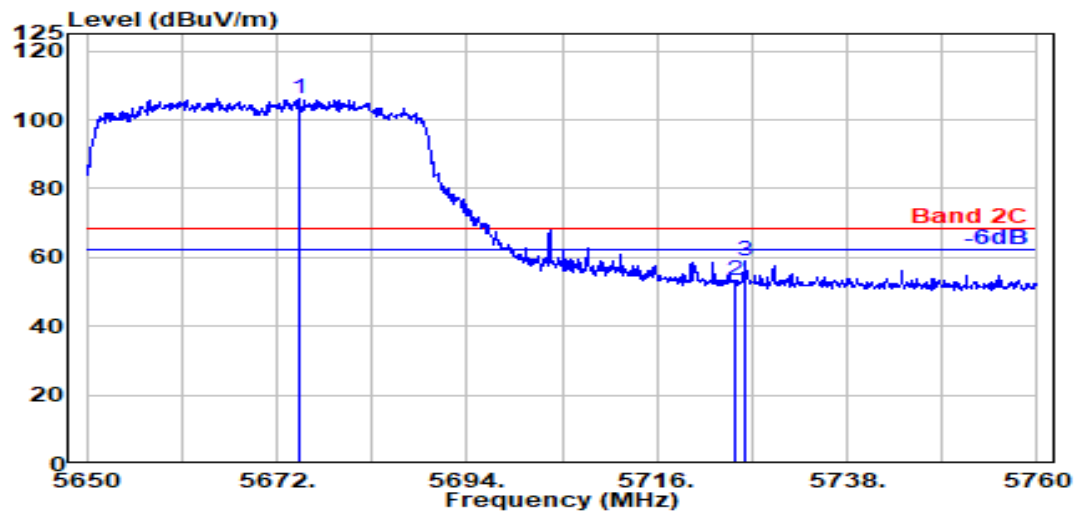

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.500	33.70	8.88	39.19	102.82	106.21	---	---	Peak
5725.000	33.60	8.93	39.20	49.88	53.21	68.20	14.99	Peak
5726.300	33.60	8.93	39.20	55.69	59.02	68.20	9.18	Peak

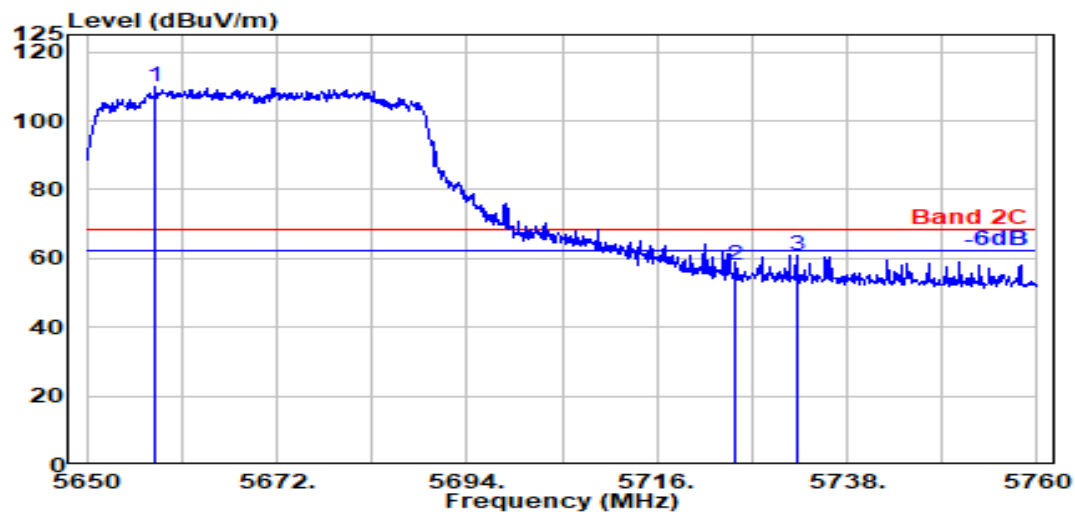

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5658.000	33.77	8.86	39.18	106.24	109.69	---	---	Peak
5725.000	33.60	8.93	39.20	54.75	58.08	68.20	10.12	Peak
5732.100	33.60	8.93	39.20	57.53	60.86	68.20	7.34	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

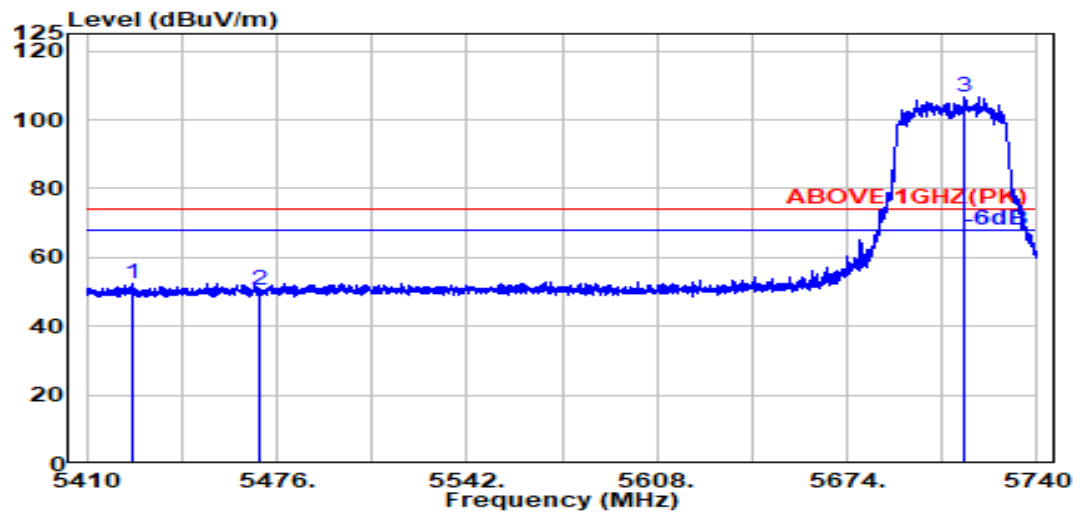

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5425.500	33.95	8.65	39.16	49.04	52.48	74.00	21.52	Peak
5470.000	34.04	8.69	39.15	46.74	50.31	74.00	23.69	Peak
@ 5715.000	33.60	8.92	39.19	103.32	106.64	---	---	Peak

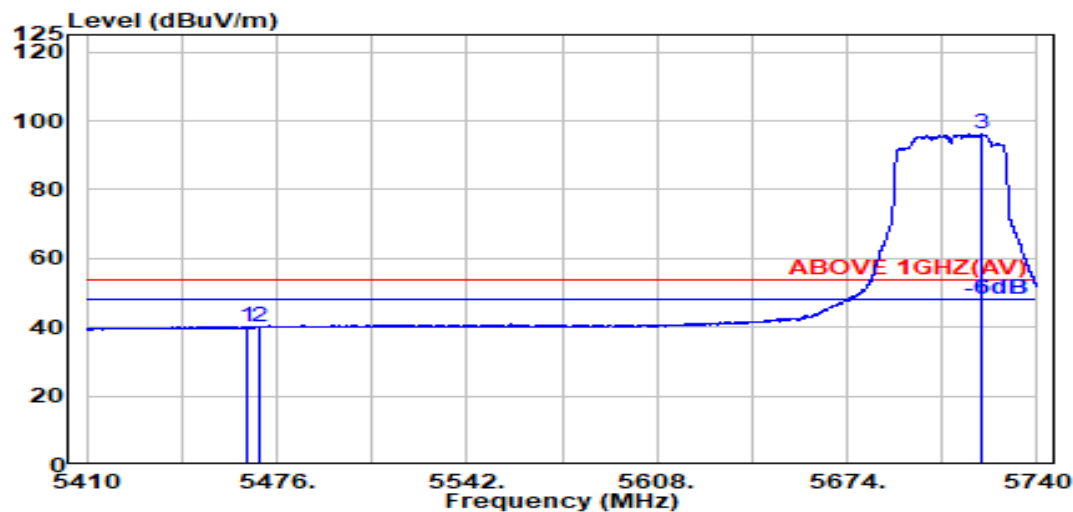

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.03	8.68	39.15	36.55	40.11	54.00	13.89	Average
5470.000	34.04	8.69	39.15	36.31	39.88	54.00	14.12	Average
@ 5721.000	33.60	8.92	39.20	92.90	96.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

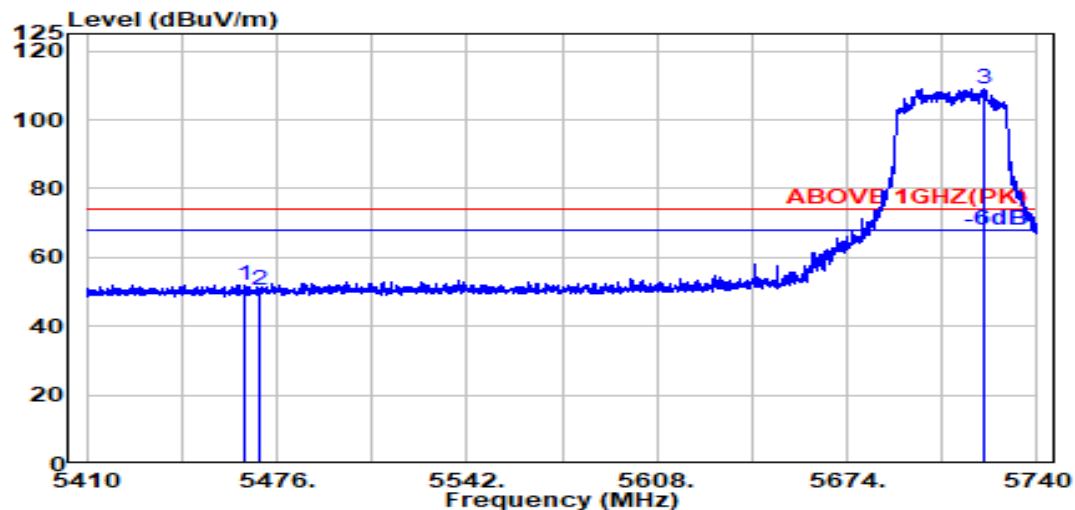

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	34.03	8.68	39.15	48.54	52.10	74.00	21.90	Peak
5470.000	34.04	8.69	39.15	46.67	50.24	74.00	23.76	Peak
@ 5721.600	33.60	8.92	39.20	105.85	109.18	---	---	Peak

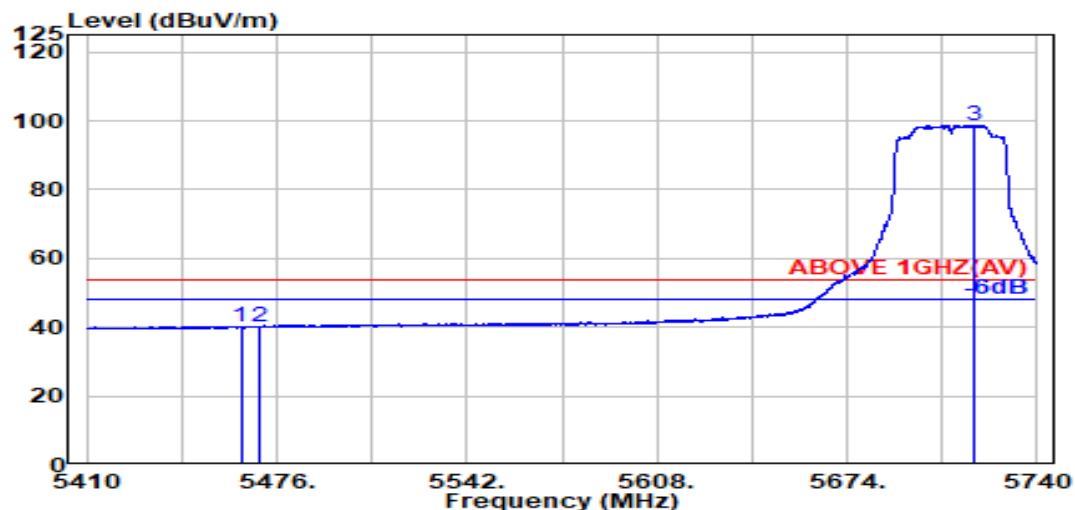

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.03	8.68	39.15	36.72	40.27	54.00	13.73	Average
5470.000	34.04	8.69	39.15	36.46	40.04	54.00	13.96	Average
@ 5718.000	33.60	8.92	39.19	95.29	98.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

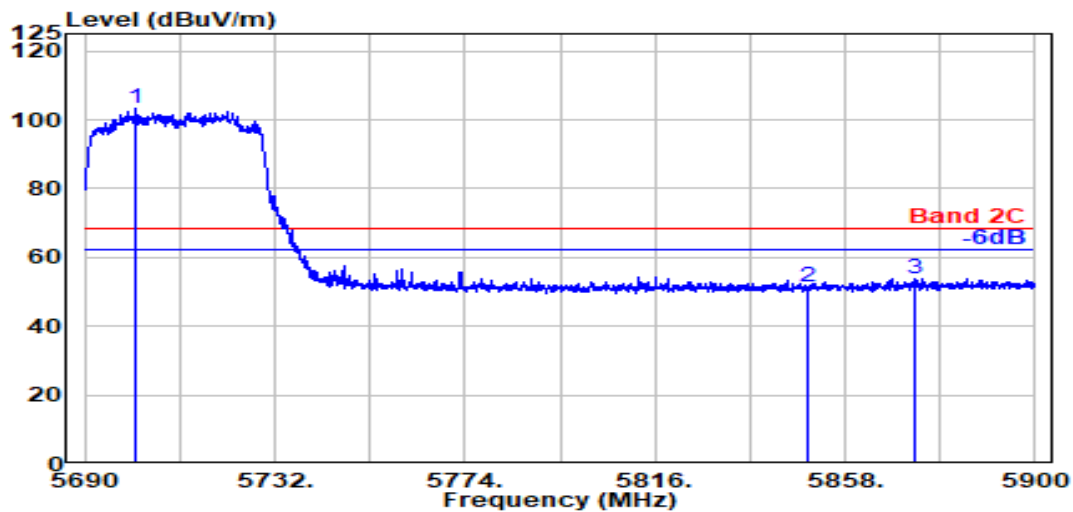

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.200	33.60	8.90	39.19	99.86	103.17	---	---	Peak
5850.000	33.90	9.04	39.22	47.68	51.40	68.20	16.80	Peak
5873.400	33.99	9.06	39.23	50.03	53.86	68.20	14.34	Peak

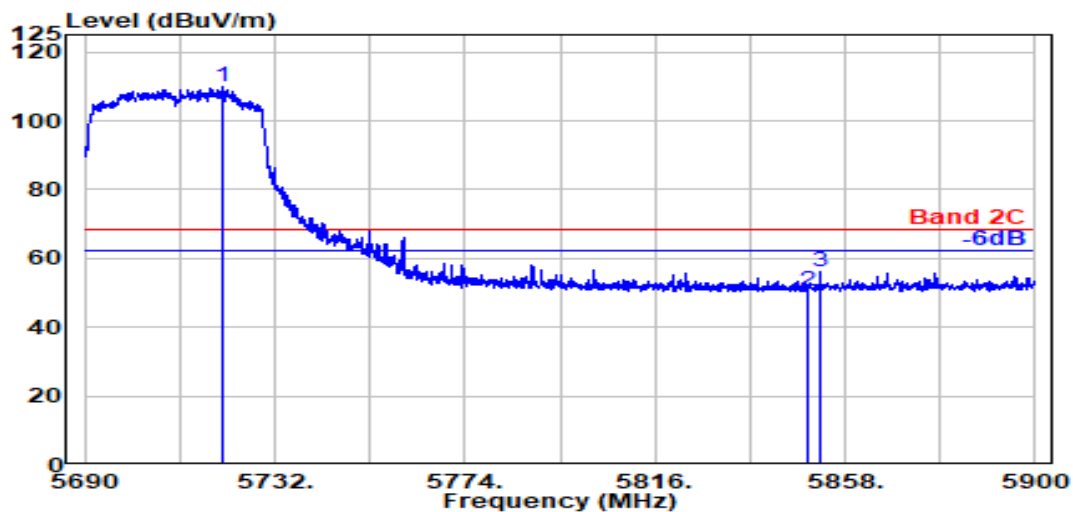

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.500	33.60	8.92	39.20	106.40	109.73	---	---	Peak
5850.000	33.90	9.04	39.22	46.84	50.56	68.20	17.64	Peak
5852.600	33.91	9.04	39.22	52.55	56.28	68.20	11.92	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

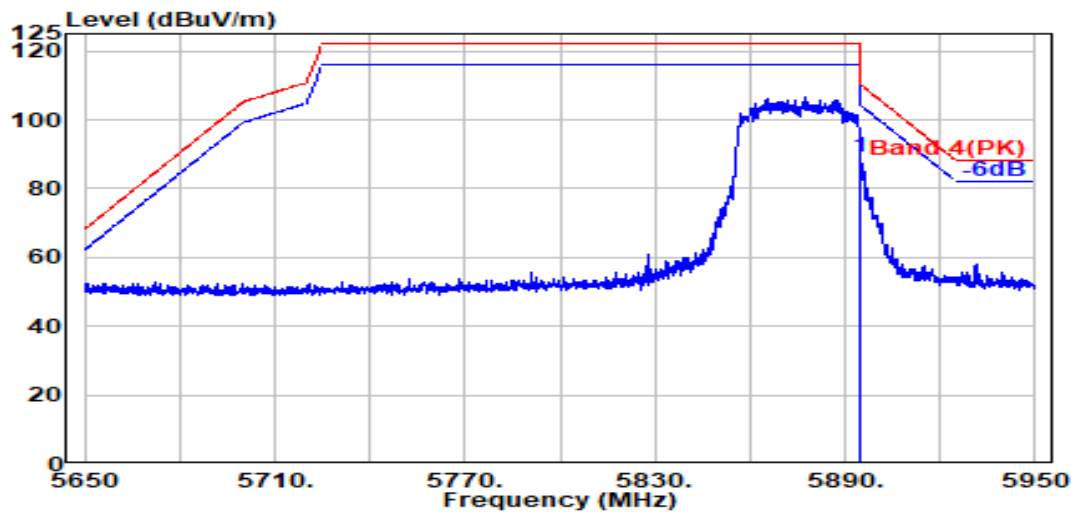

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	85.30	89.23	110.20	20.97	Peak

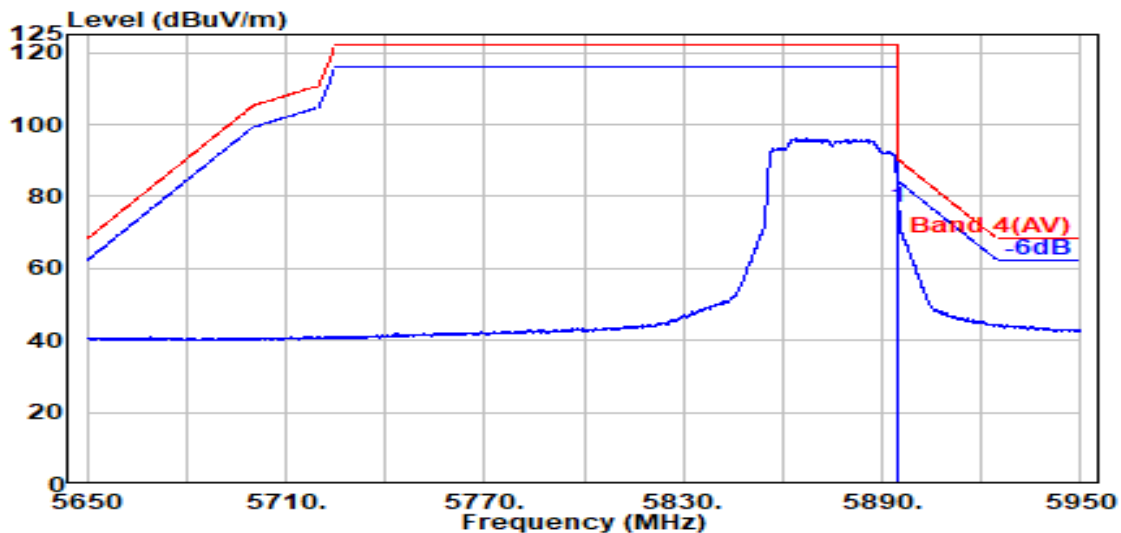

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	72.94	76.87	90.20	13.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

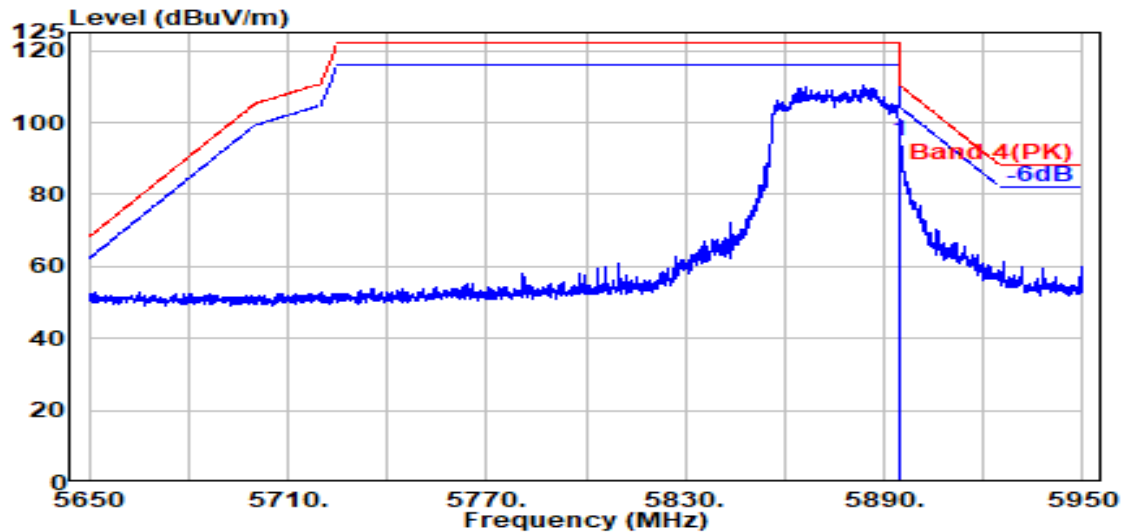

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	91.03	94.96	110.20	15.24	Peak

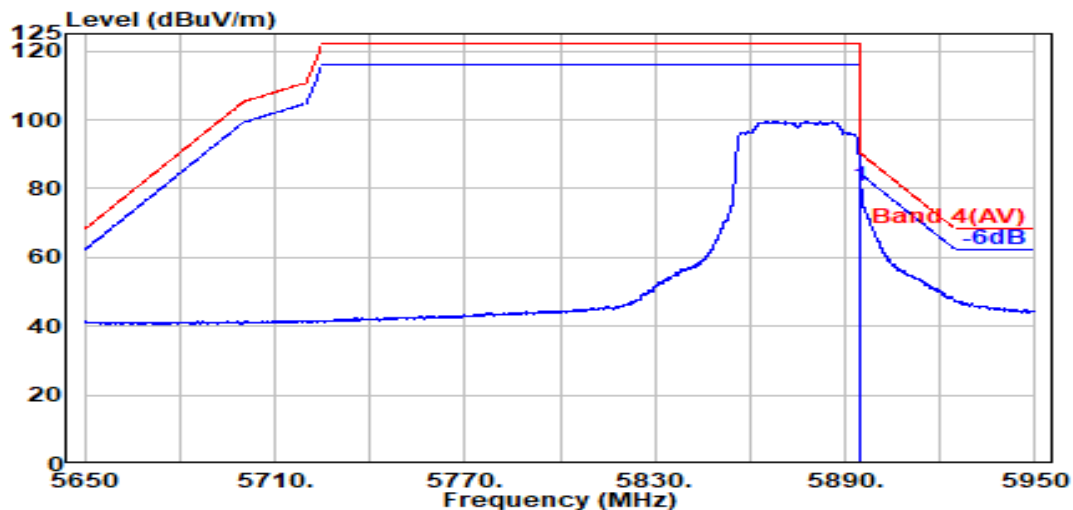

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.000	34.08	9.08	39.23	76.79	80.72	90.20	9.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

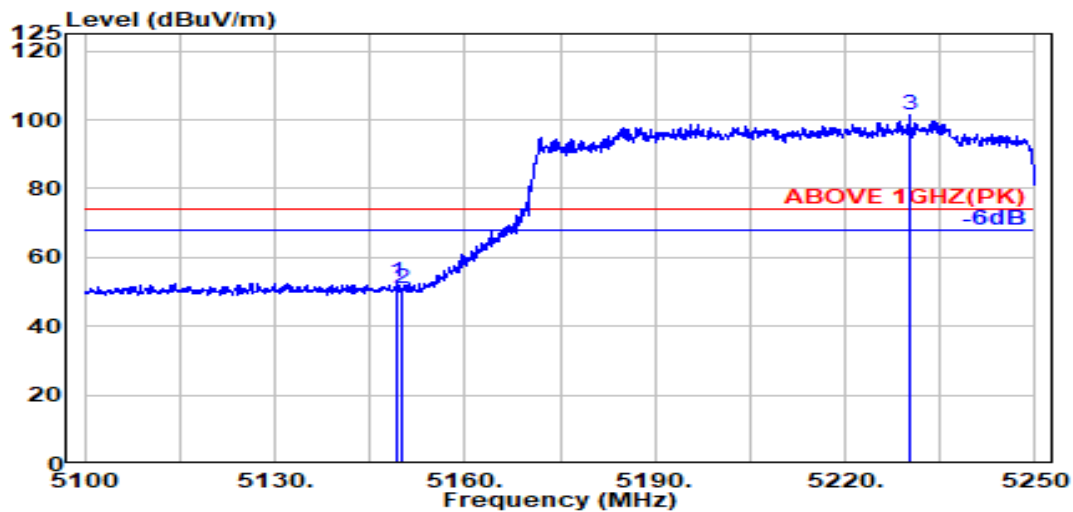

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.19	50.09	52.77	74.00	21.23	Peak
5150.000	33.50	8.37	39.19	48.45	51.13	74.00	22.87	Peak
@ 5230.100	33.74	8.45	39.18	98.32	101.33	---	---	Peak

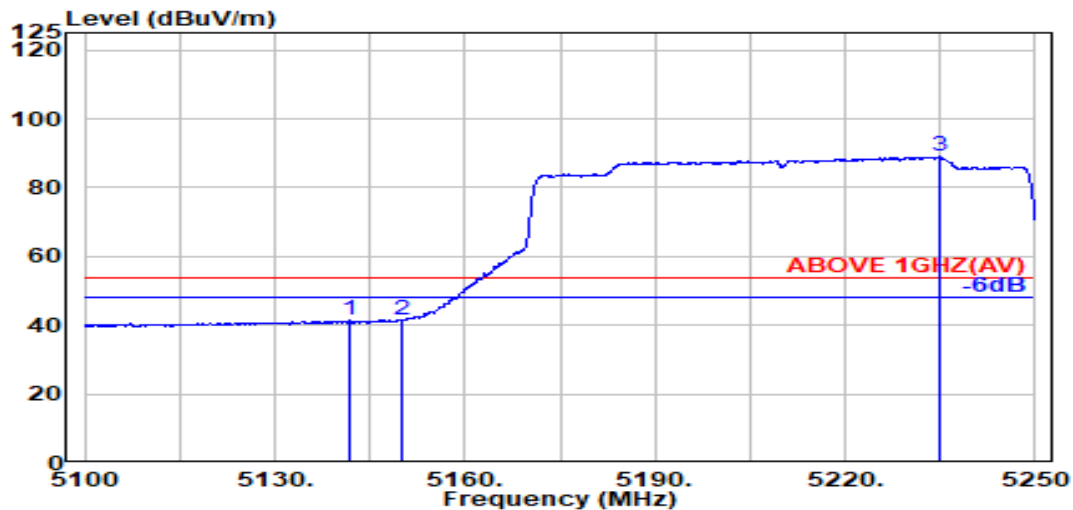

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	33.48	8.37	39.19	38.87	41.53	54.00	12.47	Average
5150.000	33.50	8.37	39.19	38.67	41.36	54.00	12.64	Average
@ 5235.000	33.73	8.46	39.18	85.98	88.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

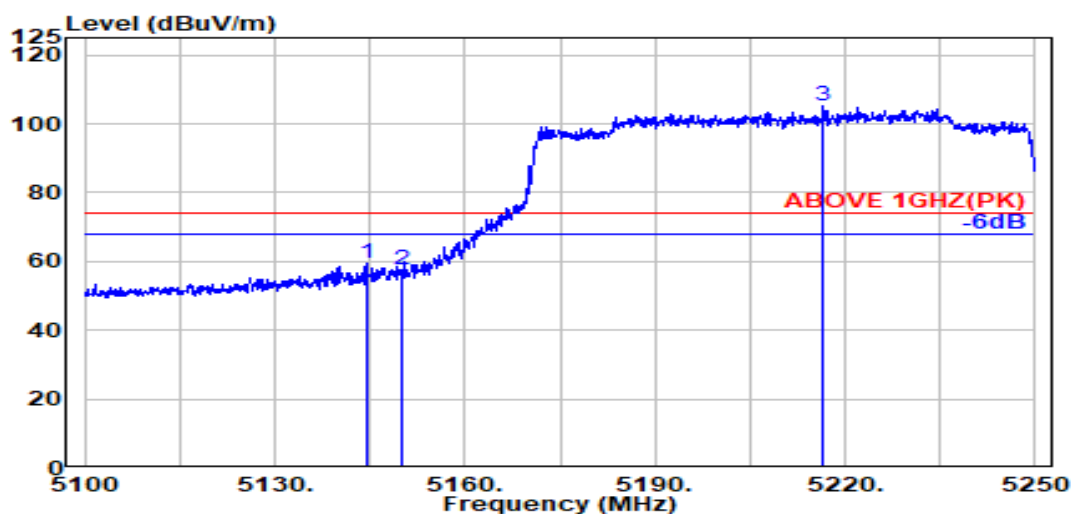

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.400	33.49	8.37	39.19	56.71	59.38	74.00	14.62	Peak
5150.000	33.50	8.37	39.19	54.73	57.41	74.00	16.59	Peak
@ 5216.600	33.77	8.44	39.18	101.95	104.98	---	---	Peak

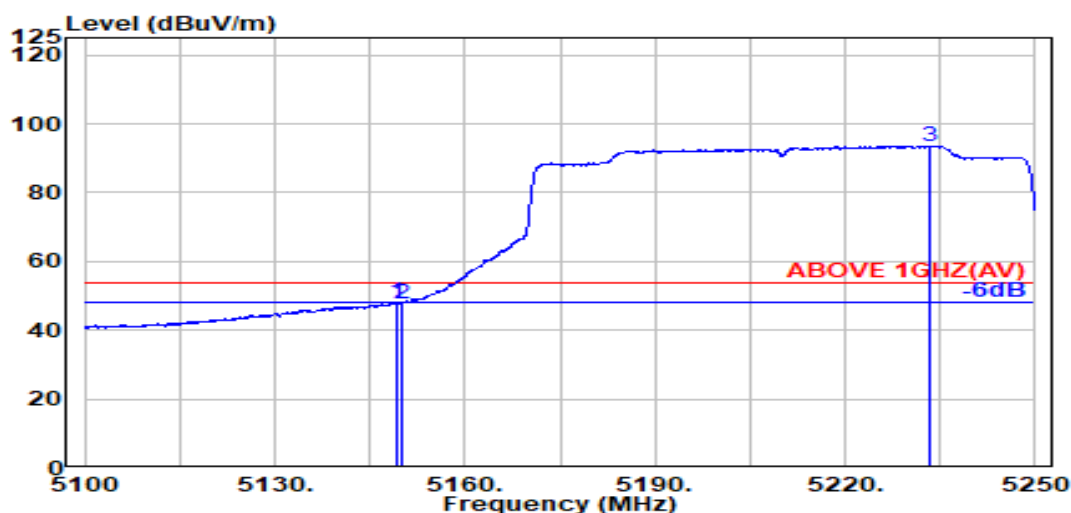

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.400	33.50	8.37	39.19	45.38	48.07	54.00	5.93	Average
5150.000	33.50	8.37	39.19	45.06	47.75	54.00	6.25	Average
@ 5233.400	33.73	8.46	39.18	90.61	93.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

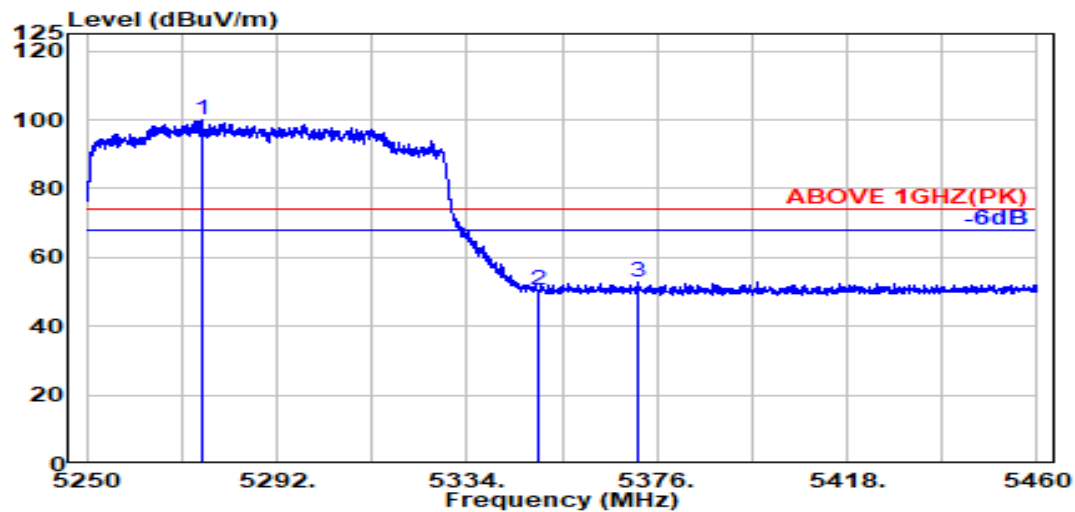

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5275.300	33.75	8.50	39.18	96.99	100.06	---	---	Peak
5350.000	33.70	8.57	39.17	47.23	50.34	74.00	23.66	Peak
5371.700	33.79	8.59	39.16	49.56	52.77	74.00	21.23	Peak

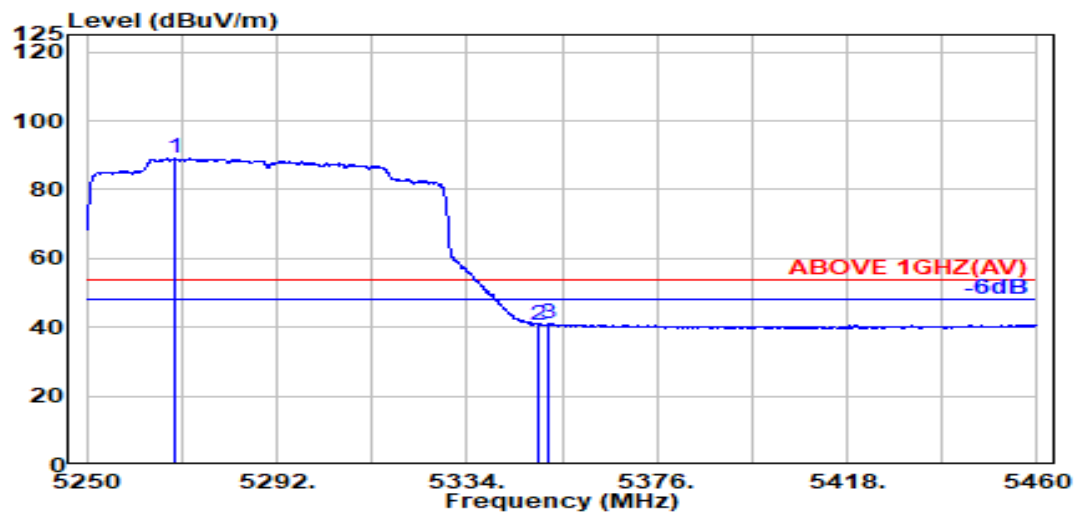

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.600	33.74	8.49	39.18	86.06	89.12	---	---	Average
5350.000	33.70	8.57	39.17	37.69	40.80	54.00	13.20	Average
5352.200	33.71	8.57	39.17	37.91	41.02	54.00	12.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

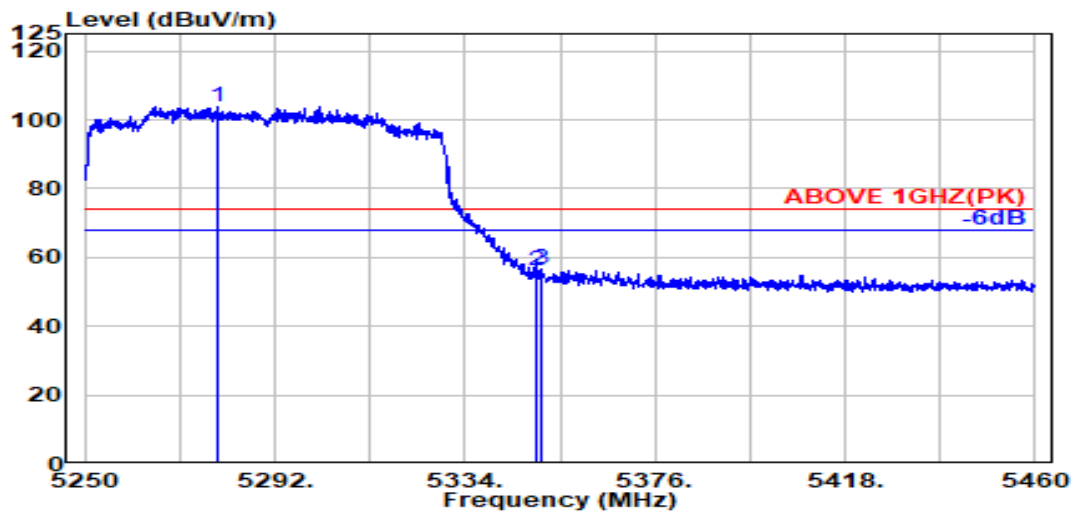

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5279.300	33.76	8.50	39.18	100.85	103.94	---	---	Peak
5350.000	33.70	8.57	39.17	53.15	56.26	74.00	17.74	Peak
5351.000	33.70	8.57	39.17	53.41	56.52	74.00	17.48	Peak

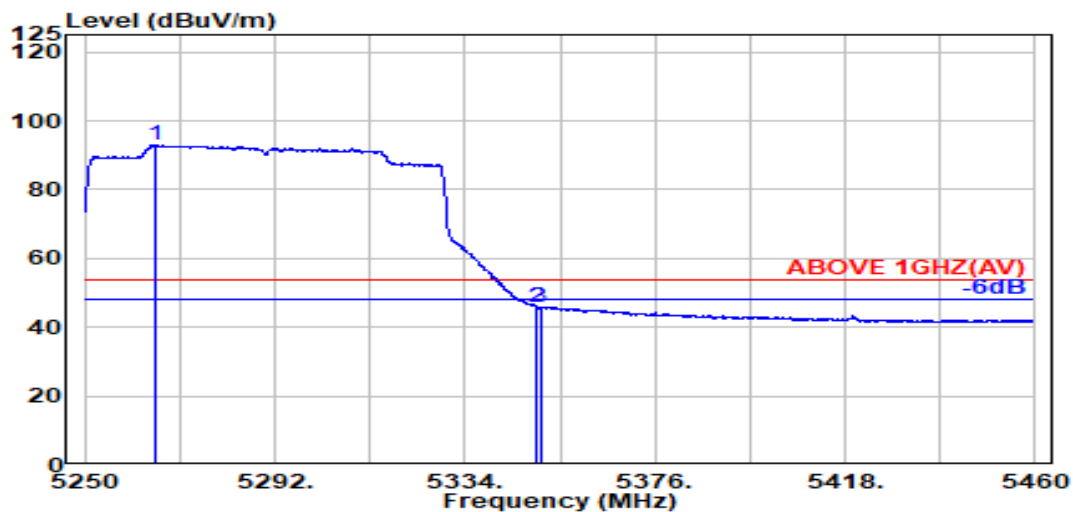

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.600	33.73	8.49	39.18	89.90	92.94	---	---	Average
5350.000	33.70	8.57	39.17	42.50	45.60	54.00	8.40	Average
5350.600	33.70	8.57	39.17	42.88	45.99	54.00	8.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

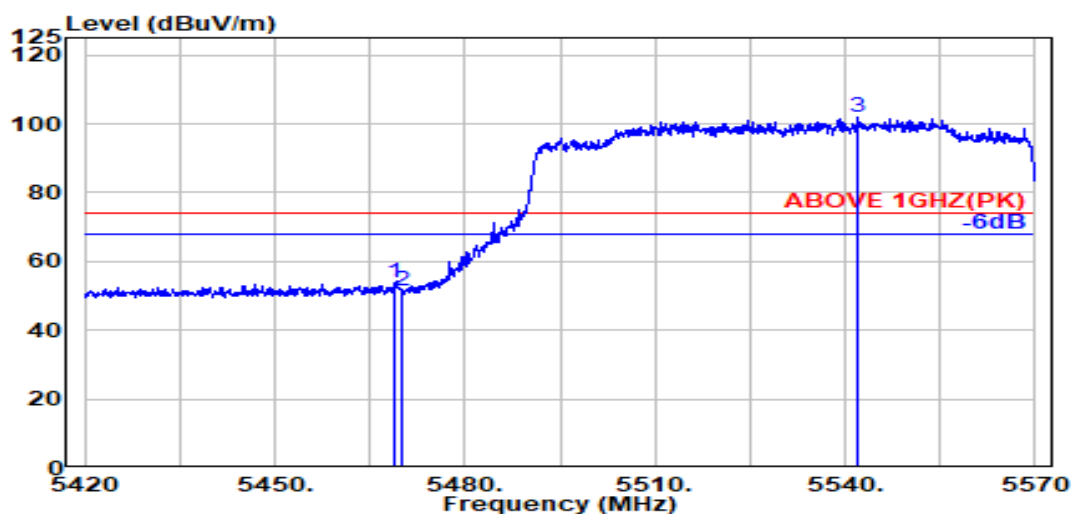

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	50.11	53.69	74.00	20.31	Peak
5470.000	34.04	8.69	39.15	47.80	51.38	74.00	22.62	Peak
@ 5542.000	34.02	8.76	39.16	98.16	101.78	---	---	Peak

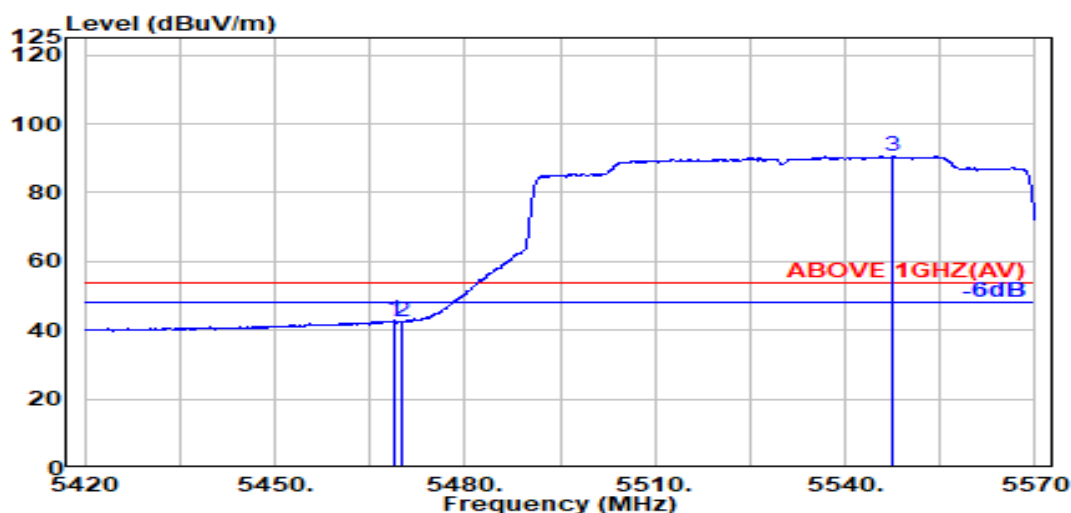

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	39.22	42.79	54.00	11.21	Average
5470.000	34.04	8.69	39.15	38.90	42.47	54.00	11.53	Average
@ 5547.500	34.00	8.76	39.16	86.77	90.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

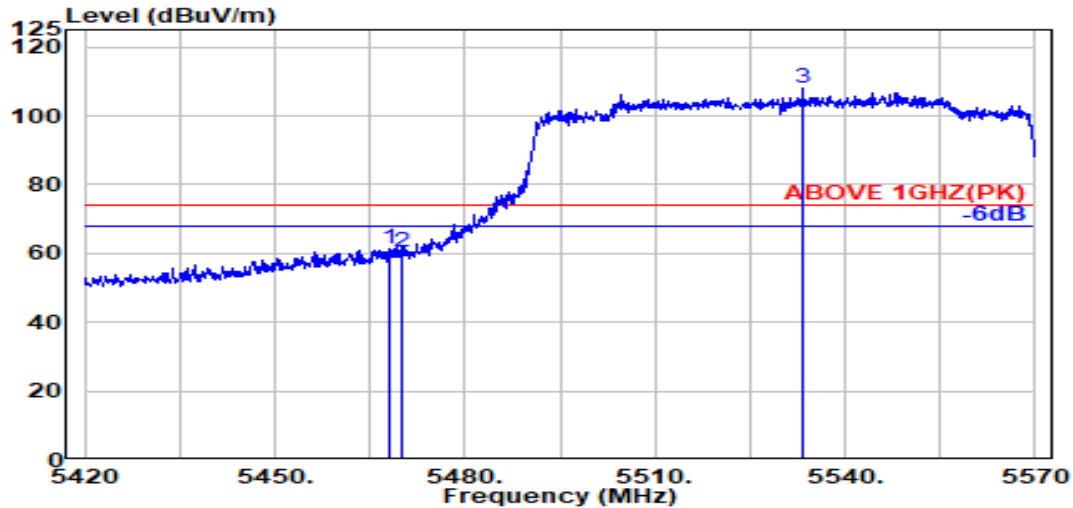

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	57.84	61.40	74.00	12.60	Peak
5470.000	34.04	8.69	39.15	56.94	60.51	74.00	13.49	Peak
@ 5533.400	34.03	8.75	39.16	104.40	108.02	---	---	Peak

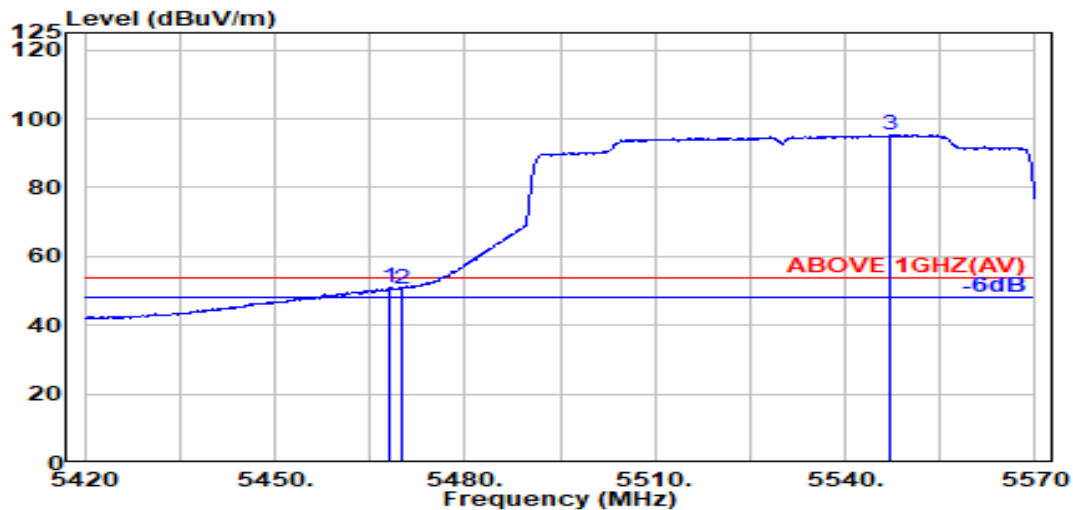

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	47.22	50.79	54.00	3.21	Average
5470.000	34.04	8.69	39.15	46.97	50.54	54.00	3.46	Average
@ 5547.200	34.01	8.76	39.16	91.91	95.51	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

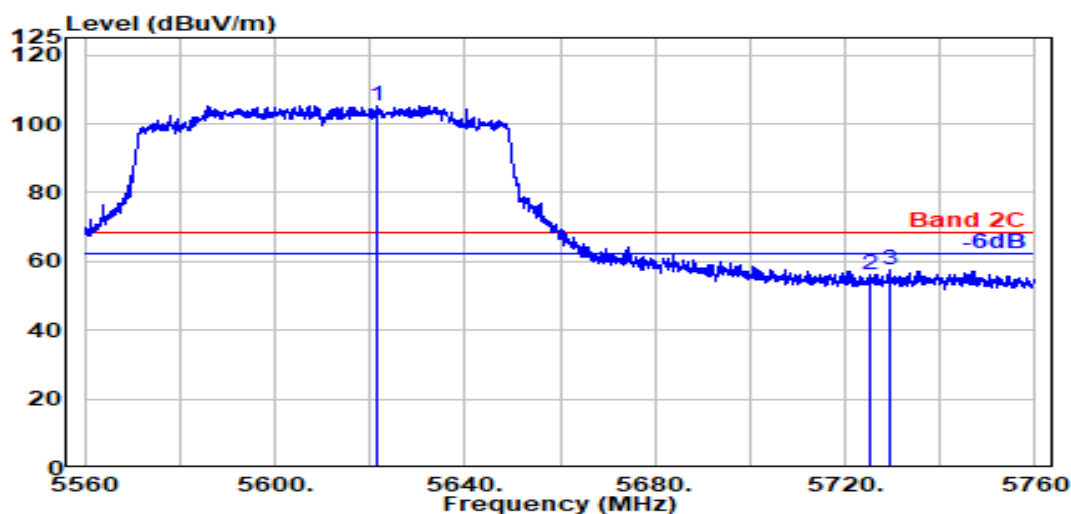

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5621.700	33.80	8.83	39.18	101.84	105.29	---	---	Peak
5725.000	33.60	8.93	39.20	52.83	56.16	68.20	12.04	Peak
5729.500	33.60	8.93	39.20	54.01	57.34	68.20	10.86	Peak

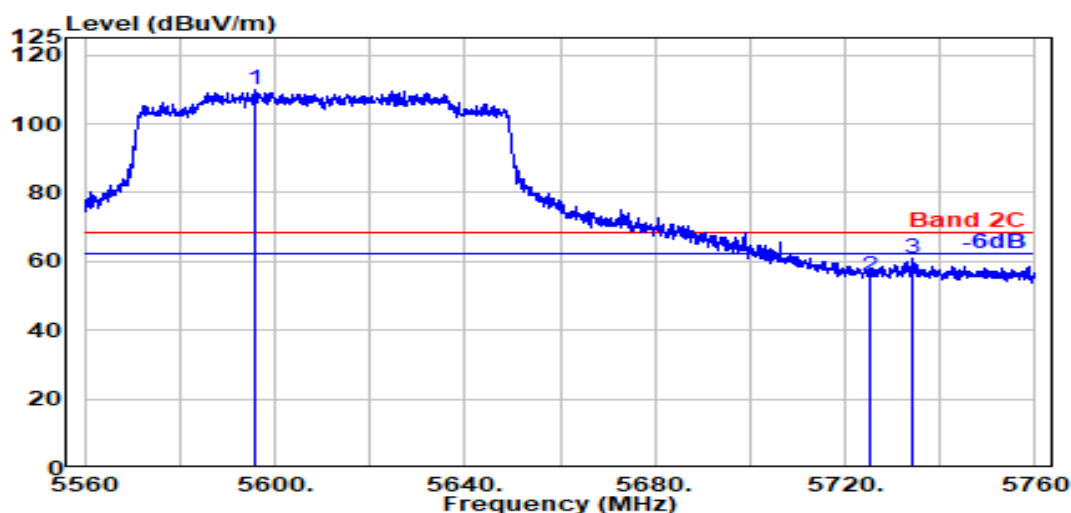

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.700	33.82	8.81	39.17	106.36	109.81	---	---	Peak
5725.000	33.60	8.93	39.20	52.48	55.81	68.20	12.39	Peak
5734.300	33.60	8.93	39.20	57.54	60.88	68.20	7.32	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

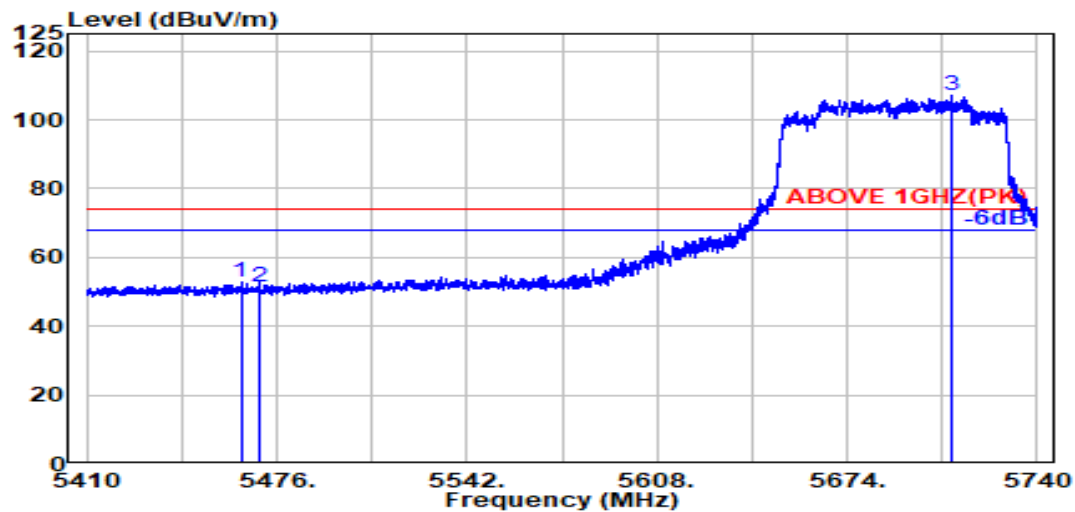

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.500	34.03	8.68	39.15	49.21	52.77	74.00	21.23	Peak
5470.000	34.04	8.69	39.15	47.71	51.29	74.00	22.71	Peak
@ 5710.000	33.60	8.91	39.19	103.70	107.02	---	---	Peak

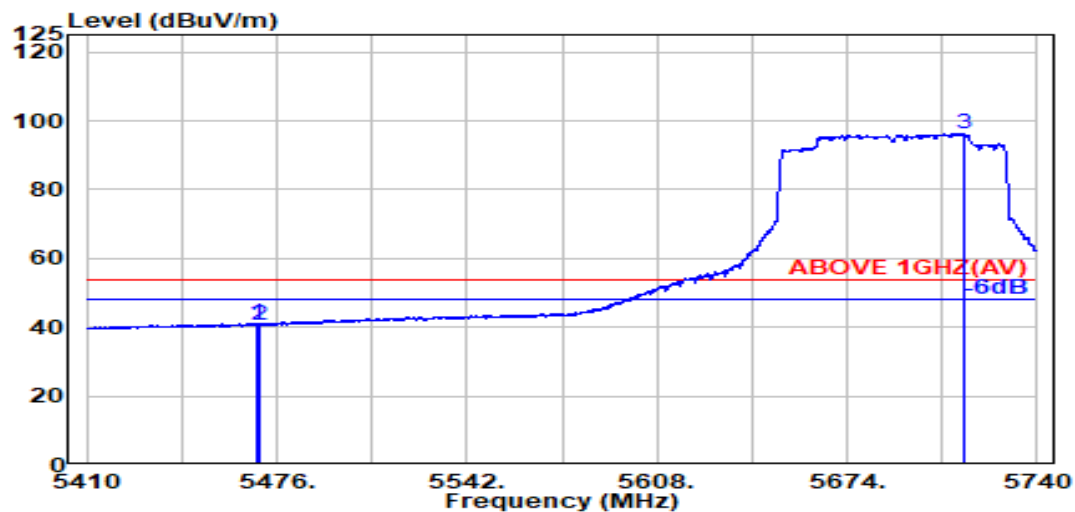

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	37.42	41.00	54.00	13.00	Average
5470.000	34.04	8.69	39.15	37.00	40.57	54.00	13.43	Average
@ 5714.300	33.60	8.92	39.19	92.90	96.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

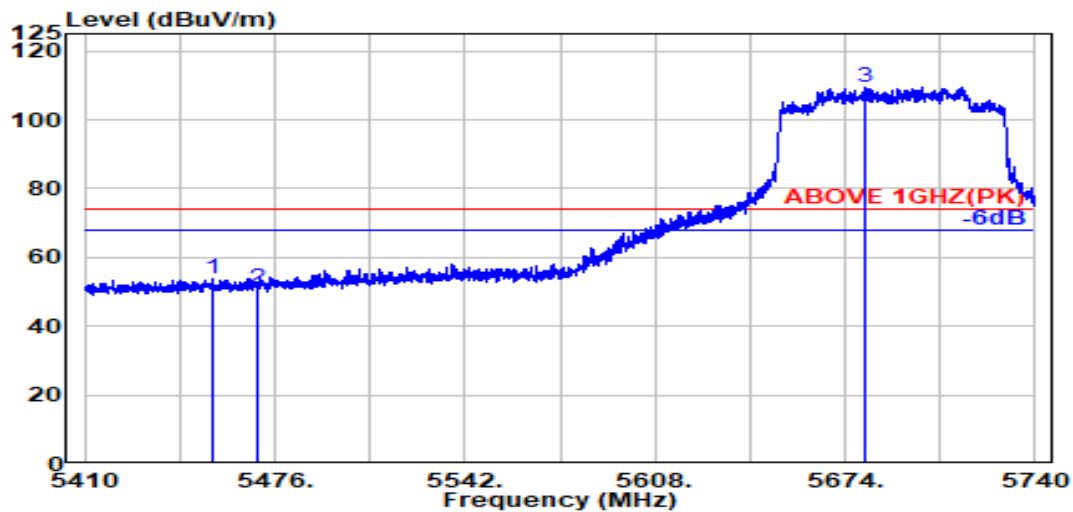

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.600	34.01	8.67	39.16	50.29	53.82	74.00	20.18	Peak
5470.000	34.04	8.69	39.15	47.23	50.81	74.00	23.19	Peak
@ 5681.300	33.67	8.89	39.19	106.12	109.50	---	---	Peak

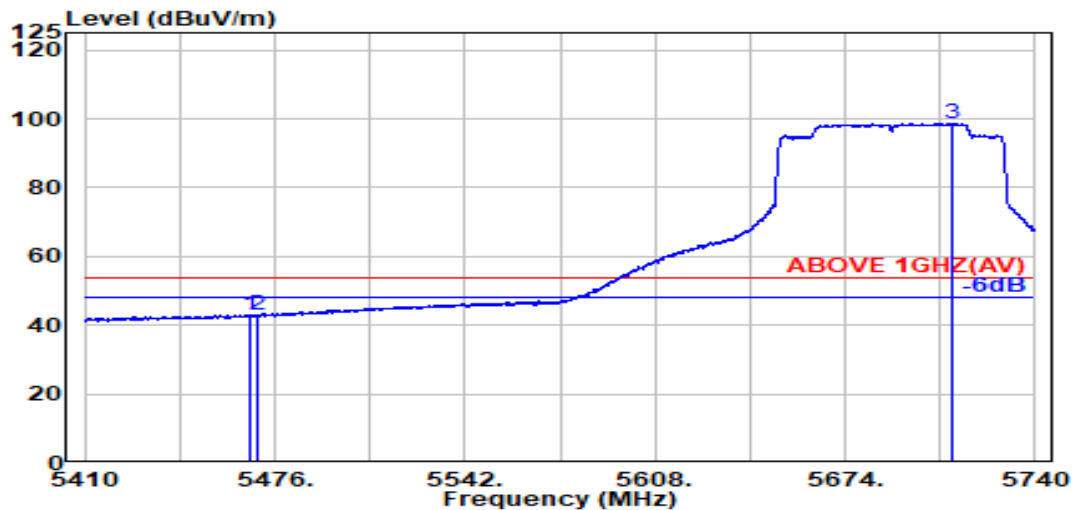

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.04	8.69	39.15	39.42	42.99	54.00	11.01	Average
5470.000	34.04	8.69	39.15	39.22	42.79	54.00	11.21	Average
@ 5710.900	33.60	8.91	39.19	95.37	98.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

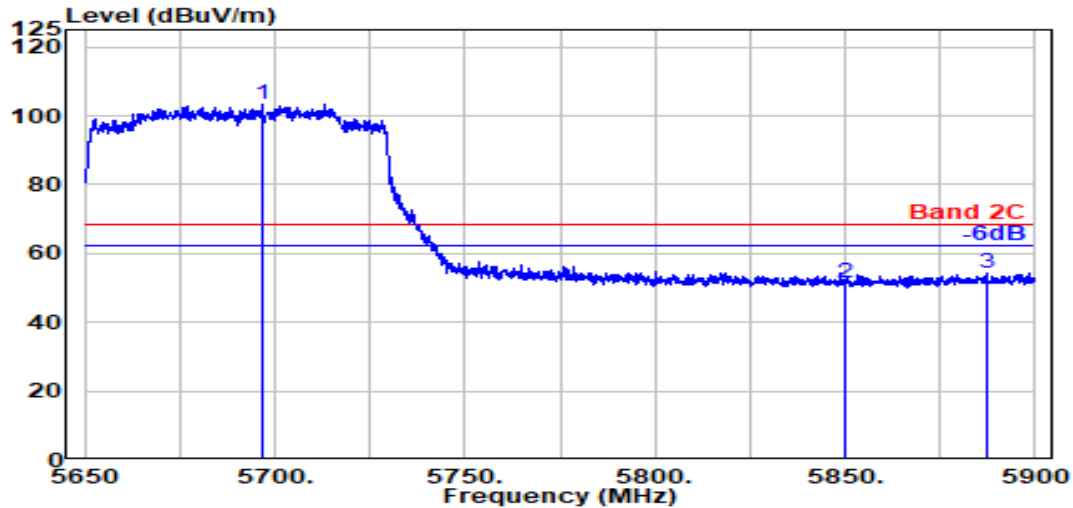

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.800	33.61	8.90	39.19	100.19	103.51	---	---	Peak
5850.000	33.90	9.04	39.22	47.89	51.61	68.20	16.59	Peak
5887.500	34.05	9.07	39.23	50.17	54.06	68.20	14.14	Peak

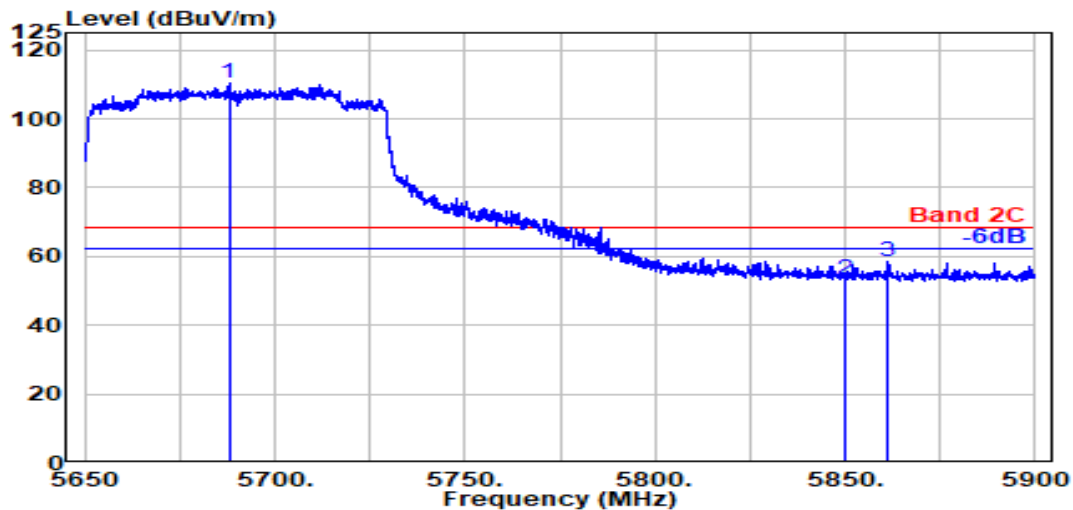

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.900	33.65	8.89	39.19	106.84	110.19	---	---	Peak
5850.000	33.90	9.04	39.22	49.59	53.31	68.20	14.89	Peak
5861.400	33.95	9.05	39.22	54.51	58.28	68.20	9.92	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

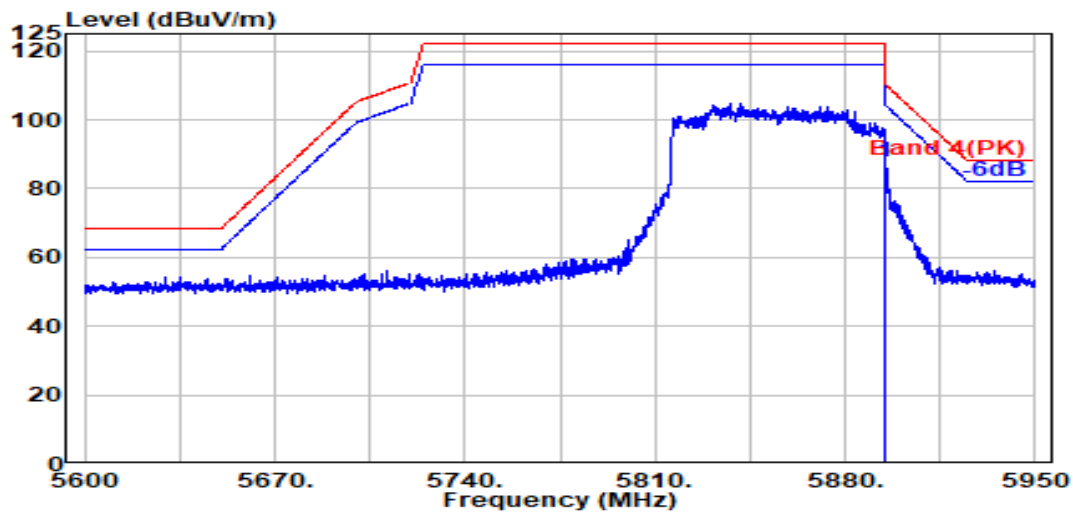

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	83.62	87.55	110.16	22.61	Peak

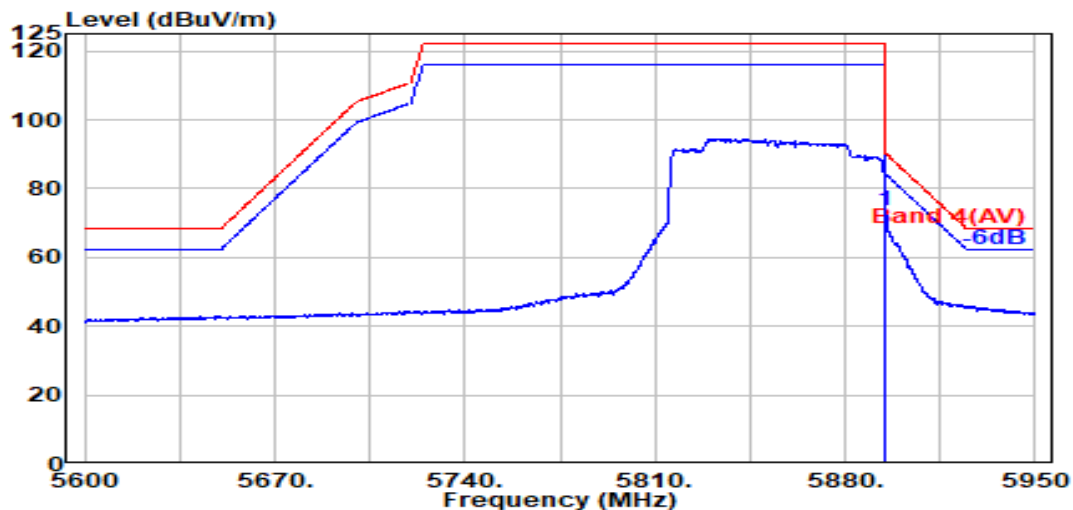

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	69.50	73.42	90.16	16.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

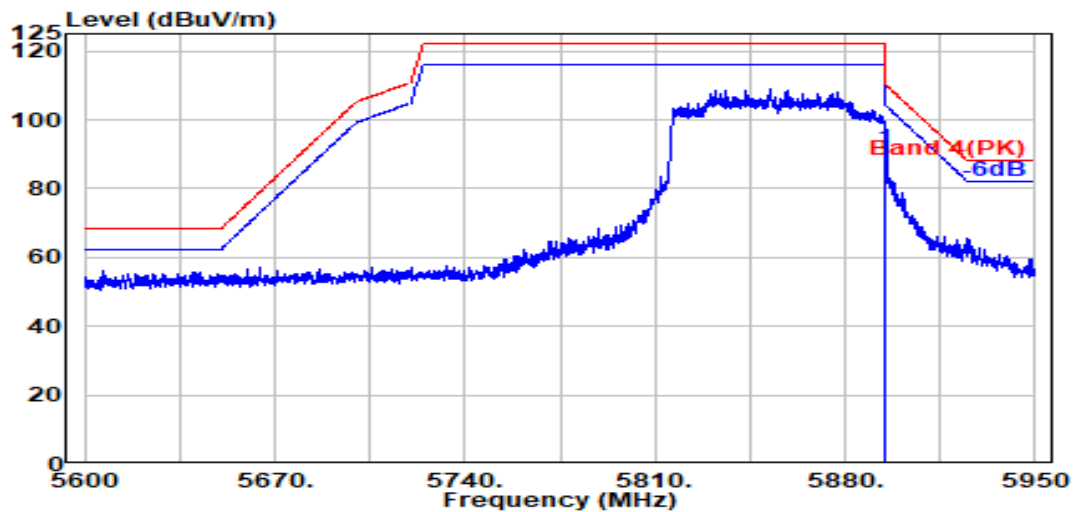

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	87.44	91.37	110.16	18.79	Peak

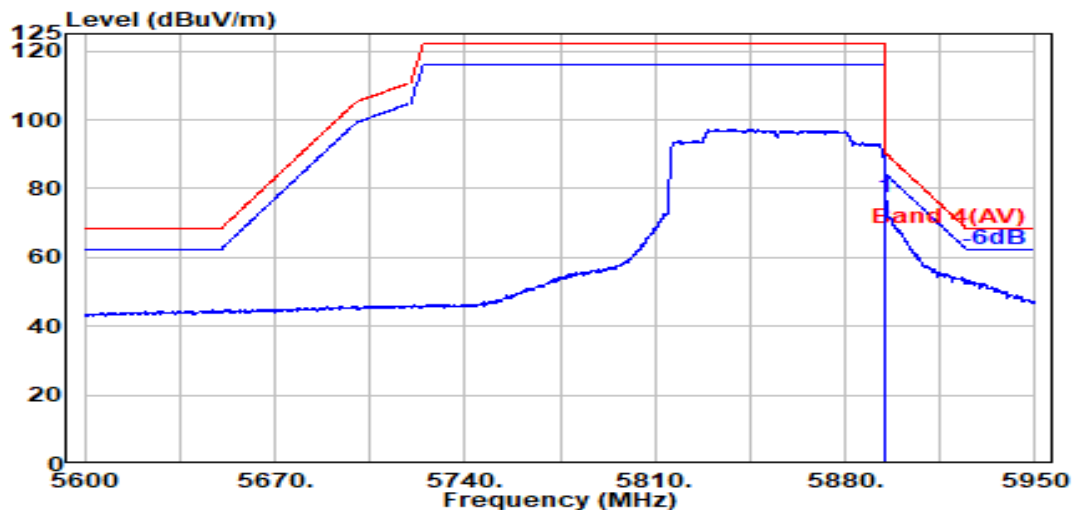


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	73.36	77.28	90.16	12.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

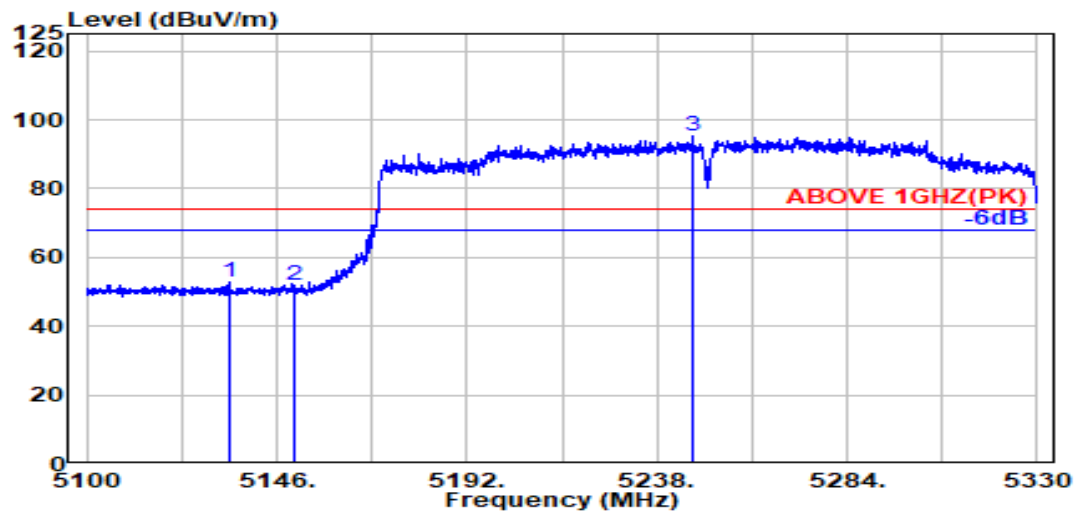

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.500	33.47	8.36	39.19	50.11	52.75	74.00	21.25	Peak
5150.000	33.50	8.37	39.19	49.14	51.82	74.00	22.18	Peak
@ 5246.500	33.71	8.47	39.18	92.05	95.05	---	---	Peak

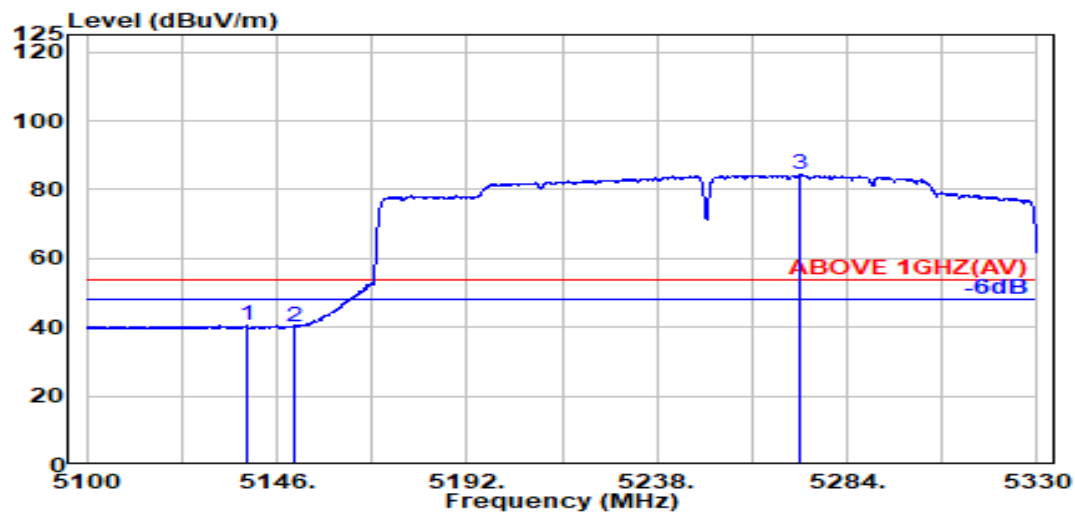


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.600	33.48	8.36	39.19	37.92	40.57	54.00	13.43	Average
5150.000	33.50	8.37	39.19	37.63	40.31	54.00	13.69	Average
@ 5272.300	33.74	8.50	39.18	81.23	84.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

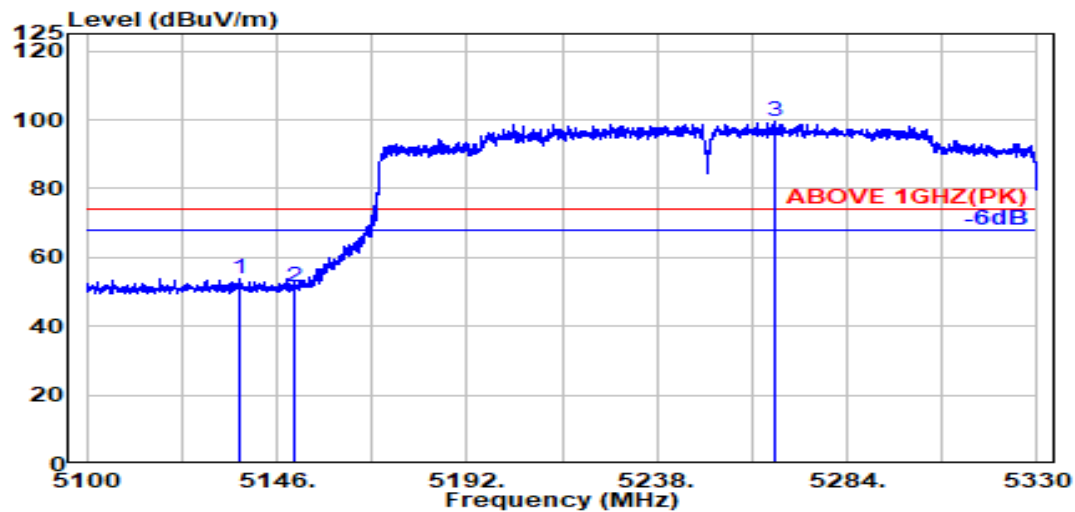

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.000	33.47	8.36	39.19	51.33	53.97	74.00	20.03	Peak
5150.000	33.50	8.37	39.19	48.69	51.37	74.00	22.63	Peak
@ 5266.300	33.73	8.49	39.18	96.30	99.34	---	---	Peak

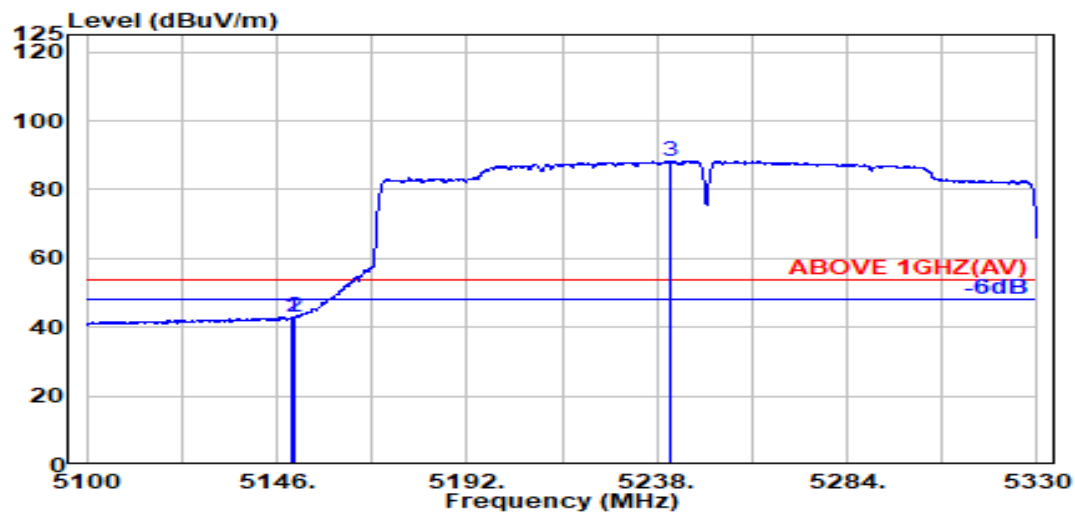


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.50	8.37	39.19	40.25	42.93	54.00	11.07	Average
5150.000	33.50	8.37	39.19	40.12	42.80	54.00	11.20	Average
@ 5241.100	33.72	8.47	39.18	85.34	88.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

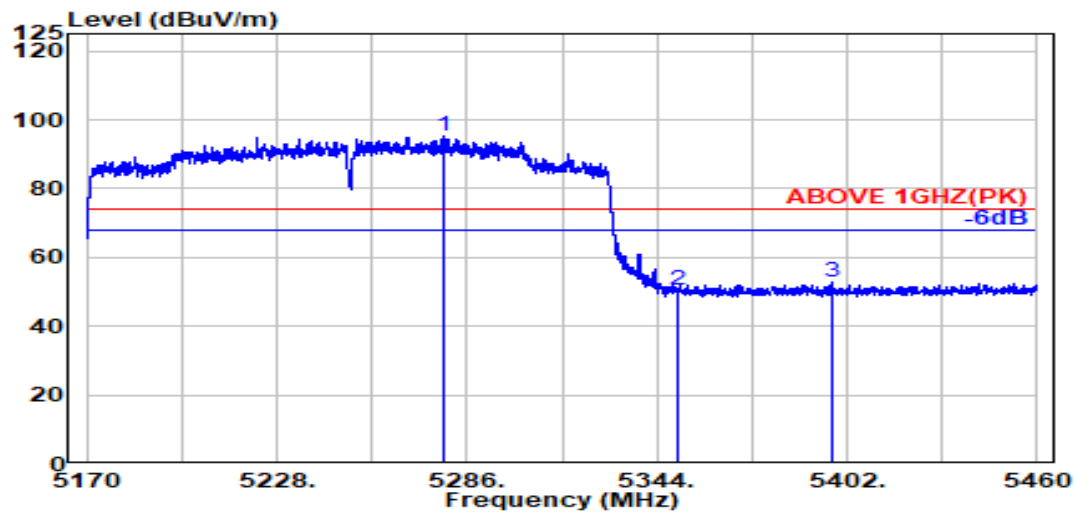

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5278.700	33.76	8.50	39.18	92.29	95.37	---	---	Peak
5350.000	33.70	8.57	39.17	47.53	50.63	74.00	23.37	Peak
5397.700	33.89	8.62	39.16	49.37	52.72	74.00	21.28	Peak

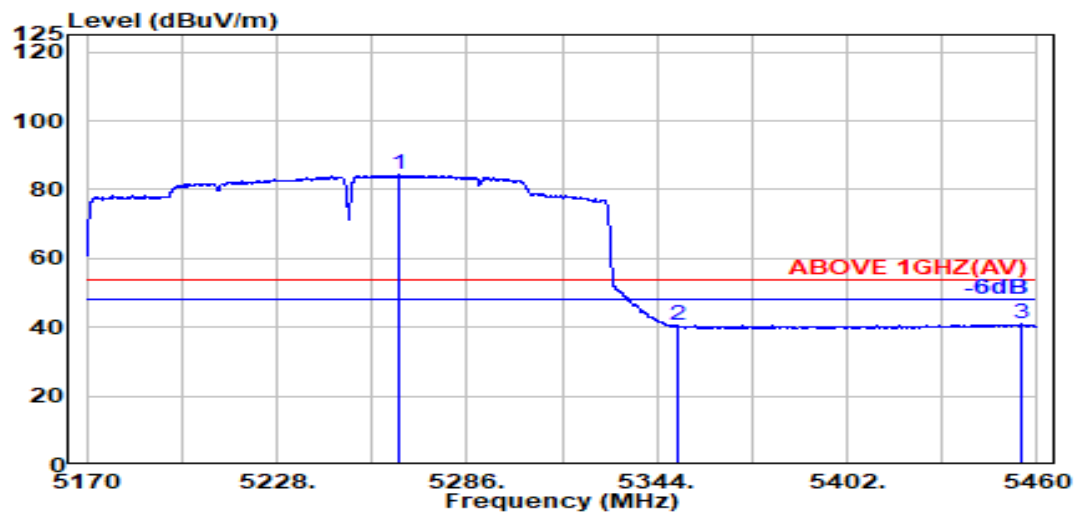

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.600	33.73	8.49	39.18	81.16	84.20	---	---	Average
5350.000	33.70	8.57	39.17	37.44	40.54	54.00	13.46	Average
5455.500	34.01	8.67	39.16	37.42	40.95	54.00	13.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 1/2A
		Frequency	TX 5250MHz

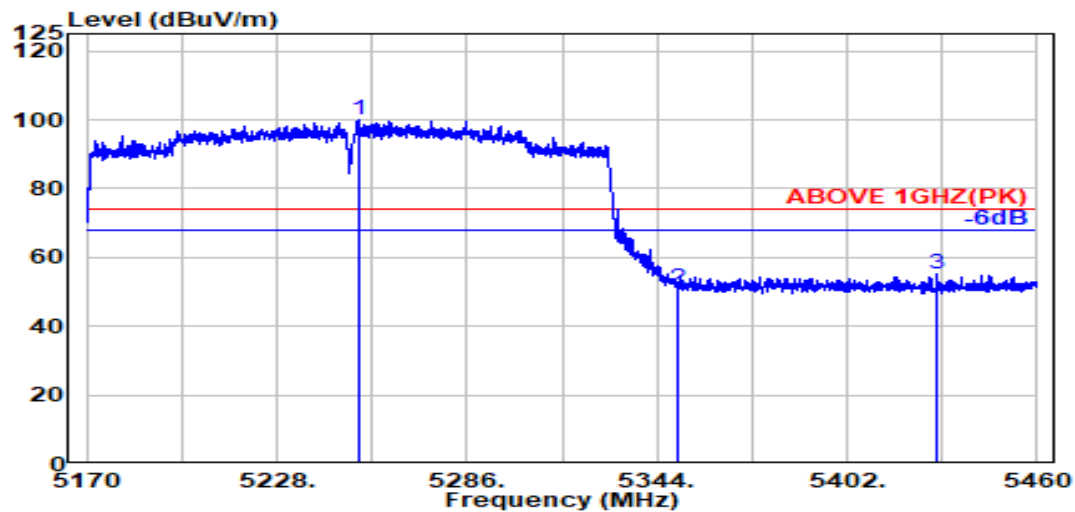

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5252.800	33.71	8.48	39.18	96.78	99.79	---	---	Peak
5350.000	33.70	8.57	39.17	47.82	50.93	74.00	23.07	Peak
5429.200	33.96	8.65	39.16	51.71	55.15	74.00	18.85	Peak

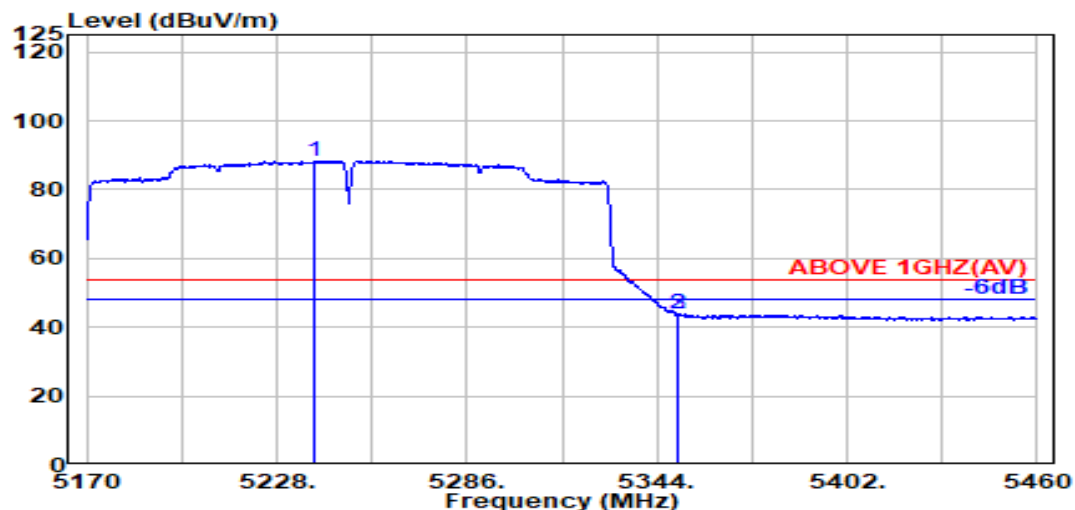

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5239.600	33.72	8.46	39.18	85.25	88.25	---	---	Average
5350.000	33.70	8.57	39.17	40.90	44.01	54.00	9.99	Average
5350.200	33.70	8.57	39.17	40.76	43.87	54.00	10.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

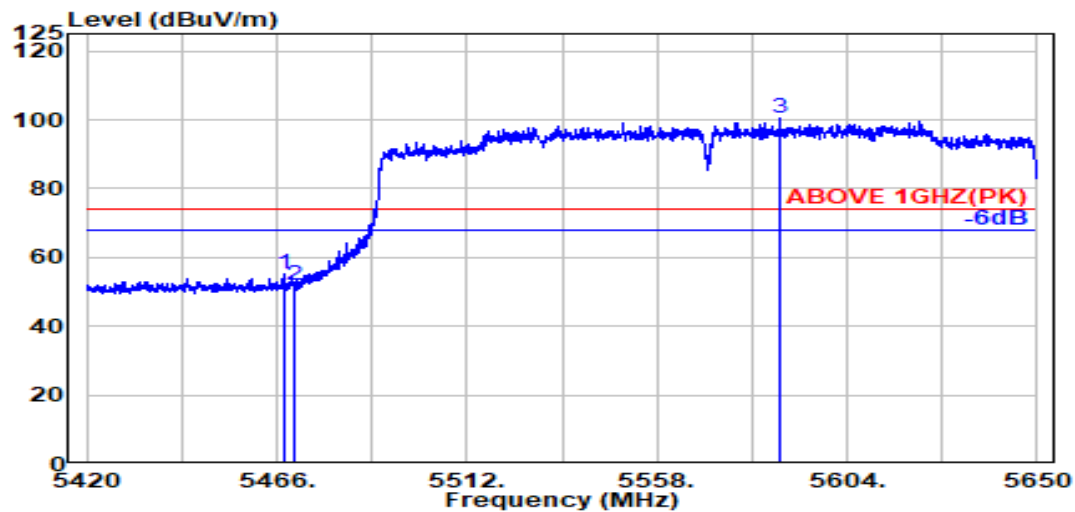

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.15	51.80	55.37	74.00	18.63	Peak
5470.000	34.04	8.69	39.15	48.31	51.88	74.00	22.12	Peak
@ 5587.800	33.85	8.80	39.17	97.18	100.66	---	---	Peak

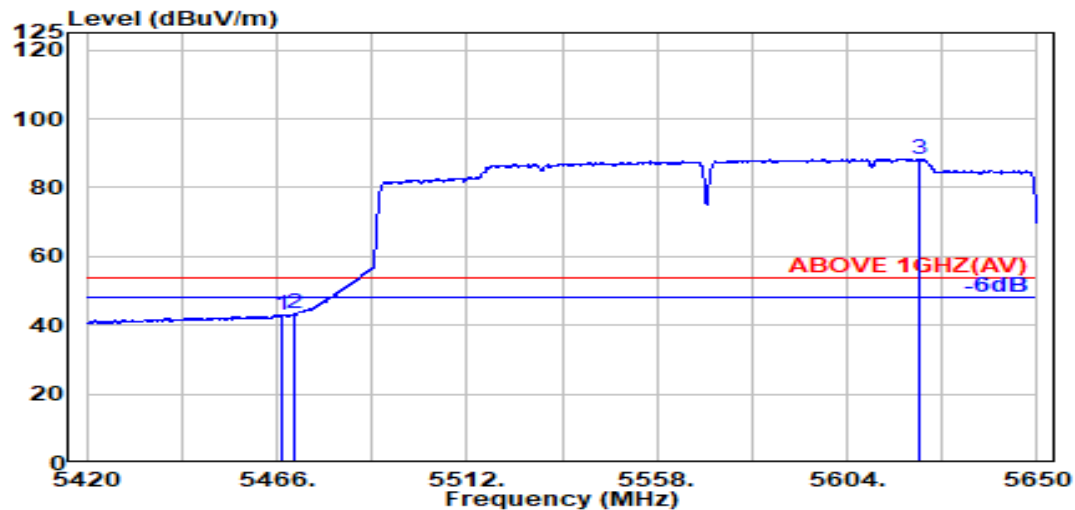

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.500	34.04	8.69	39.15	39.55	43.12	54.00	10.88	Average
5470.000	34.04	8.69	39.15	39.79	43.37	54.00	10.63	Average
@ 5621.700	33.80	8.83	39.18	84.94	88.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

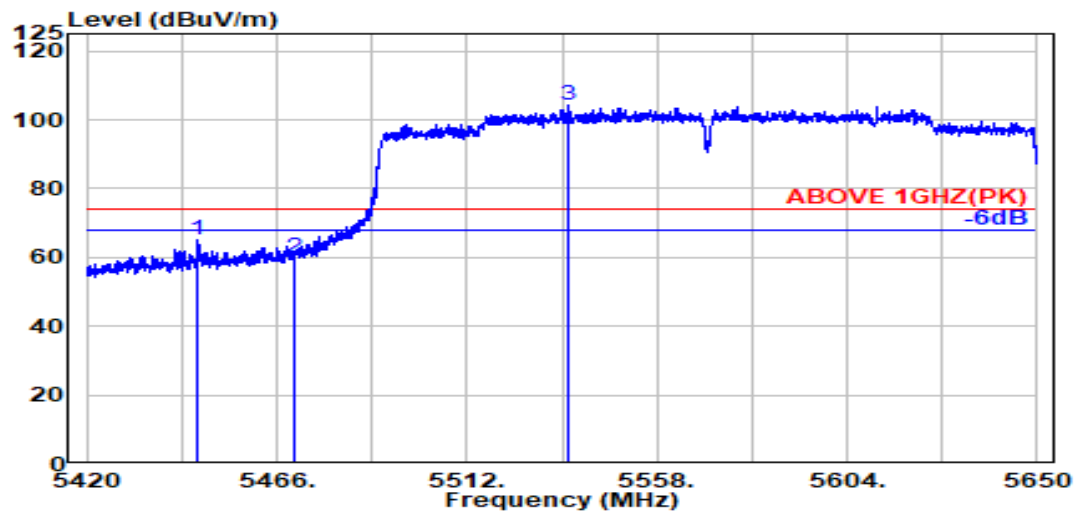

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.000	33.99	8.67	39.16	61.45	64.96	74.00	9.04	Peak
5470.000	34.04	8.69	39.15	56.53	60.10	74.00	13.90	Peak
@ 5536.700	34.03	8.75	39.16	100.55	104.17	---	---	Peak

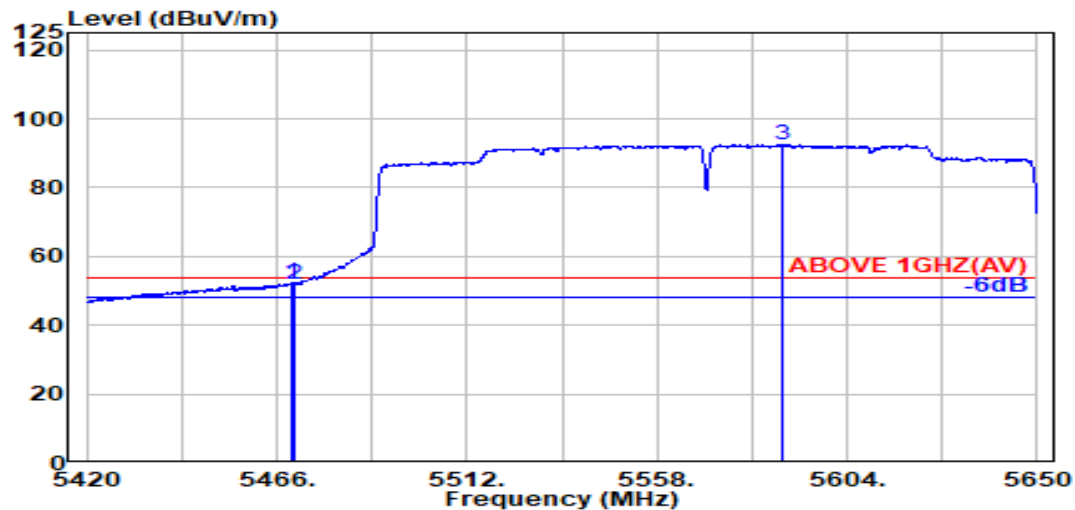

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.04	8.69	39.15	48.83	52.41	54.00	1.59	Average
5470.000	34.04	8.69	39.15	48.27	51.84	54.00	2.16	Average
@ 5588.100	33.85	8.80	39.17	89.00	92.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 2C
		Frequency	TX 5570MHz

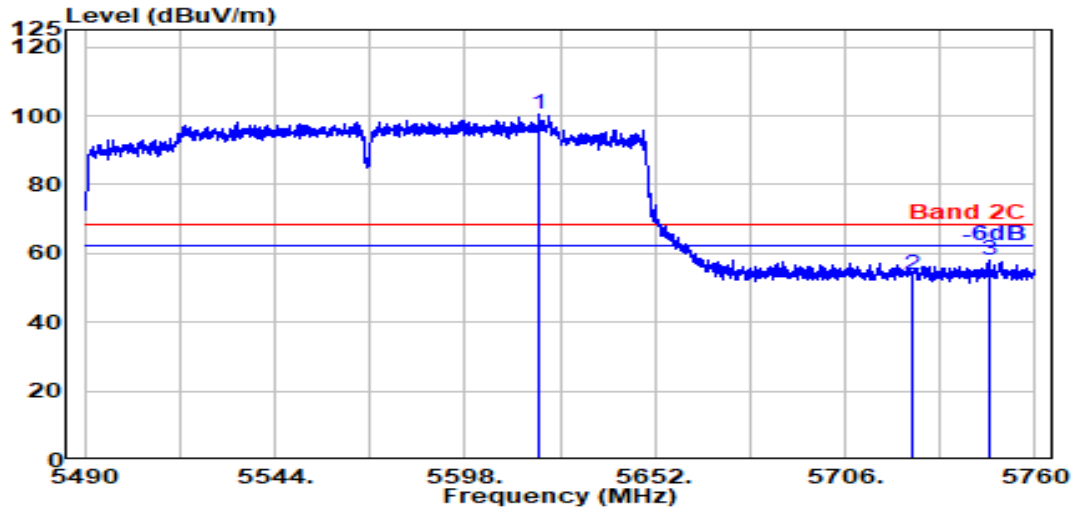

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.300	33.80	8.83	39.17	96.85	100.31	---	---	Peak
5725.000	33.60	8.93	39.20	50.67	54.00	68.20	14.20	Peak
5746.700	33.60	8.95	39.20	54.60	57.94	68.20	10.26	Peak

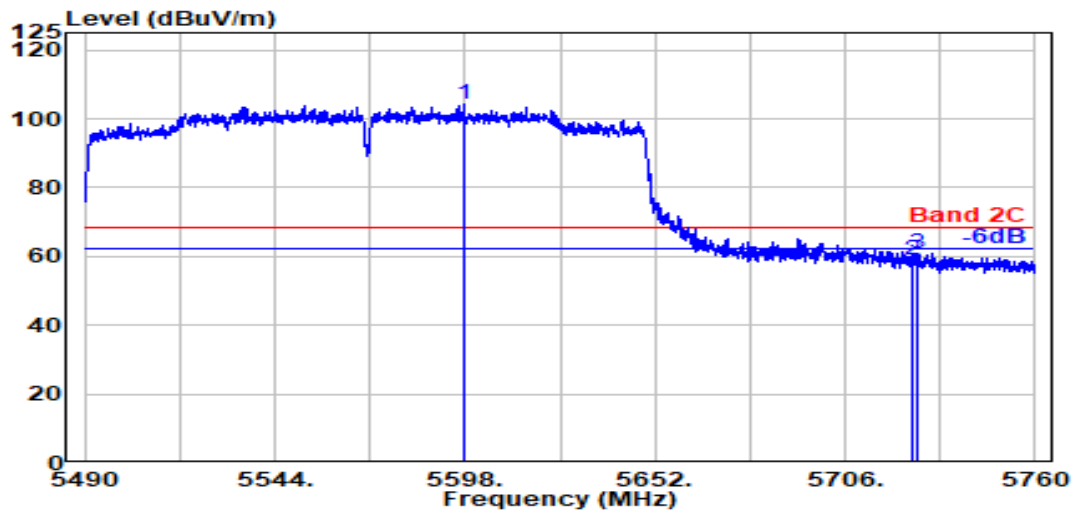

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5597.900	33.81	8.81	39.17	100.72	104.17	---	---	Peak
5725.000	33.60	8.93	39.20	55.51	58.84	68.20	9.36	Peak
5726.500	33.60	8.93	39.20	57.59	60.92	68.20	7.28	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

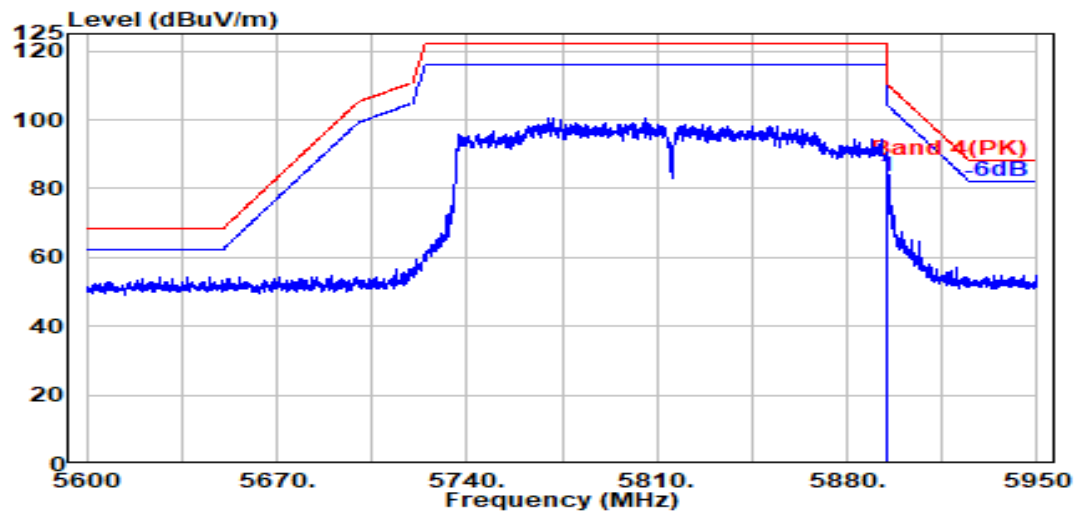

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	79.57	83.50	110.16	26.66	Peak

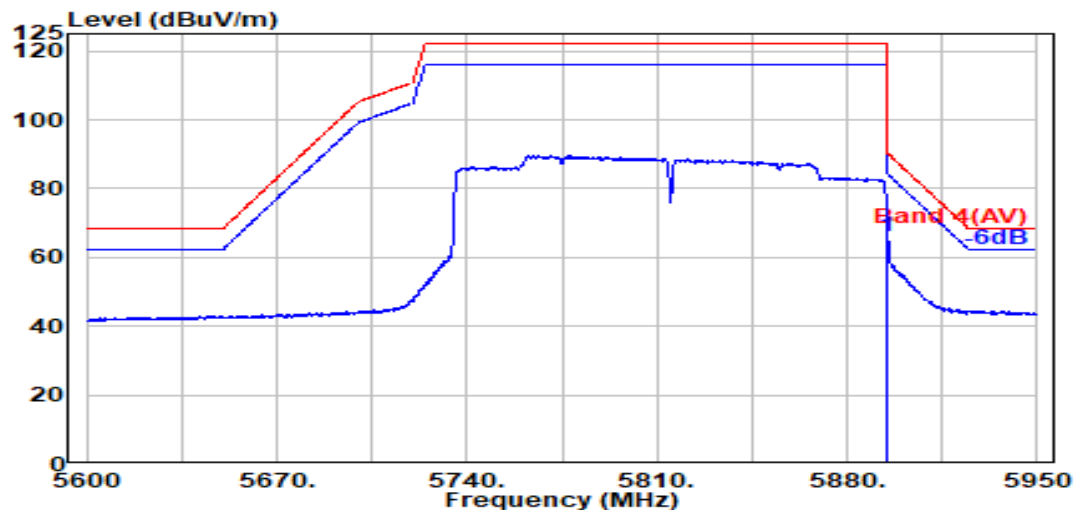

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	62.12	66.05	90.16	24.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT160	U-NII Band	U-NII Band 4
		Frequency	TX 5815MHz

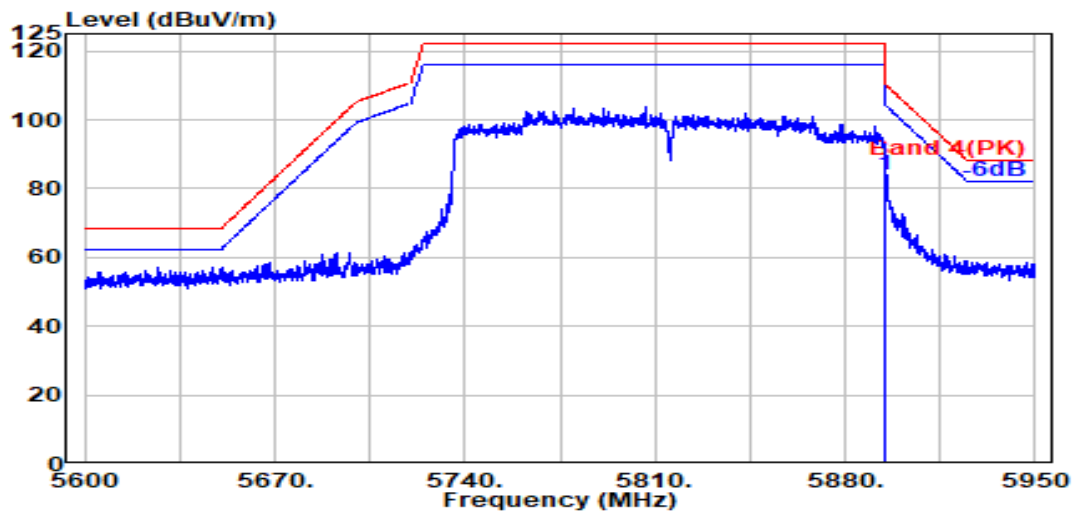

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	80.15	84.08	110.16	26.09	Peak

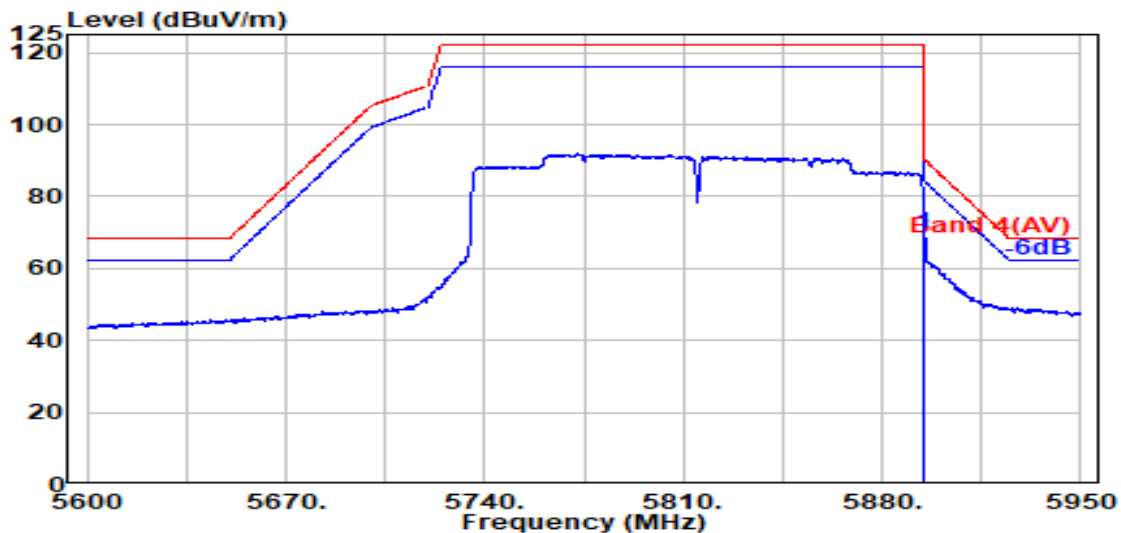

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5895.050	34.08	9.08	39.23	65.88	69.81	90.16	20.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

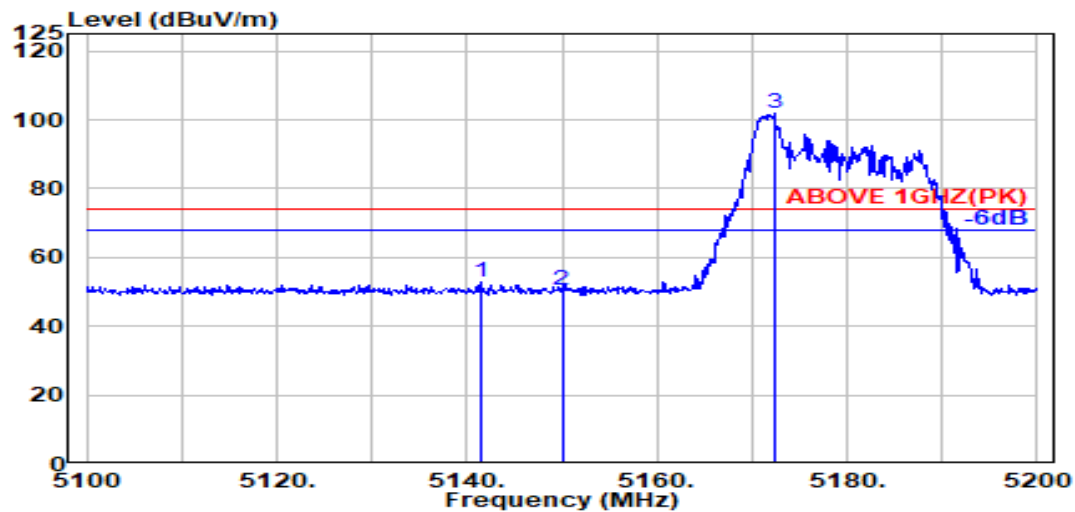

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.500	33.48	8.37	39.19	50.27	52.93	74.00	21.07	Peak
5150.000	33.50	8.37	39.19	47.87	50.55	74.00	23.45	Peak
@ 5172.300	33.63	8.40	39.19	98.93	101.77	---	---	Peak

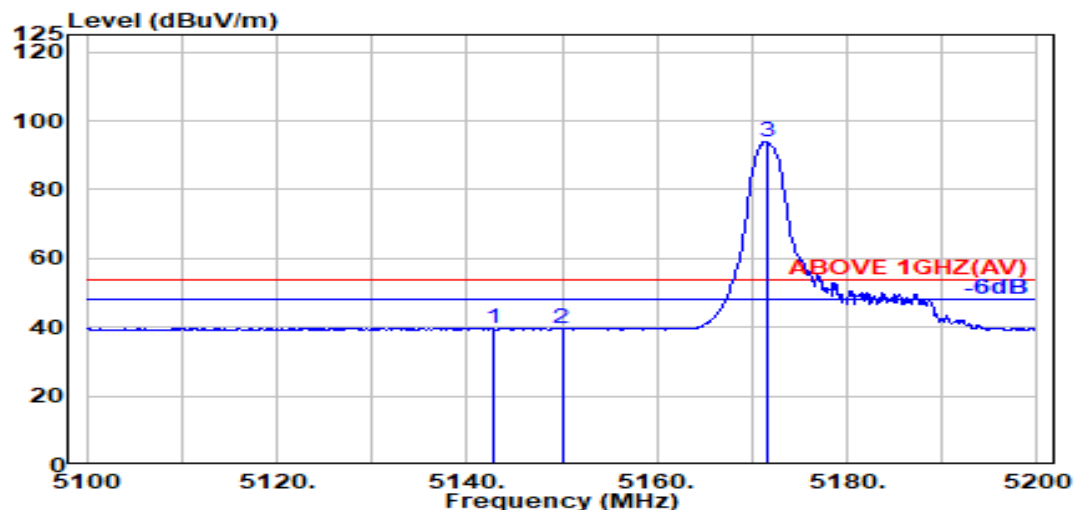

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.800	33.49	8.37	39.19	37.07	39.73	54.00	14.27	Average
5150.000	33.50	8.37	39.19	36.74	39.42	54.00	14.58	Average
@ 5171.600	33.63	8.40	39.19	91.22	94.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

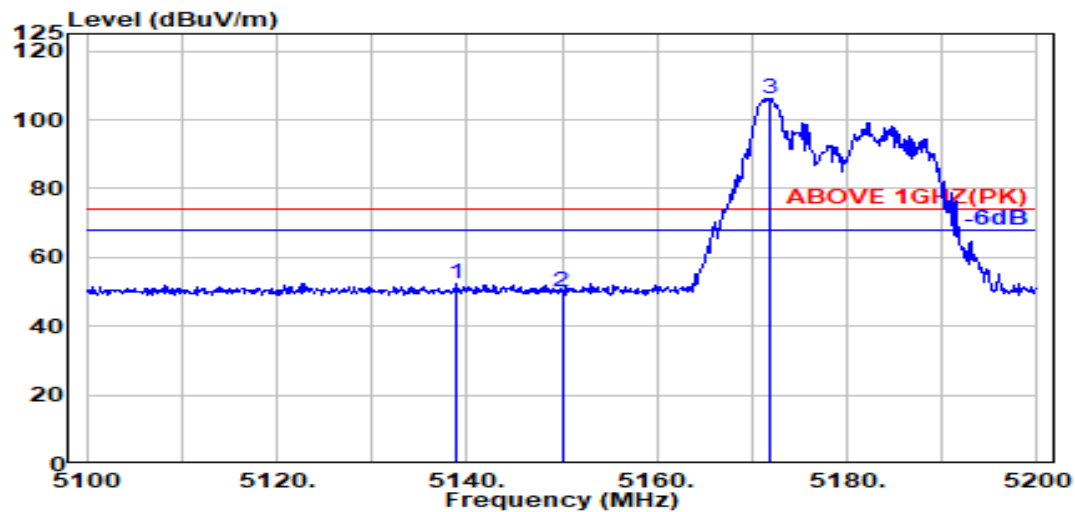

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.800	33.48	8.36	39.19	49.76	52.41	74.00	21.59	Peak
5150.000	33.50	8.37	39.19	47.26	49.95	74.00	24.05	Peak
@ 5171.800	33.63	8.40	39.19	103.45	106.29	---	---	Peak

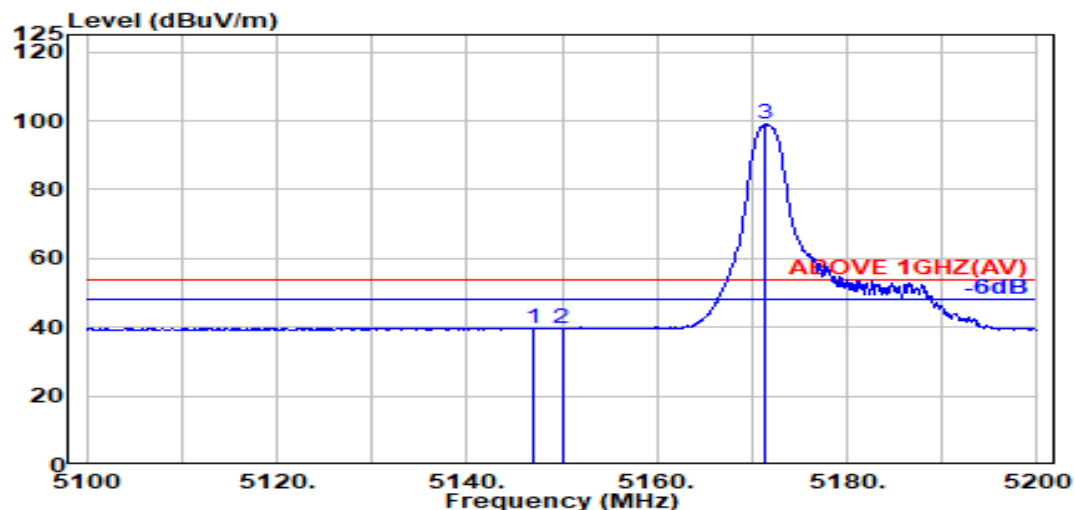

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.100	33.49	8.37	39.19	37.08	39.75	54.00	14.25	Average
5150.000	33.50	8.37	39.19	36.84	39.52	54.00	14.48	Average
@ 5171.400	33.63	8.40	39.19	96.14	98.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

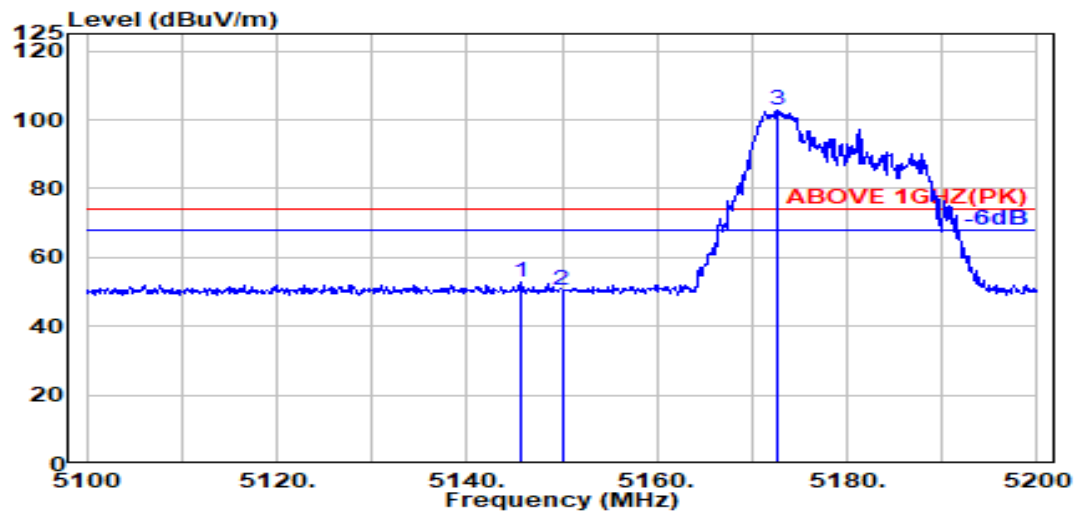

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.600	33.49	8.37	39.19	50.20	52.87	74.00	21.13	Peak
5150.000	33.50	8.37	39.19	47.65	50.33	74.00	23.67	Peak
@ 5172.600	33.64	8.40	39.19	99.87	102.71	---	---	Peak

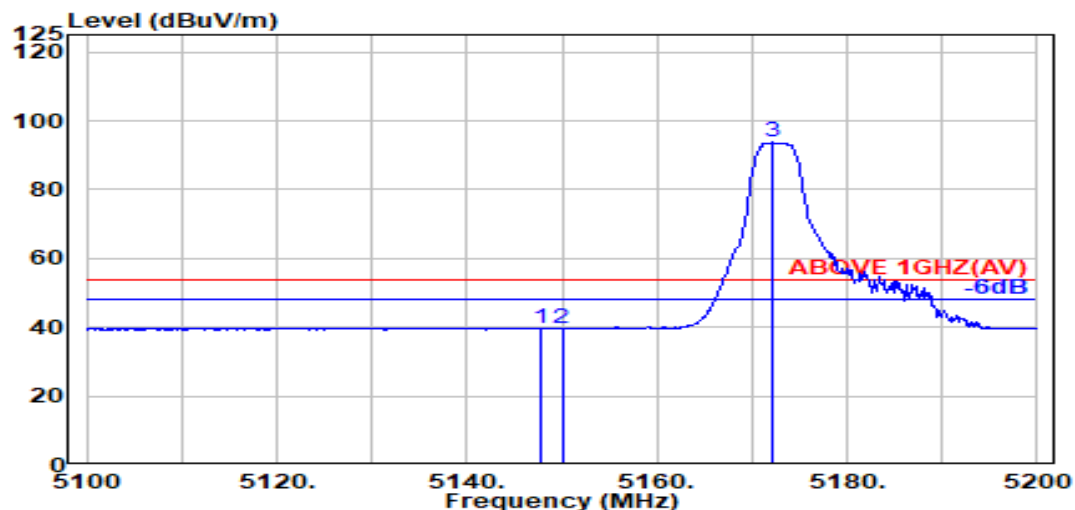

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.800	33.50	8.37	39.19	37.15	39.82	54.00	14.18	Average
5150.000	33.50	8.37	39.19	36.97	39.65	54.00	14.35	Average
@ 5172.100	33.63	8.40	39.19	90.89	93.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

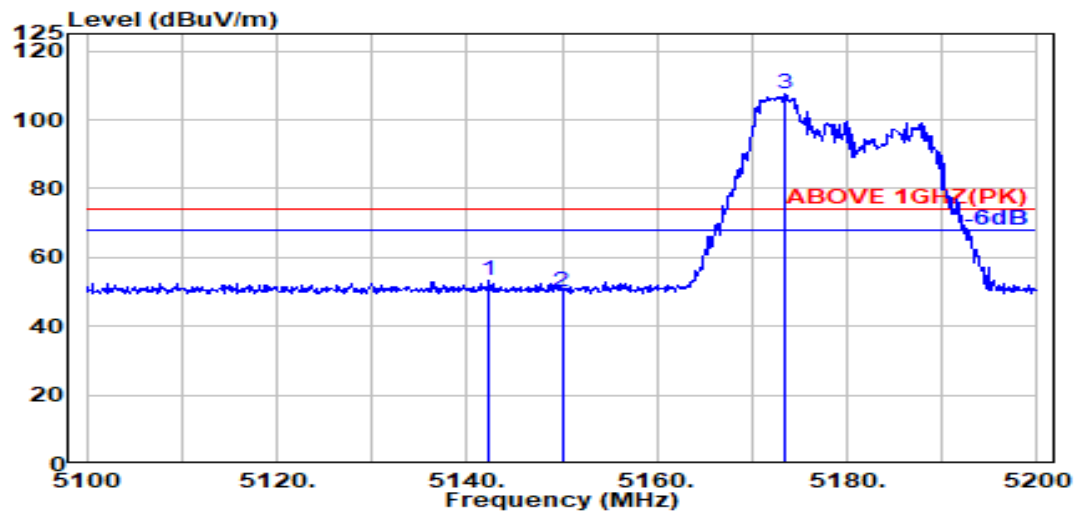

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5142.300	33.48	8.37	39.19	50.57	53.23	74.00	20.77	Peak
5150.000	33.50	8.37	39.19	47.15	49.83	74.00	24.17	Peak
@ 5173.500	33.64	8.40	39.19	104.91	107.76	---	---	Peak

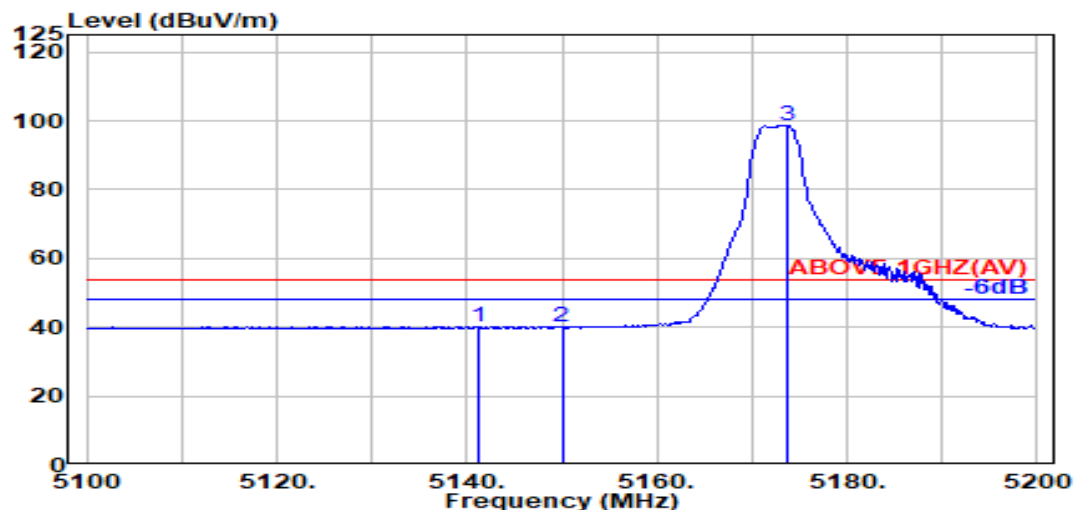

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5141.300	33.48	8.37	39.19	37.48	40.14	54.00	13.86	Average
5150.000	33.50	8.37	39.19	37.27	39.96	54.00	14.04	Average
@ 5173.800	33.64	8.40	39.19	95.82	98.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

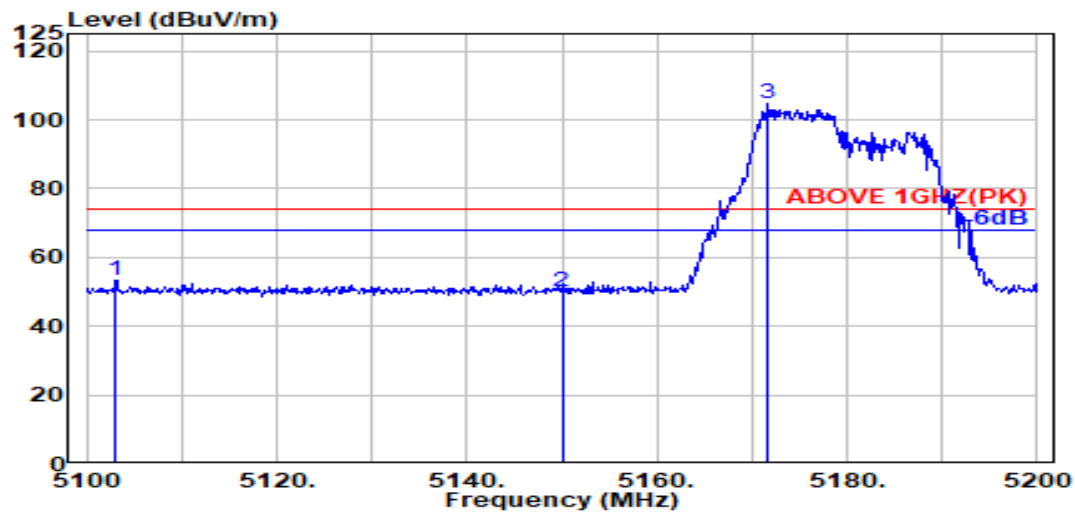

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5103.100	33.41	8.33	39.20	50.76	53.30	74.00	20.70	Peak
5150.000	33.50	8.37	39.19	47.48	50.16	74.00	23.84	Peak
@ 5171.700	33.63	8.40	39.19	101.89	104.73	---	---	Peak

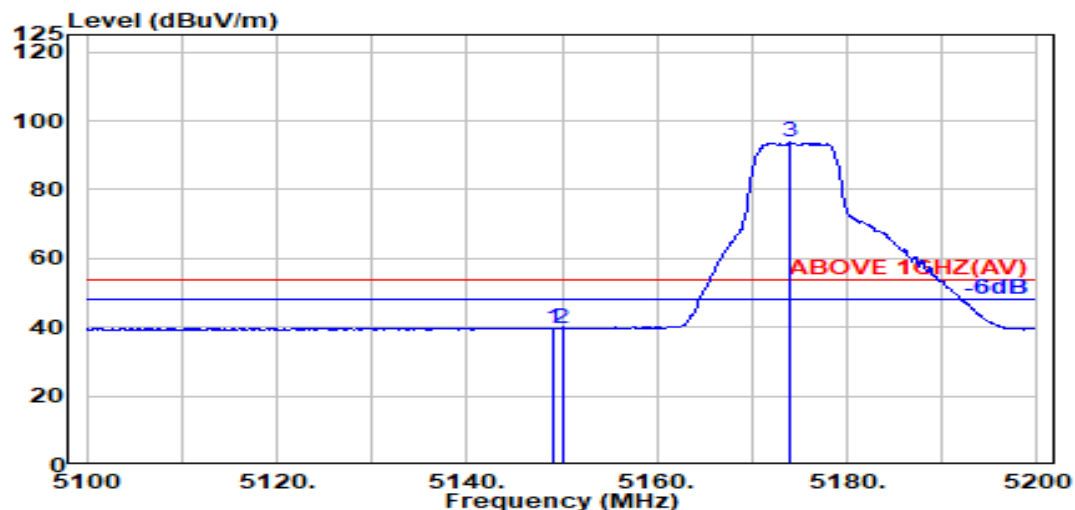

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.100	33.50	8.37	39.19	37.15	39.83	54.00	14.17	Average
5150.000	33.50	8.37	39.19	37.17	39.85	54.00	14.15	Average
@ 5173.900	33.64	8.40	39.19	90.82	93.67	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

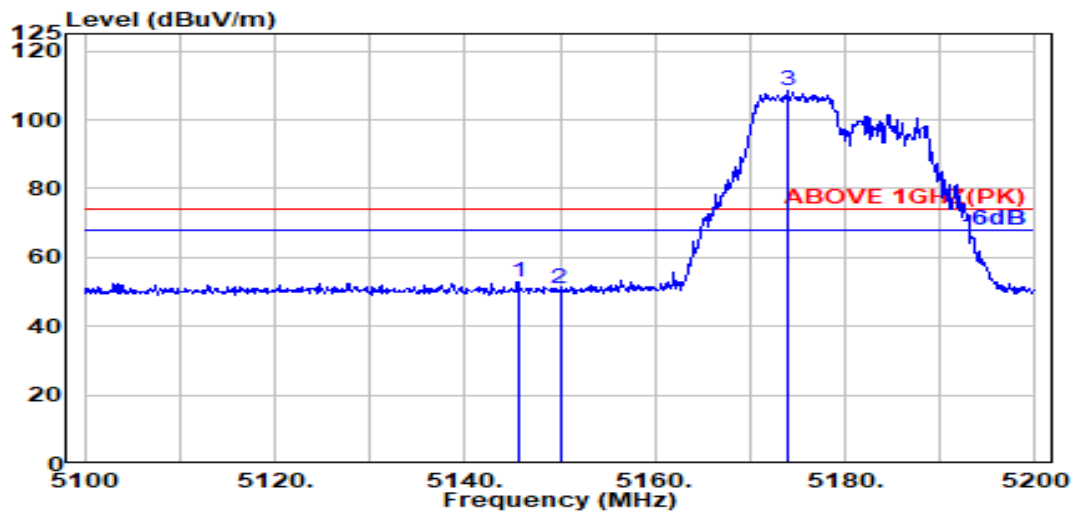

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.600	33.49	8.37	39.19	50.20	52.87	74.00	21.13	Peak
5150.000	33.50	8.37	39.19	48.10	50.78	74.00	23.22	Peak
@ 5173.900	33.64	8.40	39.19	105.70	108.56	---	---	Peak

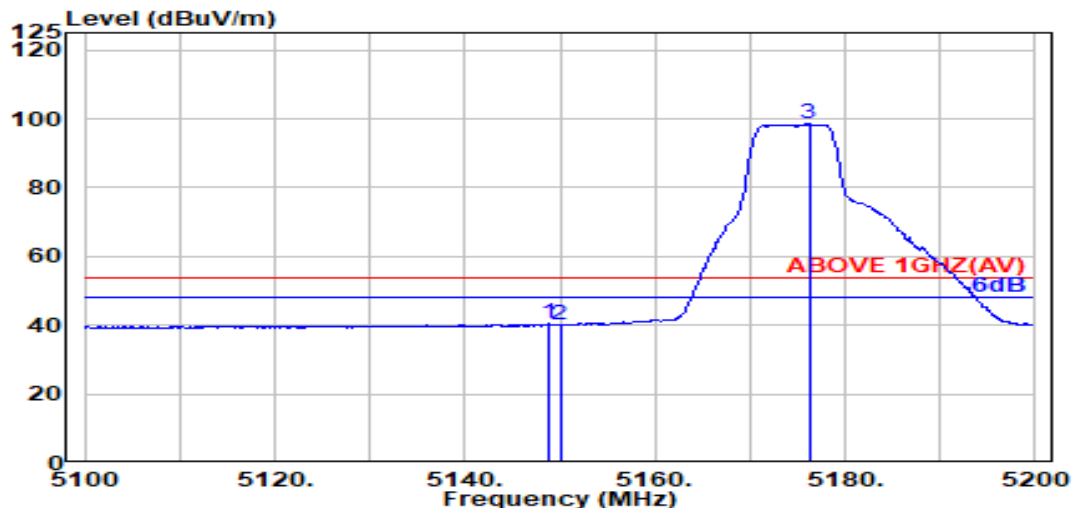

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.900	33.50	8.37	39.19	37.66	40.34	54.00	13.66	Average
5150.000	33.50	8.37	39.19	37.34	40.03	54.00	13.98	Average
@ 5176.200	33.66	8.40	39.19	95.78	98.65	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

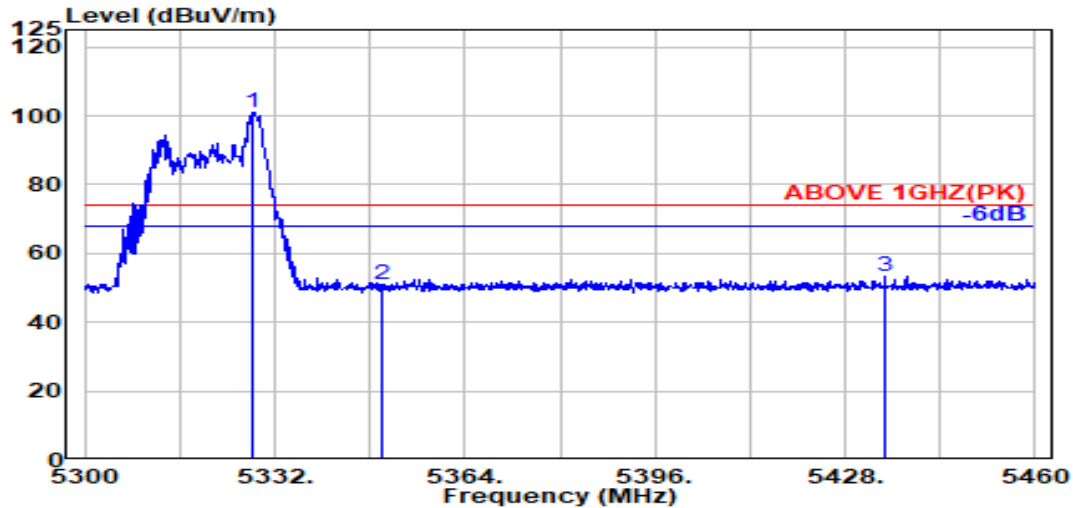

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.74	8.55	39.17	97.83	100.95	---	---	Peak
5350.000	33.70	8.57	39.17	47.77	50.87	74.00	23.13	Peak
5434.800	33.97	8.65	39.16	49.82	53.29	74.00	20.71	Peak

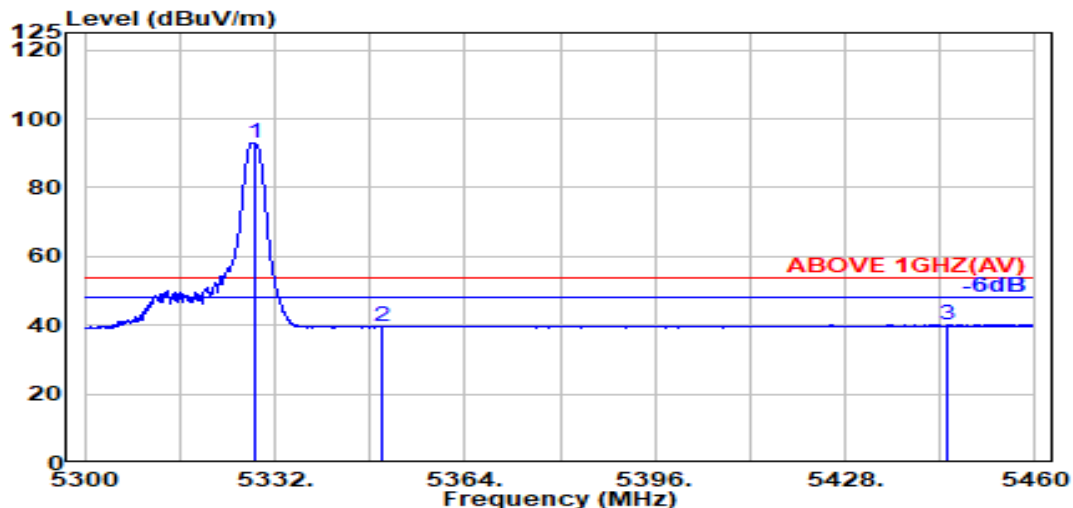

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.600	33.74	8.55	39.17	89.72	92.84	---	---	Average
5350.000	33.70	8.57	39.17	36.54	39.65	54.00	14.35	Average
5445.300	33.99	8.66	39.16	36.61	40.11	54.00	13.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

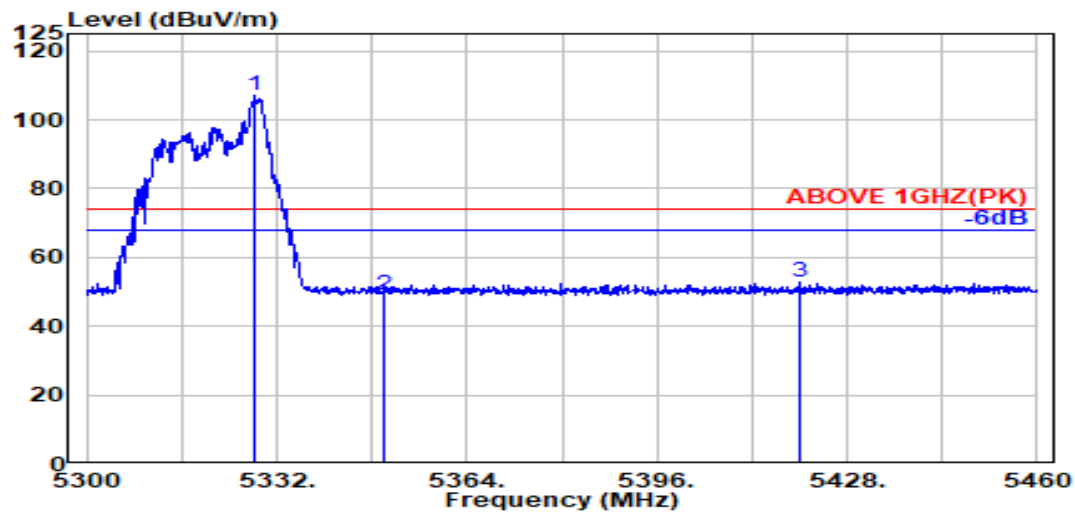

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.74	8.55	39.17	103.73	106.85	---	---	Peak
5350.000	33.70	8.57	39.17	46.11	49.21	74.00	24.79	Peak
5420.100	33.94	8.64	39.16	49.51	52.93	74.00	21.07	Peak

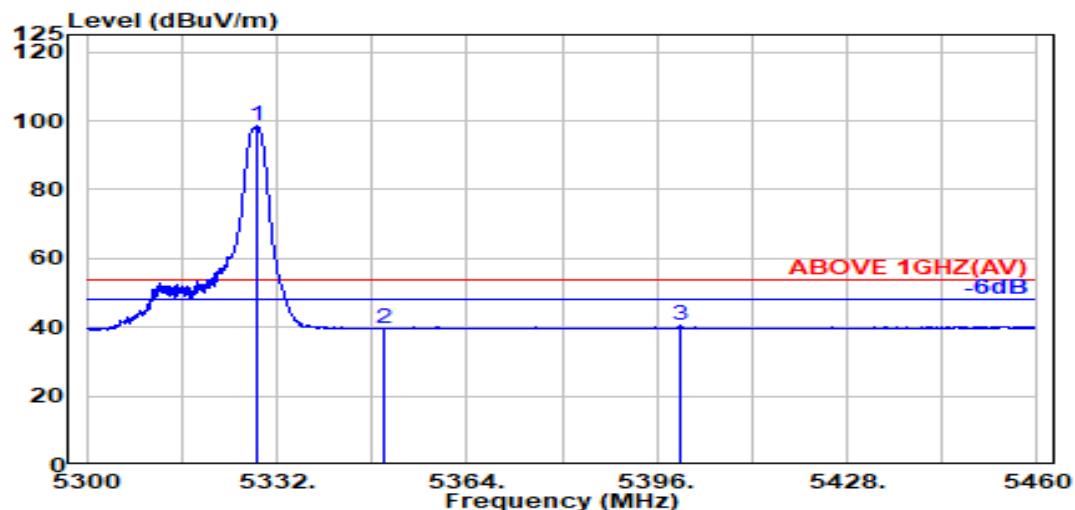

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.74	8.55	39.17	95.29	98.42	---	---	Average
5350.000	33.70	8.57	39.17	36.44	39.55	54.00	14.45	Average
5400.100	33.90	8.62	39.16	36.99	40.35	54.00	13.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

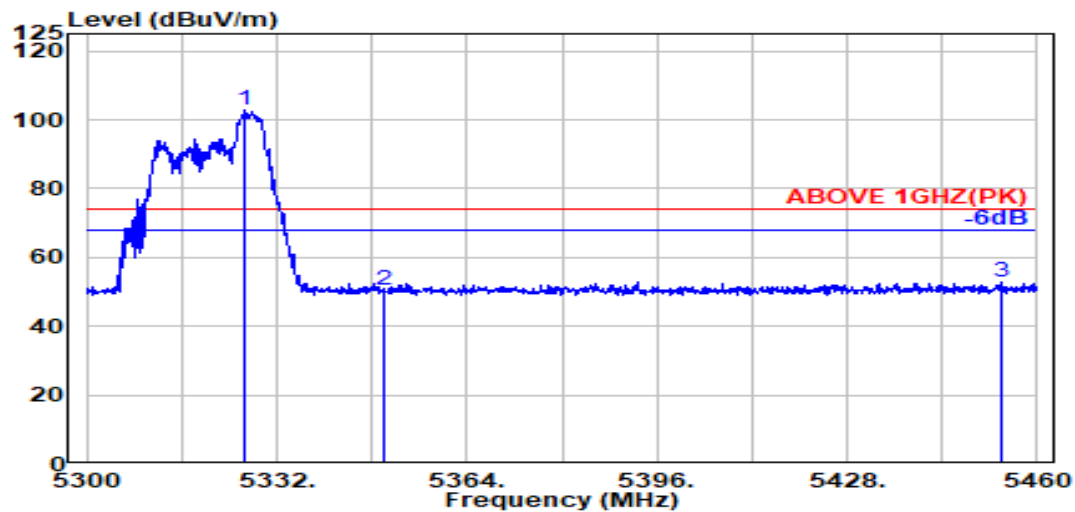

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.500	33.75	8.55	39.17	99.55	102.68	---	---	Peak
5350.000	33.70	8.57	39.17	47.25	50.36	74.00	23.64	Peak
5454.000	34.01	8.67	39.16	49.30	52.82	74.00	21.18	Peak

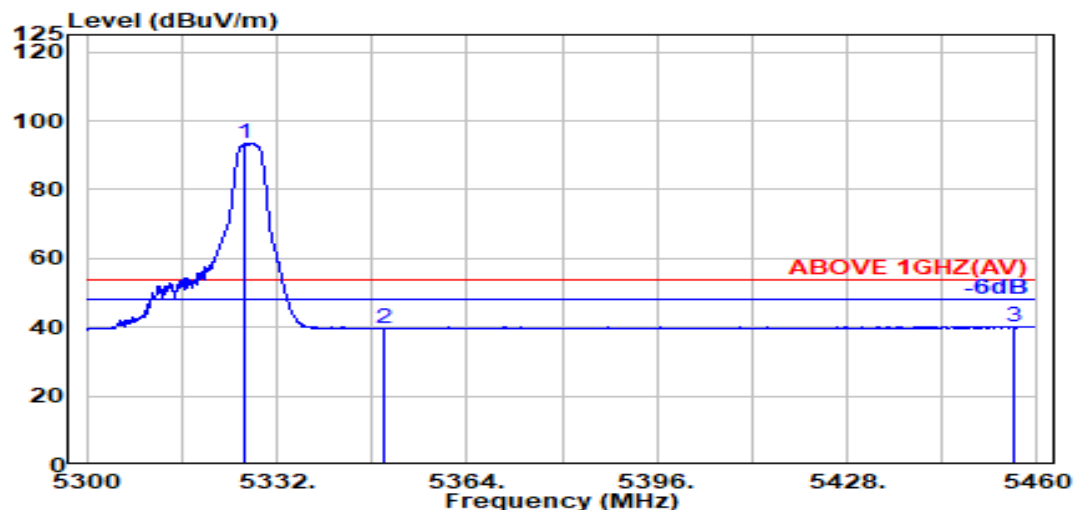

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.500	33.75	8.55	39.17	90.33	93.46	---	---	Average
5350.000	33.70	8.57	39.17	36.47	39.57	54.00	14.43	Average
5456.000	34.01	8.67	39.16	36.60	40.14	54.00	13.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

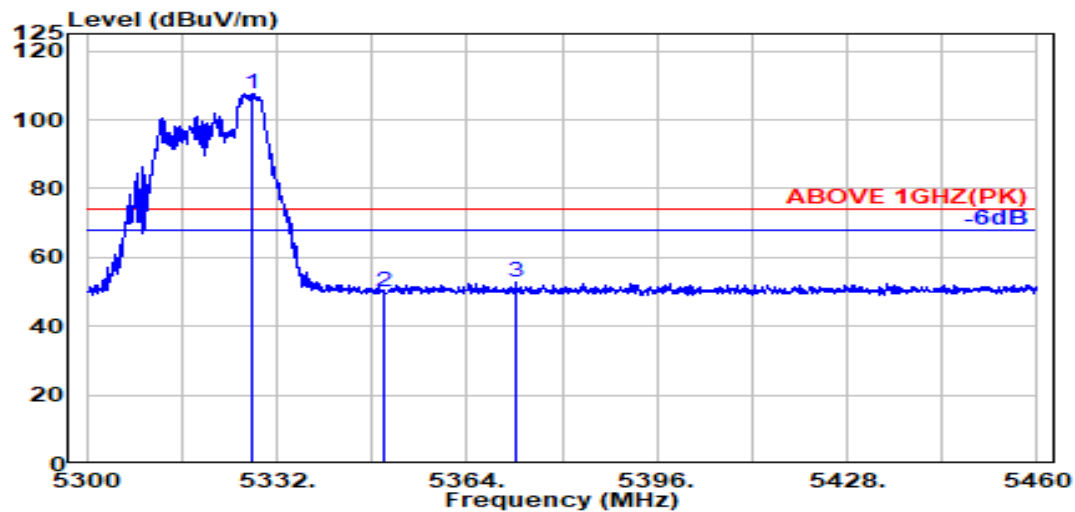

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.74	8.55	39.17	104.65	107.78	---	---	Peak
5350.000	33.70	8.57	39.17	46.84	49.95	74.00	24.05	Peak
5372.200	33.79	8.59	39.16	49.41	52.63	74.00	21.37	Peak

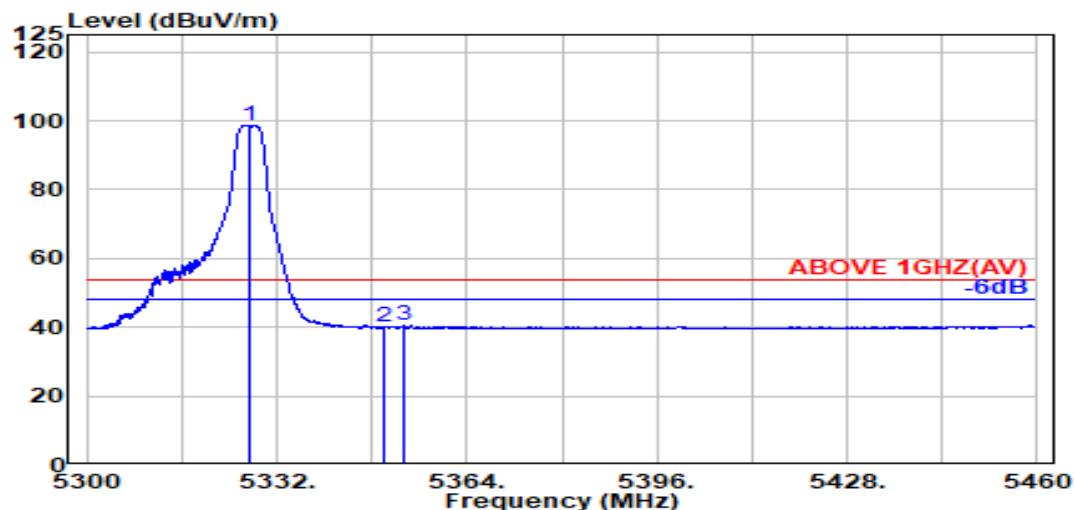

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.74	8.55	39.17	95.47	98.60	---	---	Average
5350.000	33.70	8.57	39.17	37.03	40.13	54.00	13.87	Average
5353.200	33.71	8.58	39.17	37.25	40.38	54.00	13.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

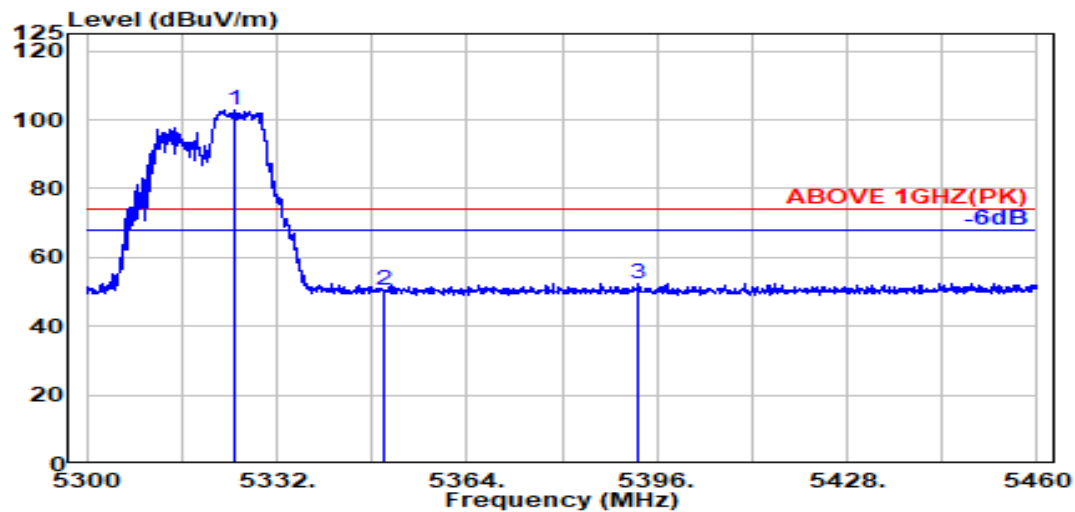

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.000	33.75	8.55	39.17	99.53	102.65	---	---	Peak
5350.000	33.70	8.57	39.17	47.20	50.30	74.00	23.70	Peak
5392.900	33.87	8.61	39.16	49.24	52.57	74.00	21.43	Peak

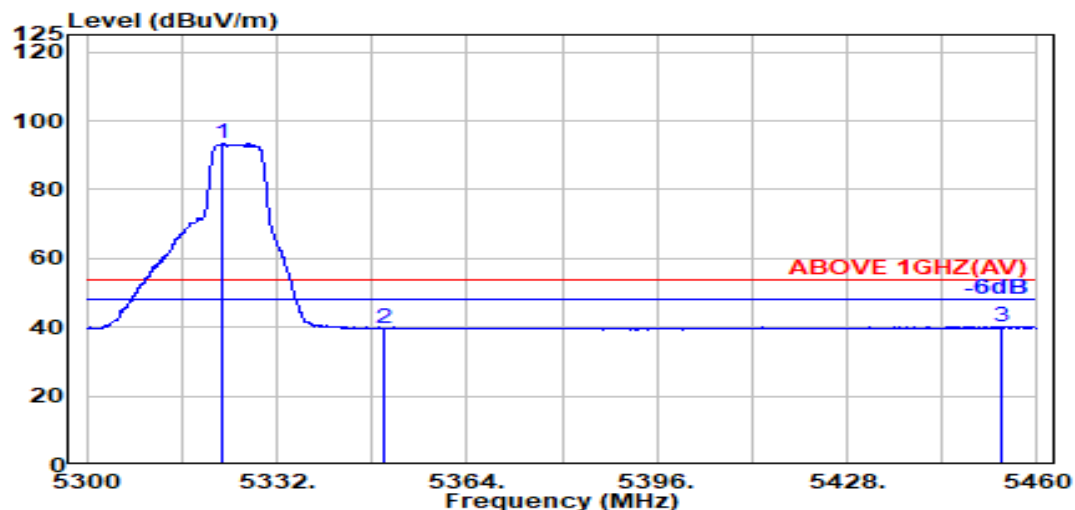

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.800	33.75	8.55	39.17	90.34	93.47	---	---	Average
5350.000	33.70	8.57	39.17	36.63	39.74	54.00	14.26	Average
5453.900	34.01	8.67	39.16	36.60	40.13	54.00	13.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

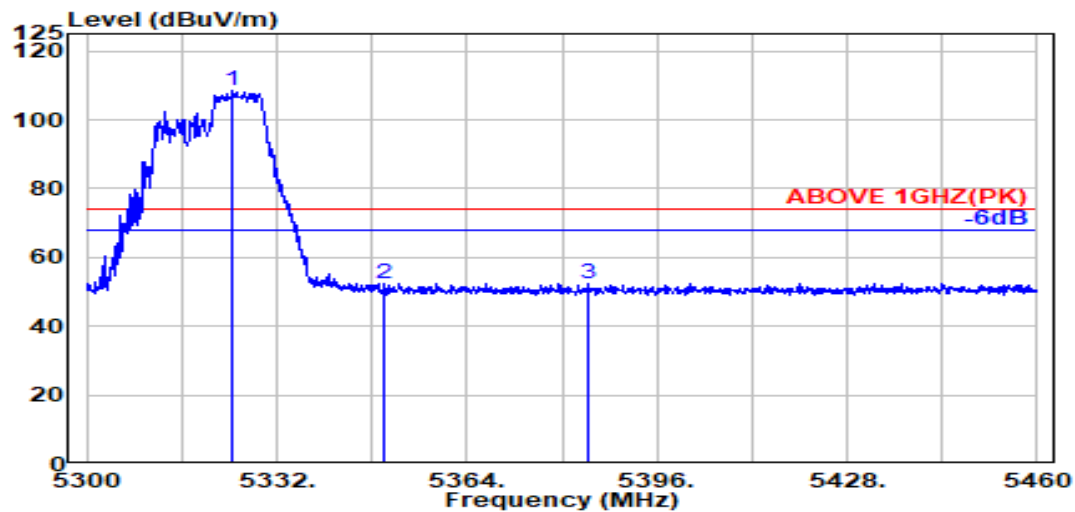

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.600	33.75	8.55	39.17	105.14	108.27	---	---	Peak
5350.000	33.70	8.57	39.17	49.30	52.41	74.00	21.59	Peak
5384.400	33.84	8.61	39.16	49.22	52.50	74.00	21.50	Peak

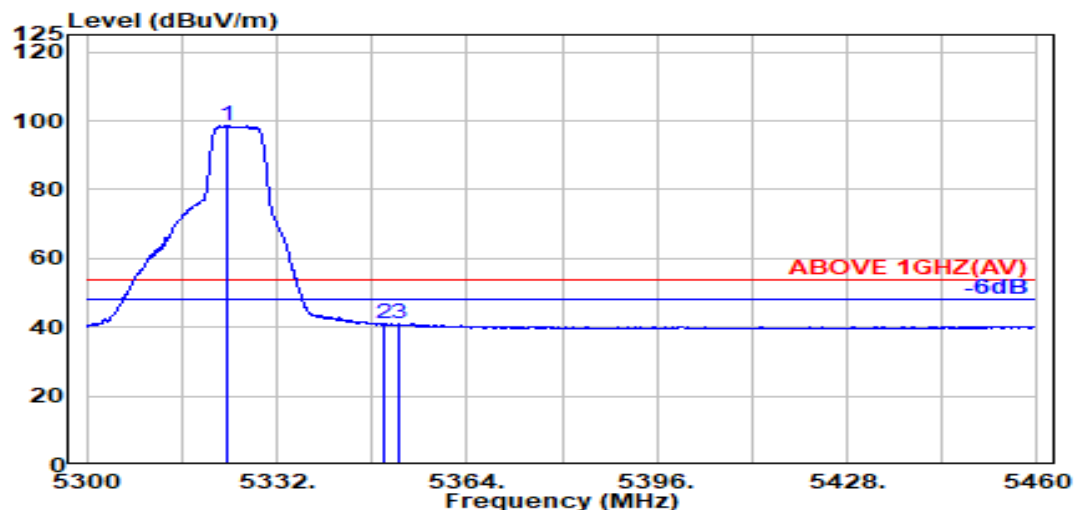

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.800	33.75	8.55	39.17	95.32	98.45	---	---	Average
5350.000	33.70	8.57	39.17	37.72	40.83	54.00	13.17	Average
5352.600	33.71	8.58	39.17	38.01	41.13	54.00	12.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

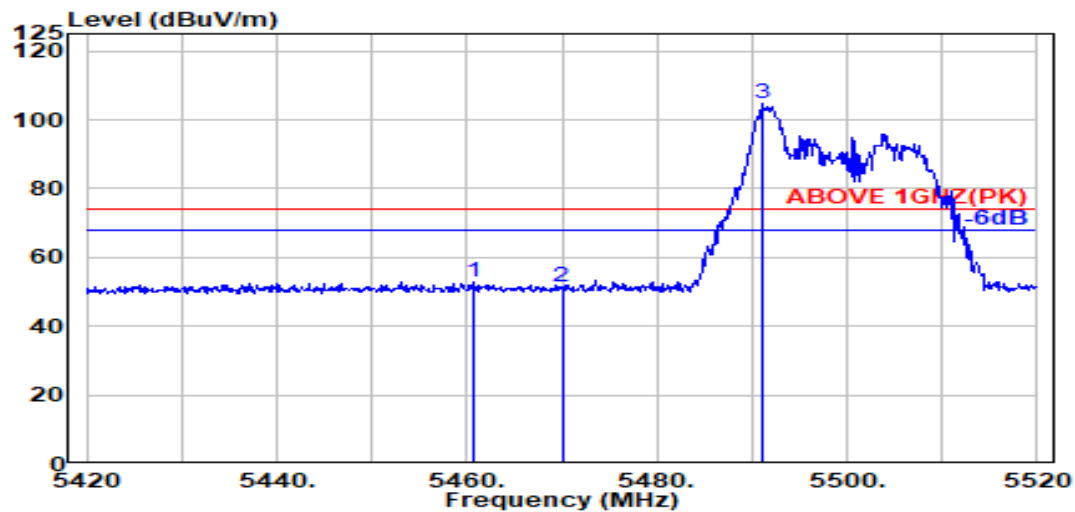

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	34.02	8.68	39.15	49.47	53.02	74.00	20.98	Peak
5470.000	34.04	8.69	39.15	47.70	51.27	74.00	22.73	Peak
@ 5491.100	34.08	8.71	39.15	100.85	104.49	---	---	Peak

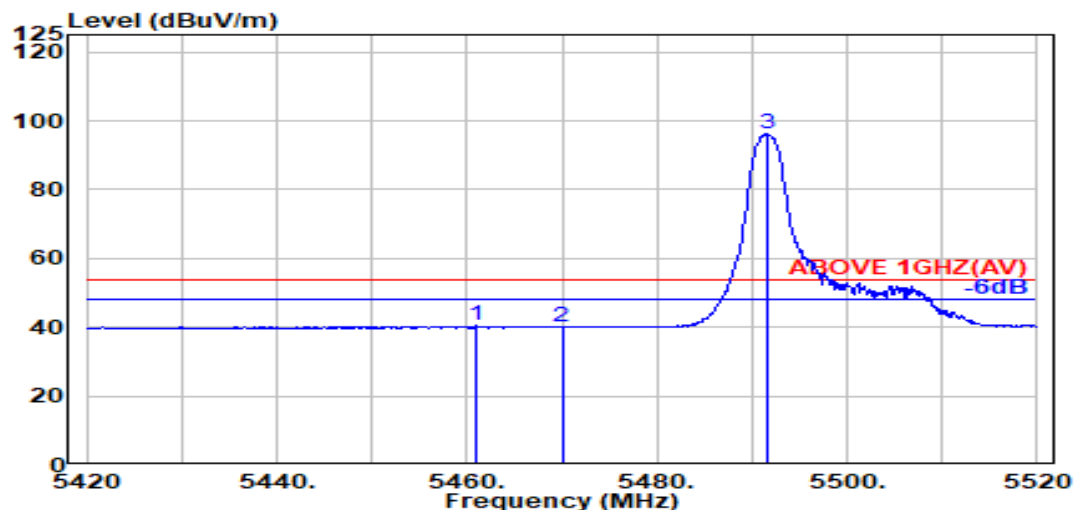

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.000	34.02	8.68	39.15	36.82	40.37	54.00	13.63	Average
5470.000	34.04	8.69	39.15	36.54	40.12	54.00	13.88	Average
@ 5491.500	34.08	8.71	39.15	92.63	96.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

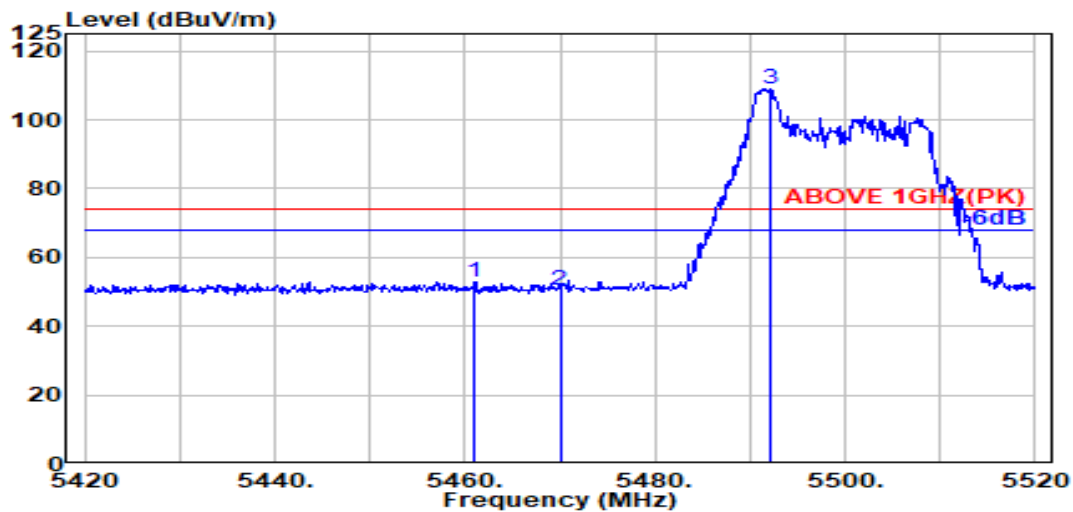

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.000	34.02	8.68	39.15	49.27	52.82	74.00	21.18	Peak
5470.000	34.04	8.69	39.15	46.84	50.42	74.00	23.58	Peak
@ 5492.100	34.08	8.71	39.15	105.49	109.13	---	---	Peak

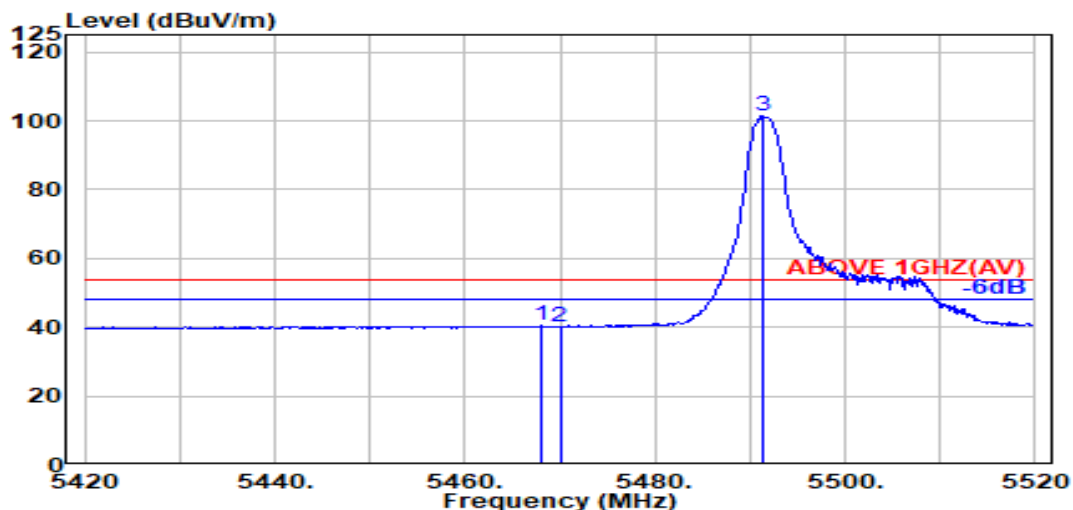

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.000	34.04	8.69	39.15	36.76	40.33	54.00	13.67	Average
5470.000	34.04	8.69	39.15	36.62	40.19	54.00	13.81	Average
@ 5491.300	34.08	8.71	39.15	97.60	101.24	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

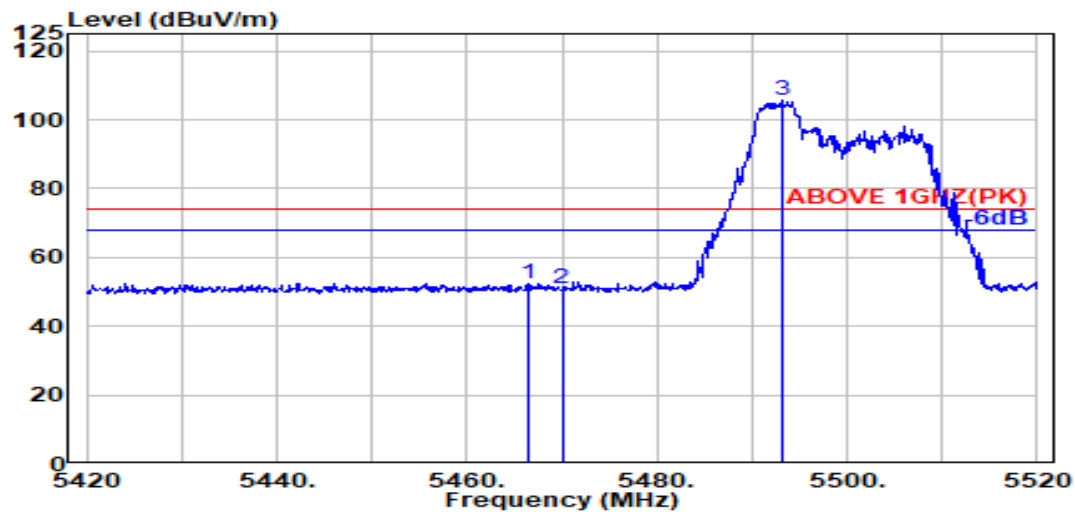

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.400	34.03	8.68	39.15	48.91	52.47	74.00	21.53	Peak
5470.000	34.04	8.69	39.15	47.46	51.03	74.00	22.97	Peak
@ 5493.200	34.09	8.71	39.15	102.22	105.86	---	---	Peak

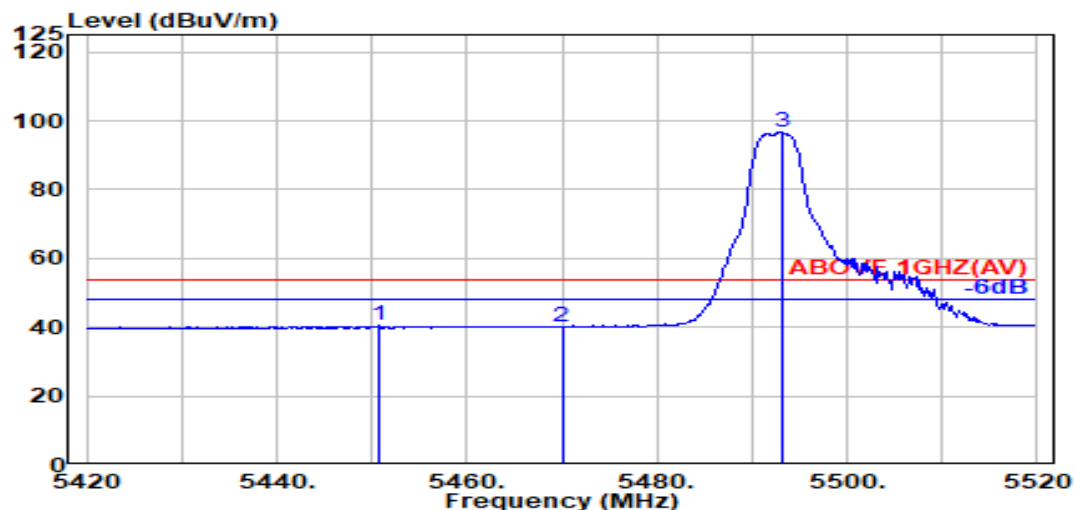

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5450.700	34.00	8.67	39.16	36.83	40.34	54.00	13.66	Average
5470.000	34.04	8.69	39.15	36.50	40.07	54.00	13.93	Average
@ 5493.100	34.09	8.71	39.15	93.02	96.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

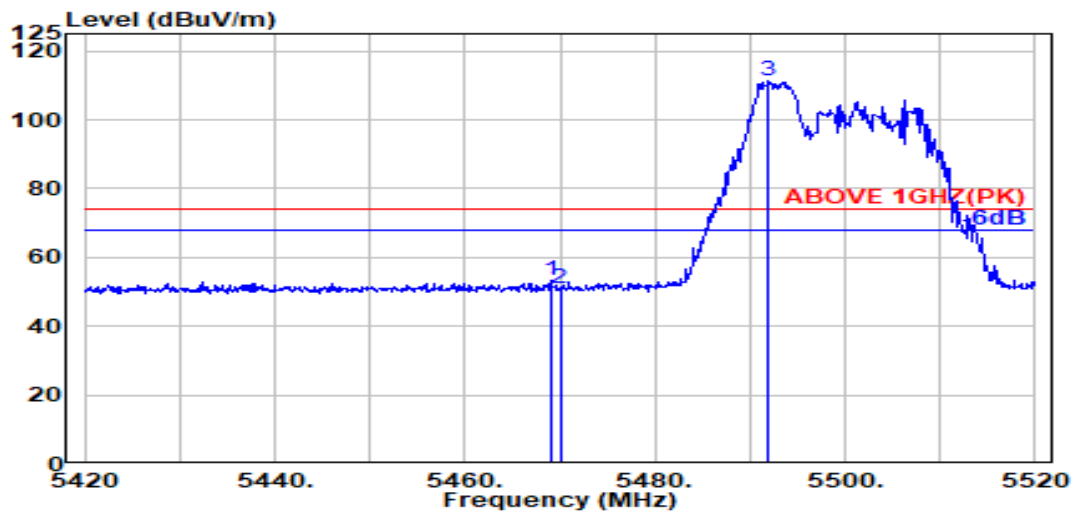

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	49.88	53.45	74.00	20.55	Peak
5470.000	34.04	8.69	39.15	47.44	51.02	74.00	22.98	Peak
@ 5491.900	34.08	8.71	39.15	107.59	111.23	---	---	Peak

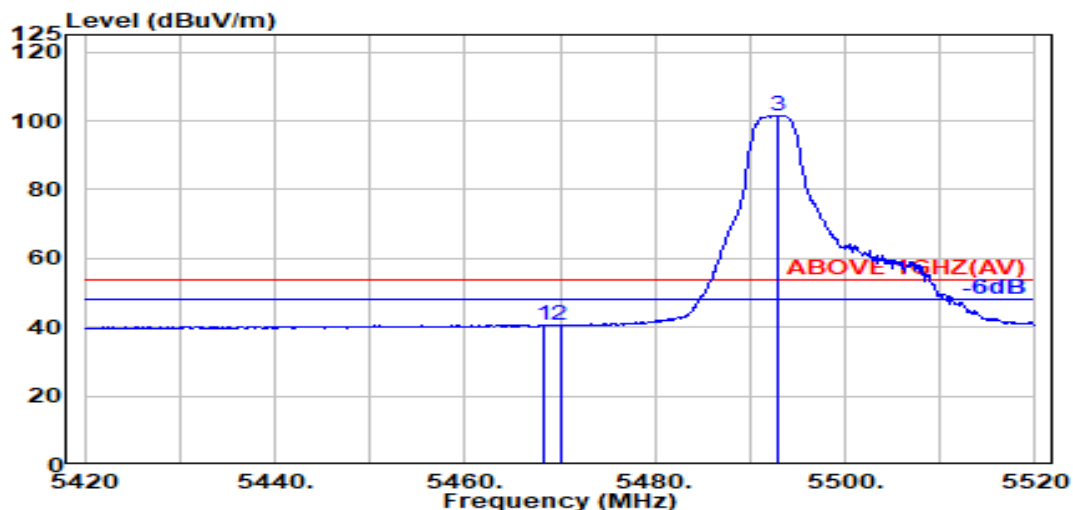

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.200	34.04	8.69	39.15	37.12	40.69	54.00	13.31	Average
5470.000	34.04	8.69	39.15	37.09	40.66	54.00	13.34	Average
@ 5492.900	34.09	8.71	39.15	97.94	101.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

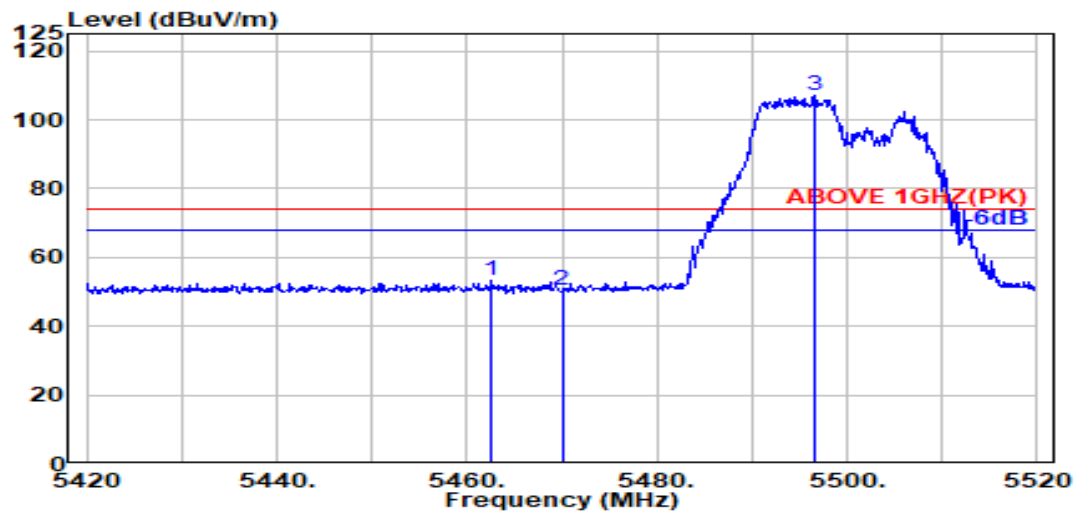

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.600	34.03	8.68	39.15	49.76	53.31	74.00	20.69	Peak
5470.000	34.04	8.69	39.15	46.80	50.38	74.00	23.62	Peak
@ 5496.500	34.09	8.71	39.15	103.22	106.87	---	---	Peak

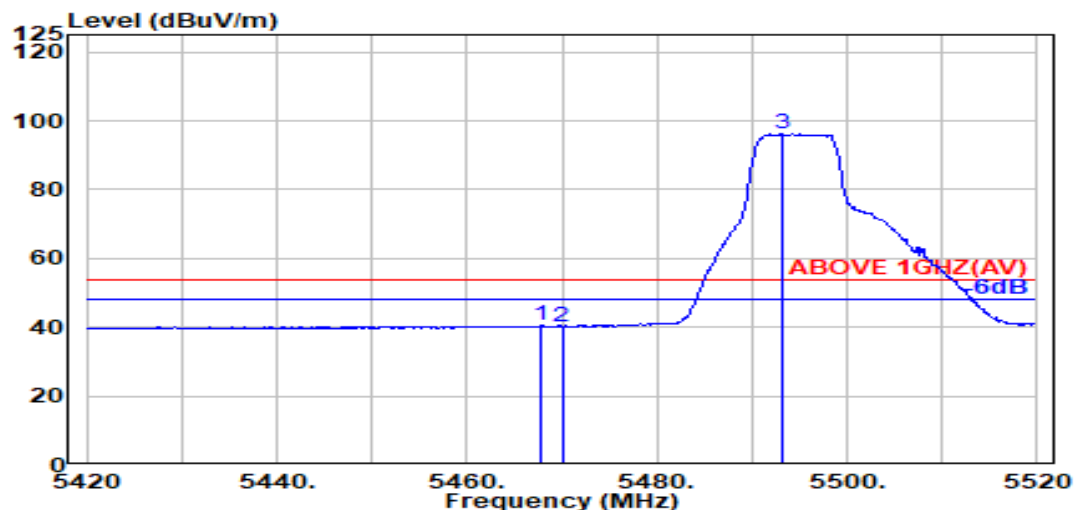

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.04	8.69	39.15	36.86	40.43	54.00	13.57	Average
5470.000	34.04	8.69	39.15	36.64	40.21	54.00	13.79	Average
@ 5493.100	34.09	8.71	39.15	92.51	96.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

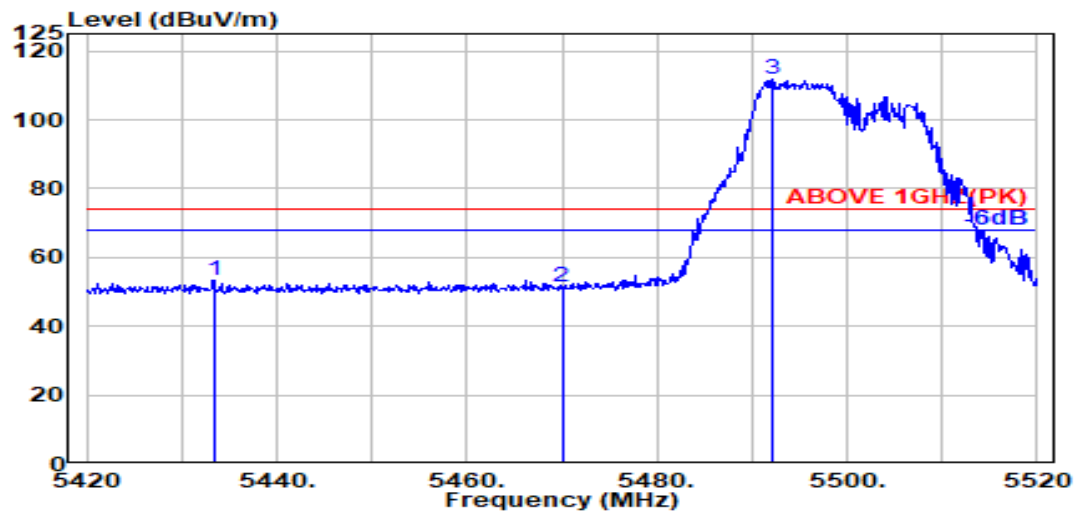

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5433.400	33.97	8.65	39.16	49.84	53.30	74.00	20.70	Peak
5470.000	34.04	8.69	39.15	47.82	51.39	74.00	22.61	Peak
@ 5492.100	34.08	8.71	39.15	107.98	111.62	---	---	Peak

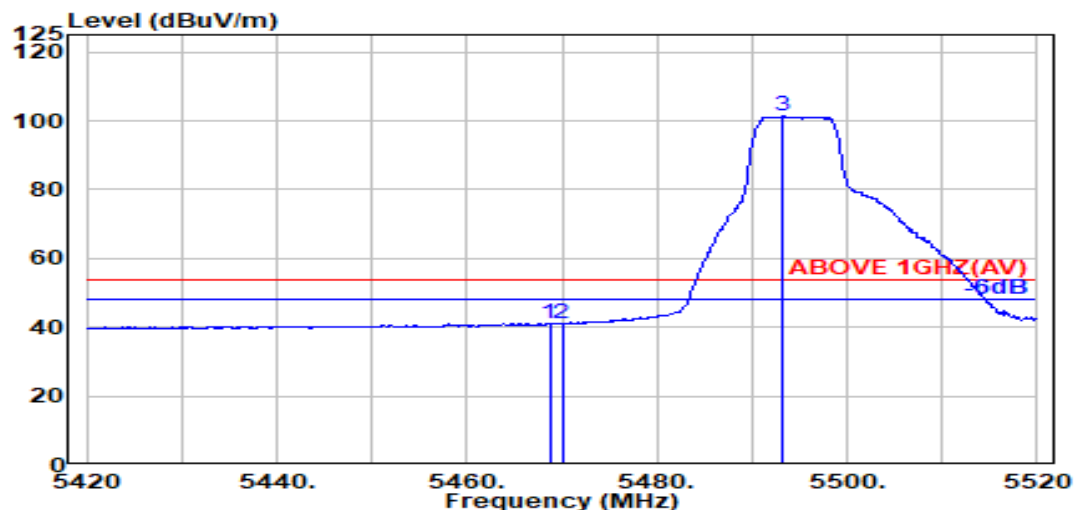

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.700	34.04	8.69	39.15	37.42	40.99	54.00	13.01	Average
5470.000	34.04	8.69	39.15	37.49	41.07	54.00	12.93	Average
@ 5493.300	34.09	8.71	39.15	97.76	101.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	26/8	Frequency	TX 5700MHz

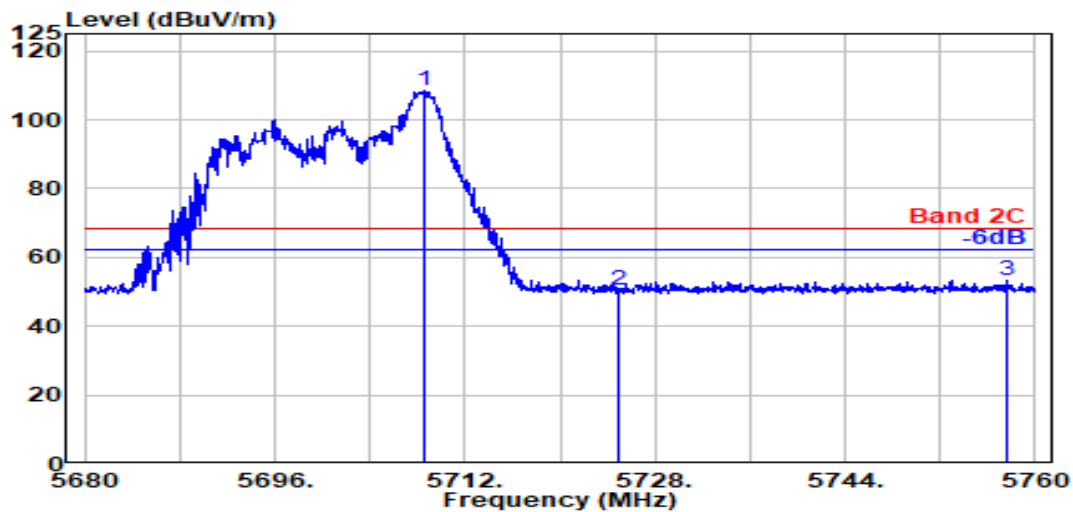

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.550	33.60	8.91	39.19	105.27	108.59	---	---	Peak
5725.000	33.60	8.93	39.20	47.02	50.35	68.20	17.85	Peak
5757.650	33.63	8.96	39.20	49.77	53.16	68.20	15.04	Peak

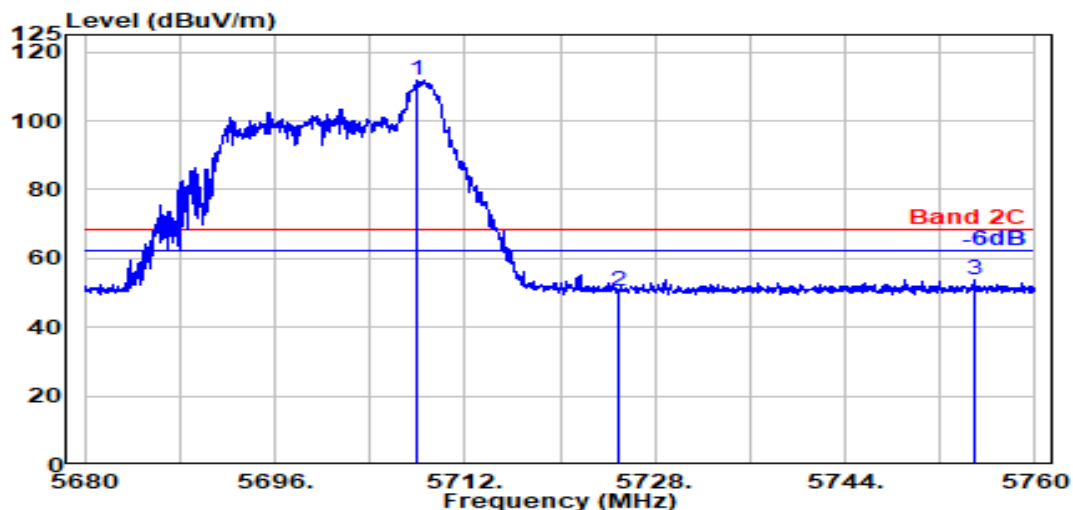

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.950	33.60	8.91	39.19	108.38	111.70	---	---	Peak
5725.000	33.60	8.93	39.20	46.98	50.31	68.20	17.89	Peak
5754.800	33.62	8.95	39.20	50.59	53.96	68.20	14.24	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	52/40	Frequency	TX 5700MHz

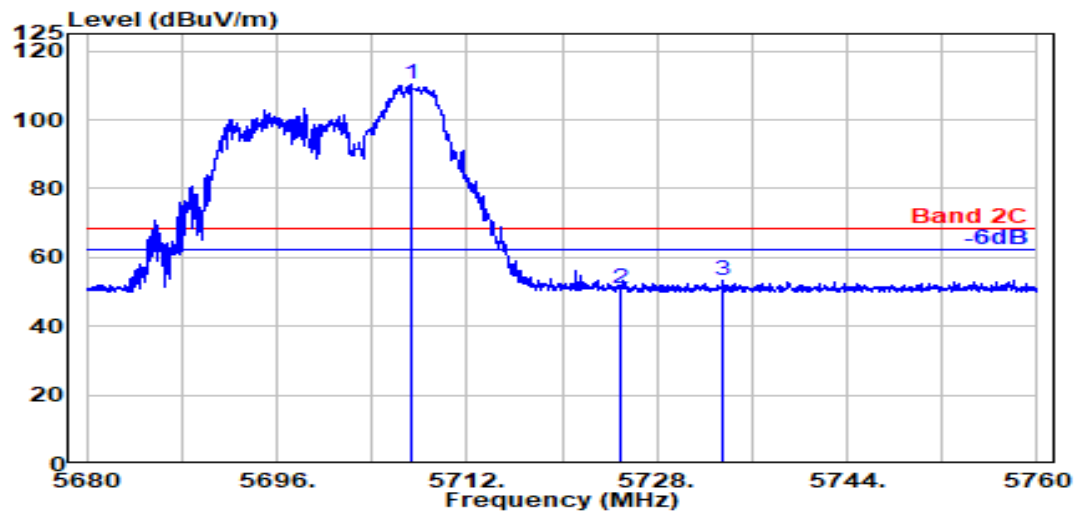

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.250	33.60	8.91	39.19	107.03	110.35	---	---	Peak
5725.000	33.60	8.93	39.20	47.68	51.01	68.20	17.19	Peak
5733.500	33.60	8.93	39.20	49.85	53.19	68.20	15.01	Peak

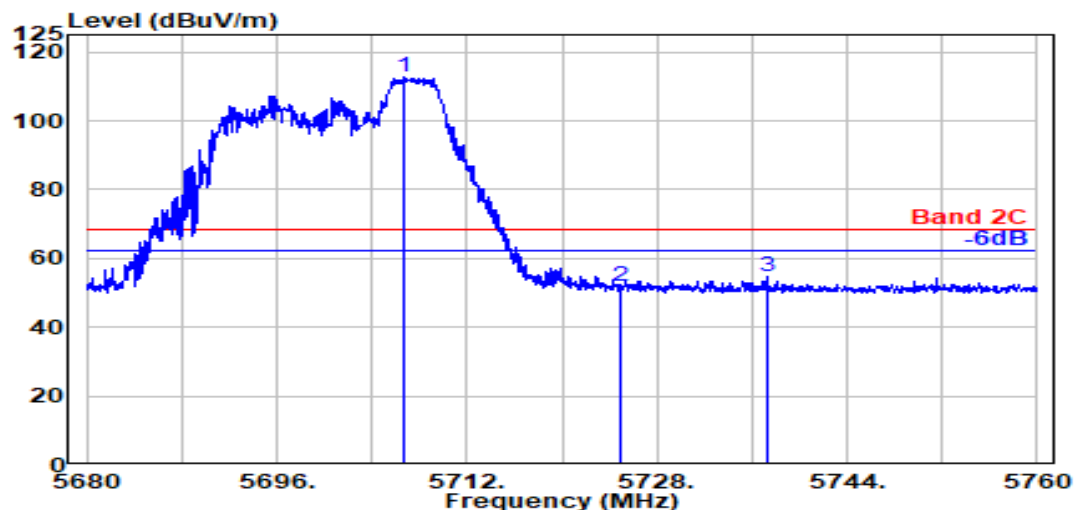

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.750	33.60	8.91	39.19	109.40	112.71	---	---	Peak
5725.000	33.60	8.93	39.20	48.72	52.05	68.20	16.15	Peak
5737.250	33.60	8.94	39.20	51.15	54.49	68.20	13.71	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
RU Configuration	106/54	Frequency	TX 5700MHz

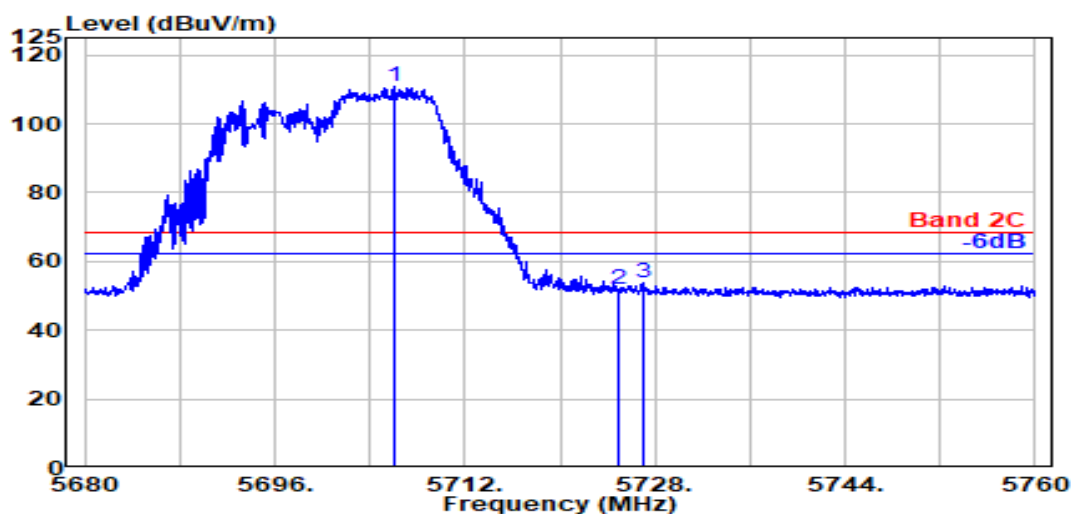

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.150	33.60	8.91	39.19	107.56	110.87	---	---	Peak
5725.000	33.60	8.93	39.20	48.37	51.70	68.20	16.50	Peak
5727.000	33.60	8.93	39.20	50.40	53.73	68.20	14.47	Peak

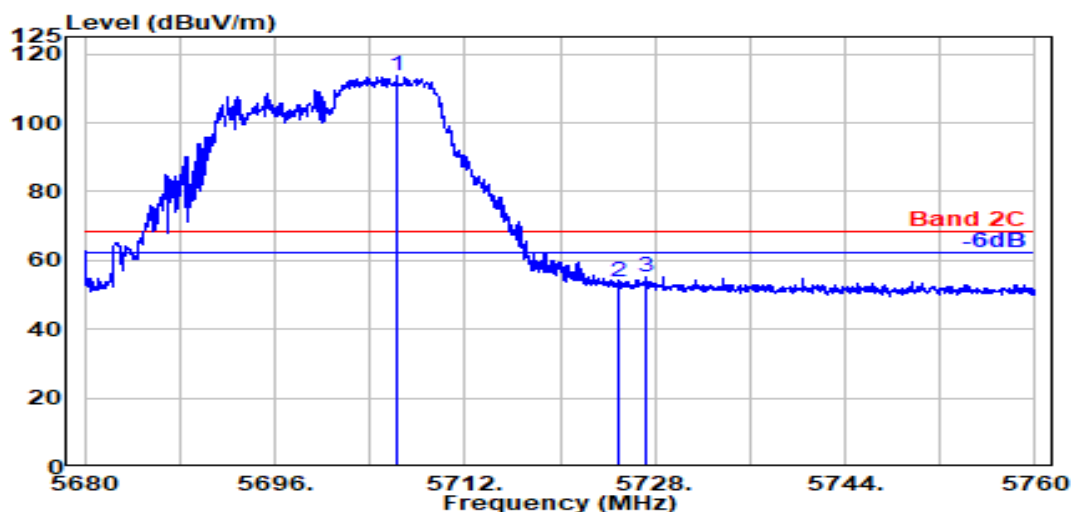

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.300	33.60	8.91	39.19	110.19	113.51	---	---	Peak
5725.000	33.60	8.93	39.20	50.49	53.82	68.20	14.38	Peak
5727.200	33.60	8.93	39.20	51.93	55.26	68.20	12.94	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

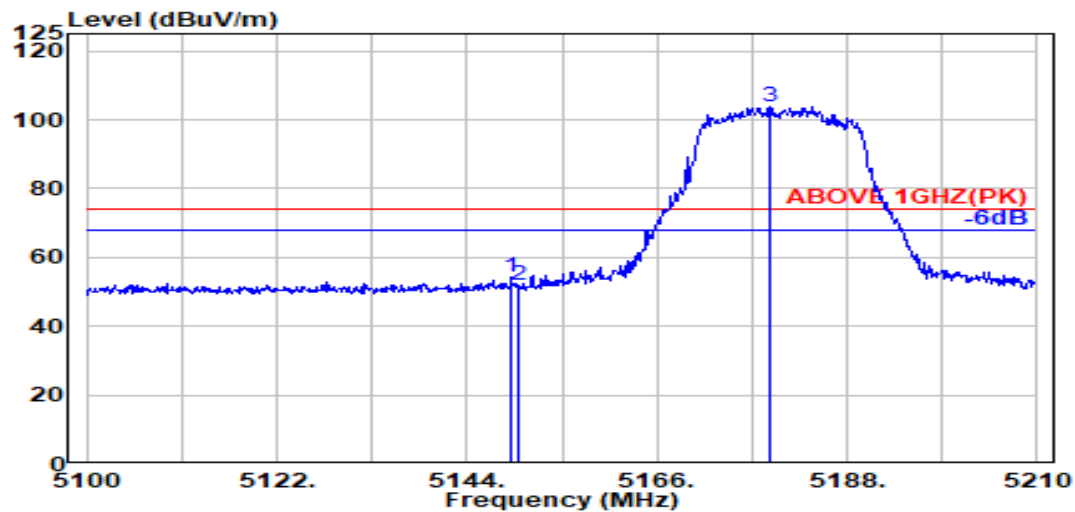

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.060	33.50	8.37	39.19	51.80	54.48	74.00	19.52	Peak
5150.000	33.50	8.37	39.19	49.06	51.75	74.00	22.25	Peak
@ 5179.200	33.68	8.40	39.19	100.91	103.80	---	---	Peak

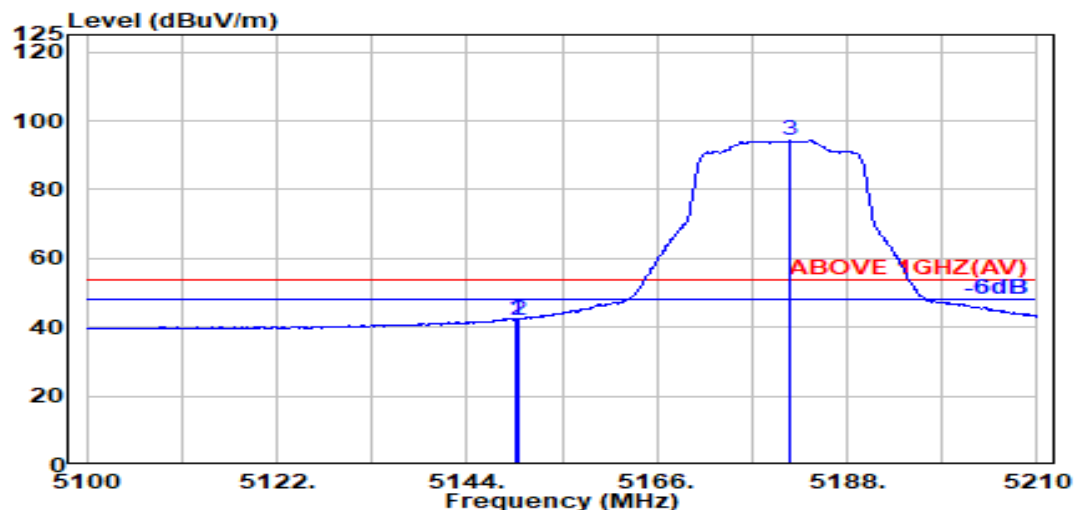

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.610	33.50	8.37	39.19	39.85	42.53	54.00	11.47	Average
5150.000	33.50	8.37	39.19	39.46	42.14	54.00	11.86	Average
@ 5181.400	33.69	8.41	39.19	91.52	94.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

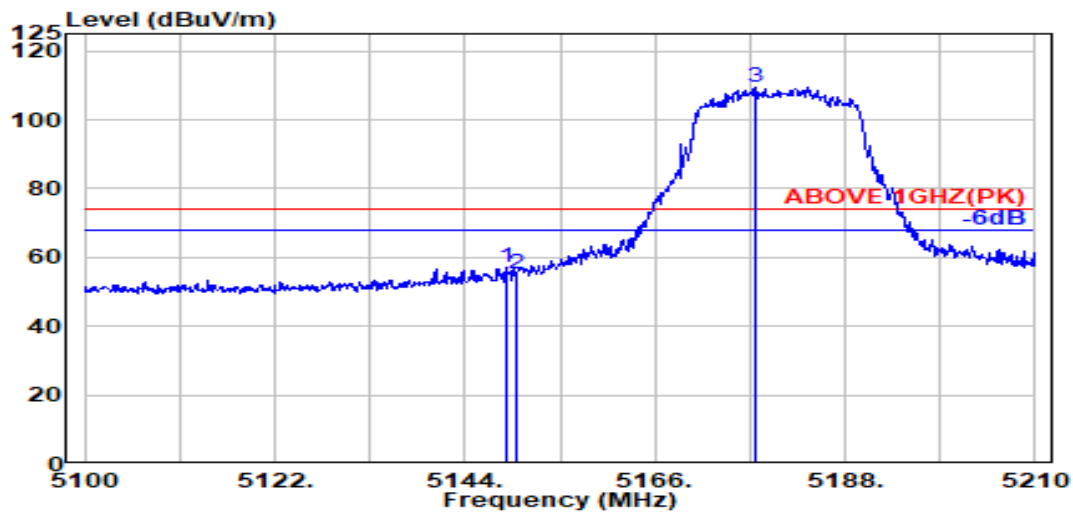

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.730	33.50	8.37	39.19	54.18	56.86	74.00	17.14	Peak
5150.000	33.50	8.37	39.19	52.52	55.21	74.00	18.79	Peak
@ 5177.660	33.67	8.40	39.19	106.55	109.43	---	---	Peak

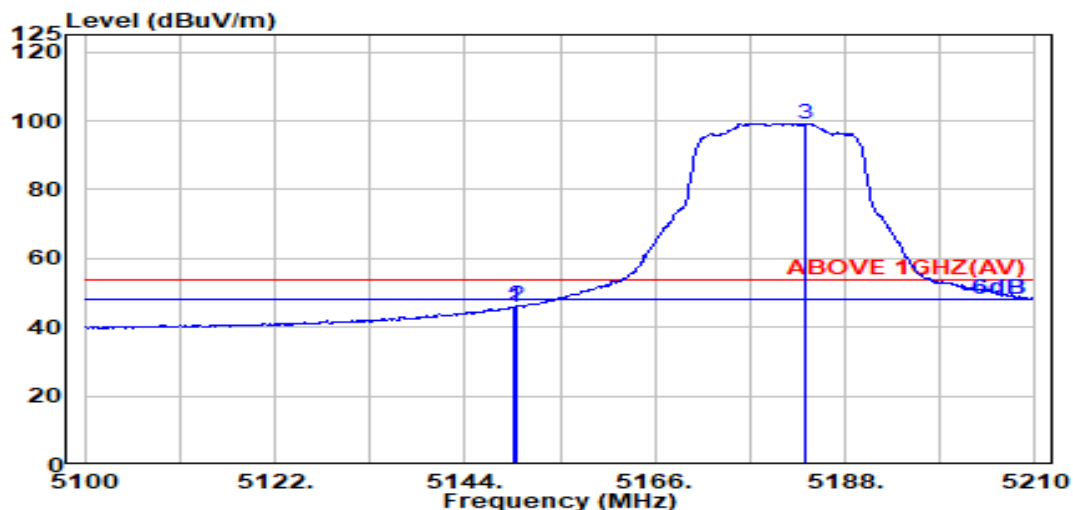

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	33.50	8.37	39.19	42.98	45.66	54.00	8.34	Average
5150.000	33.50	8.37	39.19	43.66	46.34	54.00	7.66	Average
@ 5183.380	33.70	8.41	39.19	96.36	99.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

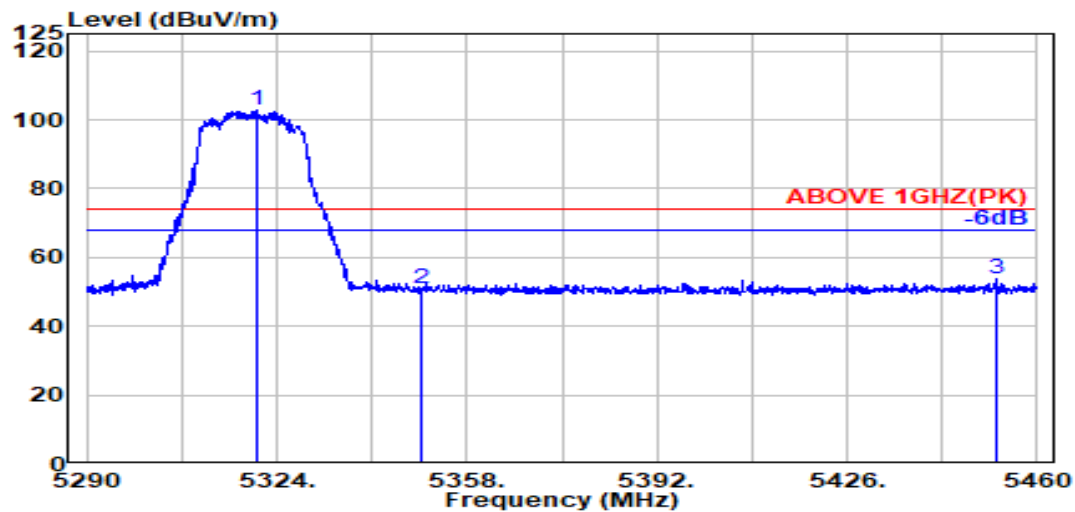

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5320.300	33.76	8.54	39.17	99.71	102.84	---	---	Peak
5350.000	33.70	8.57	39.17	47.67	50.77	74.00	23.23	Peak
5452.700	34.01	8.67	39.16	50.11	53.63	74.00	20.37	Peak

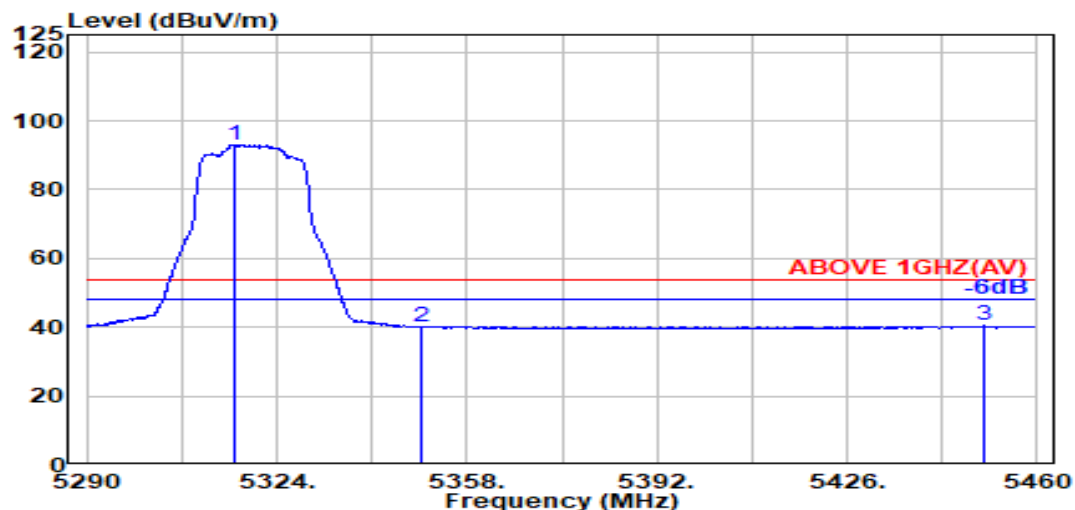

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.300	33.77	8.54	39.17	89.93	93.06	---	---	Average
5350.000	33.70	8.57	39.17	37.12	40.23	54.00	13.77	Average
5450.700	34.00	8.67	39.16	36.82	40.34	54.00	13.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

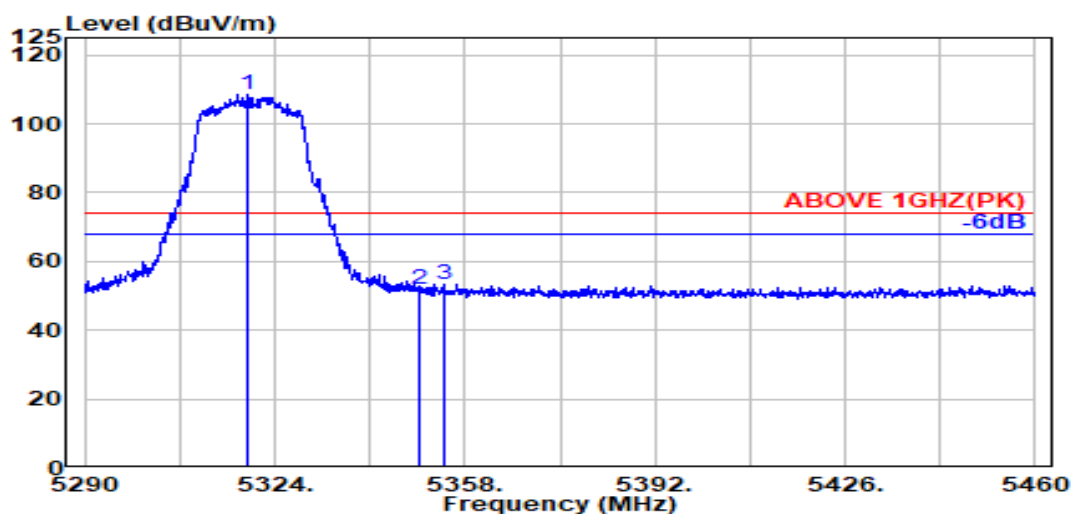

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5319.200	33.76	8.54	39.17	105.27	108.40	---	---	Peak
5350.000	33.70	8.57	39.17	48.64	51.74	74.00	22.26	Peak
5354.400	33.72	8.58	39.17	50.23	53.35	74.00	20.65	Peak

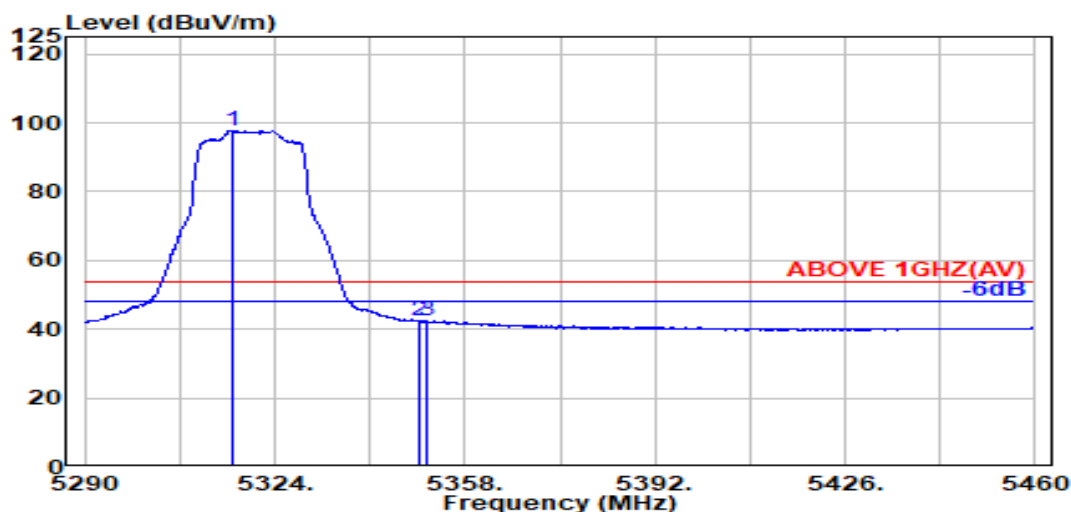

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.500	33.77	8.54	39.17	94.65	97.78	---	---	Average
5350.000	33.70	8.57	39.17	39.17	42.27	54.00	11.73	Average
5351.100	33.70	8.57	39.17	39.29	42.40	54.00	11.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

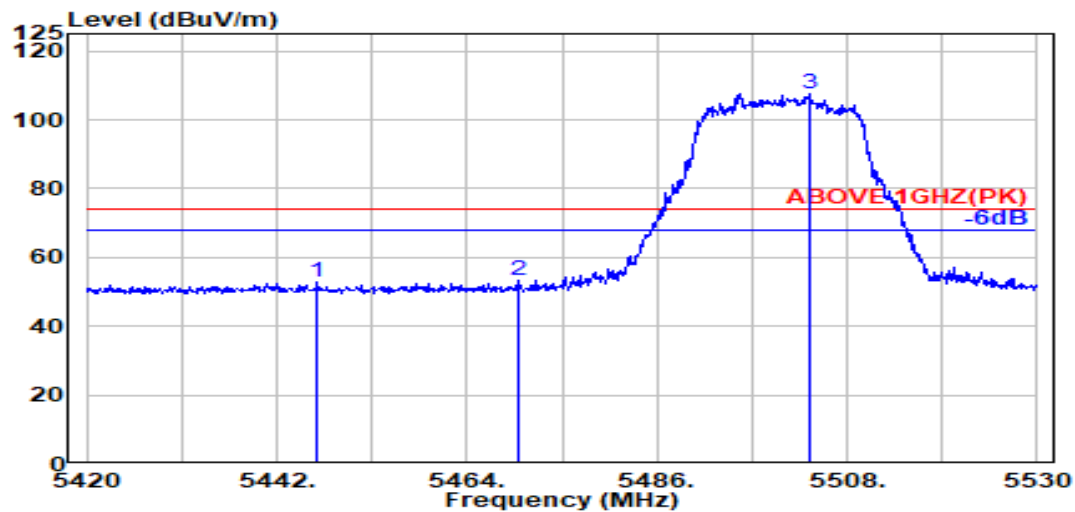

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.600	33.99	8.67	39.16	49.50	53.00	74.00	21.00	Peak
5470.000	34.04	8.69	39.15	49.55	53.12	74.00	20.88	Peak
@ 5503.700	34.09	8.72	39.15	103.81	107.47	---	---	Peak

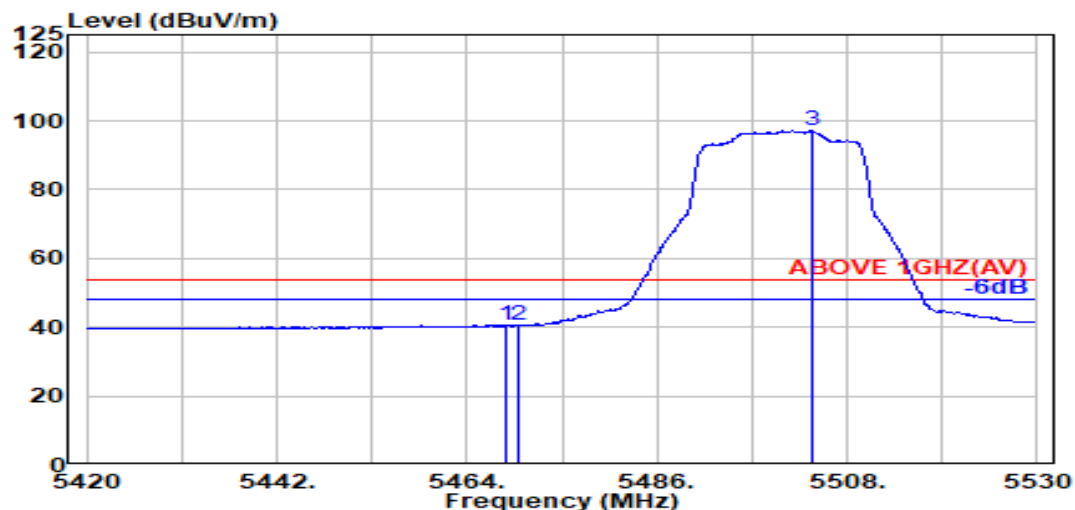

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.04	8.69	39.15	37.23	40.80	54.00	13.20	Average
5470.000	34.04	8.69	39.15	36.88	40.45	54.00	13.55	Average
@ 5504.000	34.09	8.72	39.15	93.38	97.04	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

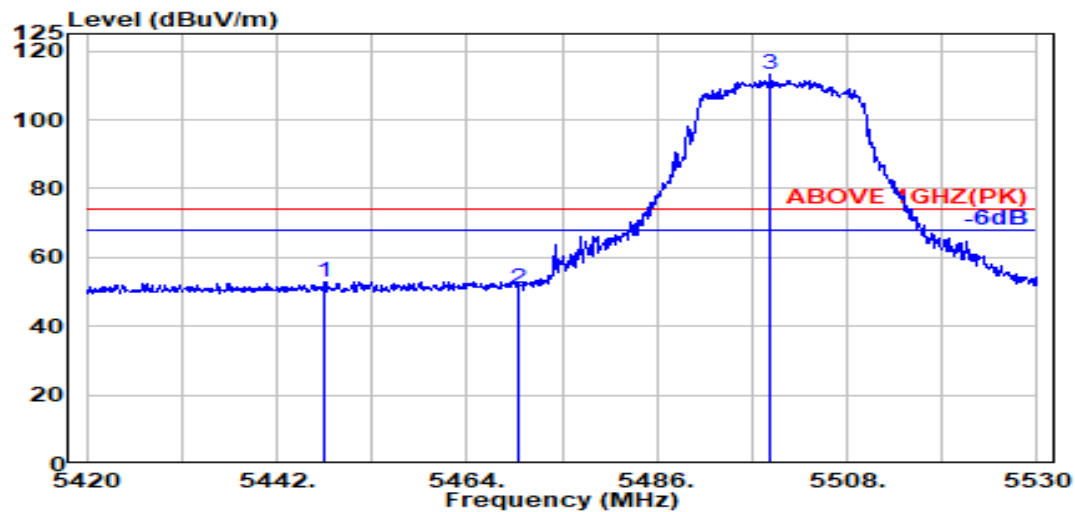

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.600	34.00	8.67	39.16	49.44	52.95	74.00	21.05	Peak
5470.000	34.04	8.69	39.15	47.52	51.09	74.00	22.91	Peak
@ 5499.100	34.10	8.72	39.15	109.32	112.98	---	---	Peak

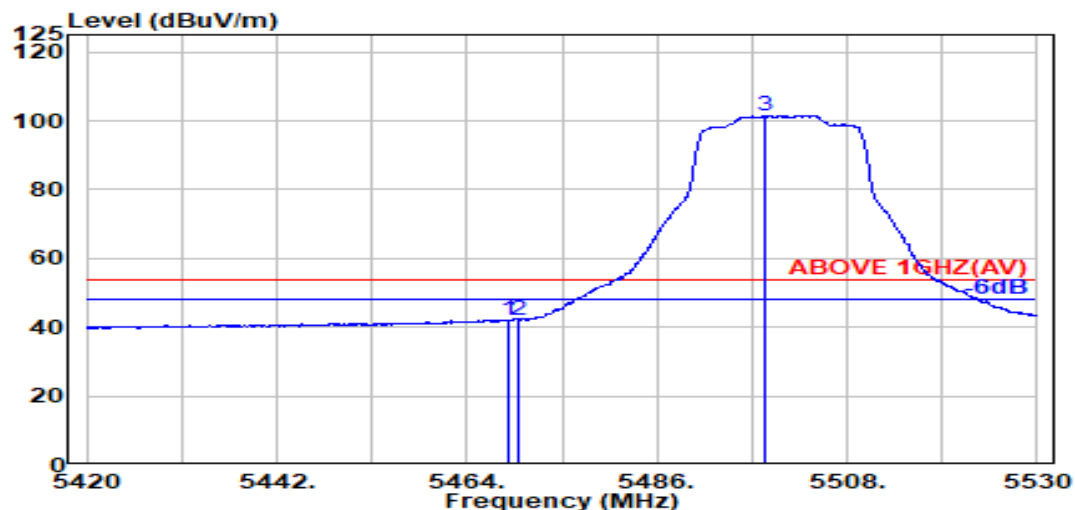

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	38.63	42.20	54.00	11.80	Average
5470.000	34.04	8.69	39.15	38.48	42.05	54.00	11.95	Average
@ 5498.500	34.10	8.72	39.15	97.80	101.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

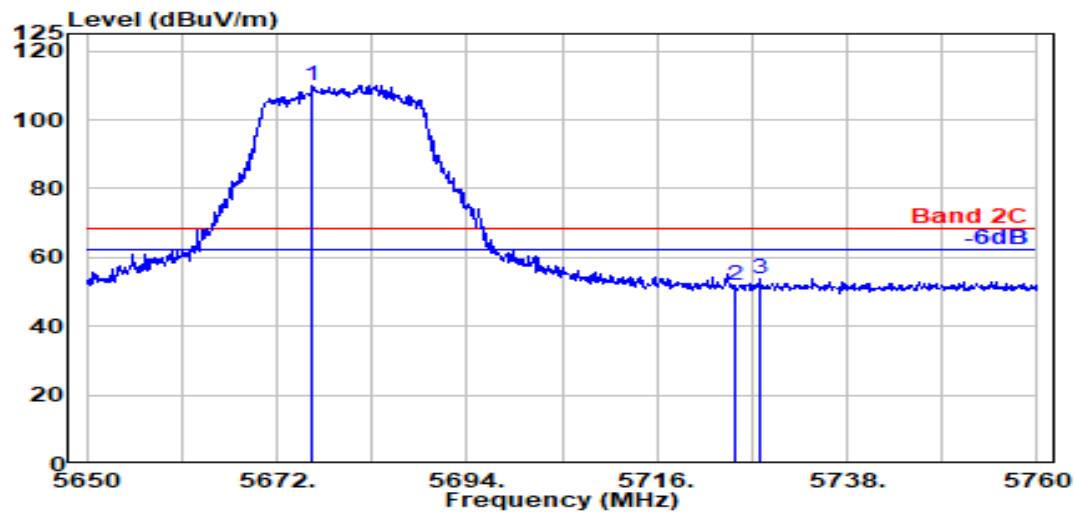

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5676.100	33.70	8.88	39.19	106.75	110.14	---	---	Peak
5725.000	33.60	8.93	39.20	48.67	52.00	68.20	16.20	Peak
5727.800	33.60	8.93	39.20	50.54	53.88	68.20	14.32	Peak

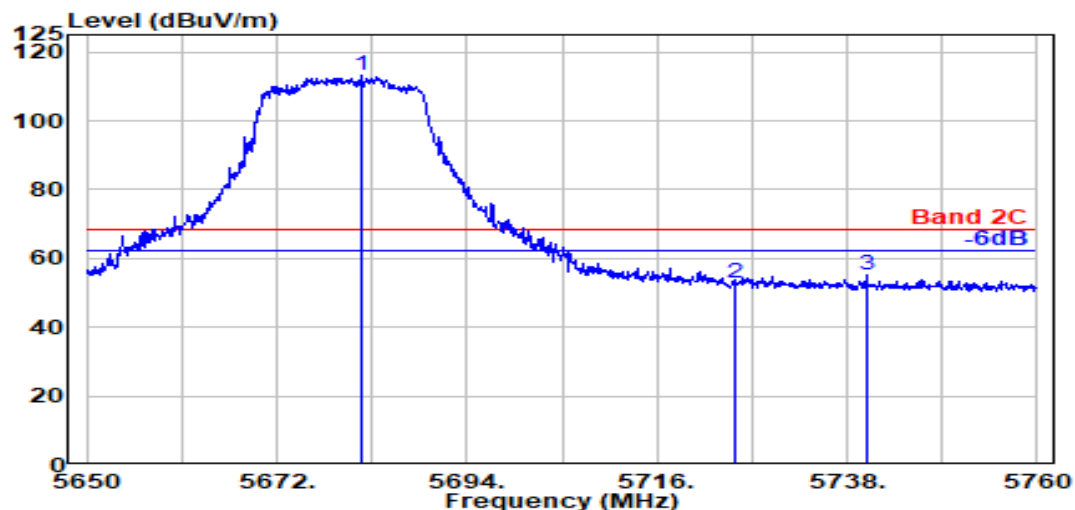

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.700	33.67	8.89	39.19	109.72	113.09	---	---	Peak
5725.000	33.60	8.93	39.20	49.39	52.72	68.20	15.48	Peak
5740.200	33.60	8.94	39.20	52.01	55.35	68.20	12.85	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

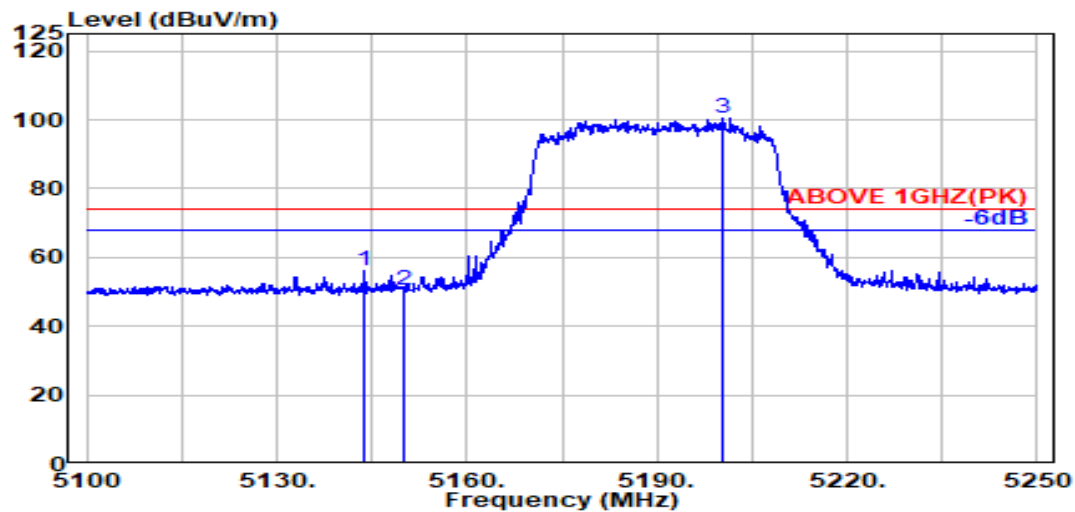

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.800	33.49	8.37	39.19	53.25	55.92	74.00	18.08	Peak
5150.000	33.50	8.37	39.19	47.65	50.33	74.00	23.67	Peak
@ 5200.200	33.80	8.42	39.19	97.39	100.43	---	---	Peak

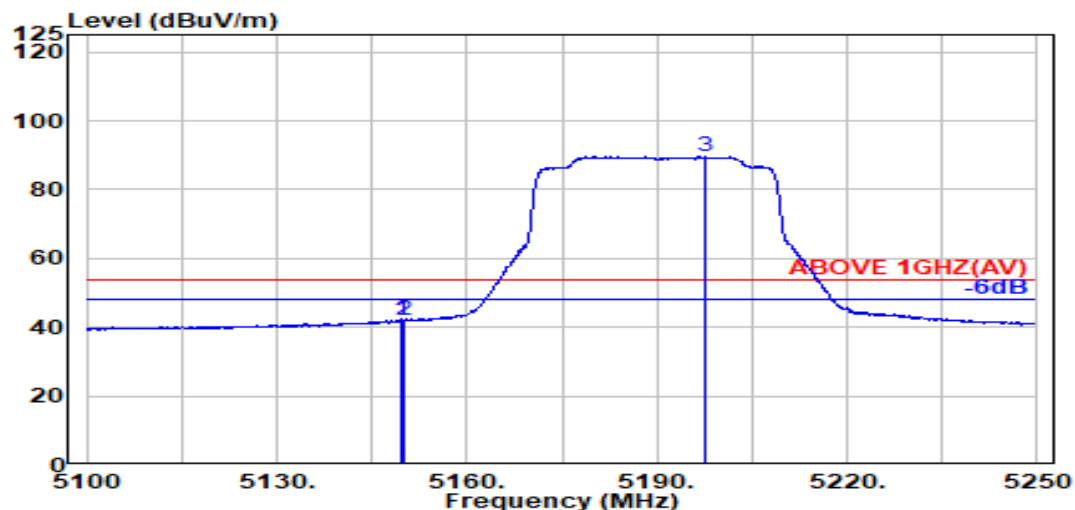

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	39.39	42.08	54.00	11.92	Average
5150.000	33.50	8.37	39.19	39.19	41.87	54.00	12.13	Average
@ 5197.500	33.79	8.42	39.19	86.51	89.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

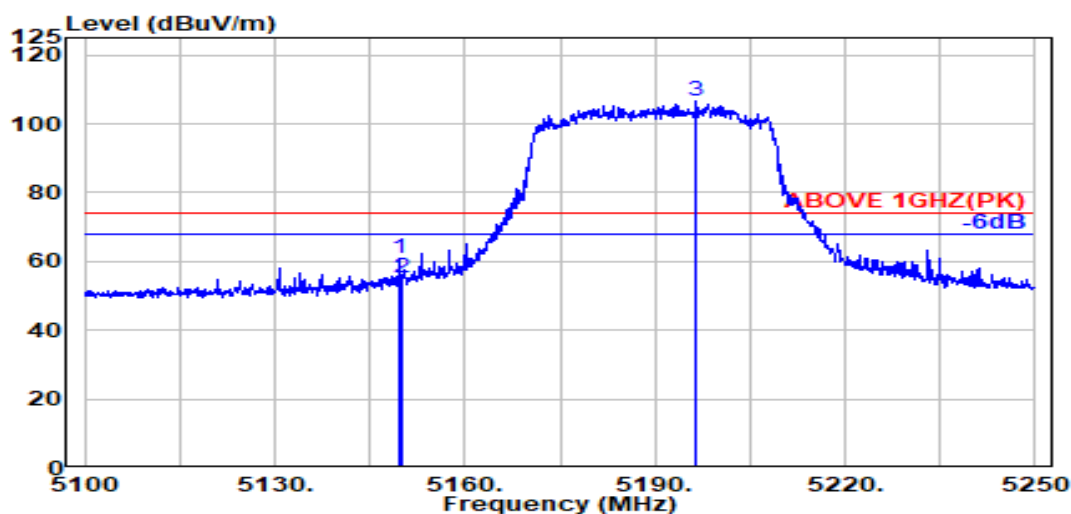

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.50	8.37	39.19	58.04	60.72	74.00	13.28	Peak
5150.000	33.50	8.37	39.19	52.60	55.28	74.00	18.72	Peak
@ 5196.400	33.78	8.42	39.19	103.37	106.39	---	---	Peak

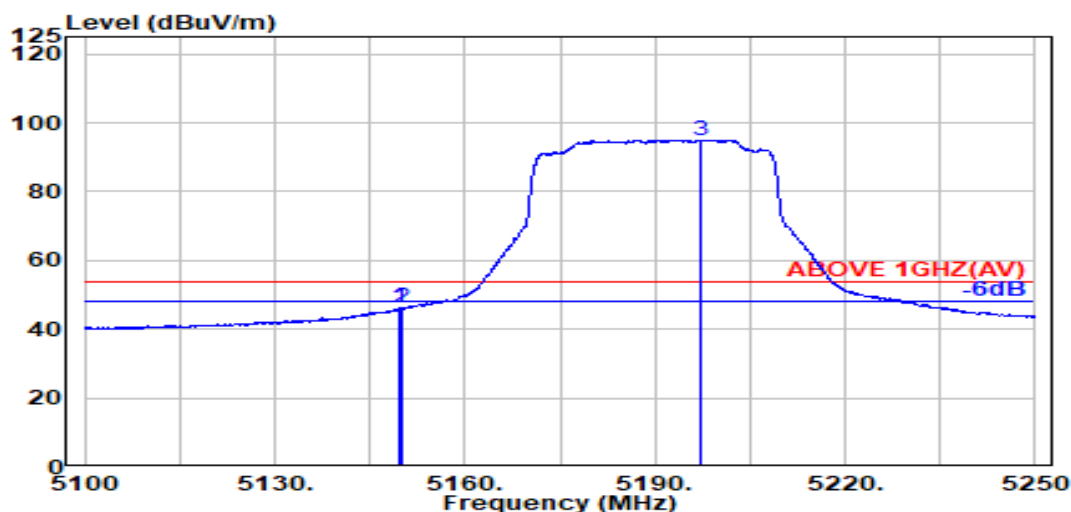

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.50	8.37	39.19	43.34	46.02	54.00	7.98	Average
5150.000	33.50	8.37	39.19	43.35	46.04	54.00	7.96	Average
@ 5197.100	33.78	8.42	39.19	92.02	95.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

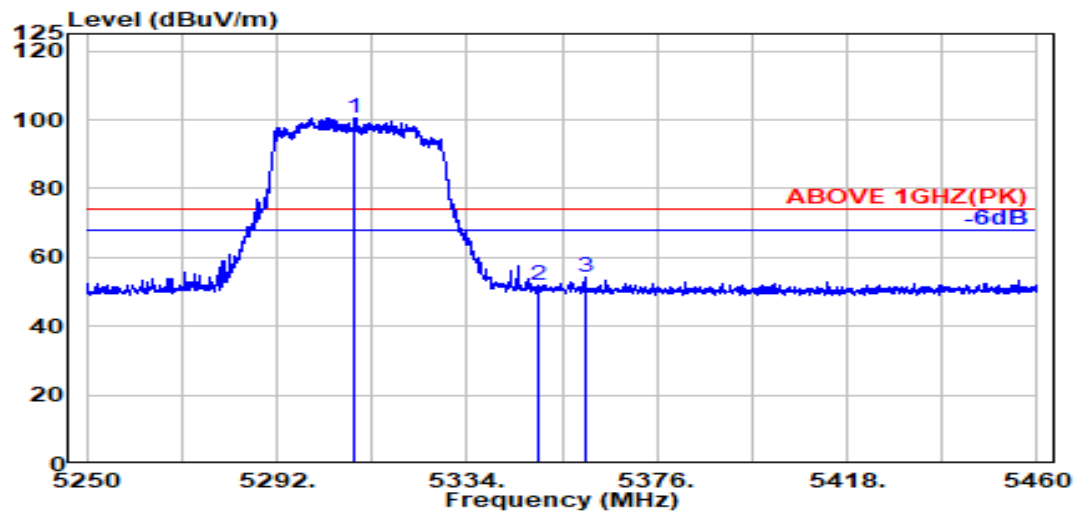

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.300	33.78	8.53	39.17	97.38	100.53	---	---	Peak
5350.000	33.70	8.57	39.17	48.73	51.83	74.00	22.17	Peak
5360.000	33.74	8.58	39.17	51.07	54.23	74.00	19.77	Peak

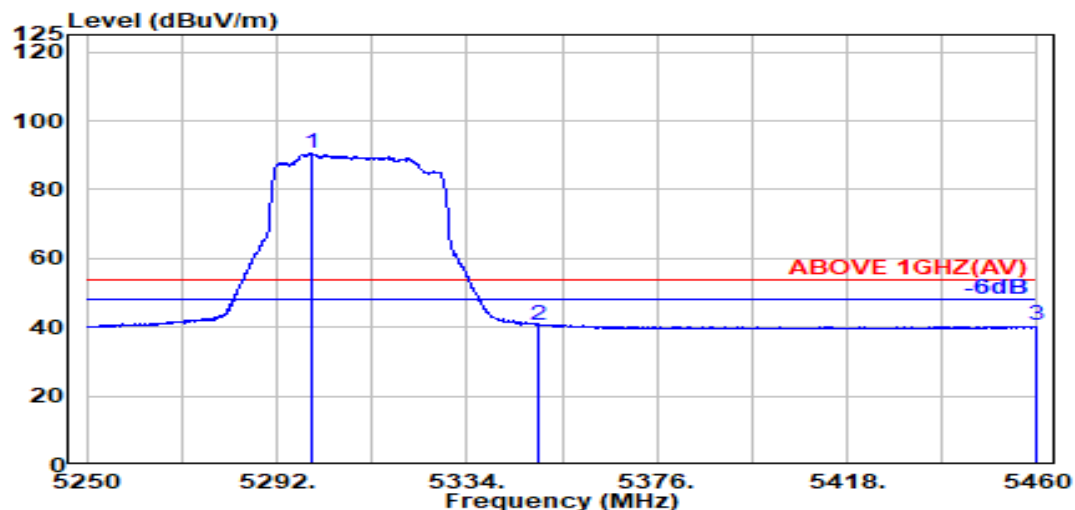

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.600	33.80	8.52	39.17	87.41	90.56	---	---	Average
5350.000	33.70	8.57	39.17	37.56	40.67	54.00	13.33	Average
5459.800	34.02	8.68	39.15	37.18	40.72	54.00	13.28	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

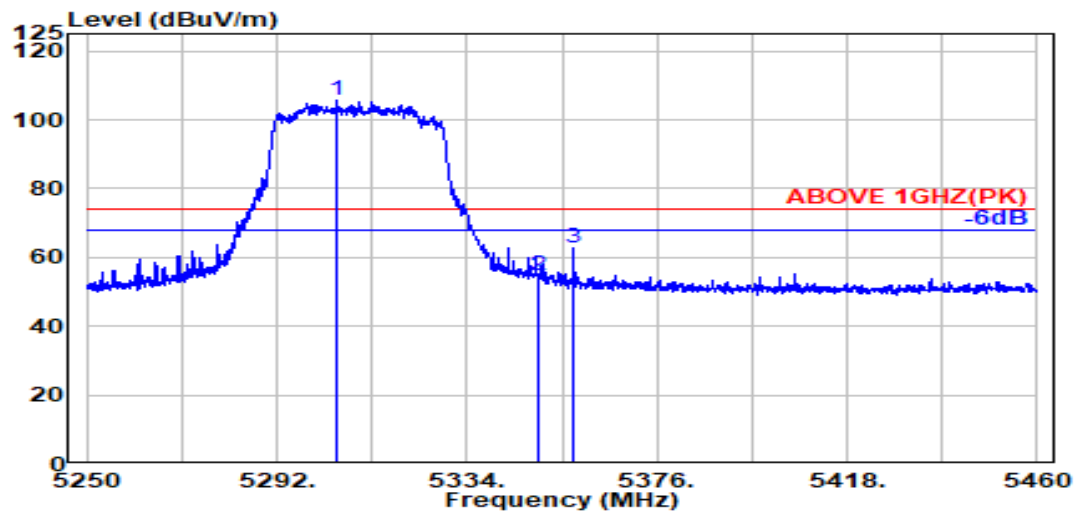

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.300	33.79	8.53	39.17	102.56	105.70	---	---	Peak
5350.000	33.70	8.57	39.17	51.83	54.93	74.00	19.07	Peak
5357.600	33.73	8.58	39.17	59.45	62.60	74.00	11.40	Peak

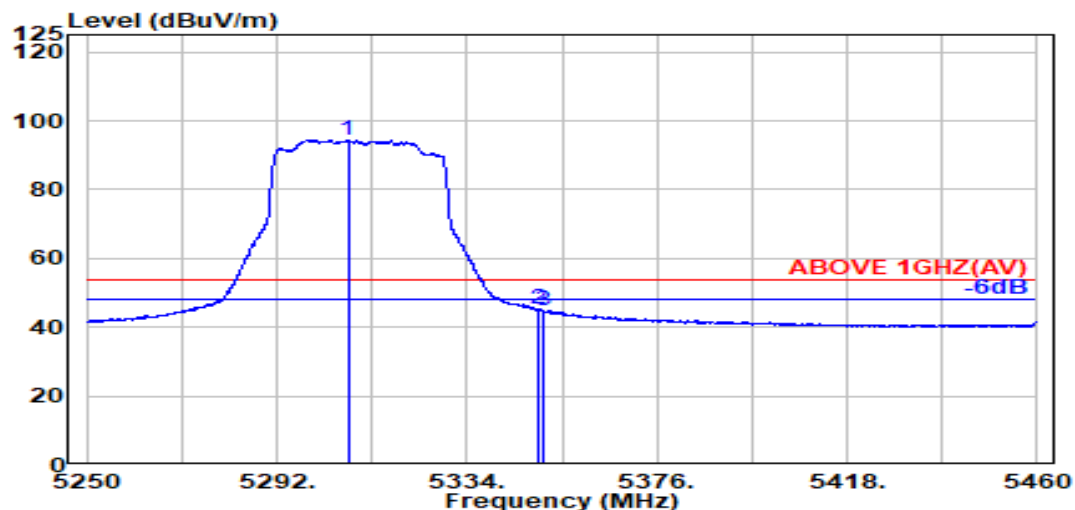

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5307.700	33.78	8.53	39.17	91.27	94.41	---	---	Average
5350.000	33.70	8.57	39.17	42.01	45.12	54.00	8.88	Average
5350.900	33.70	8.57	39.17	41.88	44.99	54.00	9.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

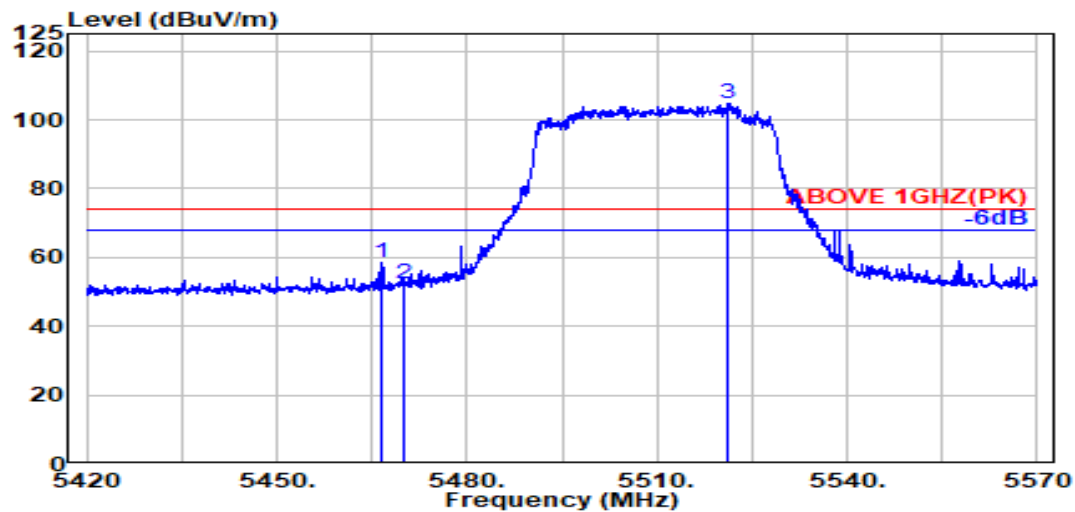

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.700	34.03	8.68	39.15	54.71	58.27	74.00	15.73	Peak
5470.000	34.04	8.69	39.15	48.80	52.37	74.00	21.63	Peak
@ 5521.200	34.06	8.74	39.15	101.19	104.83	---	---	Peak

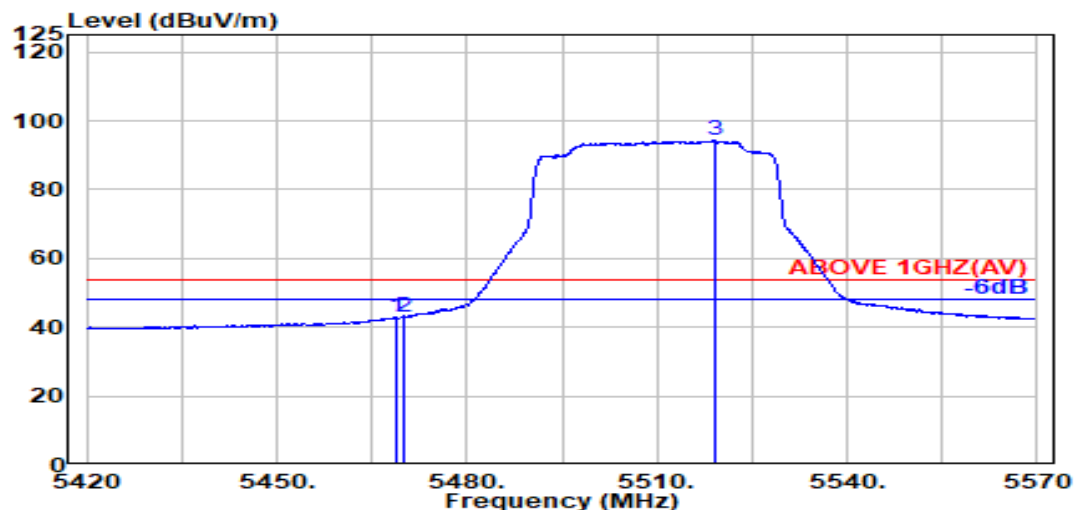

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.04	8.69	39.15	39.16	42.73	54.00	11.27	Average
5470.000	34.04	8.69	39.15	39.43	43.01	54.00	10.99	Average
@ 5519.000	34.06	8.73	39.15	90.62	94.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

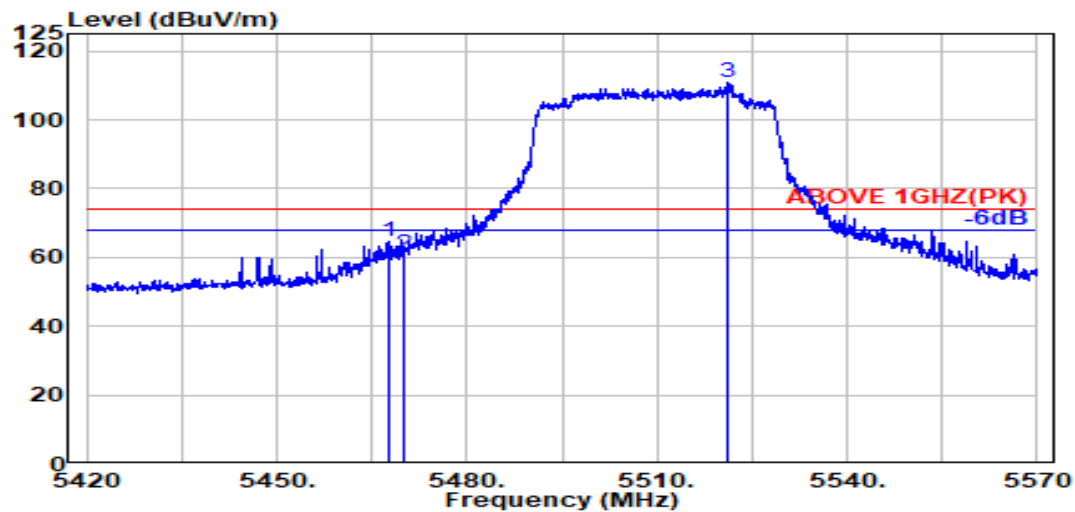

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.600	34.04	8.69	39.15	61.26	64.83	74.00	9.17	Peak
5470.000	34.04	8.69	39.15	57.43	61.01	74.00	12.99	Peak
@ 5521.300	34.06	8.74	39.15	107.09	110.73	---	---	Peak

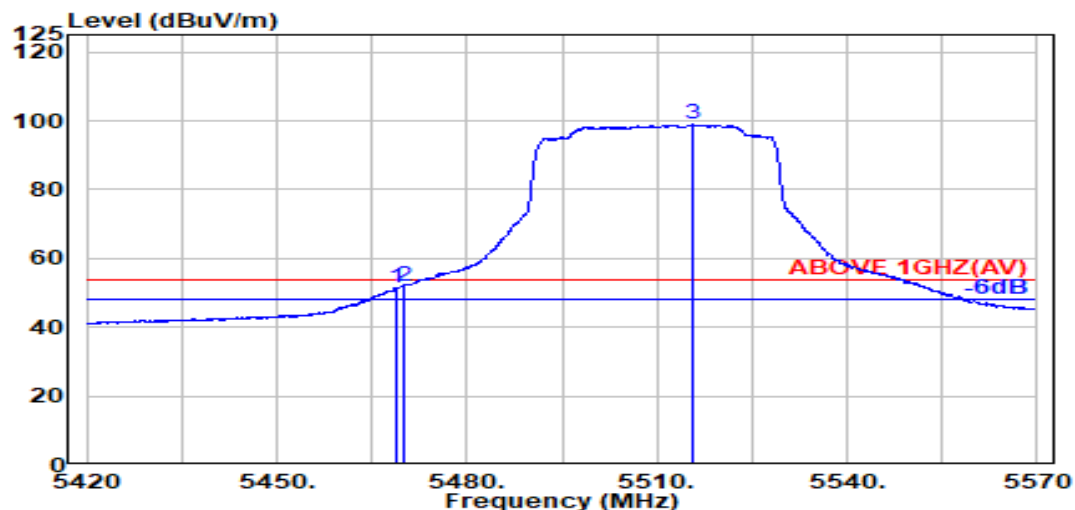

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	47.81	51.38	54.00	2.62	Average
5470.000	34.04	8.69	39.15	48.24	51.82	54.00	2.18	Average
@ 5515.700	34.07	8.73	39.15	95.22	98.87	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

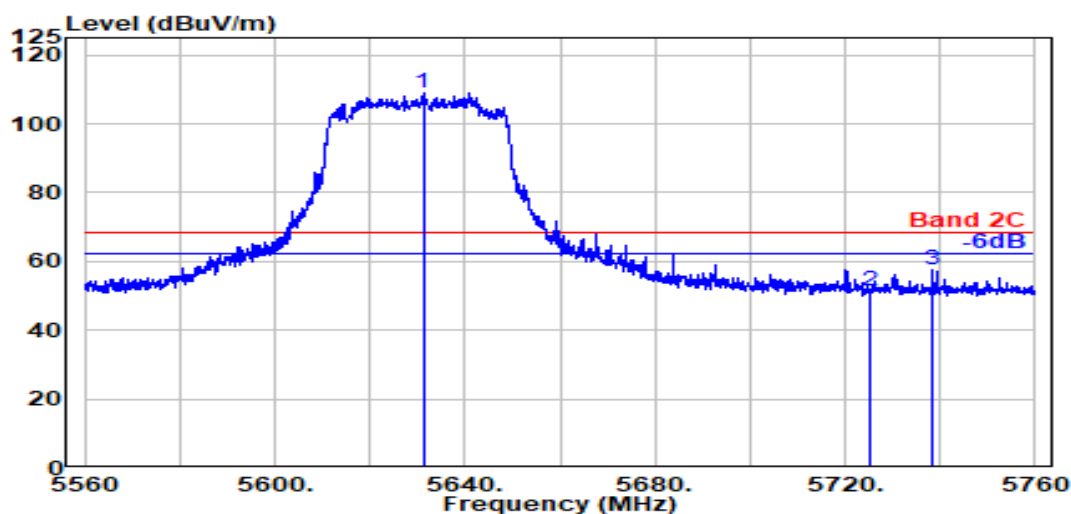

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5631.200	33.80	8.84	39.18	105.58	109.04	---	---	Peak
5725.000	33.60	8.93	39.20	47.87	51.20	68.20	17.00	Peak
5738.400	33.60	8.94	39.20	54.05	57.39	68.20	10.81	Peak

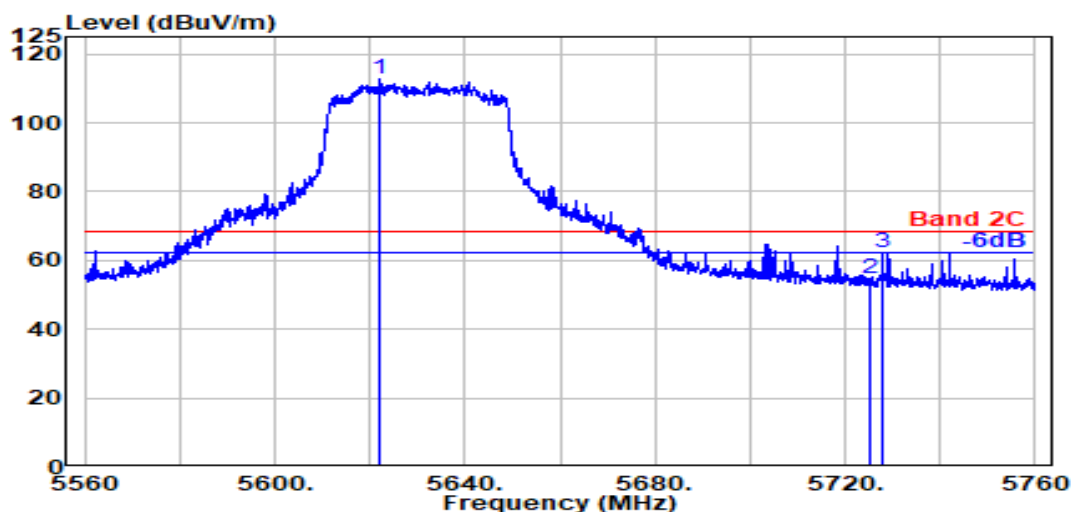

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5621.900	33.80	8.83	39.18	109.36	112.81	---	---	Peak
5725.000	33.60	8.93	39.20	51.20	54.53	68.20	13.67	Peak
5727.800	33.60	8.93	39.20	59.07	62.41	68.20	5.79	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

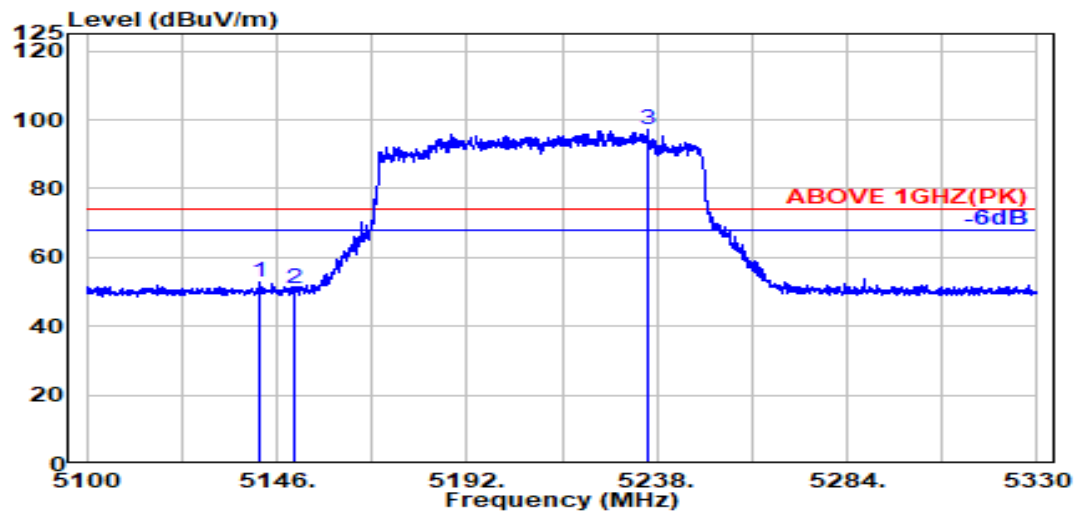

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5141.900	33.48	8.37	39.19	50.16	52.82	74.00	21.18	Peak
5150.000	33.50	8.37	39.19	48.45	51.13	74.00	22.87	Peak
@ 5235.800	33.73	8.46	39.18	94.18	97.19	---	---	Peak

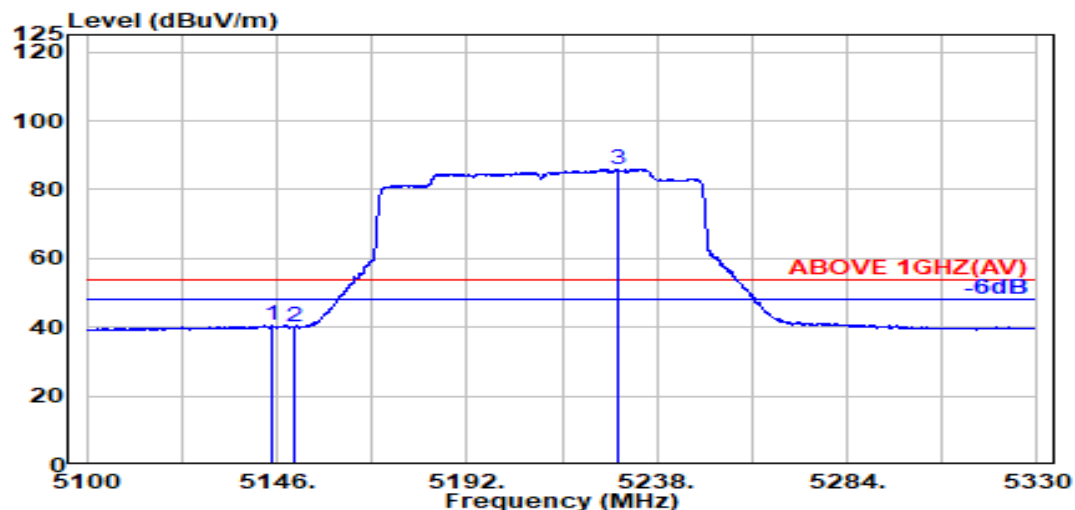

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5144.900	33.49	8.37	39.19	37.81	40.47	54.00	13.53	Average
5150.000	33.50	8.37	39.19	37.35	40.03	54.00	13.97	Average
@ 5228.300	33.74	8.45	39.18	82.92	85.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/67	Frequency	TX 5250MHz

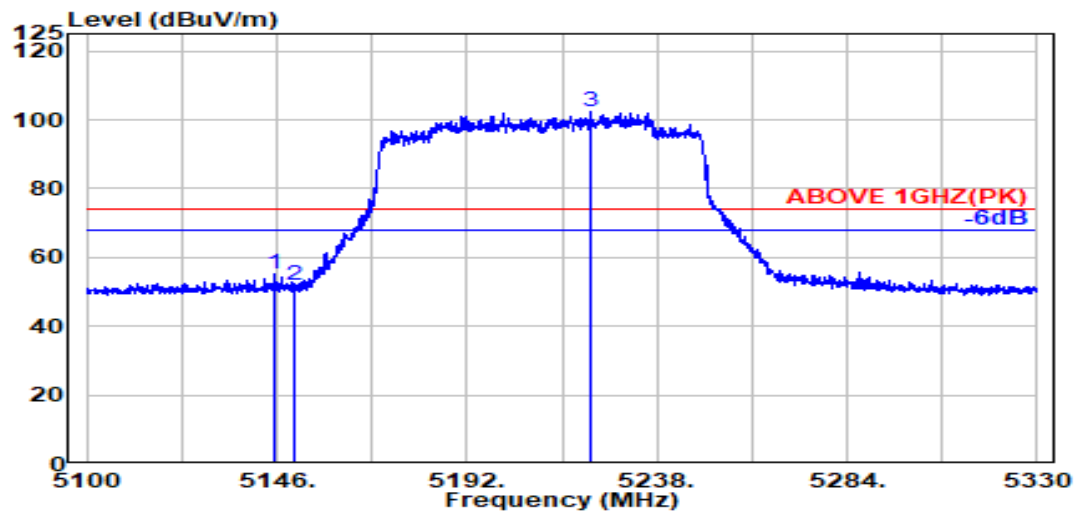

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.700	33.49	8.37	39.19	52.62	55.29	74.00	18.71	Peak
5150.000	33.50	8.37	39.19	49.39	52.07	74.00	21.93	Peak
@ 5221.800	33.76	8.45	39.18	99.29	102.31	---	---	Peak

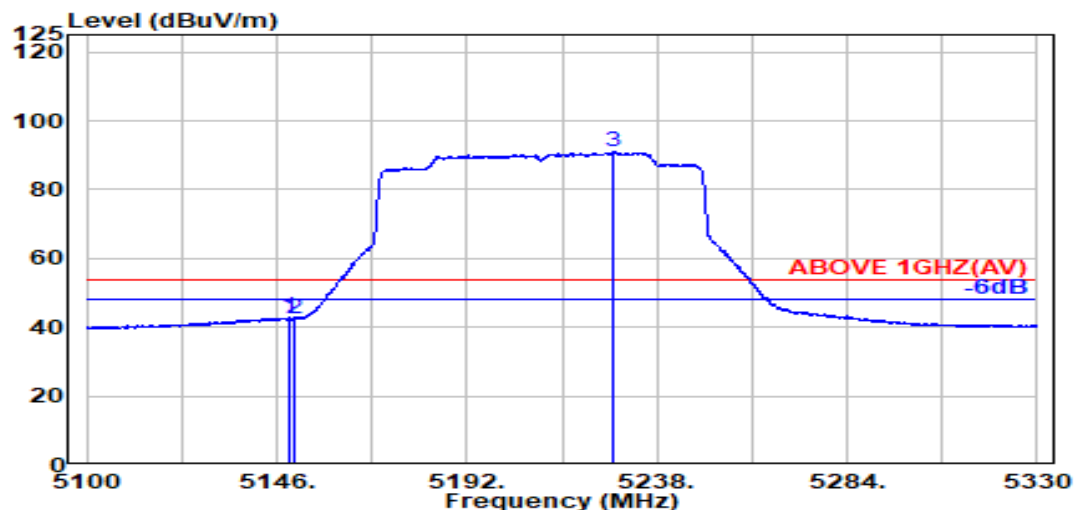

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.19	40.02	42.70	54.00	11.30	Average
5150.000	33.50	8.37	39.19	39.66	42.35	54.00	11.65	Average
@ 5227.600	33.74	8.45	39.18	87.89	90.91	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

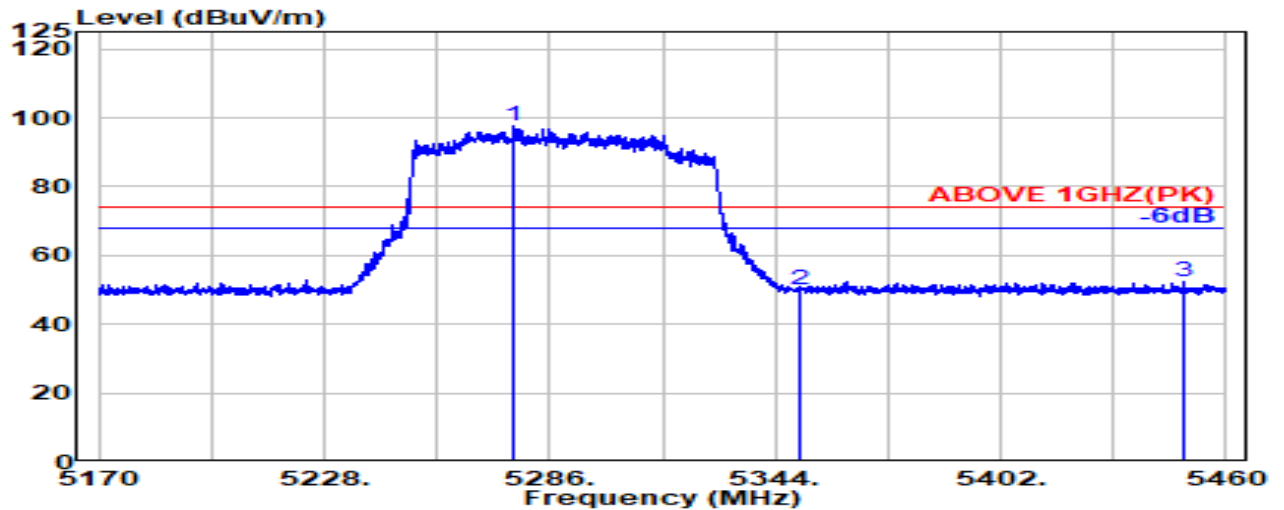

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5277.000	33.75	8.50	39.18	94.55	97.63	---	---	Peak
5350.000	33.70	8.57	39.17	46.98	50.08	74.00	23.92	Peak
5448.900	34.00	8.67	39.16	48.64	52.15	74.00	21.85	Peak

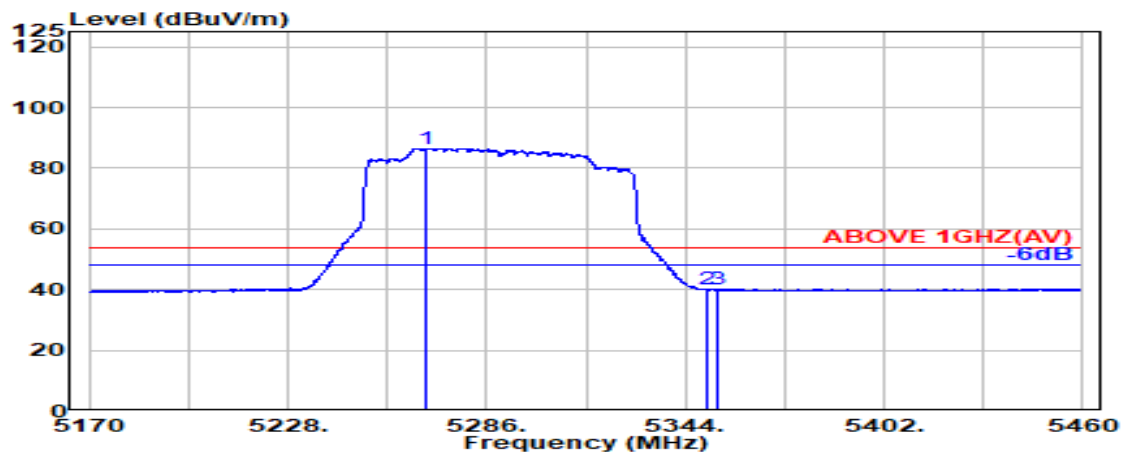

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5268.400	33.74	8.49	39.18	83.50	86.55	---	---	Average
5350.000	33.70	8.57	39.17	36.81	39.91	54.00	14.09	Average
5353.200	33.71	8.58	39.17	37.18	40.30	54.00	13.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 1/2A
RU Configuration	996/S67	Frequency	TX 5250MHz

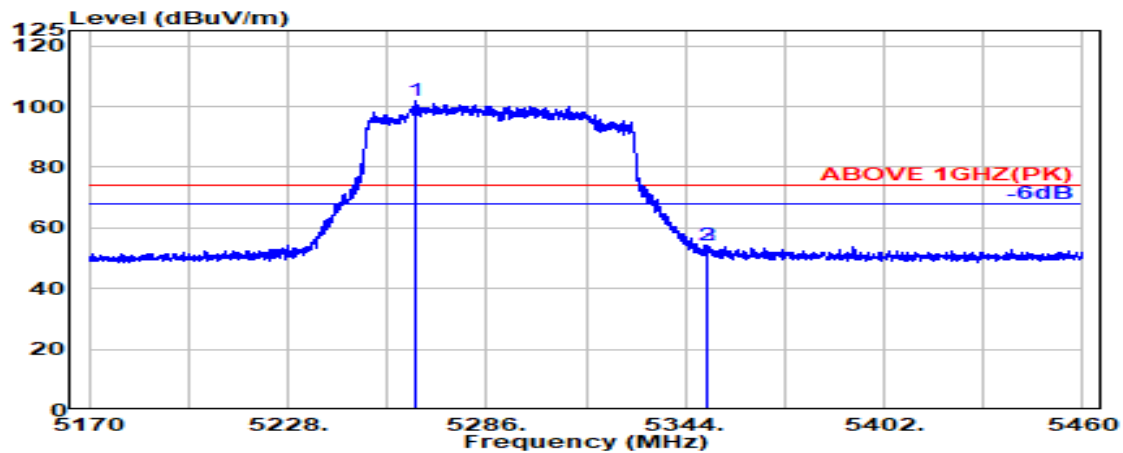

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5265.500	33.73	8.49	39.18	99.02	102.07	---	---	Peak
5350.000	33.70	8.57	39.17	51.06	54.16	74.00	19.84	Peak
5350.200	33.70	8.57	39.17	51.09	54.19	74.00	19.81	Peak

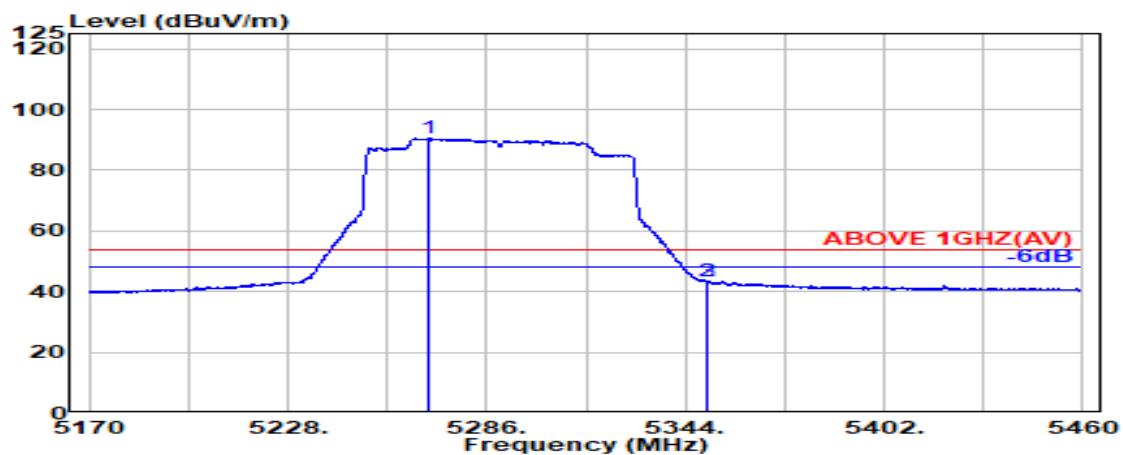

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5269.200	33.74	8.49	39.18	87.49	90.54	---	---	Average
5350.000	33.70	8.57	39.17	40.28	43.39	54.00	10.61	Average
5350.200	33.70	8.57	39.17	40.28	43.39	54.00	10.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

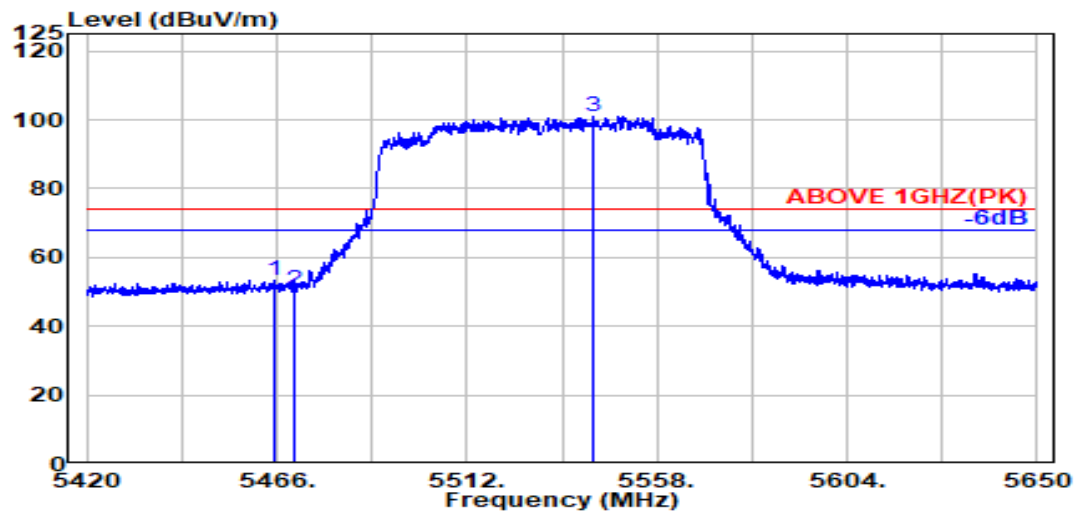

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.400	34.03	8.68	39.15	49.90	53.46	74.00	20.54	Peak
5470.000	34.04	8.69	39.15	46.86	50.44	74.00	23.56	Peak
@ 5542.800	34.01	8.76	39.16	97.50	101.11	---	---	Peak

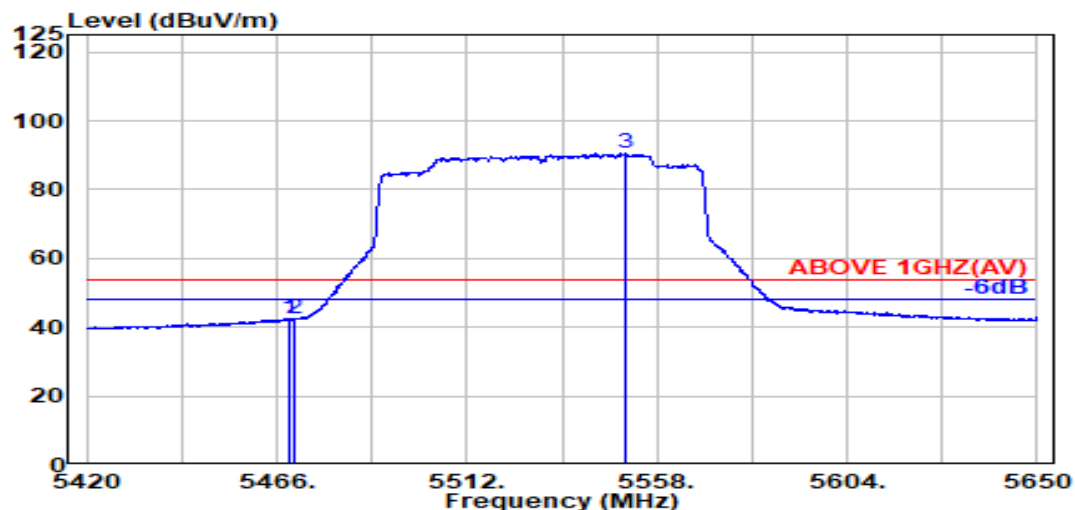

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.200	34.04	8.69	39.15	38.96	42.53	54.00	11.47	Average
5470.000	34.04	8.69	39.15	38.78	42.35	54.00	11.65	Average
@ 5550.300	34.00	8.76	39.16	86.88	90.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/67	Frequency	TX 5570MHz

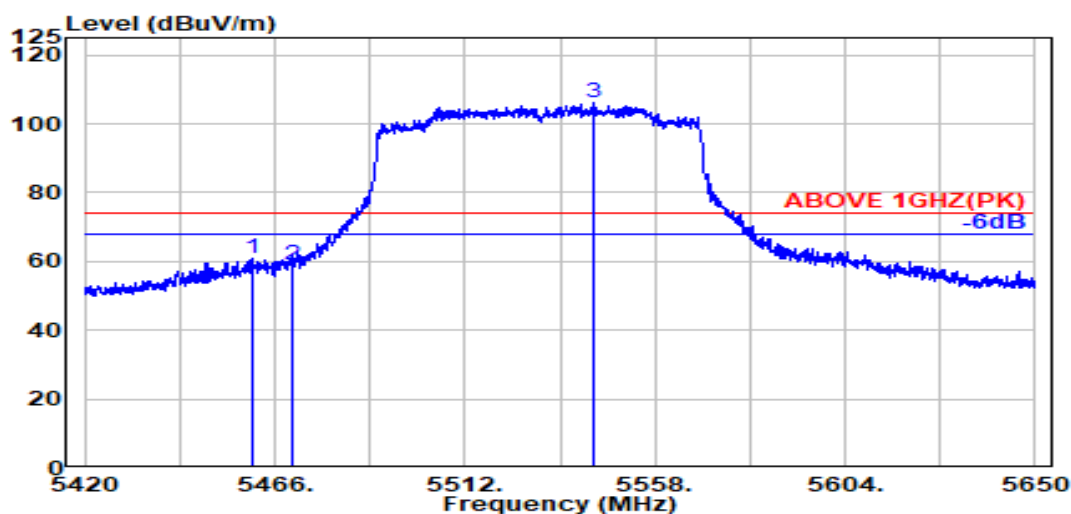

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.700	34.02	8.68	39.15	57.39	60.94	74.00	13.06	Peak
5470.000	34.04	8.69	39.15	55.50	59.08	74.00	14.92	Peak
@ 5542.900	34.01	8.76	39.16	102.28	105.90	---	---	Peak

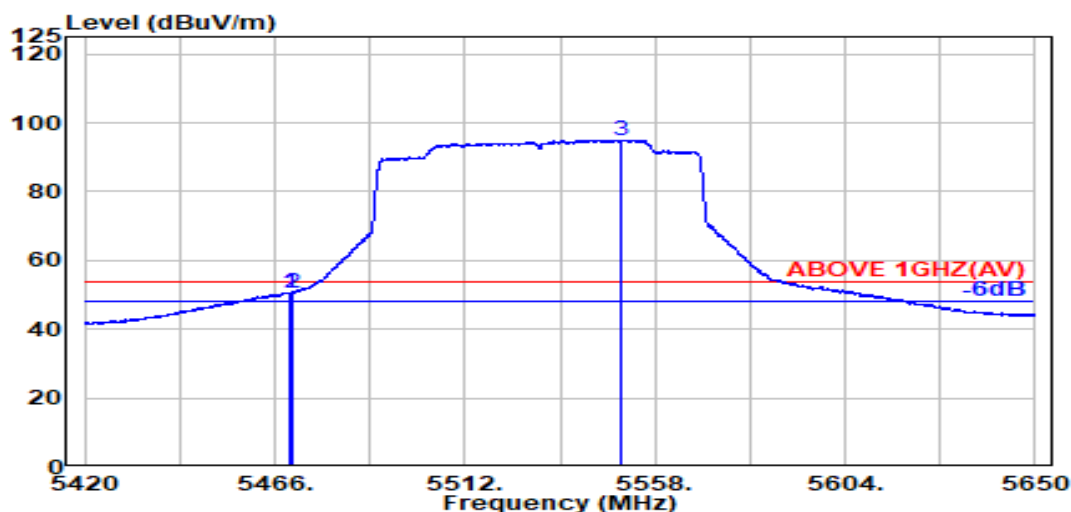

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.04	8.69	39.15	47.07	50.64	54.00	3.36	Average
5470.000	34.04	8.69	39.15	46.95	50.52	54.00	3.48	Average
@ 5549.600	34.00	8.76	39.16	91.40	95.00	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	U-NII Band 2C
RU Configuration	996/S67	Frequency	TX 5570MHz

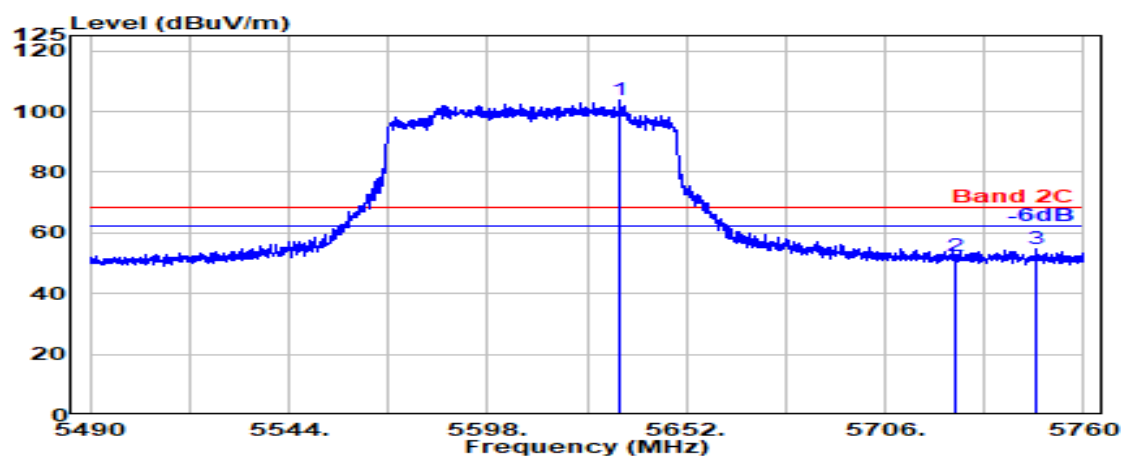

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5633.700	33.80	8.84	39.18	100.14	103.61	---	---	Peak
5725.000	33.60	8.93	39.20	49.05	52.38	68.20	15.82	Peak
5746.800	33.60	8.95	39.20	51.29	54.64	68.20	13.56	Peak

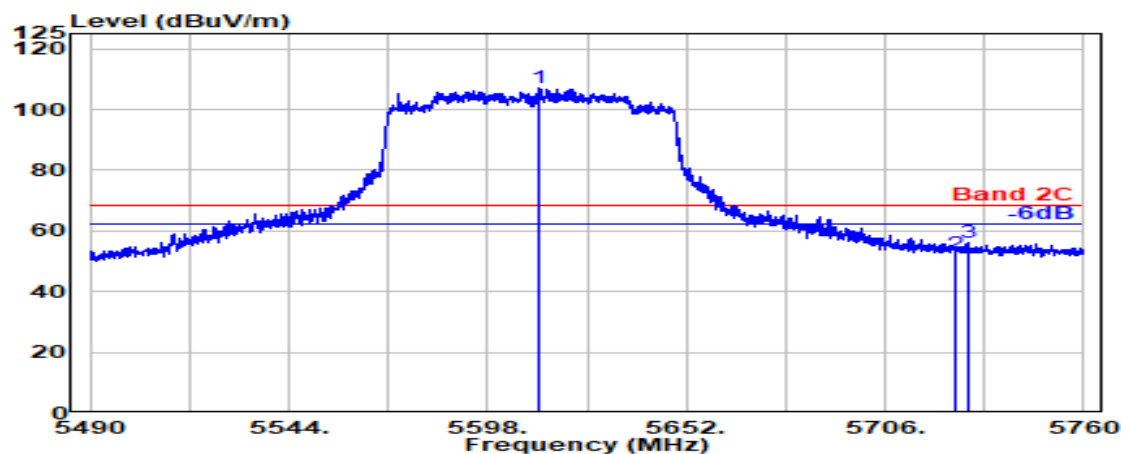

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5612.200	33.80	8.82	39.17	103.44	106.89	---	---	Peak
5725.000	33.60	8.93	39.20	49.25	52.58	68.20	15.62	Peak
5728.800	33.60	8.93	39.20	52.85	56.19	68.20	12.01	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

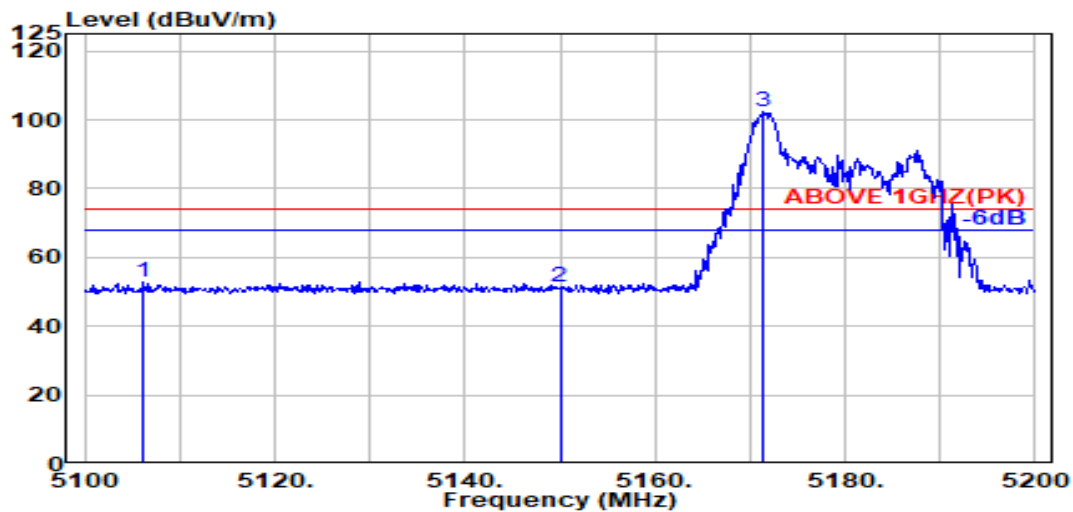

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.200	33.41	8.33	39.20	50.28	52.82	74.00	21.18	Peak
5150.000	33.50	8.37	39.19	48.52	51.20	74.00	22.80	Peak
@ 5171.400	33.63	8.40	39.19	99.45	102.28	---	---	Peak

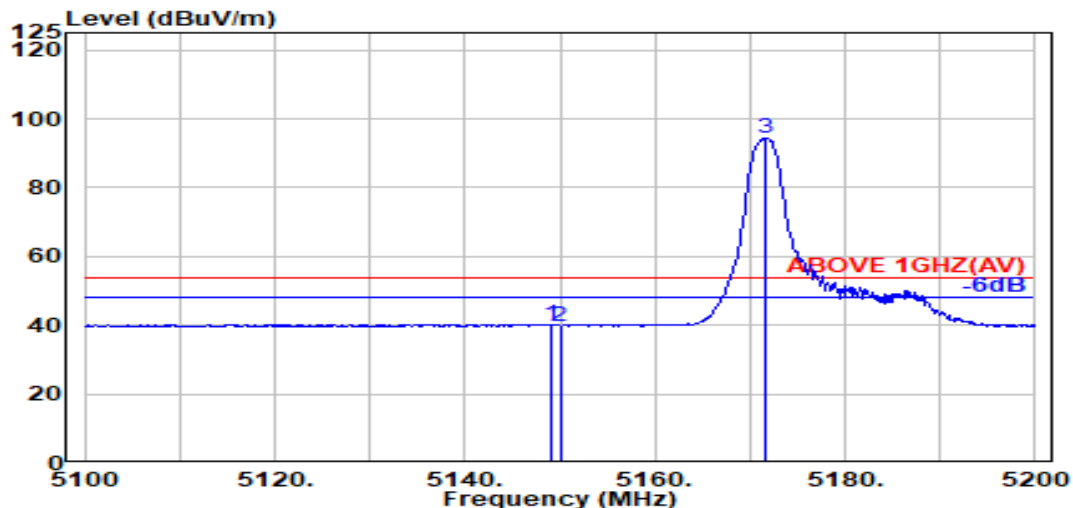

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.200	33.50	8.37	39.19	37.52	40.20	54.00	13.80	Average
5150.000	33.50	8.37	39.19	37.16	39.85	54.00	14.15	Average
@ 5171.700	33.63	8.40	39.19	91.63	94.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5180MHz

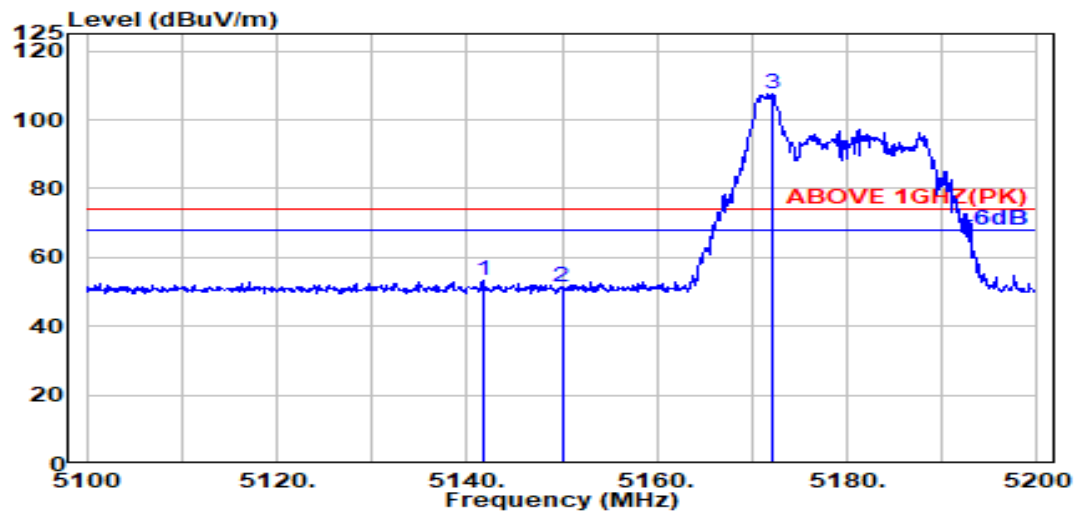

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.700	33.48	8.37	39.19	50.44	53.09	74.00	20.91	Peak
5150.000	33.50	8.37	39.19	48.80	51.49	74.00	22.51	Peak
@ 5172.200	33.63	8.40	39.19	104.84	107.68	---	---	Peak

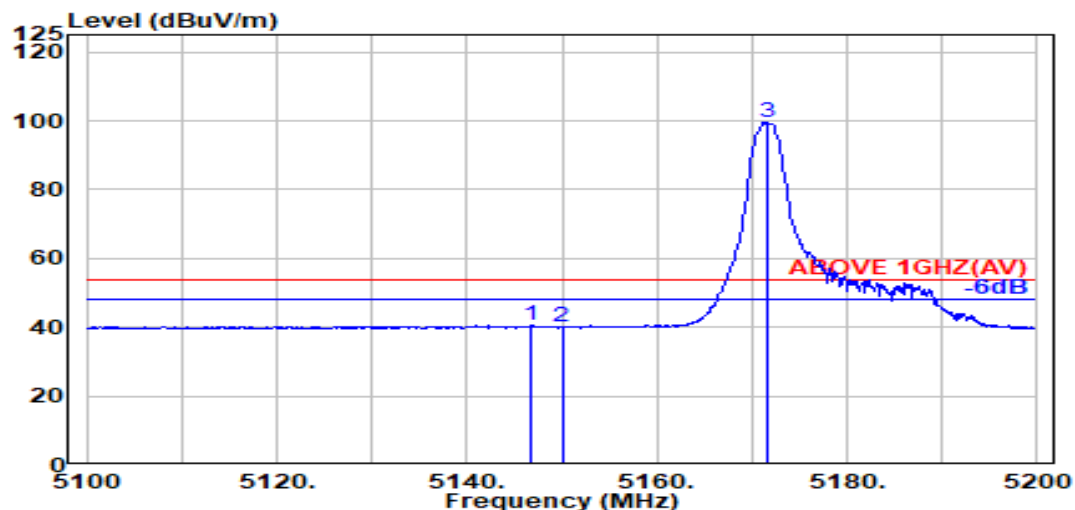

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	33.49	8.37	39.19	37.74	40.41	54.00	13.59	Average
5150.000	33.50	8.37	39.19	37.23	39.91	54.00	14.09	Average
@ 5171.700	33.63	8.40	39.19	96.56	99.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

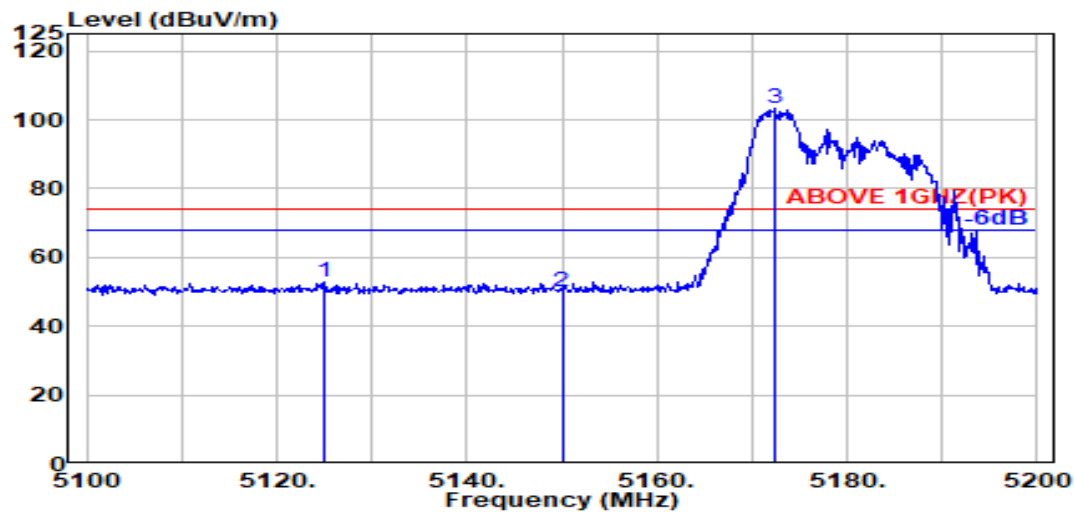

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.900	33.45	8.35	39.19	50.13	52.74	74.00	21.26	Peak
5150.000	33.50	8.37	39.19	47.29	49.97	74.00	24.03	Peak
@ 5172.500	33.64	8.40	39.19	100.23	103.07	---	---	Peak

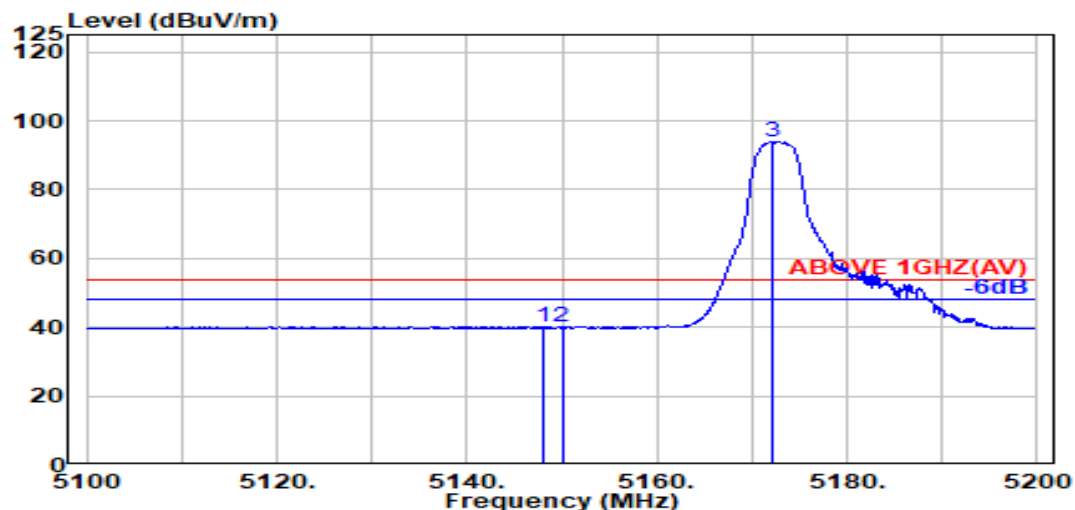

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	33.50	8.37	39.19	37.46	40.13	54.00	13.87	Average
5150.000	33.50	8.37	39.19	37.24	39.92	54.00	14.08	Average
@ 5172.200	33.63	8.40	39.19	91.14	93.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5180MHz

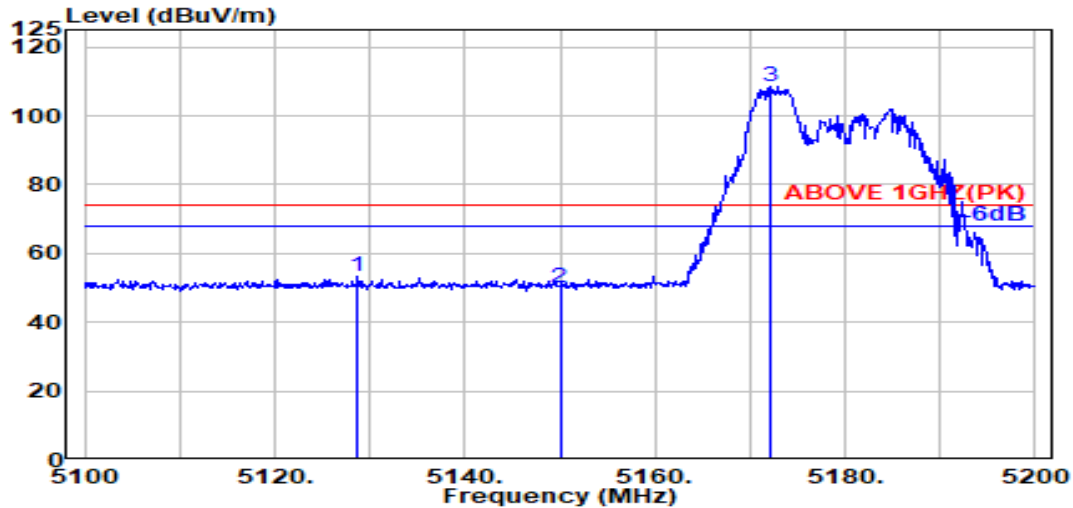

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.700	33.46	8.35	39.19	50.48	53.09	74.00	20.91	Peak
5150.000	33.50	8.37	39.19	47.50	50.18	74.00	23.82	Peak
@ 5172.100	33.63	8.40	39.19	105.84	108.68	---	---	Peak

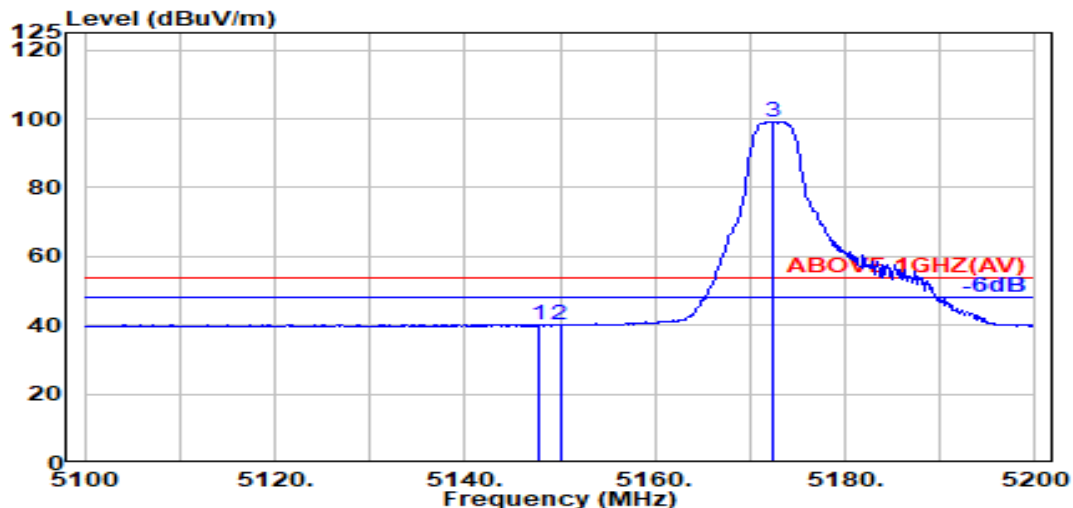

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	33.50	8.37	39.19	37.52	40.19	54.00	13.81	Average
5150.000	33.50	8.37	39.19	37.33	40.01	54.00	13.99	Average
@ 5172.300	33.63	8.40	39.19	96.37	99.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

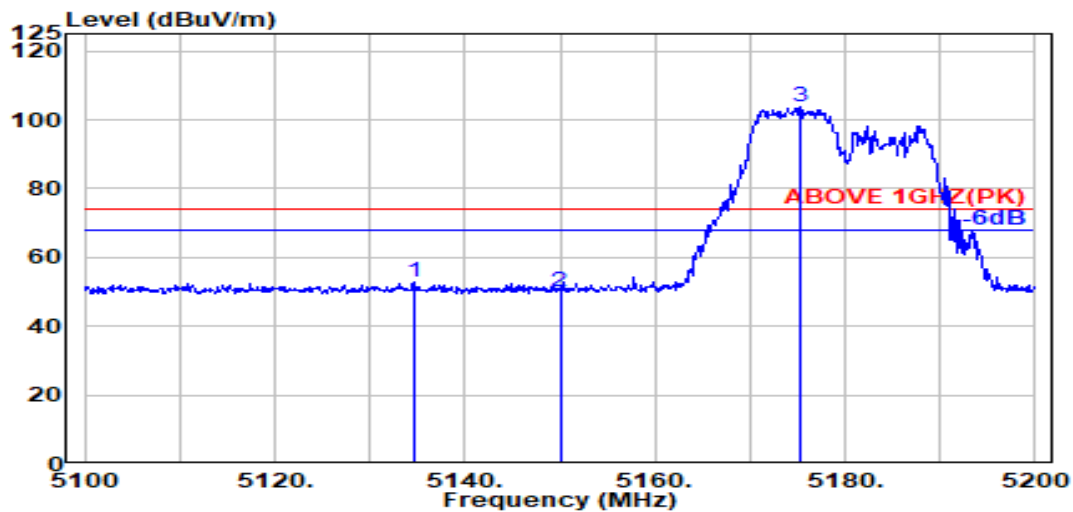

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.600	33.47	8.36	39.19	50.01	52.64	74.00	21.36	Peak
5150.000	33.50	8.37	39.19	47.41	50.09	74.00	23.91	Peak
@ 5175.200	33.65	8.40	39.19	100.68	103.54	---	---	Peak

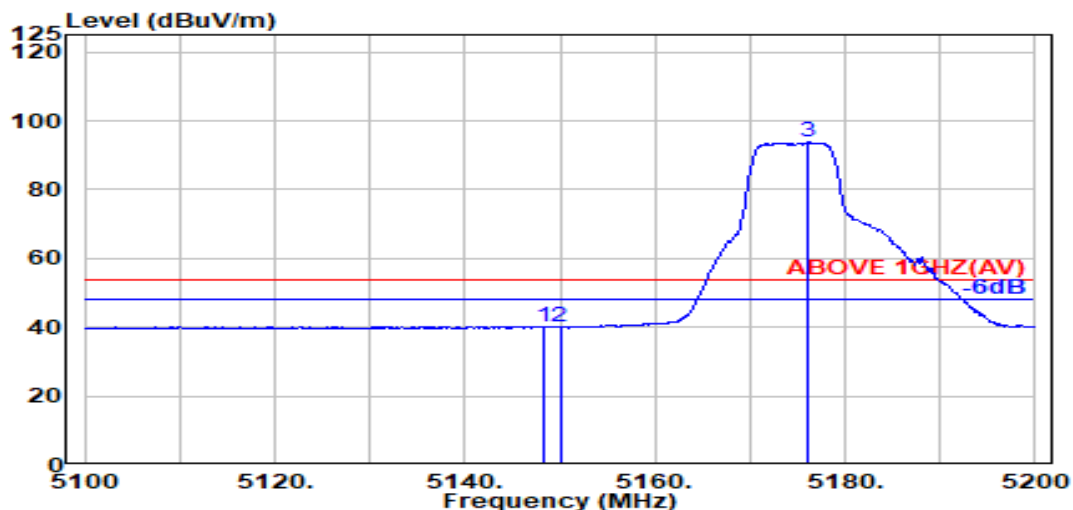

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.50	8.37	39.19	37.59	40.26	54.00	13.74	Average
5150.000	33.50	8.37	39.19	37.54	40.23	54.00	13.77	Average
@ 5176.100	33.66	8.40	39.19	90.88	93.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5180MHz

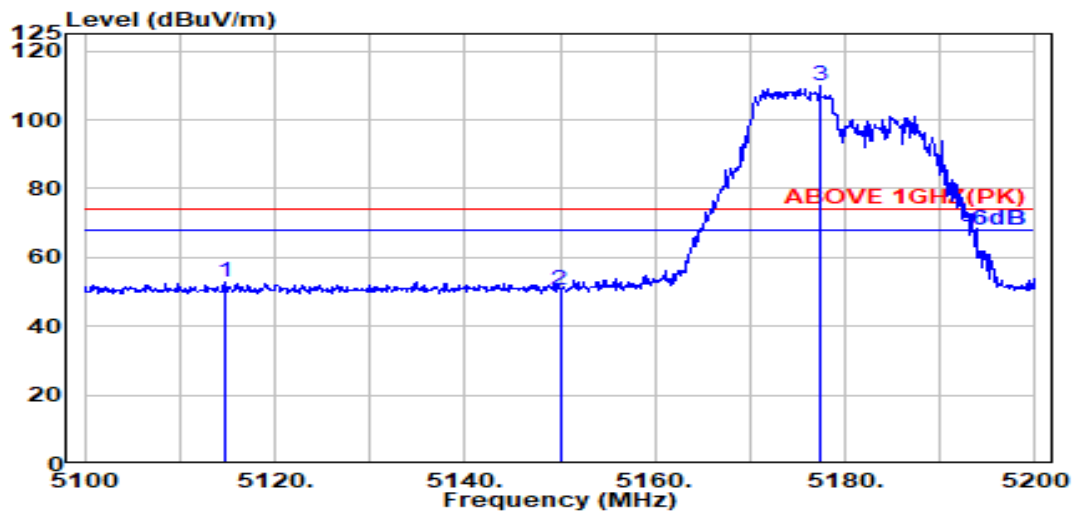

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5114.800	33.43	8.34	39.20	50.05	52.63	74.00	21.37	Peak
5150.000	33.50	8.37	39.19	47.61	50.29	74.00	23.71	Peak
@ 5177.400	33.66	8.40	39.19	106.80	109.67	---	---	Peak

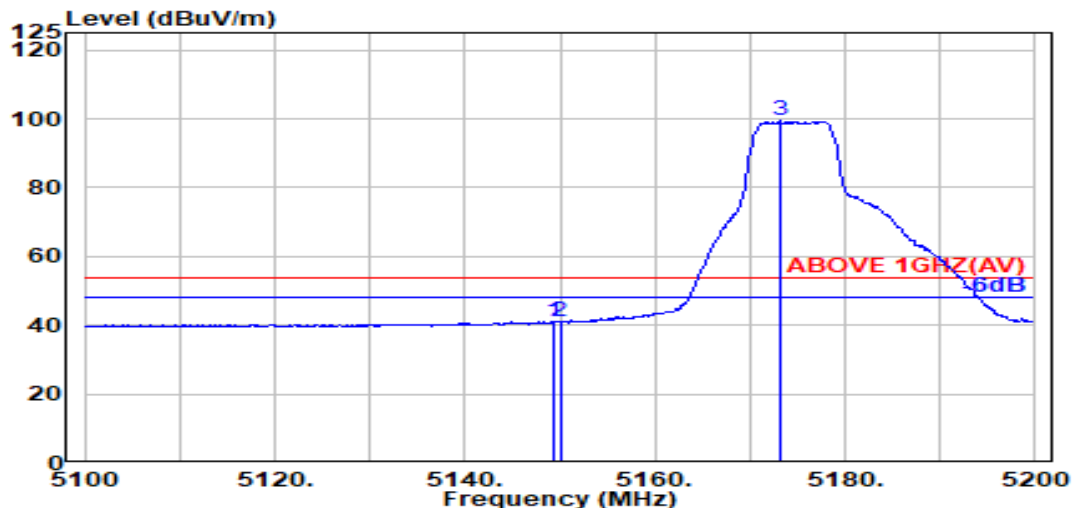

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.300	33.50	8.37	39.19	38.33	41.01	54.00	12.99	Average
5150.000	33.50	8.37	39.19	38.26	40.95	54.00	13.05	Average
@ 5173.200	33.64	8.40	39.19	96.53	99.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

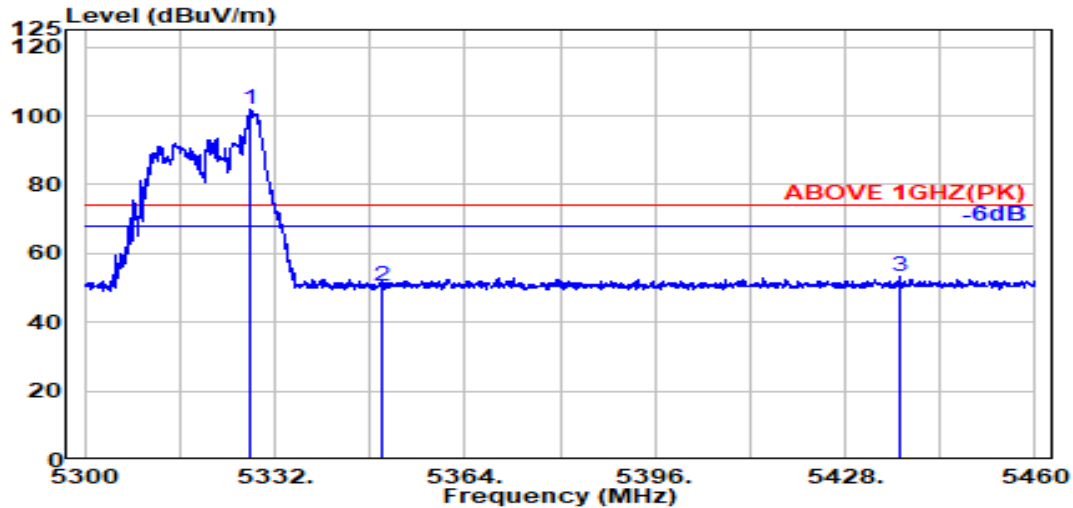

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	33.74	8.55	39.17	98.63	101.75	---	---	Peak
5350.000	33.70	8.57	39.17	47.51	50.62	74.00	23.38	Peak
5437.100	33.97	8.66	39.16	49.74	53.21	74.00	20.79	Peak

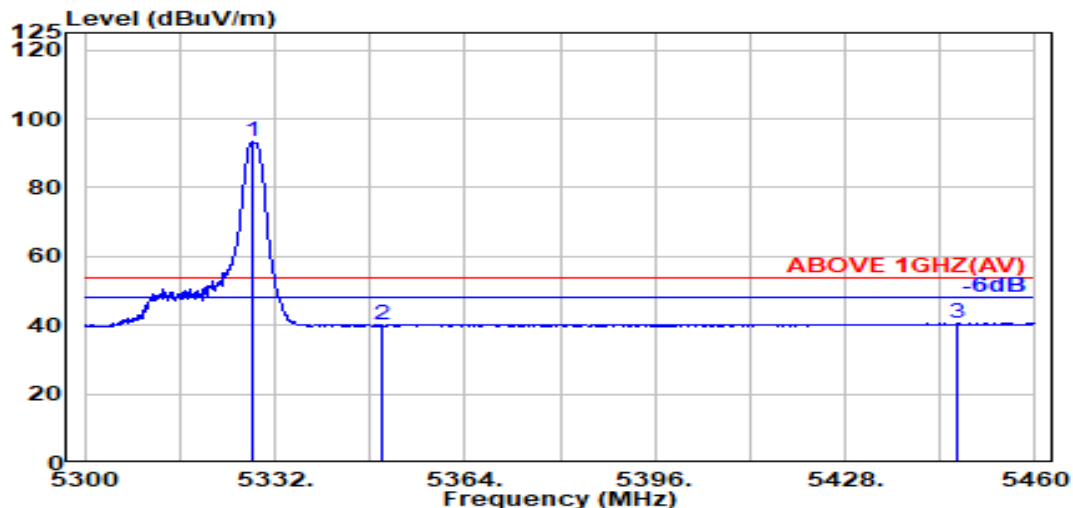

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	90.05	93.18	---	---	Average
5350.000	33.70	8.57	39.17	36.80	39.90	54.00	14.10	Average
5447.000	33.99	8.67	39.16	36.96	40.47	54.00	13.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	26/8	Frequency	TX 5320MHz

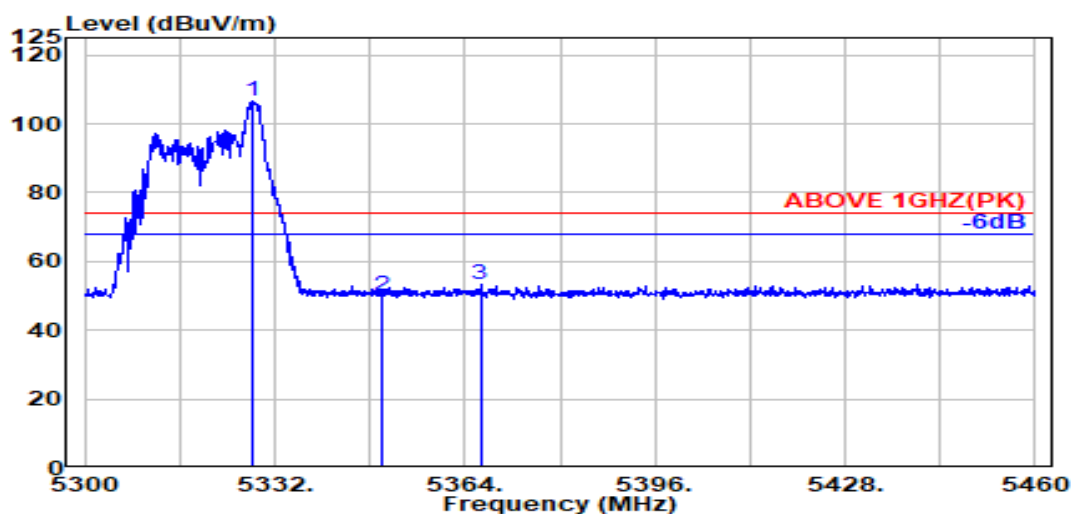

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.74	8.55	39.17	103.53	106.65	---	---	Peak
5350.000	33.70	8.57	39.17	46.98	50.09	74.00	23.91	Peak
5366.600	33.77	8.59	39.17	50.12	53.31	74.00	20.69	Peak

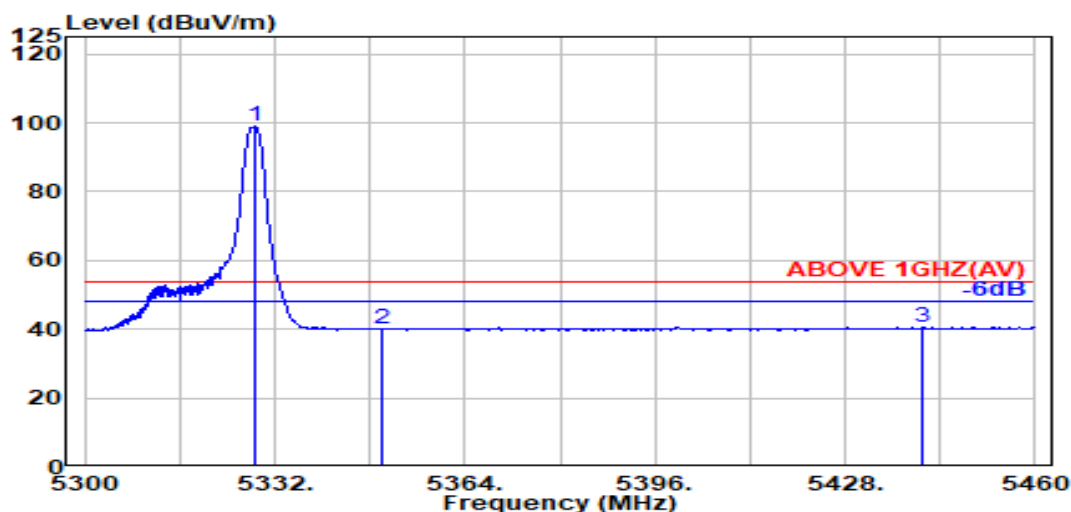

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.74	8.55	39.17	95.78	98.90	---	---	Average
5350.000	33.70	8.57	39.17	36.90	40.00	54.00	14.00	Average
5441.100	33.98	8.66	39.16	37.06	40.55	54.00	13.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

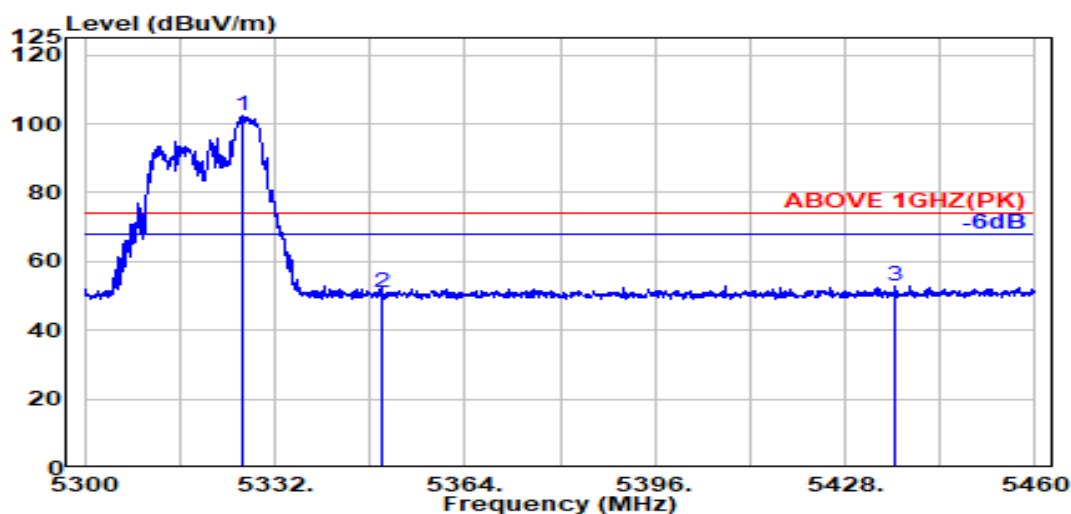

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.400	33.75	8.55	39.17	99.11	102.23	---	---	Peak
5350.000	33.70	8.57	39.17	47.91	51.02	74.00	22.98	Peak
5436.400	33.97	8.66	39.16	49.21	52.68	74.00	21.32	Peak

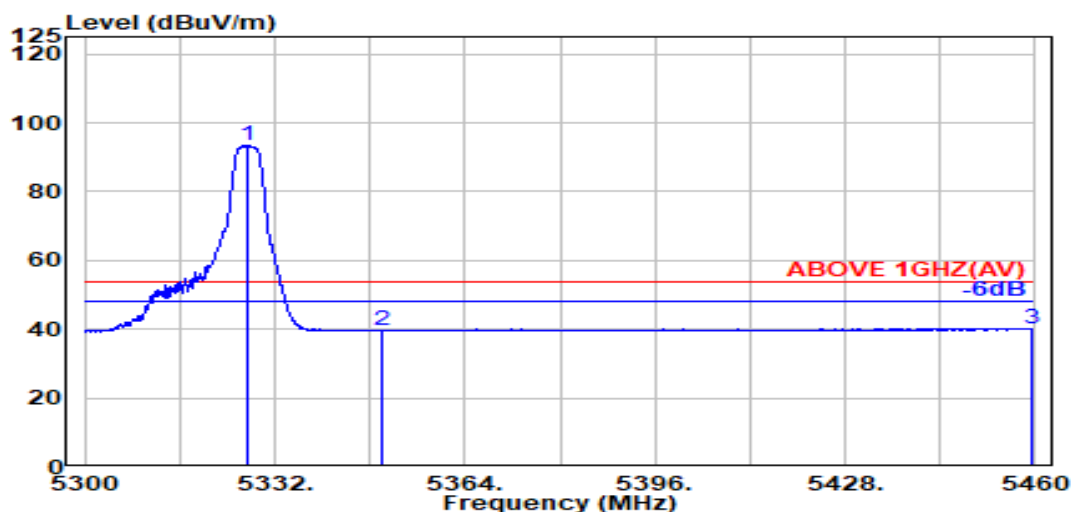

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.74	8.55	39.17	90.25	93.37	---	---	Average
5350.000	33.70	8.57	39.17	36.69	39.79	54.00	14.21	Average
5459.400	34.02	8.68	39.15	36.69	40.23	54.00	13.77	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174


Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	52/40	Frequency	TX 5320MHz

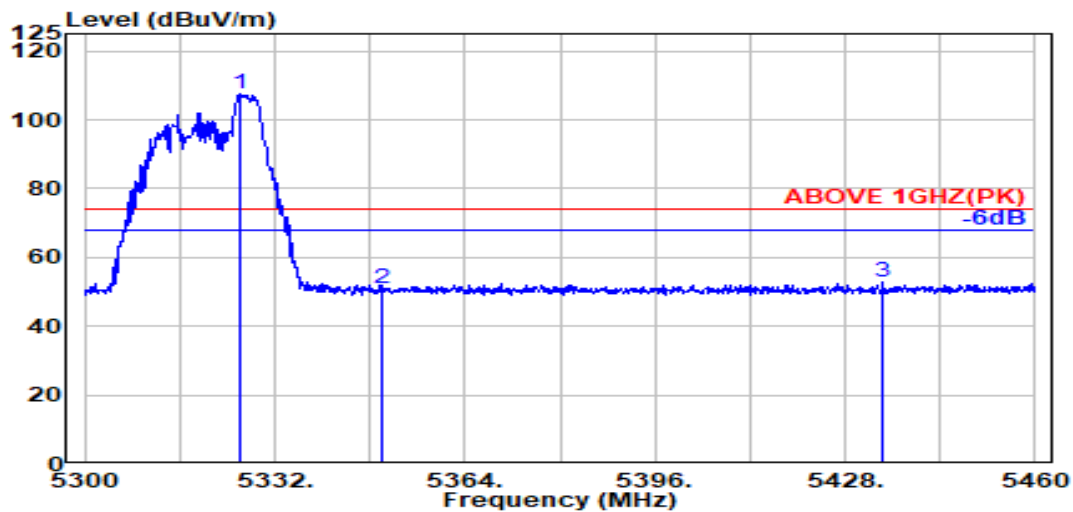

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.000	33.75	8.55	39.17	104.42	107.54	---	---	Peak
5350.000	33.70	8.57	39.17	47.68	50.79	74.00	23.21	Peak
5434.200	33.97	8.65	39.16	49.28	52.75	74.00	21.25	Peak

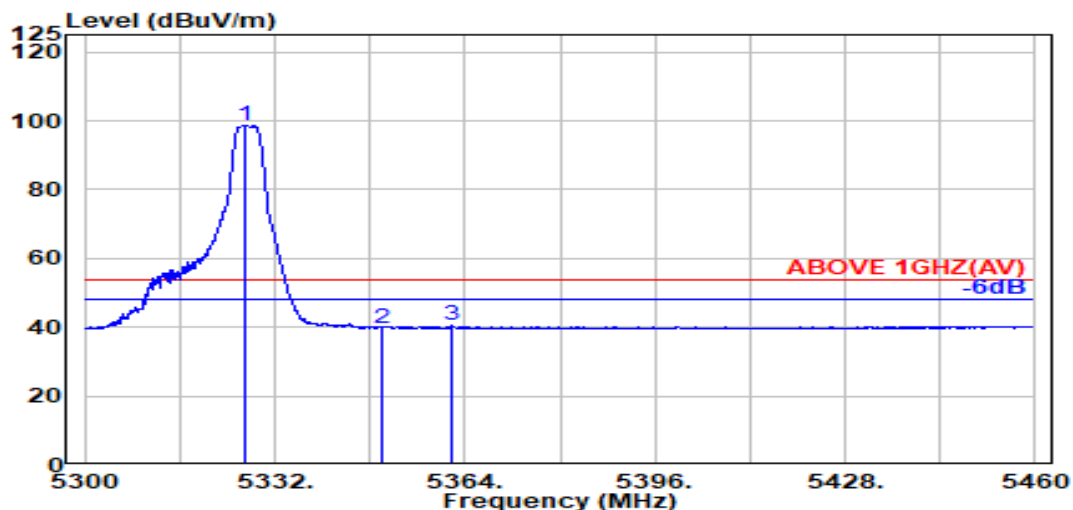

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.000	33.75	8.55	39.17	95.67	98.79	---	---	Average
5350.000	33.70	8.57	39.17	36.66	39.77	54.00	14.23	Average
5361.800	33.75	8.58	39.17	37.18	40.35	54.00	13.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

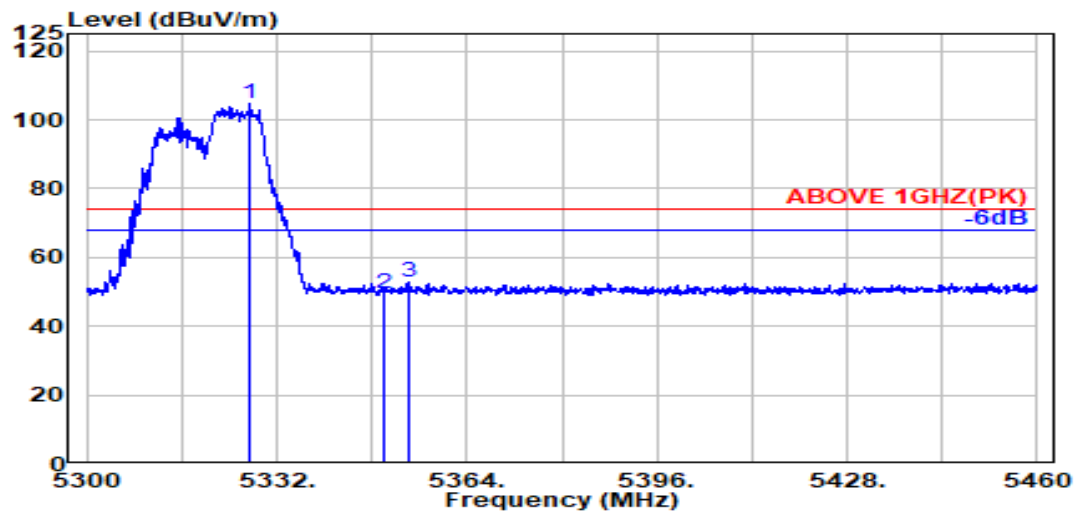

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.74	8.55	39.17	101.40	104.52	---	---	Peak
5350.000	33.70	8.57	39.17	46.36	49.47	74.00	24.53	Peak
5354.100	33.72	8.58	39.17	49.64	52.76	74.00	21.24	Peak

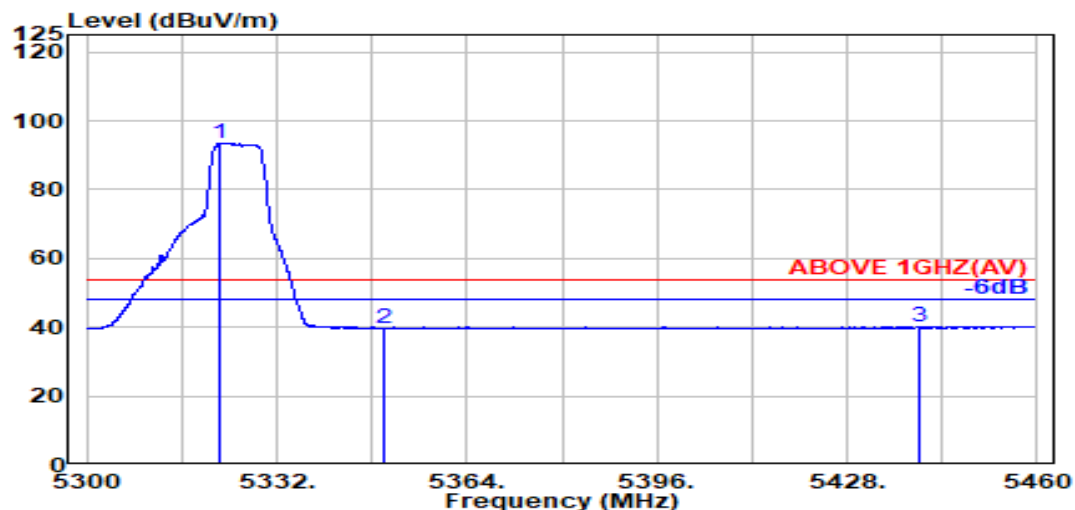

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.200	33.76	8.55	39.17	90.35	93.48	---	---	Average
5350.000	33.70	8.57	39.17	36.59	39.69	54.00	14.31	Average
5440.000	33.98	8.66	39.16	36.80	40.28	54.00	13.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2A
RU Configuration	106/54	Frequency	TX 5320MHz

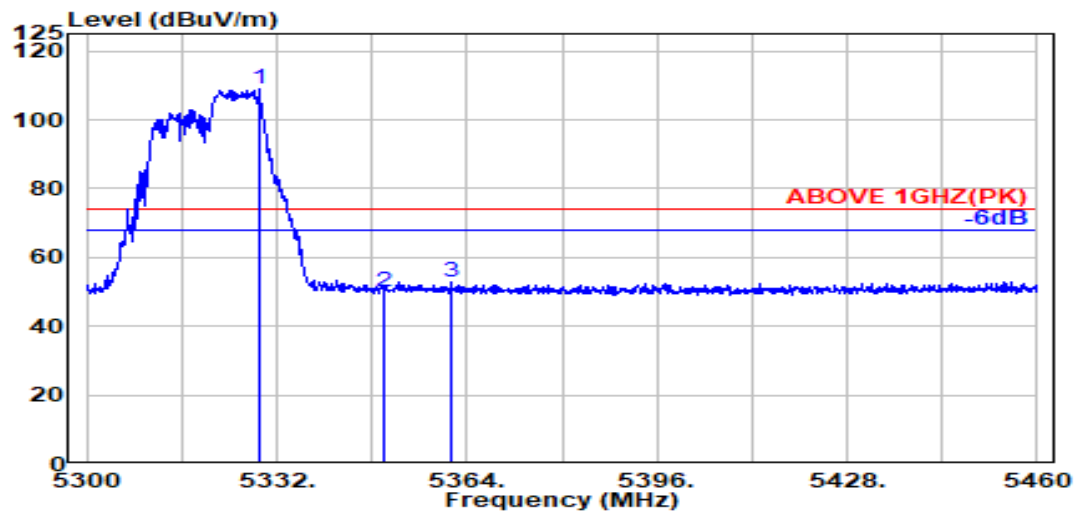

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5329.000	33.74	8.55	39.17	105.62	108.75	---	---	Peak
5350.000	33.70	8.57	39.17	46.79	49.90	74.00	24.10	Peak
5361.300	33.75	8.58	39.17	49.88	53.04	74.00	20.96	Peak

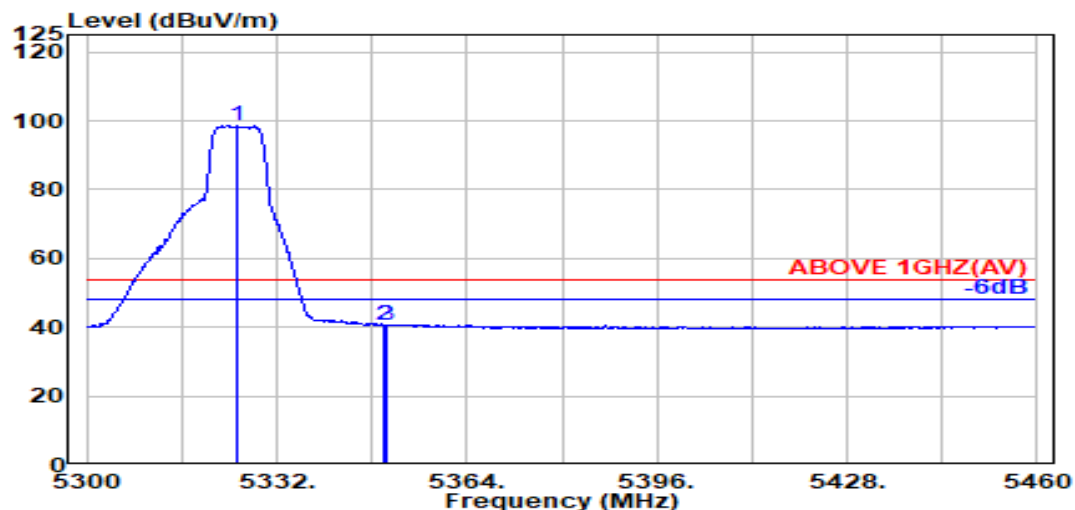

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.400	33.75	8.55	39.17	95.44	98.57	---	---	Average
5350.000	33.70	8.57	39.17	37.41	40.52	54.00	13.48	Average
5350.600	33.70	8.57	39.17	37.61	40.71	54.00	13.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

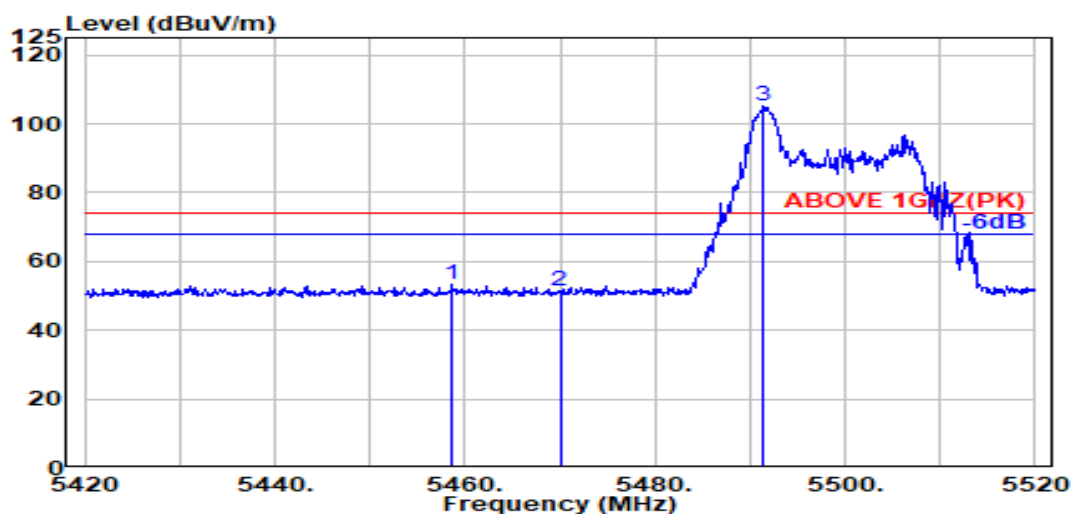

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.700	34.02	8.68	39.15	49.61	53.15	74.00	20.85	Peak
5470.000	34.04	8.69	39.15	47.75	51.33	74.00	22.67	Peak
@ 5491.400	34.08	8.71	39.15	101.35	104.99	---	---	Peak

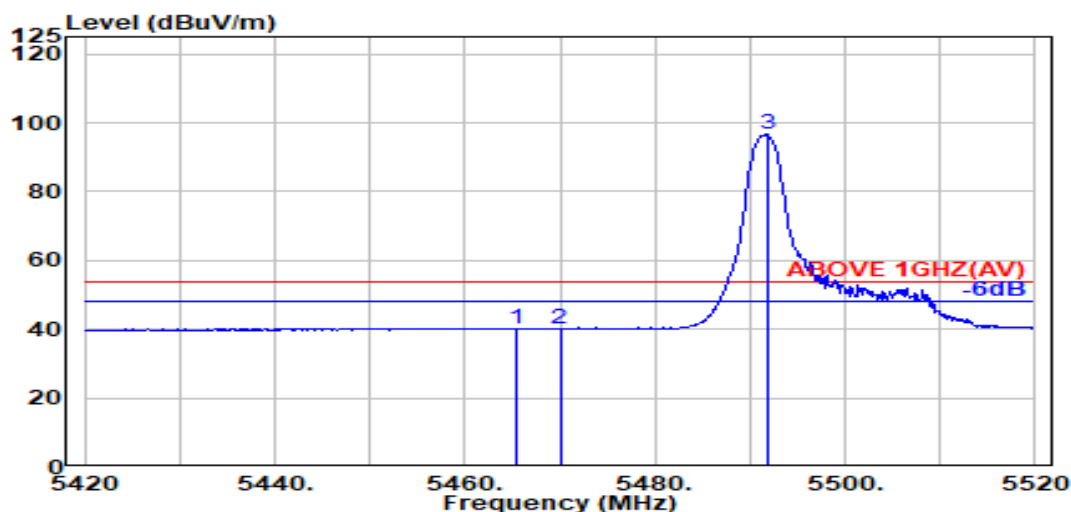

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.03	8.68	39.15	36.74	40.30	54.00	13.70	Average
5470.000	34.04	8.69	39.15	36.52	40.10	54.00	13.90	Average
@ 5491.800	34.08	8.71	39.15	92.95	96.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5500MHz

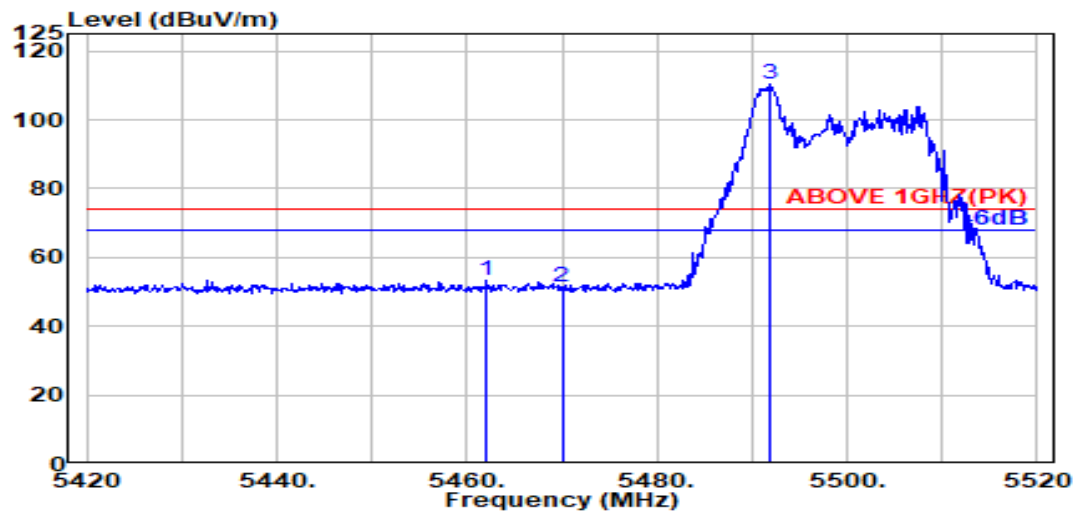

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.100	34.02	8.68	39.15	49.84	53.39	74.00	20.61	Peak
5470.000	34.04	8.69	39.15	47.75	51.32	74.00	22.68	Peak
@ 5492.000	34.08	8.71	39.15	106.92	110.57	---	---	Peak

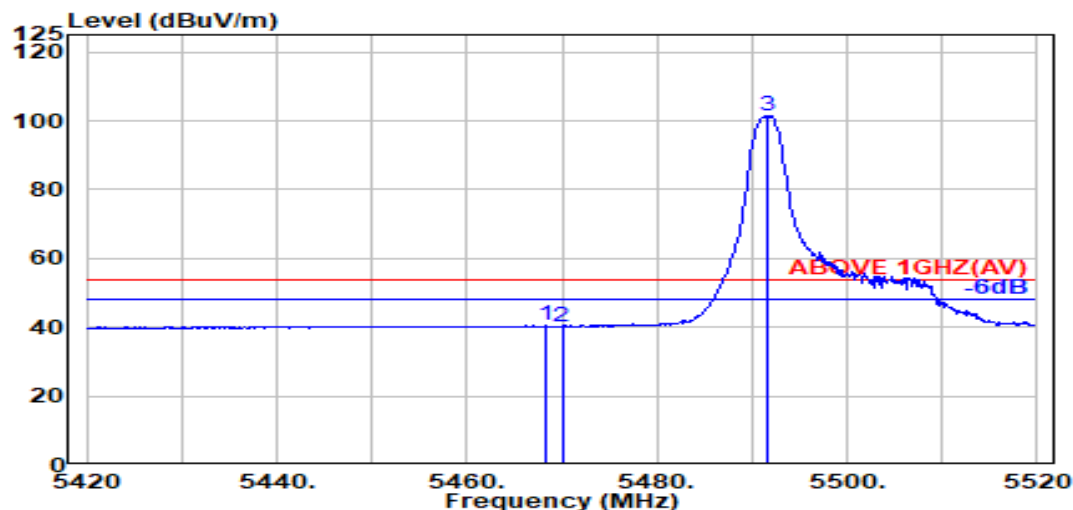

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.300	34.04	8.69	39.15	36.86	40.43	54.00	13.57	Average
5470.000	34.04	8.69	39.15	36.71	40.28	54.00	13.72	Average
@ 5491.500	34.08	8.71	39.15	97.79	101.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

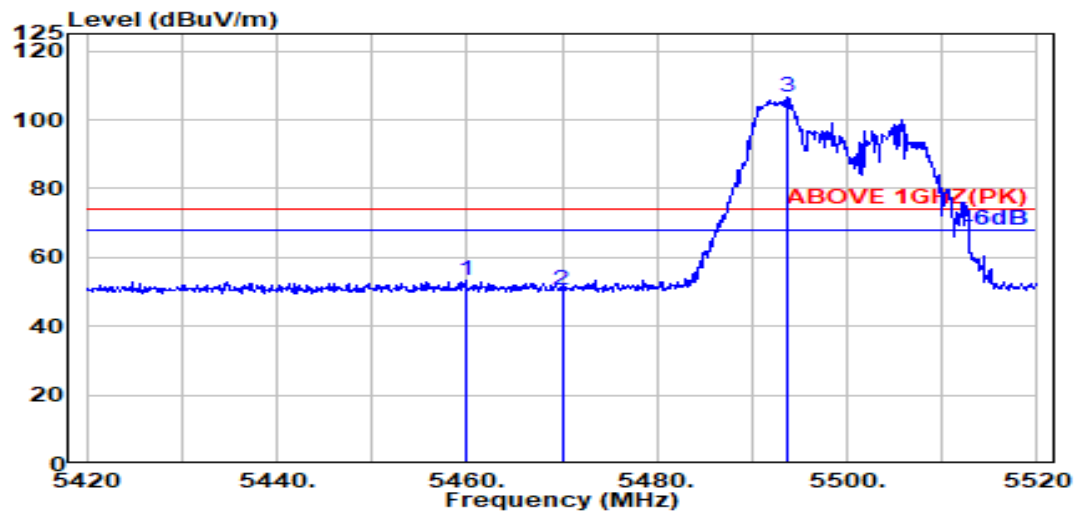

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.02	8.68	39.15	49.53	53.07	74.00	20.93	Peak
5470.000	34.04	8.69	39.15	46.85	50.43	74.00	23.57	Peak
@ 5493.600	34.09	8.71	39.15	103.03	106.67	---	---	Peak

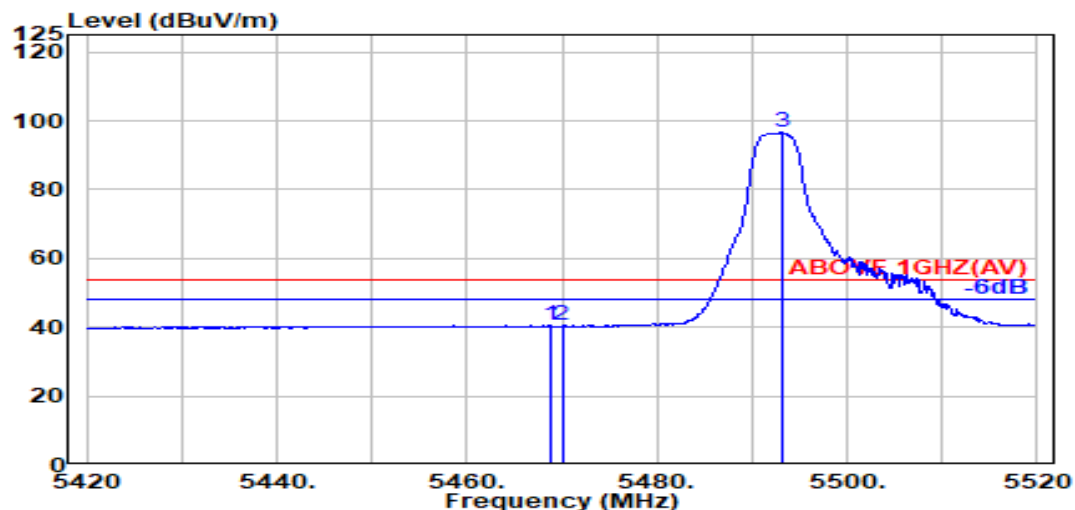

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.900	34.04	8.69	39.15	36.85	40.42	54.00	13.58	Average
5470.000	34.04	8.69	39.15	36.79	40.36	54.00	13.64	Average
@ 5493.200	34.09	8.71	39.15	92.99	96.64	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5500MHz

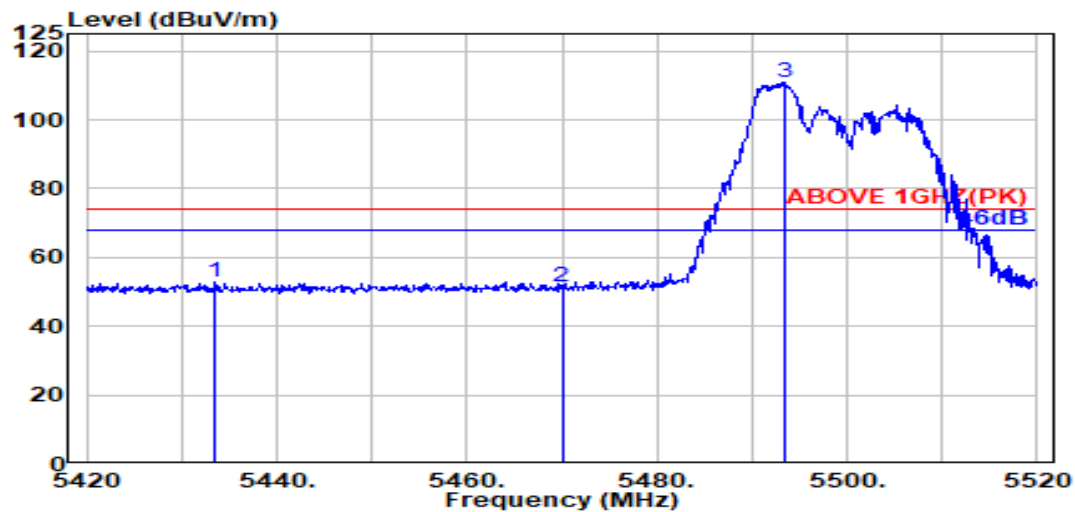

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.500	33.97	8.65	39.16	49.43	52.90	74.00	21.10	Peak
5470.000	34.04	8.69	39.15	47.79	51.37	74.00	22.63	Peak
@ 5493.400	34.09	8.71	39.15	107.31	110.96	---	---	Peak

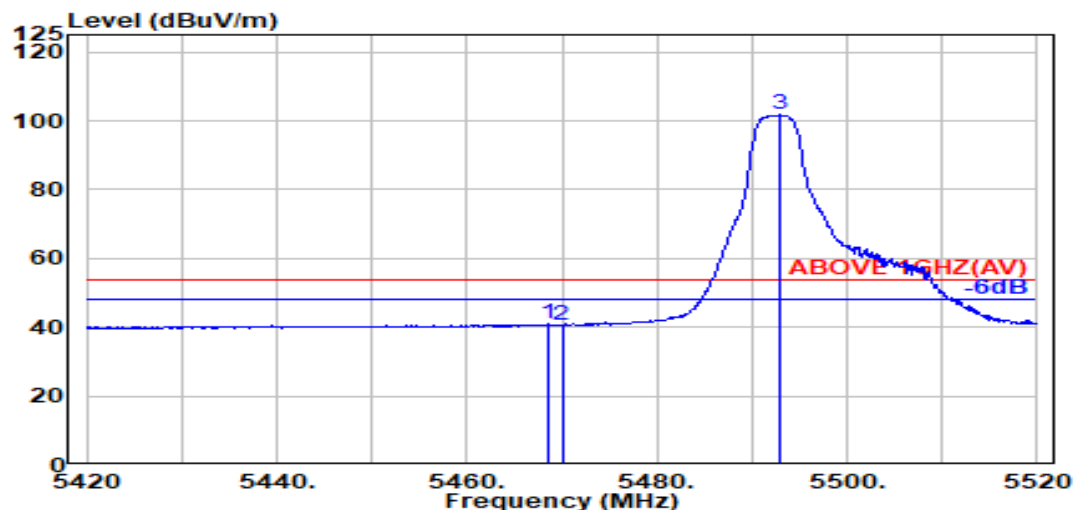

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.04	8.69	39.15	37.41	40.98	54.00	13.02	Average
5470.000	34.04	8.69	39.15	36.85	40.42	54.00	13.58	Average
@ 5493.000	34.09	8.71	39.15	98.12	101.76	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

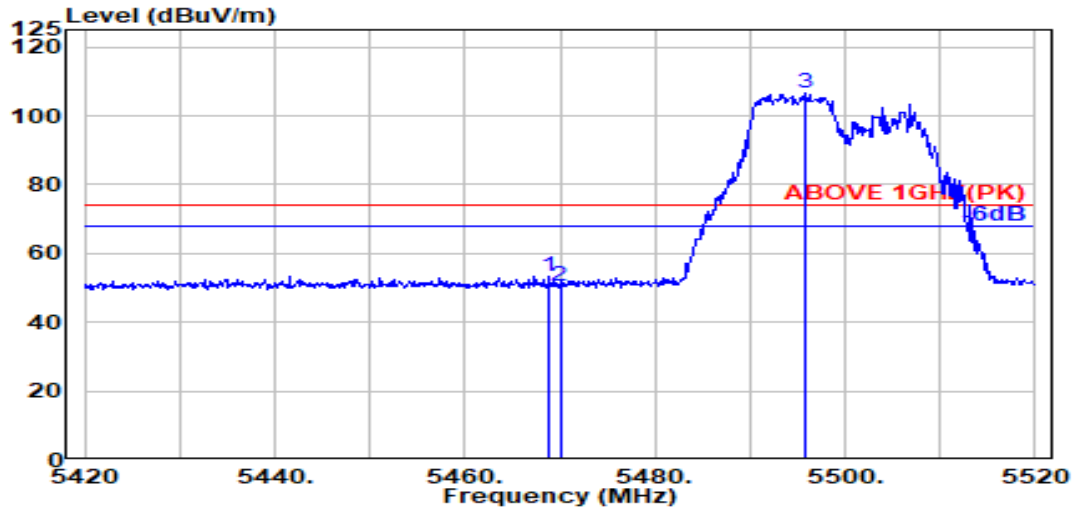

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.04	8.69	39.15	49.80	53.37	74.00	20.63	Peak
5470.000	34.04	8.69	39.15	47.12	50.70	74.00	23.30	Peak
@ 5495.900	34.09	8.71	39.15	102.98	106.64	---	---	Peak

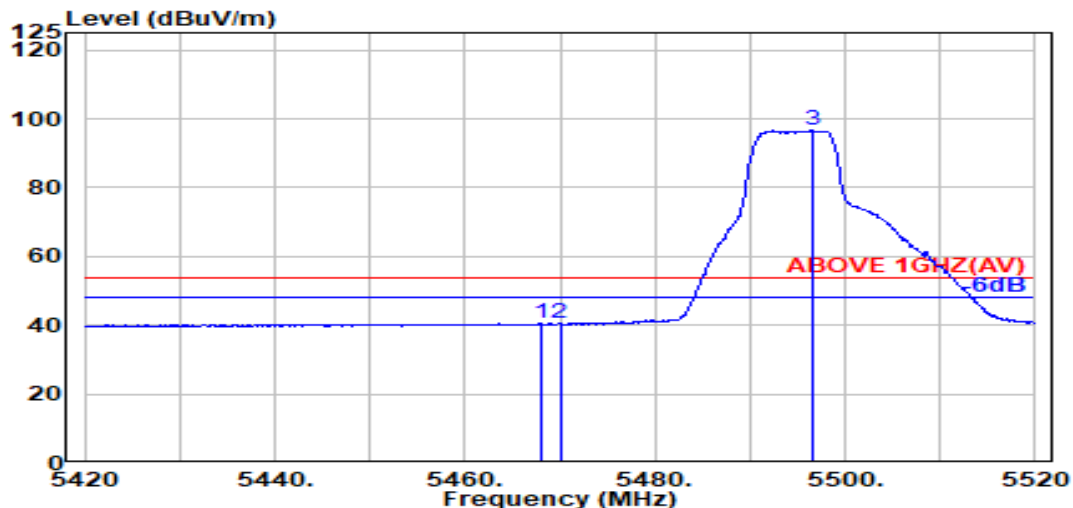

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.100	34.04	8.69	39.15	36.86	40.43	54.00	13.57	Average
5470.000	34.04	8.69	39.15	36.86	40.44	54.00	13.56	Average
@ 5496.500	34.09	8.71	39.15	92.97	96.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11be-EHT20	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5500MHz

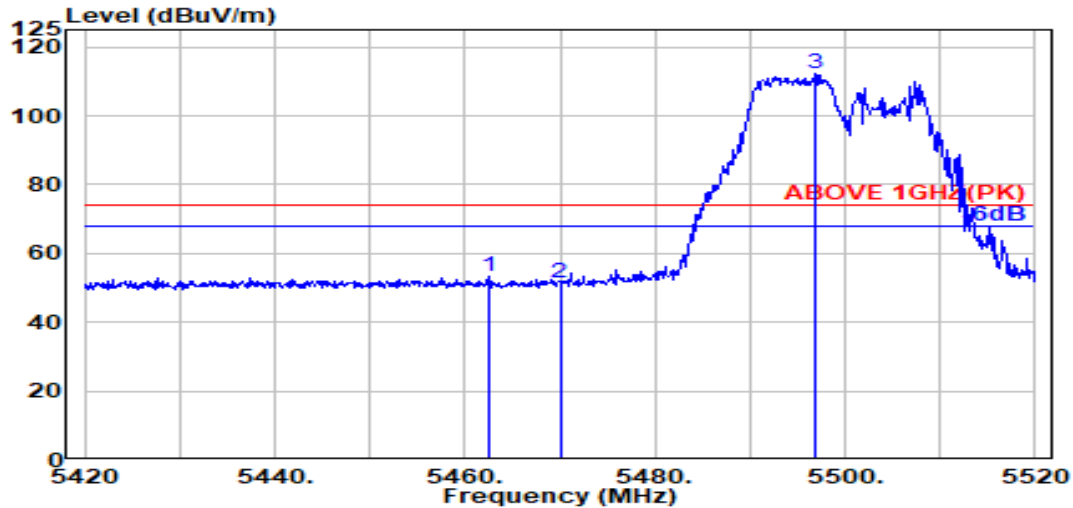

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.500	34.03	8.68	39.15	49.68	53.23	74.00	20.77	Peak
5470.000	34.04	8.69	39.15	47.87	51.45	74.00	22.55	Peak
@ 5496.800	34.09	8.71	39.15	108.41	112.07	---	---	Peak

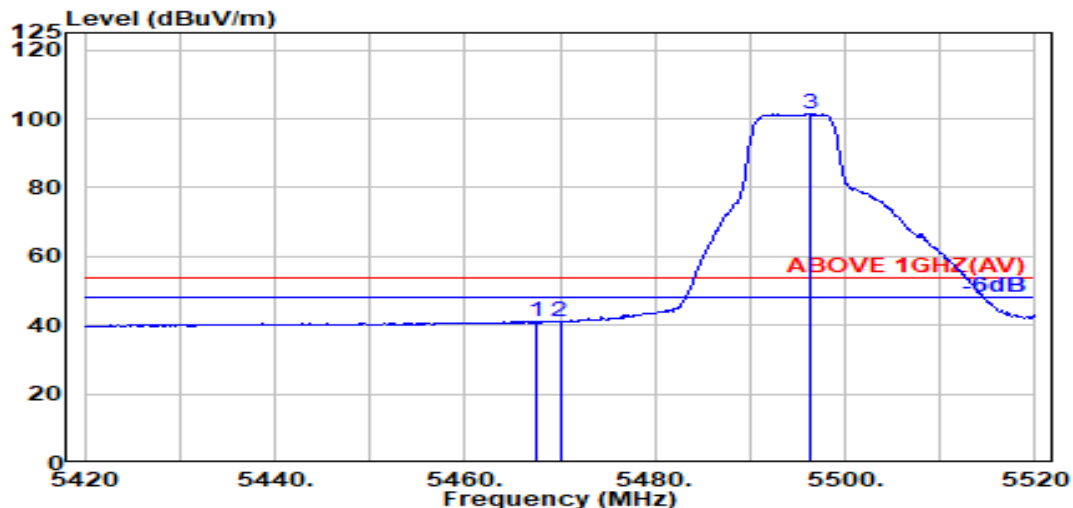

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.03	8.69	39.15	37.55	41.12	54.00	12.88	Average
5470.000	34.04	8.69	39.15	37.42	41.00	54.00	13.00	Average
@ 5496.400	34.09	8.71	39.15	97.93	101.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2501174

Report Number: EM-F250105

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.