

## Supplemental “Transmit Simultaneously” Test Report

**Report No.:** RF180206E03-5

**FCC ID:** S9GM510

**Test Model:** M510

**Received Date:** Feb. 06, 2018

**Test Date:** Feb. 23 to Mar. 27, 2018

**Issued Date:** May 16, 2018

**Applicant:** Ruckus Wireless, Inc.

**Address:** 350 West Java Drive, Sunnyvale, CA 94089

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results .....</b>	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.1.1 Test Mode Applicability and Tested Channel Detail .....	9
3.2 Description of Support Units .....	11
3.2.1 Configuration of System under Test .....	12
<b>4 Test Types and Results .....</b>	<b>16</b>
4.1 Radiated Emission and Bandedge Measurement .....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	16
4.1.2 Test Instruments .....	18
4.1.3 Test Procedures .....	19
4.1.4 Deviation from Test Standard .....	21
4.1.5 Test Setup .....	21
4.1.6 EUT Operating Conditions .....	22
4.1.7 Test Results .....	23
4.2 Conducted Emission Measurement .....	27
4.2.1 Limits of Conducted Emission Measurement .....	27
4.2.2 Test Instruments .....	27
4.2.3 Test Procedures .....	28
4.2.4 Deviation from Test Standard .....	28
4.2.5 Test Setup .....	28
4.2.6 EUT Operating Conditions .....	28
4.2.7 Test Results (Mode 1) .....	29
4.2.8 Test Results (Mode 2) .....	31
4.2.9 Test Results (Mode 3) .....	33
4.3 Conducted Out of Band Emission Measurement .....	35
4.3.1 Limits of Conducted Out of Band Emission Measurement .....	35
4.3.2 Test Setup .....	35
4.3.3 Test Instruments .....	35
4.3.4 Test Procedures .....	35
4.3.5 Deviation from Test Standard .....	35
4.3.6 EUT Operating Conditions .....	35
4.3.7 Test Results .....	35
<b>5 Pictures of Test Arrangements .....</b>	<b>37</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>38</b>

### Release Control Record

Issue No.	Description	Date Issued
RF180206E03-5	Original release.	May 16, 2018

## 1 Certificate of Conformity

**Product:** M510 Access Point

**Brand:** Ruckus Wireless

**Test Model:** M510

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Ruckus Wireless, Inc.

**Test Date:** Feb. 23 to Mar. 27, 2018

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 15, Subpart E (Section 15.407)

FCC Part 27

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Phoenix Huang , **Date:** May 16, 2018  
Phoenix Huang / Specialist

**Approved by :** May Chen , **Date:** May 16, 2018  
May Chen / Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.74dB at 0.46150MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.6dB at 4874.00MHz.
2.1053 27.53	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -29.88dB at 2099.1MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.33 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.10 dB
	6GHz ~ 18GHz	4.85 dB
	18GHz ~ 40GHz	5.24 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	M510 Access Point
Brand	Ruckus Wireless
Test Model	M510
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 48V from POE or DC 12V from adapter or DC 12V from Terminal
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	<b>2.4GHz:</b> 2.412 ~ 2.462GHz <b>5GHz:</b> 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	<b>2.4GHz:</b> 802.11b, 802.11g, 802.11ac (VHT20), VHT20: 11 802.11ac (VHT40), VHT40: 7 <b>5GHz:</b> 802.11a, 802.11ac (VHT20), 802.11ac (VHT20): 9 802.11ac (VHT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	<b>2.4GHz:</b> 702.651mW <b>5GHz:</b> 5.18 ~ 5.24GHz: 652.747mW 5.745 ~ 5.825GHz: 830.988mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

- There are WLAN, WWAN and GPS technology used for the EUT. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN (2.4GHz + 5GHz)	WWAN (LTE + WCDMA) +GPS

- Simultaneously transmission condition.

Condition	Technology			
1	WLAN 2.4GHz	WLAN 5GHz	WWAN WCDMA	GPS
2	WLAN 2.4GHz	WLAN 5GHz	WWAN LTE	GPS

Note: For the above condition, the worse radiated emissions test was found in Condition 2. Therefore only the test data of the modes were recorded in this report.

3. The EUT must be supplied with a POE or power adapter as following table:

PoE (only for test)		
Brand	Model No.	Spec.
Ruckus Wireless, Inc	740-64214-001	Input: 100-240V, 0.75A, 50/60Hz Output: 48V, 0.5A
Adapter (only for test)		
Brand	Model No.	Spec.
Ruckus Wireless, Inc	NBS24J120200B3	Input: 100-240V, 0.6A, 50/60Hz Output: 12V, 2.0A

4. The antennas provided to the EUT, please refer to the following table:

WLAN									
Antenna NO.	Transmitter Circuit		Antenna Net Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length (mm)	Cable Loss (dB)	Excluding cable loss Antenna Gain(dBi)
1	5GHz_chain_0 2.4GHz_chain_1		1	2.4~2.4835	PIFA	i-pex (MHF)	120	0	1
			3	5.15~5.85				0	3
2	5GHz_chain_1 2.4GHz_chain_0		1.2	2.4~2.4835	PIFA	i-pex (MHF)	70	0	1.2
			3	5.15~5.85				0	3
GPS									
Antenna Net Gain(dBi)				Frequency range (MHz)	Antenna Type	Connector Type	Cable Length (mm)	Cable Loss (dB)	Excluding cable loss Antenna Gain(dBi)
1.66				1575.42	Dipole	i-pex (MHF)	80	0.34	2
WWAN									
Antenna NO.	Antenna Type	Brand	Model		Band		Freq. Range		Gain (dBi)
1 (Main)	Dipole	Aristotle	RFA-LTE-C55-B70-C255		WCDMA II (B2)		1850~1910		1.66
					WCDMA IV (B4)		1710~1755		1.66
					WCDMA V (B5)		824~849		1.66
					LTE Band (2)		1850~1910		1.66
					LTE Band (4)		1710~1755		1.66
					LTE Band (12)		698~716		1.53
2 (Aux)	Dipole	Aristotle	RFA-LTE-C55-B70-C255		WCDMA II (B2)		1850~1910		1.5
					WCDMA IV (B4)		1710~1755		1.5
					WCDMA V (B5)		824~849		1.5
					LTE Band (2)		1850~1910		1.5
					LTE Band (4)		1710~1755		1.5
					LTE Band (12)		698~716		1.37

Note: There are two WLAN antennas will transmit simultaneously (one is Horizontal and the other one is Vertical-- MIMO system with two outputs driving a cross-polarized pair of linearly polarized antennas). As the antenna combination must be supplied with one Horizontal and one Vertical antenna.

5. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note:

1. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	OB	
1	√	√	√	√	With PoE
2	-	-	√	-	With Adapter
3	-	-	√	-	With Terminal Blocking

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement  
**PLC**: Power Line Conducted Emission

**RE<1G**: Radiated Emission below 1GHz  
**OB**: Conducted Out-Band Emission Measurement

**Note:**

1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.
2. “-” means no effect.

#### **Radiated Emission Test (Above 1GHz):**

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b + 802.11ac (VHT40) + LTE Band 12 (1.4MHz)	1 to 11	6	DSSS	DBPSK
	38 to 46, 151 to 159	159	OFDM	BPSK
	23017 to 23173	23017	OFDMA	QPSK

#### **Radiated Emission Test (Below 1GHz):**

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b + 802.11ac (VHT40) + LTE Band 12 (1.4MHz)	1 to 11	6	DSSS	DBPSK
	38 to 46, 151 to 159	159	OFDM	BPSK
	23017 to 23173	23017	OFDMA	QPSK

#### **Power Line Conducted Emission Test:**

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b + 802.11ac (VHT40) + LTE Band 12 (1.4MHz)	1 to 11	6	DSSS	DBPSK
	38 to 46, 151 to 159	159	OFDM	BPSK
	23017 to 23173	23017	OFDMA	QPSK

### Conducted Out-Band Emission Measurement:

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b + 802.11ac (VHT40)	1 to 11	6	DSSS	DBPSK
	38 to 46, 151 to 159	159	OFDM	BPSK

### Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE $\geq$ 1G	23deg. C, 67%RH	120Vac, 60Hz	Eason Tseng
RE $<$ 1G	23deg. C, 61%RH	120Vac, 60Hz	Eason Tseng
PLC	24deg. C, 67%RH	120Vac, 60Hz	Andy Ho
	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
OB	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	SIM Card	R&S	CMW-Z04	NA	NA	Provided by Lab
B.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
C.	Laptop	DELL	E6420	482T3R1	FCC DoC	Provided by Lab
D.	iPod	Apple	MD778TA/A	CC4JL03FF4T1	NA	Provided by Lab
E.	PoE Adapter	Ruckus Wireless	740-64214-001	NA	NA	Supplied by client
F.	Simulator	R&S	CMW500	151084	NA	Provided by Lab
G.	DC Power supply	GOOD WILL INSTRUMENT CO., LTD	GPC-3030D	E847076	NA	Provided by Lab
H.	Adapter	Ruckus Wireless	NBS24J120200B3	NA	NA	Supplied by client

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	3	No	0	Provided by Lab
4.	GPS Cable	1	5	No	0	Supplied by client
5.	USB Cable	1	0.1	Yes	0	Provided by Lab
6.	AC Cable	1	1.8	No	0	Supplied by client
7.	DC Cable	1	1.8	No	0	Supplied by client
8.	DC Cable	1	1.2	No	0	Provided by Lab


### 3.2.1 Configuration of System under Test

For Mode 1:


Conducted emission test item

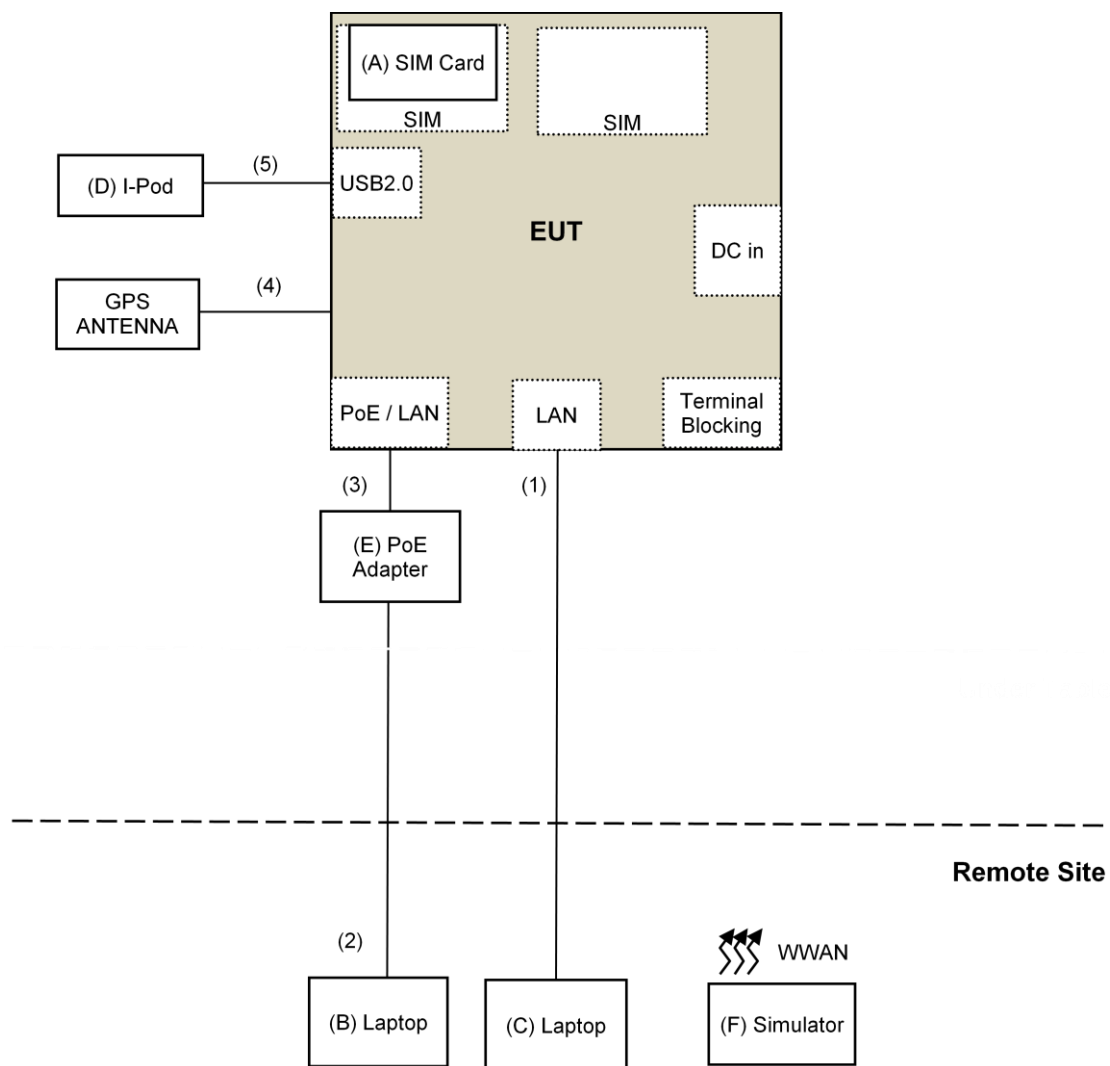


## Other test items

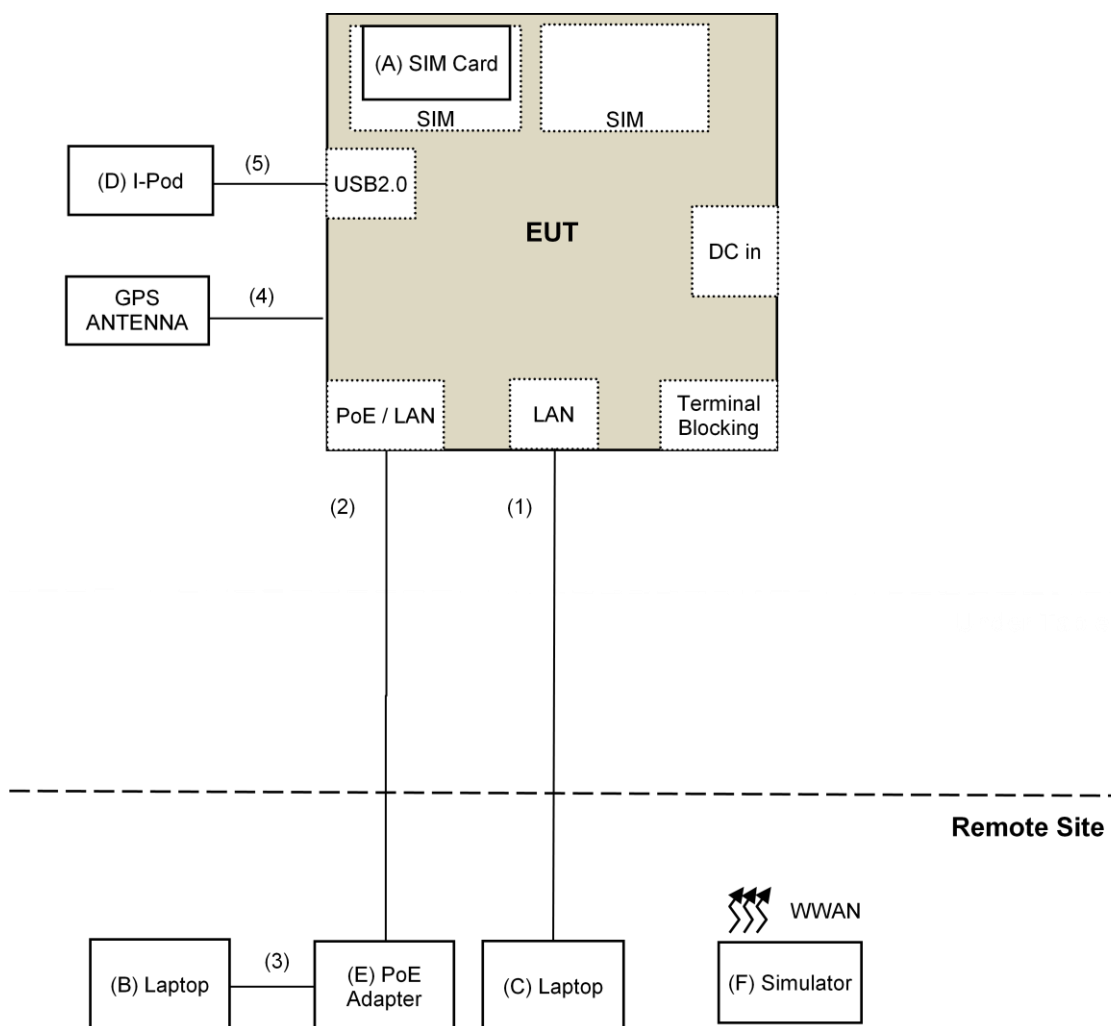

For Mode 2

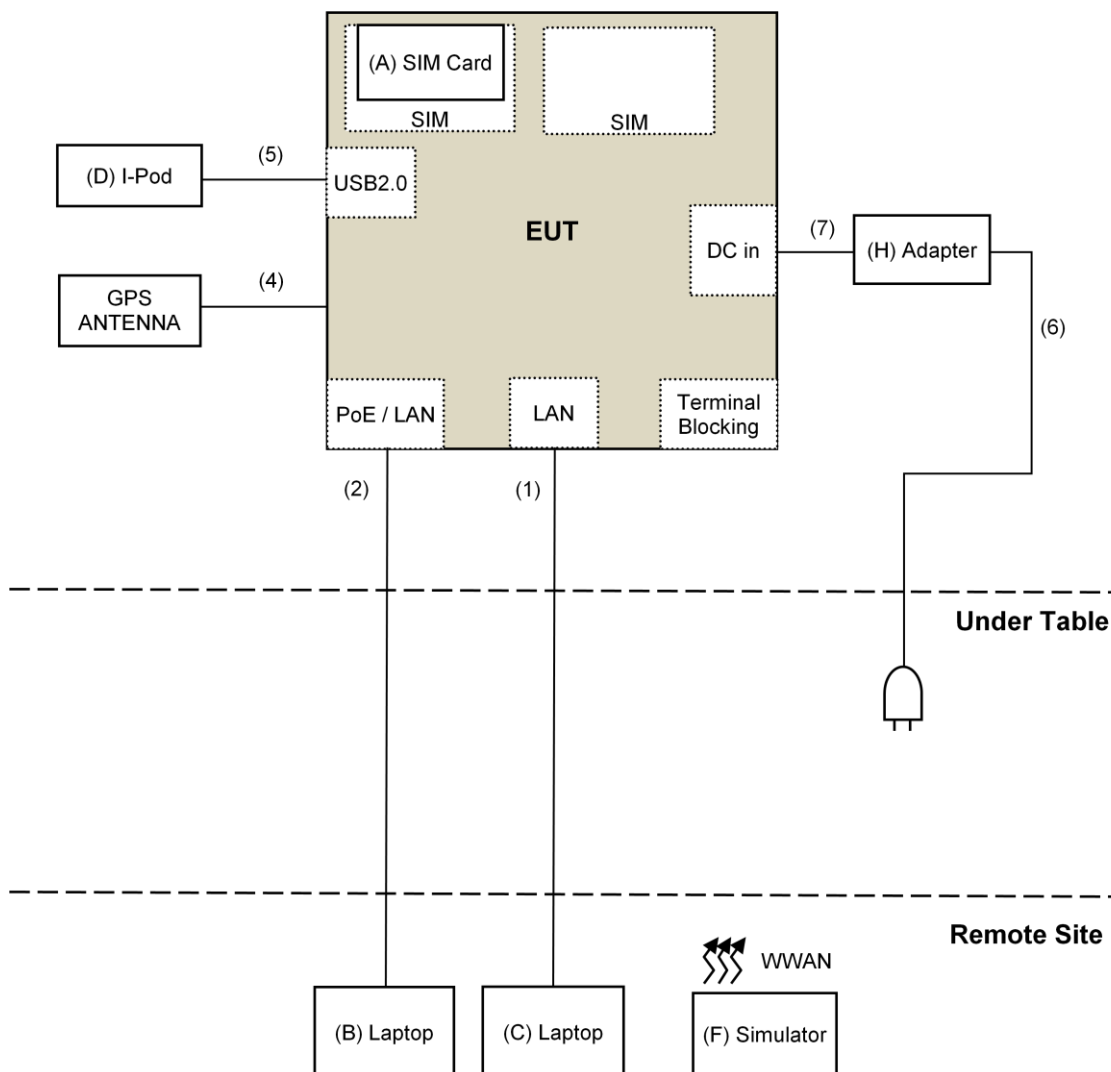

For Mode 3

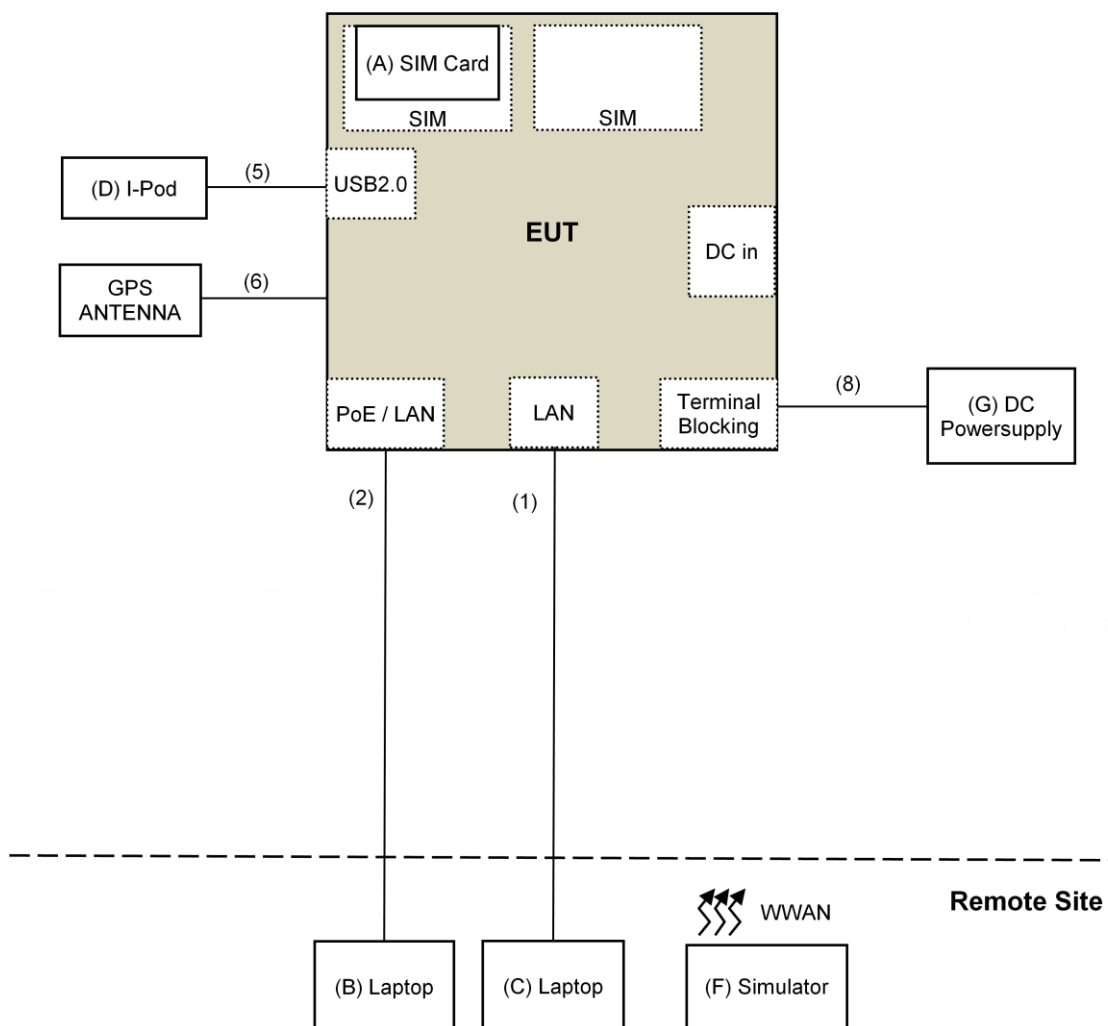

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

For 47 CFR FCC Part 15:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### Note:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v01r04		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:10 (dBm/MHz) <sup>*2</sup> PK:15.6 (dBm/MHz) <sup>*3</sup> PK:27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dBuV/m) <sup>*1</sup> PK:105.2 (dBuV/m) <sup>*2</sup> PK: 110.8(dBuV/m) <sup>*3</sup> PK:122.2 (dBuV/m) <sup>*4</sup>
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
<sup>*1</sup> beyond 75 MHz or more above of the band edge.		<sup>*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
<sup>*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		<sup>*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

#### Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$



#### FCC Part 27:

According to FCC 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) AWS emission limits— General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

#### 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Pre-Amplifier(*) EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	5D-FB	LOOPCAB-00 1 LOOPCAB-00 2	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980385	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM- SM-1200 EMC104-SM- SM-2000 EMC104-SM- SM-5000	160923 150318 150321	Jan. 29, 2018	Jan. 28, 2019
Pre-Amplifier EMCI	EMC184045S E	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM- KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-S P-AR	MAA0812-008	Jan. 10, 2018	Jan. 09, 2019
DC Power Supply Topward	6603D	795558	NA	NA
True RMS Clamp Meter FLUKE	325	31130711WS	May 29, 2017	May 28, 2018

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \*The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Feb. 24 to Mar. 08, 2018

#### 4.1.3 Test Procedures

For 47 CFR FCC Part 15:

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

FCC Part 27:


- a. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high channel of operational frequency range.)
- b. Substitution method is used for EIRP measurement. In the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution antenna}.$

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

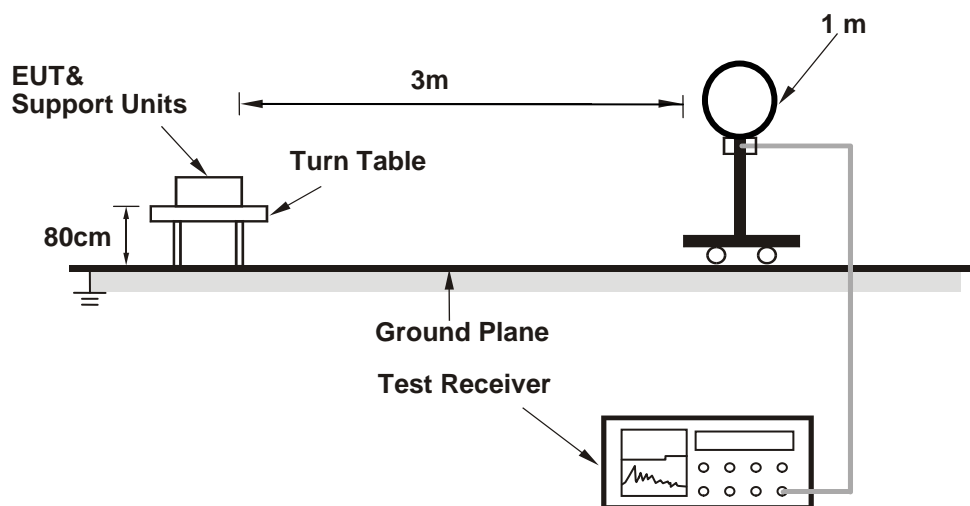

##### For Radiated emission 30MHz to 1GHz

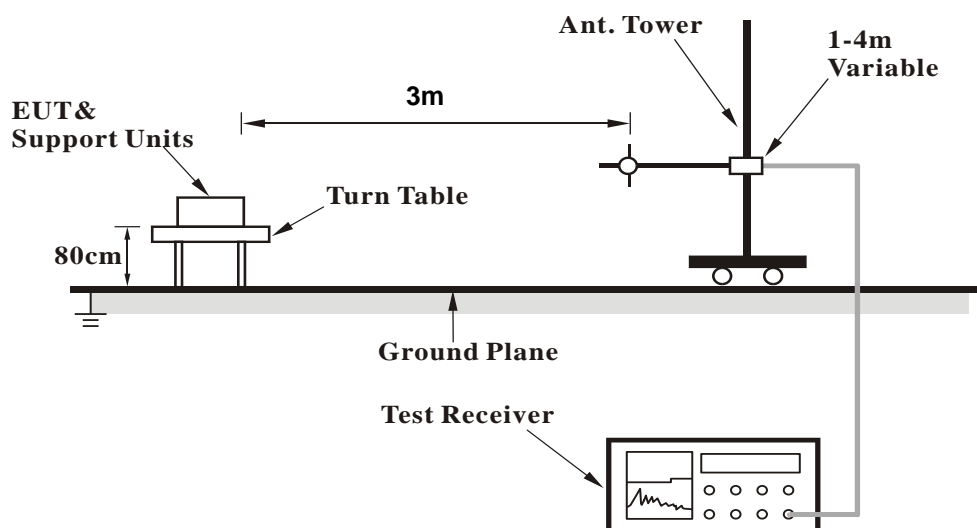

### For Radiated emission above 1GHz

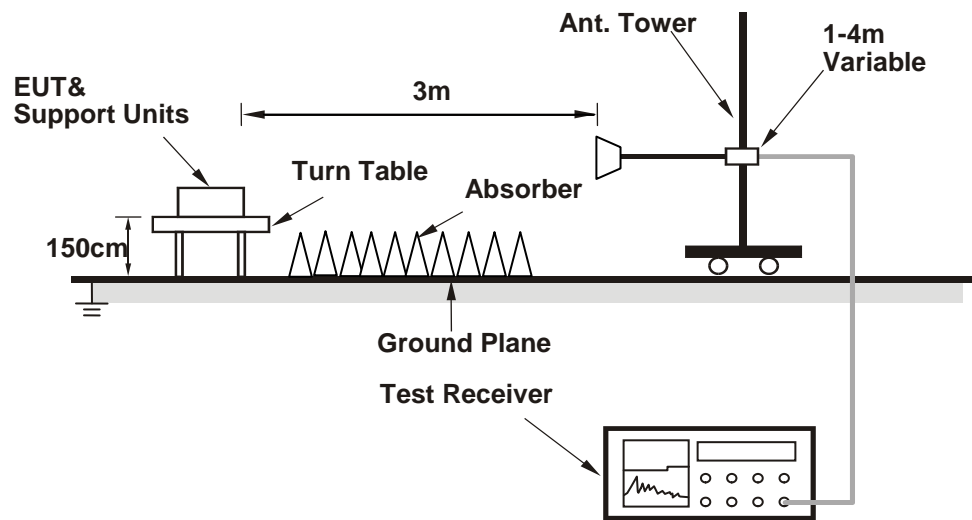

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QRCT.exe VER 3.0.297.0) has been activated to set the EUT on specific status.

#### 4.1.7 Test Results

##### Above 1GHz Data

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	52.6 PK	74.0	-21.4	3.36 H	306	49.7	2.9
2	4874.00	49.8 AV	54.0	-4.2	3.36 H	306	46.9	2.9
3	7311.00	46.9 PK	74.0	-27.1	3.17 H	288	37.6	9.3
4	7311.00	38.2 AV	54.0	-15.8	3.17 H	288	28.9	9.3
5	11590.00	61.5 PK	74.0	-12.5	2.96 H	198	47.5	14.0
6	11590.00	51.6 AV	54.0	-2.4	2.96 H	198	37.6	14.0
7	17385.00	50.8 PK	74.0	-23.2	1.62 H	180	33.5	17.3
8	17385.00	41.5 AV	54.0	-12.5	1.62 H	180	24.2	17.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	54.6 PK	74.0	-19.4	2.33 V	360	51.7	2.9
2	4874.00	52.4 AV	54.0	-1.6	2.33 V	360	49.5	2.9
3	7311.00	46.4 PK	74.0	-27.6	1.56 V	309	37.1	9.3
4	7311.00	36.2 AV	54.0	-17.8	1.56 V	309	26.9	9.3
5	11590.00	62.5 PK	74.0	-11.5	1.14 V	133	48.5	14.0
6	11590.00	49.1 AV	54.0	-4.9	1.14 V	133	35.1	14.0
7	17385.00	49.0 PK	74.0	-25.0	2.30 V	122	31.7	17.3
8	17385.00	40.6 AV	54.0	-13.4	2.30 V	122	23.3	17.3

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Mode	TX channel 23017	Frequency Range	Above 1000MHz
------	------------------	-----------------	---------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1399.4	38.89	-67.02	5.51	-61.51	-13	-48.51
2	2099.1	40.58	-62.06	6.85	-55.21	-13	-42.21
3	2798.8	34.18	-68.89	6.94	-61.95	-13	-48.95
4	3498.5	26.98	-78.36	7.85	-70.52	-13	-57.52
5	4198.2	33.47	-73.14	7.07	-66.07	-13	-53.07
6	4897.9	31.12	-75.32	7.07	-68.25	-13	-55.25
7	5597.6	29.99	-75.83	5.71	-70.11	-13	-57.11
8	6297.3	31.54	-74.75	6.27	-68.48	-13	-55.48
9	6997	33.77	-70.41	4.98	-65.44	-13	-52.44
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	1399.4	45.81	-60.10	5.51	-54.59	-13	-41.59
<b>2</b>	<b>2099.1</b>	<b>52.91</b>	<b>-49.73</b>	<b>6.85</b>	<b>-42.88</b>	<b>-13</b>	<b>-29.88</b>
3	2798.8	48.57	-54.50	6.94	-47.56	-13	-34.56
4	3498.5	47.96	-57.38	7.85	-49.54	-13	-36.54
5	4198.2	47.66	-58.95	7.07	-51.88	-13	-38.88
6	4897.9	26.99	-79.45	7.07	-72.38	-13	-59.38
7	5597.6	30.71	-76.26	7.05	-69.20	-13	-56.20
8	6297.3	31.74	-74.55	6.27	-68.28	-13	-55.28
9	6997	33.62	-70.56	4.98	-65.59	-13	-52.59

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



#### Below 1GHz Data:

<b>FREQUENCY RANGE</b>	9kHz ~ 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	80.70	33.7 QP	40.0	-6.3	2.21 H	74	46.4	-12.7
2	269.63	38.2 QP	46.0	-7.8	1.46 H	53	46.4	-8.2
3	313.19	41.2 QP	46.0	-4.8	1.38 H	44	47.9	-6.7
4	342.00	38.1 QP	46.0	-7.9	1.22 H	308	44.2	-6.1
5	363.96	38.7 QP	46.0	-7.3	1.84 H	54	44.2	-5.5
6	374.52	40.7 QP	46.0	-5.3	3.31 H	241	45.8	-5.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.59	35.7 QP	40.0	-4.3	1.23 V	48	44.6	-8.9
2	87.65	35.4 QP	40.0	-4.6	1.59 V	124	49.0	-13.6
3	249.56	35.7 QP	46.0	-10.3	3.11 V	284	44.8	-9.1
4	351.24	39.9 QP	46.0	-6.1	1.36 V	79	45.8	-5.9
5	429.63	39.2 QP	46.0	-6.8	1.64 V	253	42.7	-3.5
6	484.63	37.5 QP	46.0	-8.5	2.61 V	221	40.1	-2.6

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Mode	TX channel 23017	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	87.71	15.08	-79.86	-1.33	-81.19	-13	-68.19
2	268.99	23.01	-74.39	3.43	-70.96	-13	-57.96
3	304.45	23.55	-74.52	3.68	-70.83	-13	-57.83
4	314.4	28.68	-69.85	3.68	-66.17	-13	-53.17
5	343.36	26.52	-79.72	2.63	-77.09	-13	-64.09
6	356.23	25.27	-72.96	7.14	-65.82	-13	-52.82
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	32.38	18.78	-48.94	-15.59	-64.52	-13	-51.52
2	74.33	16.31	-80.93	-2.11	-83.03	-13	-70.03
3	261.09	17.10	-105.28	-2.08	-107.36	-13	-94.36
4	352.78	21.66	-75.46	2.33	-73.13	-13	-60.13
5	421.17	17.69	-80.91	3.48	-77.44	-13	-64.44
6	466.87	18.31	-77.47	1.92	-75.55	-13	-62.55

Remarks:

1. Emission Value (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Nov. 15, 2017	Nov. 14, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Feb. 23 to Mar. 27, 2018

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

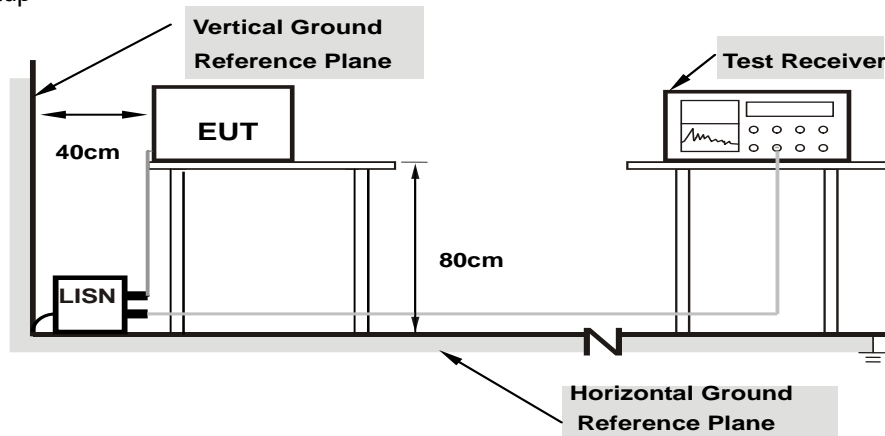

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.13	47.03	29.00	57.16	39.13	66.00	56.00	-8.84	-16.87
2	0.17344	10.13	43.48	26.79	53.61	36.92	64.79	54.79	-11.18	-17.87
3	0.19687	10.14	38.65	20.77	48.79	30.91	63.74	53.74	-14.95	-22.83
4	0.46641	10.19	39.84	32.57	50.03	42.76	56.58	46.58	-6.55	-3.82
5	20.97656	11.23	26.24	20.40	37.47	31.63	60.00	50.00	-22.53	-18.37
6	24.62891	11.26	21.47	13.34	32.73	24.60	60.00	50.00	-27.27	-25.40

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

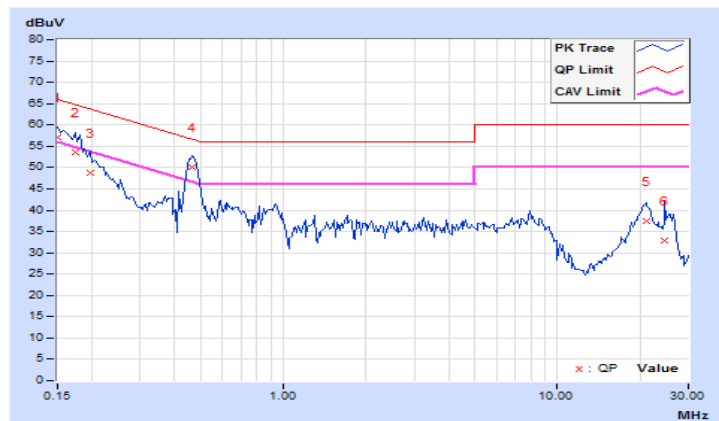


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.04	47.43	29.61	57.47	39.65	66.00	56.00	-8.53	-16.35
2	0.17344	10.04	43.40	27.17	53.44	37.21	64.79	54.79	-11.35	-17.58
3	0.23984	10.05	33.70	18.82	43.75	28.87	62.10	52.10	-18.35	-23.23
<b>4</b>	<b>0.46150</b>	<b>10.08</b>	<b>39.63</b>	<b>32.85</b>	<b>49.71</b>	<b>42.93</b>	<b>56.67</b>	<b>46.67</b>	<b>-6.96</b>	<b>-3.74</b>
5	20.55859	11.02	28.53	23.07	39.55	34.09	60.00	50.00	-20.45	-15.91
6	26.03125	11.05	23.46	15.40	34.51	26.45	60.00	50.00	-25.49	-23.55

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

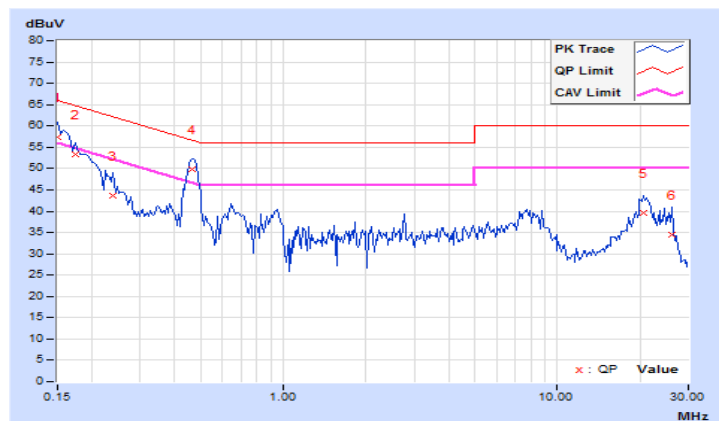


#### 4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.03	39.85	23.52	49.88	33.55	66.00	56.00	-16.12	-22.45
2	0.17344	10.05	35.90	19.70	45.95	29.75	64.79	54.79	-18.84	-25.04
3	0.30625	10.09	22.53	10.23	32.62	20.32	60.07	50.07	-27.45	-29.75
4	0.52500	10.12	23.97	15.68	34.09	25.80	56.00	46.00	-21.91	-20.20
5	9.33594	10.51	26.62	20.61	37.13	31.12	60.00	50.00	-22.87	-18.88
6	15.49609	10.86	27.55	22.47	38.41	33.33	60.00	50.00	-21.59	-16.67

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

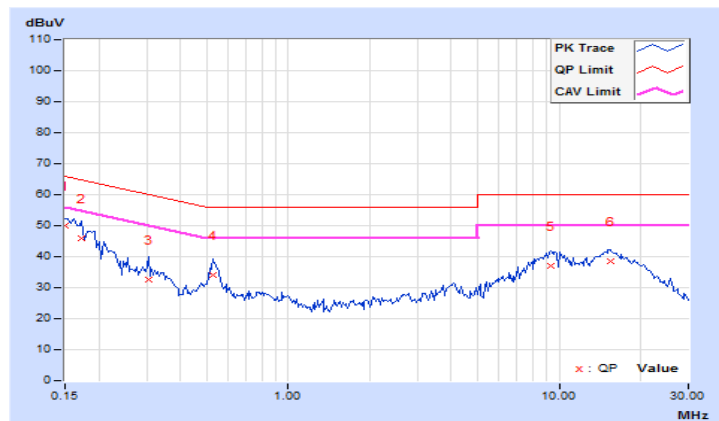


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.94	39.98	23.74	49.92	33.68	66.00	56.00	-16.08	-22.32
2	0.21250	9.96	30.09	17.21	40.05	27.17	63.11	53.11	-23.06	-25.94
3	0.53281	10.01	27.76	19.53	37.77	29.54	56.00	46.00	-18.23	-16.46
4	9.23438	10.36	25.45	18.59	35.81	28.95	60.00	50.00	-24.19	-21.05
5	15.49609	10.68	24.58	18.93	35.26	29.61	60.00	50.00	-24.74	-20.39
6	22.00000	10.91	18.41	13.27	29.32	24.18	60.00	50.00	-30.68	-25.82

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

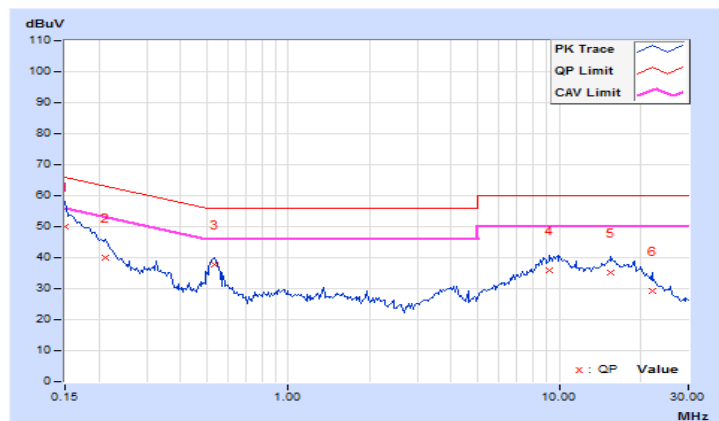




#### 4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.13	22.44	8.45	32.57	18.58	66.00	56.00	-33.43	-37.42
2	0.17344	10.13	22.22	11.77	32.35	21.90	64.79	54.79	-32.44	-32.89
3	0.63438	10.21	30.60	27.05	40.81	37.26	56.00	46.00	-15.19	-8.74
4	1.80859	10.26	14.62	6.93	24.88	17.19	56.00	46.00	-31.12	-28.81
5	10.22656	10.65	22.28	15.78	32.93	26.43	60.00	50.00	-27.07	-23.57
6	21.16797	11.23	19.99	19.15	31.22	30.38	60.00	50.00	-28.78	-19.62

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

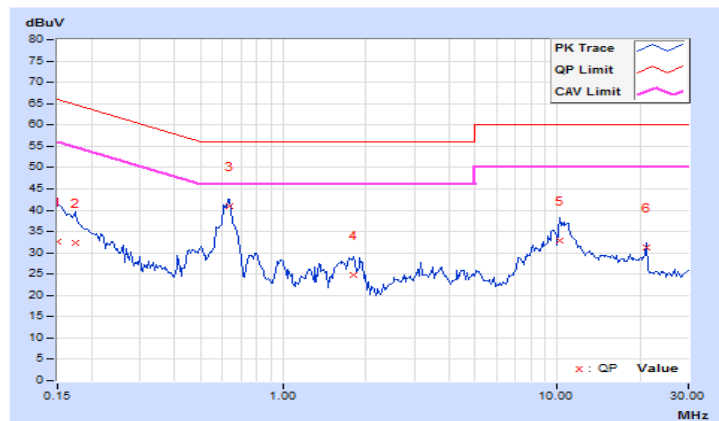


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.04	23.33	9.44	33.37	19.48	66.00	56.00	-32.63	-36.52
2	0.19297	10.04	19.83	6.12	29.87	16.16	63.91	53.91	-34.04	-37.75
3	0.63047	10.09	30.20	25.66	40.29	35.75	56.00	46.00	-15.71	-10.25
4	1.89453	10.15	16.88	8.13	27.03	18.28	56.00	46.00	-28.97	-27.72
5	10.82422	10.54	22.21	16.17	32.75	26.71	60.00	50.00	-27.25	-23.29
6	21.16797	11.02	19.63	18.70	30.65	29.72	60.00	50.00	-29.35	-20.28

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

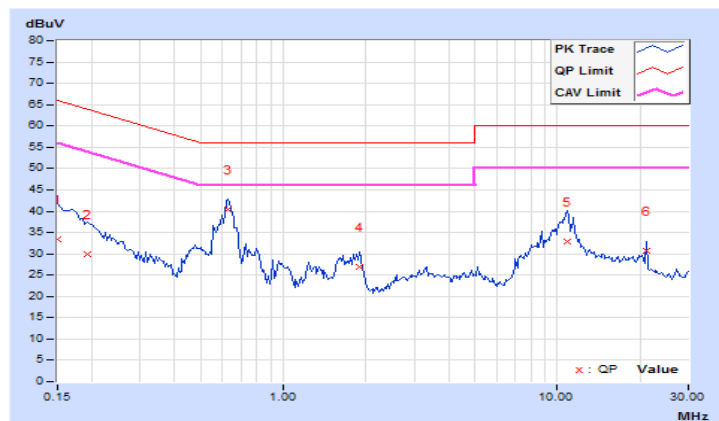


### 4.3 Conducted Out of Band Emission Measurement

#### 4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

## 2.4GHz\_802.11b CH6 + 5GHz\_802.11ac (VHT40) CH159

### Chain 0

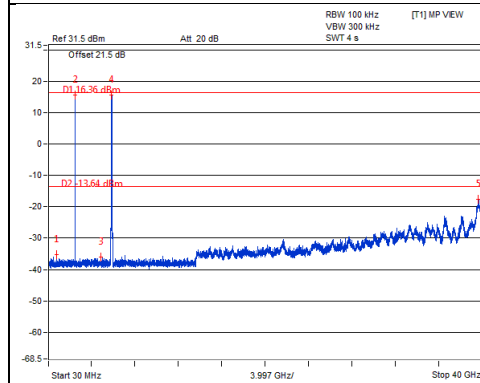

### Chain 1

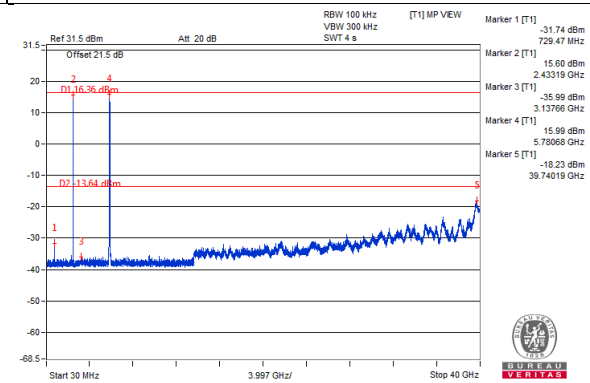

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---