

RF Exposure Report

Report No.: SABBCBS-WTW-P21100276

FCC ID: K7SWIA004

Test Model: WIA004

Received Date: Oct. 08, 2021

Test Date: Oct. 15 ~ Oct. 25, 2021

Issued Date: Nov. 25, 2021

Applicant: Belkin International, Inc.

Address: 12045 East Waterfront Drive, Playa Vista, CA 90094

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
3 RF Exposure	7
3.1 Description of Support Units	7
3.1.1 Configuration of System under Test	7
3.2 Test Setup	8
3.3 Test Instruments	9
3.4 Limits for Maximum Permissible Exposure (MPE)	10
3.5 Test Point Description	10
4. Calculation Result of Maximum Conducted Power	11
5. Photographs of the Test Configuration	31

Release Control Record

Issue No.	Description	Date Issued
SABBCBS-WTW-P21100276	Original release	Nov. 25, 2021

1 Certificate of Conformity

Product: BOOST↑CHARGE™ PRO Portable Wireless Charger Pad with MagSafe

Brand: belkin

Test Model: WIA004

Sample Status: Engineering sample

Applicant: Belkin International, Inc.

Test Date: Oct. 15 ~ Oct. 25, 2021

Standards: FCC Part 1 (Section 1.1307(b), Section 1.1310)
FCC Part 2 (Section 2.1091)

References Test Guidance: KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Celine Chou

Date:

Nov. 25, 2021

Celine Chou / Senior Specialist

Approved by :

Jeremy Lin

Date:

Nov. 25, 2021

Jeremy Lin / Project Engineer

2 General Information

2.1 General Description of EUT

Product	BOOST↑CHARGE™ PRO Portable Wireless Charger Pad with MagSafe
Brand	belkin
Test Model	WIA004
Sample Status	Engineering sample
Power Supply Rating	27W (9Vdc, 3A)
Modulation Type	FSK
Operating Frequency	360.0kHz
Antenna Type	Coil antenna (The Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible)
Field Strength	-32.1dBuV/m (PK) (300m) -34.4dBuV/m (AV) (300m)
Dimension for iPhone charging coil	16.62cm ² (Diameter = 46.01mm)
Accessory Device	Refer to Note as below
Data Cable Supplied	2.0m shielded cable without core attached on EUT
Maximum Power Output for Apple watch charging coil	15W

Note:

1. The EUT has two types for sale.

Brand	Model	Type
belkin	WIA004	with plastic kick stand / with PSU
		with metal kick stand / without PSU

* After pre-test, EUT with metal kick stand was chosen for final test and presented in the test report.

2. The EUT uses following adapters.

Adapter 1	
Brand	belkin
Model	PD027U-1C01 (Black)
Input Power	100-240Vac, 50-60Hz, 0.9A
Output Power	5Vdc, 3A; 9Vdc, 3A

Adapter 2	
Brand	belkin
Model	PD027U-1C02 (White)
Input Power	100-240Vac, 50-60Hz, 0.9A
Output Power	5Vdc, 3A; 9Vdc, 3A

Adapter 3	
Brand	belkin
Model	WCA004dq V2
Input Power	100-240Vac, 50-60Hz, 0.7A
Output Power	5Vdc, 3A; 9Vdc, 2.77A

* Adapter 1 and adapter 2 are different at appearance color only, after pre-test adapter 2 and adapter 3, adapter 2 was chosen for final test and presented in the test report.

3 RF Exposure


3.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPhone	APPLE	A2633	NA	BCG-E4031A	Provided by manufacturer

3.1.1 Configuration of System under Test


Charging Mode:

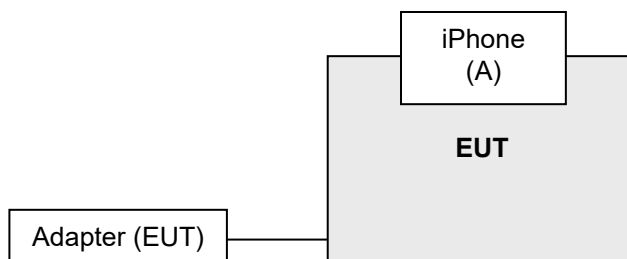

Standby Mode:

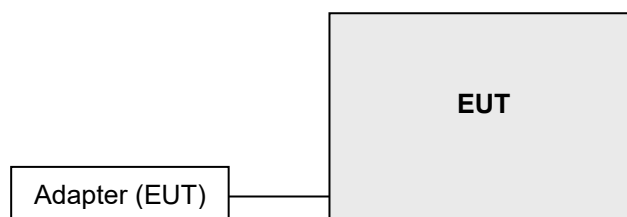

3.2 Test Setup

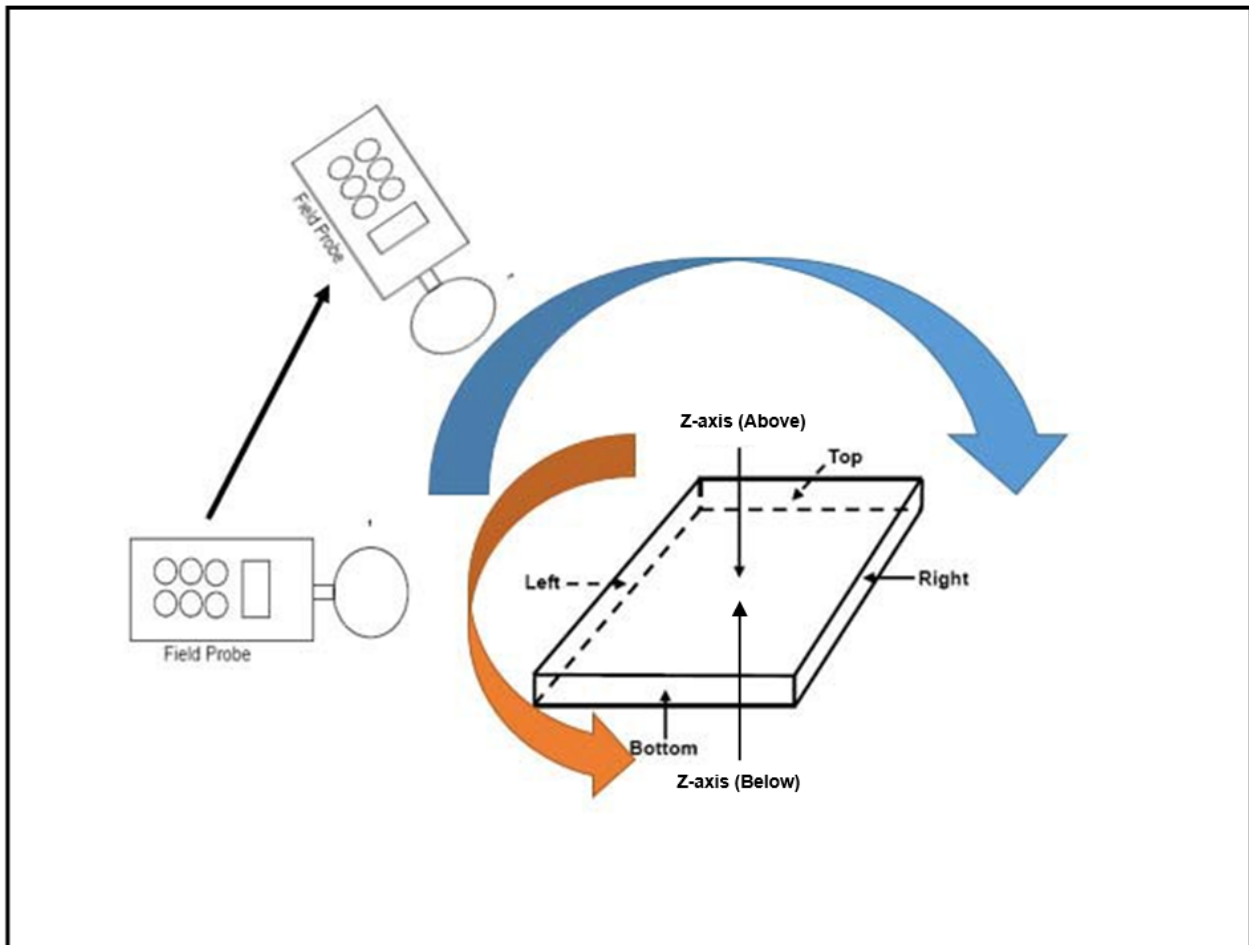

Note:

1. Measurements were made from all sides and the top of the primary/client pair, with the 15, 20cm measured from the center of the probe(s) to the edge of the device.
2. According to KDB inquiry, measurements were made from all sides and the top of the primary/client pair, with the 0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20cm measured from the top of the probe(s) to the edge of the device.

3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	-	Mar. 25, 2020	Mar. 24, 2022
Magnetic Field Meter	NARDA	ELT-400	1Hz – 400MHz	Apr. 17, 2020	Apr. 16, 2022
Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	Apr. 16, 2020	Apr. 15, 2022
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Apr. 21, 2020	Apr. 20, 2022
Broadband Field Meter	NARDA	NBM-550	-	Mar. 25, 2020	Mar. 24, 2022
Electric Field Meter	COMBINOVA	EFM 200	5Hz – 400kHz	Dec. 06, 2019	Dec. 05, 2021
E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	Mar. 25, 2020	Mar. 24, 2022
E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	Mar. 25, 2020	Mar. 24, 2022

Note: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa RF Chamber

3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density


NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

680106 D01 RF Exposure Wireless Charging Apps v03

The aggregate H-fields strengths at 15 or 0cm surrounding the device and 20 or 0cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

3.5 Test Point Description

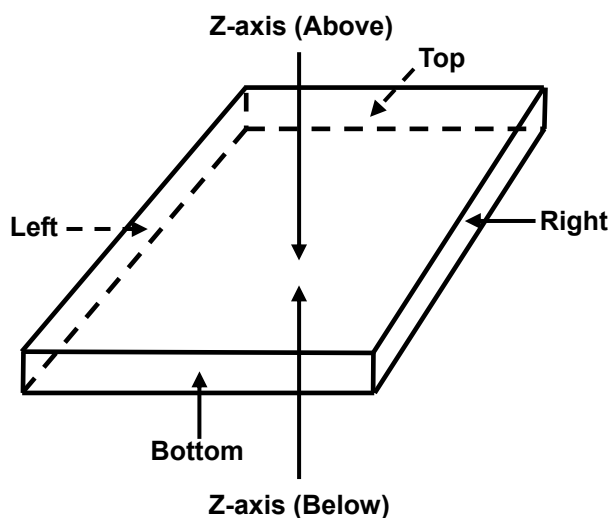

4. Calculation Result of Maximum Conducted Power

Charging Mode with iPhone, battery 10% Charge

E-Field (15cm)								E-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	1.2400	1.2200	1.3100	1.2500	1.6700	1.1400	0.8400
360.0	Limit (V/m)	614	614	614	614	614	614	614
360.0	Margin (V/m)	-612.7600	-612.7800	-612.6900	-612.7500	-612.3300	-612.8600	-613.1600
360.0	50 % Limit (V/m)	307	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-305.7600	-305.7800	-305.6900	-305.7500	-305.3300	-305.8600	-306.1600

H-Field (15cm)								H-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.2310	0.2280	0.2360	0.2210	0.2740	0.2040	0.2160
360.0	Max H-field (A/m)	0.1848	0.1824	0.1888	0.1768	0.2192	0.1632	0.1728
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4452	-1.4476	-1.4412	-1.4532	-1.4108	-1.4668	-1.4572
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6302	-0.6326	-0.6262	-0.6382	-0.5958	-0.6518	-0.6422

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. With the 20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above). The highest emission level was recorded.

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3475	0.3470	0.3604	0.2882	0.4148	0.3416
360.0	Max H-field (A/m)	0.2780	0.2776	0.2883	0.2306	0.3318	0.2733
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3520	-1.3524	-1.3417	-1.3994	-1.2982	-1.3567
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5370	-0.5374	-0.5267	-0.5844	-0.4832	-0.5417

Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the top of the probe(s) to the edge of the device.

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3318	0.3319	0.3443	0.2787	0.3962	0.3245
360.0	Max H-field (A/m)	0.2654	0.2655	0.2754	0.2230	0.3170	0.2596
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3646	-1.3645	-1.3546	-1.4070	-1.3130	-1.3704
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5496	-0.5495	-0.5396	-0.5920	-0.4980	-0.5554

Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the top of the probe(s) to the edge of the device.

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3182	0.3167	0.3288	0.2704	0.3783	0.3065
360.0	Max H-field (A/m)	0.2546	0.2534	0.2630	0.2163	0.3026	0.2452
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3754	-1.3766	-1.3670	-1.4137	-1.3274	-1.3848
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5604	-0.5616	-0.5520	-0.5987	-0.5124	-0.5698

Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the top of the probe(s) to the edge of the device.

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3064	0.3028	0.3133	0.2619	0.3608	0.2910
360.0	Max H-field (A/m)	0.2451	0.2422	0.2506	0.2095	0.2886	0.2328
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3849	-1.3878	-1.3794	-1.4205	-1.3414	-1.3972
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5699	-0.5728	-0.5644	-0.6055	-0.5264	-0.5822

Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the top of the probe(s) to the edge of the device.

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2899	0.2875	0.2984	0.2541	0.3436	0.2730
360.0	Max H-field (A/m)	0.2319	0.2300	0.2387	0.2033	0.2749	0.2184
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3981	-1.4000	-1.3913	-1.4267	-1.3551	-1.4116
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5831	-0.5850	-0.5763	-0.6117	-0.5401	-0.5966

Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the top of the probe(s) to the edge of the device.

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2756	0.2730	0.2833	0.2457	0.3263	0.2561
360.0	Max H-field (A/m)	0.2205	0.2184	0.2266	0.1966	0.2610	0.2049
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4095	-1.4116	-1.4034	-1.4334	-1.3690	-1.4251
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5945	-0.5966	-0.5884	-0.6184	-0.5540	-0.6101

Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the top of the probe(s) to the edge of the device.

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2599	0.2587	0.2670	0.2377	0.3095	0.2388
360.0	Max H-field (A/m)	0.2079	0.2070	0.2136	0.1902	0.2476	0.1910
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4221	-1.4230	-1.4164	-1.4398	-1.3824	-1.4390
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6071	-0.6080	-0.6014	-0.6248	-0.5674	-0.6240

Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the top of the probe(s) to the edge of the device.

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2444	0.2428	0.2510	0.2297	0.2907	0.2213
360.0	Max H-field (A/m)	0.1955	0.1942	0.2008	0.1838	0.2326	0.1770
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4345	-1.4358	-1.4292	-1.4462	-1.3974	-1.4530
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6195	-0.6208	-0.6142	-0.6312	-0.5824	-0.6380

Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the top of the probe(s) to the edge of the device.

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2364	0.2339	0.2414	0.2197	0.2807	0.2132
360.0	Max H-field (A/m)	0.1891	0.1871	0.1931	0.1758	0.2246	0.1706
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4409	-1.4429	-1.4369	-1.4542	-1.4054	-1.4594
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6259	-0.6279	-0.6219	-0.6392	-0.5904	-0.6444

Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the top of the probe(s) to the edge of the device.

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2247	0.2245	0.2335	0.2136	0.2735	0.2037
360.0	Max H-field (A/m)	0.1798	0.1796	0.1868	0.1709	0.2188	0.1630
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4502	-1.4504	-1.4432	-1.4591	-1.4112	-1.4670
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6352	-0.6354	-0.6282	-0.6441	-0.5962	-0.6520

Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the top of the probe(s) to the edge of the device.

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2159	0.2137	0.2243	0.2037	0.2612	0.1979
360.0	Max H-field (A/m)	0.1727	0.1710	0.1794	0.1630	0.2090	0.1583
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4573	-1.4590	-1.4506	-1.4670	-1.4210	-1.4717
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6423	-0.6440	-0.6356	-0.6520	-0.6060	-0.6567

Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the top of the probe(s) to the edge of the device.

Charging Mode with iPhone, battery 50% Charge

E-Field (15cm)								E-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	1.3400	1.3300	1.4500	1.2800	1.7800	1.1900	1.1100
360.0	Limit (V/m)	614	614	614	614	614	614	614
360.0	Margin (V/m)	-612.6600	-612.6700	-612.5500	-612.7200	-612.2200	-612.8100	-612.8900
360.0	50 % Limit (V/m)	307	307	307	307	307	307.0000	307
360.0	50 % Margin (V/m)	-305.6600	-305.6700	-305.5500	-305.7200	-305.2200	-305.8100	-305.8900

H-Field (15cm)								H-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.2390	0.2370	0.2470	0.2260	0.2790	0.2140	0.2230
360.0	Max H-field (A/m)	0.1912	0.1896	0.1976	0.1808	0.2232	0.1712	0.1784
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4388	-1.4404	-1.4324	-1.4492	-1.4068	-1.4588	-1.4516
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6238	-0.6254	-0.6174	-0.6342	-0.5918	-0.6438	-0.6366

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. With the 20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above). The highest emission level was recorded.

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3581	0.3574	0.3706	0.2979	0.4215	0.3508
360.0	Max H-field (A/m)	0.2865	0.2859	0.2965	0.2383	0.3372	0.2806
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3435	-1.3441	-1.3335	-1.3917	-1.2928	-1.3494
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5285	-0.5291	-0.5185	-0.5767	-0.4778	-0.5344

Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the top of the probe(s) to the edge of the device.

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3394	0.3415	0.3521	0.2896	0.4063	0.3332
360.0	Max H-field (A/m)	0.2715	0.2732	0.2817	0.2317	0.3250	0.2666
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3585	-1.3568	-1.3483	-1.3983	-1.3050	-1.3634
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5435	-0.5418	-0.5333	-0.5833	-0.4900	-0.5484

Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the top of the probe(s) to the edge of the device.

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3285	0.3251	0.3369	0.2800	0.3857	0.3149
360.0	Max H-field (A/m)	0.2628	0.2601	0.2695	0.2240	0.3086	0.2519
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3672	-1.3699	-1.3605	-1.4060	-1.3214	-1.3781
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5522	-0.5549	-0.5455	-0.5910	-0.5064	-0.5631

Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the top of the probe(s) to the edge of the device.

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3138	0.3093	0.3212	0.2701	0.3705	0.2981
360.0	Max H-field (A/m)	0.2510	0.2474	0.2570	0.2161	0.2964	0.2385
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3790	-1.3826	-1.3730	-1.4139	-1.3336	-1.3915
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5640	-0.5676	-0.5580	-0.5989	-0.5186	-0.5765

Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the top of the probe(s) to the edge of the device.

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2999	0.2946	0.3089	0.2610	0.3514	0.2831
360.0	Max H-field (A/m)	0.2399	0.2357	0.2471	0.2088	0.2811	0.2265
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3901	-1.3943	-1.3829	-1.4212	-1.3489	-1.4035
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5751	-0.5793	-0.5679	-0.6062	-0.5339	-0.5885

Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the top of the probe(s) to the edge of the device.

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2837	0.2827	0.2912	0.2543	0.3353	0.2639
360.0	Max H-field (A/m)	0.2270	0.2262	0.2330	0.2034	0.2682	0.2111
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4030	-1.4038	-1.3970	-1.4266	-1.3618	-1.4189
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5880	-0.5888	-0.5820	-0.6116	-0.5468	-0.6039

Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the top of the probe(s) to the edge of the device.

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2683	0.2688	0.2775	0.2456	0.3178	0.2482
360.0	Max H-field (A/m)	0.2146	0.2150	0.2220	0.1965	0.2542	0.1986
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4154	-1.4150	-1.4080	-1.4335	-1.3758	-1.4314
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6004	-0.6000	-0.5930	-0.6185	-0.5608	-0.6164

Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the top of the probe(s) to the edge of the device.

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2539	0.2509	0.2602	0.2396	0.2988	0.2293
360.0	Max H-field (A/m)	0.2031	0.2007	0.2082	0.1917	0.2390	0.1834
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4269	-1.4293	-1.4218	-1.4383	-1.3910	-1.4466
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6119	-0.6143	-0.6068	-0.6233	-0.5760	-0.6316

Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the top of the probe(s) to the edge of the device.

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2430	0.2424	0.2517	0.2302	0.2885	0.2210
360.0	Max H-field (A/m)	0.1944	0.1939	0.2014	0.1842	0.2308	0.1768
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4356	-1.4361	-1.4286	-1.4458	-1.3992	-1.4532
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6206	-0.6211	-0.6136	-0.6308	-0.5842	-0.6382

Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the top of the probe(s) to the edge of the device.

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2360	0.2319	0.2413	0.2211	0.2824	0.2139
360.0	Max H-field (A/m)	0.1888	0.1855	0.1930	0.1769	0.2259	0.1711
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4412	-1.4445	-1.4370	-1.4531	-1.4041	-1.4589
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6262	-0.6295	-0.6220	-0.6381	-0.5891	-0.6439

Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the top of the probe(s) to the edge of the device.

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2239	0.2246	0.2337	0.2119	0.2692	0.2052
360.0	Max H-field (A/m)	0.1791	0.1797	0.1870	0.1695	0.2154	0.1642
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4509	-1.4503	-1.4430	-1.4605	-1.4146	-1.4658
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6359	-0.6353	-0.6280	-0.6455	-0.5996	-0.6508

Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the top of the probe(s) to the edge of the device.

Charging Mode with iPhone, battery Max Charge

E-Field (15cm)								E-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	1.4200	1.4100	1.5200	1.3500	1.8700	1.2400	1.1800
360.0	Limit (V/m)	614	614	614	614	614	614	614
360.0	Margin (V/m)	-612.5800	-612.5900	-612.4800	-612.6500	-612.1300	-612.7600	-612.8200
360.0	50 % Limit (V/m)	307	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-305.5800	-305.5900	-305.4800	-305.6500	-305.1300	-305.7600	-305.8200

H-Field (15cm)								H-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.2440	0.2460	0.2540	0.2380	0.2910	0.2230	0.2130
360.0	Max H-field (A/m)	0.1952	0.1968	0.2032	0.1904	0.2328	0.1784	0.1704
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4348	-1.4332	-1.4268	-1.4396	-1.3972	-1.4516	-1.4596
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6198	-0.6182	-0.6118	-0.6246	-0.5822	-0.6366	-0.6446

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. With the 20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above). The highest emission level was recorded.

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3637	0.3628	0.3804	0.3044	0.4325	0.3583
360.0	Max H-field (A/m)	0.2910	0.2902	0.3043	0.2435	0.3460	0.2866
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3390	-1.3398	-1.3257	-1.3865	-1.2840	-1.3434
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5240	-0.5248	-0.5107	-0.5715	-0.4690	-0.5284

Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the top of the probe(s) to the edge of the device.

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3503	0.3499	0.3617	0.2987	0.4180	0.3430
360.0	Max H-field (A/m)	0.2802	0.2799	0.2894	0.2390	0.3344	0.2744
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3498	-1.3501	-1.3406	-1.3910	-1.2956	-1.3556
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5348	-0.5351	-0.5256	-0.5760	-0.4806	-0.5406

Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the top of the probe(s) to the edge of the device.

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3391	0.3364	0.3462	0.2892	0.3958	0.3232
360.0	Max H-field (A/m)	0.2713	0.2691	0.2770	0.2314	0.3166	0.2586
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3587	-1.3609	-1.3530	-1.3986	-1.3134	-1.3714
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5437	-0.5459	-0.5380	-0.5836	-0.4984	-0.5564

Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the top of the probe(s) to the edge of the device.

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3222	0.3204	0.3299	0.2793	0.3765	0.3076
360.0	Max H-field (A/m)	0.2578	0.2563	0.2639	0.2234	0.3012	0.2461
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3722	-1.3737	-1.3661	-1.4066	-1.3288	-1.3839
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5572	-0.5587	-0.5511	-0.5916	-0.5138	-0.5689

Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the top of the probe(s) to the edge of the device.

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.3090	0.3035	0.3151	0.2704	0.3641	0.2905
360.0	Max H-field (A/m)	0.2472	0.2428	0.2521	0.2163	0.2913	0.2324
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3828	-1.3872	-1.3779	-1.4137	-1.3387	-1.3976
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5678	-0.5722	-0.5629	-0.5987	-0.5237	-0.5826

Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the top of the probe(s) to the edge of the device.

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2959	0.2873	0.3011	0.2640	0.3440	0.2750
360.0	Max H-field (A/m)	0.2367	0.2298	0.2409	0.2112	0.2752	0.2200
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.3933	-1.4002	-1.3891	-1.4188	-1.3548	-1.4100
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5783	-0.5852	-0.5741	-0.6038	-0.5398	-0.5950

Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the top of the probe(s) to the edge of the device.

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2769	0.2757	0.2841	0.2552	0.3254	0.2573
360.0	Max H-field (A/m)	0.2215	0.2206	0.2273	0.2042	0.2603	0.2058
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4085	-1.4094	-1.4027	-1.4258	-1.3697	-1.4242
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.5935	-0.5944	-0.5877	-0.6108	-0.5547	-0.6092

Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the top of the probe(s) to the edge of the device.

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2633	0.2630	0.2681	0.2473	0.3066	0.2388
360.0	Max H-field (A/m)	0.2106	0.2104	0.2145	0.1978	0.2453	0.1910
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4194	-1.4196	-1.4155	-1.4322	-1.3847	-1.4390
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6044	-0.6046	-0.6005	-0.6172	-0.5697	-0.6240

Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the top of the probe(s) to the edge of the device.

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2538	0.2526	0.2594	0.2381	0.2980	0.2325
360.0	Max H-field (A/m)	0.2030	0.2021	0.2075	0.1905	0.2384	0.1860
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4270	-1.4279	-1.4225	-1.4395	-1.3916	-1.4440
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6120	-0.6129	-0.6075	-0.6245	-0.5766	-0.6290

Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the top of the probe(s) to the edge of the device.

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2402	0.2398	0.2533	0.2301	0.2898	0.2201
360.0	Max H-field (A/m)	0.1922	0.1918	0.2026	0.1841	0.2318	0.1761
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4378	-1.4382	-1.4274	-1.4459	-1.3982	-1.4539
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6228	-0.6232	-0.6124	-0.6309	-0.5832	-0.6389

Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the top of the probe(s) to the edge of the device.

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.2324	0.2355	0.2447	0.2208	0.2822	0.2160
360.0	Max H-field (A/m)	0.1859	0.1884	0.1958	0.1766	0.2258	0.1728
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.4441	-1.4416	-1.4342	-1.4534	-1.4042	-1.4572
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6291	-0.6266	-0.6192	-0.6384	-0.5892	-0.6422

Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the top of the probe(s) to the edge of the device.

Standby Mode

E-Field (15cm)								E-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max E-field (V/m)	0.5300	0.5200	0.4300	0.3800	0.6800	0.4300	0.3200
360.0	Limit (V/m)	614	614	614	614	614	614	614
360.0	Margin (V/m)	-613.4700	-613.4800	-613.5700	-613.6200	-613.3200	-613.5700	-613.6800
360.0	50 % Limit (V/m)	307	307	307	307	307	307	307
360.0	50 % Margin (V/m)	-306.4700	-306.4800	-306.5700	-306.6200	-306.3200	-306.5700	-306.6800

H-Field (15cm)								H-Field (20cm)
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)	Z-axis (Above)
360.0	Max H-field (uT)	0.0460	0.0470	0.0390	0.0360	0.0730	0.0440	0.0240
360.0	Max H-field (A/m)	0.0368	0.0376	0.0312	0.0288	0.0584	0.0352	0.0192
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5932	-1.5924	-1.5988	-1.6012	-1.5716	-1.5948	-1.6108
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7782	-0.7774	-0.7838	-0.7862	-0.7566	-0.7798	-0.7958

Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. With the 20 cm measured from the center of the probe(s) to the edge of the device. Z-axis (Above). The highest emission level was recorded.

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.1508	0.1610	0.1542	0.1469	0.1856	0.1534
360.0	Max H-field (A/m)	0.1206	0.1288	0.1234	0.1175	0.1485	0.1227
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5094	-1.5012	-1.5066	-1.5125	-1.4815	-1.5073
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.6944	-0.6862	-0.6916	-0.6975	-0.6665	-0.6923

Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the top of the probe(s) to the edge of the device.

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.1376	0.1465	0.1397	0.1332	0.1717	0.1398
360.0	Max H-field (A/m)	0.1101	0.1172	0.1118	0.1066	0.1374	0.1118
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5199	-1.5128	-1.5182	-1.5234	-1.4926	-1.5182
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7049	-0.6978	-0.7032	-0.7084	-0.6776	-0.7032

Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the top of the probe(s) to the edge of the device.

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.1246	0.1326	0.1255	0.1194	0.1573	0.1261
360.0	Max H-field (A/m)	0.0997	0.1061	0.1004	0.0955	0.1258	0.1009
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5303	-1.5239	-1.5296	-1.5345	-1.5042	-1.5291
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7153	-0.7089	-0.7146	-0.7195	-0.6892	-0.7141

Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the top of the probe(s) to the edge of the device.

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.1114	0.1183	0.1111	0.1055	0.1433	0.1125
360.0	Max H-field (A/m)	0.0891	0.0946	0.0889	0.0844	0.1146	0.0900
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5409	-1.5354	-1.5411	-1.5456	-1.5154	-1.5400
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7259	-0.7204	-0.7261	-0.7306	-0.7004	-0.7250

Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the top of the probe(s) to the edge of the device.

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0984	0.1038	0.0965	0.0917	0.1293	0.0986
360.0	Max H-field (A/m)	0.0787	0.0830	0.0772	0.0734	0.1034	0.0789
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5513	-1.5470	-1.5528	-1.5566	-1.5266	-1.5511
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7363	-0.7320	-0.7378	-0.7416	-0.7116	-0.7361

Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the top of the probe(s) to the edge of the device.

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0852	0.0898	0.0819	0.0776	0.1152	0.0851
360.0	Max H-field (A/m)	0.0682	0.0718	0.0655	0.0621	0.0922	0.0681
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5618	-1.5582	-1.5645	-1.5679	-1.5378	-1.5619
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7468	-0.7432	-0.7495	-0.7529	-0.7228	-0.7469

Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the top of the probe(s) to the edge of the device.

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0722	0.0757	0.0679	0.0637	0.1011	0.0715
360.0	Max H-field (A/m)	0.0578	0.0606	0.0543	0.0510	0.0809	0.0572
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5722	-1.5694	-1.5757	-1.5790	-1.5491	-1.5728
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7572	-0.7544	-0.7607	-0.7640	-0.7341	-0.7578

Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the top of the probe(s) to the edge of the device.

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0591	0.0612	0.0534	0.0497	0.0870	0.0577
360.0	Max H-field (A/m)	0.0473	0.0490	0.0427	0.0398	0.0696	0.0462
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5827	-1.5810	-1.5873	-1.5902	-1.5604	-1.5838
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7677	-0.7660	-0.7723	-0.7752	-0.7454	-0.7688

Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the top of the probe(s) to the edge of the device.

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0452	0.0462	0.0383	0.0359	0.0722	0.0432
360.0	Max H-field (A/m)	0.0362	0.0370	0.0306	0.0287	0.0578	0.0346
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.5938	-1.5930	-1.5994	-1.6013	-1.5722	-1.5954
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7788	-0.7780	-0.7844	-0.7863	-0.7572	-0.7804

Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the top of the probe(s) to the edge of the device.

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0328	0.0328	0.0246	0.0220	0.0589	0.0303
360.0	Max H-field (A/m)	0.0262	0.0262	0.0197	0.0176	0.0471	0.0242
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.6038	-1.6038	-1.6103	-1.6124	-1.5829	-1.6058
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7888	-0.7888	-0.7953	-0.7974	-0.7679	-0.7908

Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the top of the probe(s) to the edge of the device.

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360.0	Max H-field (uT)	0.0246	0.0237	0.0172	0.0154	0.0502	0.0232
360.0	Max H-field (A/m)	0.0197	0.0190	0.0138	0.0123	0.0402	0.0186
360.0	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360.0	Margin (A/m)	-1.6103	-1.6110	-1.6162	-1.6177	-1.5898	-1.6114
360.0	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360.0	50 % Margin (A/m)	-0.7953	-0.7960	-0.8012	-0.8027	-0.7748	-0.7964

Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the top of the probe(s) to the edge of the device.

5. Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---