

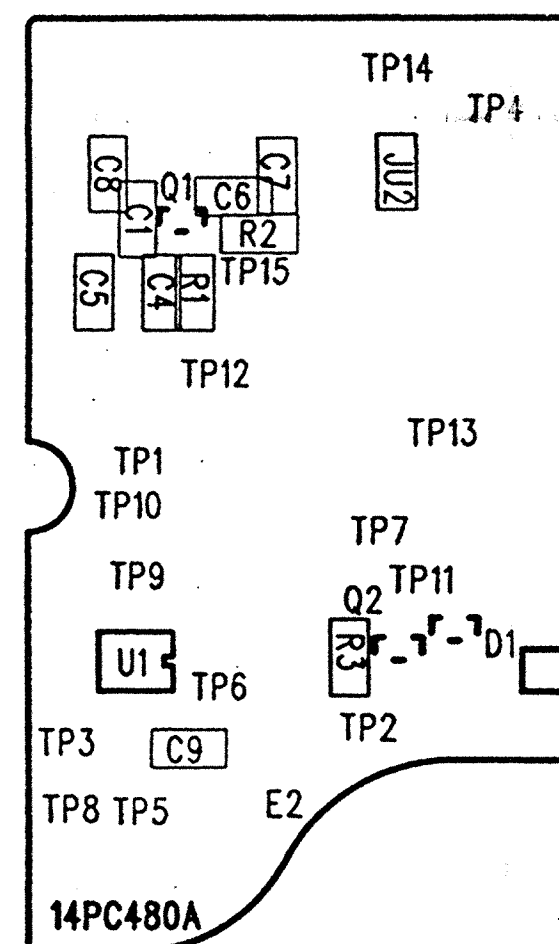
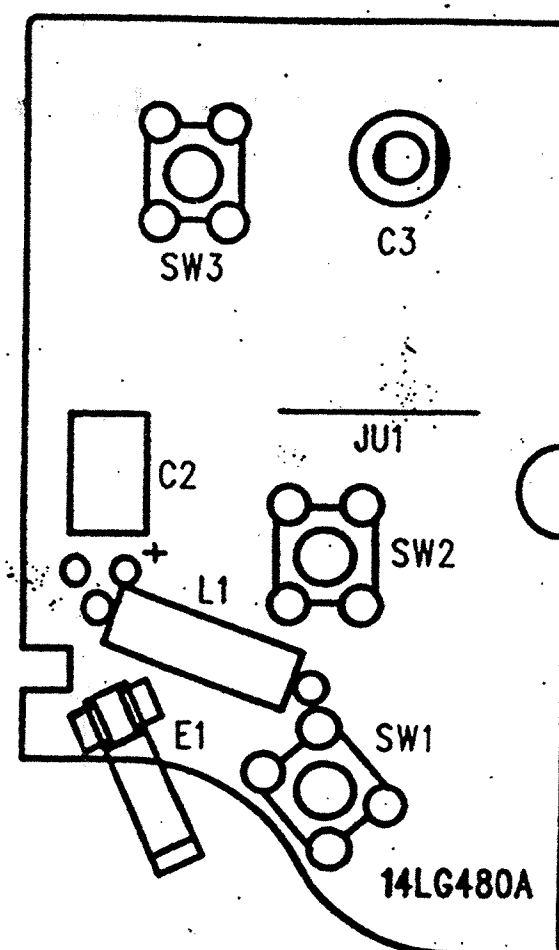
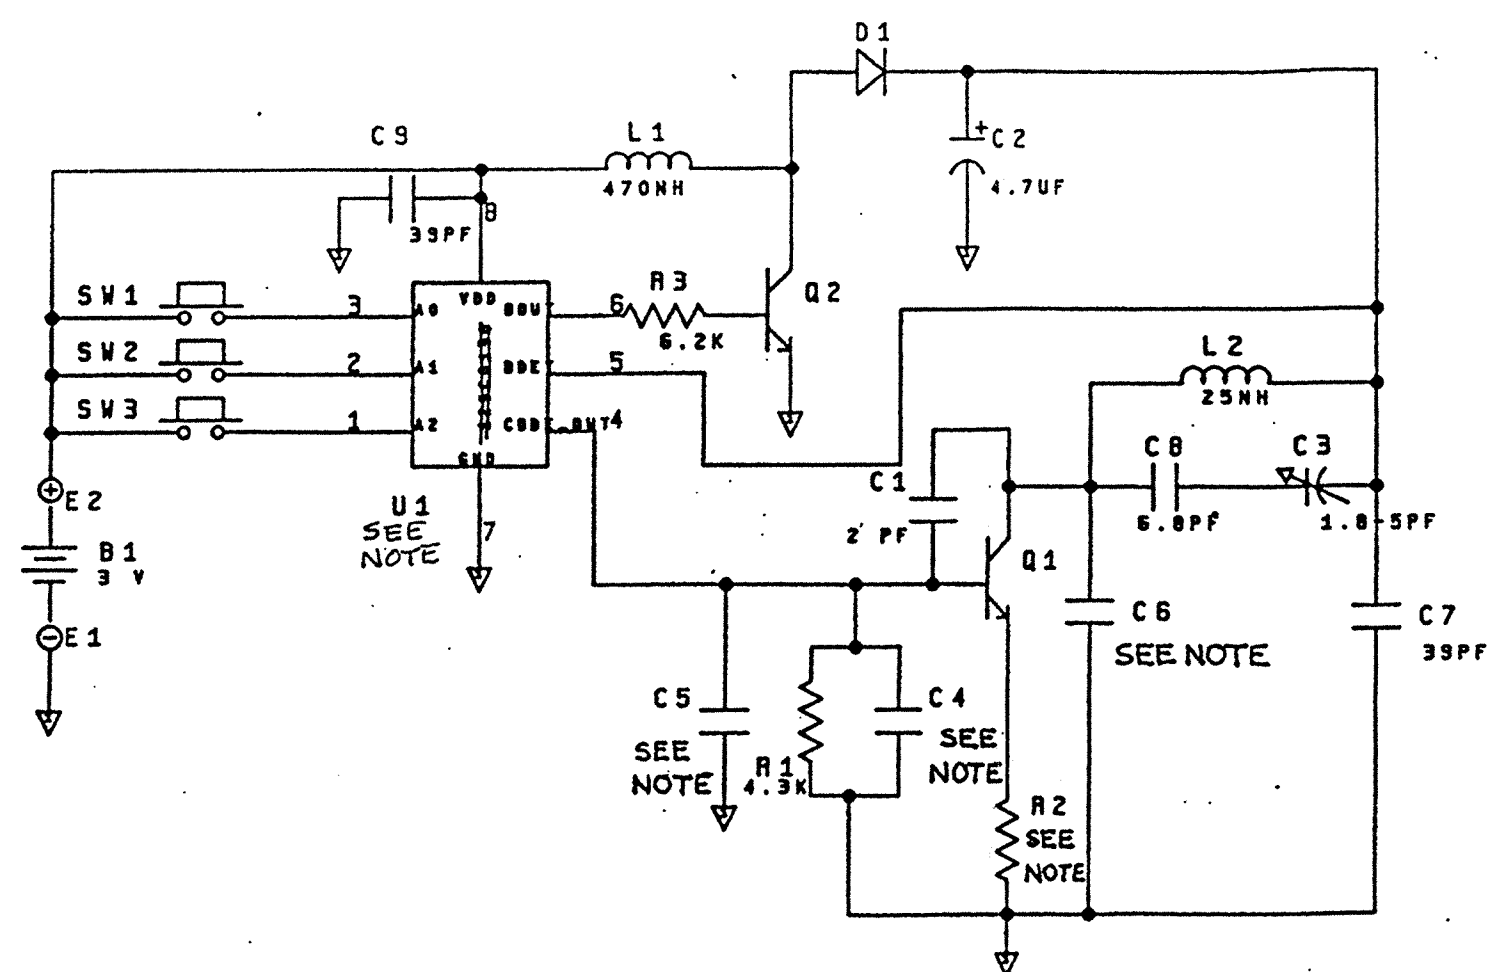


REF. NO.	PART NO.	DESCRIPTION	QTY
C1	30D72003000	CAP. SMD805 2PF NPO	1
C2	030B0442	CAP. LYTIC 4.7UF 25V	1
C3	030B0444	CAP. RF TUNING 1.8-5.0PF	1
C4	NOTE 8	CAP SMD 805	1
C5	NOTE 8	CAP SMD 805	1
C7,9	030D73910000	CAP. SMD805 39PF NPO	2
C6	NOTE 8	CAP. SMD805	1
C8	030D76800000	CAP. SMD805 6.8PF NPO	1
D1	52B0065	DIODE SMD SIGNAL	1
L1	040B0092	COIL 470UH	1
JU1	304A0001-50	JUMPERS .5 SPACING	1
JU2	311C0001	JUMPER SMD805	1
Q1	207C0074	TRANSISTOR SMD NPN RF	1
Q2	207C0073	TRANSISTOR SMD NPN SW	1
R1	311C4325	RES. SMD805 4.3K 1/10W 5%	1
R2	NOTE 8	RES. SMD805	1
R3	311C6225	RES. SMD805 6.2K 1/10W 5%	1
SW1,SW2,SW3	180B0120-2	SWITCH HORZ MOMENTARY	3
U1	NOTE 8	IC SMD ROLLING CODE ATMEL	1
E1	032B0128	BATTERY TERMINAL NEG	1
ITEM1	014R0480	PCB 16UP ARRAY	0.0625

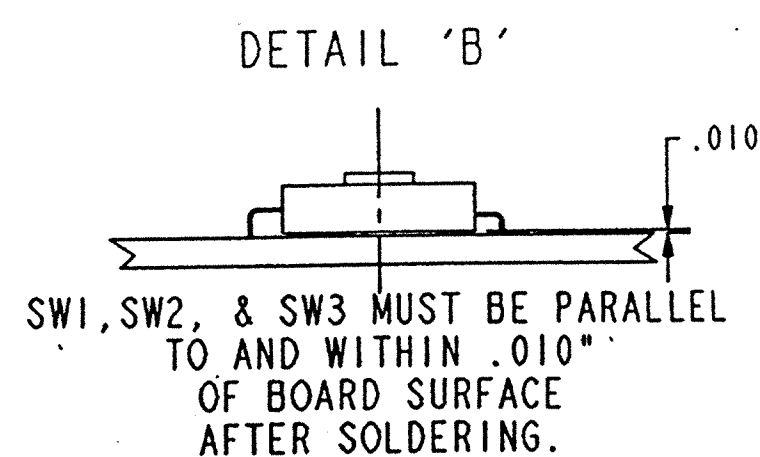

- NOTES:
- UNLESS OTHERWISE NOTED:
-CAPACITORS ARE IN PICO FARADS
-RESISTORS ARE IN OHMS
 - ALL LEADED COMPONENTS TO BE INSERTED TO WITHIN .020" OF BODY OR PREFORM LIMITS, EXCEPT SW1, SW2, & SW3 WHICH ARE TO BE WITHIN .010" (SEE DETAIL B).
 - TEST SPEC. REFERENCES: 190A0454, 190A0523.
 - ALL FLUX USED IN SOLDER PROCESS MUST BE HALIDE-FREE.
 - LEAD CLIPPING SPEC. (WIRE LEADED PARTS ONLY) .050 MIN., .095 MAX.
 - CLEANING OF ASSEMBLY WITH A CLEANING SOLVENT AFTER SOLDERING IS NOT PERMITTED.
 - ALL ARRAY TABS MUST BE CUT FLUSH TO EDGE OF PCB, BUT NO MORE THAN .005" INTO BOARD.
 - COMPONENT USAGE CHART:

1A5076 (390 MHz)			1A5235-1 (433 MHz)			1A5247 (390 MHz)		
COMPONENT	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
C4	030D73910000	CAP SMD 39pF	030D72210000	CAP SMD 22pF	030D73910000	CAP SMD 39pF	030D73910000	CAP SMD 39pF
C5	030D73910000	CAP SMD 39pF	030D71210000	CAP SMD 12pF	030D73910000	CAP SMD 39pF	030D73910000	CAP SMD 39pF
C6	030D73000020	CAP SMD 3.0pF N220	030D71003040	CAP SMD 1.0pF N470	030D73000020	CAP SMD 3.0pF N220	030D73000020	CAP SMD 3.0pF N220
R2	311C9115	RES SMD 910 OHM	311C8215	RES SMD 820 OHM	311C1125	RES SMD 11K OHM	311C1125	RES SMD 11K OHM
U1	125C0130	IC SMD ROLLING CODE ATMEL	125C0130	IC SMD ROLLING CODE ATMEL	125C0204	IC SMD BILLION CODE ATMEL	125C0204	IC SMD BILLION CODE ATMEL

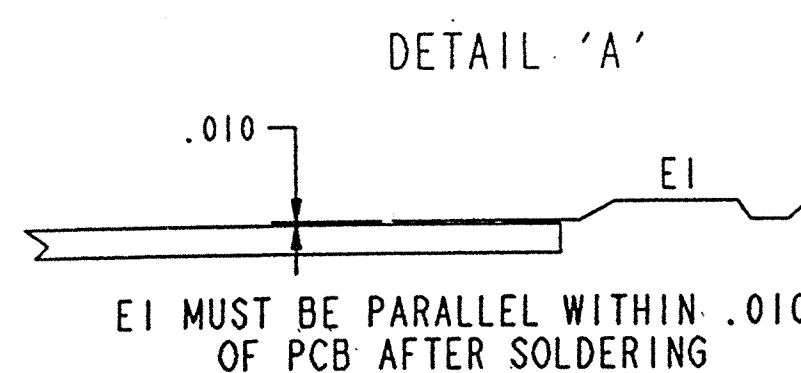

CONFIDENTIAL				TOLERANCES EXCEPT AS NOTED:			
THIS DRAWING AND/OR INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF CHAMBERLAIN CONSUMER PRODUCTS GROUP. IT IS TO BE USED FOR THE PURPOSES SPECIFIED HEREIN AND IS NOT TO BE REPRODUCED, COPIED, OR IN ANY MANNER DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN CONSENT OF CHAMBERLAIN CONSUMER PRODUCTS GROUP.				±.010 .00 DECIMAL ±.005 .000 DECIMAL ±1/64 ON FRACTIONS ±.00 ON ANGLES ±.003 ON HOLES			
THIS IS A COMPUTER GENERATED DRAWING. DO NOT CHANGE THIS DOCUMENT WITHOUT UPDATING THE COMPUTER DATA BASE.							
CHECKED	AM	DATE	2/17/97	SCALE	NONE	PART NUMBER	195D1255
APPROVED	JF	DATE	2/18/97	REV	2	REV	D

PART NUMBER: 195D1255				REV
REV	DATE	BY	APP	REVISION
1	1/31/97	LK	AM	RELEASE
2	1/31/97	LK	AM	C2 WAS 030B0469 AND SW1,2,3 WERE 180B0120
3	10/24/97	LK	AM	ADDED NOTE 8
4	10/24/97	LK	AM	ADDED 001A5247 TO NOTE 8. DELETE U1 IN SCHEMATIC AND ADDED "SEE NOTE".

CHAMBERLAIN CONSUMER PRODUCTS GROUP	
A UNIT OF DUCLOS INDUSTRIES, INC.	
NAME	ASS'Y, 3 CHNL STD TX CHANGE PLUS ROLLING