



# TEST REPORT

**APPLICANT** : Nubia Technology Co.,Ltd

**PRODUCT NAME** : RedMagic Tws Gaming Earbuds

**MODEL NAME** : BH4004

**BRAND NAME** : RedMagic

**FCC ID** : 2AHJO-BH4004

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2020-09-16

**TEST DATE** : 2020-09-24 to 2020-10-21

**ISSUE DATE** : 2020-10-21

Edited by: Peng Mi  
Peng Mi (Rapporteur)

Approved by: Peng Huarui  
Peng Huarui (Supervisor)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

|                                               |           |
|-----------------------------------------------|-----------|
| <b>1. Technical Information</b>               | <b>3</b>  |
| 1.1. Applicant and Manufacturer Information   | 3         |
| 1.2. Equipment Under Test (EUT) Description   | 3         |
| 1.3. The Channel Number and Frequency         | 5         |
| 1.4. Test Standards and Results               | 6         |
| 1.5. Environmental Conditions                 | 7         |
| <b>2. 47 CFR Part 15C Requirements</b>        | <b>8</b>  |
| 2.1. Antenna Requirement                      | 8         |
| 2.2. Hopping Mechanism                        | 8         |
| 2.3. Number of Hopping Frequency              | 9         |
| 2.4. Duty Cycle of Test Signal                | 12        |
| 2.5. Maximum Peak Conducted Output Power      | 13        |
| 2.6. Maximum Average Conducted Output Power   | 20        |
| 2.7. 20dB Bandwidth                           | 22        |
| 2.8. Carried Frequency Separation             | 29        |
| 2.9. Time of Occupancy (Dwell time)           | 32        |
| 2.10. Conducted Spurious Emissions            | 39        |
| 2.11. Conducted Emission                      | 52        |
| 2.12. Restricted Frequency Bands              | 56        |
| 2.13. Radiated Emission                       | 66        |
| <b>Annex A Test Uncertainty</b>               | <b>79</b> |
| <b>Annex B Testing Laboratory Information</b> | <b>80</b> |

| Change History |            |                   |
|----------------|------------|-------------------|
| Version        | Date       | Reason for change |
| 1.0            | 2020-10-21 | First edition     |
|                |            |                   |



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1.Applicant and Manufacturer Information

|                              |                                                                                                         |
|------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>            | Nubia Technology Co.,Ltd                                                                                |
| <b>Applicant Address:</b>    | 16/F, Building 2, chongwen Park, Nanshan zhiyuan, 3370 Liuxian Road, Nanshan District, Shenzhen, China. |
| <b>Manufacturer:</b>         | Nubia Technology Co.,Ltd                                                                                |
| <b>Manufacturer Address:</b> | 16/F, Building 2, chongwen Park, Nanshan zhiyuan, 3370 Liuxian Road, Nanshan District, Shenzhen, China. |

## 1.2.Equipment Under Test (EUT) Description

|                                   |                                                                  |                                         |
|-----------------------------------|------------------------------------------------------------------|-----------------------------------------|
| <b>Product Name:</b>              | RedMagic Tws Gaming Earbuds                                      |                                         |
| <b>Serial No.:</b>                | (N/A, marked #1 by test site)                                    |                                         |
| <b>Hardware Version:</b>          | V5.0                                                             |                                         |
| <b>Software Version:</b>          | V106                                                             |                                         |
| <b>Equipment Type:</b>            | Bluetooth classic                                                |                                         |
| <b>Bluetooth Version:</b>         | 5.0                                                              |                                         |
| <b>Modulation Type:</b>           | FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps)) |                                         |
| <b>Operating Frequency Range:</b> | 2402MHz-2480MHz                                                  |                                         |
| <b>Antenna Type:</b>              | FPC Antenna                                                      |                                         |
| <b>Antenna Gain:</b>              | 2dBi                                                             |                                         |
| <b>Accessory Information:</b>     | Battery cell (Headphones)                                        |                                         |
|                                   | Brand Name:                                                      | N/A                                     |
|                                   | Model No.:                                                       | M1254A                                  |
|                                   | Serial No.:                                                      | (N/A, marked #1 by test site)           |
|                                   | Capacity:                                                        | 60mAh                                   |
|                                   | Rated Voltage:                                                   | 3.7V                                    |
|                                   | Charge Limit:                                                    | 4.2V                                    |
|                                   | Manufacturer:                                                    | Guangdong Mic-power New Energy Co., Ltd |



|                               |                              |                                                  |
|-------------------------------|------------------------------|--------------------------------------------------|
| <b>Accessory Information:</b> | Battery cell (Charging Case) |                                                  |
|                               | Brand Name:                  | N/A                                              |
|                               | Model No.:                   | 752132                                           |
|                               | Serial No.:                  | (N/A, marked #1 by test site)                    |
|                               | Capacity:                    | 500mAh                                           |
|                               | Rated Voltage:               | 3.7V                                             |
|                               | Charge Limit:                | 4.2V                                             |
|                               | Manufacturer:                | Guangdong Anqiao New Energy Technology Co., Ltd. |

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3.The Channel Number and Frequency

| Channel  | Frequency (MHz) | Channel   | Frequency (MHz) | Channel | Frequency (MHz) | Channel   | Frequency (MHz) |
|----------|-----------------|-----------|-----------------|---------|-----------------|-----------|-----------------|
| <b>0</b> | <b>2402</b>     | 20        | 2422            | 40      | 2442            | 60        | 2462            |
| 1        | 2403            | 21        | 2423            | 41      | 2443            | 61        | 2463            |
| 2        | 2404            | 22        | 2424            | 42      | 2444            | 62        | 2464            |
| 3        | 2405            | 23        | 2425            | 43      | 2445            | 63        | 2465            |
| 4        | 2406            | 24        | 2426            | 44      | 2446            | 64        | 2466            |
| 5        | 2407            | 25        | 2427            | 45      | 2447            | 65        | 2467            |
| 6        | 2408            | 26        | 2428            | 46      | 2448            | 66        | 2468            |
| 7        | 2409            | 27        | 2429            | 47      | 2449            | 67        | 2469            |
| 8        | 2410            | 28        | 2430            | 48      | 2450            | 68        | 2470            |
| 9        | 2411            | 29        | 2431            | 49      | 2451            | 69        | 2471            |
| 10       | 2412            | 30        | 2432            | 50      | 2452            | 70        | 2472            |
| 11       | 2413            | 31        | 2433            | 51      | 2453            | 71        | 2473            |
| 12       | 2414            | 32        | 2434            | 52      | 2454            | 72        | 2474            |
| 13       | 2415            | 33        | 2435            | 53      | 2455            | 73        | 2475            |
| 14       | 2416            | 34        | 2436            | 54      | 2456            | 74        | 2476            |
| 15       | 2417            | 35        | 2437            | 55      | 2457            | 75        | 2477            |
| 16       | 2418            | 36        | 2438            | 56      | 2458            | 76        | 2478            |
| 17       | 2419            | 37        | 2439            | 57      | 2459            | 77        | 2479            |
| 18       | 2420            | 38        | 2440            | 58      | 2460            | <b>78</b> | <b>2480</b>     |
| 19       | 2421            | <b>39</b> | <b>2441</b>     | 59      | 2461            |           |                 |

**Note 1:** The black bold channels were selected for test.



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

| No. | Identity       | Document Title          |
|-----|----------------|-------------------------|
| 1   | 47 CFR Part 15 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section                | Description                            | Test Date    | Test Engineer | Result | Method determination /Remark |
|-----|------------------------|----------------------------------------|--------------|---------------|--------|------------------------------|
| 1   | 15.203                 | Antenna Requirement                    | N/A          | N/A           | PASS   | No deviation                 |
| 2   | 15.247(a)<br>15.247(h) | Hopping Mechanism                      | N/A          | N/A           | PASS   | No deviation                 |
| 3   | 15.247(a)              | Number of Hopping Frequency            | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 4   | ANSI C63.10            | Duty Cycle                             | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 5   | 15.247(b)              | Maximum Peak Conducted Output Power    | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 6   | 15.247(b)              | Maximum Average Conducted Output Power | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 7   | 15.247(a)              | 20dB Bandwidth                         | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 8   | 15.247(a)              | Carrier Frequency Separation           | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 9   | 15.247(a)              | Time of Occupancy (Dwell time)         | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 10  | 15.247(d)              | Conducted Spurious Emission            | Oct 14, 2019 | Tu Ya'nan     | PASS   | No deviation                 |
| 11  | 15.207                 | Conducted Emission                     | Sep 26, 2020 | Huang Zhiye   | PASS   | No deviation                 |
| 12  | 15.247(d)              | Restricted Frequency Bands             | Oct 21, 2019 | Gao Jianrou   | PASS   | No deviation                 |
| 13  | 15.209,<br>15.247(d)   | Radiated Emission                      | Sep 24, 2020 | Gao Jianrou   | PASS   | No deviation                 |



**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

## 1.5.Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |        |
|-----------------------------|--------|
| Temperature (°C):           | 15-35  |
| Relative Humidity (%):      | 30-60  |
| Atmospheric Pressure (kPa): | 86-106 |



## 2.47 CFR Part 15C Requirements

### 2.1. Antenna Requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

### 2.2. Hopping Mechanism

#### 2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### 2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".




## 2.3. Number of Hopping Frequency

### 2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

### 2.3.2. Test Description

#### Test Setup:

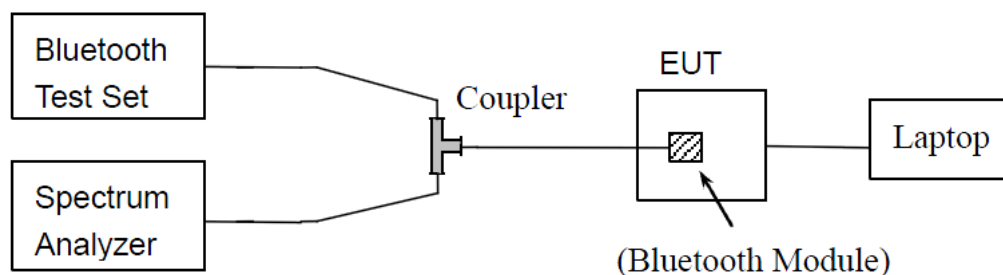

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



## 2.3.4. Test Result



### A. Test Verdict:

| Test Mode      | Frequency Block (MHz) | Measured Channel Numbers | Min. Limit | Verdict |
|----------------|-----------------------|--------------------------|------------|---------|
| GFSK           | 2400 - 2483.5         | 79                       | 15         | PASS    |
| $\pi/4$ -DQPSK | 2400 - 2483.5         | 79                       | 15         | PASS    |
| 8-DPSK         | 2400 - 2483.5         | 79                       | 15         | PASS    |

### B. Test Plots:



(GFSK)

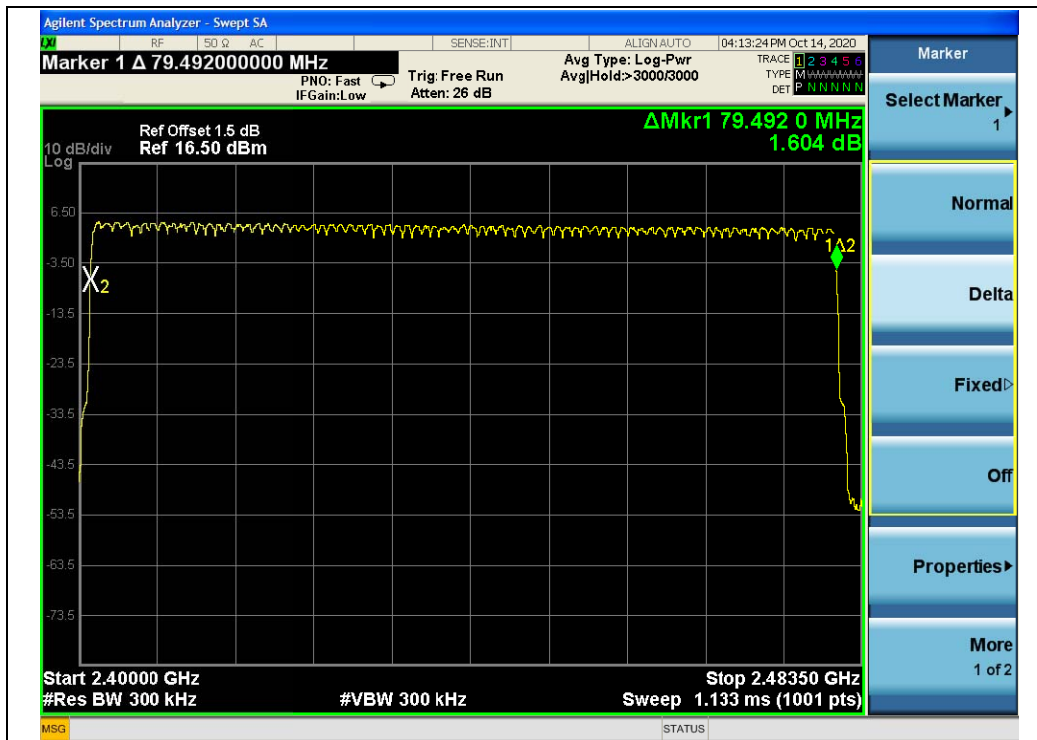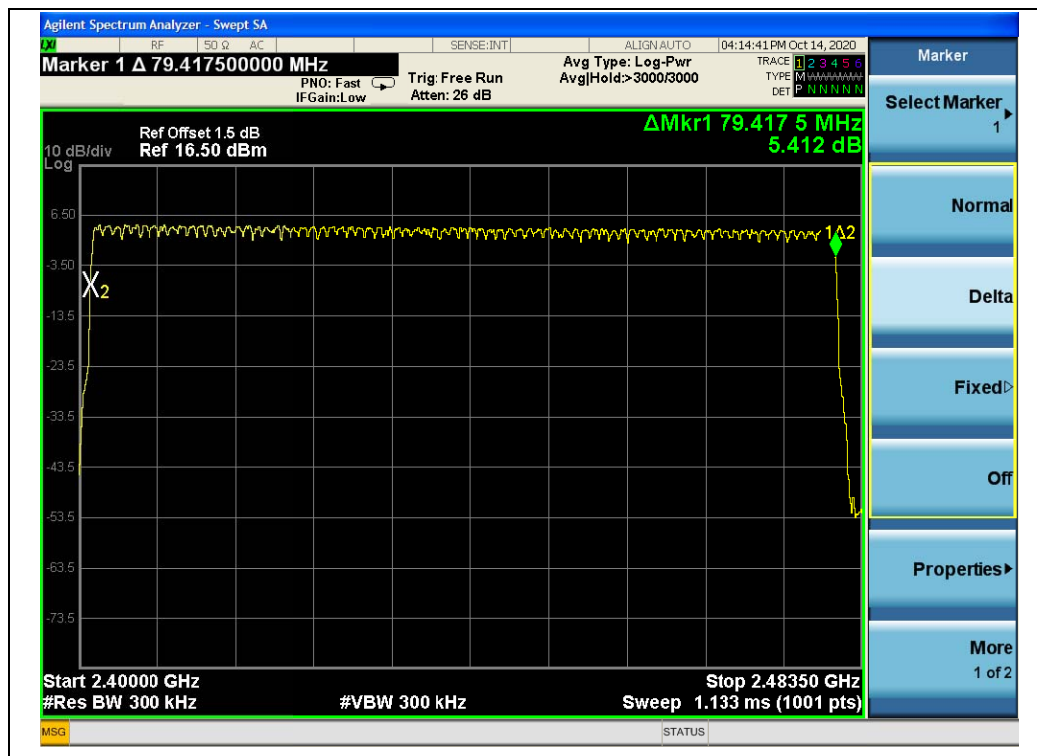 $(\pi/4\text{-DQPSK})$  $(8\text{-DPSK})$

## 2.4.Duty Cycle of Test Signal


### 2.4.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.4.2.Test Description

#### Test Setup:

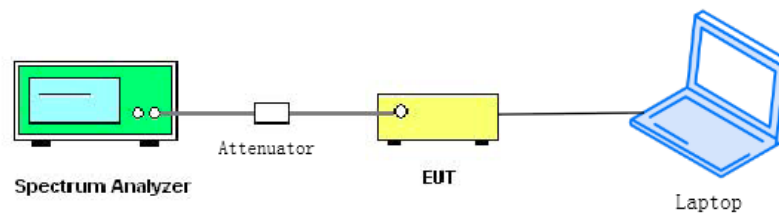

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

### 2.4.3.Test Result

| Test Mode      | Duty Cycle (%)<br>(D) | Duty Factor<br>( $10 \cdot \lg[1/D]$ ) |
|----------------|-----------------------|----------------------------------------|
| GFSK           | 76.80                 | 1.15                                   |
| $\pi/4$ -DQPSK | 76.80                 | 1.15                                   |
| 8-DPSK         | 77.20                 | 1.12                                   |


## 2.5.Maximum Peak Conducted Output Power

### 2.5.1.Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### 2.5.2.Test Description

#### Test Setup:

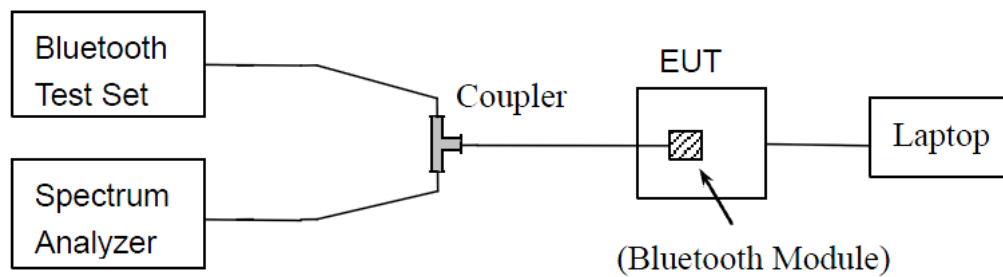

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.




### 2.5.3. Test Result

#### GFSK Mode

##### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Output Peak Power |       | Limit |       | Verdict |
|---------|-----------------|----------------------------|-------|-------|-------|---------|
|         |                 | dBm                        | W     | dBm   | W     |         |
| 0       | 2402            | 6.85                       | 0.005 | 20.96 | 0.125 | PASS    |
| 39      | 2441            | 6.35                       | 0.004 |       |       | PASS    |
| 78      | 2480            | 5.84                       | 0.004 |       |       | PASS    |


##### B. Test Plot:

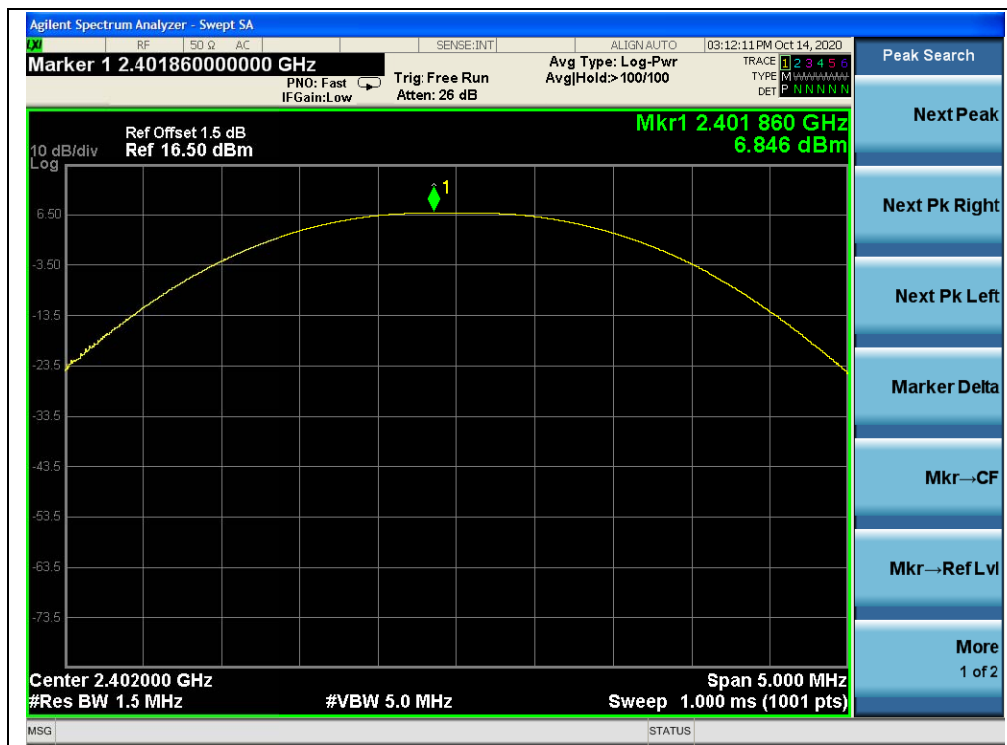

(Channel 0, GFSK)



(Channel 39, GFSK)

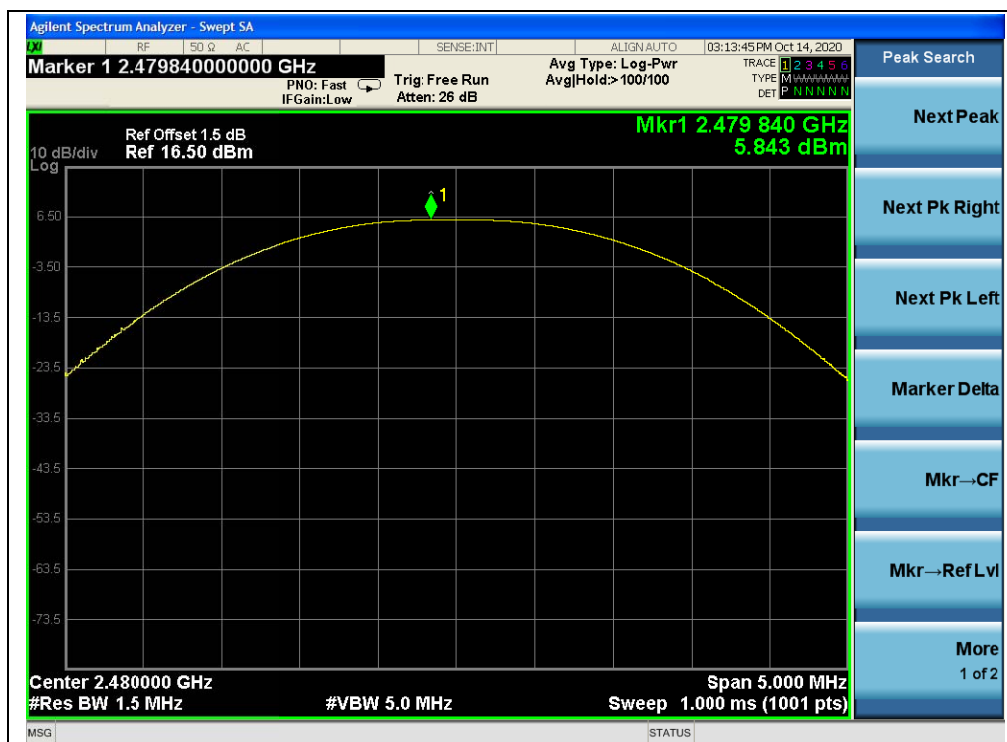

(Channel 78, GFSK)




$\pi/4$ -DQPSK Mode

**A.Test Verdict:**



| Channel | Frequency<br>(MHz) | Measured Output Peak Power |       | Limit |       | Verdict |
|---------|--------------------|----------------------------|-------|-------|-------|---------|
|         |                    | dBm                        | W     | dBm   | W     |         |
| 0       | 2402               | 6.46                       | 0.004 | 20.96 | 0.125 | PASS    |
| 39      | 2441               | 5.94                       | 0.004 |       |       | PASS    |
| 78      | 2480               | 5.40                       | 0.003 |       |       | PASS    |

**B.Test Plot:**

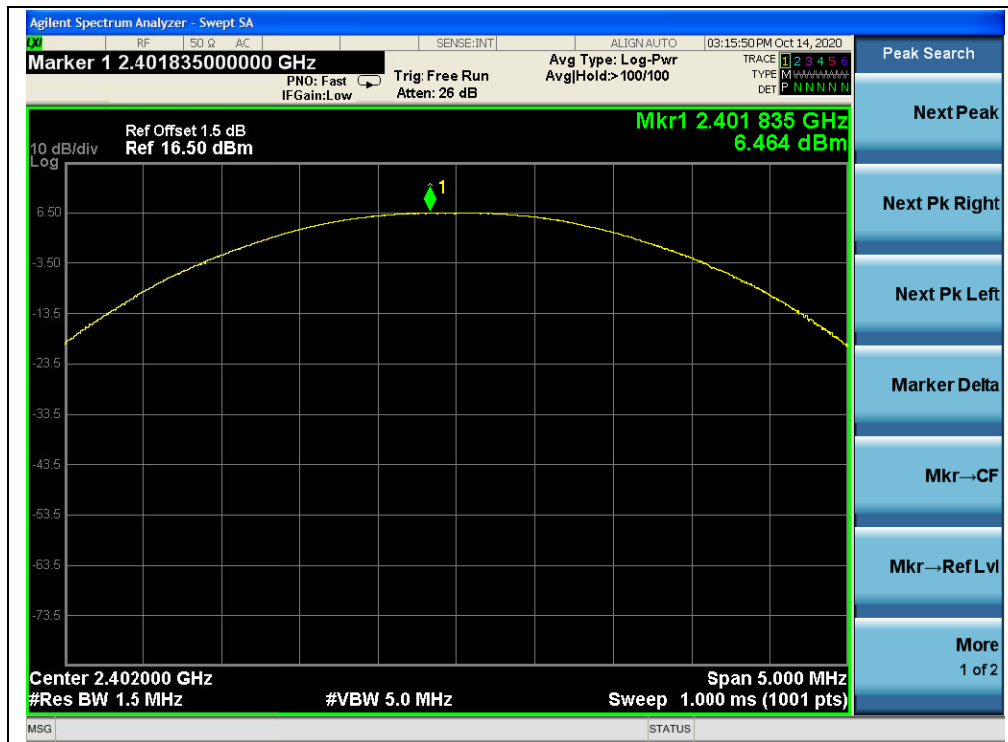

(Channel 0,  $\pi/4$ -DQPSK)

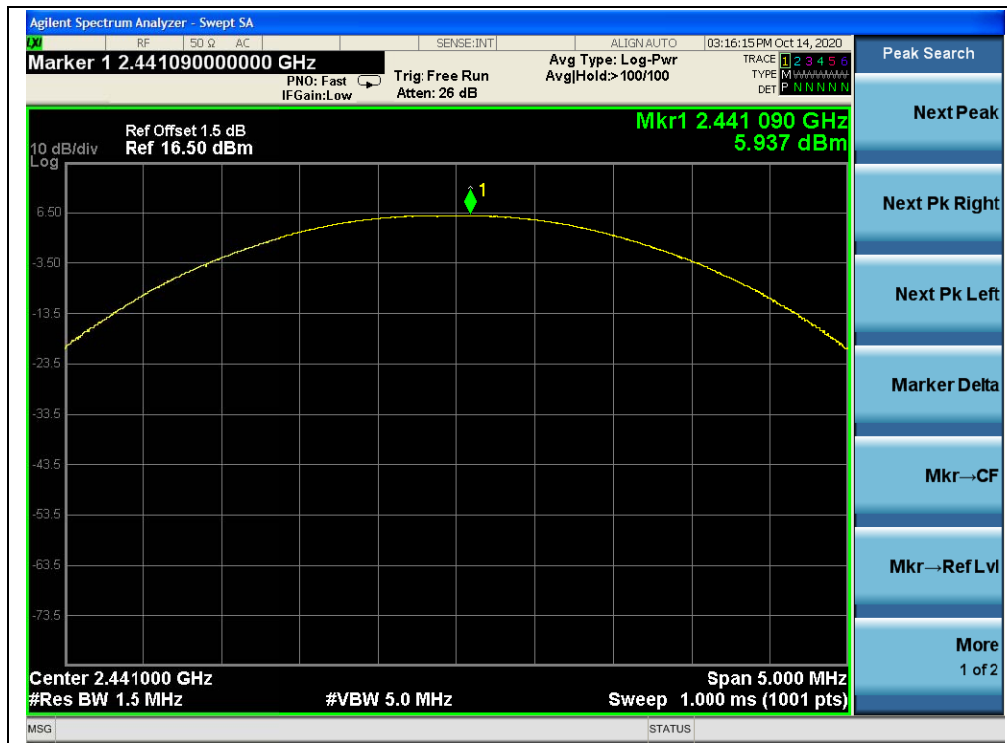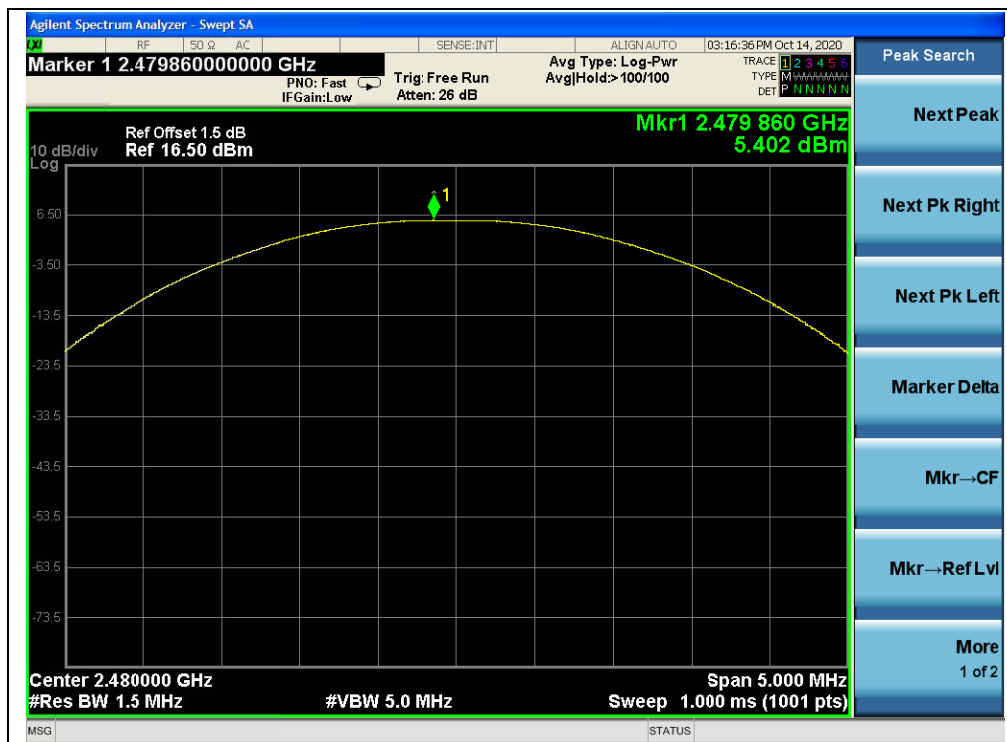

(Channel 39,  $\pi/4$ -DQPSK)(Channel 78,  $\pi/4$ -DQPSK)




## 8-DPSK Mode

### A.Test Verdict:

| Channel | Frequency<br>(MHz) | Measured Output Peak Power |              | Limit |       | Verdict |
|---------|--------------------|----------------------------|--------------|-------|-------|---------|
|         |                    | dBm                        | W            | dBm   | W     |         |
| 0       | 2402               | <b>6.90</b>                | <b>0.005</b> | 20.96 | 0.125 | PASS    |
| 39      | 2441               | 6.40                       | 0.004        |       |       | PASS    |
| 78      | 2480               | 5.87                       | 0.004        |       |       | PASS    |


### B.Test Plot:

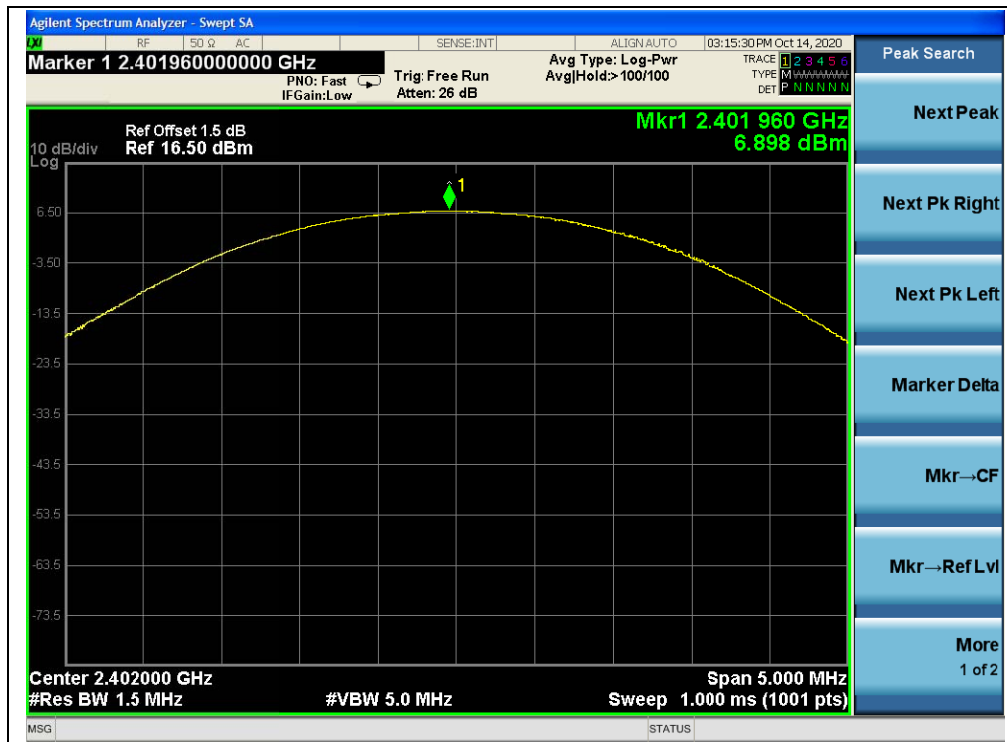

(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)

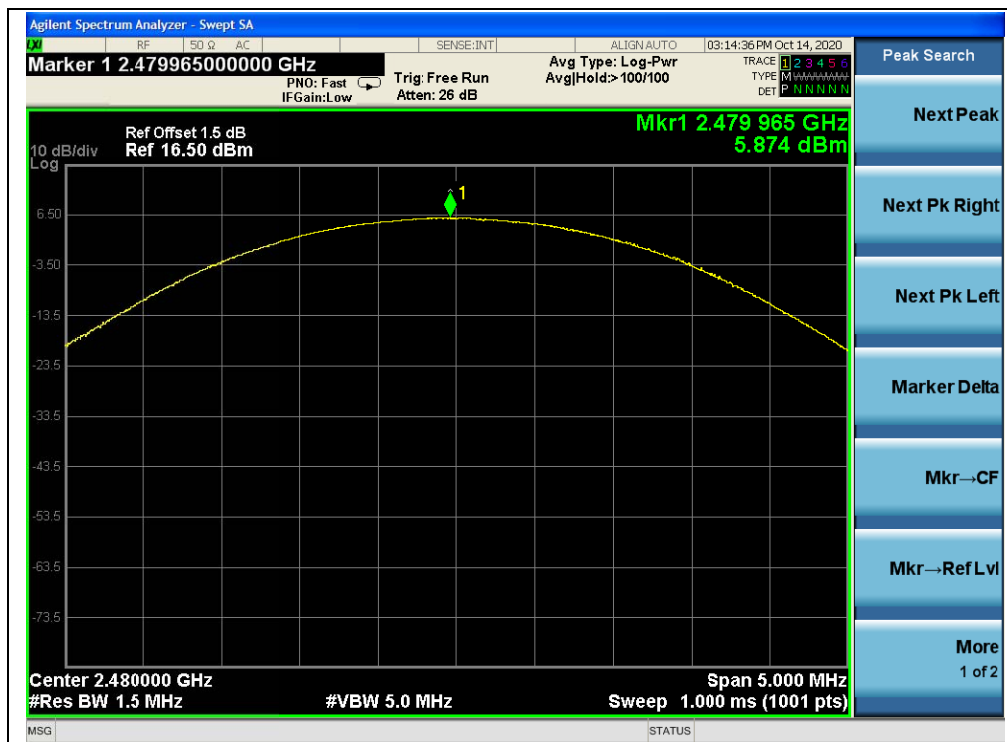

(Channel 39, 8-DPSK)

## 2.6. Maximum Average Conducted Output Power


### 2.6.1. Requirement

According to FCC §15.247(b), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum average output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

### 2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

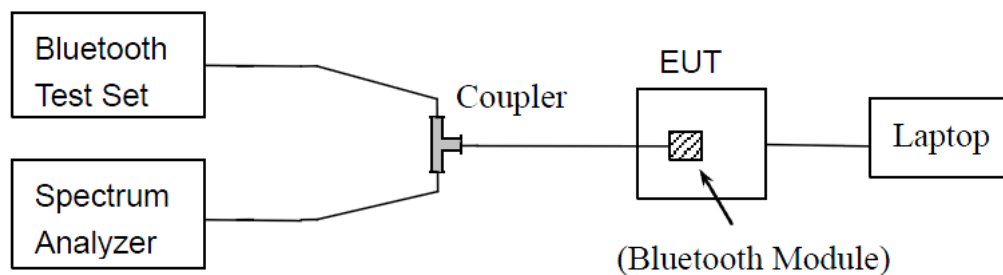

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

**2.6.3.Test Result****GFSK Mode**

| Channel | Frequency<br>(MHz) | Measured | Average Power  |                        |              | Limit |       | Verdict |
|---------|--------------------|----------|----------------|------------------------|--------------|-------|-------|---------|
|         |                    |          | Duty<br>Factor | Duty factor Calculated |              |       |       |         |
|         |                    | dBm      |                | dBm                    | W            | dBm   | W     |         |
| 0       | 2402               | 5.63     | 1.15           | <b>6.78</b>            | <b>0.005</b> | 20.96 | 0.125 | PASS    |
| 39      | 2441               | 4.98     |                | 6.13                   | 0.004        |       |       | PASS    |
| 78      | 2480               | 4.55     |                | 5.70                   | 0.004        |       |       | PASS    |

 **$\pi/4$ -DQPSK Mode**

| Channel | Frequency<br>(MHz) | Measured | Average Power |                        |       | Limit |       | Verdict |
|---------|--------------------|----------|---------------|------------------------|-------|-------|-------|---------|
|         |                    |          | Duty          | Duty factor Calculated |       |       |       |         |
|         |                    | dBm      | Factor        | dBm                    | W     | dBm   | W     |         |
| 0       | 2402               | 2.61     | 1.15          | 3.76                   | 0.002 | 20.96 | 0.125 | PASS    |
| 39      | 2441               | 2.18     |               | 3.33                   | 0.002 |       |       | PASS    |
| 78      | 2480               | 1.51     |               | 2.66                   | 0.002 |       |       | PASS    |

**8-DPSK Mode**

| Channel | Frequency<br>(MHz) | Measured | Average Power  |                        |       | Limit |       | Verdict |
|---------|--------------------|----------|----------------|------------------------|-------|-------|-------|---------|
|         |                    | dBm      | Duty<br>Factor | Duty factor Calculated |       |       |       |         |
|         |                    |          |                |                        |       | dBm   | W     |         |
| 0       | 2402               | 2.70     | 1.12           | 3.82                   | 0.002 | 20.96 | 0.125 | PASS    |
| 39      | 2441               | 2.12     |                | 3.24                   | 0.002 |       |       | PASS    |
| 78      | 2480               | 1.52     |                | 2.64                   | 0.002 |       |       | PASS    |


## 2.7.20dB Bandwidth

### 2.7.1.Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \cdot \log 1\% = 20\text{dB}$ ) taking the total RF output power.

### 2.7.2.Test Description

#### Test Setup:

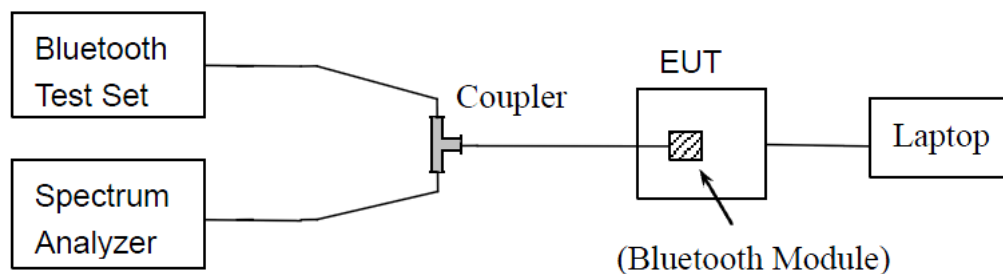

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.7.3.Test Procedure

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW  $\geq 3 \times$  RBW

Sweep = auto

Detector function = peak

Trace = max hold




## 2.7.4. Test Result

### GFSK Mode

#### A. Test Verdict:

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Result |
|---------|-----------------|----------------------|--------|
| 0       | 2402            | 1.029                | PASS   |
| 39      | 2441            | 1.028                | PASS   |
| 78      | 2480            | 1.021                | PASS   |

#### B. Test Plot:

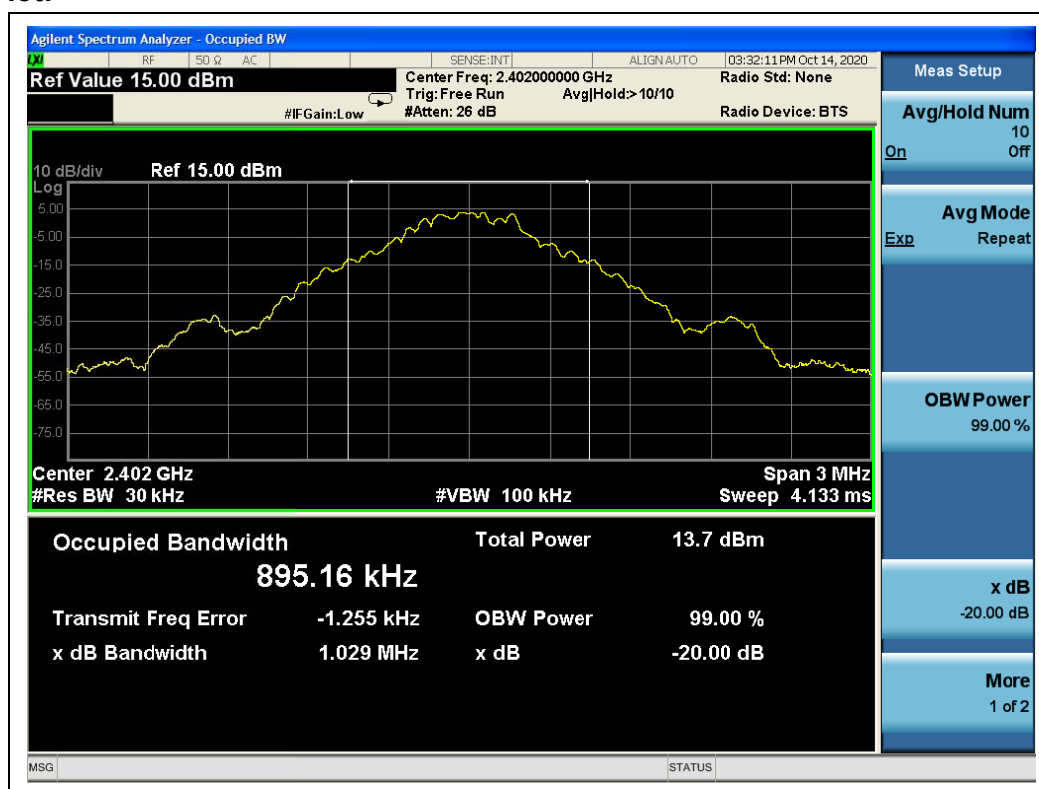

(Channel 0, GFSK)



(Channel 39, GFSK)



(Channel 78, GFSK)





 $\pi/4$ -DQPSK Mode

## A.Test Verdict:

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Result |
|---------|-----------------|----------------------|--------|
| 0       | 2402            | 1.320                | PASS   |
| 39      | 2441            | 1.316                | PASS   |
| 78      | 2480            | 1.318                | PASS   |

## B.Test Plot:

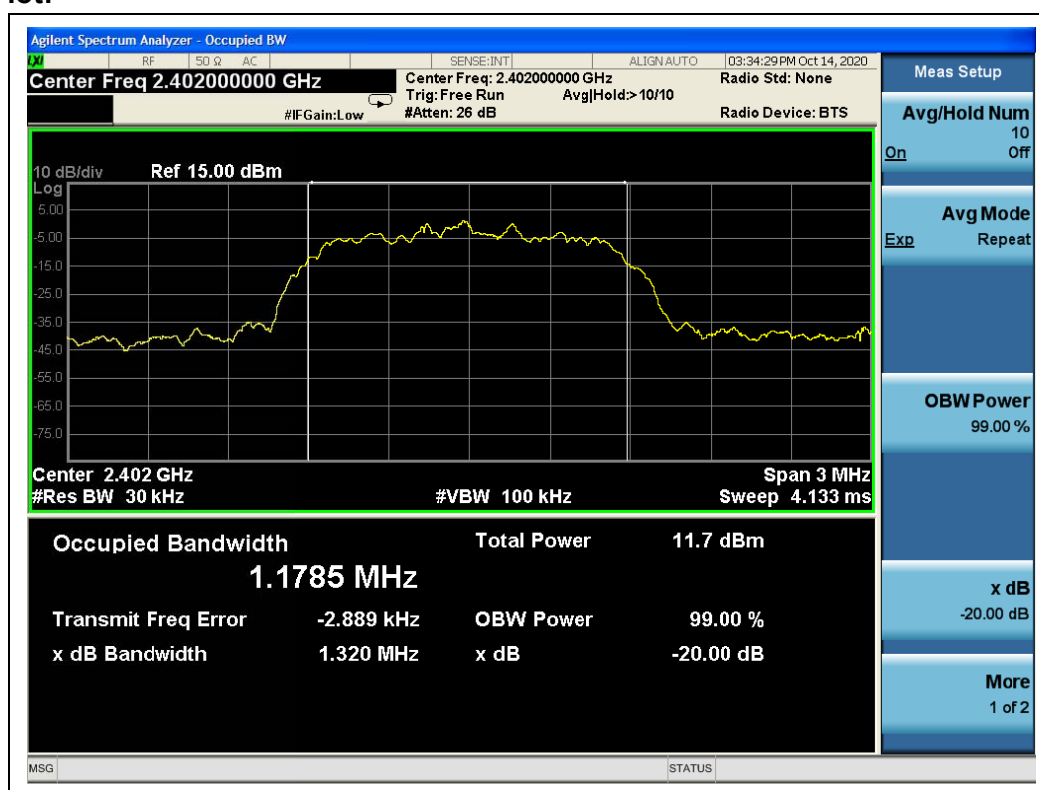(Channel 0,  $\pi/4$ -DQPSK)

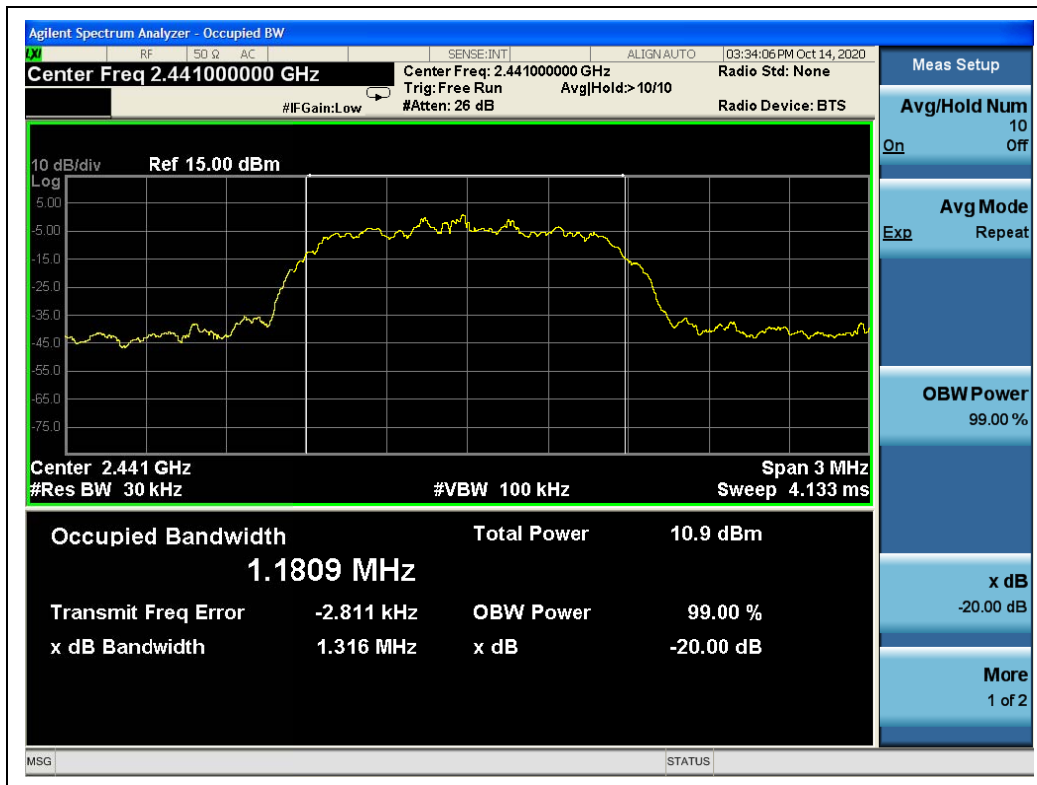(Channel 39,  $\pi/4$ -DQPSK)(Channel 78,  $\pi/4$ -DQPSK)

**8-DPSK Mode****A.Test Verdict:**

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Result |
|---------|-----------------|----------------------|--------|
| 0       | 2402            | 1.313                | PASS   |
| 39      | 2441            | 1.310                | PASS   |
| 78      | 2480            | 1.310                | PASS   |

**B.Test Plot:**

(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)



(Channel 78, 8-DPSK)


## 2.8.Carried Frequency Separation

### 2.8.1.Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

### 2.8.2.Test Description

#### Test Setup:

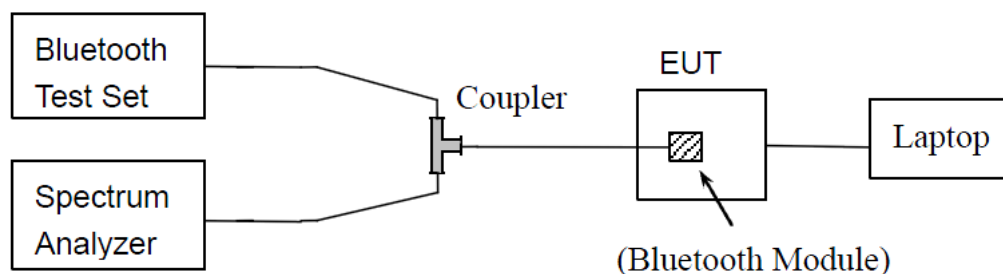

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.8.3.Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.




## 2.8.4. Test Result

### A. Test Verdict:

| Test Mode      | Measured Channel Numbers | Carried Frequency Separation (MHz) | 20dBband width (MHz) | Min. Limit                      | Verdict |
|----------------|--------------------------|------------------------------------|----------------------|---------------------------------|---------|
| GFSK           | 39 and 40                | 1.101                              | 1.029                | two-thirds of the 20dBbandwidth | PASS    |
| $\pi/4$ -DQPSK | 39 and 40                | 1.020                              | 1.320                |                                 | PASS    |
| 8-DPSK         | 39 and 40                | 1.053                              | 1.313                |                                 | PASS    |

### B. Test Plot:

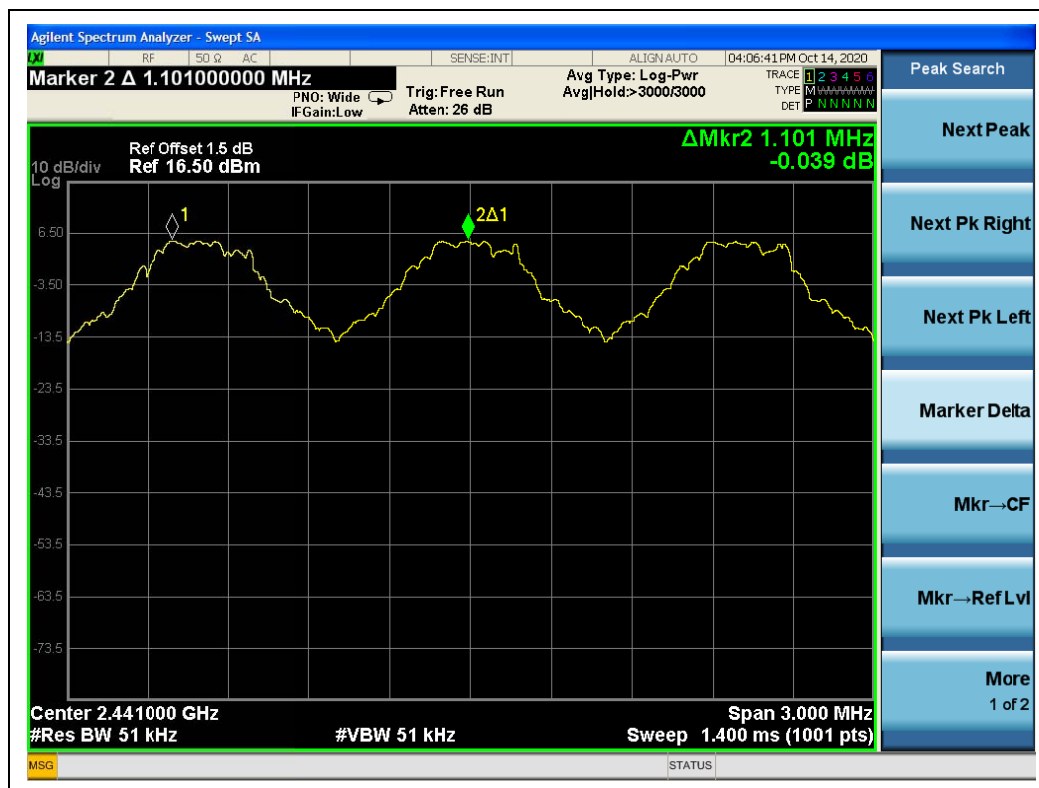

(GFSK)

 $(\pi/4\text{-DQPSK})$  $(8\text{-DPSK})$


## 2.9.Time of Occupancy (Dwell time)

### 2.9.1.Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 2.9.2.Test Description

#### Test Setup:

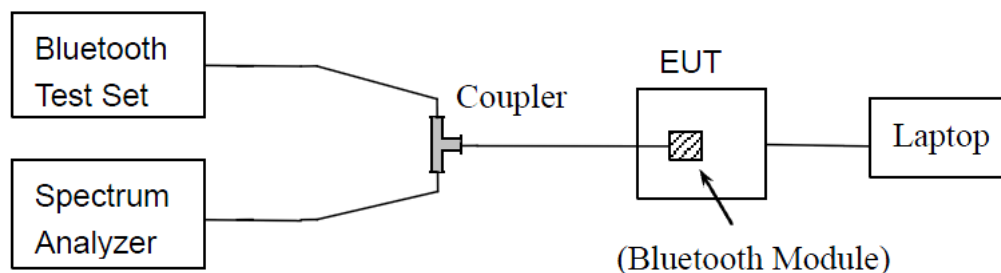

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.9.3.Test Procedure

#### Normal Mode:

DH1: Dwell time equal to Pulse time (ms) \* (1600 / 2 / 79) \* 31.6 Millisecond  
DH3: Dwell time equal to Pulse time (ms) \* (1600 / 4 / 79) \* 31.6 Millisecond  
DH5: Dwell time equal to Pulse Time (ms) \* (1600 / 6 / 79) \* 31.6 Millisecond

#### AFH Mode:

DH1: Dwell time equal to Pulse time (ms) \* (800 / 2 / 20) \* (0.4 \* 20) Millisecond  
DH3: Dwell time equal to Pulse time (ms) \* (800 / 4 / 20) \* (0.4 \* 20) Millisecond  
DH5: Dwell time equal to Pulse Time (ms) \* (800 / 6 / 20) \* (0.4 \* 20) Millisecond.





## GFSK Mode

| DH Packet | Pulse Width (ms) | Dwell Time (ms) |          | Limit (sec) | Verdict |
|-----------|------------------|-----------------|----------|-------------|---------|
|           |                  | Normal Mode     | AFH Mode |             |         |
| DH1       | 0.38             | 121.60          | 60.80    | 0.4         | PASS    |
| DH3       | 1.64             | 262.40          | 131.20   |             | PASS    |
| DH5       | 2.88             | 307.20          | 153.60   |             | PASS    |

Agilent Spectrum Analyzer - Swept SA

Marker 1  $\Delta$  380.000  $\mu$ s

PNO: Fast  $\rightarrow$  Trig: Free Run  
IFGain: Low Atten: 26 dB

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6  
TYPE P P P P P P  
DET P N N N N N

Ref Offset 1.5 dB  
Ref 16.50 dBm

$\Delta$ Mkr1 380.0  $\mu$ s  
-0.34 dB

10 dB/div  
Log

6.50  
-3.50  
-13.5  
-23.5  
-33.5  
-43.5  
-53.5  
-63.5  
-73.5

Center 2.441000000 GHz  
Res BW 1.0 MHz

#VBW 3.0 MHz

Span 0 Hz  
Sweep 10.00 ms (1001 pts)

MSG STATUS

Marker

Select Marker 1

Normal

Delta


Fixed

Off


Properties

More 1 of 2

(DH1, GFSK)

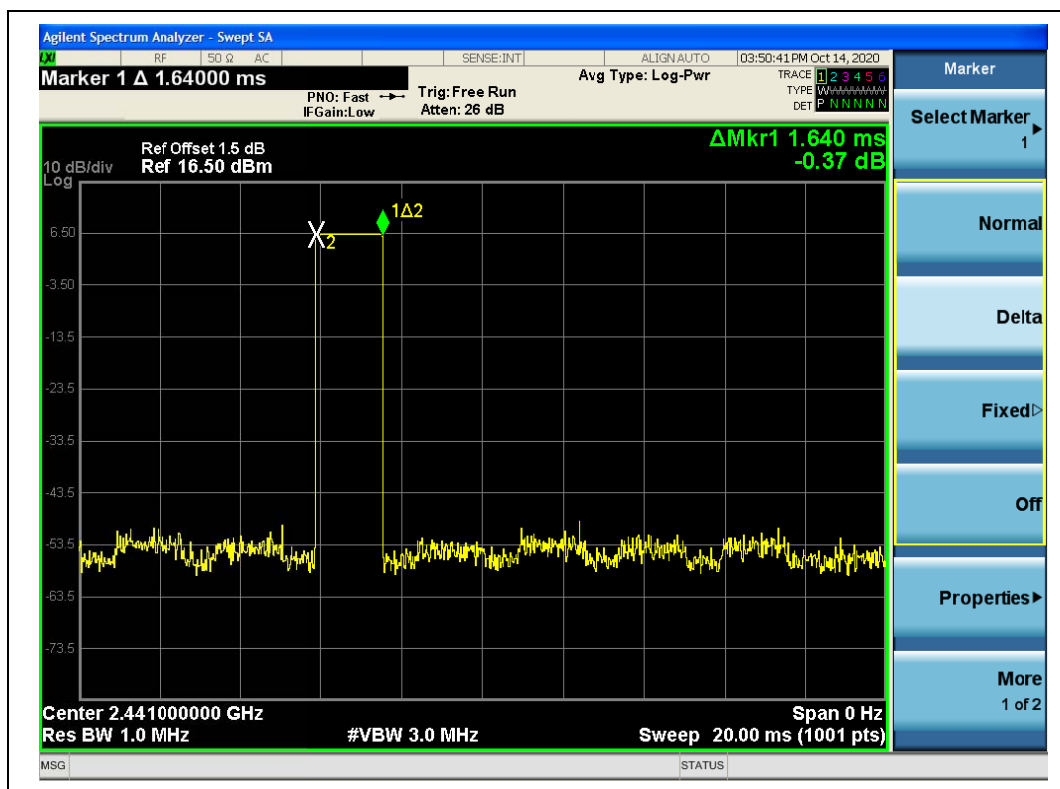

(DH3, GFSK)

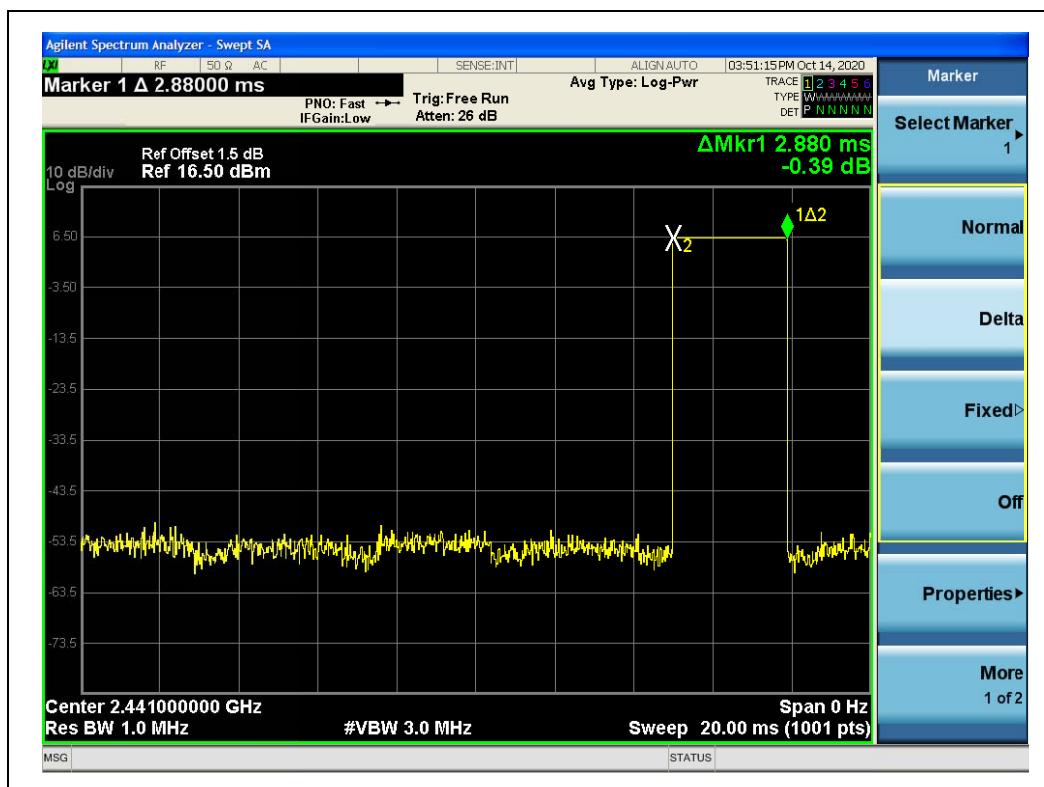

(DH5, GFSK)



### A. Test Verdict:

| DH Packet | Pulse Width (ms) | Dwell Time (ms) |          | Limit (sec) | Verdict |
|-----------|------------------|-----------------|----------|-------------|---------|
|           |                  | Normal Mode     | AFH Mode |             |         |
| DH1       | 0.39             | 124.80          | 62.40    | 0.4         | PASS    |
| DH3       | 1.64             | 262.40          | 131.20   |             | PASS    |
| DH5       | 2.88             | 307.20          | 153.60   |             | PASS    |

Agilent Spectrum Analyzer - Swept SA

RF 50  $\Omega$  AC SENSE:INT ALIGN: AUTO 03:53:00 PM Oct 14, 2020

Marker 1  $\Delta$  390.000  $\mu$ s Avg Type: Log-Pwr

PNO: Fast  $\rightarrow$  Trig: Free Run  
IF Gain: Low Atten: 26 dB

TRACE 1 2 3 4 5 6  
TYPE W W W W W W  
DET P N N N N N

Ref Offset 1.5 dB  
Ref 16.50 dBm

$\Delta$ Mkr1 390.0  $\mu$ s  
1.07 dB

10 dB/div  
Log

6.50  
-3.50  
-13.5  
-23.5  
-33.5  
-43.5  
-53.5  
-63.5  
-73.5

X2

1  $\Delta$  2

Center 2.441000000 GHz  
Res BW 1.0 MHz  
Span 0 Hz  
Sweep 10.00 ms (1001 pts)

#VBW 3.0 MHz

Marker

Select Marker 1

Normal

Delta

Fixed



Off

Properties

More 1 of 2

MSG STATUS

(DH1,  $\pi/4$ -DQPSK)

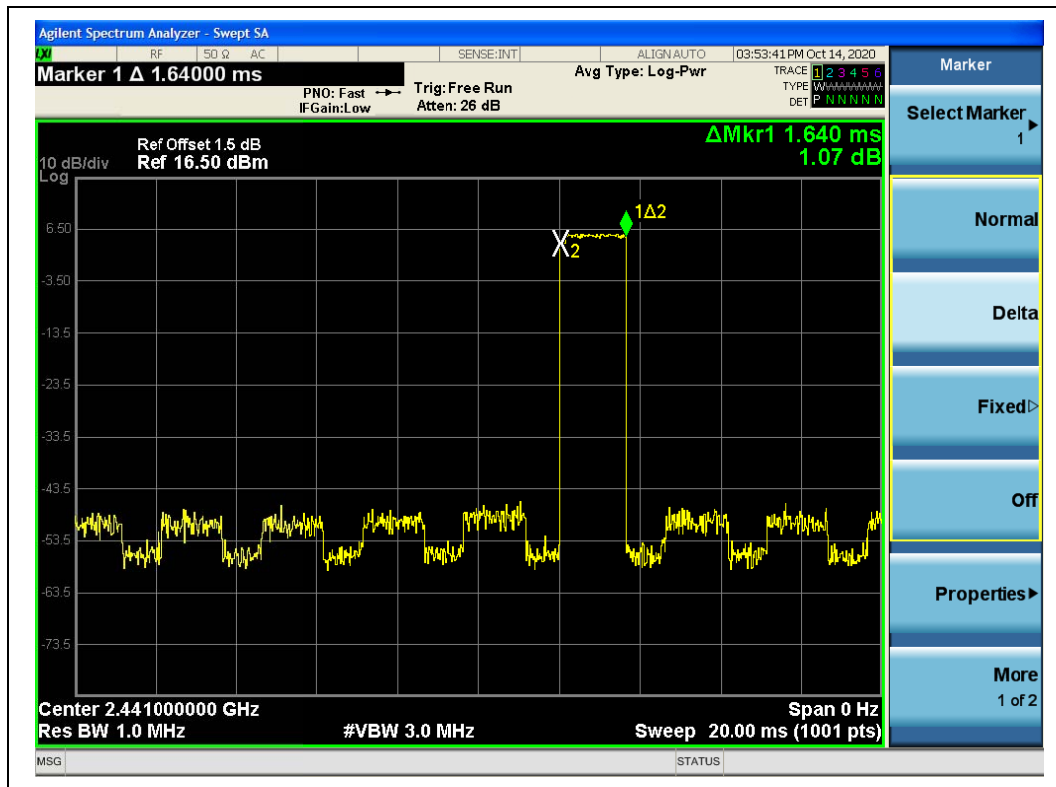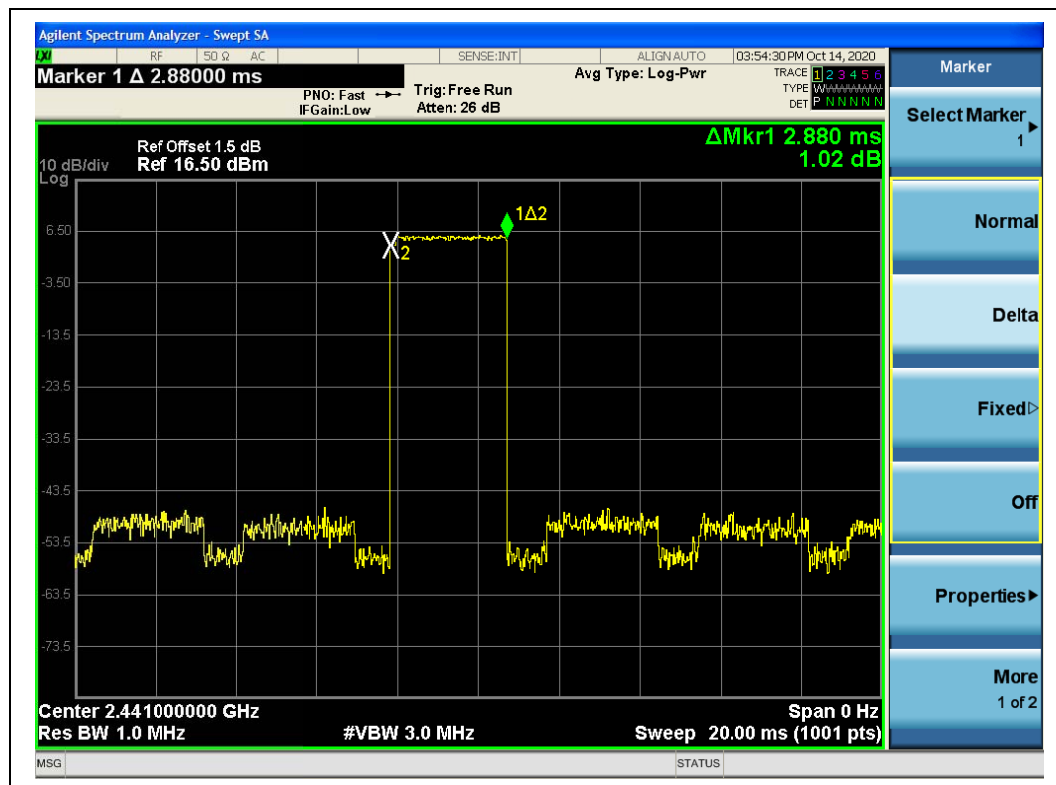
(DH3,  $\pi/4$ -DQPSK)

(DH5,  $\pi/4$ -DQPSK)



### A.Test Verdict:

| DH Packet | Pulse Width (ms) | Dwell Time (ms) |          | Limit (sec) | Verdict |
|-----------|------------------|-----------------|----------|-------------|---------|
|           |                  | Normal Mode     | AFH Mode |             |         |
| DH1       | 0.39             | 124.80          | 62.40    | 0.4         | PASS    |
| DH3       | 1.64             | 262.40          | 131.20   |             | PASS    |
| DH5       | 2.88             | 307.20          | 153.60   |             | PASS    |

Agilent Spectrum Analyzer - Swept SA

RF 50  $\Omega$  AC SENSE:INT ALIGN:AUTO 03:54:58 PM Oct 14, 2020

Marker 1  $\Delta$  390.000  $\mu$ s Avg Type: Log-Pwr

PNO: Fast  $\rightarrow$  Trig: Free Run  
IF Gain: Low Atten: 26 dB

TRACE 1 2 3 4 5 6  
TYPE W W W W W W  
DET P N N N N N

Ref Offset: 1.5 dB  
Ref: 16.50 dBm

$\Delta$ Mkr1 390.0  $\mu$ s  
-0.11 dB

10 dB/div  
Log

The screenshot displays a swept spectrum on a grid. The vertical axis represents power in dBm, ranging from -73.5 to 10 dBm. The horizontal axis represents frequency in GHz, ranging from 2.43 to 2.45 GHz. A yellow trace shows the spectrum, with a prominent peak at 2.441 GHz. A green marker labeled '1' is placed on this peak. A green line connects the marker to the dwell time measurement, which is displayed as  $\Delta$ Mkr1 390.0  $\mu$ s and -0.11 dB. The peak is also labeled with 'X2' and '1 $\Delta$ 2'. The bottom of the screen shows the center frequency (2.441000000 GHz), resolution bandwidth (1.0 MHz), video bandwidth (3.0 MHz), span (0 Hz), sweep time (10.00 ms), and number of points (1001 pts).

Center 2.441000000 GHz Span 0 Hz  
Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (1001 pts)

MSG STATUS

Marker

Select Marker 1

Normal

Delta


Fixed

Off


Properties

More 1 of 2

(DH1, 8-DPSK)

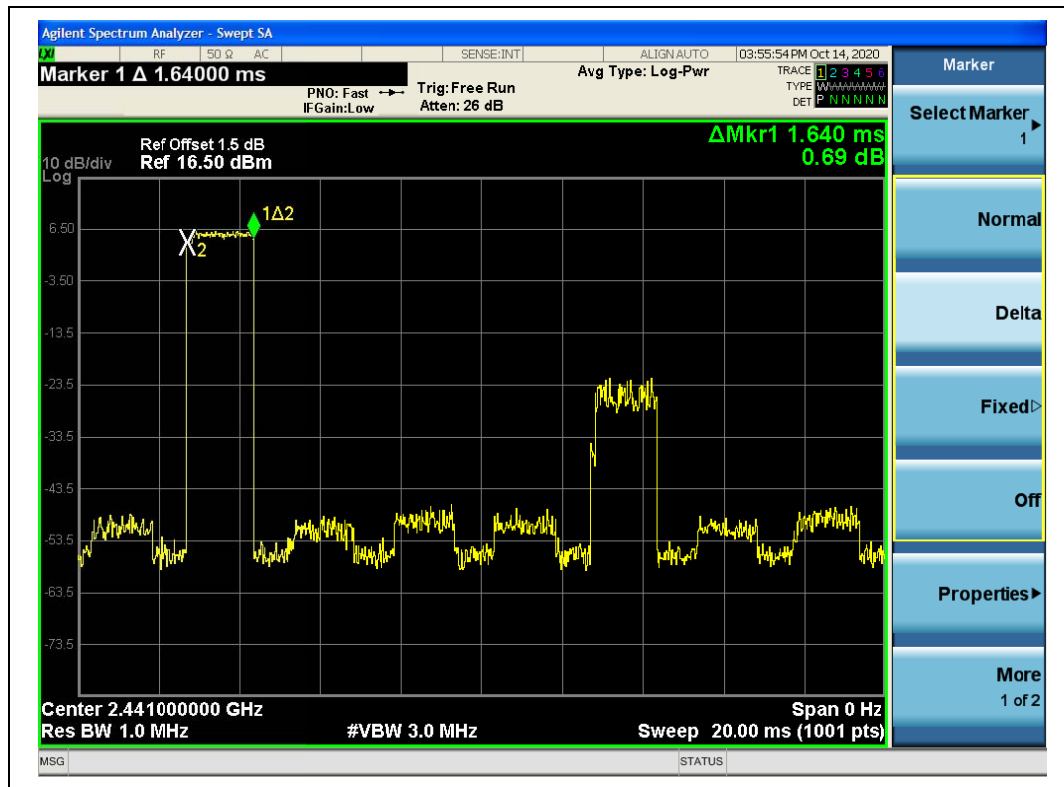

(DH3, 8-DPSK)

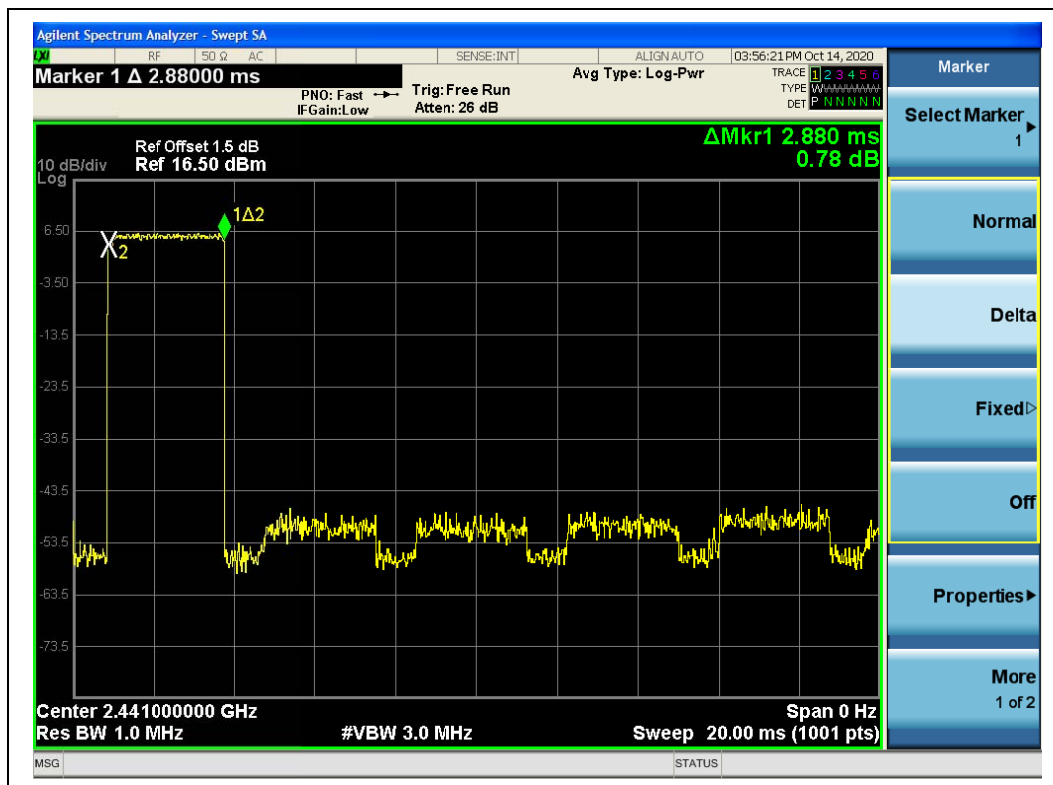

(DH5, 8-DPSK)


## 2.10. Conducted Spurious Emissions

### 2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.10.2. Test Description

#### Test Setup:

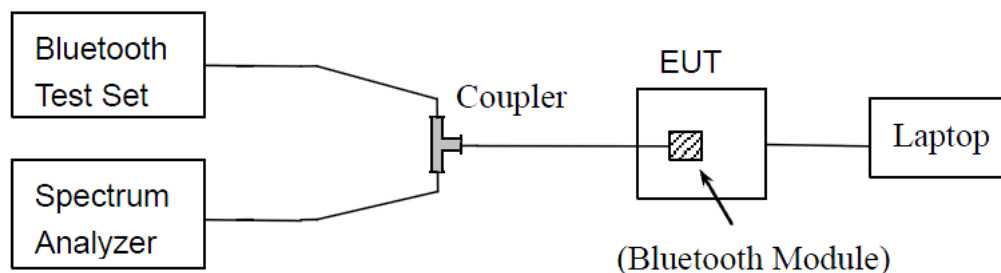

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.




## 2.10.4. Test Result

### GFSK Mode

#### A. Test Verdict:


| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 0       | 2402            | -41.92                                   | 5.25          | -14.75                  | PASS    |
| 39      | 2441            | -41.33                                   | 5.39          | -14.61                  | PASS    |
| 78      | 2480            | -40.62                                   | 5.58          | -14.42                  | PASS    |

#### B. Test Plot:

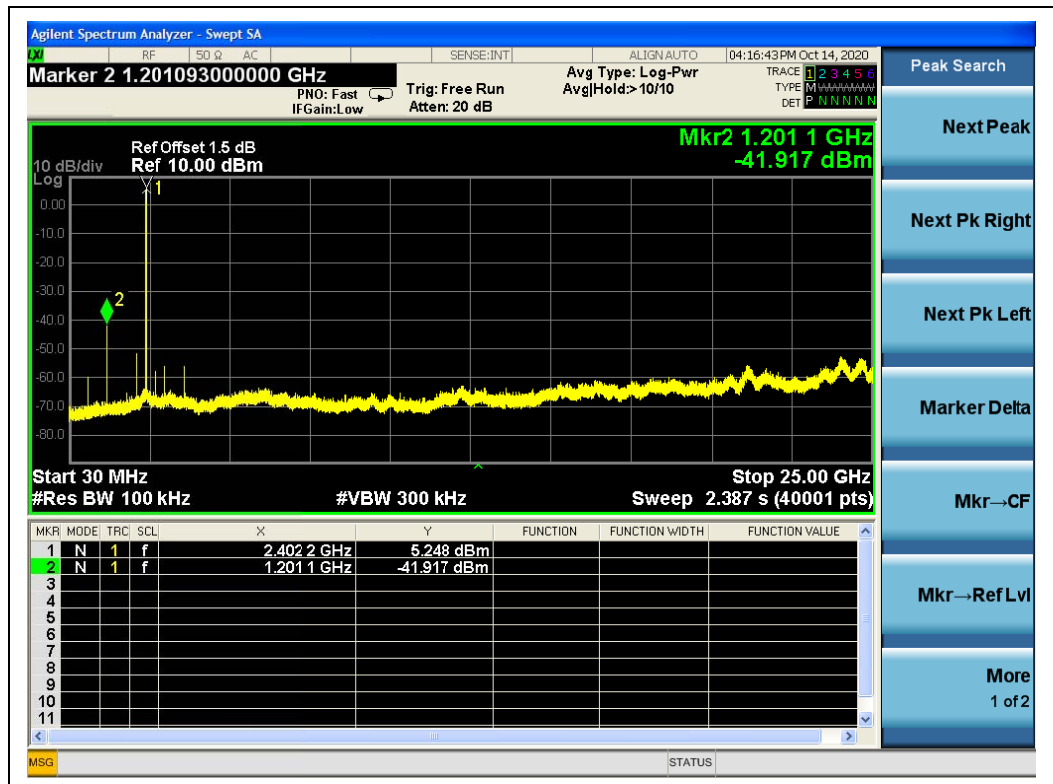


(30MHz to 25GHz, Channel 0, GFSK)




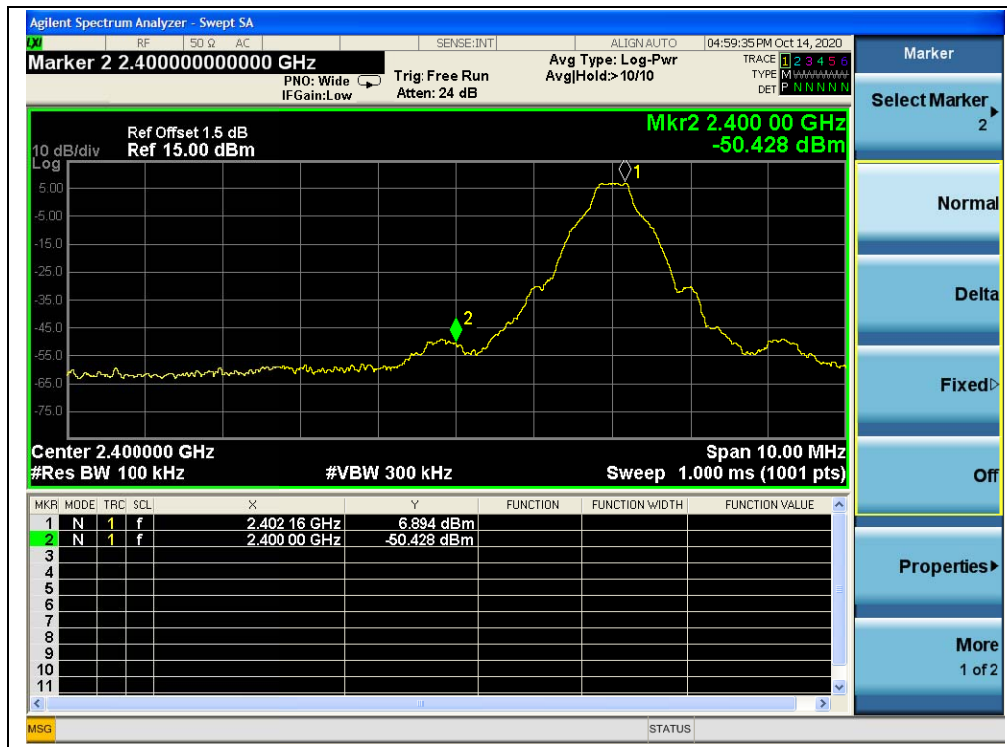


(Band edge, Channel 0, GFSK)

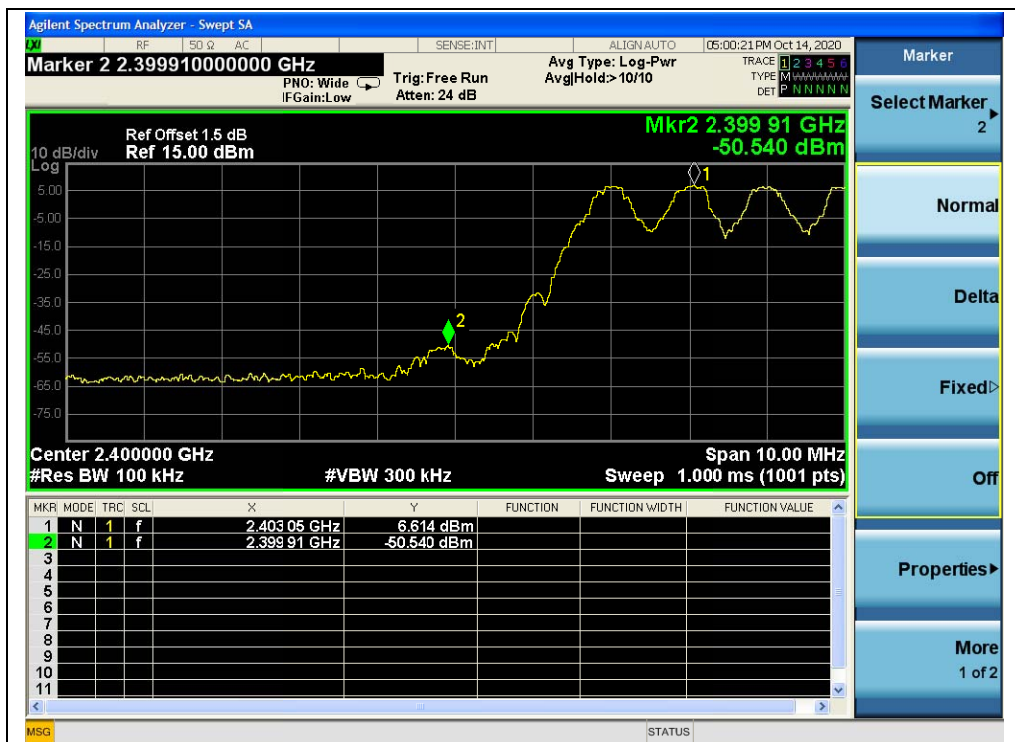


(Band edge with hopping on, Channel 0, GFSK)

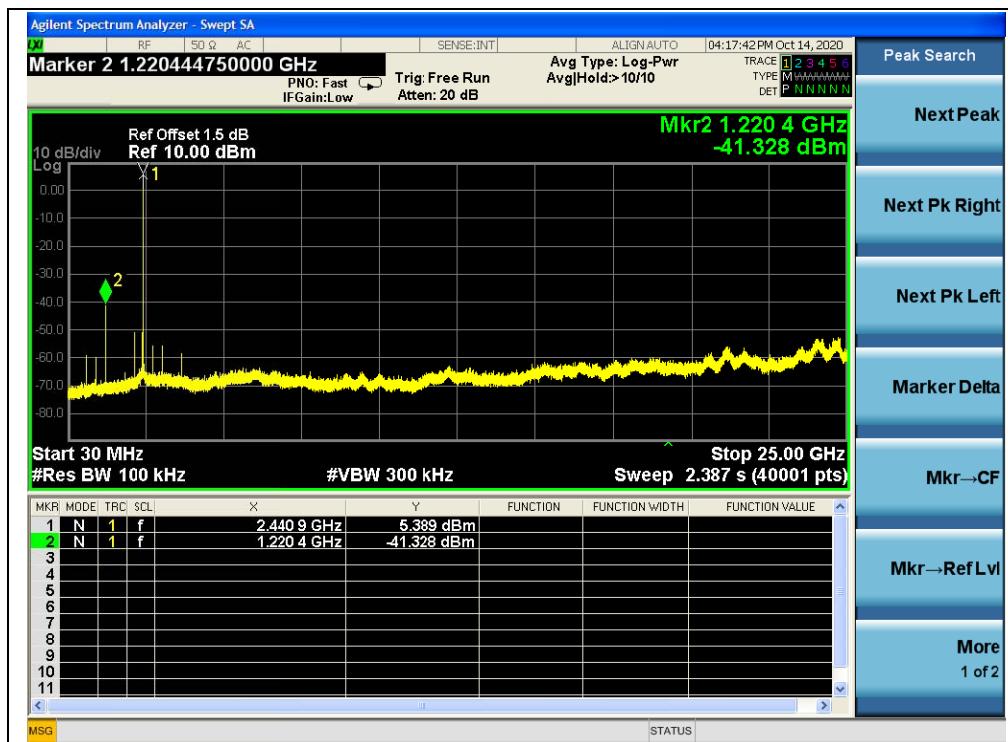

(30MHz to 25GHz, Channel 39, GFSK)

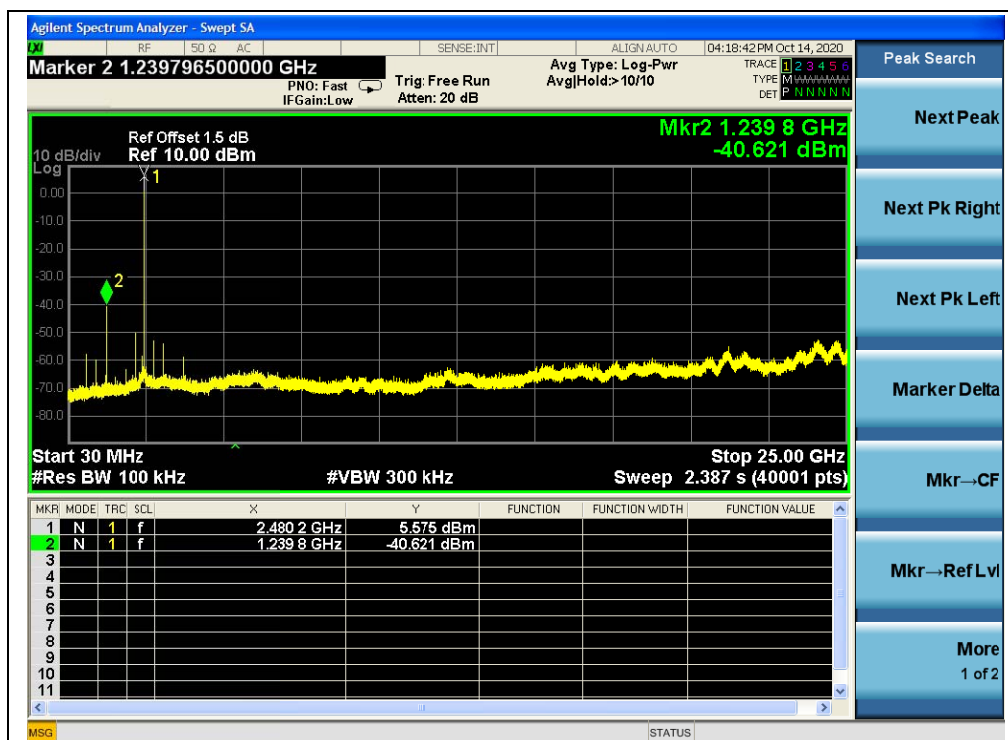

(30MHz to 25GHz, Channel 78, GFSK)

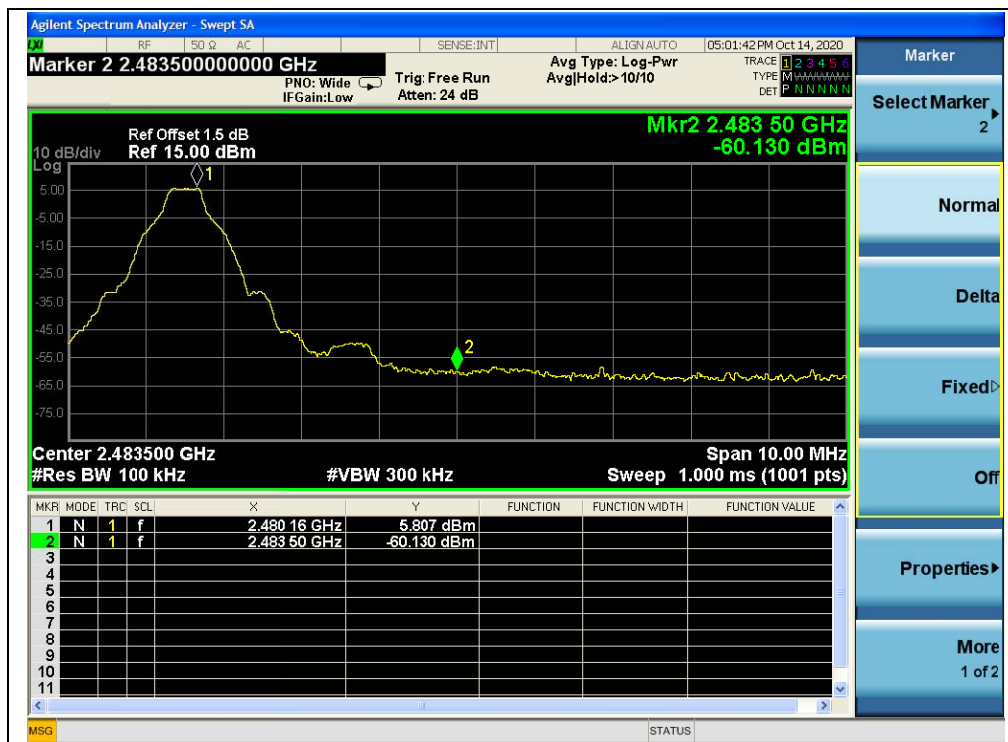

(Band edge, Channel 78, GFSK)



(Band edge with hopping on, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode



**A.Test Verdict:**



| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 0       | 2402            | -46.64                                   | 3.79          | -16.21                  | PASS    |
| 39      | 2441            | -45.83                                   | 1.26          | -18.74                  | PASS    |
| 78      | 2480            | -45.32                                   | 1.03          | -18.97                  | PASS    |



**B.Test Plot:**

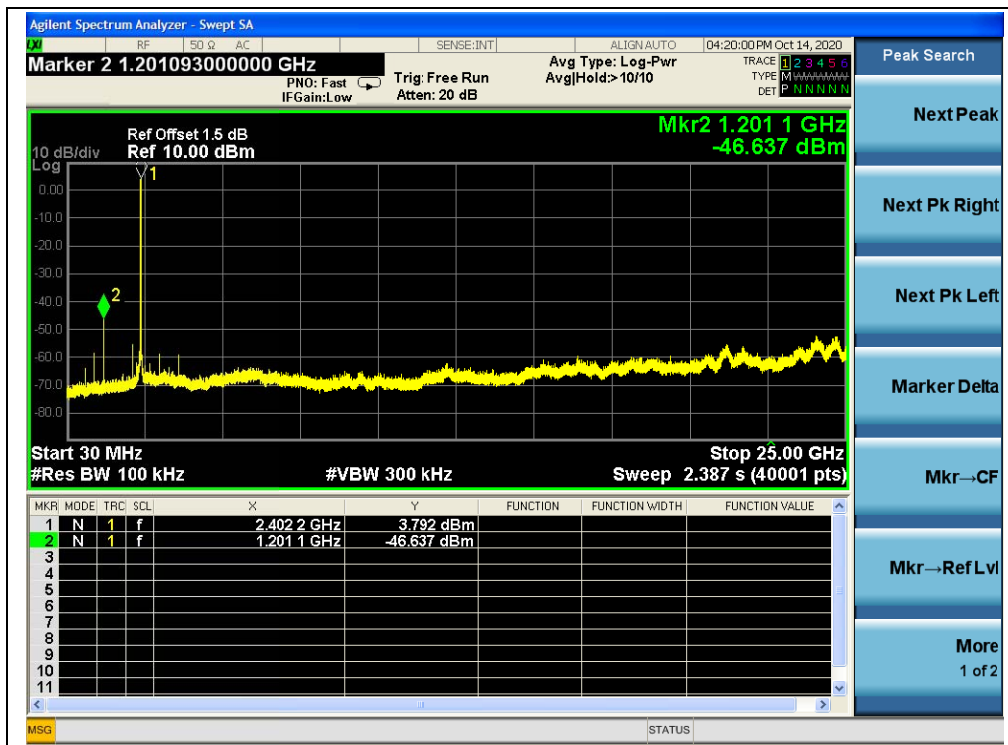

(30MHz to 25GHz, Channel 0,  $\pi/4$ -DQPSK)

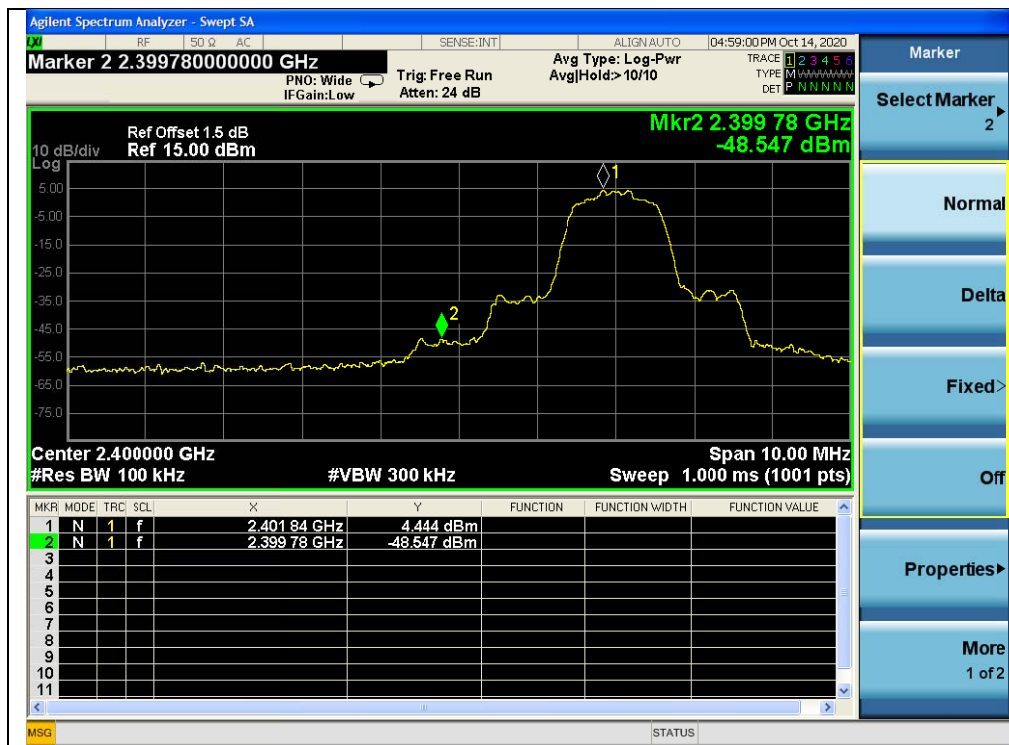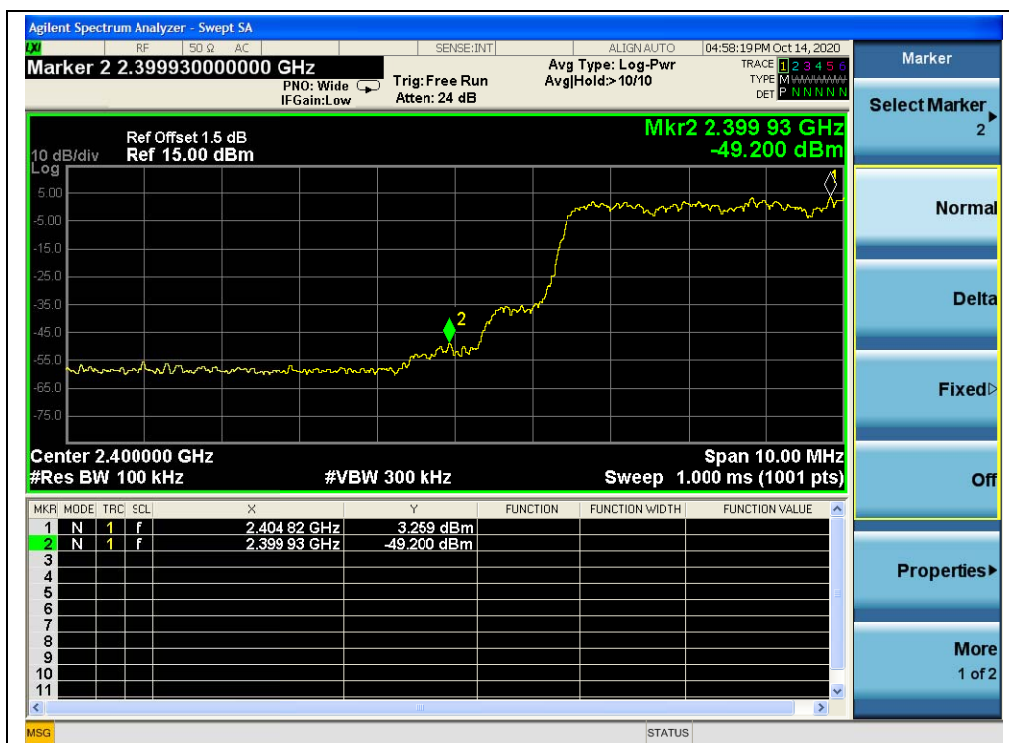
(Band edge, Channel 0,  $\pi/4$ -DQPSK)

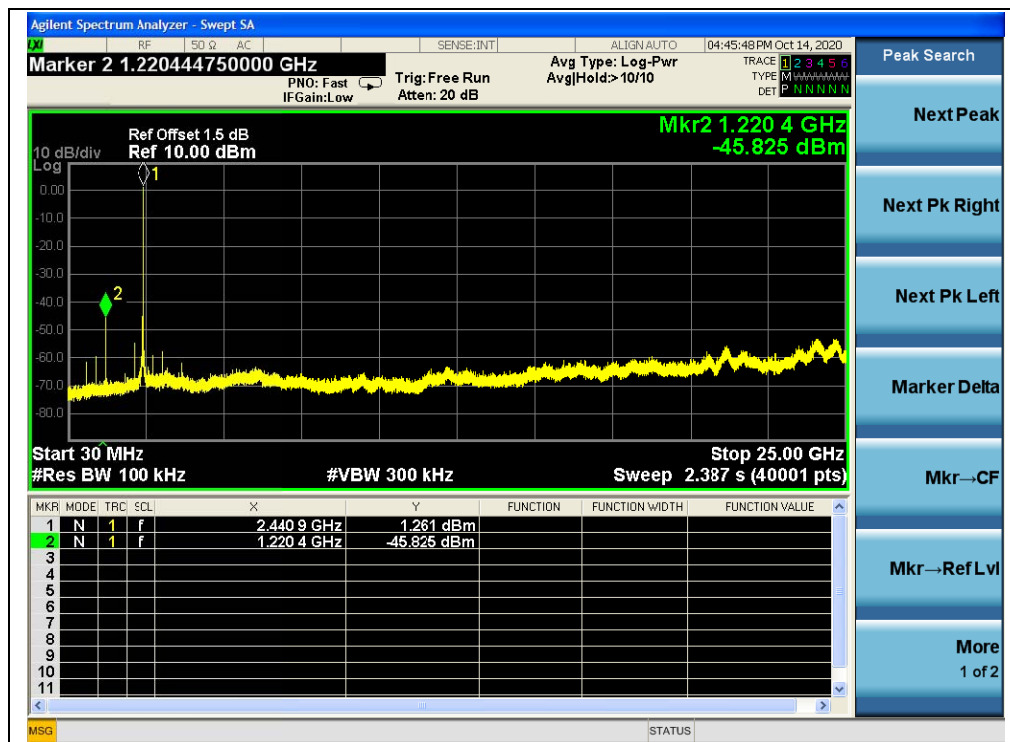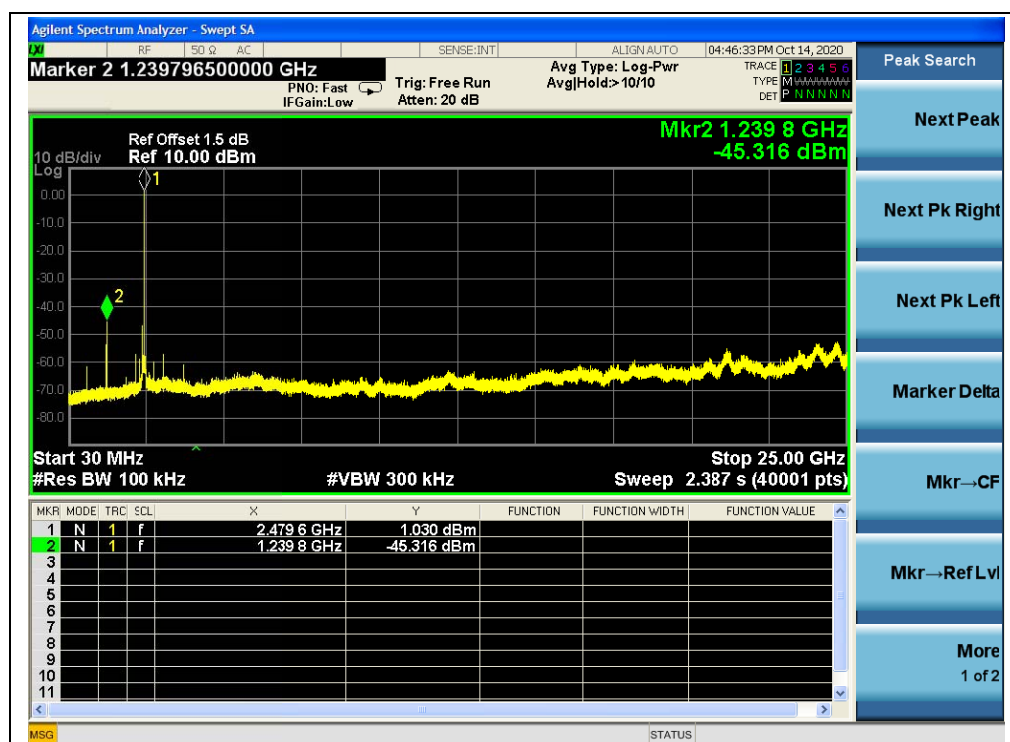(Band edge with hopping on, Channel 0,  $\pi/4$ -DQPSK)

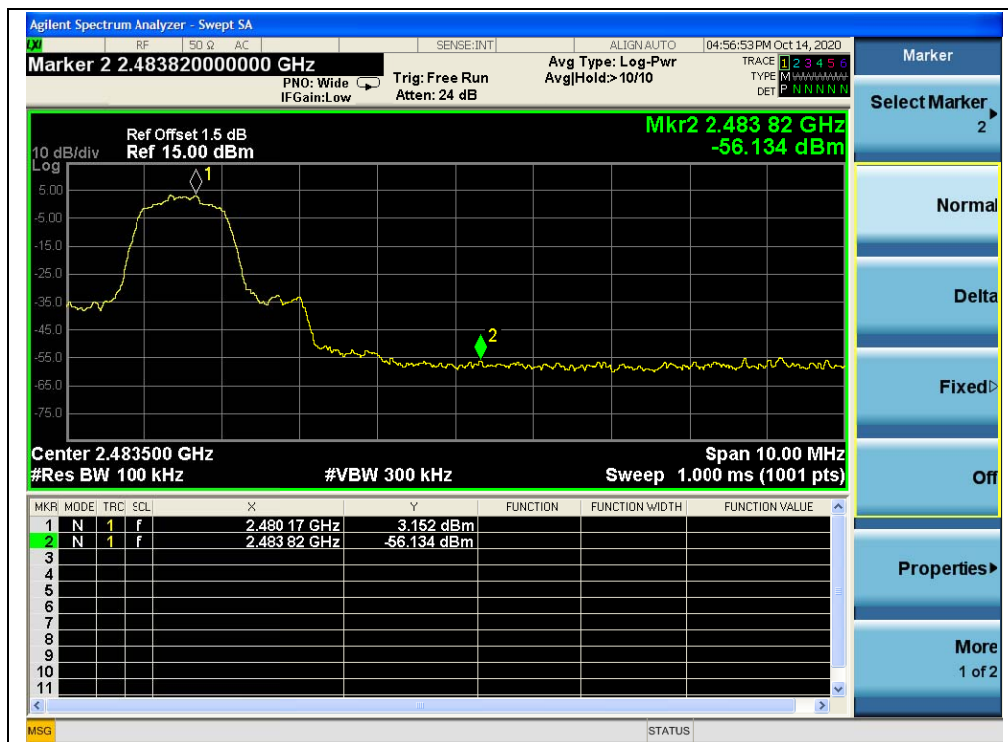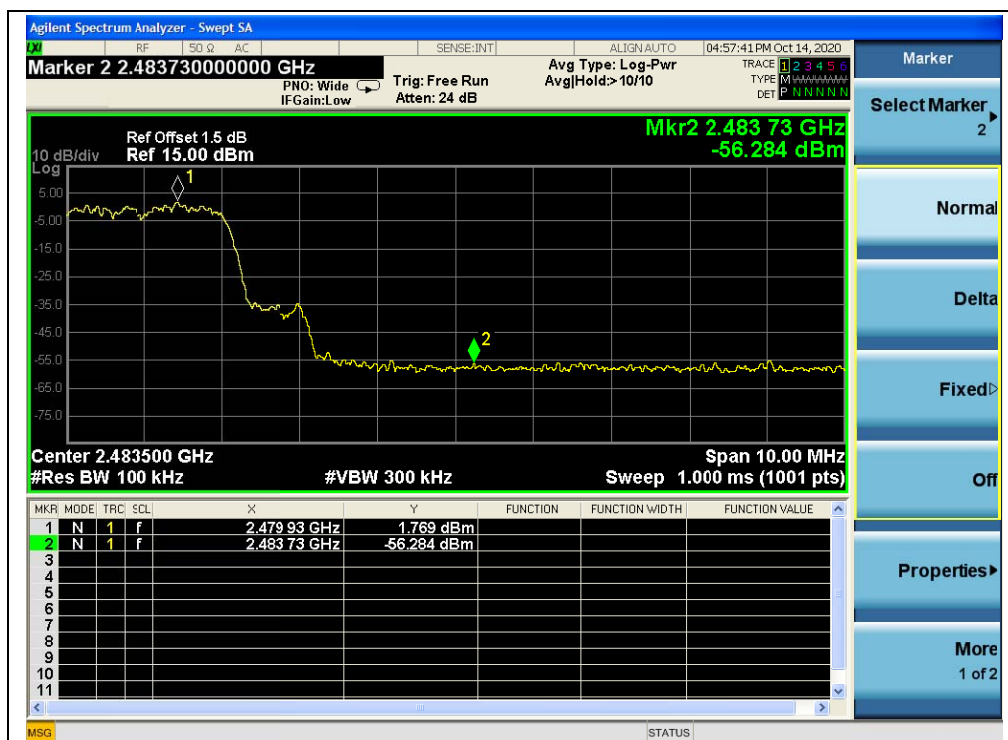
(30MHz to 25GHz, Channel 39,  $\pi/4$ -DQPSK)(30MHz to 25GHz, Channel 78,  $\pi/4$ -DQPSK)


(Band edge, Channel 78,  $\pi/4$ -DQPSK)

(Band edge with hopping on, Channel 78,  $\pi/4$ -DQPSK)



**8-DPSK Mode****A.Test Verdict:**
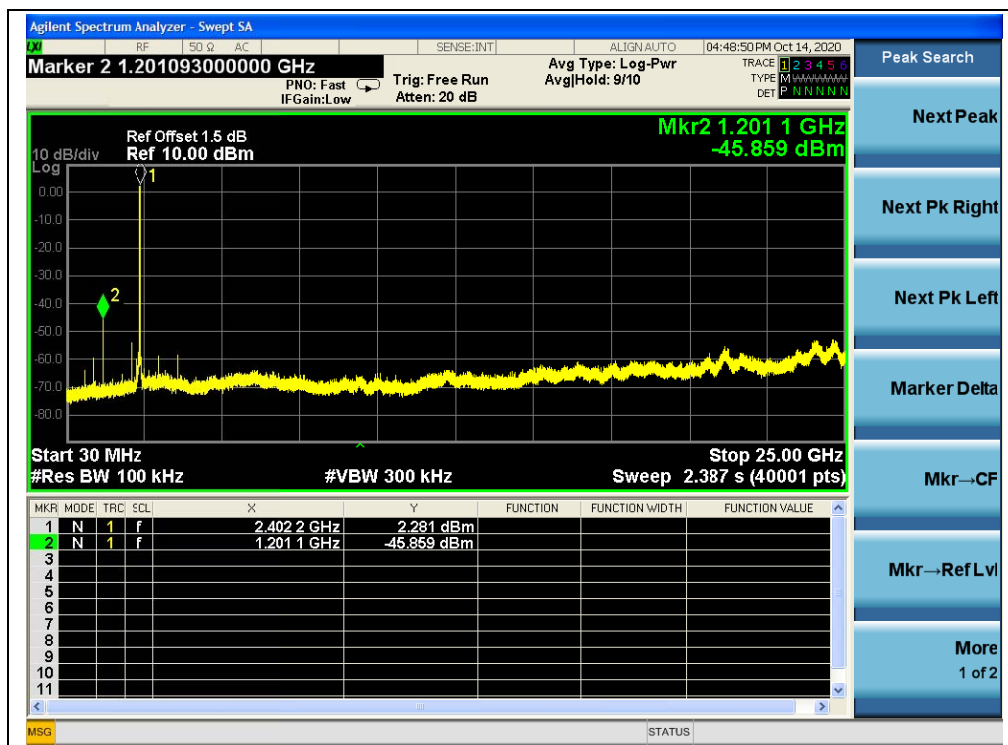
| Channel | Frequency (MHz) | Measured Max. Out of Band Emission (dBm) | Limit (dBm)   |                         | Verdict |
|---------|-----------------|------------------------------------------|---------------|-------------------------|---------|
|         |                 |                                          | Carrier Level | Calculated -20dBc Limit |         |
| 0       | 2402            | -45.86                                   | 2.28          | -17.72                  | PASS    |
| 39      | 2441            | -45.62                                   | 1.54          | -18.46                  | PASS    |
| 78      | 2480            | -44.79                                   | 2.81          | -17.19                  | PASS    |


**B.Test Plot:**

(30MHz to 25GHz, Channel 0, 8-DPSK)







(Band edge, Channel 0, 8-DPSK)

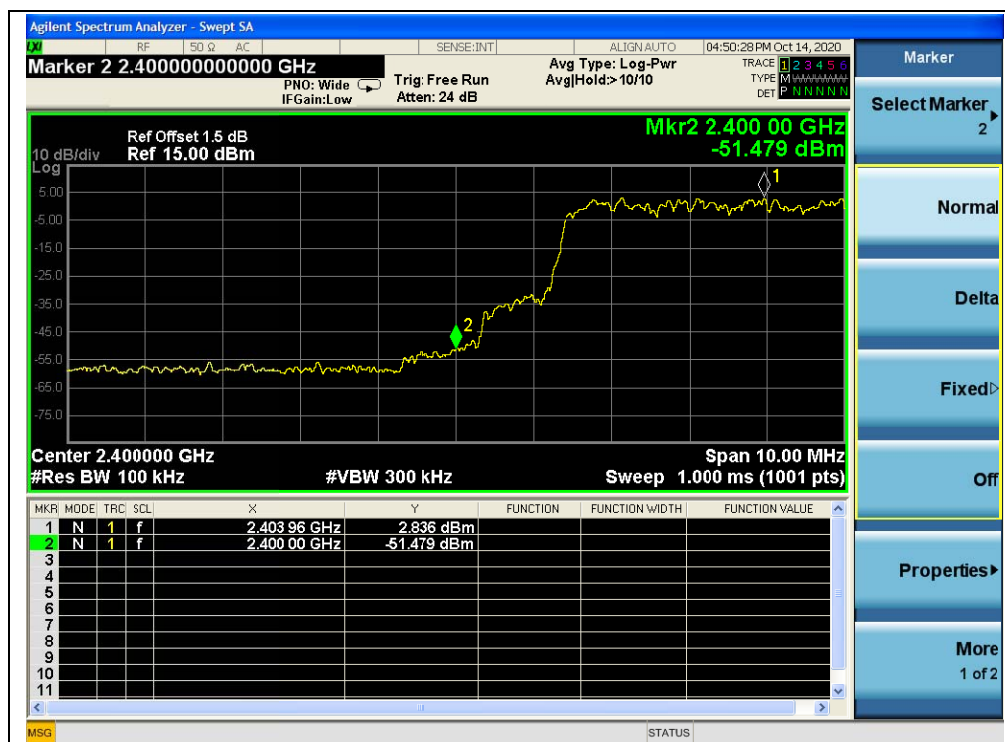

(Band edge with hopping on, Channel 0, 8-DPSK)

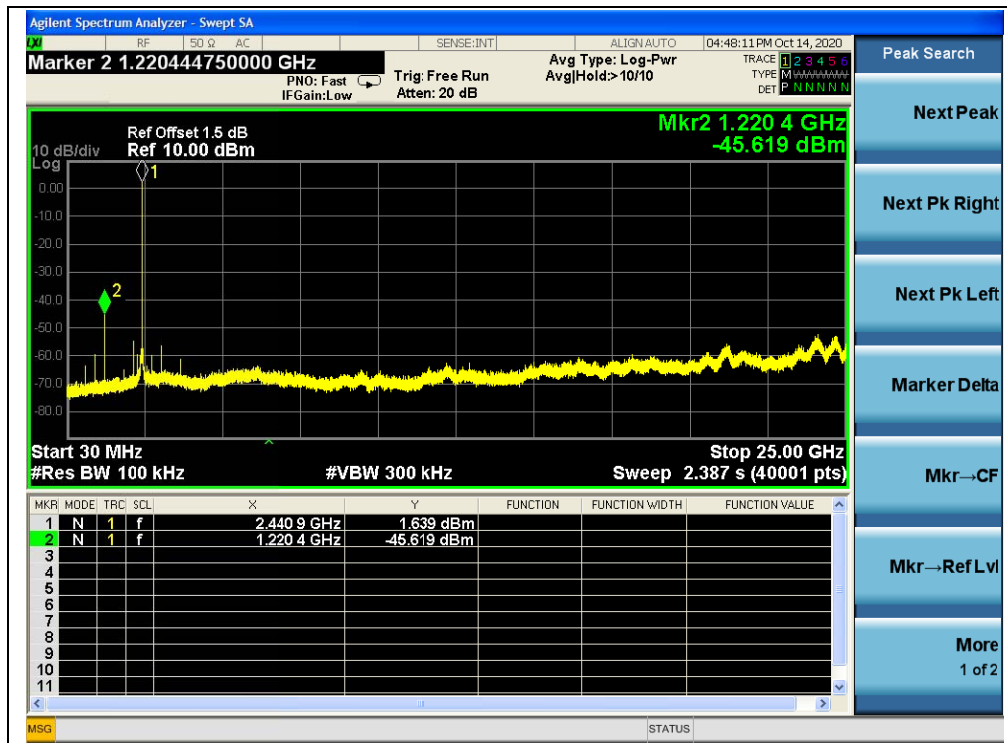


(30MHz to 25GHz, Channel 39, 8-DPSK)

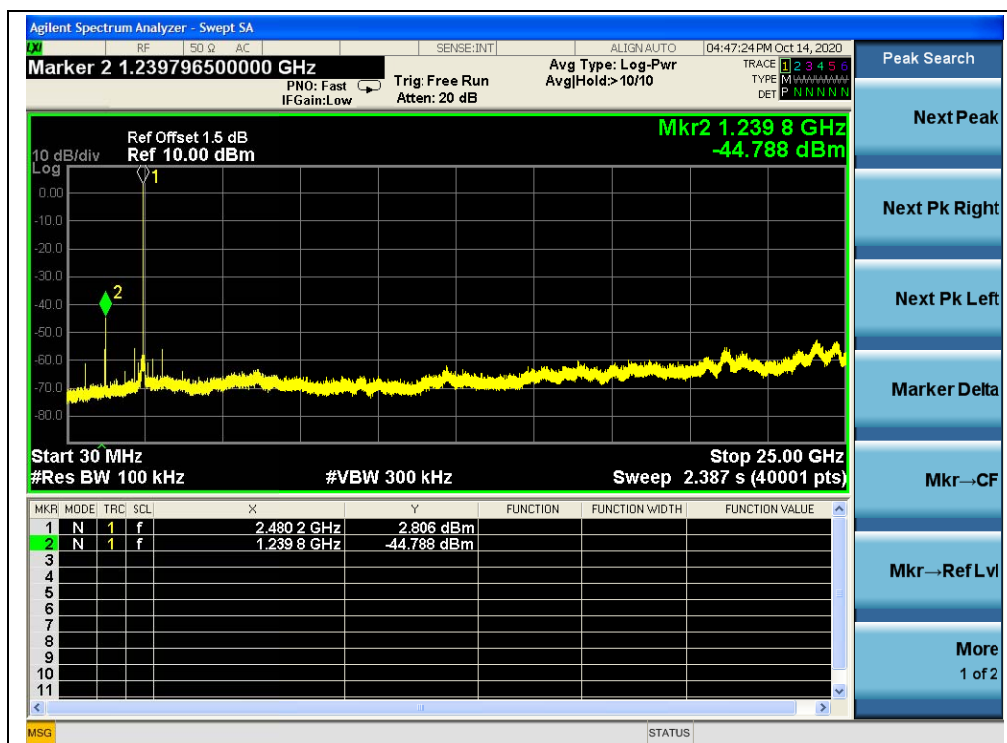

(30MHz to 25GHz, Channel 78, 8-DPSK)



(Band edge, Channel 78, 8-DPSK)

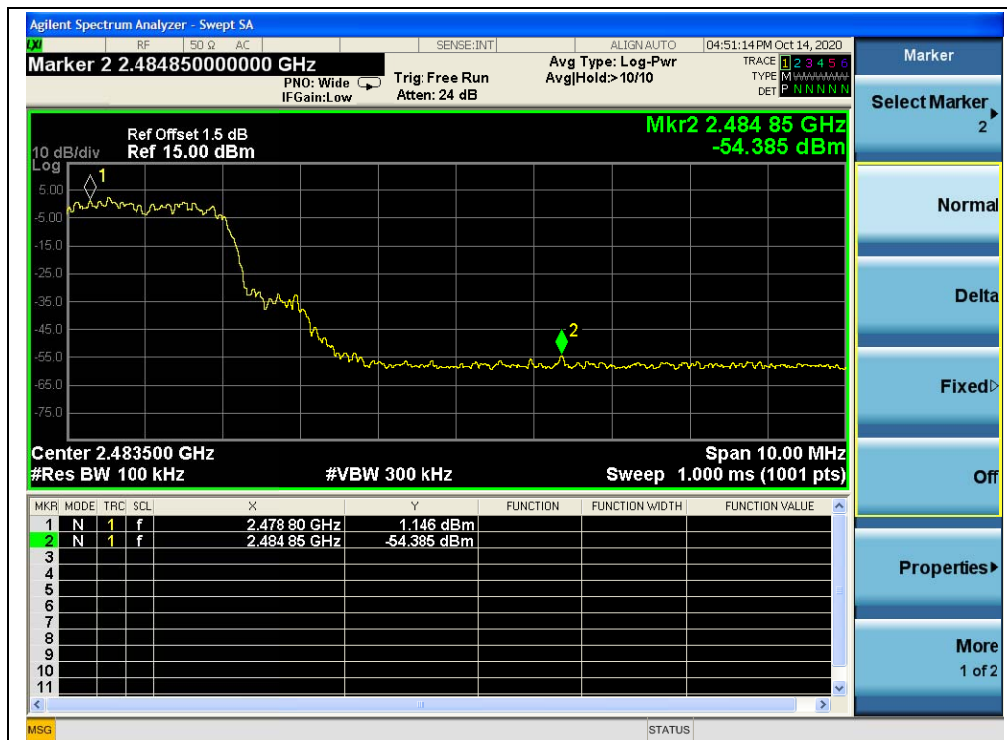

(Band edge with hopping on, Channel 78, 8-DPSK)

## 2.11. Conducted Emission

### 2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


| Frequency range<br>(MHz) | Conducted Limit (dB $\mu$ V) |          |
|--------------------------|------------------------------|----------|
|                          | Quai-peak                    | Average  |
| 0.15 - 0.50              | 66 to 56                     | 56 to 46 |
| 0.50 - 5                 | 56                           | 46       |
| 5- 30                    | 60                           | 50       |

#### NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.11.2. Test Description

#### Test Setup:

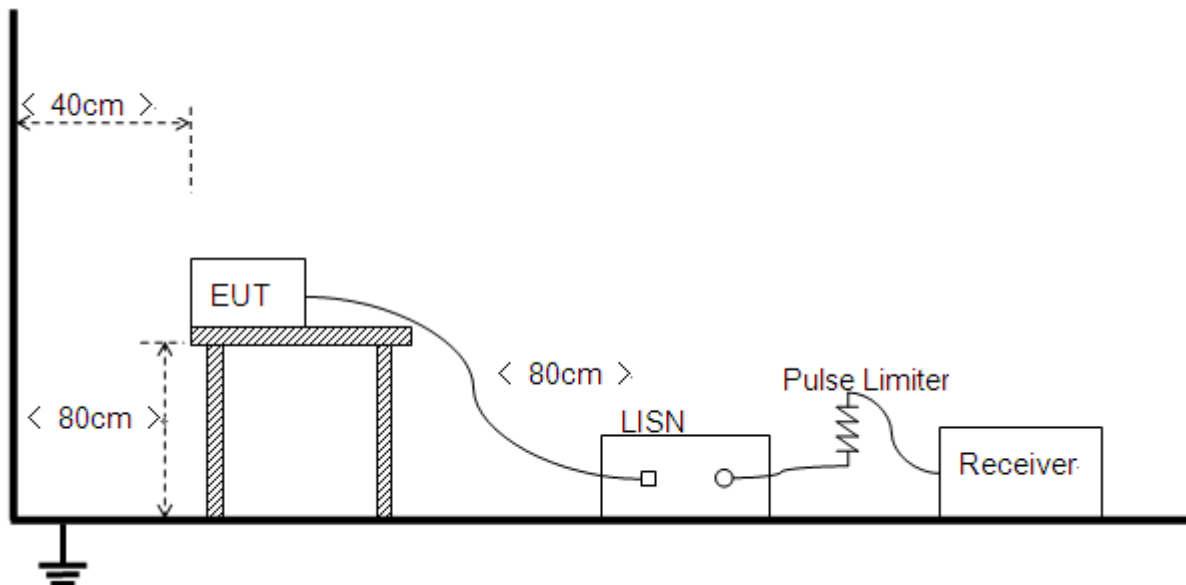

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



### 2.11.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT+ ADAPTER+ BT TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss [dB]} + A_{\text{Factor}}$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN

### B.Test Plot:

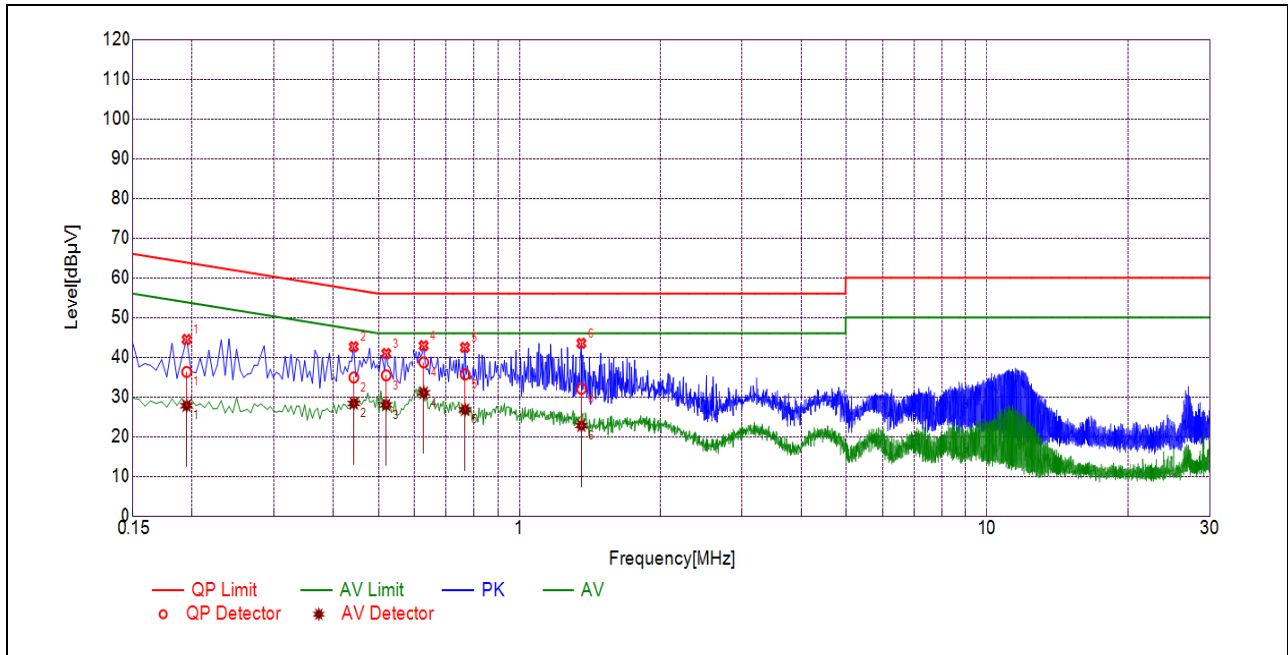

(L Phase)

| No. | Fre.<br>(MHz) | Emission Level (dBμV) |         | Limit (dBμV) |         | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
|     |               | Quai-peak             | Average | Quai-peak    | Average |            |         |
| 1   | 0.1950        | 36.29                 | 27.79   | 63.82        | 53.82   | Line       | PASS    |
| 2   | 0.4428        | 34.90                 | 28.37   | 57.01        | 47.01   |            | PASS    |
| 3   | 0.5188        | 35.43                 | 28.00   | 56.00        | 46.00   |            | PASS    |
| 4   | 0.6274        | 38.68                 | 31.04   | 56.00        | 46.00   |            | PASS    |
| 5   | 0.7671        | 35.66                 | 26.79   | 56.00        | 46.00   |            | PASS    |
| 6   | 1.3609        | 32.04                 | 22.77   | 56.00        | 46.00   |            | PASS    |

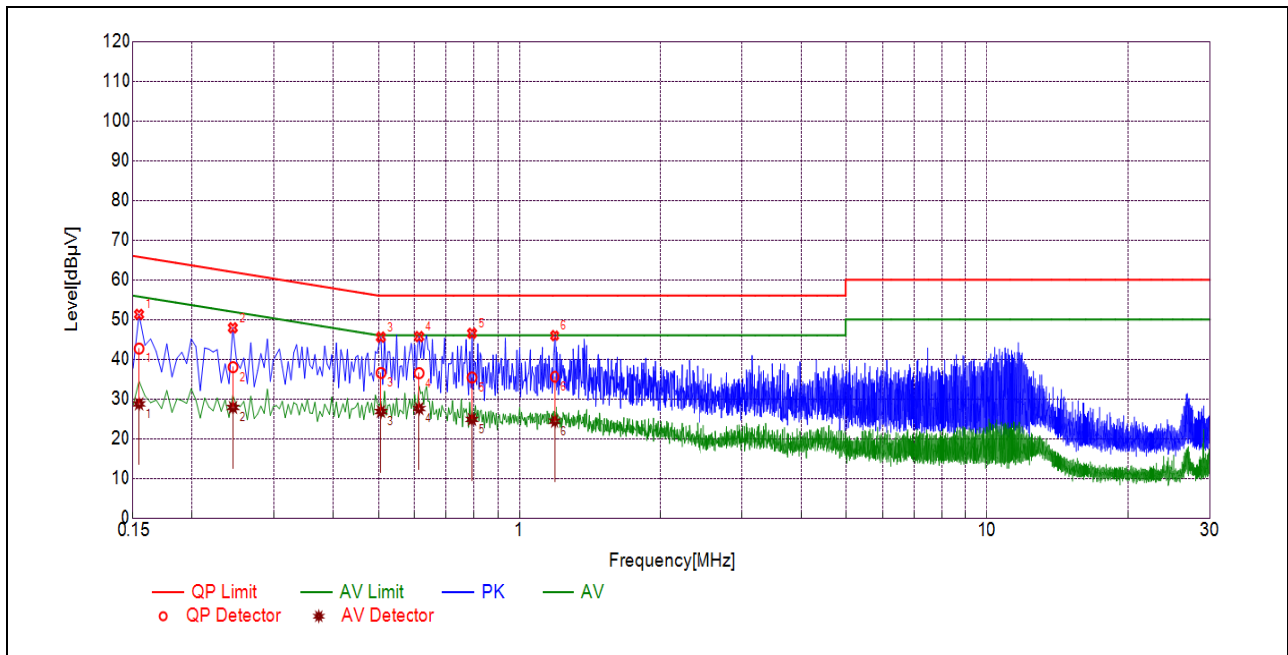

(N Phase)

| No. | Fre.<br>(MHz) | Emission Level (dBμV) |         | Limit (dBμV) |         | Power-line | Verdict |
|-----|---------------|-----------------------|---------|--------------|---------|------------|---------|
|     |               | Quai-peak             | Average | Quai-peak    | Average |            |         |
| 1   | 0.1545        | 42.68                 | 28.74   | 65.75        | 55.75   | Neutral    | PASS    |
| 2   | 0.2447        | 37.99                 | 27.85   | 61.93        | 51.93   |            | PASS    |
| 3   | 0.5057        | 36.53                 | 26.83   | 56.00        | 46.00   |            | PASS    |
| 4   | 0.6133        | 36.49                 | 27.58   | 56.00        | 46.00   |            | PASS    |
| 5   | 0.7932        | 35.39                 | 24.85   | 56.00        | 46.00   |            | PASS    |
| 6   | 1.1892        | 35.57                 | 24.38   | 56.00        | 46.00   |            | PASS    |


## 2.12.Restricted Frequency Bands

### 2.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.12.2.Test Description

#### Test Setup:

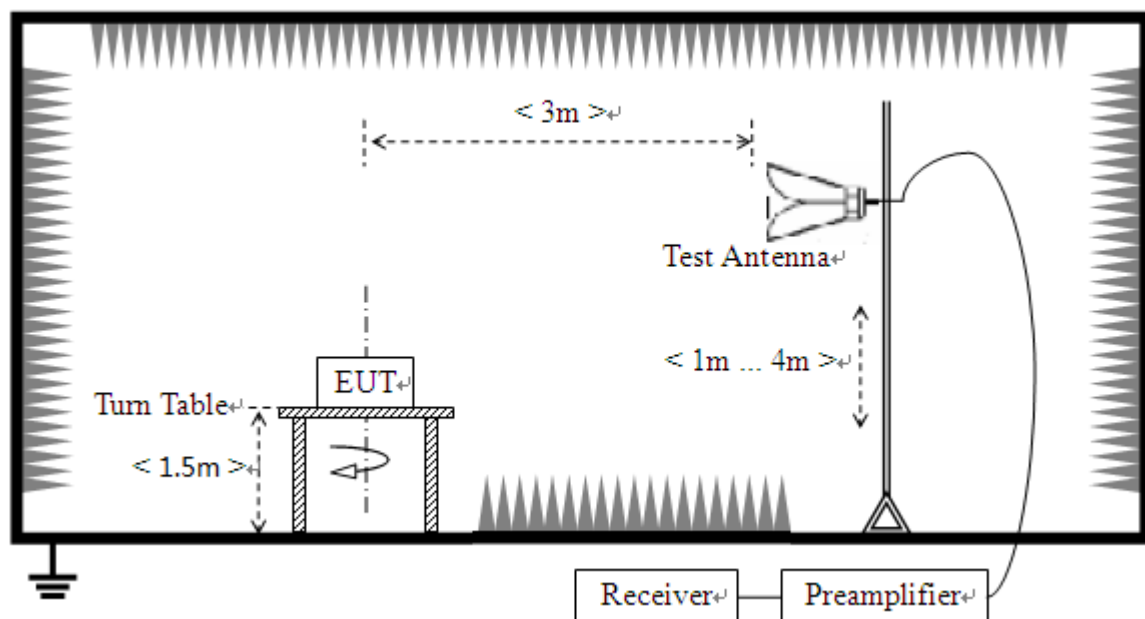

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





### 2.12.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 KHz for  $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

### 2.12.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


#### GFSK Mode

##### A. Test Verdict:


| Channel | Frequency (MHz) | Detector | Receiver Reading $U_R$ (dB $\mu$ V) | $A_T$ (dB) | $A_{\text{Factor}}$ (dB@3m) | Max. Emission E (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Verdict |
|---------|-----------------|----------|-------------------------------------|------------|-----------------------------|--------------------------------|----------------------|---------|
|         |                 | PK/ AV   |                                     |            |                             |                                |                      |         |
| 0       | 2380.78         | PK       | 46.39                               | -29.67     | 32.56                       | 49.28                          | 74                   | PASS    |
| 0       | 2366.63         | AV       | 45.56                               | -29.67     | 32.56                       | 48.45                          | 54                   | PASS    |
| 78      | 2485.39         | PK       | 47.66                               | -29.67     | 32.56                       | 50.55                          | 74                   | PASS    |
| 78      | 2485.85         | AV       | 44.52                               | -29.67     | 32.56                       | 47.41                          | 54                   | PASS    |




## B.Test Plot:

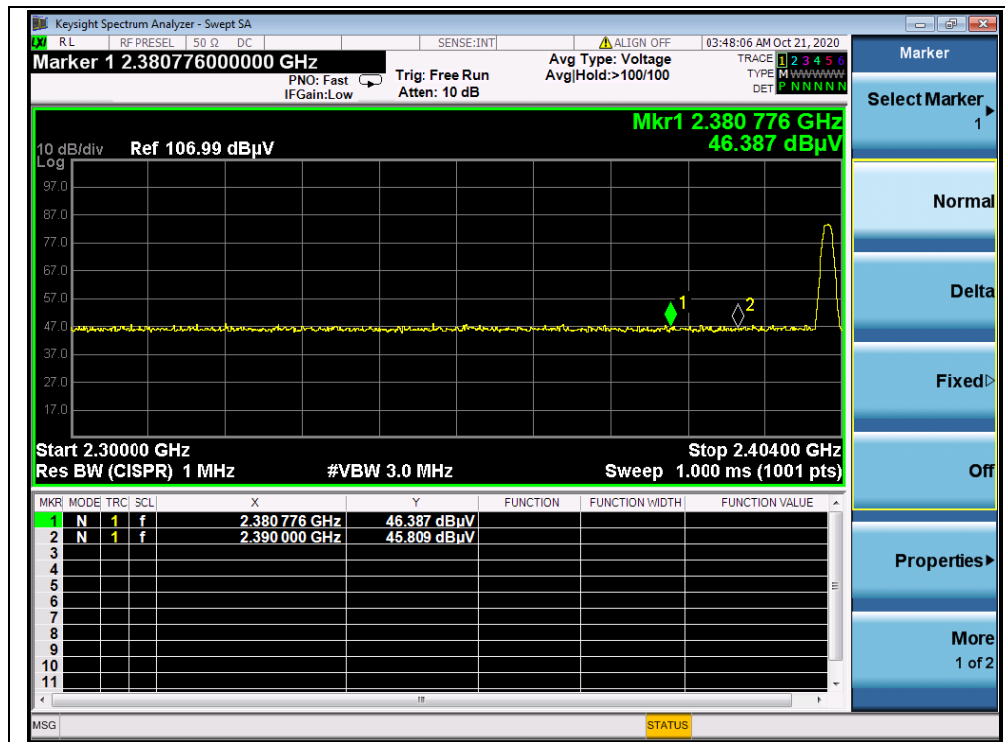


(PEAK, Channel 0, GFSK)

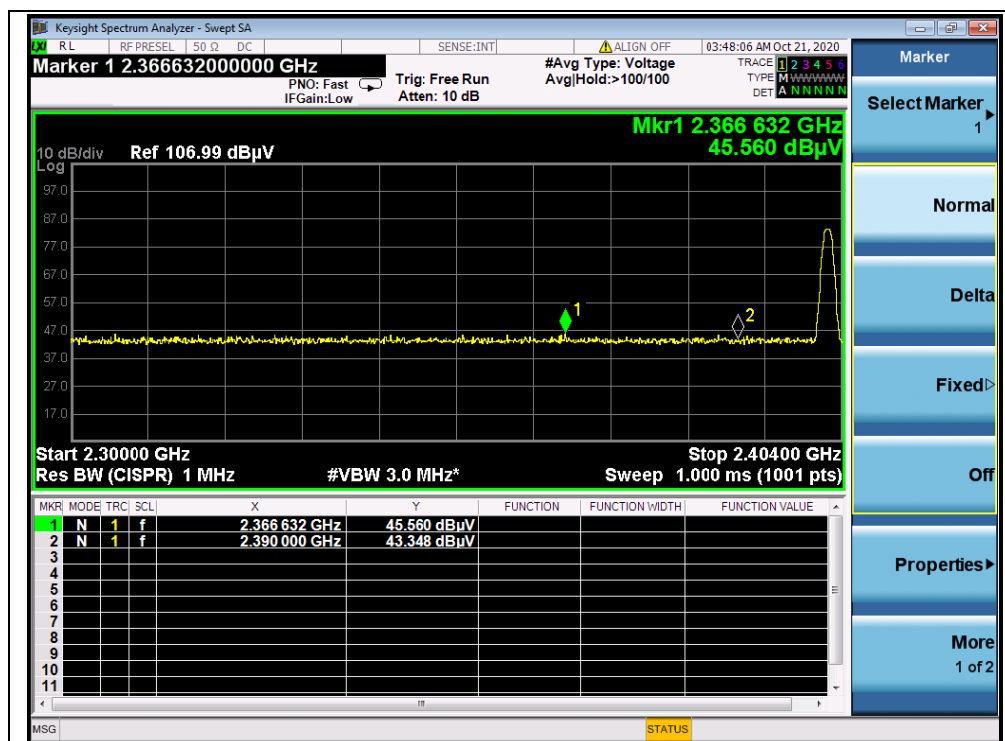

(AVERAGE, Channel 0, GFSK)

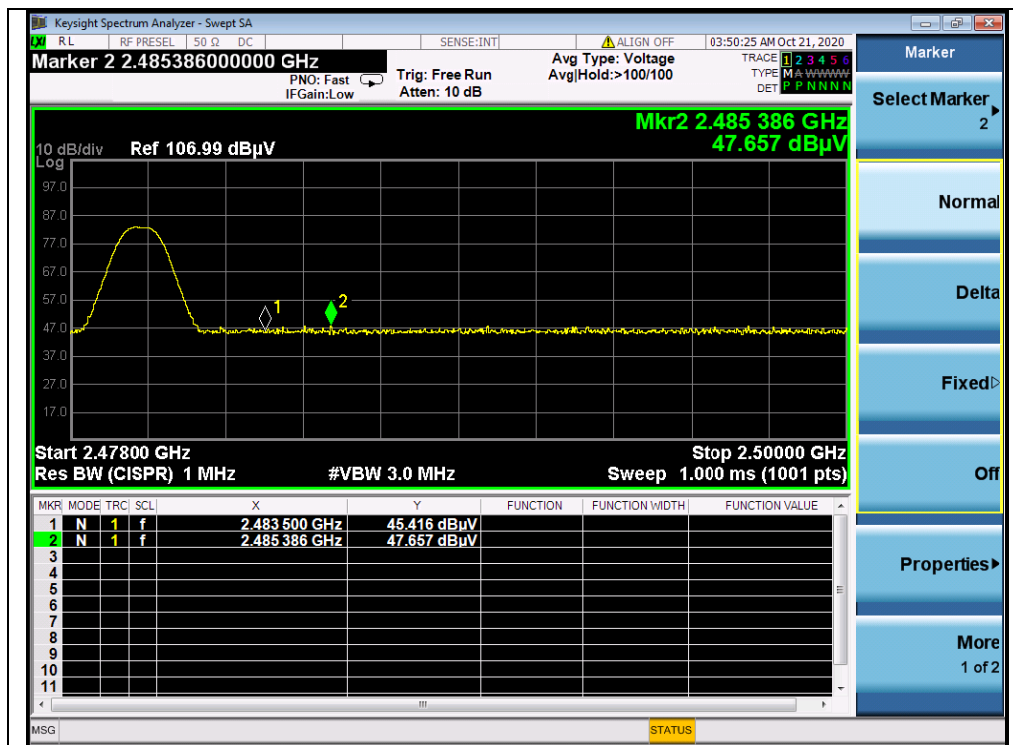

(PEAK, Channel 78, GFSK)

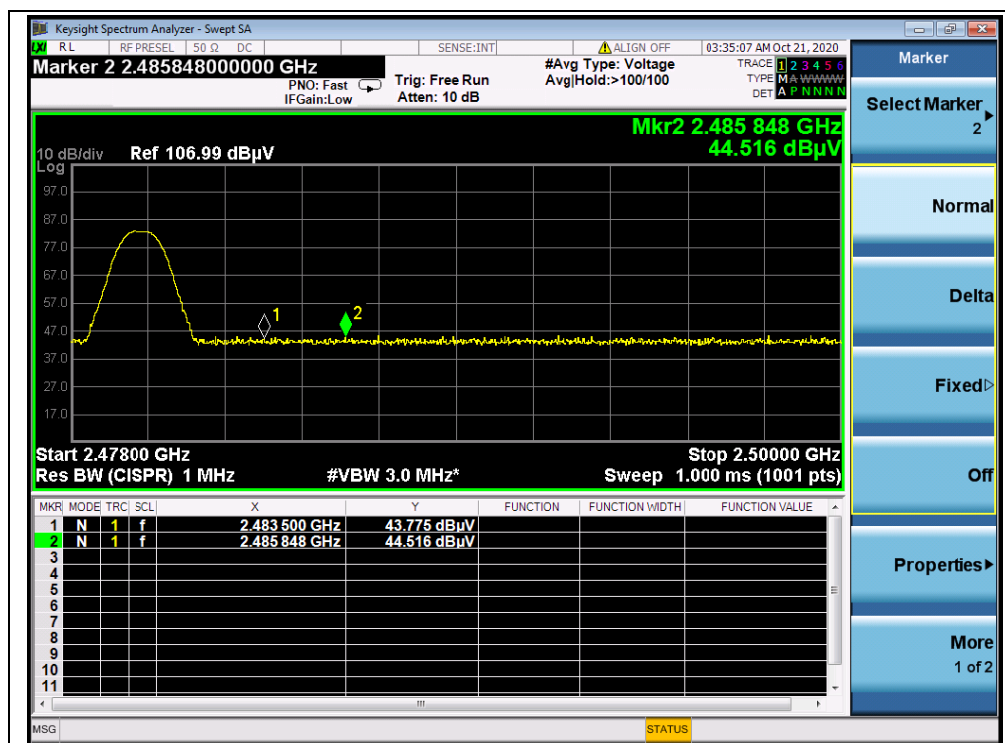

(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode



**A.Test Verdict:**


| Channel | Frequency (MHz) | Detector | Receiver Reading<br>$U_R$<br>(dB $\mu$ V) | $A_T$<br>(dB) | $A_{Factor}$<br>(dB@3m) | Max. Emission<br>$E$<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Verdict |
|---------|-----------------|----------|-------------------------------------------|---------------|-------------------------|----------------------------------------|-------------------------|---------|
|         |                 | PK/ AV   |                                           |               |                         |                                        |                         |         |
| 0       | 2368.71         | PK       | 46.73                                     | -29.67        | 32.56                   | 49.62                                  | 74                      | PASS    |
| 0       | 2380.46         | AV       | 45.97                                     | -29.67        | 32.56                   | 48.86                                  | 54                      | PASS    |
| 78      | 2485.80         | PK       | 46.93                                     | -29.67        | 32.56                   | 49.82                                  | 74                      | PASS    |
| 78      | 2488.51         | AV       | 45.16                                     | -29.67        | 32.56                   | 48.05                                  | 54                      | PASS    |

**B.Test Plot:**

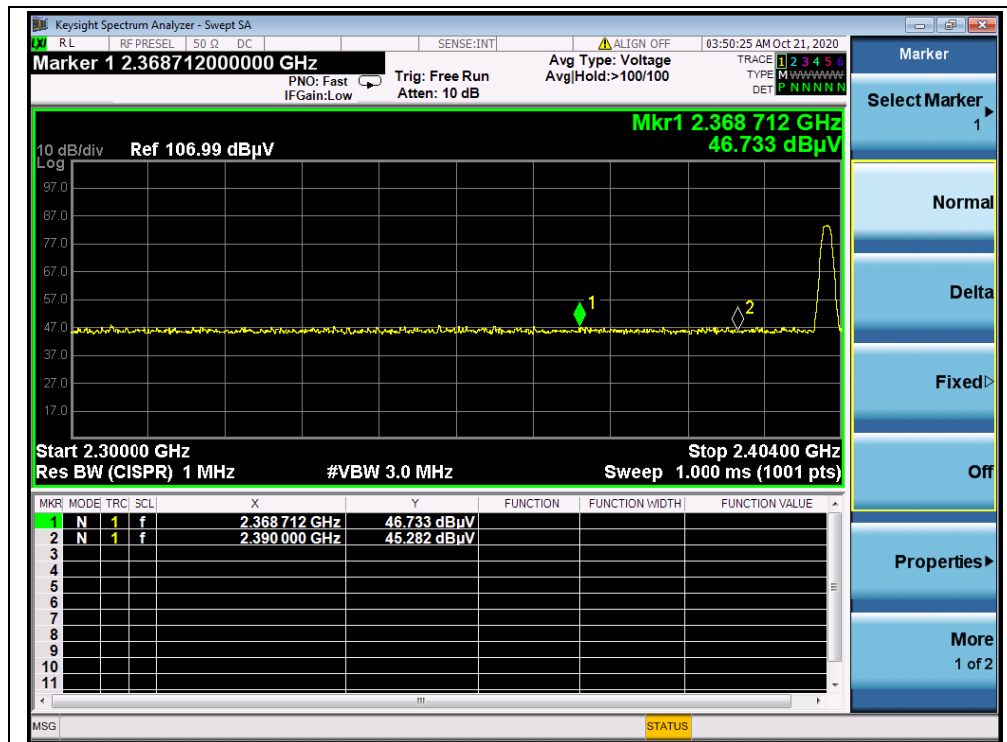

(PEAK, Channel 0,  $\pi/4$ -DQPSK)

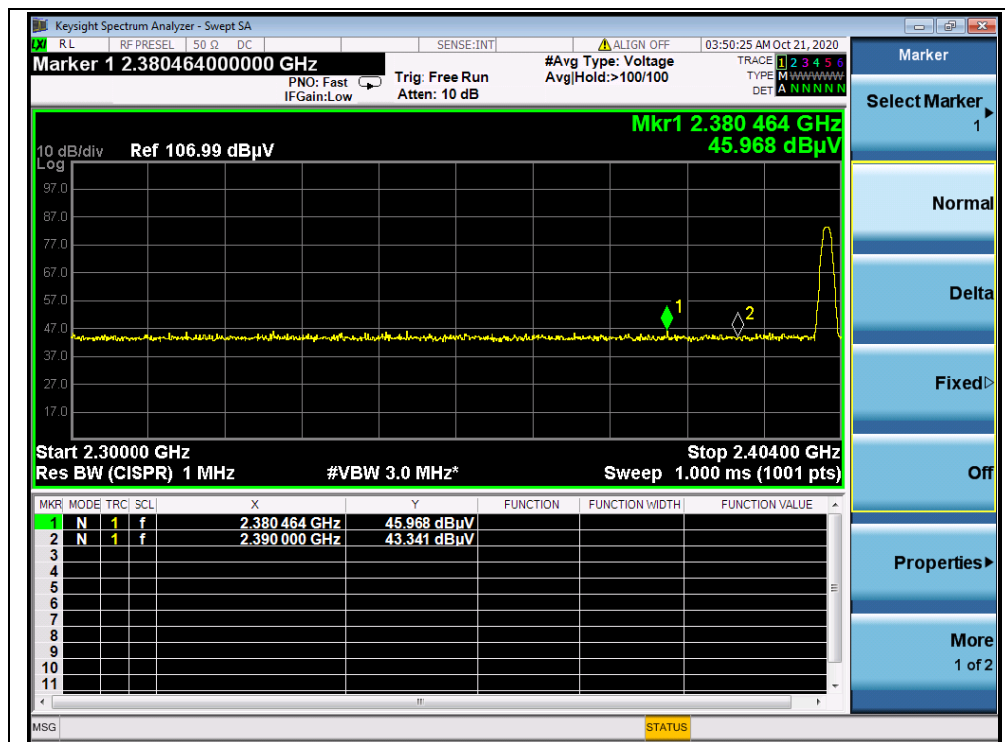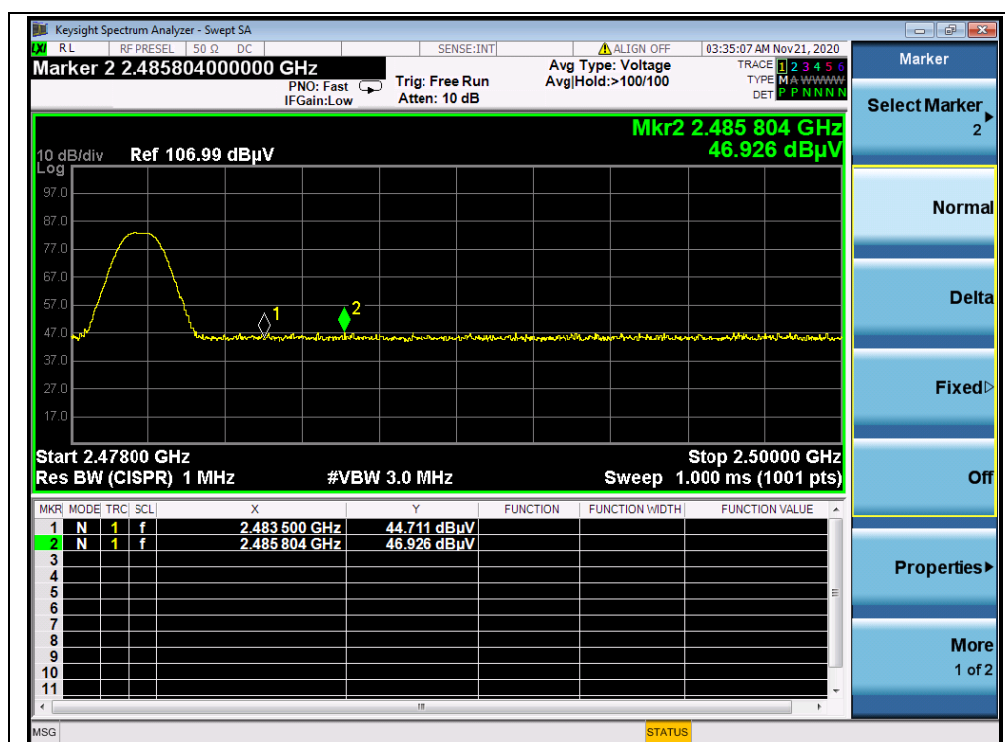(AVERAGE, Channel 0,  $\pi/4$ -DQPSK)(PEAK, Channel 78,  $\pi/4$ -DQPSK)

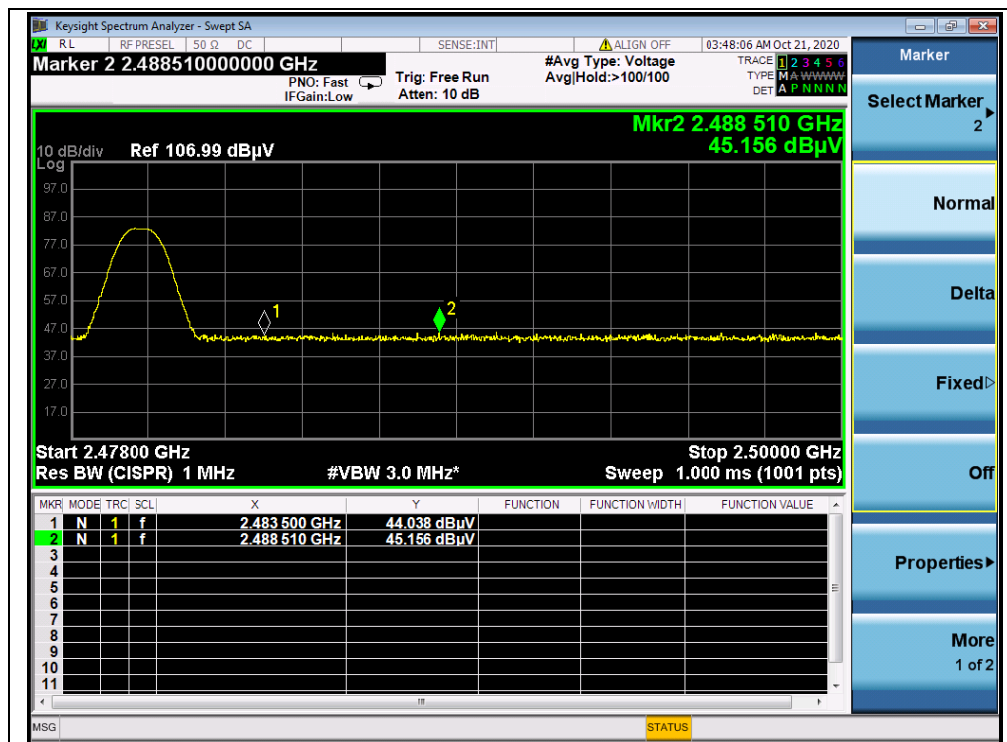(AVERAGE, Channel 78,  $\pi/4$ -DQPSK)




## 8-DPSK Mode


### A.Test Verdict:

| Channel | Frequency (MHz) | Detector | Receiver Reading<br>$U_R$<br>(dB $\mu$ V) | $A_T$<br>(dB) | $A_{Factor}$<br>(dB@3m) | Max. Emission<br>$E$<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Verdict |
|---------|-----------------|----------|-------------------------------------------|---------------|-------------------------|----------------------------------------|-------------------------|---------|
|         |                 | PK/ AV   |                                           |               |                         |                                        |                         |         |
| 0       | 2380.26         | PK       | 47.49                                     | -29.67        | 32.56                   | 50.38                                  | 74                      | PASS    |
| 0       | 2376.93         | AV       | 44.17                                     | -29.67        | 32.56                   | 47.06                                  | 54                      | PASS    |
| 78      | 2486.64         | PK       | 46.42                                     | -29.67        | 32.56                   | 49.31                                  | 74                      | PASS    |
| 78      | 2489.15         | AV       | 45.26                                     | -29.67        | 32.56                   | 48.15                                  | 54                      | PASS    |


### B.Test Plot:

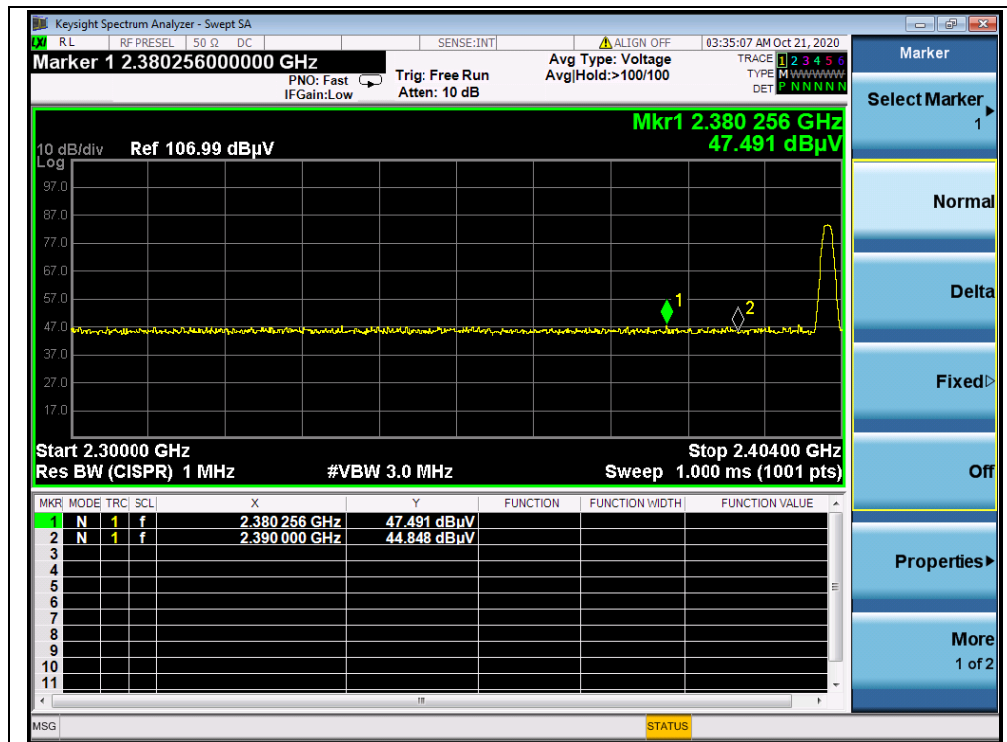

(PEAK, Channel 0, 8-DPSK)

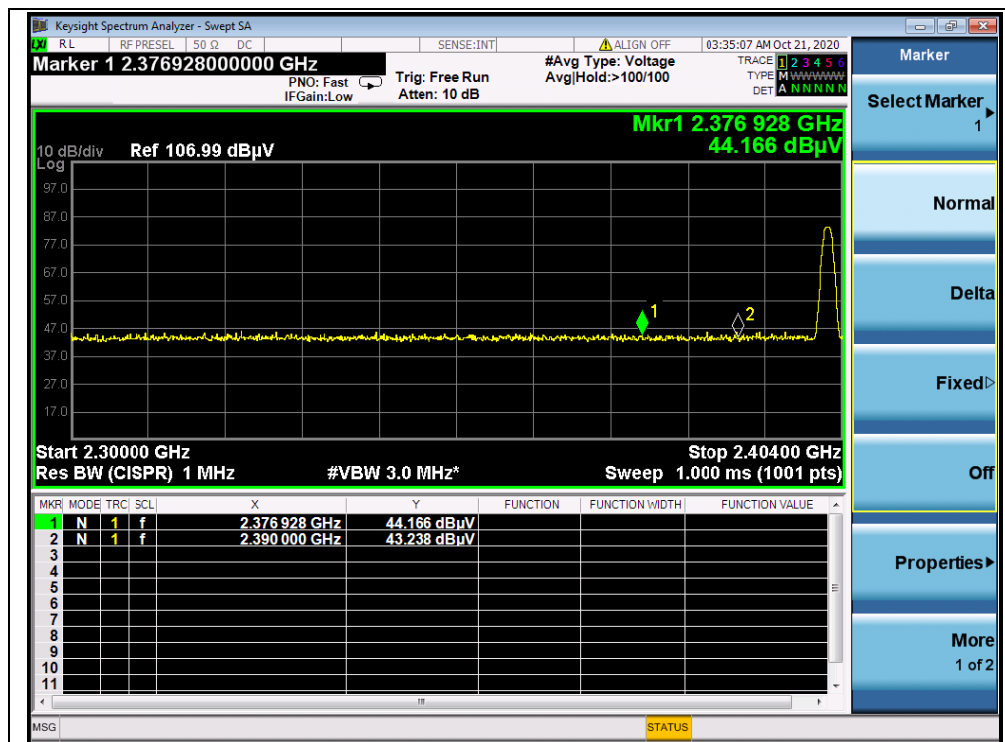


(AVERAGE, Channel 0, 8-DPSK)

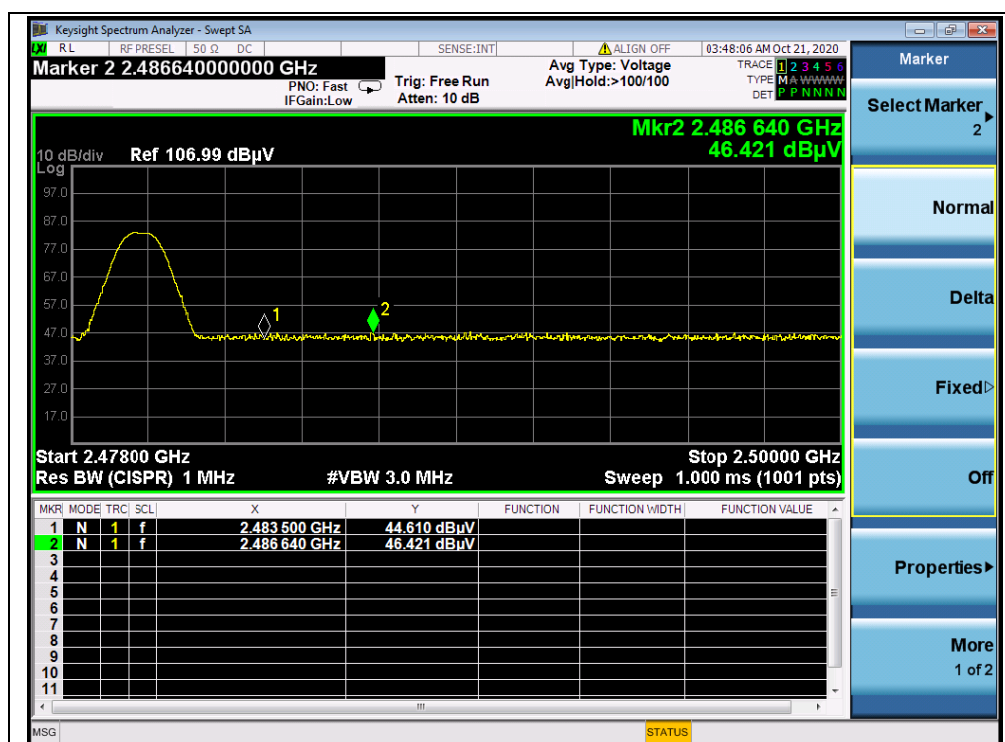

(PEAK, Channel 78, 8-DPSK)



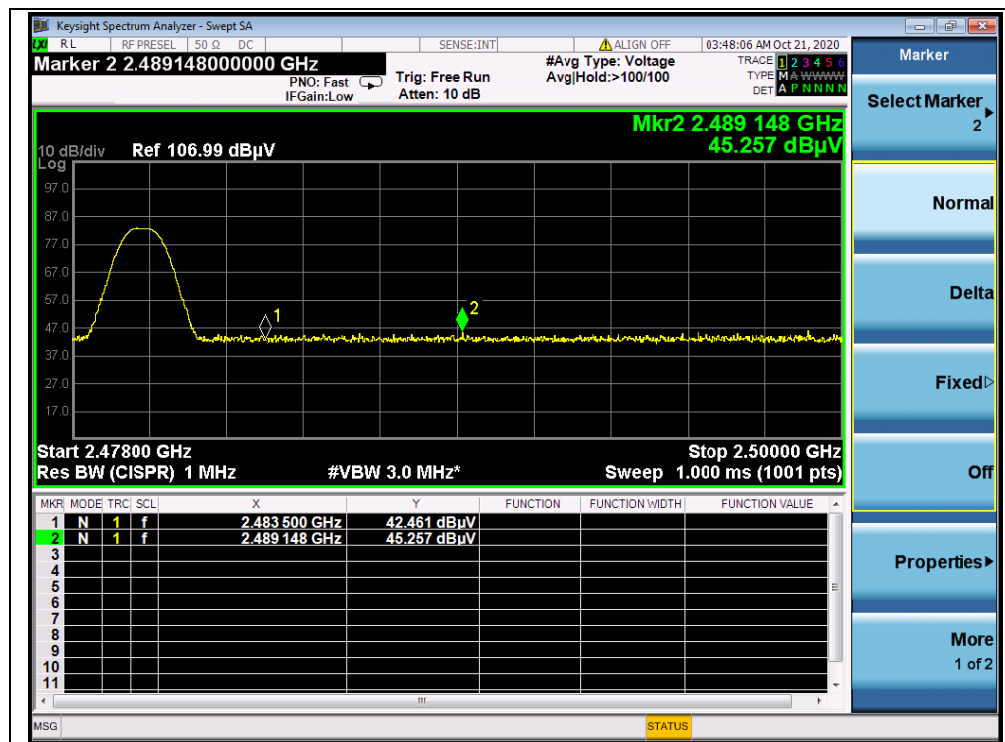

(AVERAGE, Channel 78, 8-DPSK)

## 2.13.Radiated Emission

### 2.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 - 0.490   | $2400/F(\text{kHz})$               | 300                      |
| 0.490 - 1.705   | $24000/F(\text{kHz})$              | 30                       |
| 1.705 - 30.0    | 30                                 | 30                       |
| 30 - 88         | 100                                | 3                        |
| 88 - 216        | 150                                | 3                        |
| 216 - 960       | 200                                | 3                        |
| Above 960       | 500                                | 3                        |


**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


### 2.13.2. Test Description

#### Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

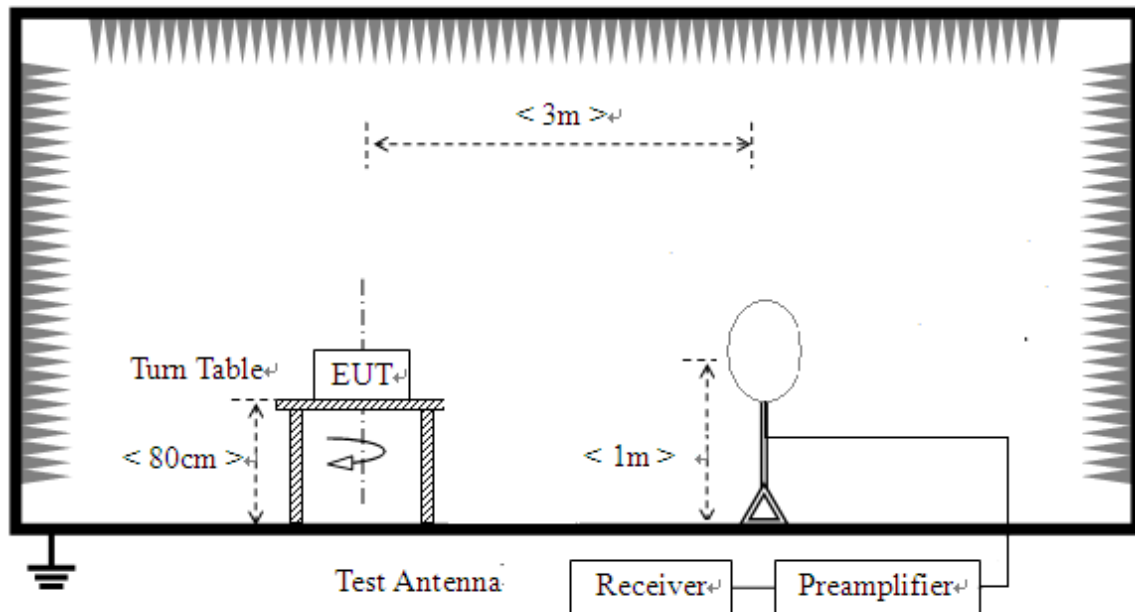

- 2) For radiated emissions from 30MHz to 1GHz

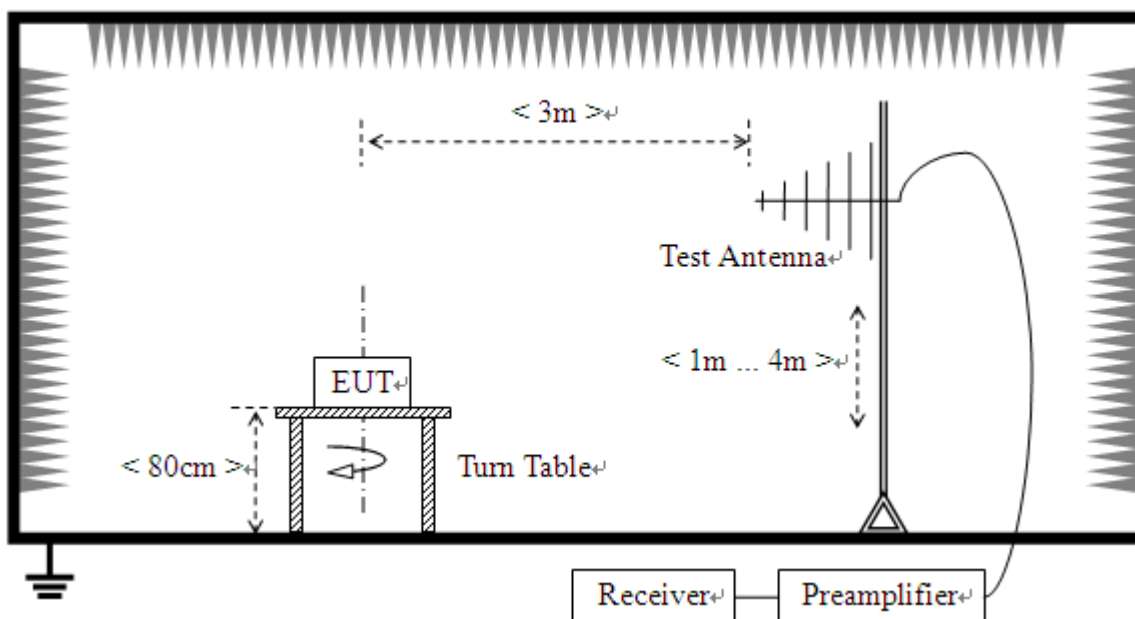

### 3) For radiated emissions above 1GHz

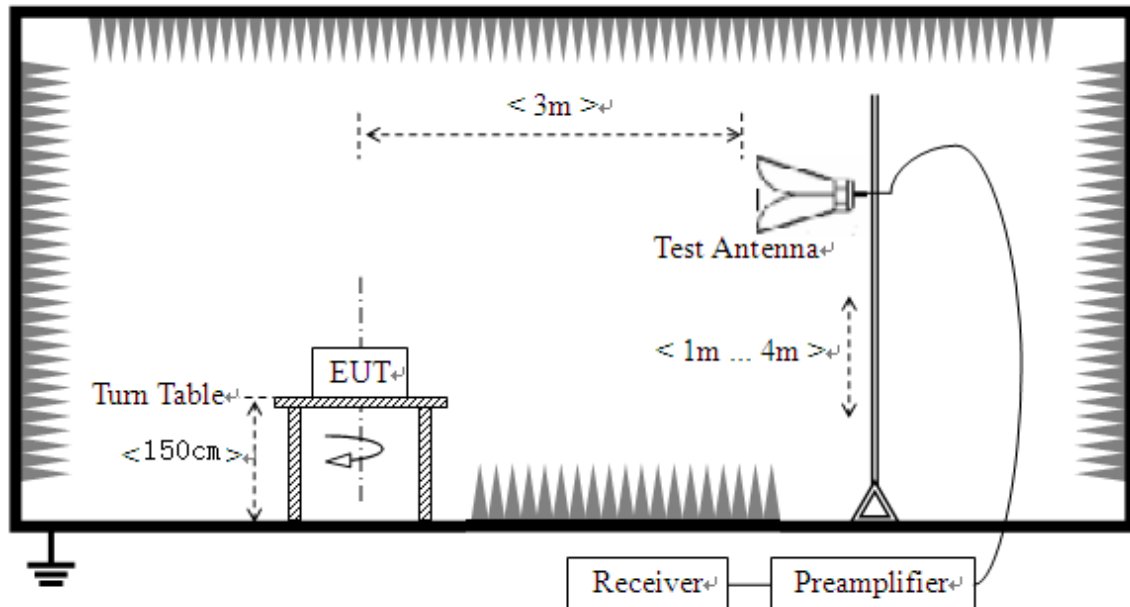

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

### 2.13.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 2.13.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note 1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note 2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note 3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode**

## Plots for Channel 0

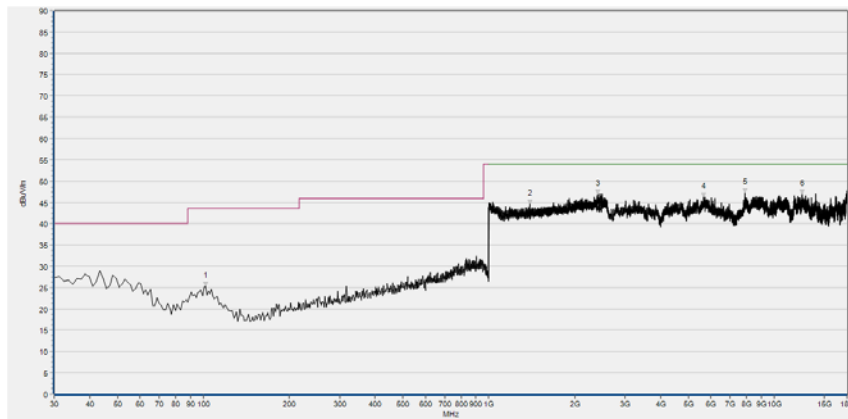

| Fre. (MHz) | PK (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 102.627    | 25.23       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1345.678   | 44.58       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2421.124   | 46.89       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 5618.552   | 46.27       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 7912.566   | 47.32       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 12499.800  | 46.88       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 18GHz)

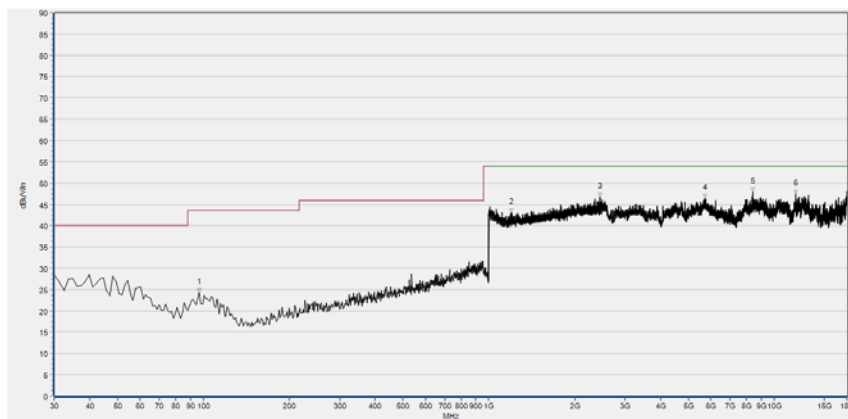


| Fre. (MHz) | PK (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna  | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|----------|---------|
| 92771      | 24.24       | N/A         | N/A         | N/A               | 43.50             | N/A               | Vertical | PASS    |
| 1199.721   | 43.01       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 2454.023   | 46.69       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 5719.765   | 46.46       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 8419.434   | 47.87       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 11889.22   | 47.36       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

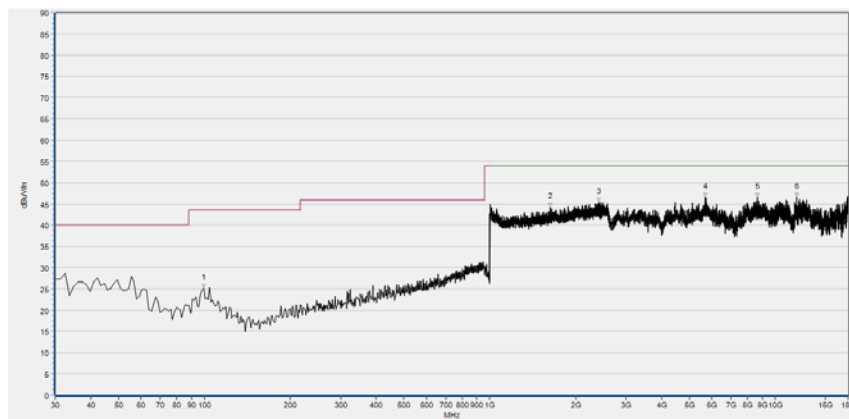

| Fre. (MHz) | PK (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 99.199     | 25.08       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1631.933   | 44.20       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2404.082   | 45.50       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 5674.959   | 46.63       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 8646.299   | 46.54       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 11903.292  | 46.67       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |


(Antenna Horizontal, 30MHz to 18GHz)

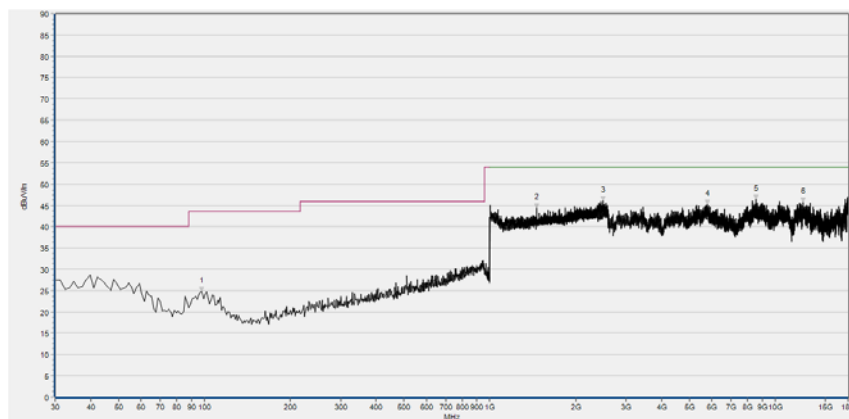


| Fre. (MHz) | PK (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 97.985     | 24.80       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1460.984   | 44.37       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2490.516   | 46.02       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 5767.376   | 45.32       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 8573.486   | 46.45       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 12553.010  | 45.70       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

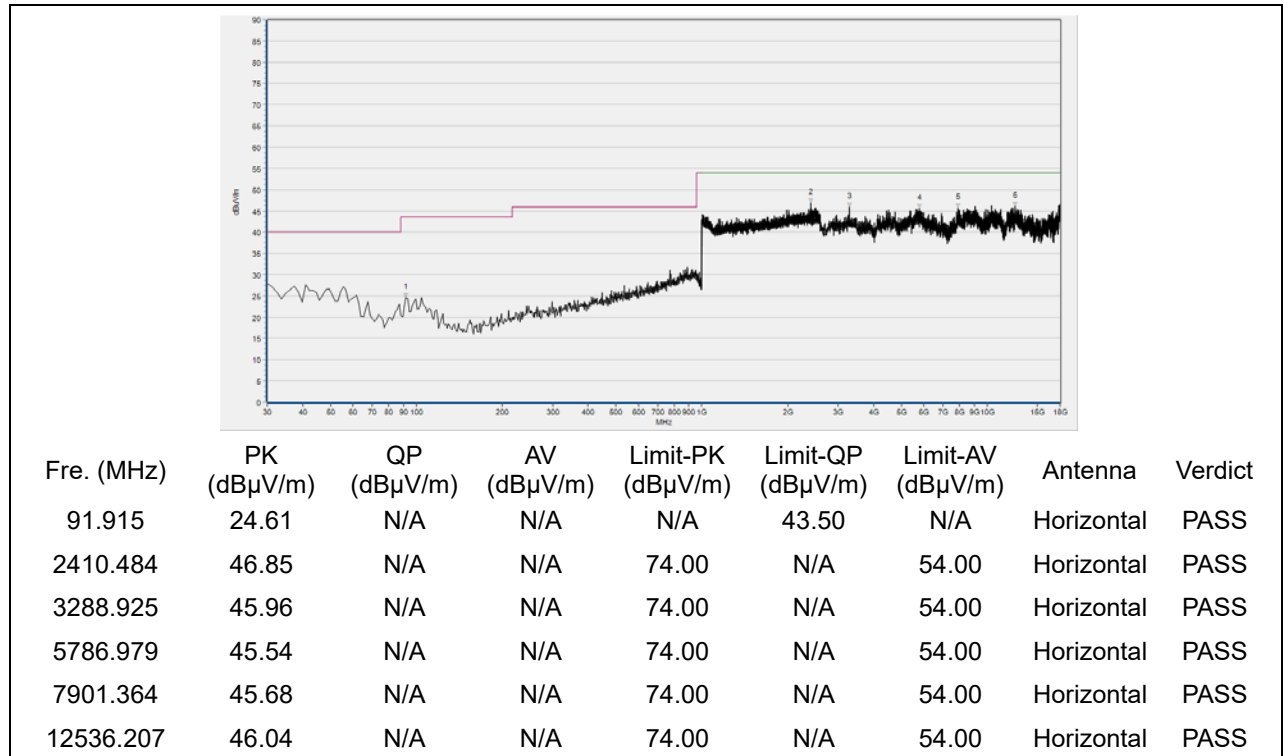

(Antenna Horizontal, 30MHz to 18GHz)

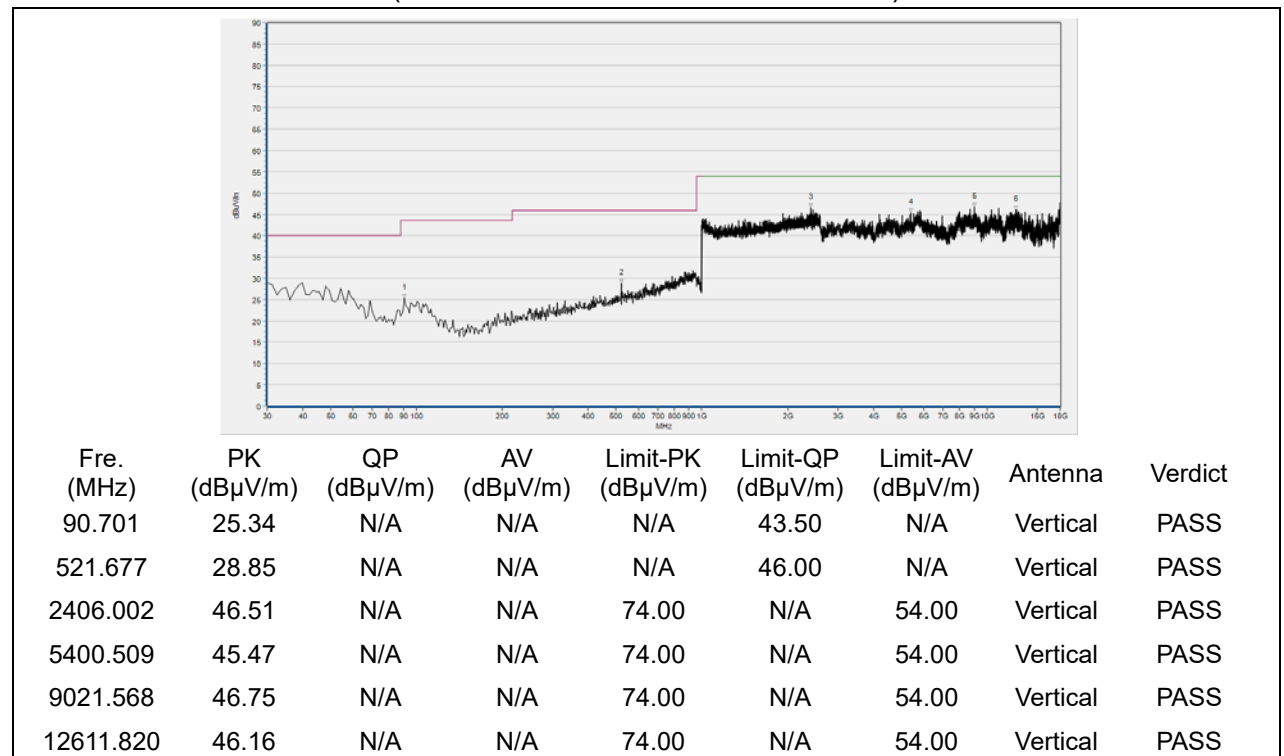


(Antenna Vertical, 30MHz to 18GHz)




 **$\pi/4$ -DQPSK Mode**

## Plots for Channel 0

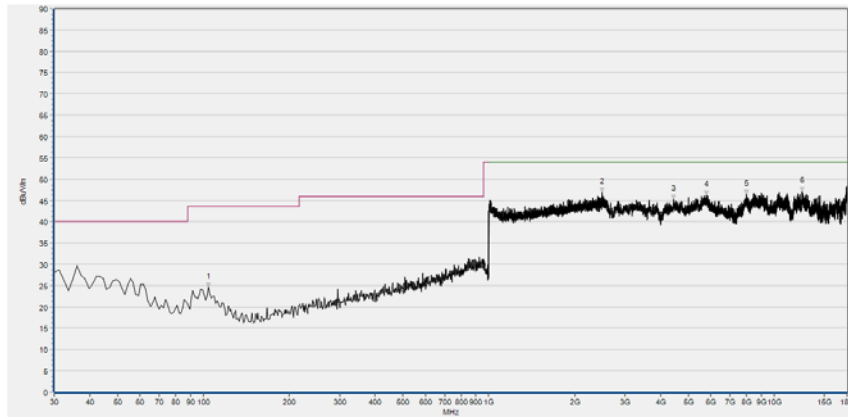

| Fre. (MHz) | PK<br>(dBμV/m) | QP<br>(dBμV/m) | AV<br>(dBμV/m) | Limit-PK<br>(dBμV/m) | Limit-QP<br>(dBμV/m) | Limit-AV<br>(dBμV/m) | Antenna    | Verdict |
|------------|----------------|----------------|----------------|----------------------|----------------------|----------------------|------------|---------|
| 104.052    | 24.62          | N/A            | N/A            | N/A                  | 43.50                | N/A                  | Horizontal | PASS    |
| 2494.913   | 46.86          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Horizontal | PASS    |
| 4445.532   | 45.32          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Horizontal | PASS    |
| 5772.973   | 46.23          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Horizontal | PASS    |
| 7988.154   | 46.48          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Horizontal | PASS    |
| 12527.812  | 47.07          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 18GHz)

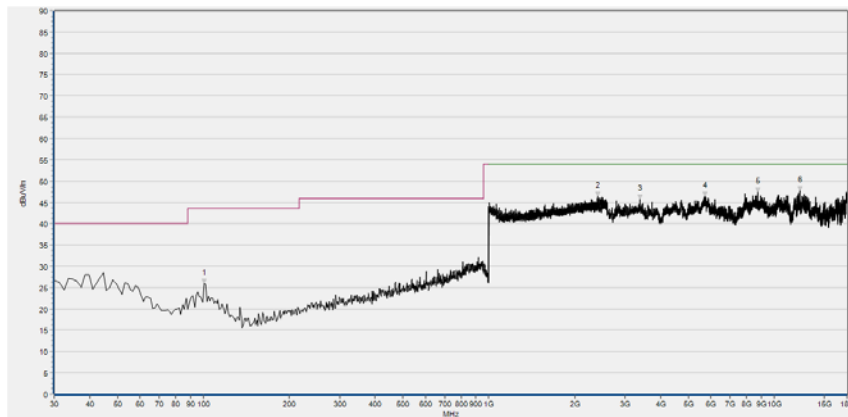


| Fre.<br>(MHz) | PK<br>(dBμV/m) | QP<br>(dBμV/m) | AV<br>(dBμV/m) | Limit-PK<br>(dBμV/m) | Limit-QP<br>(dBμV/m) | Limit-AV<br>(dBμV/m) | Antenna  | Verdict |
|---------------|----------------|----------------|----------------|----------------------|----------------------|----------------------|----------|---------|
| 100.413       | 25.92          | N/A            | N/A            | N/A                  | 43.50                | N/A                  | Vertical | PASS    |
| 2414.326      | 46.48          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Vertical | PASS    |
| 3378.542      | 45.72          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Vertical | PASS    |
| 5730.969      | 46.43          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Vertical | PASS    |
| 8735.916      | 47.46          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Vertical | PASS    |
| 12289.762     | 47.68          | N/A            | N/A            | 74.00                | N/A                  | 54.00                | Vertical | PASS    |

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

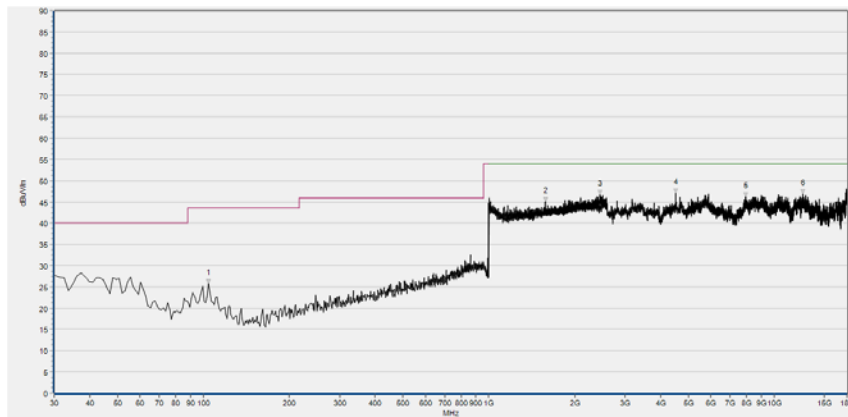

| Fre. (MHz) | PK (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 104.055    | 25.84       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1577.511   | 45.07       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2448.900   | 46.73       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 4515.548   | 47.03       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 7940.571   | 46.20       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 12575.414  | 47.01       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 18GHz)

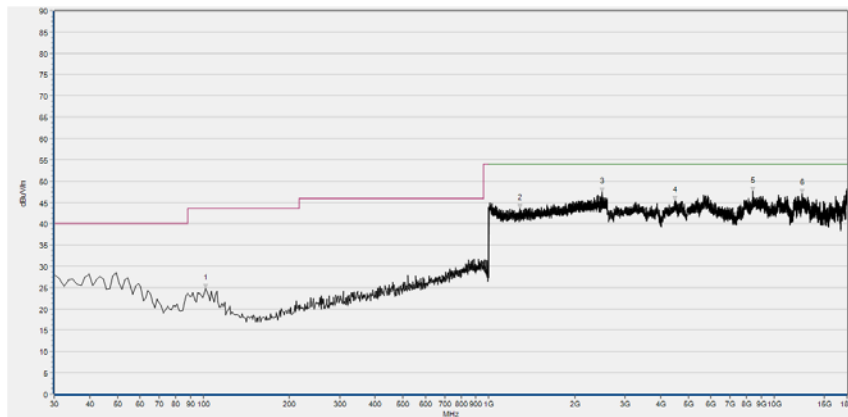


| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna  | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|----------|---------|
| 101.627    | 24.78       | N/A         | N/A         | N/A               | 43.50             | N/A               | Vertical | PASS    |
| 1284.914   | 43.53       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 2494.358   | 47.40       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 4481.942   | 45.45       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 8413.857   | 47.58       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 12494.199  | 47.06       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 78

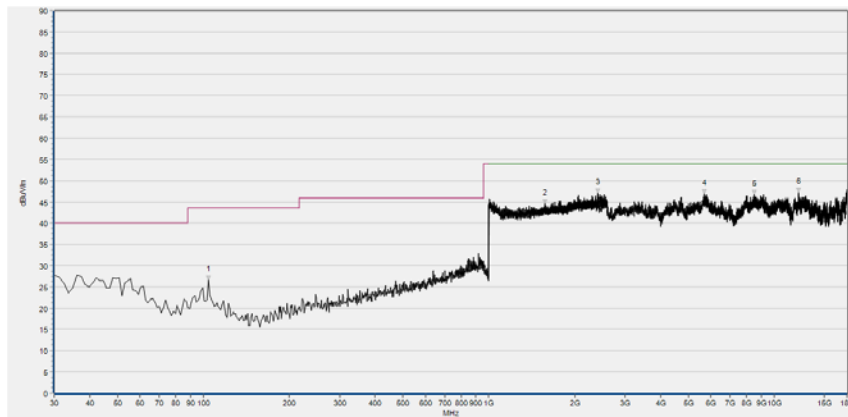

| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 104.055    | 26.62       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1574.950   | 44.59       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2404.722   | 47.16       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 5677.760   | 46.94       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 8514.675   | 46.76       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 12149.736  | 47.25       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 18GHz)

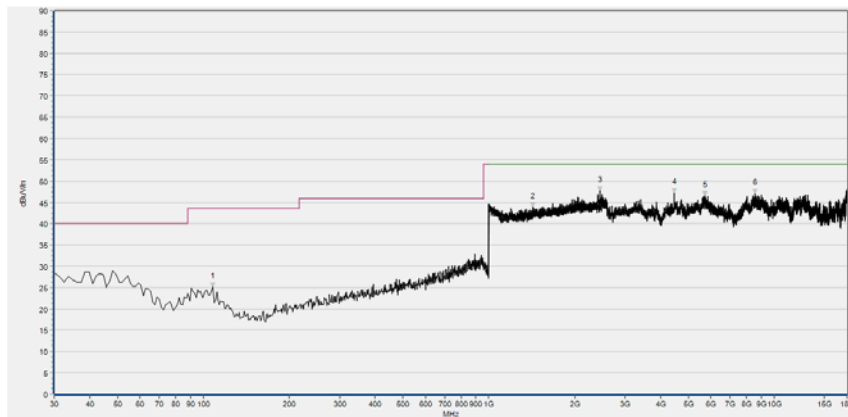


| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna  | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|----------|---------|
| 107.697    | 25.16       | N/A         | N/A         | N/A               | 43.50             | N/A               | Vertical | PASS    |
| 1428.972   | 43.90       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 2452.741   | 47.80       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 4465.139   | 47.30       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 5708.565   | 46.53       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 8553.883   | 47.13       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |

(Antenna Vertical, 30MHz to 18GHz)


**8-DPSK Mode**

## Plots for Channel 0

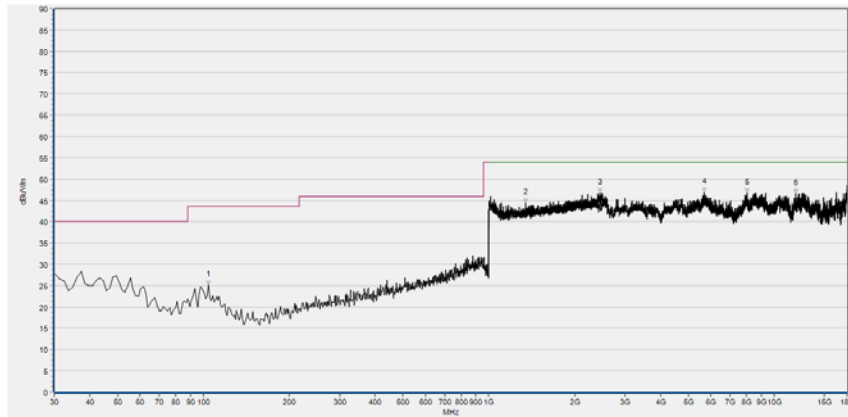

| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 104.055    | 25.21       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1344.458   | 44.40       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2449.540   | 46.69       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 5669.358   | 46.86       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 8021.786   | 46.71       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 11875.286  | 46.67       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 18GHz)

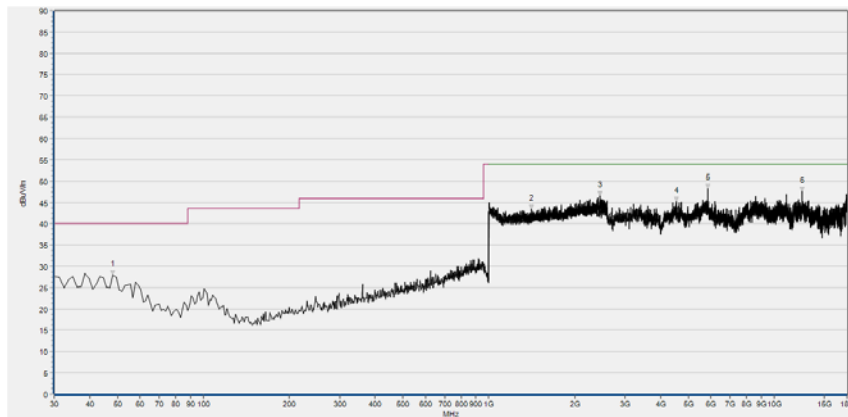


| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna  | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|----------|---------|
| 48.210     | 28.07       | N/A         | N/A         | N/A               | 40.00             | N/A               | Vertical | PASS    |
| 1407.203   | 43.34       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 2452.741   | 46.53       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 4529.551   | 45.18       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 5848.591   | 48.34       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 12505.401  | 47.68       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

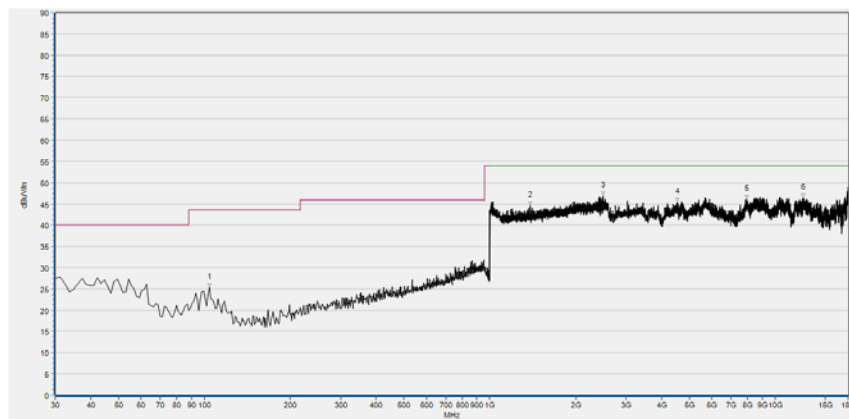

| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 104.055    | 25.37       | N/A         | N/A         | N/A               | 43.50             | N/A               | Horizontal | PASS    |
| 1384.154   | 44.57       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2494.998   | 46.98       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 4535.152   | 45.34       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 7926.568   | 46.16       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 12550.209  | 46.45       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |


(Antenna Horizontal, 30MHz to 18GHz)

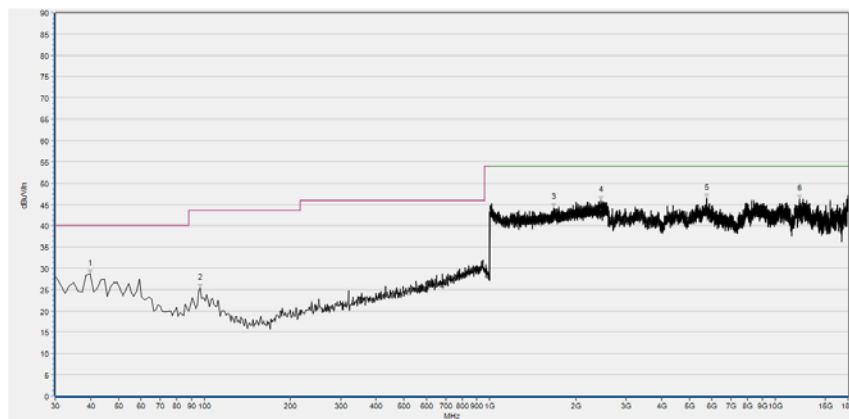

| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna  | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|----------|---------|
| 39.712     | 28.67       | N/A         | N/A         | N/A               | 40.00             | N/A               | Vertical | PASS    |
| 96.771     | 25.32       | N/A         | N/A         | N/A               | 43.50             | N/A               | Vertical | PASS    |
| 1672.909   | 44.19       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 2454.662   | 45.91       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 5739.371   | 46.41       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 12163.739  | 46.32       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

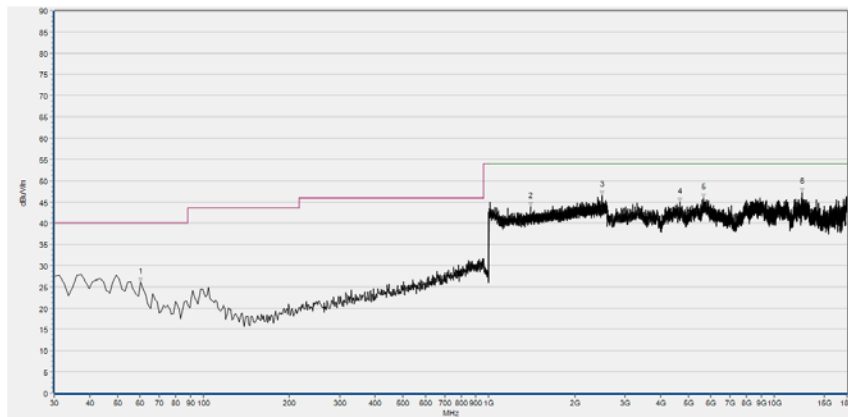

| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna    | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|------------|---------|
| 60.350     | 26.13       | N/A         | N/A         | N/A               | 40.00             | N/A               | Horizontal | PASS    |
| 1397.599   | 43.91       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 2493.077   | 46.67       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 4683.579   | 44.96       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 5652.555   | 45.97       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |
| 12499.800  | 47.20       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Horizontal | PASS    |

(Antenna Horizontal, 30MHz to 18GHz)

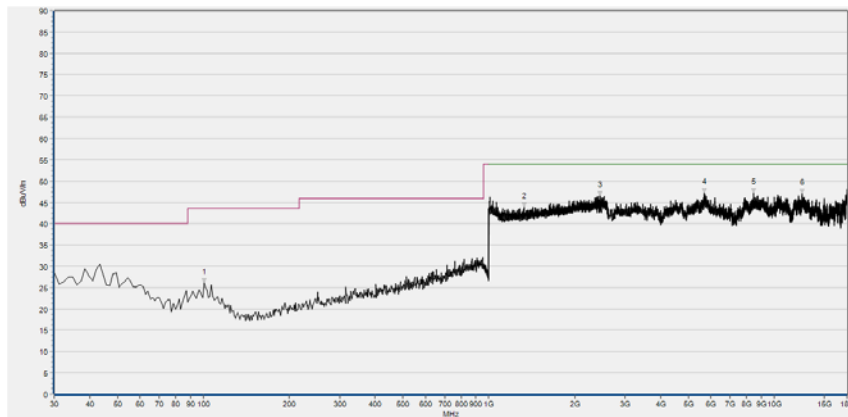

| Fre. (MHz) | Pk (dBμV/m) | QP (dBμV/m) | AV (dBμV/m) | Limit-PK (dBμV/m) | Limit-QP (dBμV/m) | Limit-AV (dBμV/m) | Antenna  | Verdict |
|------------|-------------|-------------|-------------|-------------------|-------------------|-------------------|----------|---------|
| 100.413    | 26.17       | N/A         | N/A         | N/A               | 43.50             | N/A               | Vertical | PASS    |
| 1329.732   | 43.86       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 2453.381   | 46.53       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 5686.161   | 47.32       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 8450.264   | 47.33       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |
| 12530.606  | 47.02       | N/A         | N/A         | 74.00             | N/A               | 54.00             | Vertical | PASS    |

(Antenna Vertical, 30MHz to 18GHz)

## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

| Test items                     | Uncertainty |
|--------------------------------|-------------|
| Number of Hopping Frequency    | ±5%         |
| Peak Output Power              | ±2.22dB     |
| 20dB Bandwidth                 | ±5%         |
| Carrier Frequency Separation   | ±5%         |
| Time of Occupancy (Dwell time) | ±5%         |
| Conducted Spurious Emission    | ±2.77dB     |
| Restricted Frequency Bands     | ±5%         |
| Radiated Emission              | ±2.95dB     |
| Conducted Emission             | ±2.44dB     |

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

|                            |                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Laboratory Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.<br>MorlabLaboratory                                                          |
| <b>Laboratory Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China |
| <b>Telephone:</b>          | +86 755 36698555                                                                                                                 |
| <b>Facsimile:</b>          | +86 755 36698525                                                                                                                 |

### 2. Identification of the Responsible Testing Location

|                 |                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.<br>Morlab Laboratory                                                         |
| <b>Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China |

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

| Equipment Name         | Serial No. | Type     | Manufacturer     | Cal. Date  | Due Date   |
|------------------------|------------|----------|------------------|------------|------------|
| Bluetooth Base Station | 6K00006210 | MT8852B  | Anritsu          | 2020.04.01 | 2021.03.31 |
| Directional coupler    | 17041703   | DTO-5-30 | ShangHaiHuaxiang | N/A        | N/A        |
| EXA Signal Analyzer    | MY53470836 | N9010A   | Agilent          | 2020.04.01 | 2021.03.31 |
| RF cable (30MHz-26GHz) | CB01       | RF01     | Morlab           | N/A        | N/A        |
| Coaxial cable          | CB02       | RF02     | Morlab           | N/A        | N/A        |
| SMA connector          | CN01       | RF03     | HUBER-SUHNER     | N/A        | N/A        |

##### 4.2 Conducted Emission Test Equipments

| Equipment Name                   | Serial No.         | Type        | Manufacturer | Cal. Date  | Due Date   |
|----------------------------------|--------------------|-------------|--------------|------------|------------|
| Receiver                         | MY56400093         | N9038A      | KEYSIGHT     | 2020.03.26 | 2021.03.25 |
| LISN                             | 812744             | NSLK 8127   | Schwarzbeck  | 2020.03.26 | 2021.03.25 |
| Pulse Limiter (10dB)             | VTSD 9561 F-B #206 | VTSD 9561-F | Schwarzbeck  | 2020.07.24 | 2021.07.23 |
| Coaxial cable(BNC) (30MHz-26GHz) | CB01               | EMC01       | Morlab       | N/A        | N/A        |
| Adapter                          | J5164200000 5      | AK933JH     | OPPO         | N/A        | N/A        |

##### 4.3 List of Software Used

| Description      | Manufacturer | Software Version |
|------------------|--------------|------------------|
| Test System      | Tonscend     | V2.6             |
| Power Panel      | Agilent      | V3.8             |
| MORLAB EMCR V1.2 | MORLAB       | V1.0             |
| TS+ -[JS32-CE]   | Tonscend     | V2.5.0.0         |

**4.4 Radiated Test Equipments**

| <b>Equipment Name</b>                | <b>Serial No.</b> | <b>Type</b>           | <b>Manufacturer</b> | <b>Cal. Date</b> | <b>Due Date</b> |
|--------------------------------------|-------------------|-----------------------|---------------------|------------------|-----------------|
| Receiver                             | MY54130016        | N9038A                | Agilent             | 2020.07.21       | 2021.07.20      |
| Test Antenna - Bi-Log                | 9163-519          | VULB 9163             | Schwarzbeck         | 2019.05.24       | 2022.05.23      |
| Test Antenna - Loop                  | 1519-022          | FMZB1519              | Schwarzbeck         | 2019.02.14       | 2022.02.13      |
| Test Antenna – Horn                  | 01774             | BBHA 9120D            | Schwarzbeck         | 2019.07.26       | 2022.07.25      |
| Test Antenna – Horn                  | BBHA9170 #774     | BBHA9170              | Schwarzbeck         | 2019.07.26       | 2022.07.25      |
| Coaxial cable (N male) (9KHz-30MHz)  | CB04              | EMC04                 | Morlab              | N/A              | N/A             |
| Coaxial cable (N male) (30MHz-26GHz) | CB02              | EMC02                 | Morlab              | N/A              | N/A             |
| Coaxial cable (N male) (30MHz-26GHz) | CB03              | EMC03                 | Morlab              | N/A              | N/A             |
| Coaxial cable (N male) (30MHz-40GHz) | CB05              | EMC05                 | Morlab              | N/A              | N/A             |
| 1-18GHz pre-Amplifier                | 61171/61172       | S020180L32 03         | Tonscend            | 2020.07.21       | 2021.07.20      |
| 18-26.5GHz pre-Amplifier             | 46732             | S10M100L38 02         | Tonscend            | 2020.07.21       | 2021.07.20      |
| 26-40GHz pre-Amplifier               | 56774             | S40M400L40 02         | Tonscend            | 2020.07.21       | 2021.07.20      |
| Notch Filter                         | N/A               | WRCG-2400-2483.5-60SS | Wainwright          | 2020.07.21       | 2021.07.20      |
| Anechoic Chamber                     | N/A               | 9m*6m*6m              | CRT                 | 2020.01.06       | 2023.01.05      |

\_\_\_\_\_ END OF REPORT \_\_\_\_\_