

# **FCC Test Report**

Report No.: AGC02931231004FR01

FCC ID : POD-RPT1

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: DMR Repeater

**BRAND NAME** : TYT

MODEL NAME : MD-7500

**APPLICANT**: TYT ELECTRONICS CO., LTD

**DATE OF ISSUE** : Nov. 07, 2023

**STANDARD(S)** : FCC Part 90 Subpart J

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 73

# **Report Revise Record**


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 07, 2023	Valid	Initial Release



# **Table of Contents**


1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	7
2.3 Related Submittal(S) / Grant (S)	8
2.4 Test Methodology	8
2.5 Calculation of Emission Indicators	8
2.6 Special Accessories	8
2.7 Equipment Modifications	8
3. Test Environment	9
3.1 Address of The Test Laboratory	9
3.2 Test Facility	9
3.3 Environmental Conditions	10
3.4 Measurement Uncertainty	10
3.5 List of Equipment Used	11
4.System Test Configuration	13
4.1 EUT Configuration	13
4.2 EUT Exercise	13
4.3 Configuration of Tested System	13
4.4 Equipment Used in Tested System	13
4.5 Summary of Test Results	14
5. Description of Test Modes	15
6. Frequency Stability	16
6.1 Provisions Applicable	16
6.2 Measurement Procedure	16
6.3 Measurement Setup	16
6.4 Measurement Result	17
7. 26dB Emission Bandwidth and 99% Occupied Bandwidth	19
7.1 Provisions Applicable	19
7.2 Measurement Procedure	19
7.3 Measurement Setup	19
7.4 Measurement Result	20
8. Spurious Radiated Emission	24
8.1 Provisions Applicable	24
8.2 Measurement Procedure	24
8.3 Measurement Setup	24
8.4 Measurement Result	26
8.5 Emission Mask Measurement Part	43
9. Modulation Characteristics	47
9.1 Provisions Applicable  Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedica"	ted Testing/Inspection

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





9.2 Measurement Procedure	47
9.3 Measurement Setup	47
9.4 Measurement Result	48
10. Maximum Transmitter Power	52
10.1 Provisions Applicable	52
10.2 Measurement Procedure	52
10.3 Measurement Setup	52
10.4 Measurement Result	54
11. Spurious Emission on Antenna Port	57
11.1 Provisions Applicable	57
11.2 Measurement Procedure	57
11.3 Measurement Setup	57
11.4 Measurement Result	58
12. Transmitter Frequency Behavior	64
12.1 Provisions Applicable	64
12.2 Measurement Setup	64
12.3 Measurement Procedure	65
12.4 Measurement Result	67
13. Audio Low Pass Filter Response	69
13.1 Provisions Applicable	69
13.2 Measurement Procedure	70
13.3 Measurement Setup	70
13.4 Measurement Result	71
Appendix I: Photographs of Test Setup	73
Appendix II: Photographs of Test EUT	73





# 1. General Information

Applicant	TYT ELECTRONICS CO., LTD		
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian,		
Addiess	China.		
Manufacturer	TYT ELECTRONICS CO., LTD		
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian,		
Address	China.		
Factory	TYT ELECTRONICS CO., LTD		
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian,		
Addiess	China.		
Product Designation	DMR Repeater		
Brand Name	TYT		
Test Model	MD-7500		
Date of receipt of test item	Oct. 08, 2023		
Date of Test	Oct. 08, 2023~Nov. 07, 2023		
Deviation from Standard	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Test Report Form No	AGCER-FCC-PMR-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang	
	Bibo Zhang (Project Engineer)	Nov. 07, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Nov. 07, 2023
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Nov. 07, 2023



Report No.: AGC02931231004FR01 Page 6 of 73

## 2. Product Information

# 2.1 Product Technical Description

Communication Type	Voice / Data (Voice /Tone only)					
Operation Frequency Range	From 400MHz to 470MHz					
Hardware Version	V2.0					
Software Version	V1.0.0.56					
Modulation Type	Analog Voice:	FM				
Modulation Type	Digital (Voice + Data):	4FSK				
Digital Type	DMR					
Channel Congretion	Analog Voice:	12.5 kHz				
Channel Separation	Digital (Voice + Data):	12.5 kHz				
Support Data Rate	9600bps					
	Analog Voice: (By DC Power)	□ UHF:9K96F3E-50W-12.5kHz     □ UHF:9K96F3E-50W-12.5kHz     □ UHF:9K96F3E-50W-12.5kHz     □ UHF:9K96F3E-50W-12.5kHz     □ UHF:9K96F3E-50W-12.5kHz     □ UHF:9K96F3E-50W-12.5kHz     □ UHF:9K96F3E-50W-12.5kHz				
Emission Designator	Digital (Voice + Data): (By DC Power)	☑ UHF:7K66F1D-50W-12.5kHz				
Emission Designator	Analog Voice: (By AC Power)	☑ UHF:9K94F3E-50W-12.5kHz				
	Digital (Voice + Data): (By AC Power)	☑ UHF:7K78F1D-50W-12.5kHz				
Rated Output Power	50W (It was fixed by the manufacturer any individual can't arbitrarily change it.)					
Maximum Transmitter Power	46.37dBm(By DC Power)-Analog	46.36dBm(By DC Power)- Digital				
Maximum Transmiller Power	46.54ddBm(By AC Power)-Analog	46.43dBm(By AC Power)- Digital				
Antenna Designation	Detachable Antenna					
Antenna Gain	0dBi					
Frequency Tolerance	1.091ppm					
Power Supply	DC 13.8V, 12A/ AC 120V, 60Hz					

#### Note:

- 1. The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.
- 2. This equipment is capable of supporting a minimum data rate of 4800 bits per second per 6.25 kHz of channel bandwidth. DMR interphone's bandwidth is 12.5 kHz, and it has a double time slot, one is the speech time slot, one is the data time slot, just language sequence is satisfied with 4800 bps/6.25 kHz BW.
- 3. The actual working frequency band of the device is UHF: 400-470MHz. According to the frequency division requirements of KDB634817 and the federal frequency allocation requirements, the working frequency band that the device needs to meet is UHF: 406.1-470MHz



Page 7 of 73

# 2.2 Test Frequency List

Operation mode	Channel Separation	Operation Frequency Range	Test channel	Test Frequency
Analog/ Digital	12.5 kHz	400-470MHz	Bottom	406.125 MHz
	12.5 kHz	400-470MHz	Middle	453.2125 MHz
	12.5 kHz	400-470MHz	Middle	458.2125 MHz
	12.5 kHz	400-470MHz	Тор	469.975 MHz

#### Note:

In section KDB 634817 D01 Sections II) (f) (1) and (2):

Test at least one frequency in each band for each rule part applied under and ensure the device is capable of operating on the frequency under each rule part. This requirement may result in testing on multiple frequencies. Testing on one frequency may be acceptable if multiple listed bands for a rule part with a continuous frequency range are split to remove a conflict with other rules and the technical requirements in the split bands are the same. Additional requirements for RF exposure may apply.



Page 8 of 73

## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **POD-RPT1**, filing to comply with Part 2, Part 90 of the Federal Communication Commission rules.

## 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 90	Private Land Mobile Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI TIA-102.CAAA-E	Project 25 Digital C4FM/CQPSK Transceiver Measurement Methods
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01
7	KDB 579009 D03	KDB 579009 D03 Applications Part 90 Refarming Bands v01
8	KDB 634817 D01	KDB 634817 D01 Freq Range Listing for Grants v04r01

## 2.5 Calculation of Emission Indicators

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

#### For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

#### For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1W

The 99% energy rule was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz.

F1D and F1W portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1W.

## 2.6 Special Accessories

Not available for this EUT intended for grant.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.



Page 9 of 73

#### 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 73

#### 3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions	
Temperature range (℃)	15 - 35	-20 - 50	
Relative humidty range	20 % - 75 %	20 % - 75 %	
Pressure range (kPa)	86 - 106	86 - 106	
Power supply	DC 13.8V or AC 120V	LV DC 11.73V/HV DC 15.87V or LV AC 102V/HV AC 138V	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



Page 11 of 73

# 3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E002	Wireless Connectivity Tester	HP	8920B	US35010161	2023-06-02	2024-06-01	
	AGC-EM-E001	Digital Connectivity Tester	Aeroflex	3920B	N/A	2023-06-02	2024-06-01	
$\boxtimes$	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2023-03-03	2024-03-02	
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31	
$\boxtimes$	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02	
$\boxtimes$	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E040	Directional coupler	Werlatone	C5571-10	99463	2022-03-10	2024-03-09	
$\boxtimes$		RF Connection Cable	N/A	1#	N/A	Each time	N/A	
		RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\boxtimes$	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2024-06-02	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07	
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
$\boxtimes$	AGC-EM-A088	UHF Filter	N/A	N/A	N/A	2023-06-01	2024-05-31	
	AGC-EM-A089	VHF Filter	N/A	N/A	N/A	2023-06-01	2024-05-31	
Any repo	AGC-EM-E110	Low Pass Filter	N/A having been altered with	N/A out authorization, or	N/A having not been stam	2023-06-01	2024-05-31 d Testing/Inspection	

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 12 of 73

Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0			



Page 13 of 73

# 4. System Test Configuration

# 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

- ☐ Test Accessories Come From The Laboratory
- □ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Hand microphone	N/A	N/A	N/A	0.8m unshielded
2	AC Power Cable	N/A	N/A	N/A	1.0m unshielded
3	USB Cable	N/A	N/A	N/A	1.0m unshielded
4	DC Power Cable	N/A	N/A	N/A	1.0m unshielded
5	Load Antenna	Terminator DC-3G	N/A	50W	N/A



Page 14 of 73

# 4.5 Summary of Test Results

Item	FCC Rules	Description Of Test	Result
1	47 CFR FCC PART 90	Antenna Equipment	Pass
2	§90.205& 2.1046	Maximum Transmitter Power	Pass
3	§90.207& 2.1047	Modulation Characteristic	Pass
4	§2.1047	Audio Low Pass Filter Response	Pass
5	§90.209& 2.1049	26dB Emission Bandwidth and 99% Occupied Bandwidth	Pass
6	§90.210& 2.1049	Emission Mask	Pass
7	§90.213& 2.1055	Frequency Tolerance	Pass
8	§90.214	Transmitter Frequency Behavior	Pass
9	§90.210& 2.1051	Spurious Emission on Antenna Port	Pass
10	§90.210& 2.1053	Spurious Radiated Emission	Pass



Page 15 of 73


# 5. Description of Test Modes

The EUT (**DMR Repeater**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

No.	Test Mode Description	Channel Separation
1	TX Bottom channel-UHF	12.5 kHz
2	TX Middle channel-UHF	12.5 kHz
3	TX Middle channel-UHF	12.5 kHz
4	TX Top channel-UHF	12.5 kHz

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details





## 6. Frequency Stability

## 6.1 Provisions Applicable

- a) According to FCC §2.1055, §90.213, the frequency stability shall be measured with variation of ambient temperature from −30°C to +50°C centigrade.
- b) According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c) According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 kHz channel separation and 0.0001% for 6.25 kHz channel separation.

#### **6.2 Measurement Procedure**


## 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

## 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15<sup>°</sup>C to 25<sup>°</sup>C.
   Otherwise, an environment chamber set for a temperature of 20<sup>°</sup>C shall be used. The EUT shall be powered by DC 13.8V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

#### 6.3 Measurement Setup

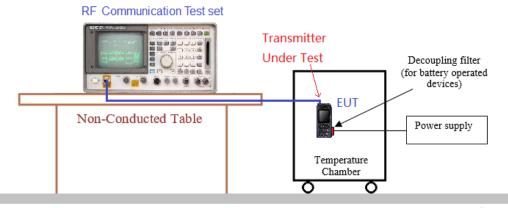



Report No.: AGC02931231004FR01 Page 17 of 73

#### **6.4 Measurement Result**

By DC Power

By BOT OW	12.5 kHz Channel Separation, Analog modulation, Assigned Frequency									
Test conditions			Frequency error (ppm)							
Voltage	Temp		Limit (ppm)	Result						
(V)	(℃)	406.125	453.2125	458.2125	469.975	(PP)				
	-30	0.599	0.937	0.477	0.892					
	-20	1.019	0.782	0.917	0.716					
	-10	0.911	0.875	0.352	0.603					
	0	0.561	0.506	0.830	0.407					
13.8	10	0.647	0.636	0.851	0.711					
	20	0.615	0.910	0.621	0.339	2.5	Pass			
	30	0.855	0.919	0.991	0.905					
	40	0.708	0.518	0.709	0.922					
	50	0.681	0.649	0.451	0.923					
15.87	20	0.973	0.577	0.524	0.765					
11.73	20	0.651	0.683	0.554	0.936					

12.5 kHz Channel Separation, Digital modulation, Assigned Frequency								
Test conditions			Frequency	error (ppm)				
Voltage	Temp		Test Frequ	ency (MHz)		Limit (ppm)	Result	
(V)	(℃)	406.125	453.2125	458.2125	469.975	(PP)		
	-30	0.793	1.004	0.954	0.966			
	-20	0.562	0.996	0.971	0.662			
	-10	1.096	0.980	0.968	0.814			
	0	0.666	0.549	0.958	0.941			
13.8	10	0.871	0.708	0.462	0.792			
	20	0.563	0.816	0.494	0.924	2.5	Pass	
	30	1.011	0.882	0.730	0.759			
	40	0.611	1.005	0.421	0.749			
	50	0.890	0.628	0.787	0.362			
15.87	20	0.931	0.933	0.808	0.423			
11.73	20	0.776	0.760	0.974	0.357			



Report No.: AGC02931231004FR01 Page 18 of 73

By AC Power

	12.5 kHz Channel Separation, Analog modulation, Assigned Frequency									
Test conditions			Frequency	error (ppm)						
Voltage	Temp		Test Freque	ency (MHz)		Limit (ppm)	Result			
(V)	(℃)	406.125	453.2125	458.2125	469.975	(PP)				
	-30	0.692	0.653	1.091	0.974					
	-20	0.701	0.753	0.789	0.684					
	-10	0.641	0.883	0.844	0.528					
	0	0.642	1.066	0.811	0.689					
120	10	0.843	0.954	0.528	0.538					
	20	0.578	0.859	0.880	0.751	2.5	Pass			
	30	1.090	0.560	0.906	0.379					
	40	1.087	0.964	1.090	0.764					
	50	0.791	1.091	0.500	0.534					
138	20	0.515	0.716	0.829	0.449					
102	20	0.930	0.565	0.526	0.886					

	12.5 kHz Channel Separation, Digital modulation, Assigned Frequency								
Test conditions			Frequency	error (ppm)					
Voltage	Temp		Test Freque	ency (MHz)		Limit (ppm)	Result		
(V)	(℃)	406.125	453.2125	458.2125	469.975	(PP)			
	-30	0.970	0.829	0.912	0.873				
	-20	0.734	1.015	0.635	0.685				
	-10	0.829	1.000	0.671	0.565				
	0	0.604	0.568	1.030	0.783				
120	10	0.820	0.781	0.530	0.616				
	20	0.511	1.077	1.021	0.515	2.5	Pass		
	30	0.897	0.510	0.553	0.659				
	40	0.716	0.870	0.745	0.833				
	50	0.830	0.650	1.076	0.538				
138	20	0.887	0.790	0.926	0.484				
102	20	0.616	0.771	1.046	0.959				



Report No.: AGC02931231004FR01 Page 19 of 73

# 7. 26dB Emission Bandwidth and 99% Occupied Bandwidth

## 7.1 Provisions Applicable


FCC Part 90.209 & FCC Part 2.1049:

The authorized bandwidth shall be 11.25 kHz for 12.5 kHz channel separation and 6 kHz for 6.25 kHz channel separation.

#### 7.2 Measurement Procedure

- 1. The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
- 2. Rated system deviation is 2.5 kHz for 12.5kHz channel spacing.
- 3. Spectrum set as follow:
- 4. Centre frequency = fundamental frequency.
- 5. Span=50kHz for 12.5kHz channel spacing.
- 6. RBW=100Hz, VBW=300Hz, Sweep = auto.
- 7. Detector function = peak, Trace = max hold.
- 8. Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 9. Measure and record the results in the test report.

#### 7.3 Measurement Setup

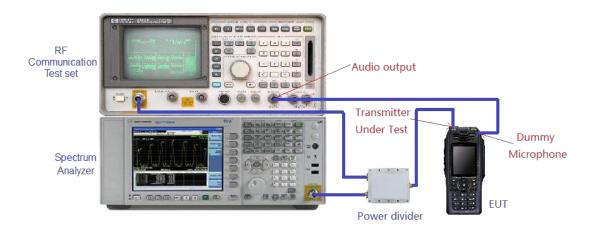



Report No.: AGC02931231004FR01 Page 20 of 73


#### 7.4 Measurement Result


By DC Power

Dy DO I OWGI							
Measurement Result of UHF-Analog Modulation							
Operating Frequency		12.5 kHz Channel Separation					
	Occupied Bandwidth	Emission Bandwidth	Limits	Result			
406.125MHz	9.929 kHz	10.16 kHz	11.25 kHz	Pass			
453.2125MHz	9.919 kHz	10.15 kHz	11.25 kHz	Pass			
458.2125MHz	9.928 kHz	10.16 kHz	11.25 kHz	Pass			
469.975MHz	9.956 kHz	10.17 kHz	11.25 kHz	Pass			


Measurement Result of UHF-Digital Modulation							
Operating Frequency		12.5 kHz Channel Sepa	aration				
	Occupied Bandwidth	Emission Bandwidth	Limits	Result			
406.125MHz	7.570 kHz	9.453 kHz	11.25 kHz	Pass			
453.2125MHz	7.658 kHz	9.137 kHz	11.25 kHz	Pass			
458.2125MHz	7.534 kHz	9.333 kHz	11.25 kHz	Pass			
469.975MHz	7.586 kHz	9.309 kHz	11.25 kHz	Pass			

## Test plot as follows:

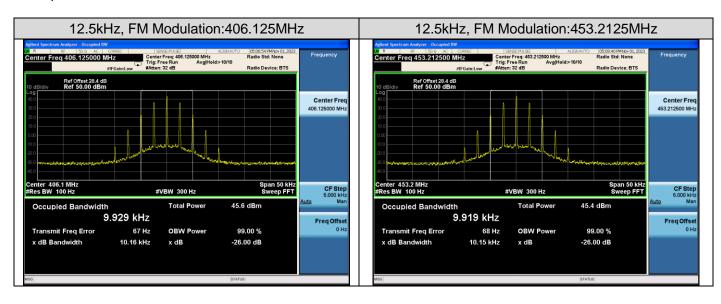





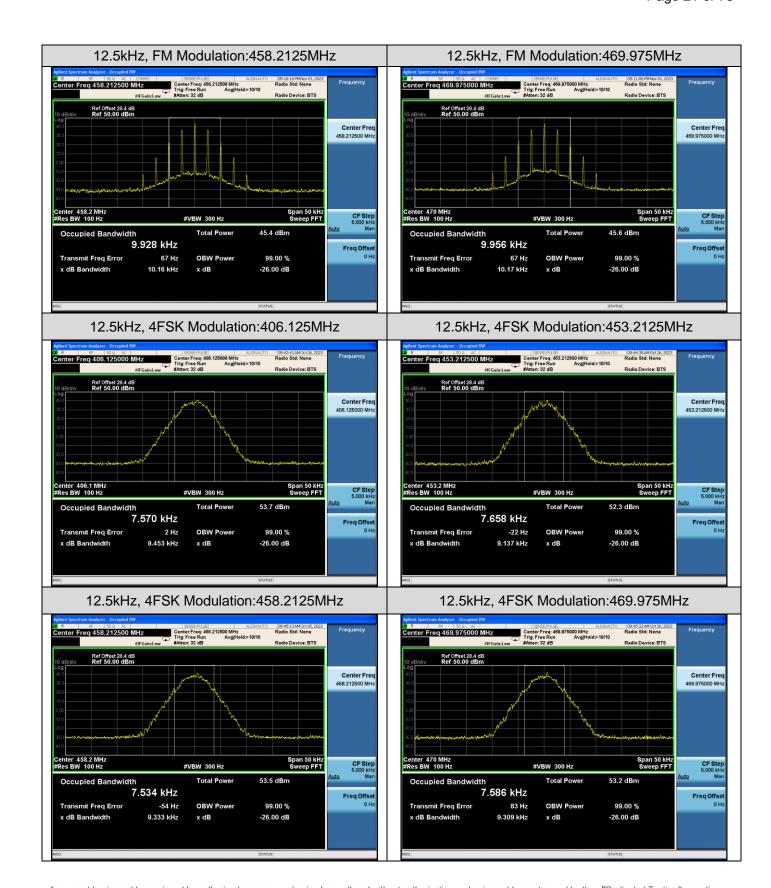




Report No.: AGC02931231004FR01 Page 22 of 73


By AC Power

Measurement Result of UHF-Analog Modulation							
Operating Frequency		12.5 kHz Channel Sepa	aration				
	Occupied Bandwidth	Emission Bandwidth	Limits	Result			
406.125MHz	9.914 kHz	10.15 kHz	11.25 kHz	Pass			
453.2125MHz	9.913 kHz	10.15 kHz	11.25 kHz	Pass			
458.2125MHz	9.919 kHz	10.15 kHz	11.25 kHz	Pass			
469.975MHz	9.936 kHz	10.16 kHz	11.25 kHz	Pass			


Measurement Result of UHF-Digital Modulation							
Operating Frequency		12.5 kHz Channel Sepa	aration				
	Occupied Bandwidth	Emission Bandwidth	Limits	Result			
406.125MHz	7.512 kHz	9.239 kHz	11.25 kHz	Pass			
453.2125MHz	7.734 kHz	8.880 kHz	11.25 kHz	Pass			
458.2125MHz	7.683 kHz	9.118 kHz	11.25 kHz	Pass			
469.975MHz	7.781 kHz	9.129 kHz	11.25 kHz	Pass			

## Test plot as follows:

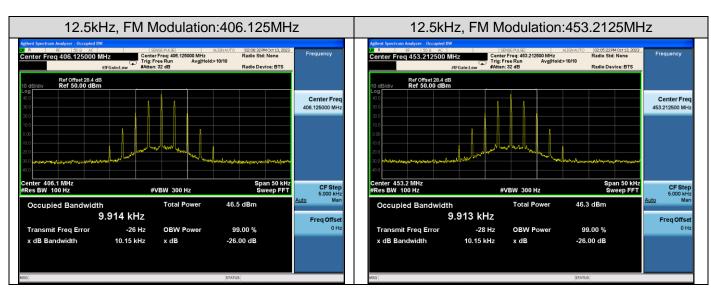





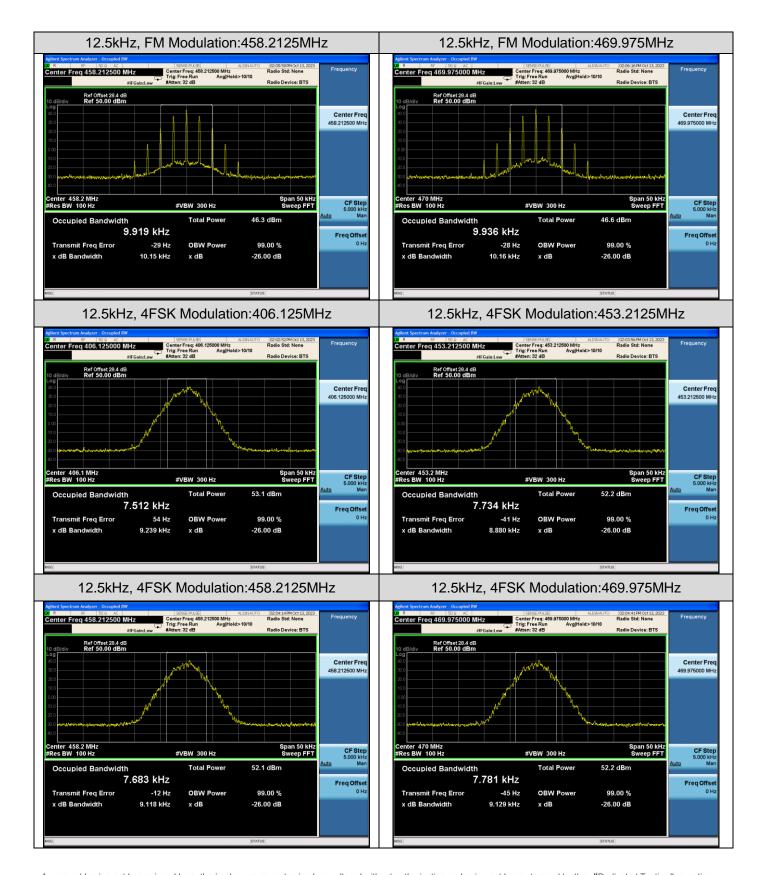



Page 24 of 73

## 8. Spurious Radiated Emission

## 8.1 Provisions Applicable


According to FCC §2.1053 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

- Emission Mask D -for 12.5 kHz Channel Separation:
- (1) On any frequency removed from the center of the authorized bandwidth fo to 5.625 kHz removed from fo: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in kHz) fo of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27(fd-2.88 kHz) dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in kHz)fo of more than 12.5 kHz: At least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

#### 8.2 Measurement Procedure


- 1. On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2. The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4. The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5. The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6. The transmitter shall than be rotated through 360°in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7. The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8. The maximum signal level detected by the measuring receiver shall be noted.
- The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10. (Replace the antenna with a proper Antenna (substitution antenna).
- 11. The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12. The substitution antenna shall be connected to a calibrated signal generator.
- 13. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 14. The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 15. The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 16. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 17. The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.


#### **8.3 MEASUREMENT SETUP**







# Radiated Emissions 30MHz to 1GHz Test setup

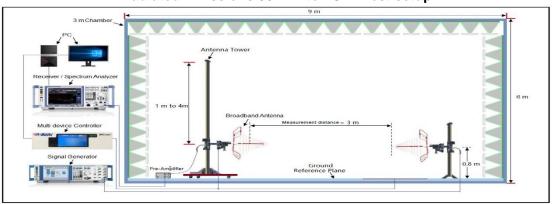

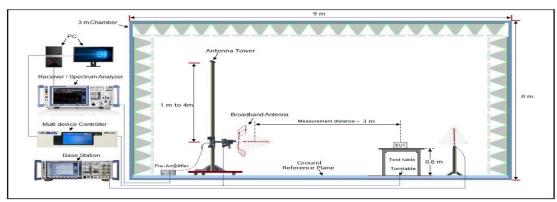

**Radiated Emissions Above 1GHz Test setup** 

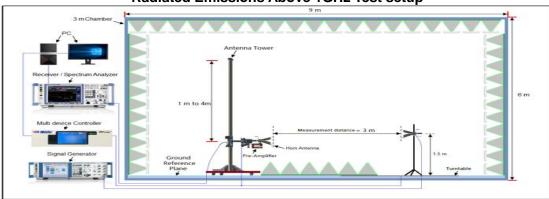

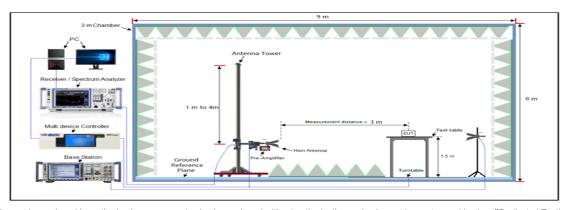



Report No.: AGC02931231004FR01 Page 26 of 73

#### **8.4 Measurement Result**

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.


In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.


Test limit calculation:

Preliminary calculation	Final Result
At least 50+10 log (P) =50+10log (50) =66.99 (dB)	Limit=P- Preliminary calculation=46.99-66.99=-20 dBm






By DC Power

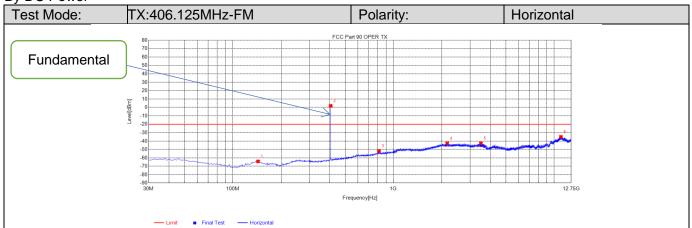


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	143.49	-91.14	-64.15	-20.00	44.15	26.99	231	Horizontal
2	406.36	-27.88	1.95	-20.00	-21.95	29.83	204	Horizontal
3	810.85	-89.40	-51.81	-20.00	31.81	37.59	169	Horizontal
4	2157.4907	-44.86	-42.68	-20.00	22.68	2.18	247	Horizontal
5	3494.7745	-44.91	-42.63	-20.00	22.63	2.28	360	Horizontal
6	11001.4251	-48.77	-34.95	-20.00	14.95	13.82	324	Horizontal

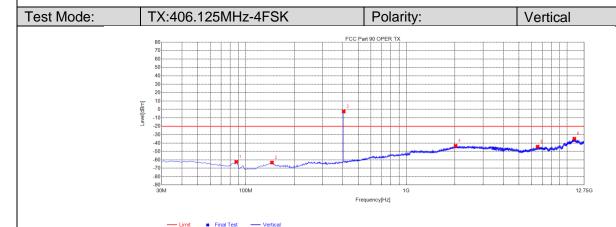


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	87.23	-85.27	-62.40	-20.00	42.40	22.87	4	Vertical
2	145.43	-89.96	-63.17	-20.00	43.17	26.79	275	Vertical
3	406.36	-32.20	-2.37	-20.00	-17.63	29.83	194	Vertical
4	2018.8269	-45.26	-43.22	-20.00	23.22	2.04	87	Vertical
5	6541.8542	-51.98	-44.27	-20.00	24.27	7.71	300	Vertical
6	11069.582	-48.52	-34.76	-20.00	14.76	13.76	318	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






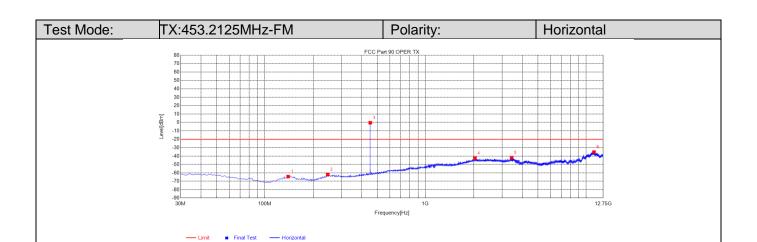


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	139.61	-91.64	-64.38	-20.00	44.38	27.26	244	Horizontal
2	246.31	-90.10	-61.82	-20.00	41.82	28.28	110	Horizontal
3	452.92	-31.36	-0.31	-20.00	-19.69	31.05	161	Horizontal
4	2028.2278	-44.52	-42.47	-20.00	22.47	2.05	307	Horizontal
5	3436.0186	-44.16	-41.97	-20.00	21.97	2.19	76	Horizontal
6	11178.8679	-48.82	-35.14	-20.00	15.14	13.68	360	Horizontal

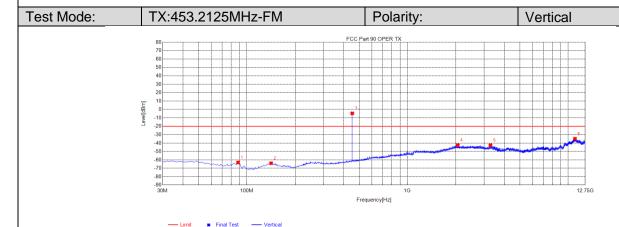


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	88.2	-85.76	-63.08	-20.00	43.08	22.68	342	Vertical
2	141.55	-91.16	-63.97	-20.00	43.97	27.19	206	Vertical
3	452.92	-35.65	-4.60	-20.00	-15.40	31.05	214	Vertical
4	2052.9053	-44.52	-42.45	-20.00	22.45	2.07	18	Vertical
5	3279.728	-44.49	-42.54	-20.00	22.54	1.95	342	Vertical
6	11009.651	-48.63	-34.82	-20.00	14.82	13.81	71	Vertical






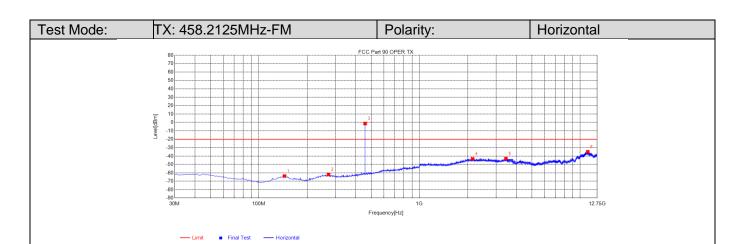


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	144.46	-90.61	-63.72	-20.00	43.72	26.89	323	Horizontal
2	271.53	-90.23	-61.85	-20.00	41.85	28.38	314	Horizontal
3	458.74	-32.39	-1.24	-20.00	-18.76	31.15	157	Horizontal
4	2137.5138	-45.39	-43.23	-20.00	23.23	2.16	10	Horizontal
5	3446.5947	-45.18	-42.97	-20.00	22.97	2.21	288	Horizontal
6	11141.2641	-48.52	-34.81	-20.00	14.81	13.71	351	Horizontal

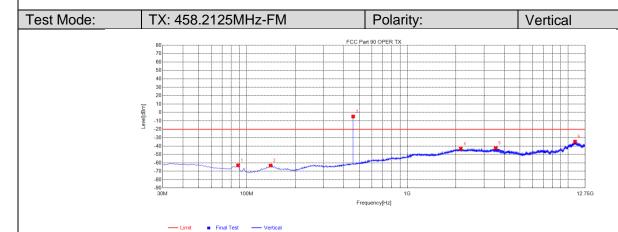


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	88.2	-85.56	-62.88	-20.00	42.88	22.68	230	Vertical
2	140.58	-90.37	-63.08	-20.00	43.08	27.29	220	Vertical
3	458.74	-35.91	-4.76	-20.00	-15.24	31.15	212	Vertical
4	2145.7396	-45.13	-42.96	-20.00	22.96	2.17	8	Vertical
5	3539.4289	-44.77	-42.46	-20.00	22.46	2.31	204	Vertical
6	11026.1026	-48.36	-34.56	-20.00	14.56	13.80	239	Vertical






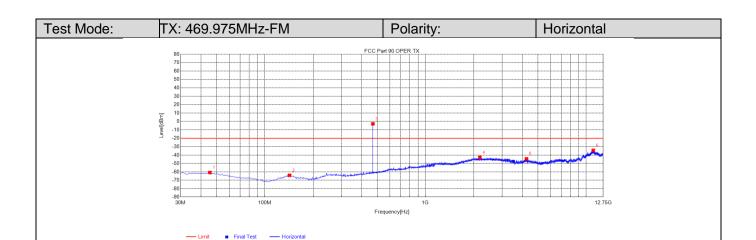


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-89.79	-60.76	-20.00	40.76	29.03	121	Horizontal
2	142.52	-91.20	-64.11	-20.00	44.11	27.09	1	Horizontal
3	470.38	-34.11	-2.76	-20.00	-17.24	31.35	154	Horizontal
4	2177.4677	-44.94	-42.74	-20.00	22.74	2.20	360	Horizontal
5	4248.0248	-47.97	-44.51	-20.00	24.51	3.46	298	Horizontal
6	11054.3054	-48.18	-34.40	-20.00	14.40	13.78	358	Horizontal

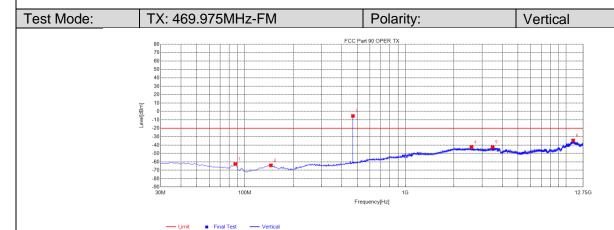


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	87.23	-85.38	-62.51	-20.00	42.51	22.87	114	Vertical
2	145.43	-90.89	-64.10	-20.00	44.10	26.79	95	Vertical
3	470.38	-36.70	-5.35	-20.00	-14.65	31.35	216	Vertical
4	2572.3072	-44.64	-42.26	-20.00	22.26	2.38	0	Vertical
5	3480.6731	-44.70	-42.44	-20.00	22.44	2.26	263	Vertical
6	11039.0289	-48.21	-34.42	-20.00	14.42	13.79	308	Vertical






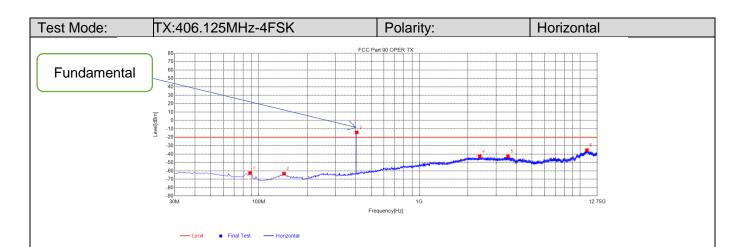


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	88.2	-85.24	-62.56	-20.00	42.56	22.68	340	Horizontal
2	143.49	-90.26	-63.27	-20.00	43.27	26.99	90	Horizontal
3	406.36	-43.92	-14.09	-20.00	-5.91	29.83	20	Horizontal
4	2370.187	-45.02	-42.62	-20.00	22.62	2.40	360	Horizontal
5	3547.6548	-44.99	-42.68	-20.00	22.68	2.31	280	Horizontal
6	11004.9505	-49.02	-35.20	-20.00	15.20	13.82	310	Horizontal

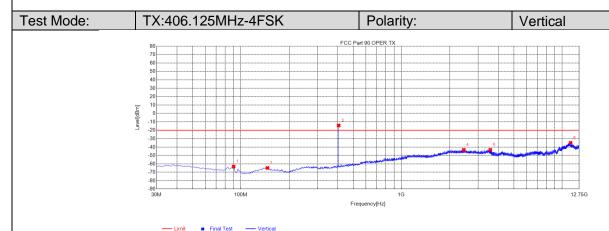


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	90.14	-85.55	-63.26	-20.00	43.26	22.29	300	Vertical
2	146.4	-91.51	-64.82	-20.00	44.82	26.69	280	Vertical
3	406.36	-44.07	-14.24	-20.00	-5.76	29.83	340	Vertical
4	2439.519	-45.75	-43.28	-20.00	23.28	2.47	190	Vertical
5	3566.4566	-45.53	-43.21	-20.00	23.21	2.32	150	Vertical
6	11268.1768	-48.50	-34.89	-20.00	14.89	13.61	0	Vertical






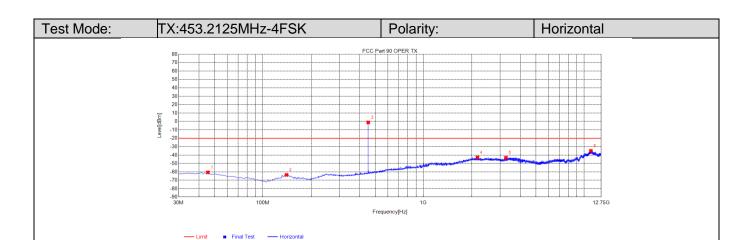


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-89.58	-60.55	-20.00	40.55	29.03	242	Horizontal
2	140.58	-90.84	-63.55	-20.00	43.55	27.29	162	Horizontal
3	452.92	-32.10	-1.05	-20.00	-18.95	31.05	162	Horizontal
4	2164.5415	-44.92	-42.73	-20.00	22.73	2.19	296	Horizontal
5	3257.4007	-45.04	-43.12	-20.00	23.12	1.92	360	Horizontal
6	11001.4251	-48.77	-34.95	-20.00	14.95	13.82	162	Horizontal

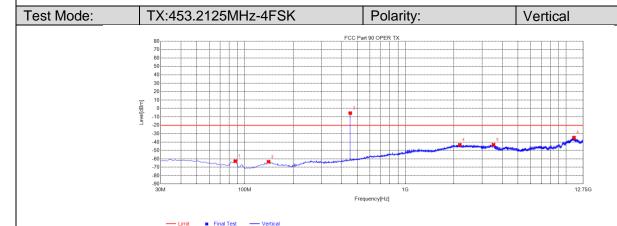


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	87.23	-85.56	-62.69	-20.00	42.69	22.87	326	Vertical
2	140.58	-90.67	-63.38	-20.00	43.38	27.29	270	Vertical
3	452.92	-36.58	-5.53	-20.00	-14.47	31.05	152	Vertical
4	2175.1175	-45.43	-43.23	-20.00	23.23	2.20	310	Vertical
5	3526.5026	-45.45	-43.15	-20.00	23.15	2.30	318	Vertical
6	11171.8172	-48.32	-34.64	-20.00	14.64	13.68	0	Vertical






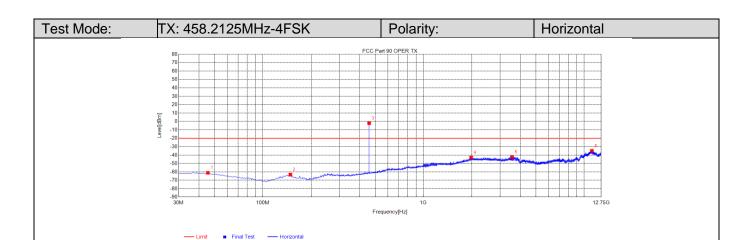


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-90.11	-61.08	-20.00	41.08	29.03	120	Horizontal
2	148.34	-89.62	-63.13	-20.00	43.13	26.49	10	Horizontal
3	458.74	-33.19	-2.04	-20.00	-17.96	31.15	155	Horizontal
4	1978.8729	-44.66	-42.90	-20.00	22.90	1.76	342	Horizontal
5	3552.3552	-44.72	-42.41	-20.00	22.41	2.31	155	Horizontal
6	11157.7158	-48.59	-34.90	-20.00	14.90	13.69	262	Horizontal

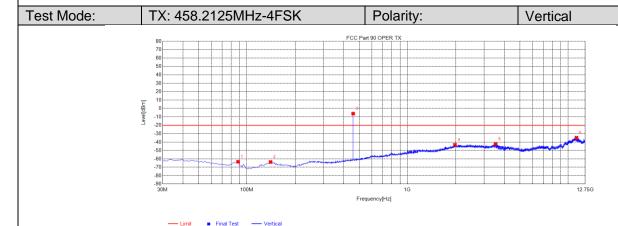


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	88.2	-86.08	-63.40	-20.00	43.40	22.68	214	Vertical
2	140.58	-90.95	-63.66	-20.00	43.66	27.29	331	Vertical
3	458.74	-37.24	-6.09	-20.00	-13.91	31.15	214	Vertical
4	1972.9973	-44.90	-43.21	-20.00	23.21	1.69	108	Vertical
5	3531.2031	-44.60	-42.30	-20.00	22.30	2.30	341	Vertical
6	11251.7252	-48.39	-34.77	-20.00	14.77	13.62	36	Vertical






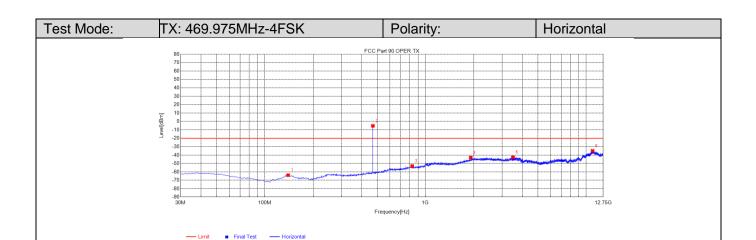

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	139.61	-91.17	-63.91	-20.00	43.91	27.26	42	Horizontal
2	470.38	-36.55	-5.20	-20.00	-14.80	31.35	164	Horizontal
3	826.37	-90.41	-53.01	-20.00	33.01	37.40	298	Horizontal
4	1911.8912	-43.89	-42.95	-20.00	22.95	0.94	128	Horizontal
5	3500.6501	-44.89	-42.60	-20.00	22.60	2.29	191	Horizontal
6	10950.8951	-48.60	-34.94	-20.00	14.94	13.66	343	Horizontal

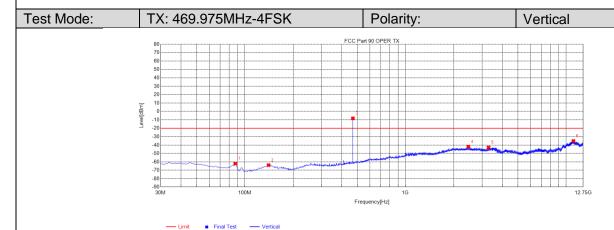


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	87.23	-84.91	-62.04	-20.00	42.04	22.87	107	Vertical
2	140.58	-91.16	-63.87	-20.00	43.87	27.29	115	Vertical
3	470.38	-39.49	-8.14	-20.00	-11.86	31.35	215	Vertical
4	2460.6711	-44.43	-41.94	-20.00	21.94	2.49	302	Vertical
5	3287.9538	-44.73	-42.77	-20.00	22.77	1.96	148	Vertical
6	11084.8585	-48.85	-35.10	-20.00	15.10	13.75	56	Vertical






By AC Power

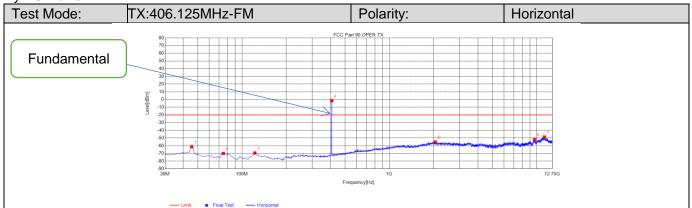


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-90.29	-61.26	-20.00	41.26	29.03	351	Horizontal
2	74.62	-94.46	-69.97	-20.00	49.97	24.49	219	Horizontal
3	122.15	-92.53	-69.41	-20.00	49.41	23.12	148	Horizontal
4	406.36	-31.48	-1.65	-20.00	-18.35	29.83	148	Horizontal
5	2047.0297	-57.25	-55.18	-20.00	35.18	2.07	314	Horizontal
6	9662.9663	-61.98	-51.88	-20.00	31.88	10.10	341	Horizontal
7	11269.3519	-62.28	-48.68	-20.00	28.68	13.60	44	Horizontal

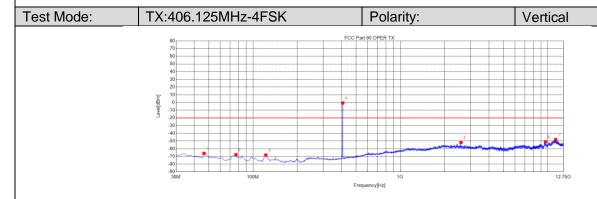

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	46.49	-94.97	-66.01	-20.00	46.01	28.96	239	Vertical
2	76.56	-92.17	-67.75	-20.00	47.75	24.42	266	Vertical
3	122.15	-91.39	-68.27	-20.00	48.27	23.12	221	Vertical
4	406.36	-30.40	-0.57	-20.00	-19.43	29.83	266	Vertical
5	2580.5331	-54.17	-51.80	-20.00	31.80	2.37	168	Vertical
6	9646.5147	-60.99	-50.94	-20.00	30.94	10.05	212	Vertical
7	11330.458	-61.73	-48.17	-20.00	28.17	13.56	346	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






Test Mode: TX:453.2125MHz-FM Polarity: Horizontal

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-89.97	-60.94	-20.00	40.94	29.03	334	Horizontal
2	72.68	-94.14	-69.58	-20.00	49.58	24.56	182	Horizontal
3	121.18	-93.62	-70.73	-20.00	50.73	22.89	226	Horizontal
4	452.92	-35.56	-4.51	-20.00	-15.49	31.05	156	Horizontal
5	2048.2048	-56.95	-54.88	-20.00	34.88	2.07	182	Horizontal
6	9599.51	-61.71	-51.78	-20.00	31.78	9.93	318	Horizontal
7	11205.8956	-62.35	-48.69	-20.00	28.69	13.66	226	Horizontal

Test Mode: TX:453.2125MHz-FM Polarity: Vertical

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	46.49	-94.95	-65.99	-20.00	45.99	28.96	88	Vertical
2	75.59	-93.16	-68.70	-20.00	48.70	24.46	252	Vertical
3	121.18	-91.95	-69.06	-20.00	49.06	22.89	278	Vertical
4	452.92	-32.85	-1.80	-20.00	-18.20	31.05	129	Vertical
5	2448.9199	-57.47	-54.99	-20.00	34.99	2.48	182	Vertical
6	9664.1414	-61.99	-51.89	-20.00	31.89	10.10	360	Vertical
7	11392.7393	-61.22	-47.71	-20.00	27.71	13.51	278	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






Test Mode: TX: 458.2125MHz-FM Polarity: Horizontal

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-89.82	-60.79	-20.00	40.79	29.03	333	Horizontal
2	72.68	-94.36	-69.80	-20.00	49.80	24.56	185	Horizontal
3	122.15	-93.12	-70.00	-20.00	50.00	23.12	80	Horizontal
4	458.74	-36.10	-4.95	-20.00	-15.05	31.15	89	Horizontal
5	2291.4541	-56.68	-54.36	-20.00	34.36	2.32	19	Horizontal
6	9660.6161	-62.02	-51.93	-20.00	31.93	10.09	45	Horizontal
7	11268.1768	-62.16	-48.55	-20.00	28.55	13.61	211	Horizontal

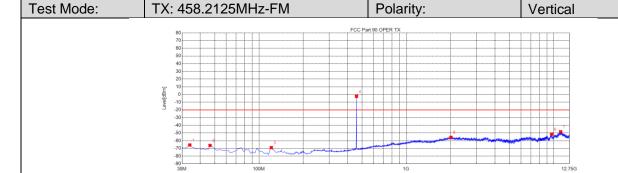

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	33.88	-94.72	-65.51	-20.00	45.51	29.21	298	Vertical
2	46.49	-95.07	-66.11	-20.00	46.11	28.96	272	Vertical
3	121.18	-91.82	-68.93	-20.00	48.93	22.89	106	Vertical
4	458.74	-33.45	-2.30	-20.00	-17.70	31.15	132	Vertical
5	2005.9006	-57.56	-55.53	-20.00	35.53	2.03	220	Vertical
6	9681.7682	-61.54	-51.39	-20.00	31.39	10.15	9	Vertical
7	11140.089	-62.03	-48.32	-20.00	28.32	13.71	36	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






Test Mode: TX: 469.975MHz-FM Polarity: Horizontal

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-90.14	-61.11	-20.00	41.11	29.03	2	Horizontal
2	79.47	-95.55	-71.23	-20.00	51.23	24.32	176	Horizontal
3	122.15	-93.84	-70.72	-20.00	50.72	23.12	80	Horizontal
4	470.38	-34.55	-3.20	-20.00	-16.80	31.35	219	Horizontal
5	2072.8823	-56.68	-54.59	-20.00	34.59	2.09	80	Horizontal
6	9672.3672	-61.03	-50.91	-20.00	30.91	10.12	350	Horizontal
7	11219.997	-61.47	-47.83	-20.00	27.83	13.64	71	Horizontal

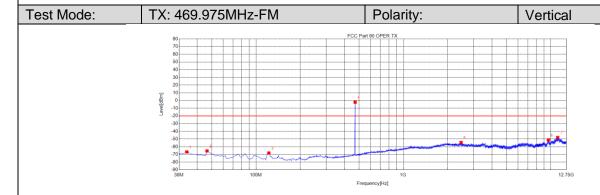


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	33.88	-95.97	-66.76	-20.00	46.76	29.21	43	Vertical
2	46.49	-94.40	-65.44	-20.00	45.44	28.96	333	Vertical
3	122.15	-91.25	-68.13	-20.00	48.13	23.12	220	Vertical
4	470.38	-33.49	-2.14	-20.00	-17.86	31.35	140	Vertical
5	2464.1964	-57.03	-54.54	-20.00	34.54	2.49	96	Vertical
6	9642.9893	-61.17	-51.13	-20.00	31.13	10.04	78	Vertical
7	11149.4899	-61.74	-48.04	-20.00	28.04	13.70	272	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






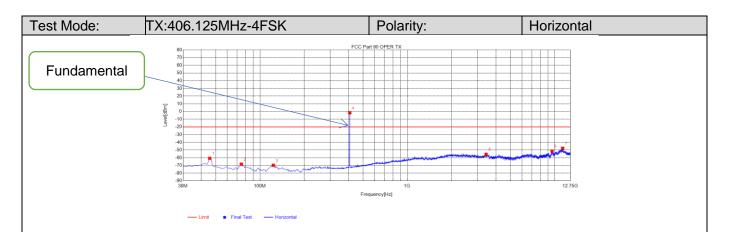

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-89.85	-60.82	-20.00	40.82	29.03	44	Horizontal
2	74.62	-92.88	-68.39	-20.00	48.39	24.49	194	Horizontal
3	123.12	-93.15	-69.80	-20.00	49.80	23.35	263	Horizontal
4	406.36	-31.43	-1.60	-20.00	-18.40	29.83	150	Horizontal
5	3421.9172	-57.70	-55.53	-20.00	35.53	2.17	325	Horizontal
6	9584.2334	-61.35	-51.46	-20.00	31.46	9.89	316	Horizontal
7	11315.1815	-61.28	-47.71	-20.00	27.71	13.57	9	Horizontal

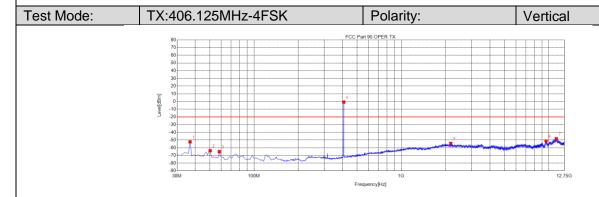


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	36.79	-81.65	-52.32	-20.00	32.32	29.33	72	Vertical
2	50.37	-92.47	-63.87	-20.00	43.87	28.60	54	Vertical
3	58.13	-91.87	-65.07	-20.00	45.07	26.80	54	Vertical
4	406.36	-30.50	-0.67	-20.00	-19.33	29.83	263	Vertical
5	2164.5415	-56.57	-54.38	-20.00	34.38	2.19	281	Vertical
6	9592.4592	-61.25	-51.34	-20.00	31.34	9.91	168	Vertical
7	11259.951	-61.90	-48.29	-20.00	28.29	13.61	54	Vertical






Test Mode: TX:453.2125MHz-4FSK Polarity: Horizontal

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-90.14	-61.11	-20.00	41.11	29.03	210	Horizontal
2	73.65	-92.39	-67.86	-20.00	47.86	24.53	201	Horizontal
3	123.12	-94.44	-71.09	-20.00	51.09	23.35	122	Horizontal
4	452.92	-35.35	-4.30	-20.00	-15.70	31.05	166	Horizontal
5	2417.1917	-56.03	-53.58	-20.00	33.58	2.45	219	Horizontal
6	9644.1644	-62.06	-52.01	-20.00	32.01	10.05	263	Horizontal
7	11142.4392	-61.33	-47.62	-20.00	27.62	13.71	0	Horizontal

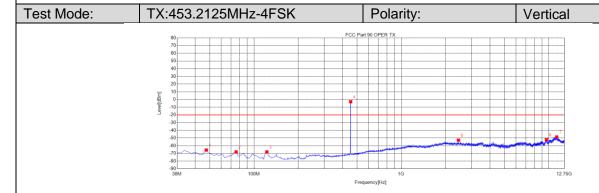


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-94.50	-65.61	-20.00	45.61	28.89	84	Vertical
2	75.59	-92.49	-68.03	-20.00	48.03	24.46	287	Vertical
3	122.15	-91.06	-67.94	-20.00	47.94	23.12	269	Vertical
4	452.92	-33.87	-2.82	-20.00	-17.18	31.05	131	Vertical
5	2440.6941	-55.26	-52.79	-20.00	32.79	2.47	348	Vertical
6	9652.3902	-61.98	-51.91	-20.00	31.91	10.07	131	Vertical
7	11329.2829	-62.17	-48.61	-20.00	28.61	13.56	356	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






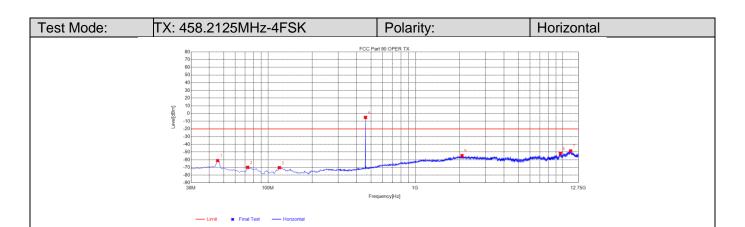


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-90.17	-61.14	-20.00	41.14	29.03	38	Horizontal
2	72.68	-94.39	-69.83	-20.00	49.83	24.56	186	Horizontal
3	119.24	-92.78	-70.32	-20.00	50.32	22.46	284	Horizontal
4	458.74	-36.20	-5.05	-20.00	-14.95	31.15	91	Horizontal
5	2072.8823	-56.80	-54.71	-20.00	34.71	2.09	178	Horizontal
6	9651.2151	-61.60	-51.53	-20.00	31.53	10.07	240	Horizontal
7	11314.0064	-62.09	-48.52	-20.00	28.52	13.57	351	Horizontal

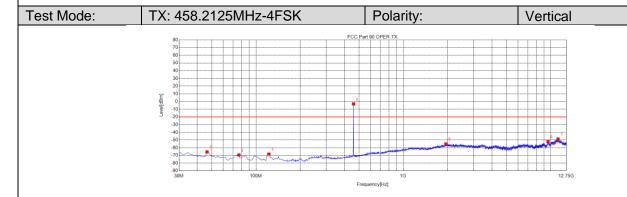


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	46.49	-94.39	-65.43	-20.00	45.43	28.96	241	Vertical
2	76.56	-93.85	-69.43	-20.00	49.43	24.42	267	Vertical
3	122.15	-91.40	-68.28	-20.00	48.28	23.12	241	Vertical
4	458.74	-34.25	-3.10	-20.00	-16.90	31.15	135	Vertical
5	1944.7945	-56.38	-55.04	-20.00	35.04	1.34	360	Vertical
6	9592.4592	-61.87	-51.96	-20.00	31.96	9.91	258	Vertical
7	11218.8219	-62.31	-48.67	-20.00	28.67	13.64	99	Vertical





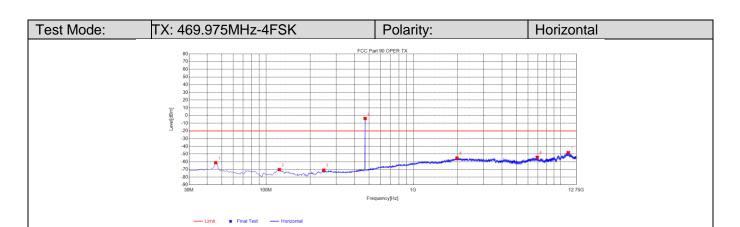

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	45.52	-90.35	-61.32	-20.00	41.32	29.03	108	Horizontal
2	123.12	-93.57	-70.22	-20.00	50.22	23.35	232	Horizontal
3	246.31	-99.14	-70.86	-20.00	50.86	28.28	100	Horizontal
4	470.38	-35.22	-3.87	-20.00	-16.13	31.35	223	Horizontal
5	1976.5227	-56.96	-55.23	-20.00	35.23	1.73	337	Horizontal
6	6929.643	-62.38	-54.16	-20.00	34.16	8.22	144	Horizontal
7	11262.3012	-61.75	-48.14	-20.00	28.14	13.61	337	Horizontal

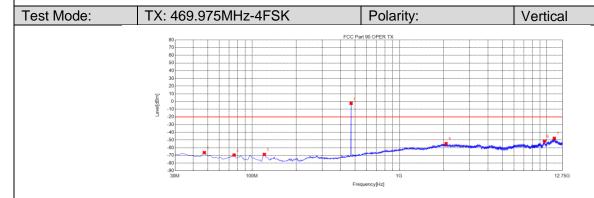

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	47.46	-95.28	-66.39	-20.00	46.39	28.89	122	Vertical
2	75.59	-93.92	-69.46	-20.00	49.46	24.46	236	Vertical
3	121.18	-91.62	-68.73	-20.00	48.73	22.89	227	Vertical
4	470.38	-33.67	-2.32	-20.00	-17.68	31.35	139	Vertical
5	2075.2325	-56.82	-54.72	-20.00	34.72	2.10	174	Vertical
6	9647.6898	-61.32	-51.26	-20.00	31.26	10.06	1	Vertical
7	11261.1261	-61.39	-47.78	-20.00	27.78	13.61	323	Vertical





Report No.: AGC02931231004FR01 Page 43 of 73

#### 8.5 Emission Mask Measurement Part

The detailed procedure employed for Emission Mask measurements are specified as following:

- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=50kHz for 12.5kHz channel spacing,
   RBW=100Hz, VBW=300Hz for 12.5 kHz, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Key the transmitter, and set the level of the unmodulated carrier to a fullscale reference line. This is the 0dB reference for the measurement.
- 3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
  The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 5. Measure and record the results in the test report.

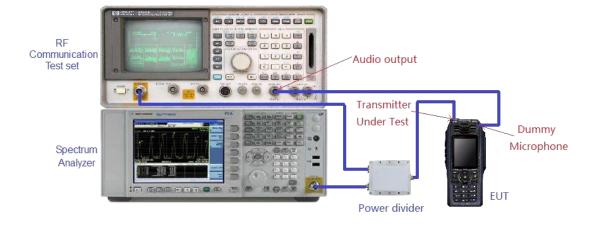






## Test plot as follows:

# By DC Power

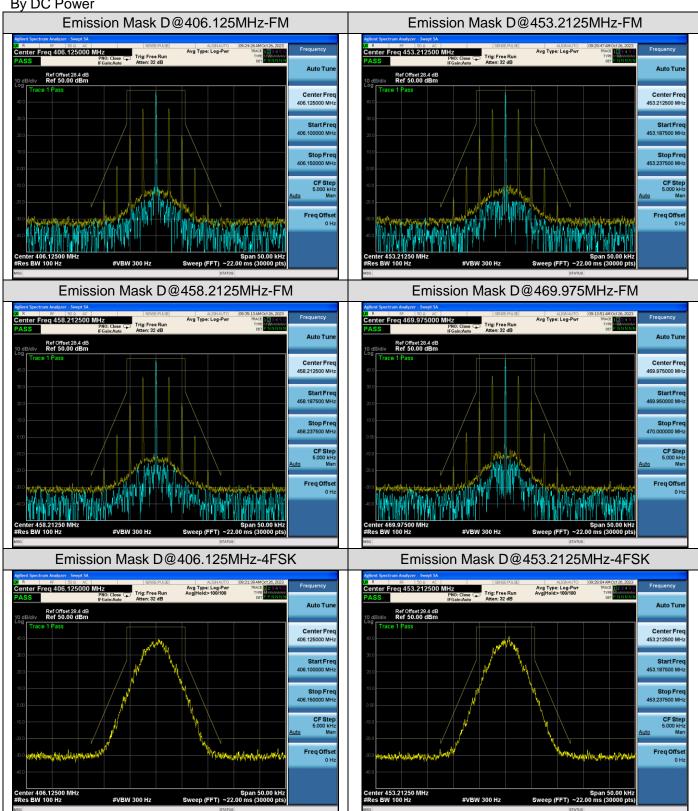

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report.  $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$ 

Web: http://www.agccert.com/