



Modulation		11a		Test Freq. (MHz)		5700			
Polarization		Vertical							
Test By		:Sean Yu		Temperature(°C):24		Humidity(%):65			
Level (dBuV/m)									



Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			




Modulation	11a	Test Freq. (MHz)	5720																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>44.20</td><td>0.58</td><td>Average</td><td>155</td><td>142</td></tr><tr><td>2</td><td>5460.00</td><td>57.00</td><td>74.00</td><td>-17.00</td><td>56.42</td><td>0.58</td><td>Peak</td><td>155</td><td>142</td></tr><tr><td>3</td><td>5470.00</td><td>57.18</td><td>68.20</td><td>-11.02</td><td>56.59</td><td>0.59</td><td>Peak</td><td>155</td><td>142</td></tr><tr><td>4 *</td><td>5720.00</td><td>103.49</td><td></td><td></td><td>102.58</td><td>0.91</td><td>Average</td><td>155</td><td>142</td></tr><tr><td>5 *</td><td>5720.00</td><td>114.66</td><td></td><td></td><td>113.75</td><td>0.91</td><td>Peak</td><td>155</td><td>142</td></tr><tr><td>6</td><td>5850.00</td><td>57.76</td><td>68.20</td><td>-10.44</td><td>56.52</td><td>1.24</td><td>Peak</td><td>155</td><td>142</td></tr><tr><td>7</td><td>11440.00</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>33.16</td><td>8.62</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>8</td><td>11440.00</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>45.82</td><td>8.62</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>9</td><td>17160.00</td><td>58.19</td><td>68.20</td><td>-10.01</td><td>51.90</td><td>6.29</td><td>Peak</td><td>100</td><td>173</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.78	54.00	-9.22	44.20	0.58	Average	155	142	2	5460.00	57.00	74.00	-17.00	56.42	0.58	Peak	155	142	3	5470.00	57.18	68.20	-11.02	56.59	0.59	Peak	155	142	4 *	5720.00	103.49			102.58	0.91	Average	155	142	5 *	5720.00	114.66			113.75	0.91	Peak	155	142	6	5850.00	57.76	68.20	-10.44	56.52	1.24	Peak	155	142	7	11440.00	41.78	54.00	-12.22	33.16	8.62	Average	100	126	8	11440.00	54.44	74.00	-19.56	45.82	8.62	Peak	100	126	9	17160.00	58.19	68.20	-10.01	51.90	6.29	Peak	100	173
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	44.78	54.00	-9.22	44.20	0.58	Average	155	142																																																																																														
2	5460.00	57.00	74.00	-17.00	56.42	0.58	Peak	155	142																																																																																														
3	5470.00	57.18	68.20	-11.02	56.59	0.59	Peak	155	142																																																																																														
4 *	5720.00	103.49			102.58	0.91	Average	155	142																																																																																														
5 *	5720.00	114.66			113.75	0.91	Peak	155	142																																																																																														
6	5850.00	57.76	68.20	-10.44	56.52	1.24	Peak	155	142																																																																																														
7	11440.00	41.78	54.00	-12.22	33.16	8.62	Average	100	126																																																																																														
8	11440.00	54.44	74.00	-19.56	45.82	8.62	Peak	100	126																																																																																														
9	17160.00	58.19	68.20	-10.01	51.90	6.29	Peak	100	173																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	11a	Test Freq. (MHz)	5745																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>59.96</td><td>68.20</td><td>-8.24</td><td>59.42</td><td>0.54</td><td>Peak</td><td>139</td><td>236</td></tr><tr><td>2</td><td>5700.00</td><td>70.41</td><td>105.20</td><td>-34.79</td><td>69.55</td><td>0.86</td><td>Peak</td><td>139</td><td>236</td></tr><tr><td>3</td><td>5720.00</td><td>83.88</td><td>110.80</td><td>-26.92</td><td>82.97</td><td>0.91</td><td>Peak</td><td>139</td><td>236</td></tr><tr><td>4</td><td>5725.00</td><td>95.91</td><td>122.20</td><td>-26.29</td><td>94.98</td><td>0.93</td><td>Peak</td><td>139</td><td>236</td></tr><tr><td>5 *</td><td>5745.00</td><td>105.36</td><td></td><td></td><td>104.38</td><td>0.98</td><td>Average</td><td>139</td><td>236</td></tr><tr><td>6 *</td><td>5745.00</td><td>115.81</td><td></td><td></td><td>114.83</td><td>0.98</td><td>Peak</td><td>139</td><td>236</td></tr><tr><td>7</td><td>5925.00</td><td>59.41</td><td>68.20</td><td>-8.79</td><td>57.92</td><td>1.49</td><td>Peak</td><td>139</td><td>236</td></tr><tr><td>8</td><td>11490.00</td><td>45.75</td><td>54.00</td><td>-8.25</td><td>37.04</td><td>8.71</td><td>Average</td><td>336</td><td>44</td></tr><tr><td>9</td><td>11490.00</td><td>59.23</td><td>74.00</td><td>-14.77</td><td>50.52</td><td>8.71</td><td>Peak</td><td>336</td><td>44</td></tr><tr><td>10</td><td>17235.00</td><td>61.42</td><td>68.20</td><td>-6.78</td><td>55.16</td><td>6.26</td><td>Peak</td><td>176</td><td>48</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.96	68.20	-8.24	59.42	0.54	Peak	139	236	2	5700.00	70.41	105.20	-34.79	69.55	0.86	Peak	139	236	3	5720.00	83.88	110.80	-26.92	82.97	0.91	Peak	139	236	4	5725.00	95.91	122.20	-26.29	94.98	0.93	Peak	139	236	5 *	5745.00	105.36			104.38	0.98	Average	139	236	6 *	5745.00	115.81			114.83	0.98	Peak	139	236	7	5925.00	59.41	68.20	-8.79	57.92	1.49	Peak	139	236	8	11490.00	45.75	54.00	-8.25	37.04	8.71	Average	336	44	9	11490.00	59.23	74.00	-14.77	50.52	8.71	Peak	336	44	10	17235.00	61.42	68.20	-6.78	55.16	6.26	Peak	176	48
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	59.96	68.20	-8.24	59.42	0.54	Peak	139	236																																																																																																								
2	5700.00	70.41	105.20	-34.79	69.55	0.86	Peak	139	236																																																																																																								
3	5720.00	83.88	110.80	-26.92	82.97	0.91	Peak	139	236																																																																																																								
4	5725.00	95.91	122.20	-26.29	94.98	0.93	Peak	139	236																																																																																																								
5 *	5745.00	105.36			104.38	0.98	Average	139	236																																																																																																								
6 *	5745.00	115.81			114.83	0.98	Peak	139	236																																																																																																								
7	5925.00	59.41	68.20	-8.79	57.92	1.49	Peak	139	236																																																																																																								
8	11490.00	45.75	54.00	-8.25	37.04	8.71	Average	336	44																																																																																																								
9	11490.00	59.23	74.00	-14.77	50.52	8.71	Peak	336	44																																																																																																								
10	17235.00	61.42	68.20	-6.78	55.16	6.26	Peak	176	48																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																																	

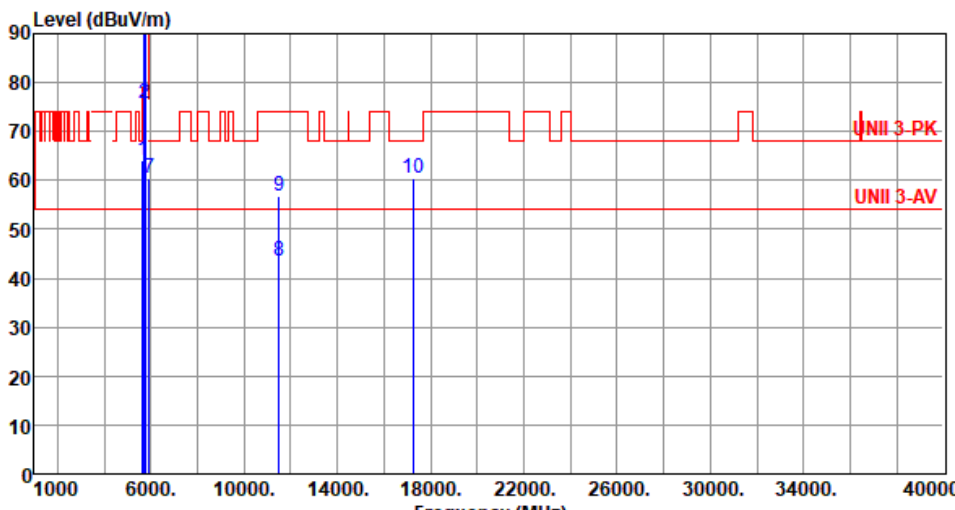

Modulation	11a	Test Freq. (MHz)	5745																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>64.03</td><td>68.20</td><td>-4.17</td><td>63.49</td><td>0.54</td><td>Peak</td><td>140</td><td>144</td></tr><tr><td>2</td><td>5700.00</td><td>75.59</td><td>105.20</td><td>-29.61</td><td>74.73</td><td>0.86</td><td>Peak</td><td>140</td><td>144</td></tr><tr><td>3</td><td>5720.00</td><td>89.10</td><td>110.80</td><td>-21.70</td><td>88.19</td><td>0.91</td><td>Peak</td><td>140</td><td>144</td></tr><tr><td>4</td><td>5725.00</td><td>101.22</td><td>122.20</td><td>-20.98</td><td>100.29</td><td>0.93</td><td>Peak</td><td>140</td><td>144</td></tr><tr><td>5 *</td><td>5745.00</td><td>109.24</td><td></td><td></td><td>108.26</td><td>0.98</td><td>Average</td><td>140</td><td>144</td></tr><tr><td>6 *</td><td>5745.00</td><td>120.86</td><td></td><td></td><td>119.88</td><td>0.98</td><td>Peak</td><td>140</td><td>144</td></tr><tr><td>7</td><td>5925.00</td><td>60.56</td><td>68.20</td><td>-7.64</td><td>59.07</td><td>1.49</td><td>Peak</td><td>140</td><td>144</td></tr><tr><td>8</td><td>11490.00</td><td>43.62</td><td>54.00</td><td>-10.38</td><td>34.91</td><td>8.71</td><td>Average</td><td>100</td><td>91</td></tr><tr><td>9</td><td>11490.00</td><td>56.84</td><td>74.00</td><td>-17.16</td><td>48.13</td><td>8.71</td><td>Peak</td><td>100</td><td>91</td></tr><tr><td>10</td><td>17235.00</td><td>60.34</td><td>68.20</td><td>-7.86</td><td>54.08</td><td>6.26</td><td>Peak</td><td>100</td><td>82</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	64.03	68.20	-4.17	63.49	0.54	Peak	140	144	2	5700.00	75.59	105.20	-29.61	74.73	0.86	Peak	140	144	3	5720.00	89.10	110.80	-21.70	88.19	0.91	Peak	140	144	4	5725.00	101.22	122.20	-20.98	100.29	0.93	Peak	140	144	5 *	5745.00	109.24			108.26	0.98	Average	140	144	6 *	5745.00	120.86			119.88	0.98	Peak	140	144	7	5925.00	60.56	68.20	-7.64	59.07	1.49	Peak	140	144	8	11490.00	43.62	54.00	-10.38	34.91	8.71	Average	100	91	9	11490.00	56.84	74.00	-17.16	48.13	8.71	Peak	100	91	10	17235.00	60.34	68.20	-7.86	54.08	6.26	Peak	100	82
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	64.03	68.20	-4.17	63.49	0.54	Peak	140	144																																																																																																								
2	5700.00	75.59	105.20	-29.61	74.73	0.86	Peak	140	144																																																																																																								
3	5720.00	89.10	110.80	-21.70	88.19	0.91	Peak	140	144																																																																																																								
4	5725.00	101.22	122.20	-20.98	100.29	0.93	Peak	140	144																																																																																																								
5 *	5745.00	109.24			108.26	0.98	Average	140	144																																																																																																								
6 *	5745.00	120.86			119.88	0.98	Peak	140	144																																																																																																								
7	5925.00	60.56	68.20	-7.64	59.07	1.49	Peak	140	144																																																																																																								
8	11490.00	43.62	54.00	-10.38	34.91	8.71	Average	100	91																																																																																																								
9	11490.00	56.84	74.00	-17.16	48.13	8.71	Peak	100	91																																																																																																								
10	17235.00	60.34	68.20	-7.86	54.08	6.26	Peak	100	82																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			




Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			

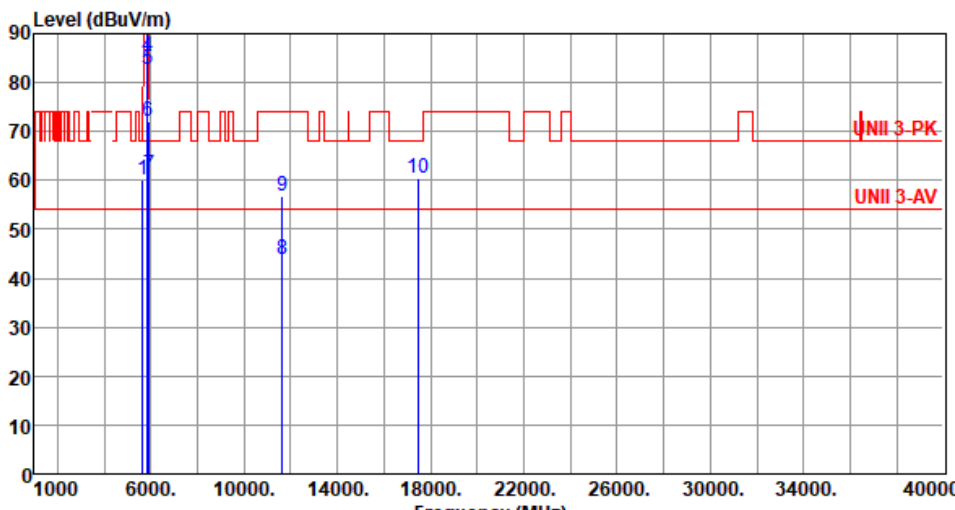

Modulation	11a	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	60.26	68.20	-7.94	59.72	0.54	Peak	142	146
2 *	5825.00	110.36			109.18	1.18	Average	142	146
3 *	5825.00	122.40			121.22	1.18	Peak	142	146
4	5850.00	85.38	122.20	-36.82	84.14	1.24	Peak	142	146
5	5855.00	82.66	110.80	-28.14	81.40	1.26	Peak	142	146
6	5875.00	72.09	105.20	-33.11	70.73	1.36	Peak	142	146
7	5925.00	61.24	68.20	-6.96	59.75	1.49	Peak	142	146
8	11650.00	43.69	54.00	-10.31	35.46	8.23	Average	100	72
9	11650.00	56.78	74.00	-17.22	48.55	8.23	Peak	100	72
10	17475.00	60.47	68.20	-7.73	53.38	7.09	Peak	100	84

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.

Unwanted Emissions (Above 1GHz) for ax HE20

Modulation	ax HE20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Modulation	ax HE20		Test Freq. (MHz)		5180																																																																																	
Polarization	Vertical																																																																																					
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																						
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>53.52</td><td>54.00</td><td>-0.48</td><td>52.70</td><td>0.82</td><td>Average</td><td>159</td><td>137</td></tr><tr><td>2</td><td>5150.00</td><td>68.37</td><td>74.00</td><td>-5.63</td><td>67.55</td><td>0.82</td><td>Peak</td><td>159</td><td>137</td></tr><tr><td>3 *</td><td>5180.00</td><td>106.52</td><td></td><td></td><td>105.82</td><td>0.70</td><td>Average</td><td>159</td><td>137</td></tr><tr><td>4 *</td><td>5180.00</td><td>120.29</td><td></td><td></td><td>119.59</td><td>0.70</td><td>Peak</td><td>159</td><td>137</td></tr><tr><td>5</td><td>10360.00</td><td>54.29</td><td>68.20</td><td>-13.91</td><td>45.80</td><td>8.49</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>6</td><td>15540.00</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>36.34</td><td>5.98</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>7</td><td>15540.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>49.72</td><td>5.98</td><td>Peak</td><td>100</td><td>136</td></tr></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.52	54.00	-0.48	52.70	0.82	Average	159	137	2	5150.00	68.37	74.00	-5.63	67.55	0.82	Peak	159	137	3 *	5180.00	106.52			105.82	0.70	Average	159	137	4 *	5180.00	120.29			119.59	0.70	Peak	159	137	5	10360.00	54.29	68.20	-13.91	45.80	8.49	Peak	100	45	6	15540.00	42.32	54.00	-11.68	36.34	5.98	Average	100	136	7	15540.00	55.70	74.00	-18.30	49.72	5.98	Peak	100	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																													
1	5150.00	53.52	54.00	-0.48	52.70	0.82	Average	159	137																																																																													
2	5150.00	68.37	74.00	-5.63	67.55	0.82	Peak	159	137																																																																													
3 *	5180.00	106.52			105.82	0.70	Average	159	137																																																																													
4 *	5180.00	120.29			119.59	0.70	Peak	159	137																																																																													
5	10360.00	54.29	68.20	-13.91	45.80	8.49	Peak	100	45																																																																													
6	15540.00	42.32	54.00	-11.68	36.34	5.98	Average	100	136																																																																													
7	15540.00	55.70	74.00	-18.30	49.72	5.98	Peak	100	136																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																						



Modulation	ax HE20	Test Freq. (MHz)	5200
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	5200
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5240																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																																							
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.85</td><td>54.00</td><td>-9.15</td><td>44.03</td><td>0.82</td><td>Average</td><td>139</td><td>259</td></tr><tr><td>2</td><td>5150.00</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>56.85</td><td>0.82</td><td>Peak</td><td>139</td><td>259</td></tr><tr><td>3 *</td><td>5240.00</td><td>102.95</td><td></td><td></td><td>102.65</td><td>0.30</td><td>Average</td><td>139</td><td>259</td></tr><tr><td>4 *</td><td>5240.00</td><td>114.97</td><td></td><td></td><td>114.67</td><td>0.30</td><td>Peak</td><td>139</td><td>259</td></tr><tr><td>5</td><td>5350.00</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>43.08</td><td>0.14</td><td>Average</td><td>139</td><td>259</td></tr><tr><td>6</td><td>5350.00</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>55.55</td><td>0.14</td><td>Peak</td><td>139</td><td>259</td></tr><tr><td>7</td><td>10480.00</td><td>54.58</td><td>68.20</td><td>-13.62</td><td>45.89</td><td>8.69</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>8</td><td>15720.00</td><td>43.63</td><td>54.00</td><td>-10.37</td><td>37.91</td><td>5.72</td><td>Average</td><td>143</td><td>111</td></tr><tr><td>9</td><td>15720.00</td><td>56.85</td><td>74.00</td><td>-17.15</td><td>51.13</td><td>5.72</td><td>Peak</td><td>143</td><td>111</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.85	54.00	-9.15	44.03	0.82	Average	139	259	2	5150.00	57.67	74.00	-16.33	56.85	0.82	Peak	139	259	3 *	5240.00	102.95			102.65	0.30	Average	139	259	4 *	5240.00	114.97			114.67	0.30	Peak	139	259	5	5350.00	43.22	54.00	-10.78	43.08	0.14	Average	139	259	6	5350.00	55.69	74.00	-18.31	55.55	0.14	Peak	139	259	7	10480.00	54.58	68.20	-13.62	45.89	8.69	Peak	100	32	8	15720.00	43.63	54.00	-10.37	37.91	5.72	Average	143	111	9	15720.00	56.85	74.00	-17.15	51.13	5.72	Peak	143	111
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	44.85	54.00	-9.15	44.03	0.82	Average	139	259																																																																																														
2	5150.00	57.67	74.00	-16.33	56.85	0.82	Peak	139	259																																																																																														
3 *	5240.00	102.95			102.65	0.30	Average	139	259																																																																																														
4 *	5240.00	114.97			114.67	0.30	Peak	139	259																																																																																														
5	5350.00	43.22	54.00	-10.78	43.08	0.14	Average	139	259																																																																																														
6	5350.00	55.69	74.00	-18.31	55.55	0.14	Peak	139	259																																																																																														
7	10480.00	54.58	68.20	-13.62	45.89	8.69	Peak	100	32																																																																																														
8	15720.00	43.63	54.00	-10.37	37.91	5.72	Average	143	111																																																																																														
9	15720.00	56.85	74.00	-17.15	51.13	5.72	Peak	143	111																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE20	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5260																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m) UNI 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>44.30</td><td>54.00</td><td>-9.70</td><td>43.48</td><td>0.82</td><td>Average</td><td>127</td><td>246</td></tr><tr><td>2</td><td>5150.00</td><td>57.73</td><td>74.00</td><td>-16.27</td><td>56.91</td><td>0.82</td><td>Peak</td><td>127</td><td>246</td></tr><tr><td>3 *</td><td>5260.00</td><td>100.56</td><td></td><td></td><td>100.37</td><td>0.19</td><td>Average</td><td>127</td><td>246</td></tr><tr><td>4 *</td><td>5260.00</td><td>113.95</td><td></td><td></td><td>113.76</td><td>0.19</td><td>Peak</td><td>127</td><td>246</td></tr><tr><td>5</td><td>5350.00</td><td>43.51</td><td>54.00</td><td>-10.49</td><td>43.37</td><td>0.14</td><td>Average</td><td>127</td><td>246</td></tr><tr><td>6</td><td>5350.00</td><td>55.97</td><td>74.00</td><td>-18.03</td><td>55.83</td><td>0.14</td><td>Peak</td><td>127</td><td>246</td></tr><tr><td>7</td><td>10520.00</td><td>55.02</td><td>68.20</td><td>-13.18</td><td>46.30</td><td>8.72</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>8</td><td>15780.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>37.01</td><td>5.67</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>9</td><td>15780.00</td><td>56.36</td><td>74.00</td><td>-17.64</td><td>50.69</td><td>5.67</td><td>Peak</td><td>100</td><td>103</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.30	54.00	-9.70	43.48	0.82	Average	127	246	2	5150.00	57.73	74.00	-16.27	56.91	0.82	Peak	127	246	3 *	5260.00	100.56			100.37	0.19	Average	127	246	4 *	5260.00	113.95			113.76	0.19	Peak	127	246	5	5350.00	43.51	54.00	-10.49	43.37	0.14	Average	127	246	6	5350.00	55.97	74.00	-18.03	55.83	0.14	Peak	127	246	7	10520.00	55.02	68.20	-13.18	46.30	8.72	Peak	100	52	8	15780.00	42.68	54.00	-11.32	37.01	5.67	Average	100	103	9	15780.00	56.36	74.00	-17.64	50.69	5.67	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	44.30	54.00	-9.70	43.48	0.82	Average	127	246																																																																																														
2	5150.00	57.73	74.00	-16.27	56.91	0.82	Peak	127	246																																																																																														
3 *	5260.00	100.56			100.37	0.19	Average	127	246																																																																																														
4 *	5260.00	113.95			113.76	0.19	Peak	127	246																																																																																														
5	5350.00	43.51	54.00	-10.49	43.37	0.14	Average	127	246																																																																																														
6	5350.00	55.97	74.00	-18.03	55.83	0.14	Peak	127	246																																																																																														
7	10520.00	55.02	68.20	-13.18	46.30	8.72	Peak	100	52																																																																																														
8	15780.00	42.68	54.00	-11.32	37.01	5.67	Average	100	103																																																																																														
9	15780.00	56.36	74.00	-17.64	50.69	5.67	Peak	100	103																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE20	Test Freq. (MHz)	5260
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation		ax HE20		Test Freq. (MHz)		5300				
Polarization		Horizontal								
Test By		:Brad Wu		Temperature(°C):24		Humidity(%):65				
Level (dBuV/m) Frequency (MHz)										
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		MHz	level			reading			High	Table
			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	*	5300.00	100.13			100.10	0.03	Average	115	249
2	*	5300.00	113.26			113.23	0.03	Peak	115	249
3		5350.00	43.21	54.00	-10.79	43.07	0.14	Average	115	249
4		5350.00	56.31	74.00	-17.69	56.17	0.14	Peak	115	249
5		10600.00	41.95	54.00	-12.05	33.15	8.80	Average	100	49
6		10600.00	55.56	74.00	-18.44	46.76	8.80	Peak	100	49
7		15900.00	42.98	54.00	-11.02	37.34	5.64	Average	100	97
8		15900.00	56.17	74.00	-17.83	50.53	5.64	Peak	100	97

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.



Modulation		ax HE20			Test Freq. (MHz)		5300		
Polarization		Vertical							
Test By		:Brad Wu			Temperature(°C):24		Humidity(%):65		
Level (dBuV/m)									



Modulation		ax HE20		Test Freq. (MHz)		5320			
Polarization		Horizontal							
Test By		:Brad Wu		Temperature(°C):24		Humidity(%):65			
Level (dBuV/m) </									



Modulation		ax HE20			Test Freq. (MHz)		5320																																																																																																																											
Polarization		Vertical																																																																																																																																
Test By		:Brad Wu			Temperature(°C):24		Humidity(%):65																																																																																																																											
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 100060001000014000180002200026000300003400040000 Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>105.27</td><td></td><td></td><td>105.20</td><td>0.07</td><td>Average</td><td>161</td><td>135</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>119.26</td><td>-----</td><td>-----</td><td>119.19</td><td>0.07</td><td>Peak</td><td>161</td><td>135</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>49.16</td><td>54.00</td><td>-4.84</td><td>49.02</td><td>0.14</td><td>Average</td><td>161</td><td>135</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>62.72</td><td>74.00</td><td>-11.28</td><td>62.58</td><td>0.14</td><td>Peak</td><td>161</td><td>135</td></tr><tr><td>5</td><td></td><td>10640.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>34.65</td><td>8.80</td><td>Average</td><td>115</td><td>84</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>56.48</td><td>74.00</td><td>-17.52</td><td>47.68</td><td>8.80</td><td>Peak</td><td>115</td><td>84</td></tr><tr><td>7</td><td></td><td>15960.00</td><td>43.32</td><td>54.00</td><td>-10.68</td><td>37.67</td><td>5.65</td><td>Average</td><td>100</td><td>91</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>57.88</td><td>74.00</td><td>-16.12</td><td>52.23</td><td>5.65</td><td>Peak</td><td>100</td><td>91</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.												Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level			reading			High	Table				dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	5320.00	105.27			105.20	0.07	Average	161	135	2	*	5320.00	119.26	-----	-----	119.19	0.07	Peak	161	135	3		5350.00	49.16	54.00	-4.84	49.02	0.14	Average	161	135	4		5350.00	62.72	74.00	-11.28	62.58	0.14	Peak	161	135	5		10640.00	43.45	54.00	-10.55	34.65	8.80	Average	115	84	6		10640.00	56.48	74.00	-17.52	47.68	8.80	Peak	115	84	7		15960.00	43.32	54.00	-10.68	37.67	5.65	Average	100	91	8		15960.00	57.88	74.00	-16.12	52.23	5.65	Peak	100	91
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																								
		MHz	level			reading			High	Table																																																																																																																								
			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																								
1	*	5320.00	105.27			105.20	0.07	Average	161	135																																																																																																																								
2	*	5320.00	119.26	-----	-----	119.19	0.07	Peak	161	135																																																																																																																								
3		5350.00	49.16	54.00	-4.84	49.02	0.14	Average	161	135																																																																																																																								
4		5350.00	62.72	74.00	-11.28	62.58	0.14	Peak	161	135																																																																																																																								
5		10640.00	43.45	54.00	-10.55	34.65	8.80	Average	115	84																																																																																																																								
6		10640.00	56.48	74.00	-17.52	47.68	8.80	Peak	115	84																																																																																																																								
7		15960.00	43.32	54.00	-10.68	37.67	5.65	Average	100	91																																																																																																																								
8		15960.00	57.88	74.00	-16.12	52.23	5.65	Peak	100	91																																																																																																																								



Modulation	ax HE20		Test Freq. (MHz)	5500																																																																																																															
Polarization	Horizontal																																																																																																																		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65																																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.48</td><td>54.00</td><td>-9.52</td><td>43.90</td><td>0.58</td><td>Average</td><td>112</td><td>250</td></tr><tr><td>2</td><td>5460.00</td><td>58.01</td><td>74.00</td><td>-15.99</td><td>57.43</td><td>0.58</td><td>Peak</td><td>112</td><td>250</td></tr><tr><td>3</td><td>5470.00</td><td>57.72</td><td>68.20</td><td>-10.48</td><td>57.13</td><td>0.59</td><td>Peak</td><td>112</td><td>250</td></tr><tr><td>4 *</td><td>5500.00</td><td>100.09</td><td></td><td></td><td>99.43</td><td>0.66</td><td>Average</td><td>112</td><td>250</td></tr><tr><td>5 *</td><td>5500.00</td><td>113.60</td><td></td><td></td><td>112.94</td><td>0.66</td><td>Peak</td><td>112</td><td>250</td></tr><tr><td>6</td><td>11000.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>32.95</td><td>9.21</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>7</td><td>11000.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>45.92</td><td>9.21</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>8</td><td>16500.00</td><td>57.61</td><td>68.20</td><td>-10.59</td><td>50.62</td><td>6.99</td><td>Peak</td><td>100</td><td>112</td></tr></table>							Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	5460.00	44.48	54.00	-9.52	43.90	0.58	Average	112	250	2	5460.00	58.01	74.00	-15.99	57.43	0.58	Peak	112	250	3	5470.00	57.72	68.20	-10.48	57.13	0.59	Peak	112	250	4 *	5500.00	100.09			99.43	0.66	Average	112	250	5 *	5500.00	113.60			112.94	0.66	Peak	112	250	6	11000.00	42.16	54.00	-11.84	32.95	9.21	Average	100	38	7	11000.00	55.13	74.00	-18.87	45.92	9.21	Peak	100	38	8	16500.00	57.61	68.20	-10.59	50.62	6.99	Peak	100	112
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																										
					dBuV			cm	deg																																																																																																										
1	5460.00	44.48	54.00	-9.52	43.90	0.58	Average	112	250																																																																																																										
2	5460.00	58.01	74.00	-15.99	57.43	0.58	Peak	112	250																																																																																																										
3	5470.00	57.72	68.20	-10.48	57.13	0.59	Peak	112	250																																																																																																										
4 *	5500.00	100.09			99.43	0.66	Average	112	250																																																																																																										
5 *	5500.00	113.60			112.94	0.66	Peak	112	250																																																																																																										
6	11000.00	42.16	54.00	-11.84	32.95	9.21	Average	100	38																																																																																																										
7	11000.00	55.13	74.00	-18.87	45.92	9.21	Peak	100	38																																																																																																										
8	16500.00	57.61	68.20	-10.59	50.62	6.99	Peak	100	112																																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																																			




Modulation	ax HE20	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			

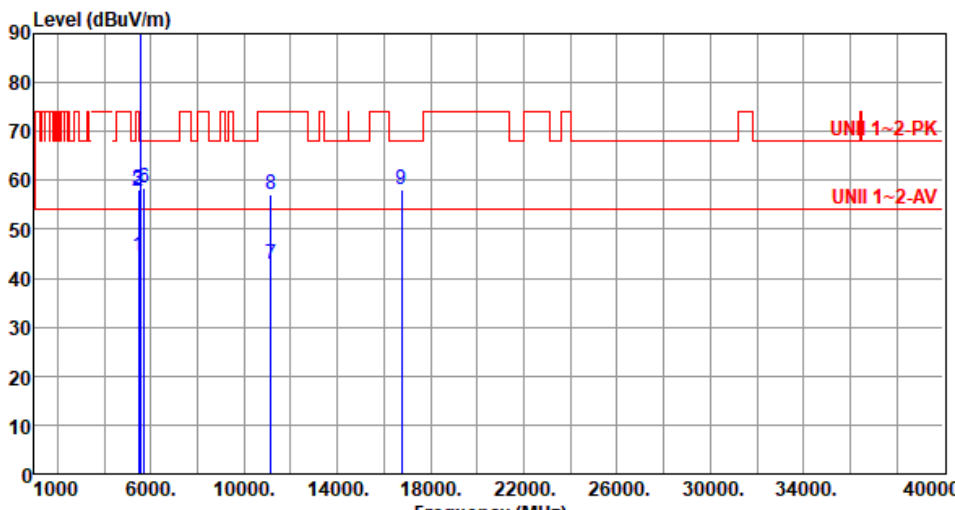

Modulation	ax HE20	Test Freq. (MHz)	5580						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.61	54.00	-9.39	44.03	0.58	Average	154	138
2	5460.00	57.81	74.00	-16.19	57.23	0.58	Peak	154	138
3	5470.00	58.02	68.20	-10.18	57.43	0.59	Peak	154	138
4 *	5580.00	104.31			103.67	0.64	Average	154	138
5 *	5580.00	118.18			117.54	0.64	Peak	154	138
6	5725.00	58.39	68.20	-9.81	57.46	0.93	Peak	154	138
7	11160.00	42.84	54.00	-11.16	34.11	8.73	Average	198	92
8	11160.00	57.16	74.00	-16.84	48.43	8.73	Peak	198	92
9	16740.00	58.26	68.20	-9.94	51.23	7.03	Peak	100	69

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.



Modulation		ax HE20		Test Freq. (MHz)		5700			
Polarization		Horizontal							
Test By		:Brad Wu		Temperature(°C):24		Humidity(%):65			
Level (dBuV/m) </									



Modulation		ax HE20		Test Freq. (MHz)		5700																																																																																											
Polarization		Vertical																																																																																															
Test By		:Brad Wu		Temperature(°C):24		Humidity(%):65																																																																																											
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5700.00</td><td>99.48</td><td></td><td>98.62</td><td>0.86</td><td>Average</td><td>151</td><td>136</td></tr><tr><td>2</td><td>*</td><td>5700.00</td><td>113.43</td><td>-----</td><td>112.57</td><td>0.86</td><td>Peak</td><td>151</td><td>136</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>67.93</td><td>68.20 -0.27</td><td>67.00</td><td>0.93</td><td>Peak</td><td>151</td><td>136</td></tr><tr><td>4</td><td></td><td>11400.00</td><td>41.94</td><td>54.00 -12.06</td><td>33.38</td><td>8.56</td><td>Average</td><td>186</td><td>72</td></tr><tr><td>5</td><td></td><td>11400.00</td><td>55.23</td><td>74.00 -18.77</td><td>46.67</td><td>8.56</td><td>Peak</td><td>186</td><td>72</td></tr><tr><td>6</td><td></td><td>17100.00</td><td>58.19</td><td>68.20 -10.01</td><td>51.77</td><td>6.42</td><td>Peak</td><td>100</td><td>48</td></tr></tbody></table>									Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	5700.00	99.48		98.62	0.86	Average	151	136	2	*	5700.00	113.43	-----	112.57	0.86	Peak	151	136	3		5725.00	67.93	68.20 -0.27	67.00	0.93	Peak	151	136	4		11400.00	41.94	54.00 -12.06	33.38	8.56	Average	186	72	5		11400.00	55.23	74.00 -18.77	46.67	8.56	Peak	186	72	6		17100.00	58.19	68.20 -10.01	51.77	6.42	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																								
1	*	5700.00	99.48		98.62	0.86	Average	151	136																																																																																								
2	*	5700.00	113.43	-----	112.57	0.86	Peak	151	136																																																																																								
3		5725.00	67.93	68.20 -0.27	67.00	0.93	Peak	151	136																																																																																								
4		11400.00	41.94	54.00 -12.06	33.38	8.56	Average	186	72																																																																																								
5		11400.00	55.23	74.00 -18.77	46.67	8.56	Peak	186	72																																																																																								
6		17100.00	58.19	68.20 -10.01	51.77	6.42	Peak	100	48																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																	




Modulation	ax HE20	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			




Modulation	ax HE20	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			

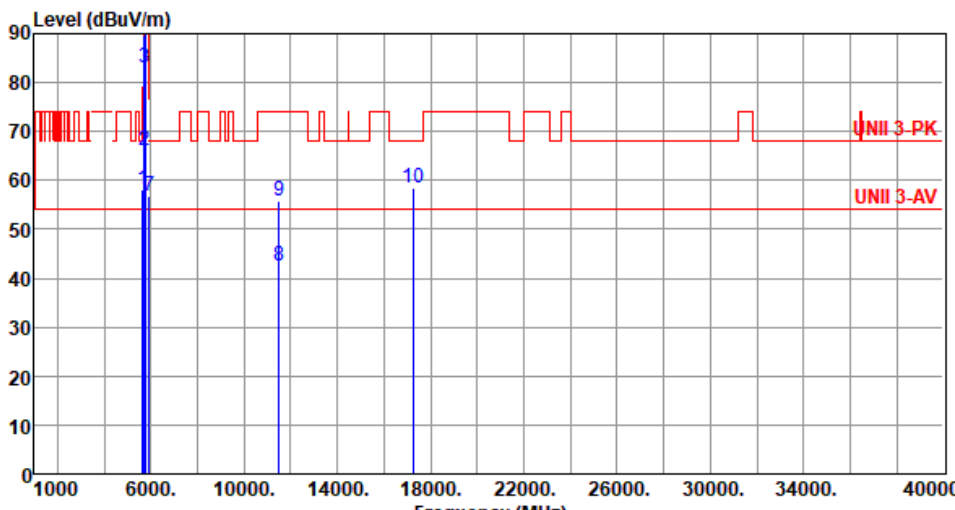

Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.24</td><td>68.20</td><td>-9.96</td><td>57.70</td><td>0.54</td><td>Peak</td><td>337</td><td>267</td></tr><tr><td>2</td><td>5700.00</td><td>65.98</td><td>105.20</td><td>-39.22</td><td>65.12</td><td>0.86</td><td>Peak</td><td>337</td><td>267</td></tr><tr><td>3</td><td>5720.00</td><td>82.98</td><td>110.80</td><td>-27.82</td><td>82.07</td><td>0.91</td><td>Peak</td><td>337</td><td>267</td></tr><tr><td>4</td><td>5725.00</td><td>89.74</td><td>122.20</td><td>-32.46</td><td>88.81</td><td>0.93</td><td>Peak</td><td>337</td><td>267</td></tr><tr><td>5 *</td><td>5745.00</td><td>104.14</td><td></td><td></td><td>103.16</td><td>0.98</td><td>Average</td><td>337</td><td>267</td></tr><tr><td>6 *</td><td>5745.00</td><td>117.96</td><td></td><td></td><td>116.98</td><td>0.98</td><td>Peak</td><td>337</td><td>267</td></tr><tr><td>7</td><td>5925.00</td><td>56.95</td><td>68.20</td><td>-11.25</td><td>55.46</td><td>1.49</td><td>Peak</td><td>337</td><td>267</td></tr><tr><td>8</td><td>11490.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>33.93</td><td>8.71</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>9</td><td>11490.00</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>46.93</td><td>8.71</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>10</td><td>17235.00</td><td>58.34</td><td>68.20</td><td>-9.86</td><td>52.08</td><td>6.26</td><td>Peak</td><td>100</td><td>167</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.24	68.20	-9.96	57.70	0.54	Peak	337	267	2	5700.00	65.98	105.20	-39.22	65.12	0.86	Peak	337	267	3	5720.00	82.98	110.80	-27.82	82.07	0.91	Peak	337	267	4	5725.00	89.74	122.20	-32.46	88.81	0.93	Peak	337	267	5 *	5745.00	104.14			103.16	0.98	Average	337	267	6 *	5745.00	117.96			116.98	0.98	Peak	337	267	7	5925.00	56.95	68.20	-11.25	55.46	1.49	Peak	337	267	8	11490.00	42.64	54.00	-11.36	33.93	8.71	Average	100	73	9	11490.00	55.64	74.00	-18.36	46.93	8.71	Peak	100	73	10	17235.00	58.34	68.20	-9.86	52.08	6.26	Peak	100	167
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	58.24	68.20	-9.96	57.70	0.54	Peak	337	267																																																																																																								
2	5700.00	65.98	105.20	-39.22	65.12	0.86	Peak	337	267																																																																																																								
3	5720.00	82.98	110.80	-27.82	82.07	0.91	Peak	337	267																																																																																																								
4	5725.00	89.74	122.20	-32.46	88.81	0.93	Peak	337	267																																																																																																								
5 *	5745.00	104.14			103.16	0.98	Average	337	267																																																																																																								
6 *	5745.00	117.96			116.98	0.98	Peak	337	267																																																																																																								
7	5925.00	56.95	68.20	-11.25	55.46	1.49	Peak	337	267																																																																																																								
8	11490.00	42.64	54.00	-11.36	33.93	8.71	Average	100	73																																																																																																								
9	11490.00	55.64	74.00	-18.36	46.93	8.71	Peak	100	73																																																																																																								
10	17235.00	58.34	68.20	-9.86	52.08	6.26	Peak	100	167																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	

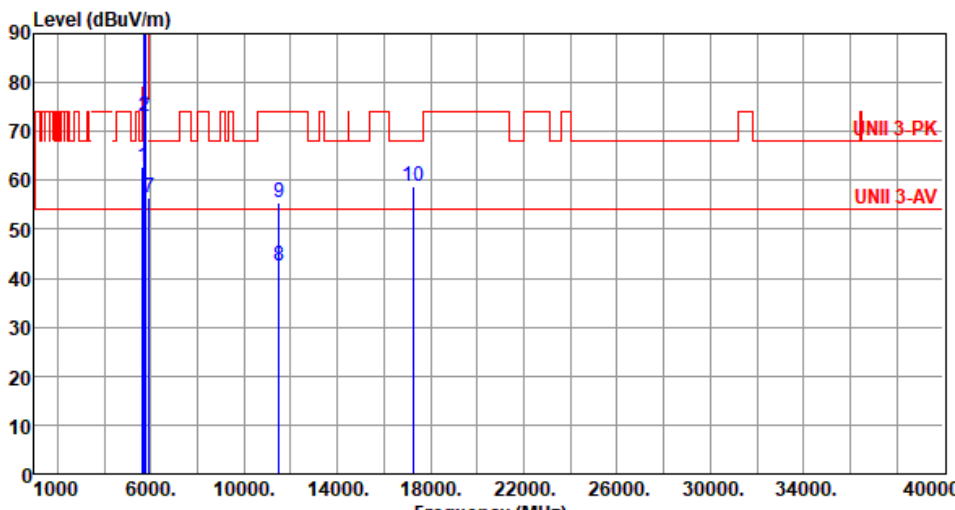

Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>62.65</td><td>68.20</td><td>-5.55</td><td>62.11</td><td>0.54</td><td>Peak</td><td>146</td><td>139</td></tr><tr><td>2</td><td>5700.00</td><td>73.10</td><td>105.20</td><td>-32.10</td><td>72.24</td><td>0.86</td><td>Peak</td><td>146</td><td>139</td></tr><tr><td>3</td><td>5720.00</td><td>92.67</td><td>110.80</td><td>-18.13</td><td>91.76</td><td>0.91</td><td>Peak</td><td>146</td><td>139</td></tr><tr><td>4</td><td>5725.00</td><td>99.93</td><td>122.20</td><td>-22.27</td><td>99.00</td><td>0.93</td><td>Peak</td><td>146</td><td>139</td></tr><tr><td>5 *</td><td>5745.00</td><td>108.66</td><td></td><td></td><td>107.68</td><td>0.98</td><td>Average</td><td>146</td><td>139</td></tr><tr><td>6 *</td><td>5745.00</td><td>121.67</td><td></td><td></td><td>120.69</td><td>0.98</td><td>Peak</td><td>146</td><td>139</td></tr><tr><td>7</td><td>5925.00</td><td>56.61</td><td>68.20</td><td>-11.59</td><td>55.12</td><td>1.49</td><td>Peak</td><td>146</td><td>139</td></tr><tr><td>8</td><td>11490.00</td><td>42.53</td><td>54.00</td><td>-11.47</td><td>33.82</td><td>8.71</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>9</td><td>11490.00</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>46.62</td><td>8.71</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>10</td><td>17235.00</td><td>58.94</td><td>68.20</td><td>-9.26</td><td>52.68</td><td>6.26</td><td>Peak</td><td>100</td><td>133</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	62.65	68.20	-5.55	62.11	0.54	Peak	146	139	2	5700.00	73.10	105.20	-32.10	72.24	0.86	Peak	146	139	3	5720.00	92.67	110.80	-18.13	91.76	0.91	Peak	146	139	4	5725.00	99.93	122.20	-22.27	99.00	0.93	Peak	146	139	5 *	5745.00	108.66			107.68	0.98	Average	146	139	6 *	5745.00	121.67			120.69	0.98	Peak	146	139	7	5925.00	56.61	68.20	-11.59	55.12	1.49	Peak	146	139	8	11490.00	42.53	54.00	-11.47	33.82	8.71	Average	100	52	9	11490.00	55.33	74.00	-18.67	46.62	8.71	Peak	100	52	10	17235.00	58.94	68.20	-9.26	52.68	6.26	Peak	100	133
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	62.65	68.20	-5.55	62.11	0.54	Peak	146	139																																																																																																								
2	5700.00	73.10	105.20	-32.10	72.24	0.86	Peak	146	139																																																																																																								
3	5720.00	92.67	110.80	-18.13	91.76	0.91	Peak	146	139																																																																																																								
4	5725.00	99.93	122.20	-22.27	99.00	0.93	Peak	146	139																																																																																																								
5 *	5745.00	108.66			107.68	0.98	Average	146	139																																																																																																								
6 *	5745.00	121.67			120.69	0.98	Peak	146	139																																																																																																								
7	5925.00	56.61	68.20	-11.59	55.12	1.49	Peak	146	139																																																																																																								
8	11490.00	42.53	54.00	-11.47	33.82	8.71	Average	100	52																																																																																																								
9	11490.00	55.33	74.00	-18.67	46.62	8.71	Peak	100	52																																																																																																								
10	17235.00	58.94	68.20	-9.26	52.68	6.26	Peak	100	133																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	ax HE20	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5785																																																																																
Polarization	Vertical																																																																																		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																			
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>58.65</td><td>68.20</td><td>-9.55</td><td>58.11</td><td>0.54</td><td>Peak</td><td>146</td><td>137</td></tr><tr><td>2 *</td><td>5785.00</td><td>109.64</td><td></td><td></td><td>108.57</td><td>1.07</td><td>Average</td><td>146</td><td>137</td></tr><tr><td>3 *</td><td>5785.00</td><td>121.96</td><td></td><td></td><td>120.89</td><td>1.07</td><td>Peak</td><td>146</td><td>137</td></tr><tr><td>4</td><td>5925.00</td><td>56.98</td><td>68.20</td><td>-11.22</td><td>55.49</td><td>1.49</td><td>Peak</td><td>146</td><td>137</td></tr><tr><td>5</td><td>11570.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>34.29</td><td>8.59</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>11570.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>47.27</td><td>8.59</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>7</td><td>17355.00</td><td>60.56</td><td>68.20</td><td>-7.64</td><td>53.98</td><td>6.58</td><td>Peak</td><td>100</td><td>109</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.65	68.20	-9.55	58.11	0.54	Peak	146	137	2 *	5785.00	109.64			108.57	1.07	Average	146	137	3 *	5785.00	121.96			120.89	1.07	Peak	146	137	4	5925.00	56.98	68.20	-11.22	55.49	1.49	Peak	146	137	5	11570.00	42.88	54.00	-11.12	34.29	8.59	Average	100	120	6	11570.00	55.86	74.00	-18.14	47.27	8.59	Peak	100	120	7	17355.00	60.56	68.20	-7.64	53.98	6.58	Peak	100	109
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5650.00	58.65	68.20	-9.55	58.11	0.54	Peak	146	137																																																																										
2 *	5785.00	109.64			108.57	1.07	Average	146	137																																																																										
3 *	5785.00	121.96			120.89	1.07	Peak	146	137																																																																										
4	5925.00	56.98	68.20	-11.22	55.49	1.49	Peak	146	137																																																																										
5	11570.00	42.88	54.00	-11.12	34.29	8.59	Average	100	120																																																																										
6	11570.00	55.86	74.00	-18.14	47.27	8.59	Peak	100	120																																																																										
7	17355.00	60.56	68.20	-7.64	53.98	6.58	Peak	100	109																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																			



Modulation	ax HE20	Test Freq. (MHz)	5825
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) <			



Modulation	ax HE20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBUV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>57.72</td><td>68.20</td><td>-10.48</td><td>57.18</td><td>0.54</td><td>Peak</td><td>150</td><td>148</td></tr><tr><td>2 *</td><td>5825.00</td><td>110.27</td><td></td><td></td><td>109.09</td><td>1.18</td><td>Average</td><td>150</td><td>148</td></tr><tr><td>3 *</td><td>5825.00</td><td>122.25</td><td></td><td></td><td>121.07</td><td>1.18</td><td>Peak</td><td>150</td><td>148</td></tr><tr><td>4</td><td>5850.00</td><td>91.64</td><td>122.20</td><td>-30.56</td><td>90.40</td><td>1.24</td><td>Peak</td><td>150</td><td>148</td></tr><tr><td>5</td><td>5855.00</td><td>81.68</td><td>110.80</td><td>-29.12</td><td>80.42</td><td>1.26</td><td>Peak</td><td>150</td><td>148</td></tr><tr><td>6</td><td>5875.00</td><td>72.17</td><td>105.20</td><td>-33.03</td><td>70.81</td><td>1.36</td><td>Peak</td><td>150</td><td>148</td></tr><tr><td>7</td><td>5925.00</td><td>58.00</td><td>68.20</td><td>-10.20</td><td>56.51</td><td>1.49</td><td>Peak</td><td>150</td><td>148</td></tr><tr><td>8</td><td>11650.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>34.01</td><td>8.23</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>9</td><td>11650.00</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>47.42</td><td>8.23</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>10</td><td>17475.00</td><td>59.67</td><td>68.20</td><td>-8.53</td><td>52.58</td><td>7.09</td><td>Peak</td><td>100</td><td>139</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.72	68.20	-10.48	57.18	0.54	Peak	150	148	2 *	5825.00	110.27			109.09	1.18	Average	150	148	3 *	5825.00	122.25			121.07	1.18	Peak	150	148	4	5850.00	91.64	122.20	-30.56	90.40	1.24	Peak	150	148	5	5855.00	81.68	110.80	-29.12	80.42	1.26	Peak	150	148	6	5875.00	72.17	105.20	-33.03	70.81	1.36	Peak	150	148	7	5925.00	58.00	68.20	-10.20	56.51	1.49	Peak	150	148	8	11650.00	42.24	54.00	-11.76	34.01	8.23	Average	100	28	9	11650.00	55.65	74.00	-18.35	47.42	8.23	Peak	100	28	10	17475.00	59.67	68.20	-8.53	52.58	7.09	Peak	100	139
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	57.72	68.20	-10.48	57.18	0.54	Peak	150	148																																																																																																								
2 *	5825.00	110.27			109.09	1.18	Average	150	148																																																																																																								
3 *	5825.00	122.25			121.07	1.18	Peak	150	148																																																																																																								
4	5850.00	91.64	122.20	-30.56	90.40	1.24	Peak	150	148																																																																																																								
5	5855.00	81.68	110.80	-29.12	80.42	1.26	Peak	150	148																																																																																																								
6	5875.00	72.17	105.20	-33.03	70.81	1.36	Peak	150	148																																																																																																								
7	5925.00	58.00	68.20	-10.20	56.51	1.49	Peak	150	148																																																																																																								
8	11650.00	42.24	54.00	-11.76	34.01	8.23	Average	100	28																																																																																																								
9	11650.00	55.65	74.00	-18.35	47.42	8.23	Peak	100	28																																																																																																								
10	17475.00	59.67	68.20	-8.53	52.58	7.09	Peak	100	139																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	

Unwanted Emissions (Above 1GHz) for ax HE40

Modulation	ax HE40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Modulation	ax HE40		Test Freq. (MHz)		5190																																																																																	
Polarization	Vertical																																																																																					
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																						
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>53.55</td><td>54.00</td><td>-0.45</td><td>52.73</td><td>0.82</td><td>Average</td><td>194</td><td>139</td></tr><tr><td>2</td><td>5150.00</td><td>68.35</td><td>74.00</td><td>-5.65</td><td>67.53</td><td>0.82</td><td>Peak</td><td>194</td><td>139</td></tr><tr><td>3 *</td><td>5190.00</td><td>100.98</td><td></td><td></td><td>100.32</td><td>0.66</td><td>Average</td><td>194</td><td>139</td></tr><tr><td>4 *</td><td>5190.00</td><td>114.24</td><td></td><td></td><td>113.58</td><td>0.66</td><td>Peak</td><td>194</td><td>139</td></tr><tr><td>5</td><td>10380.00</td><td>55.13</td><td>68.20</td><td>-13.07</td><td>46.56</td><td>8.57</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>6</td><td>15570.00</td><td>43.32</td><td>54.00</td><td>-10.68</td><td>37.46</td><td>5.86</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>7</td><td>15570.00</td><td>55.37</td><td>74.00</td><td>-18.63</td><td>49.51</td><td>5.86</td><td>Peak</td><td>100</td><td>89</td></tr></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.55	54.00	-0.45	52.73	0.82	Average	194	139	2	5150.00	68.35	74.00	-5.65	67.53	0.82	Peak	194	139	3 *	5190.00	100.98			100.32	0.66	Average	194	139	4 *	5190.00	114.24			113.58	0.66	Peak	194	139	5	10380.00	55.13	68.20	-13.07	46.56	8.57	Peak	100	114	6	15570.00	43.32	54.00	-10.68	37.46	5.86	Average	100	89	7	15570.00	55.37	74.00	-18.63	49.51	5.86	Peak	100	89
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																													
1	5150.00	53.55	54.00	-0.45	52.73	0.82	Average	194	139																																																																													
2	5150.00	68.35	74.00	-5.65	67.53	0.82	Peak	194	139																																																																													
3 *	5190.00	100.98			100.32	0.66	Average	194	139																																																																													
4 *	5190.00	114.24			113.58	0.66	Peak	194	139																																																																													
5	10380.00	55.13	68.20	-13.07	46.56	8.57	Peak	100	114																																																																													
6	15570.00	43.32	54.00	-10.68	37.46	5.86	Average	100	89																																																																													
7	15570.00	55.37	74.00	-18.63	49.51	5.86	Peak	100	89																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																						



Modulation	ax HE40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5230
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Modulation	ax HE40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5270																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>46.64</td><td>0.82</td><td>Average</td><td>162</td><td>143</td></tr><tr><td>2</td><td>5150.00</td><td>59.87</td><td>74.00</td><td>-14.13</td><td>59.05</td><td>0.82</td><td>Peak</td><td>162</td><td>143</td></tr><tr><td>3 *</td><td>5270.00</td><td>103.94</td><td></td><td></td><td>103.79</td><td>0.15</td><td>Average</td><td>162</td><td>143</td></tr><tr><td>4 *</td><td>5270.00</td><td>116.96</td><td></td><td></td><td>116.81</td><td>0.15</td><td>Peak</td><td>162</td><td>143</td></tr><tr><td>5</td><td>5350.00</td><td>49.72</td><td>54.00</td><td>-4.28</td><td>49.58</td><td>0.14</td><td>Average</td><td>162</td><td>143</td></tr><tr><td>6</td><td>5350.00</td><td>64.62</td><td>74.00</td><td>-9.38</td><td>64.48</td><td>0.14</td><td>Peak</td><td>162</td><td>143</td></tr><tr><td>7</td><td>10540.00</td><td>55.67</td><td>68.20</td><td>-12.53</td><td>46.92</td><td>8.75</td><td>Peak</td><td>100</td><td>163</td></tr><tr><td>8</td><td>15810.00</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>37.44</td><td>5.64</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>9</td><td>15810.00</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>50.02</td><td>5.64</td><td>Peak</td><td>100</td><td>88</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	47.46	54.00	-6.54	46.64	0.82	Average	162	143	2	5150.00	59.87	74.00	-14.13	59.05	0.82	Peak	162	143	3 *	5270.00	103.94			103.79	0.15	Average	162	143	4 *	5270.00	116.96			116.81	0.15	Peak	162	143	5	5350.00	49.72	54.00	-4.28	49.58	0.14	Average	162	143	6	5350.00	64.62	74.00	-9.38	64.48	0.14	Peak	162	143	7	10540.00	55.67	68.20	-12.53	46.92	8.75	Peak	100	163	8	15810.00	43.08	54.00	-10.92	37.44	5.64	Average	100	88	9	15810.00	55.66	74.00	-18.34	50.02	5.64	Peak	100	88
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	47.46	54.00	-6.54	46.64	0.82	Average	162	143																																																																																														
2	5150.00	59.87	74.00	-14.13	59.05	0.82	Peak	162	143																																																																																														
3 *	5270.00	103.94			103.79	0.15	Average	162	143																																																																																														
4 *	5270.00	116.96			116.81	0.15	Peak	162	143																																																																																														
5	5350.00	49.72	54.00	-4.28	49.58	0.14	Average	162	143																																																																																														
6	5350.00	64.62	74.00	-9.38	64.48	0.14	Peak	162	143																																																																																														
7	10540.00	55.67	68.20	-12.53	46.92	8.75	Peak	100	163																																																																																														
8	15810.00	43.08	54.00	-10.92	37.44	5.64	Average	100	88																																																																																														
9	15810.00	55.66	74.00	-18.34	50.02	5.64	Peak	100	88																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation		ax HE40		Test Freq. (MHz)		5310	
Polarization		Horizontal					
Test By		:Akun Chung-		Temperature(°C):24		Humidity(%):65	
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) 1 2 3 4 5 6 7 8 5310.00 5310.00 5350.00 5350.00 10620.00 10620.00 15930.00 15930.00 Emission level dBuV/m 96.65 109.78 48.77 63.52 42.01 54.78 42.76 55.84 Limit dBuV/m 54.00 54.00 54.00 54.00 54.00 54.00 54.00 74.00 Margin dB -5.23 -10.48 -11.99 -19.22 -11.24 -18.16 SA reading dBuV 96.59 109.72 48.63 63.38 33.20 45.97 37.11 50.19 Factor dB/m 0.06 0.06 0.14 0.14 8.81 8.81 5.65 5.65 Remark Average Peak Average Peak Average Peak Average Peak ANT High cm Turn Table deg 215 215 215 215 100 100 100 100 237 237 237 237 121 121 202 202 </							



Modulation		ax HE40			Test Freq. (MHz)		5310																																																																																																					
Polarization		Vertical																																																																																																										
Test By		:Akun Chung-		Temperature(°C):24		Humidity(%):65																																																																																																						
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5310.00</td><td>102.49</td><td></td><td></td><td>102.43</td><td>0.06</td><td>Average</td><td>163</td><td>143</td></tr><tr><td>2</td><td>*</td><td>5310.00</td><td>115.53</td><td></td><td></td><td>115.47</td><td>0.06</td><td>Peak</td><td>163</td><td>143</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>53.81</td><td>54.00</td><td>-0.19</td><td>53.67</td><td>0.14</td><td>Average</td><td>163</td><td>143</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>71.00</td><td>74.00</td><td>-3.00</td><td>70.86</td><td>0.14</td><td>Peak</td><td>163</td><td>143</td></tr><tr><td>5</td><td></td><td>10620.00</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>33.22</td><td>8.81</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td></td><td>10620.00</td><td>54.71</td><td>74.00</td><td>-19.29</td><td>45.90</td><td>8.81</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>7</td><td></td><td>15930.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>37.23</td><td>5.65</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>8</td><td></td><td>15930.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>51.16</td><td>5.65</td><td>Peak</td><td>100</td><td>79</td></tr></tbody></table>												Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	5310.00	102.49			102.43	0.06	Average	163	143	2	*	5310.00	115.53			115.47	0.06	Peak	163	143	3		5350.00	53.81	54.00	-0.19	53.67	0.14	Average	163	143	4		5350.00	71.00	74.00	-3.00	70.86	0.14	Peak	163	143	5		10620.00	42.03	54.00	-11.97	33.22	8.81	Average	100	155	6		10620.00	54.71	74.00	-19.29	45.90	8.81	Peak	100	155	7		15930.00	42.88	54.00	-11.12	37.23	5.65	Average	100	79	8		15930.00	56.81	74.00	-17.19	51.16	5.65	Peak	100	79
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																		
1	*	5310.00	102.49			102.43	0.06	Average	163	143																																																																																																		
2	*	5310.00	115.53			115.47	0.06	Peak	163	143																																																																																																		
3		5350.00	53.81	54.00	-0.19	53.67	0.14	Average	163	143																																																																																																		
4		5350.00	71.00	74.00	-3.00	70.86	0.14	Peak	163	143																																																																																																		
5		10620.00	42.03	54.00	-11.97	33.22	8.81	Average	100	155																																																																																																		
6		10620.00	54.71	74.00	-19.29	45.90	8.81	Peak	100	155																																																																																																		
7		15930.00	42.88	54.00	-11.12	37.23	5.65	Average	100	79																																																																																																		
8		15930.00	56.81	74.00	-17.19	51.16	5.65	Peak	100	79																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																												



Modulation	ax HE40	Test Freq. (MHz)	5510																																																																																										
Polarization	Horizontal																																																																																												
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>46.24</td><td>54.00</td><td>-7.76</td><td>45.66</td><td>0.58</td><td>Average</td><td>184</td><td>240</td></tr><tr><td>2</td><td>5460.00</td><td>61.24</td><td>74.00</td><td>-12.76</td><td>60.66</td><td>0.58</td><td>Peak</td><td>184</td><td>240</td></tr><tr><td>3</td><td>5470.00</td><td>63.26</td><td>68.20</td><td>-4.94</td><td>62.67</td><td>0.59</td><td>Peak</td><td>184</td><td>240</td></tr><tr><td>4 *</td><td>5510.00</td><td>96.44</td><td></td><td></td><td>95.77</td><td>0.67</td><td>Average</td><td>184</td><td>240</td></tr><tr><td>5 *</td><td>5510.00</td><td>109.71</td><td></td><td></td><td>109.04</td><td>0.67</td><td>Peak</td><td>184</td><td>240</td></tr><tr><td>6</td><td>11020.00</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>33.38</td><td>9.14</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>7</td><td>11020.00</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>46.09</td><td>9.14</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>8</td><td>16530.00</td><td>57.20</td><td>68.20</td><td>-11.00</td><td>50.34</td><td>6.86</td><td>Peak</td><td>100</td><td>217</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.24	54.00	-7.76	45.66	0.58	Average	184	240	2	5460.00	61.24	74.00	-12.76	60.66	0.58	Peak	184	240	3	5470.00	63.26	68.20	-4.94	62.67	0.59	Peak	184	240	4 *	5510.00	96.44			95.77	0.67	Average	184	240	5 *	5510.00	109.71			109.04	0.67	Peak	184	240	6	11020.00	42.52	54.00	-11.48	33.38	9.14	Average	100	117	7	11020.00	55.23	74.00	-18.77	46.09	9.14	Peak	100	117	8	16530.00	57.20	68.20	-11.00	50.34	6.86	Peak	100	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	46.24	54.00	-7.76	45.66	0.58	Average	184	240																																																																																				
2	5460.00	61.24	74.00	-12.76	60.66	0.58	Peak	184	240																																																																																				
3	5470.00	63.26	68.20	-4.94	62.67	0.59	Peak	184	240																																																																																				
4 *	5510.00	96.44			95.77	0.67	Average	184	240																																																																																				
5 *	5510.00	109.71			109.04	0.67	Peak	184	240																																																																																				
6	11020.00	42.52	54.00	-11.48	33.38	9.14	Average	100	117																																																																																				
7	11020.00	55.23	74.00	-18.77	46.09	9.14	Peak	100	117																																																																																				
8	16530.00	57.20	68.20	-11.00	50.34	6.86	Peak	100	217																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	ax HE40	Test Freq. (MHz)	5510																																																																																										
Polarization	Vertical																																																																																												
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBUV/m) UNI 1~2-PK UNII 1~2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>49.86</td><td>54.00</td><td>-4.14</td><td>49.28</td><td>0.58</td><td>Average</td><td>165</td><td>142</td></tr><tr><td>2</td><td>5460.00</td><td>66.47</td><td>74.00</td><td>-7.53</td><td>65.89</td><td>0.58</td><td>Peak</td><td>165</td><td>142</td></tr><tr><td>3</td><td>5470.00</td><td>67.89</td><td>68.20</td><td>-0.31</td><td>67.30</td><td>0.59</td><td>Peak</td><td>165</td><td>142</td></tr><tr><td>4 *</td><td>5510.00</td><td>101.12</td><td></td><td></td><td>100.45</td><td>0.67</td><td>Average</td><td>165</td><td>142</td></tr><tr><td>5 *</td><td>5510.00</td><td>115.68</td><td></td><td></td><td>115.01</td><td>0.67</td><td>Peak</td><td>165</td><td>142</td></tr><tr><td>6</td><td>11020.00</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>33.18</td><td>9.14</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>7</td><td>11020.00</td><td>55.27</td><td>74.00</td><td>-18.73</td><td>46.13</td><td>9.14</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>8</td><td>16530.00</td><td>57.19</td><td>68.20</td><td>-11.01</td><td>50.33</td><td>6.86</td><td>Peak</td><td>100</td><td>67</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	49.86	54.00	-4.14	49.28	0.58	Average	165	142	2	5460.00	66.47	74.00	-7.53	65.89	0.58	Peak	165	142	3	5470.00	67.89	68.20	-0.31	67.30	0.59	Peak	165	142	4 *	5510.00	101.12			100.45	0.67	Average	165	142	5 *	5510.00	115.68			115.01	0.67	Peak	165	142	6	11020.00	42.32	54.00	-11.68	33.18	9.14	Average	100	143	7	11020.00	55.27	74.00	-18.73	46.13	9.14	Peak	100	143	8	16530.00	57.19	68.20	-11.01	50.33	6.86	Peak	100	67
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	49.86	54.00	-4.14	49.28	0.58	Average	165	142																																																																																				
2	5460.00	66.47	74.00	-7.53	65.89	0.58	Peak	165	142																																																																																				
3	5470.00	67.89	68.20	-0.31	67.30	0.59	Peak	165	142																																																																																				
4 *	5510.00	101.12			100.45	0.67	Average	165	142																																																																																				
5 *	5510.00	115.68			115.01	0.67	Peak	165	142																																																																																				
6	11020.00	42.32	54.00	-11.68	33.18	9.14	Average	100	143																																																																																				
7	11020.00	55.27	74.00	-18.73	46.13	9.14	Peak	100	143																																																																																				
8	16530.00	57.19	68.20	-11.01	50.33	6.86	Peak	100	67																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	ax HE40		Test Freq. (MHz)		5590																																																																																																					
Polarization	Horizontal																																																																																																									
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																										
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>43.18</td><td>0.58</td><td>Average</td><td>153</td><td>303</td></tr><tr><td>2</td><td>5460.00</td><td>56.18</td><td>74.00</td><td>-17.82</td><td>55.60</td><td>0.58</td><td>Peak</td><td>153</td><td>303</td></tr><tr><td>3</td><td>5470.00</td><td>55.91</td><td>68.20</td><td>-12.29</td><td>55.32</td><td>0.59</td><td>Peak</td><td>153</td><td>303</td></tr><tr><td>4 *</td><td>5590.00</td><td>99.24</td><td></td><td></td><td>98.62</td><td>0.62</td><td>Average</td><td>153</td><td>303</td></tr><tr><td>5 *</td><td>5590.00</td><td>112.07</td><td></td><td></td><td>111.45</td><td>0.62</td><td>Peak</td><td>153</td><td>303</td></tr><tr><td>6</td><td>5725.00</td><td>57.66</td><td>68.20</td><td>-10.54</td><td>56.73</td><td>0.93</td><td>Peak</td><td>153</td><td>303</td></tr><tr><td>7</td><td>11180.00</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>33.42</td><td>8.68</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>8</td><td>11180.00</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>46.49</td><td>8.68</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>9</td><td>16770.00</td><td>57.96</td><td>68.20</td><td>-10.24</td><td>50.98</td><td>6.98</td><td>Peak</td><td>100</td><td>234</td></tr></table>								Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.76	54.00	-10.24	43.18	0.58	Average	153	303	2	5460.00	56.18	74.00	-17.82	55.60	0.58	Peak	153	303	3	5470.00	55.91	68.20	-12.29	55.32	0.59	Peak	153	303	4 *	5590.00	99.24			98.62	0.62	Average	153	303	5 *	5590.00	112.07			111.45	0.62	Peak	153	303	6	5725.00	57.66	68.20	-10.54	56.73	0.93	Peak	153	303	7	11180.00	42.10	54.00	-11.90	33.42	8.68	Average	100	101	8	11180.00	55.17	74.00	-18.83	46.49	8.68	Peak	100	101	9	16770.00	57.96	68.20	-10.24	50.98	6.98	Peak	100	234
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																	
1	5460.00	43.76	54.00	-10.24	43.18	0.58	Average	153	303																																																																																																	
2	5460.00	56.18	74.00	-17.82	55.60	0.58	Peak	153	303																																																																																																	
3	5470.00	55.91	68.20	-12.29	55.32	0.59	Peak	153	303																																																																																																	
4 *	5590.00	99.24			98.62	0.62	Average	153	303																																																																																																	
5 *	5590.00	112.07			111.45	0.62	Peak	153	303																																																																																																	
6	5725.00	57.66	68.20	-10.54	56.73	0.93	Peak	153	303																																																																																																	
7	11180.00	42.10	54.00	-11.90	33.42	8.68	Average	100	101																																																																																																	
8	11180.00	55.17	74.00	-18.83	46.49	8.68	Peak	100	101																																																																																																	
9	16770.00	57.96	68.20	-10.24	50.98	6.98	Peak	100	234																																																																																																	
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																										



Modulation	ax HE40	Test Freq. (MHz)	5590
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Modulation		ax HE40			Test Freq. (MHz)		5670																																																																															
Polarization		Horizontal																																																																																				
Test By		:Akun Chung-		Temperature(°C):24		Humidity(%):65																																																																																
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>*</td><td>5670.00</td><td>97.00</td><td></td><td></td><td>96.34</td><td>0.66</td><td>Average</td><td>159</td><td>304</td></tr><tr><td>2</td><td>*</td><td>5670.00</td><td>109.68</td><td></td><td></td><td>109.02</td><td>0.66</td><td>Peak</td><td>159</td><td>304</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>62.04</td><td>68.20</td><td>-6.16</td><td>61.11</td><td>0.93</td><td>Peak</td><td>159</td><td>304</td></tr><tr><td>4</td><td></td><td>11340.00</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>33.21</td><td>8.52</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>5</td><td></td><td>11340.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>46.09</td><td>8.52</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>6</td><td></td><td>17010.00</td><td>58.86</td><td>68.20</td><td>-9.34</td><td>52.16</td><td>6.70</td><td>Peak</td><td>100</td><td>228</td></tr></table>												Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	5670.00	97.00			96.34	0.66	Average	159	304	2	*	5670.00	109.68			109.02	0.66	Peak	159	304	3		5725.00	62.04	68.20	-6.16	61.11	0.93	Peak	159	304	4		11340.00	41.73	54.00	-12.27	33.21	8.52	Average	100	106	5		11340.00	54.61	74.00	-19.39	46.09	8.52	Peak	100	106	6		17010.00	58.86	68.20	-9.34	52.16	6.70	Peak	100	228
		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																												
1	*	5670.00	97.00			96.34	0.66	Average	159	304																																																																												
2	*	5670.00	109.68			109.02	0.66	Peak	159	304																																																																												
3		5725.00	62.04	68.20	-6.16	61.11	0.93	Peak	159	304																																																																												
4		11340.00	41.73	54.00	-12.27	33.21	8.52	Average	100	106																																																																												
5		11340.00	54.61	74.00	-19.39	46.09	8.52	Peak	100	106																																																																												
6		17010.00	58.86	68.20	-9.34	52.16	6.70	Peak	100	228																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																						



Modulation		ax HE40			Test Freq. (MHz)		5670		
Polarization		Vertical							
Test By		:Akun Chung-		Temperature(°C):24		Humidity(%):65			
Level (dBuV/m) </									



Modulation	ax HE40	Test Freq. (MHz)	5710																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>45.21</td><td>54.00</td><td>-8.79</td><td>44.63</td><td>0.58</td><td>Average</td><td>151</td><td>306</td></tr><tr><td>2</td><td>5460.00</td><td>60.24</td><td>74.00</td><td>-13.76</td><td>59.66</td><td>0.58</td><td>Peak</td><td>151</td><td>306</td></tr><tr><td>3</td><td>5470.00</td><td>60.58</td><td>68.20</td><td>-7.62</td><td>59.99</td><td>0.59</td><td>Peak</td><td>151</td><td>306</td></tr><tr><td>4 *</td><td>5710.00</td><td>99.04</td><td></td><td></td><td>98.15</td><td>0.89</td><td>Average</td><td>151</td><td>306</td></tr><tr><td>5 *</td><td>5710.00</td><td>112.45</td><td></td><td></td><td>111.56</td><td>0.89</td><td>Peak</td><td>151</td><td>306</td></tr><tr><td>6</td><td>5850.00</td><td>60.16</td><td>68.20</td><td>-8.04</td><td>58.92</td><td>1.24</td><td>Peak</td><td>151</td><td>306</td></tr><tr><td>7</td><td>11420.00</td><td>42.21</td><td>54.00</td><td>-11.79</td><td>33.62</td><td>8.59</td><td>Average</td><td>100</td><td>98</td></tr><tr><td>8</td><td>11420.00</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>46.75</td><td>8.59</td><td>Peak</td><td>100</td><td>98</td></tr><tr><td>9</td><td>17130.00</td><td>58.11</td><td>68.20</td><td>-10.09</td><td>51.75</td><td>6.36</td><td>Peak</td><td>100</td><td>229</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.21	54.00	-8.79	44.63	0.58	Average	151	306	2	5460.00	60.24	74.00	-13.76	59.66	0.58	Peak	151	306	3	5470.00	60.58	68.20	-7.62	59.99	0.59	Peak	151	306	4 *	5710.00	99.04			98.15	0.89	Average	151	306	5 *	5710.00	112.45			111.56	0.89	Peak	151	306	6	5850.00	60.16	68.20	-8.04	58.92	1.24	Peak	151	306	7	11420.00	42.21	54.00	-11.79	33.62	8.59	Average	100	98	8	11420.00	55.34	74.00	-18.66	46.75	8.59	Peak	100	98	9	17130.00	58.11	68.20	-10.09	51.75	6.36	Peak	100	229
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	45.21	54.00	-8.79	44.63	0.58	Average	151	306																																																																																														
2	5460.00	60.24	74.00	-13.76	59.66	0.58	Peak	151	306																																																																																														
3	5470.00	60.58	68.20	-7.62	59.99	0.59	Peak	151	306																																																																																														
4 *	5710.00	99.04			98.15	0.89	Average	151	306																																																																																														
5 *	5710.00	112.45			111.56	0.89	Peak	151	306																																																																																														
6	5850.00	60.16	68.20	-8.04	58.92	1.24	Peak	151	306																																																																																														
7	11420.00	42.21	54.00	-11.79	33.62	8.59	Average	100	98																																																																																														
8	11420.00	55.34	74.00	-18.66	46.75	8.59	Peak	100	98																																																																																														
9	17130.00	58.11	68.20	-10.09	51.75	6.36	Peak	100	229																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5755																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66																																																																																																																	
Level (dBUV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>64.96</td><td>68.20</td><td>-3.24</td><td>64.42</td><td>0.54</td><td>Peak</td><td>318</td><td>261</td></tr><tr><td>2</td><td>5700.00</td><td>76.09</td><td>105.20</td><td>-29.11</td><td>75.23</td><td>0.86</td><td>Peak</td><td>318</td><td>261</td></tr><tr><td>3</td><td>5720.00</td><td>92.53</td><td>110.80</td><td>-18.27</td><td>91.62</td><td>0.91</td><td>Peak</td><td>318</td><td>261</td></tr><tr><td>4</td><td>5725.00</td><td>93.53</td><td>122.20</td><td>-28.67</td><td>92.60</td><td>0.93</td><td>Peak</td><td>318</td><td>261</td></tr><tr><td>5 *</td><td>5755.00</td><td>101.93</td><td></td><td></td><td>100.94</td><td>0.99</td><td>Average</td><td>318</td><td>261</td></tr><tr><td>6 *</td><td>5755.00</td><td>115.24</td><td></td><td></td><td>114.25</td><td>0.99</td><td>Peak</td><td>318</td><td>261</td></tr><tr><td>7</td><td>5925.00</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>55.55</td><td>1.49</td><td>Peak</td><td>318</td><td>261</td></tr><tr><td>8</td><td>11550.00</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>34.14</td><td>8.63</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>9</td><td>11550.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>45.66</td><td>8.63</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>10</td><td>17323.00</td><td>58.47</td><td>68.20</td><td>-9.73</td><td>52.05</td><td>6.42</td><td>Peak</td><td>100</td><td>161</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	64.96	68.20	-3.24	64.42	0.54	Peak	318	261	2	5700.00	76.09	105.20	-29.11	75.23	0.86	Peak	318	261	3	5720.00	92.53	110.80	-18.27	91.62	0.91	Peak	318	261	4	5725.00	93.53	122.20	-28.67	92.60	0.93	Peak	318	261	5 *	5755.00	101.93			100.94	0.99	Average	318	261	6 *	5755.00	115.24			114.25	0.99	Peak	318	261	7	5925.00	57.04	68.20	-11.16	55.55	1.49	Peak	318	261	8	11550.00	42.77	54.00	-11.23	34.14	8.63	Average	100	112	9	11550.00	54.29	74.00	-19.71	45.66	8.63	Peak	100	112	10	17323.00	58.47	68.20	-9.73	52.05	6.42	Peak	100	161
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	64.96	68.20	-3.24	64.42	0.54	Peak	318	261																																																																																																								
2	5700.00	76.09	105.20	-29.11	75.23	0.86	Peak	318	261																																																																																																								
3	5720.00	92.53	110.80	-18.27	91.62	0.91	Peak	318	261																																																																																																								
4	5725.00	93.53	122.20	-28.67	92.60	0.93	Peak	318	261																																																																																																								
5 *	5755.00	101.93			100.94	0.99	Average	318	261																																																																																																								
6 *	5755.00	115.24			114.25	0.99	Peak	318	261																																																																																																								
7	5925.00	57.04	68.20	-11.16	55.55	1.49	Peak	318	261																																																																																																								
8	11550.00	42.77	54.00	-11.23	34.14	8.63	Average	100	112																																																																																																								
9	11550.00	54.29	74.00	-19.71	45.66	8.63	Peak	100	112																																																																																																								
10	17323.00	58.47	68.20	-9.73	52.05	6.42	Peak	100	161																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	ax HE40	Test Freq. (MHz)	5755
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5795
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5795
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			

Unwanted Emissions (Above 1GHz) for ax HE80

Modulation	ax HE80	Test Freq. (MHz)	5210
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):21 Humidity(%):63			
Level (dBUV/m) <			



Modulation	ax HE80	Test Freq. (MHz)	5210
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) </			



Modulation	ax HE80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>46.55</td><td>54.00</td><td>-7.45</td><td>45.73</td><td>0.82</td><td>Average</td><td>217</td><td>242</td></tr><tr><td>2</td><td>5150.00</td><td>59.37</td><td>74.00</td><td>-14.63</td><td>58.55</td><td>0.82</td><td>Peak</td><td>217</td><td>242</td></tr><tr><td>3 *</td><td>5290.00</td><td>92.09</td><td></td><td></td><td>92.02</td><td>0.07</td><td>Average</td><td>217</td><td>242</td></tr><tr><td>4 *</td><td>5290.00</td><td>105.54</td><td></td><td></td><td>105.47</td><td>0.07</td><td>Peak</td><td>217</td><td>242</td></tr><tr><td>5</td><td>5350.00</td><td>46.40</td><td>54.00</td><td>-7.60</td><td>46.26</td><td>0.14</td><td>Average</td><td>217</td><td>242</td></tr><tr><td>6</td><td>5350.00</td><td>59.88</td><td>74.00</td><td>-14.12</td><td>59.74</td><td>0.14</td><td>Peak</td><td>217</td><td>242</td></tr><tr><td>7</td><td>10580.00</td><td>55.39</td><td>68.20</td><td>-12.81</td><td>46.61</td><td>8.78</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>8</td><td>15870.00</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>37.38</td><td>5.65</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>9</td><td>15870.00</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>50.26</td><td>5.65</td><td>Peak</td><td>100</td><td>220</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	46.55	54.00	-7.45	45.73	0.82	Average	217	242	2	5150.00	59.37	74.00	-14.63	58.55	0.82	Peak	217	242	3 *	5290.00	92.09			92.02	0.07	Average	217	242	4 *	5290.00	105.54			105.47	0.07	Peak	217	242	5	5350.00	46.40	54.00	-7.60	46.26	0.14	Average	217	242	6	5350.00	59.88	74.00	-14.12	59.74	0.14	Peak	217	242	7	10580.00	55.39	68.20	-12.81	46.61	8.78	Peak	100	105	8	15870.00	43.03	54.00	-10.97	37.38	5.65	Average	100	220	9	15870.00	55.91	74.00	-18.09	50.26	5.65	Peak	100	220
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	46.55	54.00	-7.45	45.73	0.82	Average	217	242																																																																																														
2	5150.00	59.37	74.00	-14.63	58.55	0.82	Peak	217	242																																																																																														
3 *	5290.00	92.09			92.02	0.07	Average	217	242																																																																																														
4 *	5290.00	105.54			105.47	0.07	Peak	217	242																																																																																														
5	5350.00	46.40	54.00	-7.60	46.26	0.14	Average	217	242																																																																																														
6	5350.00	59.88	74.00	-14.12	59.74	0.14	Peak	217	242																																																																																														
7	10580.00	55.39	68.20	-12.81	46.61	8.78	Peak	100	105																																																																																														
8	15870.00	43.03	54.00	-10.97	37.38	5.65	Average	100	220																																																																																														
9	15870.00	55.91	74.00	-18.09	50.26	5.65	Peak	100	220																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>47.54</td><td>54.00</td><td>-6.46</td><td>46.72</td><td>0.82</td><td>Average</td><td>181</td><td>142</td></tr><tr><td>2</td><td>5150.00</td><td>59.27</td><td>74.00</td><td>-14.73</td><td>58.45</td><td>0.82</td><td>Peak</td><td>181</td><td>142</td></tr><tr><td>3 *</td><td>5290.00</td><td>97.28</td><td></td><td></td><td>97.21</td><td>0.07</td><td>Average</td><td>181</td><td>142</td></tr><tr><td>4 *</td><td>5290.00</td><td>112.11</td><td></td><td></td><td>112.04</td><td>0.07</td><td>Peak</td><td>181</td><td>142</td></tr><tr><td>5</td><td>5350.00</td><td>53.12</td><td>54.00</td><td>-0.88</td><td>52.98</td><td>0.14</td><td>Average</td><td>181</td><td>142</td></tr><tr><td>6</td><td>5350.00</td><td>66.11</td><td>74.00</td><td>-7.89</td><td>65.97</td><td>0.14</td><td>Peak</td><td>181</td><td>142</td></tr><tr><td>7</td><td>10580.00</td><td>54.56</td><td>68.20</td><td>-13.64</td><td>45.78</td><td>8.78</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>8</td><td>15870.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>37.25</td><td>5.65</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>9</td><td>15870.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>50.08</td><td>5.65</td><td>Peak</td><td>100</td><td>75</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	47.54	54.00	-6.46	46.72	0.82	Average	181	142	2	5150.00	59.27	74.00	-14.73	58.45	0.82	Peak	181	142	3 *	5290.00	97.28			97.21	0.07	Average	181	142	4 *	5290.00	112.11			112.04	0.07	Peak	181	142	5	5350.00	53.12	54.00	-0.88	52.98	0.14	Average	181	142	6	5350.00	66.11	74.00	-7.89	65.97	0.14	Peak	181	142	7	10580.00	54.56	68.20	-13.64	45.78	8.78	Peak	100	144	8	15870.00	42.90	54.00	-11.10	37.25	5.65	Average	100	75	9	15870.00	55.73	74.00	-18.27	50.08	5.65	Peak	100	75
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	47.54	54.00	-6.46	46.72	0.82	Average	181	142																																																																																														
2	5150.00	59.27	74.00	-14.73	58.45	0.82	Peak	181	142																																																																																														
3 *	5290.00	97.28			97.21	0.07	Average	181	142																																																																																														
4 *	5290.00	112.11			112.04	0.07	Peak	181	142																																																																																														
5	5350.00	53.12	54.00	-0.88	52.98	0.14	Average	181	142																																																																																														
6	5350.00	66.11	74.00	-7.89	65.97	0.14	Peak	181	142																																																																																														
7	10580.00	54.56	68.20	-13.64	45.78	8.78	Peak	100	144																																																																																														
8	15870.00	42.90	54.00	-11.10	37.25	5.65	Average	100	75																																																																																														
9	15870.00	55.73	74.00	-18.27	50.08	5.65	Peak	100	75																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE80	Test Freq. (MHz)	5530																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>47.06</td><td>54.00</td><td>-6.94</td><td>46.48</td><td>0.58</td><td>Average</td><td>210</td><td>237</td></tr><tr><td>2</td><td>5460.00</td><td>58.90</td><td>74.00</td><td>-15.10</td><td>58.32</td><td>0.58</td><td>Peak</td><td>210</td><td>237</td></tr><tr><td>3</td><td>5470.00</td><td>59.66</td><td>68.20</td><td>-8.54</td><td>59.07</td><td>0.59</td><td>Peak</td><td>210</td><td>237</td></tr><tr><td>4 *</td><td>5530.00</td><td>91.81</td><td></td><td></td><td>91.13</td><td>0.68</td><td>Average</td><td>210</td><td>237</td></tr><tr><td>5 *</td><td>5530.00</td><td>104.82</td><td></td><td></td><td>104.14</td><td>0.68</td><td>Peak</td><td>210</td><td>237</td></tr><tr><td>6</td><td>5725.00</td><td>55.91</td><td>68.20</td><td>-12.29</td><td>54.98</td><td>0.93</td><td>Peak</td><td>210</td><td>237</td></tr><tr><td>7</td><td>11060.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>33.39</td><td>9.01</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>8</td><td>11060.00</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>45.98</td><td>9.01</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>9</td><td>16590.00</td><td>56.86</td><td>68.20</td><td>-11.34</td><td>50.27</td><td>6.59</td><td>Peak</td><td>100</td><td>197</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.06	54.00	-6.94	46.48	0.58	Average	210	237	2	5460.00	58.90	74.00	-15.10	58.32	0.58	Peak	210	237	3	5470.00	59.66	68.20	-8.54	59.07	0.59	Peak	210	237	4 *	5530.00	91.81			91.13	0.68	Average	210	237	5 *	5530.00	104.82			104.14	0.68	Peak	210	237	6	5725.00	55.91	68.20	-12.29	54.98	0.93	Peak	210	237	7	11060.00	42.40	54.00	-11.60	33.39	9.01	Average	100	101	8	11060.00	54.99	74.00	-19.01	45.98	9.01	Peak	100	101	9	16590.00	56.86	68.20	-11.34	50.27	6.59	Peak	100	197
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	47.06	54.00	-6.94	46.48	0.58	Average	210	237																																																																																														
2	5460.00	58.90	74.00	-15.10	58.32	0.58	Peak	210	237																																																																																														
3	5470.00	59.66	68.20	-8.54	59.07	0.59	Peak	210	237																																																																																														
4 *	5530.00	91.81			91.13	0.68	Average	210	237																																																																																														
5 *	5530.00	104.82			104.14	0.68	Peak	210	237																																																																																														
6	5725.00	55.91	68.20	-12.29	54.98	0.93	Peak	210	237																																																																																														
7	11060.00	42.40	54.00	-11.60	33.39	9.01	Average	100	101																																																																																														
8	11060.00	54.99	74.00	-19.01	45.98	9.01	Peak	100	101																																																																																														
9	16590.00	56.86	68.20	-11.34	50.27	6.59	Peak	100	197																																																																																														



Modulation	ax HE80	Test Freq. (MHz)	5530																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>52.73</td><td>54.00</td><td>-1.27</td><td>52.15</td><td>0.58</td><td>Average</td><td>180</td><td>148</td></tr><tr><td>2</td><td>5460.00</td><td>65.22</td><td>74.00</td><td>-8.78</td><td>64.64</td><td>0.58</td><td>Peak</td><td>180</td><td>148</td></tr><tr><td>3</td><td>5470.00</td><td>67.09</td><td>68.20</td><td>-1.11</td><td>66.50</td><td>0.59</td><td>Peak</td><td>180</td><td>148</td></tr><tr><td>4 *</td><td>5530.00</td><td>97.42</td><td></td><td></td><td>96.74</td><td>0.68</td><td>Average</td><td>180</td><td>148</td></tr><tr><td>5 *</td><td>5530.00</td><td>111.11</td><td></td><td></td><td>110.43</td><td>0.68</td><td>Peak</td><td>180</td><td>148</td></tr><tr><td>6</td><td>5725.00</td><td>57.37</td><td>68.20</td><td>-10.83</td><td>56.44</td><td>0.93</td><td>Peak</td><td>180</td><td>148</td></tr><tr><td>7</td><td>11060.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>33.48</td><td>9.01</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>8</td><td>11060.00</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>46.62</td><td>9.01</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>9</td><td>16590.00</td><td>58.12</td><td>68.20</td><td>-10.08</td><td>51.53</td><td>6.59</td><td>Peak</td><td>100</td><td>63</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	52.73	54.00	-1.27	52.15	0.58	Average	180	148	2	5460.00	65.22	74.00	-8.78	64.64	0.58	Peak	180	148	3	5470.00	67.09	68.20	-1.11	66.50	0.59	Peak	180	148	4 *	5530.00	97.42			96.74	0.68	Average	180	148	5 *	5530.00	111.11			110.43	0.68	Peak	180	148	6	5725.00	57.37	68.20	-10.83	56.44	0.93	Peak	180	148	7	11060.00	42.49	54.00	-11.51	33.48	9.01	Average	100	173	8	11060.00	55.63	74.00	-18.37	46.62	9.01	Peak	100	173	9	16590.00	58.12	68.20	-10.08	51.53	6.59	Peak	100	63
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	52.73	54.00	-1.27	52.15	0.58	Average	180	148																																																																																														
2	5460.00	65.22	74.00	-8.78	64.64	0.58	Peak	180	148																																																																																														
3	5470.00	67.09	68.20	-1.11	66.50	0.59	Peak	180	148																																																																																														
4 *	5530.00	97.42			96.74	0.68	Average	180	148																																																																																														
5 *	5530.00	111.11			110.43	0.68	Peak	180	148																																																																																														
6	5725.00	57.37	68.20	-10.83	56.44	0.93	Peak	180	148																																																																																														
7	11060.00	42.49	54.00	-11.51	33.48	9.01	Average	100	173																																																																																														
8	11060.00	55.63	74.00	-18.37	46.62	9.01	Peak	100	173																																																																																														
9	16590.00	58.12	68.20	-10.08	51.53	6.59	Peak	100	63																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							




Modulation	ax HE80	Test Freq. (MHz)	5610																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m) UNI 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>46.05</td><td>54.00</td><td>-7.95</td><td>45.47</td><td>0.58</td><td>Average</td><td>209</td><td>237</td></tr><tr><td>2</td><td>5460.00</td><td>59.58</td><td>74.00</td><td>-14.42</td><td>59.00</td><td>0.58</td><td>Peak</td><td>209</td><td>237</td></tr><tr><td>3</td><td>5470.00</td><td>59.40</td><td>68.20</td><td>-8.80</td><td>58.81</td><td>0.59</td><td>Peak</td><td>209</td><td>237</td></tr><tr><td>4 *</td><td>5610.00</td><td>95.61</td><td></td><td></td><td>95.01</td><td>0.60</td><td>Average</td><td>209</td><td>237</td></tr><tr><td>5 *</td><td>5610.00</td><td>108.36</td><td></td><td></td><td>107.76</td><td>0.60</td><td>Peak</td><td>209</td><td>237</td></tr><tr><td>6</td><td>5725.00</td><td>61.03</td><td>68.20</td><td>-7.17</td><td>60.10</td><td>0.93</td><td>Peak</td><td>209</td><td>237</td></tr><tr><td>7</td><td>11220.00</td><td>41.93</td><td>54.00</td><td>-12.07</td><td>33.32</td><td>8.61</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>8</td><td>11220.00</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>46.32</td><td>8.61</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>9</td><td>16830.00</td><td>57.74</td><td>68.20</td><td>-10.46</td><td>50.85</td><td>6.89</td><td>Peak</td><td>100</td><td>231</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.05	54.00	-7.95	45.47	0.58	Average	209	237	2	5460.00	59.58	74.00	-14.42	59.00	0.58	Peak	209	237	3	5470.00	59.40	68.20	-8.80	58.81	0.59	Peak	209	237	4 *	5610.00	95.61			95.01	0.60	Average	209	237	5 *	5610.00	108.36			107.76	0.60	Peak	209	237	6	5725.00	61.03	68.20	-7.17	60.10	0.93	Peak	209	237	7	11220.00	41.93	54.00	-12.07	33.32	8.61	Average	100	115	8	11220.00	54.93	74.00	-19.07	46.32	8.61	Peak	100	115	9	16830.00	57.74	68.20	-10.46	50.85	6.89	Peak	100	231
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	46.05	54.00	-7.95	45.47	0.58	Average	209	237																																																																																														
2	5460.00	59.58	74.00	-14.42	59.00	0.58	Peak	209	237																																																																																														
3	5470.00	59.40	68.20	-8.80	58.81	0.59	Peak	209	237																																																																																														
4 *	5610.00	95.61			95.01	0.60	Average	209	237																																																																																														
5 *	5610.00	108.36			107.76	0.60	Peak	209	237																																																																																														
6	5725.00	61.03	68.20	-7.17	60.10	0.93	Peak	209	237																																																																																														
7	11220.00	41.93	54.00	-12.07	33.32	8.61	Average	100	115																																																																																														
8	11220.00	54.93	74.00	-19.07	46.32	8.61	Peak	100	115																																																																																														
9	16830.00	57.74	68.20	-10.46	50.85	6.89	Peak	100	231																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE80	Test Freq. (MHz)	5610																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>50.09</td><td>54.00</td><td>-3.91</td><td>49.51</td><td>0.58</td><td>Average</td><td>186</td><td>148</td></tr><tr><td>2</td><td>5460.00</td><td>63.26</td><td>74.00</td><td>-10.74</td><td>62.68</td><td>0.58</td><td>Peak</td><td>186</td><td>148</td></tr><tr><td>3</td><td>5470.00</td><td>54.09</td><td>68.20</td><td>-14.11</td><td>53.50</td><td>0.59</td><td>Peak</td><td>186</td><td>148</td></tr><tr><td>4 *</td><td>5610.00</td><td>99.67</td><td></td><td></td><td>99.07</td><td>0.60</td><td>Average</td><td>186</td><td>148</td></tr><tr><td>5 *</td><td>5610.00</td><td>113.46</td><td></td><td></td><td>112.86</td><td>0.60</td><td>Peak</td><td>186</td><td>148</td></tr><tr><td>6</td><td>5725.00</td><td>64.21</td><td>68.20</td><td>-3.99</td><td>63.28</td><td>0.93</td><td>Peak</td><td>186</td><td>148</td></tr><tr><td>7</td><td>11220.00</td><td>42.04</td><td>54.00</td><td>-11.96</td><td>33.43</td><td>8.61</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>8</td><td>11220.00</td><td>55.15</td><td>74.00</td><td>-18.85</td><td>46.54</td><td>8.61</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>9</td><td>16830.00</td><td>57.81</td><td>68.20</td><td>-10.39</td><td>50.92</td><td>6.89</td><td>Peak</td><td>100</td><td>71</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	50.09	54.00	-3.91	49.51	0.58	Average	186	148	2	5460.00	63.26	74.00	-10.74	62.68	0.58	Peak	186	148	3	5470.00	54.09	68.20	-14.11	53.50	0.59	Peak	186	148	4 *	5610.00	99.67			99.07	0.60	Average	186	148	5 *	5610.00	113.46			112.86	0.60	Peak	186	148	6	5725.00	64.21	68.20	-3.99	63.28	0.93	Peak	186	148	7	11220.00	42.04	54.00	-11.96	33.43	8.61	Average	100	109	8	11220.00	55.15	74.00	-18.85	46.54	8.61	Peak	100	109	9	16830.00	57.81	68.20	-10.39	50.92	6.89	Peak	100	71
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	50.09	54.00	-3.91	49.51	0.58	Average	186	148																																																																																														
2	5460.00	63.26	74.00	-10.74	62.68	0.58	Peak	186	148																																																																																														
3	5470.00	54.09	68.20	-14.11	53.50	0.59	Peak	186	148																																																																																														
4 *	5610.00	99.67			99.07	0.60	Average	186	148																																																																																														
5 *	5610.00	113.46			112.86	0.60	Peak	186	148																																																																																														
6	5725.00	64.21	68.20	-3.99	63.28	0.93	Peak	186	148																																																																																														
7	11220.00	42.04	54.00	-11.96	33.43	8.61	Average	100	109																																																																																														
8	11220.00	55.15	74.00	-18.85	46.54	8.61	Peak	100	109																																																																																														
9	16830.00	57.81	68.20	-10.39	50.92	6.89	Peak	100	71																																																																																														

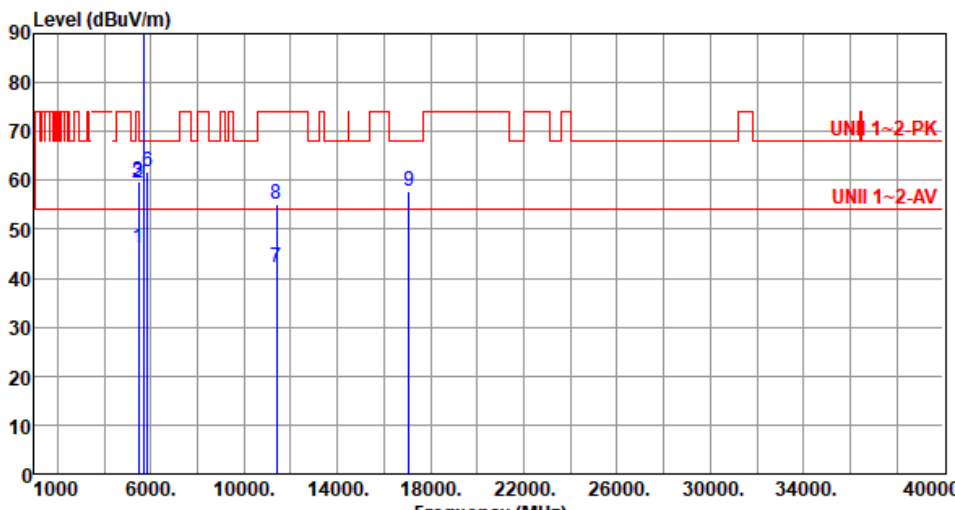

Modulation	ax HE80	Test Freq. (MHz)	5690																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.14</td><td>54.00</td><td>-7.86</td><td>45.56</td><td>0.58</td><td>Average</td><td>210</td><td>239</td></tr><tr><td>2</td><td>5460.00</td><td>59.46</td><td>74.00</td><td>-14.54</td><td>58.88</td><td>0.58</td><td>Peak</td><td>210</td><td>239</td></tr><tr><td>3</td><td>5470.00</td><td>59.68</td><td>68.20</td><td>-8.52</td><td>59.09</td><td>0.59</td><td>Peak</td><td>210</td><td>239</td></tr><tr><td>4 *</td><td>5690.00</td><td>95.45</td><td></td><td></td><td>94.66</td><td>0.79</td><td>Average</td><td>210</td><td>239</td></tr><tr><td>5 *</td><td>5690.00</td><td>108.21</td><td></td><td></td><td>107.42</td><td>0.79</td><td>Peak</td><td>210</td><td>239</td></tr><tr><td>6</td><td>5850.00</td><td>61.65</td><td>68.20</td><td>-6.55</td><td>60.41</td><td>1.24</td><td>Peak</td><td>210</td><td>239</td></tr><tr><td>7</td><td>11380.00</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>33.51</td><td>8.55</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>8</td><td>11380.00</td><td>54.98</td><td>74.00</td><td>-19.02</td><td>46.43</td><td>8.55</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>9</td><td>17070.00</td><td>57.82</td><td>68.20</td><td>-10.38</td><td>51.31</td><td>6.51</td><td>Peak</td><td>100</td><td>238</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.14	54.00	-7.86	45.56	0.58	Average	210	239	2	5460.00	59.46	74.00	-14.54	58.88	0.58	Peak	210	239	3	5470.00	59.68	68.20	-8.52	59.09	0.59	Peak	210	239	4 *	5690.00	95.45			94.66	0.79	Average	210	239	5 *	5690.00	108.21			107.42	0.79	Peak	210	239	6	5850.00	61.65	68.20	-6.55	60.41	1.24	Peak	210	239	7	11380.00	42.06	54.00	-11.94	33.51	8.55	Average	100	111	8	11380.00	54.98	74.00	-19.02	46.43	8.55	Peak	100	111	9	17070.00	57.82	68.20	-10.38	51.31	6.51	Peak	100	238
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	46.14	54.00	-7.86	45.56	0.58	Average	210	239																																																																																														
2	5460.00	59.46	74.00	-14.54	58.88	0.58	Peak	210	239																																																																																														
3	5470.00	59.68	68.20	-8.52	59.09	0.59	Peak	210	239																																																																																														
4 *	5690.00	95.45			94.66	0.79	Average	210	239																																																																																														
5 *	5690.00	108.21			107.42	0.79	Peak	210	239																																																																																														
6	5850.00	61.65	68.20	-6.55	60.41	1.24	Peak	210	239																																																																																														
7	11380.00	42.06	54.00	-11.94	33.51	8.55	Average	100	111																																																																																														
8	11380.00	54.98	74.00	-19.02	46.43	8.55	Peak	100	111																																																																																														
9	17070.00	57.82	68.20	-10.38	51.31	6.51	Peak	100	238																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	ax HE80	Test Freq. (MHz)	5690																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>47.67</td><td>54.00</td><td>-6.33</td><td>47.09</td><td>0.58</td><td>Average</td><td>145</td><td>143</td></tr><tr><td>2</td><td>5460.00</td><td>60.52</td><td>74.00</td><td>-13.48</td><td>59.94</td><td>0.58</td><td>Peak</td><td>145</td><td>143</td></tr><tr><td>3</td><td>5470.00</td><td>61.03</td><td>68.20</td><td>-7.17</td><td>60.44</td><td>0.59</td><td>Peak</td><td>145</td><td>143</td></tr><tr><td>4 *</td><td>5690.00</td><td>99.22</td><td></td><td></td><td>98.43</td><td>0.79</td><td>Average</td><td>145</td><td>143</td></tr><tr><td>5 *</td><td>5690.00</td><td>113.86</td><td></td><td></td><td>113.07</td><td>0.79</td><td>Peak</td><td>145</td><td>143</td></tr><tr><td>6</td><td>5850.00</td><td>64.38</td><td>68.20</td><td>-3.82</td><td>63.14</td><td>1.24</td><td>Peak</td><td>145</td><td>143</td></tr><tr><td>7</td><td>11380.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>33.61</td><td>8.55</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>8</td><td>11380.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>46.73</td><td>8.55</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>9</td><td>17070.00</td><td>57.92</td><td>68.20</td><td>-10.28</td><td>51.41</td><td>6.51</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.67	54.00	-6.33	47.09	0.58	Average	145	143	2	5460.00	60.52	74.00	-13.48	59.94	0.58	Peak	145	143	3	5470.00	61.03	68.20	-7.17	60.44	0.59	Peak	145	143	4 *	5690.00	99.22			98.43	0.79	Average	145	143	5 *	5690.00	113.86			113.07	0.79	Peak	145	143	6	5850.00	64.38	68.20	-3.82	63.14	1.24	Peak	145	143	7	11380.00	42.16	54.00	-11.84	33.61	8.55	Average	100	105	8	11380.00	55.28	74.00	-18.72	46.73	8.55	Peak	100	105	9	17070.00	57.92	68.20	-10.28	51.41	6.51	Peak	100	65
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	47.67	54.00	-6.33	47.09	0.58	Average	145	143																																																																																														
2	5460.00	60.52	74.00	-13.48	59.94	0.58	Peak	145	143																																																																																														
3	5470.00	61.03	68.20	-7.17	60.44	0.59	Peak	145	143																																																																																														
4 *	5690.00	99.22			98.43	0.79	Average	145	143																																																																																														
5 *	5690.00	113.86			113.07	0.79	Peak	145	143																																																																																														
6	5850.00	64.38	68.20	-3.82	63.14	1.24	Peak	145	143																																																																																														
7	11380.00	42.16	54.00	-11.84	33.61	8.55	Average	100	105																																																																																														
8	11380.00	55.28	74.00	-18.72	46.73	8.55	Peak	100	105																																																																																														
9	17070.00	57.92	68.20	-10.28	51.41	6.51	Peak	100	65																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							

Page No. : 87 of 92



Modulation	ax HE80	Test Freq. (MHz)	5775																																																																																																																																												
Polarization	Vertical																																																																																																																																														
Test By :Akun Chung Temperature(°C):21 Humidity(%):63																																																																																																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>67.80</td><td>68.20</td><td>-0.40</td><td>67.26</td><td>0.54</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>2</td><td>5700.00</td><td>82.11</td><td>105.20</td><td>-23.09</td><td>81.25</td><td>0.86</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>3</td><td>5720.00</td><td>87.21</td><td>110.80</td><td>-23.59</td><td>86.30</td><td>0.91</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>4</td><td>5725.00</td><td>88.07</td><td>122.20</td><td>-34.13</td><td>87.14</td><td>0.93</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>5 *</td><td>5775.00</td><td>99.04</td><td></td><td></td><td>97.99</td><td>1.05</td><td>Average</td><td>201</td><td>145</td></tr><tr><td>6 *</td><td>5775.00</td><td>114.69</td><td></td><td></td><td>113.64</td><td>1.05</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>7</td><td>5850.00</td><td>80.79</td><td>122.20</td><td>-41.41</td><td>79.55</td><td>1.24</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>8</td><td>5855.00</td><td>80.00</td><td>110.80</td><td>-30.80</td><td>78.74</td><td>1.26</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>9</td><td>5875.00</td><td>71.84</td><td>105.20</td><td>-33.36</td><td>70.48</td><td>1.36</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>10</td><td>5925.00</td><td>60.69</td><td>68.20</td><td>-7.51</td><td>59.20</td><td>1.49</td><td>Peak</td><td>201</td><td>145</td></tr><tr><td>11</td><td>11550.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>32.73</td><td>8.63</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>12</td><td>11550.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>46.58</td><td>8.63</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>13</td><td>17325.00</td><td>59.29</td><td>68.20</td><td>-8.91</td><td>52.86</td><td>6.43</td><td>Peak</td><td>100</td><td>76</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	67.80	68.20	-0.40	67.26	0.54	Peak	201	145	2	5700.00	82.11	105.20	-23.09	81.25	0.86	Peak	201	145	3	5720.00	87.21	110.80	-23.59	86.30	0.91	Peak	201	145	4	5725.00	88.07	122.20	-34.13	87.14	0.93	Peak	201	145	5 *	5775.00	99.04			97.99	1.05	Average	201	145	6 *	5775.00	114.69			113.64	1.05	Peak	201	145	7	5850.00	80.79	122.20	-41.41	79.55	1.24	Peak	201	145	8	5855.00	80.00	110.80	-30.80	78.74	1.26	Peak	201	145	9	5875.00	71.84	105.20	-33.36	70.48	1.36	Peak	201	145	10	5925.00	60.69	68.20	-7.51	59.20	1.49	Peak	201	145	11	11550.00	41.36	54.00	-12.64	32.73	8.63	Average	100	128	12	11550.00	55.21	74.00	-18.79	46.58	8.63	Peak	100	128	13	17325.00	59.29	68.20	-8.91	52.86	6.43	Peak	100	76
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																						
1	5650.00	67.80	68.20	-0.40	67.26	0.54	Peak	201	145																																																																																																																																						
2	5700.00	82.11	105.20	-23.09	81.25	0.86	Peak	201	145																																																																																																																																						
3	5720.00	87.21	110.80	-23.59	86.30	0.91	Peak	201	145																																																																																																																																						
4	5725.00	88.07	122.20	-34.13	87.14	0.93	Peak	201	145																																																																																																																																						
5 *	5775.00	99.04			97.99	1.05	Average	201	145																																																																																																																																						
6 *	5775.00	114.69			113.64	1.05	Peak	201	145																																																																																																																																						
7	5850.00	80.79	122.20	-41.41	79.55	1.24	Peak	201	145																																																																																																																																						
8	5855.00	80.00	110.80	-30.80	78.74	1.26	Peak	201	145																																																																																																																																						
9	5875.00	71.84	105.20	-33.36	70.48	1.36	Peak	201	145																																																																																																																																						
10	5925.00	60.69	68.20	-7.51	59.20	1.49	Peak	201	145																																																																																																																																						
11	11550.00	41.36	54.00	-12.64	32.73	8.63	Average	100	128																																																																																																																																						
12	11550.00	55.21	74.00	-18.79	46.58	8.63	Peak	100	128																																																																																																																																						
13	17325.00	59.29	68.20	-8.91	52.86	6.43	Peak	100	76																																																																																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																																															

Unwanted Emissions (Above 1GHz) for ax HE160

Modulation	ax HE160		Test Freq. (MHz)		5250	
Polarization	Horizontal					
Test By :Akun Chung Temperature(°C):21 Humidity(%):63						
Level (dBUV/m)						



Modulation	ax HE160	Test Freq. (MHz)	5250
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) <			



Modulation	ax HE160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m) <			



Modulation	ax HE160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m)			

Frequency: 5320 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	5.76	5.79	6.45	6.36
T20°CVmin	4.15	4.64	4.44	4.72
T50°CVnom	4.10	3.65	4.62	4.09
T40°CVnom	4.35	4.67	4.46	4.43
T30°CVnom	2.52	3.01	2.91	2.08
T20°CVnom	4.26	4.43	5.11	4.29
T10°CVnom	3.24	2.91	3.44	3.50
T0°CVnom	2.46	2.71	2.35	2.11
T-10°CVnom	2.79	2.99	3.10	2.74
T-20°CVnom	1.99	2.11	1.98	2.47
T-30°CVnom	0.43	0.38	0.80	0.54
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	4.95	5.37	4.95	5.05
T20°CVmin	5.67	5.75	5.89	5.71
T50°CVnom	3.72	4.03	4.46	4.13
T40°CVnom	3.72	4.23	3.49	4.16
T30°CVnom	2.84	3.43	3.45	2.43
T20°CVnom	4.16	4.24	4.92	3.88
T10°CVnom	3.84	4.02	4.00	4.21
T0°CVnom	2.82	3.21	3.25	2.89
T-10°CVnom	2.74	2.88	2.90	3.11
T-20°CVnom	2.57	2.57	2.50	3.07
T-30°CVnom	0.77	1.27	0.67	0.92
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	




Modulation Mode	11a	Test Freq. (MHz)	5200
Power Phase	Line		

Test by : Brad Wu

Temperature: 21°C

Humidity: 62%

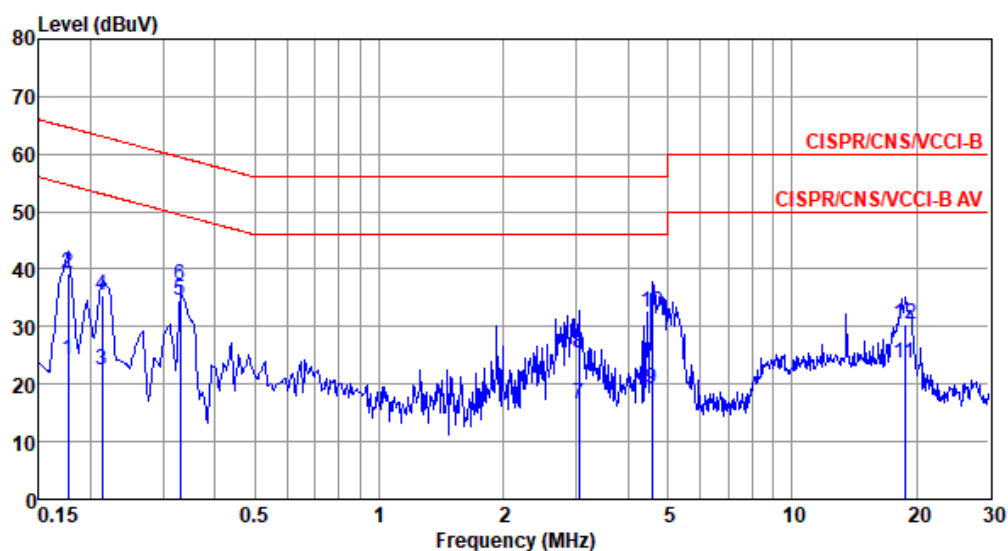

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.177	24.22	54.64	-30.42	14.29	9.68	0.06	0.19	Average
2	0.177	39.32	64.64	-25.32	29.39	9.68	0.06	0.19	QP
3	0.213	22.37	53.10	-30.73	12.43	9.68	0.06	0.20	Average
4	0.213	35.28	63.10	-27.82	25.34	9.68	0.06	0.20	QP
5*	0.330	34.50	49.44	-14.94	24.50	9.67	0.06	0.27	Average
6	0.330	37.08	59.44	-22.36	27.08	9.67	0.06	0.27	QP
7	3.041	16.46	46.00	-29.54	6.20	9.70	0.16	0.40	Average
8	3.041	25.27	56.00	-30.73	15.01	9.70	0.16	0.40	QP
9	4.574	19.11	46.00	-26.89	8.77	9.71	0.21	0.42	Average
10	4.574	32.51	56.00	-23.49	22.17	9.71	0.21	0.42	QP
11	18.721	23.56	50.00	-26.44	12.83	9.73	0.49	0.51	Average
12	18.721	30.31	60.00	-29.69	19.58	9.73	0.49	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	11a	Test Freq. (MHz)	5200
Power Phase	Neutral		

Test by : Brad Wu

Temperature: 21°C

Humidity: 62%

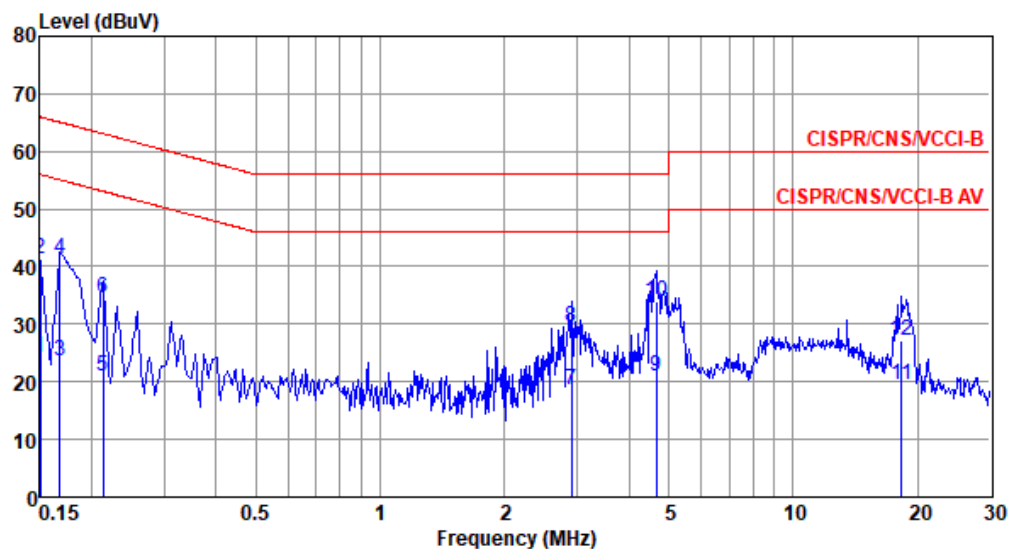

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	24.31	56.00	-31.69	14.46	9.61	0.06	0.18	Average
2	0.150	41.34	66.00	-24.66	31.49	9.61	0.06	0.18	QP
3	0.168	23.73	55.08	-31.35	13.88	9.61	0.06	0.18	Average
4	0.168	41.25	65.08	-23.83	31.40	9.61	0.06	0.18	QP
5	0.213	21.00	53.10	-32.10	11.13	9.61	0.06	0.20	Average
6	0.213	34.65	63.10	-28.45	24.78	9.61	0.06	0.20	QP
7	2.900	18.53	46.00	-27.47	8.35	9.63	0.16	0.39	Average
8	2.900	29.45	56.00	-26.55	19.27	9.63	0.16	0.39	QP
9	4.672	21.09	46.00	-24.91	10.81	9.65	0.21	0.42	Average
10*	4.672	33.94	56.00	-22.06	23.66	9.65	0.21	0.42	QP
11	18.328	19.60	50.00	-30.40	8.82	9.78	0.49	0.51	Average
12	18.328	27.15	60.00	-32.85	16.37	9.78	0.49	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	ax HE40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Brad Wu

Temperature: 21°C

Humidity: 62%

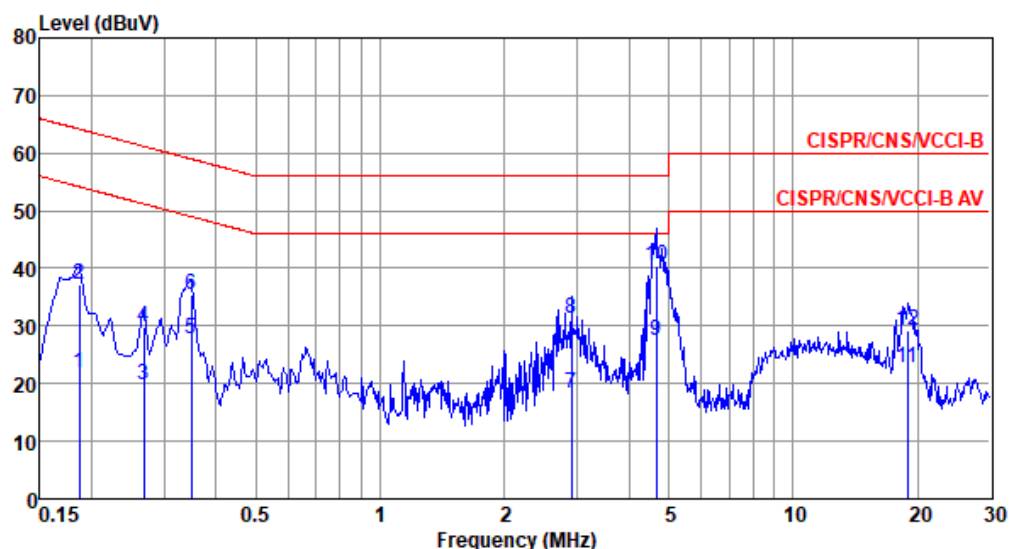

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	21.81	54.20	-32.39	11.88	9.68	0.06	0.19	Average
2	0.186	37.08	64.20	-27.12	27.15	9.68	0.06	0.19	QP
3	0.267	19.80	51.20	-31.40	9.82	9.68	0.06	0.24	Average
4	0.267	29.70	61.20	-31.50	19.72	9.68	0.06	0.24	QP
5	0.348	27.68	49.00	-21.32	17.67	9.67	0.06	0.28	Average
6	0.348	35.32	59.00	-23.68	25.31	9.67	0.06	0.28	QP
7	2.900	18.20	46.00	-27.80	7.95	9.70	0.16	0.39	Average
8	2.900	31.32	56.00	-24.68	21.07	9.70	0.16	0.39	QP
9	4.672	27.59	46.00	-18.41	17.25	9.71	0.21	0.42	Average
10*	4.672	40.36	56.00	-15.64	30.02	9.71	0.21	0.42	QP
11	18.920	22.75	50.00	-27.25	12.01	9.73	0.50	0.51	Average
12	18.920	29.23	60.00	-30.77	18.49	9.73	0.50	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	ax HE40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Brad Wu

Temperature: 21°C

Humidity: 62%

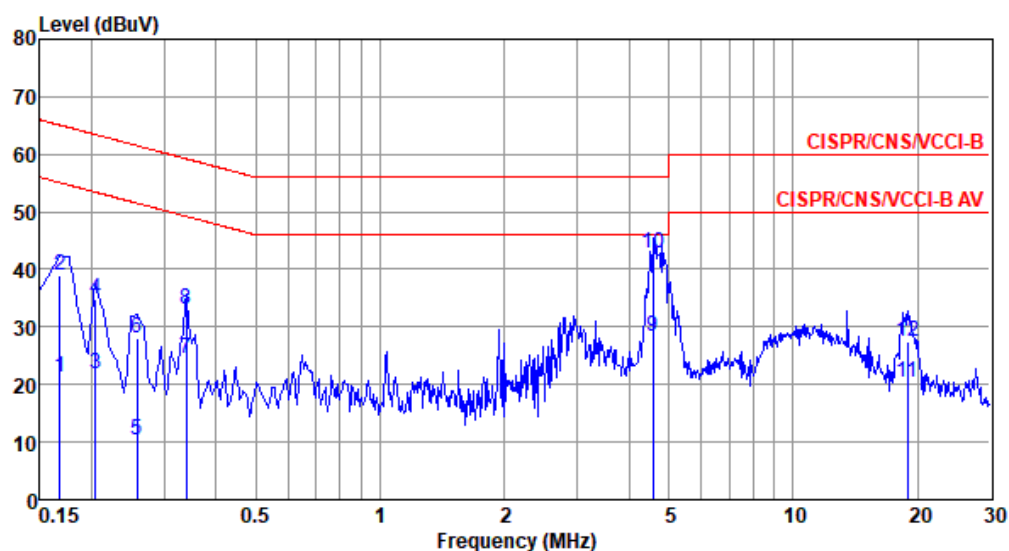

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.168	21.18	55.08	-33.90	11.33	9.61	0.06	0.18	Average
2	0.168	39.04	65.08	-26.04	29.19	9.61	0.06	0.18	QP
3	0.204	21.72	53.45	-31.73	11.86	9.61	0.06	0.19	Average
4	0.204	34.87	63.45	-28.58	25.01	9.61	0.06	0.19	QP
5	0.258	10.43	51.51	-41.08	0.53	9.61	0.06	0.23	Average
6	0.258	28.01	61.51	-33.50	18.11	9.61	0.06	0.23	QP
7	0.339	24.48	49.22	-24.74	14.54	9.61	0.06	0.27	Average
8	0.339	33.10	59.22	-26.12	23.16	9.61	0.06	0.27	QP
9	4.574	28.37	46.00	-17.63	18.09	9.65	0.21	0.42	Average
10*	4.574	42.71	56.00	-13.29	32.43	9.65	0.21	0.42	QP
11	18.920	20.34	50.00	-29.66	9.55	9.78	0.50	0.51	Average
12	18.920	27.35	60.00	-32.65	16.56	9.78	0.50	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).