

承诺书

Commitment Letter

客户名称: Customer name : 闪电猫 Shenzhen Smacat Electronic Technology Co.,Ltd

客户料号: Customer data : E05-182

我司型号: Our model number : RC-G25-2.5-3200GS -75MM

送样日期: Sample delivery date: 2024. 8. 30

供应方: Supply side: 东莞捷瑞思科技有限公司 Dongguan Jerice Technology Co., Ltd

绘制 Draw up	审核 Audit	批准 Permission granted
陆琳 Lu Lin	邓祥桂 Deng Xianggui	陆圣 Deng Xianggui

客户承认: Client acknowledges :

合格 Qualified	不合格 Disqualified	承认 Admit it
备注 Notes		

东莞捷瑞思科技有限公司

Dongguan Jerice Technology Co. , Ltd.

Tel:



Fax: 86+13632701380

地址: 东莞市大岭山镇朗湖路 96 号(金雄达科技园 L 栋 3 楼)

No. 96 Langhu Road, Dalingshan Town, Dongguan City (3rd Floor, Building L, Jinxiongda Technology Park)

客户名称 Customer name	客户料号 Customer data	我司型号 Our model number	版本 Version	日期 Date
闪电猫 Smacat	E05-182	RC-G25-2.5-3200GS -75MM	A0	2024.8.30

一、平面结构图： 单位:MM Floor plan: unit: M

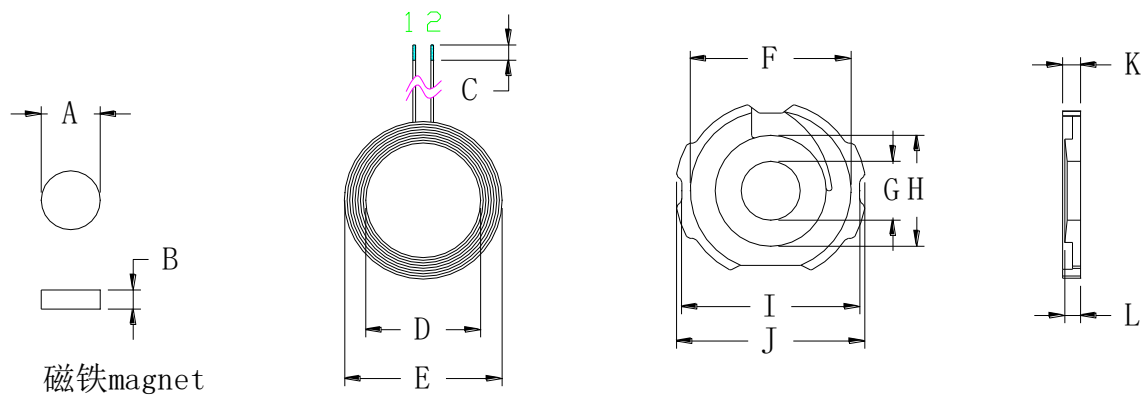

A	7.6±0.1
B	2.0±0.1
C	2±1
D	15±0.2
E	20.7±0.5
F	21±0.2
G	7.7±0.1
H	14.5±0.2
I	23.5±0.3
J	25±0.3
K	2.5±0.15
L	2.4±0.1 Center pillar height
M	75±2

二、产品参数： Product parameters:

脚 位 Feet	线 径 Line diameter	圈数 Number of turns	备 注 Notes
1- 2	0.08*24P	14	热风绞合线 Hot Air Strand

三、技术要求: Technical Requirements:

1. 把铜线的头和尾固定，防止铜线松或者断等现象。

Fix the head and tail of the copper wire to prevent loose or broken copper wire.

2. 按客户要求把多余的铜线的头部剪去，镀上锡，镀锡的深度为 1~3 mm。

According to customer requirements to cut the head of the excess copper wire, tinned, tinned depth of 1 ~ 3mm.

3. 在软的磁性片状物品上粘一些白胶，贴上铜线圈，在这过程中保证产品表面干净整洁。

Stick some white glue on the soft magnetic sheet and stick on the copper coil to ensure the clean and tidy surface of the product in the process.

4. 软的磁性片状物品上有圆孔，没有破损。

Soft magnetic flaky objects have round holes and are not damaged.

5. 附加工序（按客户要求）：在成品中间的圆孔装上 7.6x2.0mm 的磁铁，和在成品的背后再贴上直径为 16mm 的圆的双面胶，最后包装。

Additional process (according to customer requirements) : in the finished product in the middle of the round hole loaded with 7.6 x 2.0 mm magnet, and in the back of the finished product and then paste a diameter of 16 mm round double-sided adhesive, and finally packaging.

四、电性参数: Electrical parameter:

1. 电感值, Q 值: Inductance value,

$$PIN \quad 1 - 2 = 7.8\mu H \pm 0.2\mu H$$

$$Q \text{ 值} \geq 25$$

以上电感值以铨华 1062A 仪器，以 10KHZ/0.3Vrms 为标准或等同仪器。

Q 值以铨华 1062A 仪器，以 100KHZ/0.3Vrms 为标准或等同仪器

The above inductance values are based on chuanhua 1062A instrument, using 10KHZ/0.3 vrms as the standard or equivalent instrument. The Q value is based on chuanhua 1062A instrument and 100KHZ/0.3 vrms or equivalent instrument

五、材料清单： Bill of materials:

序号 NO	名称 Name	材质 Material Quality	供应商 Suppliers	备注 Notes
1	热风绞合线 Hot Air Strand	0.08X24P	维汉或等同 Uyghur or equivalent	
2	磁片 Disk	G25 软基材 Soft substrate	天通或等同 TX or equivalent	中柱Middle pillar 14.5 中 孔Middle hole 7.7
3	锡 Tin	高温环保 High temperature environmental protection	千岛或等同 Thond Island or equivalent	
4	白胶 White glue	BY882	宝月或等同 Treasure month or equivalent	
5	强磁 Strong magnetism	强度 strength 7.6* 2.03200GS ±100GS	联胜或等同 Win -win or equal	
6	双面胶 Double -sided glue	直径 16mm The diameter is 16mm	鸿辉或同等 Hung Fai or equivalent	513-16
7	套管 casing	0.8*70MM	外购 Purchase from outside	双套管 Double tube