




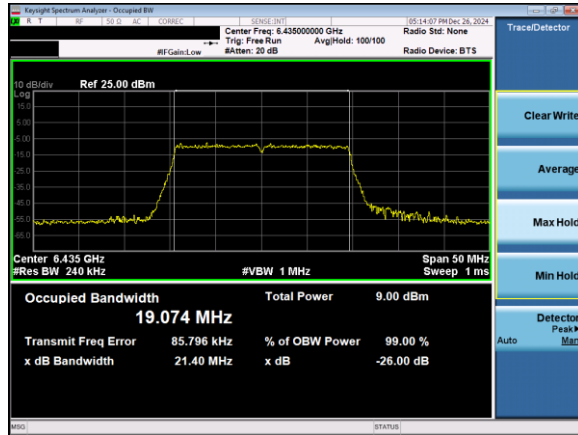


Plot 7-73. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 6) – Ch. 97)

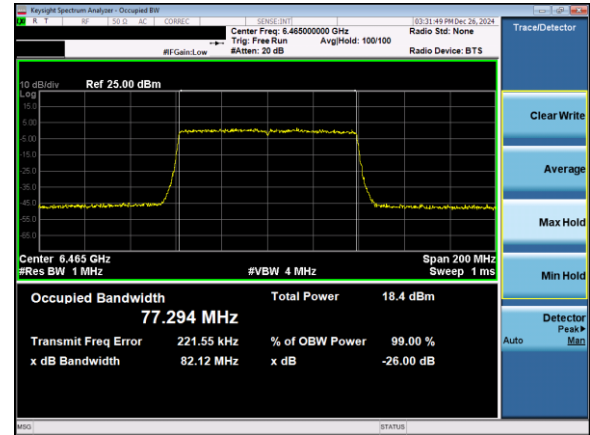

Plot 7-75. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 6) – Ch. 103)

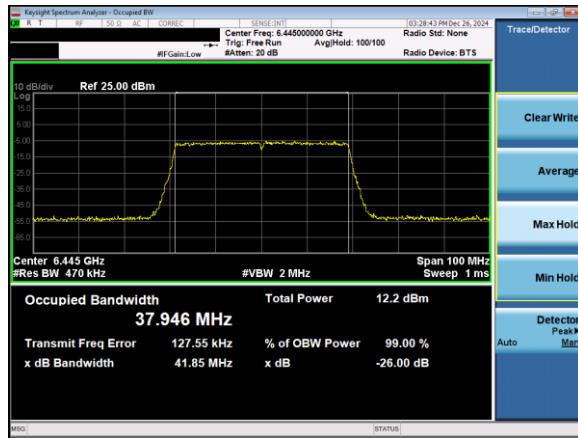


Plot 7-74. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 6) – Ch. 99)

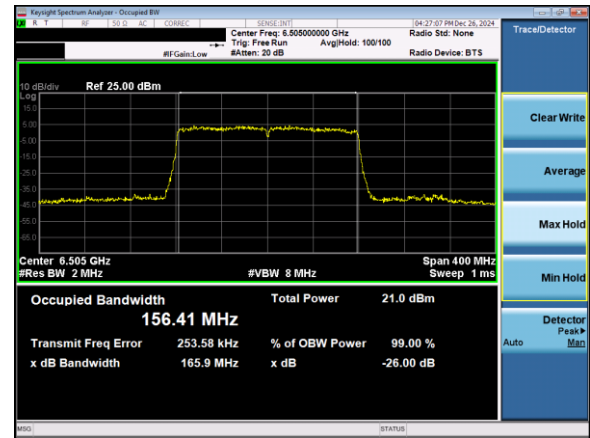


Plot 7-76. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 43 of 264


V 10.6 10/27/2023

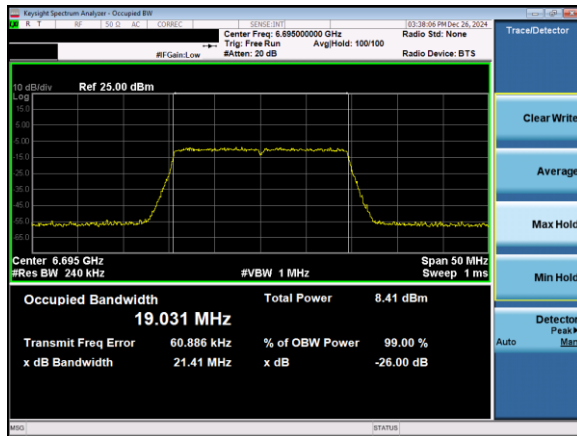


Plot 7-77. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 7) – Ch. 149)

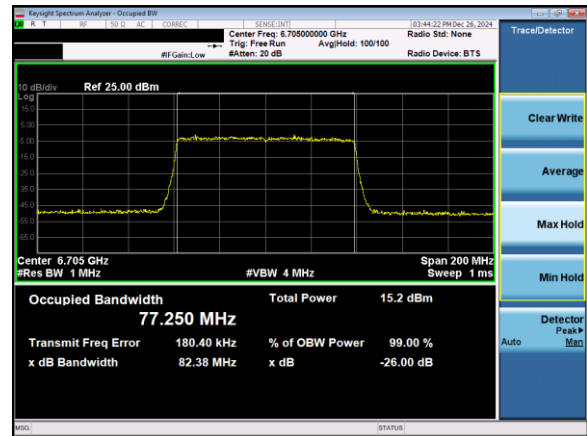

Plot 7-79. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 7) – Ch. 151)

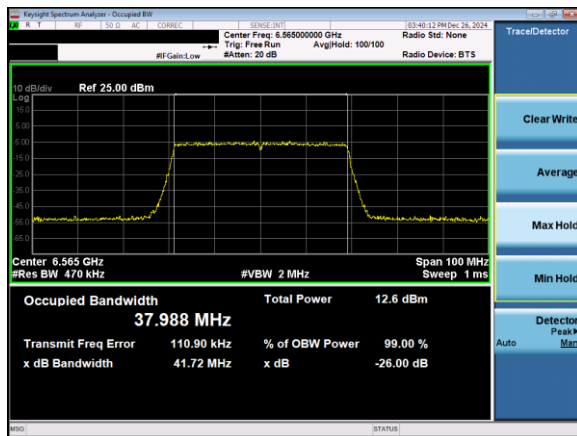


Plot 7-78. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 7) – Ch. 123)

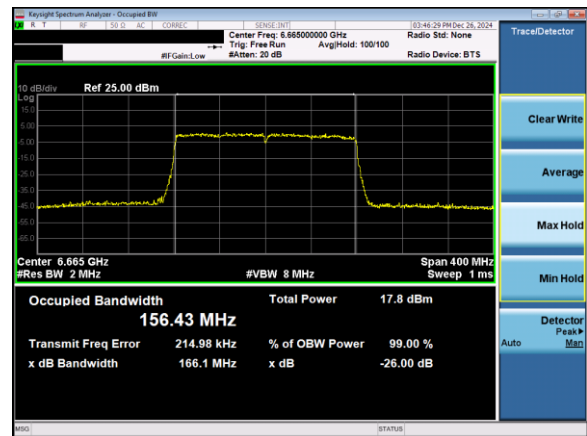


Plot 7-80. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 44 of 264


V 10.6 10/27/2023

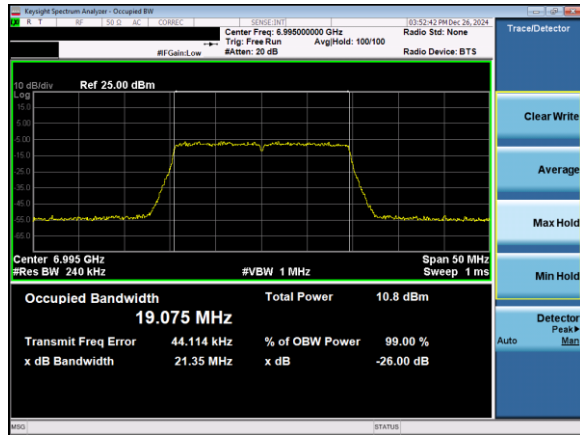


Plot 7-81. 26dB & 99% Bandwidth Plot Antenna 1b (20MHz 802.11ax (UNII Band 8) – Ch. 209)

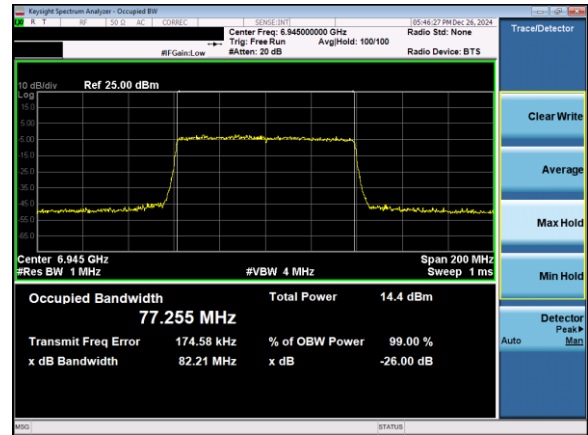

Plot 7-83. 26dB & 99% Bandwidth Plot Antenna 1b (80MHz 802.11ax (UNII Band 8) – Ch. 199)

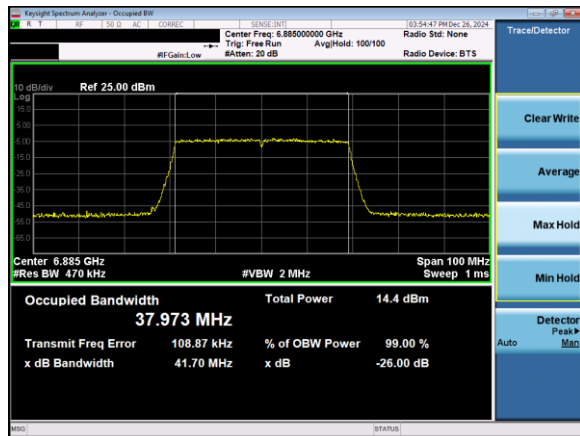

Plot 7-82. 26dB & 99% Bandwidth Plot Antenna 1b (40MHz 802.11ax (UNII Band 8) – Ch. 187)

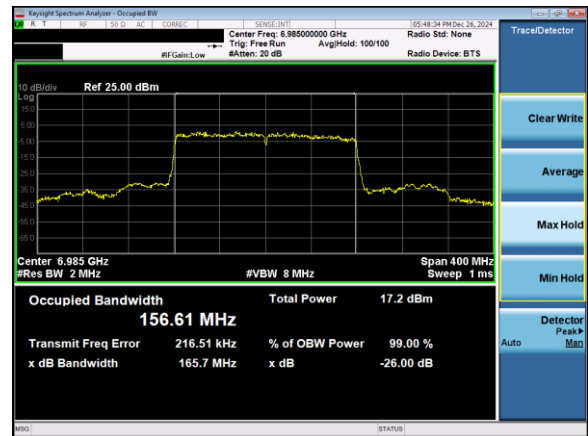

Plot 7-84. 26dB & 99% Bandwidth Plot Antenna 1b (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 45 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3 Conducted Output Power and Max EIRP Measurement

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.925 – 7.125GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm for Standard Power mode (SP), and 24dBm for Low Power Indoor mode (LPI).

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.3.2 Method PM-G
 KDB 789033 D02 v02r01 – Section E3)b) Method PM-G
 ANSI C63.10-2020 – Section 14.4 Measure-and-Sum Technique
 KDB 662911 v02r01 – Section E1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 46 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Antenna 5T Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	18.70	18.64	3.70	22.40	30.00	-7.60
	6175	45	AVG	18.78	18.97	3.20	22.17	30.00	-7.83
	6415	93	AVG	18.90	18.66	3.40	22.30	30.00	-7.70
	6435	97	AVG	17.96	17.83	4.00	21.96	30.00	-8.04
	6475	105	AVG	17.76	17.70	4.00	21.76	30.00	-8.24
	6515	113	AVG	17.79	17.81	4.00	21.81	30.00	-8.19
	6535	117	AVG	17.80	17.80	4.50	22.30	30.00	-7.70
	6695	149	AVG	17.74	17.67	4.50	22.24	30.00	-7.77
	6855	181	AVG	17.93	17.92	4.50	22.43	30.00	-7.57

Table 7-8. Antenna 5T 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	18.79	3.70	22.49	30.00	-7.51
	6165	43	AVG	18.80	3.20	22.00	30.00	-8.00
	6405	91	AVG	18.79	3.40	22.19	30.00	-7.81
	6445	99	AVG	17.91	4.00	21.91	30.00	-8.09
	6485	107	AVG	17.80	4.00	21.80	30.00	-8.20
	6525	115	AVG	17.82	4.50	22.32	30.00	-7.69
	6565	123	AVG	17.69	4.50	22.19	30.00	-7.81
	6725	155	AVG	17.77	4.50	22.27	30.00	-7.73
	6845	179	AVG	17.89	4.50	22.39	30.00	-7.61

Table 7-9. Antenna 5T 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	18.73	3.70	22.43	30.00	-7.57
	6145	39	AVG	18.80	3.20	22.00	30.00	-8.00
	6385	87	AVG	18.79	3.40	22.19	30.00	-7.81
	6465	103	AVG	17.69	4.00	21.69	30.00	-8.31
	6545	119	AVG	17.69	4.50	22.19	30.00	-7.81
	6705	151	AVG	17.81	4.50	22.31	30.00	-7.69
	6785	167	AVG	17.85	4.50	22.35	30.00	-7.65

Table 7-10. Antenna 5T 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 47 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	18.86	3.70	22.56	30.00	-7.44
	6185	47	AVG	18.76	3.20	21.96	30.00	-8.04
	6345	79	AVG	18.73	3.40	22.13	30.00	-7.87
	6505	111	AVG	17.85	4.00	21.85	30.00	-8.15
	6665	143	AVG	17.99	4.50	22.49	30.00	-7.51

Table 7-11. Antenna 5T 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 48 of 264

V 10.6 10/27/2023

7.3.2 Antenna 5T Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	4.53	4.94	3.70	8.64	24.00	-15.36
	6175	45	AVG	5.06	5.69	3.20	8.89	24.00	-15.11
	6415	93	AVG	4.73	5.21	3.40	8.61	24.00	-15.39
	6435	97	AVG	4.14	4.78	4.00	8.78	24.00	-15.22
	6475	105	AVG	4.49	4.67	4.00	8.67	24.00	-15.33
	6515	113	AVG	4.40	4.61	4.00	8.61	24.00	-15.39
	6535	117	AVG	3.67	4.27	4.50	8.77	24.00	-15.23
	6695	149	AVG	3.76	4.21	4.50	8.71	24.00	-15.29
	6875	185	AVG	3.46	3.70	4.50	8.20	24.00	-15.80
	6895	189	AVG	3.41	3.62	4.80	8.42	24.00	-15.58
	6995	209	AVG	3.25	3.75	4.80	8.55	24.00	-15.45
	7115	233	AVG	3.33	3.78	4.80	8.58	24.00	-15.42

Table 7-12. Antenna 5T 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	7.92	3.70	11.62	24.00	-12.38
	6165	43	AVG	8.75	3.20	11.95	24.00	-12.06
	6405	91	AVG	8.34	3.40	11.74	24.00	-12.27
	6445	99	AVG	7.85	4.00	11.85	24.00	-12.16
	6485	107	AVG	7.73	4.00	11.73	24.00	-12.27
	6525	115	AVG	7.15	4.50	11.65	24.00	-12.35
	6565	123	AVG	7.42	4.50	11.92	24.00	-12.08
	6725	155	AVG	7.27	4.50	11.77	24.00	-12.23
	6845	179	AVG	7.42	4.50	11.92	24.00	-12.08
	6885	187	AVG	6.87	4.80	11.67	24.00	-12.33
	7005	211	AVG	6.87	4.80	11.67	24.00	-12.34
	7085	227	AVG	6.81	4.80	11.61	24.00	-12.39

Table 7-13. Antenna 5T 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 49 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	10.75	3.70	14.45	24.00	-9.55
	6145	39	AVG	11.14	3.20	14.34	24.00	-9.66
	6385	87	AVG	10.60	3.40	14.00	24.00	-10.00
	6465	103	AVG	10.48	4.00	14.48	24.00	-9.52
	6545	119	AVG	9.93	4.50	14.43	24.00	-9.57
	6705	151	AVG	9.78	4.50	14.28	24.00	-9.72
	6865	183	AVG	9.14	4.50	13.64	24.00	-10.36
	6945	199	AVG	9.32	4.80	14.12	24.00	-9.88
	7025	215	AVG	9.18	4.80	13.98	24.00	-10.02

Table 7-14. Antenna 5T 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	13.12	3.70	16.82	24.00	-7.18
	6185	47	AVG	13.53	3.20	16.73	24.00	-7.28
	6345	79	AVG	13.35	3.40	16.75	24.00	-7.25
	6505	111	AVG	12.43	4.00	16.43	24.00	-7.57
	6665	143	AVG	12.20	4.50	16.70	24.00	-7.30
	6825	175	AVG	11.68	4.50	16.18	24.00	-7.83
	6985	207	AVG	11.83	4.80	16.63	24.00	-7.37

Table 7-15. Antenna 5T 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 50 of 264

V 10.6 10/27/2023

7.3.3 Antenna 3b Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	18.67	18.86	0.20	19.06	30.00	-10.94
	6175	45	AVG	18.82	18.85	-0.80	18.05	30.00	-11.95
	6415	93	AVG	18.90	18.84	-2.20	16.70	30.00	-13.30
	6435	97	AVG	17.69	17.90	-1.30	16.60	30.00	-13.40
	6475	105	AVG	17.99	17.82	-1.30	16.69	30.00	-13.31
	6515	113	AVG	17.66	17.89	-1.30	16.59	30.00	-13.41
	6535	117	AVG	17.63	17.86	-0.80	17.06	30.00	-12.94
	6695	149	AVG	17.83	17.61	-0.80	17.03	30.00	-12.97
	6855	181	AVG	17.67	17.72	-0.80	16.92	30.00	-13.08

Table 7-16. Antenna 3b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	18.86	0.20	19.06	30.00	-10.94
	6165	43	AVG	18.86	-0.80	18.06	30.00	-11.94
	6405	91	AVG	18.84	-2.20	16.64	30.00	-13.36
	6445	99	AVG	17.65	-1.30	16.35	30.00	-13.65
	6485	107	AVG	17.61	-1.30	16.31	30.00	-13.69
	6525	115	AVG	17.84	-0.80	17.04	30.00	-12.96
	6565	123	AVG	17.88	-0.80	17.08	30.00	-12.92
	6725	155	AVG	17.71	-0.80	16.91	30.00	-13.09
	6845	179	AVG	17.92	-0.80	17.12	30.00	-12.88

Table 7-17. Antenna 3b 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	18.77	0.20	18.97	30.00	-11.03
	6145	39	AVG	18.82	-0.80	18.02	30.00	-11.99
	6385	87	AVG	18.75	-2.20	16.55	30.00	-13.45
	6465	103	AVG	17.77	-1.30	16.47	30.00	-13.53
	6545	119	AVG	17.66	-0.80	16.86	30.00	-13.14
	6705	151	AVG	17.76	-0.80	16.96	30.00	-13.04
	6785	167	AVG	17.80	-0.80	17.00	30.00	-13.00

Table 7-18. Antenna 3b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	18.61	0.20	18.81	30.00	-11.19
	6185	47	AVG	18.92	-0.80	18.12	30.00	-11.88
	6345	79	AVG	18.74	-2.20	16.54	30.00	-13.46
	6505	111	AVG	17.60	-1.30	16.30	30.00	-13.70
	6665	143	AVG	17.94	-0.80	17.14	30.00	-12.86

Table 7-19. Antenna 3b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 51 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.4 Antenna 3b Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	4.56	4.99	0.20	5.19	24.00	-18.81
	6175	45	AVG	5.04	5.69	-0.80	4.89	24.00	-19.11
	6415	93	AVG	4.93	5.12	-2.20	2.92	24.00	-21.08
	6435	97	AVG	4.10	4.92	-1.30	3.62	24.00	-20.39
	6475	105	AVG	4.42	4.86	-1.30	3.56	24.00	-20.44
	6515	113	AVG	4.40	4.90	-1.30	3.60	24.00	-20.40
	6535	117	AVG	3.88	4.29	-0.80	3.49	24.00	-20.51
	6695	149	AVG	3.90	4.36	-0.80	3.56	24.00	-20.44
	6875	185	AVG	3.28	3.67	-0.80	2.87	24.00	-21.13
	6895	189	AVG	3.18	3.64	-1.00	2.64	24.00	-21.36
	6995	209	AVG	3.35	3.74	-1.00	2.74	24.00	-21.26
	7115	233	AVG	3.40	3.86	-1.00	2.86	24.00	-21.14

Table 7-20. Antenna 3b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	7.95	0.20	8.15	24.00	-15.85
	6165	43	AVG	8.61	-0.80	7.81	24.00	-16.19
	6405	91	AVG	8.47	-2.20	6.27	24.00	-17.73
	6445	99	AVG	7.75	-1.30	6.45	24.00	-17.55
	6485	107	AVG	7.64	-1.30	6.34	24.00	-17.66
	6525	115	AVG	7.28	-0.80	6.48	24.00	-17.52
	6565	123	AVG	7.36	-0.80	6.56	24.00	-17.44
	6725	155	AVG	7.49	-0.80	6.69	24.00	-17.31
	6845	179	AVG	7.38	-0.80	6.58	24.00	-17.42
	6885	187	AVG	6.76	-1.00	5.76	24.00	-18.24
	7005	211	AVG	6.67	-1.00	5.67	24.00	-18.33
	7085	227	AVG	6.71	-1.00	5.71	24.00	-18.29

Table 7-21. Antenna 3b 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 52 of 264

V 10.6 10/27/2023

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	10.72	0.20	10.92	24.00	-13.08
	6145	39	AVG	11.18	-0.80	10.38	24.00	-13.62
	6385	87	AVG	10.63	-2.20	8.43	24.00	-15.57
	6465	103	AVG	10.21	-1.30	8.91	24.00	-15.09
	6545	119	AVG	9.80	-0.80	9.00	24.00	-15.01
	6705	151	AVG	9.95	-0.80	9.15	24.00	-14.85
	6865	183	AVG	9.47	-0.80	8.67	24.00	-15.33
	6945	199	AVG	9.27	-1.00	8.27	24.00	-15.73
	7025	215	AVG	9.15	-1.00	8.15	24.00	-15.85

Table 7-22. Antenna 3b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	13.20	0.20	13.40	24.00	-10.60
	6185	47	AVG	13.65	-0.80	12.85	24.00	-11.15
	6345	79	AVG	13.13	-2.20	10.93	24.00	-13.07
	6505	111	AVG	12.14	-1.30	10.84	24.00	-13.16
	6665	143	AVG	12.46	-0.80	11.66	24.00	-12.34
	6825	175	AVG	11.68	-0.80	10.88	24.00	-13.12
	6985	207	AVG	11.62	-1.00	10.62	24.00	-13.38

Table 7-23. Antenna 3b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 53 of 264

V 10.6 10/27/2023

7.3.5 Antenna 1b Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	16.88	16.99	-0.40	16.59	30.00	-13.41
	6175	45	AVG	17.08	17.07	-1.10	15.98	30.00	-14.02
	6415	93	AVG	17.01	16.98	-0.80	16.21	30.00	-13.79
	6435	97	AVG	16.23	16.00	-1.10	15.13	30.00	-14.88
	6475	105	AVG	16.15	15.90	-1.10	15.05	30.00	-14.95
	6515	113	AVG	16.14	15.89	-1.10	15.04	30.00	-14.96
	6535	117	AVG	15.97	15.86	-0.40	15.57	30.00	-14.43
	6695	149	AVG	16.18	16.15	-0.40	15.78	30.00	-14.22
	6855	181	AVG	16.01	16.19	-0.40	15.79	30.00	-14.21

Table 7-24. Antenna 1b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	16.97	-0.40	16.57	30.00	-13.43
	6165	43	AVG	17.06	-1.10	15.96	30.00	-14.04
	6405	91	AVG	17.07	-0.80	16.27	30.00	-13.73
	6445	99	AVG	16.02	-1.10	14.92	30.00	-15.08
	6485	107	AVG	15.95	-1.10	14.85	30.00	-15.15
	6525	115	AVG	15.95	-0.40	15.55	30.00	-14.45
	6565	123	AVG	16.18	-0.40	15.78	30.00	-14.22
	6725	155	AVG	16.25	-0.40	15.85	30.00	-14.15
	6845	179	AVG	16.23	-0.40	15.83	30.00	-14.17

Table 7-25. Antenna 1b 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	16.94	-0.40	16.54	30.00	-13.46
	6145	39	AVG	17.10	-1.10	16.00	30.00	-14.00
	6385	87	AVG	17.00	-0.80	16.20	30.00	-13.80
	6465	103	AVG	15.91	-1.10	14.81	30.00	-15.19
	6545	119	AVG	16.23	-0.40	15.83	30.00	-14.17
	6705	151	AVG	15.99	-0.40	15.59	30.00	-14.41
	6785	167	AVG	16.02	-0.40	15.62	30.00	-14.38

Table 7-26. Antenna 1b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	16.88	-0.40	16.48	30.00	-13.52
	6185	47	AVG	16.94	-1.10	15.84	30.00	-14.16
	6345	79	AVG	17.03	-0.80	16.23	30.00	-13.78
	6505	111	AVG	15.98	-1.10	14.88	30.00	-15.12
	6665	143	AVG	16.10	-0.40	15.70	30.00	-14.30

Table 7-27. Antenna 1b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 54 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.6 Antenna 1b Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]		Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
				802.11a	802.11ax				
	5955	1	AVG	2.91	3.13	-0.40	2.73	24.00	-21.27
	6175	45	AVG	3.24	3.98	-1.10	2.88	24.00	-21.12
	6415	93	AVG	3.05	3.74	-0.80	2.94	24.00	-21.06
	6435	97	AVG	2.72	2.96	-1.10	1.86	24.00	-22.14
	6475	105	AVG	2.71	2.92	-1.10	1.82	24.00	-22.18
	6515	113	AVG	2.68	2.92	-1.10	1.82	24.00	-22.18
	6535	117	AVG	2.22	2.49	-0.40	2.09	24.00	-21.92
	6695	149	AVG	2.08	2.60	-0.40	2.20	24.00	-21.80
	6875	185	AVG	1.47	1.90	-0.40	1.50	24.00	-22.50
	6895	189	AVG	1.63	2.07	-0.60	1.47	24.00	-22.53
	6995	209	AVG	1.59	1.97	-0.60	1.37	24.00	-22.63
	7115	233	AVG	1.36	1.86	-0.60	1.26	24.00	-22.74

Table 7-28. Antenna 1b 20MHz BW 802.11a/ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5965	3	AVG	6.42	-0.40	6.02	24.00	-17.98
	6165	43	AVG	6.80	-1.10	5.70	24.00	-18.30
	6405	91	AVG	6.43	-0.80	5.63	24.00	-18.37
	6445	99	AVG	6.01	-1.10	4.91	24.00	-19.09
	6485	107	AVG	5.93	-1.10	4.83	24.00	-19.18
	6525	115	AVG	5.68	-0.40	5.28	24.00	-18.72
	6565	123	AVG	5.68	-0.40	5.28	24.00	-18.72
	6725	155	AVG	5.52	-0.40	5.12	24.00	-18.88
	6845	179	AVG	5.53	-0.40	5.13	24.00	-18.88
	6885	187	AVG	4.89	-0.60	4.29	24.00	-19.71
	7005	211	AVG	4.89	-0.60	4.29	24.00	-19.71
	7085	227	AVG	4.96	-0.60	4.36	24.00	-19.65

Table 7-29. Antenna 1b 40MHz 802.11ax(SU) BW (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 55 of 264

V 10.6 10/27/2023

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	5985	7	AVG	8.68	-0.40	8.28	24.00	-15.72
	6145	39	AVG	9.41	-1.10	8.31	24.00	-15.69
	6385	87	AVG	8.97	-0.80	8.17	24.00	-15.83
	6465	103	AVG	8.56	-1.10	7.46	24.00	-16.54
	6545	119	AVG	8.21	-0.40	7.81	24.00	-16.19
	6705	151	AVG	8.07	-0.40	7.67	24.00	-16.33
	6865	183	AVG	7.50	-0.40	7.10	24.00	-16.90
	6945	199	AVG	7.42	-0.60	6.82	24.00	-17.18
	7025	215	AVG	7.36	-0.60	6.76	24.00	-17.24

Table 7-30. Antenna 1b 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Detector	Conducted Power [dBm]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
	6025	15	AVG	11.12	-0.40	10.72	24.00	-13.28
	6185	47	AVG	11.79	-1.10	10.69	24.00	-13.31
	6345	79	AVG	11.53	-0.80	10.73	24.00	-13.27
	6505	111	AVG	10.49	-1.10	9.39	24.00	-14.61
	6665	143	AVG	10.38	-0.40	9.98	24.00	-14.02
	6825	175	AVG	9.93	-0.40	9.53	24.00	-14.47
	6985	207	AVG	10.11	-0.60	9.51	24.00	-14.49

Table 7-31. Antenna 1b 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 56 of 264

V 10.6 10/27/2023

7.3.7 CDD/SDM Primary Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	5955	1	SDM	AVG	18.75	18.98	21.88	2.29	24.17	30.00	-5.83
	6175	45	CDD	AVG	18.99	18.99	22.00	3.20	25.20	30.00	-4.80
	6415	93	CDD	AVG	18.71	18.69	21.71	3.40	25.11	30.00	-4.89
	6435	97	CDD	AVG	17.79	17.68	20.74	4.00	24.74	30.00	-5.26
	6475	105	CDD	AVG	17.73	17.61	20.68	4.00	24.68	30.00	-5.32
	6515	113	CDD	AVG	17.79	17.77	20.79	4.00	24.79	30.00	-5.21
	6535	117	CDD	AVG	17.71	17.62	20.68	4.50	25.18	30.00	-4.82
	6695	149	CDD	AVG	17.63	17.89	20.78	4.50	25.28	30.00	-4.72
	6855	181	CDD	AVG	17.87	17.79	20.84	4.50	25.34	30.00	-4.66

Table 7-32. CDD Primary 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	5965	3	CDD	AVG	18.80	18.72	21.77	3.70	25.47	30.00	-4.53
	6165	43	CDD	AVG	18.80	18.63	21.72	3.20	24.92	30.00	-5.08
	6405	91	CDD	AVG	18.78	18.70	21.75	3.40	25.15	30.00	-4.85
	6445	99	CDD	AVG	17.89	17.97	20.94	4.00	24.94	30.00	-5.06
	6485	107	CDD	AVG	17.78	17.86	20.83	4.00	24.83	30.00	-5.17
	6525	115	CDD	AVG	17.87	17.68	20.79	4.50	25.29	30.00	-4.71
	6565	123	CDD	AVG	17.70	17.87	20.79	4.50	25.29	30.00	-4.71
	6725	155	CDD	AVG	17.94	17.86	20.91	4.50	25.41	30.00	-4.59
	6845	179	CDD	AVG	17.87	17.74	20.81	4.50	25.31	30.00	-4.69

Table 7-33. CDD Primary 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	5985	7	CDD	AVG	18.73	18.86	21.80	3.70	25.50	30.00	-4.50
	6145	39	CDD	AVG	18.68	18.82	21.76	3.20	24.96	30.00	-5.04
	6385	87	CDD	AVG	18.86	18.84	21.86	3.40	25.26	30.00	-4.74
	6465	103	CDD	AVG	17.70	17.69	20.71	4.00	24.71	30.00	-5.29
	6545	119	CDD	AVG	17.71	17.82	20.78	4.50	25.28	30.00	-4.72
	6705	151	CDD	AVG	17.83	17.85	20.85	4.50	25.35	30.00	-4.65
	6785	167	CDD	AVG	17.88	17.81	20.86	4.50	25.36	30.00	-4.64

Table 7-34. CDD Primary 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	6025	15	CDD	AVG	18.83	18.89	21.87	3.70	25.57	30.00	-4.43
	6185	47	CDD	AVG	18.84	18.61	21.74	3.20	24.94	30.00	-5.06
	6345	79	CDD	AVG	18.85	18.75	21.81	3.40	25.21	30.00	-4.79
	6505	111	CDD	AVG	17.86	17.68	20.78	4.00	24.78	30.00	-5.22
	6665	143	CDD	AVG	17.73	17.78	20.76	4.50	25.26	30.00	-4.74

Table 7-35. CDD Primary 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device		Page 57 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.8 SDM Primary Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	5955	1	SDM	AVG	3.40	3.64	6.53	2.29	8.82	24.00	-15.18
	6175	45	SDM	AVG	4.17	4.18	7.18	1.65	8.83	24.00	-15.17
	6415	93	SDM	AVG	3.88	3.85	6.88	1.45	8.33	24.00	-15.67
	6435	97	SDM	AVG	3.58	3.60	6.60	2.11	8.71	24.00	-15.29
	6475	105	SDM	AVG	3.49	3.51	6.51	2.11	8.62	24.00	-15.38
	6515	113	SDM	AVG	3.67	3.50	6.60	2.11	8.71	24.00	-15.29
	6535	117	SDM	AVG	3.05	3.03	6.05	2.61	8.66	24.00	-15.34
	6695	149	SDM	AVG	2.93	3.12	6.03	2.61	8.64	24.00	-15.36
	6875	185	SDM	AVG	2.63	2.88	5.76	2.61	8.37	24.00	-15.63
	6895	189	SDM	AVG	2.62	2.87	5.76	2.80	8.56	24.00	-15.44
	6995	209	SDM	AVG	2.70	2.63	5.67	2.80	8.47	24.00	-15.53
	7115	233	SDM	AVG	2.71	2.77	5.75	2.80	8.55	24.00	-15.45

Table 7-36. SDM Primary 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	5965	3	SDM	AVG	6.50	6.54	9.53	2.29	11.82	24.00	-12.18
	6165	43	SDM	AVG	7.10	6.86	9.99	1.65	11.64	24.00	-12.36
	6405	91	SDM	AVG	6.93	6.82	9.88	1.45	11.33	24.00	-12.67
	6445	99	SDM	AVG	6.59	6.60	9.60	2.11	11.71	24.00	-12.29
	6485	107	SDM	AVG	6.43	6.44	9.44	2.11	11.55	24.00	-12.45
	6525	115	SDM	AVG	6.13	6.04	9.09	2.61	11.70	24.00	-12.30
	6565	123	SDM	AVG	6.09	5.92	9.02	2.61	11.63	24.00	-12.37
	6725	155	SDM	AVG	6.04	6.02	9.04	2.61	11.65	24.00	-12.35
	6845	179	SDM	AVG	5.99	6.22	9.12	2.61	11.73	24.00	-12.27
	6885	187	SDM	AVG	5.98	5.92	8.96	2.80	11.76	24.00	-12.24
	7005	211	SDM	AVG	5.69	5.74	8.72	2.80	11.52	24.00	-12.48
	7085	227	SDM	AVG	5.80	5.73	8.78	2.80	11.58	24.00	-12.42

Table 7-37. SDM Primary 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	5985	7	SDM	AVG	9.23	9.21	12.23	2.29	14.52	24.00	-9.48
	6145	39	SDM	AVG	9.52	9.37	12.45	1.65	14.10	24.00	-9.90
	6385	87	SDM	AVG	9.18	9.17	12.18	1.45	13.63	24.00	-10.37
	6465	103	SDM	AVG	8.97	9.17	12.08	2.11	14.19	24.00	-9.81
	6545	119	SDM	AVG	8.75	8.53	11.65	2.61	14.26	24.00	-9.74
	6705	151	SDM	AVG	8.53	8.57	11.56	2.61	14.17	24.00	-9.83
	6865	183	SDM	AVG	8.45	8.39	11.43	2.61	14.04	24.00	-9.96
	6945	199	SDM	AVG	8.14	8.22	11.19	2.80	13.99	24.00	-10.01
	7025	215	SDM	AVG	8.47	8.24	11.37	2.80	14.17	24.00	-9.83

Table 7-38. SDM Primary 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 58 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Antenna 5T	Antenna 3b	Summed				
	6025	15	SDM	AVG	11.74	11.46	14.61	2.29	16.90	24.00	-7.10
	6185	47	SDM	AVG	12.24	11.98	15.12	1.65	16.77	24.00	-7.23
	6345	79	SDM	AVG	11.65	12.00	14.84	1.45	16.29	24.00	-7.71
	6505	111	SDM	AVG	11.15	11.10	14.14	2.11	16.25	24.00	-7.75
	6665	143	SDM	AVG	11.07	11.10	14.10	2.61	16.71	24.00	-7.29
	6825	175	SDM	AVG	10.81	10.86	13.84	2.61	16.45	24.00	-7.55
	6985	207	SDM	AVG	10.91	10.91	13.92	2.80	16.72	24.00	-7.28

Table 7-39. SDM Primary 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 59 of 264

V 10.6 10/27/2023

7.3.9 CDD/SDM Diversity Conducted Output Power Measurements – SP

6GHz (20MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Antenna 1b	Summed				
	5955	1	SDM	AVG	18.75	17.11	21.02	2.12	23.14	30.00	-6.86
	6175	45	CDD	AVG	18.99	17.24	21.21	3.20	24.41	30.00	-5.59
	6415	93	CDD	AVG	18.71	17.24	21.05	3.40	24.45	30.00	-5.55
	6435	97	CDD	AVG	17.79	16.03	20.01	4.00	24.01	30.00	-5.99
	6475	105	CDD	AVG	17.73	15.97	19.94	4.00	23.94	30.00	-6.06
	6515	113	CDD	AVG	17.79	15.92	19.96	4.00	23.96	30.00	-6.04
	6535	117	CDD	AVG	17.71	16.16	20.01	4.50	24.51	30.00	-5.49
	6695	149	CDD	AVG	17.63	15.92	19.87	4.50	24.37	30.00	-5.63
	6855	181	CDD	AVG	17.87	16.07	20.07	4.50	24.57	30.00	-5.43

Table 7-40. CDD/SDM Diversity 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Antenna 1b	Summed				
	5965	3	CDD	AVG	18.80	17.11	21.05	3.70	24.75	30.00	-5.25
	6165	43	CDD	AVG	18.80	17.00	21.00	3.20	24.20	30.00	-5.80
	6405	91	CDD	AVG	18.78	17.13	21.04	3.40	24.44	30.00	-5.56
	6445	99	CDD	AVG	17.89	16.11	20.10	4.00	24.10	30.00	-5.90
	6485	107	CDD	AVG	17.78	15.99	19.99	4.00	23.99	30.00	-6.01
	6525	115	CDD	AVG	17.87	16.07	20.08	4.50	24.58	30.00	-5.42
	6565	123	CDD	AVG	17.70	16.05	19.96	4.50	24.46	30.00	-5.54
	6725	155	CDD	AVG	17.94	16.01	20.09	4.50	24.59	30.00	-5.41
	6845	179	CDD	AVG	17.87	16.17	20.11	4.50	24.61	30.00	-5.39

Table 7-41. CDD Diversity 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Antenna 1b	Summed				
	5985	7	CDD	AVG	18.73	16.98	20.95	3.70	24.65	30.00	-5.35
	6145	39	CDD	AVG	18.68	17.09	20.97	3.20	24.17	30.00	-5.83
	6385	87	CDD	AVG	18.86	17.11	21.08	3.40	24.48	30.00	-5.52
	6465	103	CDD	AVG	17.70	15.98	19.94	4.00	23.94	30.00	-6.06
	6545	119	CDD	AVG	17.71	16.19	20.03	4.50	24.53	30.00	-5.47
	6705	151	CDD	AVG	17.83	15.97	20.01	4.50	24.51	30.00	-5.49
	6785	167	CDD	AVG	17.88	16.02	20.06	4.50	24.56	30.00	-5.44

Table 7-42. CDD Diversity 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Antenna 1b	Summed				
	6025	15	CDD	AVG	18.83	17.13	21.07	3.70	24.77	30.00	-5.23
	6185	47	CDD	AVG	18.84	16.88	20.98	3.20	24.18	30.00	-5.82
	6345	79	CDD	AVG	18.85	16.95	21.01	3.40	24.41	30.00	-5.59
	6505	111	CDD	AVG	17.86	16.04	20.06	4.00	24.06	30.00	-5.94
	6665	143	CDD	AVG	17.73	15.89	19.92	4.50	24.42	30.00	-5.58

Table 7-43. CDD Diversity 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 60 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.10 SDM Diversity Conducted Output Power Measurements – LPI

6GHz (20MHz Bandwidth) (1+2)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Ant 1b	Summed				
	5955	1	SDM	AVG	3.40	1.93	5.74	2.12	7.86	24.00	-16.14
	6175	45	SDM	AVG	4.17	2.11	6.27	1.56	7.83	24.00	-16.17
	6415	93	SDM	AVG	3.88	2.13	6.11	1.79	7.90	24.00	-16.10
	6435	97	SDM	AVG	3.58	1.86	5.81	2.16	7.97	24.00	-16.03
	6475	105	SDM	AVG	3.49	1.86	5.76	2.16	7.92	24.00	-16.08
	6515	113	SDM	AVG	3.67	1.96	5.91	2.16	8.07	24.00	-15.93
	6535	117	SDM	AVG	3.05	1.30	5.27	2.71	7.98	24.00	-16.02
	6695	149	SDM	AVG	2.93	1.50	5.28	2.71	7.99	24.00	-16.01
	6875	185	SDM	AVG	2.63	1.21	4.99	2.71	7.70	24.00	-16.30
	6895	189	SDM	AVG	2.62	1.04	4.91	2.89	7.80	24.00	-16.20
	6995	209	SDM	AVG	2.70	0.97	4.93	2.89	7.82	24.00	-16.18
	7115	233	SDM	AVG	2.71	1.18	5.03	2.89	7.92	24.00	-16.08

Table 7-44. SDM Diversity 20MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (40MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Ant 1b	Summed				
	5965	3	SDM	AVG	6.50	4.91	8.79	2.12	10.91	24.00	-13.09
	6165	43	SDM	AVG	7.10	5.38	9.33	1.56	10.89	24.00	-13.11
	6405	91	SDM	AVG	6.93	5.16	9.14	1.79	10.93	24.00	-13.07
	6445	99	SDM	AVG	6.59	4.90	8.83	2.16	10.99	24.00	-13.01
	6485	107	SDM	AVG	6.43	4.78	8.69	2.16	10.85	24.00	-13.15
	6525	115	SDM	AVG	6.13	4.47	8.39	2.71	11.10	24.00	-12.90
	6565	123	SDM	AVG	6.09	4.16	8.24	2.71	10.95	24.00	-13.05
	6725	155	SDM	AVG	6.04	4.37	8.29	2.71	11.00	24.00	-13.00
	6845	179	SDM	AVG	5.99	4.36	8.26	2.71	10.97	24.00	-13.03
	6885	187	SDM	AVG	5.98	4.10	8.15	2.89	11.04	24.00	-12.96
	7005	211	SDM	AVG	5.69	4.08	7.97	2.89	10.86	24.00	-13.14
	7085	227	SDM	AVG	5.80	3.92	7.97	2.89	10.86	24.00	-13.14

Table 7-45. SDM Diversity 40MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

6GHz (80MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Ant 1b	Summed				
	5985	7	SDM	AVG	9.23	7.46	11.44	2.12	13.56	24.00	-10.44
	6145	39	SDM	AVG	9.52	7.86	11.78	1.56	13.34	24.00	-10.66
	6385	87	SDM	AVG	9.18	7.60	11.47	1.79	13.26	24.00	-10.74
	6465	103	SDM	AVG	8.97	7.30	11.23	2.16	13.39	24.00	-10.61
	6545	119	SDM	AVG	8.75	6.63	10.83	2.71	13.54	24.00	-10.46
	6705	151	SDM	AVG	8.53	6.64	10.70	2.71	13.41	24.00	-10.59
	6865	183	SDM	AVG	8.45	6.56	10.62	2.71	13.33	24.00	-10.67
	6945	199	SDM	AVG	8.14	6.55	10.42	2.89	13.31	24.00	-10.69
	7025	215	SDM	AVG	8.47	6.36	10.55	2.89	13.44	24.00	-10.56

Table 7-46. SDM Diversity 80MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 61 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6GHz (160MHz Bandwidth)	Frequency [MHz]	Channel	Mode	Detector	Conducted Power [dBm]			Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					Ant 5T	Ant 1b	Summed				
	6025	15	SDM	AVG	11.74	9.78	13.88	2.12	16.00	24.00	-8.00
	6185	47	SDM	AVG	12.24	10.10	14.31	1.56	15.87	24.00	-8.13
	6345	79	SDM	AVG	11.65	10.05	13.93	1.79	15.72	24.00	-8.28
	6505	111	SDM	AVG	11.15	9.28	13.33	2.16	15.49	24.00	-8.51
	6665	143	SDM	AVG	11.07	9.21	13.25	2.71	15.96	24.00	-8.04
	6825	175	SDM	AVG	10.81	9.08	13.04	2.71	15.75	24.00	-8.25
	6985	207	SDM	AVG	10.91	8.89	13.02	2.89	15.91	24.00	-8.09

Table 7-47. SDM Diversity 160MHz BW 802.11ax(SU) (UNII) Maximum Conducted Output Power

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 62 of 264

V 10.6 10/27/2023

Note:

Per ANSI C63.10-2020 and KDB 662911 v02r01 Section E1), the conducted powers at 5T and Antenna 3b were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Subclause 14.6.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = G_{ANT} + \text{Array Gain dBi}$$

Per ANSI C63.10-2020 Subclause 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log [(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample SDM Calculation:

At 5955MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 3.40 dBm for Antenna-5T and 3.64 dBm for Antenna-3b.

$$\text{Antenna 5T} + \text{Antenna 3b} = \text{SDM}$$

$$(3.40\text{dBm} + 3.64 \text{ dBm}) = (2.188\text{mW} + 2.312\text{mW}) = 4.500 \text{ mW} = 6.53 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5955MHz in 802.11ax (20MHz BW), SDM mode, the average SDM conducted power was calculated to be 6.53 dBm with directional gain of 2.29 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$6.53 \text{ dBm} + 2.29 \text{ dBi} = 8.82 \text{ dBm}$$

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 63 of 264

V 10.6 10/27/2023

7.4 Maximum Power Spectral Density

§15.407(a)(7)(8), RSS-248 [4.5.3], [4.5.5]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.925 – 7.125GHz band, the maximum permissible power spectral density must not exceed -1dBm e.i.r.p. in any 1-megahertz band for Low Power Indoor operating modes.

In the 5.925 – 6.425GHz & 6.525 – 6.875GHz bands, the maximum permissible power spectral density must not exceed 17dBm e.i.r.p. in any 1-megahertz band for Standard Power operating modes.

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2020 – Section 14.5.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span/RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates have been investigated, and tabular data has been reported. Only the worst-case plot per bandwidth was reported.

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 64 of 264

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.4.1 Antenna 5T Power Spectral Density Measurements – SP

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	24	8.45	3.70	12.15	17	-4.85
	6175	45	a	54	8.66	3.20	11.86	17	-5.14
	6415	93	a	24	8.62	3.40	12.02	17	-4.98
	5955	1	ax (20MHz)	135/143.4 (MCS11)	8.16	3.70	11.86	17	-5.14
	6175	45	ax (20MHz)	49/51.6 (MCS4)	8.39	3.20	11.59	17	-5.41
	6415	93	ax (20MHz)	135/143.4 (MCS11)	7.96	3.40	11.36	17	-5.64
	5965	3	ax (40MHz)	271/286.8 (MCS11)	5.19	3.70	8.89	17	-8.11
	6165	43	ax (40MHz)	271/286.8 (MCS11)	5.32	3.20	8.52	17	-8.48
	6405	91	ax (40MHz)	271/286.8 (MCS11)	5.42	3.40	8.82	17	-8.18
	5985	7	ax (80MHz)	567/600.5 (MCS11)	2.70	3.70	6.40	17	-10.60
	6145	39	ax (80MHz)	567/600.5 (MCS11)	2.54	3.20	5.74	17	-11.26
	6385	87	ax (80MHz)	204/216.2 (MCS4)	2.72	3.40	6.12	17	-10.88
	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	0.38	3.70	4.08	17	-12.92
	6181	47	ax (160MHz)	1020.8/1201 (MCS11)	0.07	3.20	3.27	17	-13.73
Band 6	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-0.03	3.40	3.37	17	-13.63
	6435	97	a	54	5.65	4.00	9.65	17	-7.36
	6475	105	a	54	5.69	4.00	9.69	17	-7.31
	6515	113	a	54	5.78	4.00	9.78	17	-7.22
	6435	97	ax (20MHz)	49/51.6 (MCS4)	5.07	4.00	9.07	17	-7.93
	6475	105	ax (20MHz)	135/143.4 (MCS11)	5.06	4.00	9.06	17	-7.94
	6515	113	ax (20MHz)	135/143.4 (MCS11)	5.28	4.00	9.28	17	-7.72
	6445	99	ax (40MHz)	271/286.8 (MCS11)	3.26	4.00	7.26	17	-9.74
	6485	107	ax (40MHz)	271/286.8 (MCS11)	3.29	4.00	7.29	17	-9.71
	6525	115	ax (40MHz)	271/286.8 (MCS11)	3.12	4.00	7.12	17	-9.88
Band 7	6465	103	ax (80MHz)	204/216.2 (MCS4)	0.12	4.00	4.12	17	-12.89
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	-3.03	4.00	0.97	17	-16.03
	6535	117	a	12	7.72	4.50	12.22	17	-4.78
	6695	149	a	54	7.94	4.50	12.44	17	-4.56
	6875	181	a	24	7.99	4.50	12.49	17	-4.51
	6535	117	ax (20MHz)	135/143.4 (MCS11)	7.55	4.50	12.05	17	-4.96
	6695	149	ax (20MHz)	49/51.6 (MCS4)	7.49	4.50	11.99	17	-5.01
	6875	181	ax (20MHz)	24/25.8 (MCS2)	7.48	4.50	11.98	17	-5.02
	6565	123	ax (40MHz)	98/103.2 (MCS4)	4.46	4.50	8.96	17	-8.04
	6725	155	ax (40MHz)	98/103.2 (MCS4)	4.68	4.50	9.18	17	-7.82
	6845	179	ax (40MHz)	271/286.8 (MCS11)	5.06	4.50	9.56	17	-7.44
	6545	135	ax (80MHz)	204/216.2 (MCS4)	1.60	4.50	6.10	17	-10.90
	6705	151	ax (80MHz)	567/600.5 (MCS11)	1.65	4.50	6.15	17	-10.85
	6865	167	ax (80MHz)	567/600.5 (MCS11)	1.91	4.50	6.41	17	-10.59
	6665	143	ax (160MHz)	1020.8/1201 (MCS11)	-0.66	4.50	3.85	17	-13.16


Table 7-48. Power Spectral Density Measurements Antenna 5T

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 65 of 264


V 10.6 10/27/2023

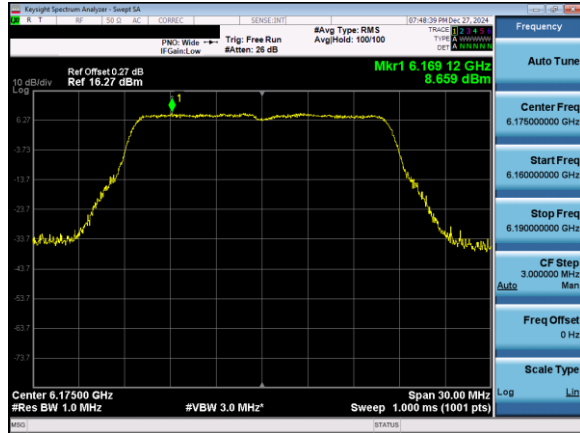


Plot 7-85. Power Spectral Density Plot Antenna 5T (20MHz 802.11a (UNII Band 5) – Ch. 45)

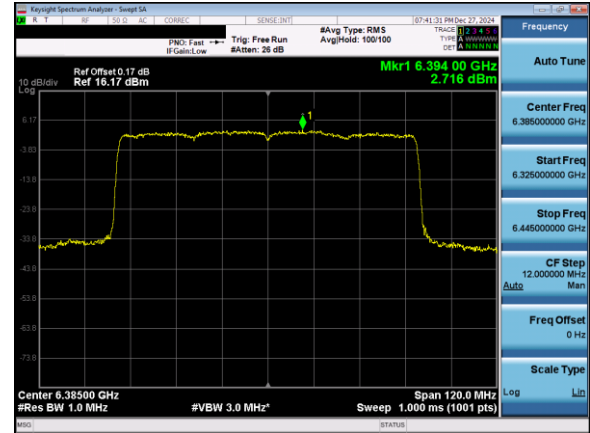

Plot 7-87. Power Spectral Density Plot Antenna 5T (80MHz 802.11ax (UNII Band 5) – Ch. 87)

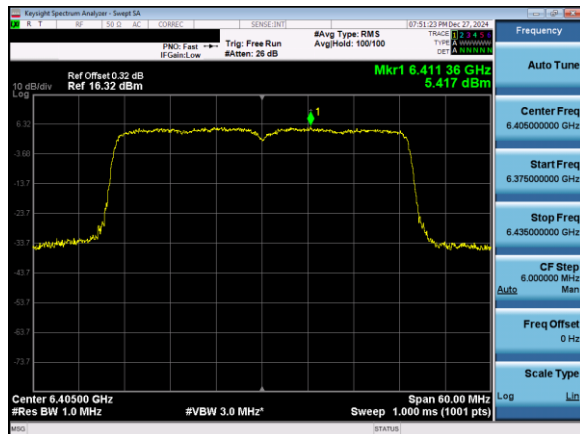


Plot 7-86. Power Spectral Density Plot Antenna 5T (40MHz 802.11ax (UNII Band 5) – Ch. 91)

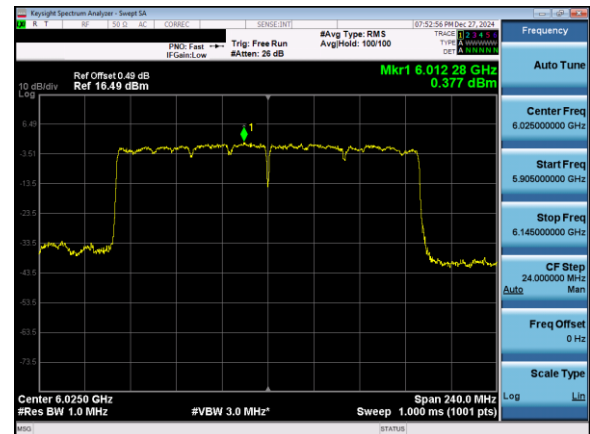


Plot 7-88. Power Spectral Density Plot Antenna 5T (160MHz 802.11ax (UNII Band 5) – Ch. 15)


FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 66 of 264

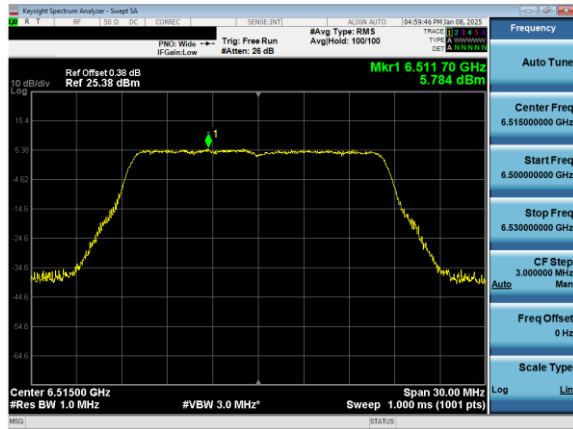


Plot 7-89. Power Spectral Density Plot Antenna 5T (20MHz 802.11a (UNII Band 6) – Ch. 113)

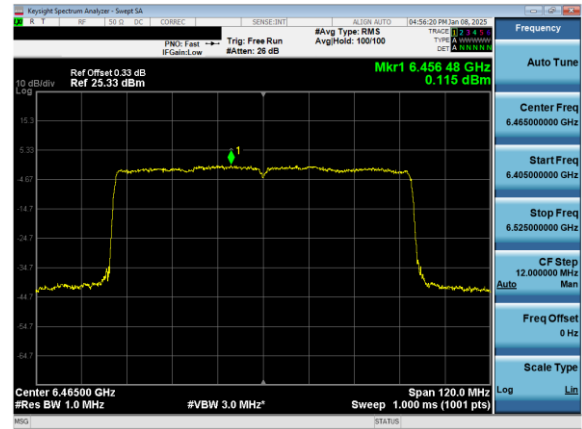

Plot 7-91. Power Spectral Density Plot Antenna 5T (80MHz 802.11ax (UNII Band 6) – Ch. 103)

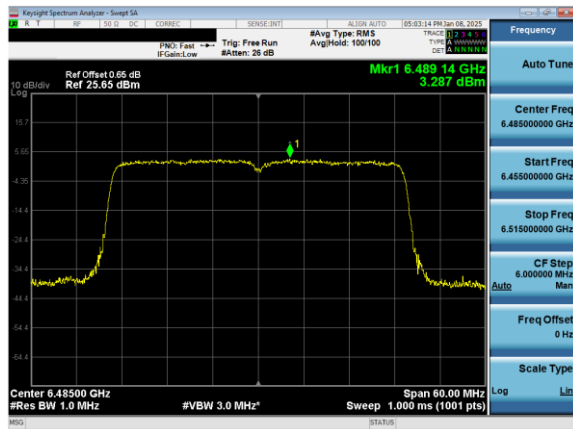


Plot 7-90. Power Spectral Density Plot Antenna 5T (40MHz 802.11ax (UNII Band 6) – Ch. 107)

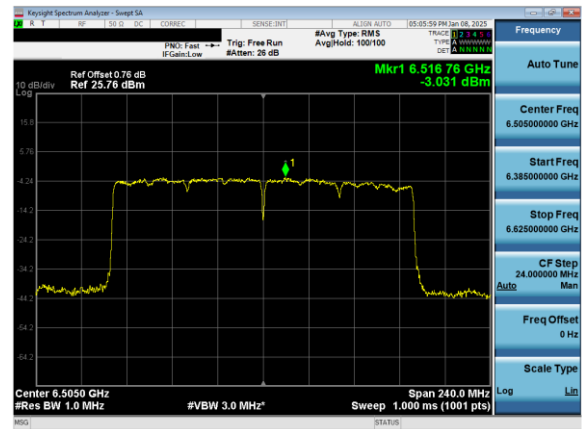


Plot 7-92. Power Spectral Density Plot Antenna 5T (160MHz 802.11ax (UNII Band 6) – Ch. 111)


FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 67 of 264

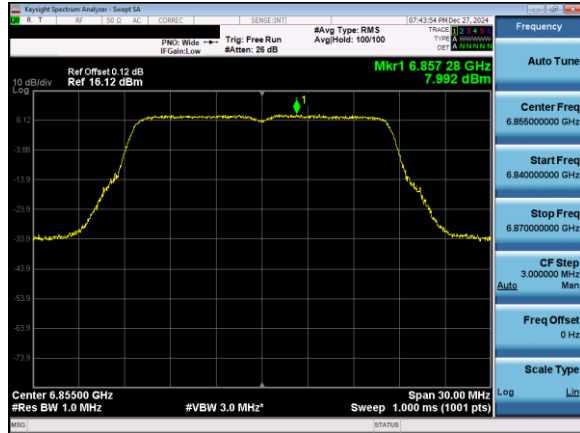


Plot 7-93. Power Spectral Density Plot Antenna 5T (20MHz 802.11a (UNII Band 7) – Ch. 181)

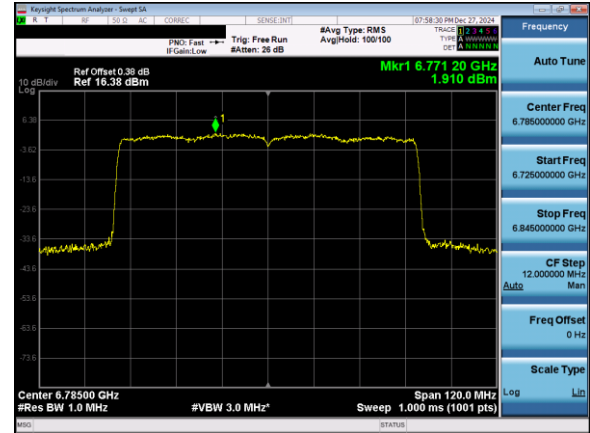

Plot 7-95. Power Spectral Density Plot Antenna 5T (80MHz 802.11ax (UNII Band 7) – Ch. 167)

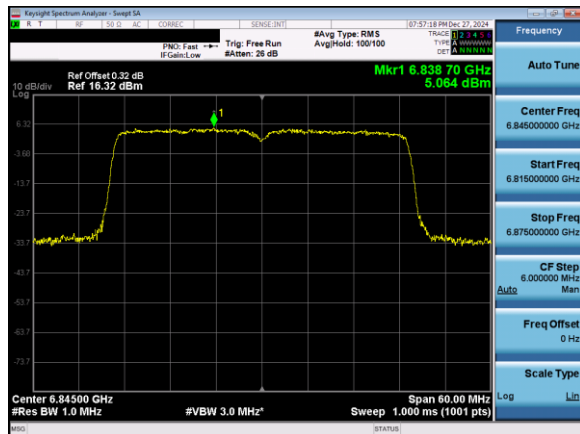

Plot 7-94. Power Spectral Density Plot Antenna 5T (40MHz 802.11ax (UNII Band 7) – Ch. 179)

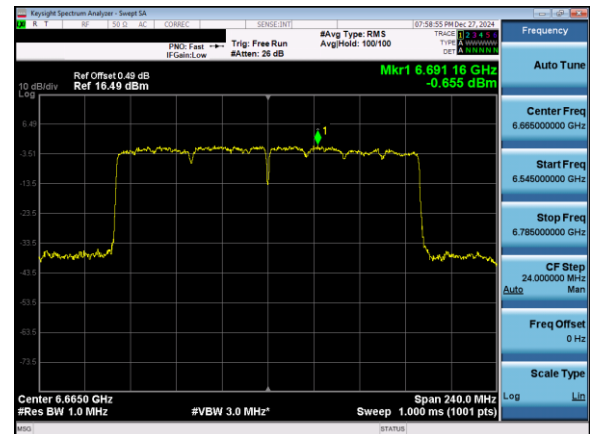

Plot 7-96. Power Spectral Density Plot Antenna 5T (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 68 of 264


7.4.2 Antenna 5T Power Spectral Density Measurements – LPI

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	54	-5.78	3.70	-2.08	-1	-1.08
	6175	45	a	54	-5.11	3.20	-1.91	-1	-0.91
	6415	93	a	24	-5.53	3.40	-2.13	-1	-1.13
	5955	1	ax (20MHz)	135/143.4 (MCS11)	-5.80	3.70	-2.10	-1	-1.10
	6175	45	ax (20MHz)	24/25.8 (MCS2)	-5.11	3.20	-1.91	-1	-0.91
	6415	93	ax (20MHz)	49/51.6 (MCS4)	-5.57	3.40	-2.17	-1	-1.17
	5965	3	ax (40MHz)	271/286.8 (MCS11)	-5.73	3.70	-2.03	-1	-1.03
	6165	43	ax (40MHz)	49/51.6 (MCS2)	-4.80	3.20	-1.60	-1	-0.60
	6405	91	ax (40MHz)	98/103.2 (MCS4)	-5.15	3.40	-1.75	-1	-0.75
	5985	7	ax (80MHz)	204/216.2 (MCS4)	-5.81	3.70	-2.11	-1	-1.11
	6145	39	ax (80MHz)	102/108.1 (MCS2)	-5.52	3.20	-2.32	-1	-1.32
	6385	87	ax (80MHz)	204/216.2 (MCS4)	-5.50	3.40	-2.10	-1	-1.10
Band 6	6025	15	ax (160MHz)	1020.8/1201 (MCS11)	-5.81	3.70	-2.11	-1	-1.11
	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	-5.41	3.20	-2.21	-1	-1.21
	6345	79	ax (160MHz)	1020.8/1201 (MCS11)	-5.61	3.40	-2.21	-1	-1.21
	6435	97	a	54	-6.04	4.00	-2.04	-1	-1.04
	6475	105	a	12	-5.95	4.00	-1.95	-1	-0.95
	6515	113	a	12	-6.03	4.00	-2.03	-1	-1.03
	6435	97	ax (20MHz)	135/143.4 (MCS11)	-5.59	4.00	-1.59	-1	-0.59
	6475	105	ax (20MHz)	135/143.4 (MCS11)	-5.85	4.00	-1.85	-1	-0.85
	6515	113	ax (20MHz)	135/143.4 (MCS11)	-5.79	4.00	-1.79	-1	-0.79
	6445	99	ax (40MHz)	49/51.6 (MCS2)	-5.82	4.00	-1.82	-1	-0.82
	6485	107	ax (40MHz)	271/286.8 (MCS11)	-5.76	4.00	-1.76	-1	-0.76
	6525	115	ax (40MHz)	271/286.8 (MCS11)	-6.07	4.00	-2.07	-1	-1.07
Band 7	6465	103	ax (80MHz)	102/108.1 (MCS2)	-5.85	4.00	-1.85	-1	-0.85
	6505	111	ax (160MHz)	367.5/432.4 (MCS4)	-6.73	4.00	-2.73	-1	-1.73
	6535	117	a	54	-6.24	4.50	-1.74	-1	-0.74
	6695	149	a	54	-6.23	4.50	-1.73	-1	-0.73
	6875	185	a	49/51.6 (MCS2)	-6.54	4.50	-2.04	-1	-1.04
	6535	117	ax (20MHz)	135/143.4 (MCS11)	-6.50	4.50	-2.00	-1	-1.00
	6695	149	ax (20MHz)	135/143.4 (MCS11)	-6.23	4.50	-1.73	-1	-0.73
	6875	185	ax (20MHz)	135/143.4 (MCS11)	-6.73	4.50	-2.23	-1	-1.23
	6565	123	ax (40MHz)	271/286.8 (MCS11)	-6.29	4.50	-1.79	-1	-0.79
	6725	155	ax (40MHz)	271/286.8 (MCS11)	-6.02	4.50	-1.52	-1	-0.52
	6845	179	ax (40MHz)	271/286.8 (MCS11)	-6.02	4.50	-1.52	-1	-0.52
	6545	119	ax (80MHz)	204/216.2 (MCS4)	-6.30	4.50	-1.80	-1	-0.80
Band 8	6705	151	ax (80MHz)	204/216.2 (MCS4)	-6.55	4.50	-2.05	-1	-1.05
	6865	183	ax (80MHz)	204/216.2 (MCS4)	-6.85	4.50	-2.35	-1	-1.35
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	-6.69	4.50	-2.19	-1	-1.19
	6825	175	ax (160MHz)	1020.8/1201 (MCS11)	-6.92	4.50	-2.42	-1	-1.42
	6895	189	a	54	-6.82	4.80	-2.02	-1	-1.02
	6995	209	a	54	-6.75	4.80	-1.95	-1	-0.95
	7115	233	a	24	-6.81	4.80	-2.01	-1	-1.01
	6895	189	ax (20MHz)	135/143.4 (MCS11)	-6.58	4.80	-1.78	-1	-0.78
	6995	209	ax (20MHz)	24/25.8 (MCS2)	-6.69	4.80	-1.89	-1	-0.89
	7115	233	ax (20MHz)	49/51.6 (MCS4)	-6.80	4.80	-2.00	-1	-1.00
	6885	187	ax (40MHz)	98/103.2 (MCS4)	-6.54	4.80	-1.74	-1	-0.74
	7005	211	ax (40MHz)	12	-6.66	4.80	-1.86	-1	-0.86
	7085	227	ax (40MHz)	271/286.8 (MCS11)	-6.51	4.80	-1.71	-1	-0.71
	6945	199	ax (80MHz)	102/108.1 (MCS2)	-7.03	4.80	-2.23	-1	-1.23
	7025	215	ax (80MHz)	567/600.5 (MCS11)	-7.14	4.80	-2.34	-1	-1.34
	6985	207	ax (160MHz)	367.5/432.4 (MCS4)	-6.70	4.80	-1.90	-1	-0.90


Table 7-49. Power Spectral Density Measurements Antenna 5T

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 69 of 264


V 10.6 10/27/2023

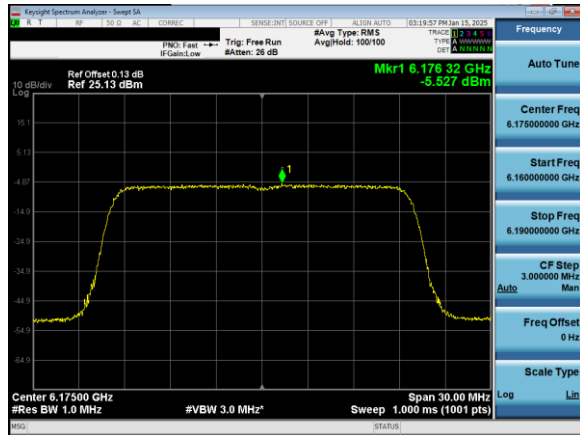


Plot 7-97. Power Spectral Density Plot Antenna 5T (20MHz) 802.11ax (UNII Band 5) - Ch. 45)

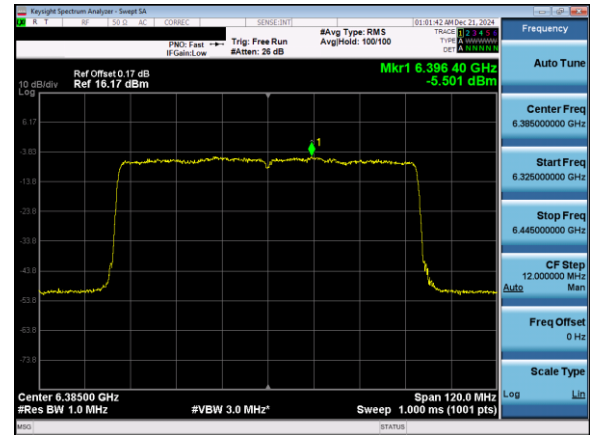

Plot 7-99. Power Spectral Density Plot Antenna 5T (80MHz) 802.11ax (UNII Band 5) - Ch. 87)

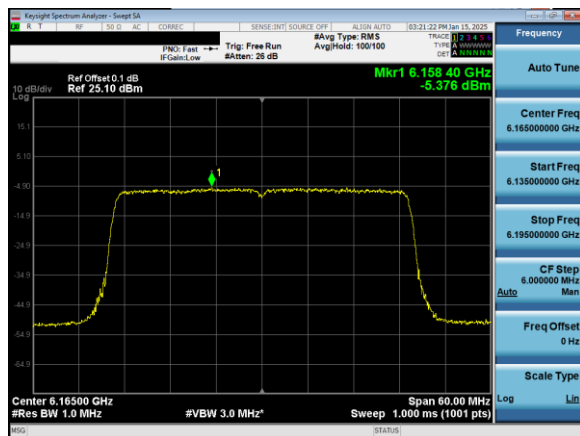


Plot 7-98. Power Spectral Density Plot Antenna 5T (40MHz) 802.11ax (UNII Band 5) - Ch. 43)

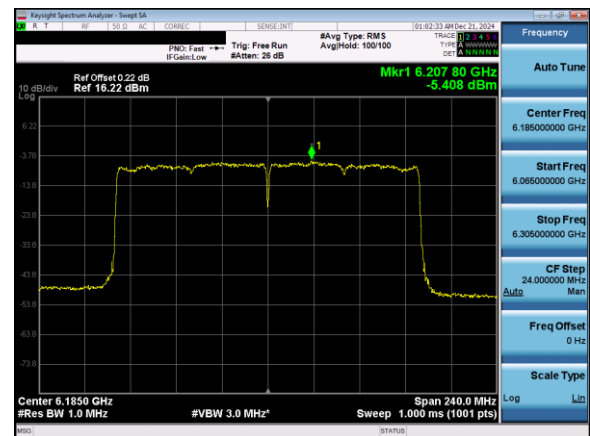


Plot 7-100. Power Spectral Density Plot Antenna 5T (160MHz) 802.11ax (UNII Band 5) - Ch. 47)


FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 70 of 264

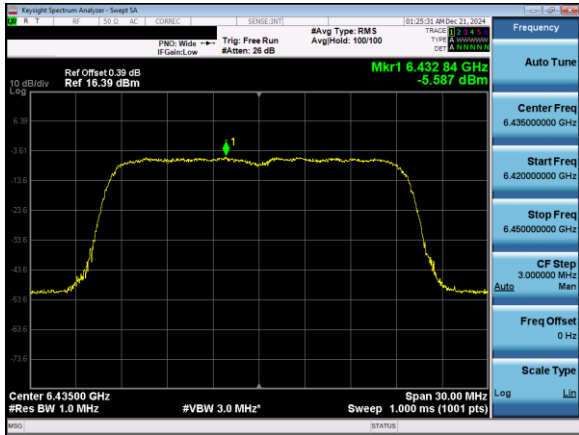


Plot 7-101. Power Spectral Density Plot Antenna 5T (20MHz 802.11ax (UNII Band 6) – Ch. 97)

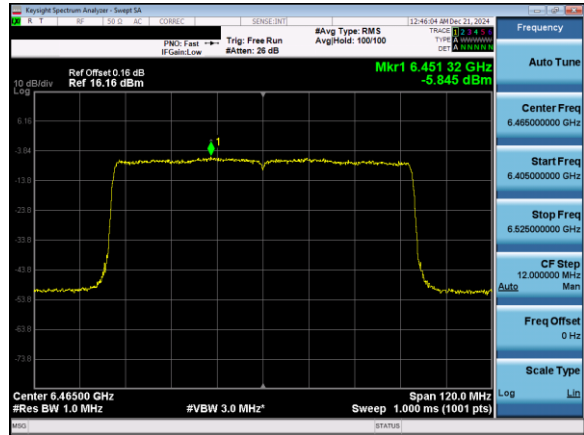

Plot 7-103. Power Spectral Density Plot Antenna 5T (80MHz 802.11ax (UNII Band 6) – Ch. 103)

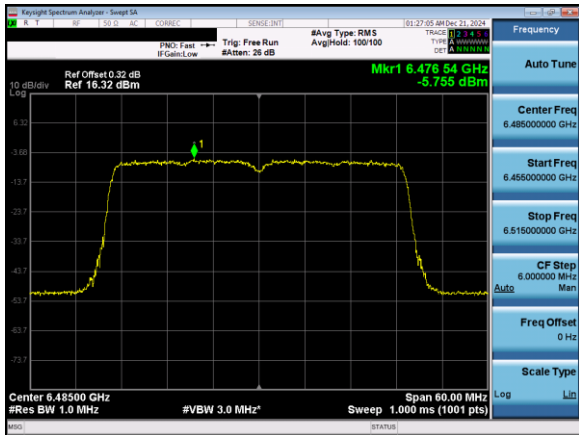


Plot 7-102. Power Spectral Density Plot Antenna 5T (40MHz 802.11ax (UNII Band 6) – Ch. 107)

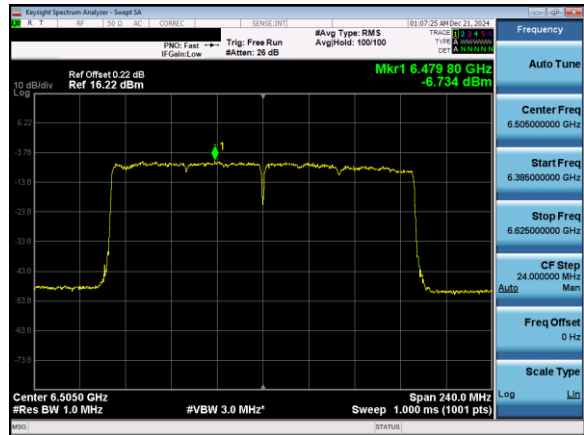


Plot 7-104. Power Spectral Density Plot Antenna 5T (160MHz 802.11ax (UNII Band 6) – Ch. 111)


FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 71 of 264

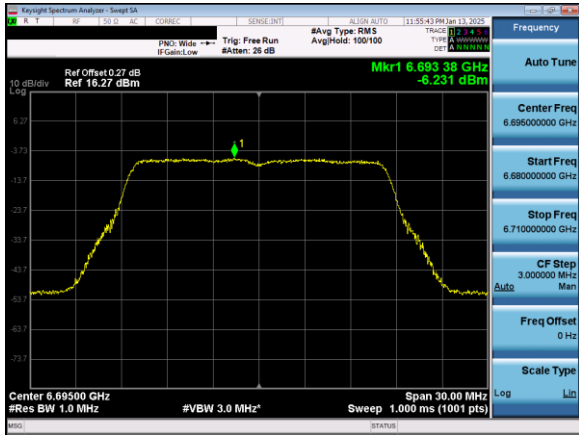


Plot 7-105. Power Spectral Density Plot Antenna 5T (20MHz 802.11a (UNII Band 7) – Ch. 149)

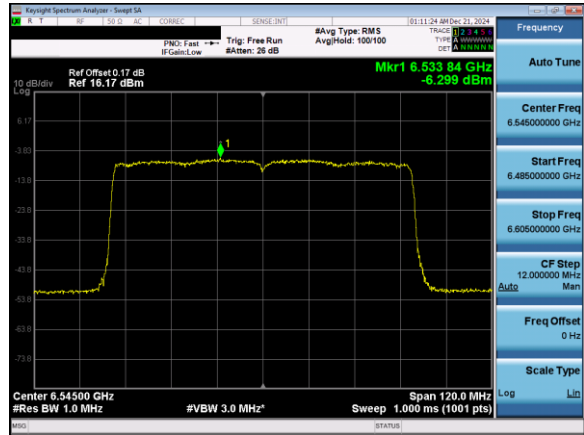

Plot 7-107. Power Spectral Density Plot Antenna 5T (80MHz 802.11ax (UNII Band 7) – Ch. 119)

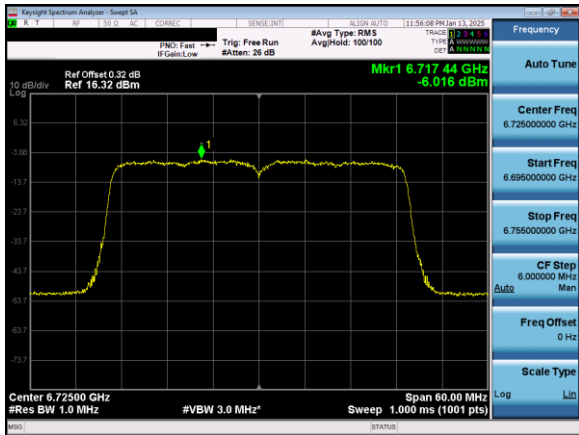


Plot 7-106. Power Spectral Density Plot Antenna 5T (40MHz 802.11ax (UNII Band 7) – Ch. 155)

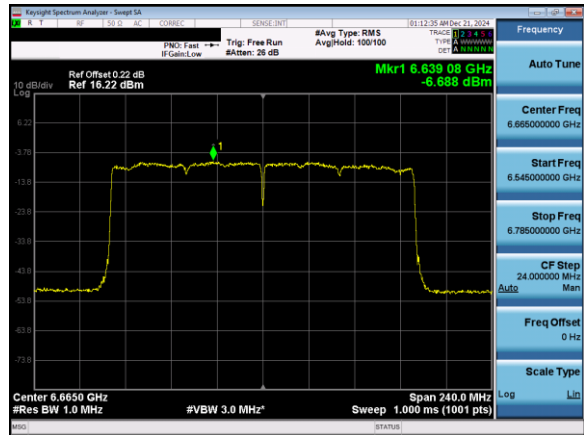


Plot 7-108. Power Spectral Density Plot Antenna 5T (160MHz 802.11ax (UNII Band 7) – Ch. 143)


FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 72 of 264

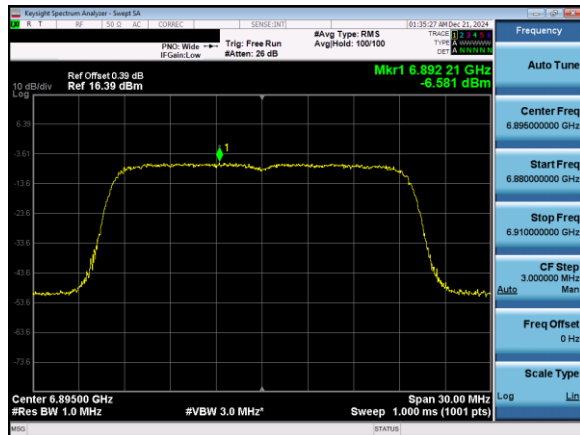


Plot 7-109. Power Spectral Density Plot Antenna 5T (20MHz 802.11ax (UNII Band 8) – Ch. 189)

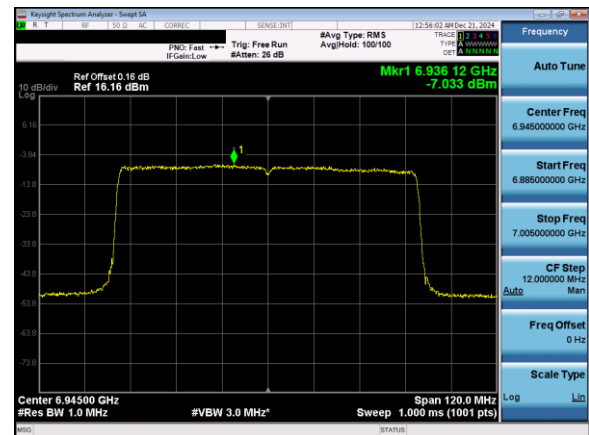

Plot 7-111. Power Spectral Density Plot Antenna 5T (80MHz 802.11ax (UNII Band 8) – Ch. 199)

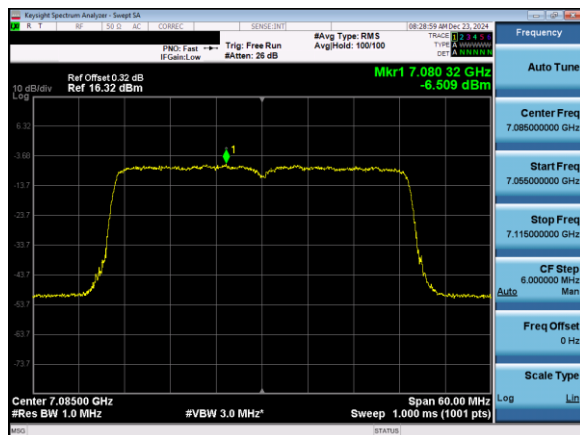

Plot 7-110. Power Spectral Density Plot Antenna 5T (40MHz 802.11ax (UNII Band 8) – Ch. 227)

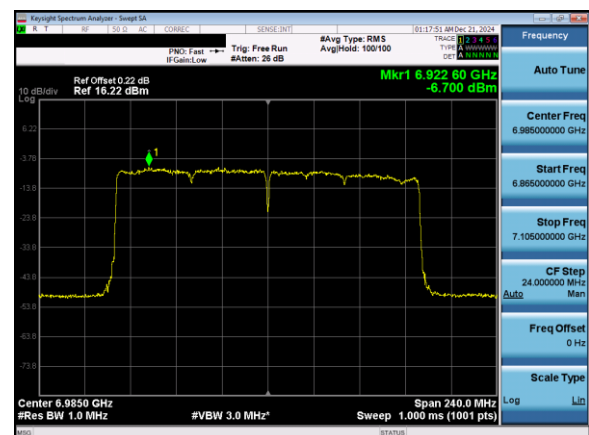

Plot 7-112. Power Spectral Density Plot Antenna 5T (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 73 of 264

V 10.6 10/27/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.3 Antenna 3b Power Spectral Density Measurements – SP


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	54	8.73	0.20	8.93	17	-8.07
	6175	45	a	54	8.66	-0.80	7.86	17	-9.14
	6415	93	a	54	8.82	-2.20	6.62	17	-10.38
	5955	1	ax (20MHz)	49/51.6 (MCS4)	8.09	0.20	8.29	17	-8.71
	6175	45	ax (20MHz)	135/143.4 (MCS11)	8.26	-0.80	7.46	17	-9.54
	6415	93	ax (20MHz)	135/143.4 (MCS11)	8.39	-2.20	6.19	17	-10.81
	5965	3	ax (40MHz)	271/286.8 (MCS11)	5.47	0.20	5.67	17	-11.33
	6165	43	ax (40MHz)	271/286.8 (MCS11)	5.60	-0.80	4.80	17	-12.20
	6405	91	ax (40MHz)	49/51.6 (MCS2)	5.26	-2.20	3.06	17	-13.94
	5985	7	ax (80MHz)	102/108.1 (MCS2)	2.52	0.20	2.72	17	-14.28
	6145	39	ax (80MHz)	567/600.5 (MCS11)	2.62	-0.80	1.82	17	-15.18
	6385	87	ax (80MHz)	204/216.2 (MCS4)	2.74	-2.20	0.54	17	-16.46
	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	0.06	0.20	0.26	17	-16.74
Band 6	6181	47	ax (160MHz)	367.5/432.4 (MCS4)	0.06	-0.80	-0.74	17	-17.74
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	0.10	-2.20	-2.10	17	-19.10
	6435	97	a	54	5.82	-1.30	4.52	17	-12.48
	6475	105	a	12	5.99	-1.30	4.69	17	-12.32
	6515	113	a	24	5.87	-1.30	4.57	17	-12.43
	6435	97	ax (20MHz)	135/143.4 (MCS11)	5.57	-1.30	4.27	17	-12.73
	6475	105	ax (20MHz)	135/143.4 (MCS11)	5.42	-1.30	4.12	17	-12.88
	6515	113	ax (20MHz)	135/143.4 (MCS11)	5.35	-1.30	4.05	17	-12.95
	6445	99	ax (40MHz)	98/103.2 (MCS4)	3.22	-1.30	1.92	17	-15.08
	6485	107	ax (40MHz)	98/103.2 (MCS4)	3.21	-1.30	1.91	17	-15.09
	6525	115	ax (40MHz)	271/286.8 (MCS11)	3.29	-1.30	1.99	17	-15.02
	6465	103	ax (80MHz)	204/216.2 (MCS4)	0.43	-1.30	-0.87	17	-17.87
	6505	111	ax (160MHz)	1020.8/1201 (MCS11)	-3.30	-1.30	-4.60	17	-21.60
Band 7	6535	117	a	54	7.58	-0.80	6.78	17	-10.22
	6695	149	a	54	8.26	-0.80	7.46	17	-9.54
	6875	181	a	24	8.10	-0.80	7.30	17	-9.71
	6535	117	ax (20MHz)	135/143.4 (MCS11)	7.23	-0.80	6.43	17	-10.57
	6695	149	ax (20MHz)	135/143.4 (MCS11)	7.57	-0.80	6.77	17	-10.23
	6875	181	ax (20MHz)	135/143.4 (MCS11)	7.73	-0.80	6.93	17	-10.07
	6565	123	ax (40MHz)	98/103.2 (MCS4)	4.45	-0.80	3.65	17	-13.35
	6725	155	ax (40MHz)	271/286.8 (MCS11)	4.78	-0.80	3.98	17	-13.03
	6845	179	ax (40MHz)	271/286.8 (MCS11)	4.88	-0.80	4.08	17	-12.92
	6545	135	ax (80MHz)	567/600.5 (MCS11)	1.76	-0.80	0.96	17	-16.04
	6705	151	ax (80MHz)	567/600.5 (MCS11)	2.14	-0.80	1.34	17	-15.67
	6865	167	ax (80MHz)	567/600.5 (MCS11)	2.39	-0.80	1.59	17	-15.41
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	-0.75	-0.80	-1.55	17	-18.55

Table 7-50. Power Spectral Density Measurements Antenna 3b


FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 74 of 264

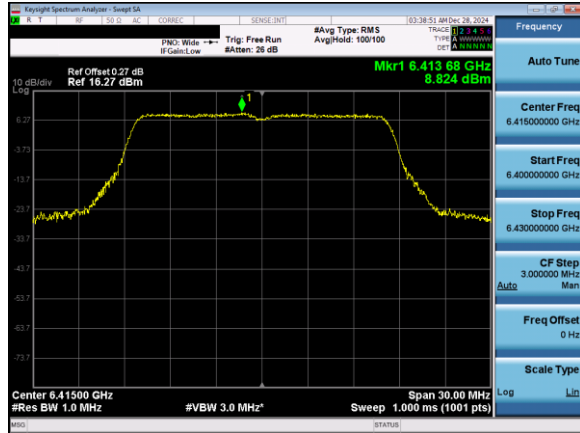


Plot 7-113. Power Spectral Density Plot Antenna 3b (20MHz 802.11a (UNII Band 5) – Ch. 93)

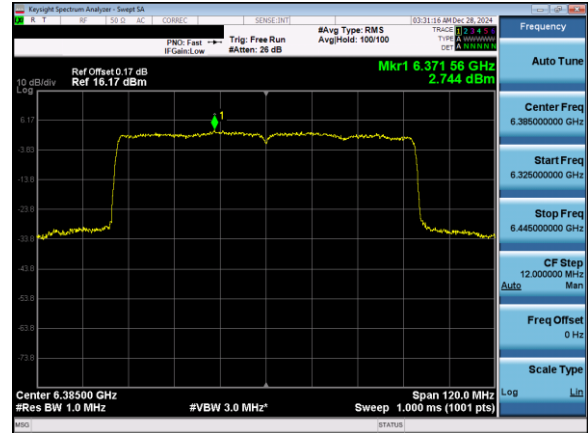

Plot 7-115. Power Spectral Density Plot Antenna 3b (80MHz 802.11ax (UNII Band 5) – Ch. 87)

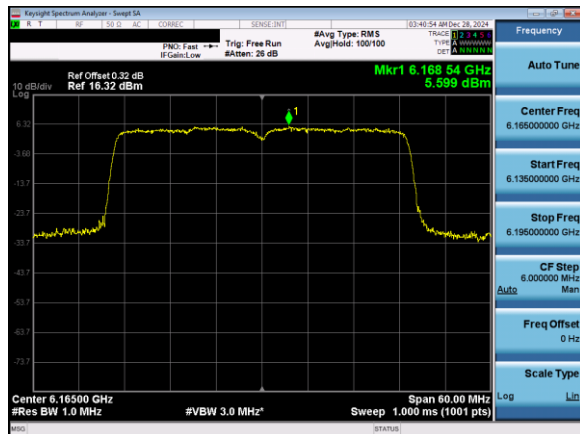


Plot 7-114. Power Spectral Density Plot Antenna 3b (40MHz 802.11ax (UNII Band 5) – Ch. 43)

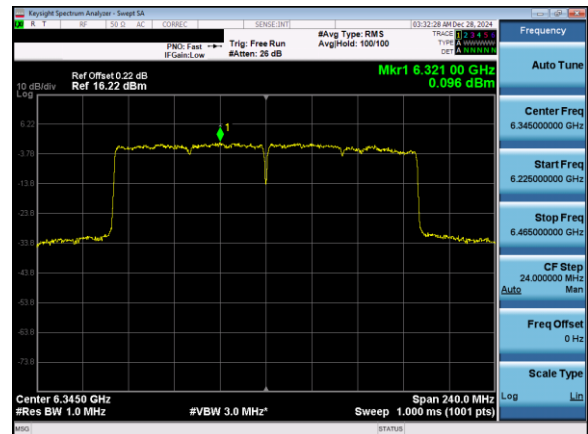


Plot 7-116. Power Spectral Density Plot Antenna 3b (160MHz 802.11ax (UNII Band 5) – Ch. 79)


FCC ID: BCGA3269 IC: 579C-A3269	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 75 of 264

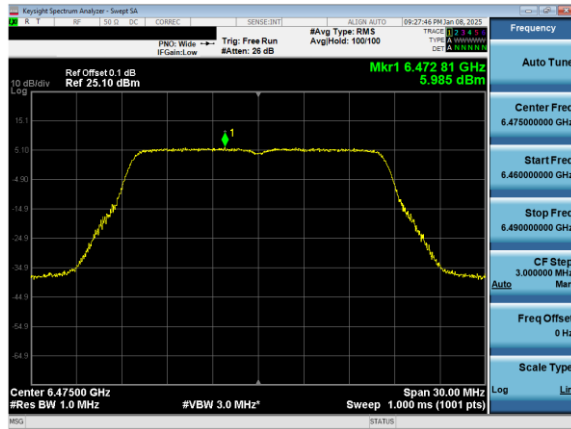


Plot 7-117. Power Spectral Density Plot Antenna 3b (20MHz 802.11a (UNII Band 6) – Ch. 105)

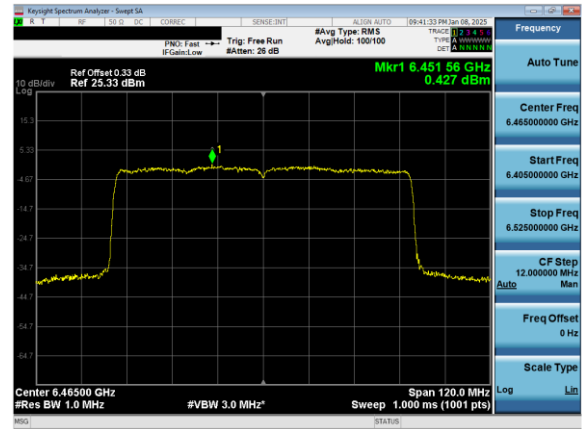

Plot 7-119. Power Spectral Density Plot Antenna 3b (80MHz 802.11ax (UNII Band 6) – Ch. 103)

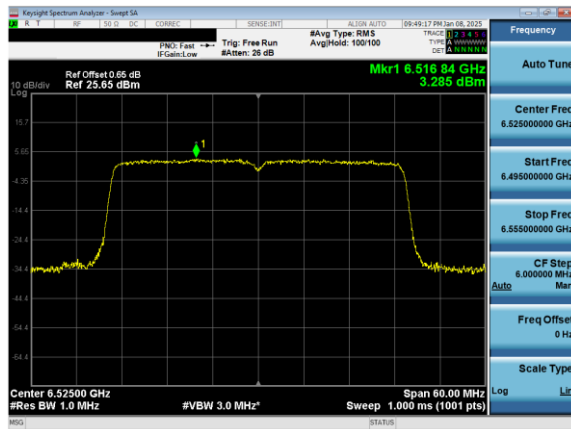


Plot 7-118. Power Spectral Density Plot Antenna 3b (40MHz 802.11ax (UNII Band 6) – Ch. 115)

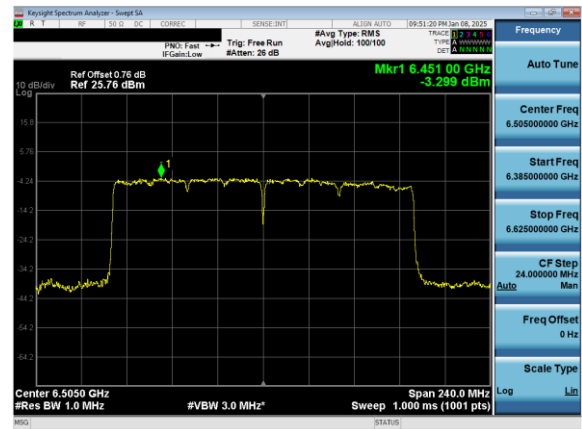


Plot 7-120. Power Spectral Density Plot Antenna 3b (160MHz 802.11ax (UNII Band 6) – Ch. 111)


FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 76 of 264

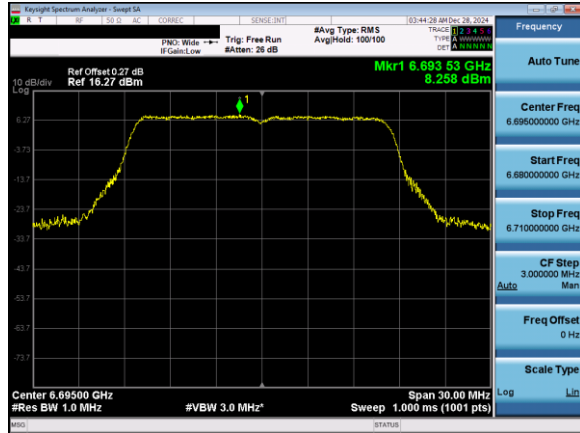


Plot 7-121. Power Spectral Density Plot Antenna 3b (20MHz 802.11a (UNII Band 7) – Ch. 149)

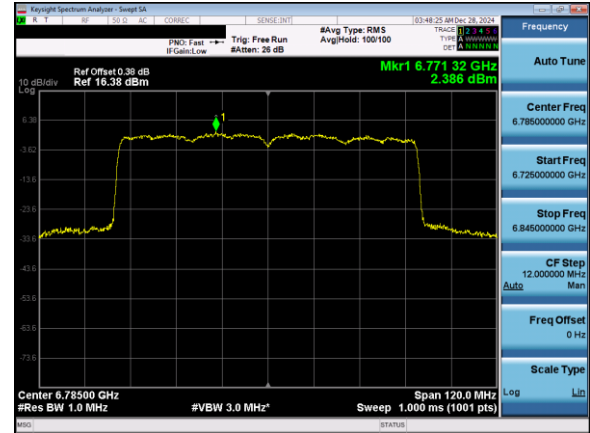

Plot 7-123. Power Spectral Density Plot Antenna 3b (80MHz 802.11ax (UNII Band 7) – Ch. 167)

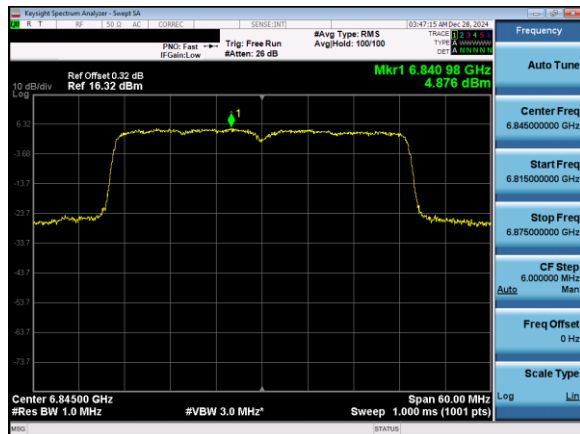

Plot 7-122. Power Spectral Density Plot Antenna 3b (40MHz 802.11ax (UNII Band 7) – Ch. 179)

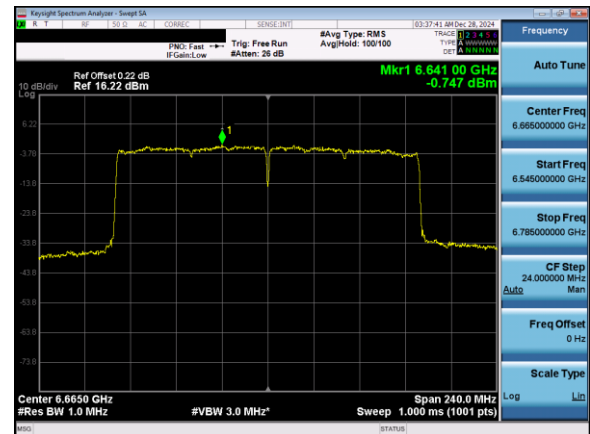

Plot 7-124. Power Spectral Density Plot Antenna 3b (160MHz 802.11ax (UNII Band 7) – Ch. 143)

FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 77 of 264


7.4.4 Antenna 3b Power Spectral Density Measurements – LPI

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p Density [dBm/MHz]	Max EIRP Density [dBm/MHz]	Margin [dB]
Band 5	5955	1	a	24	-5.77	0.20	-5.57	-1	-4.57
	6175	45	a	54	-4.89	-0.80	-5.69	-1	-4.69
	6415	93	a	12	-5.17	-2.20	-7.37	-1	-6.37
	5955	1	ax (20MHz)	24/25.8 (MCS2)	-5.85	0.20	-5.65	-1	-4.65
	6175	45	ax (20MHz)	49/51.6 (MCS4)	-4.91	-0.80	-5.71	-1	-4.71
	6415	93	ax (20MHz)	49/51.6 (MCS4)	-5.48	-2.20	-7.68	-1	-6.68
	5965	3	ax (40MHz)	98/103.2 (MCS4)	-5.88	0.20	-5.68	-1	-4.68
	6165	43	ax (40MHz)	98/103.2 (MCS4)	-4.72	-0.80	-5.52	-1	-4.52
	6405	91	ax (40MHz)	49/51.6 (MCS2)	-4.89	-2.20	-7.09	-1	-6.09
	5985	7	ax (80MHz)	204/216.2 (MCS4)	-5.76	0.20	-5.56	-1	-4.56
	6145	39	ax (80MHz)	204/216.2 (MCS4)	-5.21	-0.80	-6.01	-1	-5.01
	6385	87	ax (80MHz)	204/216.2 (MCS4)	-5.25	-2.20	-7.45	-1	-6.45
Band 6	6025	15	ax (160MHz)	367.5/432.4 (MCS4)	-5.60	0.20	-5.40	-1	-4.40
	6185	47	ax (160MHz)	367.5/432.4 (MCS4)	-5.16	-0.80	-5.96	-1	-4.96
	6345	79	ax (160MHz)	367.5/432.4 (MCS4)	-5.56	-2.20	-7.76	-1	-6.76
	6435	97	a	24	-5.85	-1.30	-7.15	-1	-6.15
	6475	105	a	12	-5.99	-1.30	-7.29	-1	-6.29
	6515	113	a	12	-5.66	-1.30	-6.96	-1	-5.96
	6435	97	ax (20MHz)	49/51.6 (MCS4)	-5.60	-1.30	-6.90	-1	-5.90
	6475	105	ax (20MHz)	49/51.6 (MCS4)	-5.60	-1.30	-6.90	-1	-5.90
	6515	113	ax (20MHz)	24/25.8 (MCS2)	-5.51	-1.30	-6.81	-1	-5.81
	6445	99	ax (40MHz)	98/103.2 (MCS4)	-5.45	-1.30	-6.75	-1	-5.75
	6485	107	ax (40MHz)	24	-5.77	-1.30	-7.07	-1	-6.07
	6525	115	ax (40MHz)	24/25.8 (MCS2)	-5.85	-1.30	-7.15	-1	-6.15
Band 7	6465	103	ax (80MHz)	204/216.2 (MCS4)	-5.79	-1.30	-7.09	-1	-6.09
	6505	111	ax (160MHz)	102/108.1 (MCS2)	-6.20	-1.30	-7.50	-1	-6.50
	6535	117	a	12	-6.17	-0.80	-6.97	-1	-5.97
	6695	149	a	24	-5.71	-0.80	-6.51	-1	-5.51
	6875	185	a	54	-6.52	-0.80	-7.32	-1	-6.32
	6535	117	ax (20MHz)	49/51.6 (MCS4)	-6.13	-0.80	-6.93	-1	-5.93
	6695	149	ax (20MHz)	49/51.6 (MCS4)	-5.85	-0.80	-6.65	-1	-5.65
	6875	185	ax (20MHz)	24/25.8 (MCS2)	-6.68	-0.80	-7.48	-1	-6.48
	6565	123	ax (40MHz)	49/51.6 (MCS2)	-5.84	-0.80	-6.64	-1	-5.64
	6725	155	ax (40MHz)	271/286.8 (MCS11)	-5.62	-0.80	-6.42	-1	-5.42
	6845	179	ax (40MHz)	271/286.8 (MCS11)	-5.90	-0.80	-6.70	-1	-5.70
	6545	119	ax (80MHz)	567/600.5 (MCS11)	-6.48	-0.80	-7.28	-1	-6.28
Band 8	6705	151	ax (80MHz)	204/216.2 (MCS4)	-6.02	-0.80	-6.82	-1	-5.82
	6865	183	ax (80MHz)	567/600.5 (MCS11)	-6.50	-0.80	-7.30	-1	-6.30
	6665	143	ax (160MHz)	367.5/432.4 (MCS4)	-6.26	-0.80	-7.06	-1	-6.06
	6825	175	ax (160MHz)	367.5/432.4 (MCS4)	-6.57	-0.80	-7.37	-1	-6.37
	6895	189	a	24	-6.63	-1.00	-7.63	-1	-6.63
	6995	209	a	24	-6.60	-1.00	-7.60	-1	-6.60
	7115	233	a	24	-6.61	-1.00	-7.61	-1	-6.61
	6895	189	ax (20MHz)	135/143.4 (MCS11)	-6.52	-1.00	-7.52	-1	-6.52
	6995	209	ax (20MHz)	135/143.4 (MCS11)	-6.57	-1.00	-7.57	-1	-6.57
	7115	233	ax (20MHz)	135/143.4 (MCS11)	-6.47	-1.00	-7.47	-1	-6.47
	6885	187	ax (40MHz)	49/51.6 (MCS2)	-6.37	-1.00	-7.37	-1	-6.37
	7005	211	ax (40MHz)	98/103.2 (MCS4)	-6.21	-1.00	-7.21	-1	-6.21
	7085	227	ax (40MHz)	271/286.8 (MCS11)	-6.78	-1.00	-7.78	-1	-6.78
	6945	199	ax (80MHz)	204/216.2 (MCS4)	-6.64	-1.00	-7.64	-1	-6.64
	7025	215	ax (80MHz)	102/108.1 (MCS2)	-6.78	-1.00	-7.78	-1	-6.78
	6985	207	ax (160MHz)	1020.8/1201 (MCS11)	-7.07	-1.00	-8.07	-1	-7.07


Table 7-51. Power Spectral Density Measurements Antenna 3b

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 78 of 264


V 10.6 10/27/2023

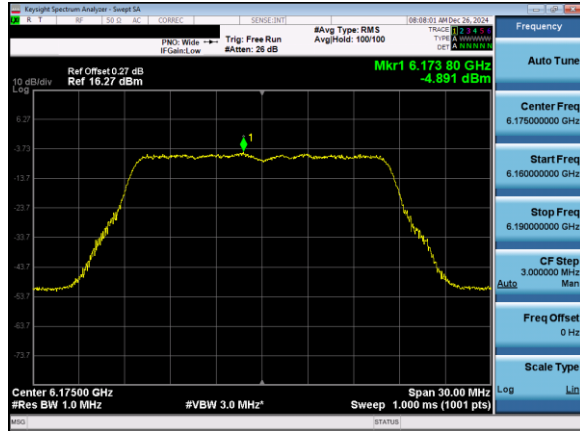


Plot 7-125. Power Spectral Density Plot Antenna 3b (20MHz 802.11a (UNII Band 5) – Ch. 45)

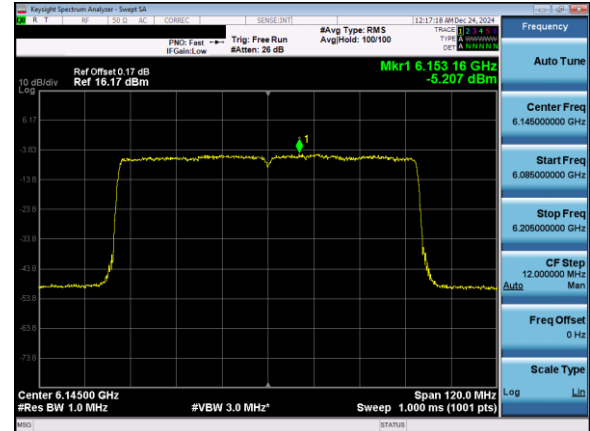

Plot 7-127. Power Spectral Density Plot Antenna 3b (80MHz 802.11ax (UNII Band 5) – Ch. 39)

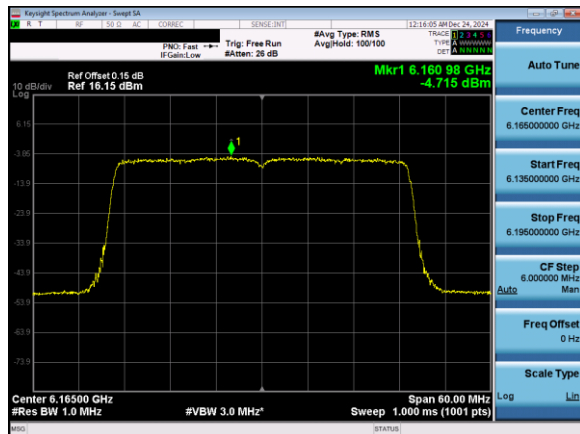


Plot 7-126. Power Spectral Density Plot Antenna 3b (40MHz 802.11ax (UNII Band 5) – Ch. 43)

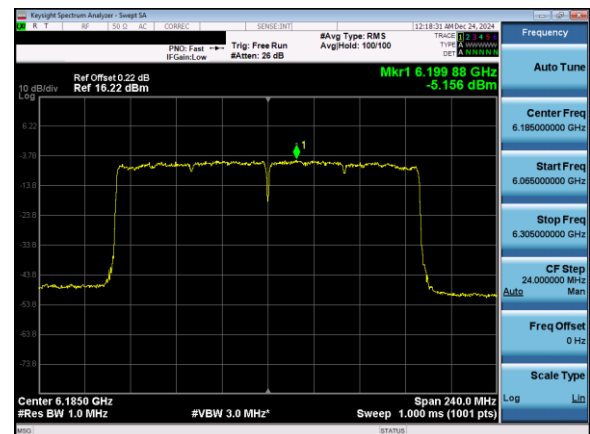


Plot 7-128. Power Spectral Density Plot Antenna 3b (160MHz 802.11ax (UNII Band 5) – Ch. 47)


FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 79 of 264

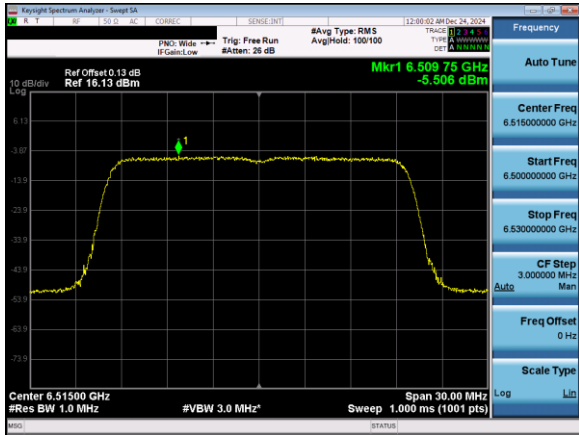


Plot 7-129. Power Spectral Density Plot Antenna 3b (20MHz 802.11ax (UNII Band 6) – Ch. 113)

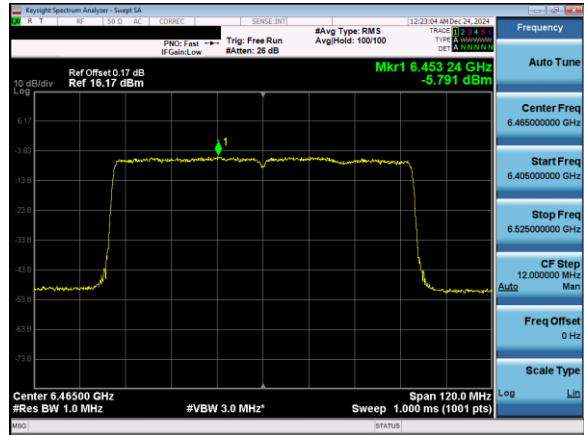

Plot 7-131. Power Spectral Density Plot Antenna 3b (80MHz 802.11ax (UNII Band 6) – Ch. 103)

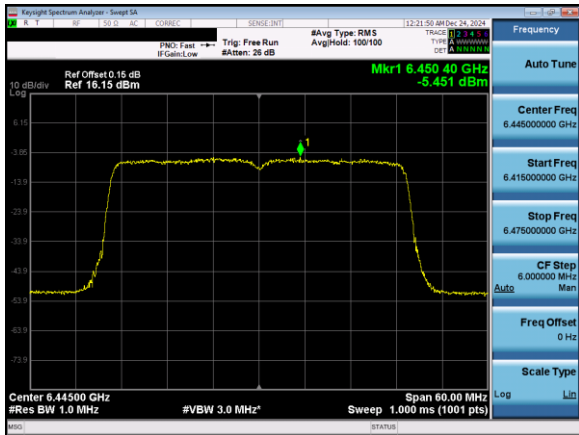

Plot 7-130. Power Spectral Density Plot Antenna 3b (40MHz 802.11ax (UNII Band 6) –Ch. 99)

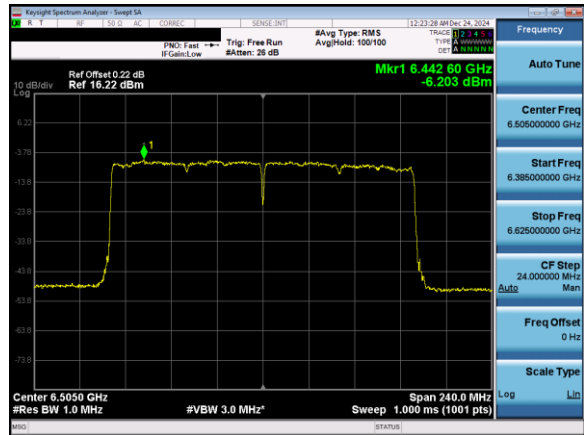

Plot 7-132. Power Spectral Density Plot Antenna 3b (160MHz 802.11ax (UNII Band 6) – Ch. 111)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-23.BCG	Test Dates: 10/25/2024 - 1/2/2025	EUT Type: Tablet Device	Page 80 of 264