



EMC

TEST REPORT

REPORT NO. : F87050802
MODEL NO. : 7257C, D2832A
DATE OF TEST : May 14, 1998

PREPARED FOR : ACER PERIPHERALS, INC.

ADDRESS : 157, SHAN-YING ROAD, KWEISHAN,
TAOYUAN 333, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

12F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 14 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION.....	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION.....	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION).....	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.1.1 EUT OPERATION CONDITION	8
4.1.2 TEST DATA OF CONDUCTED EMISSION	9
4.1.3 TEST DATA OF RADIATED EMISSION.....	10
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN...	12
6. ATTACHMENT I -TECHNICAL DESCRIPTION OF EUT	14

**1. CERTIFICATION**

Issue Date: June 9, 1998

Product : COLOR MONITOR
Trade Name : ACER
Model No. : 7257C, D2832A
Applicant : ACER PERIPHERALS, INC.
Standard : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
CISPR 22:1993+A1+A2

We hereby certify that one sample of the designation has been tested in our facility on May 14, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards.

PREPARED BY: Sharon Hsiung, DATE: 6/9/98
(Sharon Hsiung)

TESTED BY: Chris Yang, DATE: 6/9/98
(Chris Yang)

APPROVED BY: Mike Su, DATE: 6/9/98
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

NVLAP[®]

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	COLOR MONITOR
Model No.	:	7257C, D2832A
Power Supply Type	:	Switching
Power Cord	:	Nonshielded (1.8m)
Data Cable	:	Shielded (1.5m)

Note: The EUT is a 15" color monitor with resolution up to 1280x1024.

The EUT has two model names, which are identical to each other in all aspects except for the following:

- MODEL: 7257C, brand: ACER
- MODEL: D2832A, band: HP

From the above models, model 7257C was selected as the representative model for the test and therefore only its data is recorded in this report.

There is one ferrite core on the video cable outside the monitor.

For more detailed features description, please refer to ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT and User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC ID	I/O Cable
1	PERSONAL COMPUTER	HP	D4579A	DoC Approved	Nonshielded Power (1.8 m)
2	KEYBOARD	FORWARD	FDA-104GA	FDKB8110123	Shielded Signal (1.4 m)
3	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (1.6 m) Nonshielded Power (1.8m)
4	MODEM	DATATRONICS	1200C+	F2O5OV1200CK	Shielded Signal (1.6m) Nonshielded Power (1.8m)
5	MOUSE	COMPAQ	M-S28-6MD	DZL210472	Shielded Signal (1.6m)
6	VGA CARD	GORDIA	DSV3365	LUT-DSV3365	N/A

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated until
HP Spectrum Analyzer	8590L	3544A00941	Dec. 14, 1998
HP Pre-Amplifier	8447D	2944A08312	Sept. 10, 1998
R&S Receiver	ESVS10	844591/010	Sept. 23, 1998
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 28, 1998
CHASE BILOG Antenna	CBL6111A	1500	Sept. 12, 1998
EMCO Turn Table	1060-04	1196	N/A
EMCO Tower	1051	1264	N/A
Open Field Test Site	Site 1	ADT-R01	Sept. 5, 1998

- Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	Aug. 4, 1998
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 22, 1998
EMCO L.I.S.N.	3825/2	9504-2359	Aug. 1, 1998
Shielded Room	Site 3	ADT-C03	N/A

- Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 2000 MHz (Radiated Emission)

Input Voltage : 120 Vac, 60 Hz

Temperature : 25 °C

Humidity : 60 %

Atmospheric Pressure : 1060 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -4.0 dB at 0.346 MHz Minimum passing margin of radiated emission: -3.7 dB at 133.90 MHz

Note: The EUT was pretested under the following resolution & horizontal synchronization speed mode:

- ❖ 1280 x 1024 (64 kHz)
- ❖ 1024 x 768 (69 kHz)
- ❖ 640 x 480 (31.5 kHz)

The worst emission levels were found under 1024x768 (69 kHz) and therefore the test data of only this mode is recorded.

4.1.1 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. PC sends "H" messages to monitor (EUT) and monitor display "H" patterns on screen.
5. PC sends "H" messages to modem.
6. PC sends "H" messages to printer, and the printer prints them on paper.
7. Repeat steps 3-7.



4.1.2 TEST DATA OF CONDUCTED EMISSION

EUT: COLOR MONITORMODEL: 7257CMODE: 1024x768 (69 kHz)6 dB Bandwidth: 10 kHz

TEST PERSONNEL:

Chris Yang - - -

Freq. [MHz]	L Level		N Level		Limit		Margin [dB (μV)]			
	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.206	50.60	-	45.80	-	63.37	53.37	-12.8	-	-17.6	-
0.273	50.90	-	49.10	-	61.03	51.03	-10.1	-	-11.9	-
0.346	55.10	47.20	54.60	46.30	59.06	49.06	-4.0	-	-4.5	-
4.341	35.20	-	34.00	-	56.00	46.00	-20.8	-	-22.0	-
13.238	43.20	-	42.20	-	60.00	50.00	-16.8	-	-17.8	-
18.961	49.80	42.70	50.30	43.10	60.00	50.00	-10.2	-	-9.7	-

Remarks: 1. "*": Undetectable

2. Q.P. and AV. are abbreviations of quasi-peak and average individually.

3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

4. The emission level of other frequencies were very low against the limit.

5. Margin value = Emission level - Limit value

ADT CO. SITE 3

CISPR 22 CLASS B

EUT:

7257C

Test Spec:

LISN : L

Comment:

1024X768 69KHZ

Page

9-1


Report No. F87050802

Tested by Chris Yang

Fast Scan Settings (3 Ranges)

Start	Stop	IF BW	Detector	M-Time	Atten	Preamp	OPRge
150K	450K	3K	10K	1ms	10dB	10dB	10dB
450K	5M	3K	10K	2ms	10dB	10dB	10dB
5M	30M	3K	10K	1ms	10dB	10dB	10dB

DBV 18.96200MHZ 51.9 DBV

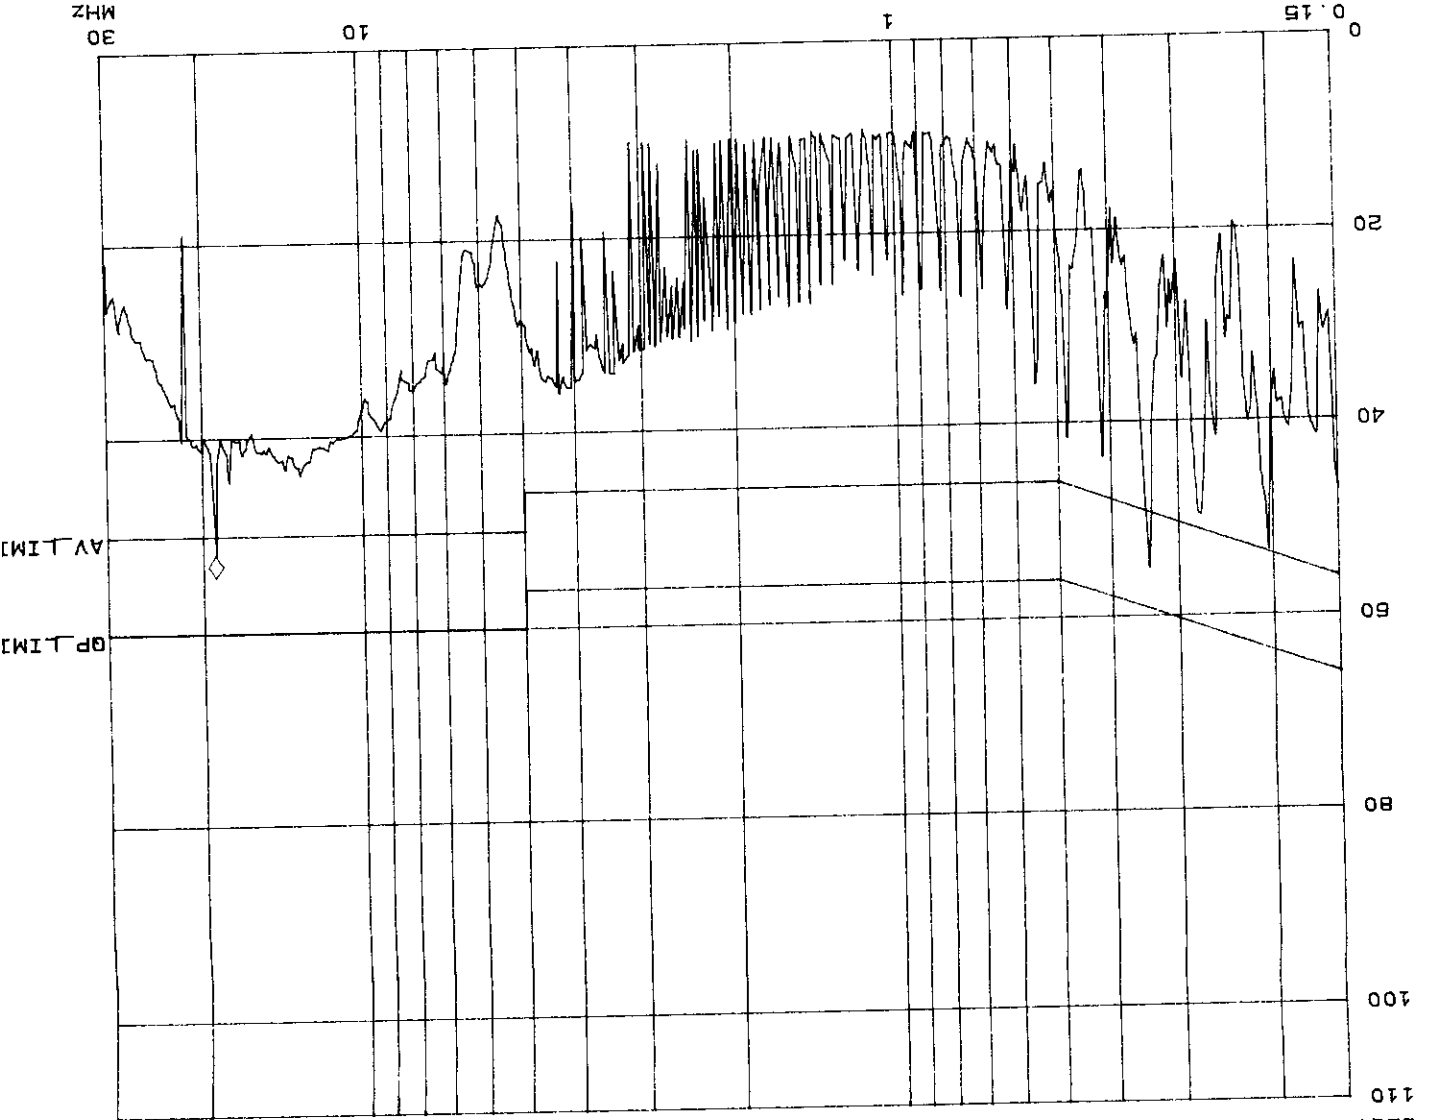

PAGE 1

14. May 98 15:18

ADT CO. SITE 3
CISPR 22 CLASS B

14. May 98 15:41

EUT: 72570
Test Spec: LISN : N
Comment: 1024X768 69KHZ


Report No. F87050802

Page 9-2

Tested by Chris Yang

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	450k	3k	10k	PK	1ms	10dBLN	OFF	60dB
450k	5M	3k	10k	PK	1ms	10dBLN	OFF	60dB
5M	30M	3k	10k	PK	1ms	10dBLN	OFF	60dB

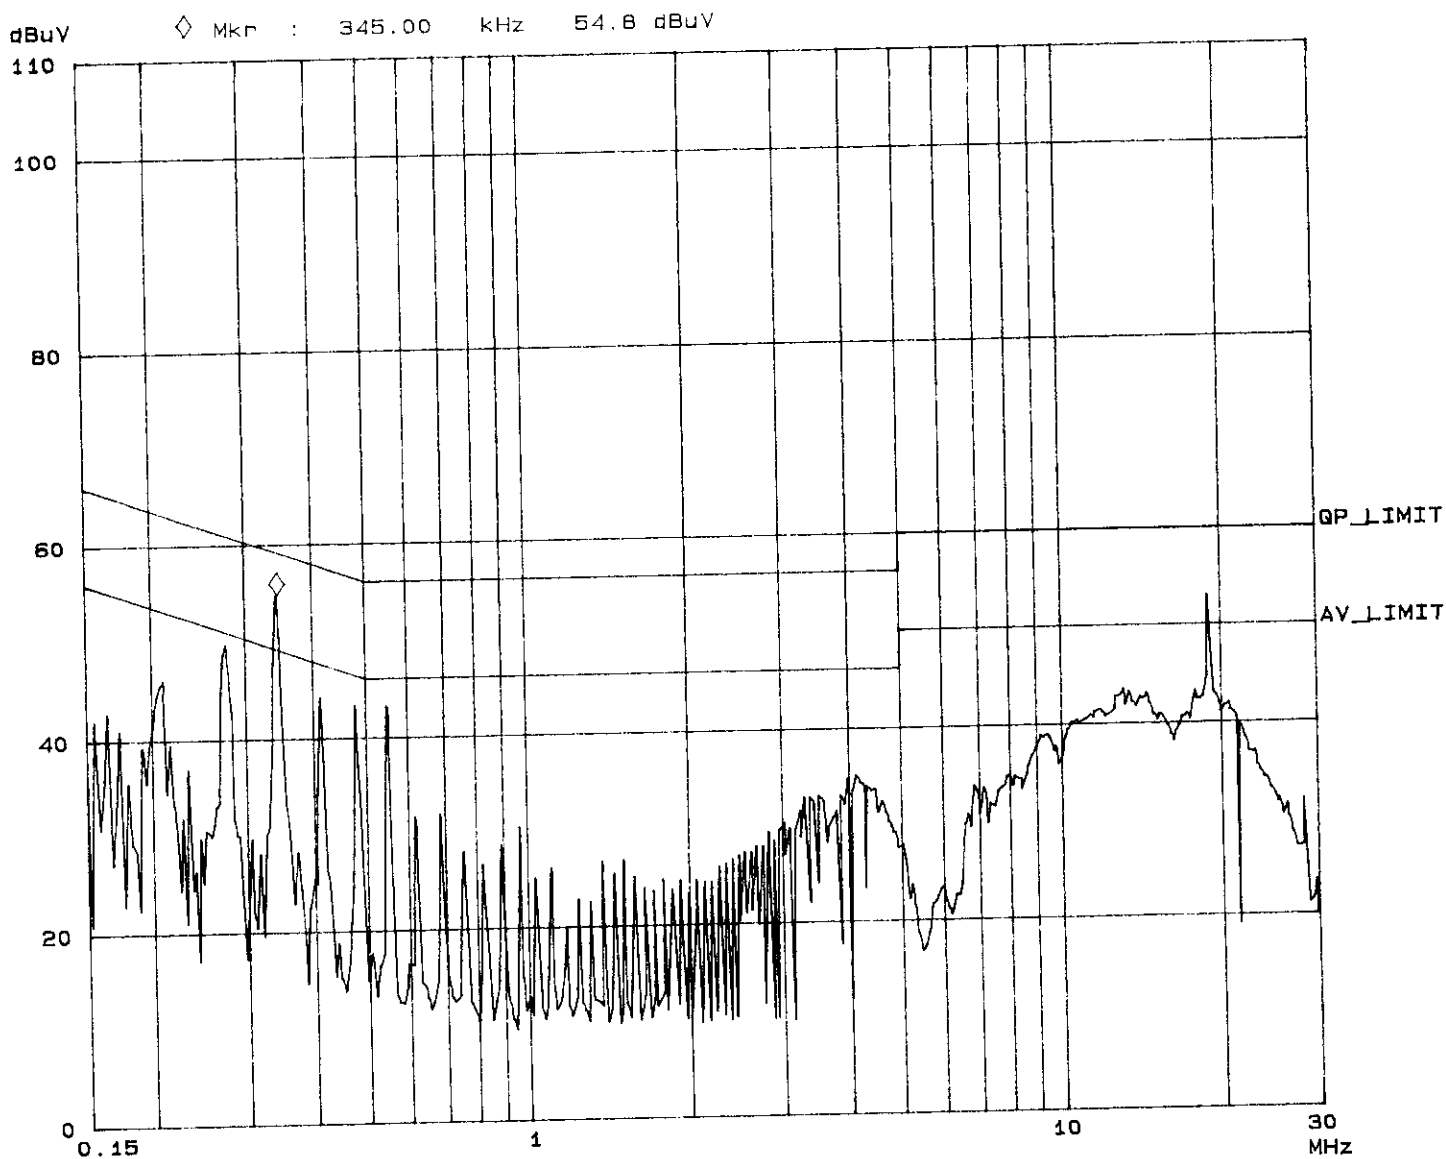



4.1.3 TEST DATA OF RADIATED EMISSION

EUT: **COLOR MONITOR** MODEL: **7257C** MODE: **1024x768 (69 kHz)**
 ANTENNA: **CHASE BILOG CBL6111A** POLARITY: **Horizontal**
 DETECTOR FUNCTION: **Quasi-peak** 6 dB BANDWIDTH: **120 kHz**
 FREQUENCY RANGE: **30-1000 MHz** MEASURED DISTANCE: **10 M**
 TEST PERSONNEL: *Chris Yang*

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
66.41	8.0	11.2	19.2	30.0	-10.8
68.55	8.0	12.0	20.0	30.0	-10.0
70.70	8.1	12.4	20.5	30.0	-9.5
75.93	8.7	9.0	17.7	30.0	-12.3
116.20	14.2	8.3	22.5	30.0	-7.5
147.00	13.8	5.7	19.5	30.0	-10.5

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
 2. Correction Factor(dB/m) = Ant. Factor(dB/m) + Cable loss(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value

TEST DATA OF RADIATED EMISSION

EUT: COLOR MONITOR MODEL: 7257C MODE: 1024x768 (69 KHz)

ANTENNA: CHASE BILOG CBL611A

POLARITY: Vertical

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 KHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

TEST PERSONNEL:

Chris Hwang

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
46.80	12.4	12.7	25.1	30.0	-4.9
66.45	7.7	17.9	25.6	30.0	-4.4
69.75	7.5	18.4	25.9	30.0	-4.1
75.92	7.9	16.0	23.9	30.0	-6.1
112.70	14.0	12.0	26.0	30.0	-4.0
133.90	16.7	9.6	26.3	30.0	-3.7

REMARKS :

1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
2. Correction Factor(dB/m) = Ant. Factor(dB/m) + Cable loss(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value





6. ATTACHMENT I-TECHNICAL DESCRIPTION OF EUT

SPECIFICATIONS:

- | | |
|-------------------------|---|
| * Picture Tube | Size: 15", diagonal
Dot Pitch: 0.28mm
Surface: AR, AS coating |
| * Bandwidth | 80 MHz |
| * Maximum Viewable Size | 13.7" diagonal |
| * Power Supply | Input voltage: 90-264 Vac, 47-63 Hz
Power Consumption: 75 watts (max.) |
| * Max. Resolution | 1280x1024 |
| * Horizontal Frequency | 30-70 kHz |
| * Vertical Frequency | 50-120 Hz |
| * Dimensions | 376mm(W) x 373mm(H) x 385mm (D) |
| * Operating Conditions | Temperature: 5°C ~ 40°C
Humidity: 20% to 90% |
| * Storage Conditions | Temperature: 0°C to 60 °C
Humidity: 10% to 90% |
| * Weight | 12.5 kg. |