



WiFi 802.11b -Body Front CH1	2
WiFi 802.11b -Body Front CH6	3
WiFi 802.11b -Body Front CH11	4
WiFi 802.11b -Body Rear CH11	5
WiFi 802.11b -Body Right CH11	6

Test Laboratory: Compliance Certification Services Inc.

Date: 4/2/2018

WiFi 802.11b -Body Front CH1**DUT: Indoor Air Quality; Type: HAQ; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2412 MHz;Duty Cycle: 1:1Medium parameters used: $f = 2412$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 52.164$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2017;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Front CH1/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0379 W/kg


WiFi/Body Front CH1/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.234 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.00881 W/kg

Maximum value of SAR (measured) = 0.0349 W/kg

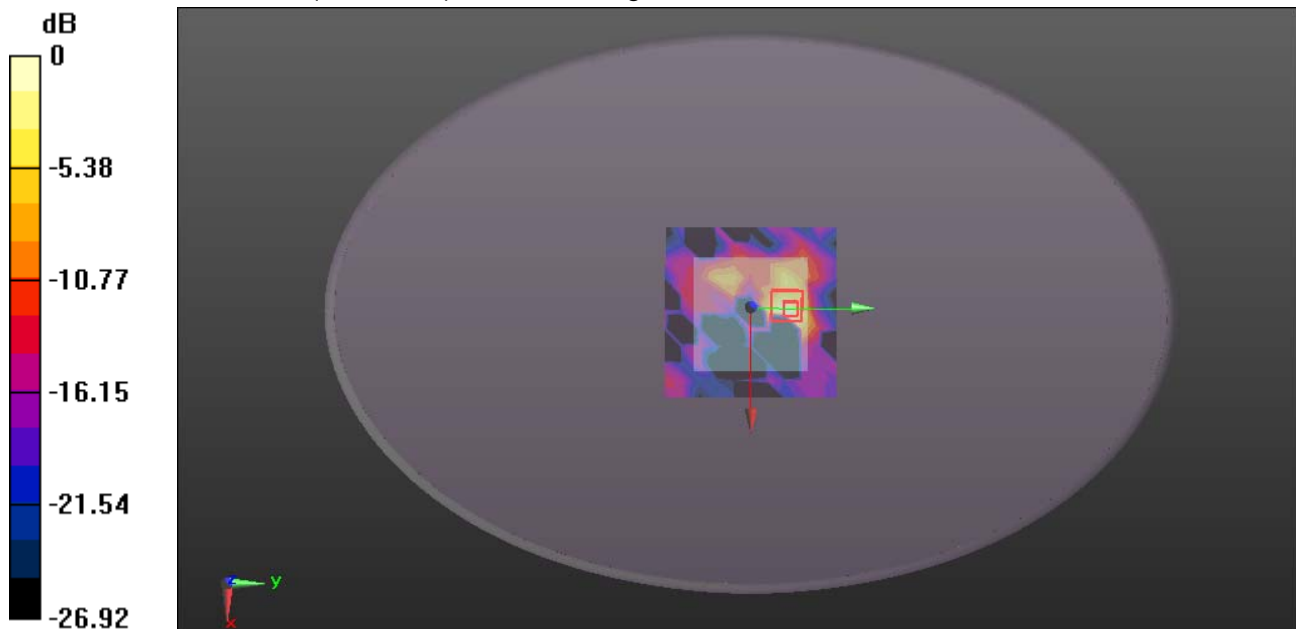

0 dB = 0.0349 W/kg = -14.57 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 4/2/2018

WiFi 802.11b -Body Front CH6

DUT: Indoor Air Quality; Type: HAQ; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.912 \text{ S/m}$; $\epsilon_r = 51.966$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2017;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Front CH6/Area Scan (11x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0313 W/kg


WiFi/Body Front CH6/Zoom Scan (7x7x5)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.3614 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.0072 W/kg

Maximum value of SAR (measured) = 0.0314 W/kg

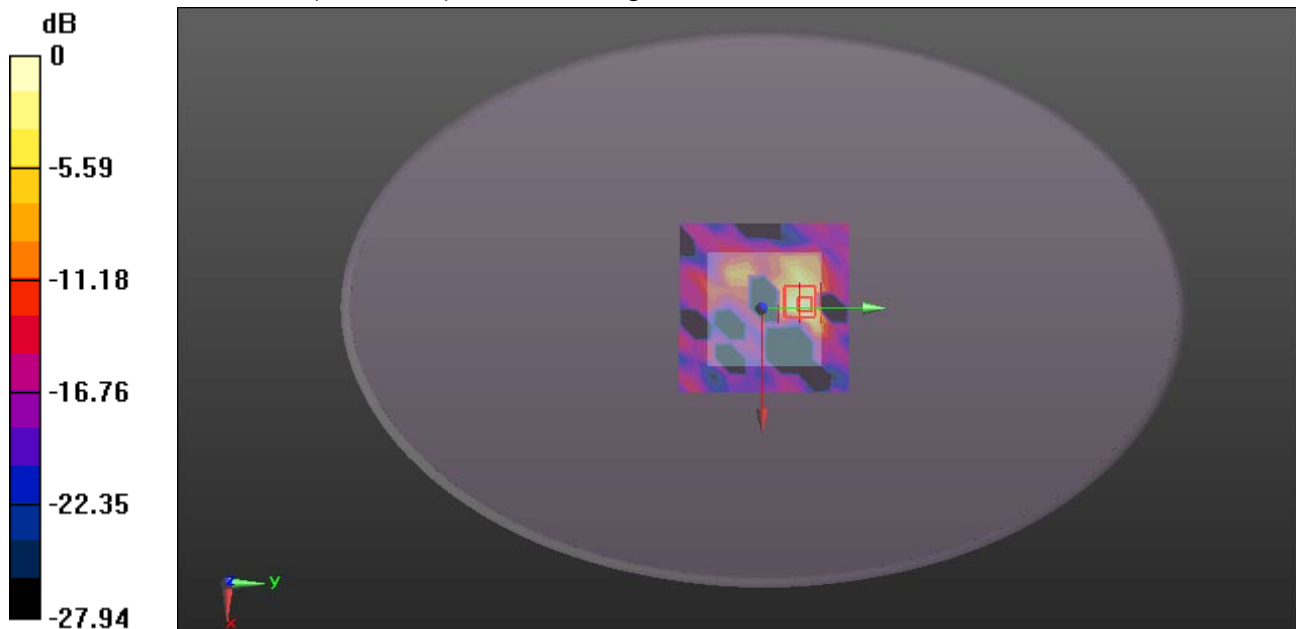

0 dB = 0.0314 W/kg = -15.03 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 4/2/2018

WiFi 802.11b -Body Front CH11**DUT: Indoor Air Quality; Type: HAQ; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 51.669$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2017;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Front CH11/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0292 W/kg


WiFi/Body Front CH11/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3317 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00741 W/kg

Maximum value of SAR (measured) = 0.0287 W/kg

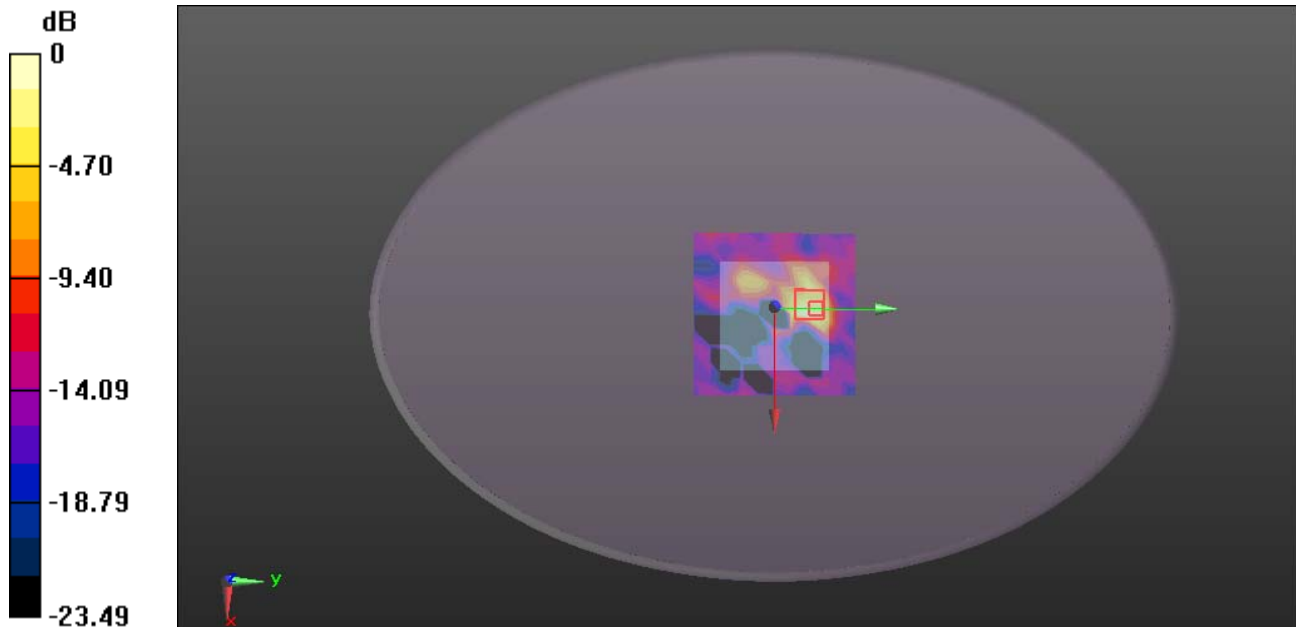

0 dB = 0.0287 W/kg = -15.42 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 4/2/2018

WiFi 802.11b -Body Rear CH11**DUT: Indoor Air Quality; Type: HAQ; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 51.669$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2017;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Rear CH11/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00240 W/kg


WiFi/Body Rear CH11/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4142 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.00585 W/kg

SAR(1 g) = 0.00166 W/kg; SAR(10 g) = 0.000505 W/kg

Maximum value of SAR (measured) = 0.00330 W/kg

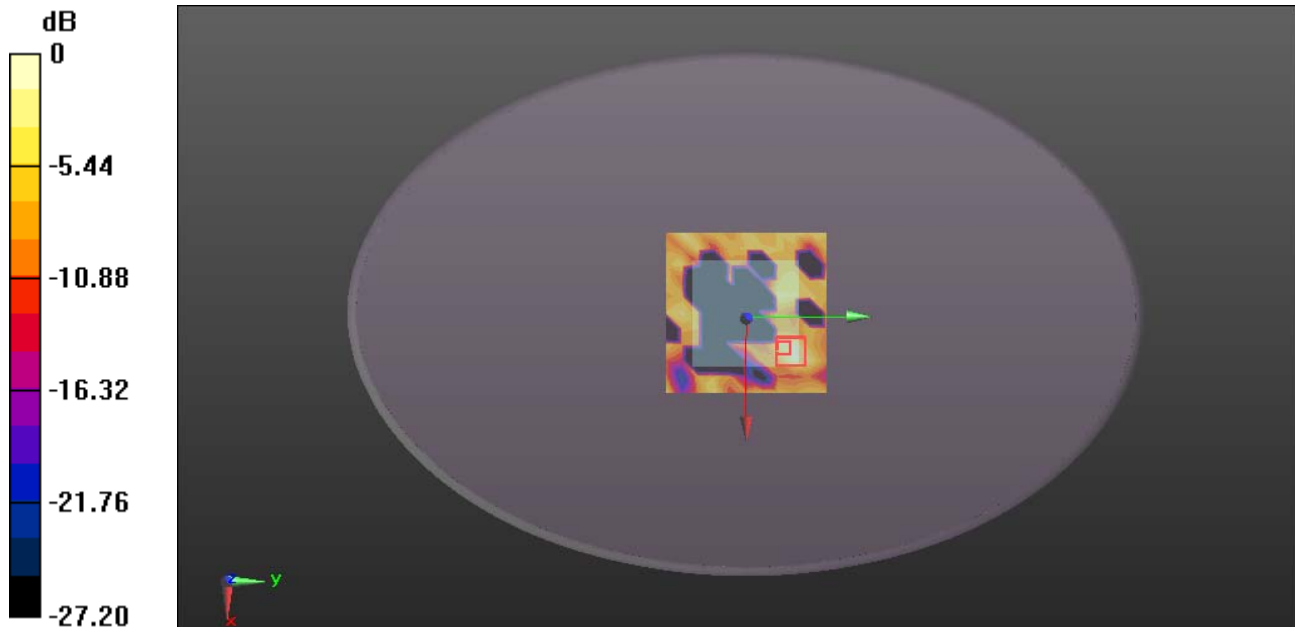

Test Laboratory: Compliance Certification Services Inc.

Date: 4/2/2018

WiFi 802.11b -Body Right CH11**DUT: Indoor Air Quality; Type: HAQ; Serial: N/A**Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;
Frequency: 2462 MHz; Duty Cycle: 1:1Medium parameters used: $f = 2462$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 51.669$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2017;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2017
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WiFi/Body Right CH11/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.00433 W/kg


WiFi/Body Right CH11/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1693 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.00736 W/kg

SAR(1 g) = 0.000577 W/kg; SAR(10 g) = 0.000108 W/kg

Maximum value of SAR (measured) = 0.00412 W/kg

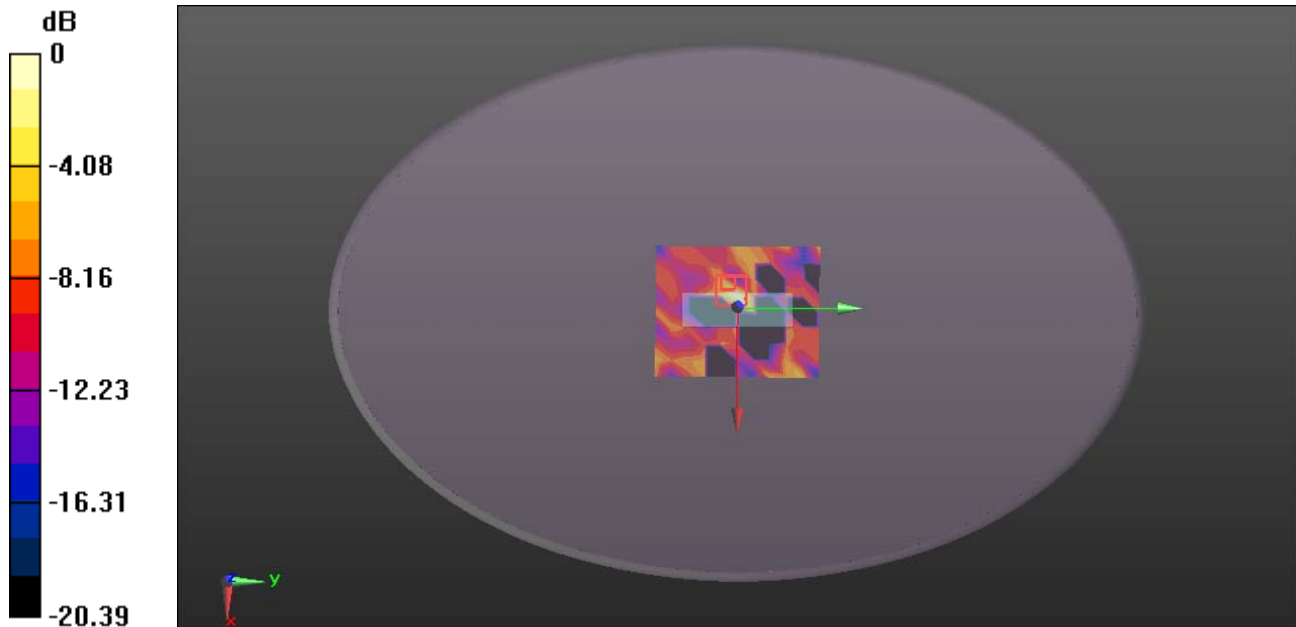

0 dB = 0.00412 W/kg = -23.85 dBW/kg