

FCC REPORT

Applicant: Shenzhen Hangshi Technology Co., Ltd

Address of Applicant: Hangshi Technology Park, Democracy West Industry Area, Shajing Town, Bao'an District, Shenzhen, China

Manufacturer/Factory: Shenzhen Hangshi Technology Co., Ltd

Address of Manufacturer/Factory: Hangshi Technology Park, Democracy West Industry Area, Shajing Town, Bao'an District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 2.4GHz Keyboard

Model No: HW186-3

FCC ID: 2AKHJHW186-3

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: May 11, 2018

Date of Test: May 11-14, 2018

Date of report issued: May 25, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
V1.0	May25, 2018	Original

Prepared By:




Date:

May 25, 2018

Project Engineer

Check By:



Date:

May 25, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.7 ADDITIONAL INSTRUCTIONS.....	8
6 TEST INSTRUMENTS LIST	9
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 RADIATED EMISSION METHOD.....	14
7.3.1 Field Strength of The Fundamental Signal	17
7.3.2 Spurious emissions.....	18
7.3.3 Bandedge emissions.....	23
7.4 20dB OCCUPY BANDWIDTH	24
8 TEST SETUP PHOTO.....	26
9 EUT CONSTRUCTIONAL DETAILS	28

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	2.4GHz Keyboard
Model No.:	HW186-3
Serial No.:	HSHW186300001
Test sample(s) ID:	GTS201805000109-1
Sample(s) Status	Engineer sample
Hardware:	v1.0
Software:	v1.0
Operation Frequency:	2405MHz~2470MHz
Channel numbers:	8
Channel separation:	N/A
Modulation type:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	-1.2dBi
Power supply:	3.7 Vdc (Li-ON battery)

Operation Frequency each of channel			
Channel	Frequency	Channel	Frequency
01	2405MHz	05	2440MHz
02	2413MHz	06	2450MHz
03	2422MHz	07	2460MHz
04	2430MHz	08	2470MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2430MHz
The Highest channel	2470MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	92.47	94.94	93.51

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Emerson Network Power	USB Charger	A1299	N/A

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

5.7 Additional instructions

Software (Used for test) from client

Mode	Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Name	N/A		
Test Software Version	N/A		
Support Units (Software installation media)	Description	Manufacturer	Model
	N/A	N/A	N/A
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH01	2405	TX LEVEL: Default
	CH04	2430	
	CH08	2470	

Operating instructions:

Press "ESC" key to power up, keyboard into test mode, The default frequency and test mode are 2430MHz and carry mode.

Refer to the button setting frequency in the table below

Keyboard test

F1	frequency point:2405MHz, Test Mode : Single carrier transmission
F2	frequency point: 2405MHz, Test Mode : Modulated data continuous transmission
F3	frequency point: 2405MHz , Test Mode : RX Mode
F4	frequency point: 2405MHz, Test Mode : Tx Mode
F5	frequency point: 2430 MHz, Test Mode : Single carrier transmission
F6	frequency point: 2430 MHz, Test Mode : Modulated data continuous transmission
F7	frequency point: 2430 MHz, Test Mode : RX Mode
F8	frequency point: 2430 MHz, Test Mode : Tx Mode
F9	frequency point: 2470 MHz, Test Mode : Single carrier transmission
F10	frequency point: 2470 MHz, Test Mode : Modulated data continuous transmission
F11	frequency point: 2470 MHz, Test Mode : RX Mode
F12	frequency point: 2470 MHz, Test Mode : Tx Mode

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Keysight	N9010A	GTS533	March 02 2018	March 01 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

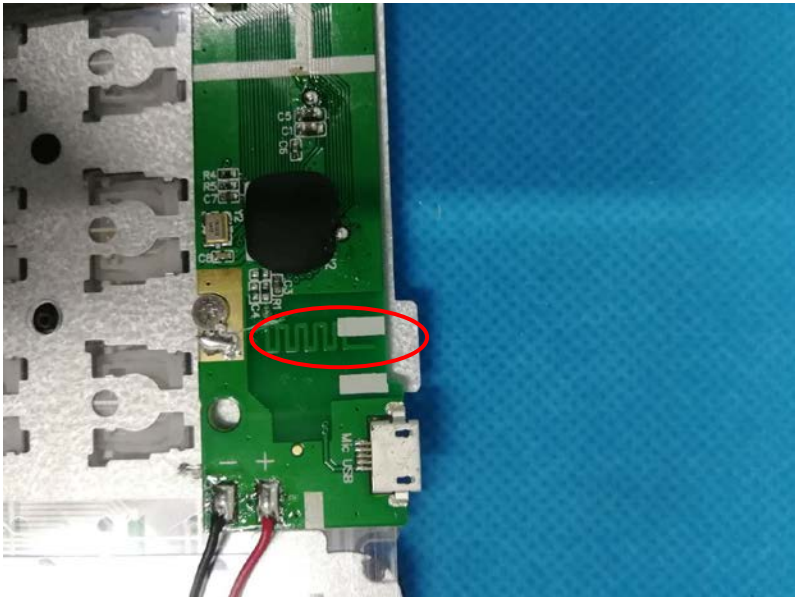
Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna: <i>The antenna is integral antenna, the best case gain of the antenna is -1.2dBi.</i> 	

7.2 Conducted Emissions

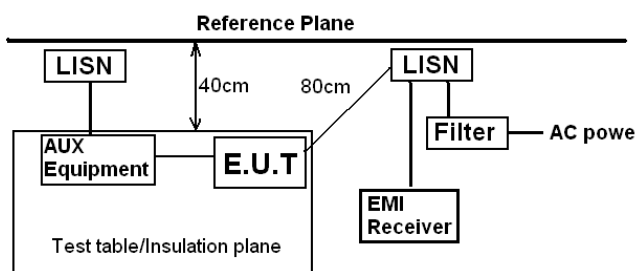Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	Reference Plane  <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>		
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		


Measurement data

Line:

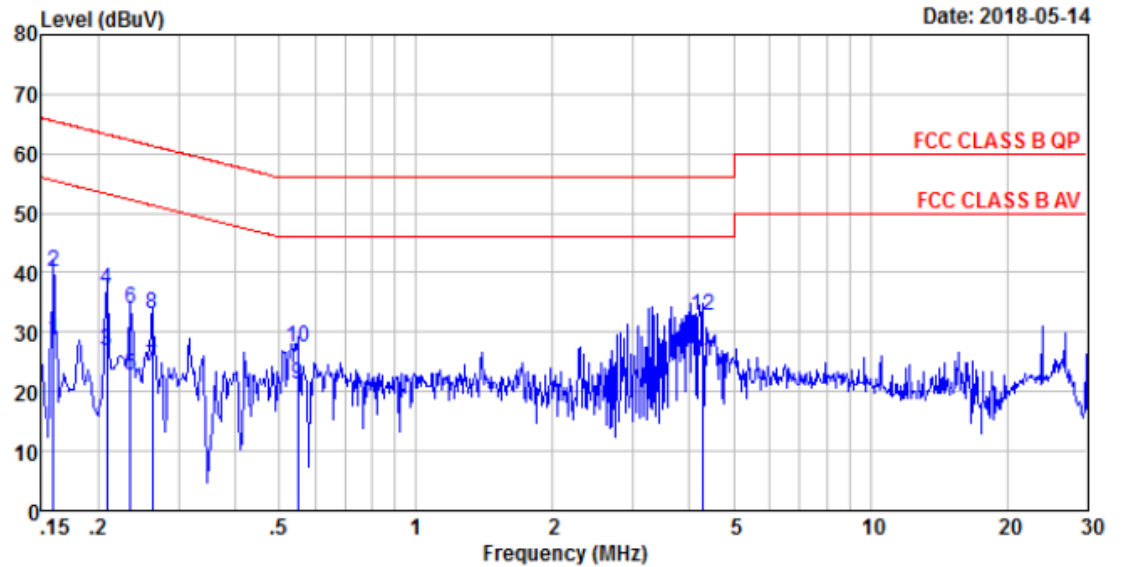

	Freq	Read Level	Level	Cable Loss	LISN Factor	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB	dB	dBuV	dB		
1	0.16	19.00	28.60	0.06	9.54	55.52	-26.92	Average	LINE
2	0.16	30.60	40.20	0.06	9.54	65.52	-25.32	QP	LINE
3	0.21	17.33	26.90	0.01	9.56	53.27	-26.37	Average	LINE
4	0.21	27.73	37.30	0.01	9.56	63.27	-25.97	QP	LINE
5	0.24	13.23	22.80	0.01	9.56	52.26	-29.46	Average	LINE
6	0.24	24.33	33.90	0.01	9.56	62.26	-28.36	QP	LINE
7	0.26	14.52	24.10	0.01	9.57	51.34	-27.24	Average	LINE
8	0.26	23.52	33.10	0.01	9.57	61.34	-28.24	QP	LINE
9	0.55	11.60	21.20	0.02	9.58	46.00	-24.80	Average	LINE
10	0.55	18.00	27.60	0.02	9.58	56.00	-28.40	QP	LINE
11 AV	4.29	15.53	25.20	0.03	9.64	46.00	-20.80	Average	LINE
12 QP	4.29	23.13	32.80	0.03	9.64	56.00	-23.20	QP	LINE

Neutral:

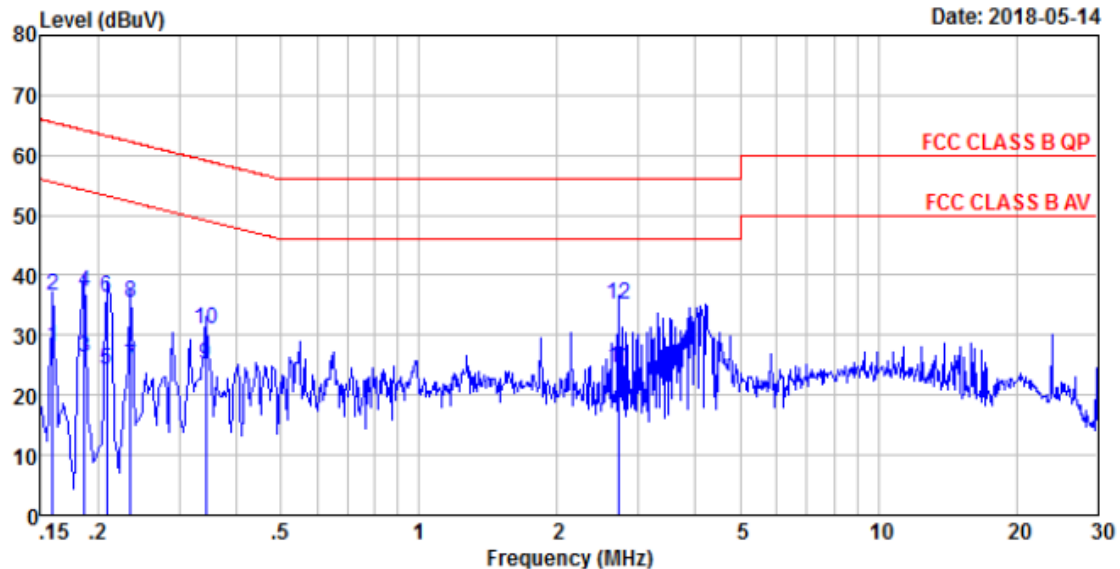

	Freq	Read Level	Level	Cable Loss	LISN Factor	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dBuV	dB	dB	dBuV	dB		
1	0.16	18.49	28.10	0.06	9.55	55.52	-27.42	Average	NEUTRAL
2	0.16	26.89	36.50	0.06	9.55	65.52	-29.02	QP	NEUTRAL
3	0.19	16.72	26.30	0.02	9.56	54.20	-27.90	Average	NEUTRAL
4	0.19	27.62	37.20	0.02	9.56	64.20	-27.00	QP	NEUTRAL
5	0.21	14.52	24.10	0.01	9.57	53.27	-29.17	Average	NEUTRAL
6	0.21	26.82	36.40	0.01	9.57	63.27	-26.87	QP	NEUTRAL
7	0.24	15.30	24.90	0.01	9.59	52.26	-27.36	Average	NEUTRAL
8	0.24	25.90	35.50	0.01	9.59	62.26	-26.76	QP	NEUTRAL
9	0.34	15.47	25.10	0.02	9.61	49.13	-24.03	Average	NEUTRAL
10	0.34	21.27	30.90	0.02	9.61	59.13	-28.23	QP	NEUTRAL
11 av	2.72	14.71	24.40	0.03	9.66	46.00	-21.60	Average	NEUTRAL
12 QP	2.72	25.51	35.20	0.03	9.66	56.00	-20.80	QP	NEUTRAL

Notes


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)	Value	Measurement Distance
	0.009MHz-0.490MHz		2400/F(KHz)	QP	300m
	0.490MHz-1.705MHz		24000/F(KHz)	QP	300m
	1.705MHz-30MHz		30	QP	30m
	30MHz-88MHz		100	QP	3m
	88MHz-216MHz		150	QP	
	216MHz-960MHz		200	QP	
	960MHz-1GHz		500	QP	
	Above 1GHz		500	Average	
			5000	Peak	
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				

Test setup:


Below 30MHz

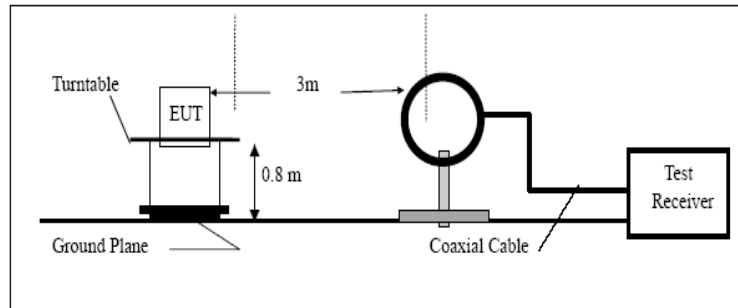

Below 1GHz

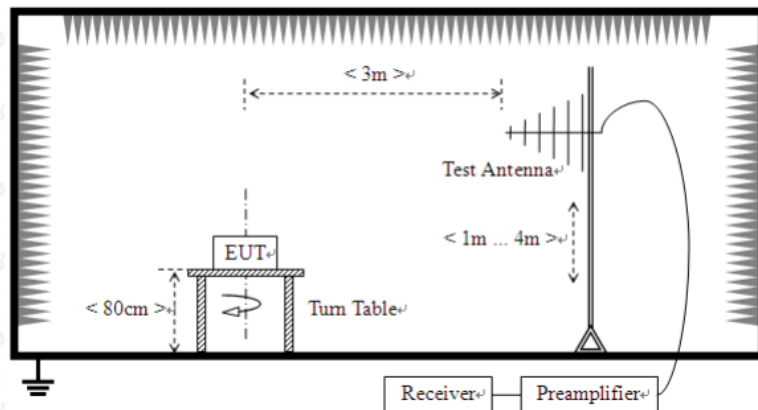

Above 1GHz

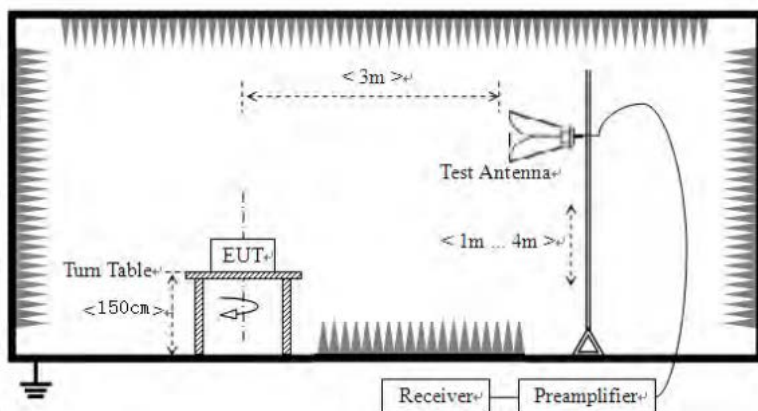

Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2405.00	92.12	27.15	3.65	36.12	86.8	114.00	-27.2	Vertical
2405.00	86.89	27.15	3.65	36.12	81.57	114.00	-32.43	Horizontal
2430.00	94.94	27.22	3.66	36.19	89.63	114.00	-24.37	Vertical
2430.00	91.88	27.22	3.66	36.19	86.57	114.00	-27.43	Horizontal
2470.00	93.63	27.32	3.67	36.29	88.33	114.00	-25.67	Vertical
2470.00	94.66	27.32	3.67	36.29	89.36	114.00	-24.64	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2405.00	79.97	27.15	3.65	36.12	74.65	94.00	-39.35	Vertical
2405.00	77.68	27.15	3.65	36.12	72.36	94.00	-41.64	Horizontal
2430.00	81.18	27.22	3.66	36.19	75.87	94.00	-38.13	Vertical
2430.00	81.02	27.22	3.66	36.19	75.71	94.00	-38.29	Horizontal
2470.00	82.87	27.32	3.67	36.29	77.57	94.00	-36.43	Vertical
2470.00	76.00	27.32	3.67	36.29	70.70	94.00	-43.30	Horizontal


7.3.2 Spurious emissions

■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz


Horizontal:

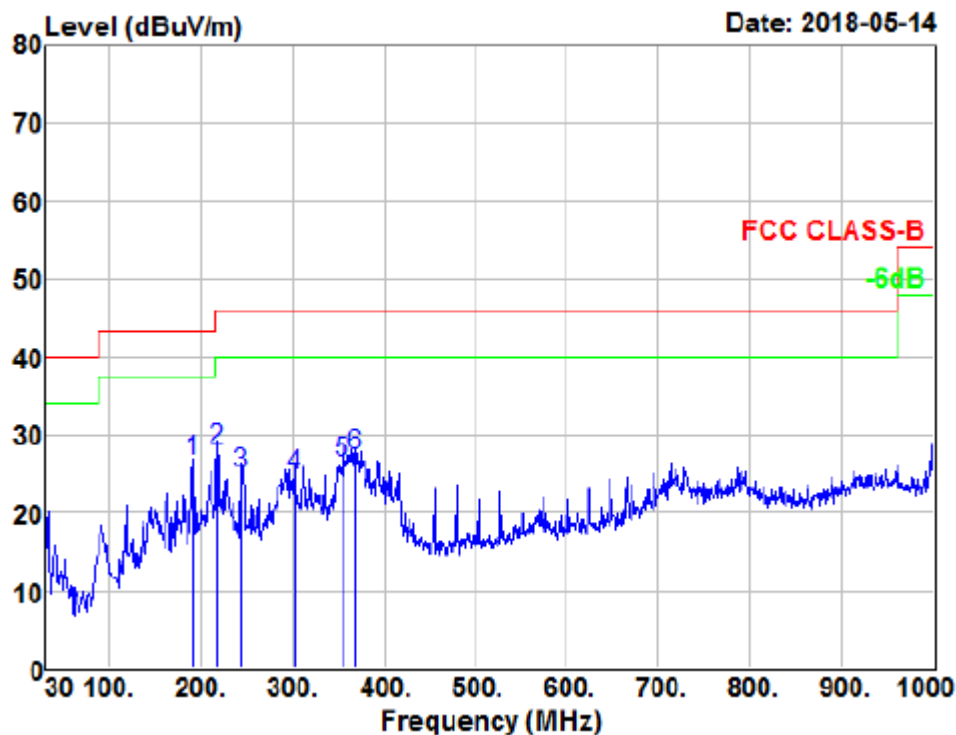

Site : SAC
Condition: 3m VULB 9168 HORIZONTAL

	Read	Aux	Limit	Over	
Freq	Level	Factor	Level	Line	Limit Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	191.99	45.98	0.00	26.60	43.50 -16.90 QP
2	217.21	47.41	0.00	28.20	46.00 -17.80 QP
3	244.37	43.27	0.00	25.10	46.00 -20.90 QP
4	301.60	40.91	0.00	24.80	46.00 -21.20 QP
5	354.95	41.10	0.00	26.40	46.00 -19.60 QP
6	367.56	41.82	0.00	27.40	46.00 -18.60 QP

Vertical:

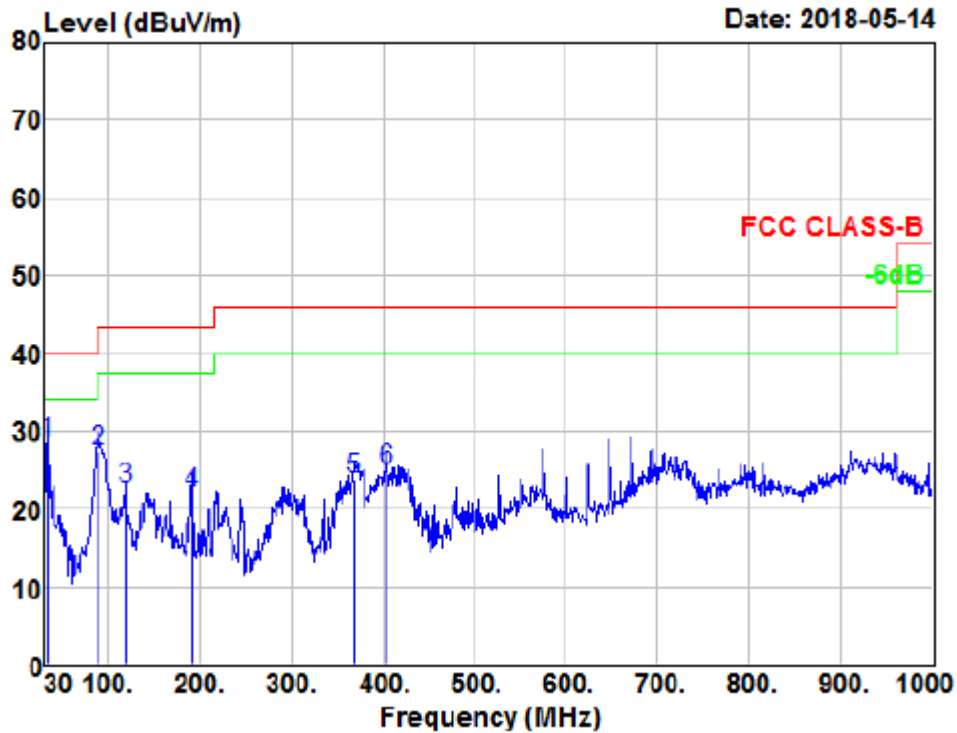

Site : SAC

Condition: 3m VULB 9168 VERTICAL

	Freq	Read Level	Aux Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dBuV/m	dBuV/m	dB	
1	32.91	46.77	0.00	28.60	40.00	-11.40	QP
2	88.20	48.48	0.00	27.30	43.50	-16.20	QP
3	119.24	40.84	0.00	22.60	43.50	-20.90	QP
4	191.02	41.23	0.00	21.90	43.50	-21.60	QP
5	368.53	38.20	0.00	23.80	46.00	-22.20	QP
6	404.42	38.67	0.00	25.10	46.00	-20.90	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	62.75	31.25	5.44	36.27	63.17	74.00	-10.83	Vertical
7215.00	58.89	35.90	6.97	34.26	67.5	74.00	-6.50	Vertical
9620.00	*					74.00		Vertical
12025.00	*					74.00		Vertical
14430.00	*					74.00		Vertical
4810.00	58.84	31.24	5.44	36.27	59.25	74	-14.75	Horizontal
7215.00	56.99	35.89	6.96	34.25	65.59	74	-8.00	Horizontal
9620.00	*					74.00		Horizontal
12025.00	*					74.00		Horizontal
14430.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	50.97	31.24	5.44	36.27	51.38	54.00	-2.62	Vertical
7215.00	36.02	35.89	6.96	34.25	44.62	54.00	-9.38	Vertical
9620.00	*					54.00		Vertical
12025.00	*					54.00		Vertical
14430.00	*					54.00		Vertical
4810.00	46.06	31.24	5.44	36.27	46.47	54.00	-7.53	Horizontal
7215.00	36.74	35.89	6.96	34.25	45.34	54.00	-8.66	Horizontal
9620.00	*					54.00		Horizontal
12025.00	*					54.00		Horizontal
14430.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4860.00	61.21	31.37	5.42	36.25	61.75	74.00	-12.25	Vertical
7290.00	57.74	36.06	7.18	34.32	66.66	74.00	-7.34	Vertical
9720.00	*					74.00		Vertical
12150.00	*					74.00		Vertical
14580.00	*					74.00		Vertical
4860.00	58.49	31.35	5.42	36.25	59.01	74.00	-14.99	Horizontal
7290.00	57.23	36.07	7.19	34.33	66.16	74.00	-7.84	Horizontal
9720.00	*					74.00		Horizontal
12150.00	*					74.00		Horizontal
14580.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4860.00	51.25	31.36	5.42	36.25	52.05	54.00	-1.95	Vertical
7290.00	36.06	36.06	7.18	34.32	44.98	54.00	-9.02	Vertical
9720.00	*					54.00		Vertical
12150.00	*					54.00		Vertical
14580.00	*					54.00		Vertical
4860.00	45.00	31.36	5.42	36.25	45.53	54.00	-8.47	Horizontal
7290.00	35.15	36.06	7.18	34.32	44.07	54.00	-9.93	Horizontal
9720.00	*					54.00		Horizontal
12150.00	*					54.00		Horizontal
14580.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4940.00	62.76	31.56	5.37	36.22	63.47	74.00	-10.53	Vertical
7410.00	59.05	36.33	7.49	34.44	68.43	74.00	-5.57	Vertical
9880.00	*	1				74.00		Vertical
12350.00	*					74.00		Vertical
14820.00	*					74.00		Vertical
4940.00	59.05	31.56	5.37	36.22	59.76	74.00	-14.24	Horizontal
7410.00	59.31	36.35	7.48	34.44	68.70	74.00	-5.30	Horizontal
9880.00	*					74.00		Horizontal
12350.00	*					74.00		Horizontal
14820.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4940.00	49.75	31.56	5.37	36.22	50.46	54.00	-3.54	Vertical
7410.00	36.53	36.34	7.49	34.44	45.92	54.00	-8.08	Vertical
9880.00	*					54.00		Vertical
12350.00	*					54.00		Vertical
14820.00	*					54.00		Vertical
4940.00	45.83	31.56	5.37	36.22	46.54	54.00	-7.46	Horizontal
7410.00	35.77	36.34	7.49	34.44	45.16	54.00	-8.84	Horizontal
9880.00	*					54.00		Horizontal
12350.00	*					54.00		Horizontal
14820.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.58	27.11	3.64	36.08	26.25	74	-47.75	Horizontal
2400.00	38.86	27.14	3.65	36.11	33.54	74	-40.46	Horizontal
2390.00	31.83	27.11	3.64	36.08	26.5	74	-47.50	Vertical
2400.00	41.51	27.14	3.65	36.11	36.19	74	-37.81	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	28.65	27.11	3.64	36.08	23.32	54	-30.68	Horizontal
2400.00	36.14	27.14	3.65	36.11	30.82	54	-23.18	Horizontal
2390.00	29.84	27.11	3.64	36.08	24.51	54	-29.49	Vertical
2400.00	40.72	27.14	3.65	36.11	35.4	54	-18.6	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.65	27.36	3.68	36.33	26.36	74	-47.64	Horizontal
2500.00	31.92	27.40	3.68	36.37	26.63	74	-47.37	Horizontal
2483.50	31.95	27.36	3.68	36.33	26.66	74	-47.34	Vertical
2500.00	32.43	27.40	3.68	36.37	27.14	74	-46.86	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	30.13	27.36	3.68	36.33	24.84	54	-29.16	Horizontal
2500.00	29.14	27.40	3.68	36.37	23.85	54	-30.15	Horizontal
2483.50	31.00	27.36	3.68	36.33	25.71	54	-28.29	Vertical
2500.00	29.17	27.40	3.68	36.37	23.88	54	-30.12	Vertical

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


7.4 20dB Occupy Bandwidth

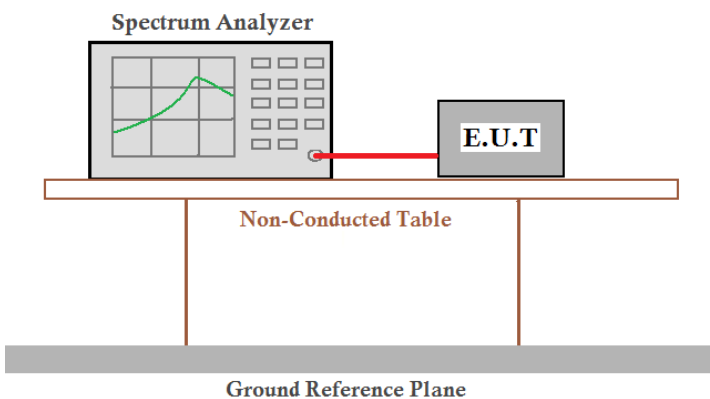Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	2.555	Pass
Middle	2.564	Pass
Highest	2.543	Pass

Test plot as follows:

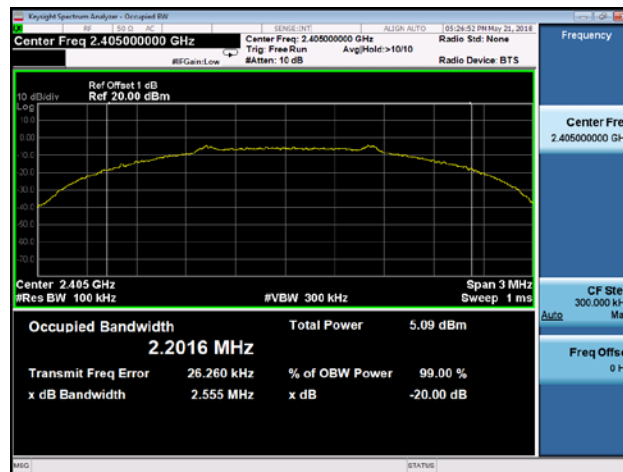

Lowest channel

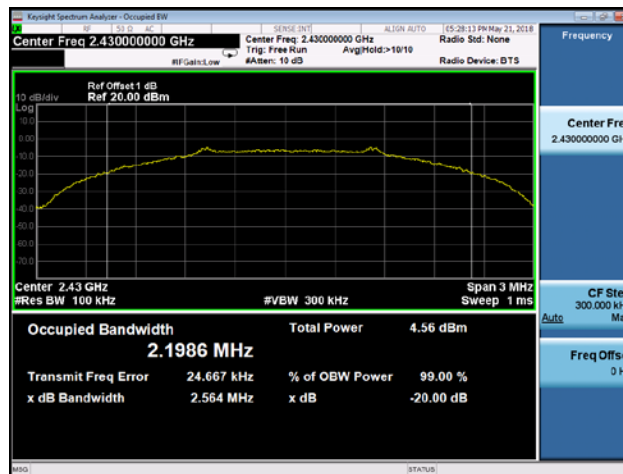


Middle channel




Highest channel

8 Test Setup Photo


Radiated Emission

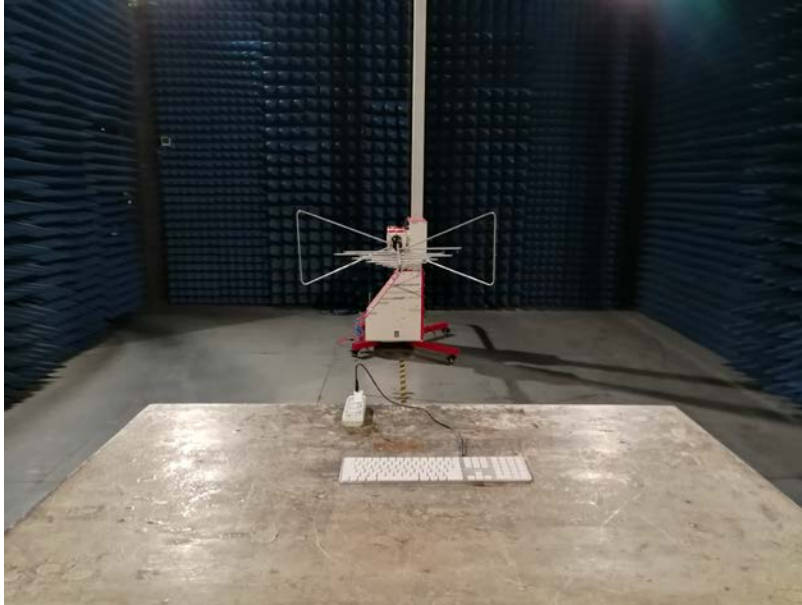


Conducted Emission


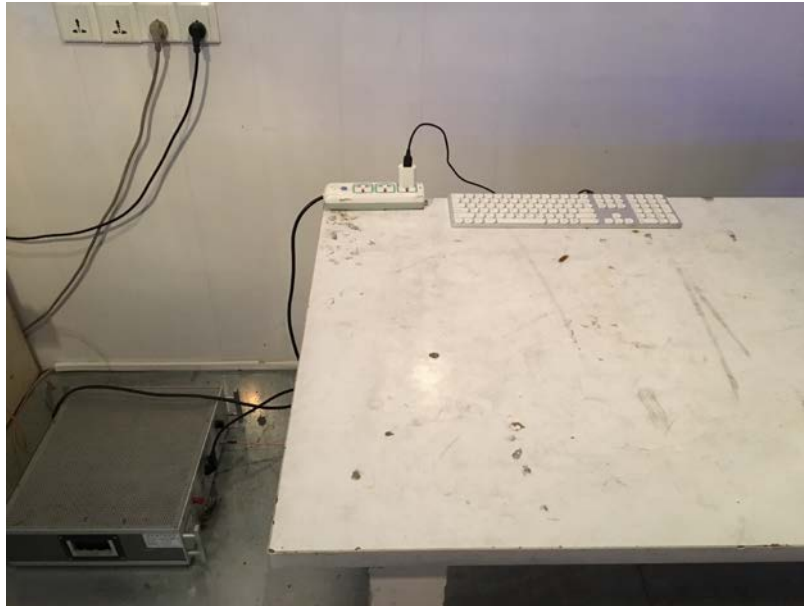


9 EUT Constructional Details

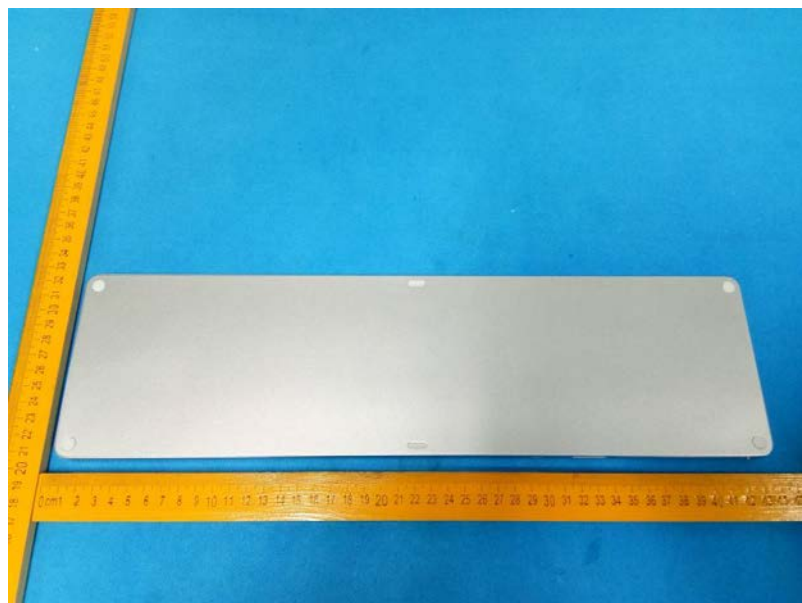



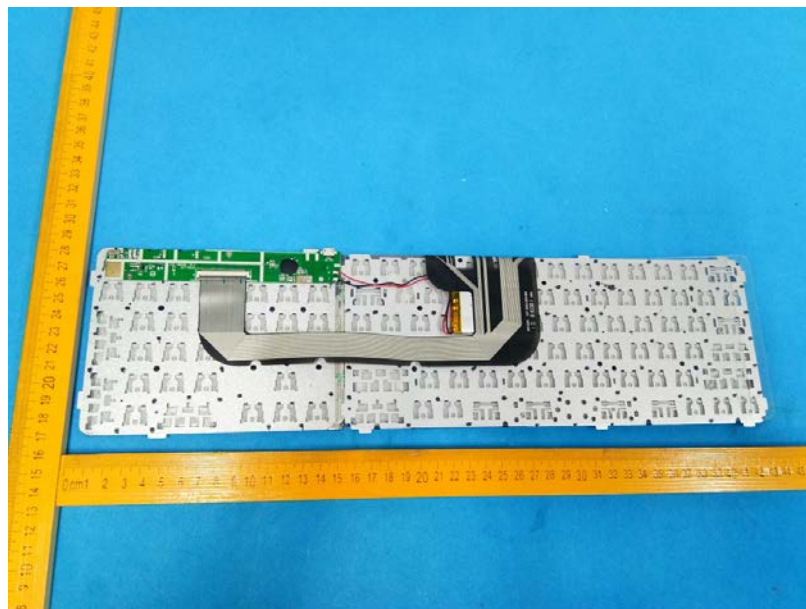

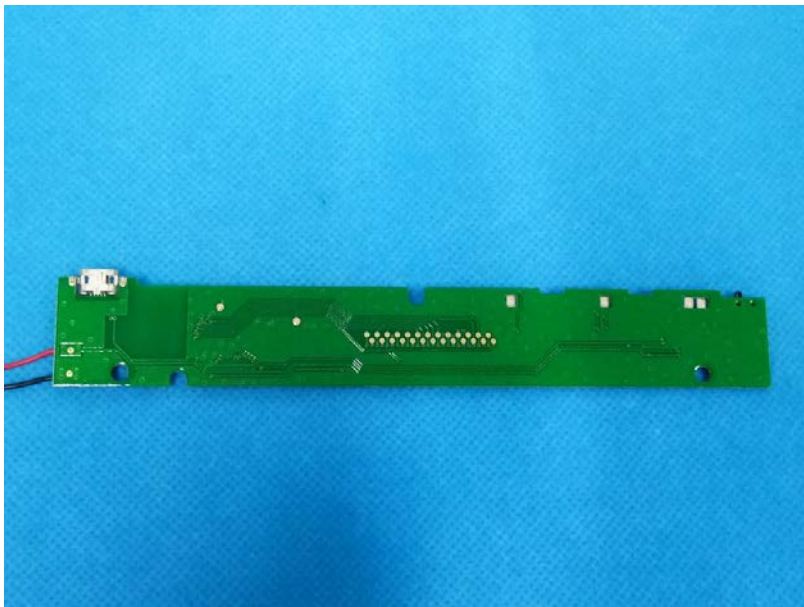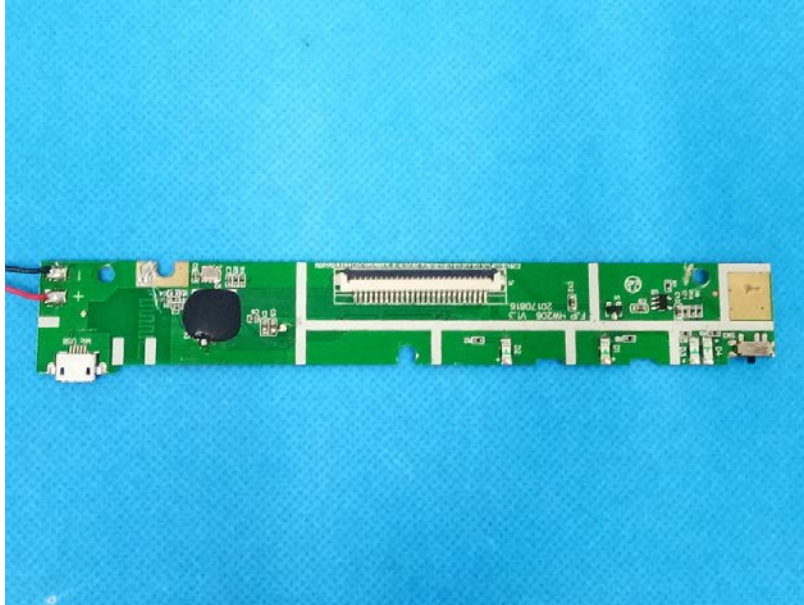



-----End-----