

# TEST REPORT

**Application No.:** KSCR2412002626AT  
**FCC ID:** 2AL8S-0235C9RE  
**Applicant:** Zhejiang Uniview Technologies Co., Ltd.  
**Address of Applicant:** No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China  
**Manufacturer:** Zhejiang Uniview Technologies Co., Ltd.  
**Address of Manufacturer:** No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Doorbell  
**Model No.:** ED-525B-WB, ED-525B-WB-xxxxxxx-yyyyyyy-zzz ("x", "y", "z" can be 0-9, A-Z, a-z or blank; "-" may be blank) ♣  
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**Trade Mark:** unv  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2024-12-24  
**Date of Test:** 2024-12-26 to 2025-01-14  
**Date of Issue:** 2025-01-20

**Test Result:****Pass\***

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2025-01-20	/

Authorized for issue by:			
Tested By		Maker Qi	
		Maker_Qi/Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	

## 2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	Test Lab*
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Customer Declaration	N/A

Radio Spectrum Matter Part					
Item	Standard	Method	Requirement	Result	Test Lab*
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass	B
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	B
Conducted Peak Output Power		ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass	A
Minimum 6dB Bandwidth		ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass	A
Power Spectrum Density		ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass	A
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass	A
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass	A

### Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model ED-525B-WB was tested since their differences were the model number .

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 Test Summary .....</b>	<b>3</b>
<b>3 Contents.....</b>	<b>4</b>
<b>4 General Information.....</b>	<b>5</b>
4.1 Details of E.U.T. ....	5
4.2 Power level setting using in test:.....	5
4.3 Description of Support Units .....	5
4.4 Measurement Uncertainty .....	6
4.5 Test Location.....	7
4.6 Test Facility .....	8
4.7 Deviation from Standards.....	8
4.8 Abnormalities from Standard Conditions.....	8
<b>5 Equipment List .....</b>	<b>9</b>
<b>6 Radio Spectrum Technical Requirement.....</b>	<b>11</b>
6.1 Antenna Requirement .....	11
<b>7 Radio Spectrum Matter Test Results .....</b>	<b>12</b>
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Radiated Emissions which fall in the restricted bands .....	16
7.3 Radiated Spurious Emissions Below 1GHz .....	35
7.4 Radiated Spurious Emissions Above 1GHz.....	39
7.5 Conducted Peak Output Power.....	53
7.6 Minimum 6dB Bandwidth .....	55
7.7 Power Spectrum Density.....	56
7.8 Conducted Band Edges Measurement .....	57
7.9 Conducted Spurious Emissions .....	58
<b>8 Test Setup Photo .....</b>	<b>59</b>
<b>9 EUT Constructional Details (EUT Photos).....</b>	<b>59</b>
<b>10 Appendix.....</b>	<b>60</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	~12-24V,50-60Hz,1.0A
Test voltage:	AC 120V/60Hz
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Internal antenna
Antenna Gain:	3.9dBi (Provided by the manufacturer)

### 4.2 Power level setting using in test:

Channel	BLE 1M	BLE 2M
	Ant 1	Ant 1
0	Default	Default
19	Default	Default
39	Default	Default

### 4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

#### 4.4 Measurement Uncertainty

##### Lab A:

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

##### Lab B:

For a 95% confidence level ( $k = 2$ ), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.54\text{dB}$
2	RF power density, conducted	$\pm 1.03\text{dB}$
3	Spurious emissions, conducted	$\pm 0.54\text{dB}$
4	Radio Frequency	$\pm 1.0 \%$
5	Duty Cycle	$\pm 0.37\%$
6	Occupied Bandwidth	$\pm 1.0 \%$
7	Radiated Emission	$\pm 3.13\text{dB}$ (9k -30MHz) $\pm 4.8\text{dB}$ (30M -1GHz) $\pm 4.8\text{dB}$ (1GHz to 18 GHz) $\pm 4.8\text{dB}$ (Above 18GHz)

##### Remark:

The  $U_{\text{lab}}$  (lab Uncertainty) is less than  $U_{\text{CISPR/ETSI}}$  (CISPR/ETSI Uncertainty), so the test results  
– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;  
– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

## 4.5 Test Location

### Lab A:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

### Lab B:

Conducted Emissions at AC Power Line (150kHz-30MHz); Radiated Emissions; Radiated Emissions which fall in the restricted bands test at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**Lab A:**

• **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

**Lab B:**

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

#### 4.7 Deviation from Standards

None

#### 4.8 Abnormalities from Standard Conditions

None



## 5 Equipment List

### Lab A:

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
<b>RF Conducted Test</b>						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/14/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/12/2024	08/11/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/14/2025
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111- CZ301120	01/15/2024	01/14/2025
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
15	Software	BST	TST-PASS	/	NCR	NCR

**Lab B:**

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
<b>Conducted Emission at Mains Terminals</b>						
1	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2/1/2024	1/31/2025
2	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2/8/2024	2/7/2025
3	Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2/4/2024	2/3/2025
4	Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2/4/2024	2/3/2025
5	Measurement Software	Tonscend	JS32-CE	SUWI-02-09-05	NCR	NCR
<b>RF Radiated Test</b>						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	11/25/2024	11/24/2027
2	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2/8/2024	2/7/2025
3	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	5/8/2024	5/7/2025
4	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	11/21/2024	11/20/2025
5	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2/1/2024	1/31/2025
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	11/25/2023	11/24/2025
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	11/25/2023	11/24/2025
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/12/2023	5/11/2025
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/13/2023	5/12/2025
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2/1/2024	1/31/2025
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2/1/2024	1/31/2025
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2/1/2024	1/31/2025
13	Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR
14	Measurement Software	Tonscend	JS32-RSE	SUWI-02-09-06	NCR	NCR

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.9 dBi.

Antenna location: Refer to internal photo.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 18.6 °C


Humidity: 47.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

#### 7.1.3 Test Setup Diagram

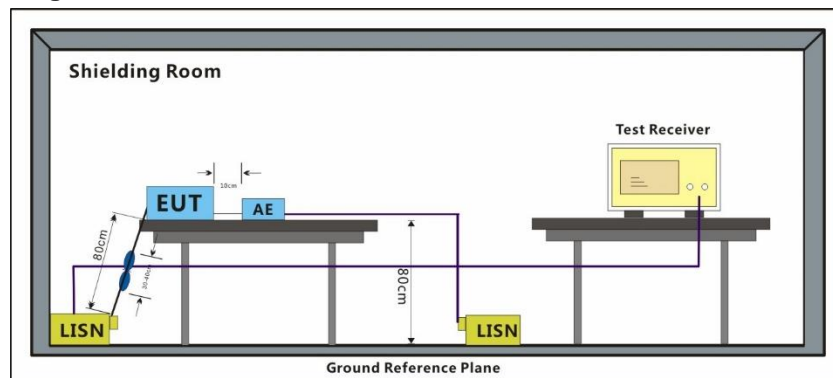


#### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


## BLE 1M

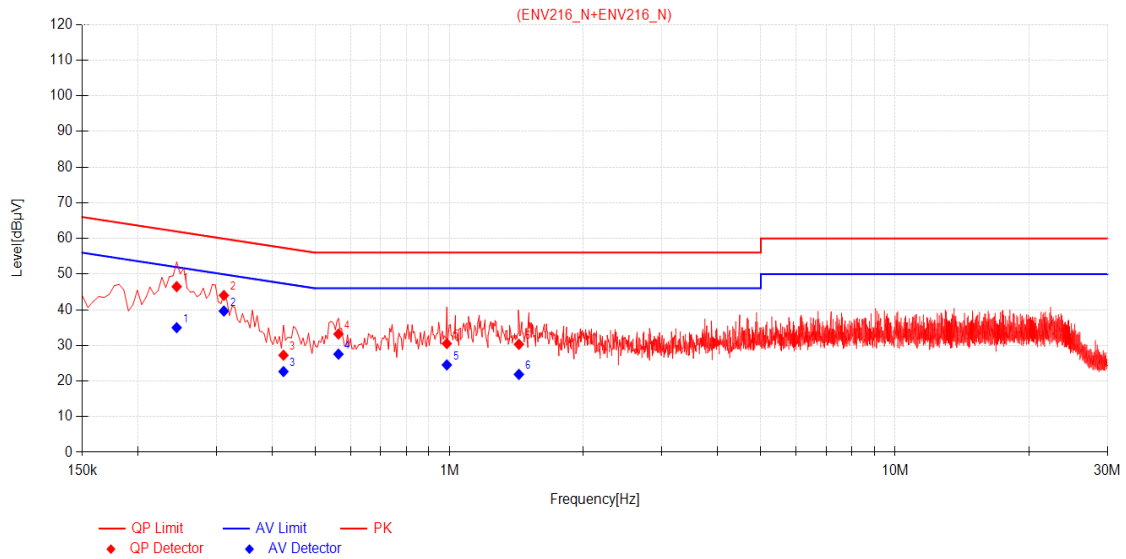

## Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2445	10.16	36.32	46.48	61.94	15.46	24.80	34.96	51.94	16.98	PASS
2	0.3120	10.16	33.85	44.01	59.92	15.91	29.47	39.63	49.92	10.29	PASS
3	0.4245	10.16	17.07	27.23	57.36	30.13	12.49	22.65	47.36	24.71	PASS
4	0.5640	10.18	23.01	33.19	56.00	22.81	17.35	27.53	46.00	18.47	PASS
5	0.9870	10.10	20.39	30.49	56.00	25.51	14.41	24.51	46.00	21.49	PASS
6	1.4325	10.12	20.17	30.29	56.00	25.71	11.73	21.85	46.00	24.15	PASS

## BLE 1M

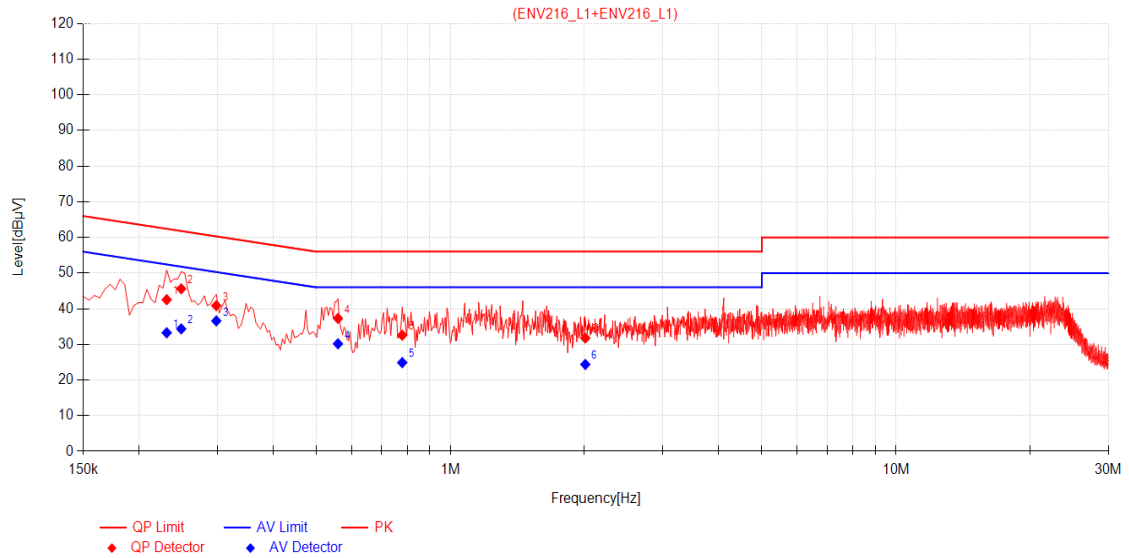

## Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2310	10.17	32.35	42.52	62.41	19.89	23.08	33.25	52.41	19.16	PASS
2	0.2490	10.16	35.43	45.59	61.79	16.20	24.18	34.34	51.79	17.45	PASS
3	0.2985	10.15	30.73	40.88	60.28	19.40	26.43	36.58	50.28	13.70	PASS
4	0.5595	10.18	27.08	37.26	56.00	18.74	19.98	30.16	46.00	15.84	PASS
5	0.7800	10.16	22.41	32.57	56.00	23.43	14.72	24.88	46.00	21.12	PASS
6	2.0085	10.05	21.72	31.77	56.00	24.23	14.32	24.37	46.00	21.63	PASS

## 7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C

Humidity: 48.3 % RH


Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



## 7.2.3 Test Setup Diagram

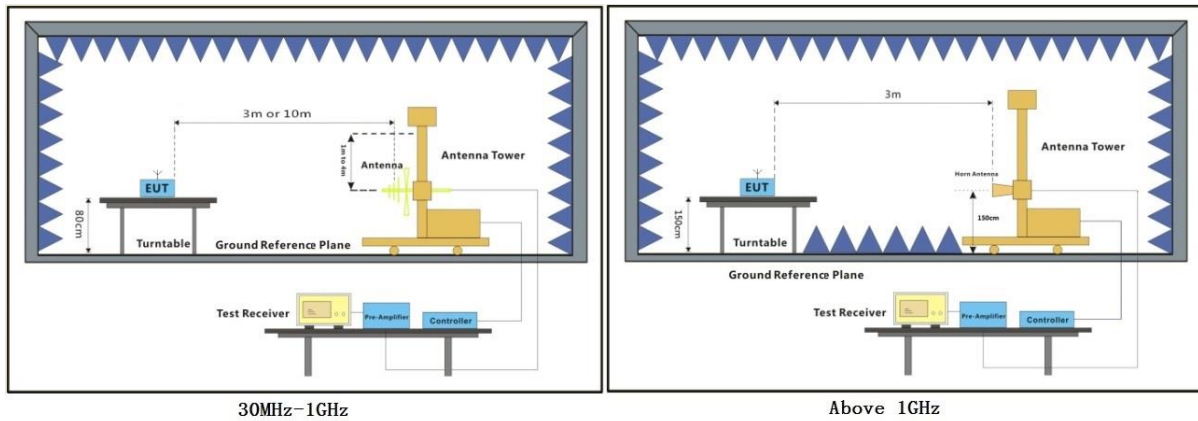

#### 7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1:  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.

## BLE 1M\_Channel 00

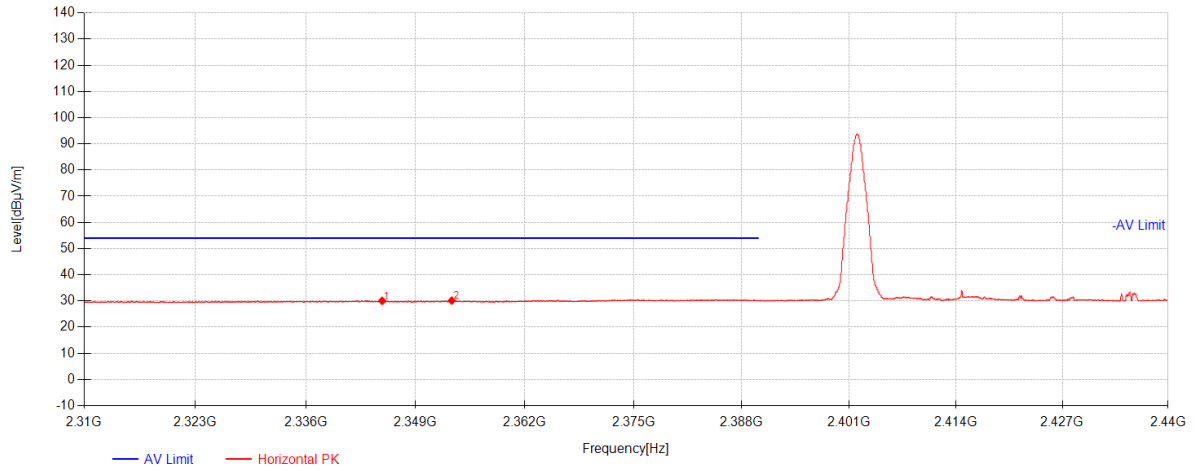

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2345.035	26.73	26.89	-23.58	30.04	54.00	23.96	Horizontal
2	2353.29	26.79	26.91	-23.57	30.12	54.00	23.88	Horizontal


## BLE 1M\_Channel 00

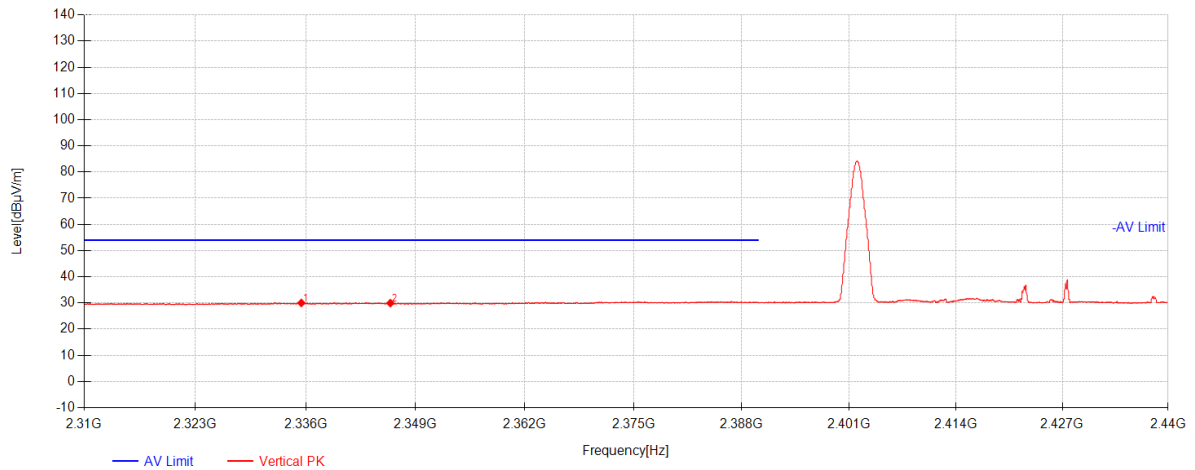

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2335.48	26.71	26.87	-23.58	30.00	54.00	24.00	Vertical
2	2346.01	26.62	26.89	-23.58	29.94	54.00	24.06	Vertical




BLE 1M\_Channel 00

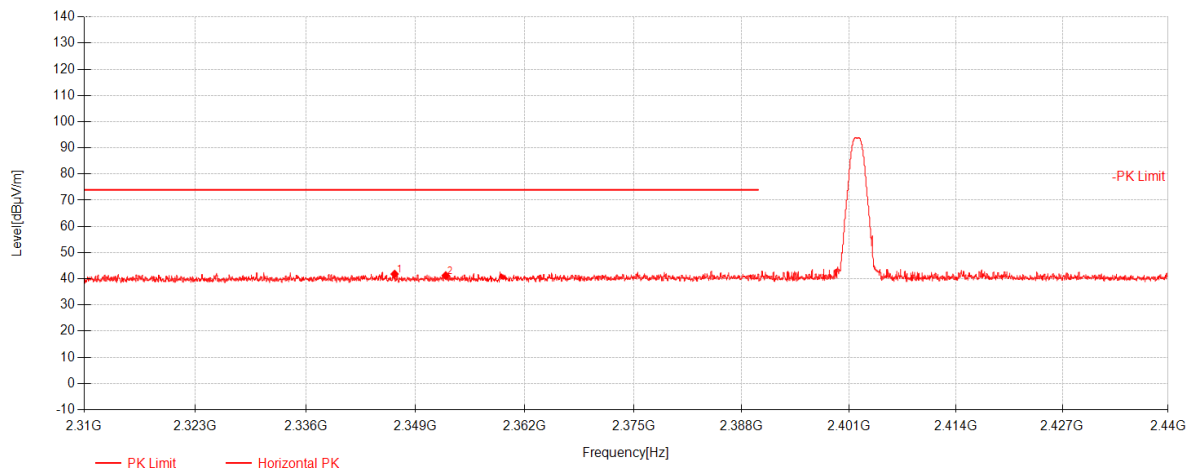

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2346.5138	38.50	26.89	-23.58	41.82	74.00	32.18	Horizontal
2	2352.575	37.91	26.91	-23.57	41.24	74.00	32.76	Horizontal




BLE 1M\_Channel 00

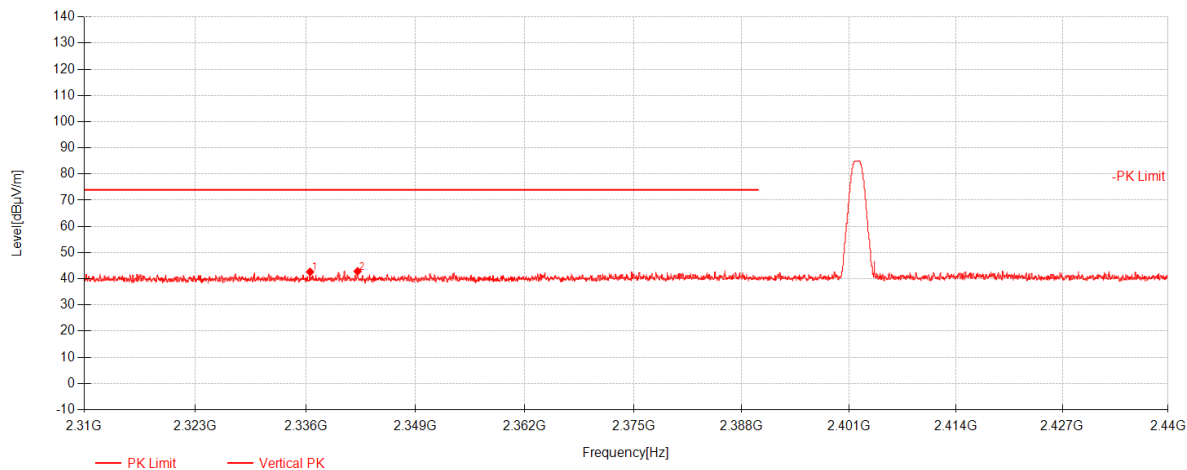

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2336.52	39.33	26.87	-23.58	42.63	74.00	31.37	Vertical
2	2342.1262	39.52	26.88	-23.58	42.83	74.00	31.17	Vertical




BLE 1M Channel 39

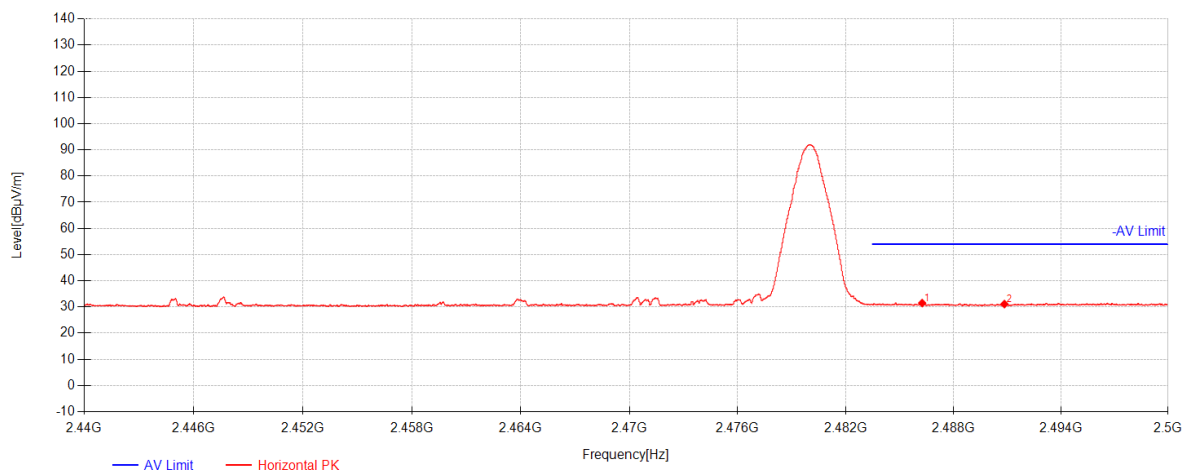

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2486.26	27.86	27.17	-23.54	31.49	54.00	22.51	Horizontal
2	2490.85	27.46	27.18	-23.54	31.10	54.00	22.90	Horizontal



BLE 1M Channel 39

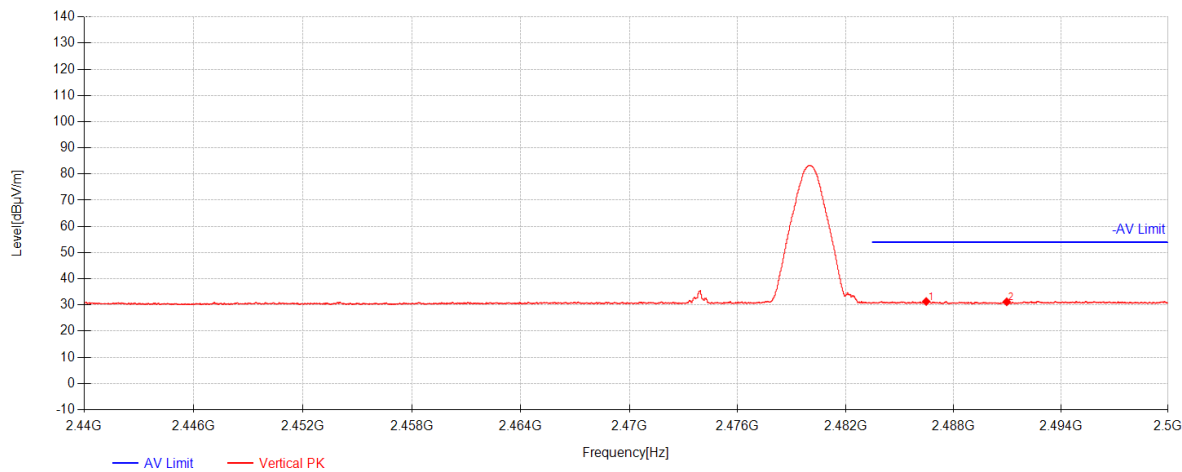


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2486.485	27.69	27.17	-23.54	31.32	54.00	22.68	Vertical
2	2490.9775	27.55	27.18	-23.54	31.19	54.00	22.81	Vertical






BLE 1M Channel 39

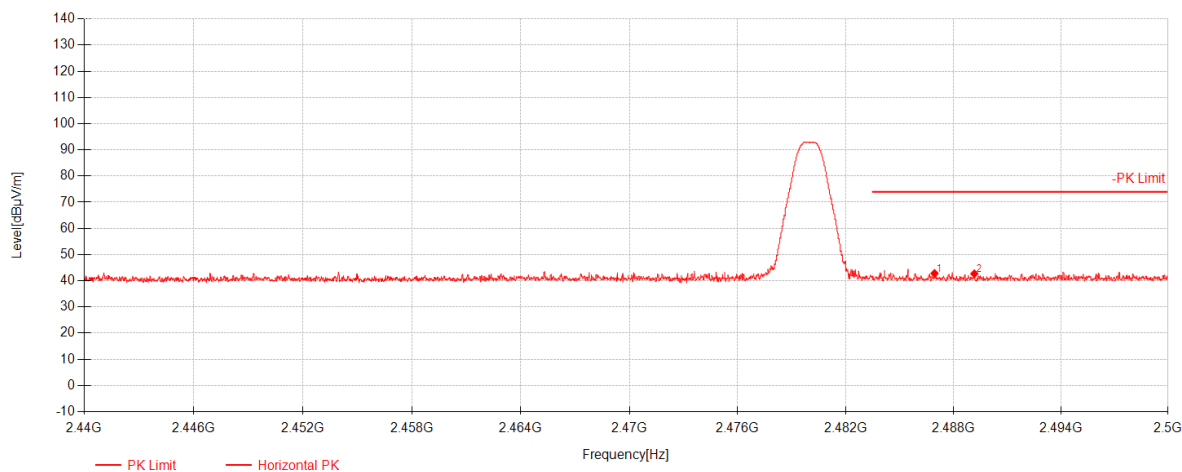

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2486.95	39.21	27.17	-23.54	42.84	74.00	31.16	Horizontal
2	2489.17	39.05	27.18	-23.54	42.69	74.00	31.31	Horizontal




BLE 1M Channel 39

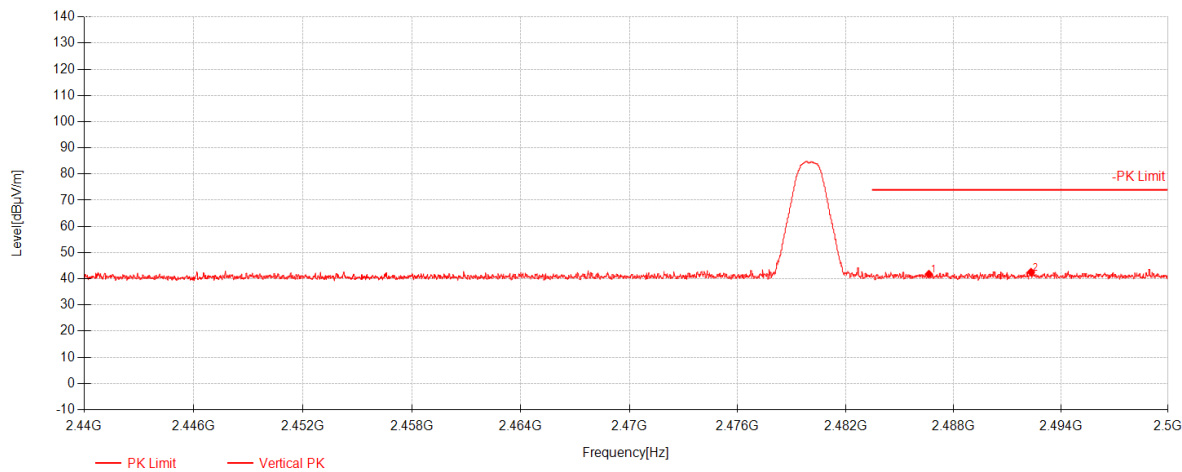


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2486.635	38.14	27.17	-23.54	41.77	74.00	32.23	Vertical
2	2492.335	38.91	27.18	-23.54	42.55	74.00	31.45	Vertical

## BLE 2M\_Channel 00

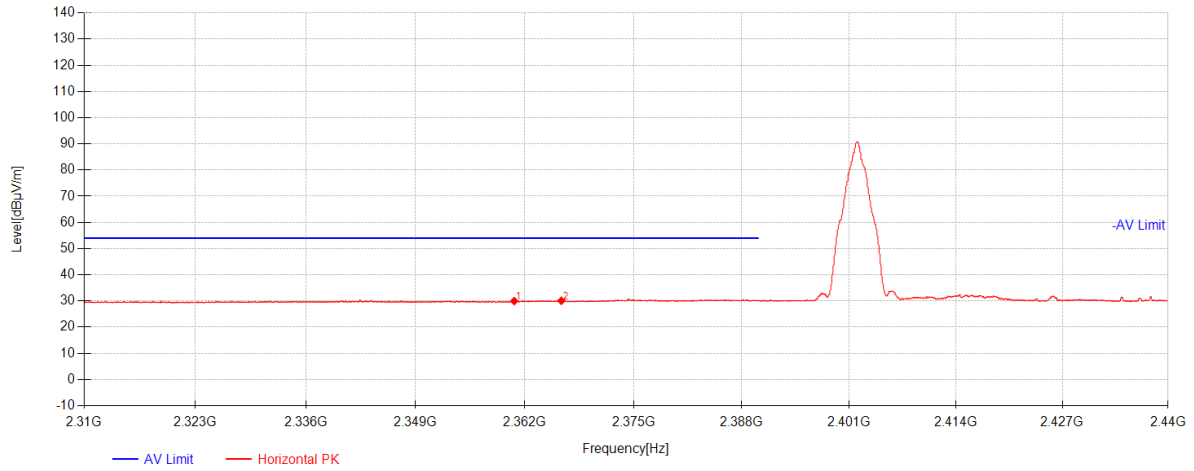

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2360.7325	26.62	26.92	-23.57	29.97	54.00	24.03	Horizontal
2	2366.355	26.70	26.93	-23.57	30.06	54.00	23.94	Horizontal


## BLE 2M\_Channel 00

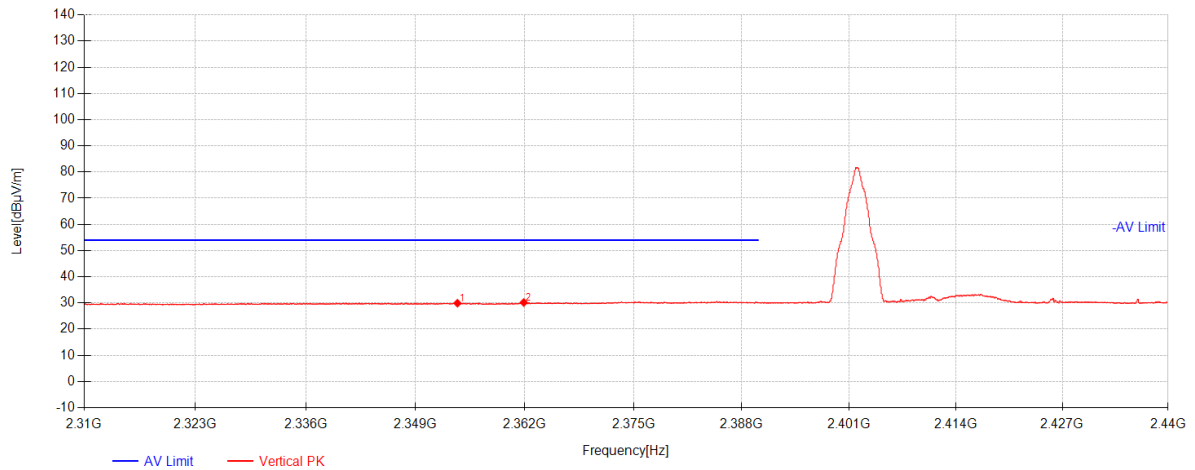

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2353.9725	26.58	26.91	-23.57	29.91	54.00	24.09	Vertical
2	2361.87	26.81	26.92	-23.57	30.16	54.00	23.84	Vertical




BLE 2M\_Channel 00

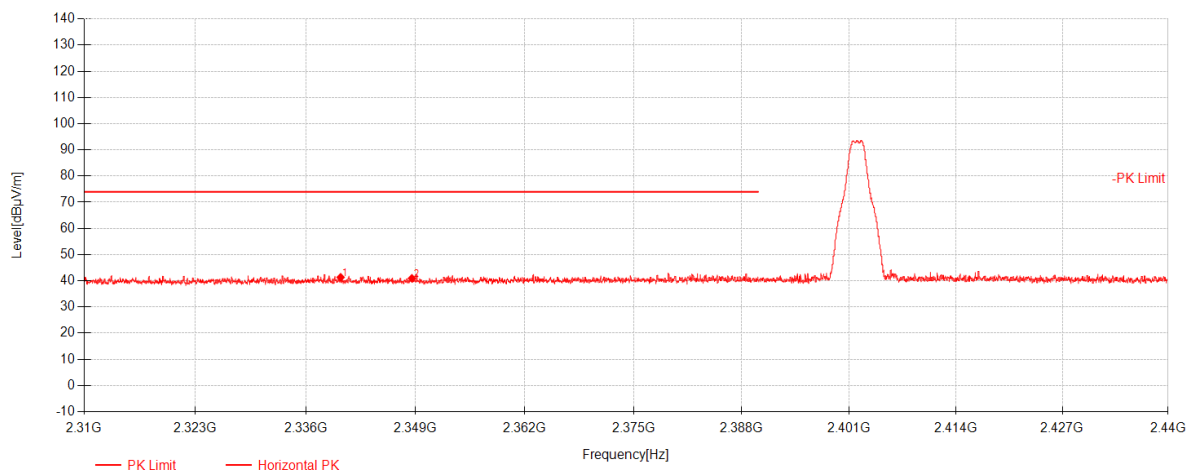

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2340.1275	38.02	26.88	-23.58	41.32	74.00	32.68	Horizontal
2	2348.5613	37.61	26.90	-23.58	40.93	74.00	33.07	Horizontal



BLE 2M\_Channel 00

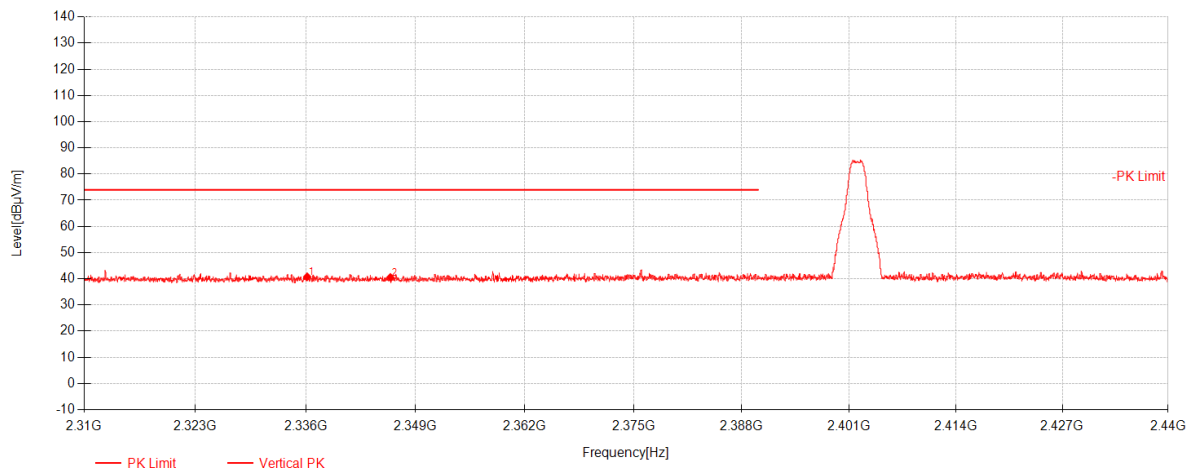


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2336.1788	37.47	26.87	-23.58	40.77	74.00	33.23	Vertical
2	2346.01	37.22	26.89	-23.58	40.54	74.00	33.46	Vertical



Report No.: KSCR241200262603


Page: 31 of 87

BLE 2M Channel 39

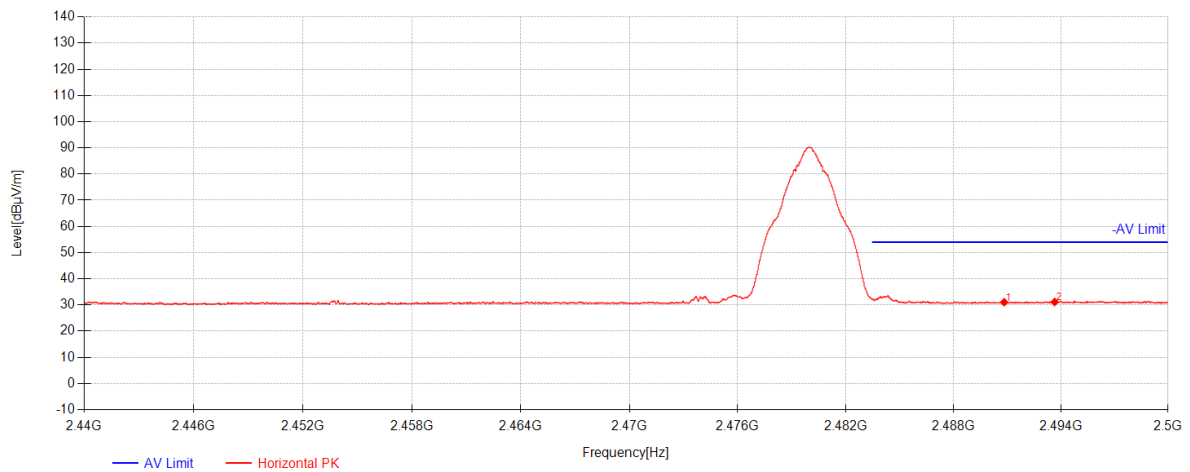

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2490.835	27.42	27.18	-23.54	31.06	54.00	22.94	Horizontal
2	2493.655	27.50	27.19	-23.54	31.15	54.00	22.85	Horizontal


## BLE 2M Channel 39

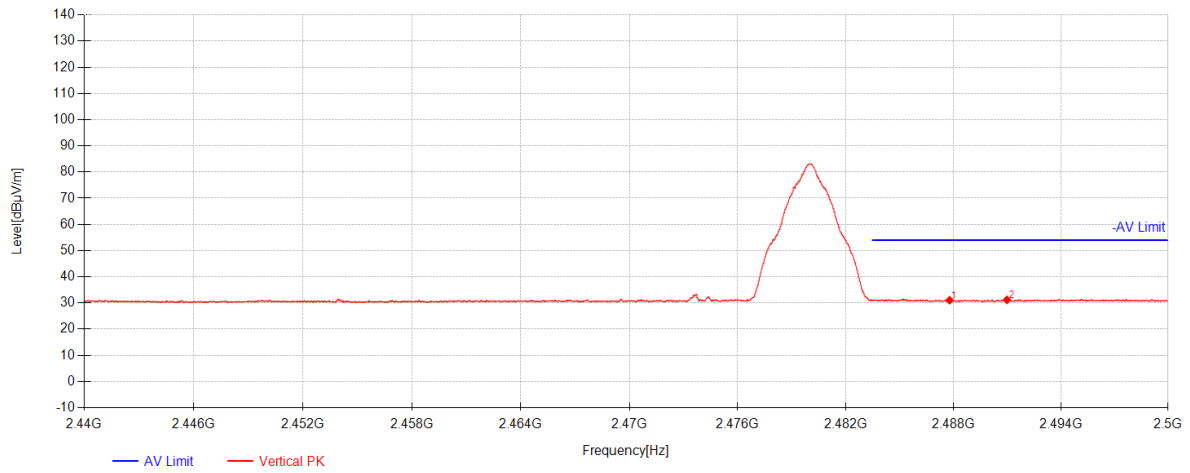

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2487.79	27.43	27.18	-23.54	31.06	54.00	22.94	Vertical
2	2490.9925	27.55	27.18	-23.54	31.19	54.00	22.81	Vertical




## BLE 2M Channel 39

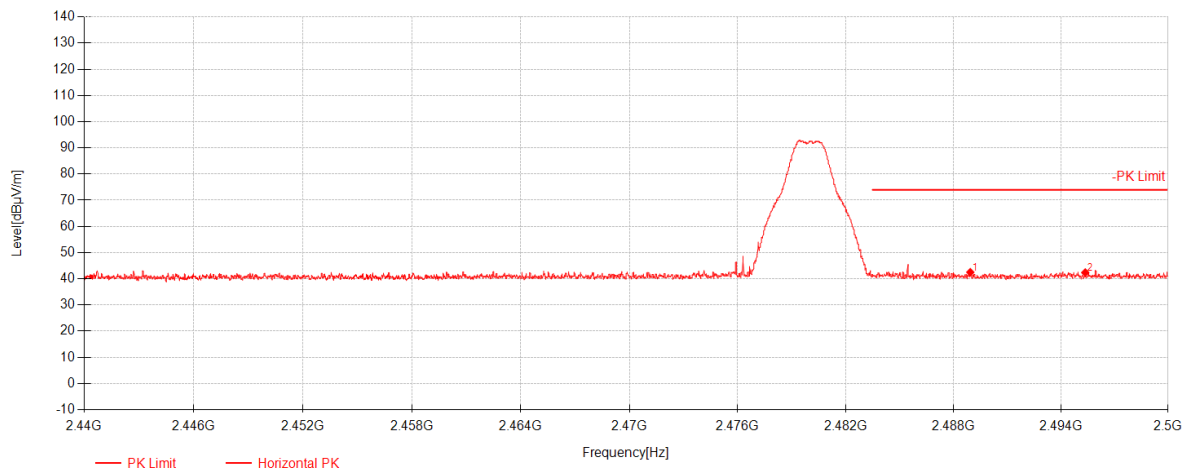

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2488.945	38.87	27.18	-23.54	42.50	74.00	31.50	Horizontal
2	2495.365	38.73	27.19	-23.54	42.38	74.00	31.62	Horizontal

## BLE 2M Channel 39

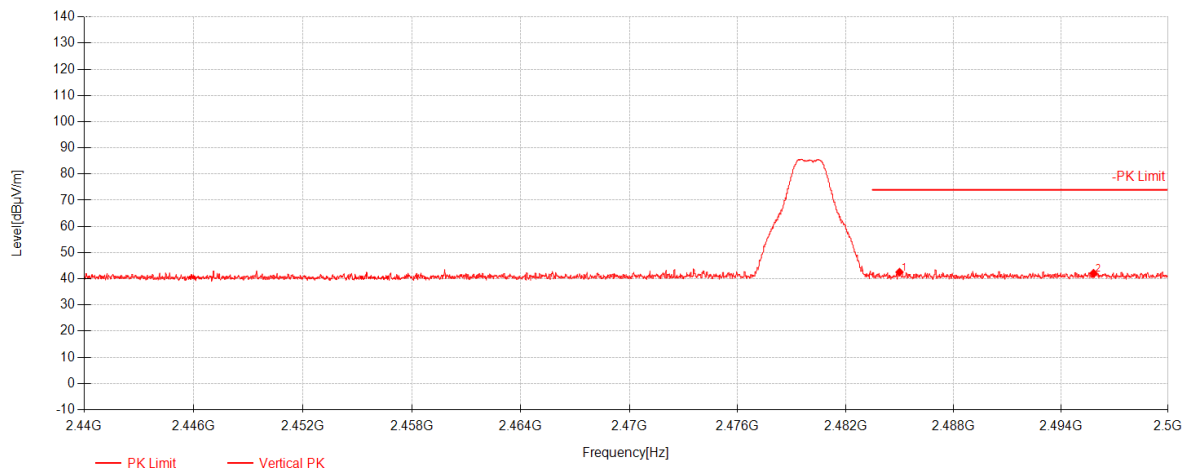

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485	38.91	27.17	-23.54	42.54	74.00	31.46	Vertical
2	2495.83	38.46	27.19	-23.54	42.11	74.00	31.89	Vertical

## 7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C


Humidity: 48.3 % RH

Atmospheric Pressure: 1010 mbar

### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.3.3 Test Setup Diagram

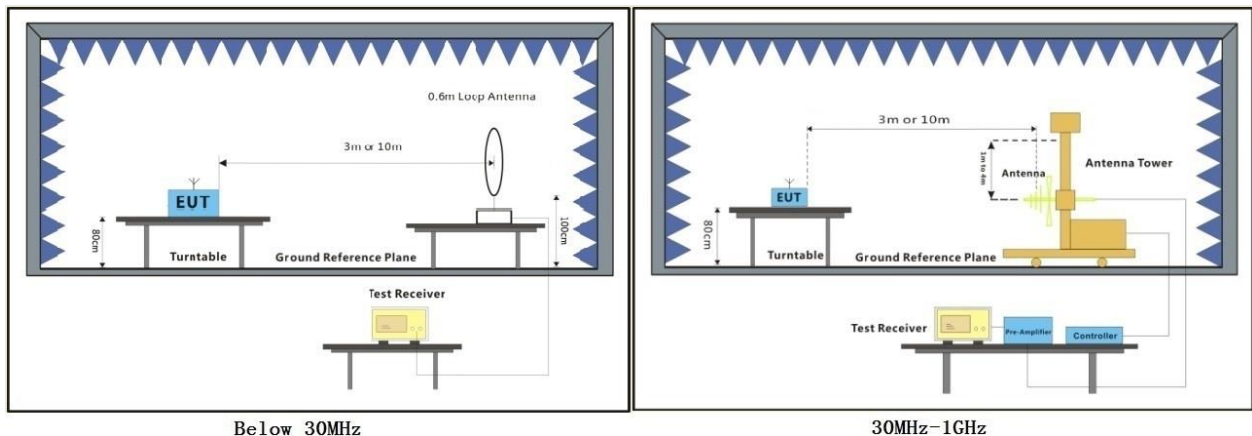

#### 7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



BLE 1M Channel 39 wrose

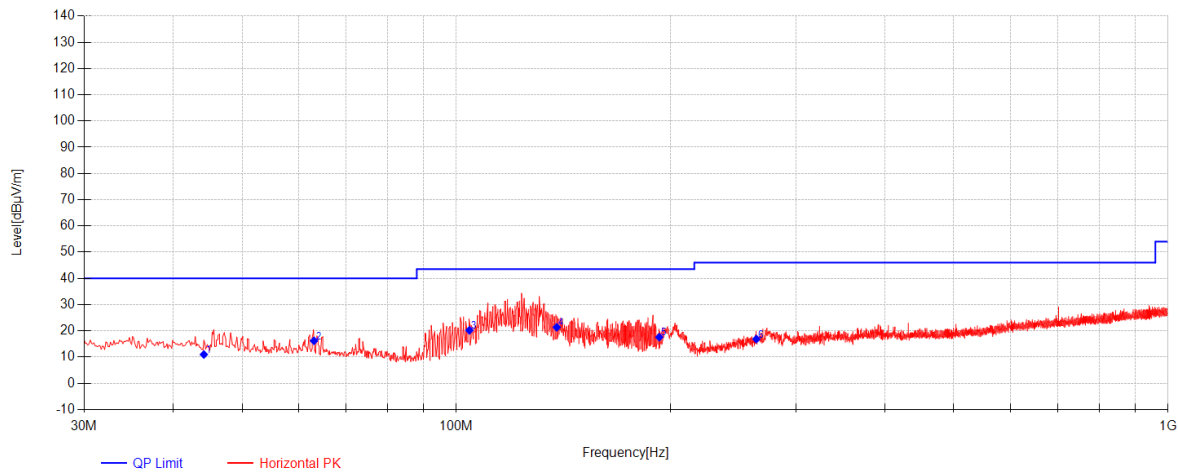

Final Data List								
NO.	Frequency [MHz]	Reading [dBµV]	Factor [dB]	AF [dB/m]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Polarity
1	44.1862	26.12	-33.99	18.82	10.95	40.00	29.05	Horizontal
2	63.1012	32.42	-33.82	17.59	16.19	40.00	23.81	Horizontal
3	104.3262	38.26	-33.44	15.37	20.18	43.50	23.32	Horizontal
4	138.3975	36.15	-33.25	18.44	21.34	43.50	22.16	Horizontal
5	192.8388	35.11	-32.79	15.25	17.57	43.50	25.93	Horizontal
6	264.0125	32.03	-32.37	17.18	16.84	46.00	29.16	Horizontal

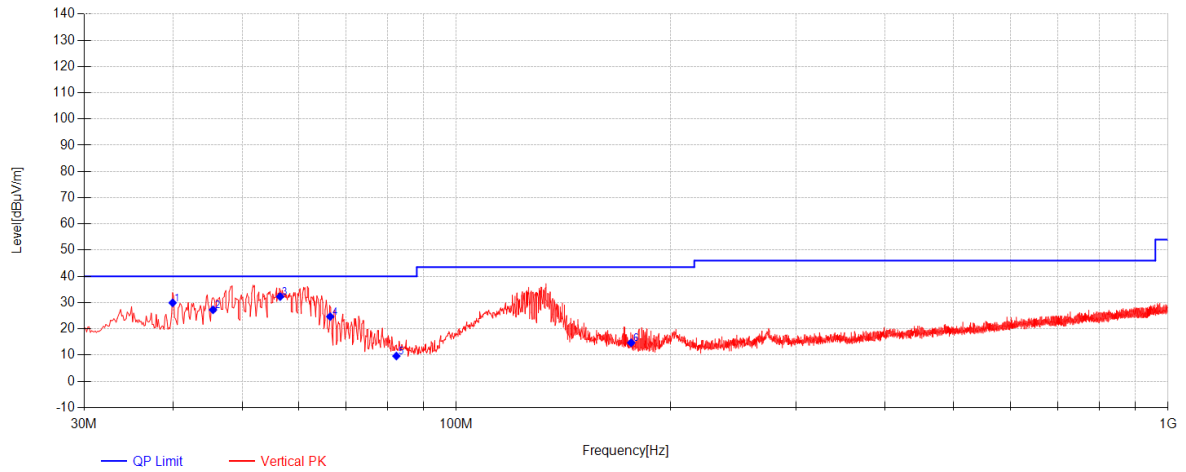BLE 1M Channel 39 wrose**Final Data List**

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	39.9425	45.12	-34.00	18.79	29.91	40.00	10.09	Vertical
2	45.52	42.22	-33.99	19.00	27.24	40.00	12.76	Vertical
3	56.5538	48.03	-33.90	18.14	32.27	40.00	7.73	Vertical
4	66.4962	41.23	-33.78	17.20	24.65	40.00	15.35	Vertical
5	82.38	28.69	-33.63	14.56	9.62	40.00	30.38	Vertical
6	176.1062	30.03	-32.90	17.56	14.68	43.50	28.82	Vertical

## 7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C


Humidity: 48.3 % RH

Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.4.3 Test Setup Diagram

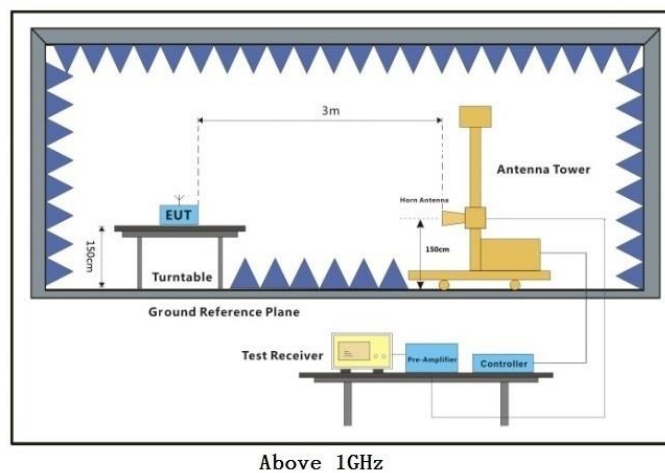

#### 7.4.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
- 5:For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle<98%) or 10Hz (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.




## BLE 1M\_Channel 00

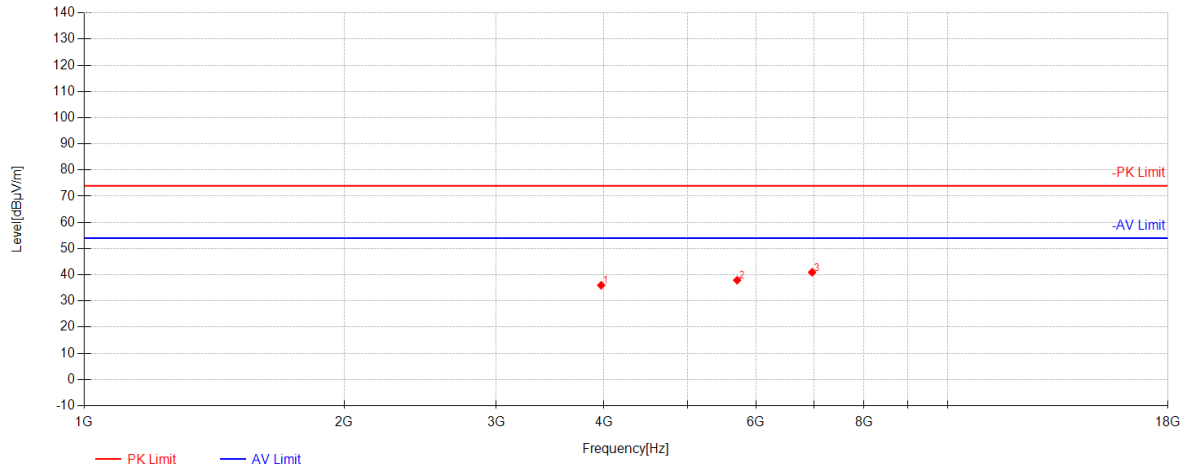

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	3969.75	52.74	29.35	-46.11	35.98	74.00	38.02	Horizontal
2	5704.875	50.42	32.34	-44.85	37.92	74.00	36.08	Horizontal
3	6967.125	49.76	34.94	-43.73	40.97	74.00	33.03	Horizontal




BLE 1M\_Channel 00

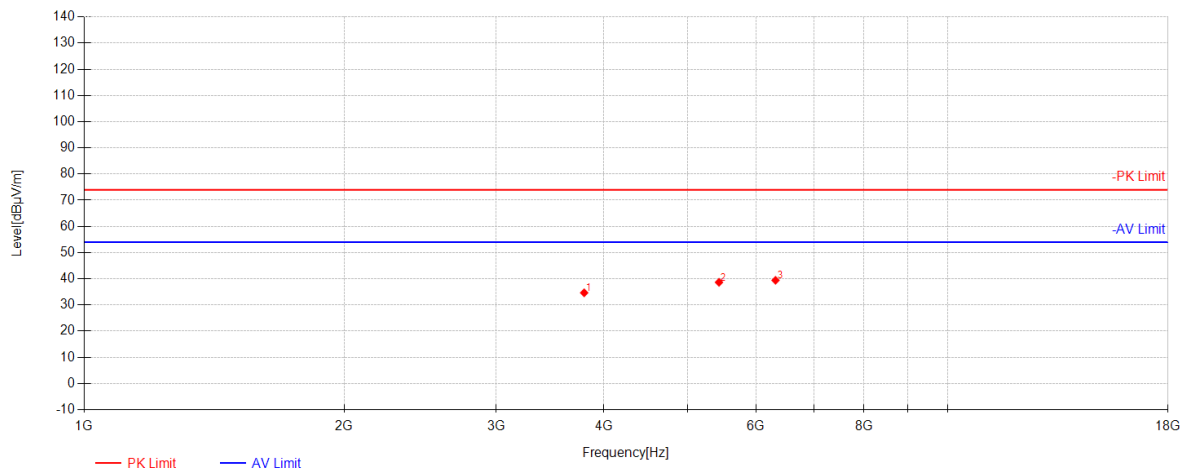

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	3793.875	51.47	29.07	-45.89	34.65	74.00	39.35	Vertical
2	5435.625	51.75	32.18	-45.28	38.66	74.00	35.34	Vertical
3	6319.5	50.45	33.49	-44.51	39.42	74.00	34.58	Vertical




BLE 1M\_Channel 19

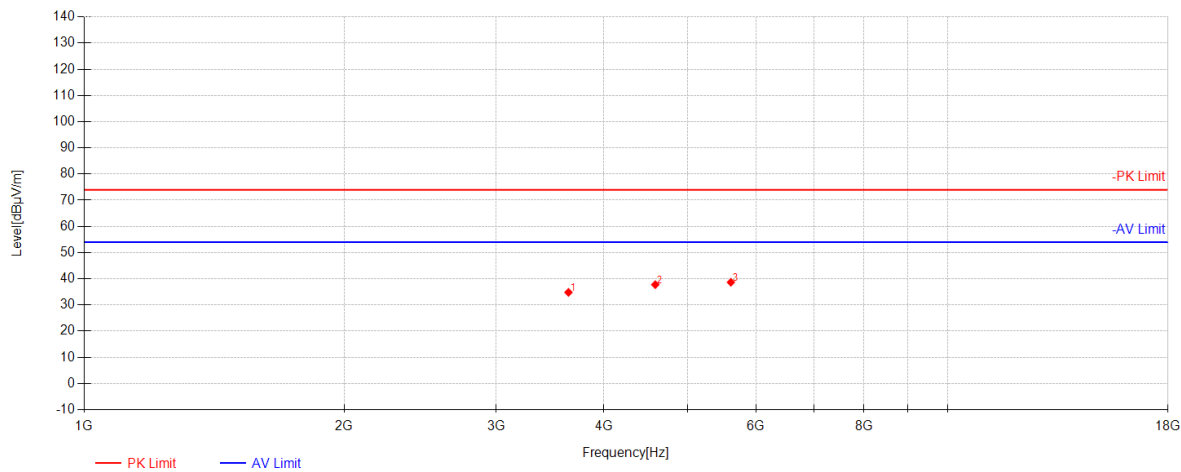

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	3638.25	51.87	28.82	-45.89	34.80	74.00	39.20	Horizontal
2	4585.5	52.70	30.74	-45.68	37.76	74.00	36.24	Horizontal
3	5610.375	51.38	32.32	-45.05	38.65	74.00	35.35	Horizontal




BLE 1M Channel 19

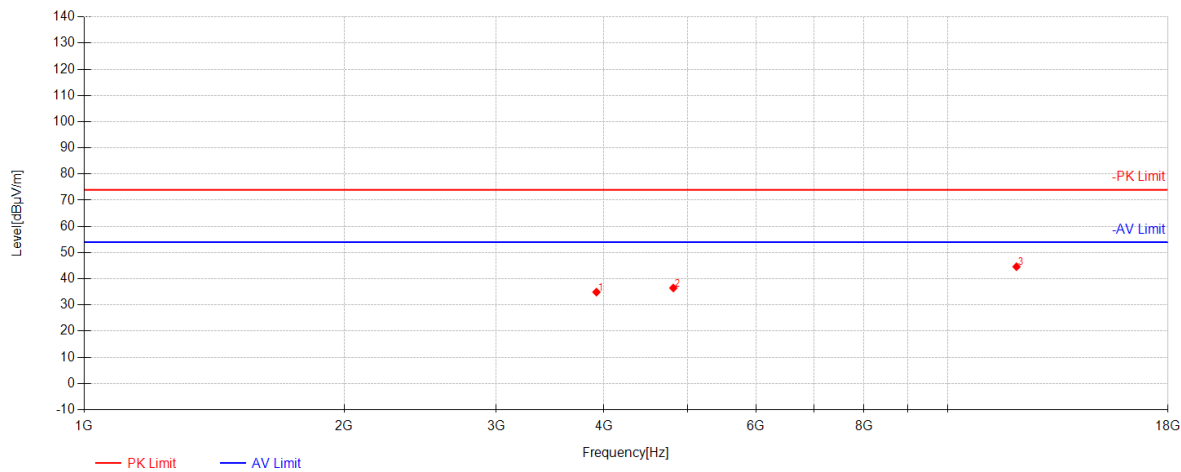

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	3920.25	51.86	29.27	-46.23	34.90	74.00	39.10	Vertical
2	4812	50.92	31.10	-45.54	36.48	74.00	37.52	Vertical
3	12016.5	43.09	39.10	-37.58	44.61	74.00	29.39	Vertical




BLE 1M\_Channel 39

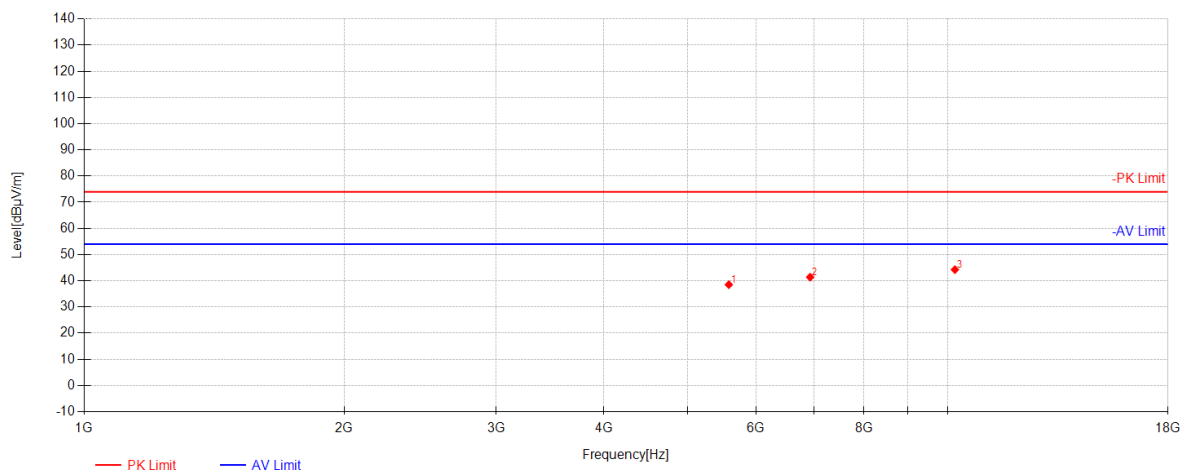

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5579.625	51.31	32.32	-45.10	38.52	74.00	35.48	Horizontal
2	6931.125	50.43	34.88	-43.93	41.38	74.00	32.62	Horizontal
3	10196.625	45.22	38.52	-39.49	44.25	74.00	29.75	Horizontal




BLE 1M Channel 39

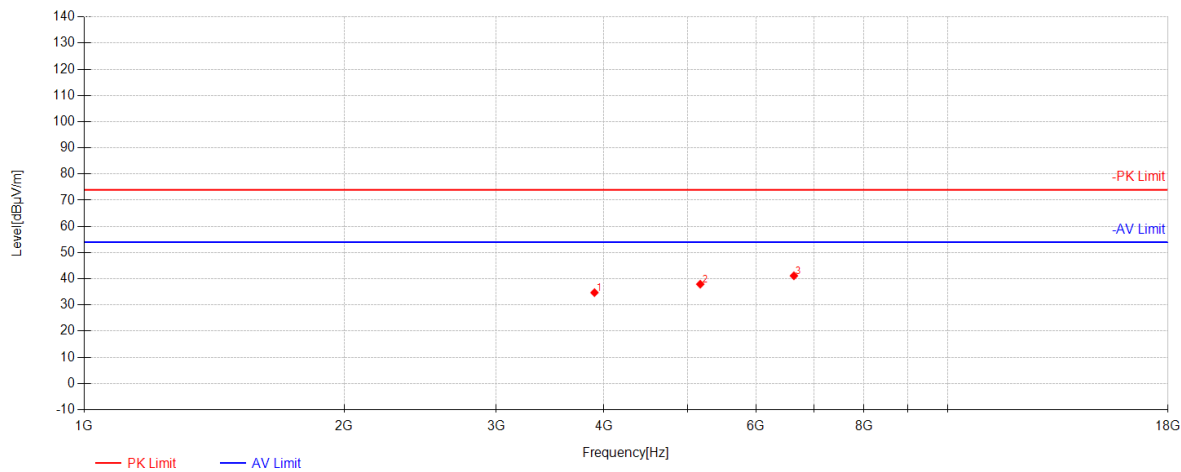

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	3899.625	51.76	29.24	-46.28	34.72	74.00	39.28	Vertical
2	5170.5	51.54	31.71	-45.31	37.94	74.00	36.06	Vertical
3	6637.5	50.94	34.35	-44.15	41.14	74.00	32.86	Vertical




BLE 2M\_Channel 00

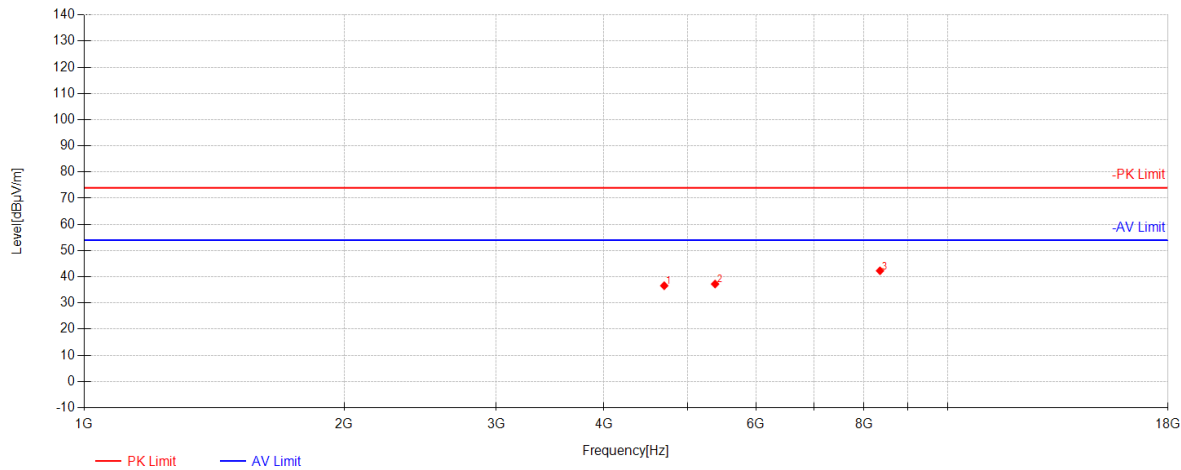

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	4697.25	51.28	30.92	-45.60	36.59	74.00	37.41	Horizontal
2	5379	50.41	32.08	-45.26	37.24	74.00	36.76	Horizontal
3	8350.125	47.14	36.89	-41.73	42.30	74.00	31.70	Horizontal



BLE 2M\_Channel 00

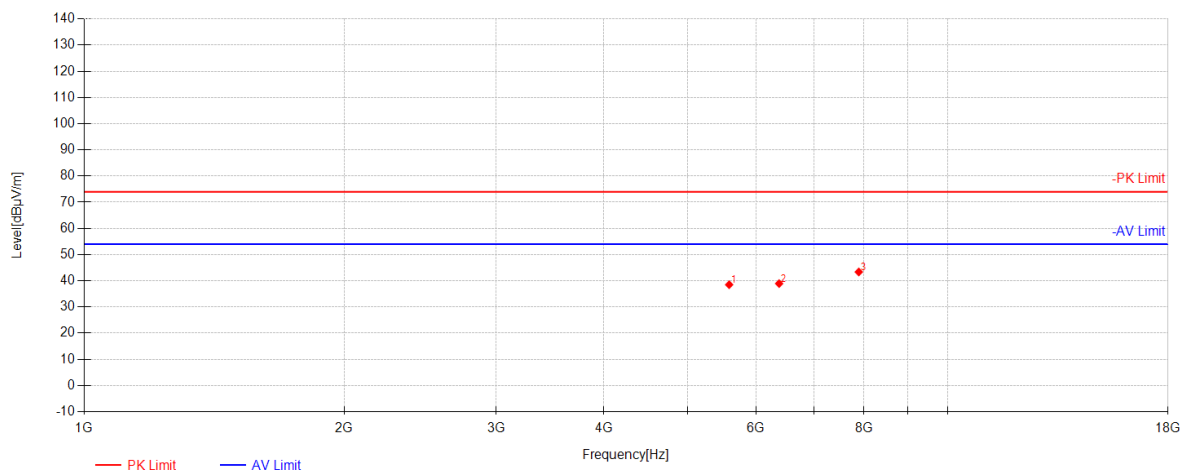


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5584.875	51.29	32.32	-45.10	38.51	74.00	35.49	Vertical
2	6380.25	49.67	33.69	-44.44	38.93	74.00	35.07	Vertical
3	7890.75	49.20	36.95	-42.77	43.37	74.00	30.63	Vertical





BLE 2M Channel 19

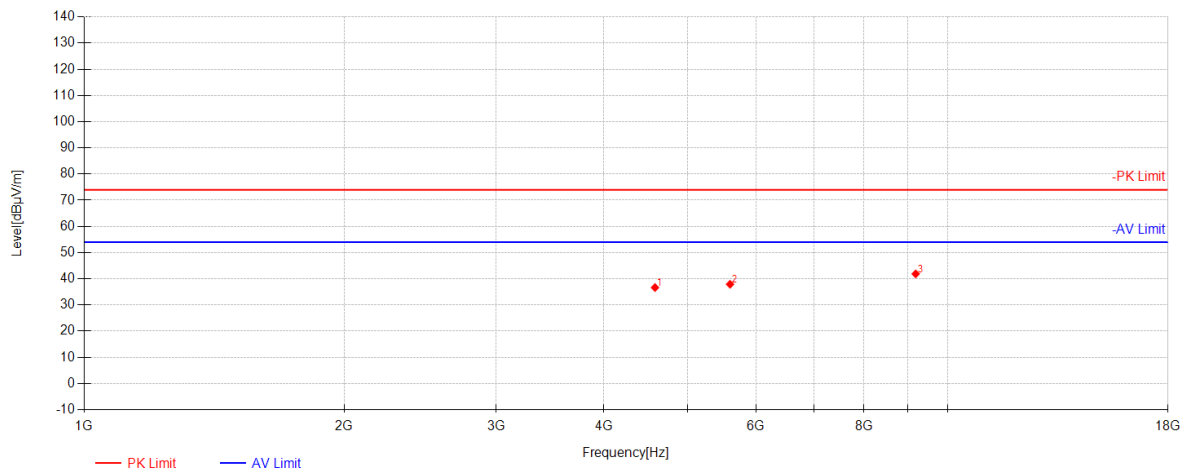


Data List

NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	4582.5	51.61	30.73	-45.68	36.66	74.00	37.34	Horizontal
2	5597.625	50.66	32.32	-45.07	37.91	74.00	36.09	Horizontal
3	9183.375	45.28	36.87	-40.27	41.88	74.00	32.12	Horizontal




BLE 2M Channel 19

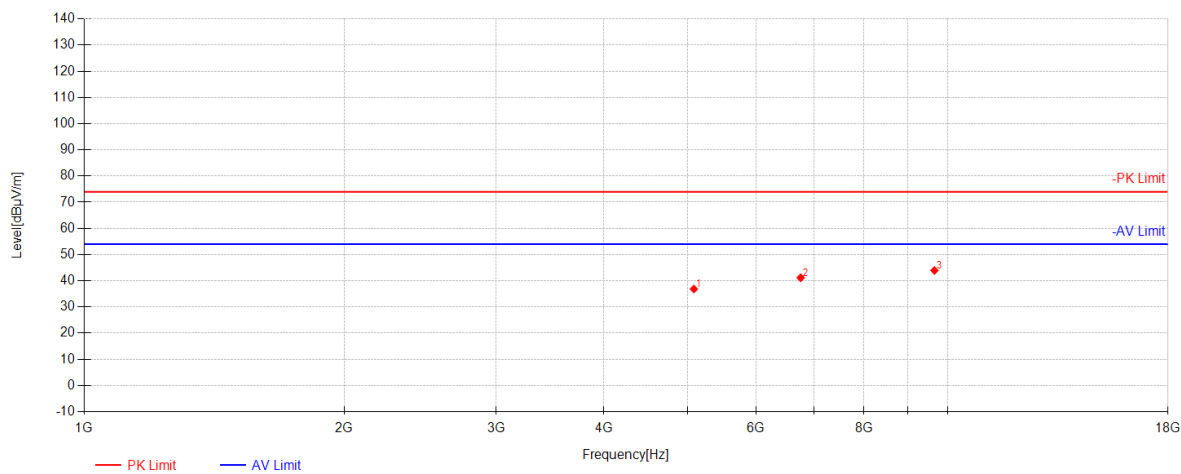

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5082.75	50.73	31.55	-45.42	36.86	74.00	37.14	Vertical
2	6759	50.62	34.57	-44.02	41.16	74.00	32.84	Vertical
3	9654.375	45.68	37.81	-39.54	43.94	74.00	30.06	Vertical




BLE 2M Channel 39

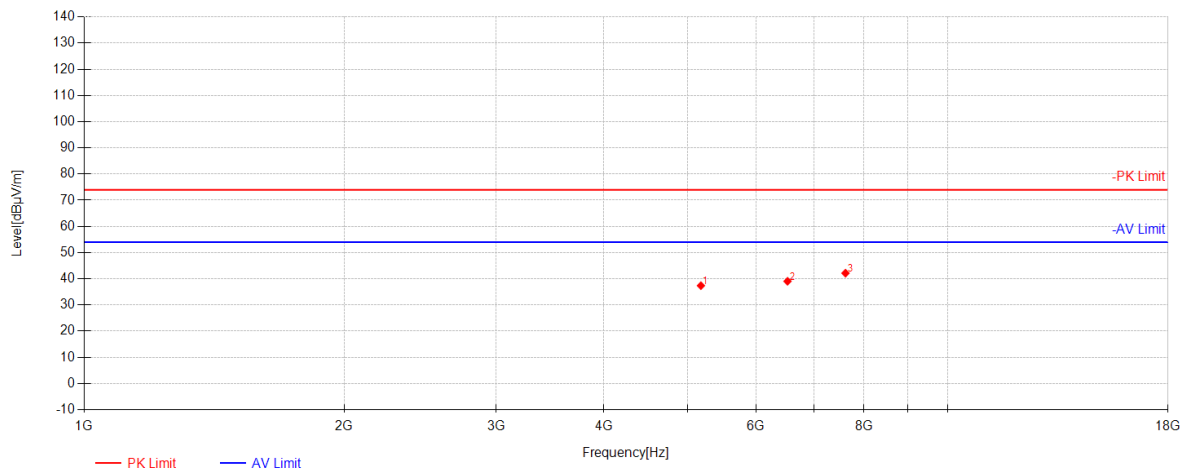

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5179.5	50.96	31.72	-45.30	37.38	74.00	36.62	Horizontal
2	6525.375	49.45	34.15	-44.54	39.05	74.00	34.95	Horizontal
3	7615.5	48.54	36.56	-42.96	42.14	74.00	31.86	Horizontal



BLE 2M\_Channel 39

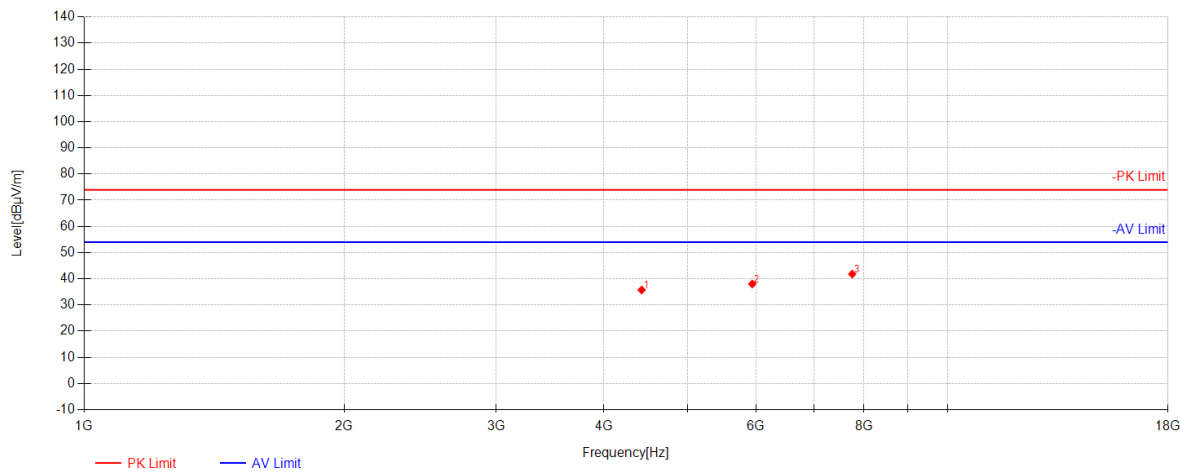

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	4422.75	51.10	30.41	-45.79	35.72	74.00	38.28	Vertical
2	5938.875	50.55	32.39	-44.92	38.02	74.00	35.98	Vertical
3	7753.875	47.73	36.76	-42.68	41.80	74.00	32.20	Vertical

## 7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 49.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.5.3 Test Setup Diagram

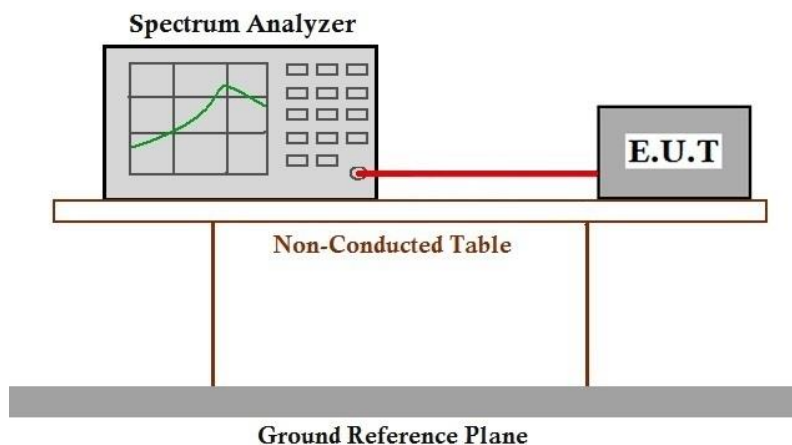

#### **7.5.4 Measurement Procedure and Data**

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

## 7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C

Humidity: 49.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.6.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C

Humidity: 49.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.7.3 Measurement Procedure and Data

Please Refer to Appendix for Details



## 7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C

Humidity: 49.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.8.3 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C

Humidity: 49.6 % RH

Atmospheric Pressure: 1010 mbar

### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	09	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

### 7.9.3 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: KSCR241200262603

Page: 59 of 87

## **8 Test Setup Photo**

Refer to Appendix - Test Setup Photo for KSCR2412002626AT

## **9 EUT Constructional Details (EUT Photos)**

Refer to Appendix\_Photographs of EUT Constructional Details for KSCR2412002626AT



10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.124	2.501	84.93	0.71	0.03
		2440	2.123	2.500	84.92	0.71	0.03
		2480	2.123	2.500	84.92	0.71	0.03
2M	SISO	2402	1.065	1.875	56.80	2.46	0.01
		2440	1.066	1.875	56.85	2.45	0.01
		2480	1.065	1.875	56.80	2.46	0.03

## 1.2 Test Graph


### 1.2.1 Ant1

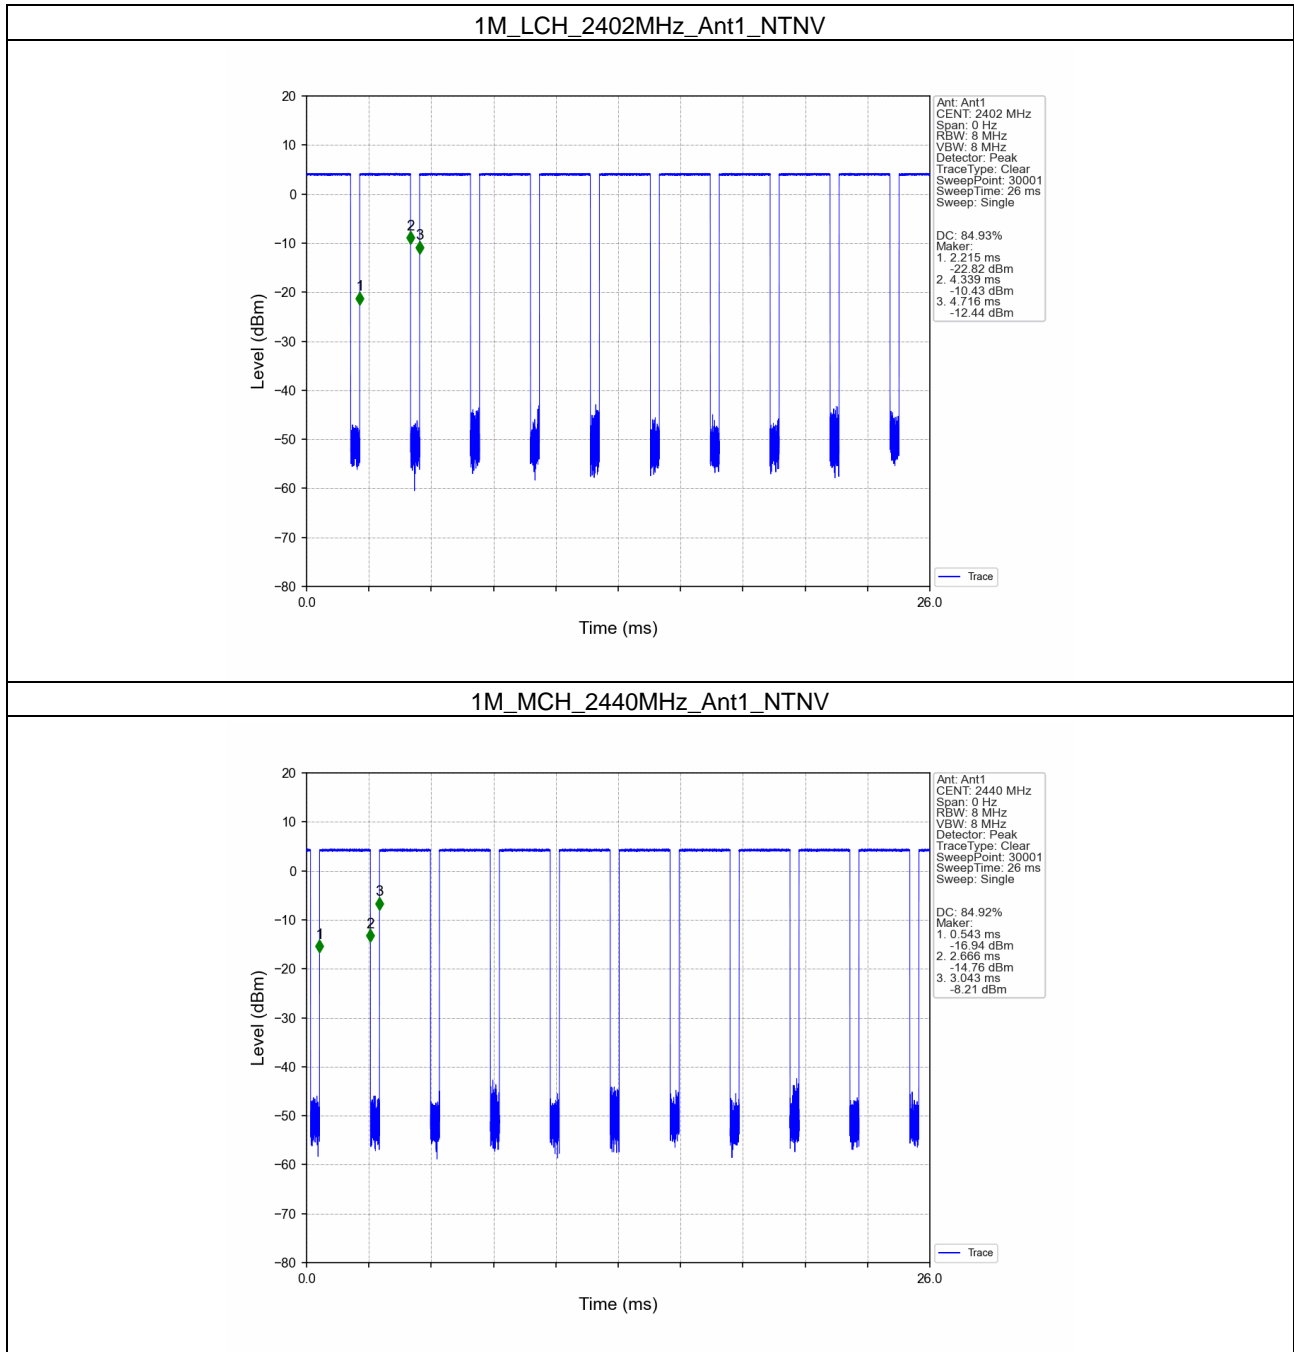


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

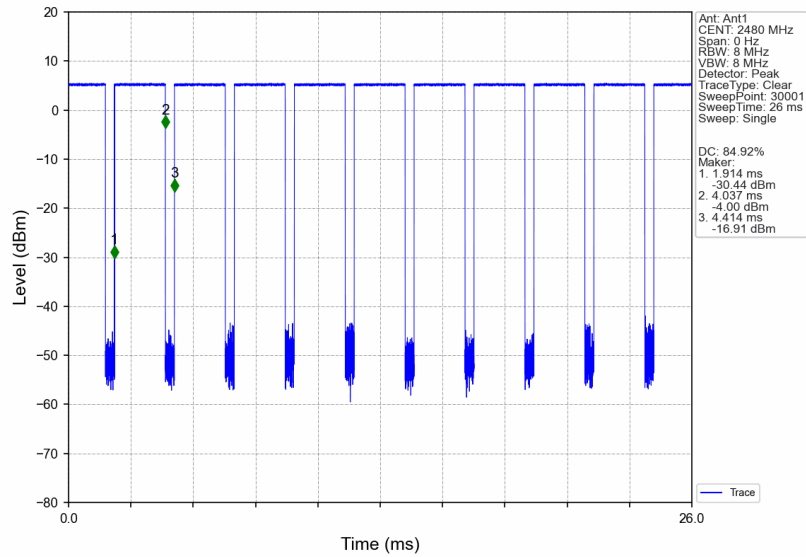


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

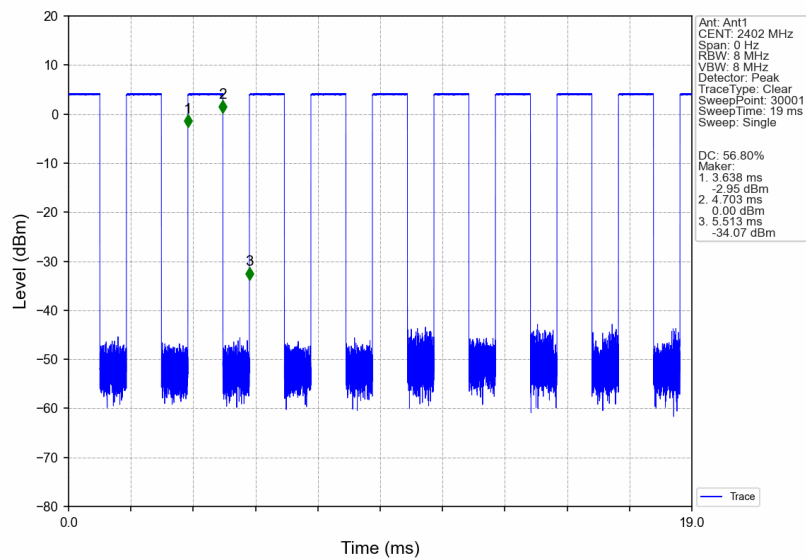

2M\_MCH\_2440MHz\_Ant1\_NTNV

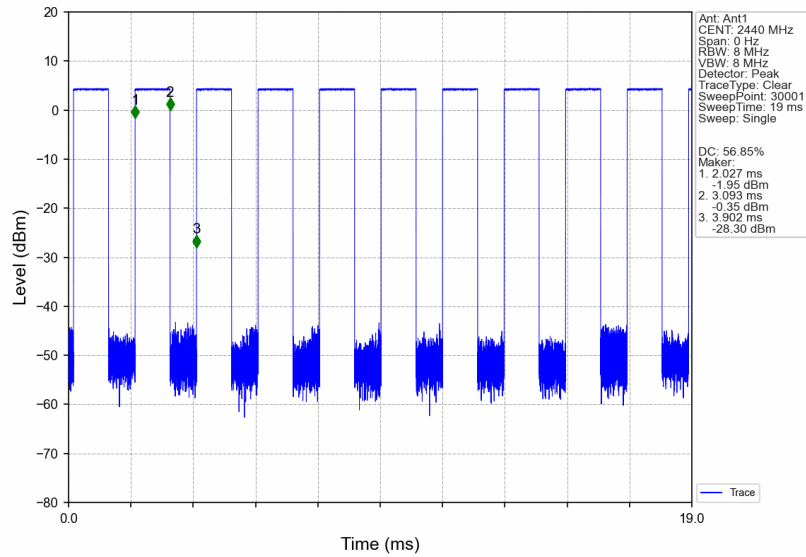

2M\_HCH\_2480MHz\_Ant1\_NTNV

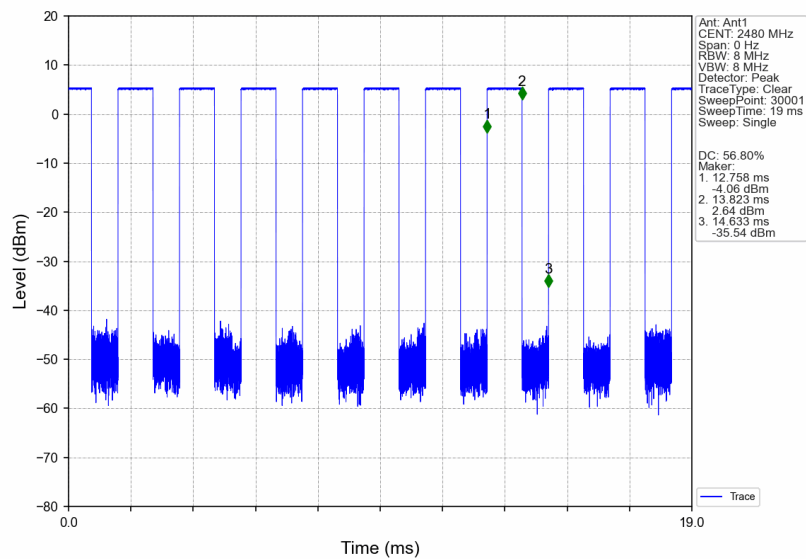

## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.026	/	Pass
		2440	1	1.027	/	Pass
		2480	1	1.027	/	Pass
2M	SISO	2402	1	2.063	/	Pass
		2440	1	2.063	/	Pass
		2480	1	2.064	/	Pass


#### 2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.674	$\geq 0.5$	Pass
		2440	1	0.674	$\geq 0.5$	Pass
		2480	1	0.671	$\geq 0.5$	Pass
2M	SISO	2402	1	1.261	$\geq 0.5$	Pass
		2440	1	1.215	$\geq 0.5$	Pass
		2480	1	1.177	$\geq 0.5$	Pass




## 2.2 Test Graph


### 2.2.1 OBW

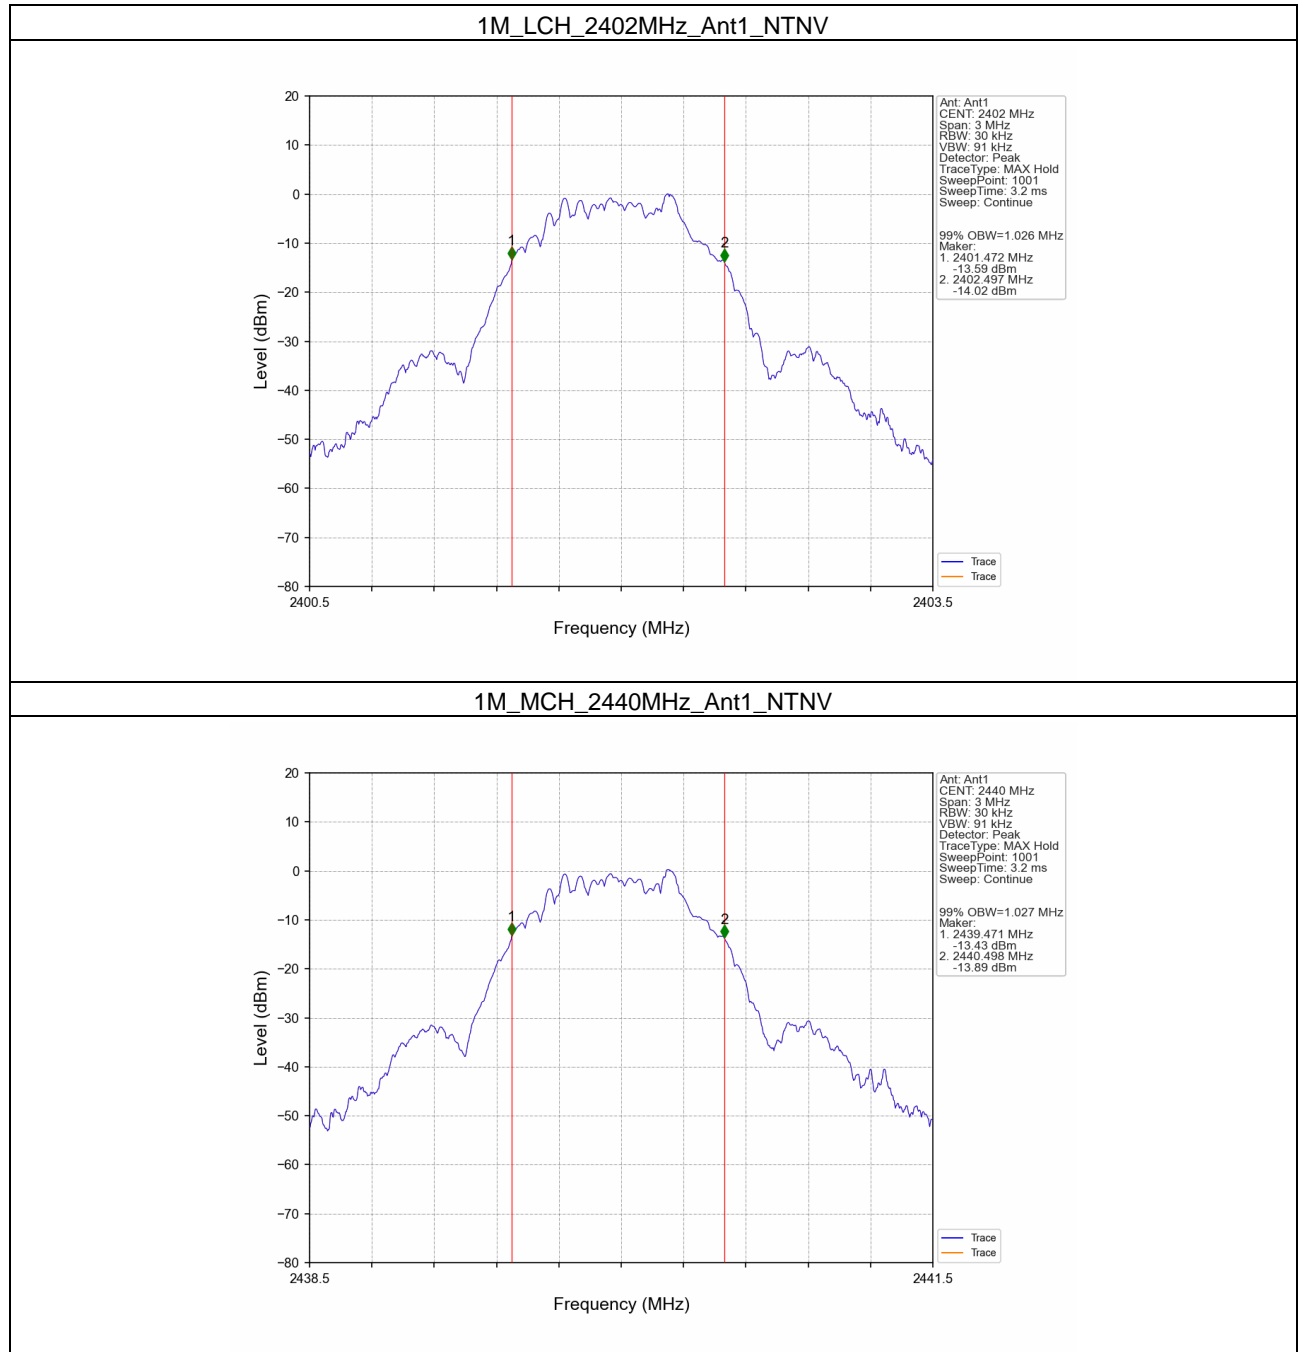


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

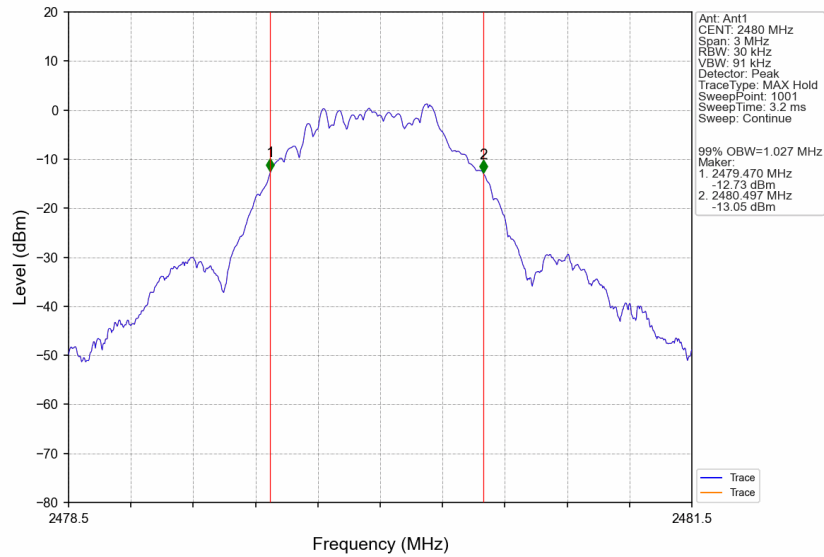


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

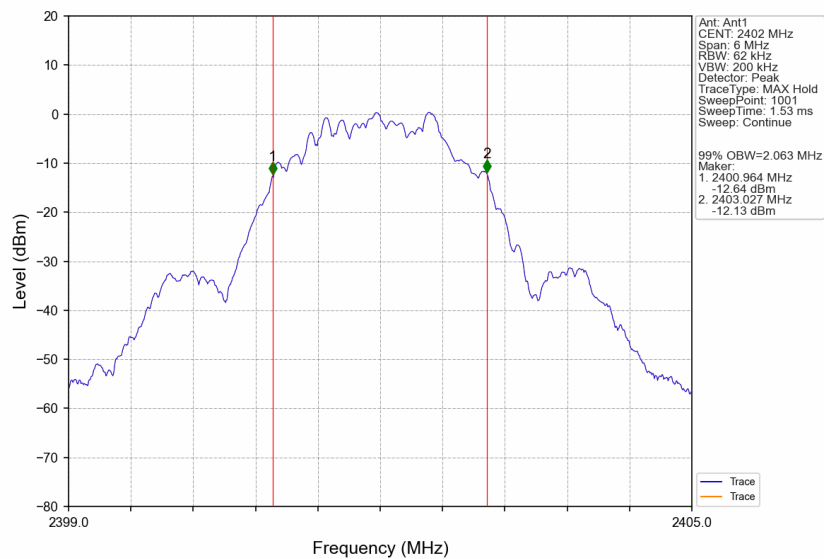

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

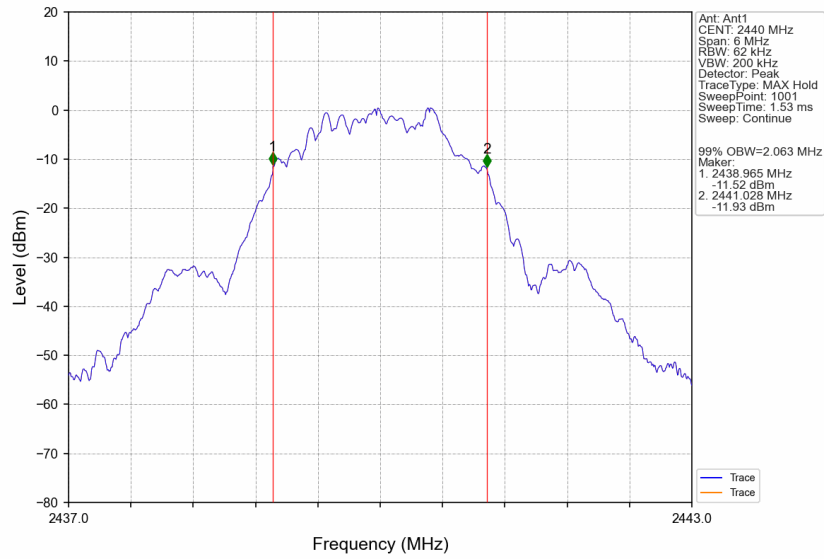


## 2M\_HCH\_2480MHz\_Ant1\_NTNV

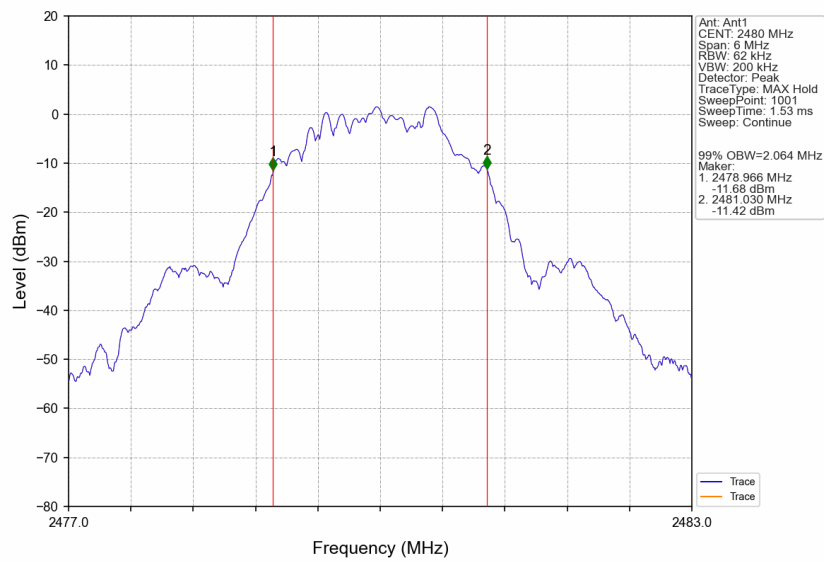


## 2.2.2 6dB BW


1M\_LCH\_2402MHz\_Ant1\_NTNV

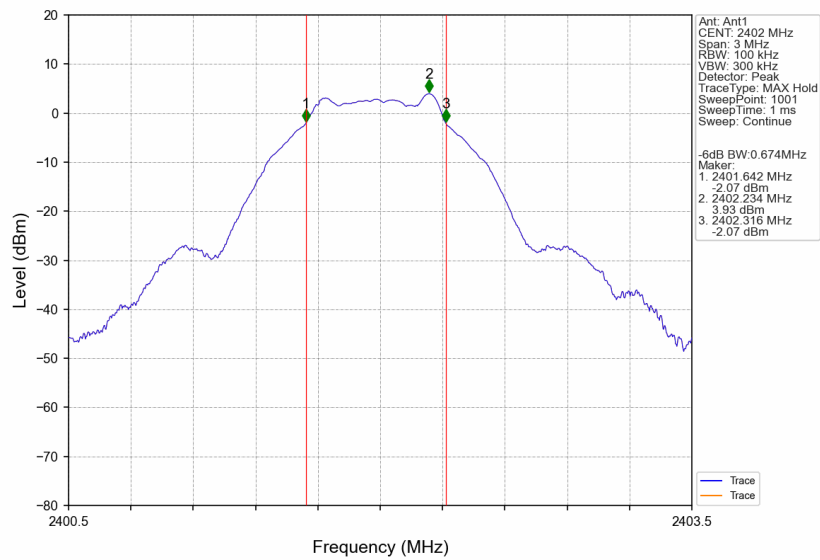


1M\_MCH\_2440MHz\_Ant1\_NTNV

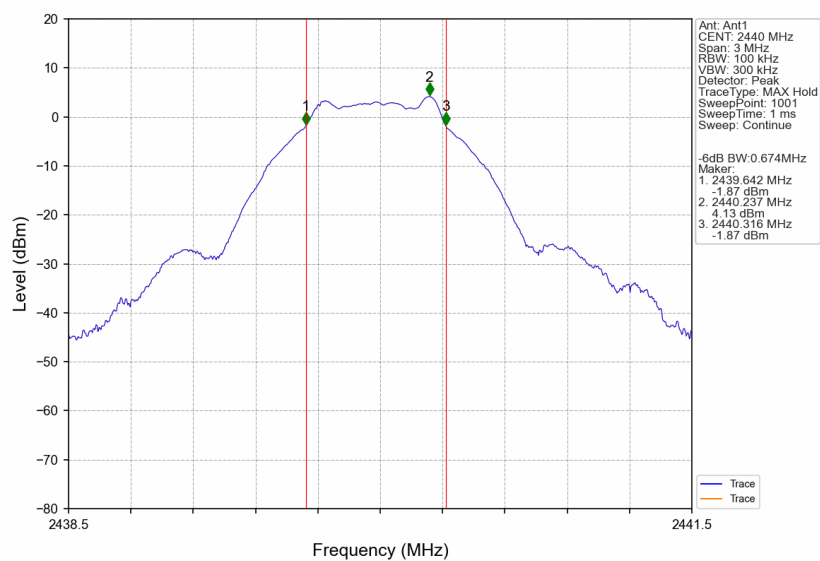


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

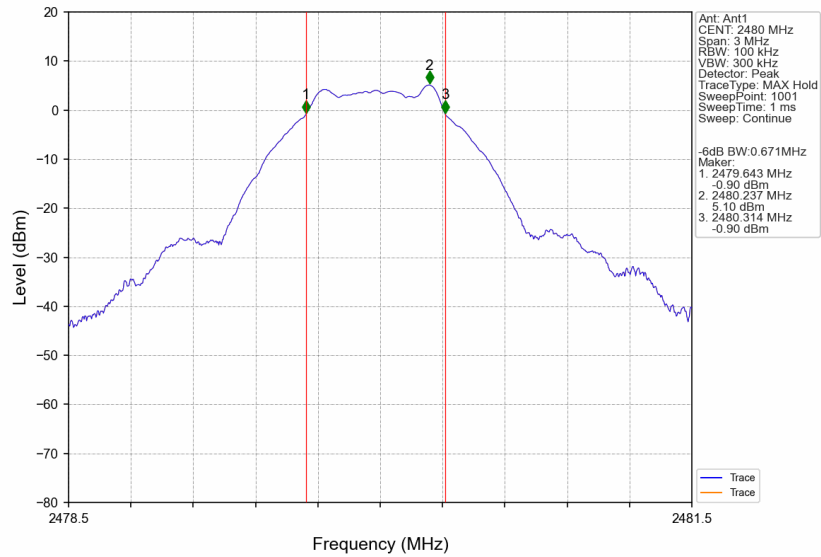


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

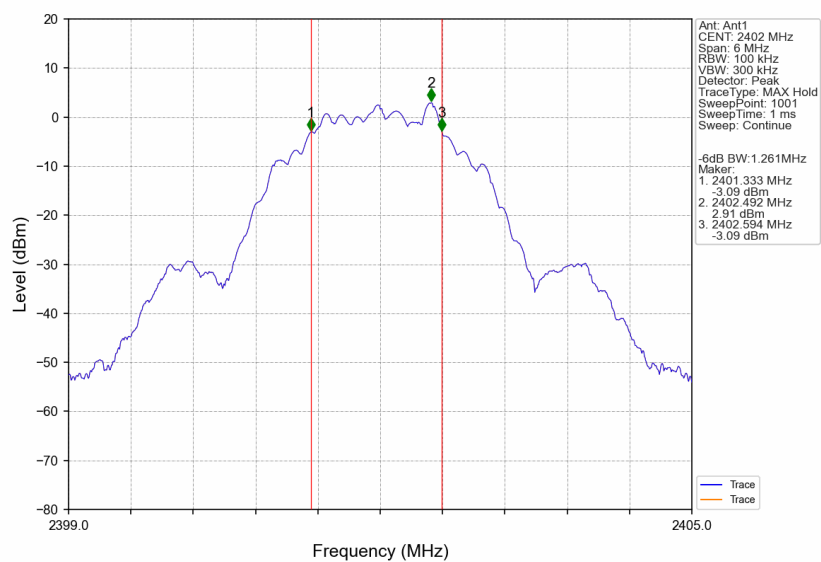

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

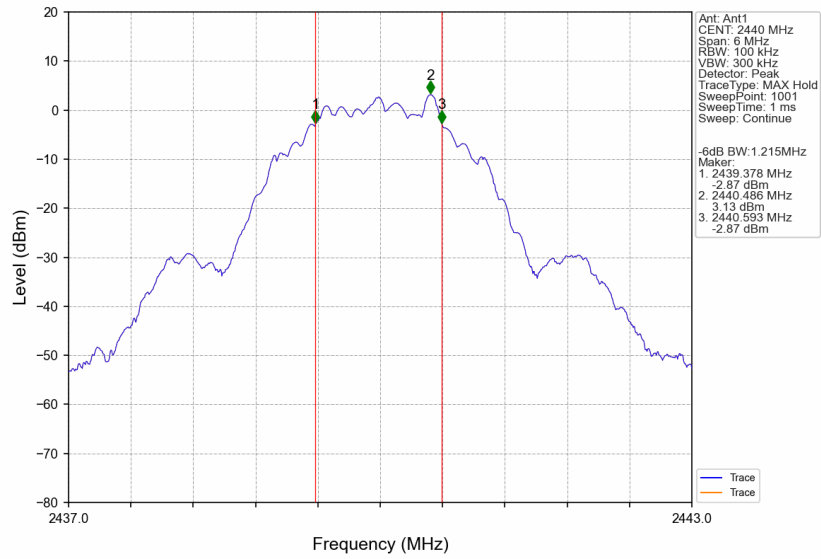

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

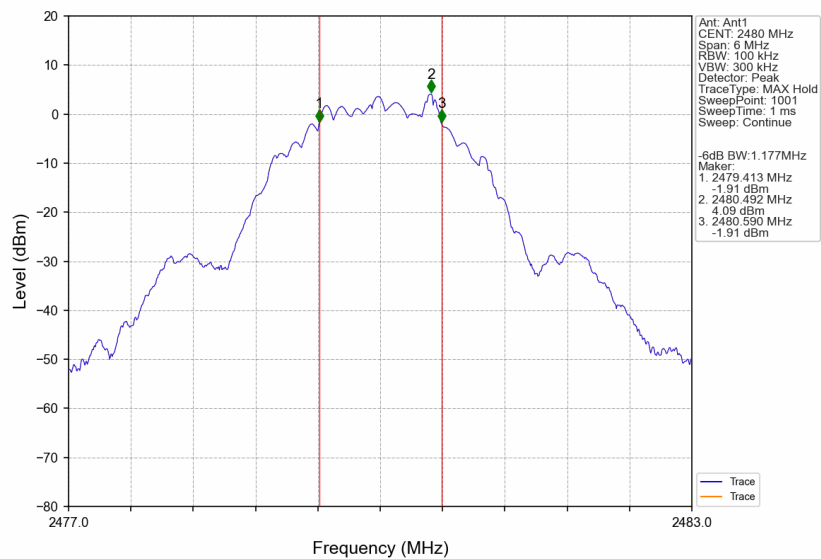

### 3. Maximum Conducted Output Power

#### 3.1 Test Result

##### 3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	4.08	<=30	Pass
		2440	4.31	<=30	Pass
		2480	5.26	<=30	Pass
2M	SISO	2402	4.12	<=30	Pass
		2440	4.34	<=30	Pass
		2480	5.26	<=30	Pass

Note1: Antenna Gain: Ant1: 3.90dBi;


##### 3.1.2 EIRP

Mode	TX Type	Frequency (MHz)	E.I.R.P (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	7.98	<=36.02	Pass
		2440	8.21	<=36.02	Pass
		2480	9.16	<=36.02	Pass
2M	SISO	2402	8.02	<=36.02	Pass
		2440	8.24	<=36.02	Pass
		2480	9.16	<=36.02	Pass

Note1: Antenna Gain: Ant1: 3.90dBi;  
Note2: E.I.R.P = Measured Power + Antenna Gain


## 3.2 Test Graph

### 3.2.1 Power

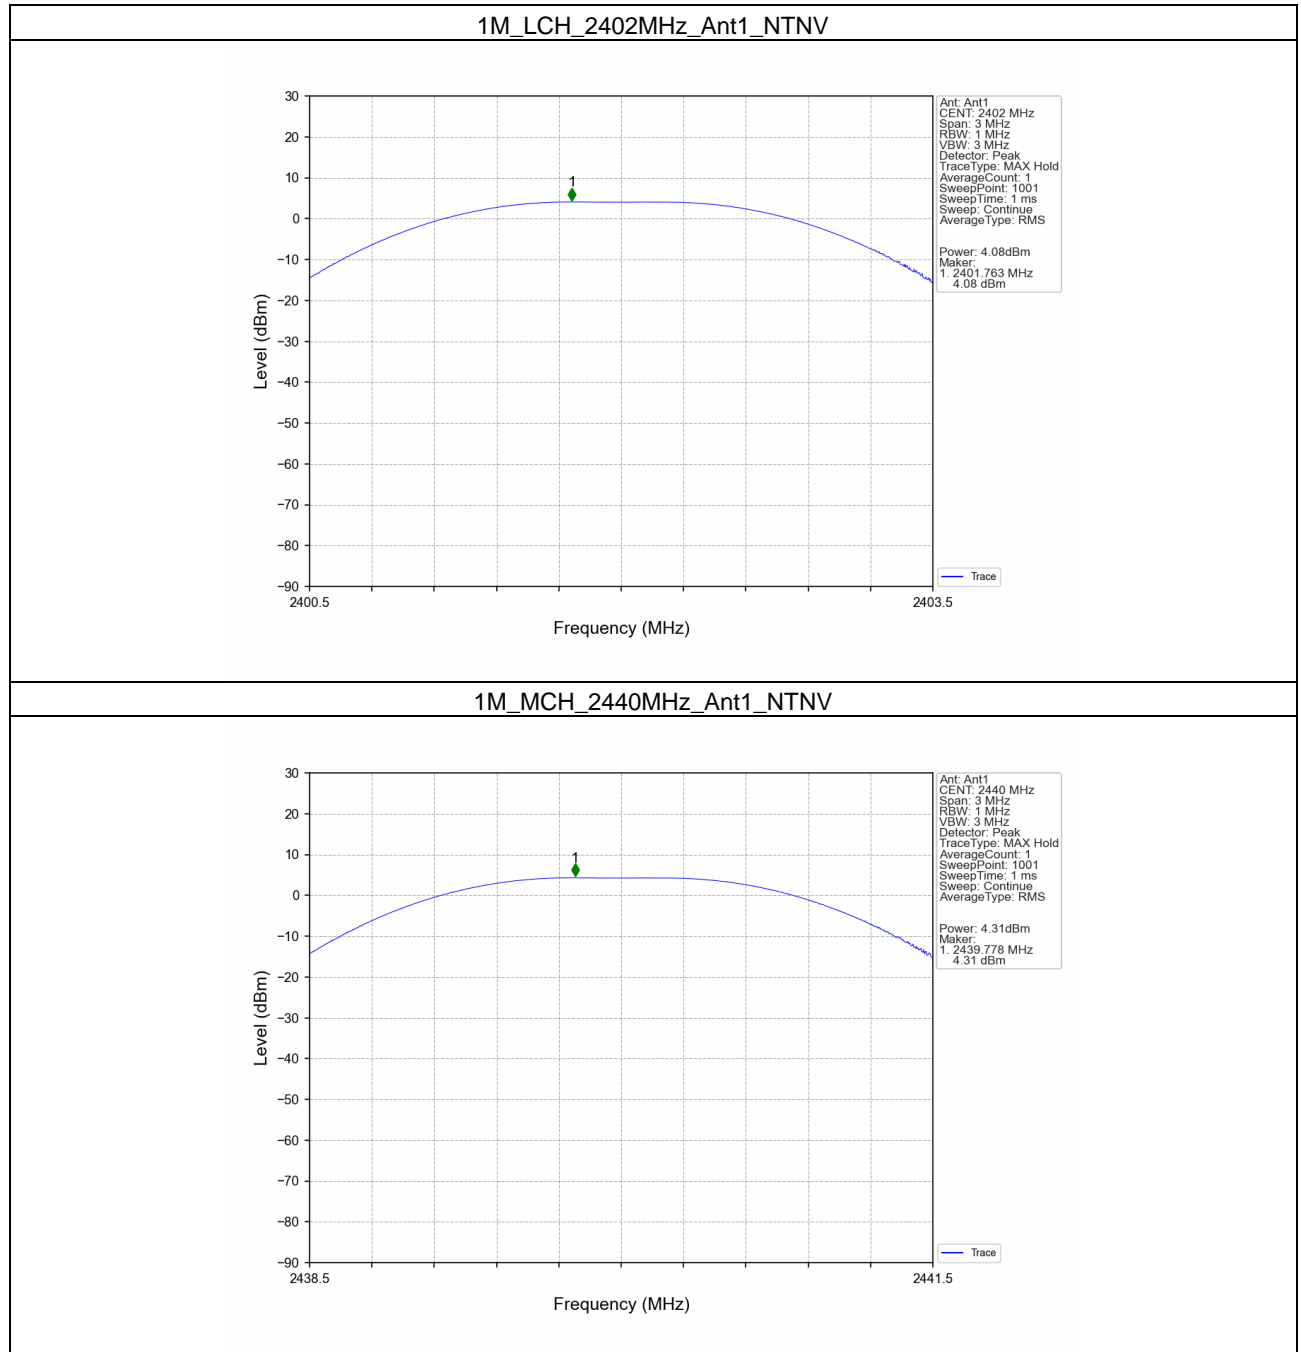





1M\_HCH\_2480MHz\_Ant1\_NTNV

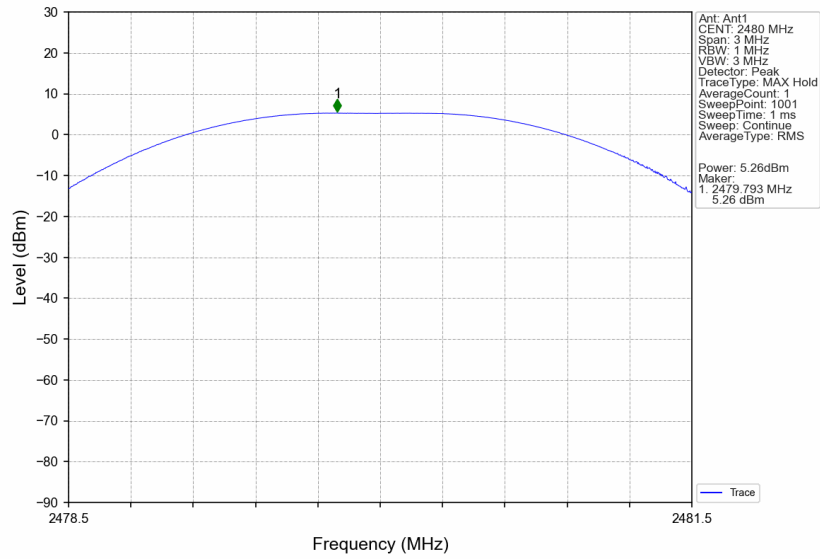


2M\_LCH\_2402MHz\_Ant1\_NTNV

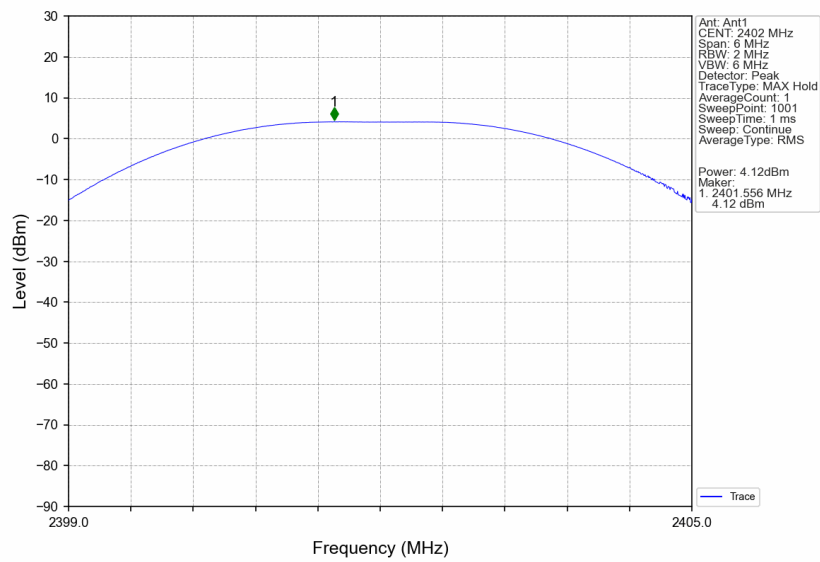

2M\_MCH\_2440MHz\_Ant1\_NTNV

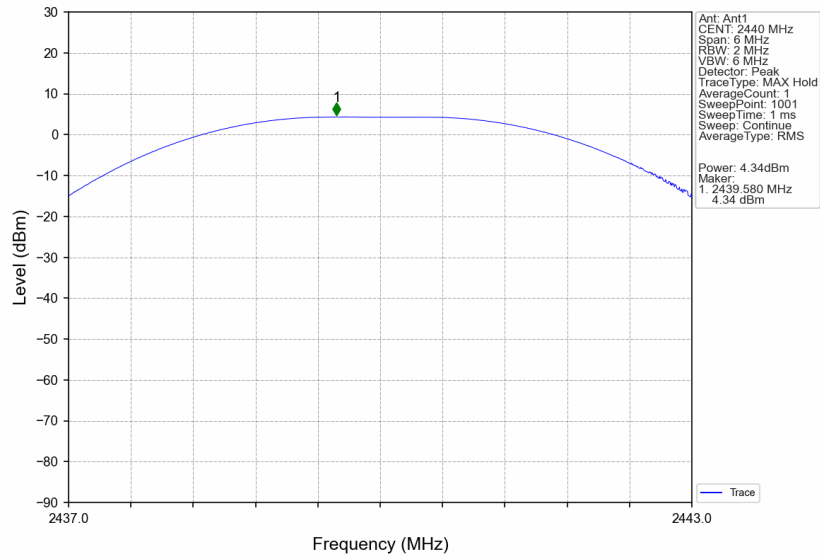

2M\_HCH\_2480MHz\_Ant1\_NTNV

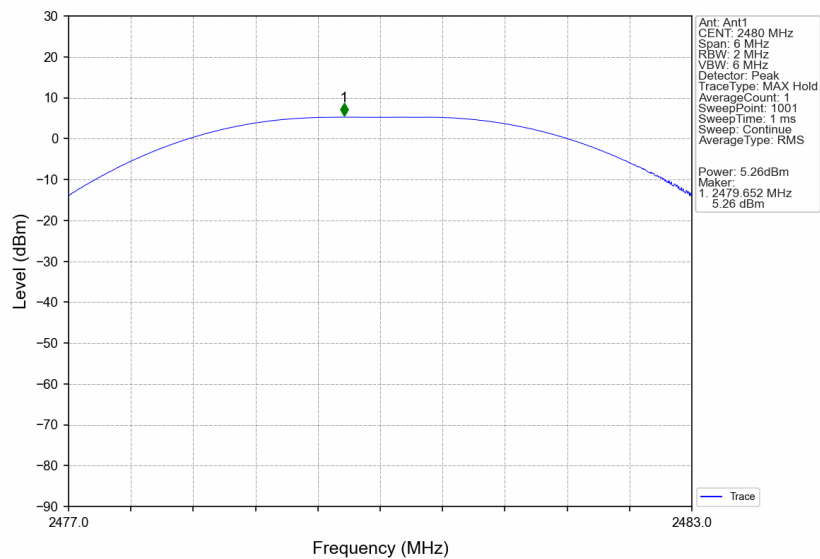



4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-12.06	<=8	Pass
		2440	-11.58	<=8	Pass
		2480	-10.66	<=8	Pass
2M	SISO	2402	-16.02	<=8	Pass
		2440	-15.20	<=8	Pass
		2480	-14.39	<=8	Pass

Note1: Antenna Gain: Ant1: 3.90dBi;




4.2 Test Graph


4.2.1 PSD

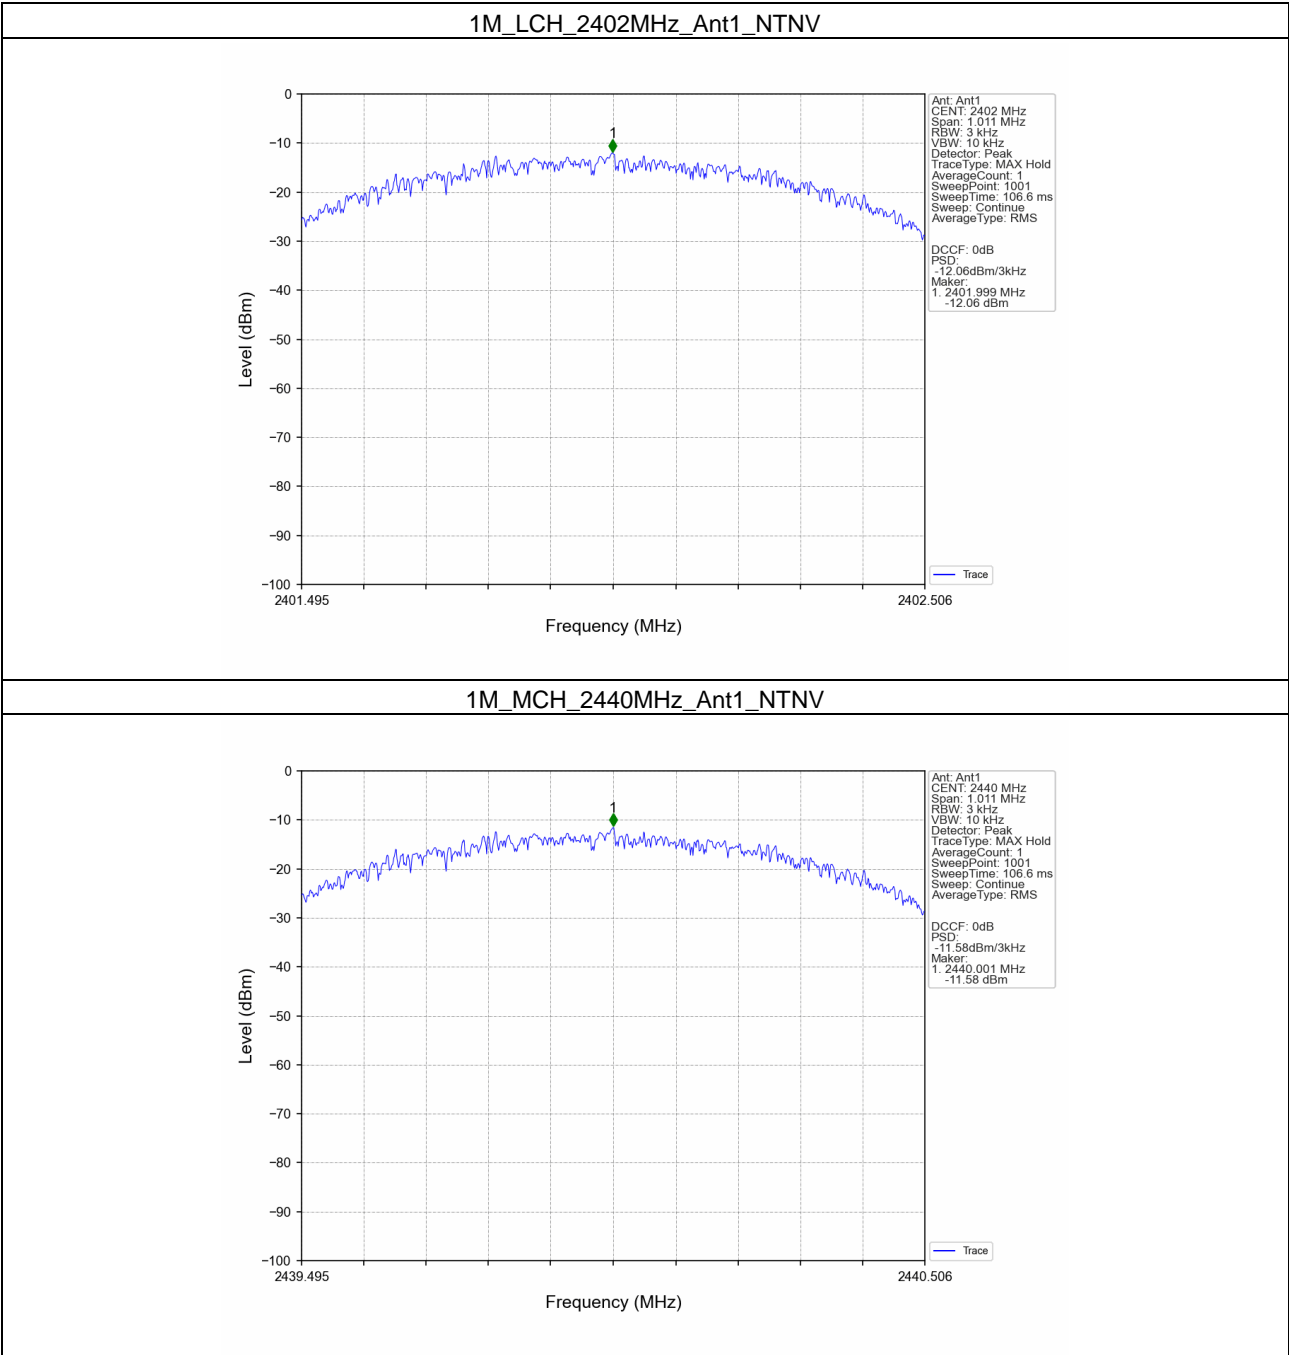


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

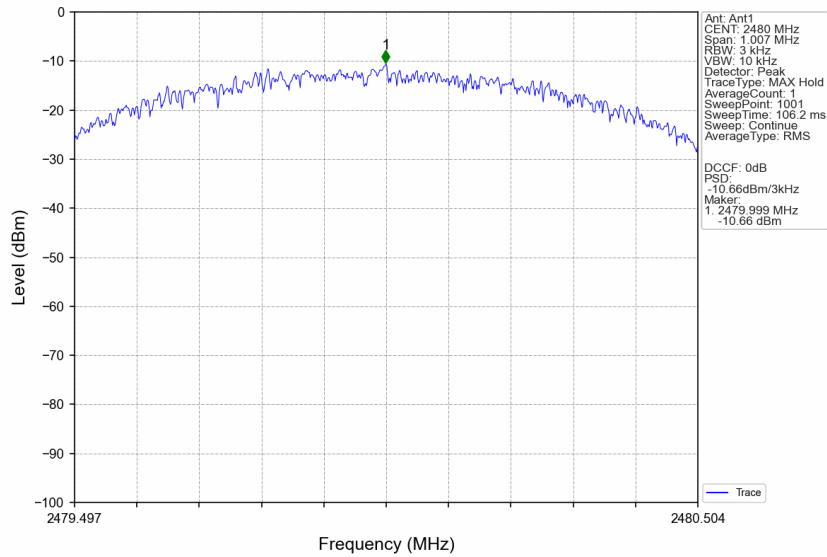


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

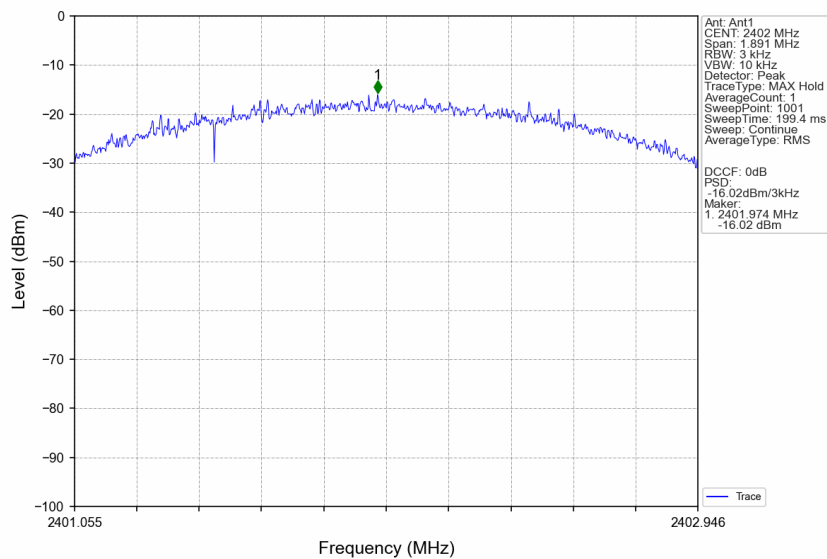

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

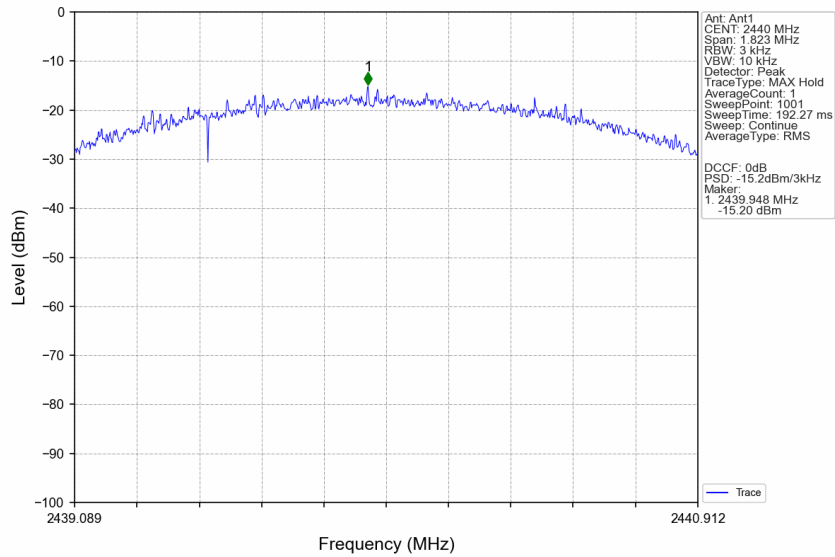

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

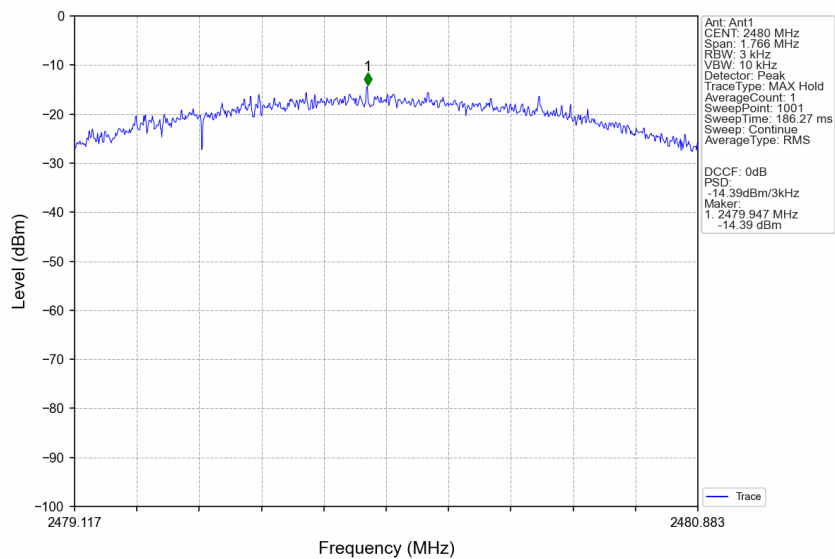

## 5. Unwanted Emissions In Non-restricted Frequency Bands

### 5.1 Test Result

#### 5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	3.91
		2440	1	4.10
		2480	1	5.07
2M	SISO	2402	1	2.82
		2440	1	3.00
		2480	1	3.97

Note1: Refer to RSS-247 Issue 3 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


#### 5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	5.07	-14.93	Pass
		2440	1	5.07	-14.93	Pass
		2480	1	5.07	-14.93	Pass
2M	SISO	2402	1	3.97	-16.03	Pass
		2440	1	3.97	-16.03	Pass
		2480	1	3.97	-16.03	Pass

Note1: Refer to RSS-247 Issue 3 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


## 5.2 Test Graph

### 5.2.1 Ref

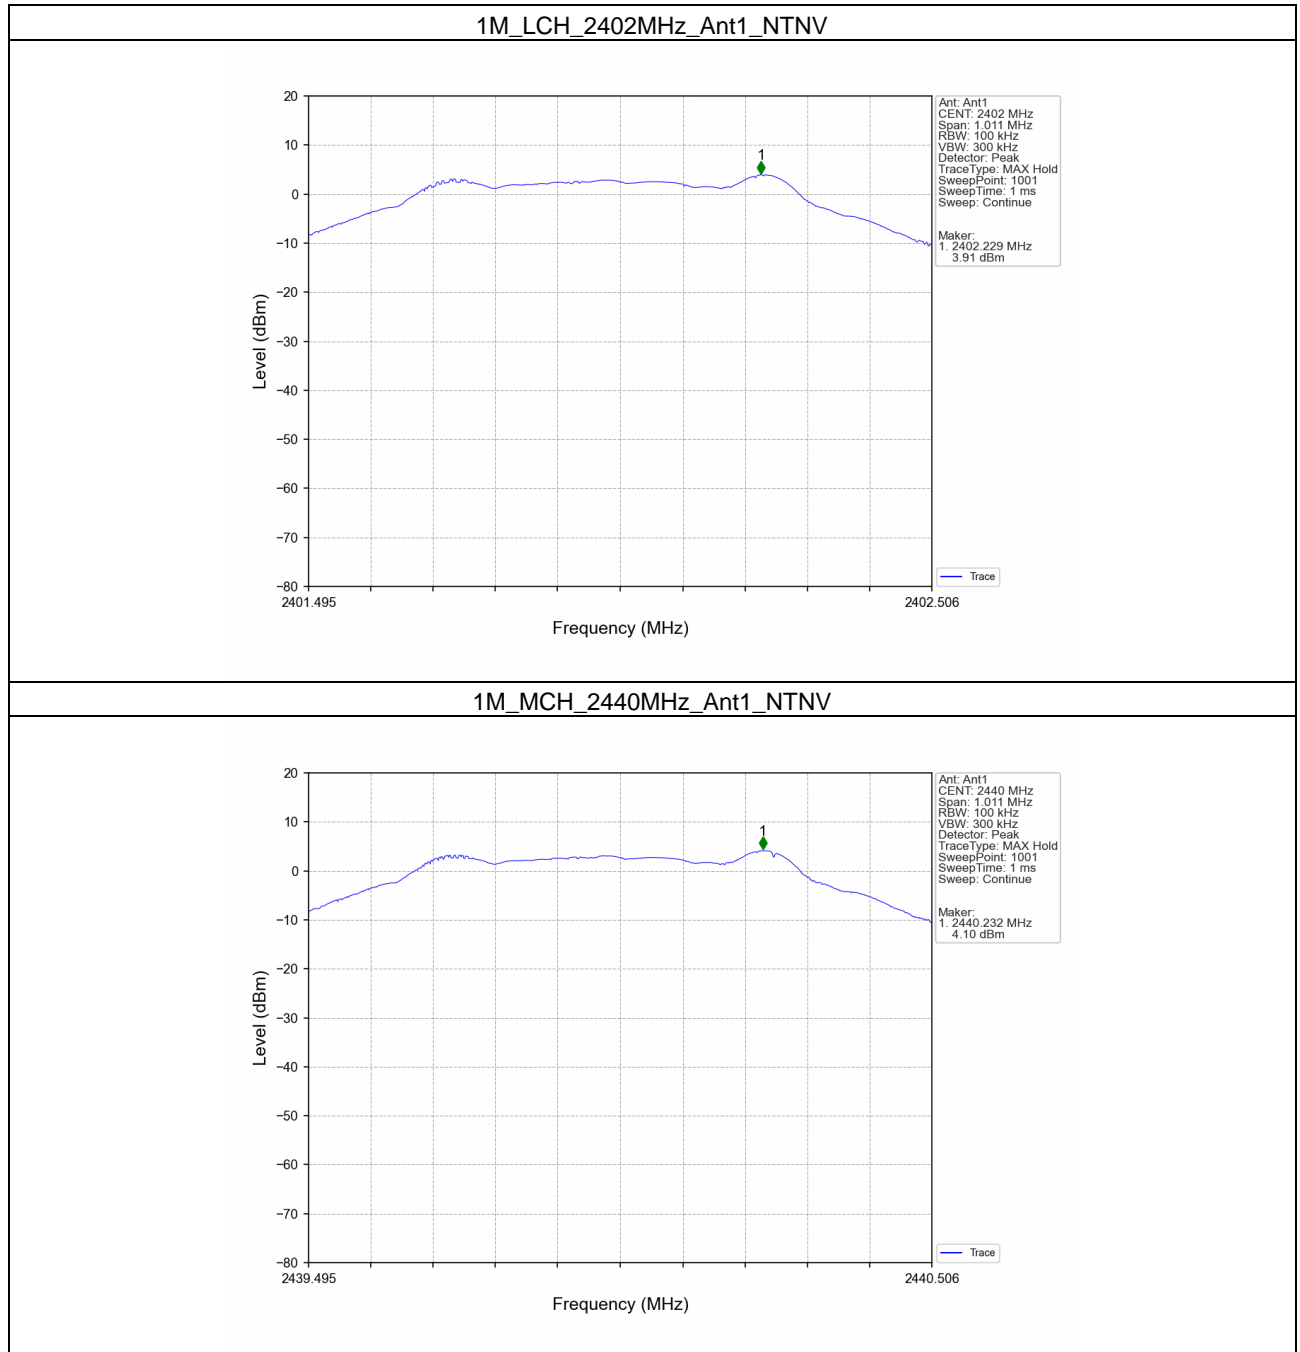





## 1M\_HCH\_2480MHz\_Ant1\_NTNV

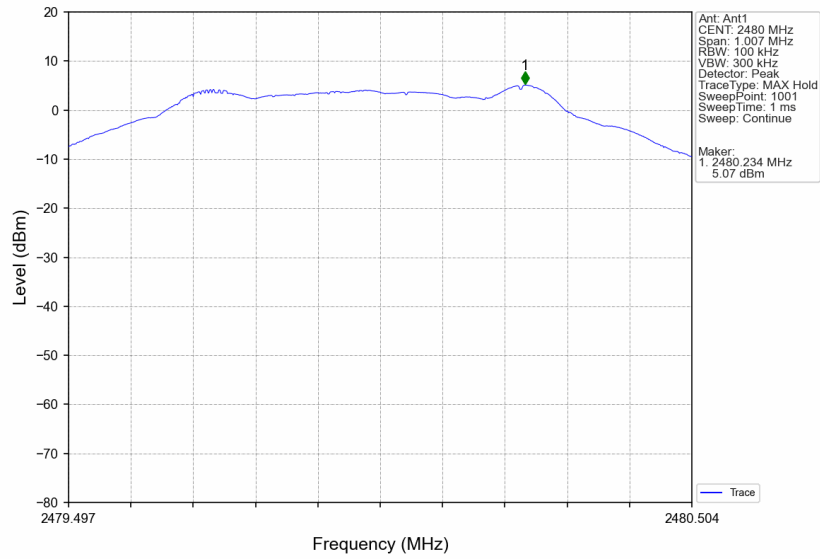


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

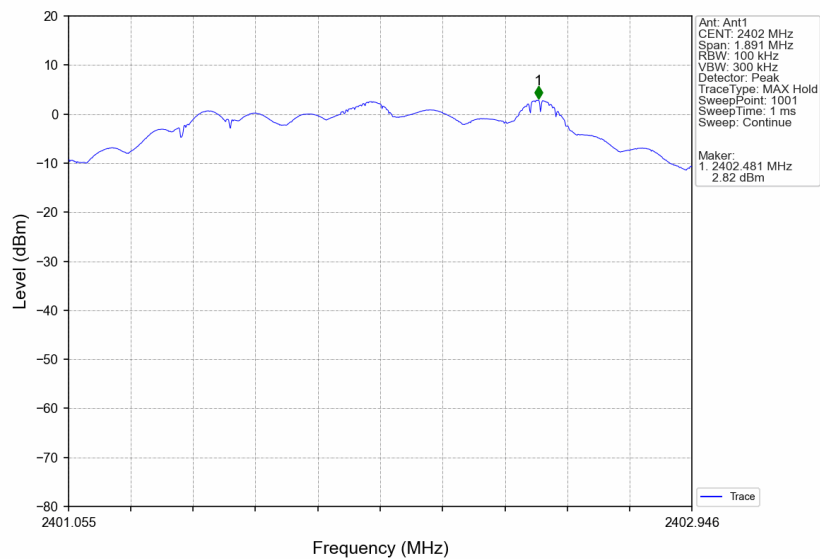

2M\_MCH\_2440MHz\_Ant1\_NTNV

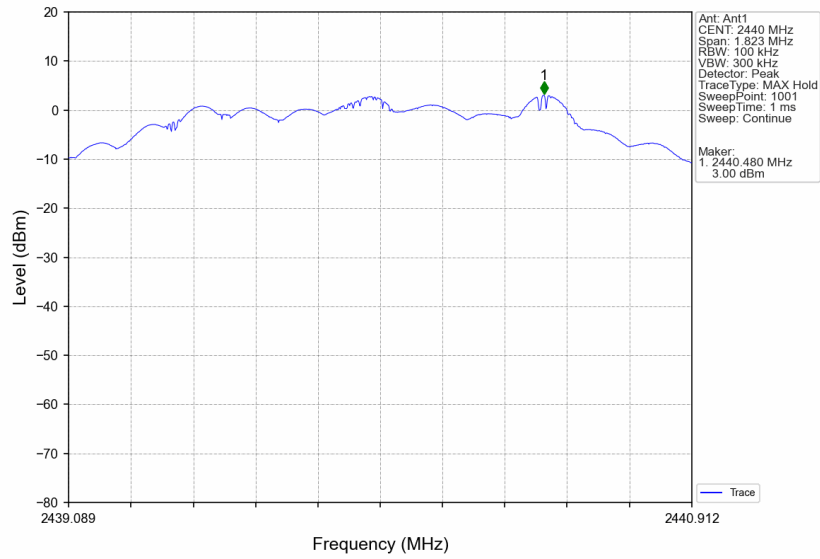


2M\_HCH\_2480MHz\_Ant1\_NTNV

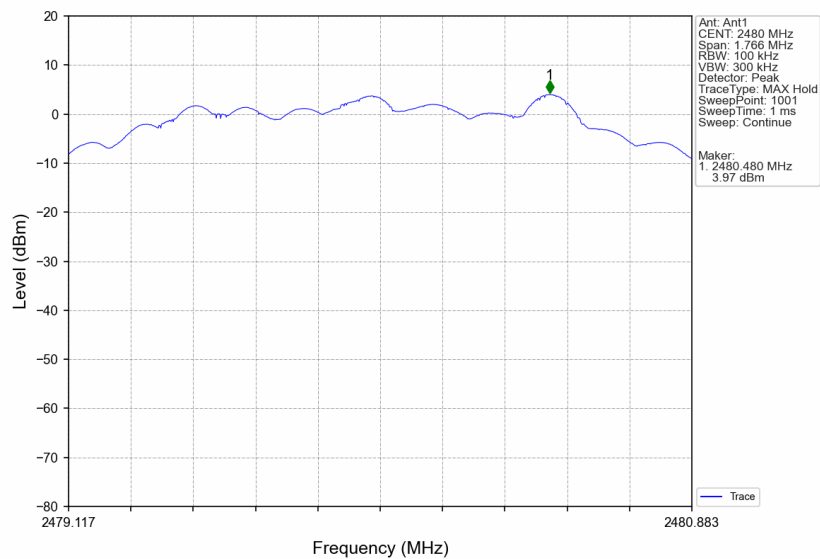


## 5.2.2 CSE


1M\_LCH\_2402MHz\_Ant1\_NTNV

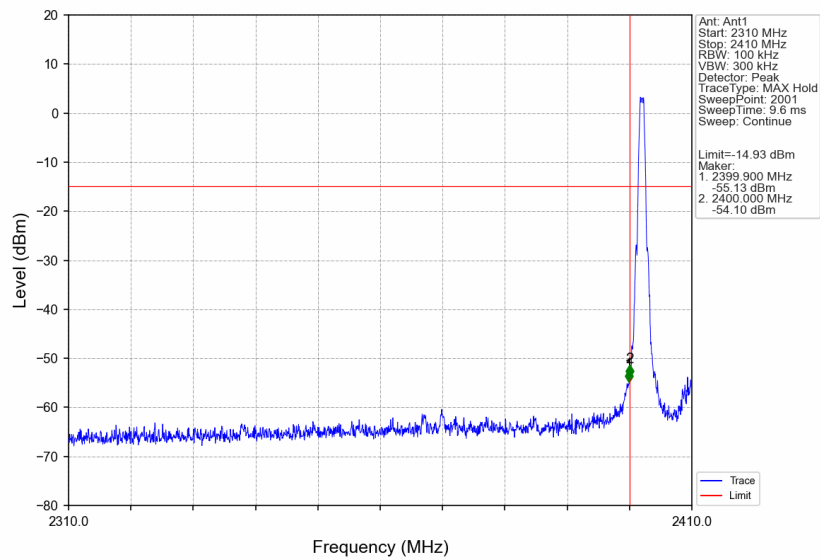


1M\_LCH\_2402MHz\_Ant1\_NTNV

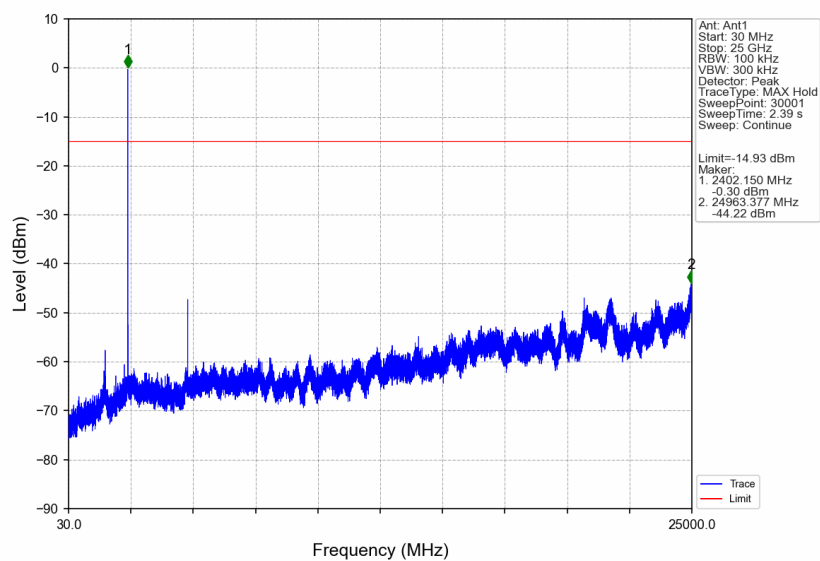


## 1M\_MCH\_2440MHz\_Ant1\_NTNV

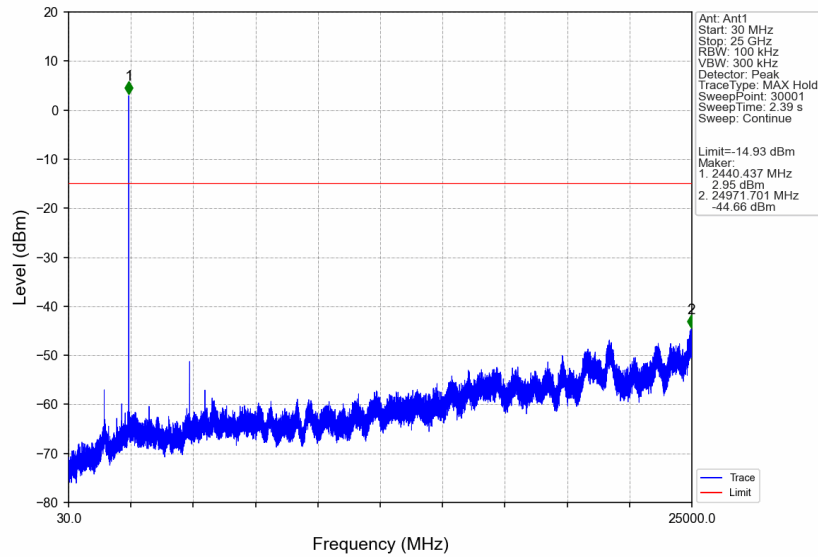


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

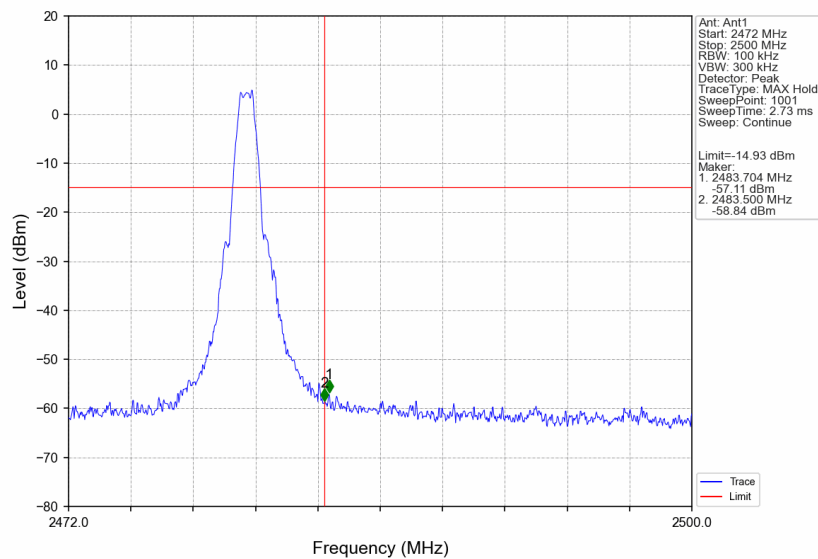


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

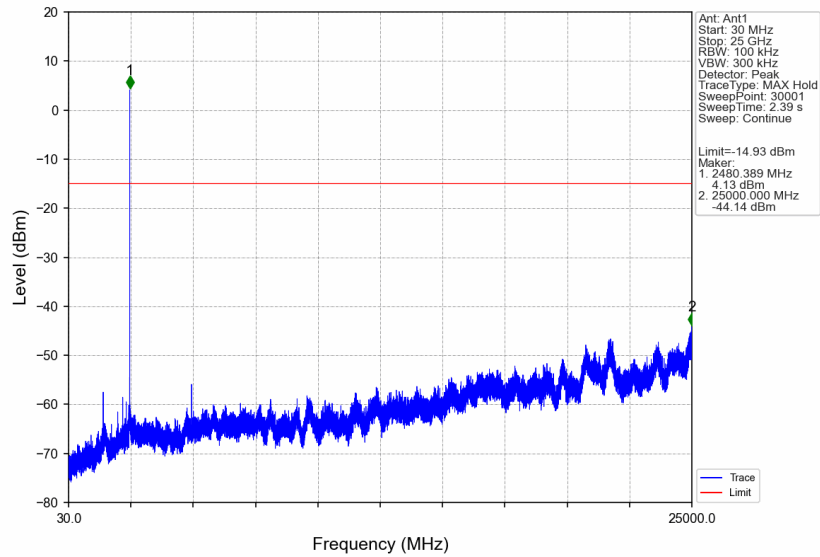


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

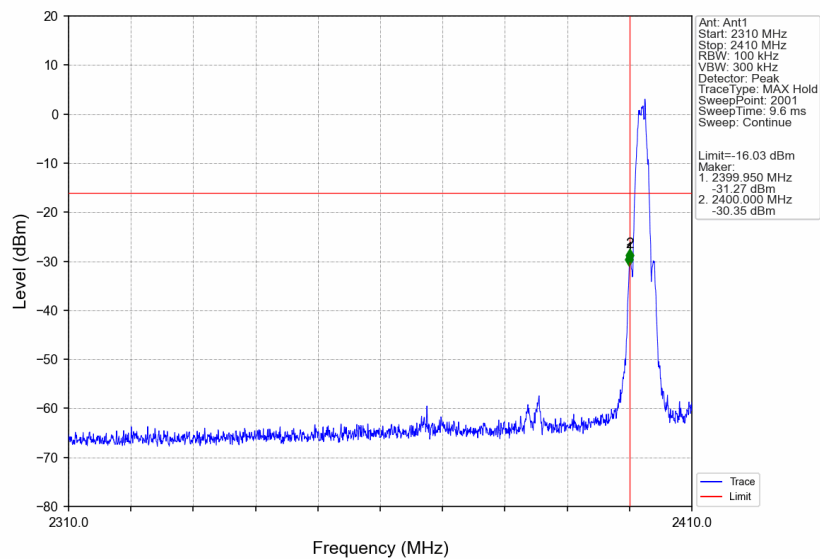


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

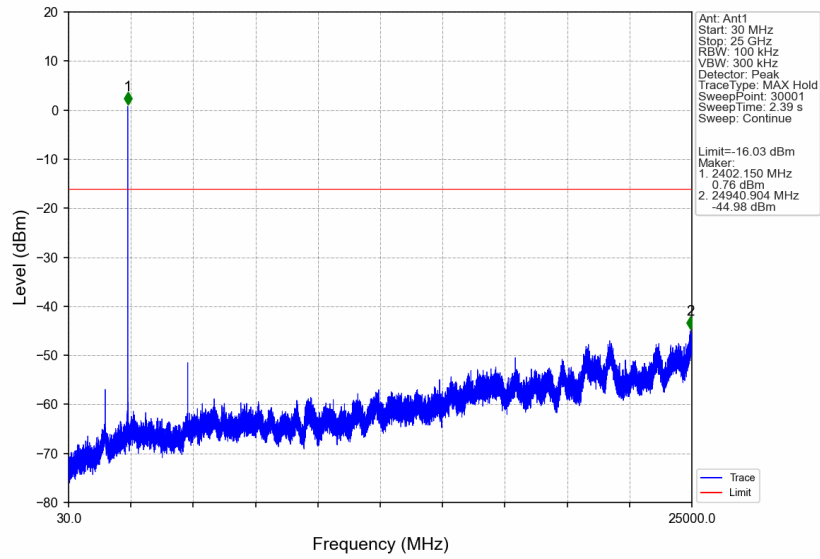


## 2M\_MCH\_2440MHz\_Ant1\_NTNV

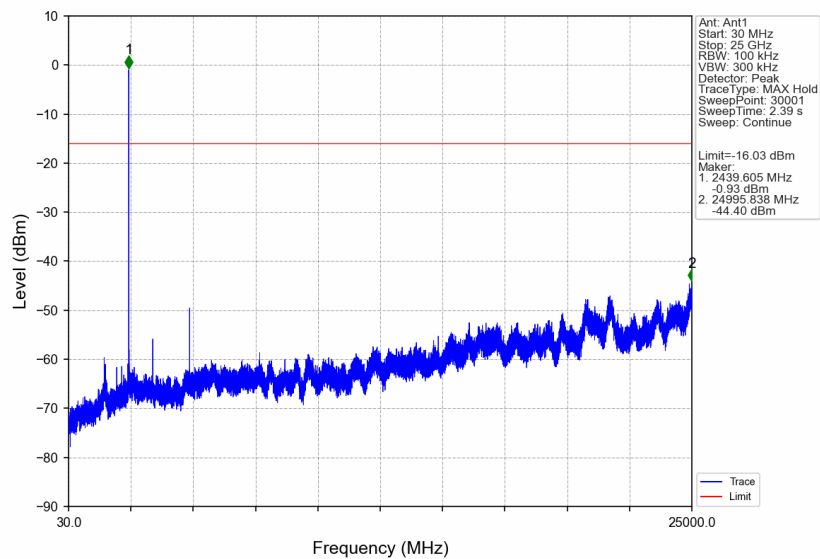

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

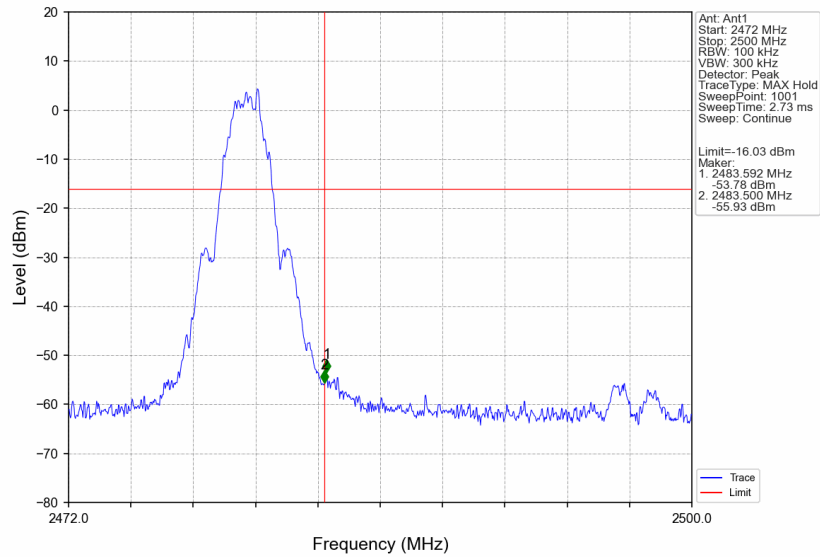

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

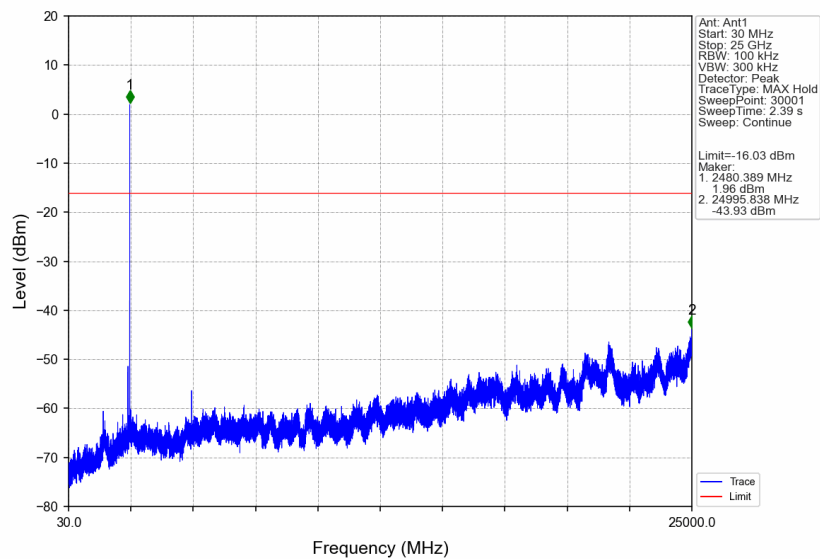

- End of the Report -