

# FCC PART 15 SUBPART C

## EMI MEASUREMENT AND TEST REPORT

For

**AMBIT Microsystems Corporation**

4-1, Ming Shen Street, Tu Chen Industrial District.  
Tu Chen, Taipei Hsien 236, Taiwan, R.O.C.

**FCC ID: MCLT60M665**

February 25, 2003

|                                                                                                                                                              |                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report                                                                          | <b>Equipment Type:</b><br>Notebook PC with Bluetooth<br>Wireless Card |
| <b>Test Engineer:</b> Jerry Wang                                                                                                                             |                                                                       |
| <b>Report No.:</b> R0301173                                                                                                                                  |                                                                       |
| <b>Test Date:</b> February 16, 2003                                                                                                                          |                                                                       |
| <b>Reviewed By:</b> Hans Mellberg                                                                                                                            |                                                                       |
| <b>Prepared By:</b> Bay Area Compliance Laboratory Corporation<br>230 Commercial Street<br>Sunnyvale, CA 94085<br>Tel: (408) 732-9162<br>Fax: (408) 732 9164 |                                                                       |

**Note:** This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1 - GENERAL INFORMATION.....</b>                         | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4         |
| 1.2 OBJECTIVE .....                                         | 4         |
| 1.3 RELATED SUBMITTAL(S)/GRANT(S).....                      | 4         |
| 1.4 TEST METHODOLOGY .....                                  | 4         |
| 1.5 TEST FACILITY .....                                     | 5         |
| 1.6 TEST EQUIPMENT LIST .....                               | 5         |
| 1.7 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....           | 6         |
| 1.8 EXTERNAL I/O CABLING LIST AND DETAILS.....              | 6         |
| <b>2 - SYSTEM TEST CONFIGURATION.....</b>                   | <b>7</b>  |
| 2.1 JUSTIFICATION .....                                     | 7         |
| 2.2 EUT EXERCISE SOFTWARE.....                              | 7         |
| 2.3 SPECIAL ACCESSORIES.....                                | 7         |
| 2.4 SCHEMATICS / BLOCK DIAGRAM .....                        | 7         |
| 2.5 EQUIPMENT MODIFICATIONS.....                            | 7         |
| 2.6 CONFIGURATION OF TEST SYSTEM.....                       | 8         |
| 2.7 TEST SETUP BLOCK DIAGRAM .....                          | 8         |
| <b>3 - SUMMARY OF TEST RESULTS .....</b>                    | <b>9</b>  |
| <b>4 - MAXIMUM PEAK OUTPUT POWER .....</b>                  | <b>10</b> |
| 4.1 STANDARD APPLICABLE.....                                | 10        |
| 4.2 MEASUREMENT PROCEDURE .....                             | 10        |
| 4.3 MEASUREMENT RESULT .....                                | 10        |
| 4.4 PLOT OF MAXIMUM PEAK OUTPUT POWER.....                  | 10        |
| <b>5 – 20DB BANDWIDTH.....</b>                              | <b>12</b> |
| 5.1 STANDARD APPLICABLE.....                                | 12        |
| 5.2 MEASUREMENT PROCEDURE .....                             | 12        |
| 5.3 MEASUREMENT RESULT .....                                | 12        |
| 5.4 PLOT OF CHANNEL BANDWIDTH.....                          | 12        |
| <b>6 - NUMBER OF HOPPING FREQUENCY USED.....</b>            | <b>14</b> |
| 6.1 STANDARD APPLICABLE.....                                | 14        |
| 6.2 MEASUREMENT PROCEDURE .....                             | 14        |
| 6.3 MEASUREMENT PROCEDURE .....                             | 14        |
| 6.4 PLOTS OF NUMBER OF HOPPING FREQUENCY .....              | 14        |
| <b>7 - HOPPING CHANNEL SEPARATION.....</b>                  | <b>16</b> |
| 7.1 STANDARD APPLICABLE.....                                | 16        |
| 7.2 MEASUREMENT PROCEDURE .....                             | 16        |
| 7.3 MEASUREMENT DATA .....                                  | 16        |
| <b>8 - 100 KHZ BANDWIDTH OF BAND EDGES.....</b>             | <b>17</b> |
| 8.1 STANDARD APPLICABLE.....                                | 17        |
| 8.2 MEASUREMENT PROCEDURE .....                             | 17        |
| 8.3 MEASUREMENT DATA .....                                  | 17        |
| <b>9 - DWELL TIME.....</b>                                  | <b>20</b> |
| 9.1 STANDARD APPLICABLE.....                                | 20        |
| 9.2 MEASUREMENT PROCEDURE .....                             | 20        |
| 9.3 MEASUREMENT RESULTS.....                                | 20        |
| 9.4 PLOTS OF DWELL TIME.....                                | 20        |
| <b>10 - SPURIOUS EMISSION.....</b>                          | <b>25</b> |
| 10.1 STANDARD APPLICABLE.....                               | 25        |
| 10.2 MEASUREMENT PROCEDURE .....                            | 25        |
| 10.3 MEASUREMENT RESULTS.....                               | 25        |
| <b>11 - RADIATED EMISSION.....</b>                          | <b>27</b> |

|                                                    |           |
|----------------------------------------------------|-----------|
| 11.1 MEASUREMENT UNCERTAINTY.....                  | 27        |
| 11.2 TEST SETUP .....                              | 27        |
| 11.3 SPECTRUM ANALYZER SETUP .....                 | 27        |
| 12.4 TEST PROCEDURE .....                          | 28        |
| 12.5 CORRECTED AMPLITUDE & MARGIN CALCULATION..... | 28        |
| 12.6 SUMMARY OF TEST RESULTS.....                  | 29        |
| <b>12 - CONDUCTED EMISSION .....</b>               | <b>35</b> |
| 12.1 MEASUREMENT UNCERTAINTY.....                  | 35        |
| 12.2 TEST SETUP .....                              | 35        |
| 12.3 SPECTRUM ANALYZER SETUP .....                 | 35        |
| 12.4 TEST PROCEDURE .....                          | 35        |
| 12.5 SUMMARY OF TEST RESULTS.....                  | 35        |
| 12.6 CONDUCTED EMISSIONS TEST DATA .....           | 36        |
| 12.7 PLOT OF CONDUCTED EMISSIONS TEST DATA.....    | 36        |
| <b>13 - ANTENNA REQUIREMENT.....</b>               | <b>40</b> |

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

The *Ambit Microsystems Corporation's* Model: *T60M665* or the "EUT" as referred to in this report is a Wireless Card & Antenna installed in the ACER notebook PC. During the test, there were respectively three antennas (BY27, ZG1S and ZI1S) connected to the wireless card. The wireless card measures approximately 2.4" L x 1.7" W x 0.1"H.

*\* The test data in this test report was good for the test sample only. It may have deviation for other test samples.*

### 1.2 Objective

This type approval report is prepared on behalf of *AMBIT Microsystems Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with C108.8 & RSS-210 rules for the bluetooth transmitter:

- Maximum Peak Output Power
- Hopping Channel Separation
- Number of Hopping Frequency Used
- 20 dB Bandwidth
- Dwell Time on Each Channel
- 100 kHz Bandwidth of Band Edge
- Conducted Emission
- Spurious Emission
- Radiated Emission
- Antenna Requirement
- RF Exposure Limit

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2000, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2000.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 2002, and AS/NZS CISPR 22: 2002: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

## 1.6 Test Equipment List

| Manufacturer      | Description          | Model            | Serial Number | Cal. Due Date |
|-------------------|----------------------|------------------|---------------|---------------|
| HP                | Spectrum Analyzer    | 8568B            | 2610A02165    | 12/6/03       |
| HP                | Spectrum Analyzer    | 8593B            | 2919A00342    | 12/20/03      |
| HP                | Amplifier            | 8349B            | 2644A03662    | 12/20/03      |
| HP                | Quasi-Peak Adapter   | 85650A           | 917059        | 12/6/03       |
| HP                | Amplifier            | 8447E            | 1937A01046    | 12/6/03       |
| A.H. System       | Horn Antenna         | SAS0300/571      | 261           | 12/27/03      |
| Com-Power         | Log Periodic Antenna | AL-100           | 16005         | 11/2/03       |
| Com-Power         | Biconical Antenna    | AB-100           | 14012         | 11/2/03       |
| Solar Electronics | LISN                 | 8012-50-R-24-BNC | 968447        | 12/28/03      |
| Com-Power         | LISN                 | LI-200           | 12208         | 12/20/03      |
| Com-Power         | LISN                 | LI-200           | 12005         | 12/20/03      |
| BACL              | Data Entry Software  | DES1             | 0001          | 12/20/03      |

**\* Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY (NIST).

**1.7 Local Support Equipment List and Details**

| Manufacturer | Description | Model | Serial Number | FCC ID |
|--------------|-------------|-------|---------------|--------|
| ACER         | Notebook PC | SKU-4 | N/A           | DOC    |
| HP           | Printer     | 2225C | N/A           | DOC    |

**1.8 External I/O Cabling List and Details**

| Cable Description      | Length (M) | Port/From                 | To      |
|------------------------|------------|---------------------------|---------|
| Shielded Printer Cable | 2.0        | Parallel Port/Notebook PC | Printer |

## **2 - SYSTEM TEST CONFIGURATION**

---

### **2.1 Justification**

The host system was configured for testing in a typical fashion (as a normally used by a typical user).

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

### **2.2 EUT Exercise Software**

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The test software, bluetest, provided by the customer, is started the Windows 98 terminal program under the Windows 98 operating system. Once started, select USB from “choose a protocol”, select TXDATA1 from “bluetest” then click execute. The process is continuous throughout all tests.

### **2.3 Special Accessories**

As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied by INMAC and their respective support equipment manufacturers. The host pc and other peripherals featured shielded metal connectors.


### **2.4 Schematics / Block Diagram**

Please refer to Exhibit D.


### **2.5 Equipment Modifications**

No modifications were made by BACL Corporation to ensure the EUT to comply with the applicable limits and requirements.

## 2.6 Configuration of Test System

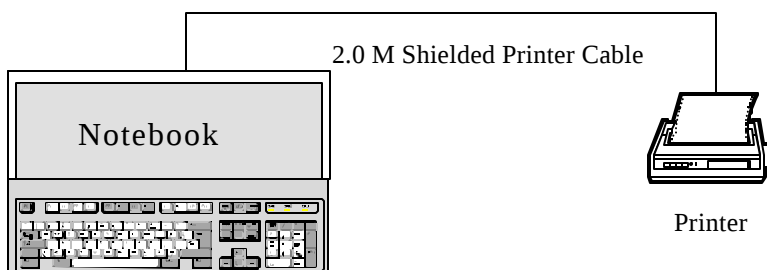

## 2.7 Test Setup Block Diagram

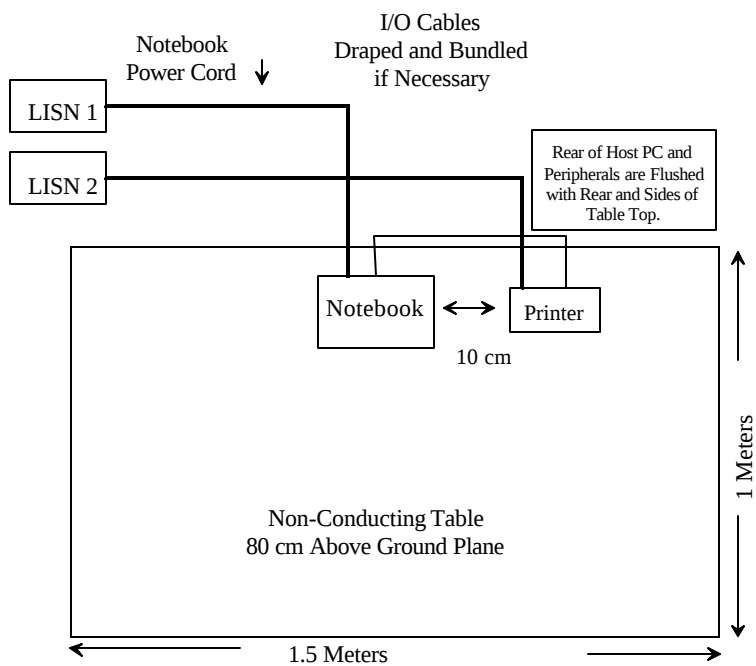

### 3 - SUMMARY OF TEST RESULTS

| FCC RULES             | DESCRIPTION OF TEST                                                                                                                                                                            | RESULT    | REFERENCE                |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------|
| General Requirements  |                                                                                                                                                                                                |           |                          |
| § 2.1091              | RF Safety Requirements                                                                                                                                                                         | Compliant | Section 16<br>Exhibit H  |
| § 15.203              | Antenna Requirement                                                                                                                                                                            | Compliant | Section 14<br>Appendix I |
| § 15.207 (a)          | Conducted Emission                                                                                                                                                                             | Compliant | Section 13               |
| Bluetooth Transmitter |                                                                                                                                                                                                |           |                          |
| § 15.205              | Restricted Bands                                                                                                                                                                               | Compliant | Section 10               |
| § 15.247 (a) (1) (i)  | Number of Hopping Frequencies Used                                                                                                                                                             | Compliant | Section 6<br>Appendix C  |
| § 15.209 (a)          | Radiated Emission                                                                                                                                                                              | Compliant | Section 12               |
| § 15.209 (f)          | Spurious Emission                                                                                                                                                                              | Compliant | Section 10<br>Appendix G |
| § 15.247 (a) (1)      | Hopping Channel Separation                                                                                                                                                                     | Compliant | Section 7<br>Appendix D  |
| § 15.247 (a) (1) (i)  | Dwell Time of Each Frequency within a 10 Second Period                                                                                                                                         | Compliant | Section 9<br>Appendix F  |
| § 15.247 (a) (1) (ii) | 20dB Bandwidth                                                                                                                                                                                 | Compliant | Section 5<br>Appendix B  |
| § 15.247 (b) (2)      | Maximum Peak Output Power                                                                                                                                                                      | Compliant | Section 4<br>Appendix A  |
| § 15.247 (c)          | 100 kHz Bandwidth of Frequency Band Edge                                                                                                                                                       | Compliant | Section 8<br>Appendix E  |
| § 15.247 (g)          | Full and complete compliance with applicable requirements for FHSS. Compliance with the definition of frequency hopping system, distribute transmission over minimum number of hopping channel | Compliant | Exhibit G<br>Exhibit H   |
| § 15.247 (h)          | Limitation on avoidance on hopping on occupied channel                                                                                                                                         | Compliant | Exhibit G<br>Exhibit H   |

## 4 - MAXIMUM PEAK OUTPUT POWER

### 4.1 Standard Applicable

According to §15.247(b) (1), for frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all direct sequence systems, the maximum peak output power of the transmitter shall not exceed 1 Watt.

### 4.2 Measurement Procedure




1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer (power meter).

### 4.3 Measurement Result

| Frequency (MHz) | Output Power in dBm | Output Power in mW | Standard  | Result    |
|-----------------|---------------------|--------------------|-----------|-----------|
| 2402.25         | 3.17                | 2.075              | $\leq 1W$ | Compliant |
| 2442.67         | 3.50                | 2.239              | $\leq 1W$ | Compliant |
| 2485.00         | 3.17                | 2.075              | $\leq 1W$ | Compliant |

### 4.4 Plot of Maximum Peak Output Power

Please refer to the appending for more information.

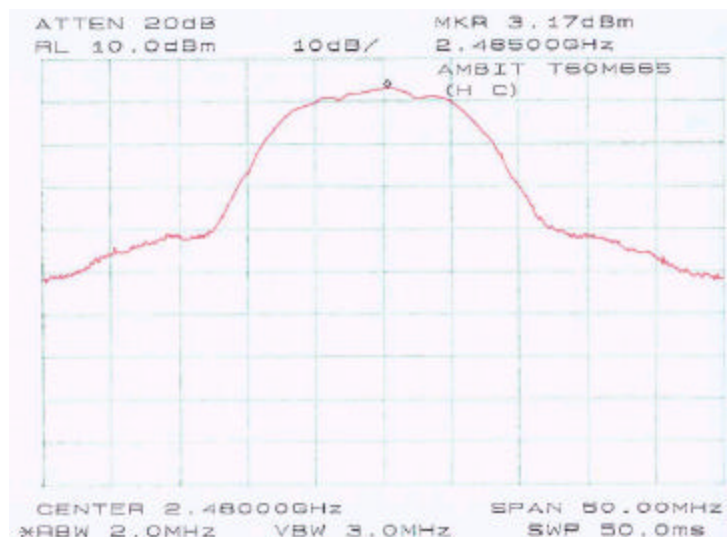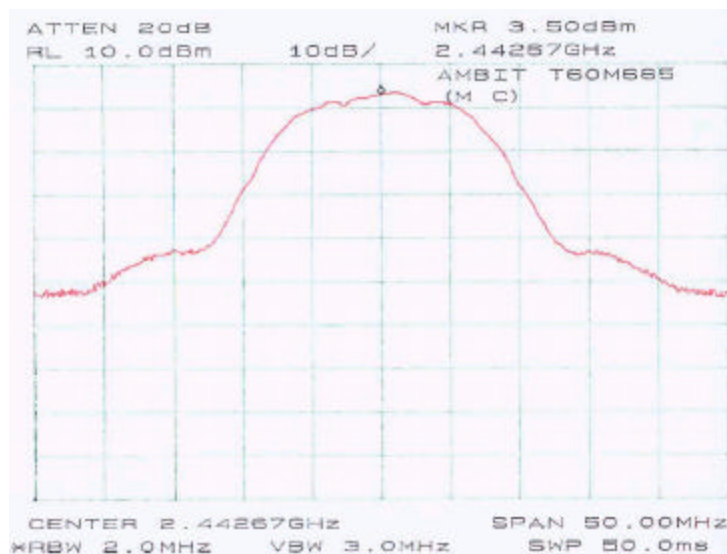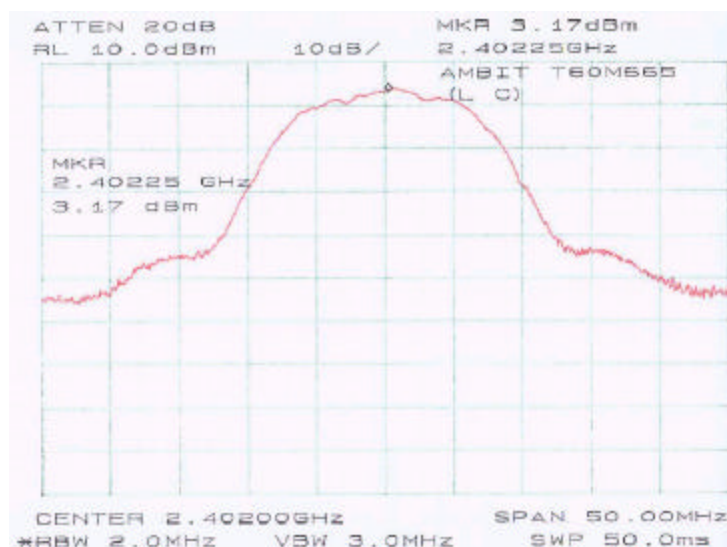

## 5 – 20dB BANDWIDTH

### 5.1 Standard Applicable

According to §15.247(a)(l)(iii), the maximum 20dB bandwidth of the hopping channel is 1MHz.

### 5.2 Measurement Procedure




1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 5.3 Measurement Result

| Channel | Measurement | Standard           | Result    |
|---------|-------------|--------------------|-----------|
| Low     | 780kHz      | $\leq 1\text{MHz}$ | Compliant |
| Middle  | 765kHz      | $\leq 1\text{MHz}$ | Compliant |
| High    | 765kHz      | $\leq 1\text{MHz}$ | Compliant |

### 5.4 Plot of Channel Bandwidth

Please refer to attached plots.

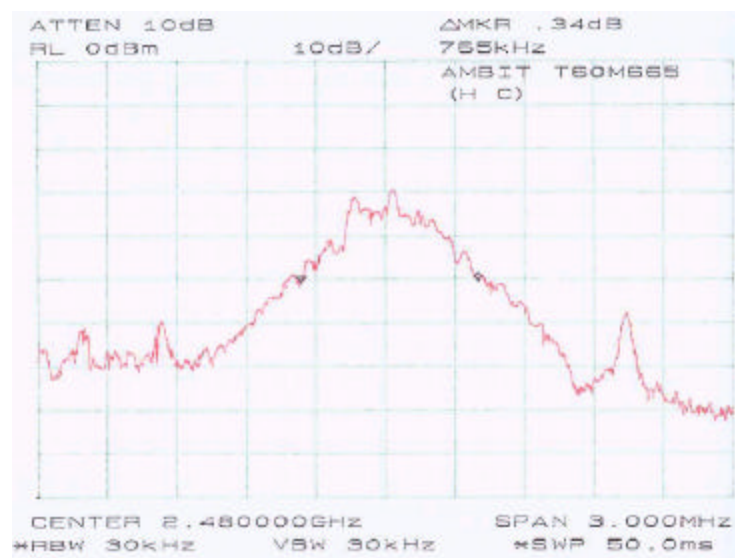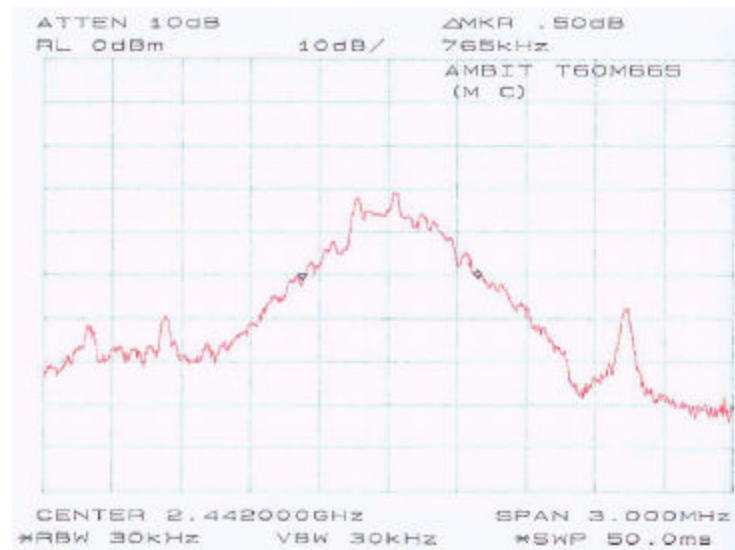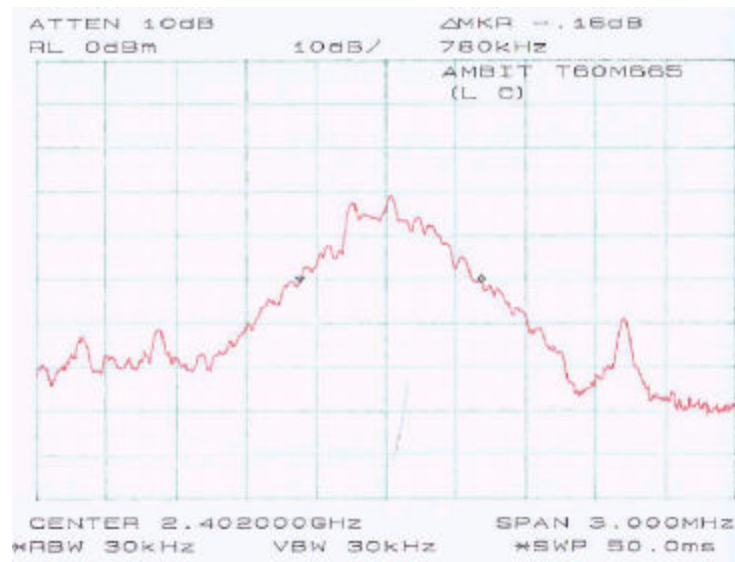

## 6 - NUMBER OF HOPPING FREQUENCY USED

### 6.1 Standard Applicable

According to §15.247(a)(1)(ii), frequency hopping systems operating in the 2400-2483.5Mhz band shall use at least 75 hopping frequencies.

### 6.2 Measurement Procedure




1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 6.3 Measurement Procedure

| Measurement | Standard | Result    |
|-------------|----------|-----------|
| 79          | 75       | Compliant |

### 6.4 Plots of Number of Hopping Frequency

Please refer to the attached plots.

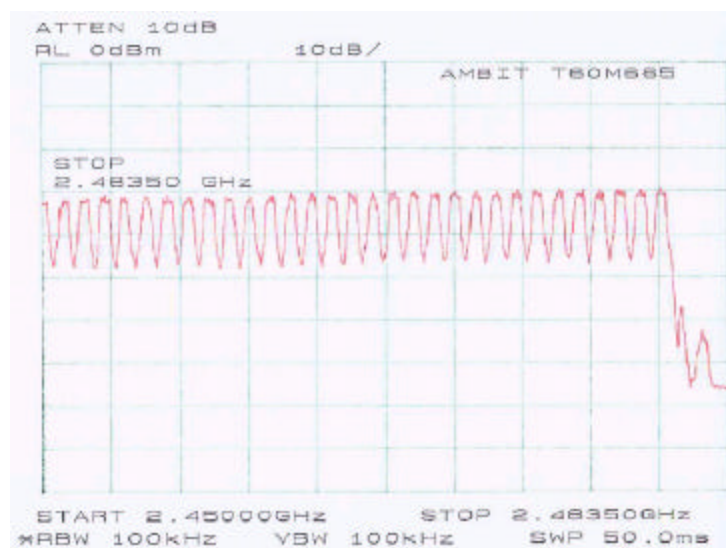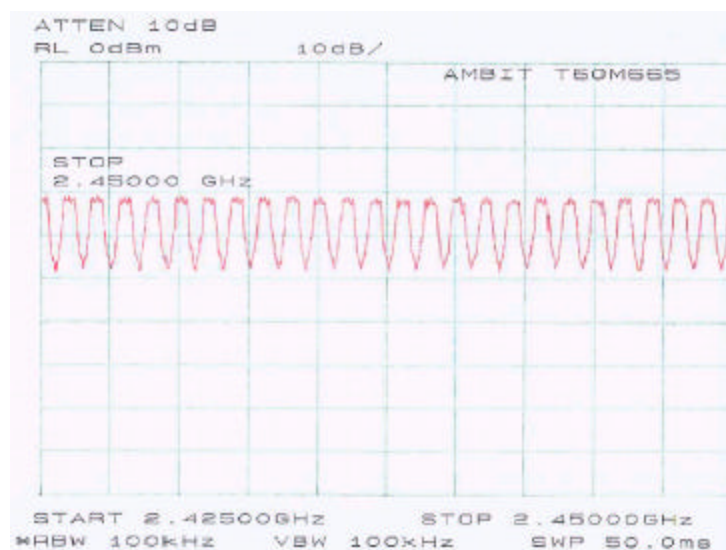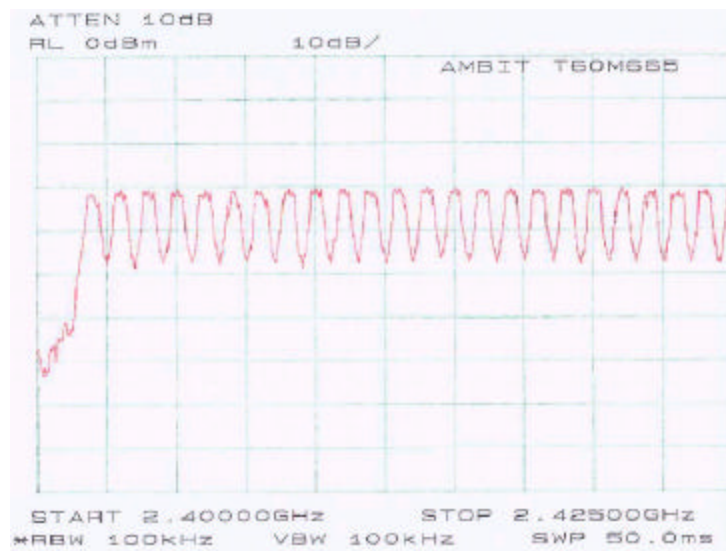

## 7 - HOPPING CHANNEL SEPARATION

### 7.1 Standard Applicable


According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 7.3 Measurement Data

Please refer to the attached plots.

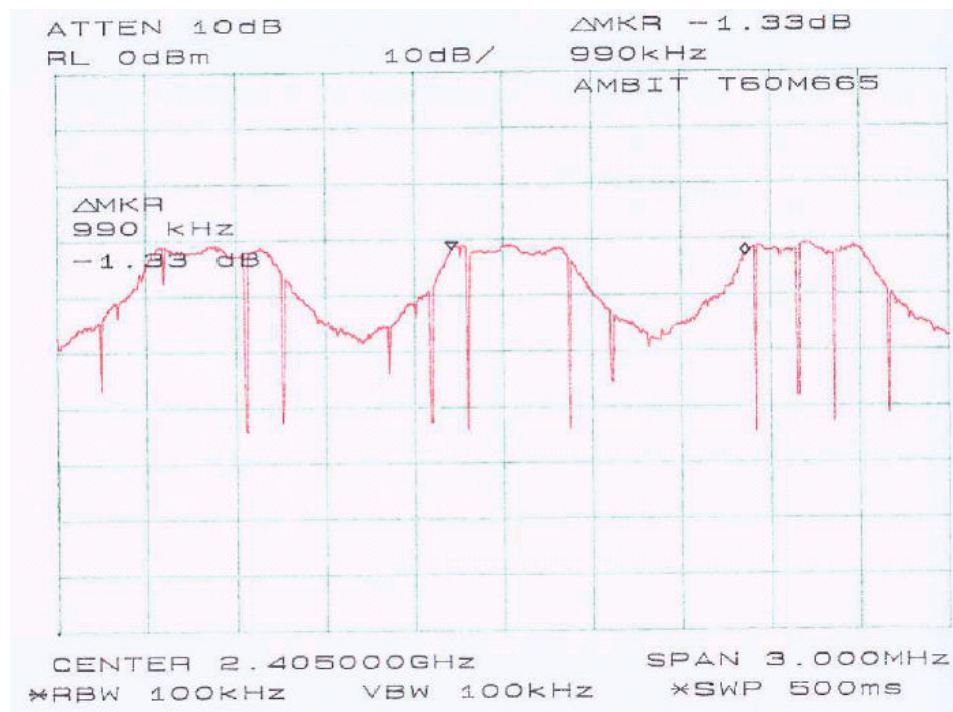

---

## 8 - 100 KHZ BANDWIDTH OF BAND EDGES

---

### 8.1 Standard Applicable



According to §15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.



### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 8.3 Measurement Data

Please refer to the attached plots.

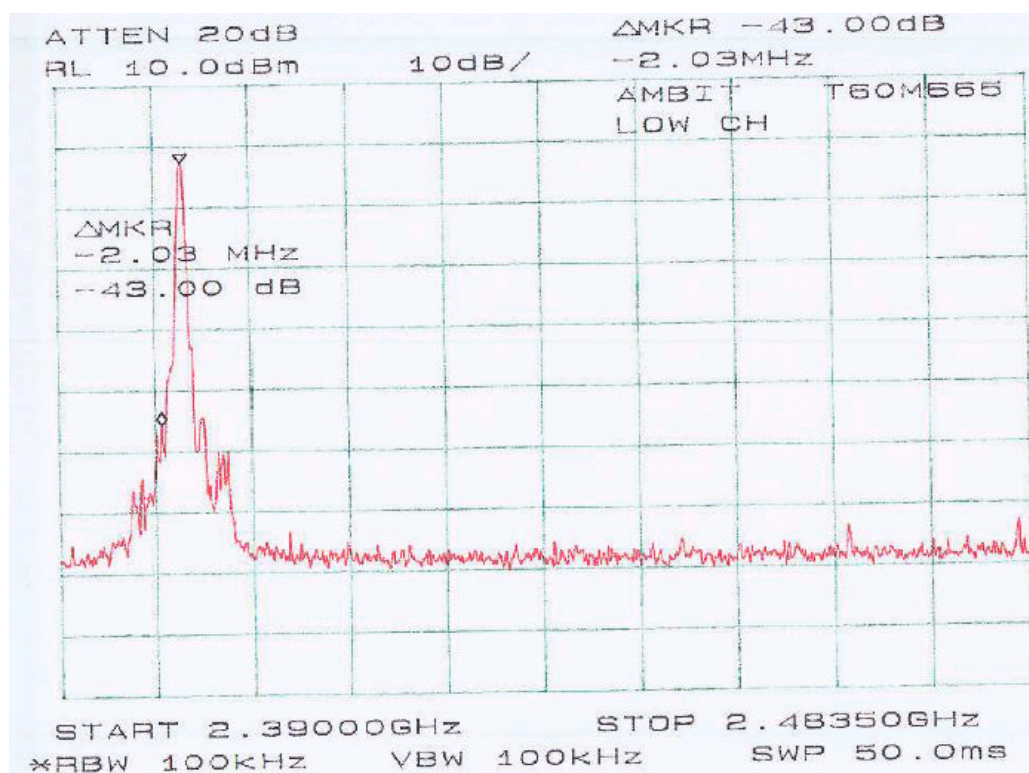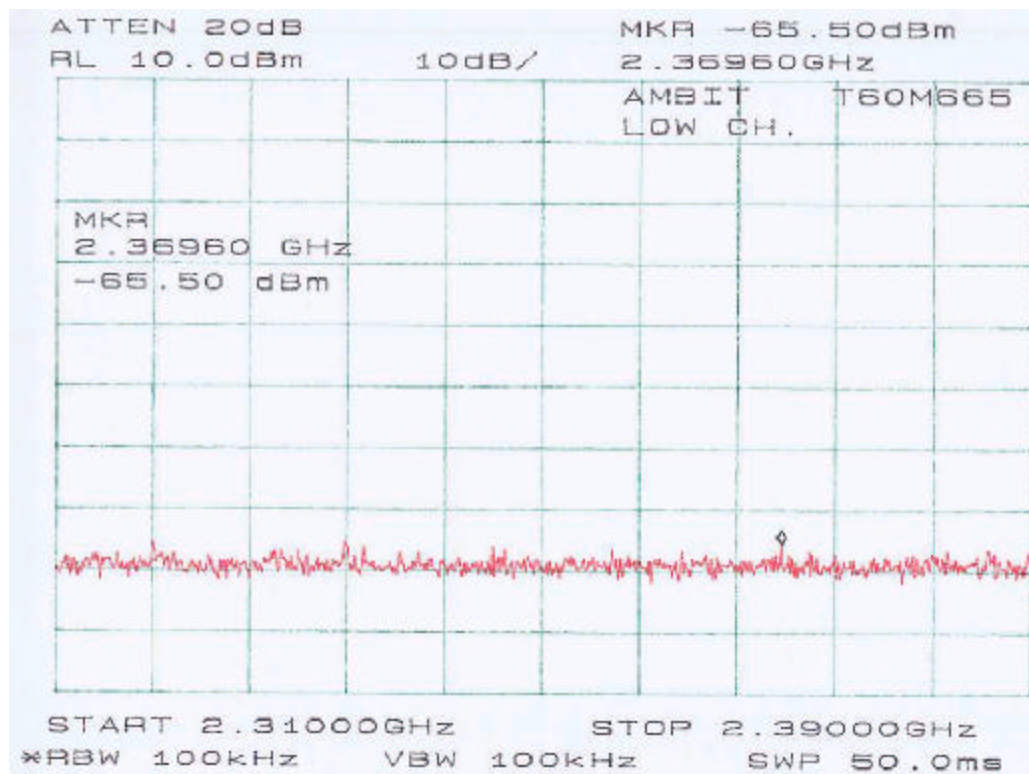

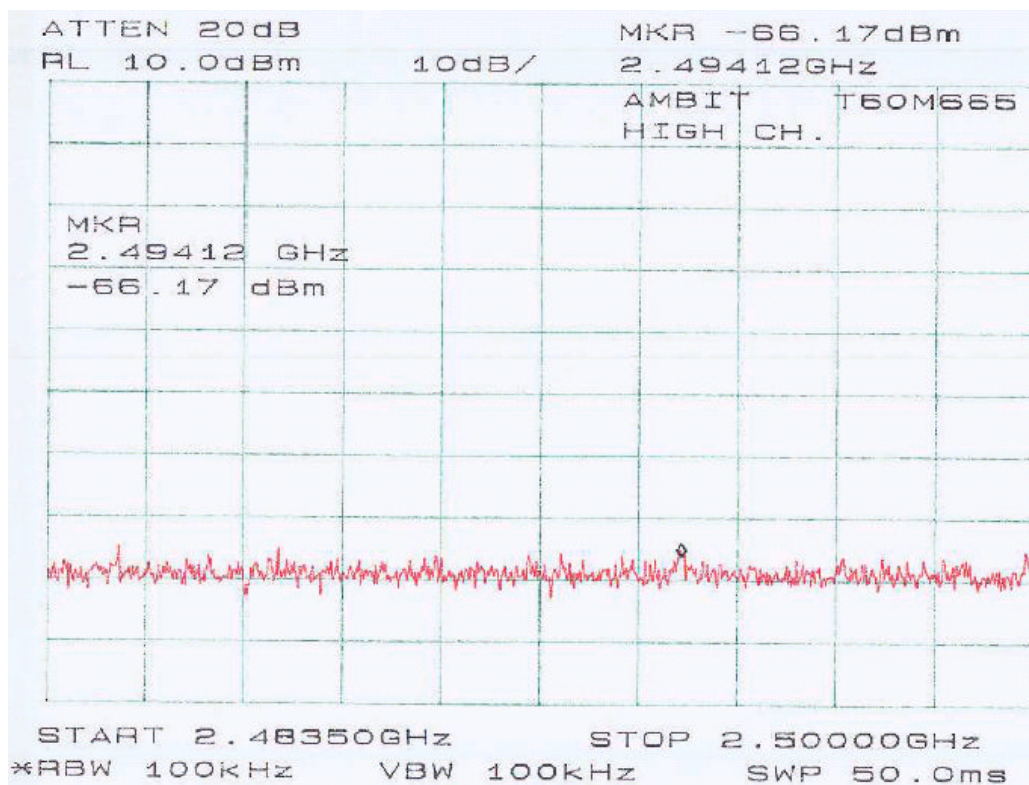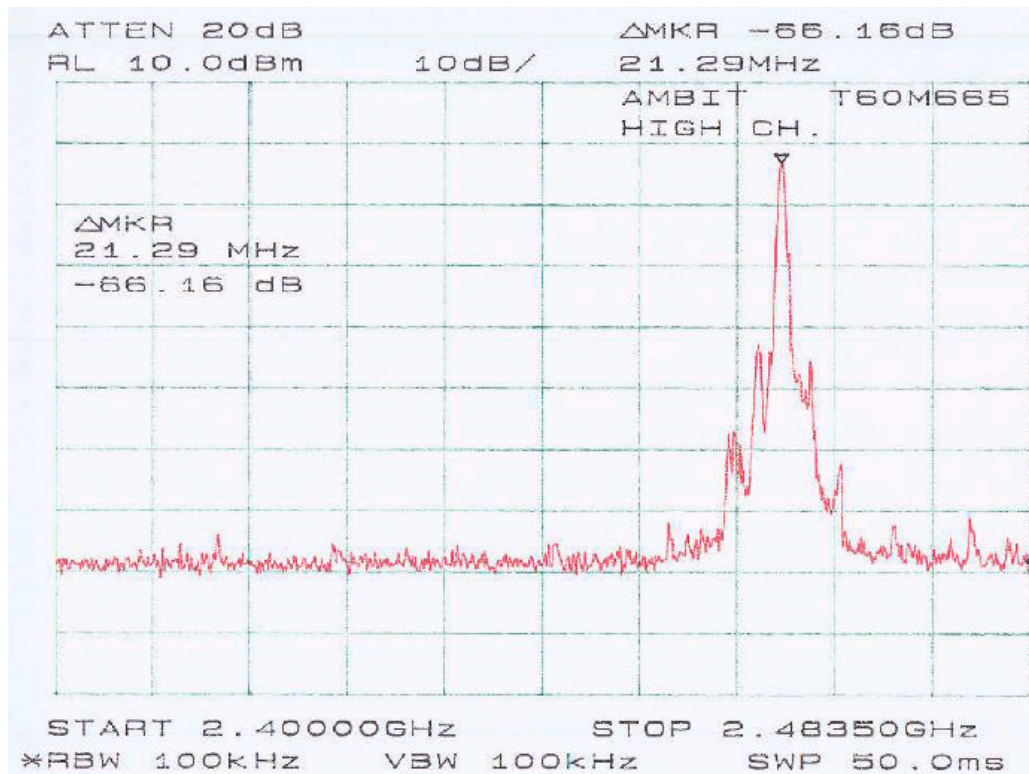

---

## 9 - DWELL TIME

---

### 9.1 Standard Applicable

According to §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.


### 9.3 Measurement Results

The worst case dwell time is (DH5 packet)  $(4 \times 2.952 \text{ ms})$  (dwell time in 1 sec)  $\times 30 \text{ seconds} = 354.24 \text{ ms} < 0.4 \times 79$


### 9.4 Plots of Dwell Time

Please refer the following plots.


DH1 Mode Dwell Time: DH1 Data Packet – Dwell Time = 484.3  $\mu$ sec

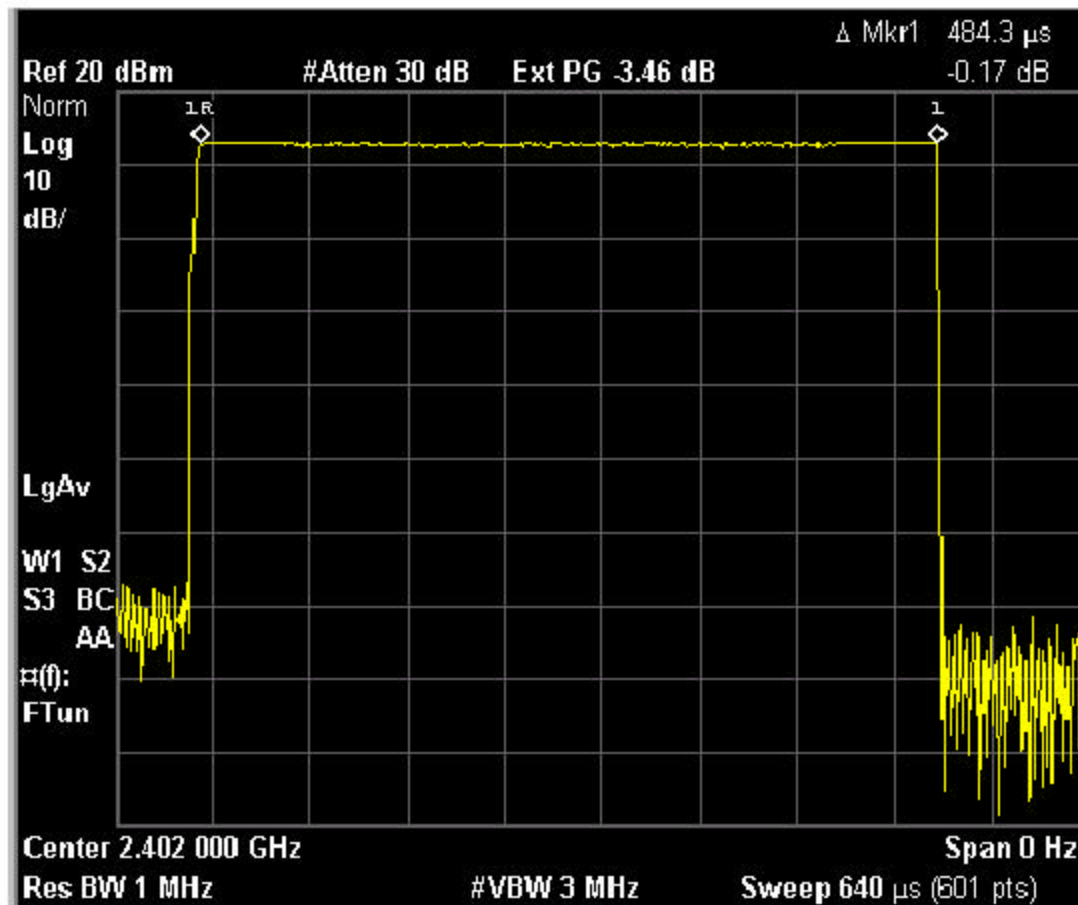


DH3 Mode Dwell Time: DH3 Data Packet – Dwell Time = 1.736 msec

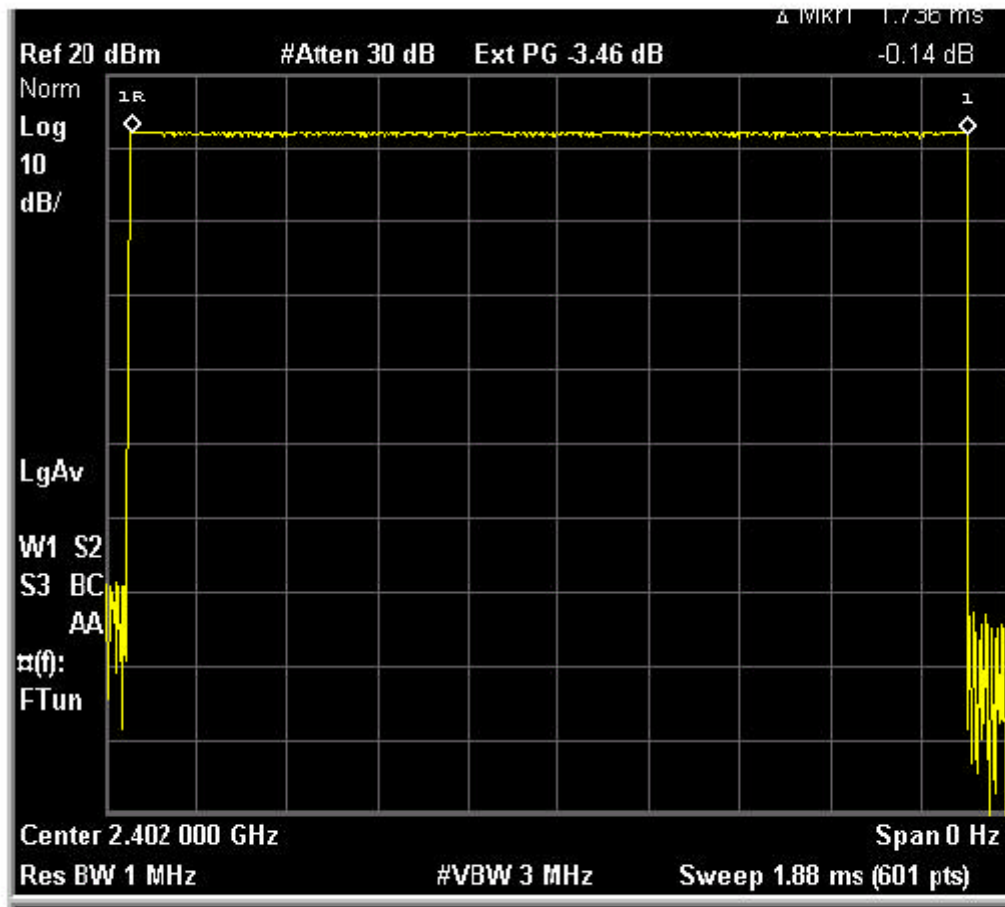

DH5 Mode Dwell Time: DH5 Data Packet – Dwell Time = 2.952 msec

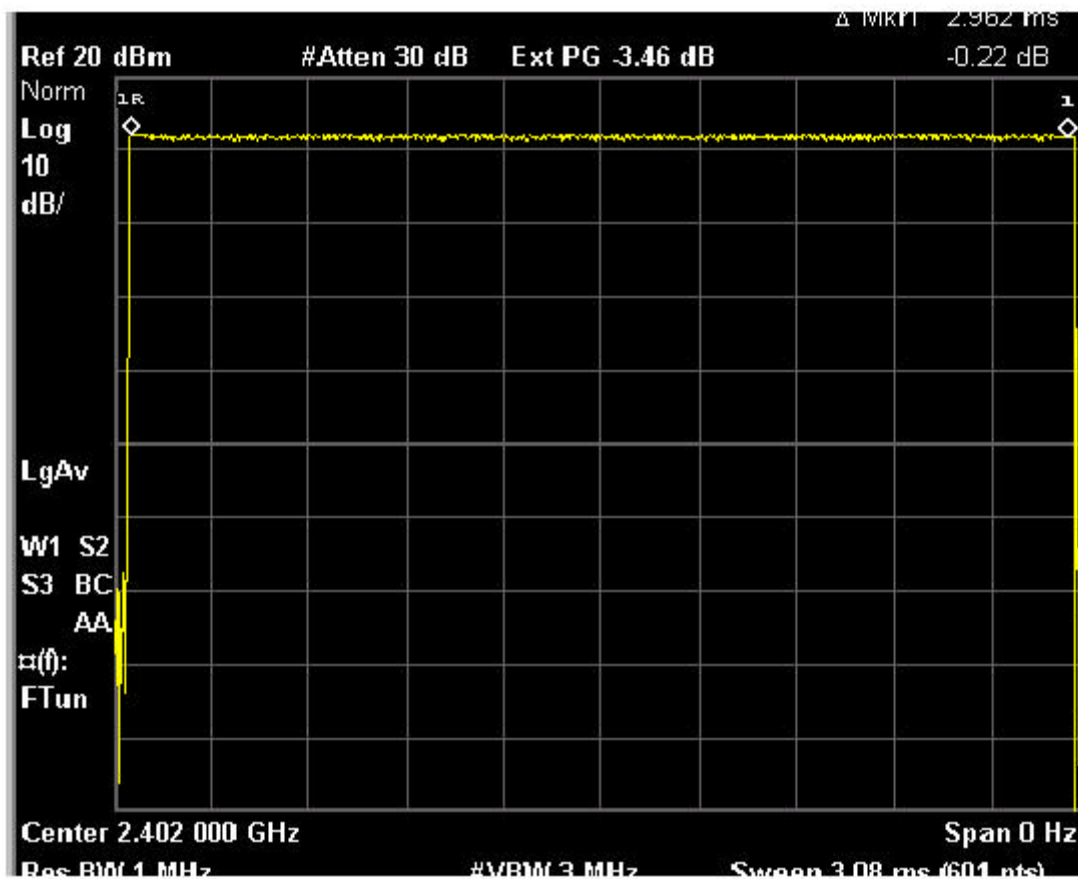

Plot Showing numbers of pulses in 1 second in DH5 Mode: 4 peaks of DH5 packets in 1 second

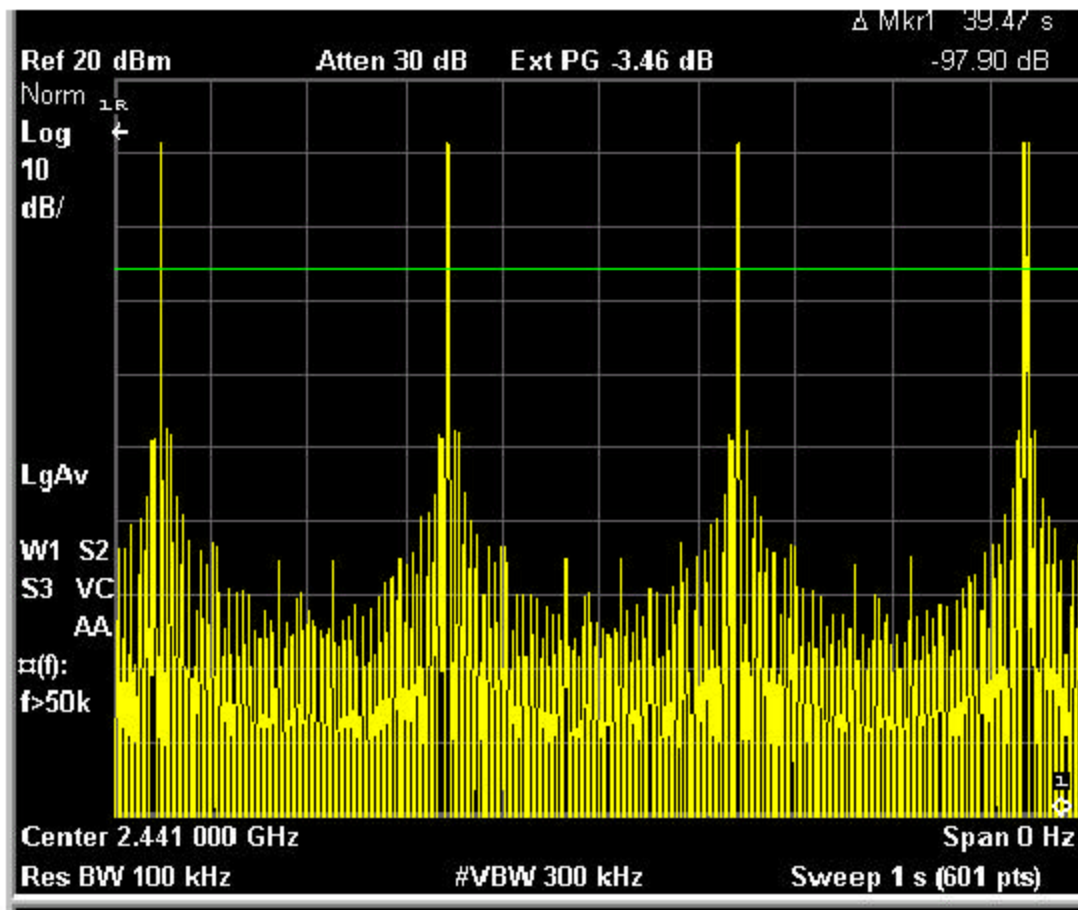

---

## 10 - SPURIOUS EMISSION

---

### 10.1 Standard Applicable




According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

### 10.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

### 10.3 Measurement Results

Please refer to Appendix G.

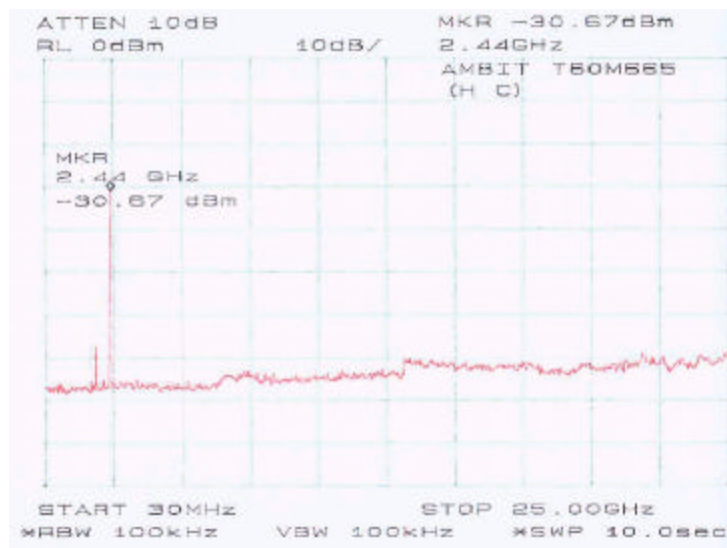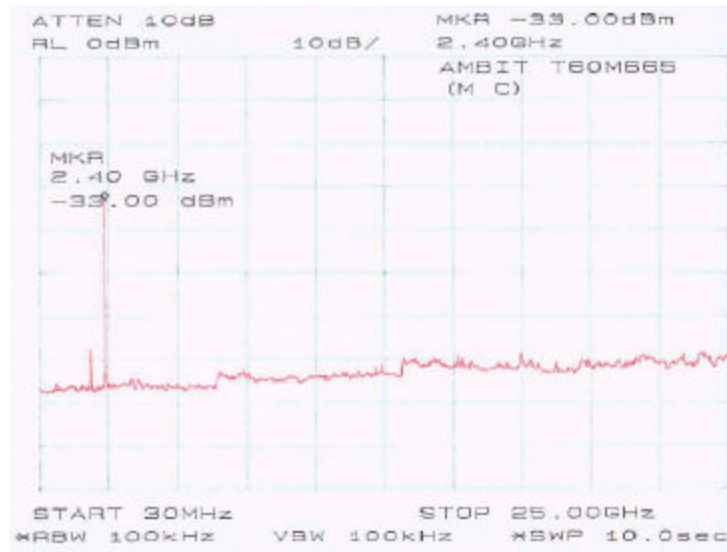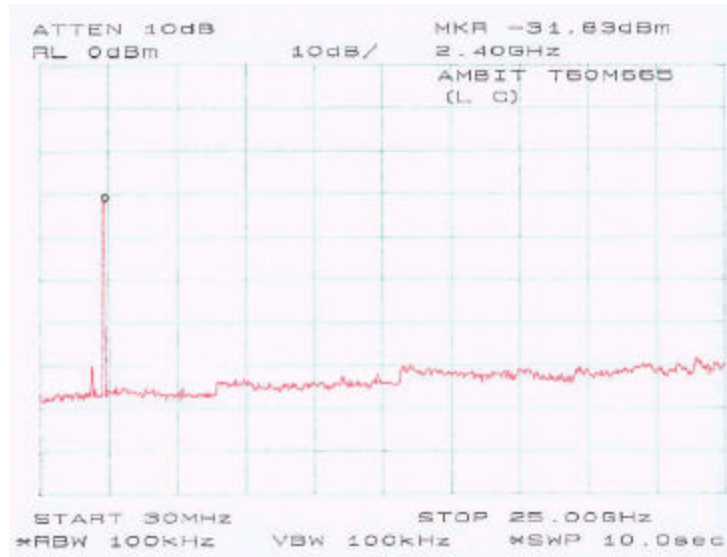

## 11 - RADIATED EMISSION

---

### 11.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### 11.2 Test Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4-2000. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The laptop was connected with 120Vac/60Hz power source.

### 11.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

|                                   |           |
|-----------------------------------|-----------|
| Start Frequency .....             | 30 MHz    |
| Stop Frequency .....              | 25000 MHz |
| Sweep Speed.....                  | Auto      |
| IF Bandwidth.....                 | 1 MHz     |
| Video Bandwidth .....             | 1 MHz     |
| Quasi-Peak Adapter Bandwidth..... | 120 kHz   |
| Quasi-Peak Adapter Mode.....      | Normal    |
| Resolution Bandwidth.....         | 1MHz      |

## 12.4 Test Procedure

For the radiated emissions test, both the laptop and all peripheral power cords were connected to the AC floor outlet since the power supply used in the laptop did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.

## 12.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## 12.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.247, and had the worst margin of:

- 10.9 dB at 747.04 MHz in the **Horizontal** polarization, Low Channel, antenna: BY27
- 8.8 dB at 781.74 MHz in the **Horizontal** polarization, Middle Channel, antenna: BY27
- 15.4 dB at 7440.00 MHz in the **Vertical** polarization, High Channel, antenna: BY27
- 14.2 dB at 7206.00 MHz in the **Horizontal** polarization, Low Channel antenna: ZG1S
- 7.4 dB at 4882.00 MHz in the **Horizontal** polarization, Middle Channel, antenna: ZG1S
- 18.4 dB at 7440.00 MHz in the **Vertical** polarization, High Channel, antenna: ZG1S
- 14.7 dB at 149.50 MHz in the **Horizontal** polarization, Low Channel, antenna: ZI1S
- 17.1 dB at 9764.00 MHz in the **Horizontal** polarization, Middle Channel, antenna: ZI1S
- 17.3 dB at 960.00 MHz in the **Horizontal** polarization, High Channel, antenna: ZI1S

**30MHz ~ 25 GHz, 3 Meters, antenna: BY27**

| Indicated      |        |           | Table  | Antenna |         | Correction Factor |      |             | FCC 15 Subpart C |        |      |
|----------------|--------|-----------|--------|---------|---------|-------------------|------|-------------|------------------|--------|------|
| Frequency      | Ampl.  | Direction | Height | Polar   | Antenna | Cable Loss        | Amp. | Corr. Ampl. | Limit            | Margin | Mode |
| MHz            | dBμV/m | Degree    | Meter  | H/V     | dBμV/m  | dBμV/m            | dB   | dBμV/m      | dBμV/m           | dB     |      |
| Low Channel    |        |           |        |         |         |                   |      |             |                  |        |      |
| 2402.00        | 76.3   | 0         | 1.0    | V       | 28.1    | 3.4               | 30.0 | 77.8        |                  |        | Ave  |
| 2402.00        | 78.3   | 200       | 1.5    | H       | 28.1    | 3.4               | 30.0 | 79.8        |                  |        | Ave  |
| 2402.00        | 78.2   | 0         | 1.0    | V       | 28.1    | 3.4               | 30.0 | 79.6        |                  |        | Peak |
| 2402.00        | 82.5   | 200       | 1.5    | H       | 28.1    | 3.4               | 30.0 | 84.0        |                  |        | Peak |
| 747.04         | 39.8   | 30        | 1.5    | H       | 22.4    | 2.9               | 30.0 | 35.1        | 46.0             | -10.9  | /    |
| 7206.00        | 28.1   | 90        | 1.2    | H       | 35.1    | 5.6               | 30.0 | 38.8        | 54.0             | -15.2  | Ave  |
| 259.68         | 44.3   | 270       | 1.5    | H       | 13.1    | 3.0               | 30.0 | 30.4        | 46.0             | -15.6  | /    |
| 7206.00        | 27.5   | 200       | 1.5    | V       | 35.1    | 5.6               | 30.0 | 38.2        | 54.0             | -15.8  | Ave  |
| 301.30         | 37.8   | 270       | 1.2    | V       | 15.1    | 4.6               | 30.0 | 27.5        | 46.0             | -18.5  | /    |
| 440.02         | 36.3   | 30        | 1.2    | V       | 17.4    | 2.7               | 30.0 | 26.4        | 46.0             | -19.6  | /    |
| 4804.00        | 26.2   | 0         | 1.0    | V       | 32.5    | 4.9               | 30.0 | 33.6        | 54.0             | -20.4  | Ave  |
| 4804.00        | 25.6   | 200       | 1.5    | H       | 32.5    | 4.9               | 30.0 | 33.0        | 54.0             | -21.0  | Ave  |
| 390.17         | 34.6   | 90        | 1.2    | V       | 16.5    | 2.8               | 30.0 | 23.9        | 46.0             | -22.1  | /    |
| 229.08         | 34.7   | 200       | 1.2    | H       | 12.1    | 3.9               | 30.0 | 20.7        | 46.0             | -25.3  | /    |
| 7206.00        | 36.9   | 90        | 1.2    | H       | 35.1    | 5.6               | 30.0 | 47.6        | 74.0             | -26.4  | Peak |
| 7206.00        | 36.2   | 200       | 1.5    | V       | 35.1    | 5.6               | 30.0 | 46.9        | 74.0             | -27.1  | Peak |
| 4804.00        | 35.3   | 0         | 1.0    | V       | 32.5    | 4.9               | 30.0 | 42.7        | 74.0             | -31.3  | Peak |
| 4804.00        | 34.7   | 200       | 1.5    | H       | 32.5    | 4.9               | 30.0 | 42.1        | 74.0             | -31.9  | Peak |
| Middle Channel |        |           |        |         |         |                   |      |             |                  |        |      |
| 2441.00        | 83.8   | 180       | 2.0    | H       | 28.1    | 3.4               | 30.0 | 85.3        |                  |        | Peak |
| 2441.00        | 80.1   | 180       | 2.0    | H       | 28.1    | 3.4               | 30.0 | 81.6        |                  |        | Ave  |
| 2441.00        | 82.1   | 180       | 1.2    | V       | 28.1    | 3.4               | 30.0 | 83.6        |                  |        | Peak |
| 2441.00        | 79.2   | 180       | 1.2    | V       | 28.1    | 3.4               | 30.0 | 80.7        |                  |        | Ave  |
| 781.74         | 39.6   | 90        | 2.0    | H       | 23.1    | 4.5               | 30.0 | 37.2        | 46.0             | -8.8   | /    |
| 7323.00        | 28.5   | 90        | 1.0    | V       | 35.1    | 5.6               | 30.0 | 39.2        | 54.0             | -14.8  | Ave  |
| 7323.00        | 28.1   | 270       | 2.0    | H       | 35.1    | 5.6               | 30.0 | 38.8        | 54.0             | -15.2  | Ave  |
| 352.00         | 39.7   | 90        | 1.5    | H       | 15.5    | 4.3               | 30.0 | 29.5        | 46.0             | -16.5  | /    |
| 4882.00        | 26.5   | 180       | 2.0    | H       | 32.5    | 4.9               | 30.0 | 33.9        | 54.0             | -20.1  | Ave  |
| 4882.00        | 26.4   | 180       | 1.2    | V       | 32.5    | 4.9               | 30.0 | 33.8        | 54.0             | -20.2  | Ave  |
| 160.13         | 36.5   | 180       | 1.2    | V       | 13.2    | 1.6               | 30.0 | 21.3        | 43.5             | -22.2  | /    |
| 270.95         | 32.6   | 0         | 1.2    | V       | 13.9    | 5.2               | 30.0 | 21.7        | 46.0             | -24.3  | /    |
| 211.26         | 31.9   | 30        | 1.5    | H       | 12.5    | 4.7               | 30.0 | 19.1        | 43.5             | -24.4  | /    |
| 7323.00        | 37.8   | 90        | 1.0    | V       | 35.1    | 5.6               | 30.0 | 48.5        | 74.0             | -25.5  | Peak |
| 1182.00        | 28.7   | 270       | 2.0    | H       | 25.9    | 3.7               | 30.0 | 28.3        | 54.0             | -25.7  | /    |
| 250.01         | 33.8   | 0         | 2.0    | H       | 13.1    | 3.0               | 30.0 | 19.9        | 46.0             | -26.1  | /    |
| 7323.00        | 36.2   | 270       | 2.0    | H       | 35.1    | 5.6               | 30.0 | 46.9        | 74.0             | -27.1  | Peak |
| 4882.00        | 37.6   | 180       | 2.0    | H       | 32.5    | 4.9               | 30.0 | 45.0        | 74.0             | -29.0  | Peak |
| 4882.00        | 36.5   | 180       | 1.2    | V       | 32.5    | 4.9               | 30.0 | 43.9        | 74.0             | -30.1  | Peak |

| High Channel |      |     |     |   |      |     |      |      |      |       |      |
|--------------|------|-----|-----|---|------|-----|------|------|------|-------|------|
| 2480.00      | 76.9 | 200 | 1.2 | V | 28.1 | 3.4 | 30.0 | 78.4 |      |       | Peak |
| 2480.00      | 74.2 | 200 | 1.2 | V | 28.1 | 3.4 | 30.0 | 75.7 |      |       | Ave  |
| 2480.00      | 77.2 | 180 | 1.2 | V | 28.1 | 3.4 | 30.0 | 78.7 |      |       | Peak |
| 2480.00      | 74.1 | 180 | 1.2 | V | 28.1 | 3.4 | 30.0 | 75.6 |      |       | Ave  |
| 7440.00      | 27.9 | 90  | 1.0 | V | 35.1 | 5.6 | 30.0 | 38.6 | 54.0 | -15.4 | Ave  |
| 7440.00      | 27.5 | 270 | 2.0 | H | 35.1 | 5.6 | 30.0 | 38.2 | 54.0 | -15.8 | Ave  |
| 1720.31      | 38.5 | 180 | 1.5 | H | 25.3 | 2.6 | 30.0 | 36.4 | 54.0 | -17.6 | /    |
| 4960.00      | 26.5 | 180 | 2.0 | H | 32.5 | 4.9 | 30.0 | 33.9 | 54.0 | -20.1 | Ave  |
| 4960.00      | 25.9 | 180 | 1.2 | V | 32.5 | 4.9 | 30.0 | 33.3 | 54.0 | -20.7 | Ave  |
| 81.80        | 36.2 | 270 | 1.0 | V | 9.6  | 1.4 | 30.0 | 17.2 | 40   | -22.8 | /    |
| 240.00       | 36.2 | 90  | 1.2 | V | 12.6 | 2.3 | 30.0 | 21.1 | 46   | -24.9 | /    |
| 181.27       | 30.8 | 90  | 2.0 | H | 13.6 | 4.0 | 30.0 | 18.4 | 43.5 | -25.1 | /    |
| 1720.31      | 30.9 | 90  | 1.0 | V | 25.3 | 2.6 | 30.0 | 28.8 | 54.0 | -25.2 | /    |
| 360.02       | 29.7 | 120 | 1.2 | V | 15.5 | 5.2 | 30.0 | 20.4 | 46   | -25.6 | /    |
| 7440.00      | 37.2 | 90  | 1.0 | V | 35.1 | 5.6 | 30.0 | 47.9 | 74.0 | -26.1 | Peak |
| 240.00       | 34.1 | 120 | 2.0 | H | 12.6 | 2.3 | 30.0 | 19.0 | 46   | -27.0 | /    |
| 7440.00      | 35.9 | 270 | 2.0 | H | 35.1 | 5.6 | 30.0 | 46.6 | 74.0 | -27.4 | Peak |
| 4960.00      | 36.5 | 180 | 2.0 | H | 32.5 | 4.9 | 30.0 | 43.9 | 74.0 | -30.1 | Peak |
| 4960.00      | 36.2 | 180 | 1.2 | V | 32.5 | 4.9 | 30.0 | 43.6 | 74.0 | -30.4 | Peak |

**30MHz ~ 25 GHz, 3 Meters, antenna: ZG1S**

| Indicated   |        |           | Table  | Antenna |         | Correction Factor |      |             | FCC 15 Subpart C |        |      |
|-------------|--------|-----------|--------|---------|---------|-------------------|------|-------------|------------------|--------|------|
| Frequency   | Ampl.  | Direction | Height | Polar   | Antenna | Cable Loss        | Amp. | Corr. Ampl. | Limit            | Margin | Mode |
| MHz         | dBμV/m | Degree    | Meter  | H/V     | dBμV/m  | dBμV/m            | dB   | dBμV/m      | dBμV/m           | dB     |      |
| Low Channel |        |           |        |         |         |                   |      |             |                  |        |      |
| 2402.00     | 77.2   | 300       | 1.0    | V       | 28.1    | 3.4               | 30.0 | 78.7        |                  |        | Peak |
| 2402.00     | 75.2   | 300       | 1.0    | V       | 28.1    | 3.4               | 30.0 | 76.7        |                  |        | Ave  |
| 2402.00     | 70.2   | 180       | 1.2    | H       | 28.1    | 3.4               | 30.0 | 71.7        |                  |        | Peak |
| 2402.00     | 68.2   | 180       | 1.2    | H       | 28.1    | 3.4               | 30.0 | 69.7        |                  |        | Ave  |
| 7206.00     | 29.1   | 120       | 1.2    | H       | 35.1    | 5.6               | 30.0 | 39.8        | 54.0             | -14.2  | Ave  |
| 299.09      | 40.2   | 30        | 1.2    | V       | 14.9    | 5.1               | 30.0 | 30.2        | 46.0             | -15.8  | /    |
| 7206.00     | 25.7   | 180       | 1.5    | V       | 35.1    | 5.6               | 30.0 | 36.4        | 54.0             | -17.6  | Ave  |
| 4804.00     | 27.8   | 200       | 1.2    | V       | 32.5    | 4.9               | 30.0 | 35.2        | 54.0             | -18.8  | Ave  |
| 766.04      | 30.5   | 45        | 1.2    | V       | 22.7    | 2.6               | 30.0 | 25.8        | 46.0             | -20.2  | /    |
| 665.90      | 31.2   | 300       | 2.0    | H       | 20.8    | 3.6               | 30.0 | 25.6        | 46.0             | -20.4  | /    |
| 4804.00     | 26.1   | 200       | 1.5    | H       | 32.5    | 4.9               | 30.0 | 33.5        | 54.0             | -20.5  | Ave  |
| 72.01       | 35.9   | 120       | 2.0    | H       | 9.6     | 1.6               | 30.0 | 17.1        | 40.0             | -22.9  | /    |
| 149.89      | 35.2   | 270       | 2.0    | H       | 13.4    | 1.6               | 30.0 | 20.2        | 43.5             | -23.3  | /    |
| 7206.00     | 38.2   | 120       | 1.2    | H       | 35.1    | 5.6               | 30.0 | 48.9        | 74.0             | -25.1  | Peak |
| 150.02      | 34.2   | 90        | 1.2    | V       | 13.0    | 0.7               | 30.0 | 17.9        | 43.5             | -25.6  | /    |
| 7206.00     | 36.3   | 180       | 1.5    | V       | 35.1    | 5.6               | 30.0 | 47.0        | 74.0             | -27.0  | Peak |
| 4804.00     | 37.6   | 200       | 1.2    | V       | 32.5    | 4.9               | 30.0 | 45.0        | 74.0             | -29.0  | Peak |
| 4804.00     | 37.4   | 200       | 1.5    | H       | 32.5    | 4.9               | 30.0 | 44.8        | 74.0             | -29.2  | Peak |

| Middle Channel |      |     |     |   |      |     |      |      |      |       |      |
|----------------|------|-----|-----|---|------|-----|------|------|------|-------|------|
| 2441.00        | 76.5 | 160 | 1.5 | H | 28.1 | 3.4 | 30.0 | 78.0 |      |       | Peak |
| 2441.00        | 71.8 | 160 | 1.5 | H | 28.1 | 3.4 | 30.0 | 73.3 |      |       | Ave  |
| 2441.00        | 74.3 | 270 | 1.2 | V | 28.1 | 3.4 | 30.0 | 75.8 |      |       | Peak |
| 2441.00        | 72.3 | 270 | 1.2 | V | 28.1 | 3.4 | 30.0 | 73.8 |      |       | Ave  |
| 4882.00        | 39.2 | 180 | 1.2 | H | 32.5 | 4.9 | 30.0 | 46.6 | 54.0 | -7.4  | Ave  |
| 7323.00        | 52.8 | 200 | 1.5 | H | 35.1 | 5.6 | 30.0 | 63.6 | 74.0 | -10.4 | Peak |
| 4882.00        | 49.7 | 180 | 1.2 | H | 32.5 | 4.9 | 30.0 | 57.1 | 74.0 | -16.9 | Peak |
| 7323.00        | 25.9 | 200 | 1.5 | H | 35.1 | 5.6 | 30.0 | 36.6 | 54.0 | -17.4 | Ave  |
| 7323.00        | 25.0 | 270 | 1.0 | V | 35.1 | 5.6 | 30.0 | 35.7 | 54.0 | -18.3 | Ave  |
| 72.01          | 38.2 | 120 | 2.0 | H | 9.6  | 1.6 | 30.0 | 19.4 | 40.0 | -20.6 | /    |
| 366.02         | 34.7 | 60  | 2.0 | H | 15.5 | 5.2 | 30.0 | 25.4 | 46.0 | -20.6 | /    |
| 4882.00        | 24.8 | 0   | 1.2 | V | 32.5 | 4.9 | 30.0 | 32.3 | 54.0 | -21.8 | Ave  |
| 144.02         | 36.8 | 60  | 2.5 | H | 13.2 | 1.0 | 30.0 | 21.0 | 43.5 | -22.5 | /    |
| 122.06         | 35.9 | 0   | 1.2 | V | 12.1 | 2.2 | 30.0 | 20.2 | 43.5 | -23.3 | /    |
| 133.09         | 35.2 | 30  | 1.2 | V | 12.6 | 2.0 | 30.0 | 19.8 | 43.5 | -23.7 | /    |
| 240.03         | 36.2 | 90  | 1.2 | V | 12.6 | 2.3 | 30.0 | 21.1 | 46.0 | -24.9 | /    |
| 7323.00        | 36.8 | 270 | 1.0 | V | 35.1 | 5.6 | 30.0 | 47.6 | 74.0 | -26.4 | Peak |
| 4882.00        | 35.3 | 0   | 1.2 | V | 32.5 | 4.9 | 30.0 | 42.7 | 74.0 | -31.3 | Peak |
| High Channel   |      |     |     |   |      |     |      |      |      |       |      |
| 2480.00        | 73.0 | 180 | 1.2 | V | 28.1 | 3.4 | 30.0 | 74.5 |      |       | Peak |
| 2480.00        | 71.1 | 180 | 1.2 | V | 28.1 | 3.4 | 30.0 | 72.6 |      |       | Ave  |
| 2480.00        | 73.5 | 180 | 1.5 | H | 28.1 | 3.4 | 30.0 | 75.0 |      |       | Peak |
| 2480.00        | 71.2 | 330 | 2.0 | H | 28.1 | 3.4 | 30.0 | 72.7 |      |       | Ave  |
| 7440.00        | 24.9 | 330 | 1.2 | V | 35.1 | 5.6 | 30.0 | 35.6 | 54.0 | -18.4 | Ave  |
| 7440.00        | 24.8 | 250 | 1.5 | H | 35.1 | 5.6 | 30.0 | 35.6 | 54.0 | -18.4 | Ave  |
| 4960.00        | 25.3 | 330 | 1.2 | V | 32.5 | 4.9 | 30.0 | 32.7 | 54.0 | -21.3 | Ave  |
| 121.80         | 37.2 | 270 | 1.0 | V | 12.1 | 2.2 | 30.0 | 21.5 | 43.5 | -22.0 | /    |
| 601.03         | 30.2 | 45  | 1.5 | V | 20.1 | 3.0 | 30.0 | 23.3 | 46.0 | -22.7 | /    |
| 249.08         | 36.2 | 300 | 1.0 | V | 12.6 | 2.3 | 30.0 | 21.1 | 46.0 | -24.9 | /    |
| 4960.00        | 21.0 | 30  | 1.5 | H | 32.5 | 4.9 | 30.0 | 28.4 | 54.0 | -25.6 | Ave  |
| 7440.00        | 36.7 | 250 | 1.5 | H | 35.1 | 5.6 | 30.0 | 47.4 | 74.0 | -26.6 | Peak |
| 144.02         | 32.4 | 30  | 2.0 | H | 13.2 | 1.0 | 30.0 | 16.6 | 43.5 | -26.9 | /    |
| 7440.00        | 35.1 | 330 | 1.2 | V | 35.1 | 5.6 | 30.0 | 45.8 | 74.0 | -28.2 | Peak |
| 249.03         | 32.8 | 30  | 2.0 | H | 12.6 | 2.3 | 30.0 | 17.7 | 46.0 | -28.3 | /    |
| 4960.00        | 33.8 | 330 | 1.2 | V | 32.5 | 4.9 | 30.0 | 41.2 | 74.0 | -32.8 | Peak |
| 4960.00        | 31.8 | 30  | 1.5 | H | 32.5 | 4.9 | 30.0 | 39.2 | 74.0 | -34.8 | Peak |

**30MHz ~ 25 GHz, 3 Meters, antenna: ZI1S**

| Indicated      |        | Direction | Table | Antenna |         | Correction Factor |      |             | FCC 15 Subpart C |        |      |
|----------------|--------|-----------|-------|---------|---------|-------------------|------|-------------|------------------|--------|------|
| Frequency      | Ampl.  |           |       | Polar   | Antenna | Cable Loss        | Amp. | Corr. Ampl. | Limit            | Margin | Mode |
| MHz            | dBμV/m | Degree    | Meter | H/V     | dBμV/m  | dBμV/m            | dB   | dBμV/m      | dBμV/m           | dB     |      |
| Low Channel    |        |           |       |         |         |                   |      |             |                  |        |      |
| 2402.00        | 77.8   | 200       | 1.2   | V       | 28.1    | 3.4               | 30.0 | 79.3        |                  |        | Peak |
| 2402.00        | 75.0   | 200       | 1.2   | V       | 28.1    | 3.4               | 30.0 | 76.5        |                  |        | Ave  |
| 2402.00        | 78.2   | 330       | 2.0   | H       | 28.1    | 3.4               | 30.0 | 79.7        |                  |        | Peak |
| 2402.00        | 77.0   | 330       | 2.0   | H       | 28.1    | 3.4               | 30.0 | 78.5        |                  |        | Ave  |
| 149.50         | 43.8   | 90        | 2.0   | H       | 13.4    | 1.6               | 30.0 | 28.8        | 43.5             | -14.7  | /    |
| 775.10         | 34.1   | 90        | 2.0   | H       | 22.7    | 3.8               | 30.0 | 30.6        | 46.0             | -15.4  | /    |
| 144.07         | 41.2   | 180       | 1.2   | V       | 13.2    | 1.0               | 30.0 | 25.4        | 43.5             | -18.1  | /    |
| 229.07         | 41.8   | 200       | 1.2   | V       | 12.1    | 3.9               | 30.0 | 27.8        | 46.0             | -18.2  | /    |
| 7206.00        | 24.5   | 120       | 1.2   | V       | 35.1    | 5.6               | 30.0 | 35.2        | 54.0             | -18.8  | Ave  |
| 7206.00        | 24.5   | 270       | 1.2   | H       | 35.1    | 5.6               | 30.0 | 35.2        | 54.0             | -18.8  | Ave  |
| 612.00         | 30.9   | 200       | 1.2   | V       | 20.0    | 3.3               | 30.0 | 24.2        | 46.0             | -21.8  | /    |
| 336.30         | 36.2   | 120       | 2.0   | H       | 15.0    | 2.6               | 30.0 | 23.8        | 46.0             | -22.2  | /    |
| 4804.00        | 21.2   | 160       | 1.2   | V       | 32.5    | 4.9               | 30.0 | 28.6        | 54.0             | -25.4  | Ave  |
| 4804.00        | 21.0   | 270       | 1.5   | H       | 32.5    | 4.9               | 30.0 | 28.4        | 54.0             | -25.6  | Ave  |
| 7206.00        | 35.5   | 120       | 1.2   | V       | 35.1    | 5.6               | 30.0 | 46.2        | 74.0             | -27.8  | Peak |
| 7206.00        | 34.7   | 270       | 1.2   | H       | 35.1    | 5.6               | 30.0 | 45.4        | 74.0             | -28.6  | Peak |
| 4804.00        | 32.3   | 160       | 1.2   | V       | 32.5    | 4.9               | 30.0 | 39.7        | 74.0             | -34.3  | Peak |
| 4804.00        | 32.3   | 270       | 1.5   | H       | 32.5    | 4.9               | 30.0 | 39.7        | 74.0             | -34.3  | Peak |
| 149.50         | 43.8   | 90        | 2.0   | H       | 13.4    | 1.6               | 30.0 | 28.8        | 43.5             | -14.7  | /    |
| Middle Channel |        |           |       |         |         |                   |      |             |                  |        |      |
| 2441.00        | 82.2   | 180       | 1.5   | H       | 28.1    | 3.4               | 30.0 | 83.6        |                  |        | Peak |
| 2441.00        | 78.7   | 180       | 1.5   | H       | 28.1    | 3.4               | 30.0 | 80.2        |                  |        | Ave  |
| 2441.00        | 80.2   | 90        | 1.2   | V       | 28.1    | 3.4               | 30.0 | 81.6        |                  |        | Peak |
| 2441.00        | 79.1   | 90        | 1.2   | V       | 28.1    | 3.4               | 30.0 | 80.6        |                  |        | Ave  |
| 9764.00        | 26.2   | 120       | 1.8   | H       | 35.1    | 5.6               | 30.0 | 36.9        | 54.0             | -17.1  | Ave  |
| 9764.00        | 26.0   | 250       | 1.8   | H       | 35.1    | 5.6               | 30.0 | 36.7        | 54.0             | -17.3  | Ave  |
| 7323.00        | 25.0   | 200       | 1.5   | H       | 35.1    | 5.6               | 30.0 | 35.7        | 54.0             | -18.3  | Ave  |
| 7323.00        | 24.3   | 300       | 1.5   | H       | 35.1    | 5.6               | 30.0 | 35.0        | 54.0             | -19.0  | Ave  |
| 482.10         | 35.2   | 120       | 1.2   | V       | 18.7    | 2.5               | 30.0 | 26.4        | 46.0             | -19.6  | /    |
| 750.03         | 28.9   | 45        | 2.0   | H       | 22.5    | 2.4               | 30.0 | 23.8        | 46.0             | -22.2  | /    |
| 168.03         | 35.9   | 30        | 2.0   | H       | 13.3    | 2.1               | 30.0 | 21.3        | 43.5             | -22.2  | /    |
| 120.06         | 35.9   | 45        | 1.5   | V       | 12.1    | 2.2               | 30.0 | 20.2        | 43.5             | -23.3  | /    |
| 172.03         | 34.8   | 90        | 1.2   | V       | 13.3    | 1.4               | 30.0 | 19.5        | 43.5             | -24.0  | /    |
| 4882.00        | 22.2   | 180       | 1.2   | H       | 32.5    | 4.9               | 30.0 | 29.6        | 54.0             | -24.4  | Ave  |
| 4882.00        | 22.0   | 250       | 2.0   | H       | 32.5    | 4.9               | 30.0 | 29.4        | 54.0             | -24.6  | Ave  |
| 9764.00        | 37.5   | 250       | 1.8   | H       | 35.1    | 5.6               | 30.0 | 48.2        | 74.0             | -25.8  | Peak |
| 9764.00        | 37.3   | 120       | 1.2   | V       | 35.1    | 5.6               | 30.0 | 48.1        | 74.0             | -25.9  | Peak |
| 7323.00        | 35.7   | 0         | 1.5   | H       | 35.1    | 5.6               | 30.0 | 46.4        | 74.0             | -27.6  | Peak |
| 7323.00        | 35.4   | 300       | 1.0   | V       | 35.1    | 5.6               | 30.0 | 46.1        | 74.0             | -27.9  | Peak |
| 4882.00        | 34.3   | 250       | 1.2   | V       | 32.5    | 4.9               | 30.0 | 41.7        | 74.0             | -32.3  | Peak |
| 4882.00        | 32.3   | 180       | 1.2   | H       | 32.5    | 4.9               | 30.0 | 39.8        | 74.0             | -34.3  | Peak |

| High Channel |      |     |     |   |      |     |      |      |      |       |      |
|--------------|------|-----|-----|---|------|-----|------|------|------|-------|------|
| 2480.00      | 75.2 | 270 | 1.0 | V | 28.1 | 3.4 | 30.0 | 76.6 |      |       | Peak |
| 2480.00      | 74.6 | 270 | 1.0 | V | 28.1 | 3.4 | 30.0 | 76.1 |      |       | Ave  |
| 2480.00      | 78.3 | 270 | 2.0 | H | 28.1 | 3.4 | 30.0 | 79.8 |      |       | Peak |
| 2480.00      | 74.2 | 270 | 2.0 | H | 28.1 | 3.4 | 30.0 | 75.6 |      |       | Ave  |
| 960.00       | 28.7 | 227 | 2.0 | H | 25.2 | 4.8 | 30.0 | 28.7 | 46.0 | -17.3 | /    |
| 7440.00      | 25.1 | 250 | 1.5 | H | 35.1 | 5.6 | 30.0 | 35.8 | 54.0 | -18.2 | Ave  |
| 72.03        | 40.5 | 180 | 1.2 | V | 9.6  | 1.6 | 30.0 | 21.7 | 40.0 | -18.3 | /    |
| 7440.00      | 24.9 | 90  | 1.2 | V | 35.1 | 5.6 | 30.0 | 35.6 | 54.0 | -18.4 | Ave  |
| 144.07       | 38.7 | 200 | 1.2 | V | 13.2 | 1.0 | 30.0 | 22.9 | 43.5 | -20.6 | /    |
| 601.40       | 30.7 | 270 | 2.0 | H | 20.1 | 3.0 | 30.0 | 23.8 | 46.0 | -22.2 | /    |
| 4960.00      | 24.2 | 300 | 1.2 | V | 32.5 | 4.9 | 30.0 | 31.6 | 54.0 | -22.4 | Ave  |
| 172.08       | 35.1 | 300 | 2.0 | H | 13.3 | 1.4 | 30.0 | 19.8 | 43.5 | -23.7 | /    |
| 605.70       | 27.8 | 200 | 1.2 | V | 20.1 | 3.0 | 30.0 | 20.9 | 46.0 | -25.1 | /    |
| 4960.00      | 20.9 | 90  | 2.0 | H | 32.5 | 4.9 | 30.0 | 28.3 | 54.0 | -25.7 | Ave  |
| 112.90       | 34.6 | 270 | 2.0 | H | 11.7 | 1.3 | 30.0 | 17.6 | 43.5 | -25.9 | /    |
| 7440.00      | 35.8 | 250 | 1.5 | H | 35.1 | 5.6 | 30.0 | 46.5 | 74.0 | -27.5 | Peak |
| 7440.00      | 34.8 | 90  | 1.2 | V | 35.1 | 5.6 | 30.0 | 45.5 | 74.0 | -28.5 | Peak |
| 4960.00      | 34.7 | 300 | 1.2 | V | 32.5 | 4.9 | 30.0 | 42.1 | 74.0 | -31.9 | Peak |
| 4960.00      | 31.8 | 90  | 2.0 | H | 32.5 | 4.9 | 30.0 | 39.2 | 74.0 | -34.8 | Peak |

## 12 - CONDUCTED EMISSION

### 12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### 12.2 Test Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4-2000 measurement procedure. The specification used was FCC 15 Subpart C limits.

The EUT was installed in the notebook. The notebook was put on the center back edge of the test table.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 120Vac/60Hz power source.

### 12.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

|                                   |         |
|-----------------------------------|---------|
| Start Frequency .....             | 150 kHz |
| Stop Frequency .....              | 30 MHz  |
| Sweep Speed.....                  | Auto    |
| IF Bandwidth.....                 | 10 kHz  |
| Video Bandwidth .....             | 10 kHz  |
| Quasi-Peak Adapter Bandwidth..... | 9 kHz   |
| Quasi-Peak Adapter Mode.....      | Normal  |

### 12.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

### 12.5 Summary of Test Results

According to the data in section 12.6, the EUT complied with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:


-12.5 dB $\mu$ V at 0.150 MHz in the Neutral mode

**12.6 Conducted Emissions Test Data**

| Frequency<br>MHz | LINE CONDUCTED EMISSIONS |                         |                       | FCC CLASS B   |              |
|------------------|--------------------------|-------------------------|-----------------------|---------------|--------------|
|                  | Amplitude<br>dBμV        | Detector<br>Qp/Ave/Peak | Phase<br>Line/Neutral | Limit<br>dBμV | Margin<br>dB |
| 0.150            | 53.5                     | QP                      | Neutral               | 66            | -12.5        |
| 1.165            | 42.8                     | QP                      | Line                  | 56            | -13.2        |
| 0.150            | 52.1                     | QP                      | Line                  | 66            | -13.9        |
| 0.180            | 50.6                     | QP                      | Neutral               | 64            | -13.9        |
| 0.810            | 40.9                     | QP                      | Neutral               | 56            | -15.1        |
| 0.720            | 40.3                     | Ave                     | Line                  | 56            | -15.7        |
| 0.720            | 40.1                     | QP                      | Line                  | 56            | -15.9        |
| 0.810            | 37.4                     | Ave                     | Neutral               | 56            | -18.6        |
| 0.150            | 40.0                     | Ave                     | Line                  | 66            | -26.0        |
| 0.150            | 40.0                     | Ave                     | Neutral               | 66            | -26.0        |
| 0.200            | 37.4                     | Ave                     | Neutral               | 64            | -26.2        |
| 1.165            | 22.5                     | Ave                     | Line                  | 56            | -33.5        |

**12.7 Plot of Conducted Emissions Test Data**

Plot(s) of Conducted Emissions Test Data is presented in the following page as reference.

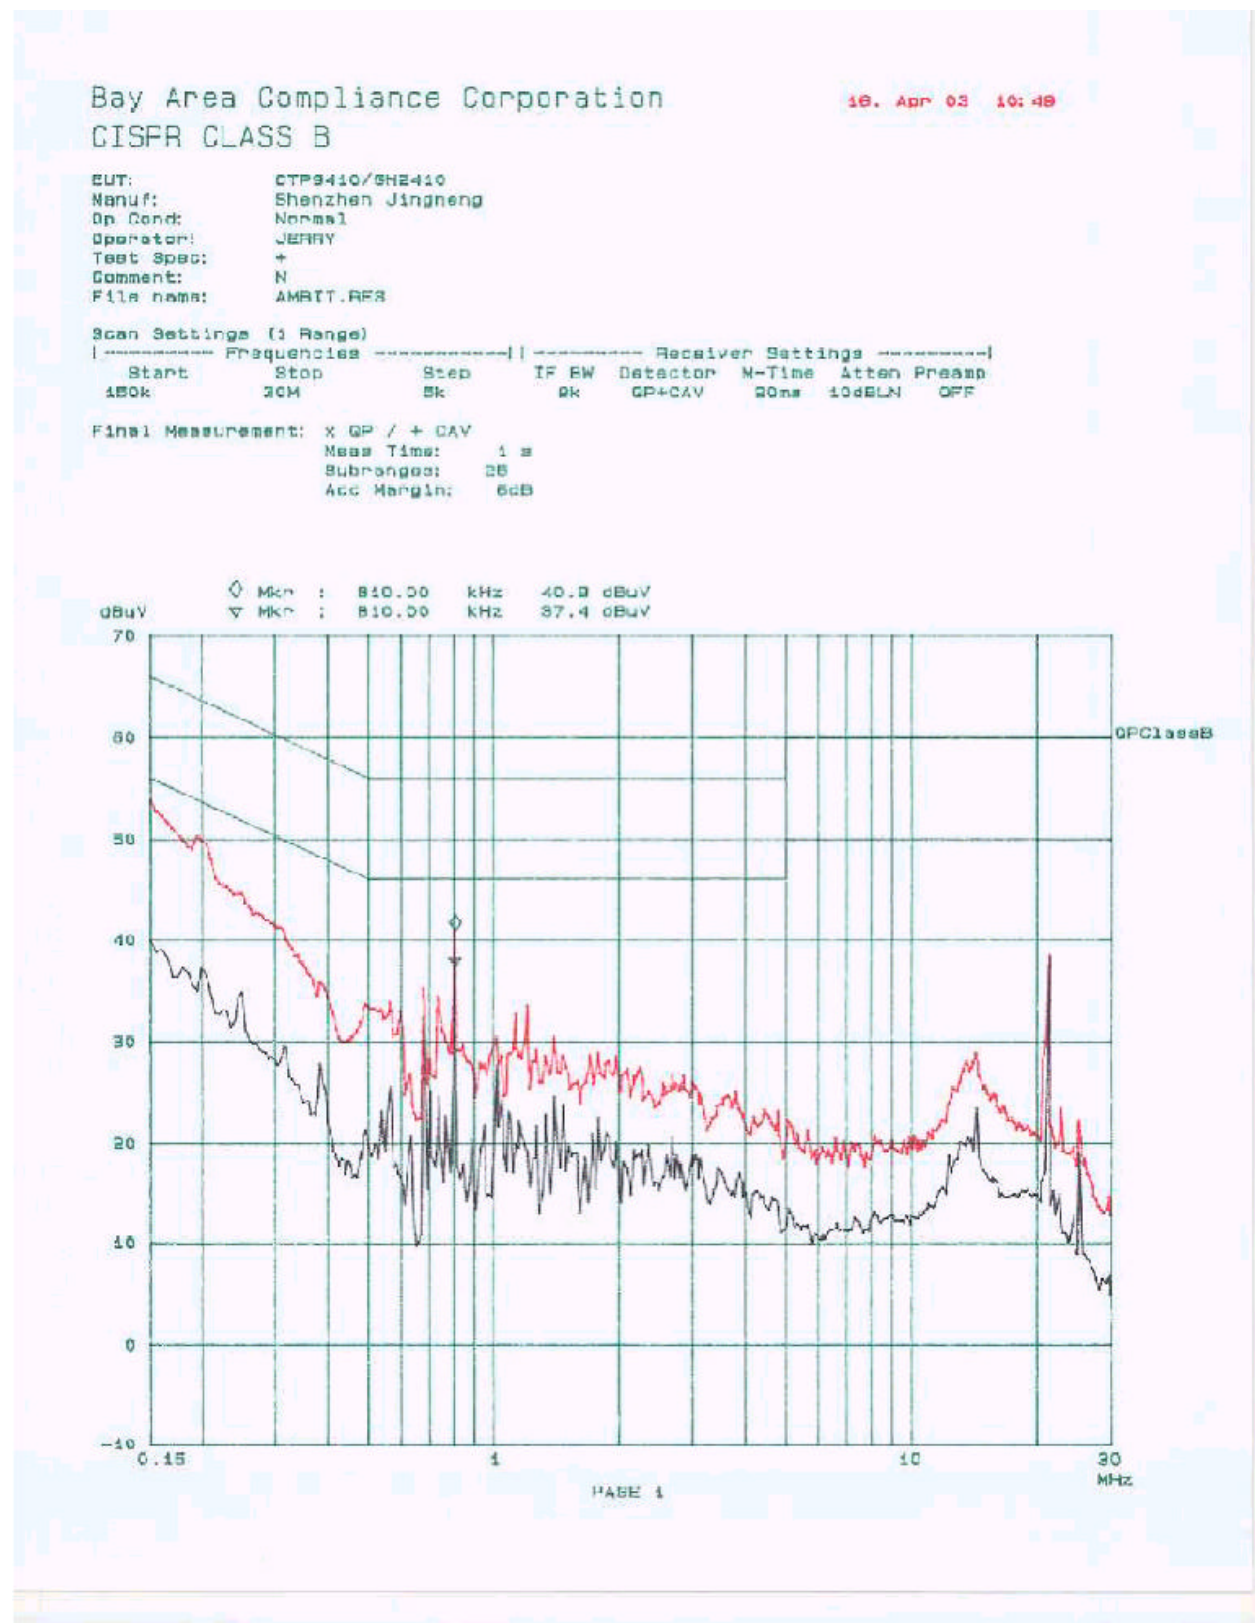

Bay Area Compliance Corporation  
CISPR CLASS B


16. Apr 03 09:19


EUT: CTPB410/6H2410  
Manuf: Shenzhen Jingheng  
Op Cond: Normal  
Operator: Ben  
Test Spec: +  
Comment: Lina  
File name: AMBIT.RES

Scan Settings (1 Range)

| Frequencies |      |      | Receiver Settings |          |        |              |
|-------------|------|------|-------------------|----------|--------|--------------|
| Start       | Stop | Step | IF BW             | Detector | M-Time | Atten Preamp |
| 150k        | 30M  | 5k   | 9k                | QP+CAV   | 20ms   | 10dB LN OFF  |

Final Measurement: x QP / + CAV  
Meas Time: 1 s  
Subranges: 25  
Acc Margin: 6dB

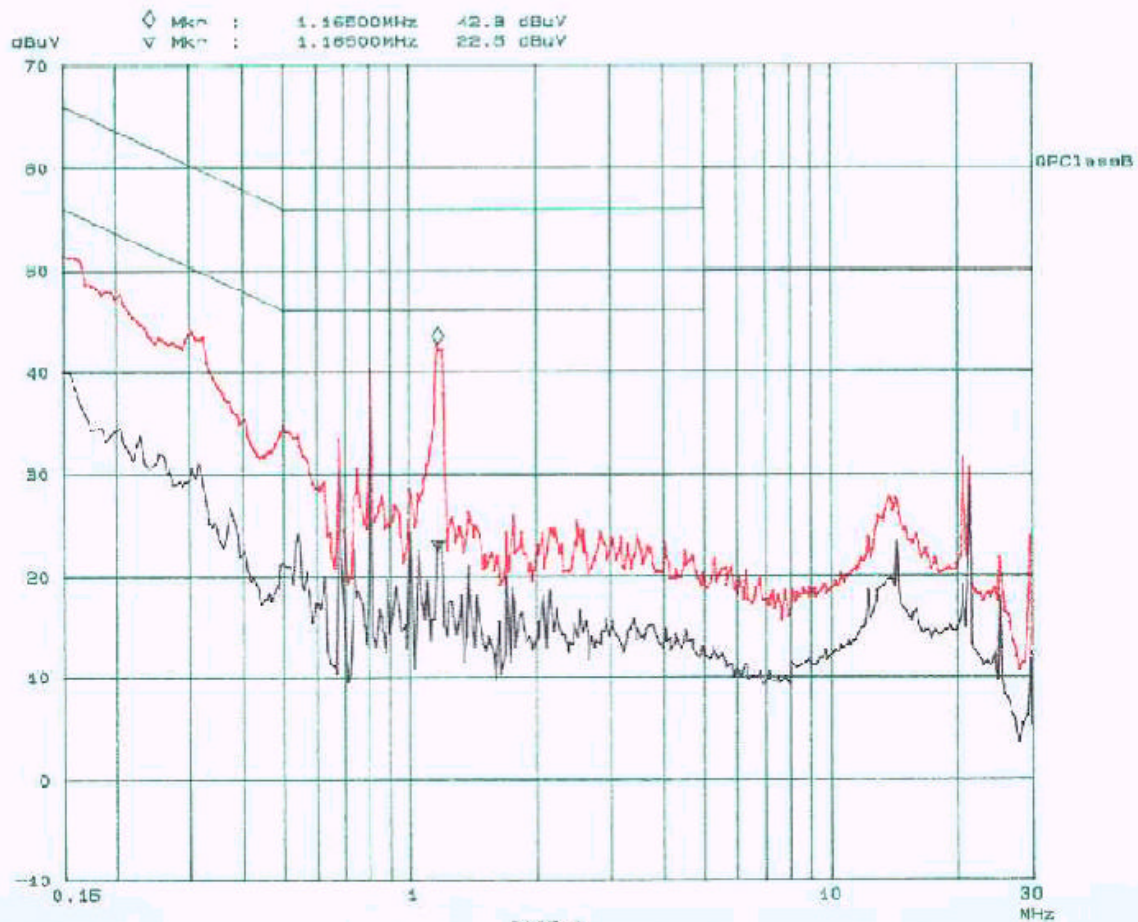

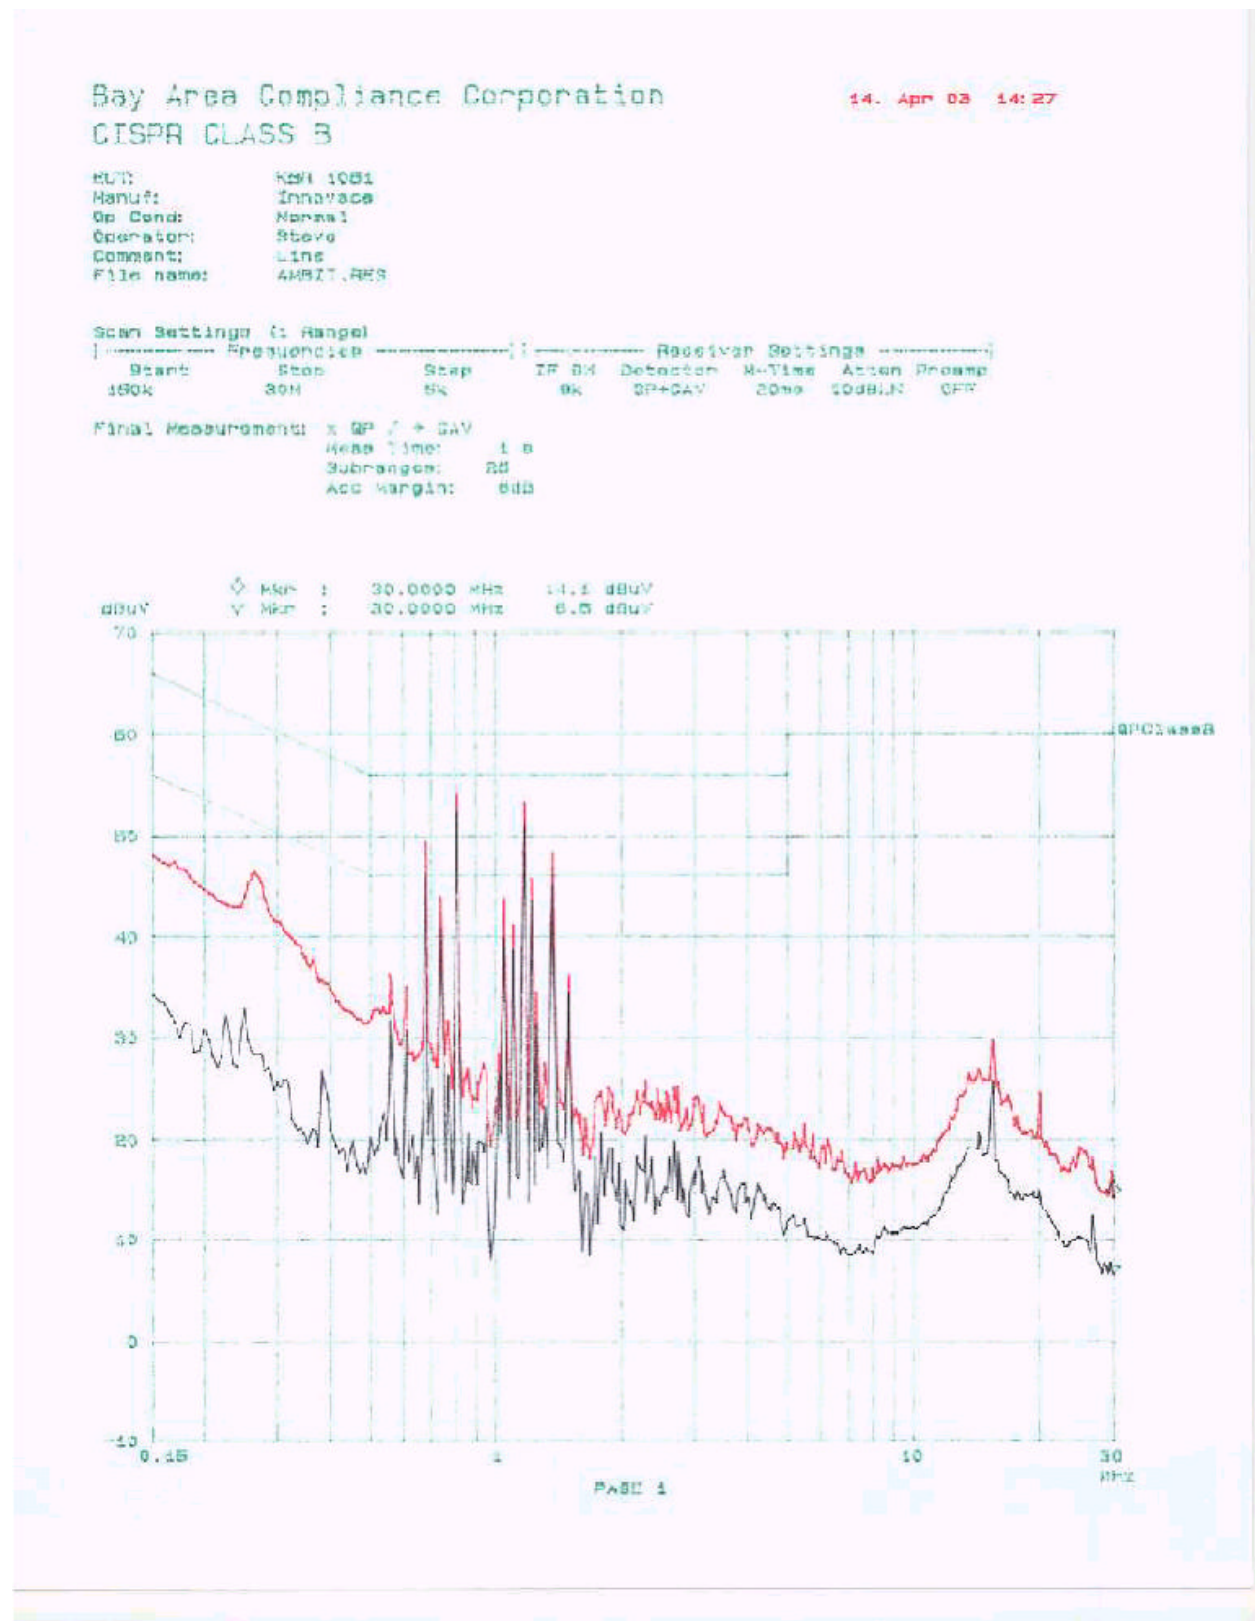

## **13 - ANTENNA REQUIREMENT**

---

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna is installed by OET integrator.