

CLASS II CHANGE

Attenuator and cable loss = 20.7 dB

MKR 173.074253 MHz


REF 20.0 dBm

ATTEN 30 dB

12.10 dBm

hp

10 dB/

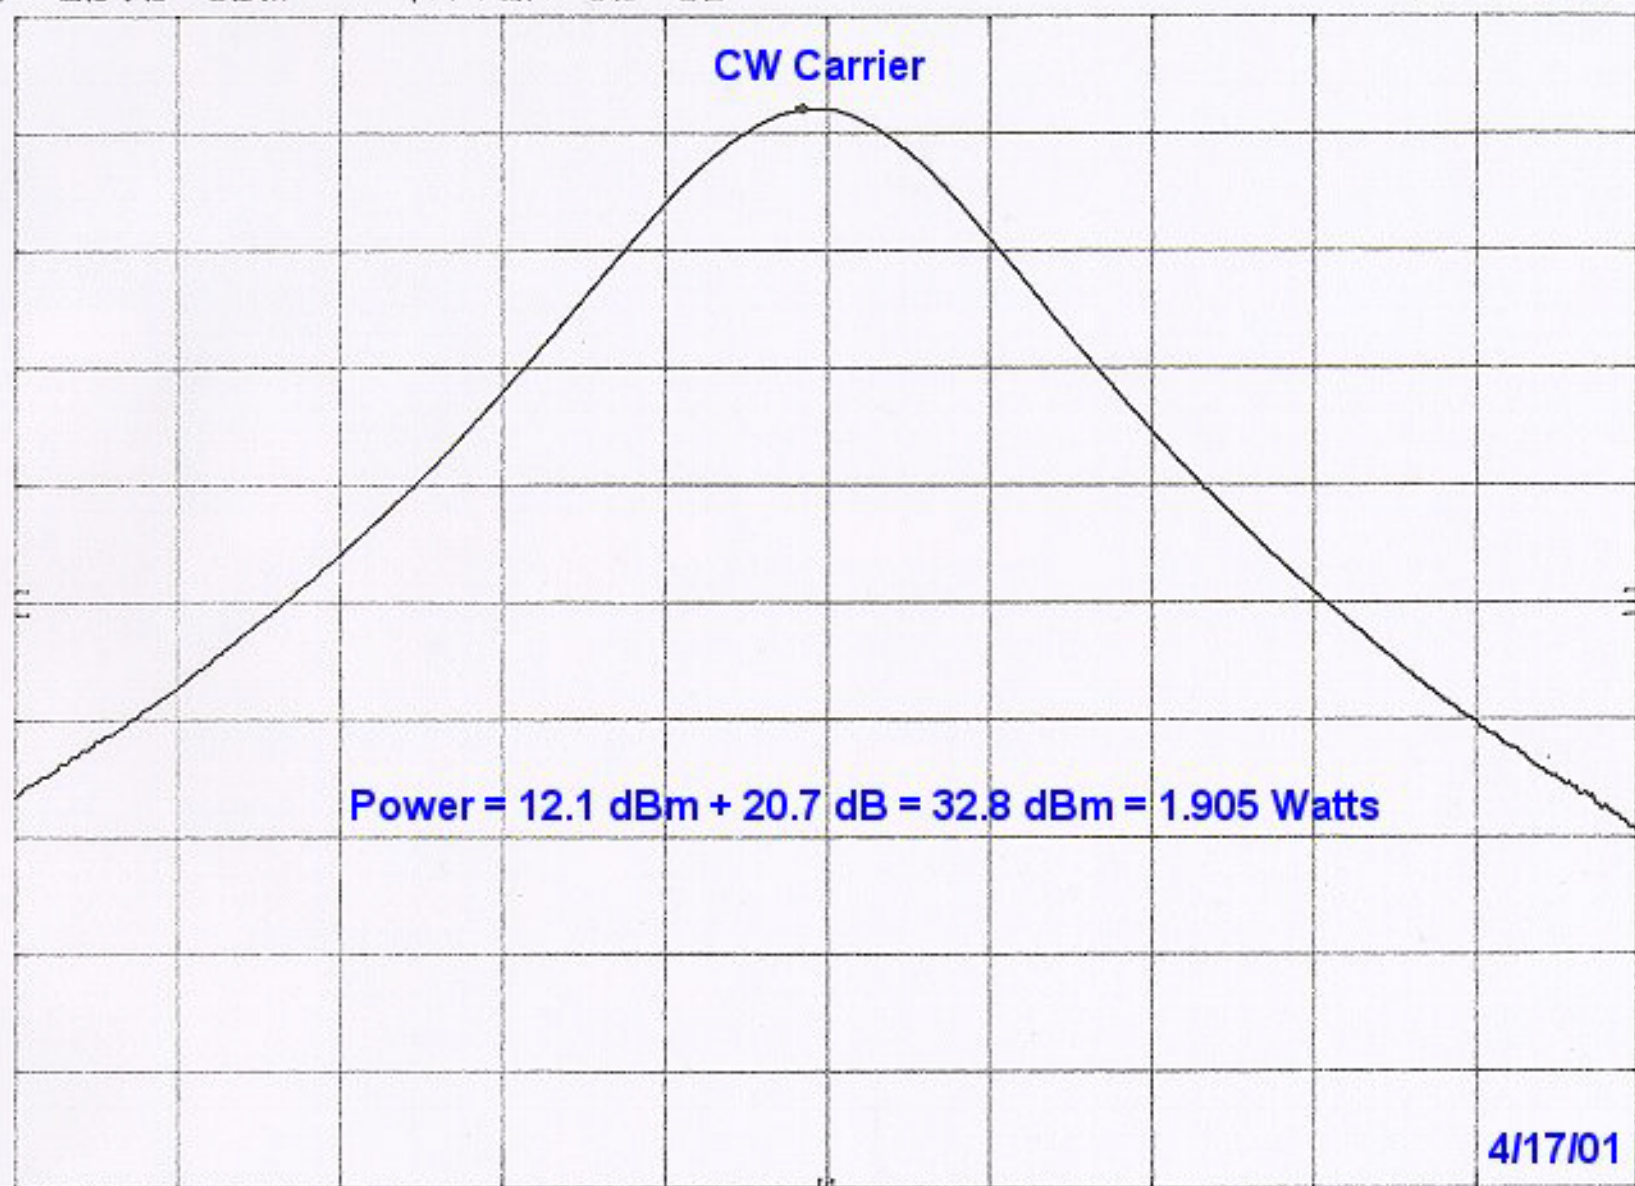

4/17/01

CENTER 173.074301 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 3.000 kHz

SWP 1.0 sec