



Element Materials Technology

(formerly PCTEST)
18855 Adams Ct, Morgan Hill, CA 95037 USA
Tel. +1.408.538.5600
<http://www.element.com>



RF EXPOSURE EVALUATION REPORT

Applicant Name:
Apple Inc.
One Apple Park Way
Cupertino, CA 95014 USA

Date of Testing:
10/26/2024 – 01/02/2025
Test Report Issue Date:
01/27/2025
Test Site/Location:
Element, Morgan Hill, CA, USA
Document Serial No.:
1C2410210072-01.BCG-R1

FCC ID: BCGA3266
APPLICANT: APPLE, INC.

DUT Type: Tablet Device
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Models: A3266

Equipment Class	Band & Mode	Tx Frequency	SAR To Body (W/kg)
DTSS	2.4 GHz WFI	2412 - 2472 MHz	1.19
NI	5 GHz WFI	U-NB-1: 5180 - 5240 MHz U-NB-2A: 5260 - 5320 MHz U-NB-2C: 5500 - 5720 MHz U-NB-3: 5740 - 5855 MHz	1.19
SCD6VL	6 GHz WFI	U-NB-5: 5935 - 6415 MHz U-NB-6: 6435 - 6815 MHz U-NB-7: 6835 - 6875 MHz U-NB-8: 6895 - 7115 MHz	1.07
DSS/DSS	2.4 GHz Bluetooth	2400 - 2480 MHz	1.14
DTSS	602.15-4	2425 - 2475 MHz	1.09
NI	NB U-NB-1	5180 - 5240 MHz	0.99
NI	NB U-NB-3	5733 - 5844 MHz	0.97
CDL	WIFI	13.56 MHz	0.57
Simultaneous SAR per FCC 69783.101-10105			
Equipment Class	Band & Mode	Tx Frequency	AFD (W/m ²)
SCD	6 GHz WFI	U-NB-5: 5935 - 6415 MHz U-NB-6: 6435 - 6815 MHz U-NB-7: 6835 - 6875 MHz U-NB-8: 6895 - 7115 MHz	6.88
Equipment Class	Band & Mode	Tx Frequency	Reported PD (mW/m ²)
SCD	6 GHz WFI	U-NB-5: 5935 - 6415 MHz U-NB-6: 6435 - 6815 MHz U-NB-7: 6835 - 6875 MHz U-NB-8: 6895 - 7115 MHz	7.09

Note: This revised Test Report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.



RJ Ortanez
Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfa.info.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 1 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	INTRODUCTION	24
3	DOSIMETRIC ASSESSMENT	25
4	TEST CONFIGURATION POSITIONS.....	26
5	RF EXPOSURE LIMITS	27
6	FCC MEASUREMENT PROCEDURES.....	29
7	RF CONDUCTED POWERS.....	32
8	SYSTEM VERIFICATION.....	72
9	SAR DATA SUMMARY	78
10	SAR MEASUREMENT VARIABILITY	88
11	EQUIPMENT LIST	89
12	MEASUREMENT UNCERTAINTIES.....	90
13	CONCLUSION.....	93
14	REFERENCES	94
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: MULTI-TX AND ANTENNA SAR CONSIDERATIONS		
APPENDIX F: SAR SYSTEM VALIDATION		
APPENDIX G: 802.11AX RU SAR EXCLUSION		
APPENDIX H: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX I: WLAN TIME-AVERAGED SAR VERIFICATION		

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 2 of 95

REV 24.0
05/01/2024

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
5 GHz WIFI	Voice/Data	U-NII-1: 5180 - 5240 MHz U-NII-2A: 5260 - 5320 MHz U-NII-2C: 5500 - 5720 MHz U-NII-3: 5745 - 5825 MHz
6 GHz WIFI	Voice/Data	U-NII-5: 5935 - 6415 MHz U-NII-6: 6435 - 6515 MHz U-NII-7: 6535 - 6875 MHz U-NII-8: 6895 - 7115 MHz
Bluetooth	Data	2402 - 2480 MHz
802.15.4	Data	2405 - 2475 MHz
NB UNII-1	Data	5162 - 5245 MHz
NB UNII-3	Data	5733 - 5844 MHz
WPT	N/A	13.56 MHz

1.2 Power Reduction for SAR

This device additionally utilizes a power reduction mechanism for Bluetooth/802.15.4/NB UNII and WLAN operations. When Bluetooth/802.15.4/NB UNII is operating simultaneously with certain combinations of WLAN antennas, the output power is permanently reduced. SAR evaluations were additionally performed at the maximum allowed output power for these scenarios to evaluate simultaneous transmission compliance.

Additionally, this device uses an independent mechanism that limits WIFI powers to a time-averaged output power. For the purposes of this test report, all SAR measurements were performed with the algorithm disabled at the maximum time-averaged output power level. Verification data for this time-averaged SAR mechanism can be found in the WLAN Time-Averaged SAR Verification Appendix.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 3 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Maximum WLAN Time-Averaged Output Power

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna WFE											
		SISO	SISO	SISO	SISO	SISO	SISO	SISO	SISO	SISO	MIMO	MIMO	MIMO
		b (Maximum)	b (Nominal)	g (Maximum)	g (Nominal)	n (Maximum)	n (Nominal)	ac SU (Maximum)	ac SU (Nominal)	g/n (Nominal)	g/n (Maximum)	ac SU (Maximum)	ac SU (Nominal)
2.4 GHz WPI 20 MHz Bandwidth	1	18.75	17.25	16.25	14.75	16.25	14.75	16.00	14.50	15.75	14.25	15.25	13.75
	2	18.75	17.25	16.25	14.75	16.25	14.75	17.25	15.75	17.25	15.75	17.25	15.75
	3	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25
	4	18.75	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25
	5	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25
	6	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25
	7	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25
	8	18.75	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25
	9	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25
	10	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25	16.75	17.25
	11	18.75	17.25	16.75	17.25	16.75	17.25	16.75	17.00	16.00	15.00	14.00	13.00
	12	18.75	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25	17.25
	13	18.75	17.25	15.00	13.50	15.00	13.50	NS	NS	NS	15.00	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna W770															
		SISO b (Maximum)	SISO b (Nominal)	SISO g (Maximum)	SISO g (Nominal)	SISO n (Maximum)	SISO n (Nominal)	SISO ax S1 (Maximum)	SISO ax S1 (Nominal)	SISO ax S2 (Nominal)	MIMO g/b (Maximum)	MIMO g/b (Nominal)	MIMO ax S1 (Maximum)	MIMO ax S2 (Nominal)	MIMO ax S3 (Maximum)	MIMO ax S4 (Nominal)	
2.4 GHz WPI 20 MHz Bandwidth	1	19.75	18.25	16.25	14.75	16.25	14.75	16.00	14.50	15.75	14.25	14.25	15.25	15.25	15.25	13.75	
	2	19.75	18.25	18.25	19.75	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.00	19.00	19.00	18.25	
	3	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	4	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	5	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	6	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	7	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	8	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	9	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	10	19.75	18.25	19.75	18.25	19.75	18.25	19.75	18.25	19.75	19.75	18.25	19.75	19.75	19.75	18.25	
	11	19.75	18.25	19.00	17.50	17.50	17.50	18.50	17.00	17.00	18.00	16.50	17.00	17.00	17.00	15.50	
	12	19.75	18.25	19.00	17.50	17.50	17.50	18.50	17.00	17.00	18.00	16.50	17.00	17.00	17.00	15.50	
	13	19.50	18.00	18.00	16.50	8.50	10.00	8.50	NS	NS	9.00	NS	NS	NS	NS	NS	

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above.

Node	Channel	IEEE 802.11 (Maximum in dBm): Antenna WTS															
		SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)	SISO a (Maximum)
5 GHz WTS 20 MHz Bandwidth	36	17.00	15.00	15.00	15.00	17.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
	40	17.00	15.00	17.00	15.00	17.00	15.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	15.00
	44	17.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00	15.00
	48	17.00	15.00	17.00	15.00	17.00	15.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	15.00
	52	17.00	15.00	17.00	15.00	17.00	15.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	15.00
	56	17.00	15.00	17.00	15.00	17.00	15.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	15.00
	60	17.00	15.00	17.00	15.00	17.00	15.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	15.00
	64	17.00	15.00	17.00	15.00	17.00	15.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	17.00	15.00	15.00
	68	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	72	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	76	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	80	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	84	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	88	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	92	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	96	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
5 GHz WTS 40 MHz Bandwidth	100	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	104	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	108	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	112	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	116	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	120	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	124	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	128	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	132	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	136	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	140	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	144	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	148	16.25	14.75	16.25	14.75	16.25	14.75	14.75	16.25	14.75	16.25	14.75	16.25	14.75	16.25	14.75	14.75
	152	17.25	15.75	17.25	15.75	17.25	15.75	15.75	17.25	15.75	17.25	15.75	17.25	15.75	17.25	15.75	15.75
	156	17.25	15.75	17.25	15.75	17.25	15.75	15.75	17.25	15.75	17.25	15.75	17.25	15.75	17.25	15.75	15.75
	160	17.25	15.75	17.25	15.75	17.25	15.75	15.75	17.25	15.75	17.25	15.75	17.25	15.75	17.25	15.75	15.75
164	17.25	15.75	17.25	15.75	17.25	15.75	15.75	17.25	15.75	17.25	15.75	17.25	15.75	17.25	15.75	15.75	
5 GHz WTS 80 MHz Bandwidth	36	15.00	13.00	13.00	13.00	15.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00
	40	15.00	13.00	15.00	13.00	15.00	13.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	13.00
	44	15.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00	13.00
	48	15.00	13.00	15.00	13.00	15.00	13.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	13.00
	52	15.00	13.00	15.00	13.00	15.00	13.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	13.00
	56	15.00	13.00	15.00	13.00	15.00	13.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	13.00
	60	15.00	13.00	15.00	13.00	15.00	13.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	13.00
	64	15.00	13.00	15.00	13.00	15.00	13.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	15.00	13.00	13.00
	68	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	72	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	76	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	80	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	84	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	88	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	92	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	96	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
5 GHz WTS 160 MHz Bandwidth	100	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	104	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	108	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	112	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	116	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	120	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	124	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	128	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	132	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	136	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	140	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	144	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	148	14.25	12.75	14.25	12.75	14.25	12.75	12.75	14.25	12.75	14.25	12.75	14.25	12.75	14.25	12.75	12.75
	152	15.25	13.75	15.25	13.75	15.25	13.75	13.75	15.25	13.75	15.25	13.75	15.25	13.75	15.25	13.75	13.75
	156	15.25	13.75	15.25	13.75	15.25	13.75	13.75	15.25	13.75	15.25	13.75	15.25	13.75	15.25	13.75	13.75
	160	15.25	13.75	15.25	13.75	15.25	13.75	13.75	15.25	13.75	15.25	13.75	15.25	13.75	15.25	13.75	13.75

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11n supports up to 40 MHz, 802.11ac/ax support up to 160 MHz.

[illegible]

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 4 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11n supports up to 40 MHz, 802.11ac/ax support up to 160 MHz.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna Wf8							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	3.50	2.00	4.00	2.50	-1.25	-2.75	1.75	0.25
	5	3.50	2.00	4.00	2.50	-1.25	-2.75	1.75	0.25
	9-29	3.50	2.00	4.00	2.50	-1.25	-2.75	1.75	0.25
	33-61	4.00	2.50	4.50	3.00	-0.75	-2.25	2.25	0.75
	65-85	5.00	3.50	5.50	4.00	0.00	-1.50	3.00	1.50
	89	5.00	3.50	5.50	4.00	0.00	-1.50	3.00	1.50
	93	5.00	3.50	5.50	4.00	0.00	-1.50	3.00	1.50
	97-113	4.50	3.00	5.00	3.50	0.25	-1.25	3.25	1.75
	117-181	5.00	3.50	5.50	4.00	0.25	-1.25	3.25	1.75
	185	5.00	3.50	5.50	4.00	0.25	-1.25	3.25	1.75
	189-225	6.75	5.25	7.25	5.75	1.25	-0.25	4.25	2.75
	229	6.75	5.25	7.25	5.75	1.25	-0.25	4.25	2.75
	233	6.75	5.25	7.25	5.75	1.25	-0.25	4.25	2.75
6 GHz WiFi (40MHz BW) LP	3			7.00	5.50	1.75	0.25	4.75	3.25
	11			7.00	5.50	1.75	0.25	4.75	3.25
	19-27			7.00	5.50	1.75	0.25	4.75	3.25
	35-59			7.50	6.00	2.25	0.75	5.25	3.75
	67-75			8.50	7.00	3.00	1.50	6.00	4.50
	83			8.50	7.00	3.00	1.50	6.00	4.50
	91			8.50	7.00	3.00	1.50	6.00	4.50
	99-107			8.00	6.50	3.25	1.75	6.25	4.75
	115			8.00	6.50	3.25	1.75	6.25	4.75
	123-179			8.50	7.00	3.25	1.75	6.25	4.75
	187			8.50	7.00	3.25	1.75	6.25	4.75
	195-219			10.25	8.75	4.25	2.75	7.25	5.75
	227			10.25	8.75	4.25	2.75	7.25	5.75
	7			9.50	8.00	4.25	2.75	7.25	5.75
6 GHz WiFi (80MHz BW) LP	23			9.50	8.00	4.25	2.75	7.25	5.75
	39-55			10.00	8.50	4.75	3.25	7.75	6.25
	71			11.00	9.50	5.50	4.00	8.50	7.00
	87			11.00	9.50	5.50	4.00	8.50	7.00
	103			10.50	9.00	5.75	4.25	8.75	7.25
	119			10.50	9.00	5.75	4.25	8.75	7.25
	135-167			11.00	9.50	5.75	4.25	8.75	7.25
	183			11.00	9.50	5.75	4.25	8.75	7.25
	199			12.00	10.50	6.75	5.25	9.75	8.25
	215			12.00	10.50	6.75	5.25	9.75	8.25
	15			12.00	10.50	6.75	5.25	9.75	8.25
	47			12.50	11.00	7.25	5.75	10.25	8.75
	79			13.50	12.00	8.00	6.50	11.00	9.50
	111			13.00	11.50	8.25	6.75	11.25	9.75
6 GHz WiFi (160MHz BW) LP	143			13.50	12.00	8.25	6.75	11.25	9.75
	175			12.00	10.50	8.25	6.75	11.25	9.75
	207			12.00	10.50	9.25	7.75	12.00	10.50

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11ax supports up to 160 MHz.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 5 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	IEEE 802.11 (Maximum in dBm) - Antenna WF8								
	Channel	SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	0.00	-1.50	0.50	-1.00	NS	NS	-1.75	-3.25
	65-85	1.00	-0.50	1.50	0.00	NS	NS	-1.00	-2.50
	89	1.00	-0.50	1.50	0.00	NS	NS	-1.00	-2.50
	93	1.00	-0.50	1.50	0.00	NS	NS	-1.00	-2.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	1.00	-0.50	1.50	0.00	NS	NS	-0.75	-2.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WiFi (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			3.50	2.00	-1.75	-3.25	1.25	-0.25
	67-75			4.50	3.00	-1.00	-3.50	2.00	0.50
	83			4.50	3.00	-1.00	-2.50	2.00	0.50
	91			4.50	3.00	-1.00	-2.50	2.00	0.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			4.50	3.00	-0.75	-2.25	2.25	0.75
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	7			NS	NS	NS	NS	NS	NS
6 GHz WiFi (80MHz BW) VLP	23			NS	NS	NS	NS	NS	NS
	39-55			6.00	4.50	0.75	-0.75	3.75	2.25
	71			7.00	5.50	1.50	0.00	4.50	3.00
	87			7.00	5.50	1.50	0.00	4.50	3.00
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			7.00	5.50	1.75	0.25	4.75	3.25
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	15			NS	NS	NS	NS	NS	NS
	47			8.50	7.00	3.25	1.75	6.25	4.75
	79			9.50	8.00	4.00	2.50	7.00	5.50
	111			NS	NS	NS	NS	NS	NS
6 GHz WiFi (160MHz BW) VLP	143			9.50	8.00	4.25	2.75	7.25	5.75
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11ax supports up to 160 MHz.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 6 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna WF8							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	14.50	13.00	14.50	13.00	14.50	13.00	14.50	13.00
	5	14.50	13.00	14.50	13.00	14.50	13.00	14.50	13.00
	9-29	14.50	13.00	14.50	13.00	14.50	13.00	14.50	13.00
	33-61	14.50	13.00	14.50	13.00	14.50	13.00	14.50	13.00
	65-85	15.25	13.75	15.25	13.75	15.25	13.75	15.25	13.75
	89	15.25	13.75	15.25	13.75	15.25	13.75	15.25	13.75
	93	15.25	13.75	15.25	13.75	15.25	13.75	15.25	13.75
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WiFi (40MHz BW) SP	3			14.50	13.00	14.50	13.00	14.50	13.00
	11			14.50	13.00	14.50	13.00	14.50	13.00
	19-27			14.50	13.00	14.50	13.00	14.50	13.00
	35-59			14.50	13.00	14.50	13.00	14.50	13.00
	67-75			15.25	13.75	15.25	13.75	15.25	13.75
	83			15.25	13.75	15.25	13.75	15.25	13.75
	91			15.25	13.75	15.25	13.75	15.25	13.75
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			12.00	10.50	12.00	10.50	12.00	10.50
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
6 GHz WiFi (80MHz BW) SP	7			14.50	13.00	14.50	13.00	14.50	13.00
	23			14.50	13.00	14.50	13.00	14.50	13.00
	39-55			14.50	13.00	14.50	13.00	14.50	13.00
	71			15.25	13.75	15.25	13.75	15.25	13.75
	87			15.25	13.75	15.25	13.75	15.25	13.75
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			12.00	10.50	12.00	10.50	12.00	10.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
6 GHz WiFi (160MHz BW) SP	15			14.50	13.00	14.50	13.00	14.50	13.00
	47			14.50	13.00	14.50	13.00	14.50	13.00
	79			15.25	13.75	15.25	13.75	15.25	13.75
	111			NS	NS	NS	NS	NS	NS
	143			14.50	13.00	14.50	13.00	14.50	13.00
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11ax supports up to 160 MHz.

Note: Targets for 802.11ax RU operations can be found in 802.11ax RU SAR Exclusion Appendix.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 7 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	IEEE 802.11 (Maximum in dBm) - Antenna WF7a								
	Channel	SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) LP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	3.50	2.00	4.00	2.50	-1.25	-2.75	1.75	0.25
	5	3.50	2.00	4.00	2.50	-1.25	-2.75	1.75	0.25
	9-29	3.50	2.00	4.00	2.50	-1.25	-2.75	1.75	0.25
	33-61	4.00	2.50	4.50	3.00	-0.75	-2.25	2.25	0.75
	65-85	5.00	3.50	5.50	4.00	0.00	-1.50	3.00	1.50
	89	5.00	3.50	5.50	4.00	0.00	-1.50	3.00	1.50
	93	5.00	3.50	5.50	4.00	0.00	-1.50	3.00	1.50
	97-113	4.50	3.00	5.00	3.50	0.25	-1.25	3.25	1.75
	117-181	5.00	3.50	5.50	4.00	0.25	-1.25	3.25	1.75
	185	5.00	3.50	5.50	4.00	0.25	-1.25	3.25	1.75
	189-225	6.75	5.25	7.25	5.75	1.25	-0.25	4.25	2.75
	229	6.75	5.25	7.25	5.75	1.25	-0.25	4.25	2.75
	233	6.75	5.25	7.25	5.75	1.25	-0.25	4.25	2.75
	3			7.00	5.50	1.75	0.25	4.75	3.25
6 GHz WiFi (40MHz BW) LP	11			7.00	5.50	1.75	0.25	4.75	3.25
	19-27			7.00	5.50	1.75	0.25	4.75	3.25
	35-59			7.50	6.00	2.25	0.75	5.25	3.75
	67-75			8.50	7.00	3.00	1.50	6.00	4.50
	83			8.50	7.00	3.00	1.50	6.00	4.50
	91			8.50	7.00	3.00	1.50	6.00	4.50
	99-107			8.00	6.50	3.25	1.75	6.25	4.75
	115			8.00	6.50	3.25	1.75	6.25	4.75
	123-179			8.50	7.00	3.25	1.75	6.25	4.75
	187			8.50	7.00	3.25	1.75	6.25	4.75
	195-219			10.25	8.75	4.25	2.75	7.25	5.75
	227			10.25	8.75	4.25	2.75	7.25	5.75
6 GHz WiFi (80MHz BW) LP	7			9.50	8.00	4.25	2.75	7.25	5.75
	23			9.50	8.00	4.25	2.75	7.25	5.75
	39-55			10.00	8.50	4.75	3.25	7.75	6.25
	71			11.00	9.50	5.50	4.00	8.50	7.00
	87			11.00	9.50	5.50	4.00	8.50	7.00
	103			10.50	9.00	5.75	4.25	8.75	7.25
	119			10.50	9.00	5.75	4.25	8.75	7.25
	135-167			11.00	9.50	5.75	4.25	8.75	7.25
	183			11.00	9.50	5.75	4.25	8.75	7.25
	199			12.75	11.25	6.75	5.25	9.75	8.25
	215			12.75	11.25	6.75	5.25	9.75	8.25
	15			12.00	10.50	6.75	5.25	9.75	8.25
6 GHz WiFi (160MHz BW) LP	47			12.50	11.00	7.25	5.75	10.25	8.75
	79			12.75	11.25	8.00	6.50	11.00	9.50
	111			12.00	10.50	8.25	6.75	11.25	9.75
	143			13.00	11.50	8.25	6.75	11.25	9.75
	175			13.00	11.50	8.25	6.75	11.25	9.75
	207			13.00	11.50	9.25	7.75	12.25	10.75

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11ax supports up to 160 MHz.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 8 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	IEEE 802.11 (Maximum in dBm) - Antenna WF7a								
	Channel	SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WIFI (20MHz BW) VLP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	NS	NS	NS	NS	NS	NS	NS	NS
	5	NS	NS	NS	NS	NS	NS	NS	NS
	9-29	NS	NS	NS	NS	NS	NS	NS	NS
	33-61	0.00	-1.50	0.00	-1.50	NS	NS	-1.75	-3.25
	65-85	0.00	-1.50	0.00	-1.50	NS	NS	-1.00	-2.50
	89	0.00	-1.50	0.00	-1.50	NS	NS	-1.00	-2.50
	93	0.00	-1.50	0.00	-1.50	NS	NS	-1.00	-2.50
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	0.00	-1.50	0.00	-1.50	NS	NS	-0.75	-2.25
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WIFI (40MHz BW) VLP	3			NS	NS	NS	NS	NS	NS
	11			NS	NS	NS	NS	NS	NS
	19-27			NS	NS	NS	NS	NS	NS
	35-59			0.00	-1.50	-1.75	-3.25	0.00	-1.50
	67-75			0.00	-1.50	-1.00	-2.50	0.00	-1.50
	83			0.00	-1.50	-1.00	-2.50	0.00	-1.50
	91			0.00	-1.50	-1.00	-2.50	0.00	-1.50
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			0.00	-1.50	-0.75	-2.25	0.00	-1.50
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
6 GHz WIFI (80MHz BW) VLP	7			NS	NS	NS	NS	NS	NS
	23			NS	NS	NS	NS	NS	NS
	39-55			0.00	-1.50	0.00	-1.50	0.00	-1.50
	71			0.00	-1.50	0.00	-1.50	0.00	-1.50
	87			0.00	-1.50	0.00	-1.50	0.00	-1.50
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			0.00	-1.50	0.00	-1.50	0.00	-1.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
6 GHz WIFI (160MHz BW) VLP	215			NS	NS	NS	NS	NS	NS
	15			NS	NS	NS	NS	NS	NS
	47			0.00	-1.50	0.00	-1.50	0.00	-1.50
	79			0.00	-1.50	0.00	-1.50	0.00	-1.50
	111			NS	NS	NS	NS	NS	NS
	143			0.00	-1.50	0.00	-1.50	0.00	-1.50
	175			NS	NS	NS	NS	NS	NS
	207			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11ax supports up to 160 MHz.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 9 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode	Channel	IEEE 802.11 (Maximum in dBm) - Antenna WF7a							
		SISO	SISO	SISO	SISO	MIMO CDD	MIMO CDD	MIMO SDM	MIMO SDM
		a (Maximum)	a (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)	ax SU (Maximum)	ax SU (Nominal)
6 GHz WiFi (20MHz BW) SP	2	NS	NS	NS	NS	NS	NS	NS	NS
	1	13.50	12.00	13.50	12.00	13.50	12.00	13.50	12.00
	5	13.50	12.00	13.50	12.00	13.50	12.00	13.50	12.00
	9-29	13.50	12.00	13.50	12.00	13.50	12.00	13.50	12.00
	33-61	13.50	12.00	13.50	12.00	13.50	12.00	13.50	12.00
	65-85	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	89	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	93	12.75	11.25	12.75	11.25	12.75	11.25	12.75	11.25
	97-113	NS	NS	NS	NS	NS	NS	NS	NS
	117-181	12.00	10.50	12.00	10.50	12.00	10.50	12.00	10.50
	185	NS	NS	NS	NS	NS	NS	NS	NS
	189-225	NS	NS	NS	NS	NS	NS	NS	NS
	229	NS	NS	NS	NS	NS	NS	NS	NS
	233	NS	NS	NS	NS	NS	NS	NS	NS
	237	NS	NS	NS	NS	NS	NS	NS	NS
6 GHz WiFi (40MHz BW) SP	3			13.50	12.00	13.50	12.00	13.50	12.00
	11			13.50	12.00	13.50	12.00	13.50	12.00
	19-27			13.50	12.00	13.50	12.00	13.50	12.00
	35-59			13.50	12.00	13.50	12.00	13.50	12.00
	67-75			12.75	11.25	12.75	11.25	12.75	11.25
	83			12.75	11.25	12.75	11.25	12.75	11.25
	91			12.75	11.25	12.75	11.25	12.75	11.25
	99-107			NS	NS	NS	NS	NS	NS
	115			NS	NS	NS	NS	NS	NS
	123-179			12.00	10.50	12.00	10.50	12.00	10.50
	187			NS	NS	NS	NS	NS	NS
	195-219			NS	NS	NS	NS	NS	NS
	227			NS	NS	NS	NS	NS	NS
	231			13.50	12.00	13.50	12.00	13.50	12.00
	235			13.50	12.00	13.50	12.00	13.50	12.00
6 GHz WiFi (80MHz BW) SP	39-55			13.50	12.00	13.50	12.00	13.50	12.00
	71			12.75	11.25	12.75	11.25	12.75	11.25
	87			12.75	11.25	12.75	11.25	12.75	11.25
	103			NS	NS	NS	NS	NS	NS
	119			NS	NS	NS	NS	NS	NS
	135-167			13.00	11.50	13.00	11.50	13.00	11.50
	183			NS	NS	NS	NS	NS	NS
	199			NS	NS	NS	NS	NS	NS
	215			NS	NS	NS	NS	NS	NS
	239			13.50	12.00	13.50	12.00	13.50	12.00
	243			13.50	12.00	13.50	12.00	13.50	12.00
	247			12.75	11.25	12.75	11.25	12.75	11.25
	251			NS	NS	NS	NS	NS	NS
	255			13.00	11.50	13.00	11.50	13.00	11.50
	259			NS	NS	NS	NS	NS	NS
6 GHz WiFi (160MHz BW) SP	263			NS	NS	NS	NS	NS	NS
	267			NS	NS	NS	NS	NS	NS
	271			NS	NS	NS	NS	NS	NS
	275			NS	NS	NS	NS	NS	NS
	279			NS	NS	NS	NS	NS	NS

Note: In MIMO operations, each antenna transmits at maximum allowed powers as indicated above. 802.11a supports up to 20 MHz, 802.11ax supports up to 160 MHz.

Note: Targets for 802.11ax RU operations can be found in 802.11ax RU SAR Exclusion Appendix.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 10 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.3.2 Bluetooth Maximum Output Power

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
Bluetooth BDR	Maximum	18.50	11.50
	Nominal	17.00	10.00
Bluetooth EDR	Maximum	15.00	8.00
	Nominal	13.50	6.50
Bluetooth LE	Maximum	18.50	11.50
	Nominal	17.00	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF8	Modulated Average (iPA) TXBF (dBm) Antenna WF8
Bluetooth BDR	Maximum	17.00	11.50
	Nominal	15.50	10.00
Bluetooth EDR	Maximum	13.50	8.00
	Nominal	12.00	6.50
Bluetooth LE	Maximum	18.50	11.50
	Nominal	17.00	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Note: In TxBF operations, each antenna transmits at allowed powers as indicated above.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 11 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7b
Bluetooth BDR	Maximum	20.00	11.50
	Nominal	18.50	10.00
Bluetooth EDR	Maximum	15.00	8.00
	Nominal	13.50	6.50
Bluetooth LE	Maximum	20.00	11.50
	Nominal	18.50	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF7b	Modulated Average (iPA) TXBF (dBm) Antenna WF7b
Bluetooth BDR	Maximum	17.00	11.50
	Nominal	15.50	10.00
Bluetooth EDR	Maximum	13.50	8.00
	Nominal	12.00	6.50
Bluetooth LE	Maximum	20.00	11.50
	Nominal	18.50	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 12 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.3.3 Bluetooth Reduced Output Power

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
Bluetooth BDR	Maximum	13.00	11.50
	Nominal	11.50	10.00
Bluetooth EDR	Maximum	13.00	8.00
	Nominal	11.50	6.50
Bluetooth LE	Maximum	13.00	11.50
	Nominal	11.50	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF8	Modulated Average (iPA) TXBF (dBm) Antenna WF8
Bluetooth BDR	Maximum	13.00	11.50
	Nominal	11.50	10.00
Bluetooth EDR	Maximum	13.00	8.00
	Nominal	11.50	6.50
Bluetooth LE	Maximum	13.00	11.50
	Nominal	11.50	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 13 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7b
Bluetooth BDR	Maximum	14.00	11.50
	Nominal	12.50	10.00
Bluetooth EDR	Maximum	14.00	8.00
	Nominal	12.50	6.50
Bluetooth LE	Maximum	14.00	11.50
	Nominal	12.50	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF7b	Modulated Average (iPA) TXBF (dBm) Antenna WF7b
Bluetooth BDR	Maximum	14.00	11.50
	Nominal	12.50	10.00
Bluetooth EDR	Maximum	13.50	8.00
	Nominal	12.00	6.50
Bluetooth LE	Maximum	14.00	11.50
	Nominal	12.50	10.00
Bluetooth HDR4	Maximum	12.50	6.00
	Nominal	11.00	4.50
Bluetooth HDR8	Maximum	12.50	6.00
	Nominal	11.00	4.50

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 14 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.3.4 802.15.4 Maximum Output Power

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
802.15.4	Maximum	21.00	11.50
	Nominal	19.50	10.00

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7b
802.15.4	Maximum	21.50	11.50
	Nominal	20.00	10.00

1.3.5 802.15.4 Reduced Output Power

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
802.15.4	Maximum	14.00	11.50
	Nominal	12.50	10.00

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7b	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7b
802.15.4	Maximum	15.00	11.50
	Nominal	13.50	10.00

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 15 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.3.6 NB UNII Maximum Output Power

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
NB UNII-1 BDR	Maximum	10.00	6.50
	Nominal	8.50	5.00
NB UNII-1 HDR4	Maximum	12.50	2.50
	Nominal	11.00	1.00
NB UNII-1 HDR8	Maximum	13.50	2.50
	Nominal	12.00	1.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF8	Modulated Average (iPA) TXBF (dBm) Antenna WF8
NB UNII-1 BDR	Maximum	7.00	6.50
	Nominal	5.50	5.00
NB UNII-1 HDR4	Maximum	9.50	2.50
	Nominal	8.00	1.00
NB UNII-1 HDR8	Maximum	12.00	2.50
	Nominal	10.50	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7a
NB UNII-1 BDR	Maximum	10.00	6.50
	Nominal	8.50	5.00
NB UNII-1 HDR4	Maximum	12.50	2.50
	Nominal	11.00	1.00
NB UNII-1 HDR8	Maximum	13.50	2.50
	Nominal	12.00	1.00

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 16 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF7a	Modulated Average (iPA) TXBF (dBm) Antenna WF7a
NB UNII-1 BDR	Maximum	7.00	6.50
	Nominal	5.50	5.00
NB UNII-1 HDR4	Maximum	9.50	2.50
	Nominal	8.00	1.00
NB UNII-1 HDR8	Maximum	12.00	2.50
	Nominal	10.50	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
NB UNII-3 BDR	Maximum	13.50	6.50
	Nominal	12.00	5.00
NB UNII-3 HDR4	Maximum	13.50	2.50
	Nominal	12.00	1.00
NB UNII-3 HDR8	Maximum	13.50	2.50
	Nominal	12.00	1.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF8	Modulated Average (iPA) TXBF (dBm) Antenna WF8
NB UNII-3 BDR	Maximum	13.50	6.50
	Nominal	12.00	5.00
NB UNII-3 HDR4	Maximum	13.50	2.50
	Nominal	12.00	1.00
NB UNII-3 HDR8	Maximum	13.50	2.50
	Nominal	12.00	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 17 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7a
NB UNII-3 BDR	Maximum	13.50	6.50
	Nominal	12.00	5.00
NB UNII-3 HDR4	Maximum	13.50	2.50
	Nominal	12.00	1.00
NB UNII-3 HDR8	Maximum	13.50	2.50
	Nominal	12.00	1.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF7a	Modulated Average (iPA) TXBF (dBm) Antenna WF7a
NB UNII-3 BDR	Maximum	13.50	6.50
	Nominal	12.00	5.00
NB UNII-3 HDR4	Maximum	13.50	2.50
	Nominal	12.00	1.00
NB UNII-3 HDR8	Maximum	13.50	2.50
	Nominal	12.00	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above

1.3.7 NB UNII Reduced Output Power

Note: Below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and WPT active.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
NB UNII-1 BDR	Maximum	10.00	6.50
	Nominal	8.50	5.00
NB UNII-1 HDR4	Maximum	10.50	2.50
	Nominal	9.00	1.00
NB UNII-1 HDR8	Maximum	10.50	2.50
	Nominal	9.00	1.00

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 18 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF8	Modulated Average (iPA) TXBF (dBm) Antenna WF8
NB UNII-1 BDR	Maximum	7.00	6.50
	Nominal	5.50	5.00
NB UNII-1 HDR4	Maximum	9.50	2.50
	Nominal	8.00	1.00
NB UNII-1 HDR8	Maximum	10.50	2.50
	Nominal	9.00	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7a
NB UNII-1 BDR	Maximum	10.00	6.50
	Nominal	8.50	5.00
NB UNII-1 HDR4	Maximum	10.00	2.50
	Nominal	8.50	1.00
NB UNII-1 HDR8	Maximum	10.00	2.50
	Nominal	8.50	1.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF7a	Modulated Average (iPA) TXBF (dBm) Antenna WF7a
NB UNII-1 BDR	Maximum	7.00	6.50
	Nominal	5.50	5.00
NB UNII-1 HDR4	Maximum	9.50	2.50
	Nominal	8.00	1.00
NB UNII-1 HDR8	Maximum	10.00	2.50
	Nominal	8.50	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 19 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF8	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF8
NB UNII-3 BDR	Maximum	9.50	6.50
	Nominal	8.00	5.00
NB UNII-3 HDR4	Maximum	9.50	2.50
	Nominal	8.00	1.00
NB UNII-3 HDR8	Maximum	9.50	2.50
	Nominal	8.00	1.00

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF8	Modulated Average (iPA) TXBF (dBm) Antenna WF8
NB UNII-3 BDR	Maximum	9.50	6.50
	Nominal	8.00	5.00
NB UNII-3 HDR4	Maximum	9.50	2.50
	Nominal	8.00	1.00
NB UNII-3 HDR8	Maximum	9.50	2.50
	Nominal	8.00	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

Mode / Band		Modulated Average (ePA) Single Tx Chain (dBm) Antenna WF7a	Modulated Average (iPA) Single Tx Chain (dBm) Antenna WF7a
NB UNII-3 BDR	Maximum	9.00	6.50
	Nominal	7.50	5.00
NB UNII-3 HDR4	Maximum	9.00	2.50
	Nominal	7.50	1.00
NB UNII-3 HDR8	Maximum	9.00	2.50
	Nominal	7.50	1.00

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 20 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band		Modulated Average (ePA) TXBF (dBm) Antenna WF7a	Modulated Average (iPA) TXBF (dBm) Antenna WF7a
NB UNII-3 BDR	Maximum	9.00	6.50
	Nominal	7.50	5.00
NB UNII-3 HDR4	Maximum	9.00	2.50
	Nominal	7.50	1.00
NB UNII-3 HDR8	Maximum	9.00	2.50
	Nominal	7.50	1.00

Note: In TxBF operations, each antenna transmits at maximum allowed powers as indicated above.

1.4 DUT Antenna Locations

The overall diagonal dimension of the device is > 200 mm. A diagram showing the location of the device antennas can be found in DUT Antenna Diagram & SAR Test Setup Photographs Appendix. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Note: Per FCC KDB Publication 616217 D04v01r01, front side of the device is not required to be evaluated for SAR. All other edges were evaluated for simultaneous transmission analysis.

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D04v01 4.3.2 procedures.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 21 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 1-1
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Body
1	2.4 GHz Wi-Fi MIMO + WPT	Yes
2	5/6 GHz Wi-Fi MIMO + WPT	Yes
3	2.4 GHz Bluetooth (TXBF) + WPT	Yes
4	NB UNII (TXBF) + WPT	Yes
5	2.4 GHz Bluetooth Antenna WF7b + 2.4 GHz Wi-Fi Antenna WF8 + WPT	Yes
6	802.15.4 Antenna WF7b + 2.4 GHz Wi-Fi Antenna WF8 + WPT	Yes
7	2.4 GHz Bluetooth + 5/6 GHz Wi-Fi + WPT	Yes
8	802.15.4 + 5/6 GHz Wi-Fi + WPT	Yes
9	2.4 GHz Bluetooth + 5/6 GHz Wi-Fi MIMO + WPT	Yes
10	802.15.4 + 5/6 GHz Wi-Fi MIMO + WPT	Yes
11	2.4 GHz Bluetooth (TXBF) + 5/6 GHz Wi-Fi + WPT	Yes
12	2.4 GHz Bluetooth (TXBF) + 5/6 GHz Wi-Fi MIMO + WPT	Yes
13	NB UNII + 2.4 GHz Wi-Fi + WPT	Yes
14	NB UNII + 2.4 GHz Wi-Fi MIMO + WPT	Yes
15	NB UNII (TXBF) + 2.4 GHz Wi-Fi + WPT	Yes
16	NB UNII (TXBF) + 2.4 GHz Wi-Fi MIMO + WPT	Yes

- 2.4GHz WIFI and 2.4 GHz Bluetooth/802.15.4 can transmit simultaneously on separate antennas. Specific 2.4 GHz WIFI Antenna that can only transmit simultaneously with 2.4 GHz Bluetooth/802.15.4 is listed in the above table. In this scenario, Wi-Fi max power will not exceed minimum of (13.5 dBm, SAR max cap, Reg max cap) power. Additionally, in disconnected mode, BT will be using iPA only.
- Specific NB UNII TxBF antennas can only transmit simultaneously and is listed in the Simultaneously Backoff Scenarios document.
- 2.4GHz WLAN and 5 GHz WLAN cannot transmit simultaneously.
- This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
- This device supports VoWIFI.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Based on the maximum allowed power for the respective antennas, U-NII-2A was evaluated for Antenna WF8 and Antenna WF7a. Additional testing for U-NII-1 was not required since all reported SAR was less than 1.2 W/kg per FCC KDB Publication 248227 D01v02r02.

The WLAN/Bluetooth/802.15.4/NB UNII chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structures to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report. WLAN/Bluetooth/802.15.4/NB UNII SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining WLAN/Bluetooth/802.15.4/NB UNII configurations.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 22 of 95

REV 24.0
05/01/2024

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6, and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 160 MHz Bandwidth only for 5/6 GHz
- b) 3 Tx antenna output
- c) 256 QAM is supported
- d) TDWR and Band gap channels are supported

This device supports IEEE 802.11ax with the following features:

- a) Up to 160 MHz Bandwidth only for 5/6 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) No aggregate channel configurations
- d) 3 Tx antenna output
- e) Up to 1024 QAM is supported
- f) TDWR and Band gap channels are supported for 5 GHz
- g) MU-MIMO UL Operations are not supported

Per April 2019 TCB Workshop Notes, SAR testing was not required for 802.11ax when applying the initial test configuration procedures of KDB 248227, with 802.11ax considered a higher order 802.11 mode.

Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. FCC KDB 648474 and FCC KDB 248227 were followed for test positions, distances, and modes. Per TCB workshop October 2020 notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements. Incident power density is evaluated at 2mm ensuring that the resolution is sufficient such that integrated power density (iPD) between d=2mm and d=λ/5mm is ≥ -1dB per equipment manufacturer guidance. Power density results are scaled up for uncertainty above 30%.

1.7 Guidance Applied

- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D04v01 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 616217 D04v01r02 (Tablet)
- November 2017, October 2018, April 2019, November 2019, October 2020 TCB Workshop Notes (IEEE 802.11ax)
- SPEAG DASY6 System Handbook
- SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz) (Nov 2021)
- IEEE 1528-2013
- IEC TR 63170:2018
- IEC 62479:2010

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 9.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 23 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

2 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 2-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 24 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

3 DOSIMETRIC ASSESSMENT

3.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface, and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 3-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 3-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

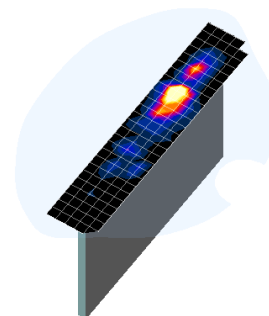


Figure 3-1
Sample SAR Area
Scan

Table 3-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 25 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

4 TEST CONFIGURATION POSITIONS

4.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

4.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D04v01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 26 of 95

REV 24.0
05/01/2024

5 RF EXPOSURE LIMITS

5.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

5.3 RF Exposure Limits for Frequencies below 6 GHz

Table 5-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 27 of 95

REV 24.0
05/01/2024

5.4 RF Exposure Limits for Frequencies above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m^2 or mW/cm^2 .

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm^2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

Table 5-2
Human Exposure Limits Specified in FCC 47 CFR §1.1310

Human Exposure to Radiofrequency (RF) Radiation Limits		
Frequency Range [MHz]	Power Density [mW/cm ²]	Average Time [Minutes]
(A) Limits For Occupational / Controlled Environments		
1,500 – 100,000	5.0	6
(B) Limits For General Population / Uncontrolled Environments		
1,500 – 100,000	1.0	30

Note: 1.0 mW/cm^2 is 10 W/m^2

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 28 of 95

REV 24.0
05/01/2024

6 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset-based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 29 of 95

REV 24.0
05/01/2024

6.2.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel, i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.2.6 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 6.2.5). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.7 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 30 of 95

REV 24.0
05/01/2024

subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.8 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D04v01 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 31 of 95

REV 24.0
05/01/2024

7 RF CONDUCTED POWERS

7.1 2.4 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 7-1
2.4 GHz WLAN Maximum Average RF Power – Antenna WF8, Variant 1

2.4GHz WIFI (20MHz 802.11b SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	17.53
2437	6		17.59
2462	11		17.68
2.4GHz WIFI (20MHz 802.11g SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.28
2437	6		17.85
2462	11		17.46
2.4GHz WIFI (20MHz 802.11n SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.31
2437	6		17.82
2462	11		17.43
2.4GHz WIFI (20MHz 802.11ax SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	14.84
2437	6		17.88
2462	11		17.12

Table 7-2
2.4 GHz WLAN Maximum Average RF Power – Antenna WF8, Variant 2

2.4GHz WIFI (20MHz 802.11b SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	17.85
2437	6		17.93
2462	11		17.98
2.4GHz WIFI (20MHz 802.11g SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.09
2437	6		17.65
2462	11		17.74
2.4GHz WIFI (20MHz 802.11n SISO ANT WF8)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.12
2437	6		17.69
2462	11		17.80

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 32 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

2.4GHz WIFI (20MHz 802.11ax SISO ANT			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	14.93
2437	6		17.57
2462	11		17.32

Table 7-3

2.4 GHz WLAN Maximum Average RF Power – Antenna WF7b, Variant 1

2.4GHz WIFI (20MHz 802.11b SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	18.67
2437	6		18.70
2462	11		18.87
2.4GHz WIFI (20MHz 802.11g SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.17
2437	6		17.77
2462	11		17.58
2.4GHz WIFI (20MHz 802.11n SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.13
2437	6		17.80
2462	11		17.62
2.4GHz WIFI (20MHz 802.11ax SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	14.78
2437	6		17.76
2462	11		17.43

Table 7-4

2.4 GHz WLAN Maximum Average RF Power – Antenna WF7b, Variant 2

2.4GHz WIFI (20MHz 802.11b SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	18.60
2437	6		18.63
2462	11		18.77
2.4GHz WIFI (20MHz 802.11g SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.20
2437	6		17.76
2462	11		17.65
2.4GHz WIFI (20MHz 802.11n SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.21
2437	6		17.77
2462	11		17.66

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 33 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

2.4GHz WIFI (20MHz 802.11ax SISO ANT WF7b)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.06
2437	6		17.79
2462	11		17.48

7.2 5 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 7-5
5 GHz WLAN Maximum Average RF Power – Antenna WF8, Variant 1

5GHz WIFI (40MHz 802.11n SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.83
	5230	46	15.21
UNII-2A	5270	54	16.42
	5310	62	15.73
5GHz WIFI (40MHz 802.11ac SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.93
	5230	46	16.13
UNII-2A	5270	54	15.95
	5310	62	15.46
5GHz WIFI (40MHz 802.11ax SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	13.38
	5230	46	16.15
UNII-2A	5270	54	15.98
	5310	62	14.41
5GHz WIFI (80MHz 802.11ac SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	13.85
	5610	122	15.61
	5690	138	15.56
UNII-3	5775	155	16.32
5GHz WIFI (80MHz 802.11ax SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	13.61
	5610	122	15.19
	5690	138	15.10
UNII-3	5775	155	16.36

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 34 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 7-6
5 GHz WLAN Maximum Average RF Power – Antenna WF8, Variant 2

5GHz WIFI (40MHz 802.11n SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.76
	5230	46	15.13
UNII-2A	5270	54	16.40
	5310	62	16.02
5GHz WIFI (40MHz 802.11ac SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.96
	5230	46	16.13
UNII-2A	5270	54	16.09
	5310	62	15.66
5GHz WIFI (40MHz 802.11ax SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	13.49
	5230	46	16.07
UNII-2A	5270	54	16.09
	5310	62	14.40
5GHz WIFI (80MHz 802.11ac SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	13.89
	5610	122	15.62
	5690	138	15.61
UNII-3	5775	155	16.19
5GHz WIFI (80MHz 802.11ax SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2C	5530	106	13.59
	5610	122	15.24
	5690	138	15.16
UNII-3	5775	155	16.34

Table 7-7
5 GHz WLAN Maximum Average RF Power – Antenna WF7a, Variant 1

5GHz WIFI (40MHz 802.11n SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.88
	5230	46	14.55
5GHz WIFI (40MHz 802.11ac SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.85
	5230	46	14.67

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 35 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

5GHz WIFI (40MHz 802.11ax SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	13.39
	5230	46	14.56
5GHz WIFI (80MHz 802.11ac SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2A	5290	58	14.99
UNII-2C	5530	106	14.26
	5610	122	14.28
	5690	138	14.08
UNII-3	5775	155	14.25
5GHz WIFI (80MHz 802.11ax SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2A	5290	58	14.62
UNII-2C	5530	106	13.49
	5610	122	14.04
	5690	138	13.93
UNII-3	5775	155	14.32

Table 7-8
5 GHz WLAN Maximum Average RF Power – Antenna WF7a, Variant 2

5GHz WIFI (40MHz 802.11n SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.64
	5230	46	14.91
5GHz WIFI (40MHz 802.11ac SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.81
	5230	46	14.77
5GHz WIFI (40MHz 802.11ax SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	13.39
	5230	46	14.67
5GHz WIFI (80MHz 802.11ac SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2A	5290	58	14.83
UNII-2C	5530	106	14.03
	5610	122	14.02
	5690	138	14.05
UNII-3	5775	155	14.18

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 36 of 95

REV 24.0
05/01/2024

5GHz WIFI (80MHz 802.11ax SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-2A	5290	58	14.76
UNII-2C	5530	106	13.54
	5610	122	13.89
	5690	138	13.97
UNII-3	5775	155	14.29

Table 7-9

5 GHz WLAN Maximum Average RF Power – Antenna WF8 and WF7a MIMO, Variant 1

5GHz WIFI (40MHz 802.11n MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT WF8	ANT WF7a	MIMO
UNII-1	5190	38	14.33	14.23	17.29
	5230	46	15.50	15.39	18.46
UNII-2A	5270	54	15.61	15.60	18.62
	5310	62	14.41	14.37	17.40
5GHz WIFI (80MHz 802.11ac MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT WF8	ANT WF7a	MIMO
UNII-2C	5530	106	12.47	12.58	15.54
	5610	122	14.67	14.47	17.58
	5690	138	14.63	14.77	17.71
UNII-3	5775	155	16.34	14.28	18.44

Table 7-10

5 GHz WLAN Maximum Average RF Power – Antenna WF8 and WF7a MIMO, Variant 2

5GHz WIFI (40MHz 802.11n MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT WF8	ANT WF7a	MIMO
UNII-1	5190	38	14.25	14.00	17.14
	5230	46	15.37	15.03	18.21
UNII-2A	5270	54	15.53	15.10	18.33
	5310	62	14.27	14.48	17.39
5GHz WIFI (80MHz 802.11ac MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT WF8	ANT WF7a	MIMO
UNII-2C	5530	106	12.42	12.68	15.56
	5610	122	14.65	14.48	17.58
	5690	138	14.75	14.57	17.67
UNII-3	5775	155	16.26	14.36	18.42

7.3 6 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 7-11

6 GHz WLAN Maximum Average RF Power – Antenna WF8, Variant 1

6GHz WIFI (160MHz 802.11ax SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	14.22
	6345	79	13.43
UNII-6	6505	111	12.45
UNII-7	6665	143	14.35
UNII-8	6985	207	10.82

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 37 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 7-12
6 GHz WLAN Maximum Average RF Power – Antenna WF8, Variant 2

6GHz WIFI (160MHz 802.11ax SISO ANT WF8)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	14.23
	6345	79	13.39
UNII-6	6505	111	12.70
UNII-7	6665	143	14.37
UNII-8	6985	207	10.28

Table 7-13
6 GHz WLAN Maximum Average RF Power – Antenna WF7a, Variant 1

6GHz WIFI (160MHz 802.11ax SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	12.51
	6345	79	12.00
UNII-6	6505	111	11.69
UNII-7	6665	143	12.23
UNII-8	6985	207	11.02

Table 7-14
6 GHz WLAN Maximum Average RF Power – Antenna WF7a, Variant 2

6GHz WIFI (160MHz 802.11ax SISO ANT WF7a)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	6025	15	12.26
	6345	79	11.74
UNII-6	6505	111	11.44
UNII-7	6665	143	12.00
UNII-8	6985	207	11.01

7.4 6 GHz WLAN Maximum Time-Averaged Conducted Powers

Table 7-15
6 GHz WLAN Maximum Average RF Power – Antenna WF8 and WF7a MIMO, Variant 1

6GHz WIFI (160MHz 802.11ax MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT WF8	ANT WF7a	MIMO
UNII-5	6025	15	13.90	12.66	16.33
	6345	79	13.57	12.06	15.89
UNII-6	6505	111	7.16	7.52	10.35
UNII-7	6665	143	14.45	12.58	16.63
UNII-8	6985	207	8.06	8.63	11.36

Table 7-16
6 GHz WLAN Maximum Average RF Power – Antenna WF8 and WF7a MIMO, Variant 2

6GHz WIFI (160MHz 802.11ax MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT WF8	ANT WF7a	MIMO
UNII-5	6025	15	14.20	12.87	16.60
	6345	79	13.45	12.13	15.85
UNII-6	6505	111	7.17	7.20	10.20
UNII-7	6665	143	14.13	12.11	16.25
UNII-8	6985	207	8.20	8.41	11.32

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 38 of 95

REV 24.0
05/01/2024

7.5 Notes for WLAN

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The WLAN chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structures to meet the same specifications and functions.
- Two device variants are referenced as Variant 1 and Variant 2 in this report.
- WLAN SAR worst case configuration was spotchecked on Variant 1 and Variant 2.

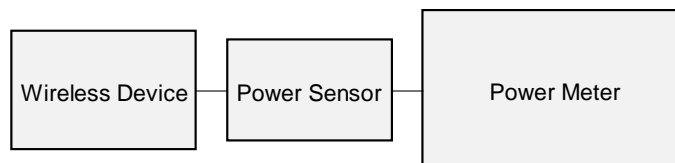


Figure 7-1
Power Measurement Setup

7.6 Bluetooth Maximum Conducted Powers

Table 7-17
Bluetooth Maximum Average RF Power – Antenna WF8, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	18.20	66.069
2441	GFSK	1.0	39	18.19	65.917
2480	GFSK	1.0	78	17.98	62.806

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 39 of 95

REV 24.0
05/01/2024

Table 7-18
Bluetooth Maximum Average RF Power – Antenna WF8, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	18.04	63.680
2441	GFSK	1.0	39	18.27	67.143
2480	GFSK	1.0	78	17.91	61.802

Table 7-19
Bluetooth Maximum Average RF Power – Antenna WF7b, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	19.39	86.896
2441	GFSK	1.0	39	19.35	86.099
2480	GFSK	1.0	78	19.48	88.716

Table 7-20
Bluetooth Maximum Average RF Power – Antenna WF7b, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	19.43	87.700
2441	GFSK	1.0	39	19.25	84.140
2480	GFSK	1.0	78	19.49	88.920

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 40 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

7.7 Bluetooth Reduced Conducted Powers

Table 7-21
Bluetooth 7 dB Reduced Average RF Power – Antenna WF8, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	12.11	16.255
2441	GFSK	1.0	39	12.12	16.293
2480	GFSK	1.0	78	11.99	15.812

Table 7-22
Bluetooth 7 dB Reduced Average RF Power – Antenna WF8, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	12.27	16.866
2441	GFSK	1.0	39	12.09	16.181
2480	GFSK	1.0	78	12.29	16.943

Table 7-23
Bluetooth 7 dB Reduced Average RF Power – Antenna WF7b, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	13.49	22.336
2441	GFSK	1.0	39	13.41	21.928
2480	GFSK	1.0	78	13.32	21.478

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 41 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 7-24
Bluetooth 7 dB Reduced Average RF Power – Antenna WF7b, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	GFSK	1.0	0	13.03	20.091
2441	GFSK	1.0	39	13.21	20.941
2480	GFSK	1.0	78	13.07	20.277

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 42 of 95

REV 24.0
05/01/2024

7.8 Bluetooth Duty Cycle Plots

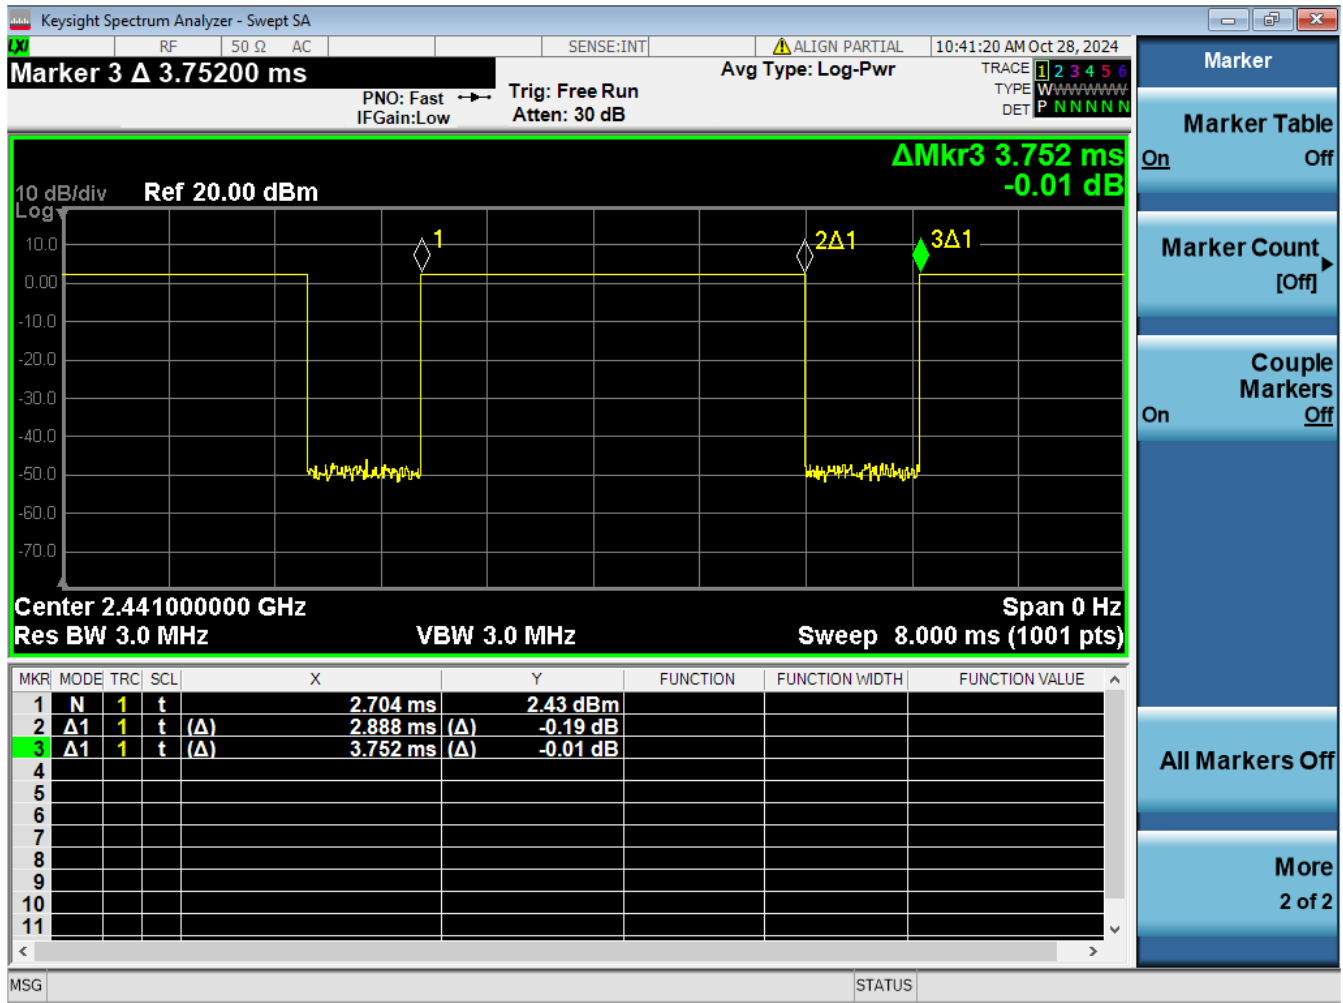


Figure 7-2
Bluetooth Transmission Plot – Antenna WF8, Variant 1

Equation 7-1
Bluetooth Duty Cycle Calculation – Antenna WF8, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 43 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

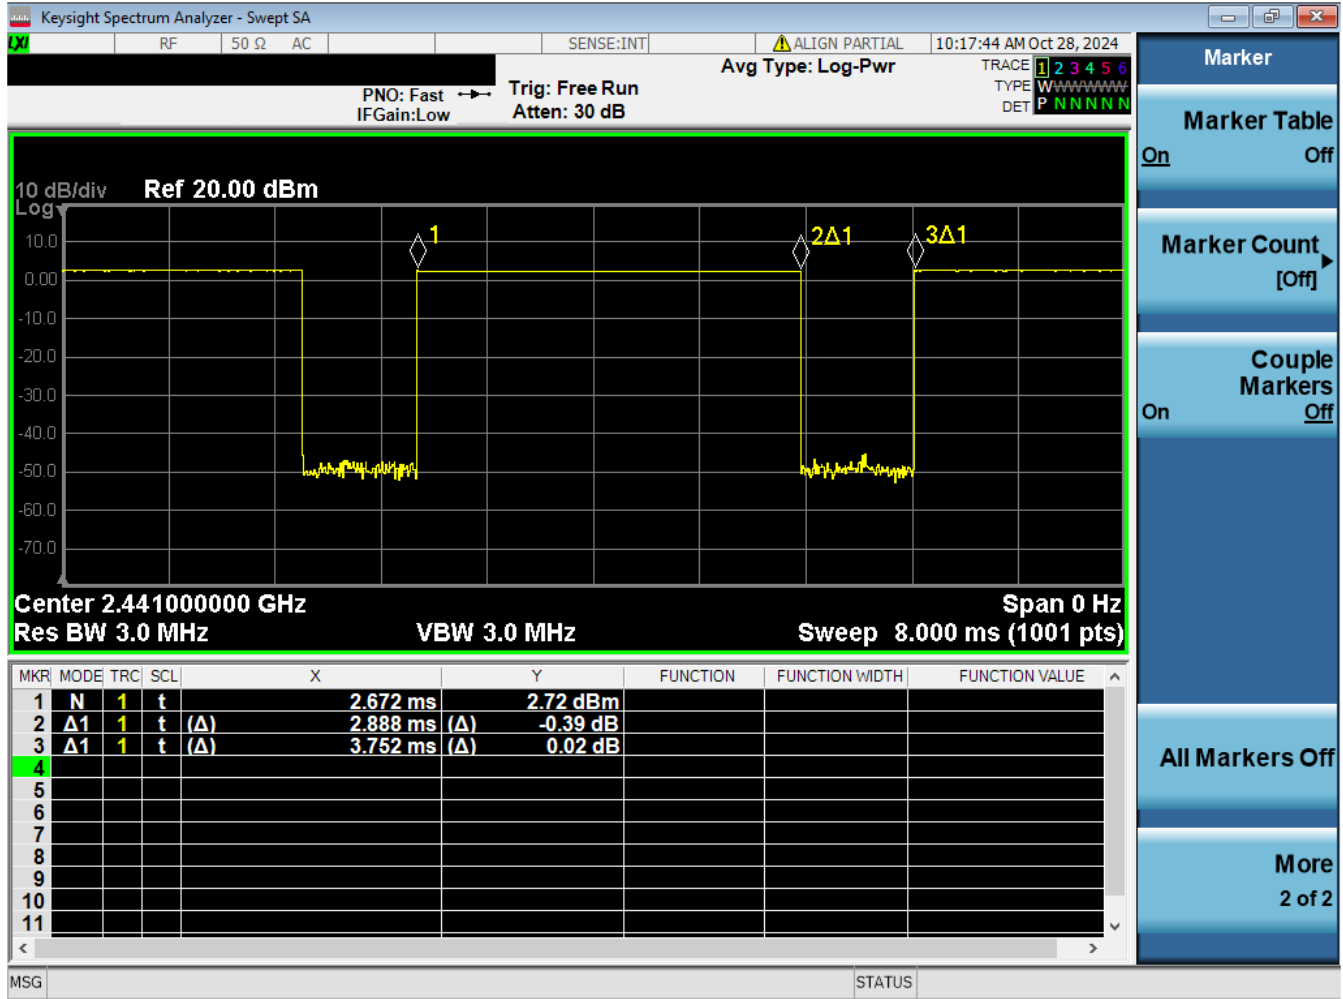


Figure 7-3
Bluetooth Transmission Plot – Antenna WF8, Variant 2

Equation 7-2
Bluetooth Duty Cycle Calculation – Antenna WF8, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.752\ ms} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 44 of 95

REV 24.0
05/01/2024

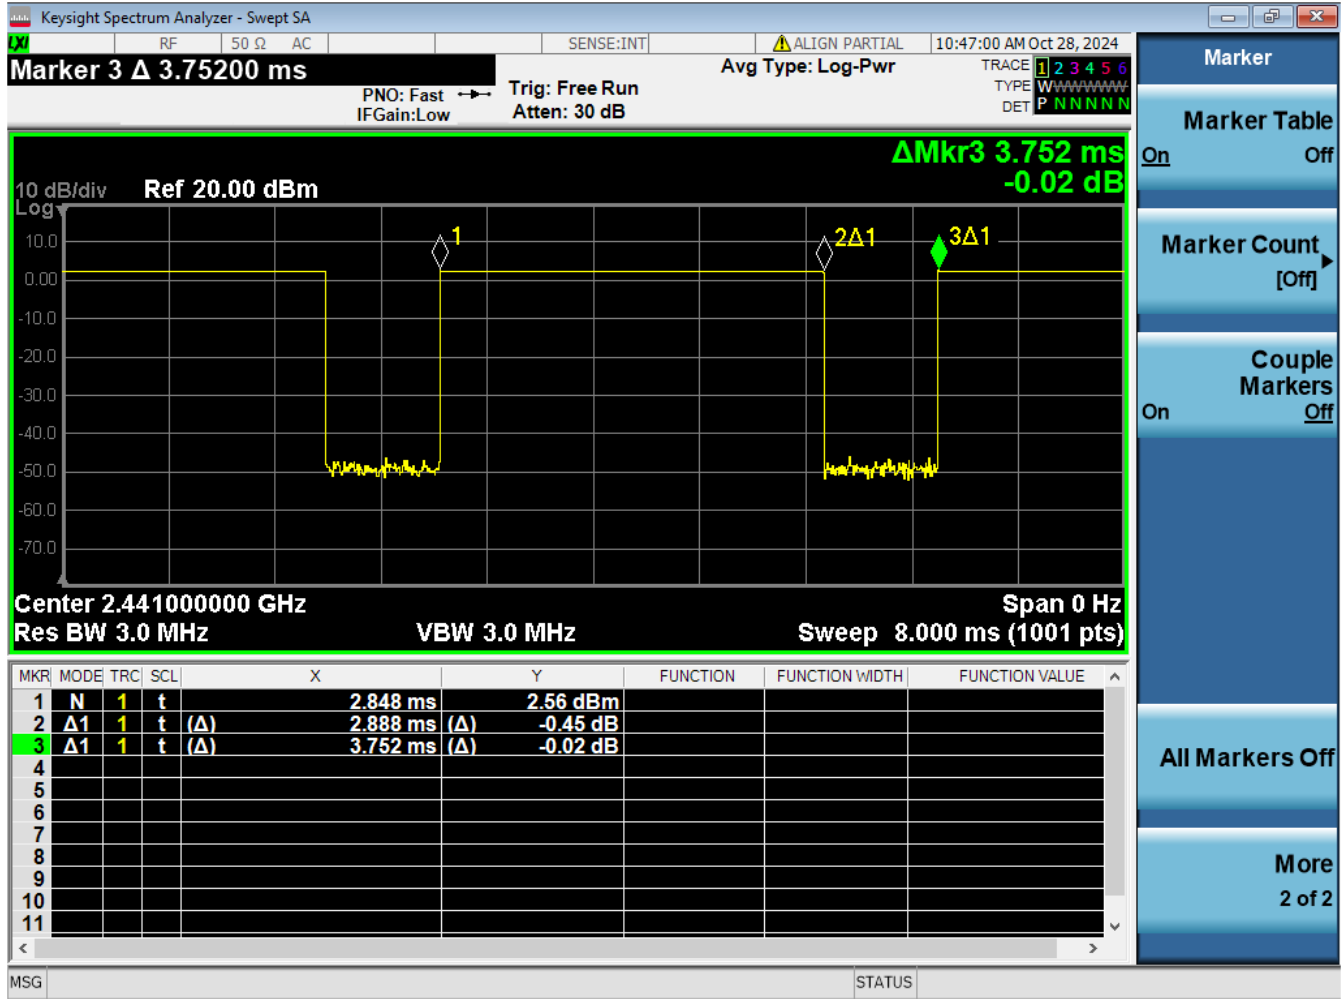


Figure 7-4
Bluetooth Transmission Plot – Antenna WF7b, Variant 1

Equation 7-3
Bluetooth Duty Cycle Calculation – Antenna WF7b, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 45 of 95

REV 24.0
05/01/2024

7.9 802.15.4 Maximum Conducted Powers

Table 7-25
802.15.4 Maximum Average RF Power – Antenna WF8, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	19.48	88.716
2440	O-QPSK	1.0	18	19.76	94.624
2475	O-QPSK	1.0	25	19.72	93.756

Table 7-26
802.15.4 Maximum Average RF Power – Antenna WF8, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	19.30	85.114
2440	O-QPSK	1.0	18	19.65	92.257
2475	O-QPSK	1.0	25	19.64	92.045

Table 7-27
802.15.4 Maximum Average RF Power – Antenna WF7b, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	20.68	116.950
2440	O-QPSK	1.0	18	20.39	109.396
2475	O-QPSK	1.0	25	20.35	108.393

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 47 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 7-28
802.15.4 Maximum Average RF Power – Antenna WF7b, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	20.47	111.429
2440	O-QPSK	1.0	18	20.67	116.681
2475	O-QPSK	1.0	25	20.28	106.660

7.10 802.15.4 Reduced Conducted Powers

Table 7-29
802.15.4 7 dB Reduced Average RF Power – Antenna WF8, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	13.69	23.388
2440	O-QPSK	1.0	18	13.33	21.528
2475	O-QPSK	1.0	25	13.42	21.979

Table 7-30
802.15.4 7 dB Reduced Average RF Power – Antenna WF8, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	13.71	23.496
2440	O-QPSK	1.0	18	13.42	21.979
2475	O-QPSK	1.0	25	13.63	23.067

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 48 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 7-31
802.15.4 7 dB Reduced Average RF Power – Antenna WF7b, Variant 1

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	14.07	25.527
2440	O-QPSK	1.0	18	13.75	23.714
2475	O-QPSK	1.0	25	13.85	24.266

Table 7-32
802.15.4 7 dB Reduced Average RF Power – Antenna WF7b, Variant 2

Frequency [MHz]	Modulation	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2405	O-QPSK	1.0	11	13.81	24.044
2440	O-QPSK	1.0	18	13.97	24.946
2475	O-QPSK	1.0	25	14.11	25.763

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 49 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

7.11 802.15.4 Duty Cycle Plots

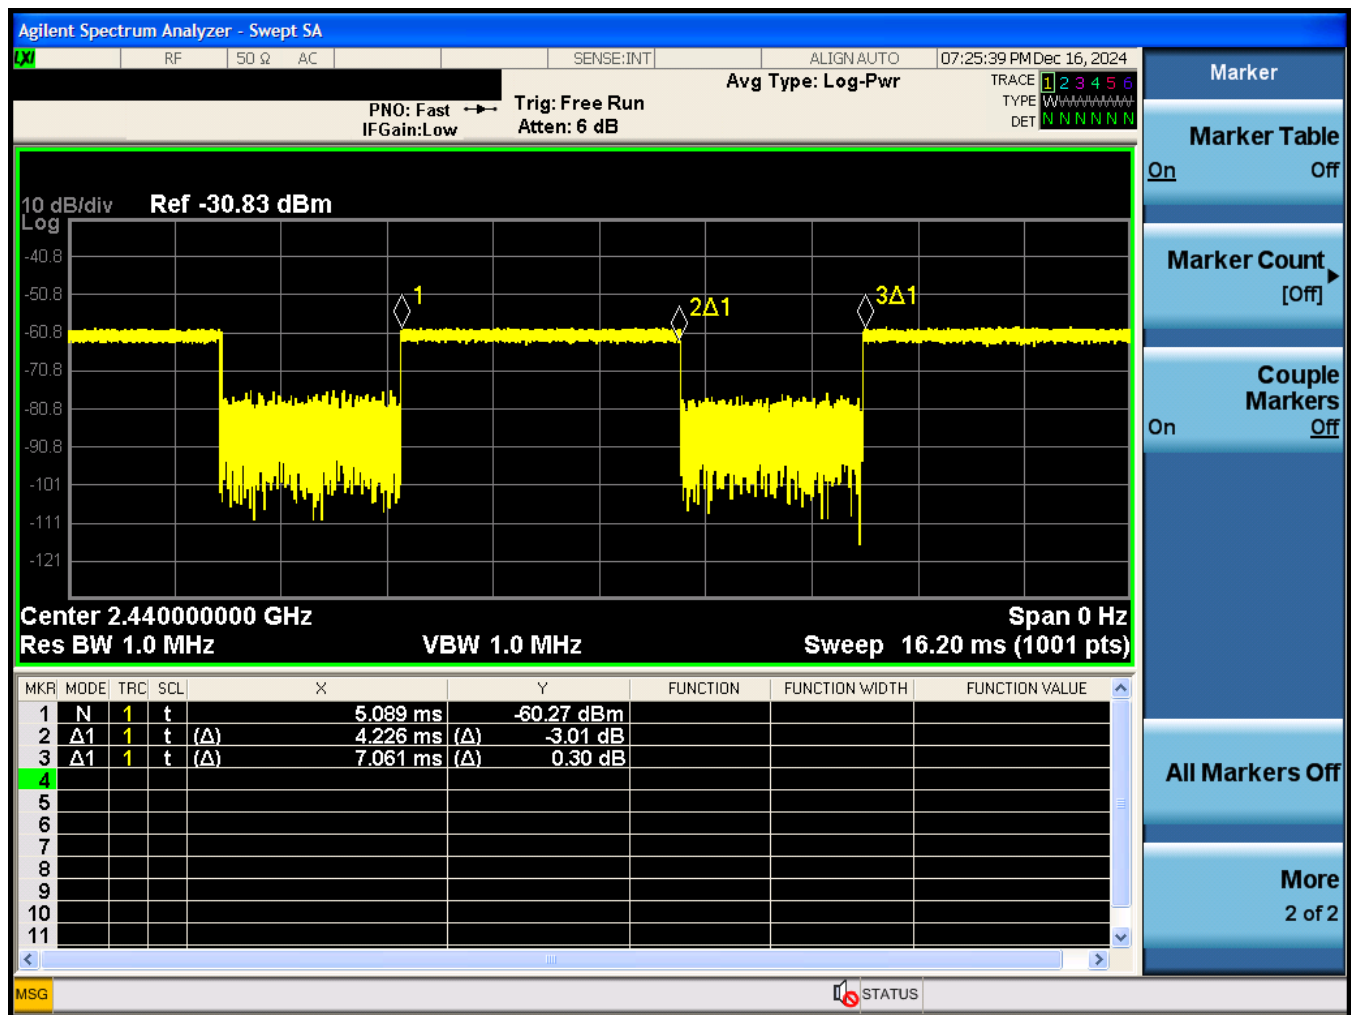


Figure 7-6
802.15.4 Transmission Plot – Antenna WF8 / WF7b, Variant 1

Equation 7-5

802.15.4 Duty Cycle Calculation – Antenna WF8 / WF7b, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{4.226 \text{ ms}}{7.061 \text{ ms}} * 100\% = 59.85\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 50 of 95

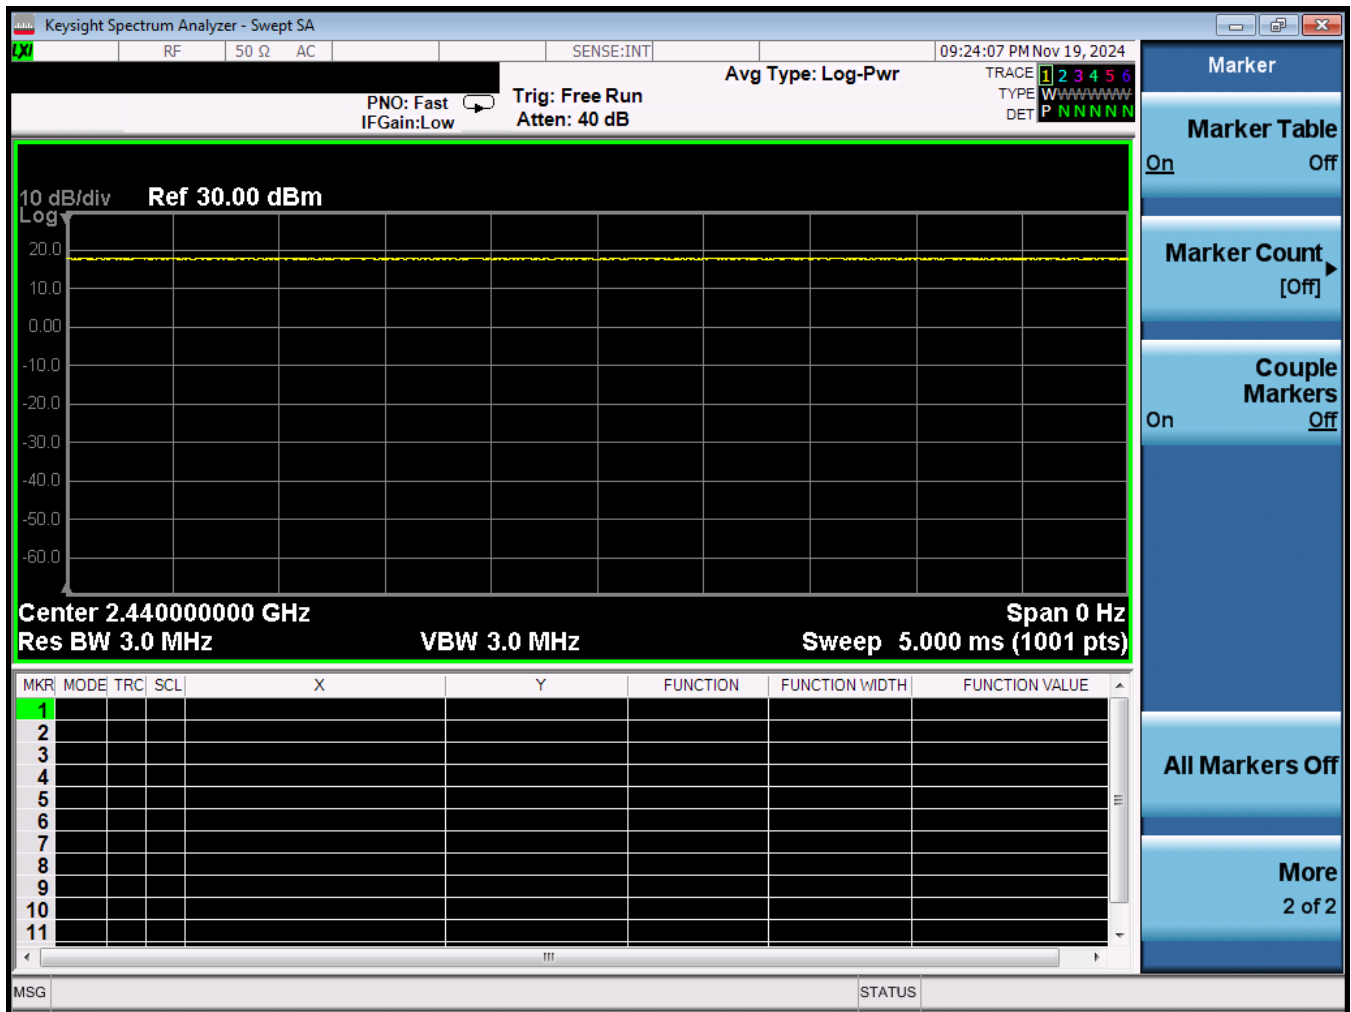


Figure 7-8
802.15.4 Transmission Plot – Antenna WF8 / WF7b, Variant 1 and 2

Equation 7-7
802.15.4 Duty Cycle Calculation – Antenna WF8 / WF7b, Variant 1 and 2

$$\text{Duty Cycle} = 100\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 52 of 95

REV 24.0
05/01/2024

7.12 Bluetooth/802.15.4 Power Reduction Verification Summary

Table 7-33
Bluetooth/802.15.4 Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Scenario Maximum Allowed Tune Up Power [dBm]	Reduced Scenario Maximum Allowed Tune Up Power [dBm]	Maximum Measured Power	Reduced Measured Power	Verdict
					[dBm]	[dBm]	
Ant WF7B	2.4 GHz Bluetooth	5/6 GHz WLAN Ant WF7A ON	20.0	14.0	18.42	12.7	PASS
	2.4 GHz Bluetooth	5/6 GHz WLAN Ant WF8 ON	20.0	14.0	18.42	12.7	PASS
	802.15.4	5/6 GHz WLAN Ant WF7A + Ant WF8 ON	21.5	15.0	19.94	14.00	PASS
Ant WF8	802.15.4	5/6 GHz WLAN Ant WF7A ON	21.0	14.0	18.55	12.42	PASS
	802.15.4	5/6 GHz WLAN Ant WF8 ON	21.0	14.0	18.55	12.42	PASS
	2.4 GHz Bluetooth	5/6 GHz WLAN Ant WF7A + Ant WF8 ON	18.5	13.0	17.49	11.42	PASS

Maximum power will not exceed minimum of (SAR max cap, Reg max cap). Power reduction backoff for simultaneous transmission is applied to SAR max cap for each antenna. Reduced power level will not exceed minimum of (SAR max cap-power reduction backoff, Reg max cap).

Per manufacturer, 2.4 GHz Bluetooth and 802.15.4 share the same antenna path and reduces with the same power backoff when it transmits simultaneously with cellular and 5/6 GHz WLAN antennas. Therefore, conducted power measurements were measured for both mode/band as shown above and applied condition. All conducted power measurements were verified to be below the maximum allowed.

7.13 Notes for Bluetooth/802.15.4

- The Bluetooth/802.15.4 chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structures to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- Bluetooth/802.15.4 SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining Bluetooth/802.15.4 configurations.
- Full power measurements were performed for Variant 1 and Variant 2 per FCC KDB Procedures 248227.

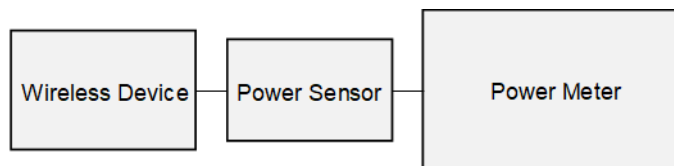


Figure 7-9
Power Measurement Setup

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 53 of 95

REV 24.0
05/01/2024

7.14 NB UNII Maximum Conducted Powers

Table 7-34

NB UNII 1 Maximum Average RF Power – Antenna WF8, Variant 1

Type	Band	Frequency	Channel	Average
HDR-8	U-NII 1	5162	Low	12.83
		5204	Mid	12.79
		5245	High	12.85

Table 7-35

NB UNII 1 Maximum Average RF Power – Antenna WF8, Variant 2

Type	Band	Frequency	Channel	Average
HDR-8	U-NII 1	5162	Low	12.76
		5204	Mid	12.81
		5245	High	12.82

Table 7-36

NB UNII 1 Maximum Average RF Power – Antenna WF7a, Variant 1

Type	Band	Frequency	Channel	Average
HDR-8	U-NII 1	5162	Low	13.36
		5204	Mid	13.23
		5245	High	13.20

Table 7-37

NB UNII 1 Maximum Average RF Power – Antenna WF7a, Variant 2

Type	Band	Frequency	Channel	Average
HDR-8	U-NII 1	5162	Low	13.15
		5204	Mid	13.03
		5245	High	13.09

Table 7-38

NB UNII 3 Maximum Average RF Power – Antenna WF8, Variant 1

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	12.50
		5789	Mid	12.45
		5844	High	12.32

Table 7-39

NB UNII 3 Maximum Average RF Power – Antenna WF8, Variant 2

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	12.52
		5789	Mid	12.58
		5844	High	12.47

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 54 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 7-40
NB UNII 3 Maximum Average RF Power – Antenna WF7a, Variant 1

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	12.40
		5789	Mid	12.60
		5844	High	12.51

Table 7-41
NB UNII 3 Maximum Average RF Power – Antenna WF7a, Variant 2

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	12.49
		5789	Mid	12.51
		5844	High	12.46

7.15 NB UNII Reduced Conducted Powers

Table 7-42
NB UNII-1 7 dB Reduced Average RF Power – Antenna WF8, Variant 1

Type	Band	Frequency	Channel	Average
HDR-4	U-NII 1	5162	Low	9.42
		5204	Mid	9.36
		5245	High	9.48

Table 7-43
NB UNII-1 7 dB Reduced Average RF Power – Antenna WF8, Variant 2

Type	Band	Frequency	Channel	Average
HDR-4	U-NII 1	5162	Low	9.44
		5204	Mid	9.46
		5245	High	9.58

Table 7-44
NB UNII-1 7 dB Reduced Average RF Power – Antenna WF7a, Variant 1

Type	Band	Frequency	Channel	Average
BDR	U-NII 1	5162	Low	8.56
		5204	Mid	8.72
		5245	High	8.71

Table 7-45
NB UNII-1 7 dB Reduced Average RF Power – Antenna WF7a, Variant 2

Type	Band	Frequency	Channel	Average
BDR	U-NII 1	5162	Low	8.91
		5204	Mid	8.84
		5245	High	8.86

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 55 of 95

REV 24.0
05/01/2024

Table 7-46
NB UNII-3 7 dB Reduced Average RF Power – Antenna WF8, Variant 1

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	8.36
		5789	Mid	8.30
		5844	High	8.05

Table 7-47
NB UNII-3 7 dB Reduced Average RF Power – Antenna WF8, Variant 2

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	8.57
		5789	Mid	8.46
		5844	High	8.24

Table 7-48
NB UNII-3 7 dB Reduced Average RF Power – Antenna WF7a, Variant 1

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	8.24
		5789	Mid	8.02
		5844	High	8.01

Table 7-49
NB UNII-3 7 dB Reduced Average RF Power – Antenna WF7a, Variant 2

Type	Band	Frequency	Channel	Average
BDR	U-NII 3	5733	Low	7.88
		5789	Mid	7.89
		5844	High	7.99

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 56 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

7.16 NB UNII Duty Cycle Plots

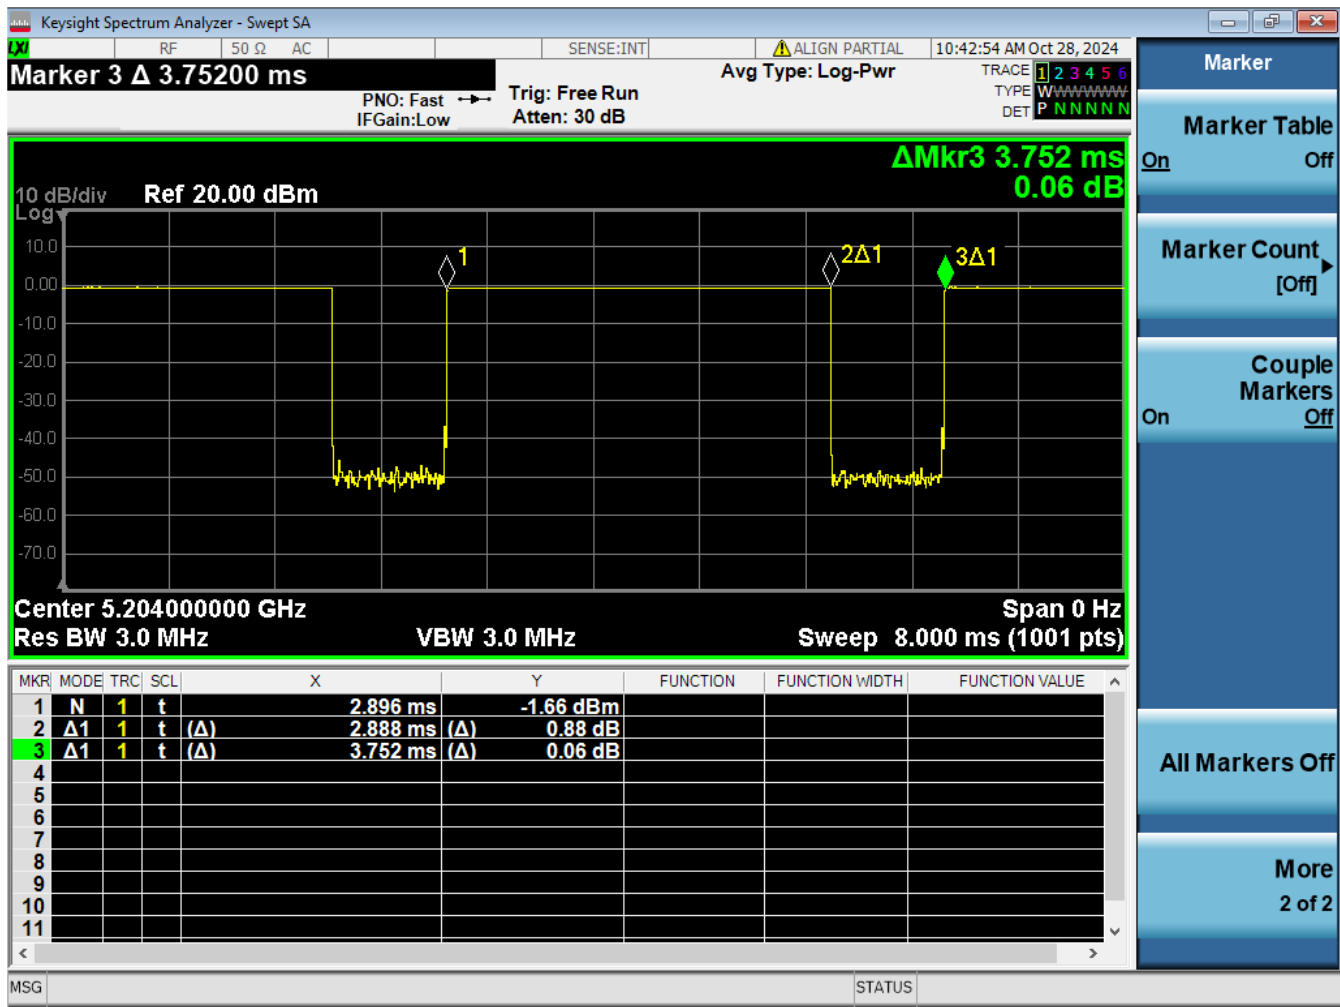


Figure 7-10
NB UNII 1 (HDR8) Transmission Plot – Antenna WF8, Variant 1

Equation 7-8
NB UNII 1 (HDR8) Duty Cycle Calculation – Antenna WF8, Variant 1

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.752\ ms} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 57 of 95

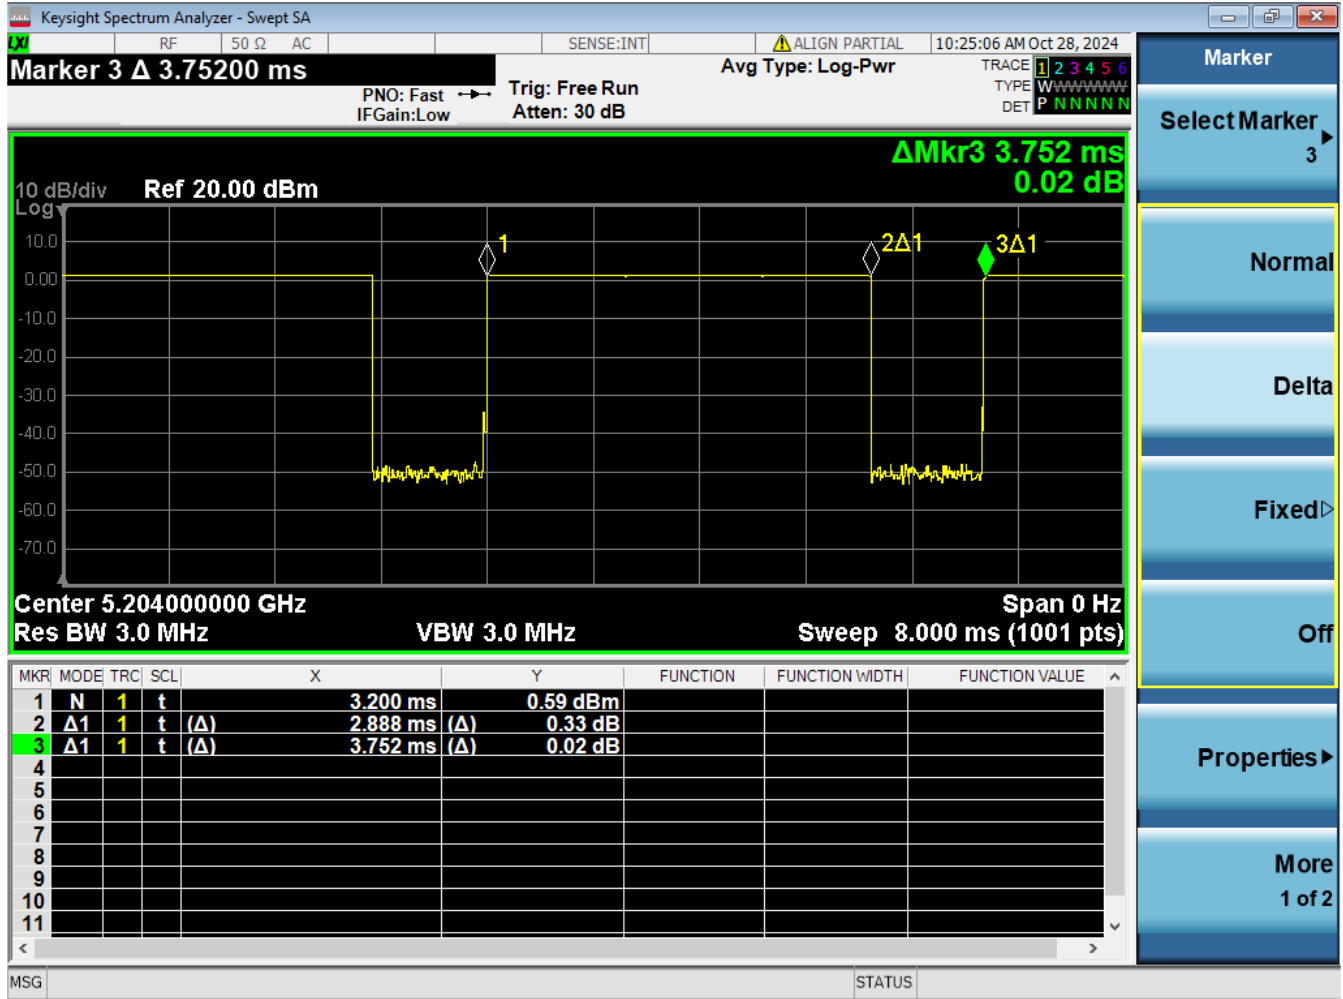


Figure 7-11
NB UNII 1 (HDR8) Transmission Plot – Antenna WF8, Variant 2

Equation 7-9
NB UNII 1 (HDR8) Duty Cycle Calculation – Antenna WF8, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.752\ ms} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 58 of 95

REV 24.0
05/01/2024


$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.871 \text{ ms}}{3.751 \text{ ms}} * 100\% = 76.54\%$$

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

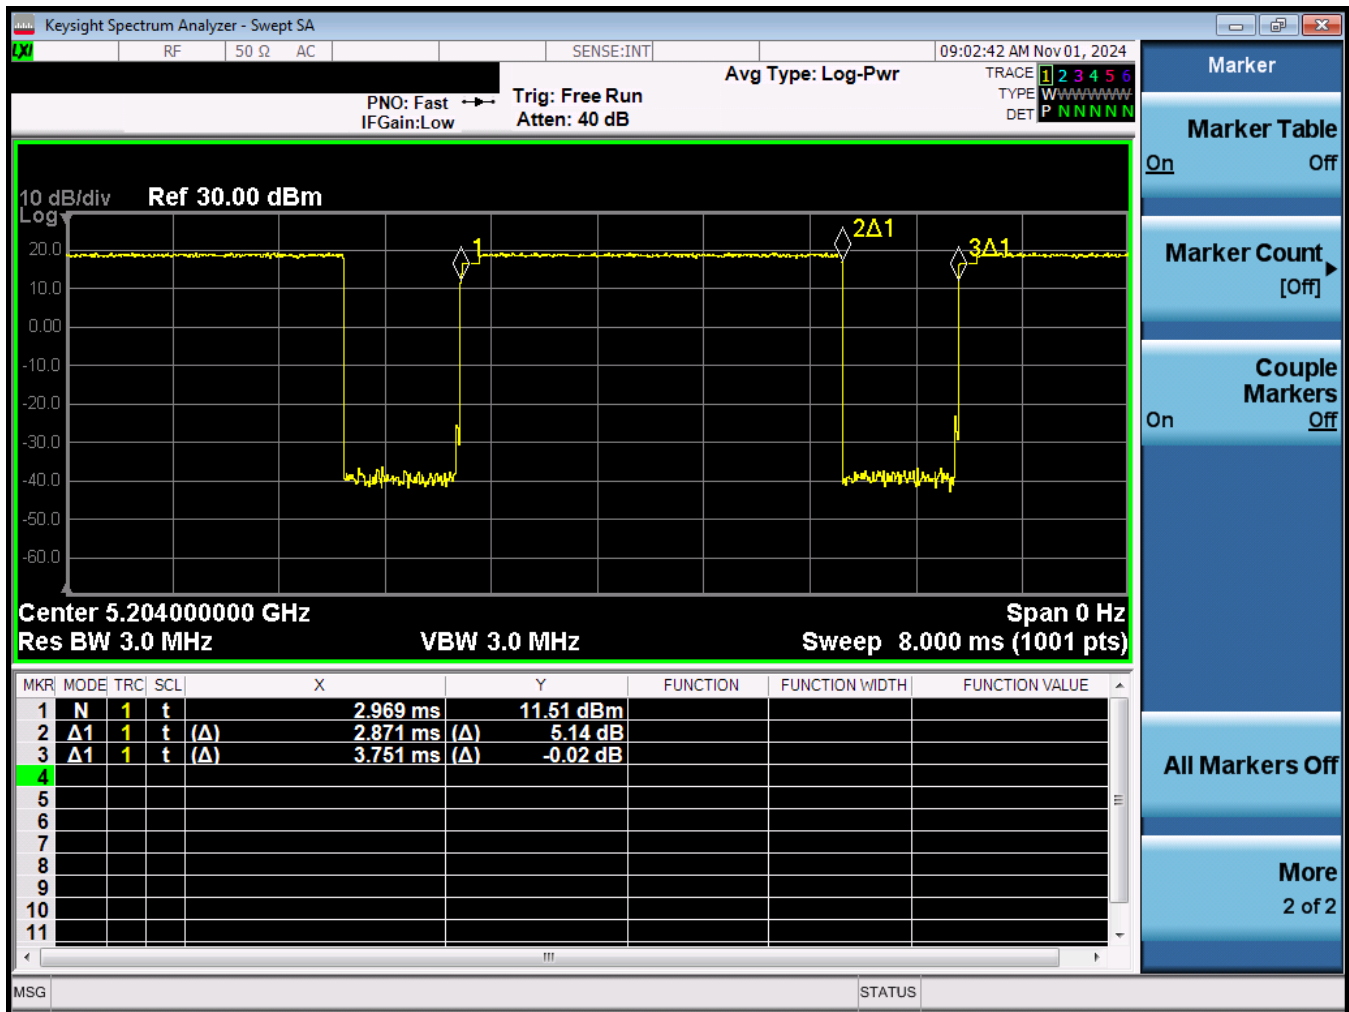


Figure 7-13
NB UNII 1 (HDR4) Transmission Plot – Antenna WF8, Variant 2

Equation 7-11
NB UNII 1 (HDR4) Duty Cycle Calculation – Antenna WF8, Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.871 \text{ ms}}{3.751 \text{ ms}} * 100\% = 76.54\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 60 of 95

REV 24.0
05/01/2024

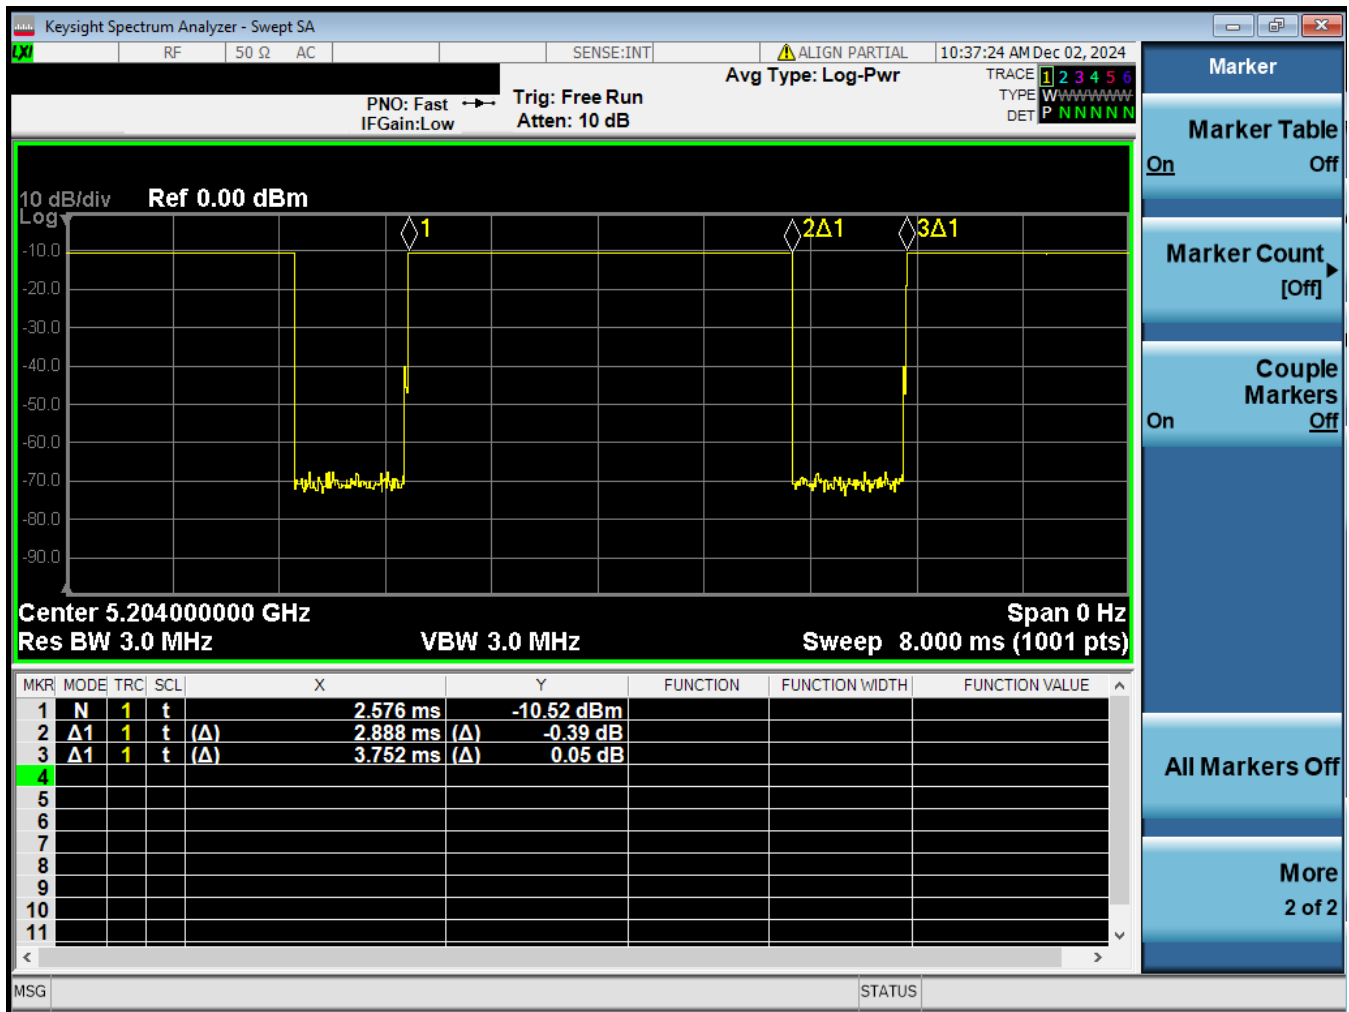


Figure 7-14
NB UNII 1 (BDR) Transmission Plot – Antenna WF8, Variant 1

Equation 7-12
NB UNII 1 (BDR) Duty Cycle Calculation – Antenna WF8, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 61 of 95

REV 24.0
05/01/2024

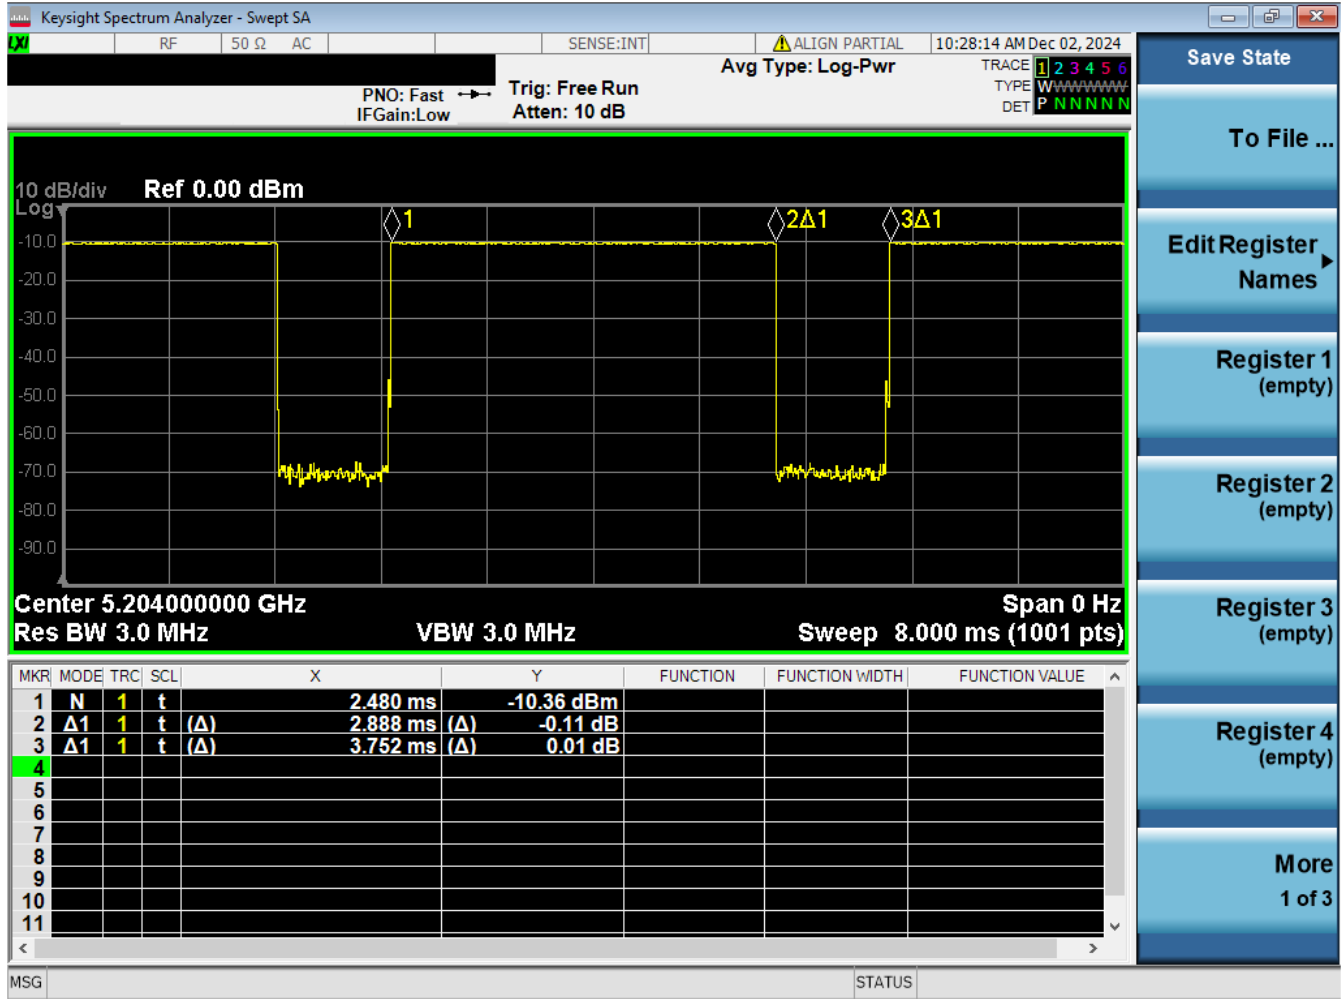


Figure 7-15
NB UNII 1 (BDR) Transmission Plot – Antenna WF8, Variant 2

Equation 7-13
NB UNII 1 (BDR) Duty Cycle Calculation – Antenna WF8, Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 62 of 95

REV 24.0
05/01/2024

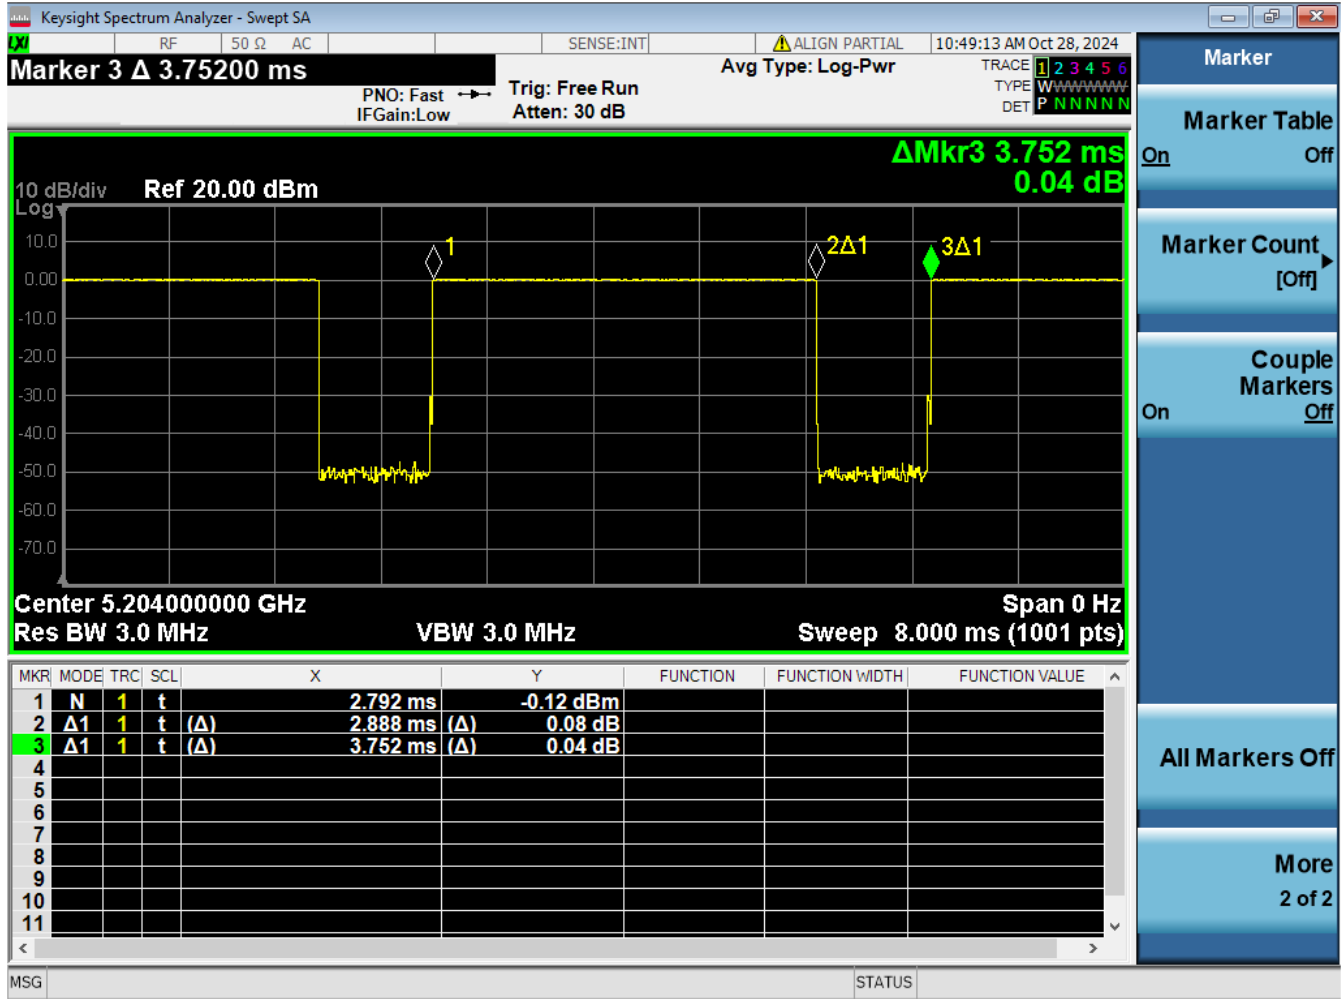


Figure 7-16
NB UNII 1 (HDR8) Transmission Plot – Antenna WF7a, Variant 1

Equation 7-14
NB UNII 1 (HDR8) Duty Cycle Calculation – Antenna WF7a, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 63 of 95

REV 24.0
05/01/2024

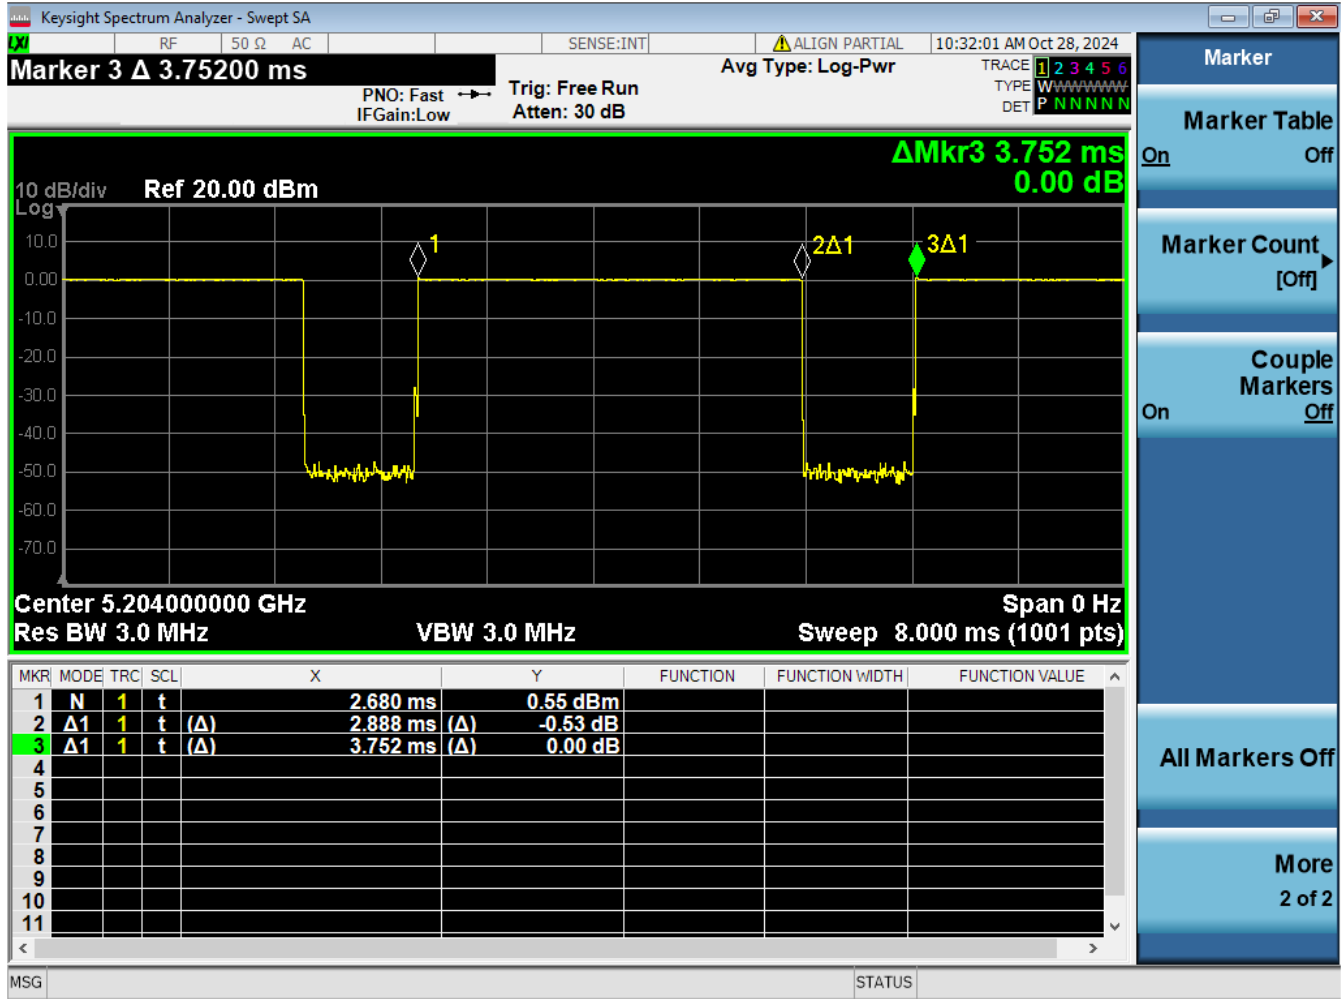


Figure 7-17
NB UNII 1 (HDR8) Transmission Plot – Antenna WF7a, Variant 2

Equation 7-15
NB UNII 1 (HDR8) Duty Cycle Calculation – Antenna WF7a, Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 64 of 95

REV 24.0
05/01/2024

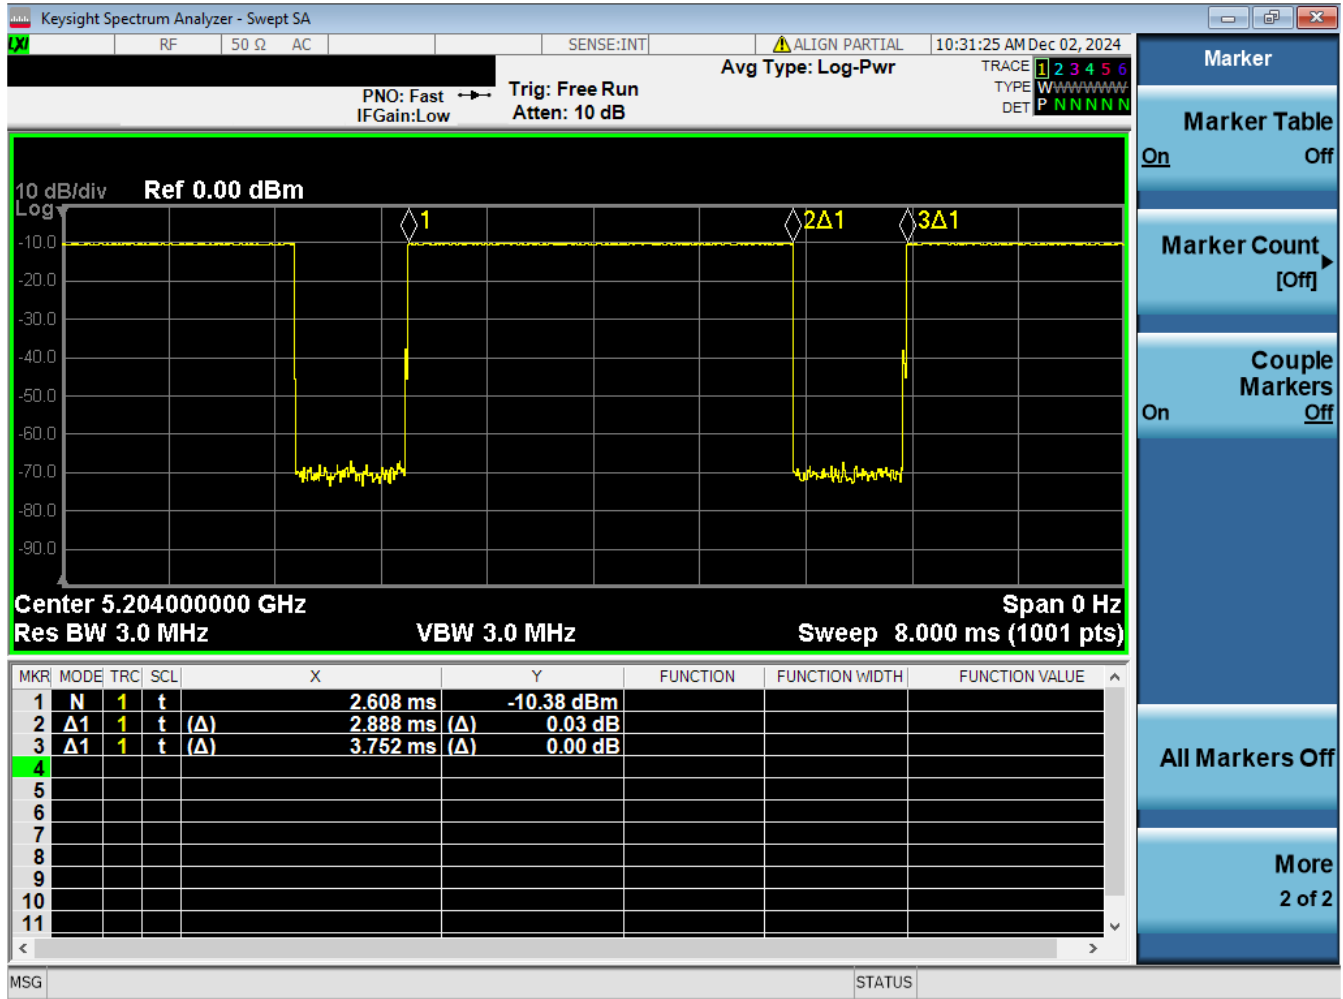


Figure 7-19
NB UNII 1 (BDR) Transmission Plot – Antenna WF7a, Variant 2

Equation 7-17
NB UNII 1 (BDR) Duty Cycle Calculation – Antenna WF7a, Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 66 of 95

REV 24.0
05/01/2024

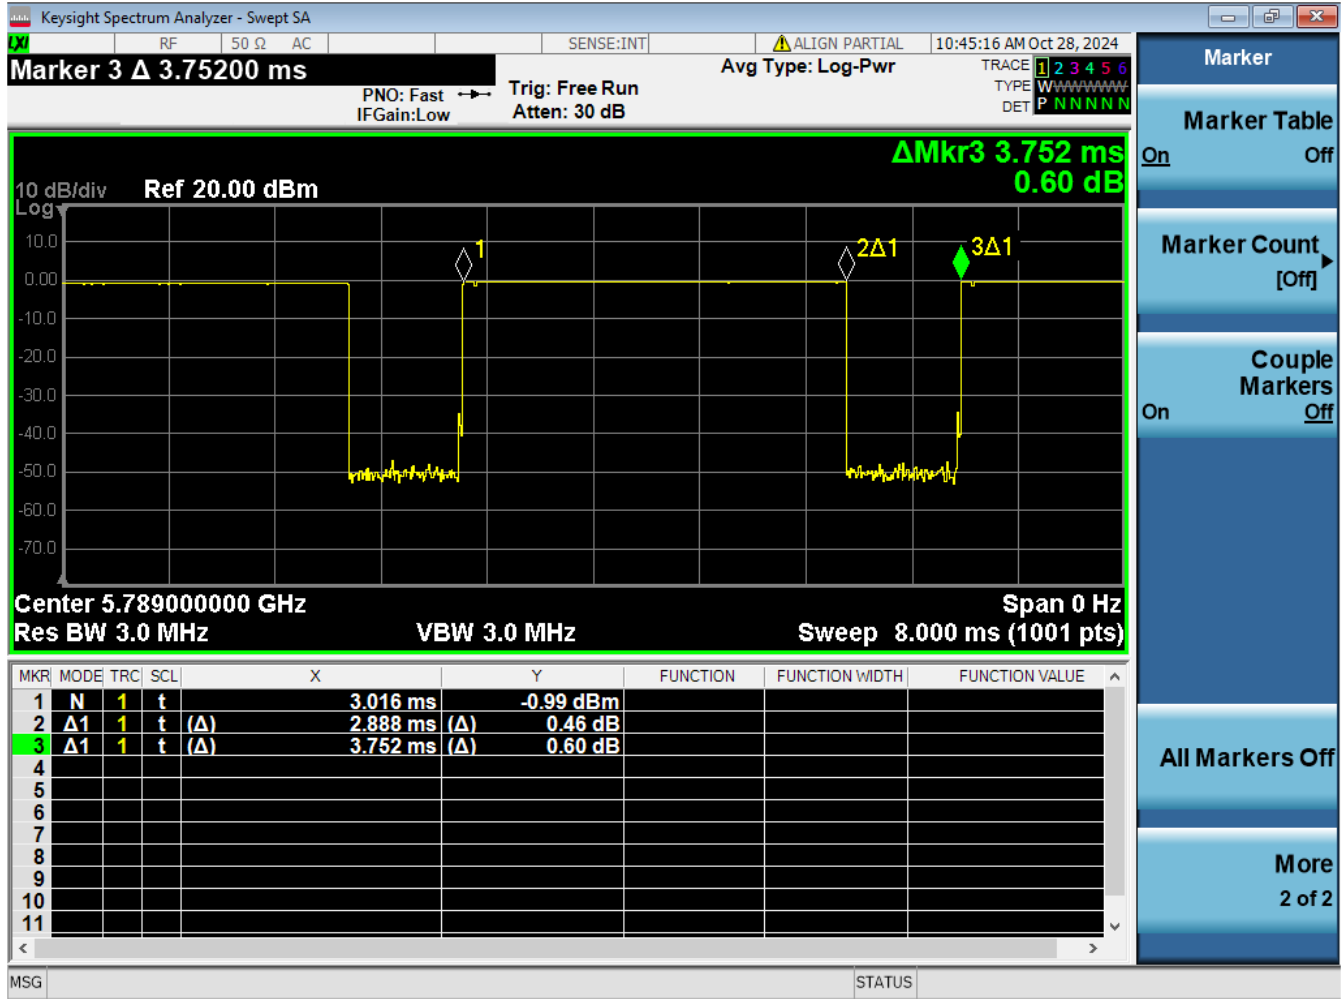


Figure 7-20
NB UNII 3 (BDR) Transmission Plot – Antenna WF8, Variant 1

Equation 7-18
NB UNII 3 (BDR) Duty Cycle Calculation – Antenna WF8, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 67 of 95

REV 24.0
05/01/2024

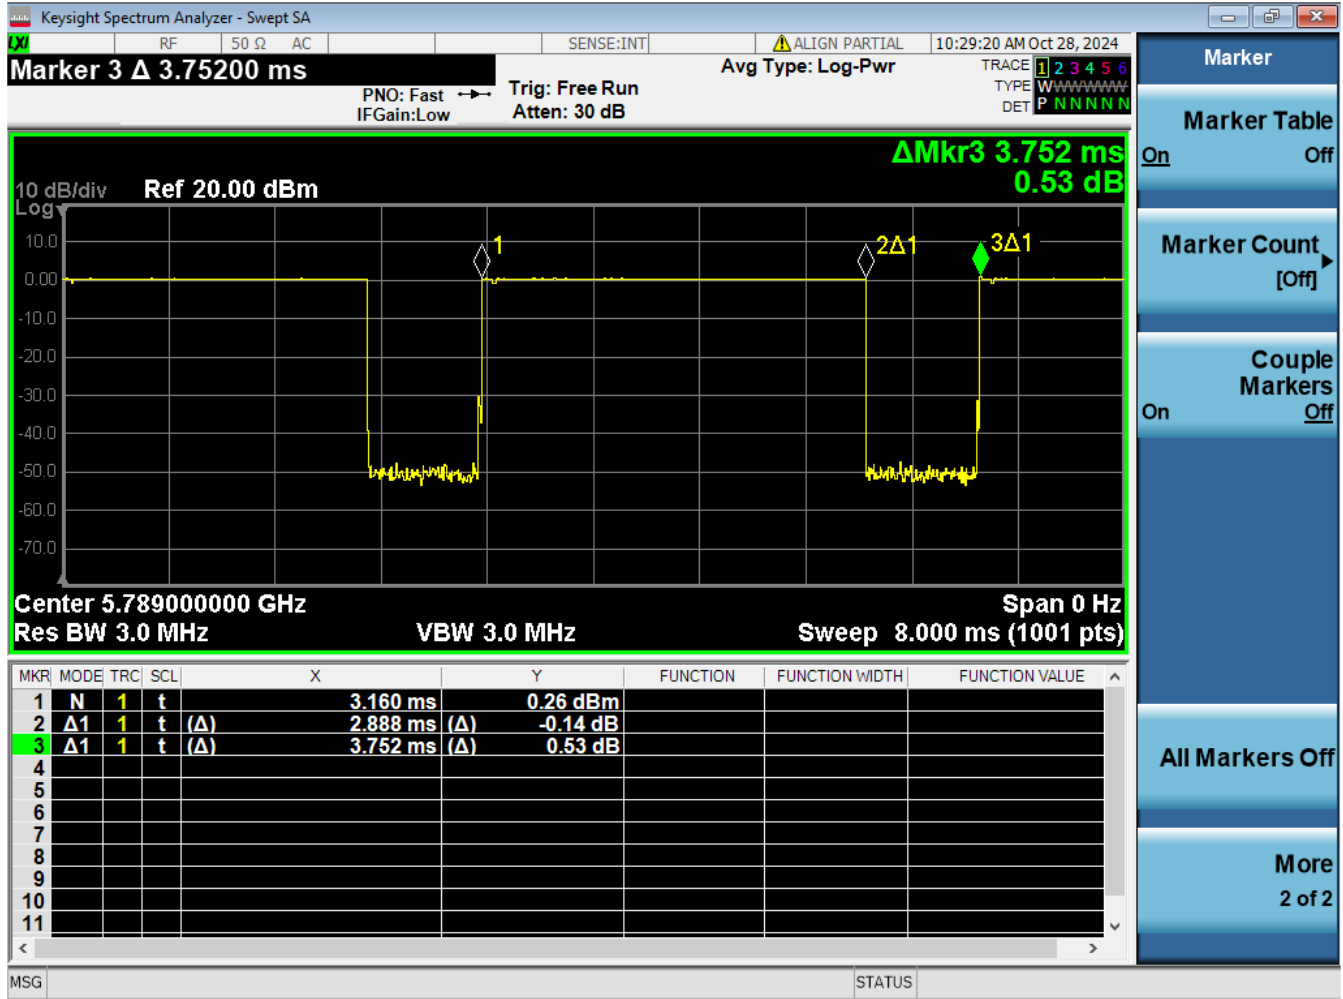


Figure 7-21
NB UNII 3 (BDR) Transmission Plot – Antenna WF8, Variant 2

Equation 7-19
NB UNII 3 (BDR) Duty Cycle Calculation – Antenna WF8, Variant 2

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 68 of 95

REV 24.0
05/01/2024

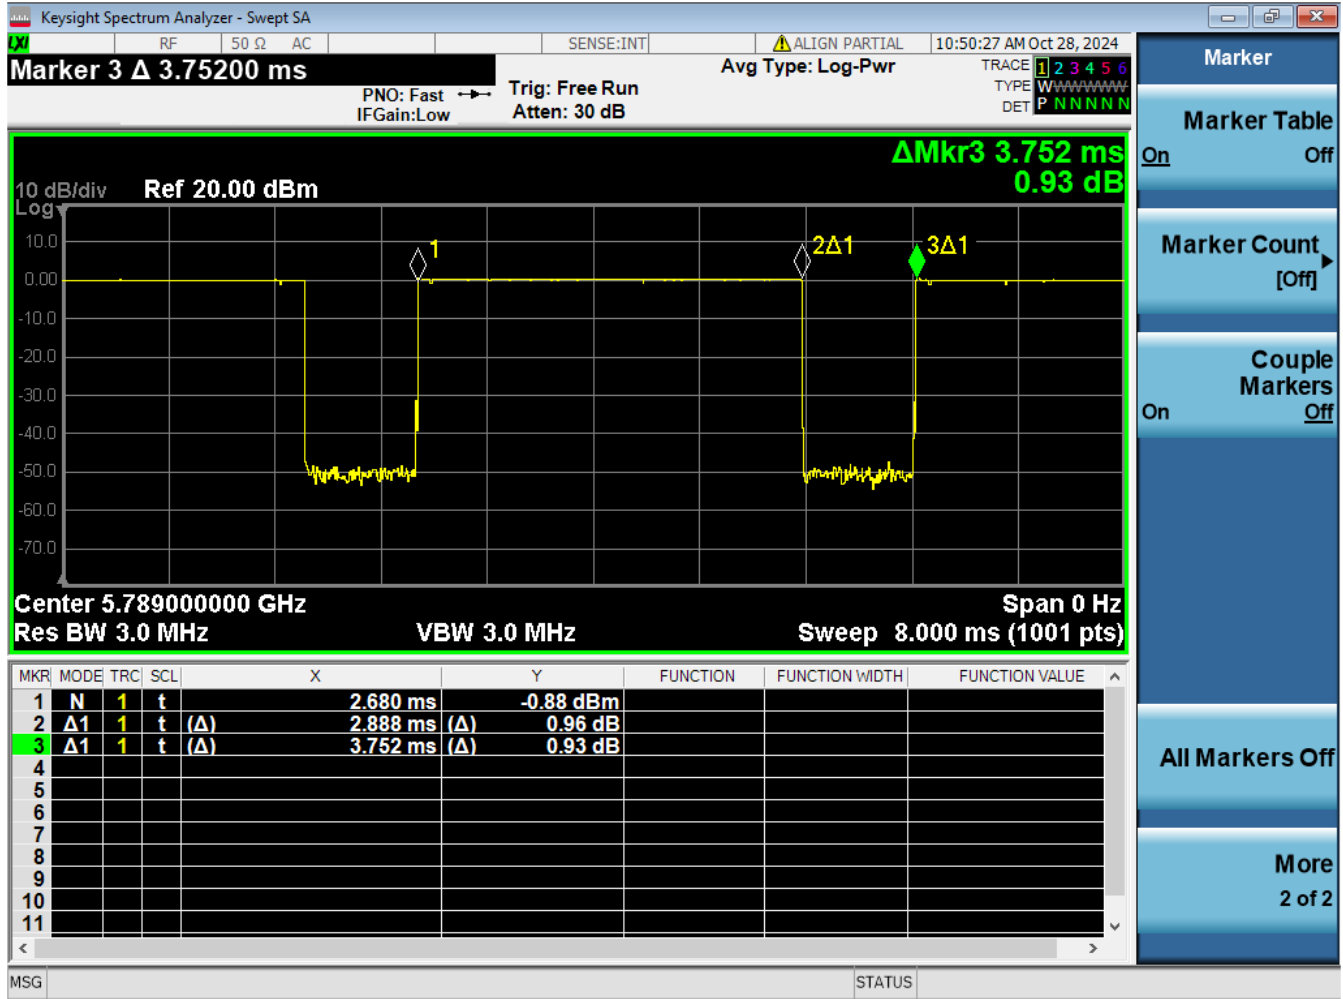


Figure 7-22
NB UNII 3 (BDR) Transmission Plot – Antenna WF7a, Variant 1

Equation 7-20
NB UNII 3 (BDR) Duty Cycle Calculation – Antenna W7a, Variant 1

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.888 \text{ ms}}{3.752 \text{ ms}} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 69 of 95

REV 24.0
05/01/2024

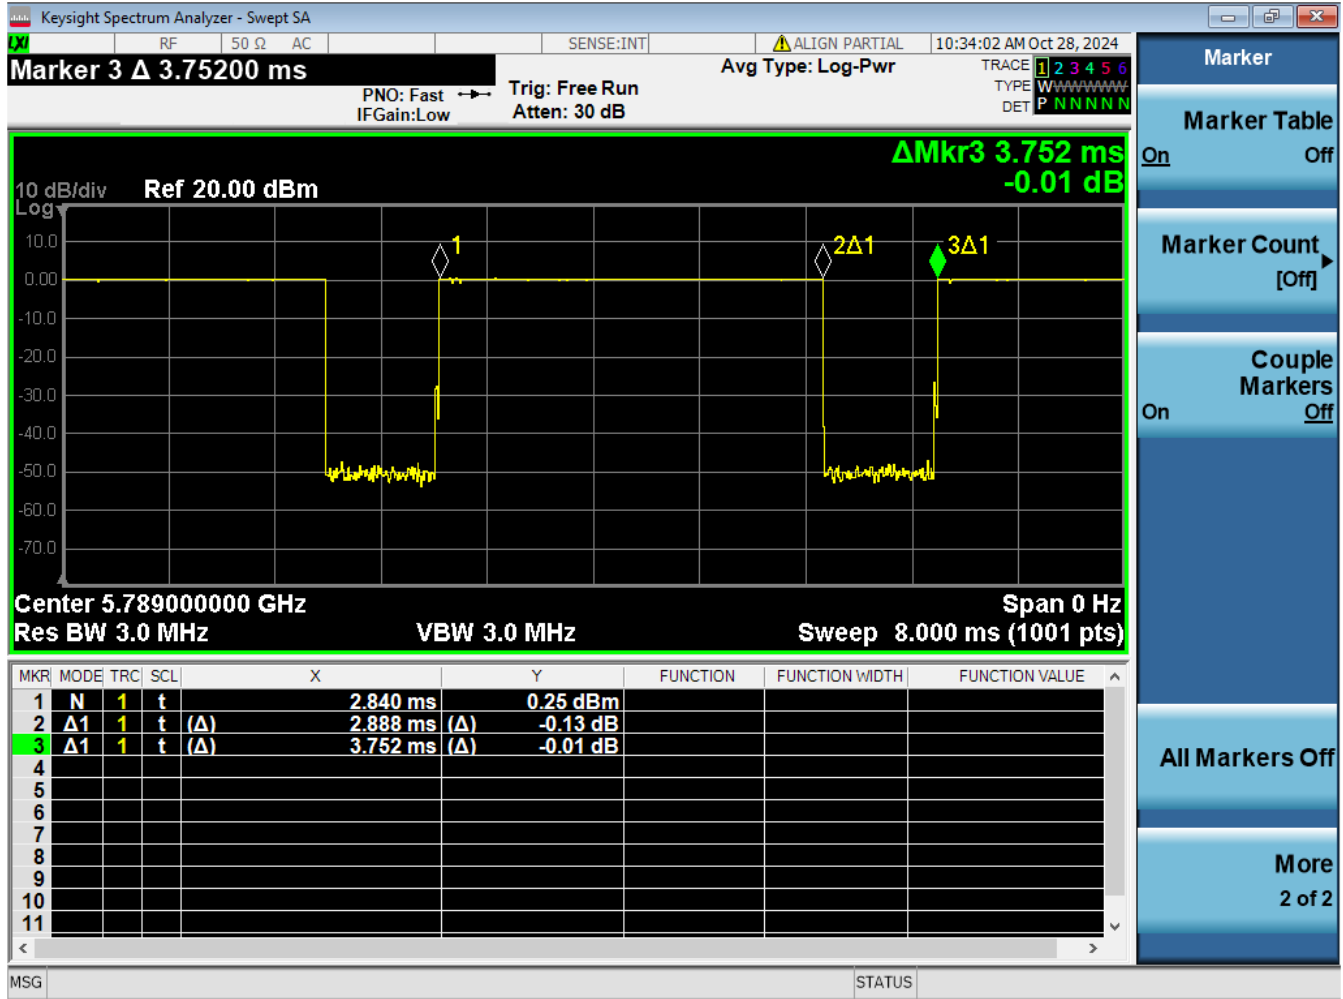


Figure 7-23
NB UNII 3 (BDR) Transmission Plot – Antenna W7a, Variant 2

Equation 7-21
NB UNII 3 (BDR) Duty Cycle Calculation – Antenna WF7a, Variant 2

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.888\ ms}{3.752\ ms} * 100\% = 76.97\%$$

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 70 of 95

REV 24.0
05/01/2024

7.17 NB UNII Power Reduction Verification Summary

Table 7-50
NB UNII Power Reduction Verification

Antenna	Mode/Band	Condition (s)	Maximum Scenario Maximum Allowed Tune Up Power [dBm]	Reduced Scenario Maximum Allowed Tune Up Power [dBm]	Maximum Measured Power	Reduced Measured Power	Verdict
					[dBm]	[dBm]	
Ant WF7a	NB UNII	2.4 GHz WLAN Ant WF7B ON	13.5	9.0	11.52	7.91	PASS
	NB UNII	2.4 GHz WLAN Ant WF8 ON	13.5	9.0	11.52	7.91	PASS
	NB UNII	2.4 GHz WLAN Ant WF7B + Ant WF8 ON	13.5	9.0	11.52	7.90	PASS
Ant WF8	NB UNII	2.4 GHz WLAN Ant WF7B ON	13.5	9.5	12.17	8.53	PASS
	NB UNII	2.4 GHz WLAN Ant WF8 ON	13.5	9.5	12.00	8.62	PASS
	NB UNII	2.4 GHz WLAN Ant WF7B + Ant WF8 ON	13.5	9.5	12.17	8.53	PASS

Maximum power will not exceed minimum of (SAR max cap, Reg max cap). Power reduction backoff for simultaneous transmission is applied to SAR max cap for each antenna. Reduced power level will not exceed minimum of (SAR max cap-power reduction backoff, Reg max cap).

Conducted powers were measured for each Mode/Band and applied condition. All conducted power measurements were verified to be within tolerance.

7.18 Notes for NB UNII

- The NB UNII chipset in this device is produced by two different suppliers. The electrically identical modules are manufactured with identical mechanical structure to meet the same specifications and functions. Two device variants are referenced as Variant 1 and Variant 2 in this report.
- NB UNII SAR worst case configuration was spotchecked on Variant 1 and Variant 2. The Variant with the highest reported SAR value was evaluated for the remaining NB UNII configurations.
- Full power measurements were performed for Variant 1 and Variant 2 per FCC KDB Procedures 248227.

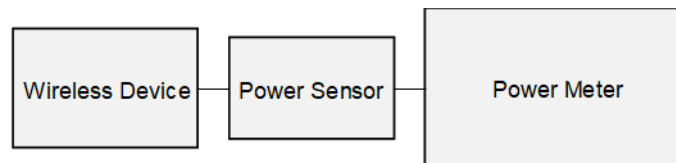


Figure 7-24

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 71 of 95

REV 24.0
05/01/2024

8 SYSTEM VERIFICATION

8.1 Tissue Verification

Table 8-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/11/2024	30 Head	24.8	4	0.744	52.836	0.750	55.000	-0.80%	-3.93%
			6	0.744	52.794	0.750	55.000	-0.80%	-4.01%
			12	0.744	52.531	0.750	55.000	-0.80%	-4.49%
			13	0.744	52.495	0.750	55.000	-0.80%	-4.55%
			14	0.745	52.422	0.750	55.000	-0.67%	-4.69%
10/26/2024	2450 Head	19.6	2300	1.693	38.525	1.670	39.500	1.38%	-2.47%
			2310	1.701	38.515	1.679	39.480	1.31%	-2.44%
			2320	1.709	38.501	1.687	39.460	1.30%	-2.43%
			2400	1.768	38.370	1.756	39.289	0.68%	-2.34%
			2450	1.806	38.292	1.800	39.200	0.33%	-2.32%
			2480	1.828	38.238	1.833	39.162	-0.27%	-2.36%
			2500	1.842	38.208	1.855	39.136	-0.70%	-2.37%
			2510	1.850	38.192	1.866	39.123	-0.86%	-2.38%
			2535	1.870	38.168	1.893	39.092	-1.22%	-2.36%
			2550	1.881	38.147	1.909	39.073	-1.47%	-2.37%
			2560	1.888	38.134	1.920	39.060	-1.67%	-2.37%
			2600	1.921	38.051	1.964	39.009	-2.19%	-2.46%
			2650	1.964	37.980	2.018	38.945	-2.68%	-2.48%
			2680	1.988	37.915	2.051	38.907	-3.07%	-2.55%
			2700	2.004	37.877	2.073	38.882	-3.33%	-2.58%
11/03/2024	2450 Head	19.2	2300	1.748	38.263	1.670	39.500	4.67%	-3.13%
			2310	1.754	38.229	1.679	39.480	4.47%	-3.17%
			2320	1.761	38.197	1.687	39.460	4.39%	-3.20%
			2400	1.841	38.119	1.756	39.289	4.84%	-2.98%
			2450	1.872	38.044	1.800	39.200	4.00%	-2.95%
			2480	1.887	37.949	1.833	39.162	2.95%	-3.10%
			2500	1.902	37.883	1.855	39.136	2.53%	-3.20%
			2510	1.911	37.857	1.866	39.123	2.41%	-3.24%
			2535	1.936	37.819	1.893	39.092	2.27%	-3.26%
			2550	1.951	37.811	1.909	39.073	2.20%	-3.23%
			2560	1.961	37.810	1.920	39.060	2.14%	-3.20%
			2600	1.990	37.756	1.964	39.009	1.32%	-3.21%
			2650	2.030	37.633	2.018	38.945	0.59%	-3.37%
			2680	2.063	37.571	2.051	38.907	0.59%	-3.43%
			2700	2.079	37.533	2.073	38.882	0.29%	-3.47%
11/19/2024	2450 Head	19.3	2300	1.743	38.641	1.670	39.500	4.37%	-2.17%
			2310	1.752	38.624	1.679	39.480	4.35%	-2.17%
			2320	1.760	38.611	1.687	39.460	4.33%	-2.15%
			2400	1.820	38.469	1.756	39.289	3.64%	-2.09%
			2450	1.862	38.386	1.800	39.200	3.44%	-2.08%
			2480	1.885	38.343	1.833	39.162	2.84%	-2.09%
			2500	1.901	38.294	1.855	39.136	2.48%	-2.15%
			2510	1.909	38.268	1.866	39.123	2.30%	-2.19%
			2535	1.931	38.214	1.893	39.092	2.01%	-2.25%
			2550	1.944	38.195	1.909	39.073	1.83%	-2.25%
			2560	1.953	38.180	1.920	39.060	1.72%	-2.25%
			2600	1.984	38.092	1.964	39.009	1.02%	-2.35%
			2650	2.028	37.982	2.018	38.945	0.50%	-2.47%
			2680	2.054	37.920	2.051	38.907	0.15%	-2.54%
			2700	2.069	37.878	2.073	38.882	-0.19%	-2.58%

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 72 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
10/30/2024	5250-5850 Head	19.6	5150	4.526	34.972	4.608	36.050	-1.78%	-2.99%
			5160	4.536	34.969	4.618	36.040	-1.78%	-2.97%
			5170	4.544	34.949	4.629	36.030	-1.84%	-3.00%
			5180	4.555	34.926	4.635	36.009	-1.73%	-3.01%
			5190	4.567	34.906	4.645	35.998	-1.68%	-3.03%
			5200	4.582	34.889	4.655	35.986	-1.57%	-3.05%
			5210	4.590	34.877	4.666	35.975	-1.63%	-3.05%
			5220	4.594	34.856	4.676	35.963	-1.75%	-3.08%
			5240	4.618	34.822	4.696	35.940	-1.66%	-3.11%
			5250	4.632	34.812	4.706	35.929	-1.57%	-3.11%
			5260	4.642	34.807	4.717	35.917	-1.59%	-3.09%
			5270	4.652	34.793	4.727	35.906	-1.59%	-3.10%
			5280	4.665	34.774	4.737	35.894	-1.52%	-3.12%
			5290	4.678	34.751	4.748	35.883	-1.47%	-3.15%
			5300	4.687	34.738	4.758	35.871	-1.49%	-3.16%
			5310	4.692	34.730	4.768	35.860	-1.59%	-3.15%
			5320	4.703	34.711	4.778	35.849	-1.57%	-3.17%
			5500	4.889	34.410	4.963	35.643	-1.49%	-3.46%
			5510	4.898	34.403	4.973	35.632	-1.51%	-3.45%
			5520	4.909	34.396	4.983	35.620	-1.49%	-3.44%
			5530	4.921	34.371	4.994	35.609	-1.46%	-3.48%
			5540	4.928	34.335	5.004	35.597	-1.52%	-3.55%
			5550	4.936	34.306	5.014	35.586	-1.56%	-3.60%
			5560	4.946	34.303	5.024	35.574	-1.55%	-3.57%
			5580	4.962	34.297	5.045	35.551	-1.65%	-3.53%
			5600	4.993	34.243	5.065	35.529	-1.42%	-3.62%
			5610	5.005	34.236	5.076	35.518	-1.40%	-3.61%
			5620	5.016	34.231	5.086	35.506	-1.38%	-3.59%
			5640	5.039	34.173	5.106	35.483	-1.31%	-3.69%
			5660	5.063	34.131	5.127	35.460	-1.25%	-3.75%
			5690	5.090	34.114	5.158	35.426	-1.32%	-3.70%
			5700	5.102	34.090	5.168	35.414	-1.28%	-3.74%
			5710	5.113	34.075	5.178	35.403	-1.26%	-3.75%
			5720	5.121	34.064	5.188	35.391	-1.29%	-3.75%
			5745	5.148	34.003	5.214	35.363	-1.27%	-3.85%
			5750	5.154	33.988	5.219	35.357	-1.25%	-3.87%
			5755	5.157	33.976	5.224	35.351	-1.28%	-3.89%
			5765	5.168	33.963	5.234	35.340	-1.26%	-3.90%
			5775	5.180	33.956	5.245	35.329	-1.24%	-3.89%
			5785	5.193	33.942	5.255	35.317	-1.18%	-3.89%
			5795	5.203	33.925	5.265	35.305	-1.18%	-3.91%
			5800	5.208	33.912	5.270	35.300	-1.18%	-3.93%
			5800	5.208	33.912	5.270	35.300	-1.18%	-3.93%
			5805	5.213	33.899	5.275	35.294	-1.18%	-3.95%
			5825	5.236	33.887	5.296	35.271	-1.13%	-3.92%
			5835	5.245	33.887	5.305	35.230	-1.13%	-3.81%
			5845	5.258	33.880	5.315	35.210	-1.07%	-3.78%
			5850	5.263	33.866	5.320	35.200	-1.07%	-3.79%
			5855	5.269	33.849	5.325	35.197	-1.05%	-3.83%
			5865	5.285	33.822	5.336	35.190	-0.96%	-3.89%
			5865	5.285	33.822	5.336	35.190	-0.96%	-3.89%
			5865	5.285	33.822	5.336	35.190	-0.96%	-3.89%
			5865	5.285	33.822	5.336	35.190	-0.96%	-3.89%
			5875	5.298	33.801	5.347	35.183	-0.92%	-3.93%
			5885	5.306	33.789	5.357	35.177	-0.95%	-3.95%
			5905	5.323	33.751	5.379	35.163	-1.04%	-4.02%

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 73 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/10/2024	5200-5800 Head	19.4	5150	4.693	34.726	4.608	36.050	1.84%	-3.67%
			5160	4.707	34.702	4.618	36.040	1.93%	-3.71%
			5170	4.719	34.679	4.629	36.030	1.94%	-3.75%
			5180	4.732	34.664	4.635	36.009	2.09%	-3.74%
			5190	4.748	34.647	4.645	35.998	2.22%	-3.75%
			5200	4.760	34.641	4.655	35.986	2.26%	-3.74%
			5210	4.771	34.638	4.666	35.975	2.25%	-3.72%
			5220	4.777	34.623	4.676	35.963	2.16%	-3.73%
			5240	4.792	34.569	4.696	35.940	2.04%	-3.81%
			5250	4.801	34.557	4.706	35.929	2.02%	-3.82%
			5260	4.808	34.535	4.717	35.917	1.93%	-3.85%
			5270	4.821	34.501	4.727	35.906	1.99%	-3.91%
			5280	4.839	34.468	4.737	35.894	2.15%	-3.97%
			5290	4.854	34.440	4.748	35.883	2.23%	-4.02%
			5300	4.869	34.425	4.758	35.871	2.33%	-4.03%
			5310	4.889	34.415	4.768	35.860	2.54%	-4.03%
			5320	4.905	34.410	4.778	35.849	2.66%	-4.01%
			5500	5.099	34.124	4.963	35.643	2.74%	-4.26%
			5510	5.106	34.117	4.973	35.632	2.67%	-4.25%
			5520	5.114	34.110	4.983	35.620	2.63%	-4.24%
			5530	5.124	34.081	4.994	35.609	2.60%	-4.29%
			5540	5.136	34.062	5.004	35.597	2.64%	-4.31%
			5550	5.147	34.053	5.014	35.586	2.65%	-4.31%
			5560	5.157	34.051	5.024	35.574	2.65%	-4.28%
			5580	5.179	34.039	5.045	35.551	2.66%	-4.25%
			5600	5.212	34.001	5.065	35.529	2.90%	-4.30%
			5610	5.223	33.996	5.076	35.518	2.90%	-4.29%
			5640	5.237	33.980	5.106	35.483	2.57%	-4.24%
			5660	5.248	33.939	5.127	35.460	2.36%	-4.29%
			5670	5.255	33.907	5.137	35.449	2.30%	-4.35%
			5680	5.264	33.883	5.147	35.437	2.27%	-4.39%
			5690	5.278	33.853	5.158	35.426	2.33%	-4.44%
			5700	5.298	33.831	5.168	35.414	2.52%	-4.47%
			5710	5.316	33.813	5.178	35.403	2.67%	-4.49%
			5720	5.331	33.800	5.188	35.391	2.76%	-4.50%
			5745	5.360	33.773	5.214	35.363	2.80%	-4.50%
			5750	5.364	33.770	5.219	35.357	2.78%	-4.49%
			5755	5.368	33.768	5.224	35.351	2.76%	-4.48%
			5765	5.372	33.764	5.234	35.340	2.64%	-4.46%
			5775	5.375	33.761	5.245	35.329	2.48%	-4.44%
			5785	5.380	33.751	5.255	35.317	2.38%	-4.43%
			5795	5.387	33.727	5.265	35.305	2.32%	-4.47%
			5800	5.389	33.711	5.270	35.300	2.26%	-4.50%
			5800	5.389	33.711	5.270	35.300	2.26%	-4.50%
			5805	5.392	33.694	5.275	35.294	2.22%	-4.53%
			5825	5.412	33.640	5.296	35.271	2.19%	-4.62%
			5835	5.426	33.630	5.305	35.230	2.28%	-4.54%
			5845	5.436	33.626	5.315	35.210	2.28%	-4.50%
			5850	5.442	33.618	5.320	35.200	2.29%	-4.49%
			5855	5.449	33.611	5.325	35.197	2.33%	-4.51%
			5865	5.462	33.587	5.336	35.190	2.36%	-4.56%
			5865	5.462	33.587	5.336	35.190	2.36%	-4.56%
			5865	5.462	33.587	5.336	35.190	2.36%	-4.56%
			5875	5.477	33.559	5.347	35.183	2.43%	-4.62%
			5885	5.488	33.536	5.357	35.177	2.45%	-4.66%
			5905	5.503	33.493	5.379	35.163	2.31%	-4.75%

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 74 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
10/27/2024	6500 Head	19.2	5935	5.321	35.307	5.411	35.143	-1.66%	0.47%
			5970	5.360	35.275	5.448	35.120	-1.62%	0.44%
			5985	5.375	35.243	5.464	35.110	-1.63%	0.38%
			6000	5.391	35.203	5.480	35.100	-1.62%	0.29%
			6025	5.426	35.133	5.510	35.070	-1.52%	0.18%
			6065	5.482	35.084	5.557	35.022	-1.35%	0.18%
			6075	5.492	35.073	5.569	35.010	-1.38%	0.18%
			6085	5.503	35.058	5.580	34.998	-1.38%	0.17%
			6185	5.624	34.846	5.698	34.878	-1.30%	-0.09%
			6275	5.743	34.662	5.805	34.770	-1.07%	-0.31%
			6285	5.753	34.656	5.816	34.758	-1.08%	-0.29%
			6305	5.772	34.628	5.840	34.734	-1.16%	-0.31%
			6345	5.822	34.547	5.887	34.686	-1.10%	-0.40%
			6475	5.977	34.323	6.041	34.530	-1.06%	-0.60%
			6485	5.987	34.311	6.052	34.518	-1.07%	-0.60%
			6500	5.999	34.282	6.070	34.500	-1.17%	-0.63%
			6505	6.003	34.269	6.076	34.494	-1.20%	-0.65%
			6545	6.064	34.157	6.122	34.446	-0.95%	-0.84%
			6665	6.218	33.942	6.265	34.302	-0.75%	-1.05%
			6675	6.234	33.936	6.273	34.290	-0.62%	-1.03%
			6685	6.250	33.931	6.285	34.278	-0.56%	-1.01%
			6715	6.277	33.912	6.319	34.242	-0.66%	-0.96%
			6785	6.353	33.742	6.400	34.158	-0.73%	-1.22%
			6825	6.402	33.712	6.447	34.110	-0.70%	-1.17%
			6985	6.595	33.400	6.633	33.918	-0.57%	-1.53%
			6995	6.608	33.384	6.644	33.906	-0.54%	-1.54%
			7000	6.611	33.384	6.650	33.900	-0.59%	-1.52%
			7005	6.616	33.387	6.656	33.894	-0.60%	-1.50%
			7025	6.645	33.381	6.680	33.870	-0.52%	-1.44%
			7500	7.212	32.518	7.240	33.300	-0.39%	-2.35%
			7980	7.812	31.695	7.816	32.724	-0.05%	-3.14%
			8000	7.830	31.782	7.840	32.700	-0.13%	-2.81%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Note: Per April 2019 TCB Workshop Notes, single head-tissue simulating liquid specified in IEC 62209-1 is permitted to use for all SAR tests.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 75 of 95

REV 24.0

05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2 Test System Verification

Prior to SAR assessment, the system is verified to ±10% of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in the SAR System Validation Appendix.

Table 8-2
System Verification Results

System Verification TARGET & MEASURED																	
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)	Measured 4cm² APD (W/m²)	1W Target 4cm² APD (W/m²)	1W Normalized 4cm² APD (W/m²)	Deviation 4cm² APD (%)
AM14	13	HEAD	12/11/2024	21.9	24.0	1.00	1004	7308	534	0.566	0.575	0.566	-1.57%				
AM6	2450	HEAD	10/26/2024	21.5	20.6	0.10	855	7639	1403	5.100	52.400	51.000	-2.67%				
AM6	2450	HEAD	11/03/2024	22.8	19.2	0.10	855	7639	1403	5.440	52.400	54.400	3.82%				
AM6	2450	HEAD	11/19/2024	21.4	20.9	0.10	921	7639	1403	5.430	52.200	54.300	4.02%				
AM8	5250	HEAD	10/30/2024	21.3	19.4	0.05	1163	7427	467	3.970	79.600	79.400	-0.25%				
AM8	5250	HEAD	12/10/2024	20.1	19.0	0.05	1066	7427	467	4.190	77.900	83.800	7.57%				
AM8	5600	HEAD	10/30/2024	21.3	19.4	0.05	1163	7427	467	3.970	82.800	79.400	-4.11%				
AM8	5600	HEAD	12/10/2024	20.1	19.0	0.05	1066	7427	467	3.900	81.800	78.000	-4.65%				
AM8	5750	HEAD	10/30/2024	21.3	19.4	0.05	1163	7427	467	3.830	81.100	76.600	-5.55%				
AM8	5750	HEAD	12/10/2024	20.1	19.0	0.05	1066	7427	467	3.770	80.700	75.400	-6.57%				
AM8	5850	HEAD	10/30/2024	21.3	19.4	0.05	1163	7427	467	4.150	79.000	83.000	5.06%				
AM8	5850	HEAD	12/10/2024	20.1	19.0	0.05	1066	7427	467	3.890	77.400	77.800	0.52%				
AM2	6500	HEAD	10/27/2024	22.1	20.7	0.03	1019	3949	1684	7.720	300.000	308.800	2.93%	34.70	1340.00	1388.00	3.58%

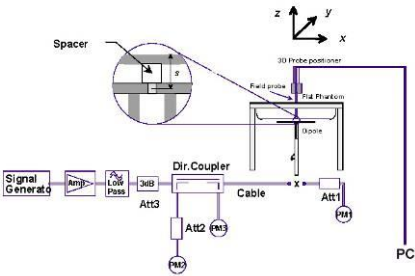


Figure 8-1
System Verification Setup Diagram



Figure 8-2
System Verification Setup Photo

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 76 of 95

8.3 Power Density Test System Verification

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

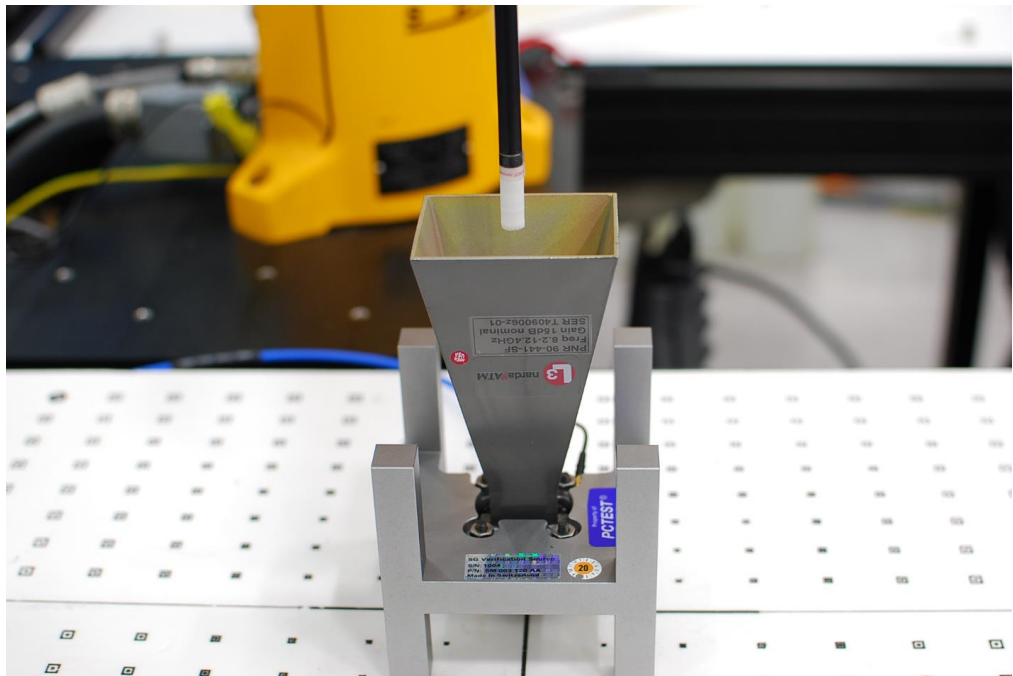


Figure 8-3
System Verification Setup Photo

Table 8-3
10 GHz Verification Results

System	Frequency (GHz)	Date	Source S/N	Probe S/N	DAE S/N	Prad (mW)	Normal psPD (W/m² over 4 cm²)		Deviation (dB)	Total psPD (W/m² over 4 cm²)		Deviation (dB)
							Measured	Target		Measured	Target	
AM5	10	01/02/2025	1006	9487	1333	93.3	58.9	58.5	0.03	58.9	59.2	0.02

Note: A 10 mm distance spacing was used from the reference horn antenna aperture to the probe element.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 77 of 95

REV 24.0
05/01/2024

9 SAR DATA SUMMARY

9.1 2.4 GHz WIFI SISO Standalone SAR

Table 9-1 Antenna WF8

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	0.01	2462	11	1	18.75	17.98	Back	0	V2	0.114	0.094	1.194	1.005	0.137	0.065	0.086	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	-0.02	2412	1	1	18.75	17.85	Top	0	V2	0.863	0.348	1.230	1.005	1.067	0.430	0.667	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	-0.02	2437	6	1	18.75	17.93	Top	0	V2	0.914	0.366	1.208	1.005	1.130	0.444	0.694	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	-0.01	2462	11	1	18.75	17.98	Top	0	V2	0.951	0.379	1.194	1.005	1.141	0.455	0.713	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	CMQJ6	99.52	0.02	2462	11	1	18.75	17.68	Top	0	V1	0.838	0.344	1.279	1.005	1.077	0.442	0.673	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	0.06	2462	11	1	18.75	17.98	Bottom	0	V2	0.001	0.000	1.194	1.005	0.001	0.000	0.001	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	-0.08	2462	11	1	18.75	17.98	Right	0	V2	0.020	0.005	1.194	1.005	0.012	0.006	0.008	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF8	61WFO	99.52	0.09	2462	11	1	18.75	17.98	Left	0	V2	0.002	0.000	1.194	1.005	0.002	0.000	0.001	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 9-2 Antenna WF7b

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	-0.03	2462	11	1	19.75	18.87	Back	0	V1	0.142	0.070	1.225	1.005	0.175	0.086	0.109	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	0.02	2412	1	1	19.75	18.67	Top	0	V1	0.803	0.350	1.282	1.005	1.035	0.451	0.647	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	0.09	2437	6	1	19.75	18.70	Top	0	V1	0.865	0.374	1.274	1.005	1.108	0.479	0.693	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	0.06	2462	11	1	19.75	18.87	Top	0	V1	0.959	0.412	1.225	1.005	1.181	0.507	0.738	A1
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	61WFO	99.52	-0.01	2462	11	1	19.75	18.77	Top	0	V2	0.822	0.350	1.253	1.005	1.035	0.441	0.647	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	0.08	2462	11	1	19.75	18.87	Bottom	0	V1	0.002	0.000	1.225	1.005	0.002	0.000	0.001	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	0.06	2462	11	1	19.75	18.87	Right	0	V1	0.016	0.007	1.225	1.005	0.020	0.009	0.013	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	-0.02	2412	1	1	19.75	18.67	Left	0	V1	0.542	0.250	1.282	1.005	0.698	0.322	0.436	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	-0.01	2437	6	1	19.75	18.70	Left	0	V1	0.644	0.290	1.274	1.005	0.825	0.371	0.516	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WF7b	N6799	99.52	-0.04	2462	11	1	19.75	18.87	Left	0	V1	0.650	0.294	1.225	1.005	0.806	0.362	0.500	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram							

9.2 5 GHz WIFI SISO Standalone SAR

Table 9-3 Antenna WF8

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	TGH66	97.72	0.16	5270	54	U-NII-2A	13.5	17.00	16.42	Back	0	V1	0.096	0.037	1.143	1.023	0.112	0.043	0.070	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	JVMNH	97.72	0.00	5270	54	U-NII-2A	13.5	17.00	16.40	Top	0	V2	0.809	0.296	1.148	1.023	1.068	0.348	0.668	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	TGH66	97.72	0.09	5270	54	U-NII-2A	13.5	17.00	16.42	Top	0	V1	0.030	0.030	1.143	1.023	0.193	0.386	0.746	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	TGH66	97.72	0.03	5310	62	U-NII-2A	13.5	16.50	15.73	Top	0	V1	0.910	0.293	1.194	1.023	1.112	0.358	0.695	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	TGH66	97.72	0.05	5270	54	U-NII-2A	13.5	17.00	16.42	Bottom	0	V1	0.005	0.000	1.143	1.023	0.006	0.000	0.004	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	TGH66	97.72	0.07	5270	54	U-NII-2A	13.5	17.00	16.42	Right	0	V1	0.006	0.002	1.143	1.023	0.007	0.002	0.004	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WF8	TGH66	97.72	0.01	5270	54	U-NII-2A	13.5	17.00	16.42	Left	0	V1	0.005	0.000	1.143	1.023	0.006	0.000	0.004	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram								
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	0.02	5610	122	U-NII-2C	29.3	16.25	15.62	Back	0	V2	0.960	0.022	1.156	1.050	0.973	0.027	0.046	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	-0.03	5530	106	U-NII-2C	29.3	15.00	13.89	Top	0	V2	0.667	0.007	1.291	1.050	0.904	0.274	0.565	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	0.10	5610	122	U-NII-2C	29.3	16.25	15.62	Top	0	V2	0.943	0.278	1.156	1.050	1.145	0.337	0.716	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	0.04	5690	138	U-NII-2C	29.3	16.25	15.61	Top	0	V2	0.949	0.284	1.159	1.050	1.155	0.346	0.727	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	N6799	95.24	0.10	5690	138	U-NII-2C	29.3	16.25	15.56	Top	0	V1	0.860	0.255	1.172	1.050	1.058	0.314	0.661	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	0.03	5610	122	U-NII-2C	29.3	16.25	15.62	Bottom	0	V2	0.006	0.000	1.156	1.050	0.007	0.000	0.004	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	0.05	5610	122	U-NII-2C	29.3	16.25	15.62	Right	0	V2	0.000	0.000	1.156	1.050	0.000	0.000	0.000	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	0.01	5610	122	U-NII-2C	29.3	16.25	15.62	Left	0	V2	0.000	0.000	1.156	1.050	0.000	0.000	0.000	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram								
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	N6799	95.24	0.11	5775	155	U-NII-3	29.3	17.25	16.32	Back	0	V1	0.111	0.044	1.239	1.050	0.144	0.057	0.090	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	4014K	95.24	-0.07	5775	155	U-NII-3	29.3	17.25	16.19	Top	0	V2	0.875	0.269	1.276	1.050	1.172	0.360	0.733	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	N6799	95.24	-0.06	5775	155	U-NII-3	29.3	17.25	16.32	Top	0	V1	0.916	0.281	1.239	1.050	1.192	0.366	0.745	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	N6799	95.24	0.08	5775	155	U-NII-3	29.3	17.25	16.12	Bottom	0	V1	0.000	0.000	1.239	1.050	0.000	0.000	0.000	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	N6799	95.24	0.01	5775	155	U-NII-3	29.3	17.25	16.32	Right	0	V1	0.000	0.000	1.239	1.050	0.000	0.000	0.000	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WF8	N6799	95.24	0.09	5775	155	U-NII-3	29.3	17.25	16.32	Left	0	V1	0.072	0.022	1.239	1.050	0.094	0.029	0.059	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 78 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-4 Antenna WF7a

Exposure		Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NI band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	T0466	95.24	0.02	5290	58	U-NII-2A	29.3	15.75	14.99	Back	0	V1	0.065	0.024	1.191	1.050	0.081	0.030	0.051	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	T0466	95.24	0.07	5290	58	U-NII-2A	29.3	15.75	14.99	Top	0	V1	0.896	0.298	1.191	1.050	1.120	0.373	0.700	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	JV4N1	95.24	0.11	5290	58	U-NII-2A	29.3	15.75	14.83	Top	0	V2	0.852	0.286	1.236	1.050	1.108	0.368	0.691	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	T0466	95.24	0.09	5290	58	U-NII-2A	29.3	15.75	14.99	Bottom	0	V1	0.000	0.000	1.191	1.050	0.000	0.000	0.000	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	T0466	95.24	0.02	5290	58	U-NII-2A	29.3	15.75	14.99	Right	0	V1	0.000	0.000	1.191	1.050	0.000	0.000	0.000	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	T0466	95.24	0.04	5290	58	U-NII-2A	29.3	15.75	14.99	Left	0	V1	0.034	0.007	1.191	1.050	0.043	0.009	0.037	
ANS/IEEE CS3.1.1992 - SAFETY LIMIT																									
Spatial Peak																									
Uncontrolled Exposure/General Population																									
1.6 W/kg (mW/g) averaged over 1 gram																									
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.02	5610	122	U-NII-2C	29.3	15.00	14.28	Back	0	V1	0.082	0.031	1.180	1.050	0.102	0.038	0.064	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.09	5530	106	U-NII-2C	29.3	15.00	14.26	Top	0	V1	0.883	0.278	1.186	1.050	1.100	0.346	0.688	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	LS893	95.24	0.01	5610	122	U-NII-2C	29.3	15.00	14.02	Top	0	V2	0.886	0.278	1.251	1.050	1.166	0.366	0.735	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.11	5610	122	U-NII-2C	29.3	15.00	14.28	Top	0	V1	0.961	0.298	1.180	1.050	1.191	0.369	0.744	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.06	5610	122	U-NII-2C	29.3	15.00	14.28	Top	0	V1	0.931	0.286	1.180	1.050	1.141	0.354	0.713	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.10	5690	138	U-NII-2C	29.3	15.00	14.08	Top	0	V1	0.844	0.266	1.236	1.050	1.095	0.317	0.684	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.02	5610	122	U-NII-2C	29.3	15.00	14.28	Bottom	0	V1	0.000	0.000	1.180	1.050	0.000	0.000	0.000	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.04	5610	122	U-NII-2C	29.3	15.00	14.28	Right	0	V1	0.000	0.000	1.180	1.050	0.000	0.000	0.000	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.07	5610	122	U-NII-2C	29.3	15.00	14.28	Left	0	V1	0.010	0.000	1.180	1.050	0.012	0.000	0.008	
ANS/IEEE CS3.1.1992 - SAFETY LIMIT																									
Spatial Peak																									
Uncontrolled Exposure/General Population																									
1.6 W/kg (mW/g) averaged over 1 gram																									
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.06	5775	155	U-NII-3	29.3	15.25	14.25	Back	0	V1	0.060	0.022	1.259	1.050	0.079	0.029	0.049	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.03	5775	155	U-NII-3	29.3	15.25	14.25	Top	0	V1	0.860	0.266	1.259	1.050	1.163	0.353	0.727	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	JV4N1	95.24	0.09	5775	155	U-NII-3	29.3	15.25	14.18	Top	0	V2	0.997	0.239	1.276	1.050	1.070	0.321	0.669	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.04	5775	155	U-NII-3	29.3	15.25	14.25	Bottom	0	V1	0.000	0.000	1.259	1.050	0.000	0.000	0.000	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.21	5775	155	U-NII-3	29.3	15.25	14.25	Right	0	V1	0.000	0.000	1.259	1.050	0.000	0.000	0.000	
Body		5 GHz WiFi / IEEE 802.11ac	80	OFDM	W7f7a	Q63F3	95.24	0.05	5775	155	U-NII-3	29.3	15.25	14.25	Left	0	V1	0.027	0.007	1.259	1.050	0.036	0.009	0.023	
ANS/IEEE CS3.1.1992 - SAFETY LIMIT																									
Spatial Peak																									
Uncontrolled Exposure/General Population																									
1.6 W/kg (mW/g) averaged over 1 gram																									

9.3 5 GHz WIFI MIMO Standalone SAR

Table 9-5 MIMO

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio [1g SAR]	Plot #
Body	5 GHz WiFi/ IEEE 802.11n	40	OFDM	Wf8	QMjU6	97.72	-0.06	5270	54	U-NII-2A	27	17.00	15.61	Top	0	V1	0.775	0.263	1.377	1.023	1.092	0.370	0.683	
				Wf7a			-0.03					15.75	15.60				1.080	0.375	1.035	1.023	1.144	0.397	0.715	A2
Body	5 GHz WiFi/ IEEE 802.11n	40	OFDM	Wf7a	QMjU6	97.72	-0.06	5270	54	U-NII-2A	27	15.75	15.65	Top	0	V1	1.095	0.353	1.095	1.023	1.091	0.374	0.682	
				Wf8			-0.00					17.00	15.53				0.757	0.255	1.403	1.023	1.086	0.366	0.679	
Body	5 GHz WiFi/ IEEE 802.11n	40	OFDM	Wf7a	61FW0	97.72	-0.17	5270	54	U-NII-2A	27	15.75	15.10	Top	0	V2	0.922	0.319	1.161	1.023	1.095	0.379	0.684	
				Wf8			-0.05					15.50	14.41				0.578	0.195	1.285	1.023	0.760	0.256	0.475	
Body	5 GHz WiFi/ IEEE 802.11n	40	OFDM	Wf7a	QMjU6	97.72	-0.15	5310	62	U-NII-2A	27	15.50	14.37	Top	0	V1	0.835	0.285	1.297	1.023	1.108	0.378	0.693	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram							
Note: Blue entry represents variability measurement																								
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio [1g SAR]	Plot #
Body	5 GHz WiFi/ IEEE 802.11ac	80	OFDM	Wf8	N6799	95.24	-0.09	5530	106	U-NII-2C	58.5	13.50	12.47	Top	0	V1	0.508	0.162	1.268	1.050	0.676	0.216	0.423	
				Wf7a			-0.19					13.50	12.58				0.571	0.191	1.236	1.050	0.741	0.248	0.463	
				Wf8	N6799	95.24	-0.15					16.25	14.47	Top	0	V1	0.739	0.241	1.439	1.050	1.117	0.364	0.698	
				Wf7a			-0.00					15.00	14.47				0.943	0.309	1.130	1.050	1.119	0.367	0.699	
Body	5 GHz WiFi/ IEEE 802.11ac	80	OFDM	Wf8	LR93	95.24	0.02	5610	122	U-NII-2C	58.5	15.00	14.65	Top	0	V2	0.730	0.238	1.445	1.050	1.108	0.361	0.693	
				Wf7a			-0.09					15.00	14.48				0.933	0.304	1.127	1.050	1.104	0.360	0.690	
				Wf8			-0.05					16.25	14.63				0.677	0.219	1.452	1.050	1.052	0.334	0.645	
Body	5 GHz WiFi/ IEEE 802.11ac	80	OFDM	Wf7a	N6799	95.24	0.01	5690	138	U-NII-2C	58.5	15.00	14.77	Top	0	V1	0.977	0.313	1.054	1.050	1.081	0.346	0.676	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																								
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio [1g SAR]	Plot #
Body	5 GHz WiFi/ IEEE 802.11ac	80	OFDM	Wf8	QOQKF	97.72	-0.00	5775	155	U-NII-3	58.5	17.25	16.34	Top	0	V1	0.921	0.322	1.233	1.023	1.162	0.406	0.726	
				Wf7a			-0.06					15.25	14.28				0.762	0.251	1.250	1.023	0.974	0.321	0.609	
Body	5 GHz WiFi/ IEEE 802.11ac	80	OFDM	Wf7a	QOQKF	97.72	-0.06	5775	155	U-NII-3	58.5	17.25	16.34	Top	0	V1	0.921	0.322	1.233	1.023	1.162	0.406	0.726	
				Wf8			-0.07					17.25	16.26				0.903	0.306	1.256	1.023	1.160	0.393	0.725	
Body	5 GHz WiFi/ IEEE 802.11ac	80	OFDM	Wf8	61FW0	97.72	-0.03	5775	155	U-NII-3	58.5	15.25	14.36	Top	0	V2	0.731	0.242	1.227	1.023	0.918	0.304	0.574	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: Due to the spatial separation of Antenna WF7a and Antenna WF8, two measurement cubes were evaluated during MIMO SAR testing. Cubes 1 and 2 are located over the SAR distributions produced by Antenna WF8 and WF7a, respectively. Due to the spatial separation of the distributions, the conduct power of each antenna was individually considered for each measurement cube to determine the reported SAR.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 79 of 95

9.4 6 GHz WIFI SISO Standalone SAR and APD

Table 9-6 Antenna WF8

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.03	6345	79	68.1	15.25	13.43	Back	0	V1	0.028	0.011	1.521	1.021	0.043	0.017	0.027	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.01	6025	15	68.1	14.50	14.22	Top	0	V1	0.814	0.249	1.067	1.021	0.887	0.271	0.554	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	JV4NH	97.95	0.03	6025	15	68.1	14.50	14.23	Top	0	V2	0.787	0.239	1.064	1.021	0.855	0.260	0.534	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.01	6345	79	68.1	15.25	13.43	Top	0	V1	0.538	0.165	1.521	1.021	0.835	0.256	0.522	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.03	6505	111	68.1	13.00	12.45	Top	0	V1	0.265	0.089	1.135	1.021	0.307	0.103	0.192	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	-0.18	6665	143	68.1	14.50	14.35	Top	0	V1	0.740	0.236	1.085	1.021	0.782	0.249	0.489	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	-0.08	6985	207	68.1	12.00	10.82	Top	0	V1	0.507	0.143	1.312	1.021	0.679	0.192	0.424	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.01	6345	79	68.1	15.25	13.43	Bottom	0	V1	0.012	0.002	1.521	1.021	0.019	0.003	0.012	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.02	6345	79	68.1	15.25	13.43	Right	0	V1	0.026	0.010	1.521	1.021	0.040	0.016	0.025	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.09	6345	79	68.1	15.25	13.43	Left	0	V1	0.001	0.000	1.521	1.021	0.002	0.000	0.001	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																							
Spatial Peak												Body											
Uncontrolled Exposure/General Population												1.6 W/kg (mW/g) averaged over 1 gram											
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	APD Exposure Ratio	Plot #		
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.03	6345	79	68.1	15.25	13.43	Back	0	V1	0.250	1.521	1.021	0.388	0.019			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.01	6025	15	68.1	14.50	14.22	Top	0	V1	5.710	1.067	1.021	6.221	0.311			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	JV4NH	97.95	0.03	6025	15	68.1	14.50	14.23	Top	0	V2	5.460	1.064	1.021	5.931	0.297			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.01	6345	79	68.1	15.25	13.43	Top	0	V1	3.740	1.521	1.021	5.839	0.292			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.03	6505	111	68.1	13.00	12.45	Top	0	V1	2.000	1.135	1.021	2.318	0.116			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	-0.18	6665	143	68.1	14.50	14.35	Top	0	V1	5.200	1.035	1.021	5.590	0.280			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	-0.08	6985	207	68.1	12.00	10.82	Top	0	V1	3.280	1.312	1.021	4.394	0.220			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.01	6345	79	68.1	15.25	13.43	Bottom	0	V1	0.051	1.521	1.021	0.079	0.004			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.02	6345	79	68.1	15.25	13.43	Right	0	V1	0.222	1.521	1.021	0.345	0.017			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF8	QM0J6	97.95	0.09	6345	79	68.1	15.25	13.43	Left	0	V1	0.006	1.521	1.021	0.009	0.000			

Table 9-7 Antenna WF7a

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	0.04	6025	15	68.1	13.50	12.26	Back	0	V2	0.033	0.013	1.330	1.021	0.045	0.018	0.028	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	0.09	6025	15	68.1	13.50	12.51	Top	0	V1	0.600	0.187	1.256	1.021	0.769	0.240	0.481	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.20	6345	79	68.1	12.75	12.00	Top	0	V1	0.612	0.182	1.189	1.021	0.743	0.221	0.464	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.03	6505	111	68.1	12.00	11.89	Top	0	V1	0.867	0.249	1.074	1.021	0.951	0.273	0.594	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	0.03	6665	143	68.1	13.00	12.23	Top	0	V1	0.868	0.246	1.194	1.021	1.058	0.300	0.661	A3
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	-0.16	6665	143	68.1	13.00	12.00	Top	0	V2	0.834	0.234	1.259	1.021	1.072	0.301	0.670	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.30	6665	143	68.1	13.00	12.23	Top	0	V1	0.805	0.227	1.194	1.021	1.015	0.289	0.634	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.07	6985	207	68.1	13.00	11.02	Top	0	V1	0.652	0.174	1.578	1.021	1.050	0.280	0.656	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	-0.13	6025	15	68.1	13.50	12.26	Bottom	0	V2	0.004	0.002	1.330	1.021	0.005	0.003	0.003	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	0.02	6025	15	68.1	13.50	12.26	Right	0	V2	0.004	0.002	1.330	1.021	0.005	0.003	0.003	
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	0.09	6025	15	68.1	13.50	12.26	Left	0	V2	0.007	0.003	1.330	1.021	0.010	0.004	0.006	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																Body							
Spatial Peak																1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population																averaged over 1 gram							
Note: Blue entry represents variability measurement																							
Exposure	Band/ Mode	Bandwidth [MHz]	Service/ Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	APD Exposure Ratio	Plot #		
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	0.04	6025	15	68.1	13.50	12.26	Back	0	V2	0.289	1.330	1.021	0.392	0.020			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	0.09	6025	15	68.1	13.50	12.51	Top	0	V1	4.250	1.256	1.021	5.450	0.273			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.20	6345	79	68.1	12.75	12.00	Top	0	V1	4.180	1.189	1.021	5.074	0.254			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.03	6505	111	68.1	12.00	11.89	Top	0	V1	5.710	1.074	1.021	6.261	0.313			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	0.03	6665	143	68.1	13.00	12.23	Top	0	V1	5.640	1.194	1.021	6.876	0.344	A3		
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	-0.16	6665	143	68.1	13.00	12.00	Top	0	V2	5.380	1.259	1.021	6.916	0.346			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.20	6665	143	68.1	13.00	12.23	Top	0	V1	5.430	1.194	1.021	6.620	0.331			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	4PVLJ	97.95	-0.07	6985	207	68.1	13.00	11.02	Top	0	V1	4.020	1.578	1.021	6.477	0.324			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	-0.13	6025	15	68.1	13.50	12.26	Bottom	0	V2	0.016	1.330	1.021	0.048	0.002			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	0.02	6025	15	68.1	13.50	12.26	Right	0	V2	0.040	1.330	1.021	0.054	0.003			
Body	6 GHz WiFi / IEEE 802.11ax	160	OFDM	WF7a	JV4NH	97.95	0.09	6025	15	68.1	13.50	12.26	Left	0	V2	0.064	1.330	1.021	0.087	0.004			

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 80 of 95

REV 24.0

05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9.5 6 GHz WIFI MIMO Standalone SAR and APD

Table 9-8 MIMO

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	-0.12	6025	15	136.1	14.50	13.90	Top	0	V1	0.795	1.148	1.021	0.932	0.305	0.583	
				WF7a			-0.04	6025			13.50	12.66				0.793	1.213	1.021	0.982	0.306	0.614	
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	-0.01	6345	79	136.1	15.25	13.57	Top	0	V1	0.582	1.472	1.021	0.875	0.289	0.547	
				WF7a			0.02	6345			12.75	12.06				0.848	1.172	1.021	0.921	0.299	0.634	
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	4D14K	97.95	0.18	6345	79	136.1	15.25	13.45	Top	0	V2	0.495	1.514	1.021	0.765	0.260	0.478	
				WF7a			0.03	6345			12.75	12.13				0.790	1.153	1.021	0.930	0.278	0.581	
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	0.00	6505	111	136.1	8.25	7.16	Top	0	V1	0.079	1.285	1.021	0.104	0.029	0.065	
				WF7a			0.04	6505			8.25	7.52				0.322	1.183	1.021	0.389	0.109	0.243	
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	-0.02	6665	143	136.1	14.50	14.45	Top	0	V1	0.580	1.012	1.021	0.599	0.207	0.374	
				WF7a			-0.02	6665			13.00	12.58				0.802	1.102	1.021	0.902	0.255	0.564	
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	0.06	6985	207	136.1	9.25	8.06	Top	0	V1	0.338	1.315	1.021	0.454	0.097	0.284	
				WF7a			0.02	6985			9.25	8.63				0.377	1.153	1.021	0.444	0.117	0.278	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						
Exposure	Band/ Mode	Bandwidth [MHz]	Service/ Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured APD [W/m ² (4cm ²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m ² (4cm ²)]	APD Exposure Ratio	Plot #	
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	-0.12	6025	15	136.1	14.50	13.90	Top	0	V1	5.860	1.148	1.021	6.869	0.343		
				WF7a			-0.04	6025			13.50	12.66				5.610	1.213	1.021	6.948	0.347		
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	-0.01	6345	79	136.1	15.25	13.57	Top	0	V1	4.310	1.472	1.021	6.478	0.324		
				WF7a			0.02	6345			12.75	12.06				5.690	1.172	1.021	6.809	0.340		
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	4D14K	97.95	0.18	6345	79	136.1	15.25	13.45	Top	0	V2	3.750	1.514	1.021	5.797	0.290		
				WF7a			0.03	6345			12.75	12.13				5.390	1.153	1.021	6.345	0.317		
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	0.00	6505	111	136.1	8.25	7.16	Top	0	V1	0.503	1.285	1.021	0.660	0.033		
				WF7a			0.04	6505			8.25	7.52				2.070	1.183	1.021	2.500	0.125		
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	-0.02	6665	143	136.1	14.50	14.45	Top	0	V1	4.490	1.012	1.021	4.639	0.232		
				WF7a			-0.02	6665			13.00	12.58				5.190	1.102	1.021	5.839	0.292		
Body	6 GHz WiFi/ IEEE 802.11ax	160	OFDM	WF8	JMIQ6	97.95	0.06	6985	207	136.1	9.25	8.06	Top	0	V1	1.710	1.315	1.021	2.296	0.115		
				WF7a			0.02	6985			9.25	8.63				2.290	1.153	1.021	2.696	0.135		

Note: Due to the spatial separation of Antenna WF7a and Antenna WF8, two measurement cubes were evaluated during MIMO SAR testing. Cubes 1 and 2 are located over the SAR distributions produced by Antenna WF8 and WF7a, respectively. Due to the spatial separation of the distributions, the conduct power of each antenna was individually considered for each measurement cube to determine the reported SAR.

9.6 2.4 GHz Bluetooth SISO Standalone SAR

Table 9-9 Antenna WF8

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Rate (1g SAR)	Plot #
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	0.08	2441	39	1	18.50	18.27	Back	0	V2	0.133	0.062	1.054	1.007	0.141	0.066	0.088	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	-0.02	2402	0	1	18.50	18.04	Top	0	V2	0.812	0.324	1.112	1.007	0.909	0.363	0.568	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	-0.09	2441	39	1	18.50	18.27	Top	0	V2	0.954	0.376	1.054	1.007	1.012	0.399	0.633	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	0.04	2480	78	1	18.50	17.91	Top	0	V2	0.991	0.381	1.146	1.007	1.144	0.440	0.715	A4
Body	2.4 GHz Bluetooth	FHSS	WF8	M06Gf	76.97	-0.16	2480	78	1	18.50	17.98	Top	0	V1	0.912	0.361	1.127	1.007	1.035	0.410	0.647	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	0.02	2441	39	1	18.50	18.27	Bottom	0	V2	0.010	0.004	1.054	1.007	0.011	0.004	0.007	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	0.01	2441	39	1	18.50	18.27	Right	0	V2	0.014	0.008	1.054	1.007	0.015	0.008	0.009	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	0.06	2441	39	1	18.50	18.27	Left	0	V2	0.901	0.000	1.054	1.007	0.901	0.000	0.001	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	0.14	2480	78	1	13.00	12.29	Back	0	V2	0.024	0.011	1.178	1.007	0.028	0.013	0.018	
Body	2.4 GHz Bluetooth	FHSS	WF8	61FW0	76.97	-0.06	2480	78	1	13.00	12.29	Top	0	V2	0.187	0.076	1.178	1.007	0.222	0.090	0.139	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population																						

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 81 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-10 Antenna WF7b

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.01	2480	78	1	20.00	19.49	Back	0	V2	0.138	0.068	1.125	1.007	0.156	0.077	0.098	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.06	2402	0	1	20.00	19.43	Top	0	V2	0.701	0.310	1.140	1.007	0.805	0.356	0.503	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.03	2441	39	1	20.00	19.25	Top	0	V2	0.850	0.377	1.189	1.007	1.018	0.451	0.636	
Body	2.4 GHz Bluetooth	FHSS	WF7b	TGH66	76.97	-0.04	2441	39	1	20.00	19.35	Top	0	V1	0.867	0.388	1.161	1.007	1.014	0.454	0.634	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.01	2480	78	1	20.00	19.49	Top	0	V2	0.873	0.376	1.125	1.007	0.989	0.426	0.618	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.04	2480	78	1	20.00	19.49	Bottom	0	V2	0.002	0.000	1.125	1.007	0.002	0.000	0.001	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.01	2480	78	1	20.00	19.49	Right	0	V2	0.008	0.003	1.125	1.007	0.009	0.003	0.006	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.04	2480	78	1	20.00	19.49	Left	0	V2	0.612	0.282	1.125	1.007	0.693	0.319	0.433	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	-0.12	2441	39	1	14.00	13.21	Back	0	V2	0.027	0.013	1.199	1.007	0.033	0.016	0.021	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.02	2441	39	1	14.00	13.21	Top	0	V2	0.165	0.071	1.199	1.007	0.199	0.086	0.124	
Body	2.4 GHz Bluetooth	FHSS	WF7b	61FW0	76.97	0.09	2441	39	1	14.00	13.21	Left	0	V2	0.118	0.052	1.199	1.007	0.142	0.063	0.089	
ANSI/IEEE C35.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population															Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

9.7 802.15.4 Standalone SAR

Table 9-11 Antenna WF8

Exposure	Band / Mode	Ant.	Serial Number	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #	
Body	802.15.4	WF8	M06GF	-0.01	2440	18	1	21.00	19.76	Back	0	V1	0.148	0.071	1.330	0.118	0.057	0.074		
Body	802.15.4	WF8	M06GF	0.00	2405	11	1	21.00	19.48	Top	0	V1	0.847	0.353	1.419	0.721	0.301	0.451		
Body	802.15.4	WF8	M06GF	0.02	2440	18	1	21.00	19.76	Top	0	V1	1.140	0.466	1.330	0.910	0.372	0.569		
Body	802.15.4	WF8	M06GF	-0.03	2475	25	1	21.00	19.72	Top	0	V1	1.480	0.584	1.343	1.193	0.471	0.746	A5	
Body	802.15.4	WF8	M06GF	0.03	2475	25	1	21.00	19.72	Top	0	V1	1.400	0.567	1.343	1.128	0.457	0.705		
Body	802.15.4	WF8	61FW0	0.05	2475	25	1	21.00	19.64	Top	0	V2	1.420	0.566	1.368	1.166	0.465	0.729		
Body	802.15.4	WF8	M06GF	-0.01	2475	25	1	21.00	19.72	Top	0	V1	1.390	0.544	1.343	1.120	0.438	0.700		
Body	802.15.4	WF8	M06GF	0.07	2440	18	1	21.00	19.76	Bottom	0	V1	0.016	0.007	1.330	0.013	0.006	0.008		
Body	802.15.4	WF8	M06GF	0.11	2440	18	1	21.00	19.76	Right	0	V1	0.021	0.012	1.330	0.017	0.010	0.011		
Body	802.15.4	WF8	M06GF	0.01	2440	18	1	21.00	19.76	Left	0	V1	0.001	0.000	1.330	0.001	0.000	0.001		
Body	802.15.4	WF8	M06GF	0.04	2405	11	1	14.00	13.69	Back	0	V1	0.045	0.022	1.074	0.029	0.014	0.018		
Body	802.15.4	WF8	M06GF	-0.04	2405	11	1	14.00	13.69	Top	0	V1	0.273	0.112	1.074	0.176	0.072	0.110		
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body					
Spatial Peak															1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population															averaged over 1 gram					

Note: Blue entry represents variability measurement

Note: Manufacturer declared that maximum source-based duty cycle of 802.15.4 mode is permanently limited to 60%. SAR measurement for 802.15.4 is evaluated at higher duty cycle of 100% and scaled down to 60%.

Table 9-12 Antenna WF7b

Exposure	Band / Mode	Ant.	Serial Number	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot
Body	802.15.4	WF7b	TGH66	-0.08	2405	11	1	21.50	20.68	Back	0	V1	0.162	0.085	1.208	0.117	0.062	0.073	
Body	802.15.4	WF7b	TGH66	-0.04	2405	11	1	21.50	20.68	Top	0	V1	1.020	0.444	1.208	0.739	0.322	0.462	
Body	802.15.4	WF7b	TGH66	0.00	2440	18	1	21.50	20.39	Top	0	V1	1.100	0.482	1.291	0.852	0.373	0.533	
Body	802.15.4	WF7b	TGH66	-0.03	2475	25	1	21.50	20.35	Top	0	V1	1.290	0.554	1.303	1.009	0.433	0.631	
Body	802.15.4	61FW0	TGH66	-0.01	2475	25	1	21.50	20.28	Top	0	V2	1.260	0.540	1.324	1.001	0.429	0.626	
Body	802.15.4	WF7b	TGH66	0.02	2405	11	1	21.50	20.68	Bottom	0	V1	0.010	0.004	1.208	0.007	0.003	0.004	
Body	802.15.4	WF7b	TGH66	-0.10	2405	11	1	21.50	20.68	Right	0	V1	0.012	0.004	1.208	0.009	0.003	0.006	
Body	802.15.4	WF7b	TGH66	-0.01	2405	11	1	21.50	20.68	Left	0	V1	0.669	0.309	1.208	0.485	0.224	0.303	
Body	802.15.4	WF7b	TGH66	0.02	2405	11	1	15.00	14.07	Back	0	V1	0.043	0.021	1.239	0.032	0.016	0.020	
Body	802.15.4	WF7b	TGH66	-0.03	2405	11	1	15.00	14.07	Top	0	V1	0.276	0.100	1.239	0.168	0.074	0.105	
Body	802.15.4	WF7b	TGH66	-0.06	2405	11	1	15.00	14.07	Left	0	V1	0.190	0.086	1.239	0.141	0.064	0.088	
ANSI/IEEE C35.1 1992 - SAFETY LIMIT													Body						
Spatial Peak													1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population													averaged over 1 gram						

Note: Manufacturer declared that maximum source-based duty cycle of 802.15.4 mode is permanently limited to 60%. SAR measurement for 802.15.4 is evaluated at higher duty cycle of 100% and scaled down to 60%.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 82 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9.8 NB U-NII 1 Standalone SAR

Table 9-13 Antenna WF8

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 1	HDR	WF8	TGH66	76.97	0.14	5245	High	8	13.50	12.85	Back	0	V1	0.037	0.013	1.161	0.043	0.015	0.027	
Body	NB U-NII 1	HDR	WF8	TGH66	76.97	-0.05	5245	High	8	13.50	12.85	Top	0	V1	0.391	0.126	1.161	0.457	0.147	0.286	
Body	NB U-NII 1	HDR	WF8	61FW0	76.97	-0.04	5245	High	8	13.50	12.82	Top	0	V2	0.176	0.122	1.169	0.443	0.144	0.277	
Body	NB U-NII 1	HDR	WF8	TGH66	76.97	0.09	5245	High	8	13.50	12.85	Bottom	0	V1	0.000	0.000	1.161	0.000	0.000	0.000	
Body	NB U-NII 1	HDR	WF8	TGH66	76.97	0.03	5245	High	8	13.50	12.85	Right	0	V1	0.000	0.000	1.161	0.000	0.000	0.000	
Body	NB U-NII 1	HDR	WF8	TGH66	76.97	0.05	5245	High	8	13.50	12.85	Left	0	V1	0.002	0.000	1.161	0.002	0.000	0.001	
Body	NB U-NII 1	HDR	WF8	TGH66	76.54	0.02	5245	High	4	10.50	9.48	Top	0	V1	0.142	0.045	1.265	0.182	0.058	0.114	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

Table 9-14 Antenna WF7a

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 1	HDR	WF7a	N6799	76.97	0.07	5162	Low	8	13.50	13.36	Back	0	V1	0.045	0.016	1.033	0.047	0.017	0.029	
Body	NB U-NII 1	HDR	WF7a	N6799	76.97	0.03	5162	Low	8	13.50	13.36	Top	0	V1	0.436	0.151	1.033	0.453	0.157	0.283	
Body	NB U-NII 1	HDR	WF7a	61FW0	76.97	0.14	5162	Low	8	13.50	13.15	Top	0	V2	0.454	0.154	1.084	0.496	0.168	0.310	
Body	NB U-NII 1	HDR	WF7a	N6799	76.97	0.04	5162	Low	8	13.50	13.36	Bottom	0	V1	0.002	0.000	1.033	0.002	0.000	0.001	
Body	NB U-NII 1	HDR	WF7a	N6799	76.97	0.02	5162	Low	8	13.50	13.36	Right	0	V1	0.000	0.000	1.033	0.000	0.000	0.000	
Body	NB U-NII 1	HDR	WF7a	N6799	76.97	0.06	5162	Low	8	13.50	13.36	Left	0	V1	0.010	0.002	1.033	0.010	0.002	0.006	
Body	NB U-NII 1	FHSS	WF7a	61FW0	76.97	0.16	5162	Low	1	10.00	8.91	Top	0	V2	0.151	0.050	1.285	0.195	0.065	0.122	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

9.9 NB U-NII 3 Standalone SAR

Table 9-15 Antenna WF8

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 3	FHSS	WF8	4D14K	76.97	0.06	5789	Mid	1	13.50	12.58	Back	0	V2	0.034	0.011	1.236	0.042	0.014	0.026	
Body	NB U-NII 3	FHSS	WF8	4D14K	76.97	-0.05	5789	Mid	1	13.50	12.58	Top	0	V2	0.469	0.141	1.236	0.584	0.175	0.365	
Body	NB U-NII 3	FHSS	WF8	N6799	76.97	-0.03	5789	Mid	1	13.50	12.45	Top	0	V1	0.410	0.123	1.274	0.526	0.158	0.329	
Body	NB U-NII 3	FHSS	WF8	4D14K	76.97	0.01	5789	Mid	1	13.50	12.58	Bottom	0	V2	0.008	0.000	1.236	0.010	0.000	0.006	
Body	NB U-NII 3	FHSS	WF8	4D14K	76.97	0.04	5789	Mid	1	13.50	12.58	Right	0	V2	0.003	0.000	1.236	0.004	0.000	0.003	
Body	NB U-NII 3	FHSS	WF8	4D14K	76.97	0.06	5789	Mid	1	13.50	12.58	Left	0	V2	0.000	0.000	1.236	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	WF8	4D14K	76.97	0.01	5733	Low	1	9.50	8.57	Top	0	V2	0.106	0.028	1.239	0.132	0.035	0.083	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

Table 9-16 Antenna WF7a

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Add'l Info	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Reported 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	NB U-NII 3	FHSS	WF7a	JV4NH	76.97	0.08	5789	Mid	1	13.50	12.51	Back	0	V2	0.050	0.019	1.256	0.063	0.024	0.039	
Body	NB U-NII 3	FHSS	WF7a	N6799	76.97	-0.04	5789	Mid	1	13.50	12.60	Top	0	V1	0.513	0.158	1.230	0.635	0.196	0.397	
Body	NB U-NII 3	FHSS	WF7a	JV4NH	76.97	0.07	5789	Mid	1	13.50	12.51	Top	0	V2	0.526	0.161	1.256	0.665	0.204	0.416	A6
Body	NB U-NII 3	FHSS	WF7a	JV4NH	76.97	0.02	5789	Mid	1	13.50	12.51	Bottom	0	V2	0.000	0.000	1.256	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	WF7a	JV4NH	76.97	0.05	5789	Mid	1	13.50	12.51	Right	0	V2	0.000	0.000	1.256	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	WF7a	JV4NH	76.97	0.02	5789	Mid	1	13.50	12.51	Left	0	V2	0.000	0.000	1.256	0.000	0.000	0.000	
Body	NB U-NII 3	FHSS	WF7a	JV4NH	76.97	-0.09	5644	High	1	9.00	7.99	Top	0	V2	0.138	0.041	1.262	0.175	0.052	0.109	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT												Body									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

Note: The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is permanently limited to 77.5% per manufacturer.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 83 of 95

REV 24.0

05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

9.10 WPT Standalone SAR

Table 9-17

Exposure	Band / Mode	Service / Modulation	Serial Number	Power Drift [dB]	Frequency [MHz]	Test Position	Measured 1g SAR [W/kg]	Measured 10g SAR [W/kg]	Exposure Ratio (1g SAR)	Plot #
Body	WPT	CW	PMQP5	0.09	13.60	Back	0.024	0.005	0.015	A7
Body	WPT	CW	PMQP5	0.07	13.60	Top	0.000	0.000	0.000	
Body	WPT	CW	PMQP5	-0.15	13.60	Bottom	0.000	0.000	0.000	
Body	WPT	CW	PMQP5	0.21	13.60	Right	0.002	0.000	0.001	
Body	WPT	CW	PMQP5	0.01	13.60	Left	0.000	0.000	0.000	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram				

9.11 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 616217 D04v01r02, and FCC KDB Publication 447498 D04v01.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical, and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
6. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 10 for variability analysis.
7. FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D04v01 was applied to determine SAR test exclusion for adjacent edge configurations.
8. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.2. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
9. The orange highlights throughout the report represent the highest scaled SAR per Equipment Class.
10. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. Per October 2020 TCB Workshop notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 6.2.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 6.2.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D04v01 by either evaluating the sum of the 1g SAR values

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 84 of 95

REV 24.0
05/01/2024

of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Appendix E for complete analysis.

4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
6. The time-averaged mechanism for WLAN operations was disabled for the above SAR measurements. The SAR was scaled to the maximum time-averaged output power.

Bluetooth/NB UNII Notes

1. Bluetooth SAR was evaluated with a test mode with hopping disabled with DH5 operation. The reported SAR was scaled to the 77.5% transmission duty factor to determine compliance since the duty factor of the device is limited to 77.5% per manufacturer. See Section 7.11 and 7.19 for the time domain plot and calculation for the duty factor of the device.

802.15.4 Notes:

1. The manufacturer declared that the maximum source-based duty cycle of 802.15.4 mode is permanently limited to 60%. SAR measurement for 802.15.4 is evaluated at a higher duty cycle of 100% and scaled down to 60%. See Section 7.5 for the time domain plot for the duty factor of the device at the maximum source-based duty cycle of 60% and at the test mode during SAR measurement of 100%.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 85 of 95

REV 24.0
05/01/2024

9.12 Power Density Data

MEASUREMENT RESULTS																								
Frequency (MHz)	Channel	Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift (dB)	Spacing (mm)	Antenna Config.	Variant	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
6025	15	802.11ax	OFDM	160	13.50	12.51	-0.05	2	WF7a	V1	4PYLJ	68.1	Back	97.95	0.25	1.550	1.554	1.256	1.021	0.511	1.018	0.689	1.373	
6025	15	802.11ax	OFDM	160	13.50	12.51	-0.04	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.330	1.554	1.256	1.021	3.100	6.178	3.550	7.074	
6345	79	802.11ax	OFDM	160	12.75	12.00	0.08	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.500	1.554	1.189	1.021	2.940	5.546	3.750	7.074	
6505	111	802.11ax	OFDM	160	12.00	11.69	-0.03	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.690	1.554	1.074	1.021	3.640	6.203	4.150	7.072	
6665	143	802.11ax	OFDM	160	13.00	12.23	0.19	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.560	1.554	1.194	1.021	3.232	6.123	3.730	7.066	
6985	207	802.11ax	OFDM	160	13.00	11.02	0.14	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.230	1.554	1.578	1.021	2.380	5.959	2.790	6.985	
6025	15	802.11ax	OFDM	160	13.50	12.51	-0.06	2	WF7a	V1	4PYLJ	68.1	Bottom	97.95	0.25	1.340	1.554	1.256	1.021	0.195	0.389	0.202	0.403	
6025	15	802.11ax	OFDM	160	13.50	12.51	-0.10	2	WF7a	V1	4PYLJ	68.1	Left	97.95	0.25	1.960	1.554	1.256	1.021	0.213	0.424	0.216	0.430	
6025	15	802.11ax	OFDM	160	13.50	12.51	-0.05	2	WF7a	V1	4PYLJ	68.1	Right	97.95	0.25	1.510	1.554	1.256	1.021	0.236	0.470	0.264	0.526	
6025	15	802.11ax	OFDM	160	13.50	12.51	0.16	9.95	WF7a	V1	4PYLJ	68.1	Back	97.95	0.25	1.690	1.554	1.256	1.021	0.317	0.632	0.339	0.676	
6345	79	802.11ax	OFDM	160	12.75	12.00	0.02	9.45	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	0.722	1.554	1.189	1.021	0.987	1.862	1.180	2.226	
6345	79	802.11ax	OFDM	160	15.25	13.43	0.17	2	WF8	V1	QMQU6	68.1	Back	97.95	0.25	1.740	1.554	1.521	1.021	0.402	0.970	0.466	1.125	
6025	15	802.11ax	OFDM	160	14.50	14.22	-0.05	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.750	1.554	1.067	1.021	3.150	5.333	4.180	7.076	
6345	79	802.11ax	OFDM	160	15.25	13.43	0.05	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.260	1.554	1.521	1.021	2.670	6.443	2.930	7.071	
6505	111	802.11ax	OFDM	160	13.00	12.45	-0.03	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	0.944	1.554	1.135	1.021	1.310	2.359	1.480	2.665	
6665	143	802.11ax	OFDM	160	14.50	14.35	0.01	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.930	1.554	1.035	1.021	3.960	6.503	4.310	7.078	
6985	207	802.11ax	OFDM	160	12.00	10.82	0.18	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.450	1.554	1.312	1.021	2.920	6.078	3.360	7.036	
6345	79	802.11ax	OFDM	160	15.25	13.43	-0.02	2	WF8	V1	QMQU6	68.1	Bottom	97.95	0.25	1.290	1.554	1.521	1.021	0.272	0.656	0.378	0.912	
6345	79	802.11ax	OFDM	160	15.25	13.43	-0.16	2	WF8	V1	QMQU6	68.1	Left	97.95	0.25	1.360	1.554	1.521	1.021	0.333	0.804	0.336	0.816	
6345	79	802.11ax	OFDM	160	15.25	13.43	-0.11	2	WF8	V1	QMQU6	68.1	Right	97.95	0.25	1.260	1.554	1.521	1.021	0.259	0.625	0.287	0.693	
6345	79	802.11ax	OFDM	160	15.25	13.43	-0.03	9.45	WF8	V1	QMQU6	68.1	Back	97.95	0.25	1.620	1.554	1.521	1.021	0.268	0.647	0.289	0.697	
6665	143	802.11ax	OFDM	160	14.50	14.36	-0.18	9	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.160	1.554	1.033	1.021	1.260	2.065	1.410	2.311	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²														

MEASUREMENT RESULTS																								
Frequency (MHz)	Channel	Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing (mm)	Antenna Config.	Variant	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
6025	15	802.11ax	OFDM	160	14.50	13.90	0.13	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.530	1.554	1.148	1.021	3.330	6.065	3.730	6.794	
6025	15	802.11ax	OFDM	160	13.50	13.26	-0.07	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.210	1.554	1.057	1.021	3.620	6.071	4.230	7.094	
6345	79	802.11ax	OFDM	160	15.25	13.57	0.29	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	1.400	1.554	1.472	1.021	2.490	5.815	2.710	6.329	
6345	79	802.11ax	OFDM	160	12.75	12.06	0.19	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.670	1.554	1.172	1.021	3.330	6.192	4.090	7.605	
6505	111	802.11ax	OFDM	160	8.25	7.16	-0.16	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	0.494	1.554	1.285	1.021	0.629	1.282	0.698	1.423	
6505	111	802.11ax	OFDM	160	8.25	7.52	-0.02	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	0.940	1.554	1.183	1.021	1.800	3.379	1.940	3.641	
6665	143	802.11ax	OFDM	160	14.50	14.45	0.11	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	2.320	1.554	1.012	1.021	3.970	6.375	4.360	7.033	A8
6665	143	802.11ax	OFDM	160	13.00	12.58	0.18	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	1.600	1.554	1.102	1.021	2.850	4.983	3.550	6.207	
6985	207	802.11ax	OFDM	160	9.25	8.06	0.05	2	WF8	V1	QMQU6	68.1	Top	97.95	0.041	0.968	1.554	1.315	1.021	1.580	3.297	1.770	3.693	
6985	207	802.11ax	OFDM	160	9.25	8.63	-0.07	2	WF7a	V1	4PYLJ	68.1	Top	97.95	0.041	0.681	1.554	1.153	1.021	0.857	1.568	1.120	2.049	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population																	Power Density 10 W/m² averaged over 4 cm²							

Note: Due to the spatial separation of Antenna WF7a and Antenna WF8, two measurement cubes were evaluated during MIMO SAR testing. Cubes 1 and 2 are located over the SAR distributions produced by Antenna WF8 and WF7a, respectively. Due to the spatial separation of the distributions, the conduct power of each antenna was individually considered for each measurement cube to determine the reported SAR.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 86 of 95

9.13 Power Density Notes

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements. The DUT was connected to a wall charger for some measurements due to the test duration. It was confirmed that the charger plugged into this DUT did not impact the near-field PD test results.
3. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
5. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
6. Per equipment manufacturer guidance, power density was measured at $d=2\text{mm}$ and $d=\lambda/5\text{mm}$ using the same grid size and grid step size for some frequencies and surfaces. The integrated Power Density (iPD) was calculated based on these measurements. Since iPD ratio between the two distances is $\geq -1\text{dB}$, the grid step was sufficient for determining compliance at $d=2\text{mm}$.
7. PD results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
8. PTP-PR algorithm was used during psPD measurement and calculations.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 87 of 95

REV 24.0
05/01/2024

10 SAR MEASUREMENT VARIABILITY

10.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Table 10-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Ant	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	3rd Repeated SAR (1g)
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)	(W/kg)
2450	2475.00	25	802.15.4, 22 MHz Bandwidth	CW	Ant WF8	1	Top	0 mm	1.480	1.400	1.06	1.39	1.06
5250	5270.00	54	5 GHz WiFi/IEEE 802.11n, 40 MHz Bandwidth MIMO	OFDM	Ant WF8	13.5	Top	0 mm	1.080	1.030	1.05	N/A	N/A
5600	5610.00	122	5 GHz WiFi/IEEE 802.11ac, 80 MHz Bandwidth	OFDM	Ant WF7a	29	Top	0 mm	0.961	0.921	1.04	N/A	N/A
5750	5775.00	155	5 GHz WiFi/IEEE 802.11ac, 80 MHz Bandwidth MIMO	OFDM	Ant WF8	29.3	Top	0 mm	0.921	0.903	1.02	N/A	N/A
6500	6665.00	143	6 GHz WiFi/IEEE 802.11ax, 160 MHz Bandwidth	OFDM	Ant WF7a	68.1	Top	0 mm	0.868	0.833	1.04	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram				

10.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 88 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

11 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY45113242
Agilent	E4438C	ESG Vector Signal Generator	10/23/2024	Annual	10/23/2025	MY45093852
Agilent	E4438C	ESG Vector Signal Generator	03/25/2024	Annual	03/25/2025	MY47270002
Agilent	N5182A	MXG Vector Signal Generator	07/09/2024	Annual	07/09/2025	MY48180366
Agilent	N5182A	MXG Vector Signal Generator	03/07/2024	Annual	03/07/2025	MY47420603
Agilent	8753ES	S-Parameter Vector Network Analyzer	01/10/2024	Annual	01/10/2025	MY40001472
Agilent	8753ES	S-Parameter Vector Network Analyzer	09/25/2024	Annual	09/25/2025	MY40003841
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433973
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Anritsu	MN8110B	I/O Adaptor	CBT	N/A	CBT	6261747881
Anritsu	ML2496A	Power Meter	07/15/2024	Annual	07/15/2025	1138001
Anritsu	ML2496A	Power Meter	06/24/2024	Annual	06/24/2025	1840005
Anritsu	MA2411B	Pulse Power Sensor	09/05/2024	Annual	09/05/2025	1726262
Anritsu	MA2411B	Pulse Power Sensor	10/21/2024	Annual	10/21/2025	1027293
Anritsu	MA24106A	USB Power Sensor	07/10/2024	Annual	07/10/2025	1827530
Anritsu	MA24106A	USB Power Sensor	04/15/2024	Annual	04/15/2025	1827528
Mini-Circuits	PWR-4GHS	USB Power Sensor	06/12/2024	Annual	06/12/2025	12001070013
Control Company	4052	Long Stem Thermometer	02/27/2024	Biennial	02/27/2026	240174346
Control Company	4052	Long Stem Thermometer	02/27/2024	Biennial	02/27/2026	240171096
Control Company	4052	Long Stem Thermometer	02/27/2024	Biennial	02/27/2026	240171059
Control Company	4040	Therm./ Clock/ Humidity Monitor	04/15/2024	Biennial	04/15/2026	240310280
Control Company	4040	Therm./ Clock/ Humidity Monitor	04/15/2024	Biennial	04/15/2026	240310282
Control Company	S66279	Therm./ Clock/ Humidity Monitor	02/16/2024	Biennial	02/16/2026	240140051
Mitutoyo	500-196-30	CD-6" ASX 6inch Digital Caliper	02/16/2022	Triennial	02/16/2025	A20238413
Keysight Technologies	N9020A	MXA Signal Analyzer	07/08/2024	Annual	07/08/2025	MY48010233
Agilent	N9020A	MXA Signal Analyzer	06/14/2024	Annual	06/14/2025	MY56470202
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	07/10/2024	Annual	07/10/2025	31634
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	07/10/2024	Annual	07/10/2025	1628
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	ZUDC10-83-S+	Directional Coupler	CBT	N/A	CBT	2050
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Seekonk	NC-100	Torque Wrench	04/02/2024	Biennial	04/02/2026	1262
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/14/2024	Annual	05/14/2025	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/05/2024	Annual	11/05/2025	1277
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	08/07/2024	Annual	08/07/2025	1041
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1237
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1331
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1390
SPEAG	DAK-12	Dielectric Assessment Kit (4MHz - 3GHz)	03/11/2024	Annual	03/11/2025	1102
SPEAG	5G Verification Source 10GHz	10GHz System Verification Antenna	10/08/2024	Annual	10/08/2025	1006
SPEAG	CLA-13	Confined Loop Antenna	11/11/2024	Annual	11/11/2025	1004
SPEAG	D2450V2	2450 MHz SAR Dipole	10/23/2024	Annual	10/23/2025	921
SPEAG	D2450V2	2450 MHz SAR Dipole	11/15/2022	Triennial	11/15/2025	855
SPEAG	D5GHzV2	5 GHz SAR Dipole	06/12/2024	Annual	06/12/2025	1163
SPEAG	D5GHzV3	6 GHz SAR Dipole	11/8/2024	Annual	11/08/2025	1066
SPEAG	D6.5GHzV2	6.5 GHz SAR Dipole	10/10/2024	Annual	10/10/2025	1019
SPEAG	DAE4	Dasy Data Acquisition Electronics	03/06/2024	Annual	03/06/2025	534
SPEAG	DAE4	Dasy Data Acquisition Electronics	09/04/2024	Annual	09/04/2025	1403
SPEAG	DAE4	Dasy Data Acquisition Electronics	02/09/2024	Annual	02/09/2025	467
SPEAG	DAE4	Dasy Data Acquisition Electronics	09/04/2024	Annual	09/04/2025	1684
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/9/2024	Annual	10/09/2025	1333
SPEAG	EX3DV4	SAR Probe	02/09/2024	Annual	02/09/2025	7427
SPEAG	EX3DV4	SAR Probe	09/09/2024	Annual	09/09/2025	3949
SPEAG	EX3DV4	SAR Probe	02/09/2024	Annual	02/09/2025	7308
SPEAG	EX3DV4	SAR Probe	09/09/2024	Annual	09/09/2025	7639
SPEAG	EX3DV4	EU mm WV4 Probe	04/08/2024	Annual	04/08/2025	9487

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 89 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

12 MEASUREMENT UNCERTAINTIES

Applicable for SAR measurements < 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)				RSS			12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)				k=2			24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 90 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for SAR measurements > 6 GHz:

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E2.1	9.3	N	1	1	1	9.3	9.3	∞
Axial Isotropy	E2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS	13.8	13.6
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	27.6	27.1

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 91 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for Power Density measurements:

a	b	c	d	e	f = c x f/e	g
Uncertainty Component	Unc. (± dB)	Prob. Dist.	Div.	c _i	u _i (± dB)	v _i
Measurement System						
Calibration	0.49	N	1	1	0.49	∞
Probe Correction	0.00	R	1.73	1	0.00	∞
Frequency Response	0.20	R	1.73	1	0.12	∞
Sensor Cross Coupling	0.00	R	1.73	1	0.00	∞
Isotropy	0.50	R	1.73	1	0.29	∞
Linearity	0.20	R	1.73	1	0.12	∞
Probe Scattering	0.00	R	1.73	1	0.00	∞
Probe Positioning offset	0.30	R	1.73	1	0.17	∞
Probe Positioning Repeatability	0.04	R	1.73	1	0.02	∞
Sensor Mechanical Offset	0.00	R	1.73	1	0.00	∞
Probe Spatial Resolution	0.00	R	1.73	1	0.00	∞
Field Impedance Dependence	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Drift	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Noise	0.04	R	1.73	1	0.02	∞
Measurement Area Truncation	0.00	R	1.73	1	0.00	∞
Data Acquisition	0.03	N	1	1	0.03	∞
Sampling	0.00	R	1.73	1	0.00	∞
Field Reconstruction	2.00	R	1.73	1	1.15	∞
Forward Transformation	0.00	R	1.73	1	0.00	∞
Power Density Scaling	0.00	R	1.73	1	0.00	∞
Spatial Averaging	0.10	R	1.73	1	0.06	∞
System Detection Limit	0.04	R	1.73	1	0.02	∞
Test Sample Related						
Probe Coupling with DUT	0.00	R	1.73	1	0.00	∞
Modulation Response	0.40	R	1.73	1	0.23	∞
Integration Time	0.00	R	1.73	1	0.00	∞
Response Time	0.00	R	1.73	1	0.00	∞
Device Holder Influence	0.10	R	1.73	1	0.06	∞
DUT alignment	0.00	R	1.73	1	0.00	∞
RF Ambient Conditions	0.04	R	1.73	1	0.02	∞
Ambient Reflections	0.04	R	1.73	1	0.02	∞
Immunity/Secondary Reception	0.00	R	1.73	1	0.00	∞
Drift of DUT	0.21	R	1.73	1	0.12	∞
Combined Standard Uncertainty (k=1)					RSS	1.34
Expanded Uncertainty (95% CONFIDENCE LEVEL)					k=2	2.68

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 92 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

13 CONCLUSION

13.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g., ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g., age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 93 of 95

REV 24.0
05/01/2024

14 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 94 of 95

REV 24.0
05/01/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: BCGA3266	RF EXPOSURE EVALUATION REPORT	Approved by: Technical Manager
DUT Type: Tablet Device		Page 95 of 95

REV 24.0
05/01/2024