

# Qwizdom Inc.

## RF Host

January 23, 2005

Report No. PROU0007

Report Prepared By



[www.nwemc.com](http://www.nwemc.com)  
1-888-EMI-CERT

© 2005 Northwest EMC, Inc

EMC Test Report



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

**Certificate of Test**  
**Issue Date: January 23, 2005**  
**Qwizdom Inc**  
**RF Host**

Emissions			
Specification	Test Method	Pass	Fail
FCC 15.247(a)(2) Occupied Bandwidth:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(b)(3) Output Power:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Band Edge Compliance:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Conducted Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(d) Spurious Radiated Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.247(e) Power Spectral Density:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FCC 15.207 AC Power Line Conducted Emissions:2004	ANSI C63.4:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Modifications made to the product**

**See the Modifications section of this report**

**Test Facility**

The measurement facilities used to collect the data is located at:

Northwest EMC, Inc.  
22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124  
Phone: (503) 844-4066  
Fax: 844-3826

The sites have been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

**Approved By:**

**Don Facteau, IS Manager**

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
00	None		

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.



200629-0  
200630-0  
200676-0

**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Hillsboro: C-1071 and R-1025, Irvine: C-2094 and R-1943, Newberg: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

**How important is it to understand performance criteria?**

It is the responsibility of the test laboratory to observe the results of the tests that are performed and to accurately report those results. As the responsible party (manufacturer, importer, etc) it is your responsibility to take those results, compare them against the specifications and standards, then, if appropriate make a declaration of conformity. As the responsible party it makes sense that you are fully aware of the requirements, how your device performs when tested to those requirements, and what information is being used to declare conformity.

To better assist you in making those conformity decisions, Northwest EMC has adopted a very simple, yet very clear performance assessment procedure. The following criteria is used when performing immunity or susceptibility tests:

**Performance Criteria 1:**

- ❑ The EUT exhibited no change in performance when operating as specified by the manufacturer. In this case no changes were observed during the test.
- ❑ In most cases this would be equivalent to Performance Criteria A. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, no changes were observed. Basically nothing happened.

**Performance Criteria 2:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment recovered without any operator intervention, once the test signal was removed. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria B. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT was able to recover from those changes without any operator intervention, once the test signal was removed.

**Performance Criteria 3:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment required some operator intervention in order to recover. This intervention may be in the form of changing EUT settings, or even resetting the system. The data sheets will detail the exact phenomena observed.
- ❑ In most cases this would be equivalent to Performance Criteria C. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. The EUT required some sort of operator intervention to recover. There was no permanent damage and the EUT appeared to function normally after completion test.

**Performance Criteria 4:**

- ❑ The EUT exhibited a change in performance when operating as specified by the manufacturer. In this case the equipment was damaged and would not recover. The data sheets will detail the exact phenomena observed.
- ❑ In most cases there is no specific criterion to compare this to, it typically ends the test. When operating the equipment in the modes or configurations specified by the responsible party, monitoring the parameters specified, changes were observed. There was no recovery; the equipment would no longer function as intended.

Each of the standards and specifications has unique performance criteria. In order to make an accurate assessment, one must compare the test results provided with the specific performance criteria. **To ensure that a responsible party is compliant with the specifications, one must read and understand those specifications. Provided below is a sample performance criteria, taken from EN 61000-6-1.**

**EN 61000-6-1 Performance Criteria**

**Performance Criteria A:** *The apparatus shall continue to operate as intended. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

**Performance Criteria B:** *The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.*

**Performance Criteria C:** *Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of controls.*

**How should a device perform in order for a declaration of conformity to be made?**

As already stated, it is the responsible party that must interpret and understand the results in such a way that a declaration of conformity is made. Having said that, we are often asked to render our opinion as to how a device should perform. Our recommendation simply follows the standards, as can be referenced below. Most of the standards and specifications offer the same performance criterion shown below as their requirements.

Test	Performance Criteria typically specified by the Standard	Equivalent Northwest EMC Performance Criteria
ESD	Performance Criteria B	Performance Criteria 1 or 2
Radiated RF	Performance Criteria A	Performance Criteria 1
EFT/Burst	Performance Criteria B	Performance Criteria 1 or 2
Surge	Performance Criteria B	Performance Criteria 1 or 2
Conducted RF	Performance Criteria A	Performance Criteria 1
Magnetic Field	Performance Criteria A	Performance Criteria 1
Voltage Dips and Variations	Performance Criteria B & C	Performance Criteria 1, 2, or 3

**What is measurement uncertainty?**


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

**How might measurement uncertainty be applied to test results?**

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

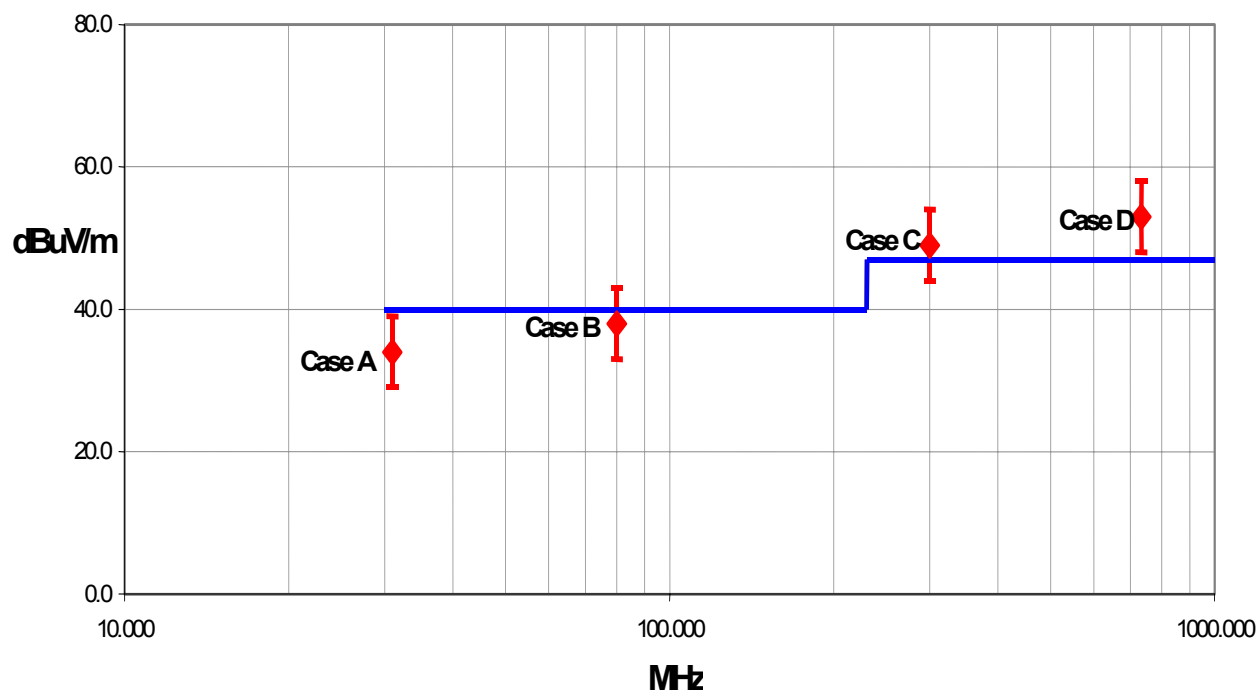**Test Result Scenarios:**

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.

**Radiated Emissions  $\leq 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

**Radiated Emissions  $> 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.38 - 1.35
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 2.57 - 2.51	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.76 - 2.70

**Conducted Emissions**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.48	1.48
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.97	2.97

**Radiated Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.11	2.11

**Conducted Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.10	2.10

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.

**California****Orange County Facility****Labs OC01 – OC13**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility****Labs EV01 – EV10**

22975 NW Evergreen Pkwy.,  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility****Labs TE01 – TE03**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**Washington****Sultan Facility****Labs SU01 – SU07**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536

**Party Requesting the Test**

<b>Company Name:</b>	Product Creation Studio
<b>Address:</b>	5425 Ballard Ave NW
<b>City, State, Zip:</b>	Seattle, WA 98107
<b>Test Requested By:</b>	Scott Thielman
<b>Model:</b>	RF Host
<b>First Date of Test:</b>	12-21-2004
<b>Last Date of Test:</b>	01-08-2005
<b>Receipt Date of Samples:</b>	12-21-2004
<b>Equipment Design Stage:</b>	Pre-Production
<b>Equipment Condition:</b>	No visual damage.

**Information Provided by the Party Requesting the Test**

<b>Clocks/Oscillators:</b>	1 MHz, 6 MHz, 16 MHz, 48 MHz, 65 MHz, 256 MHz, 2.45 GHz
<b>I/O Ports:</b>	USB

**Functional Description of the EUT (Equipment Under Test):**

EUT is a network host for an Audience Response System (ARS).

**Client Justification for EUT Selection:**

The product is an engineering sample, representative of the final product.


**Client Justification for Test Selection:**

These test satisfy the requirements for the FCC and CE mark.

**EUT Information**

The Audience Response System (ARS) consists of the elements shown in Figure1. A computer (laptop or desktop) connects to the network host via a USB connection. The host obtains its power from the USB connection and alternately from a regulated 9VDC wall transformer. The network host communicates to multiple audience remotes via an IEEE 802.15.4 compliant RF link. The teacher remote, Q5 RF, has more buttons and a larger graphical display, while the student remote, Q4 RF, has fewer buttons and smaller LCD. The remotes accept user feedback via the keypad and displays information on an LCD. The Q5 remotes are powered by rechargeable batteries and can be powered and recharged via a 9VDC regulated wall transformer. The Q4 remotes are powered by two AA alkaline batteries.

## Figure 1

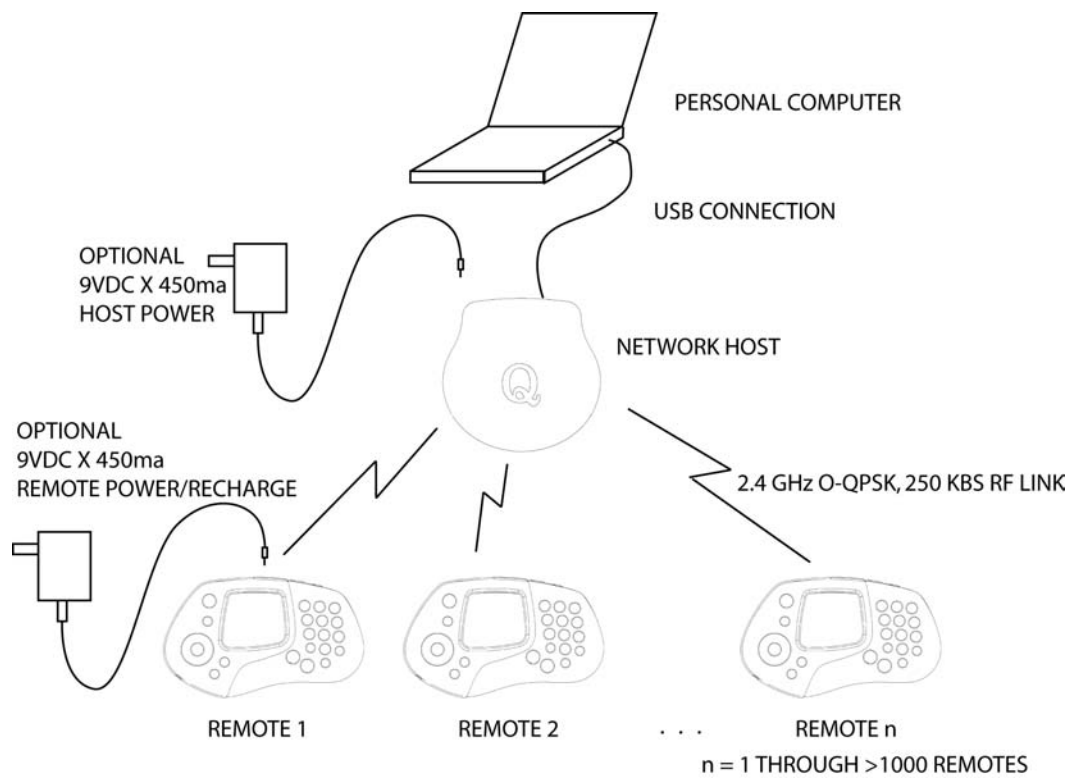

<b>Equipment modifications</b>					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Band Edge Compliance	12/20/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
2	Output Power	12/20/2004	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
3	Radiated Emissions – FCC DoC	12/28/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
4	Conducted Emissions – FCC DoC	01/03/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
5	AC Powerline Conducted Emissions	01/03/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
6	Occupied Bandwidth	01/06/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
7	Power Spectral Density	01/06/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
8	Spurious Conducted Emissions	01/06/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.
9	Spurious Radiated Emissions	01/08/2005	No EMI suppression devices were added or modified during this test.	Same configuration as in previous test.	EUT remained at Northwest EMC.

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Transmit
----------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Power Adapter	CUI, Inc.	41-9-500R	N/A
EUT- RF Host	Quizdom, Inc.	RF Host	Unknown

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
AC Power Adapter	DELTA, Inc.	ADP-75FB B	S4W0326044192
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	2.0		EUT- RF Host	Laptop PC
DC Leads	No	1.8	PA	AC Power Adapter	EUT- RF Host
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					


**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(a)(2), the 6 dB bandwidth of a direct sequence channel must be at least 500kHz. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation.

**Completed by:**

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: RF Host			Work Order: PROU0007		
Serial Number: Blue			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A			Job Site: EV06		
Tested by: Rod Peloquin			Power: 120VAC/60Hz		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(a)(2)	Year: Most Current	Method: FCC 97-114, ANSI C63.4	Year: 1992
------------------------------------	--------------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate, 802.11(b) modulation scheme

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

The minimum 6dB bandwidth is 500KHz

## RESULTS

## BANDWIDTH

Pass


1.87 MHz


## SIGNATURE


Tested By: 


## DESCRIPTION OF TEST


## Occupied Bandwidth - Low Channel

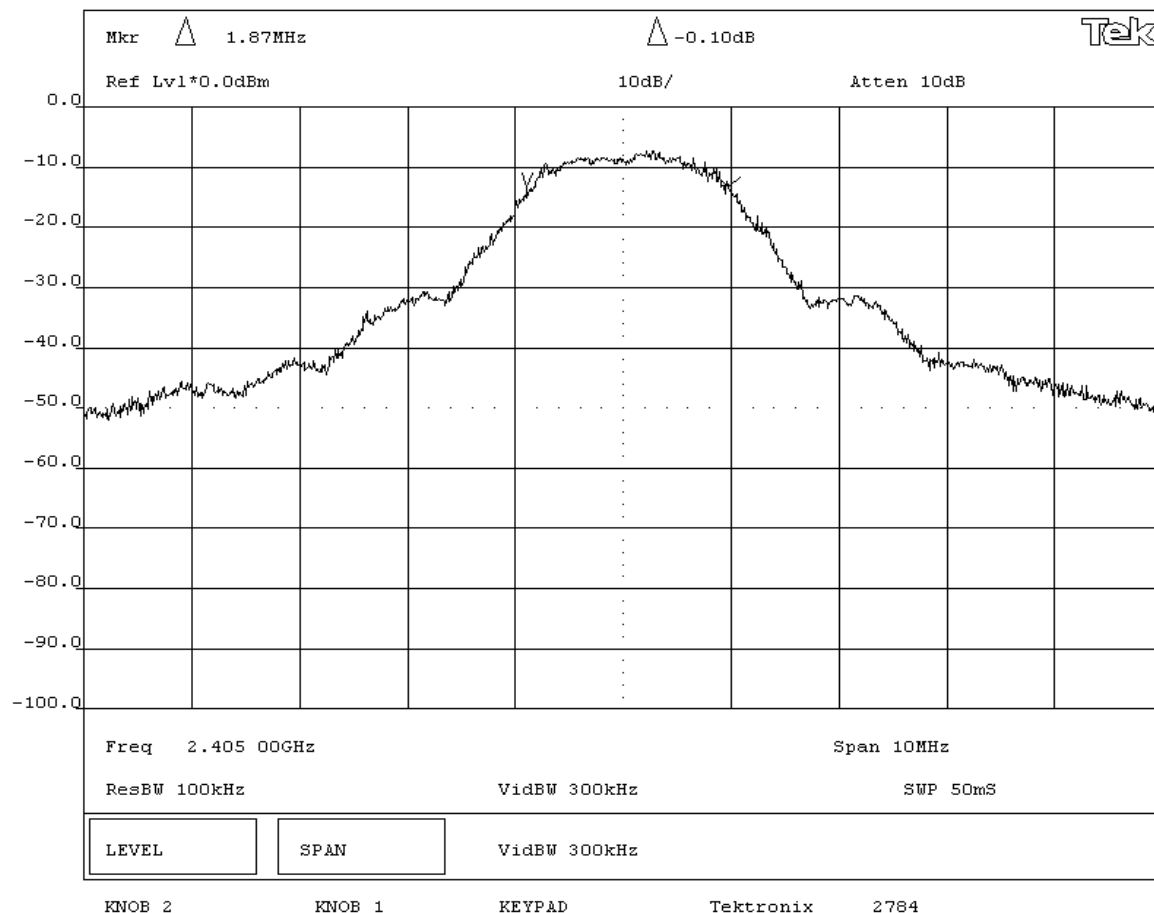


NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: RF Host			Work Order: PROU0007		
Serial Number: Blue			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(a)(2)		Year: Most Current		Method: FCC 97-114, ANSI C63.4	
				Year: 1992	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate, 802.11(b) modulation scheme					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
The minimum 6dB bandwidth is 500KHz					
RESULTS			BANDWIDTH		
Pass			1.82 MHz		
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					

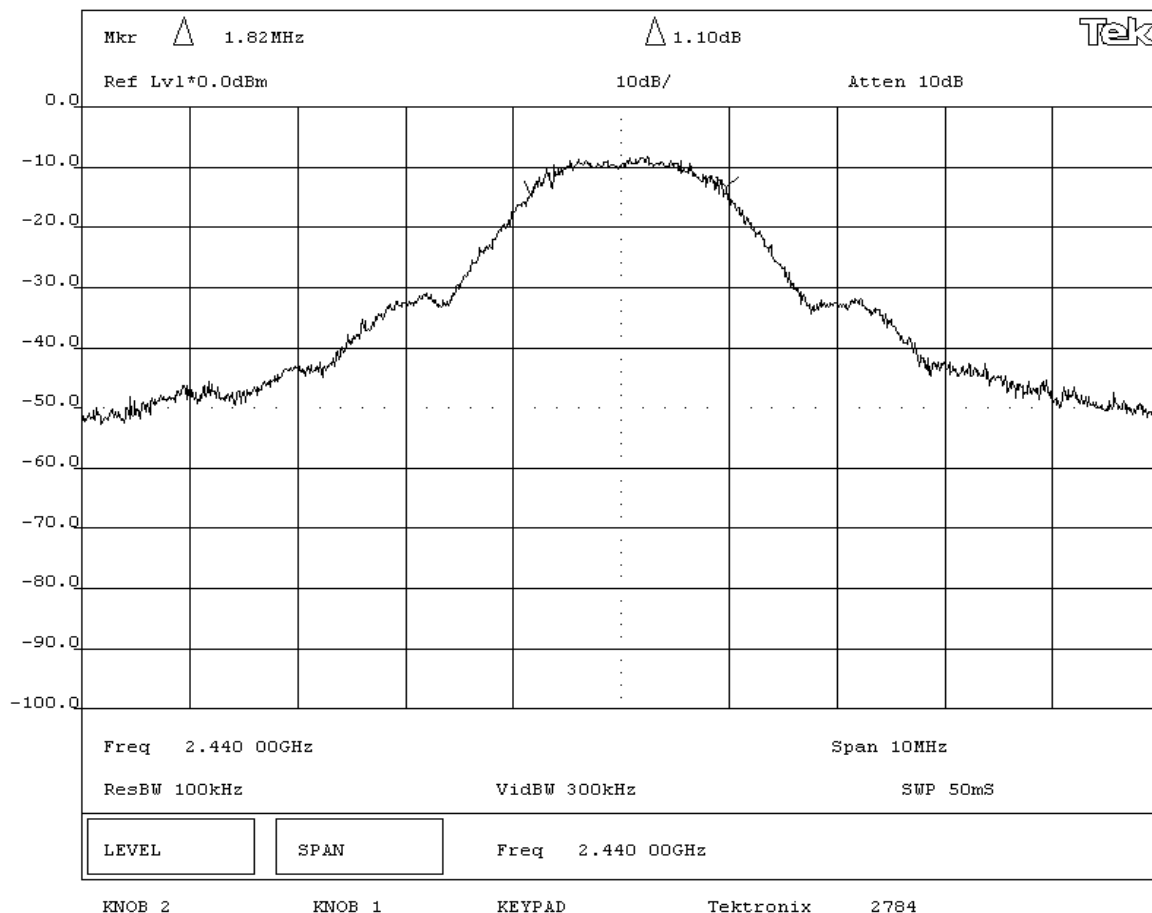

NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: RF Host			Work Order: PROU0007		
Serial Number: Blue			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	
TEST SPECIFICATIONS					
Specification: 47 CFR 15.247(a)(2)		Year: Most Current		Method: FCC 97-114, ANSI C63.4	
				Year: 1992	
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated by PRBS at maximum data rate, 802.11(b) modulation scheme					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
The minimum 6dB bandwidth is 500KHz					
RESULTS			BANDWIDTH		
Pass			1.87 MHz		
SIGNATURE					
 Tested By: _____					
DESCRIPTION OF TEST					
Occupied Bandwidth - High Channel					

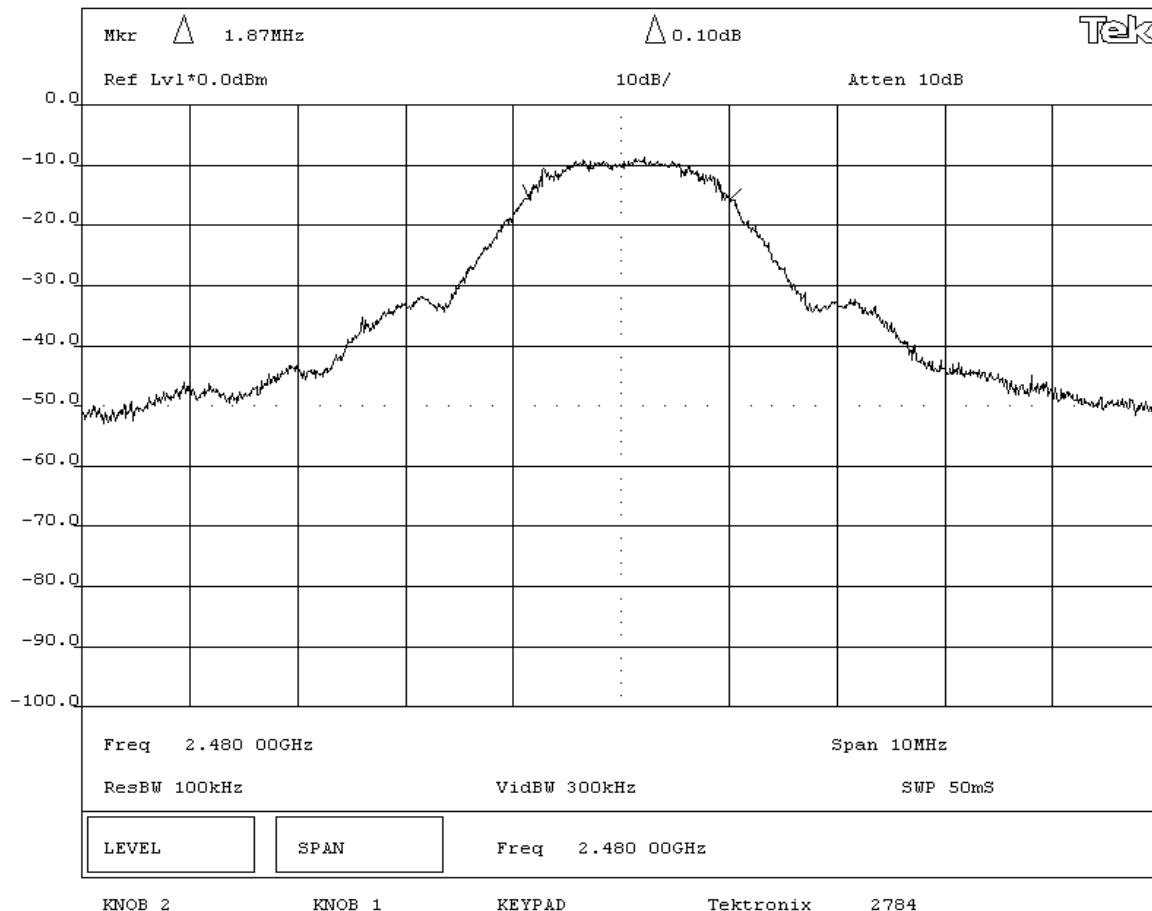

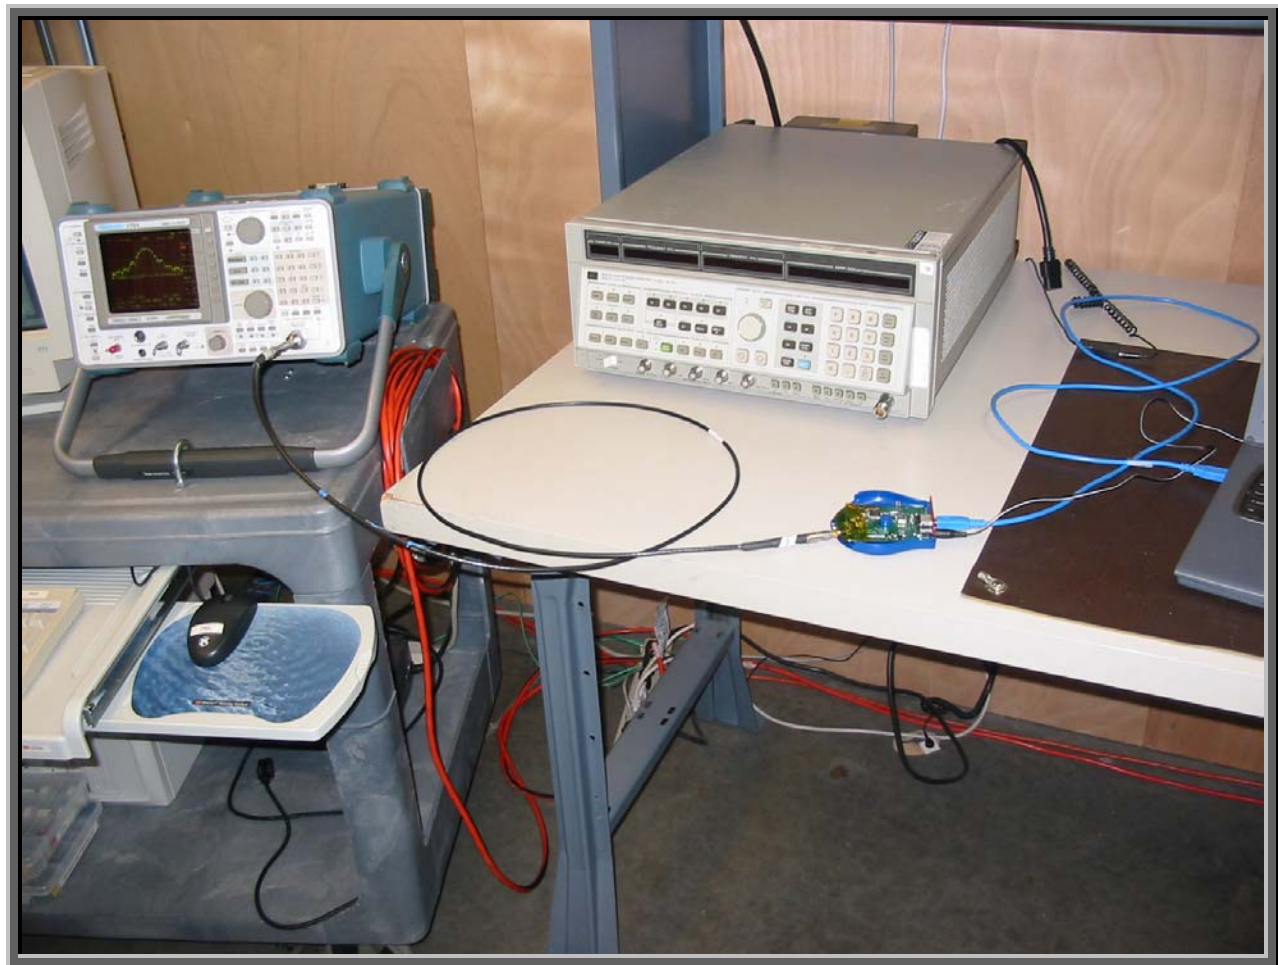

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Typical
---------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

Powered from USB
------------------

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- RF Host	Quizdom, Inc.	RF Host	Blue

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	No	2.0	No	EUT- Network Host	Laptop PC

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Power Meter	Hewlett Packard	E4418A	SPA	07/23/2004	24 mo
Power Sensor	Hewlett-Packard	8481H	SPB	07/23/2004	24 mo
Oscilloscope	Tektronix	TDS 3052	TOF	07/21/2004	12 mo
Signal Generator	Hewlett Packard	8341B	TGN	01/23/2004	13 mo
Spectrum Analyzer	Tektronix	2784	AAO	02/26/2003	24 mo

### Test Description


**Requirement:** Per 47 CFR 15.247(b)(3), the maximum peak output power must not exceed 1 Watt.


**Configuration:** The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The EUT was transmitting at its maximum output power. The data rate of the radio was varied to determine the level that produced the highest output power.


The measurement was made using a direct connection between the RF output of the EUT and a RF detector diode. The DC output of the diode was measured with the oscilloscope. The signal generator, tuned to the transmit frequency, was then substituted for the EUT. The CW output of the signal generator was adjusted until the DC output of the RF detector diode match the peak level produced when connected to the EUT. To further reduce measurement error, the power meter and sensor were then used to measure the output power level of the signal generator.

**De Facto EIRP Limit:** Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

Completed by:



NORTHWEST EMC		EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT:	RF Host	Work Order:	PROU0007		
Serial Number:	Blue	Date:	12/20/04		
Customer:	Product Creation Studio	Temperature:	23°C		
Attendees:	Scott Thielman	Tested by:	Rod Peloquin	Humidity:	38% RH
Customer Ref. No.:	N/A	Power:	USB	Job Site:	EV06
TEST SPECIFICATIONS					
Specification:	47 CFR 15.247(b)(3)	Year:	Most Current	Method:	FCC 97-114, ANSI C63.4
				Year:	1992
SAMPLE CALCULATIONS					
COMMENTS					
EUT OPERATING MODES					
Modulated at maximum data rate, at maximum output power.					
DEVIATIONS FROM TEST STANDARD					
None					
REQUIREMENTS					
Maximum peak conducted output power does not exceed 1 Watt					
RESULTS		AMPLITUDE			
Pass		0.699 mW			
SIGNATURE					
<div>  </div> <div> Tested By: _____ </div>					
DESCRIPTION OF TEST					
Output Power - Low, Mid, & High Channels					
Frequency (MHz)			Power (mW)		
2405			0.699		
2440			0.600		
2480			0.505		

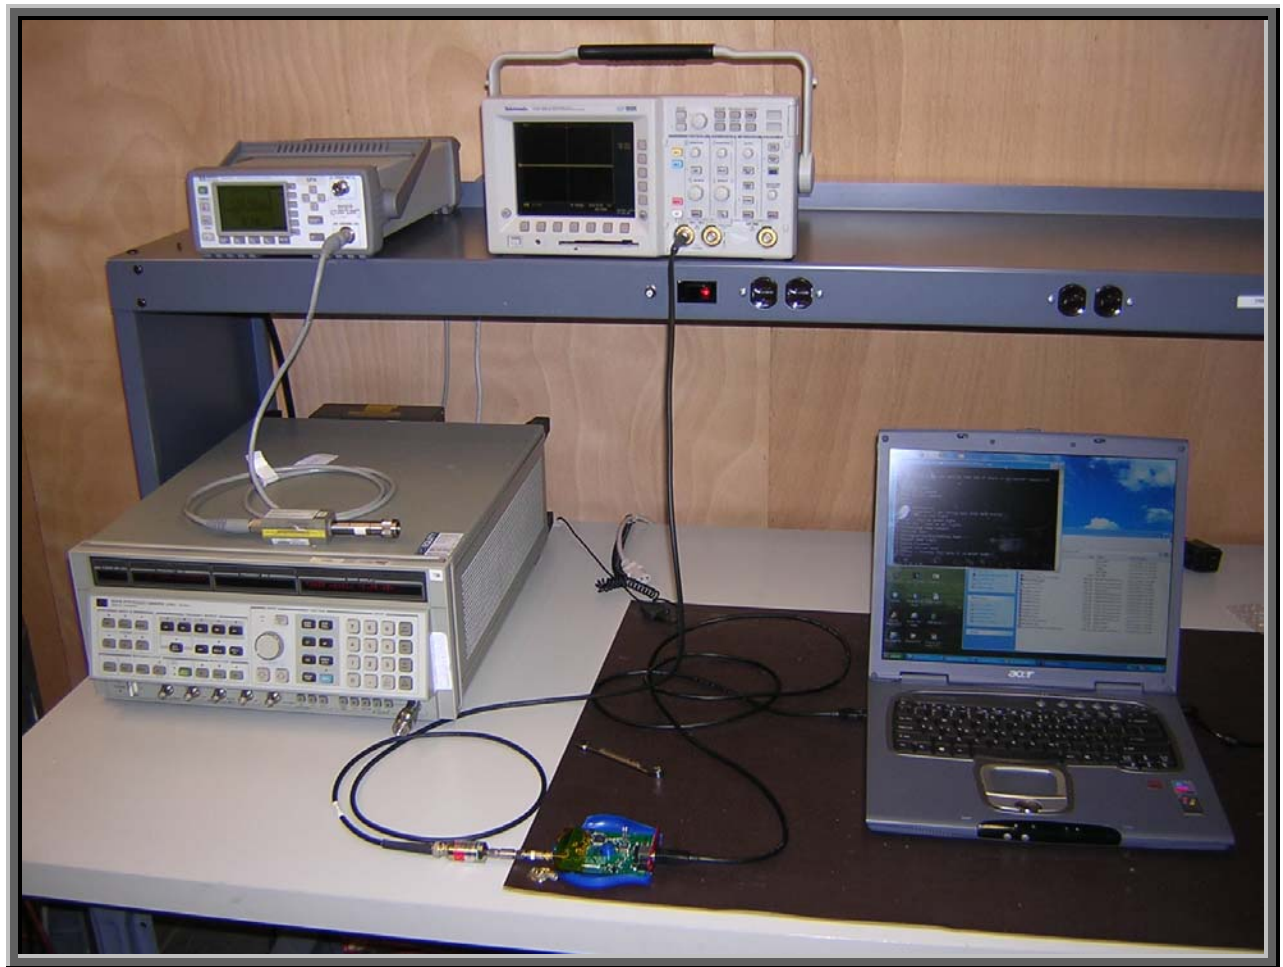

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

High

**Operating Modes Investigated:**

Transmit

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

120 VAC, 60 Hz.

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Power Adapter	CUI, Inc.	41-9-500R	N/A
EUT- RF Host	Quizdom, Inc.	RF Host	Unknown

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
AC Power Adapter	DELTA, Inc.	ADP-75FB B	S4W0326044192
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	2.0		EUT- RF Host	Laptop PC
DC Leads	No	1.8	PA	AC Power Adapter	EUT- RF Host
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					


**Measurement Equipment**


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo


**Test Description**

**Requirement:** Per 47 CFR 15.247(c), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. The channels closest to the band edges were selected. The spectrum was scanned across each band edge from 25 MHz below the band edge to 25 MHz above the band edge.

**Completed by:**


NORTHWEST EMC				EMISSIONS DATA SHEET		Rev BETA 01/30/01	
EUT: RF Host				Work Order: PROU0007			
Serial Number: Unknown				Date: 12/20/04			
Customer: Product Creation Studio				Temperature: 23°C			
Attendees: Scott Thielman		Tested by: Rod Peloquin		Humidity: 38% RH			
Customer Ref. No.: N/A		Power: USB		Job Site: EV06			
TEST SPECIFICATIONS							
Specification: 47 CFR 15.247(d)		Year: Most Current		Method: FCC 97-114, ANSI C63.4		Year: 1992	
SAMPLE CALCULATIONS							
COMMENTS							
EUT OPERATING MODES							
Modulated at maximum data rate							
DEVIATIONS FROM TEST STANDARD							
None							
REQUIREMENTS							
Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental							
RESULTS				AMPLITUDE			
Pass				-40.2 dB			
SIGNATURE							
 Tested By: _____							
DESCRIPTION OF TEST							
Band Edge Compliance - Low Channel							

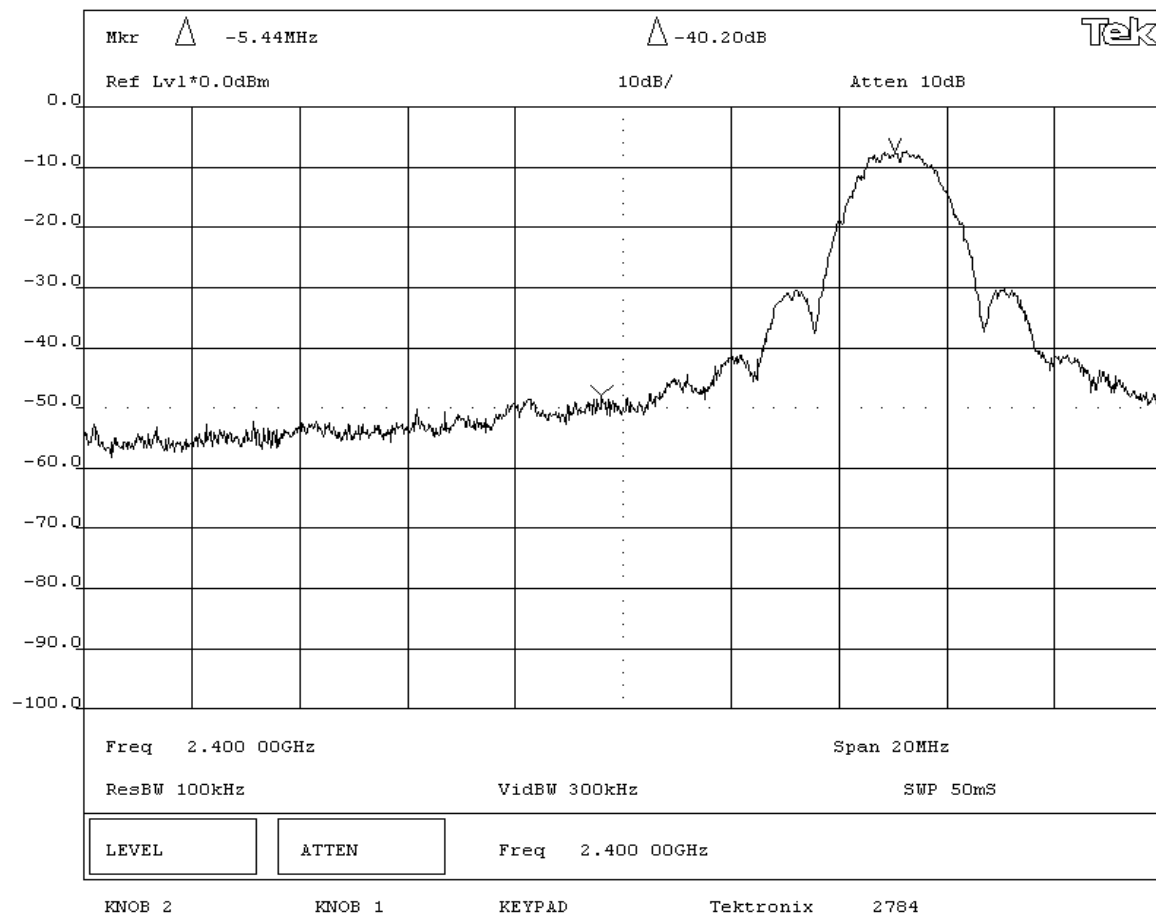

EUT:	RF Host	Work Order:	PROU0007
Serial Number:	Unknown	Date:	12/20/04
Customer:	Product Creation Studio	Temperature:	23°C
Attendees:	Scott Thielman	Tested by:	Rod Peloquin
Customer Ref. No.:	N/A	Power:	USB
		Humidity:	38% RH
		Job Site:	EV06

## TEST SPECIFICATIONS

Specification:	47 CFR 15.247(d)	Year:	Most Current	Method:	FCC 97-114, ANSI C63.4	Year:	1992
----------------	------------------	-------	--------------	---------	------------------------	-------	------

### SAMPLE CALCULATIONS

--

## COMMENTS

Comments	

## EUT OPERATING MODES

Modulated at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None
------

## REQUIREMENTS

Maximum level of any spurious emission at the edge of the authorized band is 20 dB down from the fundamental

## RESULTS

RESULTS	AMPLITUDE
---------	-----------


## Pass


SIGNATURE \_\_\_\_\_

Book by Le. Poling

### DESCRIPTION OF TEST

## Band Edge Compliance - High Channel

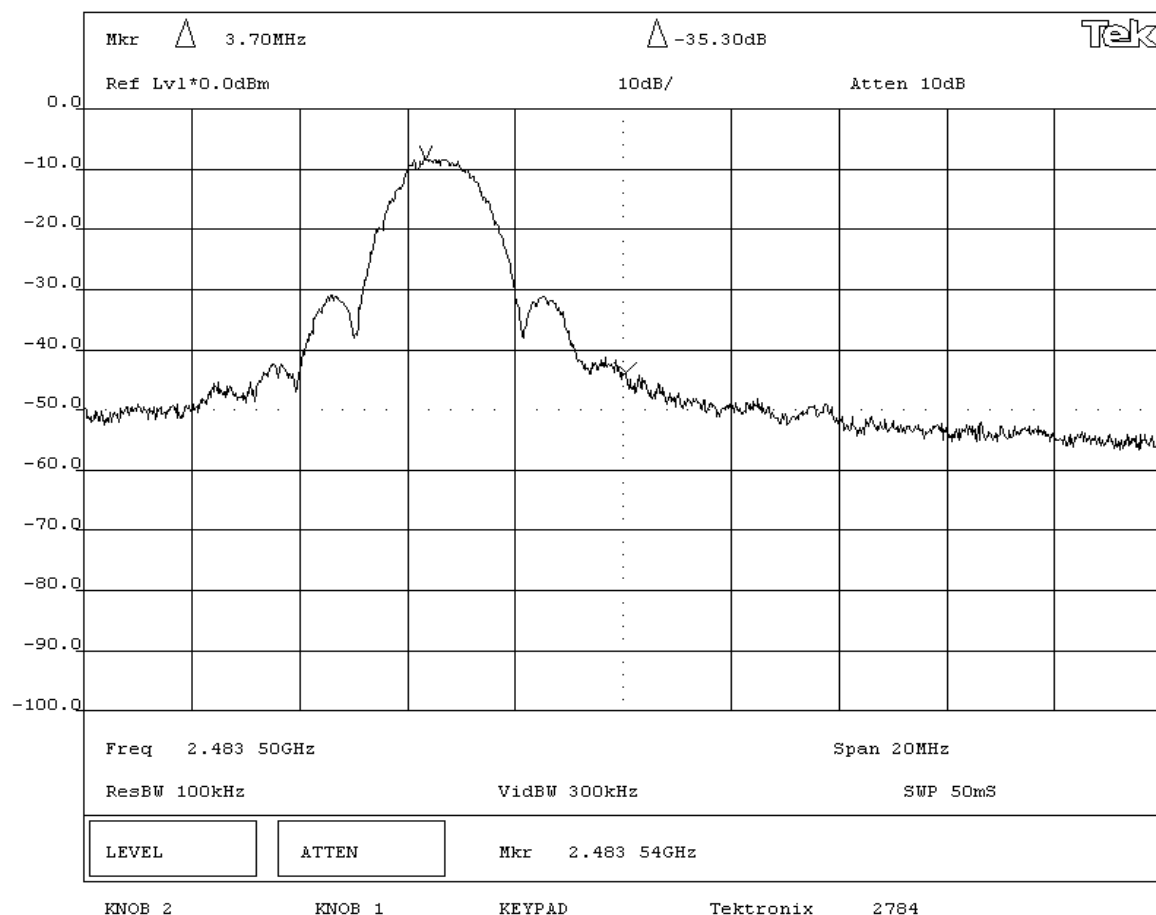

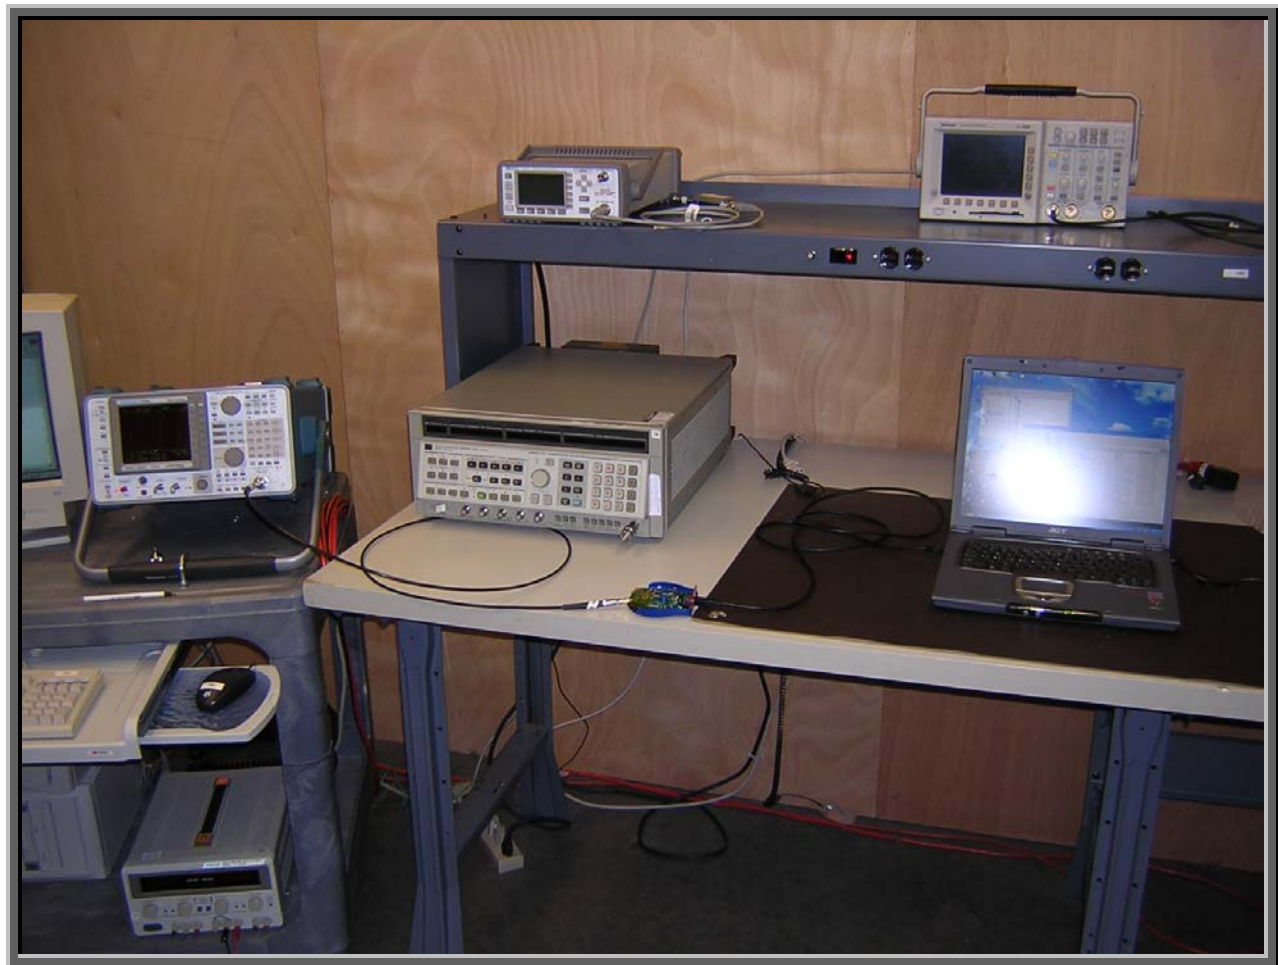

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Transmit
----------

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Frequency Range Investigated**

<b>Start Frequency</b>	0 MHz	<b>Stop Frequency</b>	25 GHz
------------------------	-------	-----------------------	--------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	TestRFGen1	<b>Version</b>	Unknown
<b>Description</b>			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
AC Power Adapter	CUI, Inc.	41-9-500R	N/A
EUT- RF Host	Quizdom, Inc.	RF Host	Unknown

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
AC Power Adapter	DELTA, Inc.	ADP-75FB B	S4W0326044192
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	2.0		EUT- RF Host	Laptop PC
DC Leads	No	1.8	PA	AC Power Adapter	EUT- RF Host
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					

**Measurement Equipment**


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(c), in any 100 kHz bandwidth outside the authorized band, the maximum level of radio frequency power must be at least 20dB down from the highest emission level within the authorized band. The measurement is made with the spectrum analyzer's resolution bandwidth set to 100 kHz, and the video bandwidth set to greater than or equal to the resolution bandwidth.

**Configuration:** The spurious RF conducted emissions were measured with the EUT set to low, medium, and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

Completed by:



NORTHWEST  
EMC

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: RF Host		Work Order: PROU0007
Serial Number: Unknown		Date: 01/06/05
Customer: Product Creation Studio		Temperature: 22°C
Attendees: None	Tested by: Rod Peloquin	Humidity: 30% RH
Customer Ref. No.: N/A	Power: 120VAC/60Hz	Job Site: EV06

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass

## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 0MHz-3GHz

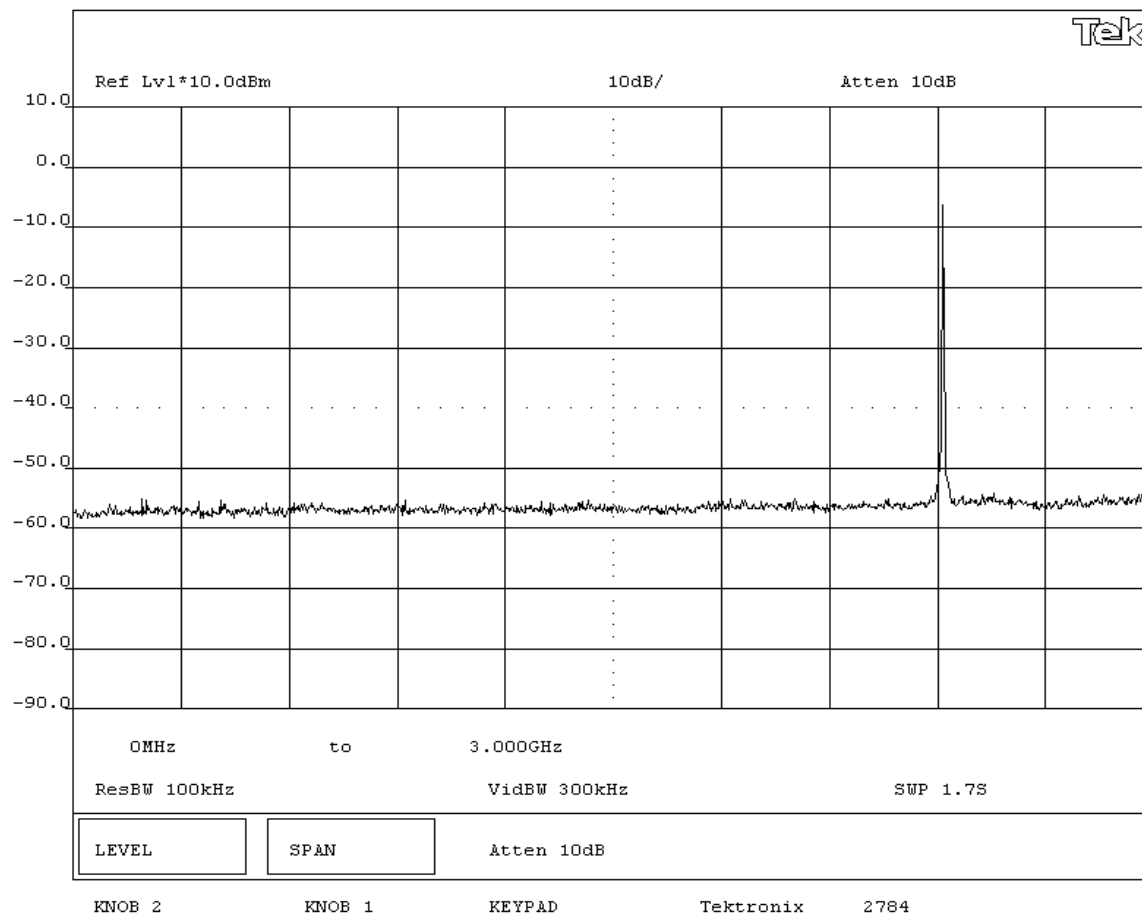

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: RF Host				Work Order: PROU0007	
Serial Number: Unknown				Date: 01/06/05	
Customer: Product Creation Studio				Temperature: 22°C	
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass

## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 3GHz-6.5GHz

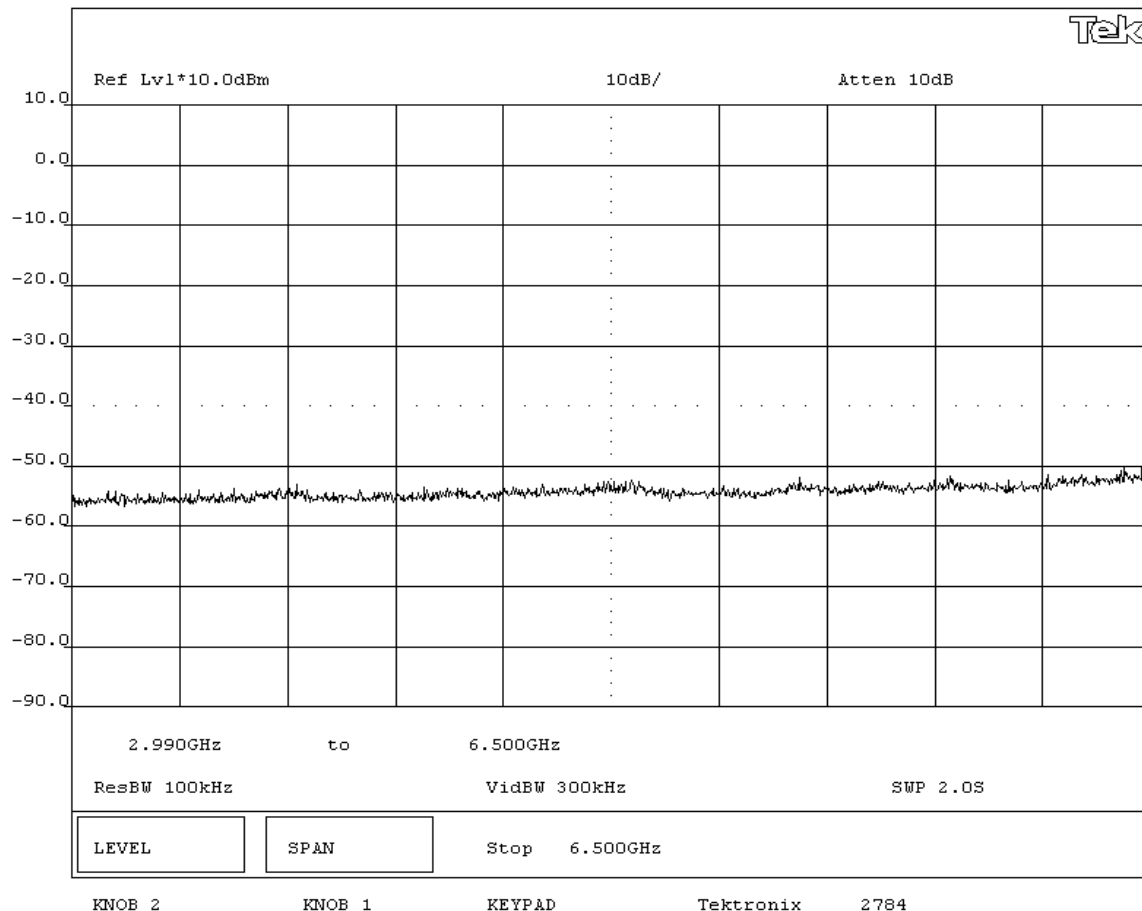

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A			Job Site: EV06		
Tested by: Rod Peloquin			Power: 120VAC/60Hz		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass

## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 6.5GHz-15GHz

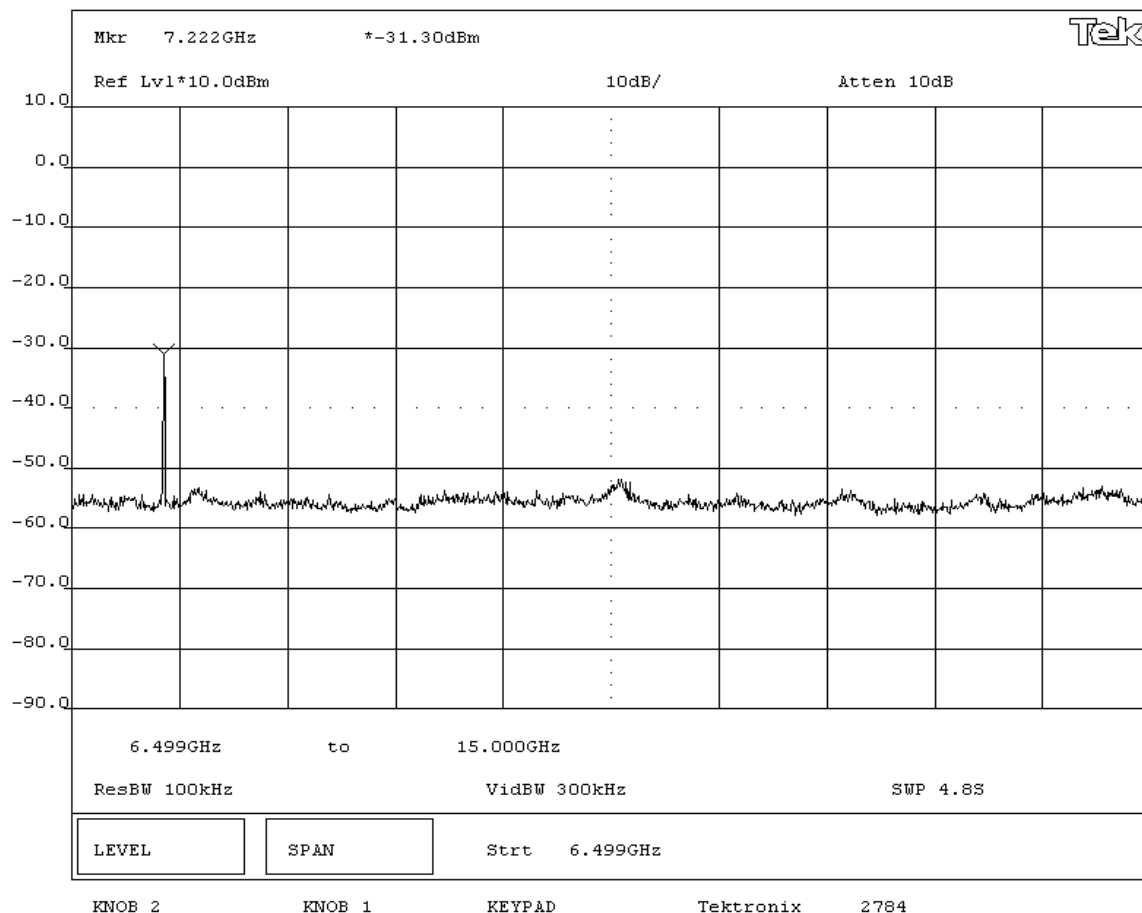

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A		Tested by: Rod Peloquin	Power: 120VAC/60Hz		Job Site: EV06

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass


## SIGNATURE


Tested By: 

## DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Low Channel 15GHz - 25GHz

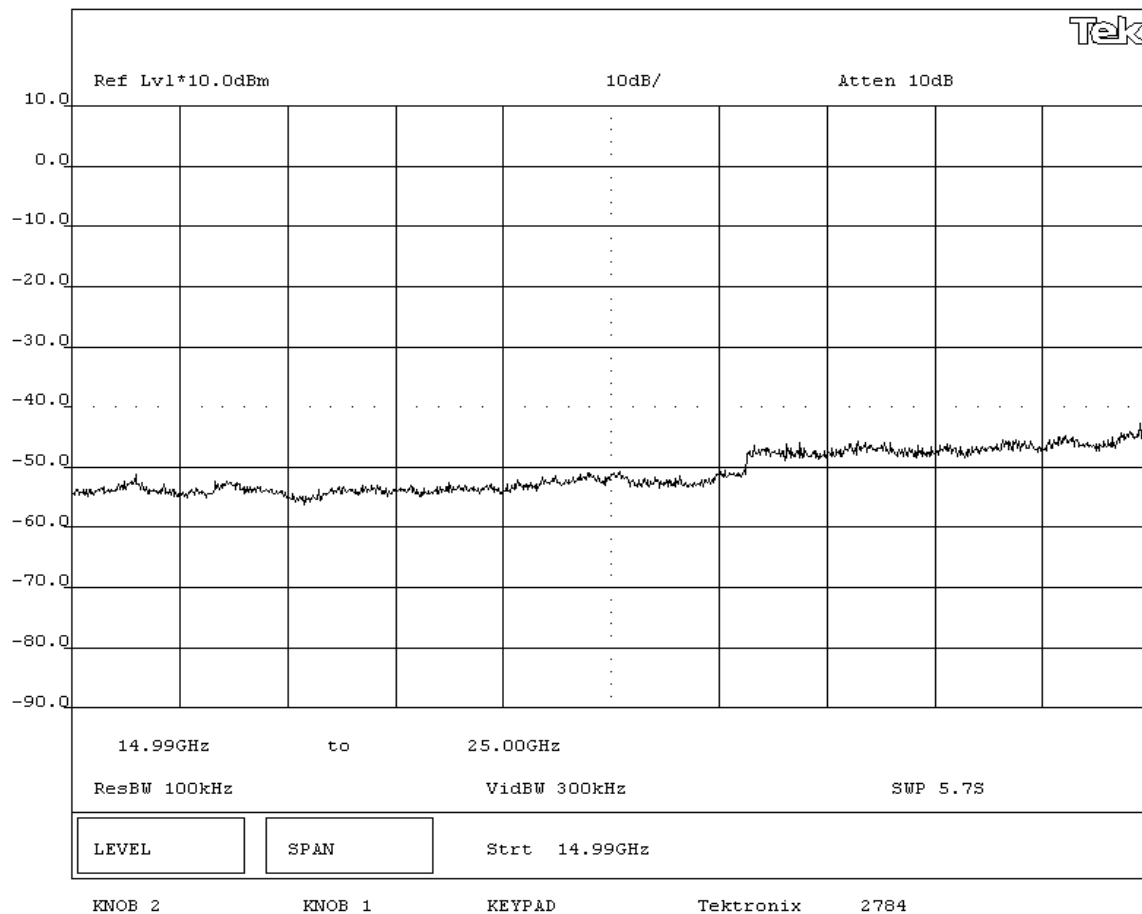

NORTHWEST <b>EMC</b>		<b>EMISSIONS DATA SHEET</b>		Rev BETA 01/30/01	
EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: FCC 97-114, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
<b>RESULTS</b>					
Pass					
<b>SIGNATURE</b>					
 Tested By: _____					
<b>DESCRIPTION OF TEST</b>					
<b>Antenna Conducted Spurious Emissions - Mid Channel 0MHz-3GHz</b>					

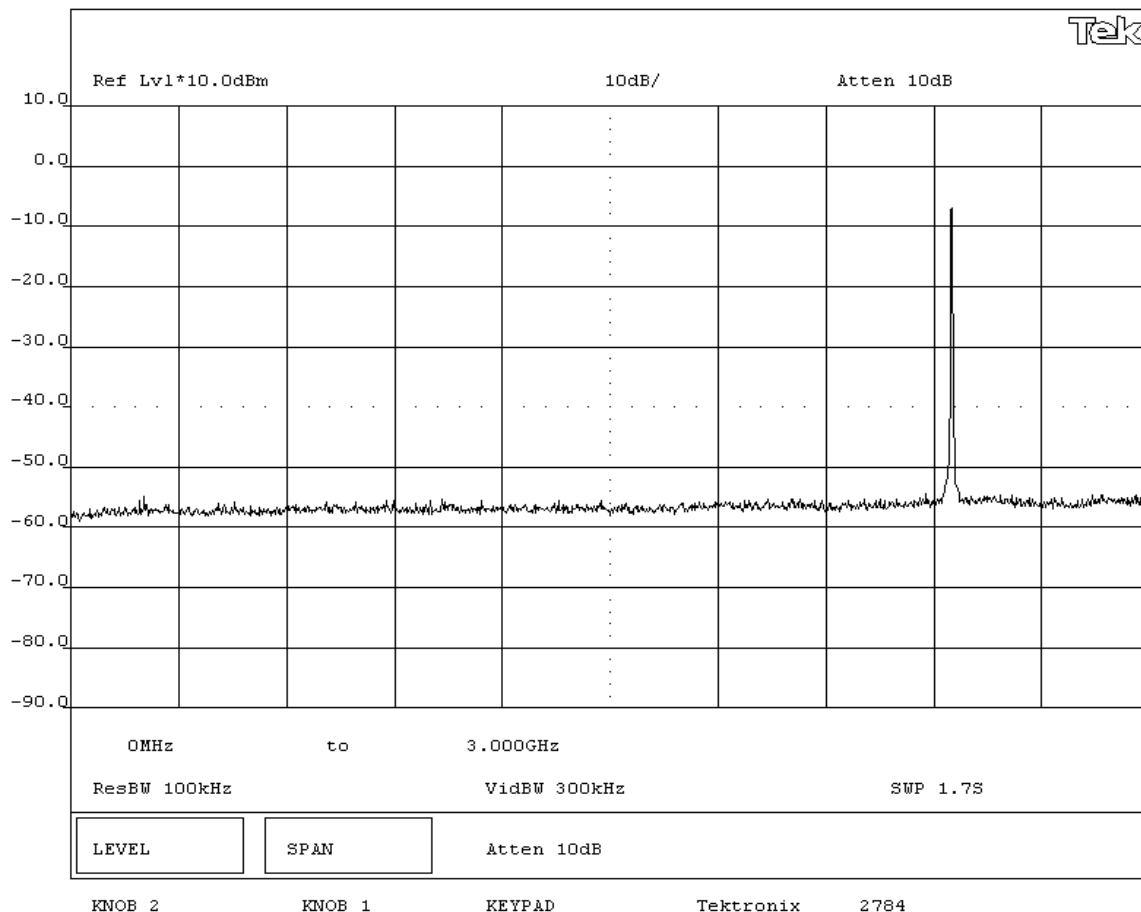

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A			Job Site: EV06		
Tested by: Rod Peloquin			Power: 120VAC/60Hz		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass

## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - Mid Channel 3GHz-6.5GHz

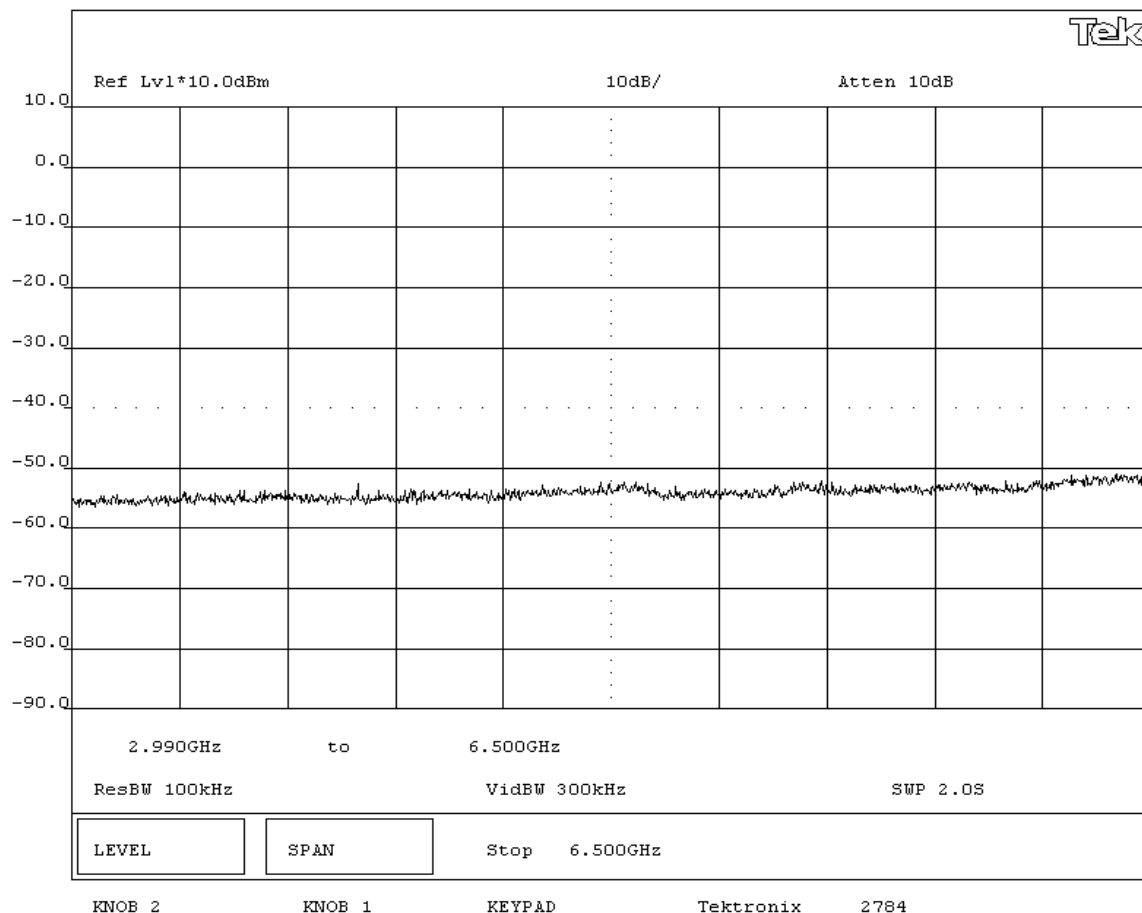

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A			Job Site: EV06		
Tested by: Rod Peloquin			Power: 120VAC/60Hz		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

**SAMPLE CALCULATIONS****COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**


None

**REQUIREMENTS**

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

**RESULTS**

Pass

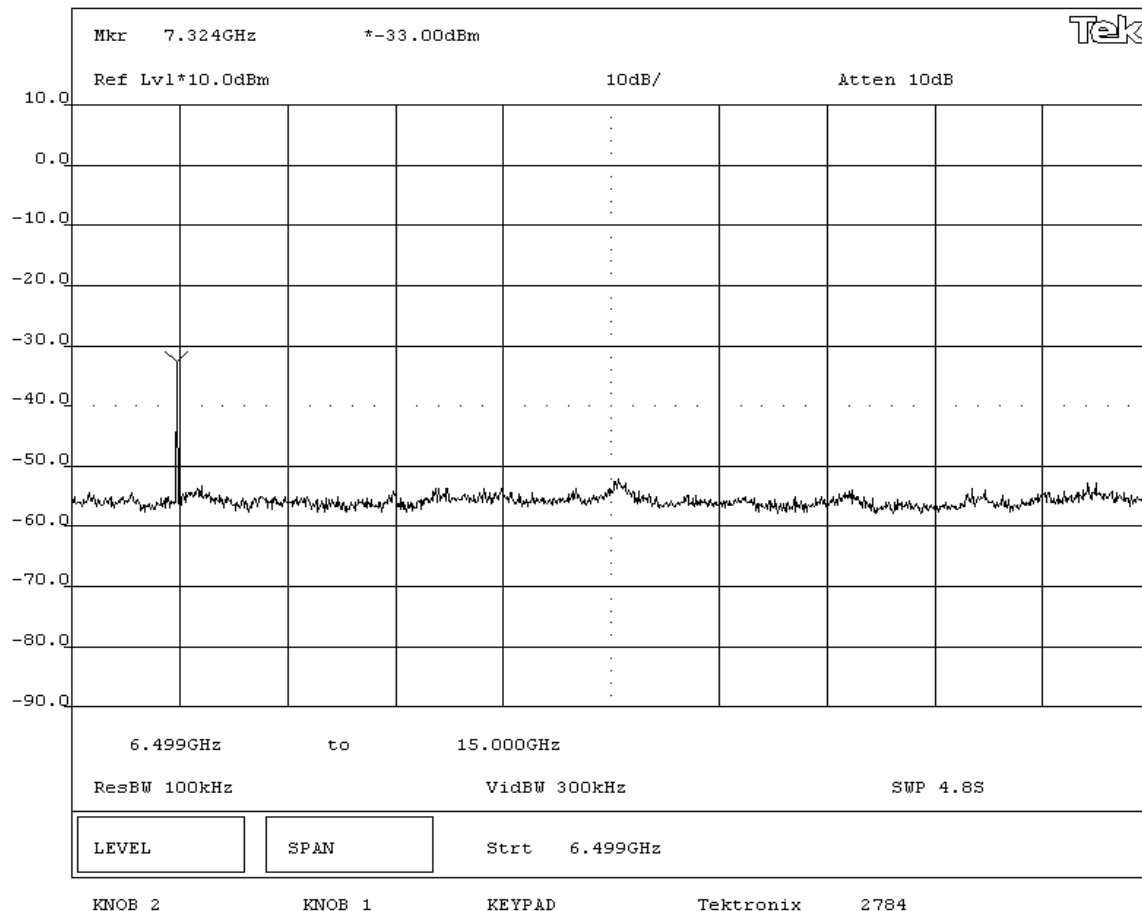**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Antenna Conducted Spurious Emissions - Mid Channel 6.5GHz-15GHz**

NORTHWEST  
EMC

## EMISSIONS DATA SHEET

Rev BETA  
01/30/01

EUT: RF Host				Work Order: PROU0007	
Serial Number: Unknown				Date: 01/06/05	
Customer: Product Creation Studio				Temperature: 22°C	
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass


## SIGNATURE


Tested By: 

## DESCRIPTION OF TEST


Antenna Conducted Spurious Emissions - Mid Channel 15GHz-25GHz

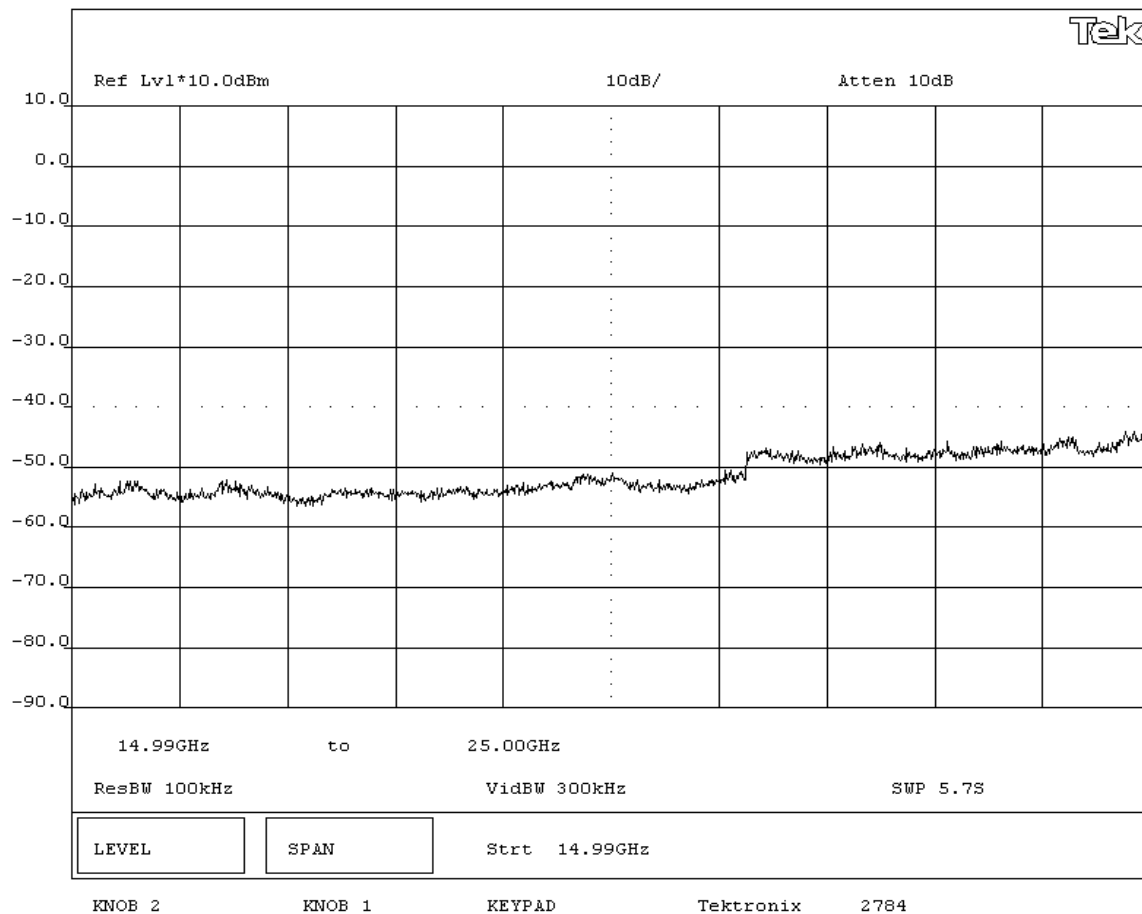

NORTHWEST <b>EMC</b>		<b>EMISSIONS DATA SHEET</b>		Rev BETA 01/30/01	
EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: FCC 97-114, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
<b>RESULTS</b>					
Pass					
<b>SIGNATURE</b>					
 Tested By: _____					
<b>DESCRIPTION OF TEST</b>					
<b>Antenna Conducted Spurious Emissions - High Channel 0MHz-3GHz</b>					

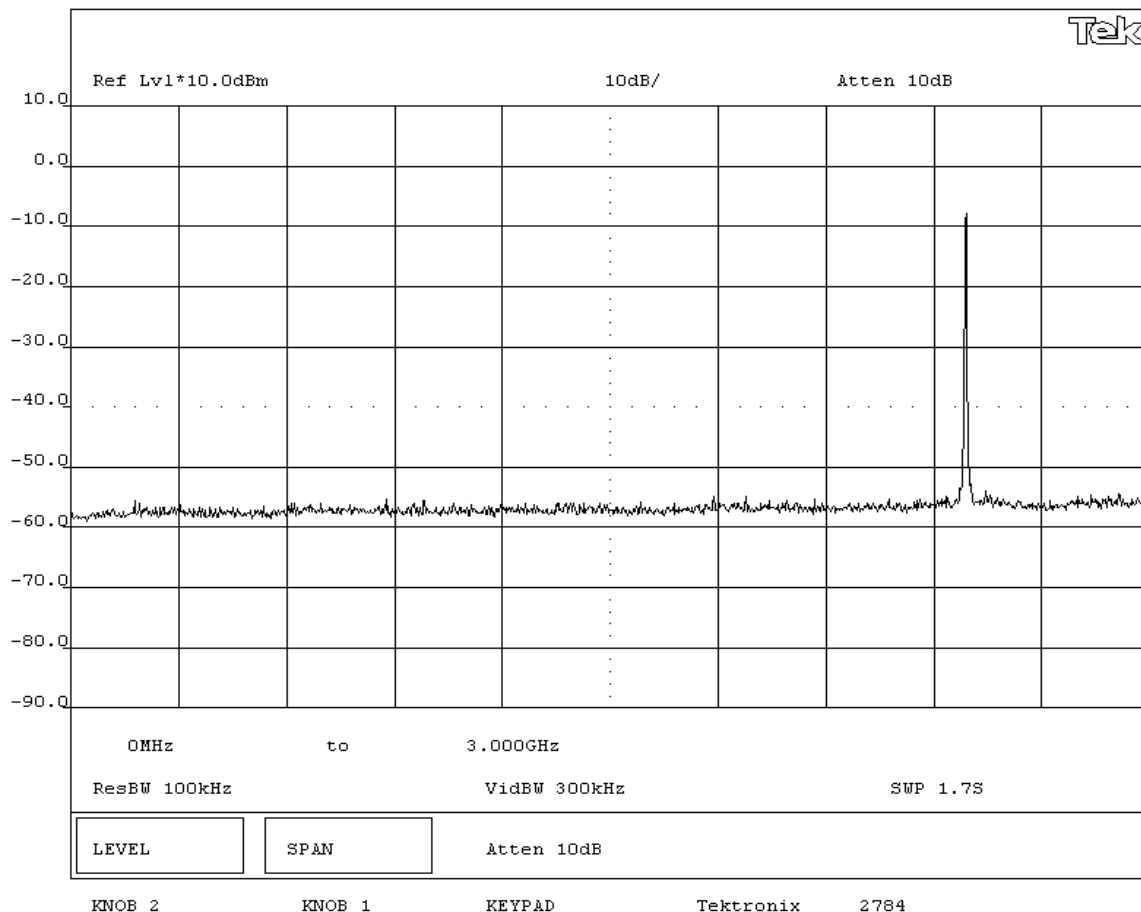

### Antenna Conducted Spurious Emissions - High Channel 3GHz-6.5GHz

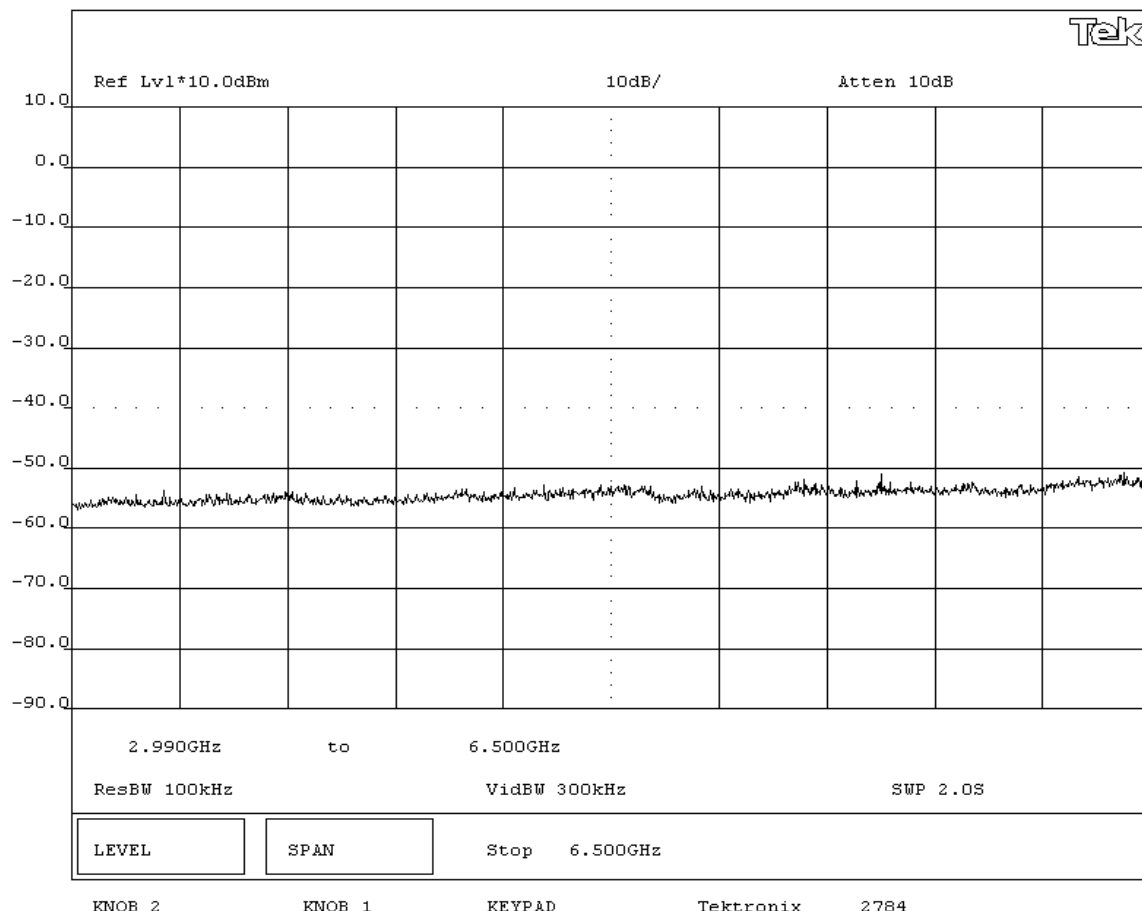

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A			Job Site: EV06		
Tested by: Rod Peloquin			Power: 120VAC/60Hz		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(d)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental

## RESULTS


Pass


## SIGNATURE


Tested By: 


## DESCRIPTION OF TEST

Antenna Conducted Spurious Emissions - High Channel 6.5GHz-15GHz

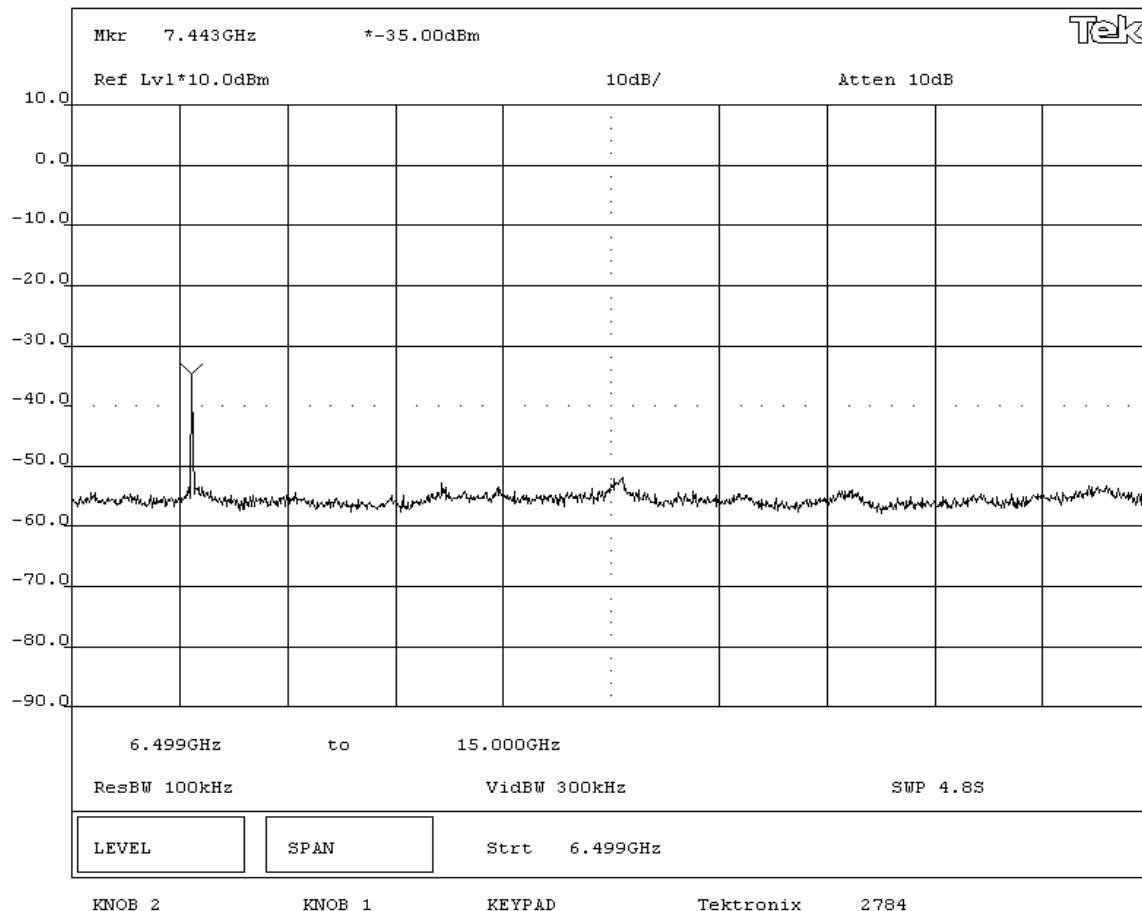

NORTHWEST <b>EMC</b>		<b>EMISSIONS DATA SHEET</b>		Rev BETA 01/30/01	
EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin		Humidity: 30% RH	
Customer Ref. No.: N/A		Power: 120VAC/60Hz		Job Site: EV06	
<b>TEST SPECIFICATIONS</b>					
Specification: 47 CFR 15.247(d)		Year: 2004		Method: FCC 97-114, ANSI C63.4	
				Year: 2003	
<b>SAMPLE CALCULATIONS</b>					
<b>COMMENTS</b>					
<b>EUT OPERATING MODES</b>					
Modulated by PRBS at maximum data rate					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
<b>REQUIREMENTS</b>					
Maximum level of any spurious emission outside of the authorized band is 20 dB down from the fundamental					
<b>RESULTS</b>					
Pass					
<b>SIGNATURE</b>					
 Tested By: _____					
<b>DESCRIPTION OF TEST</b>					
<b>Antenna Conducted Spurious Emissions - High Channel 15GHz-25GHz</b>					

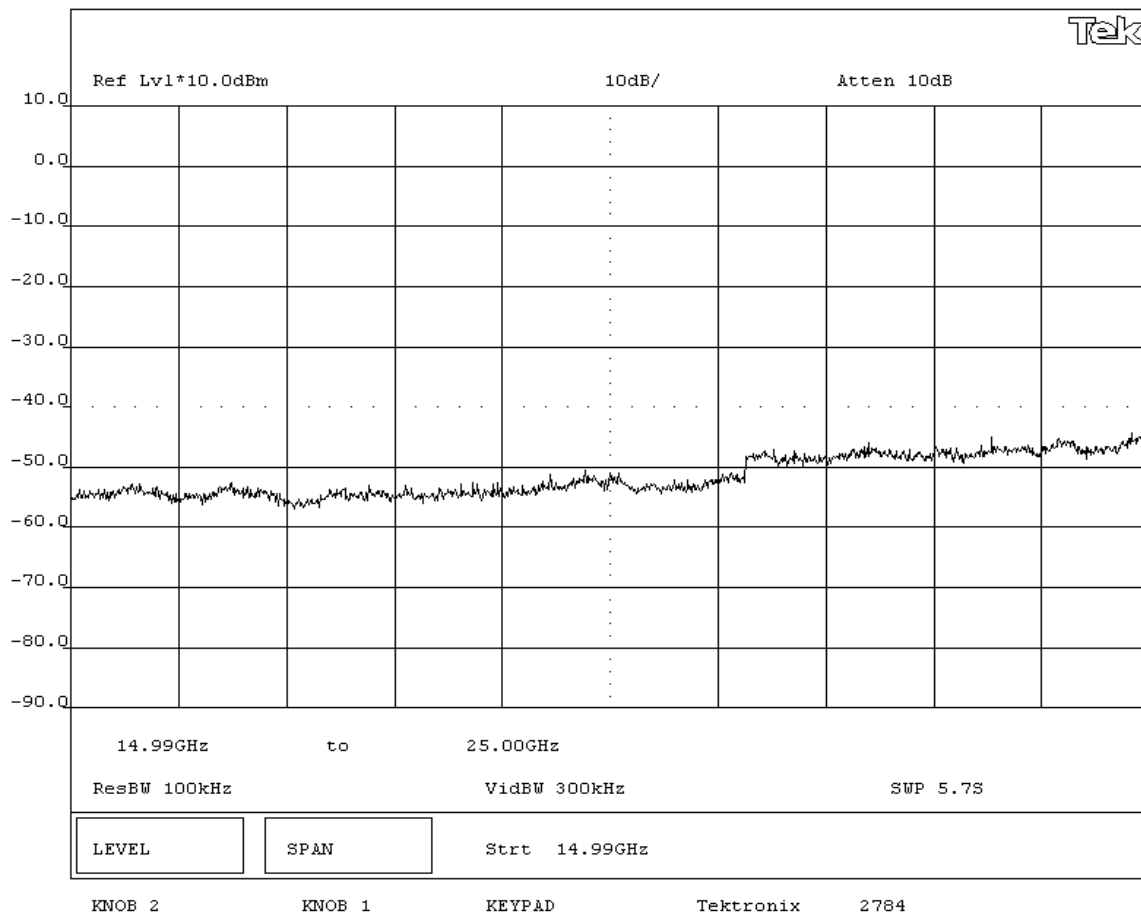

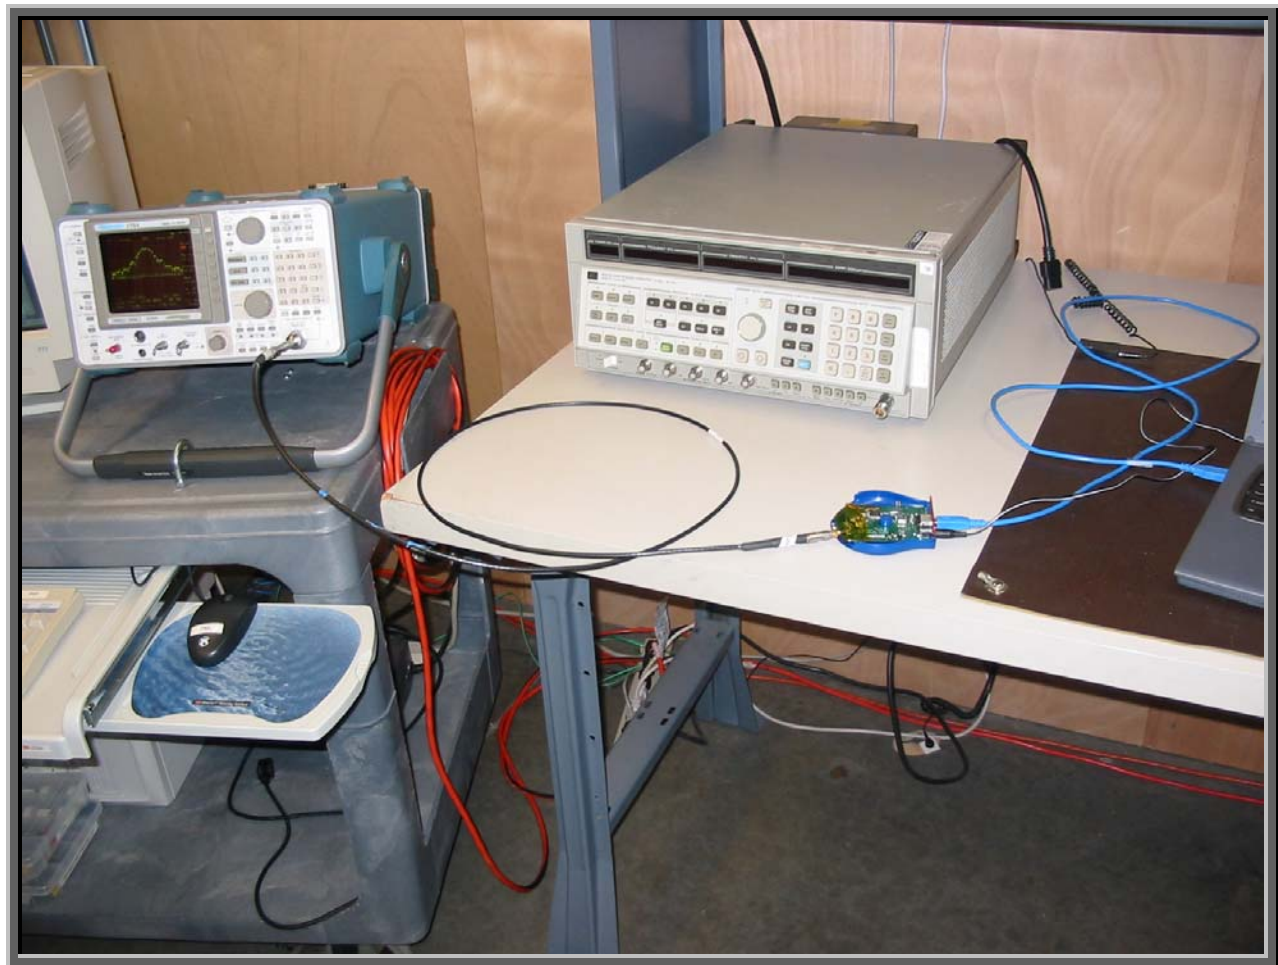

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

Mid

High

**Operating Modes Investigated:**

Transmit

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

120 VAC, 60 Hz.

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Power Adapter	CUI, Inc.	41-9-500R	N/A
EUT- RF Host	Quizdom, Inc.	RF Host	Unknown

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
AC Power Adapter	DELTA, Inc.	ADP-75FB B	S4W0326044192
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	2.0		EUT- RF Host	Laptop PC
DC Leads	No	1.8	PA	AC Power Adapter	EUT- RF Host

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo

**Test Description**

**Requirement:** Per 47 CFR 15.247(e), the peak power spectral density conducted from the antenna port of a direct sequence transmitter must not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.


**Configuration:** The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate using direct sequence modulation. Per the procedure outlined in FCC 97-114, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep =  $\text{SPAN}/3 \text{ kHz}$ ). For example, given a span of 1.5 MHz, the sweep should be  $1.5 \times 10^6 \div 3 \times 10^3 = 500$  seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

*"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 34.8 dB for correction to 3 kHz."*

The spectrum analyzer power reading was calibrated prior to testing using the power meter, power sensor, and signal generator via the substitution method.

**Completed by:**



EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin	Humidity: 30% RH		
Customer Ref. No.: N/A		Power: 120VAC/60Hz	Job Site: EV06		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation.

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

## RESULTS

## AMPLITUDE


Pass Power Spectral Density = -13.1 dBm / 3kHz

## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

## Power Spectral Density - Low Channel

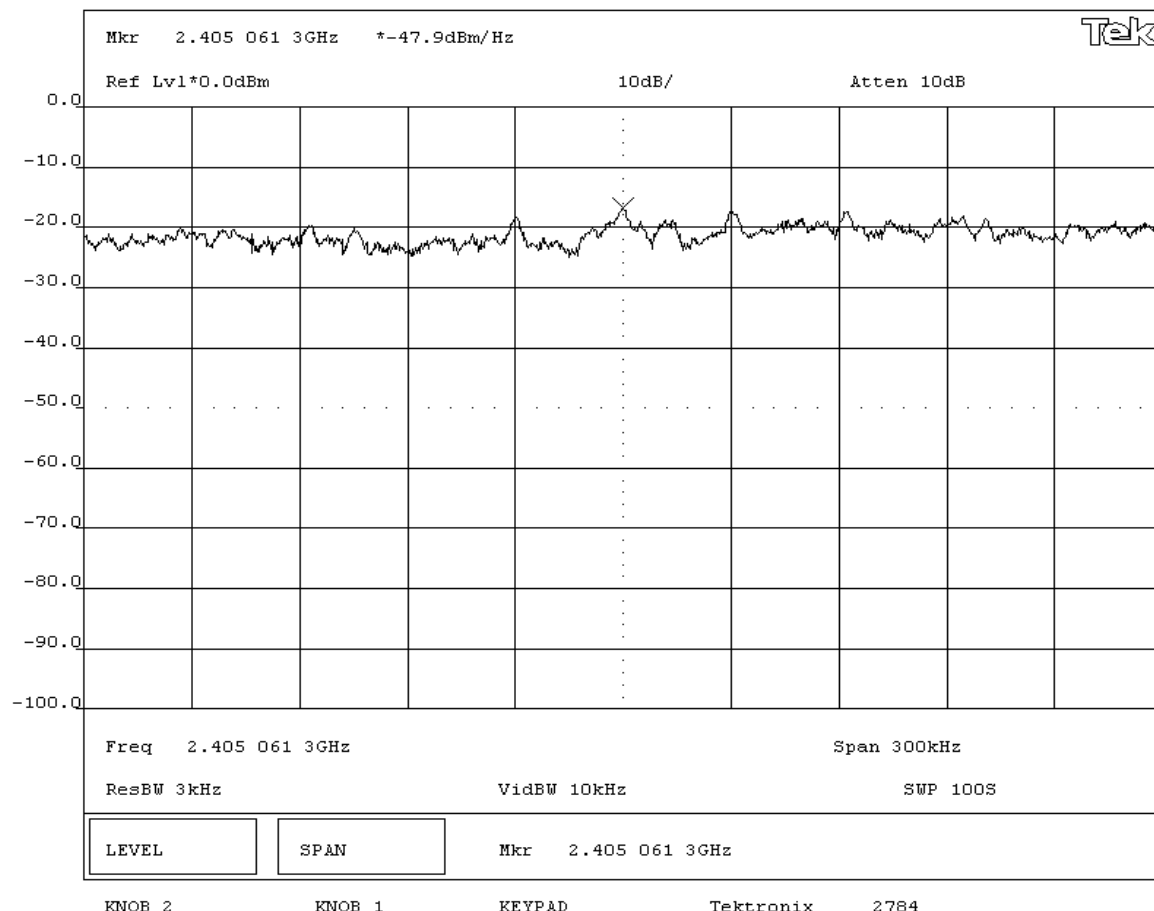

NORTHWEST  
**EMC****EMISSIONS DATA SHEET**Rev BETA  
01/30/01

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None		Tested by: Rod Peloquin	Humidity: 30% RH		
Customer Ref. No.: N/A		Power: 120VAC/60Hz	Job Site: EV06		

**TEST SPECIFICATIONS**

Specification: 47 CFR 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

**SAMPLE CALCULATIONS**

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$ **COMMENTS****EUT OPERATING MODES**

Modulated by PRBS at maximum data rate

**DEVIATIONS FROM TEST STANDARD**

None


**REQUIREMENTS**

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

**RESULTS****AMPLITUDE**

Pass

Power Spectral Density = - dBm / 3kHz

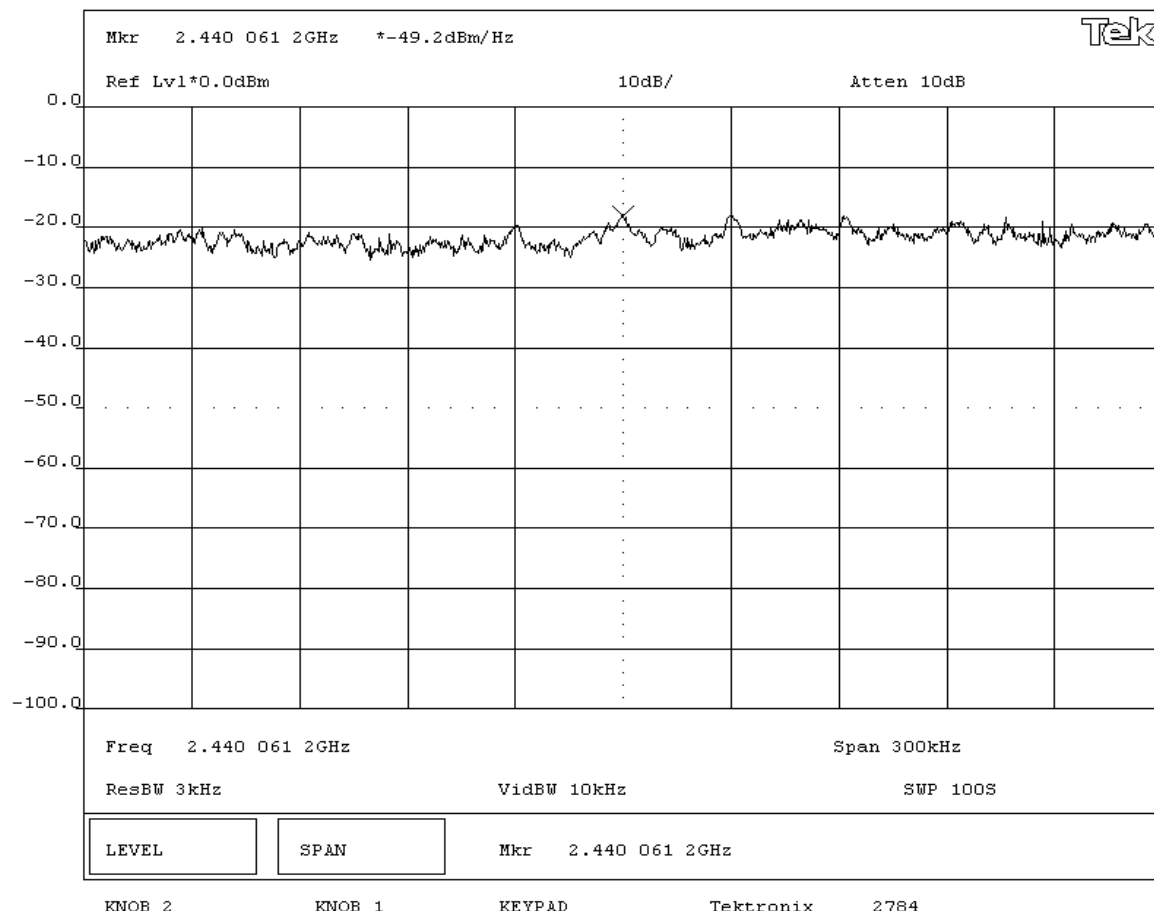**SIGNATURE**Tested By: **DESCRIPTION OF TEST****Power Spectral Density - Mid Channel**

EUT: RF Host			Work Order: PROU0007		
Serial Number: Unknown			Date: 01/06/05		
Customer: Product Creation Studio			Temperature: 22°C		
Attendees: None			Humidity: 30% RH		
Customer Ref. No.: N/A			Job Site: EV06		
Tested by: Rod Peloquin			Power: 120VAC/60Hz		

## TEST SPECIFICATIONS

Specification: 47 CFR 15.247(e)	Year: 2004	Method: FCC 97-114, ANSI C63.4	Year: 2003
---------------------------------	------------	--------------------------------	------------

## SAMPLE CALCULATIONS

Meter reading on spectrum analyzer is internally compensated for cable loss and external attenuation

Power Spectral Density per 3kHz bandwidth = Power Spectral Density per 1 Hz bandwidth + Bandwidth Correction Factor.

Bandwidth Correction Factor =  $10 \cdot \log(3\text{kHz}/1\text{Hz}) = 34.8 \text{ dB}$

## COMMENTS

## EUT OPERATING MODES

Modulated by PRBS at maximum data rate

## DEVIATIONS FROM TEST STANDARD

None

## REQUIREMENTS

Maximum peak power spectral density conducted from a DSSS transmitter does not exceed 8 dBm in any 3 kHz band

## RESULTS

## AMPLITUDE

Pass


Power Spectral Density = -15.3 dBm / 3kHz


## SIGNATURE

Tested By: 

## DESCRIPTION OF TEST

## Power Spectral Density - High Channel

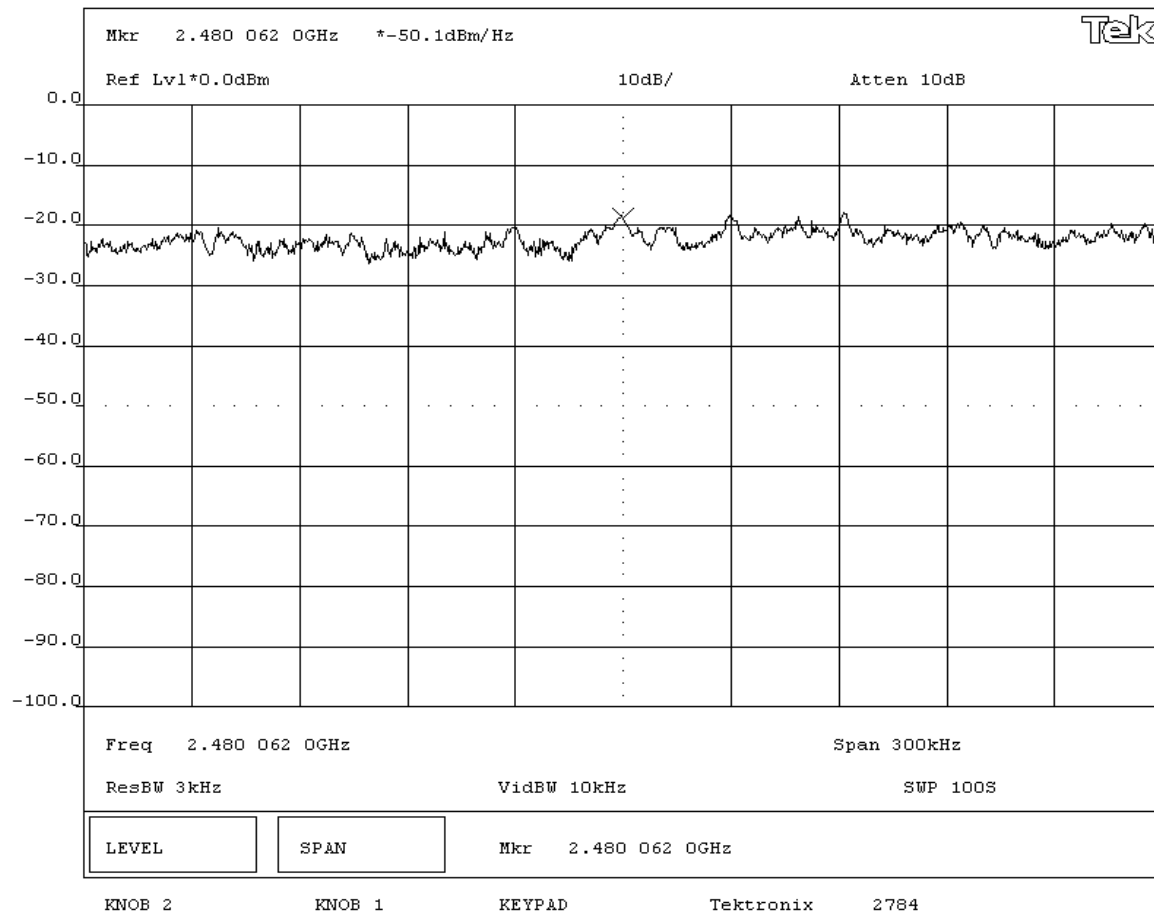

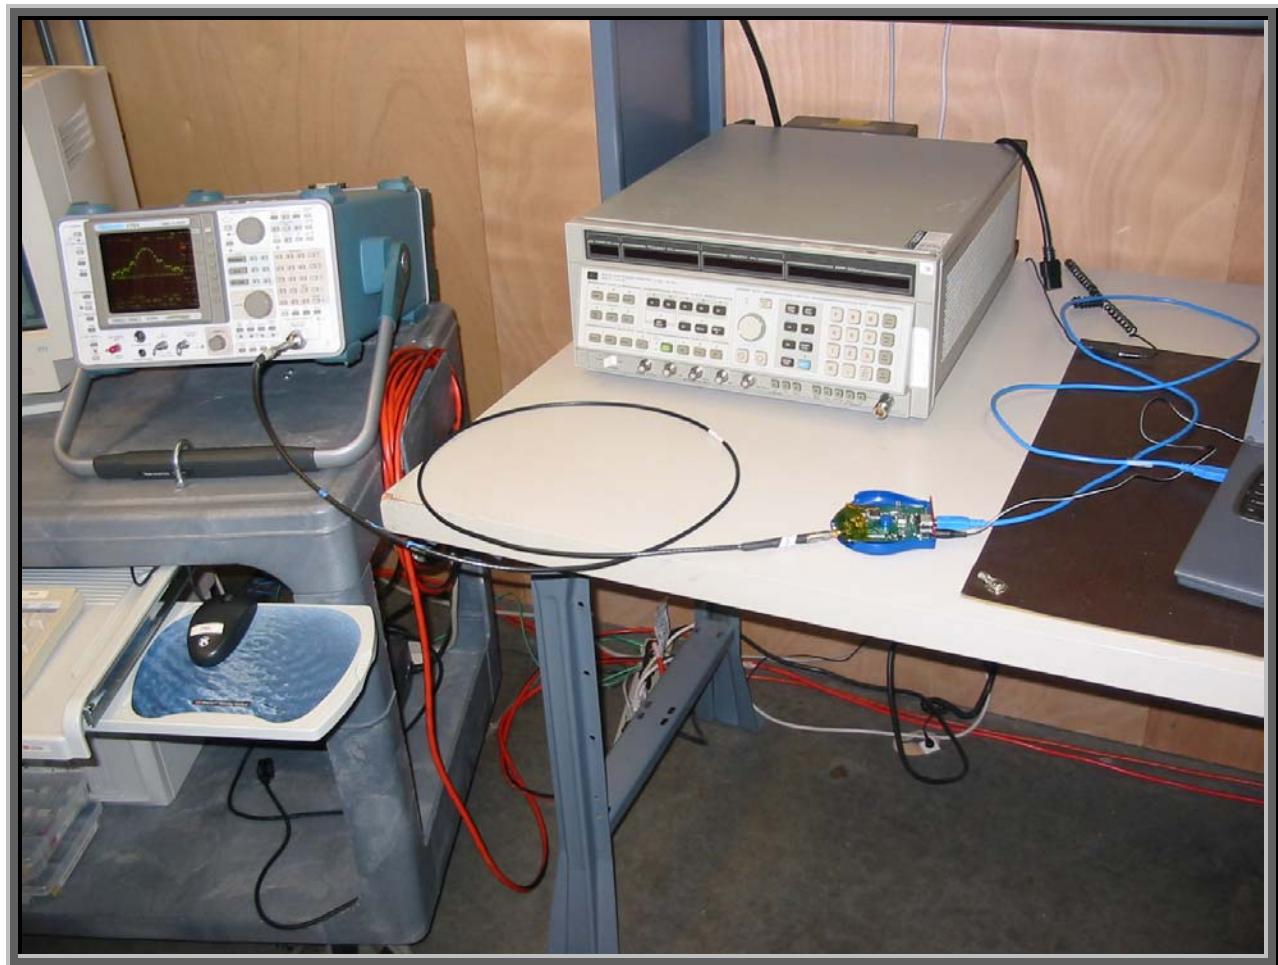

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low

Mid

High

**Operating Modes Investigated:**

Transmit

**Data Rates Investigated:**

Maximum

**Output Power Setting(s) Investigated:**

Maximum

**Power Input Settings Investigated:**

120 VAC, 60 Hz.

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
AC Power Adapter	CUI, Inc.	41-9-500R	N/A
EUT- RF Host	Quizdom, Inc.	RF Host	Red

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
AC Power Adapter	DELTA, Inc.	ADP-75FB B	S4W0326044192
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Leads	No	1.8	PA	AC Power Adapter	EUT- RF Host
USB	Yes	4.0	No	EUT- RF Host	Laptop PC

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

**Measurement Equipment**

Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	15 mo
Spectrum Analyzer	Tektronix	2784	AAO	01/02/2005	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	15 mo
Antenna, Horn	EMCO	3115	AHC	09/07/2004	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Pre-Amplifier	AR	LN1000A	APS	02/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo

**Test Description**


**Requirement:** The field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 47 CFR 15.205, is measured. The peak level must comply with the limits specified in 47 CFR 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.


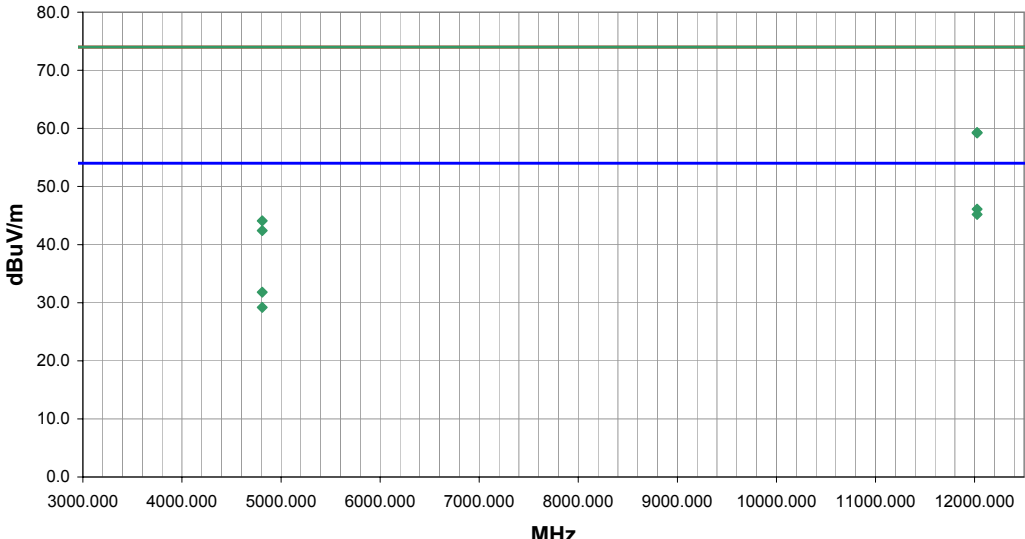
**Configuration:** The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization, and manipulating the EUT antenna in 3 orthogonal planes (per ANSI C63.4:1992). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


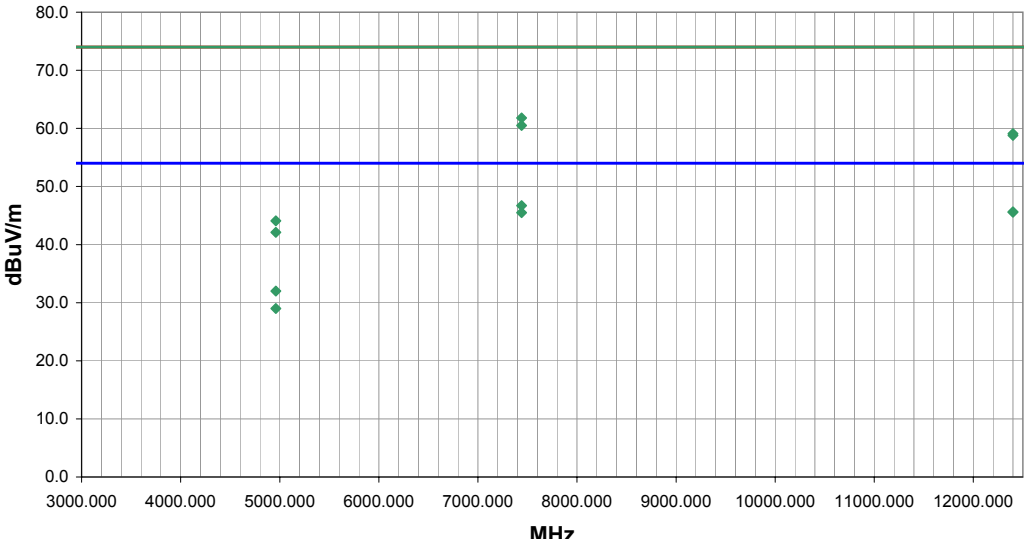
Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0


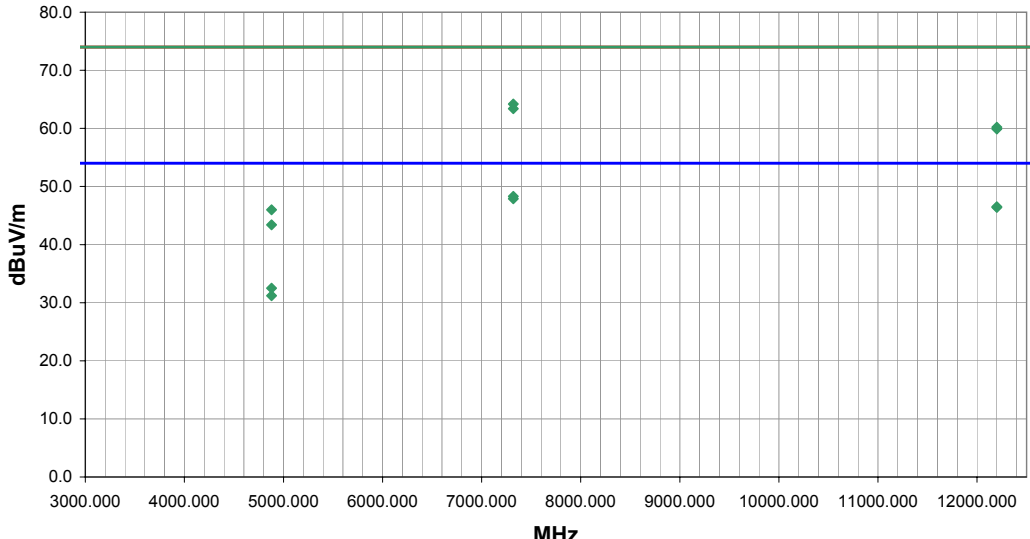
Measurements were made using the bandwidths and detectors specified. No video filter was used.


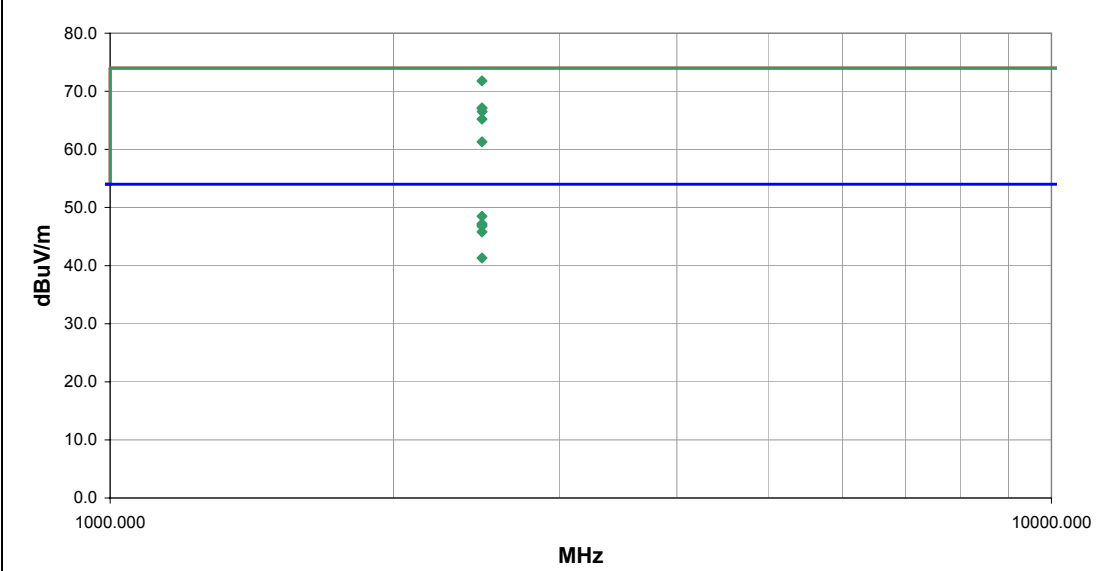
Completed by:




NORTHWEST		ACQ 2005.1.3											
<b>EMC</b>		<b>RADIATED EMISSIONS DATA SHEET</b>											
EUT: RF Host		Work Order: PROU0007											
Serial Number: Red		Date: 01/08/05											
Customer: Product Creation Studio		Temperature: 20											
Attendees: Scott Thielman		Humidity: 32%											
Cust. Ref. No.:		Barometric Pressure 30.44											
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz											
		Job Site: EV01											
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
No hop, low channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS													
Run #													
Pass			2										
Other													
		 Tested By:											
 <p>The graph plots dBuV/m (0.0 to 80.0) against MHz (3000.000 to 12000.000). Two horizontal reference lines are shown: a green line at approximately 74.0 dBuV/m and a blue line at approximately 54.0 dBuV/m. Data points are plotted at 12025.000 MHz (46.1 dBuV/m), 4809.954 MHz (31.8 dBuV/m), 4809.954 MHz (29.2 dBuV/m), 4809.954 MHz (44.1 dBuV/m), and 4809.954 MHz (42.4 dBuV/m).</p>													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
12025.000	26.0	20.1	295.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.1	54.0	-7.9	EUT on side.
12025.000	25.1	20.1	227.0	2.3	3.0	0.0	H-Horn	AV	0.0	45.2	54.0	-8.8	EUT Horizontal
12025.000	39.2	20.1	295.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.3	74.0	-14.7	EUT on side.
12025.000	39.1	20.1	227.0	2.3	3.0	0.0	H-Horn	PK	0.0	59.2	74.0	-14.8	EUT Horizontal
4809.954	28.5	3.3	354.0	1.3	3.0	0.0	V-Horn	AV	0.0	31.8	54.0	-22.2	EUT on side.
4809.954	25.9	3.3	154.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.2	54.0	-24.8	EUT Horizontal
4809.954	40.8	3.3	354.0	1.3	3.0	0.0	V-Horn	PK	0.0	44.1	74.0	-29.9	EUT on side.
4809.954	39.1	3.3	154.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.4	74.0	-31.6	EUT Horizontal



NORTHWEST		ACQ 2005.1.3 EMI 2005.1.3											
<b>EMC</b>		<b>RADIATED EMISSIONS DATA SHEET</b>											
EUT: RF Host		Work Order: PROU0007											
Serial Number: Red		Date: 01/08/05											
Customer: Product Creation Studio		Temperature: 20											
Attendees: Scott Thielman		Humidity: 32%											
Cust. Ref. No.:		Barometric Pressure: 30.44											
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz											
		Job Site: EV01											
<b>TEST SPECIFICATIONS</b>													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004		Method: ANSI C63.4:2003											
<b>SAMPLE CALCULATIONS</b>													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
<b>COMMENTS</b>													
<b>EUT OPERATING MODES</b>													
No hop, high channel													
<b>DEVIATIONS FROM TEST STANDARD</b>													
No deviations.													
<b>RESULTS</b>			Run #										
Pass			4										
Other		 Tested By:											
													
<b>Freq (MHz)</b>	<b>Amplitude (dBuV)</b>	<b>Factor (dB)</b>	<b>Azimuth (degrees)</b>	<b>Height (meters)</b>	<b>Distance (meters)</b>	<b>External Attenuation (dB)</b>	<b>Polarity</b>	<b>Detector</b>	<b>Distance Adjustment (dB)</b>	<b>Adjusted dBuV/m</b>	<b>Spec. Limit dBuV/m</b>	<b>Compared to Spec. (dB)</b>	<b>Comments</b>
7440.119	35.6	11.1	241.0	2.2	3.0	0.0	H-Horn	AV	0.0	46.7	54.0	-7.3	EUT horizontal.
12400.000	24.8	20.8	153.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.6	54.0	-8.4	EUT horizontal.
12400.000	24.8	20.8	274.0	1.1	3.0	0.0	V-Horn	AV	0.0	45.6	54.0	-8.4	EUT on side.
7440.119	34.4	11.1	119.0	1.3	3.0	0.0	V-Horn	AV	0.0	45.5	54.0	-8.5	EUT on side.
7440.119	50.7	11.1	241.0	2.2	3.0	0.0	H-Horn	PK	0.0	61.8	74.0	-12.2	EUT horizontal.
7440.119	49.4	11.1	119.0	1.3	3.0	0.0	V-Horn	PK	0.0	60.5	74.0	-13.5	EUT on side.
12400.000	38.3	20.8	153.0	1.3	3.0	0.0	H-Horn	PK	0.0	59.1	74.0	-14.9	EUT horizontal.
12400.000	38.0	20.8	274.0	1.1	3.0	0.0	V-Horn	PK	0.0	58.8	74.0	-15.2	EUT on side.
4959.985	28.4	3.6	283.0	1.3	3.0	0.0	V-Horn	AV	0.0	32.0	54.0	-22.0	EUT on side.
4959.985	25.4	3.6	26.0	1.3	3.0	0.0	H-Horn	AV	0.0	29.0	54.0	-25.0	EUT horizontal.
4959.985	40.5	3.6	283.0	1.3	3.0	0.0	V-Horn	PK	0.0	44.1	74.0	-29.9	EUT on side.
4959.985	38.5	3.6	26.0	1.3	3.0	0.0	H-Horn	PK	0.0	42.1	74.0	-31.9	EUT horizontal.

NORTHWEST EMC										ACQ 2005.1.3 EMI 2005.1.3				
RADIATED EMISSIONS DATA SHEET														
EUT: RF Host					Work Order: PROU0007									
Serial Number: Red					Date: 01/08/05									
Customer: Product Creation Studio					Temperature: 20									
Attendees: Scott Thielman					Humidity: 32%									
Cust. Ref. No.:					Barometric Pressure: 30.44									
Tested by: Holly Ashkannejhad					Power: 120VAC/60Hz					Job Site: EV01				
TEST SPECIFICATIONS														
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004					Method: ANSI C63.4:2003									
SAMPLE CALCULATIONS														
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation														
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator														
COMMENTS														
EUT OPERATING MODES														
No hop, mid channel														
DEVIATIONS FROM TEST STANDARD														
No deviations.														
RESULTS														
Pass										Run # 3				
Other														
										 Tested By:				
														
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments	
7320.002	37.8	10.5	272.0	1.8	3.0	0.0	H-Horn	AV	0.0	48.3	54.0	-5.7	EUT Horizontal.	
7320.002	37.4	10.5	121.0	1.1	3.0	0.0	V-Horn	AV	0.0	47.9	54.0	-6.1	EUT on side.	
12200.000	26.1	20.4	77.0	1.2	3.0	0.0	V-Horn	AV	0.0	46.5	54.0	-7.5	EUT on side.	
12200.000	26.0	20.4	121.0	2.1	3.0	0.0	H-Horn	AV	0.0	46.4	54.0	-7.6	EUT Horizontal.	
7320.002	53.7	10.5	272.0	1.8	3.0	0.0	H-Horn	PK	0.0	64.2	74.0	-9.8	EUT Horizontal.	
7320.002	52.9	10.5	121.0	1.1	3.0	0.0	V-Horn	PK	0.0	63.4	74.0	-10.6	EUT on side.	
12200.000	39.8	20.4	121.0	2.1	3.0	0.0	H-Horn	PK	0.0	60.2	74.0	-13.8	EUT Horizontal.	
12200.000	39.5	20.4	77.0	1.2	3.0	0.0	V-Horn	PK	0.0	59.9	74.0	-14.1	EUT on side.	
4880.079	28.9	3.6	347.0	1.1	3.0	0.0	V-Horn	AV	0.0	32.5	54.0	-21.5	EUT on side.	
4880.079	27.6	3.6	2.0	1.2	3.0	0.0	H-Horn	AV	0.0	31.2	54.0	-22.8	EUT Horizontal.	
4880.079	42.4	3.6	347.0	1.1	3.0	0.0	V-Horn	PK	0.0	46.0	74.0	-28.0	EUT on side.	
4880.079	39.8	3.6	2.0	1.2	3.0	0.0	H-Horn	PK	0.0	43.4	74.0	-30.6	EUT Horizontal.	

NORTHWEST		RADIATED EMISSIONS DATA SHEET										REV d4.6 12/14/2004	
EMC													
EUT: RF Host										Work Order: PROU0007			
Serial Number: Red										Date: 12/21/04			
Customer: Product Creation Studio										Temperature: 22			
Attendees: Scott Thielman										Humidity: 32%			
Cust. Ref. No.:										Barometric Pressure 30.44			
Tested by: Rod Peloquin						Power: 120VAC/60Hz				Job Site: EV01			
TEST SPECIFICATIONS													
Specification: FCC 15.247(d) Spurious Radiated Emissions:2004						Method: ANSI C63.4:2003							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
EUT OPERATING MODES													
No hop, high channel													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										1			
Other										Tested By: 			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	Comments
2483.550	64.0	-2.2	19.0	1.1	3.0	10.0	H-Horn	PK	0.0	71.8	74.0	-2.2	EUT horizontal
2483.500	40.7	-2.2	19.0	1.1	3.0	10.0	H-Horn	AV	0.0	48.5	54.0	-5.5	EUT horizontal
2483.500	39.4	-2.2	144.0	1.4	3.0	10.0	H-Horn	AV	0.0	47.2	54.0	-6.8	EUT vertical
2483.750	59.3	-2.2	144.0	1.4	3.0	10.0	H-Horn	PK	0.0	67.1	74.0	-6.9	EUT vertical
2483.750	59.3	-2.2	219.0	1.1	3.0	10.0	H-Horn	PK	0.0	67.1	74.0	-6.9	EUT on side
2483.500	39.2	-2.2	219.0	1.1	3.0	10.0	H-Horn	AV	0.0	47.0	54.0	-7.0	EUT on side
2483.500	39.0	-2.2	217.0	1.4	3.0	10.0	V-Horn	AV	0.0	46.8	54.0	-7.2	EUT on side
2484.250	58.7	-2.2	217.0	1.4	3.0	10.0	V-Horn	PK	0.0	66.5	74.0	-7.5	EUT on side
2483.500	38.0	-2.2	143.0	1.0	3.0	10.0	V-Horn	AV	0.0	45.8	54.0	-8.2	EUT vertical
2483.750	57.4	-2.2	143.0	1.0	3.0	10.0	V-Horn	PK	0.0	65.2	74.0	-8.8	EUT vertical
2483.500	33.5	-2.2	125.0	1.8	3.0	10.0	V-Horn	AV	0.0	41.3	54.0	-12.7	EUT horizontal
2483.550	53.5	-2.2	125.0	1.8	3.0	10.0	V-Horn	PK	0.0	61.3	74.0	-12.7	EUT horizontal



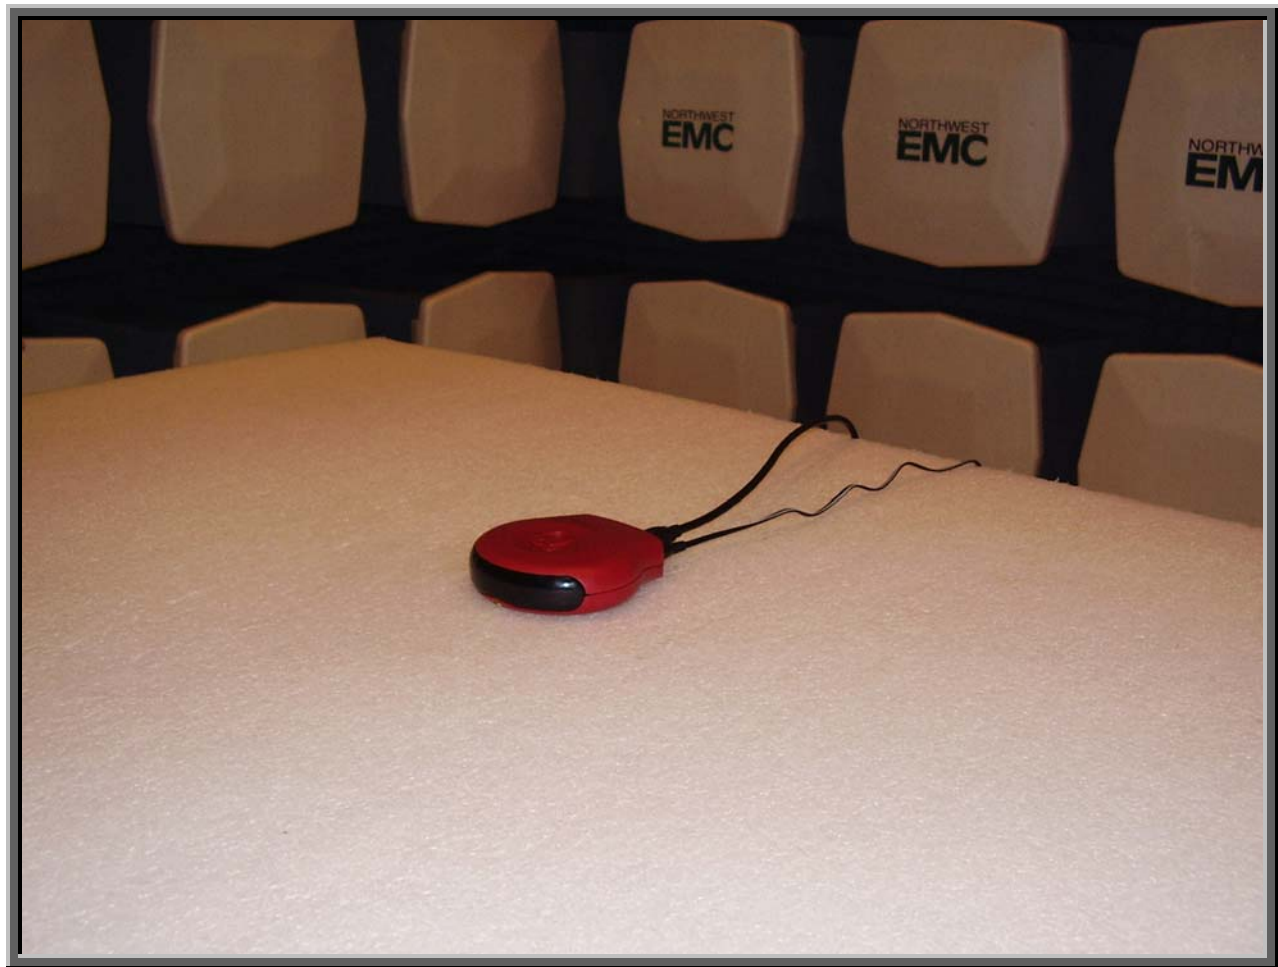

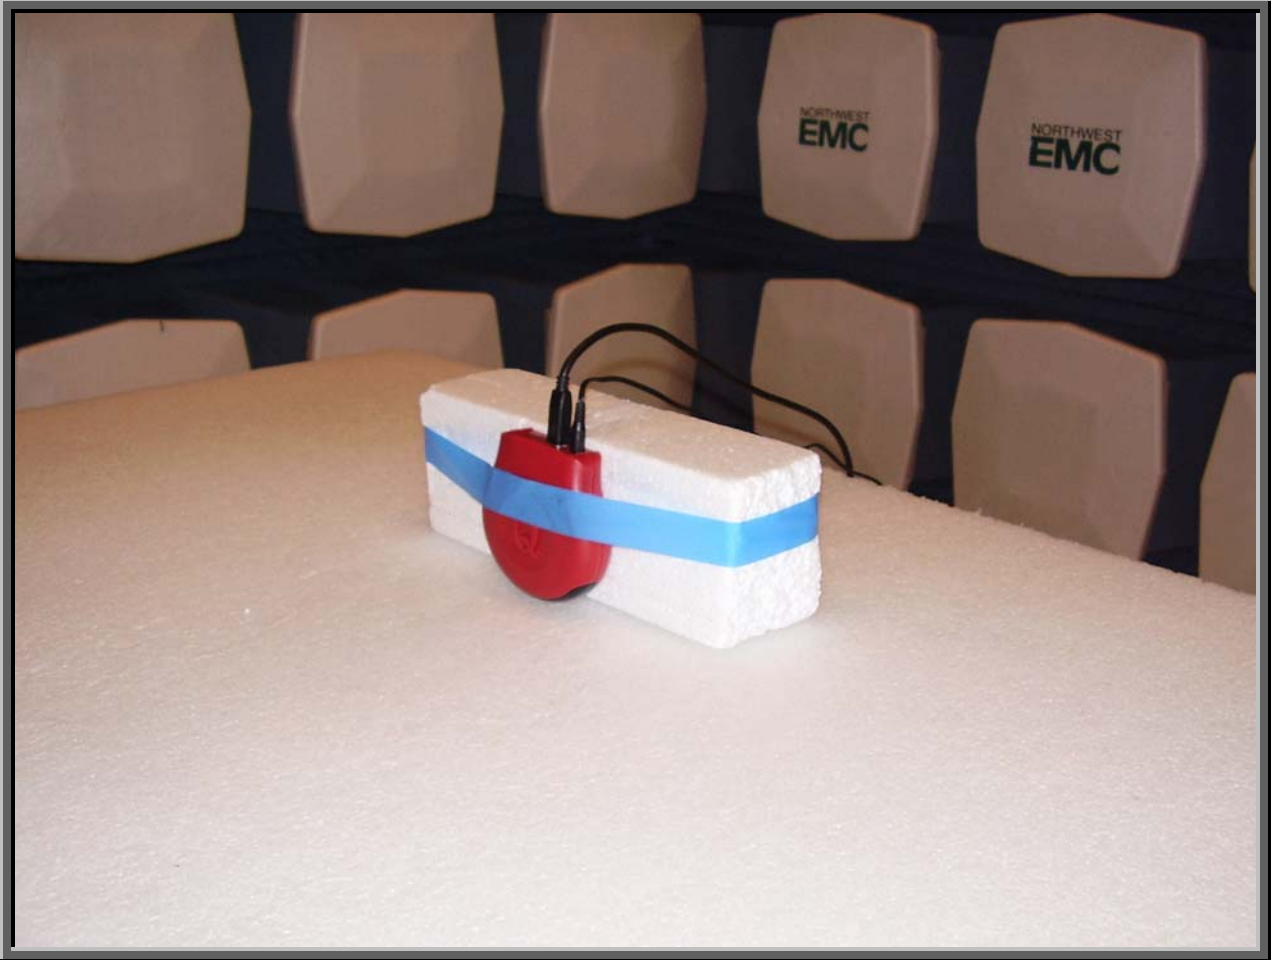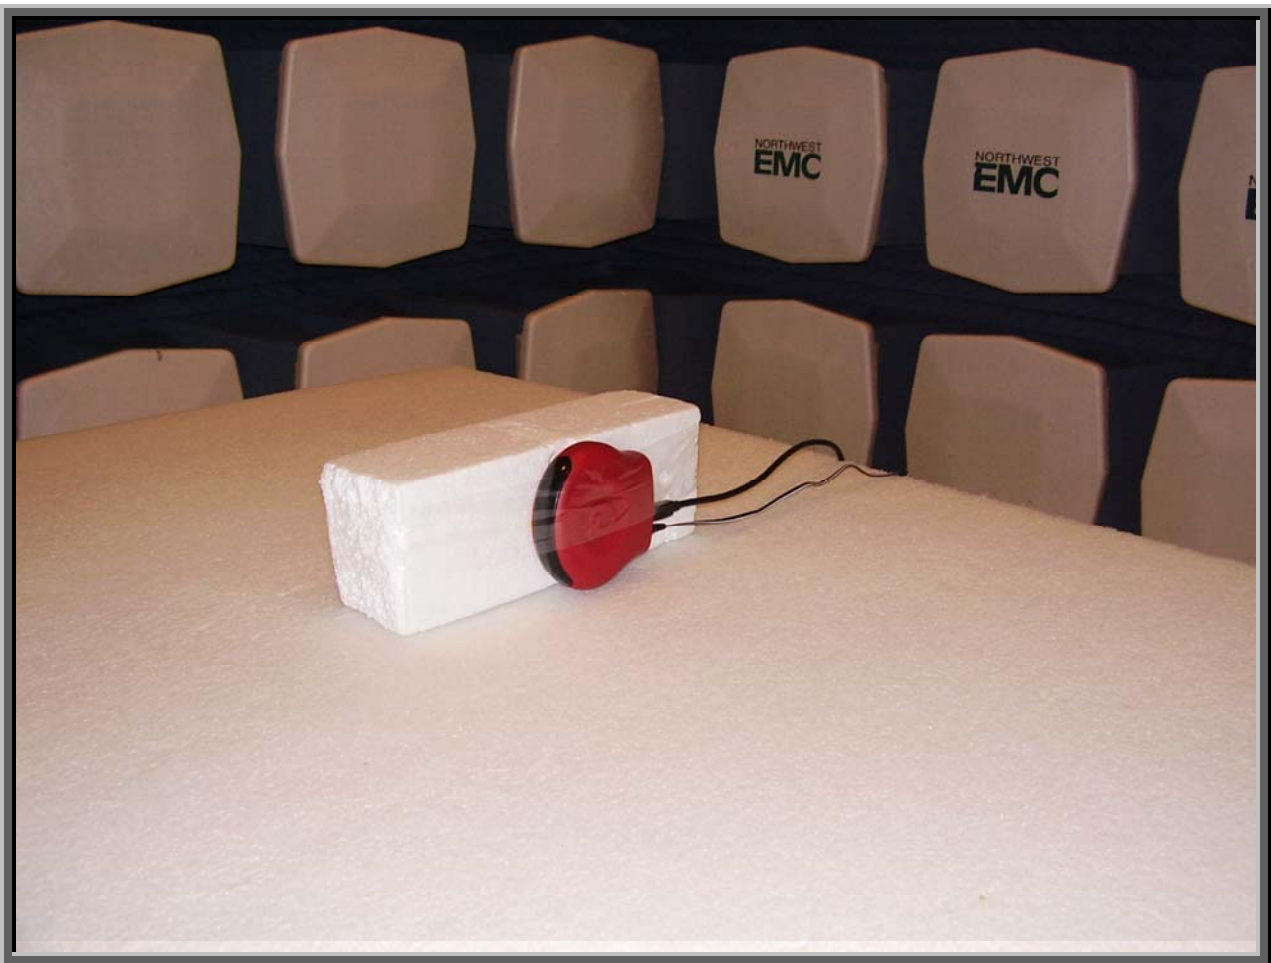

**Justification**

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. While scanning the radiated emissions, all of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

**Channels in Specified Band Investigated:**

Low
Mid
High

**Operating Modes Investigated:**

Receive
Transmit

**Data Rates Investigated:**

Maximum
---------

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.
-----------------

**Software\Firmware Applied During Test**

Exercise software	TestRFGen1	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing including mode, channel, and power.			

**EUT and Peripherals**

Description	Manufacturer	Model/Part Number	Serial Number
EUT- RF Host	Quizdom, Inc.	RF Host	Red
AC Power Adapter	CUI, Inc.	41-9-500R	N/A

**Remote Equipment Outside of Test Setup Boundary**

Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Acer, Inc.	Travelmate 803 LCi	LXT 2506001326031C2EF01
AC Power Adapter	DELTA, Inc.	ADP-75FB B	S4W0326044192
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB	Yes	2.0		EUT- RF Host	Laptop PC
DC Leads	No	1.8	PA	AC Power Adapter	EUT- RF Host
DC Leads	PA	2.0	Yes	Laptop PC	AC Power Adapter
AC Power	No	2.0	No	AC Power Adapter	AC Mains
PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.					


Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Attenuator	Tektronix	011-0059-02	ATH	12/29/2004	13 mo
High Pass Filter	TTE	H97-100k-50-720B	HFC	12/29/2004	13 mo
LISN	Solar	9252-50-R-24-BNC	LIO	04/30/2004	12 mo
LISN	Solar	9252-50-R-24-BNC	LIN	12/29/2004	13 mo
Quasi-Peak Adapter	Hewlett-Packard	85650A	AQF	12/02/2004	13 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/02/2004	13 mo
Spectrum Analyzer Display	Hewlett Packard	85662A	AALD	12/02/2004	13 mo


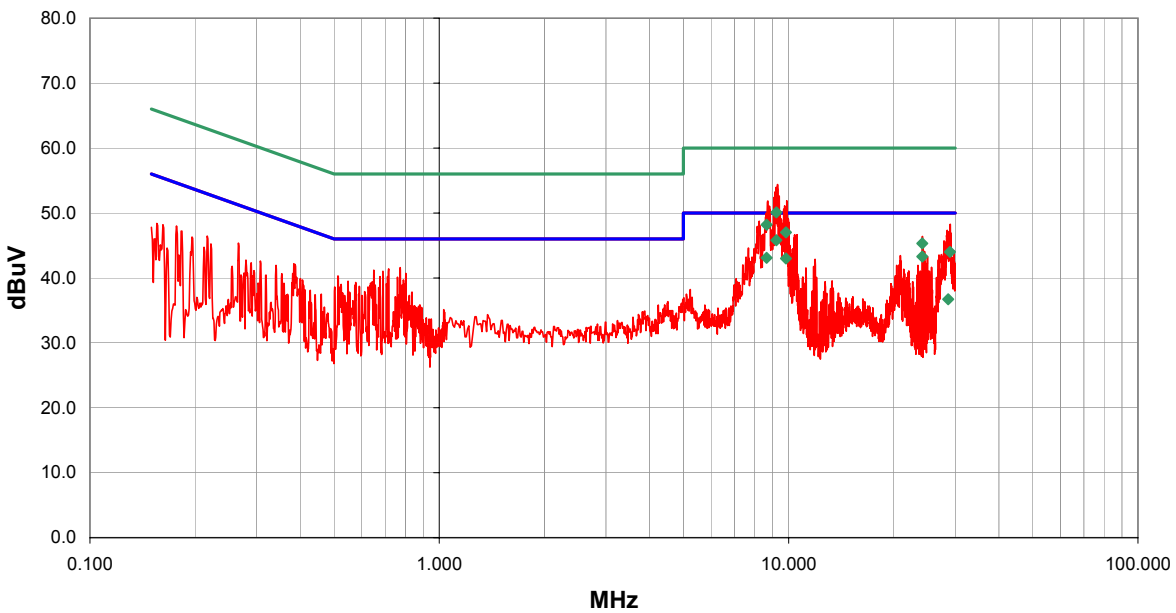
### Test Description

**Requirement:** Per 47 15.207(d), if the EUT is connected to the AC power line indirectly, obtaining its power from another device that is connected to the AC power line, then it should be tested to demonstrate compliance with the conducted limits of 15.207.

**Configuration:** The EUT will be powered from a device that could be connected to the AC power line. Therefore, the measurements were made on the device used to power the EUT. The AC power line conducted emissions were measured with the EUT operating at the lowest, the highest, and a middle channel in the operational band. The EUT was transmitting at its maximum data rate. For each mode, the spectrum was scanned from 150 kHz to 30 MHz. The test setup and procedures were in accordance with ANSI C63.4-1992.


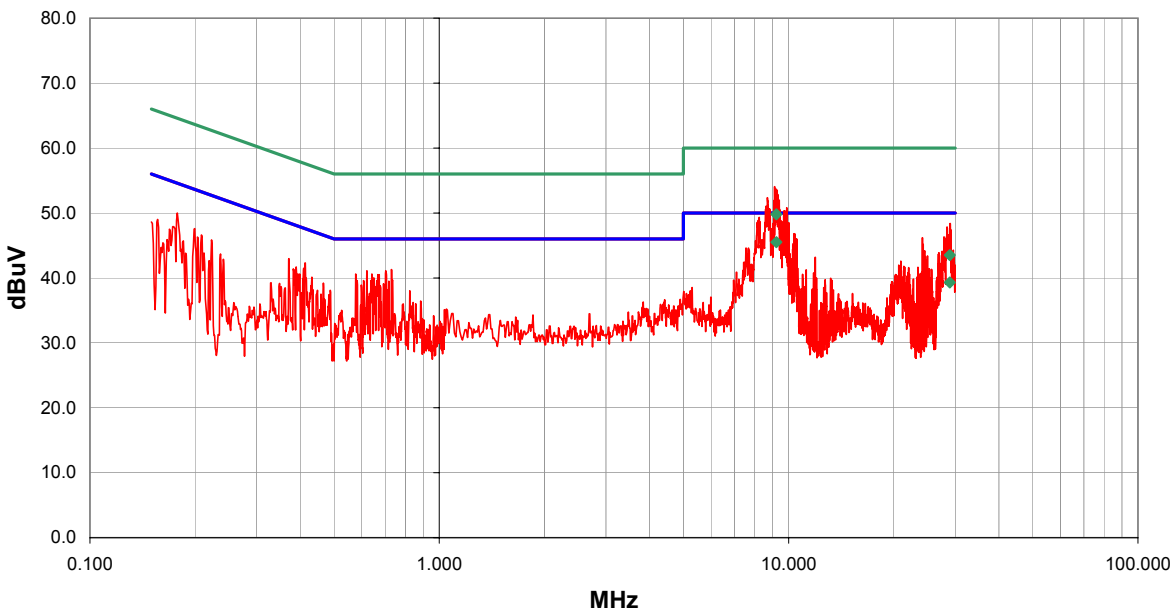
Completed by:



b EMC		CONDUCTED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI A2.13					
EUT: RF Host			Work Order: PROU0007						
Serial Number: Red			Date: 01/03/05						
Customer: Product Creation Studio			Temperature: 22						
Attendees: None			Humidity: 30%						
Cust. Ref. No.:			Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01					
TEST SPECIFICATIONS									
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004				Method: ANSI C63.4:2003					
SAMPLE CALCULATIONS									
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation									
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator									
COMMENTS									
EUT OPERATING MODES									
Transmitting low channel									
DEVIATIONS FROM TEST STANDARD									
No deviations.									
RESULTS			Line	Run #					
Pass			N	1					
Other			 Tested By:						
									
Freq (MHz)	Amplitude (dBuV)		Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks (PK) from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
9.225	24.9		0.0	0.9	20.0	AV	45.8	50.0	-4.2
24.121	21.8		0.0	1.5	20.0	AV	43.3	50.0	-6.7
8.652	22.3		0.0	0.8	20.0	AV	43.1	50.0	-6.9
9.823	22.1		0.0	0.9	20.0	AV	43.0	50.0	-7.0
9.225	29.2		0.0	0.9	20.0	QP	50.1	60.0	-9.9
8.652	27.4		0.0	0.8	20.0	QP	48.2	60.0	-11.8
9.823	26.1		0.0	0.9	20.0	QP	47.0	60.0	-13.0
28.624	15.1		0.0	1.6	20.0	AV	36.7	50.0	-13.3
24.121	23.8		0.0	1.5	20.0	QP	45.3	60.0	-14.7
28.968	22.4		0.0	1.6	20.0	QP	44.0	60.0	-16.0
8.619	29.1		0.0	0.8	20.0		49.9	50.0	-0.1
9.840	29.0		0.0	0.9	20.0		49.9	50.0	-0.1
9.759	29.0		0.0	0.9	20.0		49.9	50.0	-0.1
9.749	28.9		0.0	0.9	20.0		49.8	50.0	-0.2
9.792	28.8		0.0	0.9	20.0		49.7	50.0	-0.3
9.060	28.8		0.0	0.9	20.0		49.7	50.0	-0.3
9.439	28.7		0.0	0.9	20.0		49.6	50.0	-0.4
9.429	28.7		0.0	0.9	20.0		49.6	50.0	-0.4
9.936	28.3		0.0	0.9	20.0		49.2	50.0	-0.8

NORTHWEST		ACQ 2005.1.3						
EMI A2.13								
EMC CONDUCTED EMISSIONS DATA SHEET								
EUT: RF Host		Work Order: PROU0007						
Serial Number: Red		Date: 01/03/05						
Customer: Product Creation Studio		Temperature: 22						
Attendees: None		Humidity: 30%						
Cust. Ref. No.:		Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz						
		Job Site: EV01						
TEST SPECIFICATIONS								
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004		Method: ANSI C63.4:2003						
SAMPLE CALCULATIONS								
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation								
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator								
COMMENTS								
EUT OPERATING MODES								
Transmitting low channel								
DEVIATIONS FROM TEST STANDARD								
No deviations.								
RESULTS		Line	Run #					
Pass		L1	2					
Other								
		Holly Ashkannejhad Tested By:						
Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks (PK) from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
9.224	24.7	0.0	0.9	20.0	AV	45.6	50.0	-4.4
24.120	23.7	0.0	1.5	20.0	AV	45.2	50.0	-4.8
28.946	19.2	0.0	1.6	20.0	AV	40.8	50.0	-9.2
9.224	29.1	0.0	0.9	20.0	QP	50.0	60.0	-10.0
24.120	25.9	0.0	1.5	20.0	QP	47.4	60.0	-12.6
28.946	22.2	0.0	1.6	20.0	QP	43.8	60.0	-16.2
0.829	9.5	0.0	0.0	20.0	AV	29.5	46.0	-16.5
0.829	17.7	0.0	0.0	20.0	QP	37.7	56.0	-18.3
0.412	9.0	0.0	0.0	20.0	AV	29.0	47.6	-18.6
0.472	7.4	0.0	0.0	20.0	AV	27.4	46.5	-19.1
0.699	16.8	0.0	0.0	20.0	QP	36.8	56.0	-19.2
0.699	6.1	0.0	0.0	20.0	AV	26.1	46.0	-19.9
0.258	11.4	0.0	0.0	20.0	AV	31.4	51.5	-20.1
0.412	15.7	0.0	0.0	20.0	QP	35.7	57.6	-21.9
0.258	19.0	0.0	0.0	20.0	QP	39.0	61.5	-22.5
0.472	13.8	0.0	0.0	20.0	QP	33.8	56.5	-22.7
9.840	29.1	0.0	0.9	20.0		50.0	50.0	0.0
9.828	29.1	0.0	0.9	20.0		50.0	50.0	0.0
8.139	29.1	0.0	0.8	20.0		49.9	50.0	-0.1

NORTHWEST		ACQ 2005.1.3						
EMI A2.13								
EMC CONDUCTED EMISSIONS DATA SHEET								
EUT: RF Host		Work Order: PROU0007						
Serial Number: Red		Date: 01/03/05						
Customer: Product Creation Studio		Temperature: 22						
Attendees: None		Humidity: 30%						
Cust. Ref. No.:		Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz						
		Job Site: EV01						
TEST SPECIFICATIONS								
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004		Method: ANSI C63.4:2003						
SAMPLE CALCULATIONS								
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation								
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator								
COMMENTS								
EUT OPERATING MODES								
Transmitting mid channel								
DEVIATIONS FROM TEST STANDARD								
No deviations.								
RESULTS		Line	Run #					
Pass		L1	3					
Other								
		Holly Ashkannejhad Tested By:						
Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks (PK) from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
9.224	24.8	0.0	0.9	20.0	AV	45.7	50.0	-4.3
24.120	23.9	0.0	1.5	20.0	AV	45.4	50.0	-4.6
28.962	19.4	0.0	1.6	20.0	AV	41.0	50.0	-9.0
9.224	29.0	0.0	0.9	20.0	QP	49.9	60.0	-10.1
24.120	25.8	0.0	1.5	20.0	QP	47.3	60.0	-12.7
28.962	24.6	0.0	1.6	20.0	QP	46.2	60.0	-13.8
0.784	9.9	0.0	0.0	20.0	AV	29.9	46.0	-16.1
0.466	9.4	0.0	0.0	20.0	AV	29.4	46.6	-17.2
0.784	18.2	0.0	0.0	20.0	QP	38.2	56.0	-17.8
0.466	15.7	0.0	0.0	20.0	QP	35.7	56.6	-20.9
0.263	9.9	0.0	0.0	20.0	AV	29.9	51.3	-21.4
0.263	19.2	0.0	0.0	20.0	QP	39.2	61.3	-22.1
9.439	29.1	0.0	0.9	20.0		50.0	50.0	0.0
9.429	29.1	0.0	0.9	20.0		50.0	50.0	0.0
0.837	25.6	0.0	0.2	20.0		45.8	46.0	-0.2
0.811	25.6	0.0	0.2	20.0		45.8	46.0	-0.2
9.840	28.9	0.0	0.9	20.0		49.8	50.0	-0.2
9.828	28.9	0.0	0.9	20.0		49.8	50.0	-0.2
9.720	28.9	0.0	0.9	20.0		49.8	50.0	-0.2

NORTHWEST EMC		CONDUCTED EMISSIONS DATA SHEET		ACQ 2005.1.3 EMI A2.13					
EUT: RF Host			Work Order: PROU0007						
Serial Number: Red			Date: 01/03/05						
Customer: Product Creation Studio			Temperature: 22						
Attendees: None			Humidity: 30%						
Cust. Ref. No.:			Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz		Job Site: EV01					
TEST SPECIFICATIONS									
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004			Method: ANSI C63.4:2003						
SAMPLE CALCULATIONS									
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation									
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator									
COMMENTS									
EUT OPERATING MODES									
Transmitting mid channel									
DEVIATIONS FROM TEST STANDARD									
No deviations.									
RESULTS			Line	Run #					
Pass			N	4					
Other			 Tested By:						
									
Freq (MHz)	Amplitude (dBuV)		Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks (PK) from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
9.222	24.6		0.0	0.9	20.0	AV	45.5	50.0	-4.5
9.222	28.9		0.0	0.9	20.0	QP	49.8	60.0	-10.2
28.920	17.7		0.0	1.6	20.0	AV	39.3	50.0	-10.7
28.920	21.9		0.0	1.6	20.0	QP	43.5	60.0	-16.5
9.720	29.1		0.0	0.9	20.0		50.0	50.0	0.0
9.708	29.1		0.0	0.9	20.0		50.0	50.0	0.0
9.828	29.0		0.0	0.9	20.0		49.9	50.0	-0.1
9.840	28.9		0.0	0.9	20.0		49.8	50.0	-0.2
9.792	28.9		0.0	0.9	20.0		49.8	50.0	-0.2
9.739	28.9		0.0	0.9	20.0		49.8	50.0	-0.2
9.684	28.9		0.0	0.9	20.0		49.8	50.0	-0.2
9.899	28.8		0.0	0.9	20.0		49.7	50.0	-0.3
9.869	28.7		0.0	0.9	20.0		49.6	50.0	-0.4
9.859	28.6		0.0	0.9	20.0		49.5	50.0	-0.5
8.239	28.5		0.0	0.8	20.0		49.3	50.0	-0.7
9.456	28.1		0.0	0.9	20.0		49.0	50.0	-1.0
9.480	28.0		0.0	0.9	20.0		48.9	50.0	-1.1
9.468	28.0		0.0	0.9	20.0		48.9	50.0	-1.1
8.179	28.0		0.0	0.8	20.0		48.8	50.0	-1.2

NORTHWEST		ACQ 2005.1.3						
EMI A2.13								
EMC CONDUCTED EMISSIONS DATA SHEET								
EUT: RF Host		Work Order: PROU0007						
Serial Number: Red		Date: 01/03/05						
Customer: Product Creation Studio		Temperature: 22						
Attendees: None		Humidity: 30%						
Cust. Ref. No.:		Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz						
		Job Site: EV01						
TEST SPECIFICATIONS								
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004		Method: ANSI C63.4:2003						
SAMPLE CALCULATIONS								
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation								
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator								
COMMENTS								
EUT OPERATING MODES								
Transmitting high channel								
DEVIATIONS FROM TEST STANDARD								
No deviations.								
RESULTS		Line	Run #					
Pass		N	5					
Other								
		Holly Ashkannejhad Tested By:						
Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks (PK) from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
9.226	24.4	0.0	0.9	20.0	AV	45.3	50.0	-4.7
9.226	28.9	0.0	0.9	20.0	QP	49.8	60.0	-10.2
28.965	16.9	0.0	1.6	20.0	AV	38.5	50.0	-11.5
28.965	22.8	0.0	1.6	20.0	QP	44.4	60.0	-15.6
0.703	5.0	0.0	0.0	20.0	AV	25.0	46.0	-21.0
0.703	12.3	0.0	0.0	20.0	QP	32.3	56.0	-23.7
9.879	29.0	0.0	0.9	20.0		49.9	50.0	-0.1
9.720	28.8	0.0	0.9	20.0		49.7	50.0	-0.3
9.708	28.8	0.0	0.9	20.0		49.7	50.0	-0.3
9.684	28.8	0.0	0.9	20.0		49.7	50.0	-0.3
9.792	28.7	0.0	0.9	20.0		49.6	50.0	-0.4
9.779	28.5	0.0	0.9	20.0		49.4	50.0	-0.6
9.899	28.4	0.0	0.9	20.0		49.3	50.0	-0.7
9.439	28.2	0.0	0.9	20.0		49.1	50.0	-0.9
8.239	28.2	0.0	0.8	20.0		49.0	50.0	-1.0
9.869	28.0	0.0	0.9	20.0		48.9	50.0	-1.1
9.000	27.9	0.0	0.9	20.0		48.8	50.0	-1.2
9.552	27.7	0.0	0.9	20.0		48.6	50.0	-1.4
9.912	27.6	0.0	0.9	20.0		48.5	50.0	-1.5

NORTHWEST		ACQ 2005.1.3						
EMI A2.13								
EMC CONDUCTED EMISSIONS DATA SHEET								
EUT: RF Host		Work Order: PROU0007						
Serial Number: Red		Date: 01/03/05						
Customer: Product Creation Studio		Temperature: 22						
Attendees: None		Humidity: 30%						
Cust. Ref. No.:		Barometric Pressure: 30.09						
Tested by: Holly Ashkannejhad		Power: 120VAC/60Hz						
		Job Site: EV01						
TEST SPECIFICATIONS								
Specification: FCC 15.207 AC Powerline Conducted Emissions:2004		Method: ANSI C63.4:2003						
SAMPLE CALCULATIONS								
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation								
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator								
COMMENTS								
EUT OPERATING MODES								
Transmitting high channel								
DEVIATIONS FROM TEST STANDARD								
No deviations.								
RESULTS		Line	Run #					
Pass		L1	6					
Other								
		Holly Ashkannejhad Tested By:						
Freq (MHz)	Amplitude (dBuV)	Transducer (dB)	Cable (dB)	External Attenuation (dB)	Detector (blank equal peaks (PK) from scan)	Adjusted dBuV	Spec. Limit dBuV	Compared to Spec. (dB)
24.118	24.1	0.0	1.5	20.0	AV	45.6	50.0	-4.4
9.216	24.5	0.0	0.9	20.0	AV	45.4	50.0	-4.6
8.767	21.5	0.0	0.9	20.0	AV	42.4	50.0	-7.6
28.965	19.8	0.0	1.6	20.0	AV	41.4	50.0	-8.6
9.216	28.6	0.0	0.9	20.0	QP	49.5	60.0	-10.5
8.767	26.6	0.0	0.9	20.0	QP	47.5	60.0	-12.5
24.118	25.8	0.0	1.5	20.0	QP	47.3	60.0	-12.7
28.965	24.9	0.0	1.6	20.0	QP	46.5	60.0	-13.5
0.701	8.5	0.0	0.0	20.0	AV	28.5	46.0	-17.5
0.813	17.7	0.0	0.0	20.0	QP	37.7	56.0	-18.3
0.813	6.9	0.0	0.0	20.0	AV	26.9	46.0	-19.1
0.701	16.6	0.0	0.0	20.0	QP	36.6	56.0	-19.4
9.439	29.1	0.0	0.9	20.0		50.0	50.0	0.0
9.429	29.1	0.0	0.9	20.0		50.0	50.0	0.0
8.179	29.0	0.0	0.8	20.0		49.8	50.0	-0.2
9.859	28.8	0.0	0.9	20.0		49.7	50.0	-0.3
9.816	28.8	0.0	0.9	20.0		49.7	50.0	-0.3
9.804	28.8	0.0	0.9	20.0		49.7	50.0	-0.3
9.759	28.8	0.0	0.9	20.0		49.7	50.0	-0.3



