

TEST REPORT

Report No.: BCTC2307939313-8E

Applicant: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY
CO.,LTD


Product Name: Smart Phone

Model/Type Ref.: WP30 Pro

Tested Date: 2023-09-13 to 2023-09-20

Issued Date: 2023-11-09

Shenzhen BCTC Testing Co., Ltd.

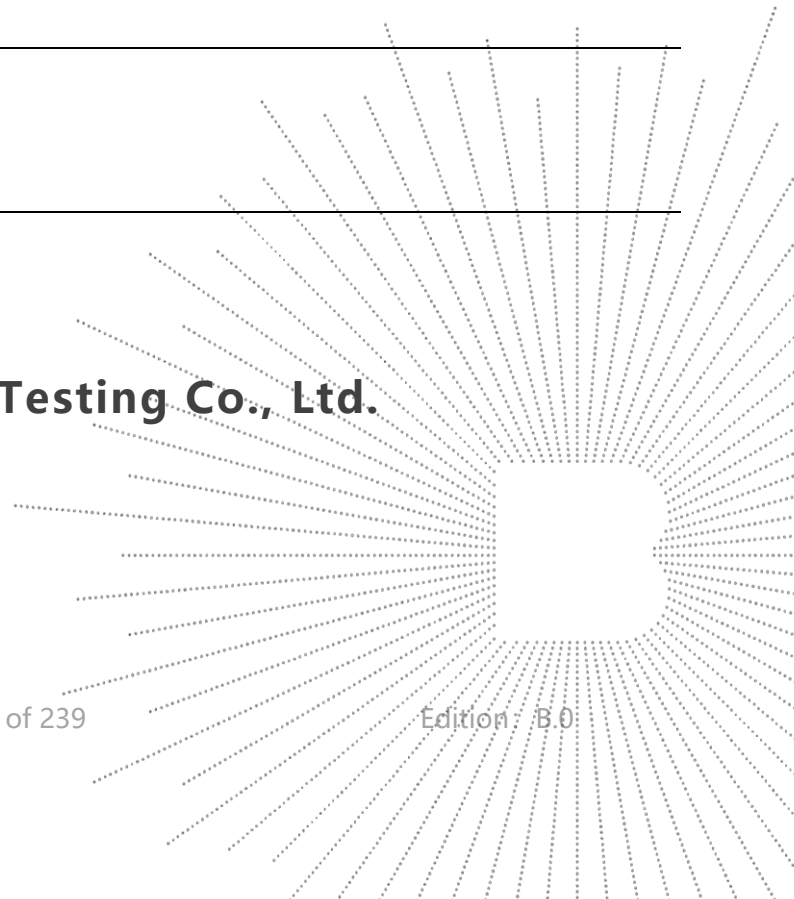

FCC ID: 2ANMU-WP30SPUT

Product Name: Smart Phone

Trademark: OUKITEL

Model/Type Ref.: WP30 Pro
WP30, WP30 S, WP30 Ultra, WP30 TITAN

Applicant: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
202, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No. 20,
Dafu Industrial Zone, Kukeng Community, Guanlan Street, Longhua District,
Shenzhen, China

Address:

Manufacturer: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
202, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No. 20,
Dafu Industrial Zone, Kukeng Community, Guanlan Street, Longhua District,
Shenzhen, China

Address:

Prepared By: Shenzhen BCTC Testing Co., Ltd.
1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Address:

Sample Received Date: 2023-09-13

Sample tested Date: 2023-09-13 to 2023-09-20

Issue Date: 2023-11-09


SAR Max. Values is: 1.177 W/kg (1g) for Head
0.565 W/kg (1g) for Body
0.573 W/kg (1g) for Hotspot

Test Standards: IEEE Std C95.1, 2019/ IEEE Std 1528™-2013/FCC Part 2.1093

Test Results: PASS

Remark: This is SAR test report

Tested by:



Min Zhi Cheng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Standards	6
3. Test Summary	7
4. SAR Limits.....	8
5. Measurement Uncertainty	9
6. Product Information and Test Setup	10
6.1 Product Information	10
6.2 Test Setup Configuration	13
6.3 Support Equipment.....	13
6.4 Test Environment	13
7. Test Facility and Test Instrument Used	14
7.1 Test Facility	14
7.2 Test Instrument Used	15
8. Specific Absorption Rate (SAR)	16
8.1 Introduction.....	16
8.2 SAR Definition	16
9. SAR Measurement System	17
9.1 The Measurement System.....	17
9.2 Probe.....	17
9.3 Probe Calibration Process	19
9.4 Phantom	20
9.5 Device Holder	20
10. Tissue Simulating Liquids.....	21
10.1 Composition of Tissue Simulating Liquid	21
10.2 Limit.....	22
10.3 Tissue Calibration Result.....	23
11. System Check	24
11.1 Purpose of System Performance Check.....	24
11.2 System Setup	24
11.3 Validation Results	25
12. EUT Testing Position.....	26
12.1 Define Two Imaginary Lines on the Handset.....	26
12.2 Cheek Position	26
12.3 Tilted Position	27
12.4 Body Position.....	27
13. SAR Measurement Procedures.....	28
13.1 Measurement Procedures	28
13.2 Spatial Peak SAR Evaluation	28
13.3 Area & Zoom Scan Procedures	29
13.4 Volume Scan Procedures.....	30
13.5 SAR Averaged Methods	30
13.6 Power Drift Monitoring	30
14. SAR Test Result.....	31


14.1 Conducted RF Output Power.....	31
14.2 Transmit Antennas and SAR Measurement Position.....	45
14.3 Measured and Reported (Scaled) SAR Results	46
14.4 SAR Measurement Variability.....	55
14.5 Simultaneous Transmission Evaluation	56
15. Test Plots	58
15.1 System Performance Check	58
15.2 SAR Test Graph Results	74
16. CALIBRATION CERTIFICATES.....	130
17. EUT Photographs.....	233
18. EUT Test Setup Photographs.....	234

(Note: N/A Means Not Applicable)

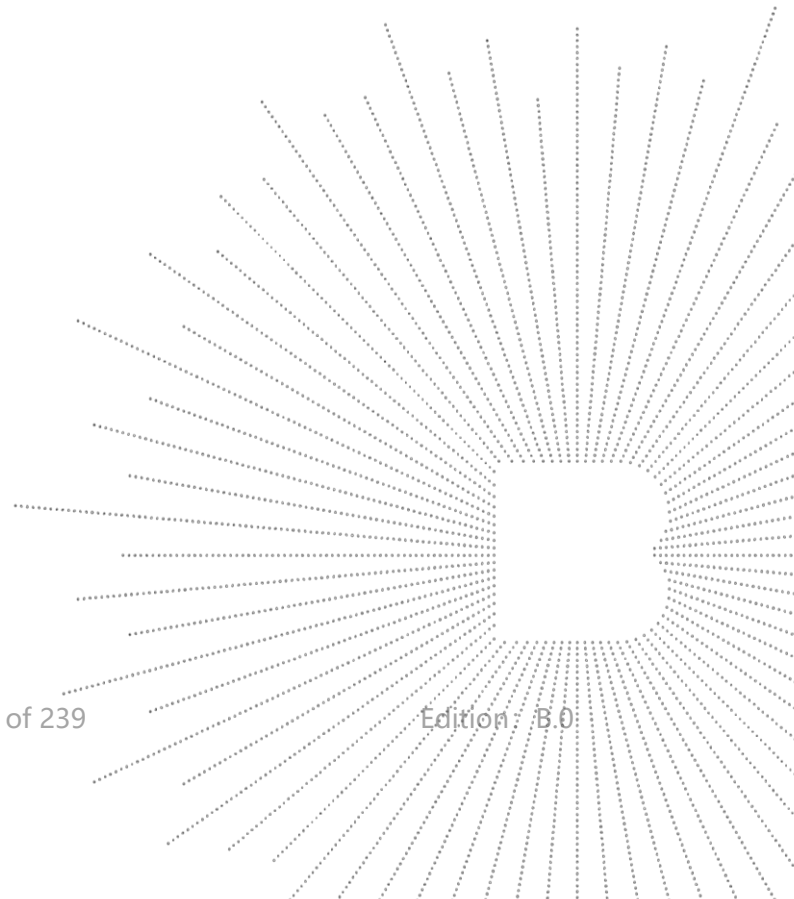

1. Version

Report No.	Issue Date	Description	Approved
BCTC2307939313-8E	2023-11-09	Original	Valid

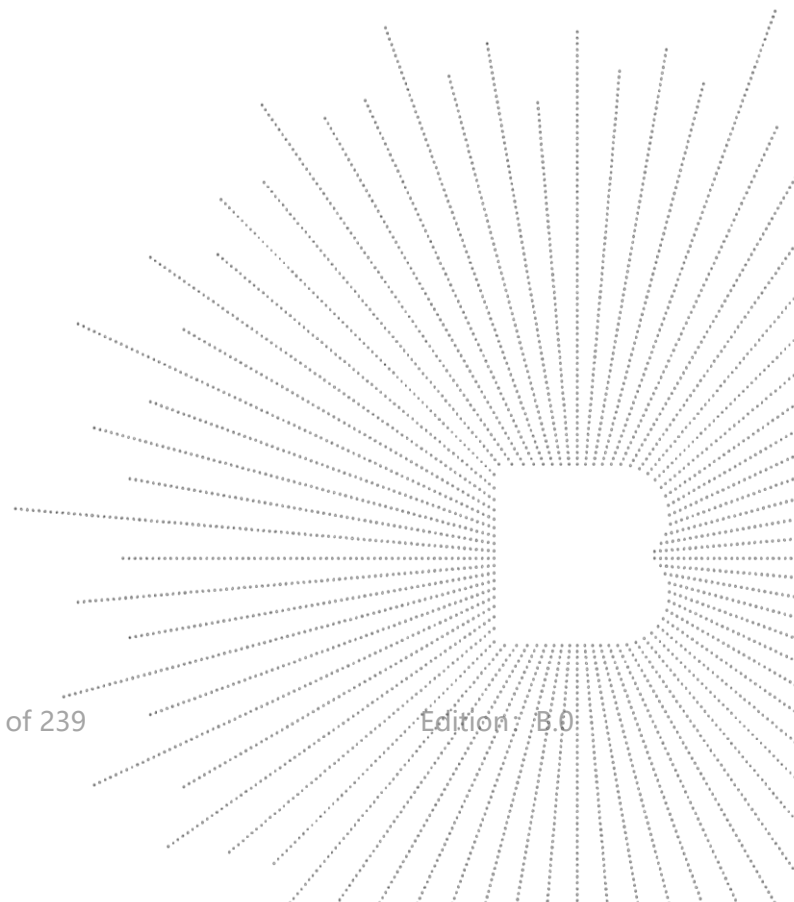

2. Test Standards

IEEE Std C95.1-2019: IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

IEEE Std 1528™-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations


KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB 941225 D01 3G SAR Procedures: 3G SAR MEAUREMENT PROCEDURES

KDB 941225 D05 SAR for LTE Devices: SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES

KDB 941225 D06 Hotspot Mode v02r01: SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES

KDB 648474 D04 Handset SAR v01r03: SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS

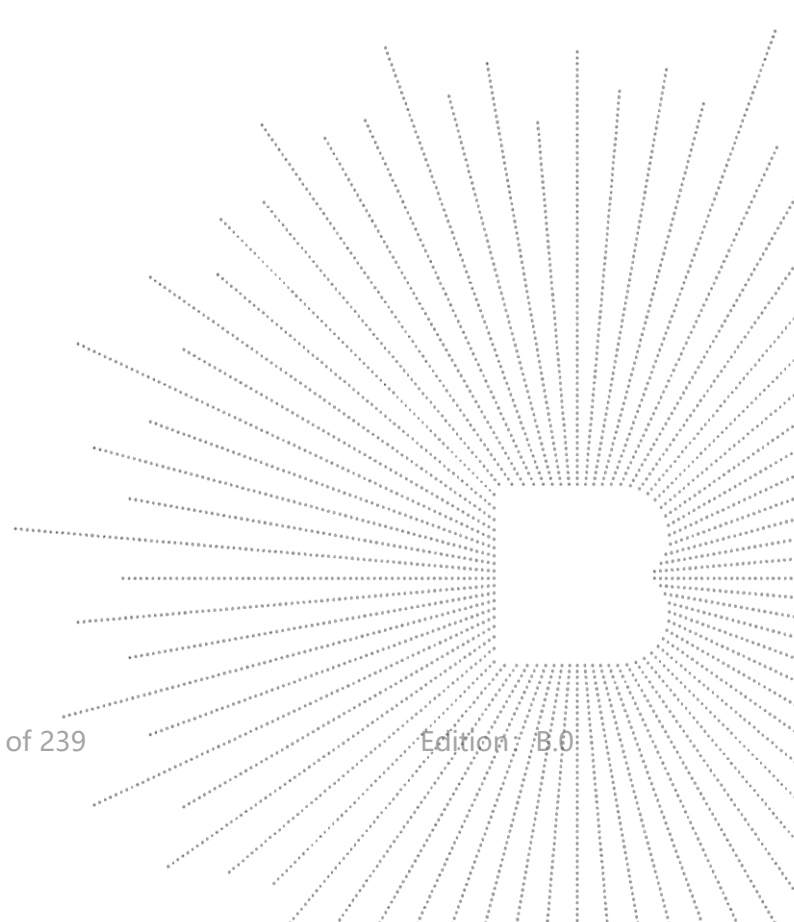


3. Test Summary

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Report SAR1g (W/kg)			SAR1g Limit (W/kg)
	Head	Body (10mm Gap)	Hotspot (10mm Gap)	
GSM	0.542	0.422	0.251	1.6
WCDMA	0.825	0.441	0.331	1.6
LTE	1.060	0.565	0.573	1.6
SA	1.158	0.561	0.533	1.6
NSA	1.177	0.526	0.517	1.6
WLAN 2.4G	0.265	0.358	0.319	1.6
WLAN 5G	0.337	0.321	0.326	1.6
Simultaneous Transmission	1.514	0.923	0.899	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013.

Remark: Data for SA and NSA were obtained from (STS2308301H03) reports.

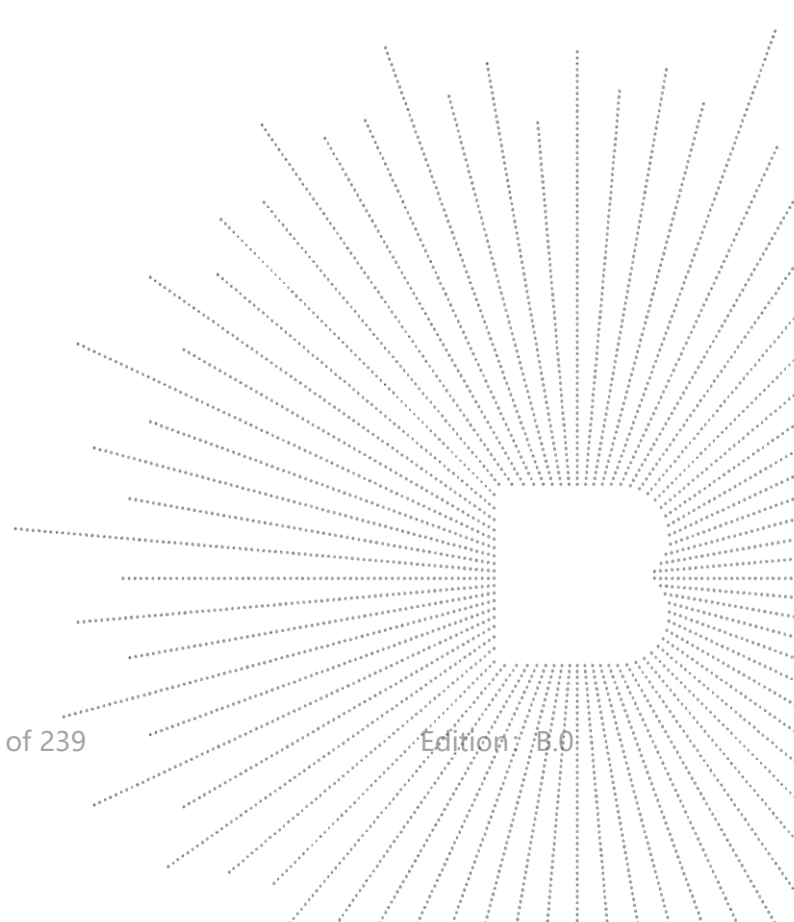


4. SAR Limits

EXPOSURE LIMITS	FCC Limit (1g Tissue)	
	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average(averaged over the whole body)	0.08	0.4
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.


Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

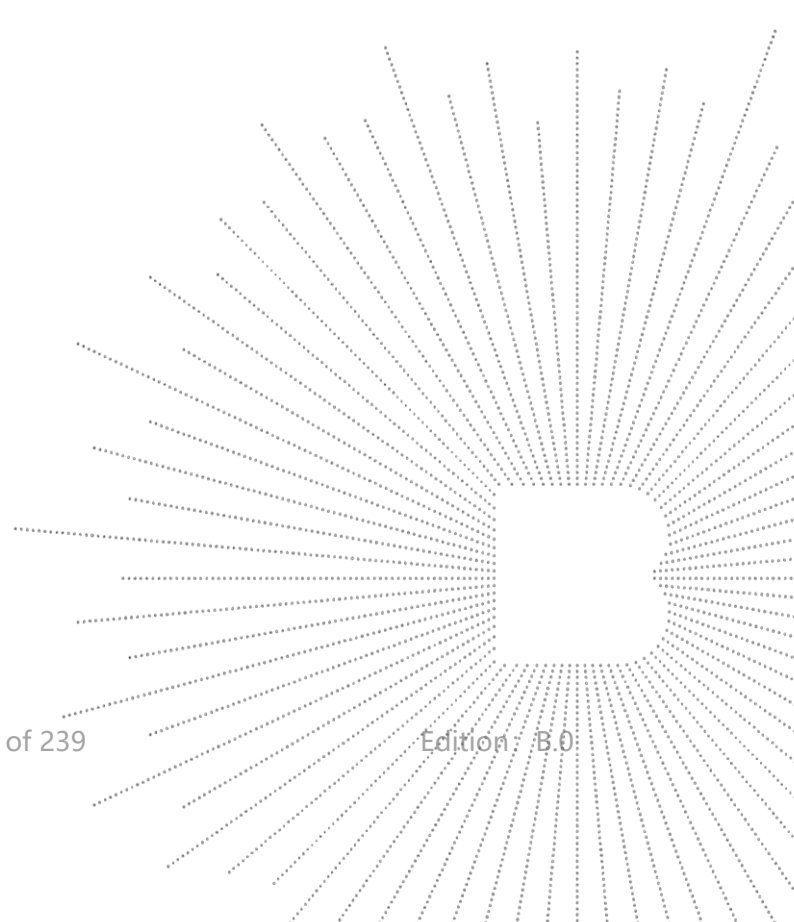

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k=2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

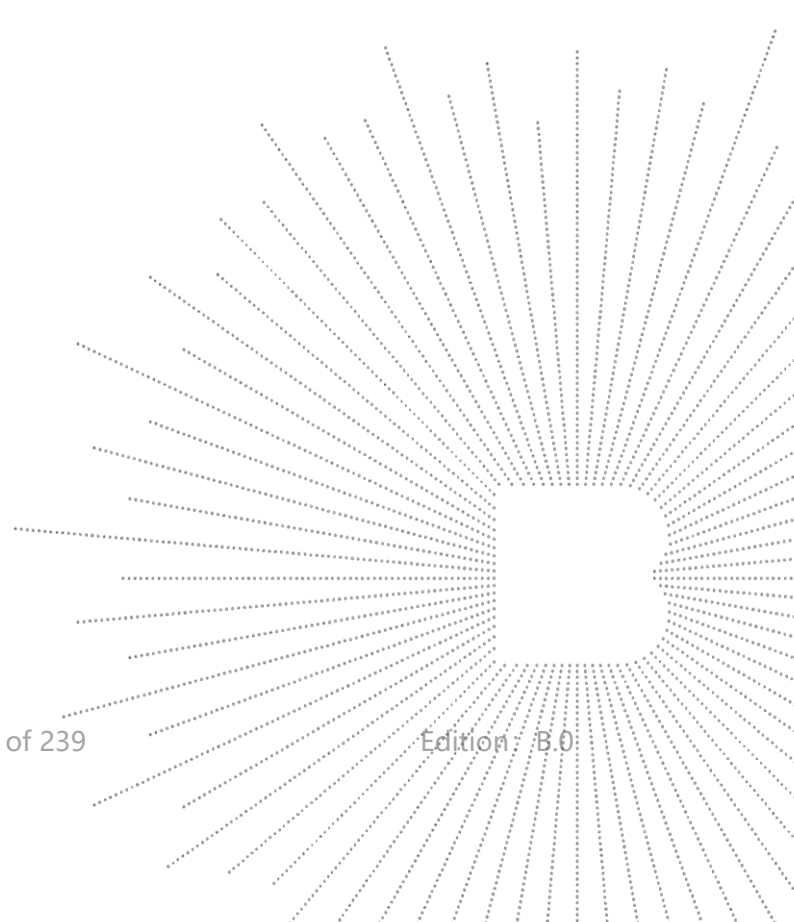

6. Product Information and Test Setup

6.1 Product Information

Model/Type reference:	WP30 Pro WP30, WP30 S, WP30 Ultra, WP30 TITAN
Model differences:	All the model are the same circuit and RF module, except model names and appearance of the color.
Hardware Version:	M159-MUB-V2
Software Version:	OUKITEL_WP30_Pro_V09_20230804
Ratings:	DC 9V from adapter
Battery:	DC 774V5500mAh/42.57Wh
Adapter Information:	Model: HJ-PD120W-US Input: 100-240V- 50/60Hz 1.8A Output: 5.0V  3.0A 15.0W OR 9.0V  3.0A 27.0W OR 12.0V  3.0A 36.0W OR 15.0V  3.0A 45.0W OR 20.0V  5.0A 100.0W MAX PPS: 3.6V-20.0V  6.0A 120W MAX

2,3G

Operation Frequency:	GSM/GPRS/EGPRS 850: TX: 824~849MHz; RX: 869~894MHz; GSM/GPRS/EGPRS 1900: TX: 1850~1910MHz; RX: 1930~1990MHz; WCDMA Band II: TX: 1852.40~1907.60MHz; Rx: 1932.60~1987.40MHz; WCDMA Band IV: TX: 1712.40~1752.60MHz; RX: 2112.60 – 2452.40MHz WCDMA Band V: TX: 826.40~846.60MHz; RX: 871.40~ 891.60MHz;
GPRS Class:	Class 12
Type of Modulation:	GSM with GMSK Modulation WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Antenna installation:	Internal antenna
Antenna Gain:	GSM850: -0.43 dBi GSM1900: -0.36 dBi WCDMA Band II: -0.36 dBi WCDMA Band IV: -0.36 dBi WCDMA Band V: -0.43 dBi

4G

Tx Frequency:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500MHz-2570MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704MHz-716MHz
Rx Frequency:	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 7: 2620MHz-2690MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 17: 734MHz-746MHz
Bandwidth:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 5: 1.4MHz /3MHz /5MHz /10MHz LTE Band 7: 5MHz /10MHz /15MHz /20MHz LTE Band 12: 1.4MHz /3MHz /5MHz /10MHz LTE Band 17: 5MHz /10MHz
Type of Modulation:	QPSK/16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 2: -0.36 dBi LTE Band 4: -0.36 dBi LTE Band 5: -0.43 dBi LTE Band 7: 0.22 dBi LTE Band 12: -0.89 dBi LTE Band 17: -0.89 dBi

BT

BT	
Operation Frequency:	2402-2480MHz
Bluetooth Version:	5.2
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number Of Channel	79CH
Antenna installation:	Internal antenna
Antenna Gain:	-0.33 dBi
BLE	
Operation Frequency:	2402-2480MHz
Bluetooth Version:	5.2
Type of Modulation:	GFSK
Data Rate:	LE 1M PHY
Number Of Channel	40CH
Antenna installation:	Internal antenna
Antenna Gain:	-0.33 dBi

WLAN

WIFI2.4G	
Operation Frequency:	802.11b/g/n20/ax20MHz:2412~2462 MHz 802.11n40/ax40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n/ax Up to 150Mbps
Type of Modulation:	OFDM/DSSS
Number Of Channel	802.11b/g/n20/ax20MHz:11 CH 802.11n40/ax40MHz: 7 CH
Antenna Gain:	-0.33 dBi
WIFI5G	
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac/ax(20MHz channel bandwidth) 802.11n/ac/ax(40MHz channel bandwidth) 802.11ac/ax(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20)/ax(HT20); 5190-5230MHz for 802.11n(HT40)/ax(HT40); 5210MHz for 802.11 ac(HT80)/ax(HT80); 5745-5825 MHz for 802.11a/ n(HT20)/ax(HT20); 5755-5795 MHz for 802.11 n(HT40)/ax(HT40); 5775MHz for 802.11 ac(HT80)/ax(HT80);
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac/ax(VHT20): NSS1, MCS0-MCS8 802.11ac/ax(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac/ax;
Number Of Channel	4 channels for 802.11a/n20/ax20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ax40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80/ax80 in the 5210MHz band ; 5 channels for 802.11a/n20/ax20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ax40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80/ax80 in the 5775MHz band
Antenna installation:	Internal antenna
Antenna Gain:	5.1G: -0.41 dBi 5.8G: -0.15 dBi

6.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

6.3 Support Equipment

Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	--
2	--	--	BCTC	--	Yes/No	--

No.	Device Type	Brand	Model	Series No.	Note
1.	---	---	---	---	---
2.	--	--	--	--	--

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.4 Test Environment

1. Normal Test Conditions:

Humidity(%):	35-75
Atmospheric Pressure(kPa):	95-105
Temperature(°C):	18-25

2. Extreme Test Conditions:


N/A

7. Test Facility and Test Instrument Used

7.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850
A2LA certificate registration number is: CN1212
ISED Registered No.: 23583
ISED CAB identifier: CN0017

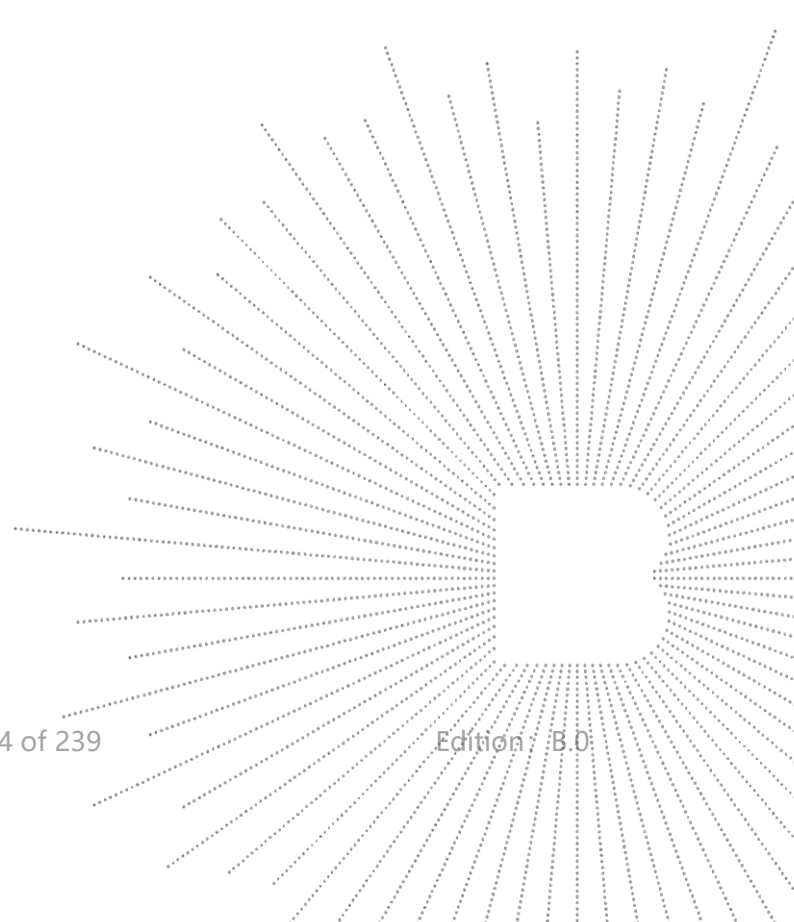

7.2 Test Instrument Used

Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
PC	DELL	\	\	N/A	N/A
SAR Measurement system	SATIMO	\	\	N/A	N/A
Signal Generator	Keysight	83711B	US37100131	Aug. 29, 2023	Aug. 28, 2024
Multimeter	Keithley	1160271	\	Nov. 10, 2022	Nov 09, 2023
S-parameter Network Analyzer	R&S	ZVB 8	101353	Dec. 07, 2022	Dec. 06, 2023
Wideband Radio Communication Tester	R&S	CMW500	\	Nov. 10, 2022	Nov 09, 2023
E SAR PROBE 6GHz	MVG	SSE2	2623-EPGO-420	July 18, 2023	July 17, 2024
DIPOLE 750	SATIMO	SID 750	SN 47/21 DIP 0G835-620	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 835	SATIMO	SID 835	SN 47/21 DIP 0G835-621	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 1800	SATIMO	SID 1800	SN 47/21 DIP 1G800-623	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 1900	SATIMO	SID 1900	SN 47/21 DIP 2G100-624	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 2450	SATIMO	SID 2450	SN 47/21 DIP 2G450-627	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 2600	SATIMO	SID 2600	SN 47/21 DIP 2G600-628	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 5000	SATIMO	SID5000	SN 47/21 DIP 5G000-629	Nov. 25, 2021	Nov. 24, 2024
COMOSAR OPENCoaxial Probe	SATIMO	\	\	Nov. 18, 2022	Nov. 17, 2023
SAR Locator	SATIMO	\	\	Nov. 18, 2022	Nov. 17, 2023
Communication Antenna	SATIMO	\	\	Nov. 18, 2022	Nov. 17, 2023
FEATURE PHONEPOSITIONING DEVICE	SATIMO	\	\	N/A	N/A
DUMMY PROBE	SATIMO	\	\	N/A	N/A
SAM Phantom	MVG	\	SN 13/09 SAM68	N/A	N/A
Liquid measurement Kit	HP	85033D	3423A08186	N/A	N/A
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Directional Coupler	Krytar 158020	131467	\	Nov. 10, 2022	Nov 09, 2023

Note:

Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.

1. There is no physical damage on the dipole;
2. System check with specific dipole is within 10% of calibrated values;
3. The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
4. The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the

electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

9. SAR Measurement System

9.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


9.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 46/21 EPGO362 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm
- Distance between probe tip and sensor center: 2.10mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annex technique using reference guide at the five frequencies.

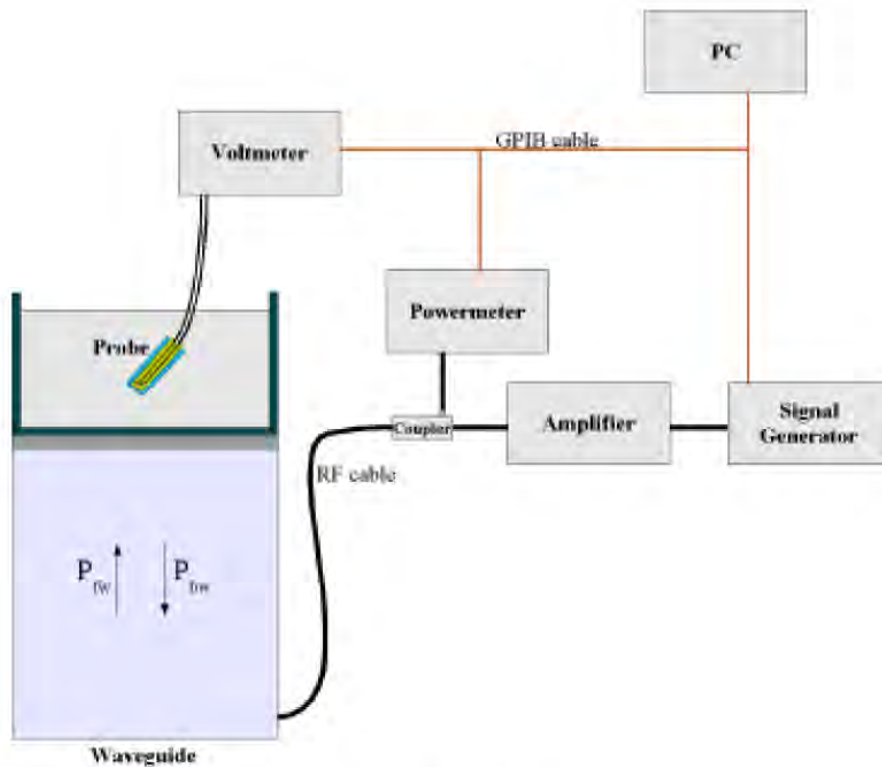

$$SAR = \frac{4(p_{fw} - p_{pbw})}{ab\delta} \cos^2 \left(\pi \frac{y}{a} \right) e^{(2\pi/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

9.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.


SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

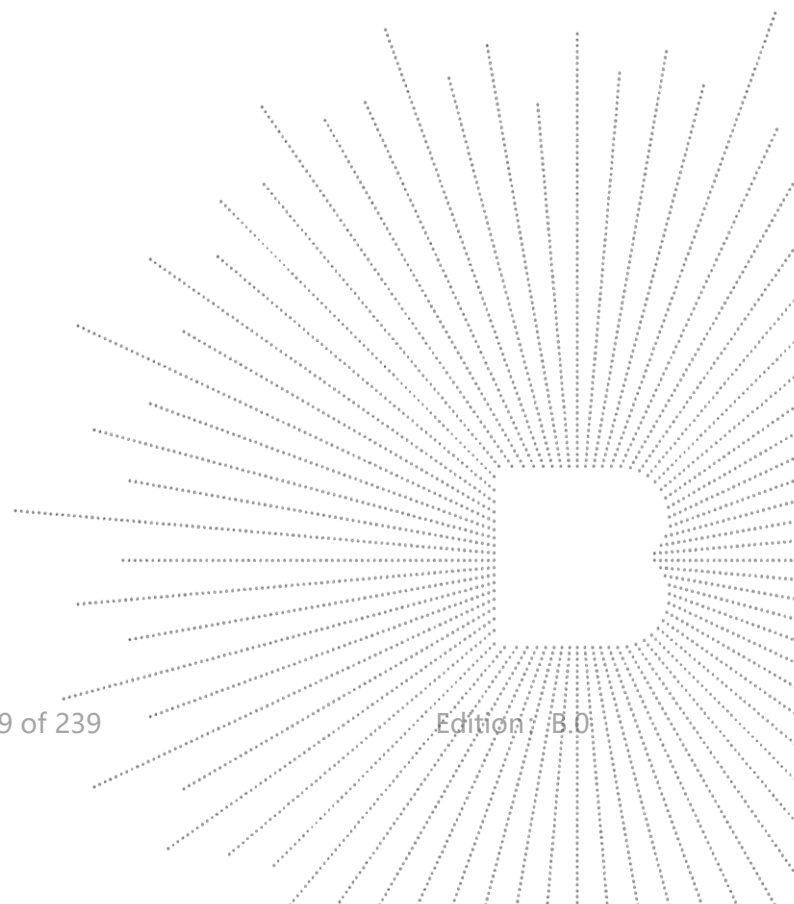

9.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

9.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.




System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

10. Tissue Simulating Liquids

10.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

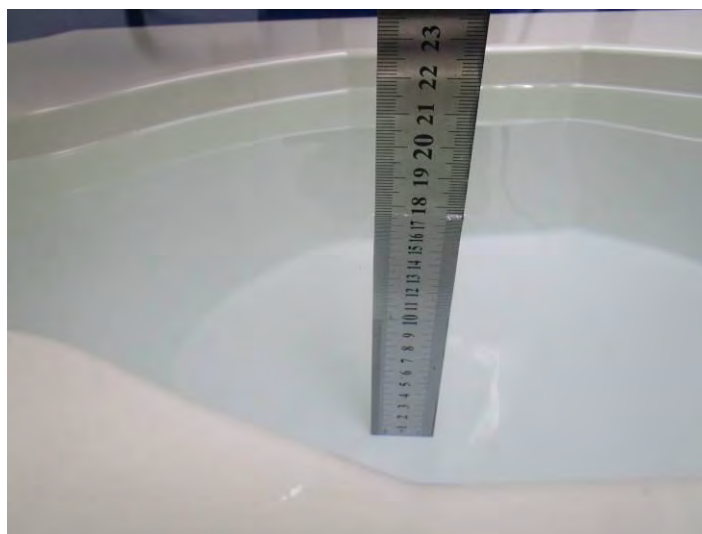

Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	1,2-Propane diol (%)	HEC (%)	Preventol (%)	DGBE (%)
Head/Body						
835	40.3	1.4	57.9	0.2	0.2	0
900	40.3	1.4	57.9	0.2	0.2	0
1800-2000	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head/Body			
5000-6000	65.52	17.24	17.24

10.2 Limit

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters

computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head	
	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3
300	0.87	45.3
450	0.87	43.5
750	0.89	41.9
835	0.90	41.5
900	0.97	41.5
915	0.98	41.5
1450	1.20	40.5
1610	1.29	40.3
1800-2000	1.40	40.0
2450	1.80	39.2
2600	1.96	39.0
3000	2.40	38.5
5200	4.66	36.0
5400	4.86	35.8
5600	5.07	35.5
5800	5.27	35.3

10.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an R&S ZVB 8. Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Frequency (MHz)	Liquid	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Temp . TSL (°C)	Date
750	Head	0.89	41.90	0.915	42.383	2.81	1.15	±5	22.8	15/09/2023
835	Head	0.90	41.50	0.900	39.709	0.00	-4.32	±5	22.8	15/09/2023
1800	Head	1.40	40.0	1.462	39.470	4.43	-1.33	±5	23.0	18/09/2023
1900	Head	1.40	40.0	1.383	39.654	-1.21	-0.86	±5	23.0	18/09/2023
2450	Head	1.80	39.2	1.873	38.809	4.06	-1.00	±5	23.0	18/09/2023
2600	Head	1.96	39.0	1.921	37.536	-1.99	-3.75	±5	23.0	18/09/2023
5200	Head	4.66	36.0	4.519	35.333	-3.03	-1.85	±5	23.0	18/09/2023
5800	Head	5.27	35.3	5.450	34.349	3.42	-2.69	±5	23.0	18/09/2023

Remark:

1. The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.
2. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.


11. System Check

11.1 Purpose of System Performance Check

At the device test frequencies. System check verifies the measurement repeatability of a SAR system before compliance testing and is not a validation of all system specifications. The latter is not required for testing a device but is mandatory before the system is deployed. The system check detects possible short-term drift and unacceptable measurement errors or uncertainties in the system.

11.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 600MHz-6000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The output power on dipole port must be calibrated to 20 dBm (100 mW) before dipole is connected.

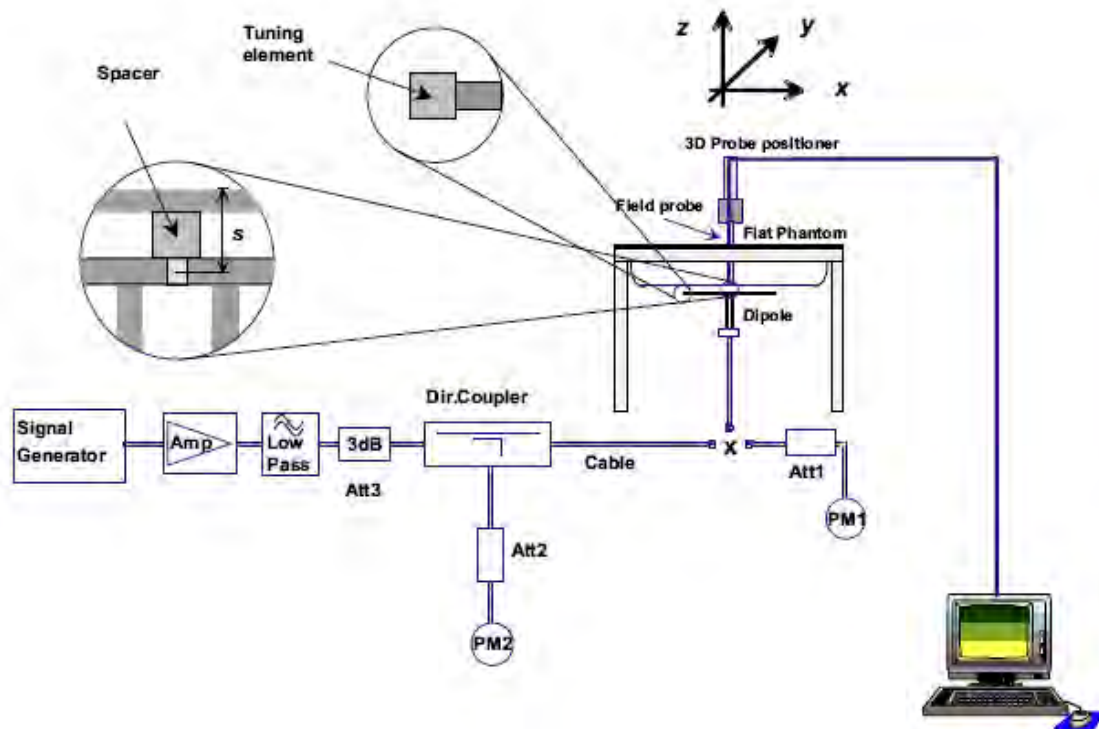

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

11.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. The following table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency (MHz)	Power	Measured SAR _{1g} (W/Kg)	Normalize to 1 Watt	Drift (%)	1W Target	Difference Percentage (%)	Limit (%)	Liquid Temp	Date
					SAR _{1g} (W/Kg)				
750	250 mW	2.093	8.372	0.11	8.58	-2.42	±10	22.8	15/09/2023
835	250 mW	2.561	10.244	-2.13	10.01	2.34	±10	22.8	15/09/2023
1800	250 mW	9.815	39.26	-1.93	39.74	-1.21	±10	23.0	18/09/2023
1900	250 mW	10.71	42.84	3.69	41.26	3.83	±10	23.0	18/09/2023
2450	250 mW	13.279	53.116	-1.11	55.16	-3.71	±10	23.0	18/09/2023
2600	250 mW	14.060	56.24	0.95	56.50	-0.46	±10	23.0	18/09/2023
5200	250 mW	18.937	75.748	1.81	76.41	-0.87	±10	23.0	18/09/2023
5800	250 mW	19.021	76.084	-3.67	76.49	-0.53	±10	23.0	18/09/2023

12. EUT Testing Position

12.1 Define Two Imaginary Lines on the Handset

(a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

(b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.

(c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

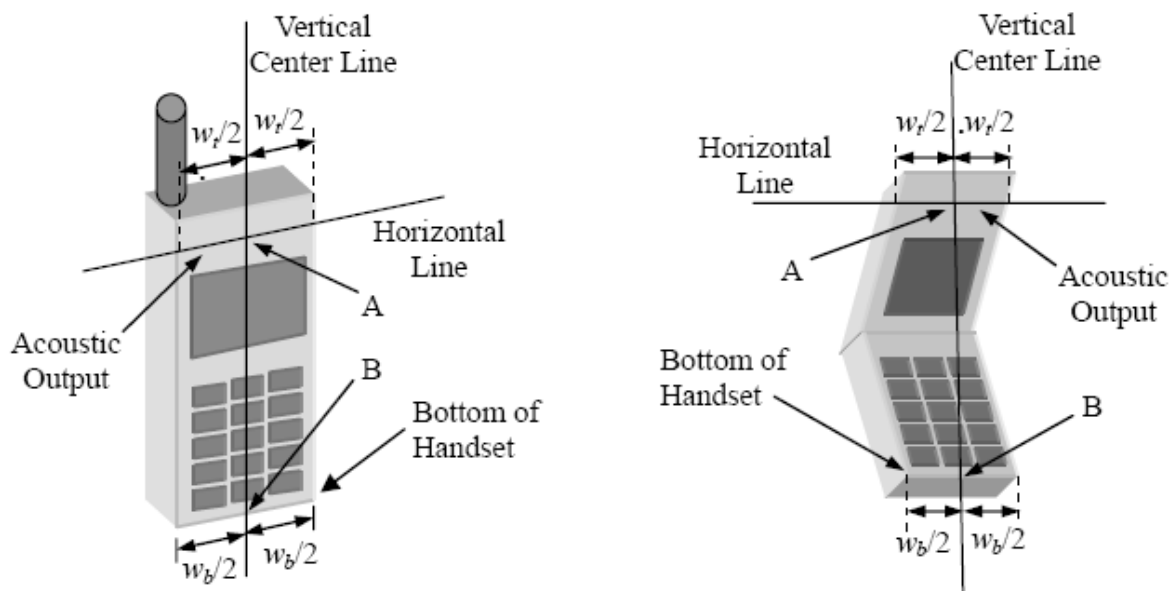


Illustration for Handset Vertical and Horizontal Reference Lines

12.2 Cheek Position

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below).

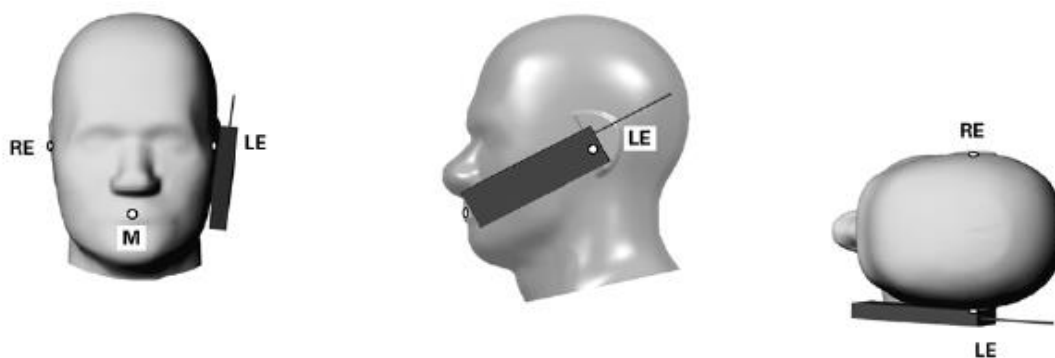


Illustration for Cheek Position

12.3 Tilted Position


- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see below).



Illustration for Tilted Position

12.4 Body Position

A typical example of a body-worn device is a Mobile Phone , wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

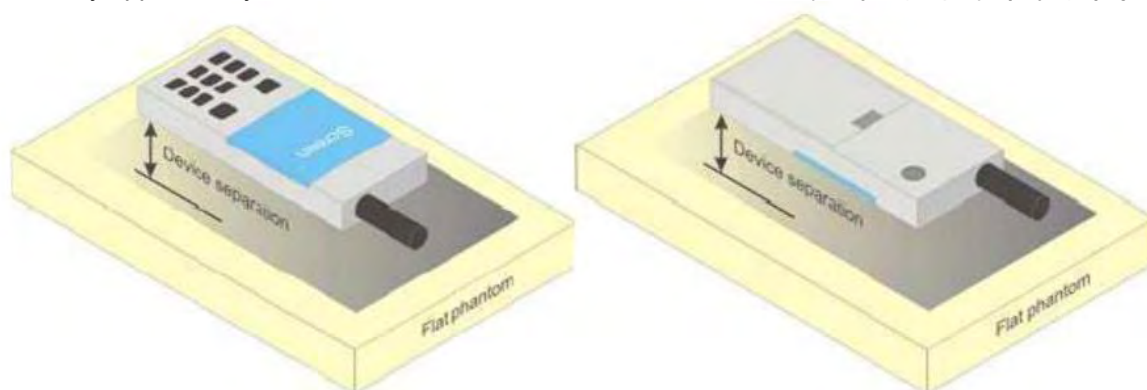

Test positions for body-worn devices

13. SAR Measurement Procedures

13.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

13.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

13.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

13.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

13.5 SAR Averaged Methods


The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

13.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

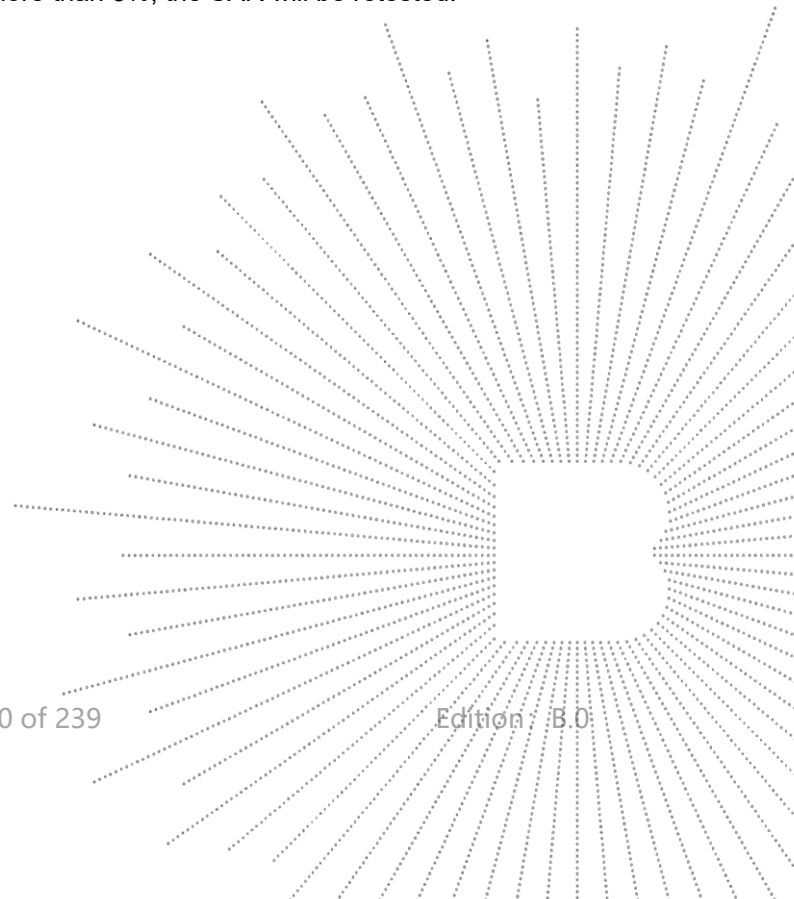

14. SAR Test Result

14.1 Conducted RF Output Power

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

The Tune-up limit already includes component tolerance. KDB 447498 sec.4.1.(d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

<GSM>

General Note:

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions.
3. Per October 2013 TCB Workshop: When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Conducted power measurement results

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up	GSM1900			Tune-up
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	31.83	31.86	31.92	32.5	28.34	28.42	27.98	29.0
GPRS (1 slot)	31.91	31.95	31.99	32.5	28.35	28.45	28.06	29.0
GPRS (2 slots)	31.10	31.12	31.16	31.5	27.63	27.76	27.36	28.0
GPRS (3 slots)	29.27	29.28	29.34	29.5	25.72	26.00	25.70	26.5
GPRS (4 slots)	28.25	28.26	28.34	28.5	24.58	24.91	24.68	25.5
EGPRS (1 slot)	26.38	26.34	26.57	27.0	23.24	23.67	23.83	24.5
EGPRS (2 slots)	25.02	25.38	25.32	25.5	22.27	22.47	22.96	23.5
EGPRS (3 slots)	23.31	23.16	23.23	23.5	20.14	20.25	20.78	21.5
EGPRS (4 slots)	21.65	21.71	21.81	22.0	18.50	19.17	19.06	19.5

GSM - Source-Based Time-Average Power (dBm)						
Band	GSM850			GSM1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM	22.83	22.86	22.92	19.34	19.42	18.98
GPRS (1 slot)	22.91	22.95	22.99	19.35	19.45	19.06
GPRS (2 slots)	25.10	25.12	25.16	21.63	21.76	21.36
GPRS (3 slots)	25.02	25.03	25.09	21.47	21.75	21.45
GPRS (4 slots)	25.25	25.26	25.34	21.58	21.91	21.68
EGPRS (1 slot)	17.38	17.34	17.57	14.24	14.67	14.83
EGPRS (2 slots)	19.02	19.38	19.32	16.27	16.47	16.96
EGPRS (3 slots)	19.06	18.91	18.98	15.89	16.00	16.53
EGPRS (4 slots)	18.65	18.71	18.81	15.50	16.17	16.06

Notes:

1. Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.00dB


2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.00dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.00dB

2. According to the conducted power as above, the GPRS measurements are performed with 2Txslot for GPRS850 and 2Txslot GPRS1900.

3. Per KDB 941225 D01, SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

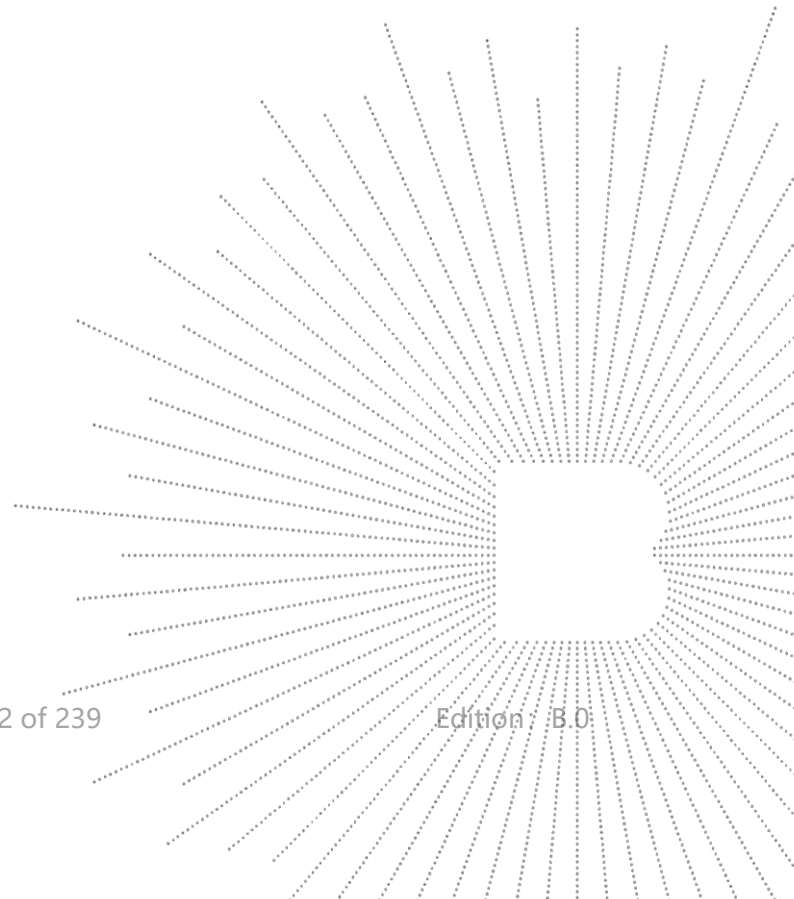

<W-CDMA>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station R&S CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

Conducted power measurement results

Band	WCDMA Band II				WCDMA Band IV			
Channel	9262	9400	9538	Tune-up	1312	1450	1513	Tune-up
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1740	1752.6	
RMC 12.2K	22.88	23.19	23.15	23.5	22.06	22.03	21.68	22.5
HSDPA Subtest-1	21.89	22.15	22.13	22.5	21.18	21.17	20.79	21.5
HSDPA Subtest-2	21.21	21.70	21.90		20.47	20.75	20.43	
HSDPA Subtest-3	20.29	20.73	20.40		19.75	19.55	19.20	
HSDPA Subtest-4	20.38	20.41	20.82		19.48	19.70	19.51	
HSUPA Subtest-1	20.44	21.93	21.90	22.5	19.40	21.01	20.63	21.5
HSUPA Subtest-2	21.71	22.09	22.00		21.16	20.99	20.61	
HSUPA Subtest-3	19.82	20.67	20.67		19.55	19.94	19.53	
HSUPA Subtest-4	21.87	22.12	22.07		21.17	21.14	20.75	
HSUPA Subtest-5	20.29	21.34	21.17		19.54	20.42	20.26	

Band	WCDMA Band V				/			
Channel	4132	4182	4233	Tune-up	/	/	/	Tune-up
Frequency (MHz)	826.4	836.4	846.6		/	/	/	
RMC 12.2K	22.29	22.36	22.56	23.0	/	/	/	/
HSDPA Subtest-1	21.31	21.35	21.56	22.0	/	/	/	/
HSDPA Subtest-2	20.69	21.01	20.94		/	/	/	
HSDPA Subtest-3	19.94	19.98	20.09		/	/	/	
HSDPA Subtest-4	19.72	19.93	20.35		/	/	/	
HSUPA Subtest-1	19.11	21.22	21.38	21.5	/	/	/	/
HSUPA Subtest-2	21.27	21.26	21.39		/	/	/	
HSUPA Subtest-3	19.82	20.00	20.46		/	/	/	
HSUPA Subtest-4	21.30	21.37	21.54		/	/	/	
HSUPA Subtest-5	19.77	20.43	20.90		/	/	/	

Note:

1. Per KDB 941225 D01 v03, the 12.2kbps RMC mode was selected for SAR testing (the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.


FDD-LTE Band 2		
Channel Bandwidth: 1.4MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	22.04
	MCK	22.34
	HCH	22.33
16QAM	LCH	21.21
	MCK	21.60
	HCH	21.54
Channel Bandwidth: 3MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	21.67
	MCK	21.92
	HCH	21.83
16QAM	LCH	20.59
	MCK	21.37
	HCH	21.12
Channel Bandwidth: 5MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	21.86
	MCK	21.93
	HCH	22.08
16QAM	LCH	21.26
	MCK	21.30
	HCH	21.42
Channel Bandwidth: 10MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	21.85
	MCK	21.98
	HCH	21.97
16QAM	LCH	21.08
	MCK	20.83
	HCH	21.37
Channel Bandwidth: 15MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	21.91
	MCK	21.99
	HCH	22.02
16QAM	LCH	21.15
	MCK	21.04
	HCH	21.43
Channel Bandwidth: 20MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	22.01
	MCK	21.85
	HCH	22.09
16QAM	LCH	21.21
	MCK	21.21
	HCH	21.51

FDD-LTE Band 4

Channel Bandwidth: 1.4MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	21.19
	MCK	21.26
	HCH	20.72
16QAM	LCH	20.45
	MCK	20.47
	HCH	19.87
Channel Bandwidth: 3MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	20.70
	MCK	20.83
	HCH	20.20
16QAM	LCH	20.01
	MCK	19.73
	HCH	19.75
Channel Bandwidth: 5MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	20.75
	MCK	20.90
	HCH	20.37
16QAM	LCH	20.11
	MCK	20.39
	HCH	19.76
Channel Bandwidth: 10MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	20.75
	MCK	20.81
	HCH	20.52
16QAM	LCH	20.21
	MCK	20.02
	HCH	19.45
Channel Bandwidth: 15MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	20.78
	MCK	20.82
	HCH	20.64
16QAM	LCH	19.76
	MCK	20.30
	HCH	19.87
Channel Bandwidth: 20MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	20.75
	MCK	20.75
	HCH	20.65
16QAM	LCH	19.94
	MCK	20.10
	HCH	19.97


FDD-LTE Band 5

Channel Bandwidth: 1.4MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	19.38
	MCK	19.37
	HCH	19.59
16QAM	LCH	18.51
	MCK	18.62
	HCH	18.79
Channel Bandwidth: 3MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	18.80
	MCK	18.86
	HCH	19.15
16QAM	LCH	18.28
	MCK	18.16
	HCH	18.06
Channel Bandwidth: 5MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	18.87
	MCK	18.96
	HCH	19.24
16QAM	LCH	18.26
	MCK	18.33
	HCH	18.60
Channel Bandwidth: 10MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	18.78
	MCK	19.06
	HCH	19.17
16QAM	LCH	17.98
	MCK	17.93
	HCH	18.56

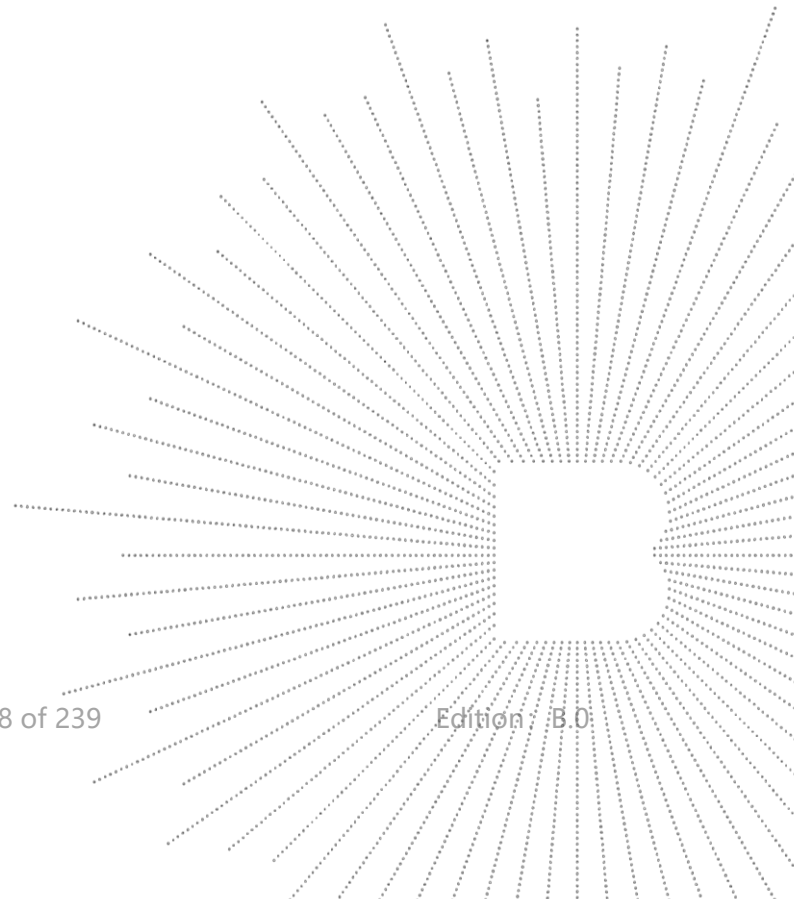

FDD-LTE Band 7

Channel Bandwidth: 5MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	21.74
	MCK	21.10
	HCH	20.09
16QAM	LCH	21.09
	MCK	20.48
	HCH	19.52
Channel Bandwidth: 10MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	21.64
	MCK	21.11
	HCH	20.23
16QAM	LCH	21.03
	MCK	20.33
	HCH	19.17
Channel Bandwidth: 15MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	21.61
	MCK	21.11
	HCH	20.26
16QAM	LCH	20.67
	MCK	20.53
	HCH	19.52
Channel Bandwidth: 20MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	21.49
	MCK	21.02
	HCH	20.64
16QAM	LCH	20.68
	MCK	20.38
	HCH	20.04

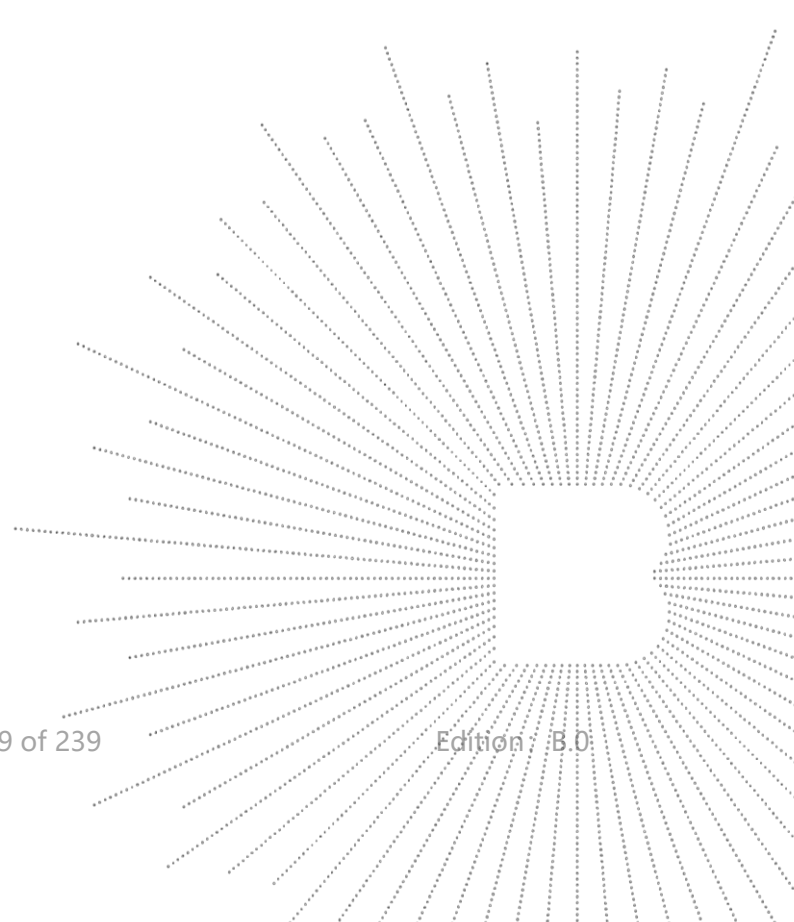

FDD-LTE Band 12

Channel Bandwidth: 1.4MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	19.75
	MCK	19.73
	HCH	19.91
16QAM	LCH	18.91
	MCK	18.96
	HCH	19.10
Channel Bandwidth: 3MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	19.28
	MCK	19.28
	HCH	19.40
16QAM	LCH	18.18
	MCK	18.70
	HCH	18.67
Channel Bandwidth: 5MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	19.37
	MCK	19.42
	HCH	19.43
16QAM	LCH	18.75
	MCK	18.77
	HCH	18.76
Channel Bandwidth: 10MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	19.33
	MCK	19.31
	HCH	19.50
16QAM	LCH	18.72
	MCK	18.48
	HCH	18.33

FDD-LTE Band 17


Channel Bandwidth: 5MHz		
Modulation	Channel	E.I.R.P(dBm)
QPSK	LCH	19.40
	MCK	19.32
	HCH	19.55
16QAM	LCH	18.74
	MCK	18.66
	HCH	18.83
Channel Bandwidth: 10MHz		
Modulation	Channel	E.R.P(dBm)
QPSK	LCH	19.40
	MCK	19.32
	HCH	19.55
16QAM	LCH	18.74
	MCK	18.66
	HCH	18.83

WLAN 2.4G			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
802.11b	2412	10.09	12.0
	2437	11.69	
	2462	11.52	
802.11g	2412	9.08	11.0
	2437	10.28	
	2462	10.23	
802.11n20	2412	7.96	9.5
	2437	9.13	
	2462	9.14	
802.11n40	2422	7.37	9.0
	2437	8.16	
	2452	8.39	
802.11ax20	2412	8.68	9.5
	2437	9.08	
	2462	7.67	
802.11ax40	2422	6.74	8.0
	2437	6.55	
	2452	6.20	


Note:

1. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 b/g/n modes, the channel in the lower order/sequence 802.11 mode (i.e. g, n) is selected. Therefore the SAR measurements performed for the 802.11b modes, as the lowest order modulation, cover 802.11g/n modes.
2. SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
3. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

WLAN 5.1G			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
802.11a	5180	8.54	9.5
	5200	8.72	
	5240	9.09	
802.11n20	5180	7.96	8.5
	5200	8.13	
	5240	8.09	
802.11n40	5190	6.94	8.0
	5230	7.37	
802.11ac20	5180	8.30	9.0
	5200	7.80	
	5240	8.04	
802.11ac40	5190	7.60	8.0
	5230	7.70	
802.11ac80	5210	6.62	7.0
802.11ax20	5180	5.81	8.5
	5200	5.98	
	5240	7.94	
802.11ax40	5190	5.54	7.5
	5230	6.95	
802.11ax80	5210	4.04	4.5

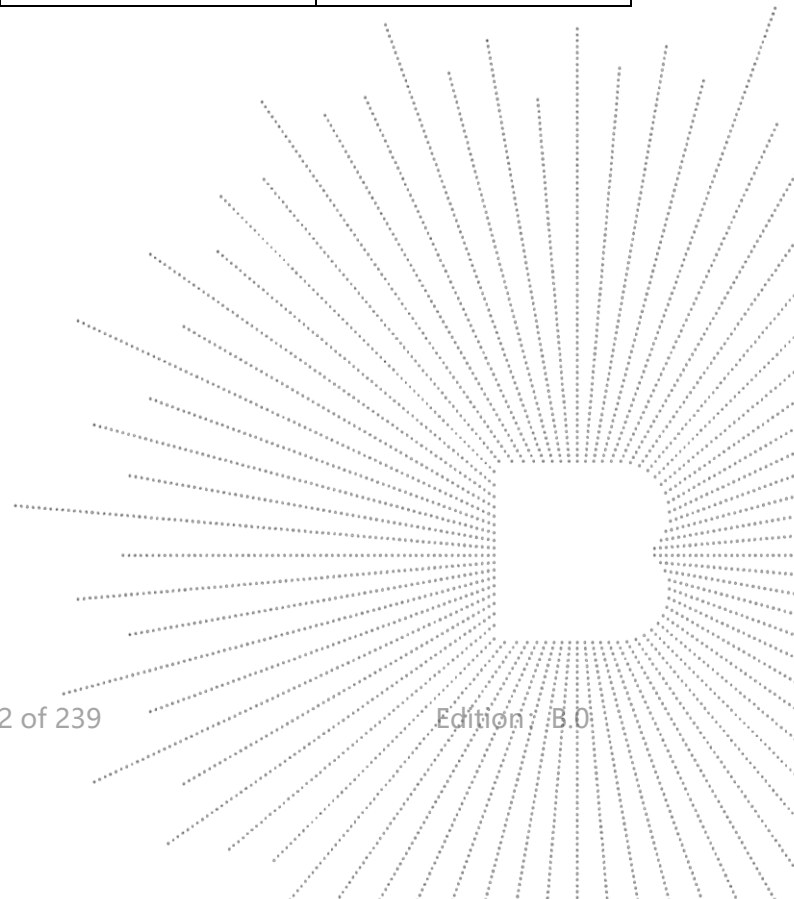

WLAN 5.8G			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
802.11a	5745	9.75	11.5
	5785	10.39	
	5825	10.88	
802.11n20	5745	9.05	10.0
	5785	9.48	
	5825	9.81	
802.11n40	5755	7.81	9.0
	5795	8.39	
802.11ac20	5745	9.11	10.5
	5785	9.58	
	5825	9.80	
802.11ac40	5755	7.88	9.0
	5795	8.40	
802.11ac80	5775	7.63	8.0
802.11ax20	5745	8.32	9.0
	5785	8.34	
	5825	8.50	
802.11ax40	5755	6.64	7.5
	5795	6.89	
802.11ax80	5775	4.49	5.0

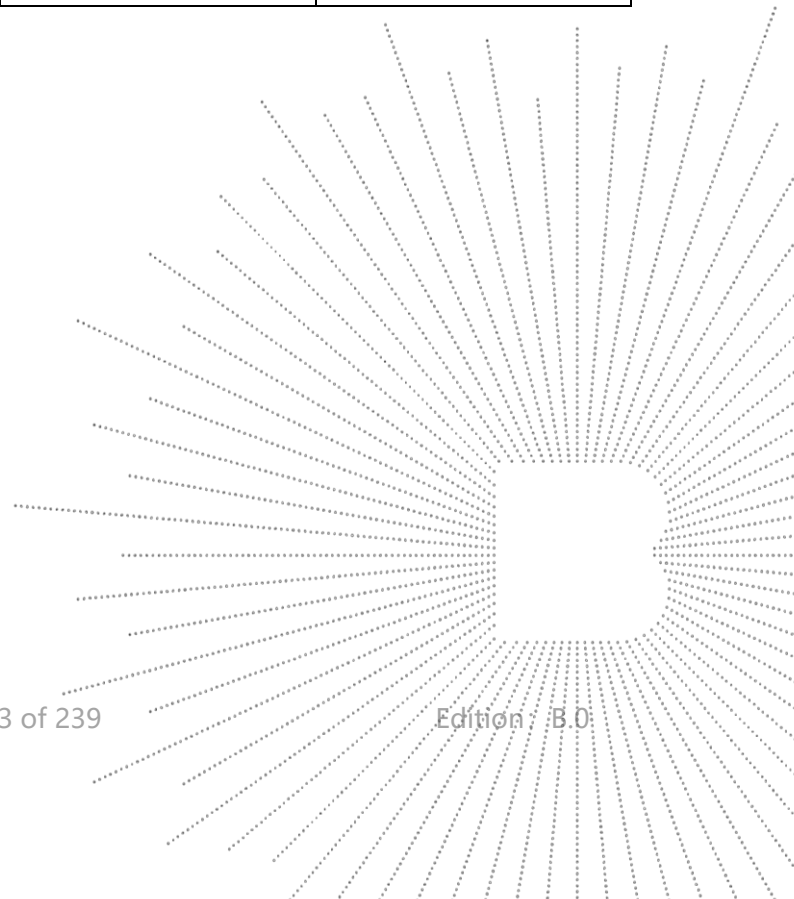

Bluetooth			
Modulation	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
1-DH1	2402	2.47	3.0
	2441	2.23	
	2480	0.85	
2-DH1	2402	1.95	2.5
	2441	1.76	
	2480	0.52	
3-DH1	2402	2.35	3.0
	2441	2.27	
	2480	0.93	

BLE			
Modulation	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
GFSK 1Mbps	2402	2.44	3.0
	2440	2.68	
	2480	0.90	

Note:

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$$

≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

f(GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison


Bluetooth Turn up Power (dBm)	Bluetooth Turn up Power (mW)	Separation Distance (mm)	Frequency (GHz)	Result	Exclusion Thresholds
3.0	2.0	5	2.48	0.63	3.0

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

According to the calculation results in the table above, BT SAR does not need to be tested.

14.2 Transmit Antennas and SAR Measurement Position

EUT Antenna Location:

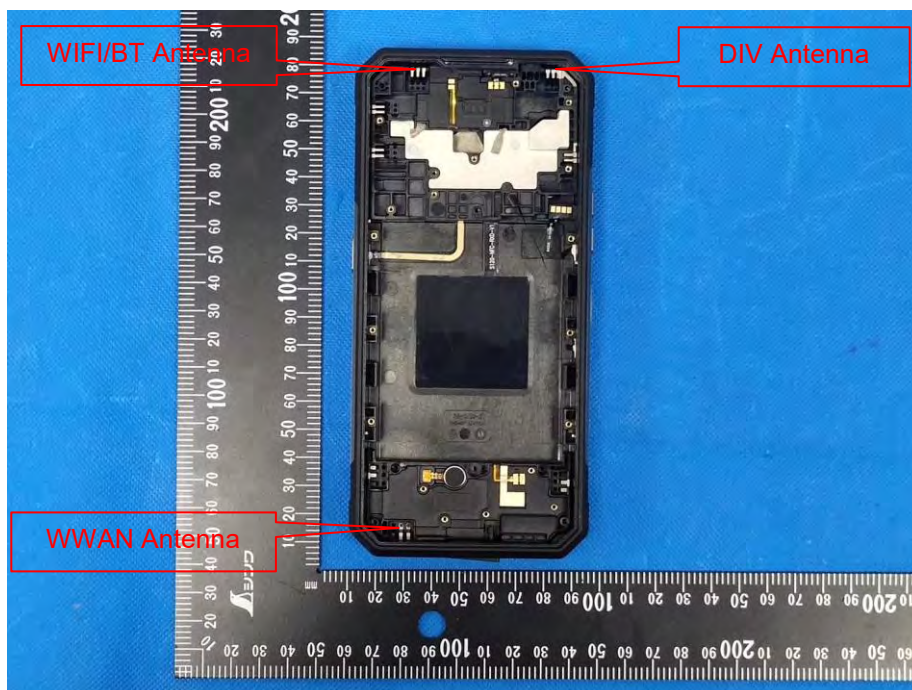

Antennas	Support Band
WWAN	GSM 850+WCDMA Band 5+LTE Band 5/12/17 TX&RX
DIV	GSM 1900+WCDMA Band 2/4+LTE Band 2/4/7 TX&RX
BT/WIFI	BT+2.4G WIFI+5G WIFI

Distance of The Antenna to the EUT surface and edge (mm)						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	<25	<25	169	<25	<25	<25
DIV	<25	<25	<25	170	<25	40
BT/WIFI	<25	<25	<25	167	56	<25

EUT Testing Location Evaluation:

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
DIV	Yes	Yes	Yes	No	Yes	No
BT/WIFI	Yes	Yes	Yes	No	No	Yes

Note:

1. According to the KDB 941225 D06 Hot Spot SAR v02, the edges with less than 25 mm distance to the antennas need to be tested for SAR.
2. According to the KDB 941225 D06 Hot Spot SAR v02, When the overall length and width of a device is > 9 cm x 5 cm (~3.5" x 2"), a test separation distance of 10 mm is required for hotspot mode SAR measurements.

14.3 Measured and Reported (Scaled) SAR Results

The calculated SAR is obtained by the following formula:

1. Reported SAR for WWAN=Measured SAR * Tune-up Scaling factor
2. Reported SAR for WLAN and Bluetooth=Measured SAR * Tune-up Scaling factor * Duty Cycle Scaling factor
3. Duty Cycle Scaling factor=1/ Duty Cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR v01r03:

1. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.
2. when the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, using the same wireless mode test configuration for voice and data, such as UMTS, LTE and Wi-Fi, and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface)
3. For Smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

KDB 941225 D01 3G SAR Procedures:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

1. Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
2. When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
3. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
4. SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is $\leq \frac{1}{2}$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.
5. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 802.11 Wi-Fi SAR

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements.

For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions.

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.16 The initial test position procedure is described in the following:

- a) When the *reported* SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- b) When the *reported* SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the *reported* SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- c) For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR

TCB workshop April 2015:

SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be less than the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz).


GSM 850											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	GSM	Left Cheek	251	848.8	31.92	32.5	1.143	0.278	0.318	1
		GSM	Left Tilt	251	848.8	31.92	32.5	1.143	0.142	0.162	
		GSM	Right Cheek	251	848.8	31.92	32.5	1.143	0.174	0.199	
		GSM	Right Tilt	251	848.8	31.92	32.5	1.143	0.168	0.192	
Body & Hotspot	10	GPRS-1Tx	Front Face	251	848.8	31.99	32.5	1.125	0.232	0.261	
		GPRS-1Tx	Back Face	251	848.8	31.99	32.5	1.125	0.568	0.639	2
Hotspot	10	GPRS-1Tx	Left Face	251	848.8	31.99	32.5	1.125	0.173	0.195	
		GPRS-1Tx	Right Face	251	848.8	31.99	32.5	1.125	0.244	0.274	
		GPRS-1Tx	Bottom Side	251	848.8	31.99	32.5	1.125	0.473	0.532	

GSM 1900											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	GSM	Left Cheek	661	1880	28.42	29.0	1.143	0.445	0.509	
		GSM	Left Tilt	661	1880	28.42	29.0	1.143	0.380	0.434	
		GSM	Right Cheek	661	1880	28.42	29.0	1.143	0.712	0.814	
		GSM	Right Tilt	661	1880	28.42	29.0	1.143	0.621	0.710	
		GSM	Right Cheek	512	1850.2	28.34	29.0	1.164	0.800	0.931	3
		GSM	Right Cheek	810	1909.8	27.98	28.5	1.127	0.641	0.723	
Body & Hotspot	10	GPRS-1Tx	Front Face	661	1880	28.45	29.0	1.135	0.423	0.480	
		GPRS-1Tx	Back Face	661	1880	28.45	29.0	1.135	0.297	0.337	
Hotspot	10	GPRS-1Tx	Left Side	661	1880	28.45	29.0	1.135	0.245	0.278	
		GPRS-1Tx	Top Side	661	1880	28.45	29.0	1.135	0.445	0.505	4

WCDMA Band II											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	RMC*	Left Cheek	9400	1880.0	23.19	23.5	1.074	0.371	0.398	
		RMC*	Left Tilt	9400	1880.0	23.19	23.5	1.074	0.306	0.329	
		RMC*	Right Cheek	9400	1880.0	23.19	23.5	1.074	0.958	1.029	5
		RMC*	Right Tilt	9400	1880.0	23.19	23.5	1.074	0.617	0.663	
		RMC*	Right Cheek	9262	1852.4	22.88	23.5	1.153	0.823	0.949	
		RMC*	Right Cheek	9538	1907.6	23.15	23.5	1.084	0.689	0.747	
Body & Hotspot	10	RMC*	Front Face	9538	1880.0	23.19	23.5	1.074	0.445	0.478	6
		RMC*	Back Face	9538	1880.0	23.19	23.5	1.074	0.218	0.234	
Hotspot	10	RMC*	Left Side	9538	1880.0	23.19	23.5	1.074	0.306	0.329	
		RMC*	Top Side	9538	1880.0	23.19	23.5	1.074	0.341	0.366	

WCDMA Band IV											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	RMC*	Left Cheek	1312	1712.4	22.06	22.5	1.107	0.259	0.287	7
		RMC*	Left Tilt	1312	1712.4	22.06	22.5	1.107	0.307	0.340	
		RMC*	Right Cheek	1312	1712.4	22.06	22.5	1.107	0.455	0.504	
		RMC*	Right Tilt	1312	1712.4	22.06	22.5	1.107	0.427	0.473	
Body & Hotspot	10	RMC*	Front Face	1312	1712.4	22.06	22.5	1.107	0.393	0.435	8
		RMC*	Back Face	1312	1712.4	22.06	22.5	1.107	0.199	0.220	
Hotspot	10	RMC*	Left Side	1312	1712.4	22.06	22.5	1.107	0.202	0.224	
		RMC*	Top Side	1312	1712.4	22.06	22.5	1.107	0.143	0.158	


WCDMA Band V											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	RMC*	Left Cheek	4233	846.6	22.56	23.0	1.107	0.232	0.257	9
		RMC*	Left Tilt	4233	846.6	22.56	23.0	1.107	0.179	0.198	
		RMC*	Right Cheek	4233	846.6	22.56	23.0	1.107	0.236	0.261	
		RMC*	Right Tilt	4233	846.6	22.56	23.0	1.107	0.141	0.156	
Body & Hotspot	10	RMC*	Front Face	4233	846.6	22.56	23.0	1.107	0.311	0.344	10
		RMC*	Back Face	4233	846.6	22.56	23.0	1.107	0.434	0.480	
Hotspot	10	RMC*	Left Face	4233	846.6	22.56	23.0	1.107	0.071	0.079	
		RMC*	Right Face	4233	846.6	22.56	23.0	1.107	0.198	0.219	
		RMC*	Bottom Side	4233	846.6	22.56	23.0	1.107	0.280	0.310	

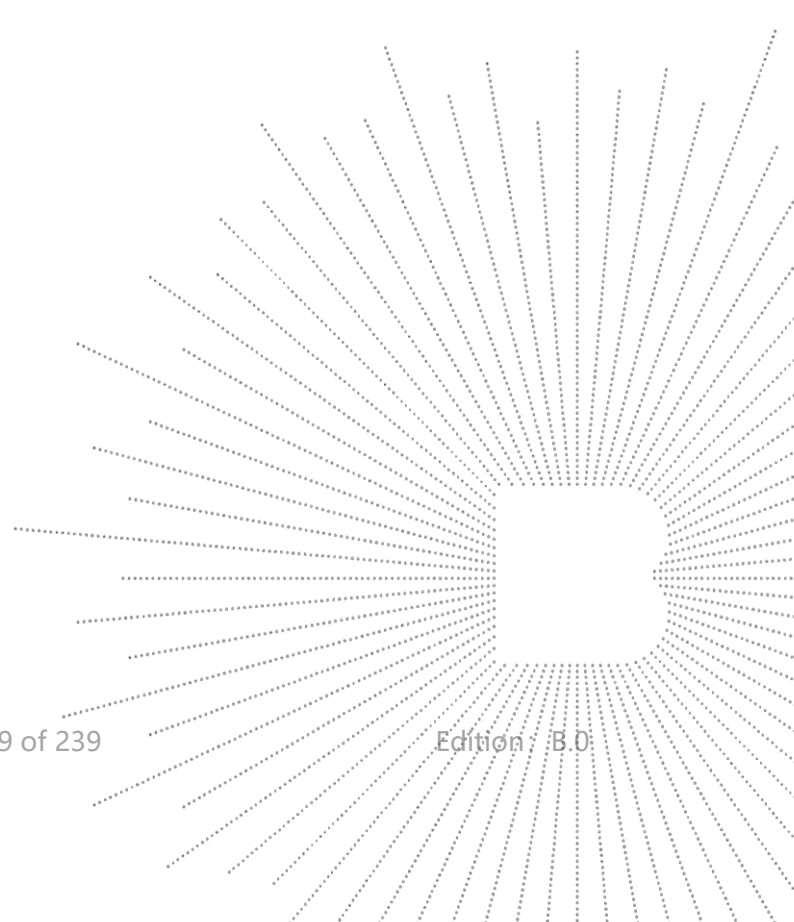

FDD-LTE Band 2 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	QPSK,1RB	Left Cheek	18900	1880	22.34	23.0	1.164	0.488	0.568	11
		QPSK,1RB	Left Tilt	18900	1880	22.34	23.0	1.164	0.440	0.512	
		QPSK,1RB	Right Cheek	18900	1880	22.34	23.0	1.164	0.777	0.905	
		QPSK,1RB	Right Tilt	18900	1880	22.34	23.0	1.164	0.651	0.758	
		QPSK,1RB	Right Cheek	18700	1860	22.04	23.0	1.247	0.754	0.941	
		QPSK,1RB	Right Cheek	19100	1900	22.33	23.0	1.167	0.743	0.867	
		QPSK,50%RB	Left Cheek	18900	1880	22.34	23.0	1.164	0.306	0.356	
		QPSK,50%RB	Left Tilt	18900	1880	22.34	23.0	1.164	0.347	0.404	
		QPSK,50%RB	Right Cheek	18900	1880	22.34	23.0	1.164	0.573	0.667	
		QPSK,50%RB	Right Tilt	18900	1880	22.34	23.0	1.164	0.427	0.497	
Body & Hotspot	10	QPSK,1RB	Front Face	18900	1880	22.34	23.0	1.164	0.381	0.444	
		QPSK,1RB	Back Face	18900	1880	22.34	23.0	1.164	0.313	0.364	
		QPSK,50%RB	Front Face	18900	1880	22.34	23.0	1.164	0.345	0.402	
		QPSK,50%RB	Back Face	18900	1880	22.34	23.0	1.164	0.195	0.227	
Hotspot	10	QPSK,1RB	Left Side	18900	1880	22.34	23.0	1.164	0.203	0.236	12
		QPSK,1RB	Top Side	18900	1880	22.34	23.0	1.164	0.382	0.445	
		QPSK,50%RB	Left Side	18900	1880	22.34	23.0	1.164	0.215	0.250	
		QPSK,50%RB	Top Side	18900	1880	22.34	23.0	1.164	0.368	0.428	

FDD-LTE Band 4 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	QPSK,1RB	Left Cheek	20175	1732.5	21.26	21.5	1.057	0.187	0.198	13
		QPSK,1RB	Left Tilt	20175	1732.5	21.26	21.5	1.057	0.203	0.215	
		QPSK,1RB	Right Cheek	20175	1732.5	21.26	21.5	1.057	0.409	0.432	
		QPSK,1RB	Right Tilt	20175	1732.5	21.26	21.5	1.057	0.555	0.587	
		QPSK,50%RB	Left Cheek	20175	1732.5	21.26	21.5	1.057	0.221	0.234	
		QPSK,50%RB	Left Tilt	20175	1732.5	21.26	21.5	1.057	0.195	0.206	
		QPSK,50%RB	Right Cheek	20175	1732.5	21.26	21.5	1.057	0.385	0.407	
		QPSK,50%RB	Right Tilt	20175	1732.5	21.26	21.5	1.057	0.385	0.407	
Body & Hotspot	10	QPSK,1RB	Front Face	20175	1732.5	21.26	21.5	1.057	0.353	0.373	14
		QPSK,1RB	Back Face	20175	1732.5	21.26	21.5	1.057	0.188	0.199	
		QPSK,50%RB	Front Face	20175	1732.5	21.26	21.5	1.057	0.323	0.341	
		QPSK,50%RB	Back Face	20175	1732.5	21.26	21.5	1.057	0.172	0.182	
Hotspot	10	QPSK,1RB	Left Side	20175	1732.5	21.26	21.5	1.057	0.192	0.203	
		QPSK,1RB	Top Side	20175	1732.5	21.26	21.5	1.057	0.132	0.139	
		QPSK,50%RB	Left Side	20175	1732.5	21.26	21.5	1.057	0.072	0.076	
		QPSK,50%RB	Top Side	20175	1732.5	21.26	21.5	1.057	0.080	0.085	

FDD-LTE Band 5 (10MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	QPSK,1RB	Left Cheek	20600	844	19.59	20.0	1.099	0.132	0.145	15
		QPSK,1RB	Left Tilt	20600	844	19.59	20.0	1.099	0.101	0.111	
		QPSK,1RB	Right Cheek	20600	844	19.59	20.0	1.099	0.148	0.163	
		QPSK,1RB	Right Tilt	20600	844	19.59	20.0	1.099	0.091	0.100	
		QPSK,50%RB	Left Cheek	20600	844	19.59	20.0	1.099	0.158	0.174	
		QPSK,50%RB	Left Tilt	20600	844	19.59	20.0	1.099	0.106	0.116	
		QPSK,50%RB	Right Cheek	20600	844	19.59	20.0	1.099	0.127	0.140	
		QPSK,50%RB	Right Tilt	20600	844	19.59	20.0	1.099	0.112	0.123	
Body & Hotspot	10	QPSK,1RB	Front Face	20600	844	19.59	20.0	1.099	0.128	0.141	16
		QPSK,1RB	Back Face	20600	844	19.59	20.0	1.099	0.426	0.468	
		QPSK,50%RB	Front Face	20600	844	19.59	20.0	1.099	0.158	0.174	
		QPSK,50%RB	Back Face	20600	844	19.59	20.0	1.099	0.321	0.353	
Hotspot	10	QPSK,1RB	Right Side	20600	844	19.59	20.0	1.099	0.148	0.163	
		QPSK,1RB	Left Side	20600	844	19.59	20.0	1.099	0.118	0.130	
		QPSK,1RB	Bottom Side	20600	844	19.59	20.0	1.099	0.360	0.396	
		QPSK,50%RB	Right Side	20600	844	19.59	20.0	1.099	0.143	0.157	
		QPSK,50%RB	Left Side	20600	844	19.59	20.0	1.099	0.206	0.226	
		QPSK,50%RB	Bottom Side	20600	844	19.59	20.0	1.099	0.197	0.217	

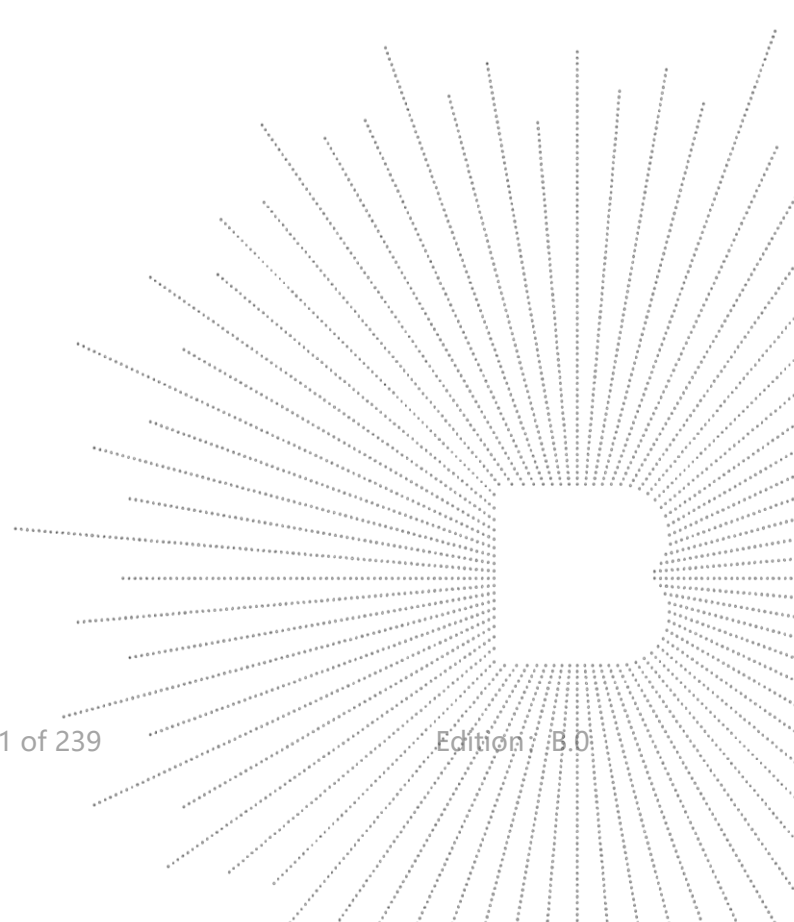

FDD-LTE Band 7 (20MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	QPSK,1RB	Left Cheek	20850	2510	21.74	22.0	1.062	0.429	0.455	17
		QPSK,1RB	Left Tilt	20850	2510	21.74	22.0	1.062	0.642	0.682	
		QPSK,1RB	Right Cheek	20850	2510	21.74	22.0	1.062	0.852	0.905	
		QPSK,1RB	Right Cheek	21100	2535	21.11	21.5	1.094	0.931	1.018	
		QPSK,1RB	Right Cheek	21350	2560	20.64	21.0	1.086	0.901	0.979	
		QPSK,1RB	Right Tilt	20850	2510	21.74	22.0	1.062	0.986	1.047	
		QPSK,1RB	Right Tilt	21100	2535	21.11	21.5	1.094	0.969	1.060	
		QPSK,1RB	Right Tilt	21350	2560	20.64	21.0	1.086	0.964	1.047	
		QPSK,50%RB	Left Cheek	20850	2510	21.74	22.0	1.062	0.399	0.424	
		QPSK,50%RB	Left Tilt	20850	2510	21.74	22.0	1.062	0.475	0.504	
		QPSK,50%RB	Right Cheek	20850	2510	21.74	22.0	1.062	0.750	0.796	
		QPSK,50%RB	Right Cheek	21100	2535	21.11	21.5	1.094	0.754	0.825	
		QPSK,50%RB	Right Cheek	21350	2560	20.64	21.0	1.086	0.810	0.880	
		QPSK,50%RB	Right Tilt	20850	2510	21.74	22.0	1.062	0.890	0.945	
		QPSK,50%RB	Right Tilt	21100	2535	21.11	21.5	1.094	0.758	0.829	
		QPSK,50%RB	Right Tilt	21350	2560	20.64	21.0	1.086	0.822	0.893	
		QPSK,100%RB	Right Tilt	20850	2510	21.74	22.0	1.062	0.408	0.433	
Body & Hotspot	10	QPSK,1RB	Front Face	20850	2510	21.74	22.0	1.062	0.322	0.342	
		QPSK,1RB	Back Face	20850	2510	21.74	22.0	1.062	0.299	0.317	
		QPSK,50%RB	Front Face	20850	2510	21.74	22.0	1.062	0.359	0.381	
		QPSK,50%RB	Back Face	20850	2510	21.74	22.0	1.062	0.507	0.538	
Hotspot	10	QPSK,1RB	Left Side	20850	2510	21.74	22.0	1.062	0.299	0.317	18
		QPSK,1RB	Top Side	20850	2510	21.74	22.0	1.062	0.846	0.898	
		QPSK,1RB	Top Side	21100	2535	21.11	21.5	1.094	0.831	0.909	
		QPSK,1RB	Top Side	21350	2560	20.64	21.0	1.086	0.786	0.854	
		QPSK,50%RB	Left Side	20850	2510	21.74	22.0	1.062	0.403	0.428	
		QPSK,50%RB	Top Side	20850	2510	21.74	22.0	1.062	0.788	0.837	
		QPSK,50%RB	Top Side	21100	2535	21.11	21.5	1.094	0.761	0.833	
		QPSK,50%RB	Top Side	21350	2560	20.64	21.0	1.086	0.744	0.808	
		QPSK,100%RB	Top Side	20850	2510	21.74	22.0	1.062	0.419	0.445	

FDD-LTE Band 12 (10MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	QPSK,1RB	Left Cheek	23130	711	19.91	20.5	1.146	0.128	0.147	19
		QPSK,1RB	Left Tilt	23130	711	19.91	20.5	1.146	0.106	0.121	
		QPSK,1RB	Right Cheek	23130	711	19.91	20.5	1.146	0.172	0.197	
		QPSK,1RB	Right Tilt	23130	711	19.91	20.5	1.146	0.099	0.113	
		QPSK,50%RB	Left Cheek	23130	711	19.91	20.5	1.146	0.172	0.197	
		QPSK,50%RB	Left Tilt	23130	711	19.91	20.5	1.146	0.096	0.110	
		QPSK,50%RB	Right Cheek	23130	711	19.91	20.5	1.146	0.113	0.129	
		QPSK,50%RB	Right Tilt	23130	711	19.91	20.5	1.146	0.101	0.116	
Body & Hotspot	10	QPSK,1RB	Front Face	23130	711	19.91	20.5	1.146	0.186	0.213	20
		QPSK,1RB	Back Face	23130	711	19.91	20.5	1.146	0.386	0.442	
		QPSK,50%RB	Front Face	23130	711	19.91	20.5	1.146	0.148	0.170	
		QPSK,50%RB	Back Face	23130	711	19.91	20.5	1.146	0.314	0.360	
Hotspot	10	QPSK,1RB	Right Side	23130	711	19.91	20.5	1.146	0.187	0.214	
		QPSK,1RB	Left Side	23130	711	19.91	20.5	1.146	0.257	0.294	
		QPSK,1RB	Bottom Side	23130	711	19.91	20.5	1.146	0.180	0.206	
		QPSK,50%RB	Right Side	23130	711	19.91	20.5	1.146	0.073	0.084	
		QPSK,50%RB	Left Side	23130	711	19.91	20.5	1.146	0.161	0.184	
		QPSK,50%RB	Bottom Side	23130	711	19.91	20.5	1.146	0.105	0.120	

FDD-LTE Band 17 (10MHz Bandwidth)											
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Output Power (dBm)			SAR1g (W/kg)		Plot No
						Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	QPSK,1RB	Left Cheek	23800	711	19.55	20.0	1.109	0.139	0.154	
		QPSK,1RB	Left Tilt	23800	711	19.55	20.0	1.109	0.147	0.163	
		QPSK,1RB	Right Cheek	23800	711	19.55	20.0	1.109	0.116	0.129	
		QPSK,1RB	Right Tilt	23800	711	19.55	20.0	1.109	0.169	0.187	21
		QPSK,50%RB	Left Cheek	23800	711	19.55	20.0	1.109	0.163	0.181	
		QPSK,50%RB	Left Tilt	23800	711	19.55	20.0	1.109	0.089	0.099	
		QPSK,50%RB	Right Cheek	23800	711	19.55	20.0	1.109	0.177	0.196	
		QPSK,50%RB	Right Tilt	23800	711	19.55	20.0	1.109	0.023	0.026	
Body & Hotspot	10	QPSK,1RB	Front Face	23800	711	19.55	20.0	1.109	0.200	0.222	
		QPSK,1RB	Back Face	23800	711	19.55	20.0	1.109	0.381	0.423	22
		QPSK,50%RB	Front Face	23800	711	19.55	20.0	1.109	0.134	0.149	
		QPSK,50%RB	Back Face	23800	711	19.55	20.0	1.109	0.306	0.339	
Hotspot	10	QPSK,1RB	Right Side	23800	711	19.55	20.0	1.109	0.287	0.318	
		QPSK,1RB	Left Side	23800	711	19.55	20.0	1.109	0.194	0.215	
		QPSK,1RB	Bottom Side	23800	711	19.55	20.0	1.109	0.169	0.187	
		QPSK,50%RB	Right Side	23800	711	19.55	20.0	1.109	0.154	0.171	
		QPSK,50%RB	Left Side	23800	711	19.55	20.0	1.109	0.046	0.051	
		QPSK,50%RB	Bottom Side	23800	711	19.55	20.0	1.109	0.110	0.122	

WLAN 2.4G												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
							Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	802.11b	Left Cheek	6	2437	100	11.69	12.0	1.074	0.247	0.265	23
		802.11b	Left Tilt	6	2437	100	11.69	12.0	1.074	0.237	0.255	
		802.11b	Right Cheek	6	2437	100	11.69	12.0	1.074	0.221	0.237	
		802.11b	Right Tilt	6	2437	100	11.69	12.0	1.074	0.186	0.200	
Body & Hotspot	10	802.11b	Front Face	6	2437	100	11.69	12.0	1.074	0.069	0.074	
		802.11b	Back Face	6	2437	100	11.69	12.0	1.074	0.158	0.170	
Hotspot	10	802.11b	Right Side	6	2437	100	11.69	12.0	1.074	0.167	0.179	
		802.11b	Top Side	6	2437	100	11.69	12.0	1.074	0.202	0.217	24

WLAN 5.1G												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
							Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	802.11a	Left Cheek	48	5240	100	9.09	9.5	1.099	0.307	0.337	25
		802.11a	Left Tilt	48	5240	100	9.09	9.5	1.099	0.213	0.234	
		802.11a	Right Cheek	48	5240	100	9.09	9.5	1.099	0.122	0.134	
		802.11a	Right Tilt	48	5240	100	9.09	9.5	1.099	0.105	0.115	
Body & Hotspot	10	802.11a	Front Face	48	5240	100	9.09	9.5	1.099	0.292	0.321	
		802.11a	Back Face	48	5240	100	9.09	9.5	1.099	0.257	0.282	
Hotspot	10	802.11a	Right Side	48	5240	100	9.09	9.5	1.099	0.297	0.326	26
		802.11a	Top Side	48	5240	100	9.09	9.5	1.099	0.238	0.262	

WLAN 5.8G												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)			SAR1g (W/kg)		Plot No.
							Meas.	Turn-up	Scaling Factor	Meas.	Scaled	
Head	0	802.11a	Left Cheek	165	5825	100	10.88	11.5	1.153	0.275	0.317	
		802.11a	Left Tilt	165	5825	100	10.88	11.5	1.153	0.277	0.320	27
		802.11a	Right Cheek	165	5825	100	10.88	11.5	1.153	0.194	0.224	
		802.11a	Right Tilt	165	5825	100	10.88	11.5	1.153	0.231	0.266	
Body & Hotspot	10	802.11a	Front Face	165	5825	100	10.88	11.5	1.153	0.241	0.278	
		802.11a	Back Face	165	5825	100	10.88	11.5	1.153	0.167	0.193	
Hotspot	10	802.11a	Right Side	165	5825	100	10.88	11.5	1.153	0.167	0.193	
		802.11a	Top Side	165	5825	100	10.88	11.5	1.153	0.242	0.279	28

Remark:

1. The value with the bold is the maximum SAR Value of each test band.
2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels SAR tests are not necessary.

14.4 SAR Measurement Variability

According to KDB865664, Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB 690783. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Test Mode	Frequency Band (MHz)	RF Exposure Configuration	Test Position	Repeated SAR (yes/no)	Highest Measured SAR1-g (W/Kg)	First Repeated	
						Measured SAR1-g (W/Kg)	Largest to Smallest SAR Ratio
GSM 1900	1850.2	Head	Right Cheek	Yes	0.931	0.857	1.086
WCDMA Band II	1880.0	Head	Right Cheek	Yes	1.029	0.891	1.155
FDD-LTE Band 2 1RB	1860	Head	Right Cheek	Yes	0.941	0.910	1.034
FDD-LTE Band 7 1RB	2535	Head	Right Tilt	Yes	1.060	0.982	1.079
FDD-LTE Band 7 50%RB	2510	Head	Right Tilt	Yes	0.945	0.924	1.023
FDD-LTE Band 7 1RB	2535	Hotspot	Top Side	Yes	0.909	0.887	1.025
FDD-LTE Band 7 50%RB	2510	Hotspot	Top Side	Yes	0.837	0.806	1.038

14.5 Simultaneous Transmission Evaluation

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

Application Simultaneous Transmission information:

No.	Configurations	Head SAR	Body SAR	Hotspot SAR
1	WWAN+WLAN 2.4G	Yes	Yes	Yes
2	WWAN+WLAN 5G	Yes	Yes	Yes
3	WWAN+Bluetooth	Yes	Yes	Yes
4	WLAN 2.4G+WLAN 5G	No	No	No
5	WLAN+Bluetooth	No	No	No

Remark:

1. WWAN cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. WLAN 2.4G and WLAN 5G cannot transmit simultaneously.
4. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$

Estimated stand alone SAR						
Communication system	Frequency (MHz)	Maximum Power (dBm)	Maximum Power (mW)	Separation Distance (mm)	X	Estimated SAR1-g (W/kg)
Bluetooth*	2480	3.0	2.0	5	7.5	0.084
Bluetooth*	2480	3.0	2.0	10	7.5	0.042

Note:

1. Bluetooth*- Including Lower power Bluetooth
2. Maximum average power including tune-up tolerance;
3. When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion


5. Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is $\leq 1.6 \text{ W/Kg}$. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

6. Simultaneous transmission of maximum SAR sum calculation.

RF Exposure Conditions	Test Position	WWAN	WLAN 2.4G	Summed SAR (W/kg)	SAR1-g Limit (W/kg)
		Scaled SAR (W/kg)	Scaled SAR (W/kg)		
Head	Left Cheek	0.568	0.265	0.833	1.6
	Left Tilt	0.682	0.255	0.937	1.6
	Right Cheek	1.018	0.237	1.255	1.6
	Right Tilt	1.060	0.200	1.260	1.6
Body-worn & Hotspot	Front Face	0.480	0.074	0.554	1.6
	Back Face	0.639	0.170	0.809	1.6
Hotspot	Left side	0.336	/	0.336	1.6
	Right side	0.318	0.179	0.497	1.6
	Top side	0.909	0.217	1.126	1.6
	Bottom side	0.396	/	0.396	1.6

RF Exposure Conditions	Test Position	WWAN	WLAN 5G	Summed SAR (W/kg)	SAR1-g Limit (W/kg)
		Scaled SAR (W/kg)	Scaled SAR (W/kg)		
Head	Left Cheek	0.568	0.317	0.885	1.6
	Left Tilt	0.682	0.320	1.002	1.6
	Right Cheek	1.018	0.224	1.242	1.6
	Right Tilt	1.060	0.266	1.326	1.6
Body-worn & Hotspot	Back	0.480	0.278	0.758	1.6
	Front	0.639	0.193	0.832	1.6
Hotspot	Left side	0.336	/	0.336	1.6
	Right side	0.318	0.193	0.511	1.6
	Top side	0.909	0.279	1.188	1.6
	Bottom side	0.396	/	0.396	1.6

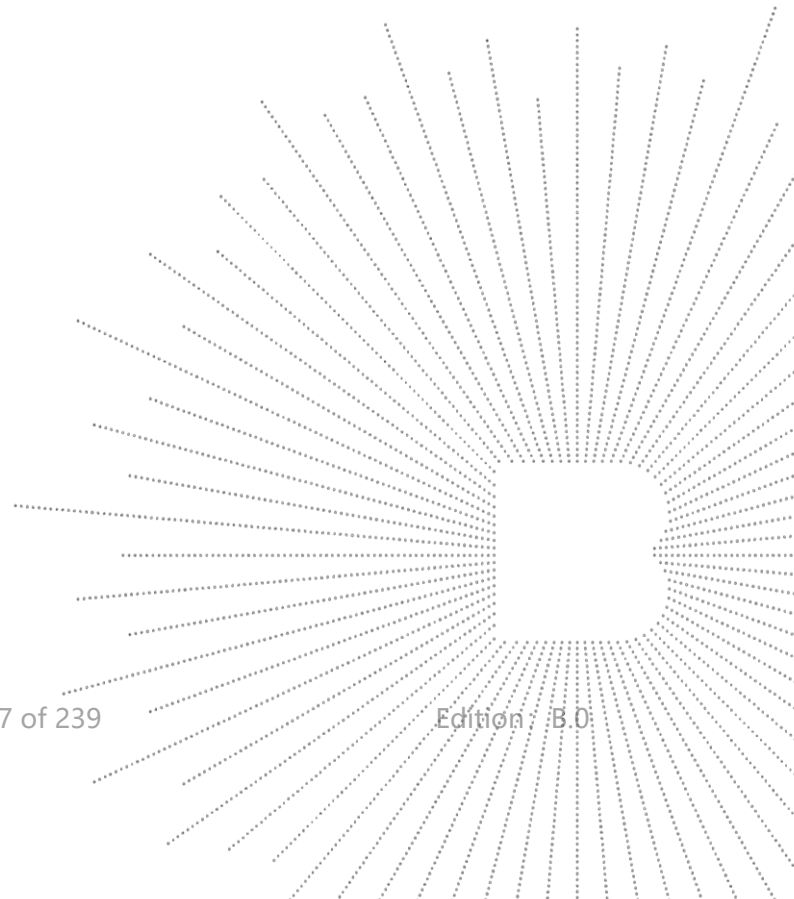

15. Test Plots

15.1 System Performance Check

System check at 750 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	750.000
Relative permittivity (real part)	42.383
Relative permittivity (imaginary part)	21.354
Conductivity (S/m)	0.915

C. SAR Surface and Volume

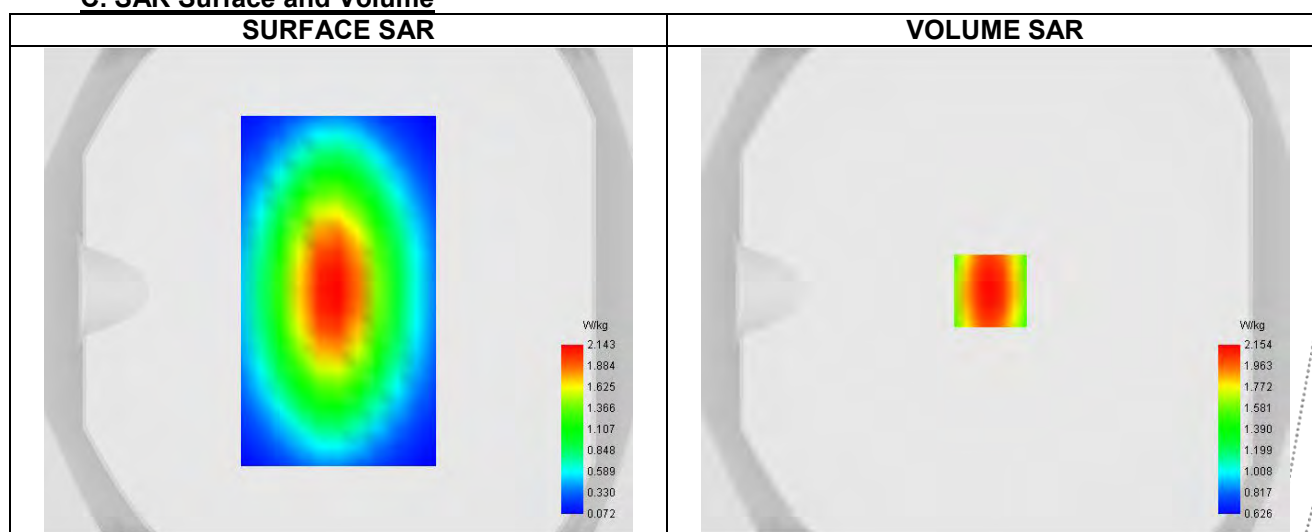


Maximum location: X=-2.00, Y=0.00 ; SAR Peak: 4.96 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.917
SAR 1g (W/Kg)	2.093
Variation (%)	0.112
Horizontal validation criteria: minimum distance (mm)	-
Vertical validation criteria: SAR ratio M2/M1 (%)	-

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	2.832	2.176	1.674	1.285	1.064

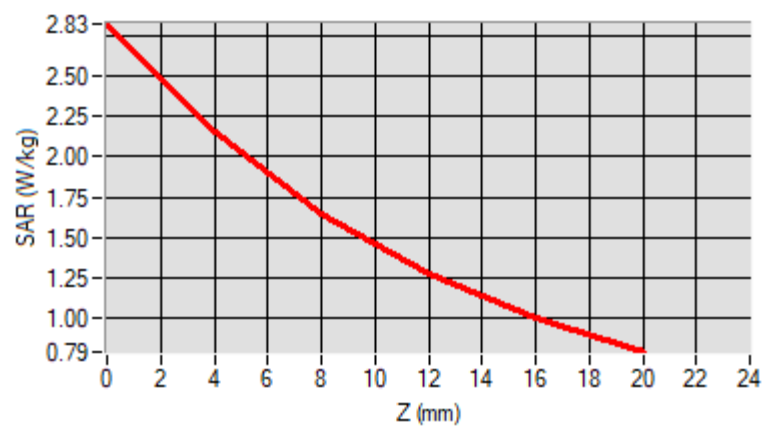

F. 3D Image

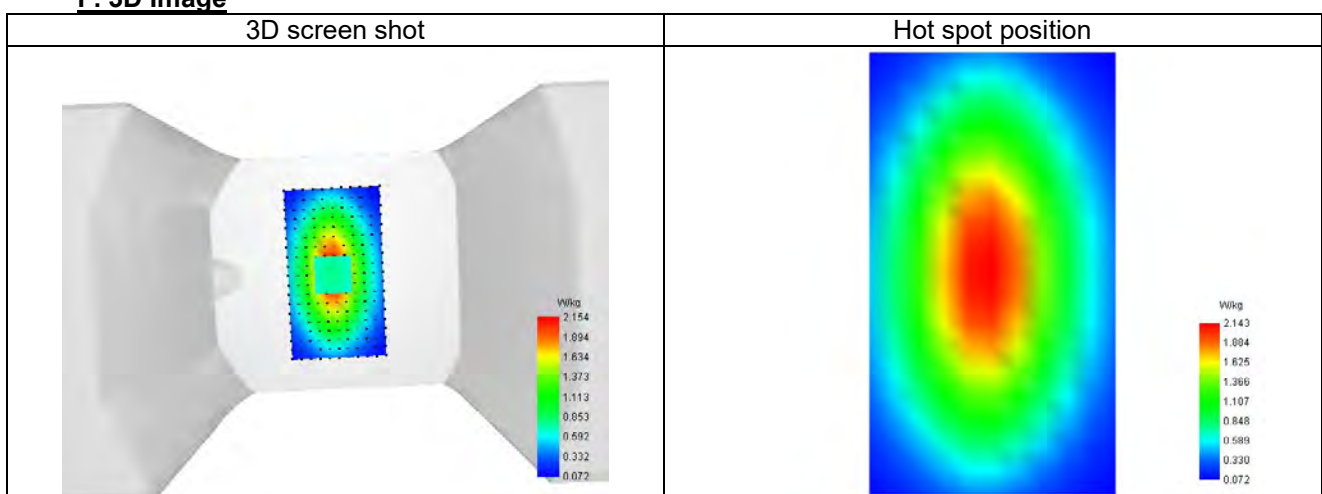

System check at 835 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	20.910
Conductivity (S/m)	0.900

C. SAR Surface and Volume

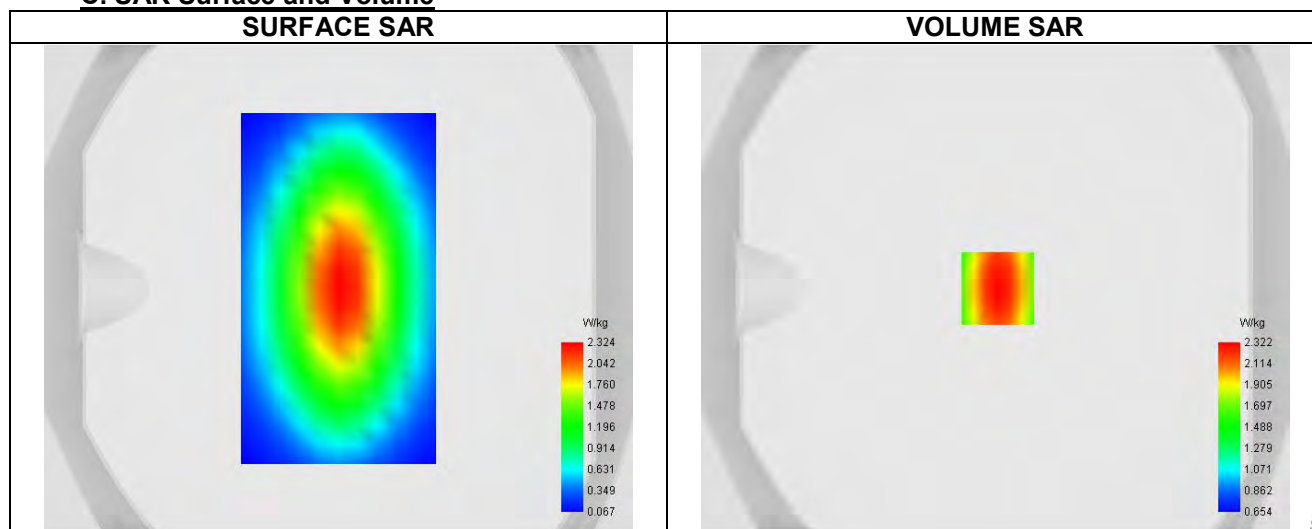


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 5.68 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	1.831
SAR 1g (W/Kg)	2.561
Variation (%)	-2.132
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	3.108	2.344	1.786	1.395	1.109

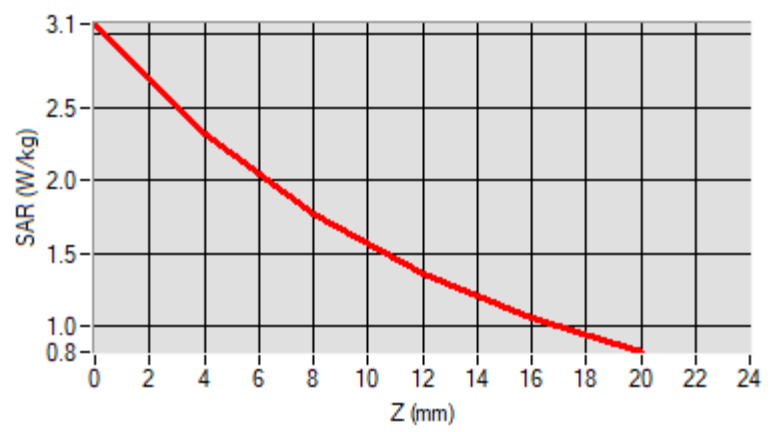

F. 3D Image

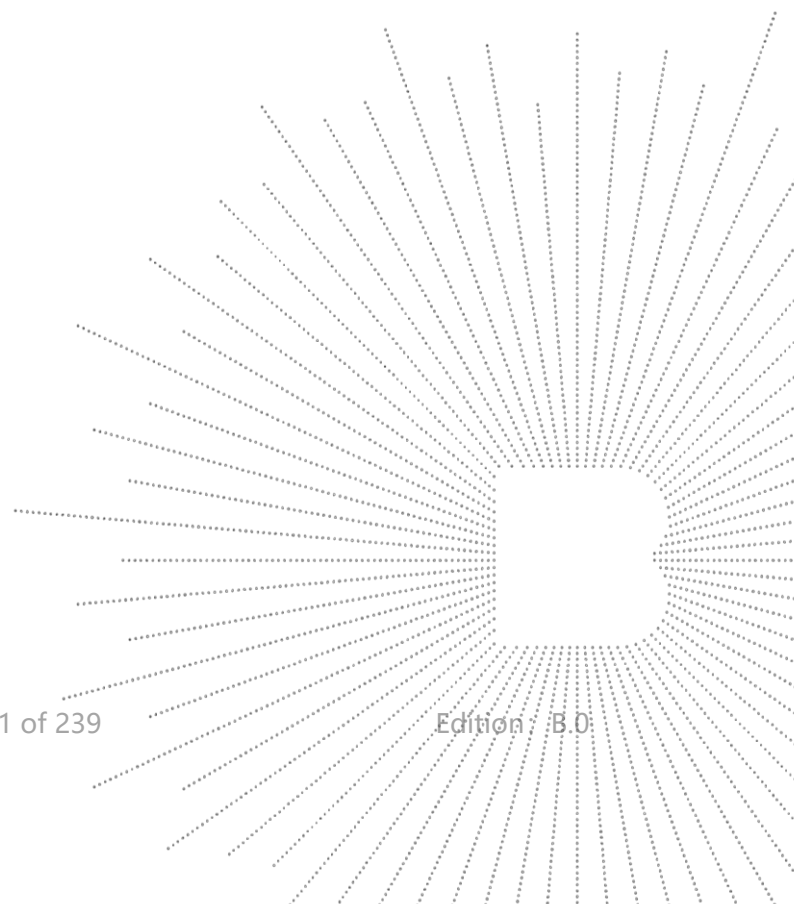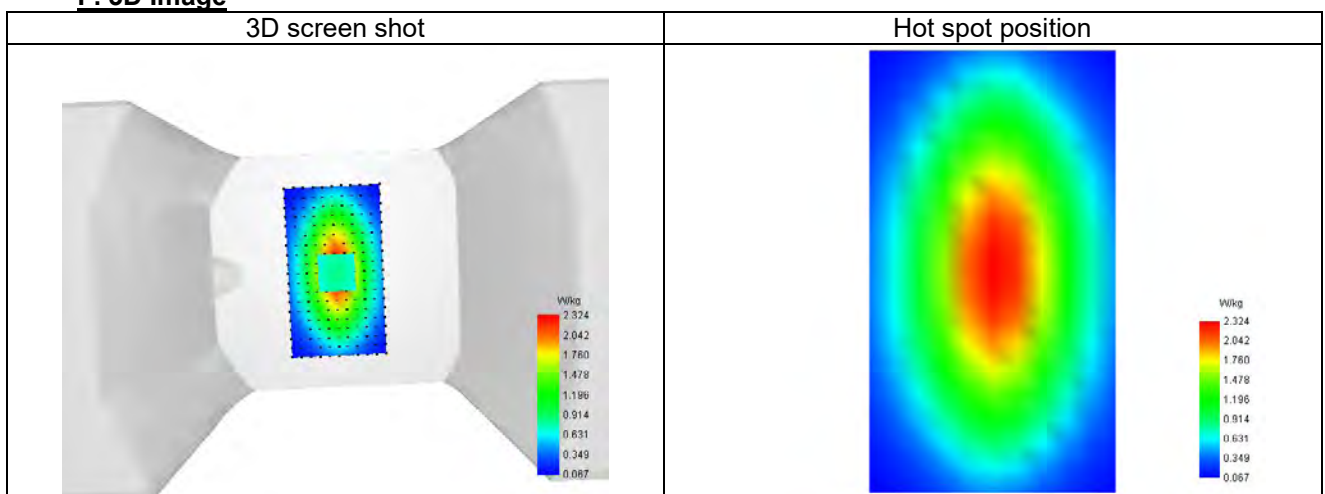

System check at 1800 MHz


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.96
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	15.186
Conductivity (S/m)	1.462

C. SAR Surface and Volume

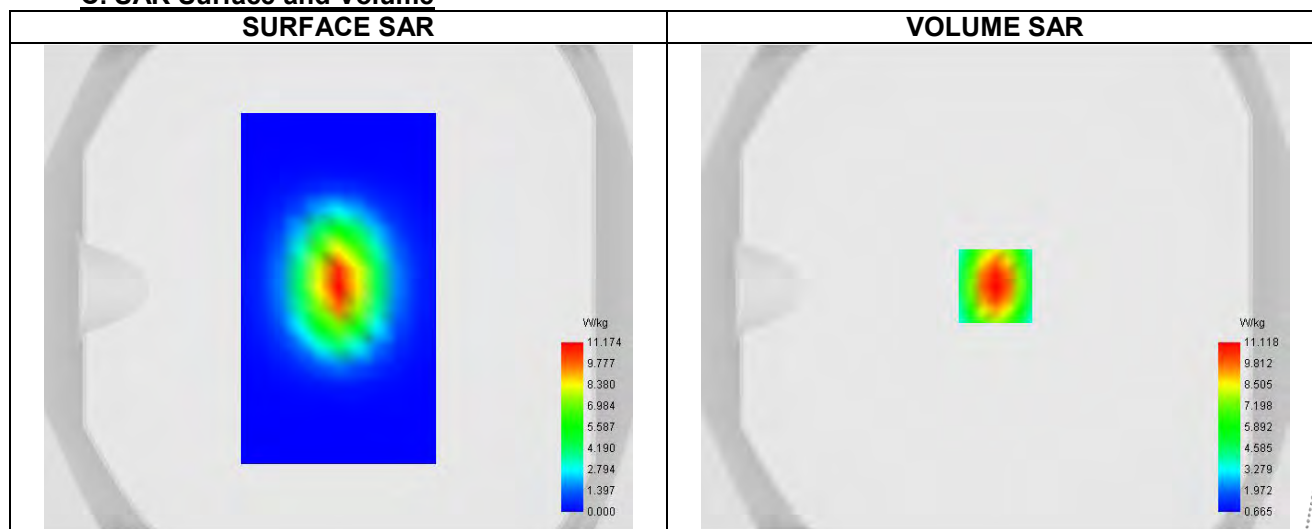


Maximum location: X=0.00, Y=1.00 ; SAR Peak: 22.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	3.871
SAR 1g (W/Kg)	9.815
Variation (%)	-1.930
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	18.71+	11.234	6.561	3.924	2.453

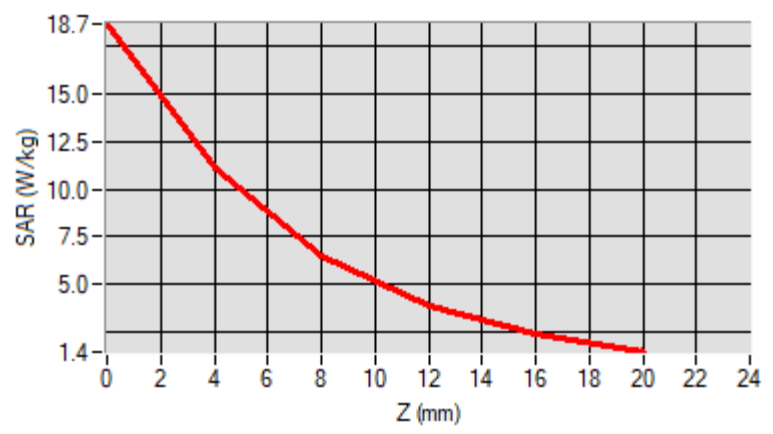

F. 3D Image

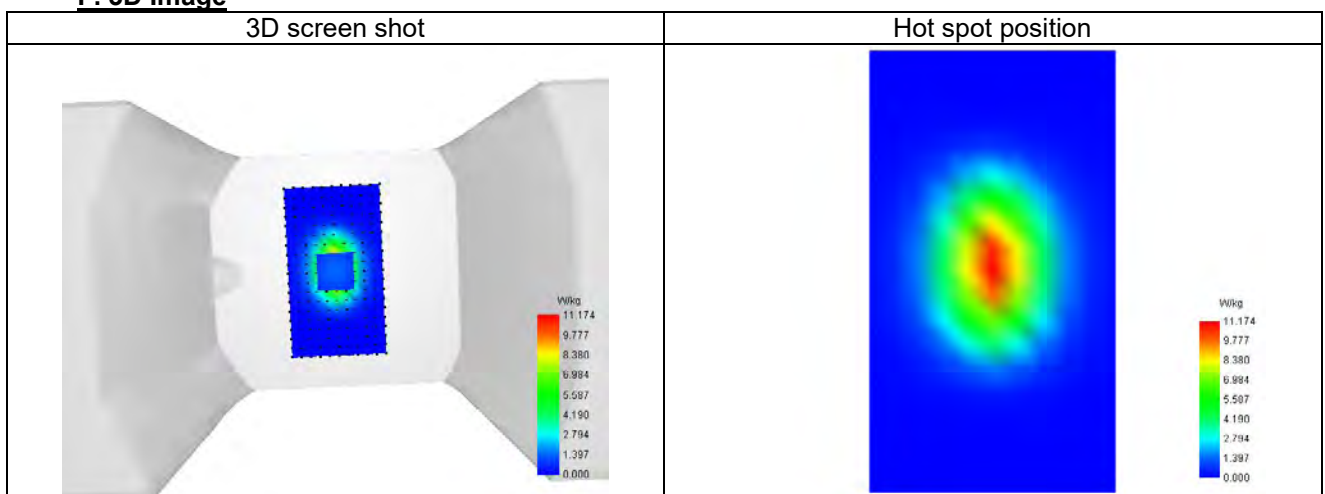

System check at 1900 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.654
Relative permittivity (imaginary part)	12.866
Conductivity (S/m)	1.383

C. SAR Surface and Volume

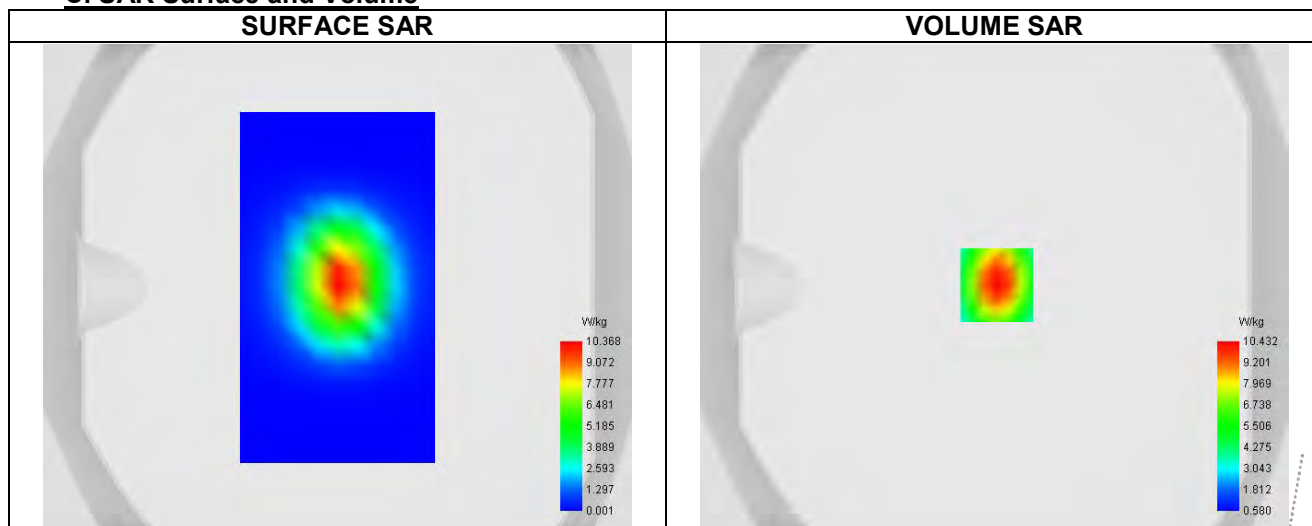


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 22.54 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.304
SAR 1g (W/Kg)	10.710
Variation (%)	3.691
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	17.387	10.484	6.206	3.672	2.184

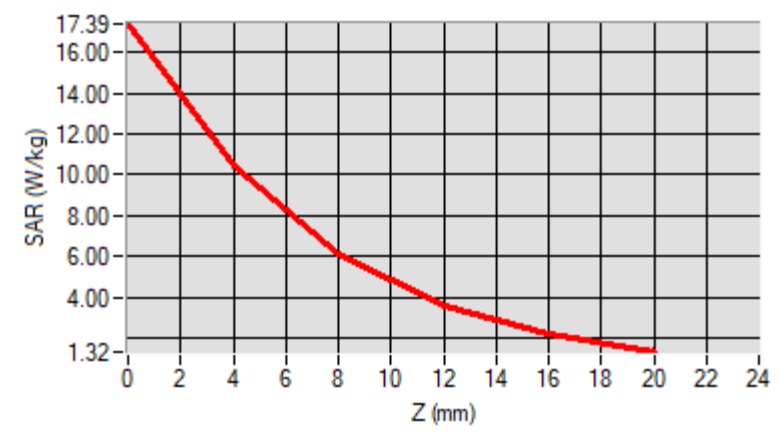

F. 3D Image

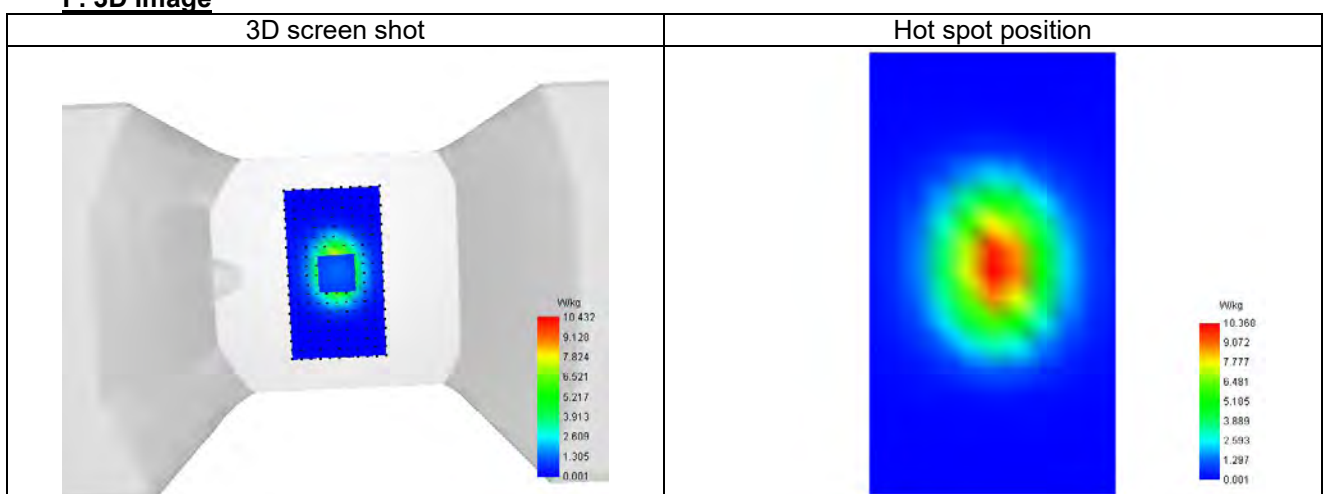

System check at 2450 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	38.809
Relative permittivity (imaginary part)	13.242
Conductivity (S/m)	1.873

C. SAR Surface and Volume

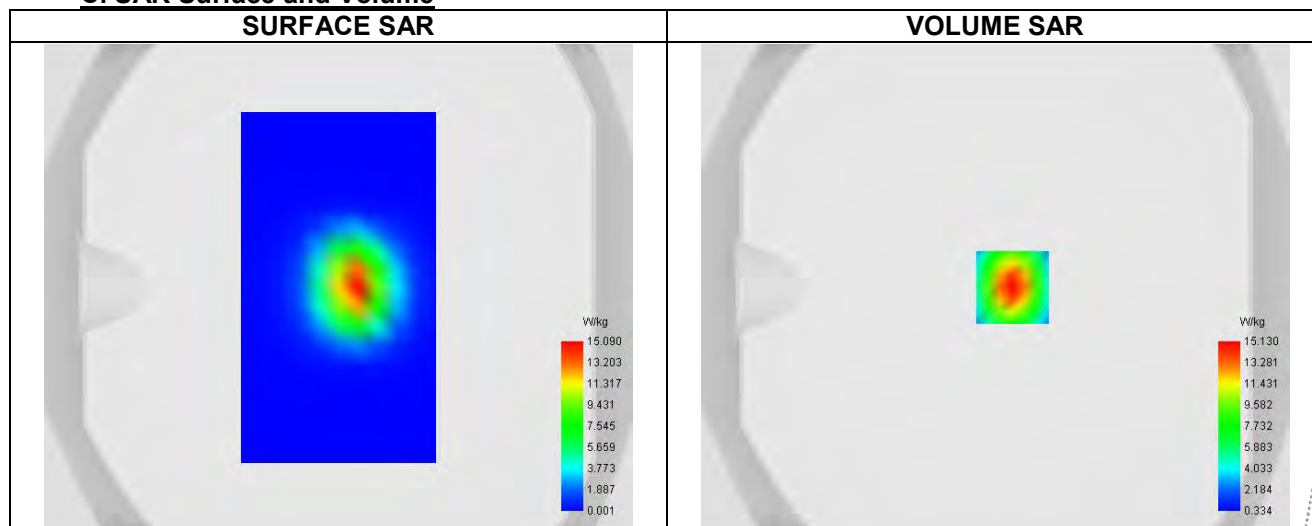


Maximum location: X=7.00, Y=0.00 ; SAR Peak: 29.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.137
SAR 1g (W/Kg)	13.279
Variation (%)	-1.114
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	28.802	15.018	7.416	3.658	1.912

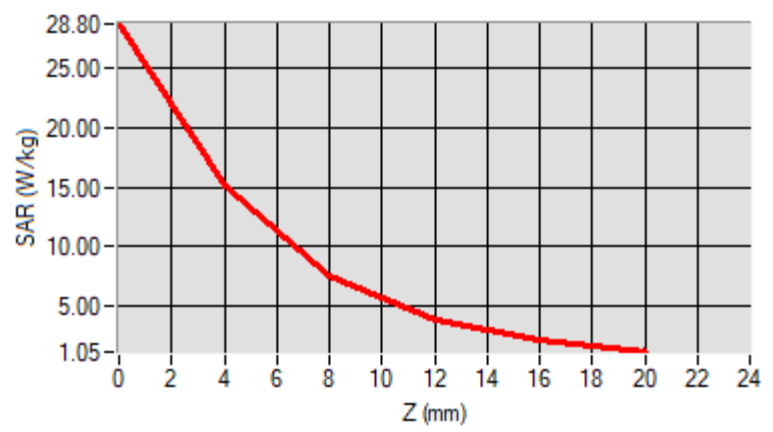

F. 3D Image

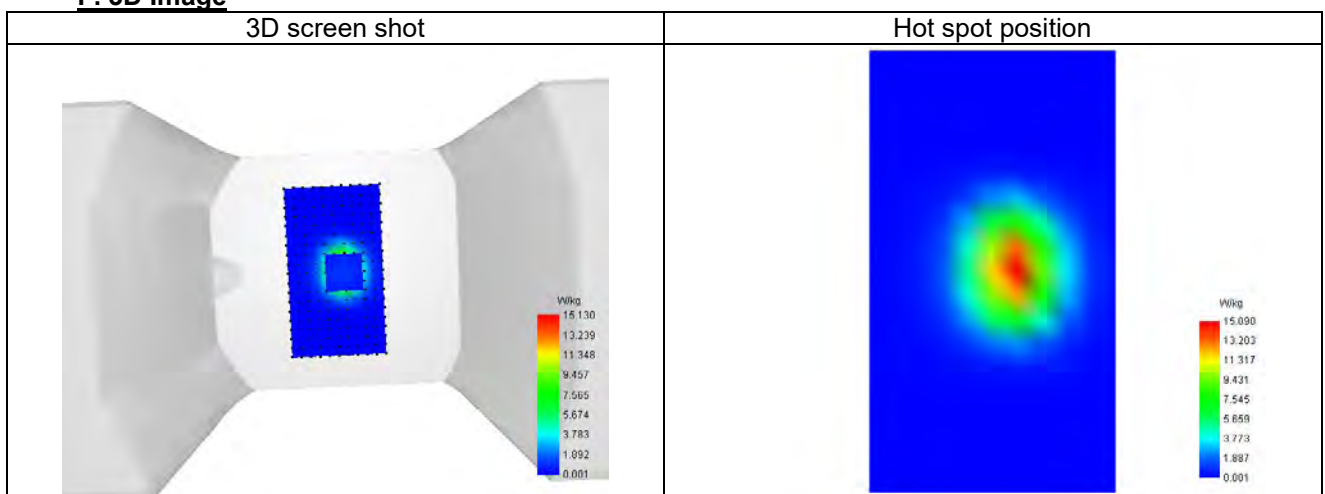

System check at 2600 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.03
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	37.536
Relative permittivity (imaginary part)	13.906
Conductivity (S/m)	1.921

C. SAR Surface and Volume

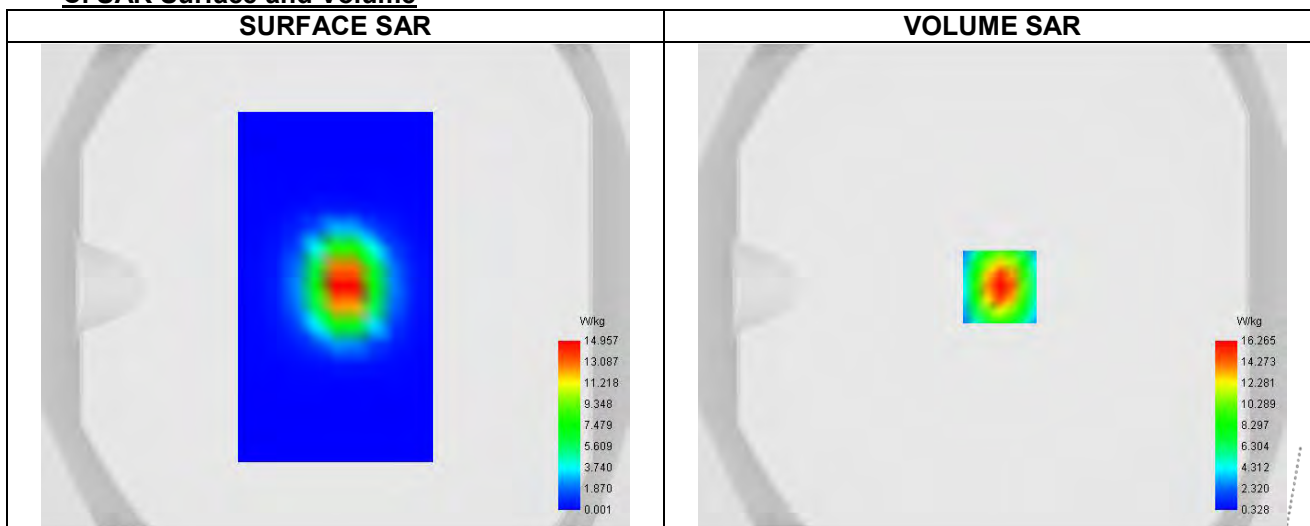


Maximum location: X=3.00, Y=0.00 ; SAR Peak: 31.98 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	6.087
SAR 1g (W/Kg)	14.060
Variation (%)	0.950
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	31.172	16.108	7.982	3.835	1.964

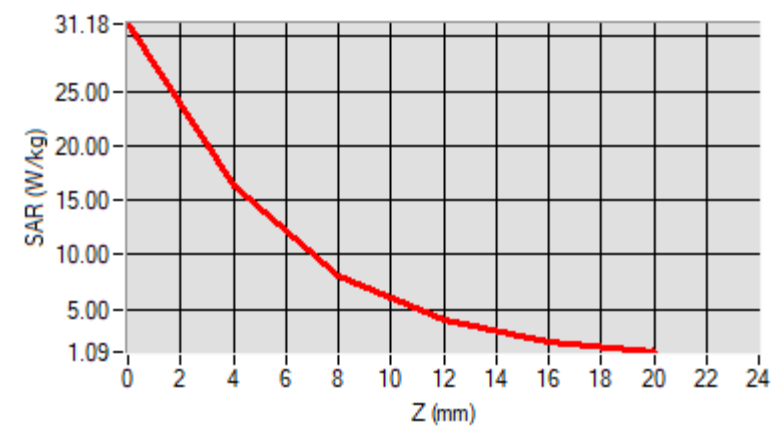

F. 3D Image

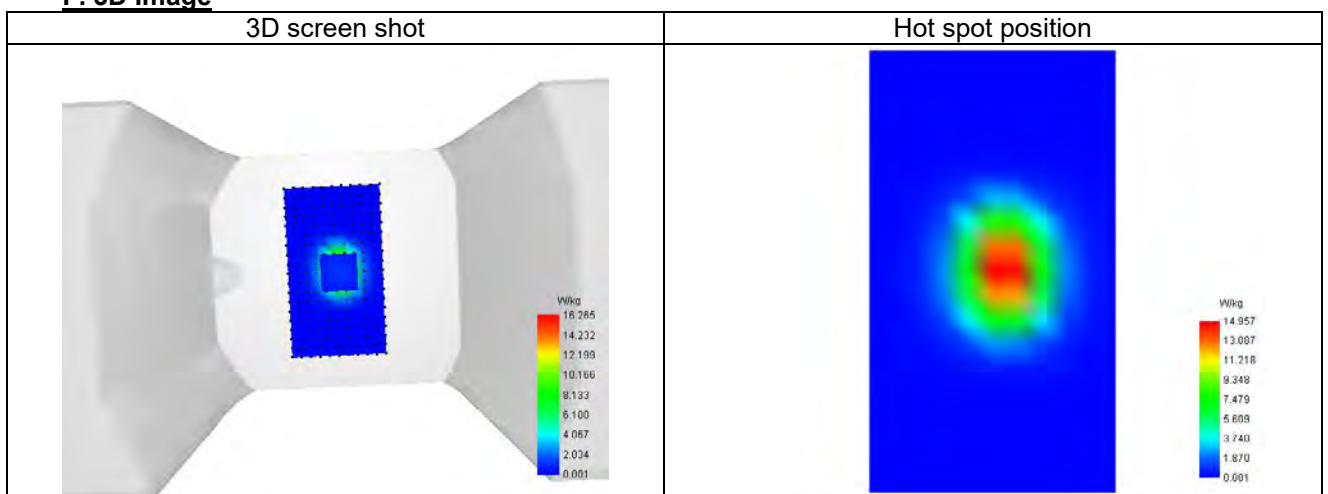

System check at 5200 MHz


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	35.333
Relative permittivity (imaginary part)	16.130
Conductivity (S/m)	4.519

C. SAR Surface and Volume

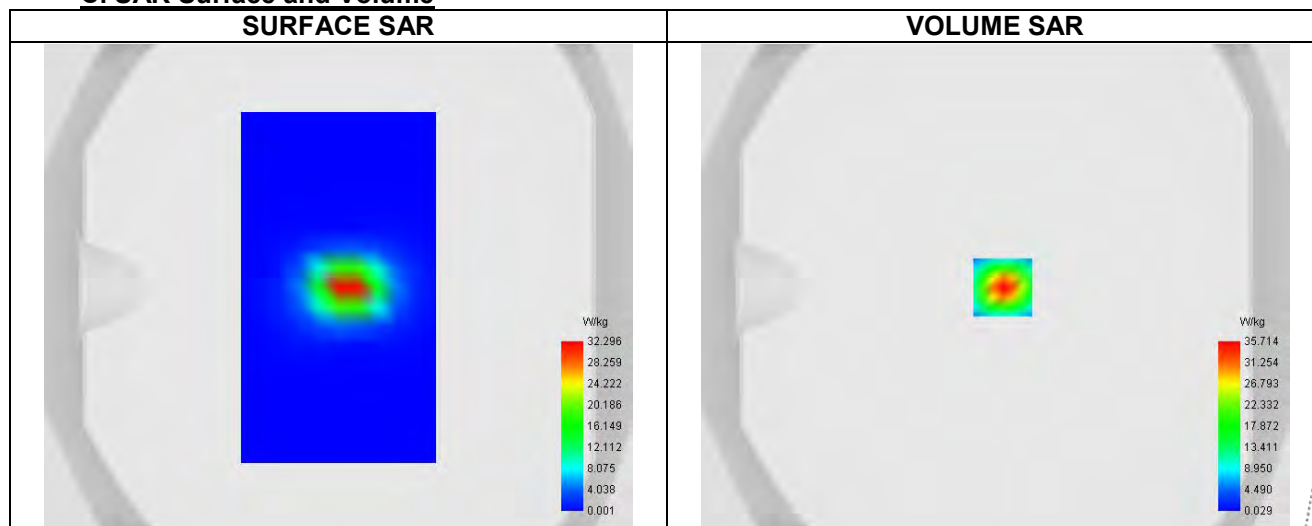


Maximum location: X=3.00, Y=0.00 ; SAR Peak: 64.02 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.064
SAR 1g (W/Kg)	18.937
Variation (%)	1.810
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	63.614	35.528	18.106	8.235	3.407	1.502	0.710	0.358	0.255

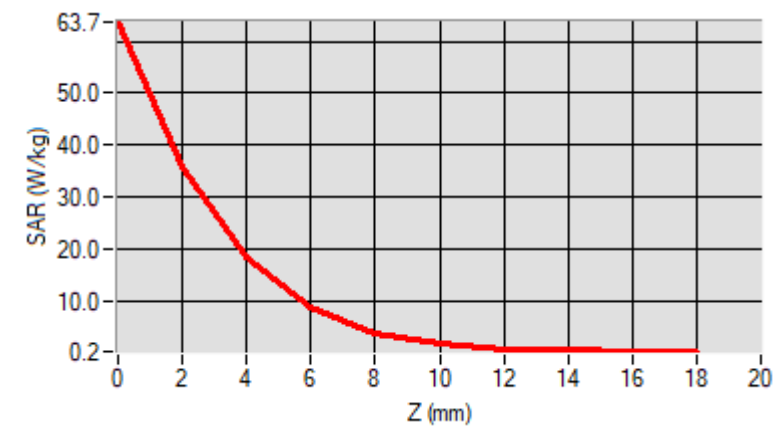

F. 3D Image

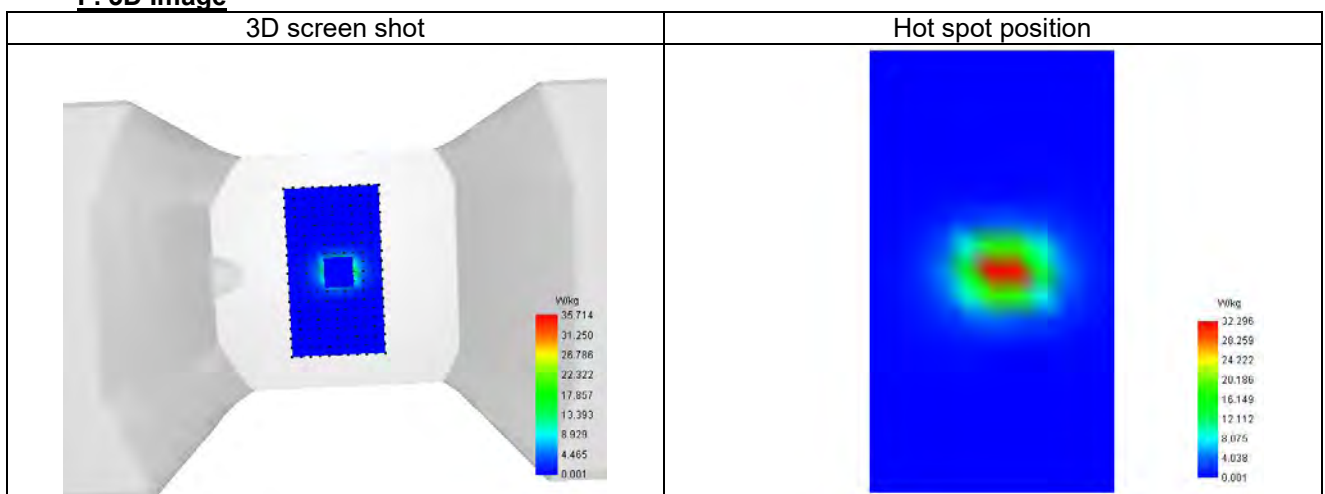

System check at 5800 MHz


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5800.000
Relative permittivity (real part)	34.349
Relative permittivity (imaginary part)	18.420
Conductivity (S/m)	5.450

C. SAR Surface and Volume

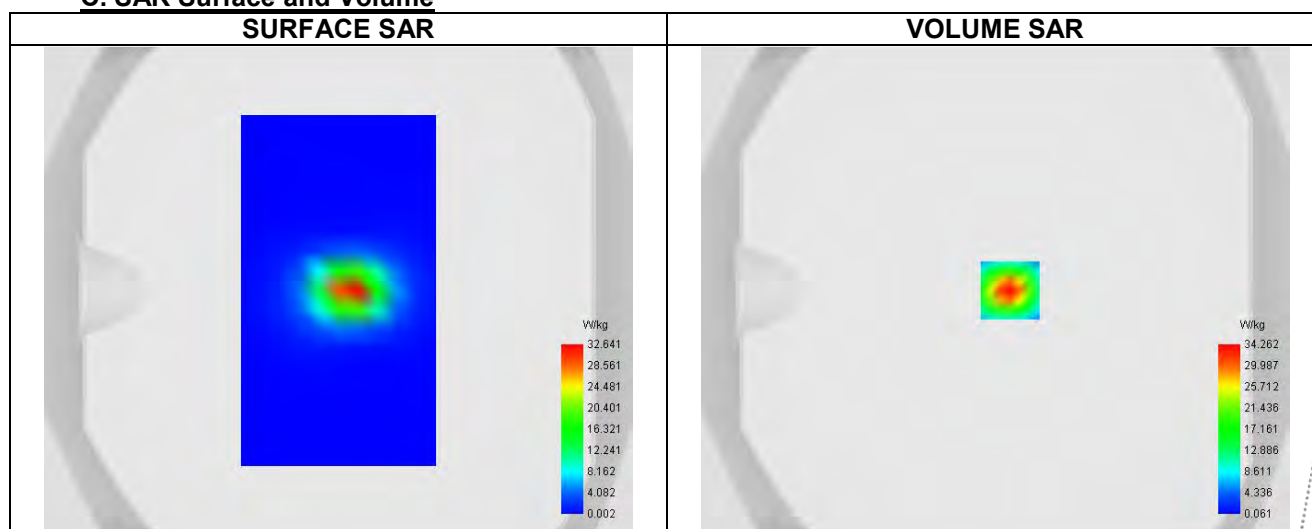


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 61.04 W/kg.

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.319
SAR 1g (W/Kg)	19.021
Variation (%)	-3.671
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	59.275	34.082	18.374	9.012	4.026	2.008	1.014	0.521	0.304

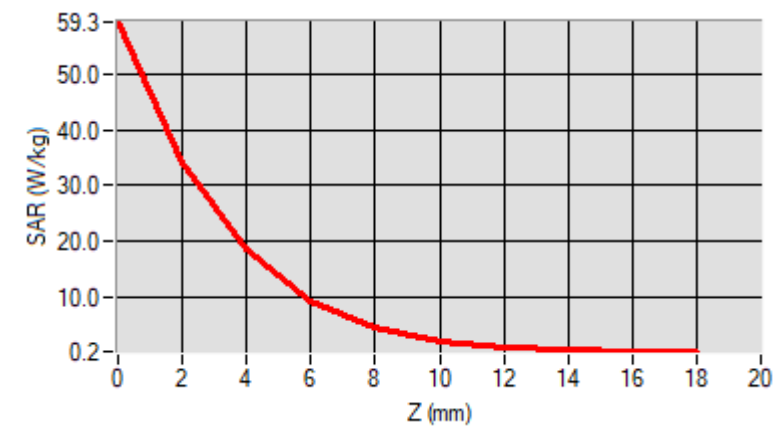

F. 3D Image

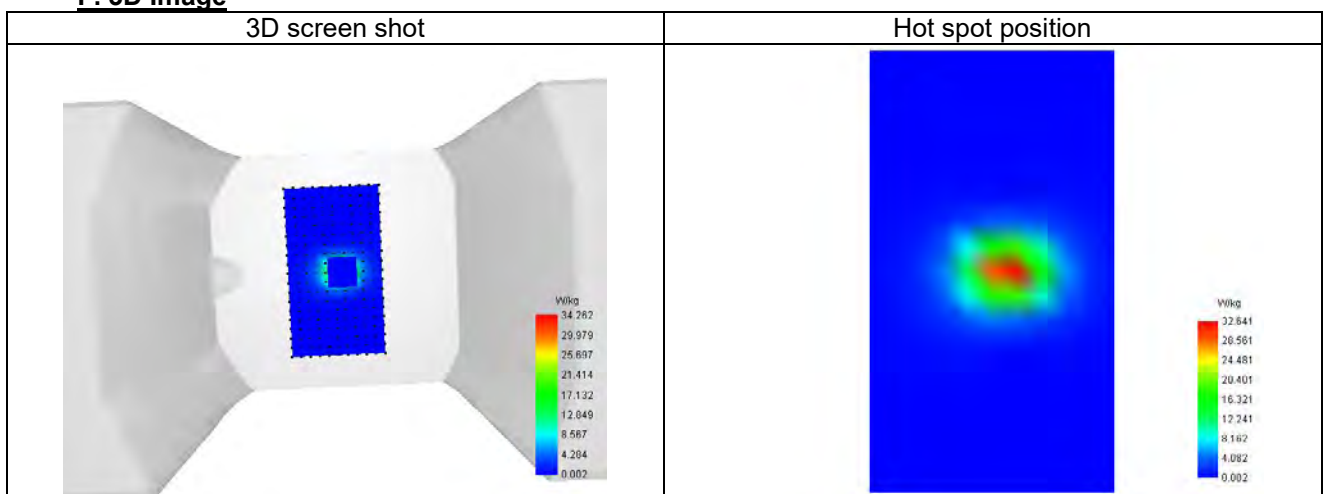

15.2 SAR Test Graph Results

SAR plots for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

Plot 1


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	dx=15mm dy=15mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	251
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	848.8
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.900

C. SAR Surface and Volume

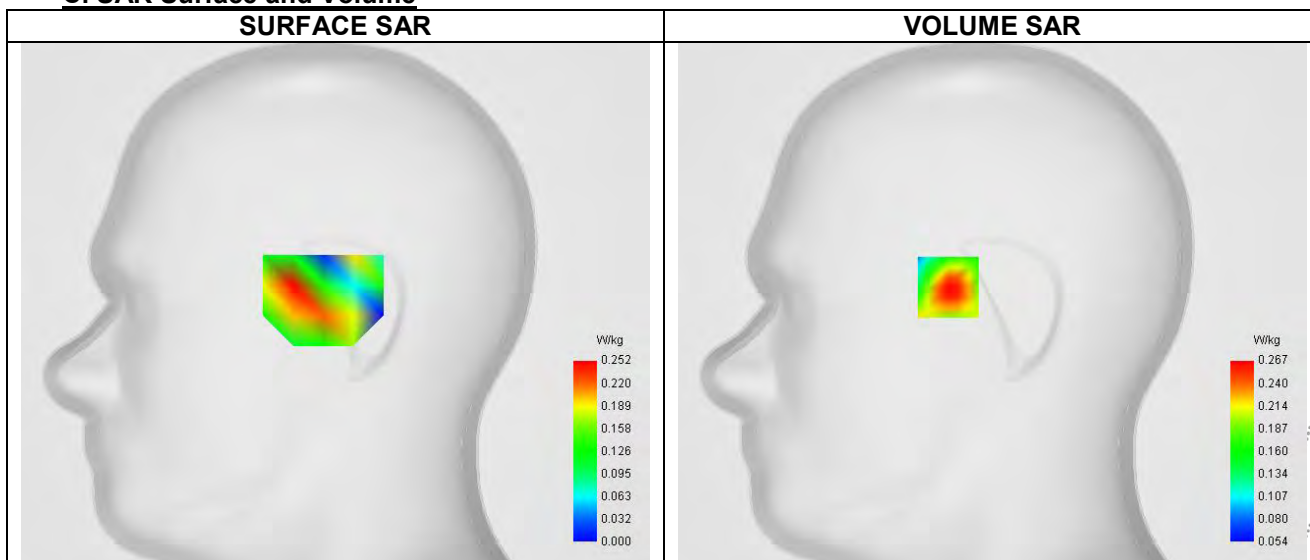

Maximum location: X=-22.00, Y=8.00 ; SAR Peak: 0.57 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.170
SAR 1g (W/Kg)	0.278
Variation (%)	2.820
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
--------	------	------	------	-------	-------

SAR (W/Kg)	0.559	0.267	0.102	0.058	0.072
------------	-------	-------	-------	-------	-------

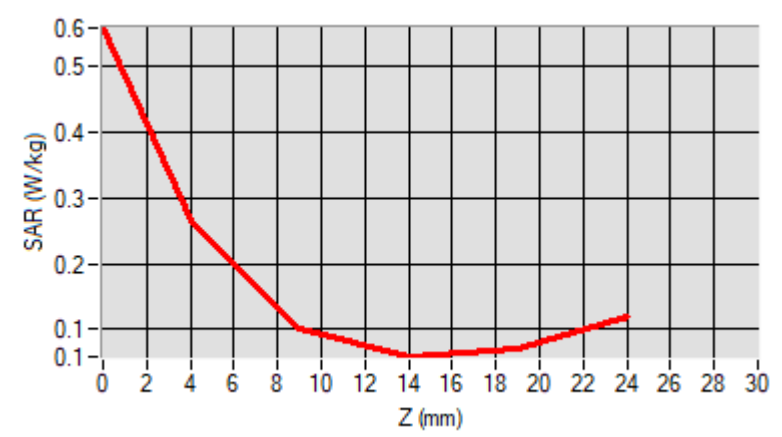

F. 3D Image

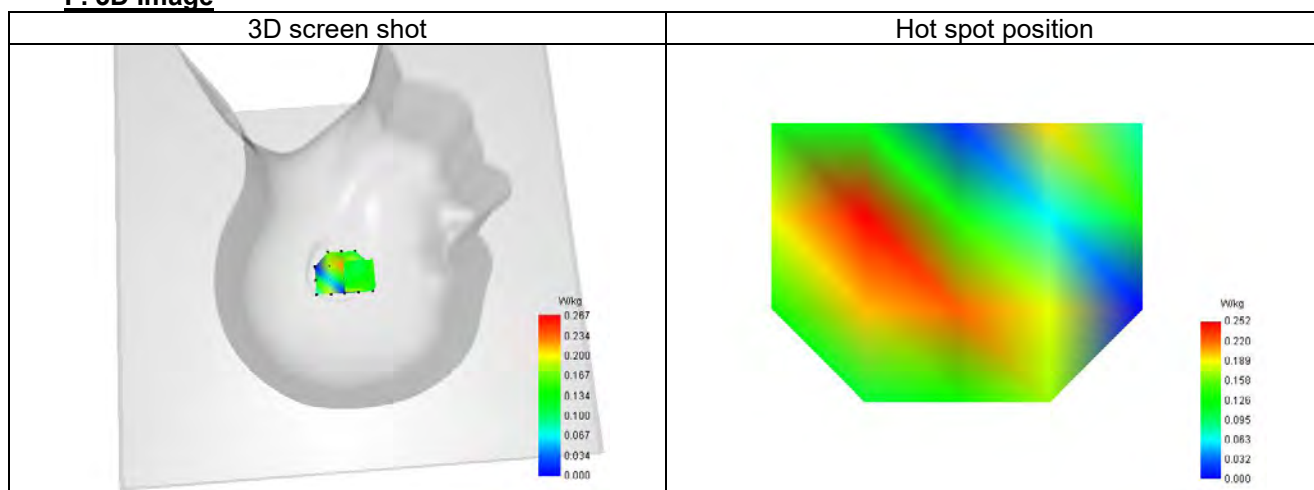

Plot 2


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	GPRS850-4TX
Channels	251
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	848.8
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.900

C. SAR Surface and Volume

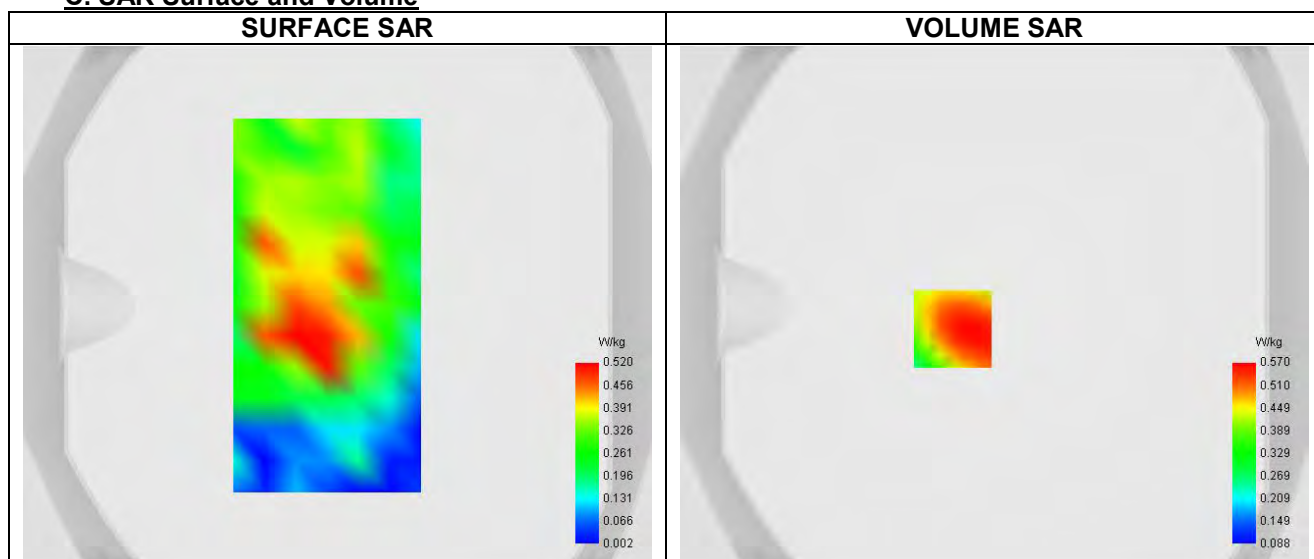


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.383
SAR 1g (W/Kg)	0.568
Variation (%)	3.260
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.570	0.570	0.377	0.233	0.202

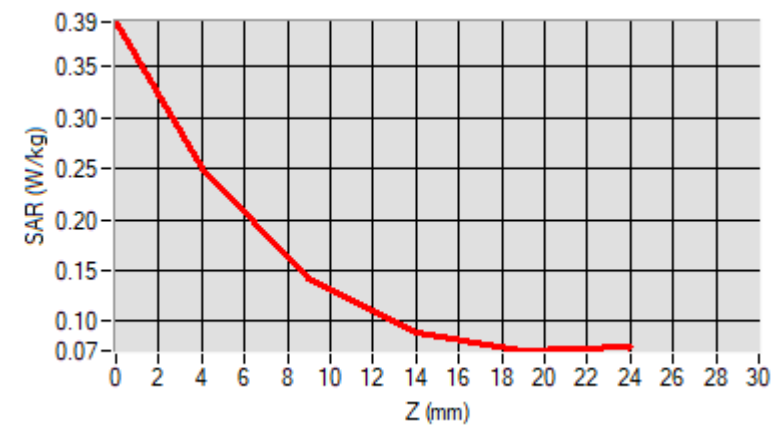

F. 3D Image

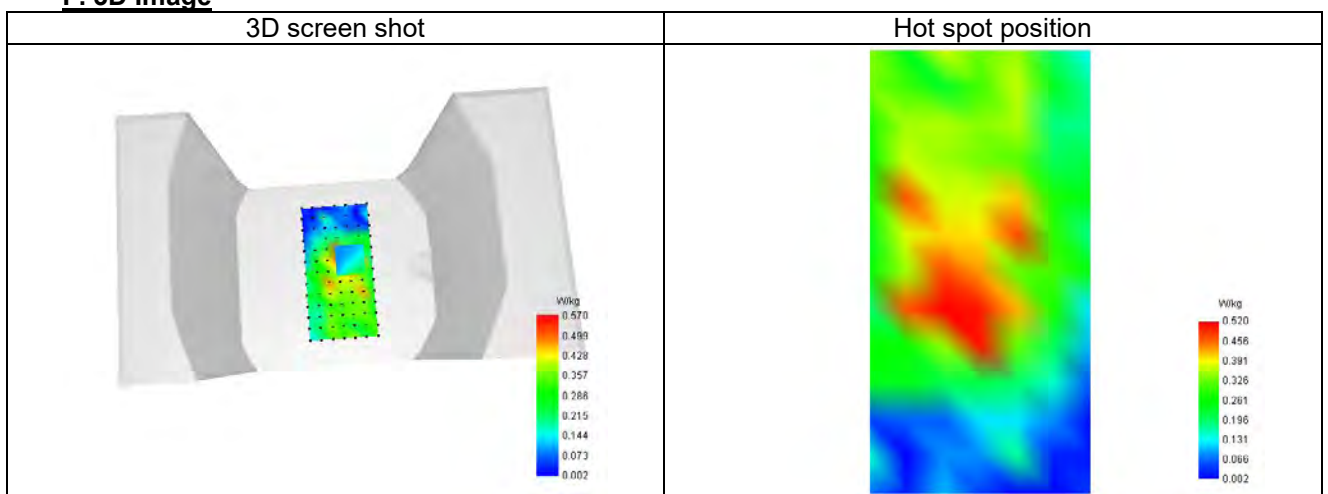

Plot 3


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	dx=15mm dy=15mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	512
Signal	TDMA (Crest factor: 8.0)

B. Permittivity

Frequency (MHz)	1850.2
Relative permittivity (real part)	39.654
Relative permittivity (imaginary part)	13.629
Conductivity (S/m)	1.383

C. SAR Surface and Volume

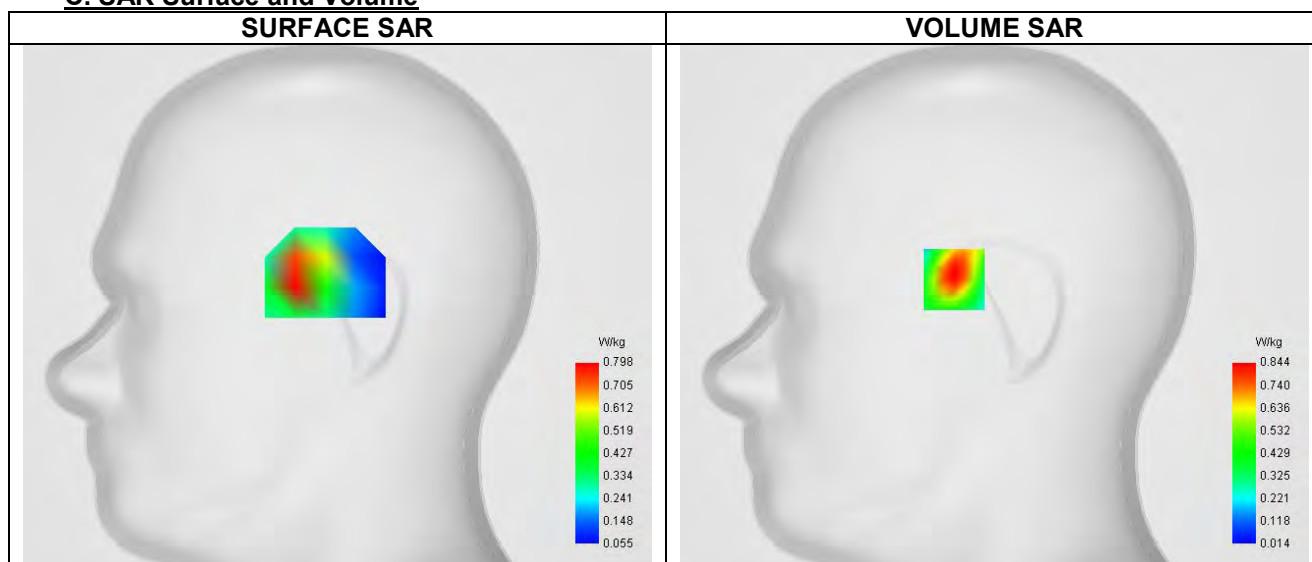


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.413
SAR 1g (W/Kg)	0.800
Variation (%)	1.270
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.824	0.844	0.365	0.215	0.130

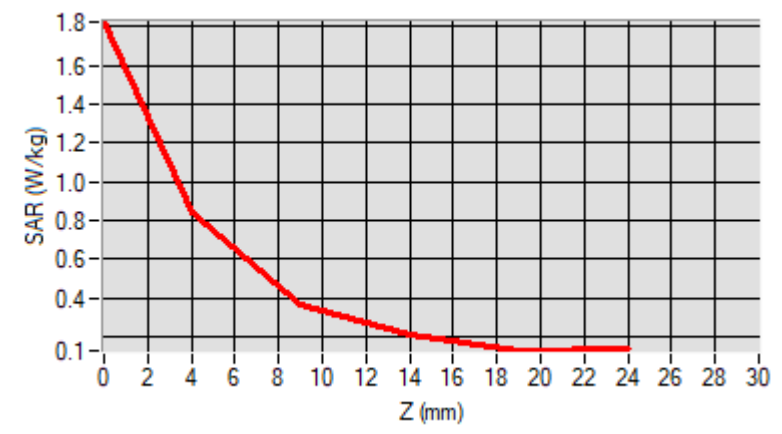

F. 3D Image

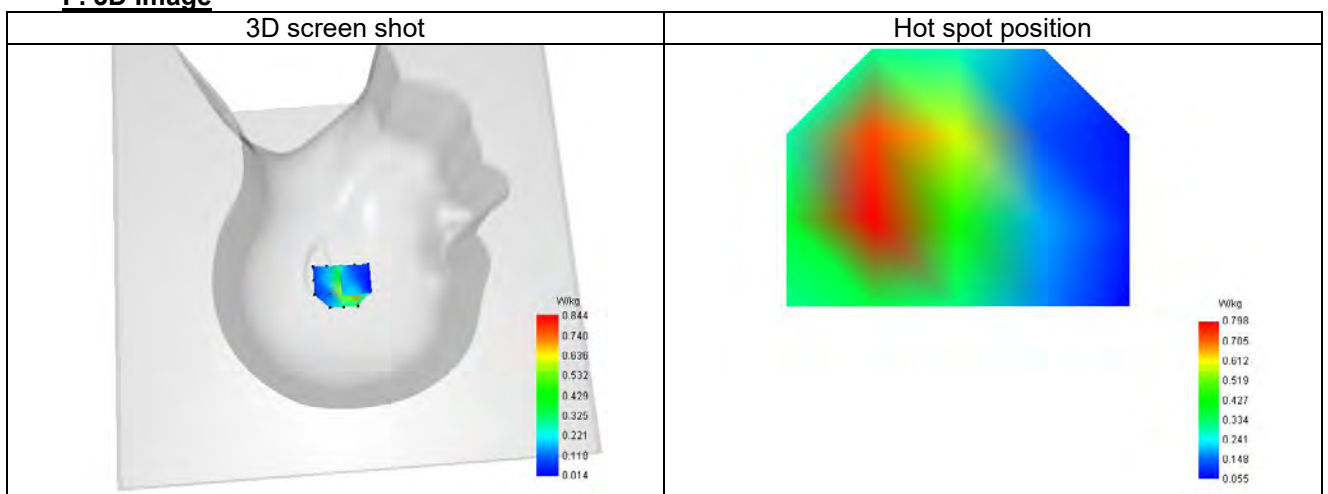

Plot 4


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	GPRS1900-4TX
Channels	661
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880
Relative permittivity (real part)	39.654
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.383

C. SAR Surface and Volume

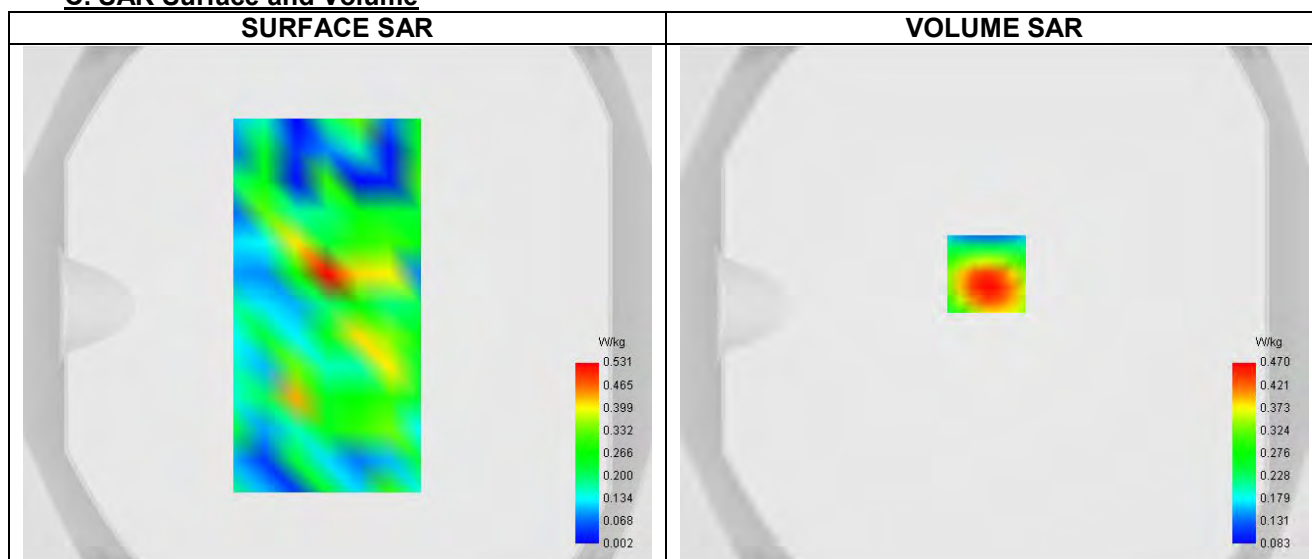


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.296
SAR 1g (W/Kg)	0.445
Variation (%)	0.780
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.723	0.470	0.256	0.190	0.219

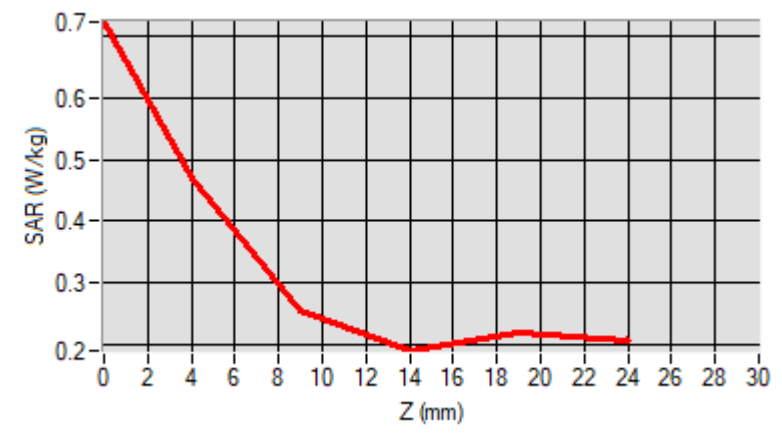

F. 3D Image

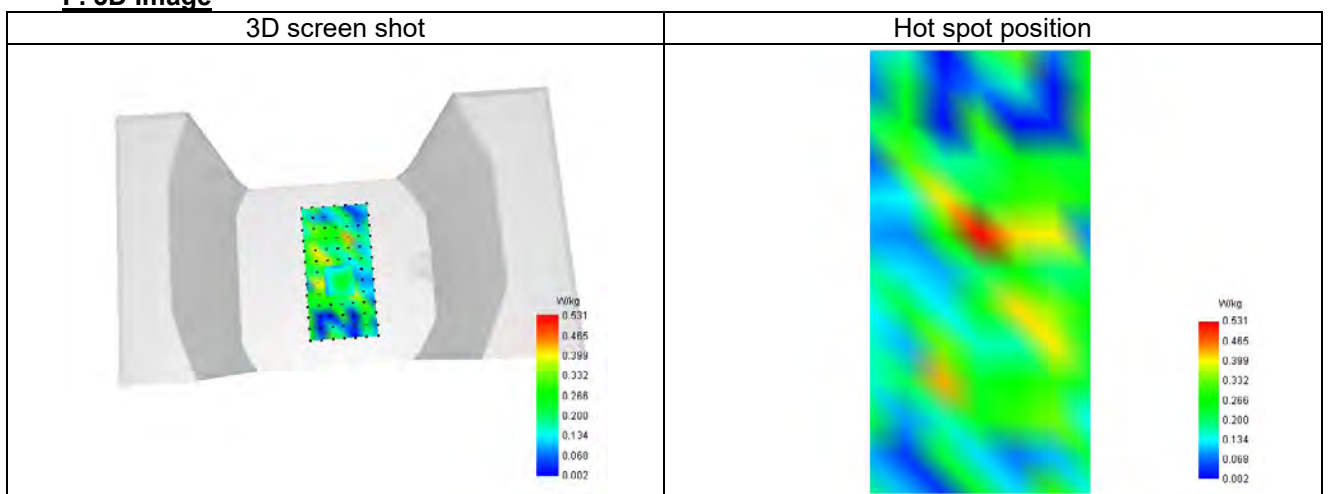

Plot 5


A. Experimental conditions.

Probe	--
ConvF	1.04
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band2_WCDMA1900
Channels	9400
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.0
Relative permittivity (real part)	39.654
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.383

C. SAR Surface and Volume

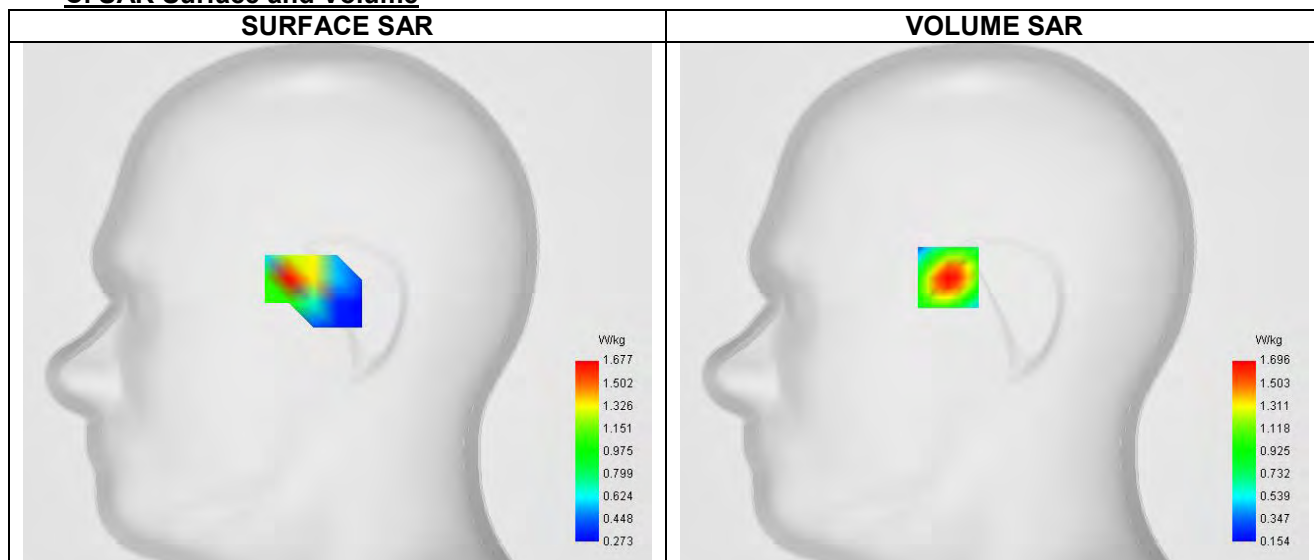


Maximum location: X=-23.00, Y=13.00 ; SAR Peak: 2.48 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.399
SAR 1g (W/Kg)	0.958
Variation (%)	1.350
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.459	1.696	1.064	0.689	0.472

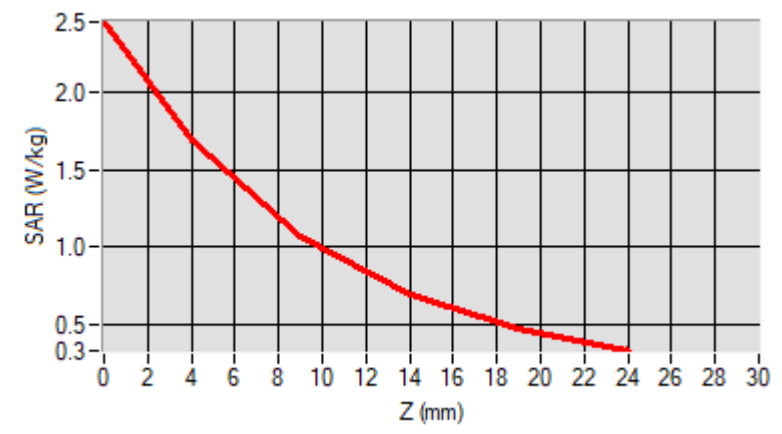

F. 3D Image

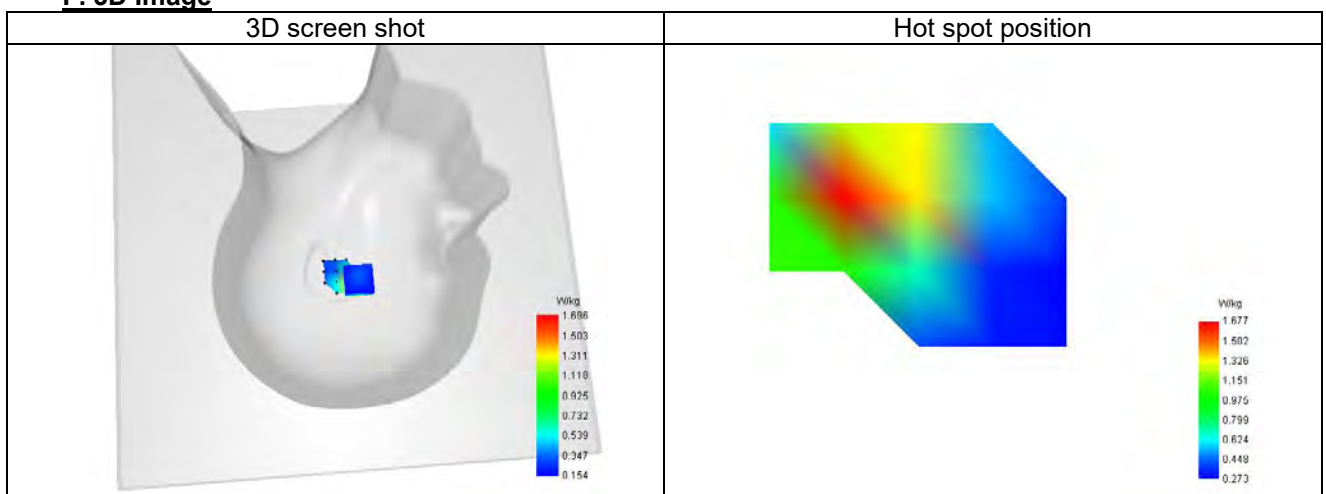

Plot 6


A. Experimental conditions.

Probe	--
ConvF	1.04
Area Scan	surf sam plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	Band2 WCDMA1900
Channels	9538
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880.0
Relative permittivity (real part)	39.654
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.383

C. SAR Surface and Volume

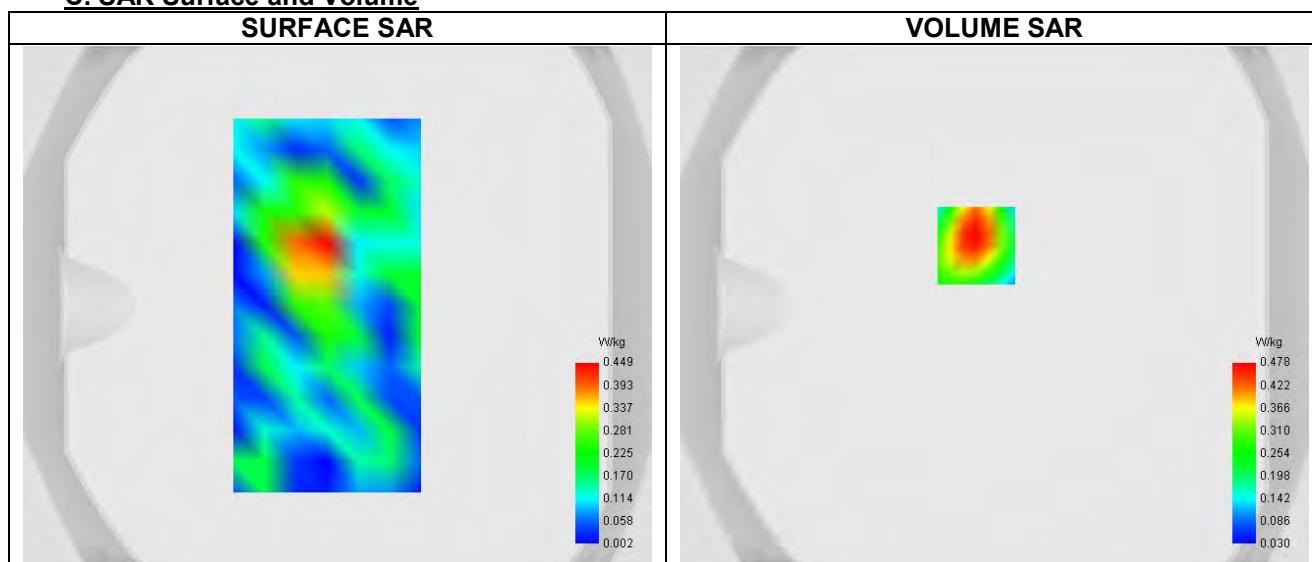


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.261
SAR 1g (W/Kg)	0.445
Variation (%)	-5.850
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.961	0.478	0.237	0.152	0.096

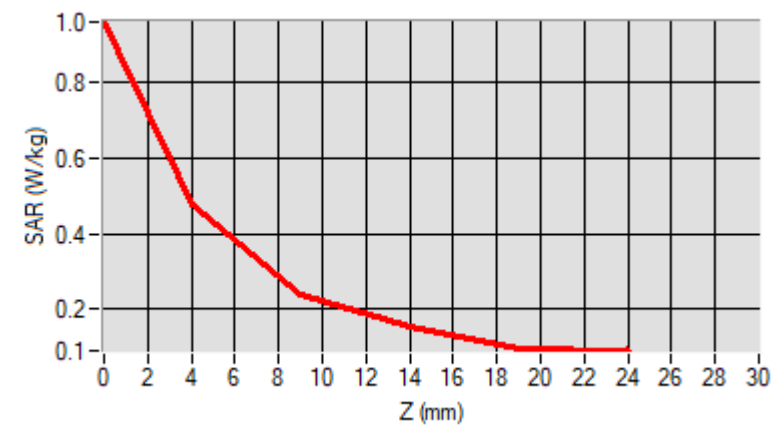

F. 3D Image

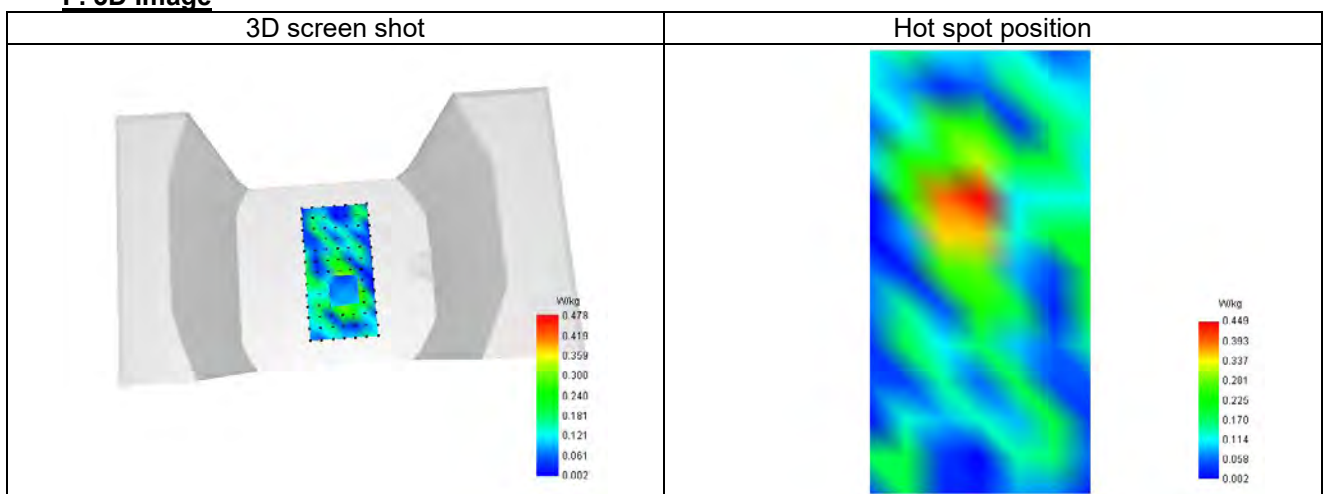

Plot 7


A. Experimental conditions.

Probe	--
ConvF	0.96
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band4 WCDMA1700
Channels	1312
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1712.4
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.462

C. SAR Surface and Volume

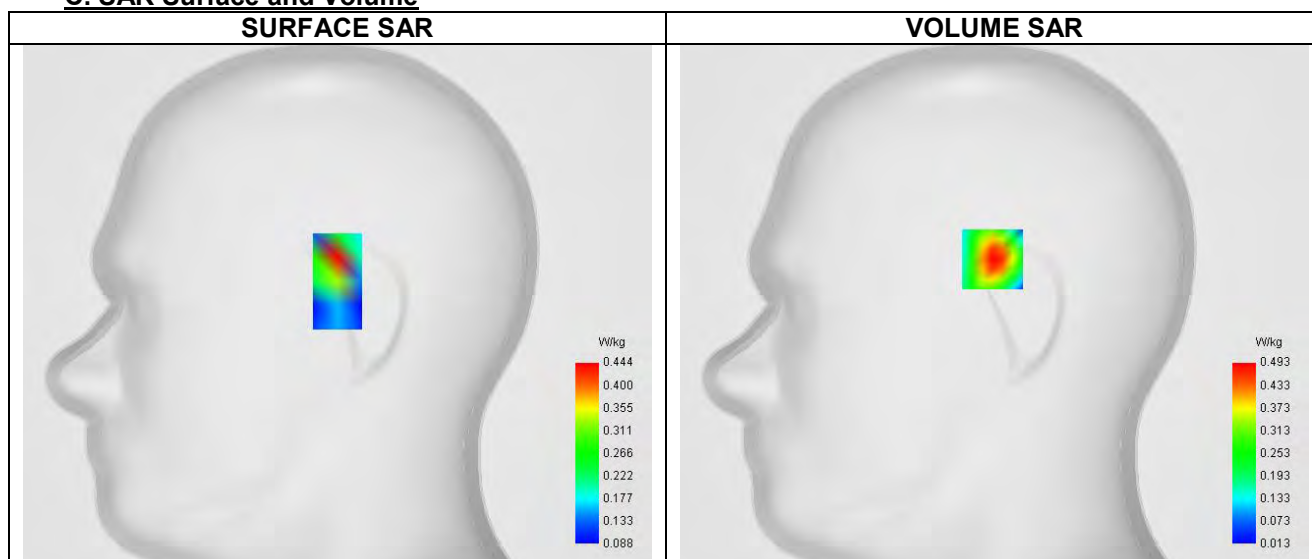


Maximum location: X=-1.00, Y=23.00 ; SAR Peak: 0.80 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.246
SAR 1g (W/Kg)	0.455
Variation (%)	-2.290
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.779	0.493	0.277	0.165	0.112

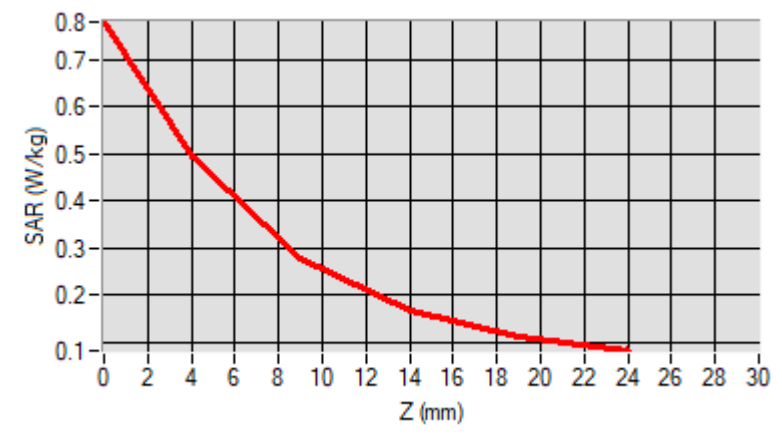

F. 3D Image

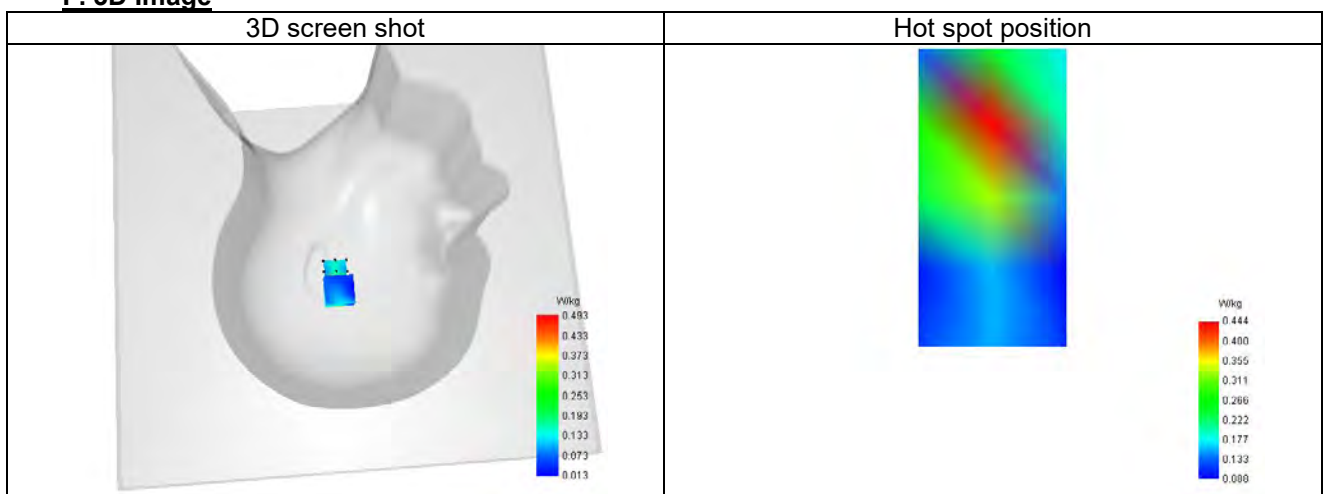

Plot 8


A. Experimental conditions.

Probe	--
ConvF	0.96
Area Scan	surf sam plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	Band4 WCDMA1700
Channels	1312
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1712.4
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.462

C. SAR Surface and Volume

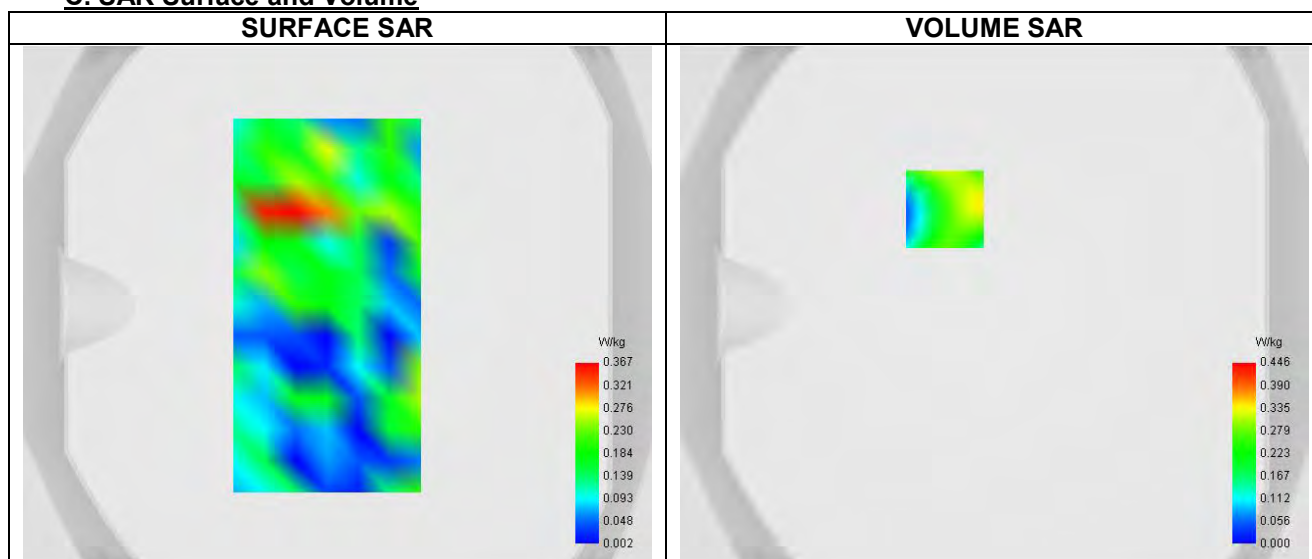


Maximum location: X=-19.00, Y=37.00 ; SAR Peak: 0.93 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.234
SAR 1g (W/Kg)	0.393
Variation (%)	3.460
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.903	0.341	0.279	0.021	0.151

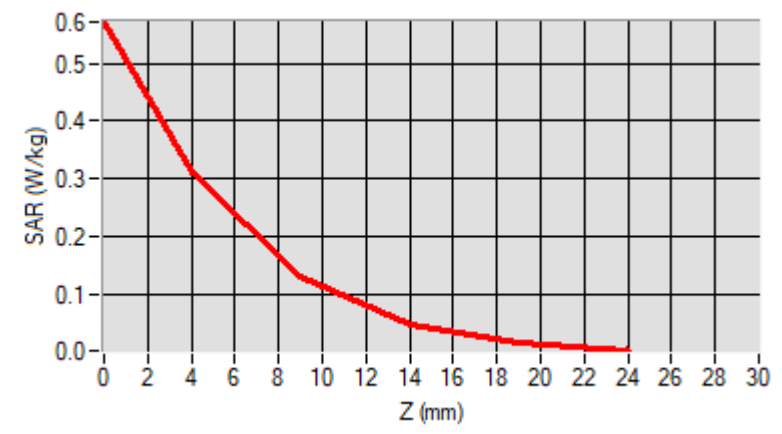

F. 3D Image

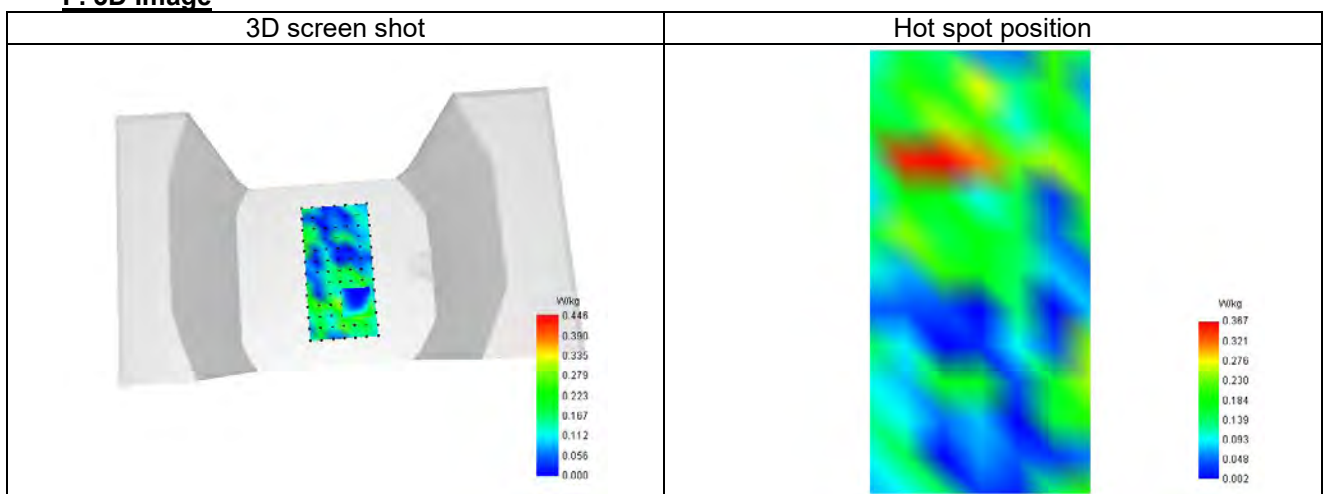

Plot 9


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	dx=15mm dy=15mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm, Very fast
Phantom	Right head
Device Position	Cheek
Band	Band5_WCDMA850
Channels	4233
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	846.6
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	20.226
Conductivity (S/m)	0.900

C. SAR Surface and Volume

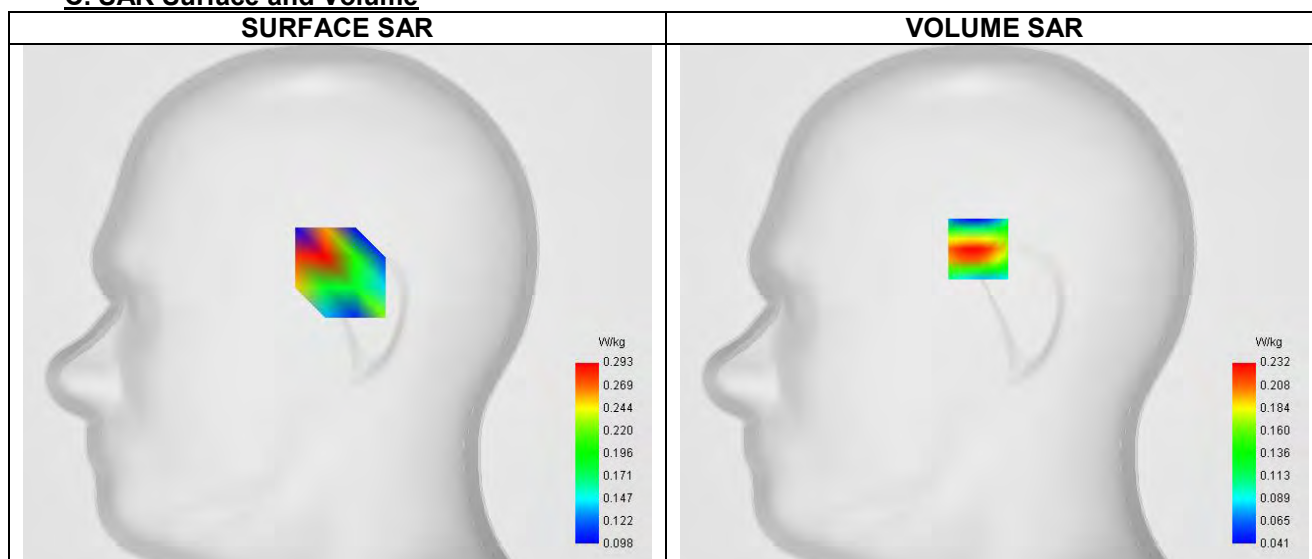


Maximum location: X=-8.00, Y=28.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.142
SAR 1g (W/Kg)	0.236
Variation (%)	11.170
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.580	0.232	0.085	0.063	0.071

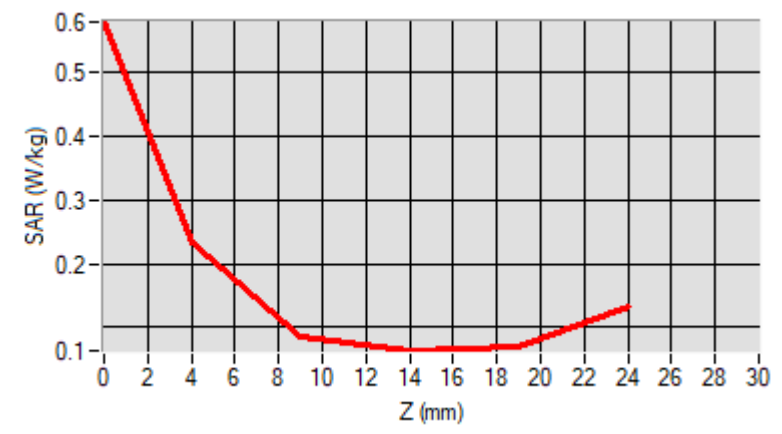

F. 3D Image

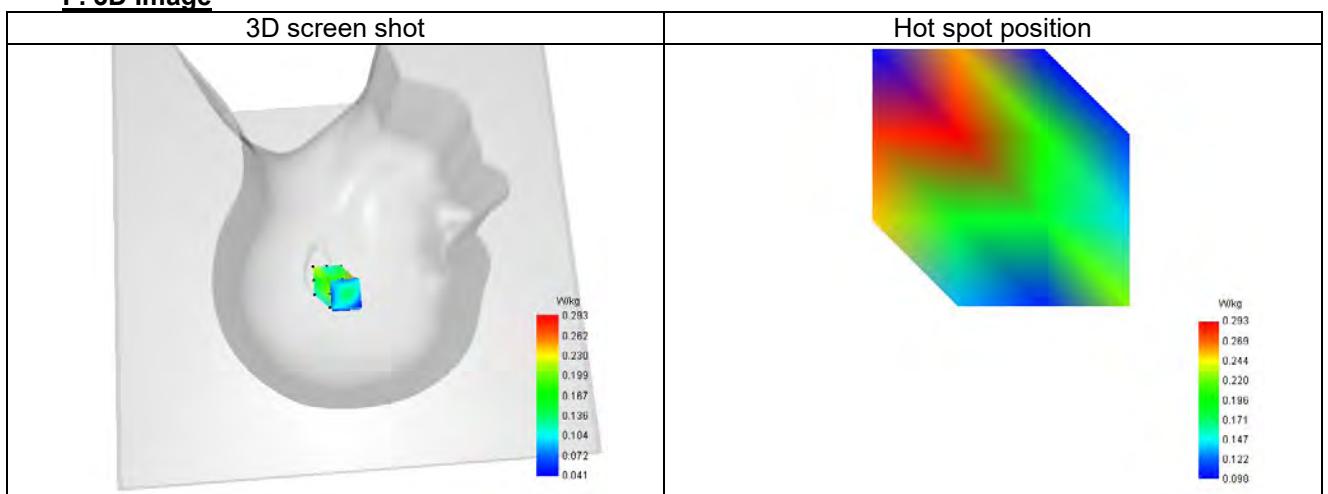

Plot 10


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	Band5_WCDMA850
Channels	4233
Signal	WCDMA (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	846.6
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	20.226
Conductivity (S/m)	0.900

C. SAR Surface and Volume

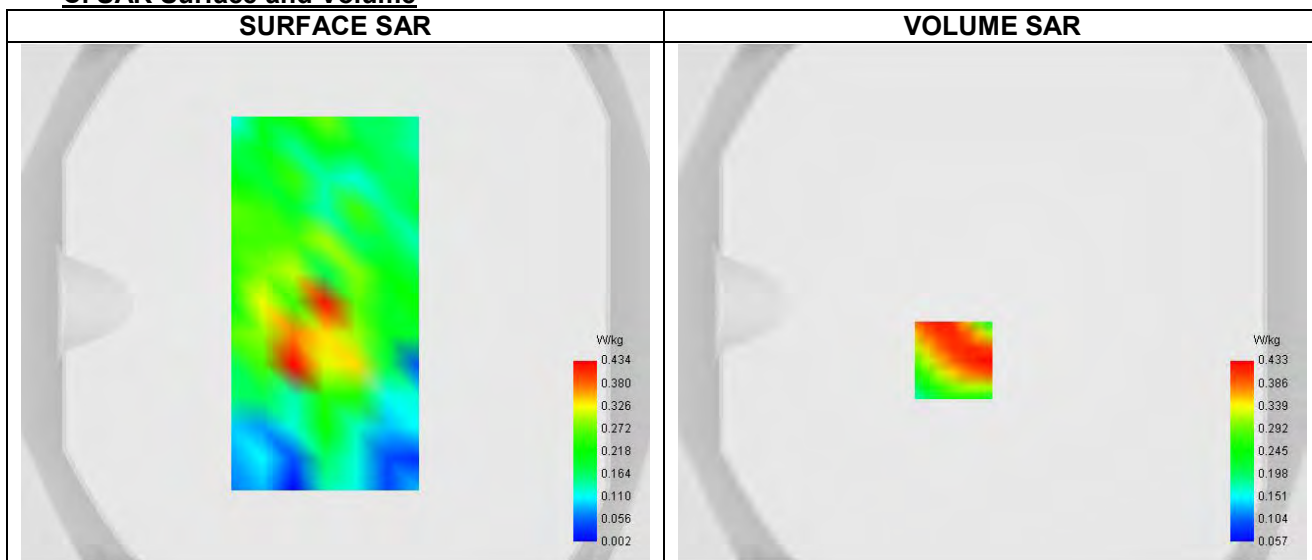


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.272
SAR 1g (W/Kg)	0.434
Variation (%)	0.730
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.508	0.433	0.219	0.112	0.134

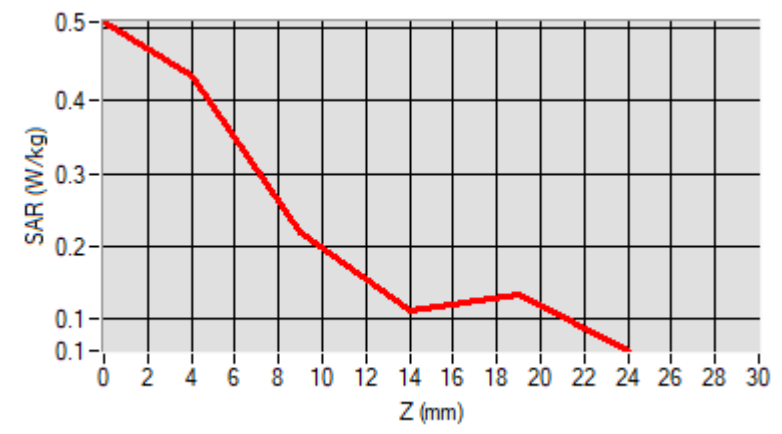

F. 3D Image

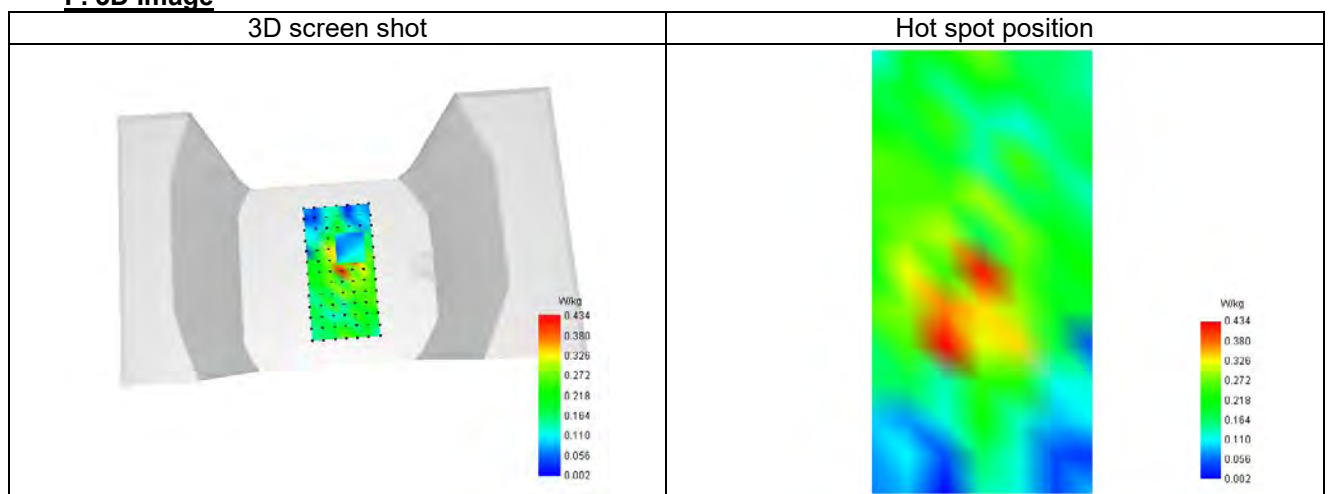

Plot 11


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Channels	18700
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1860
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	13.556
Conductivity (S/m)	1.462

C. SAR Surface and Volume

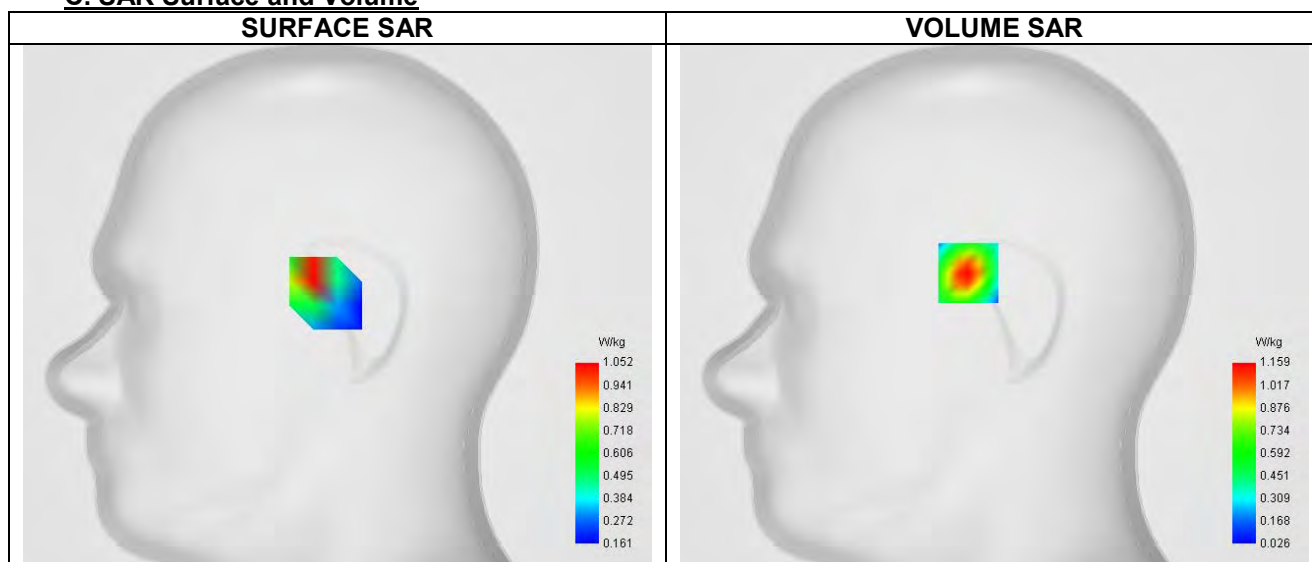


Maximum location: X=-13.00, Y=16.00 ; SAR Peak: 1.94 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.359
SAR 1g (W/Kg)	0.754
Variation (%)	-1.140
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.940	1.159	0.610	0.363	0.275

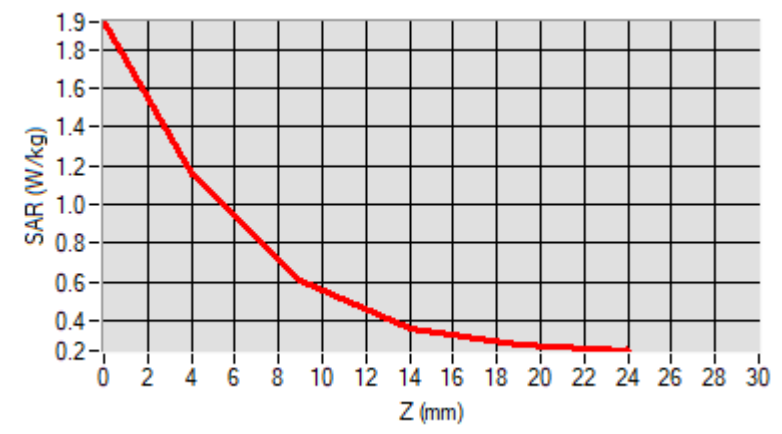

F. 3D Image

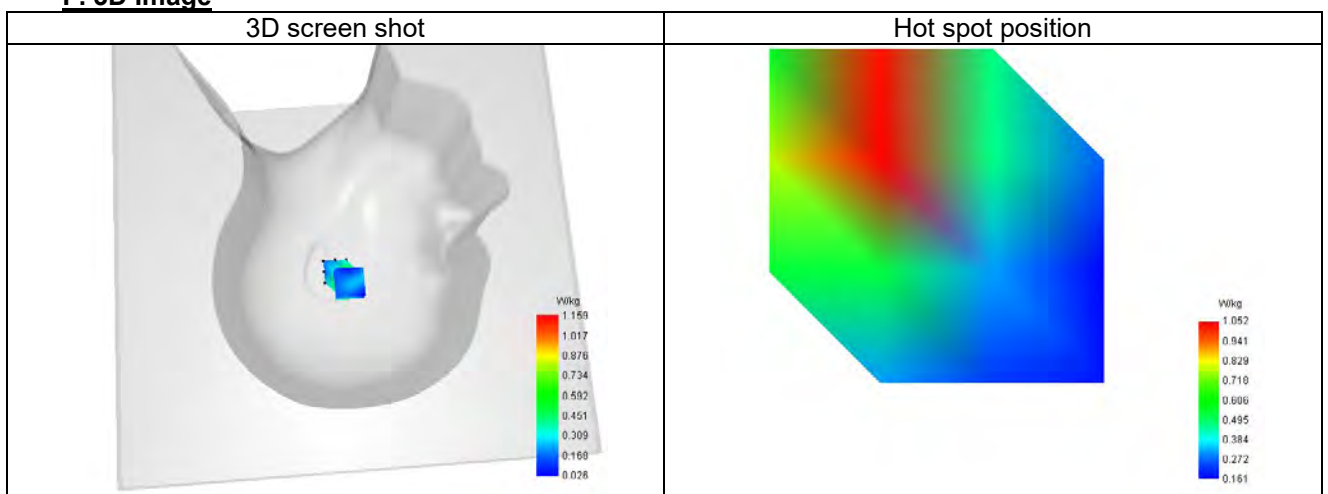

Plot 12


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.04
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	18900
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1880
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.462

C. SAR Surface and Volume

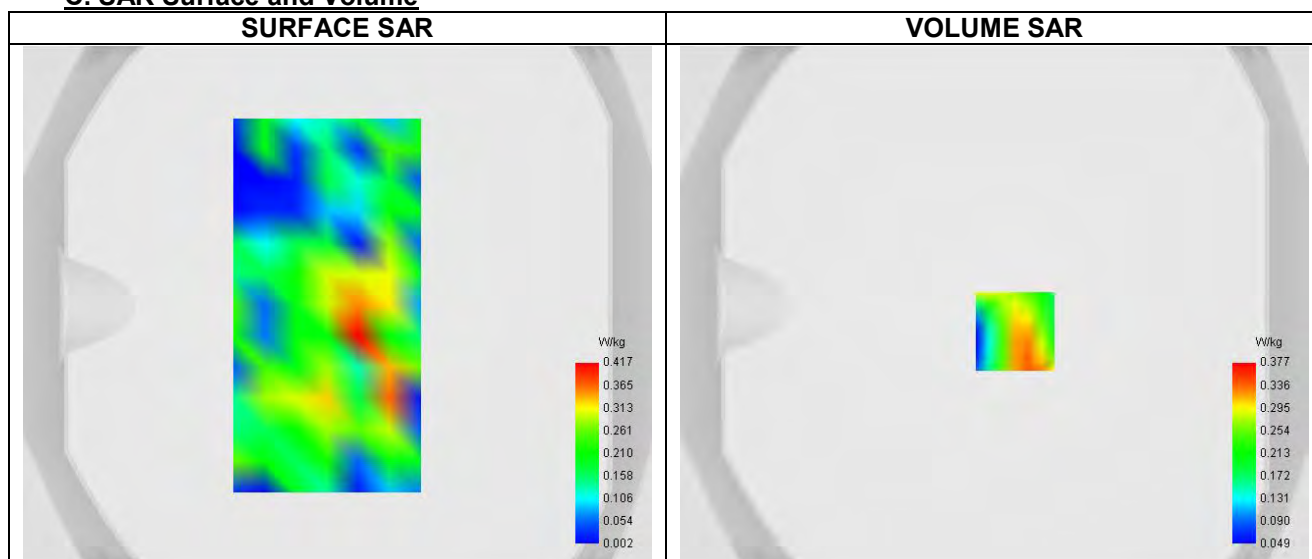


Maximum location: X=8.00, Y=-10.00 ; SAR Peak: 0.82 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.274
SAR 1g (W/Kg)	0.382
Variation (%)	2.030
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-1.305	0.342	0.320	0.053	0.289

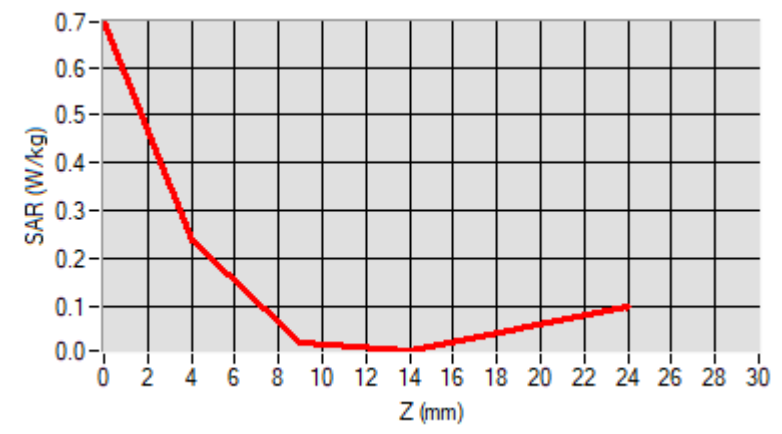

F. 3D Image

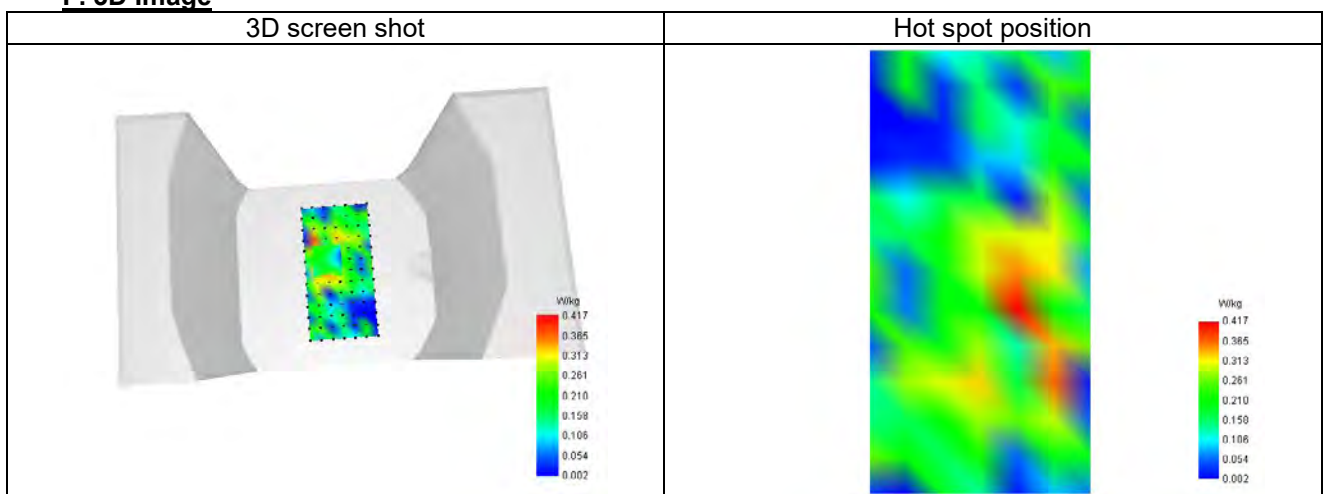

Plot 13


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.96
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	LTE band 4
Channels	20175
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.5
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.462

C. SAR Surface and Volume

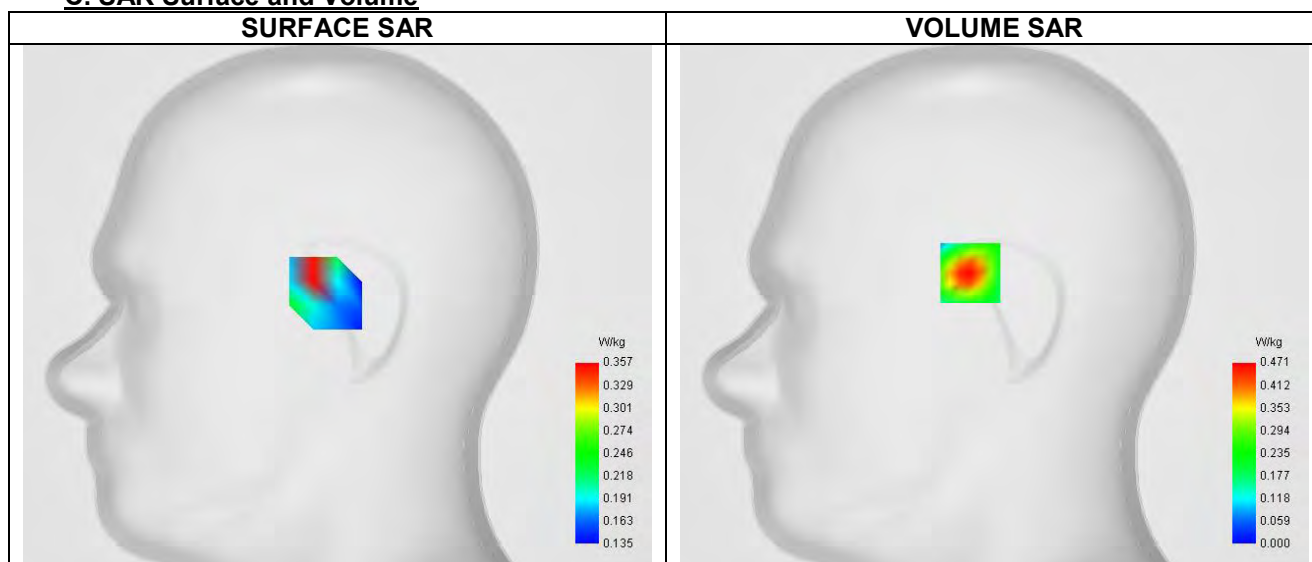


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.241
SAR 1g (W/Kg)	0.555
Variation (%)	1.190
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.421	0.471	0.042	0.000	0.045

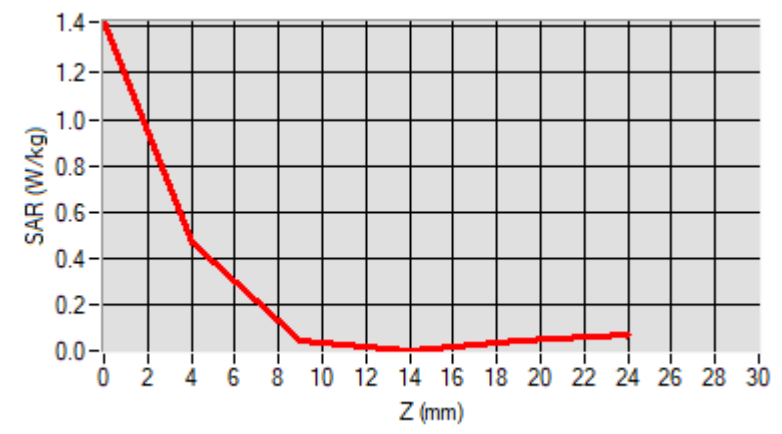

F. 3D Image

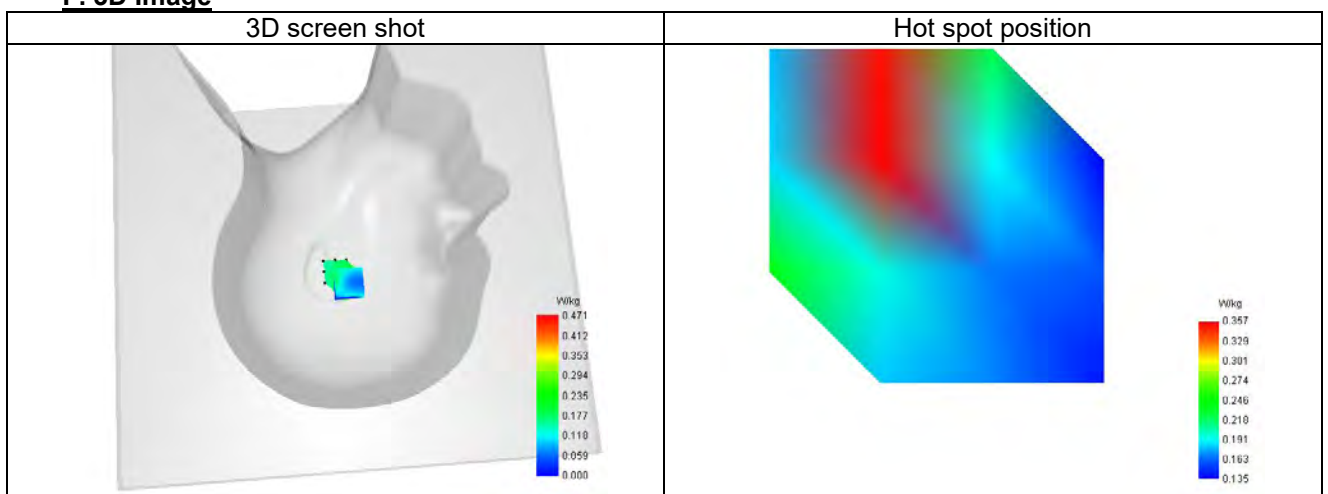

Plot 14


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.96
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	20175
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1732.5
Relative permittivity (real part)	39.470
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.462

C. SAR Surface and Volume

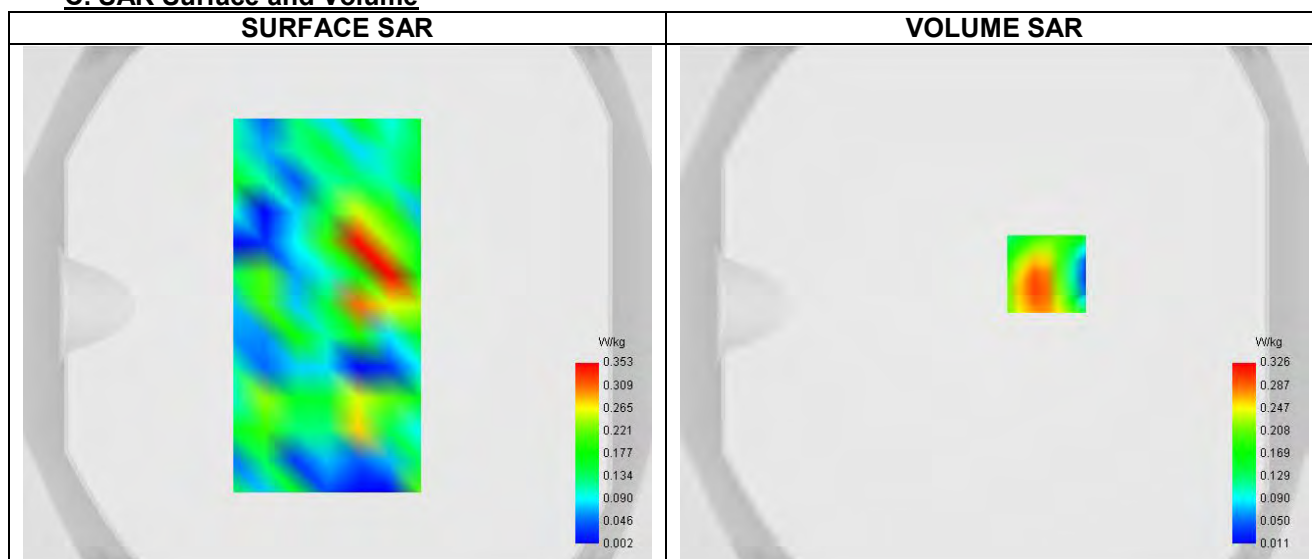


Maximum location: X=20.00, Y=12.00 ; SAR Peak: 0.84 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.353
Variation (%)	-3.860
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.772	0.298	0.060	0.030	0.068

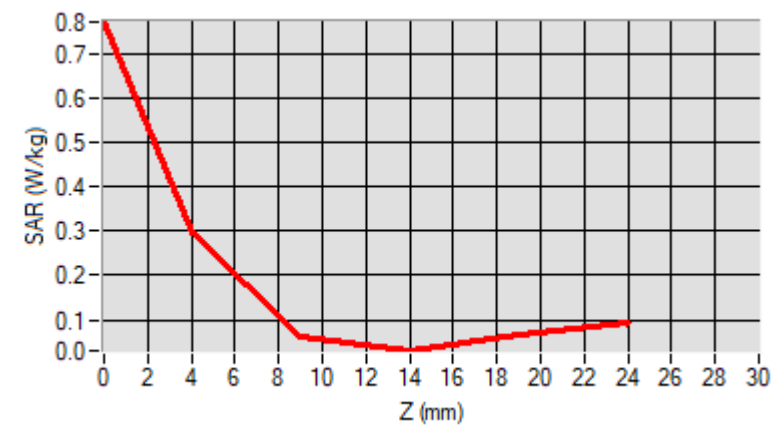

F. 3D Image

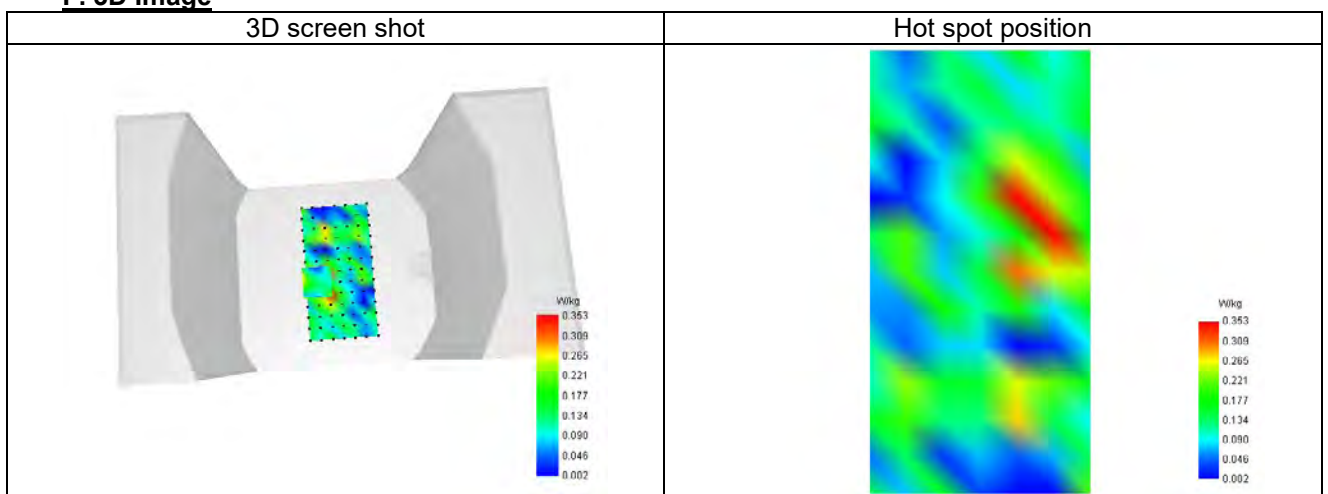

Plot 15


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Channels	20600
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	844
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	20.225
Conductivity (S/m)	0.900

C. SAR Surface and Volume

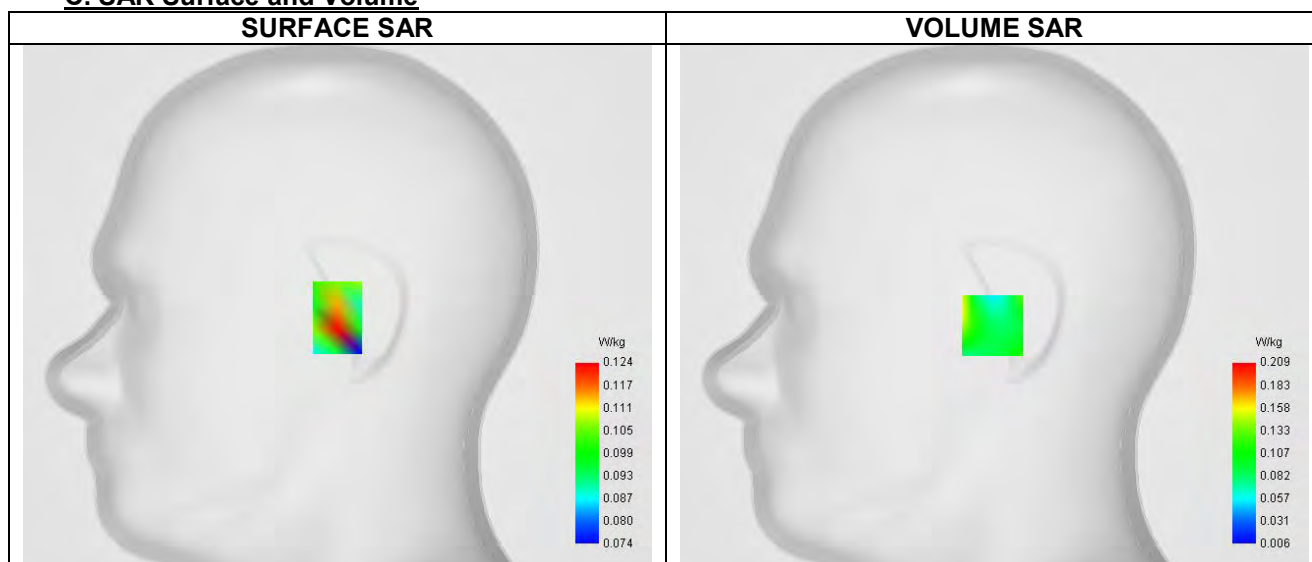


Maximum location: X=-1.00, Y=-10.00 ; SAR Peak: 0.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.132
SAR 1g (W/Kg)	0.148
Variation (%)	-31.720
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.972	0.158	0.180	0.013	0.143

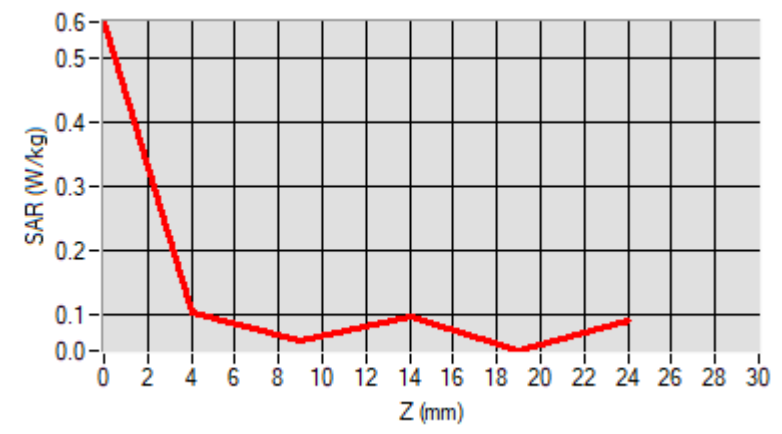

F. 3D Image

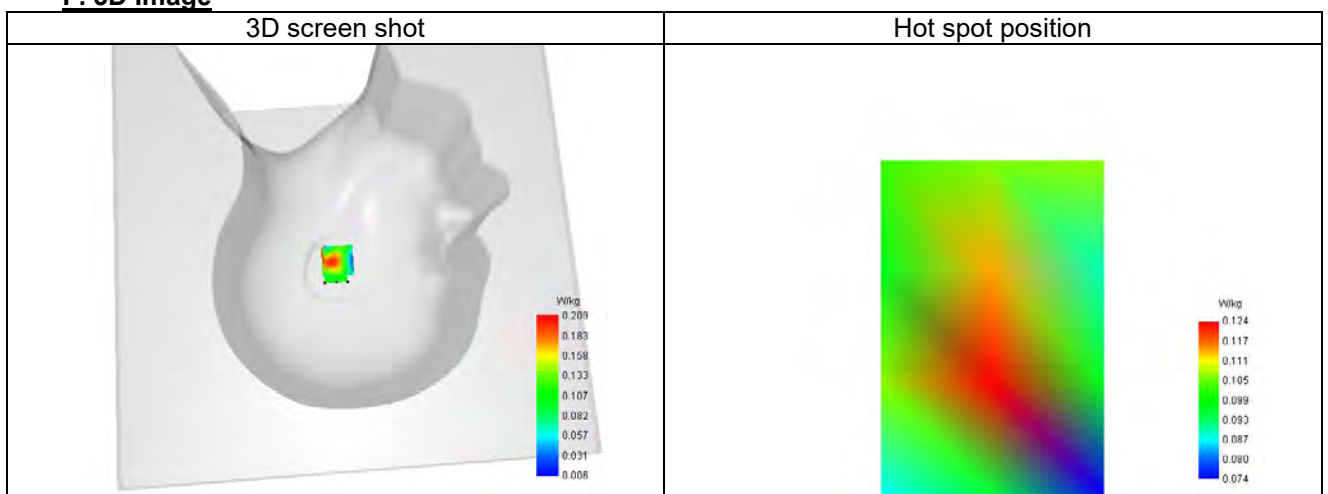

Plot 16


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.81
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	20600
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	844
Relative permittivity (real part)	39.709
Relative permittivity (imaginary part)	20.225
Conductivity (S/m)	0.900

C. SAR Surface and Volume

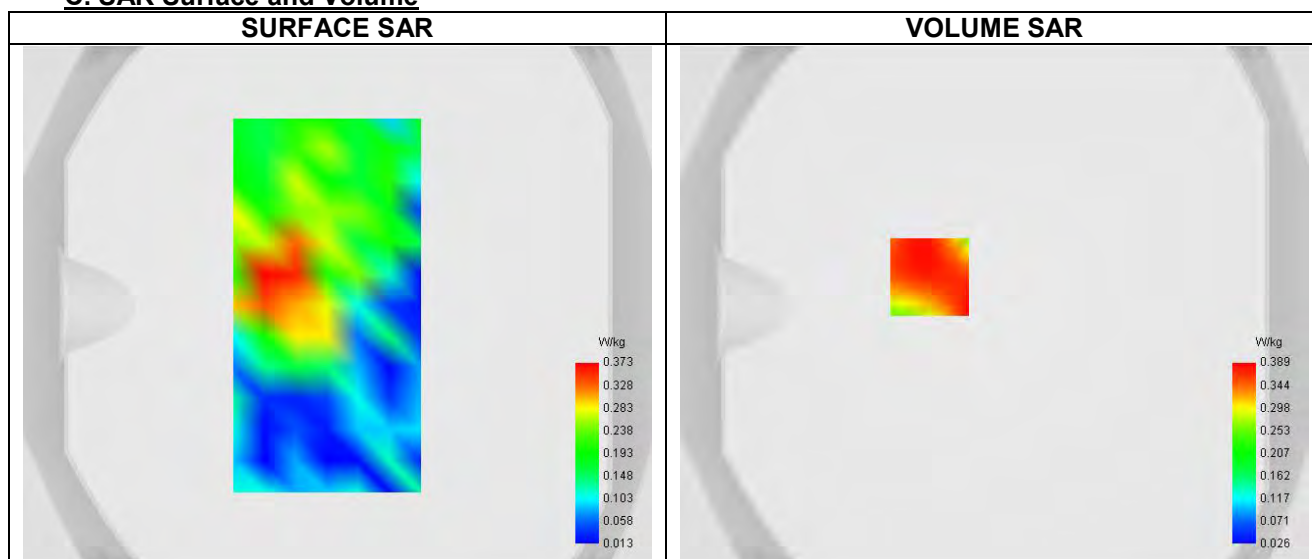


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.260
SAR 1g (W/Kg)	0.426
Variation (%)	0.090
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.813	0.389	0.171	0.239	0.062

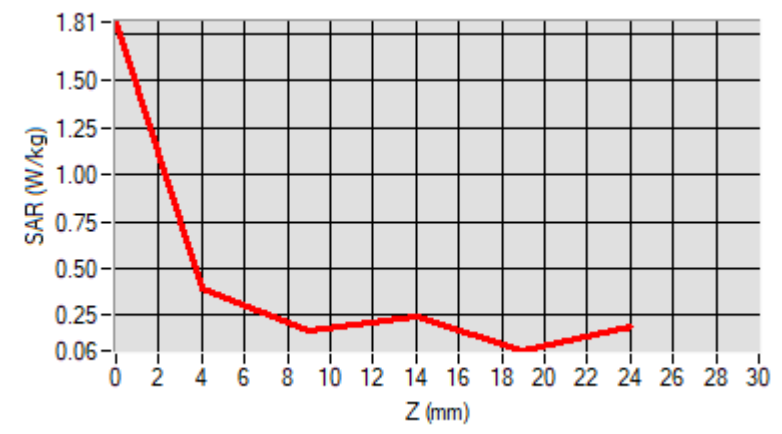

F. 3D Image

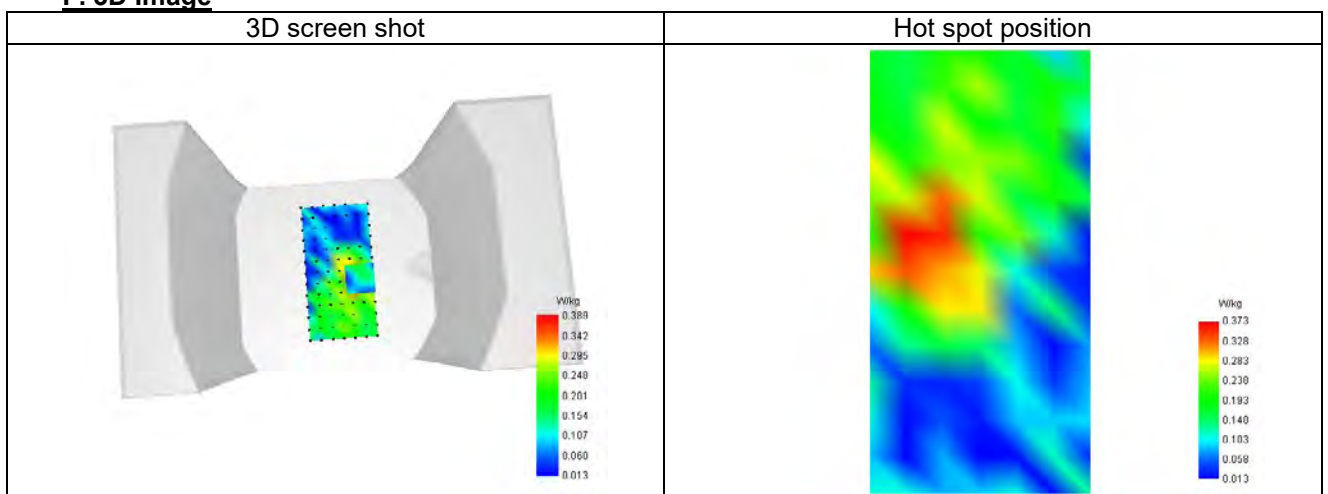

Plot 17


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.11
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	LTE band 7
Channels	21100
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2535
Relative permittivity (real part)	37.536
Relative permittivity (imaginary part)	13.360
Conductivity (S/m)	1.921

C. SAR Surface and Volume

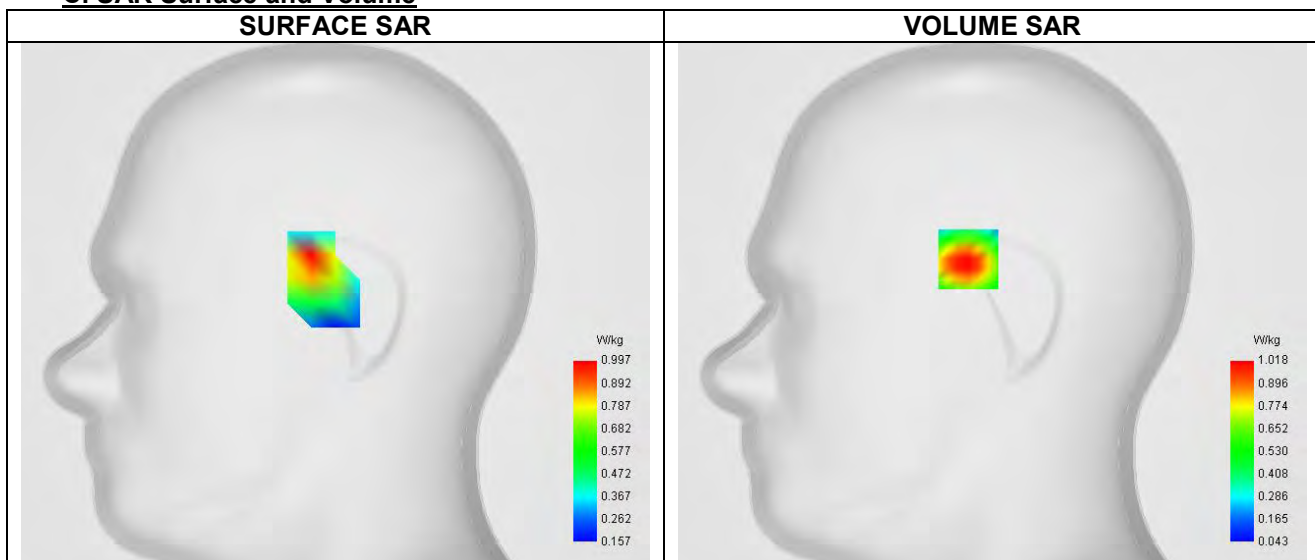


Maximum location: X=-12.00, Y=22.00 ; SAR Peak: 1.59 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.608
SAR 1g (W/Kg)	0.969
Variation (%)	0.670
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.587	1.018	0.608	0.426	0.377

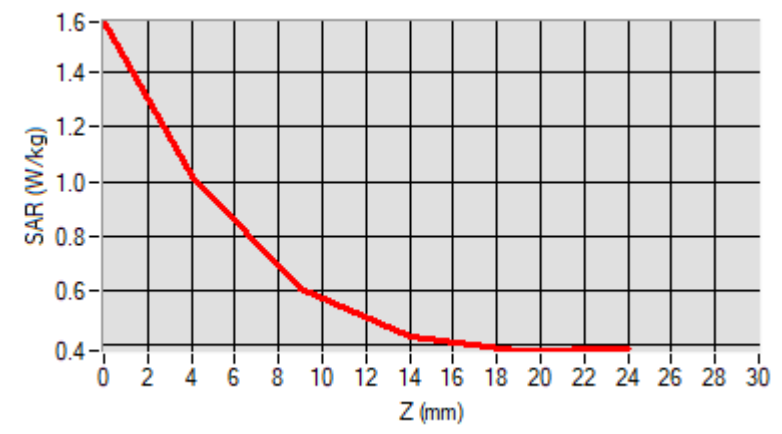

F. 3D Image

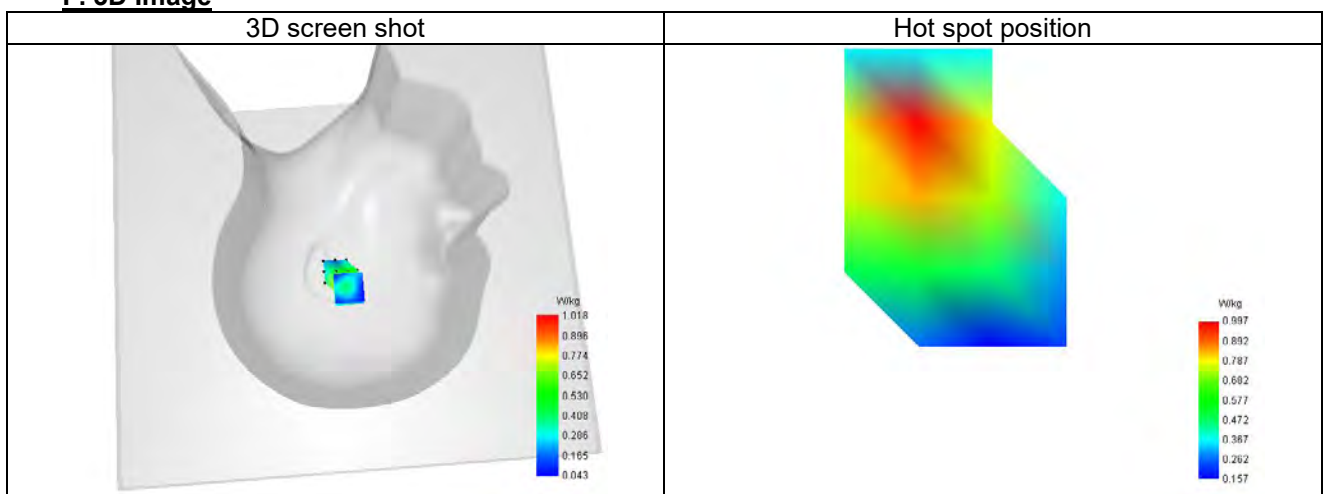

Plot 18


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.03
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	21100
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2535
Relative permittivity (real part)	37.536
Relative permittivity (imaginary part)	13.418
Conductivity (S/m)	1.921

C. SAR Surface and Volume

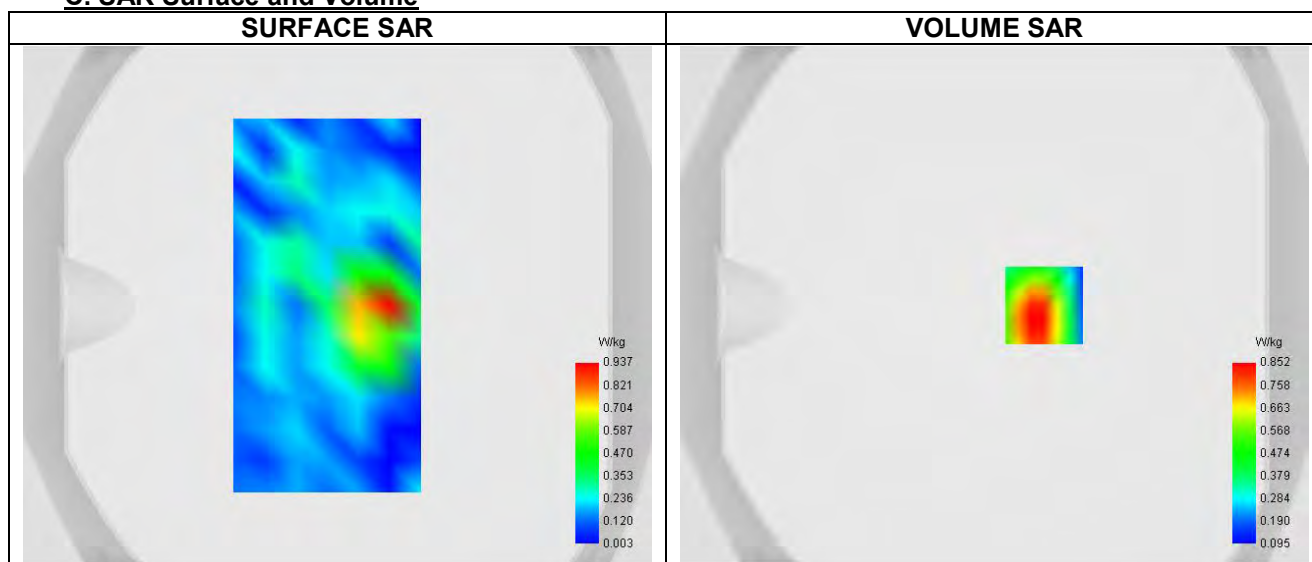


Maximum location: X=19.00, Y=0.00 ; SAR Peak: 1.50 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.470
SAR 1g (W/Kg)	0.831
Variation (%)	0.870
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.380	0.852	0.458	0.280	0.210

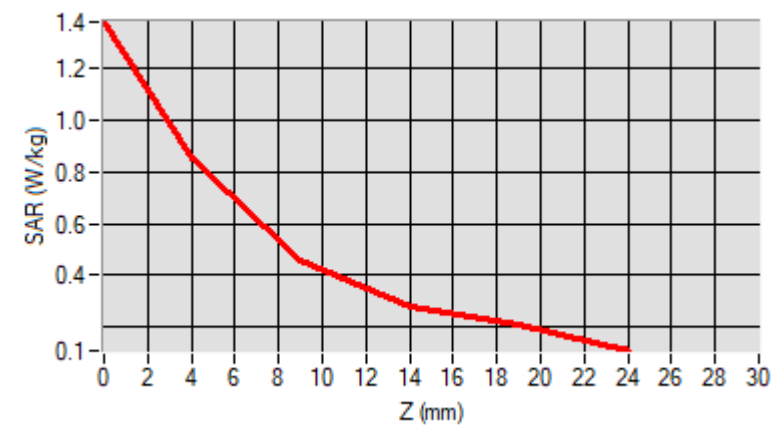

F. 3D Image

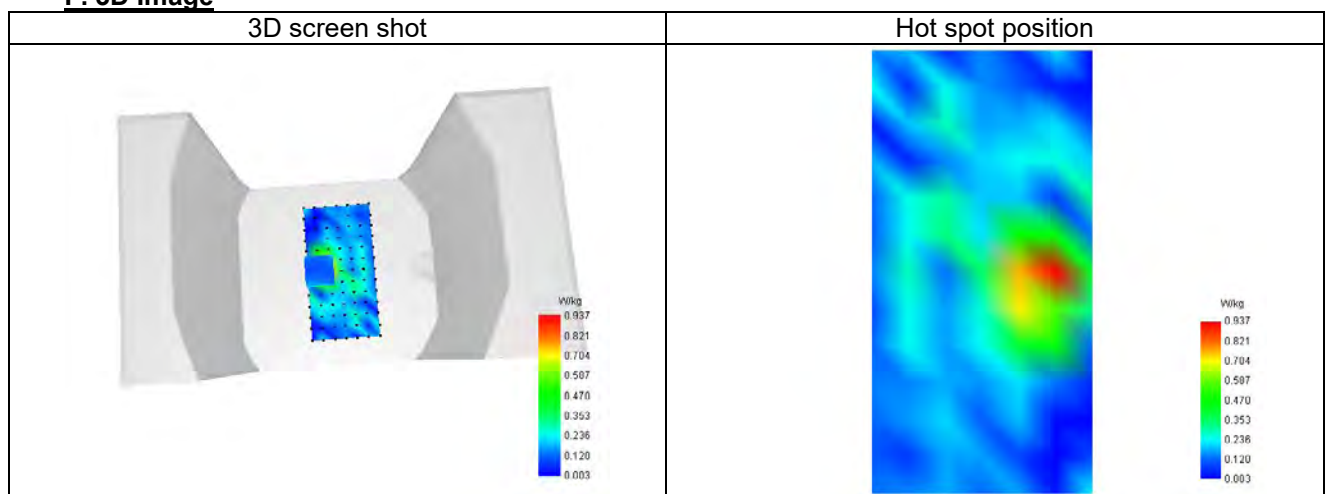

Plot 19


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.80
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Channels	23130
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	711
Relative permittivity (real part)	42.383
Relative permittivity (imaginary part)	23.264
Conductivity (S/m)	0.915

C. SAR Surface and Volume

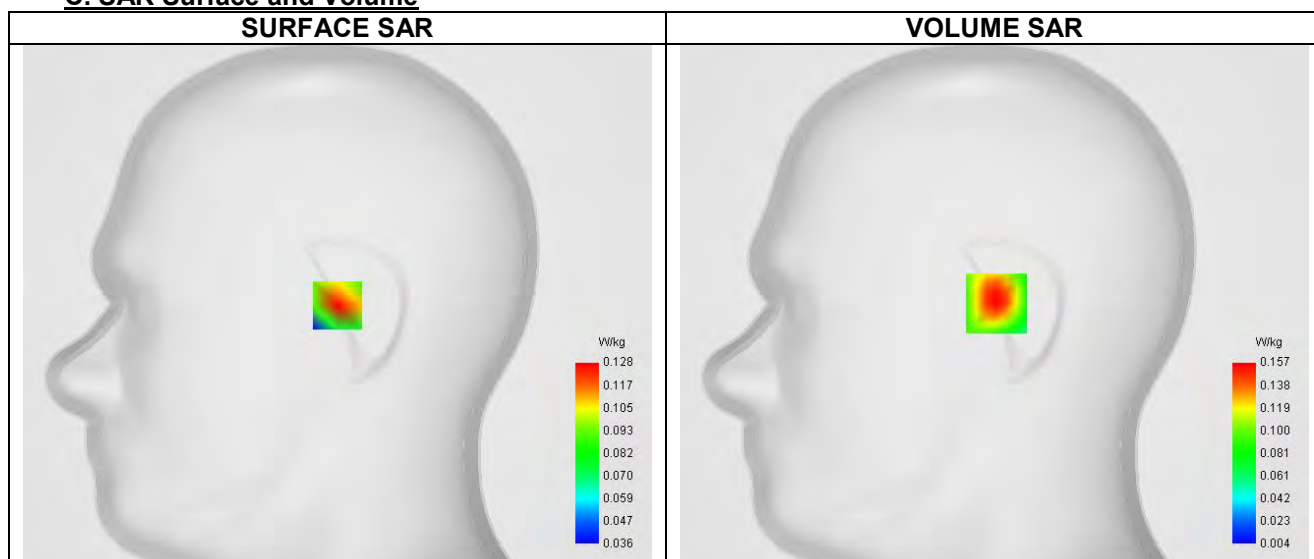


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 0.35 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.172
Variation (%)	-0.880
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.278	0.157	0.080	0.054	0.055

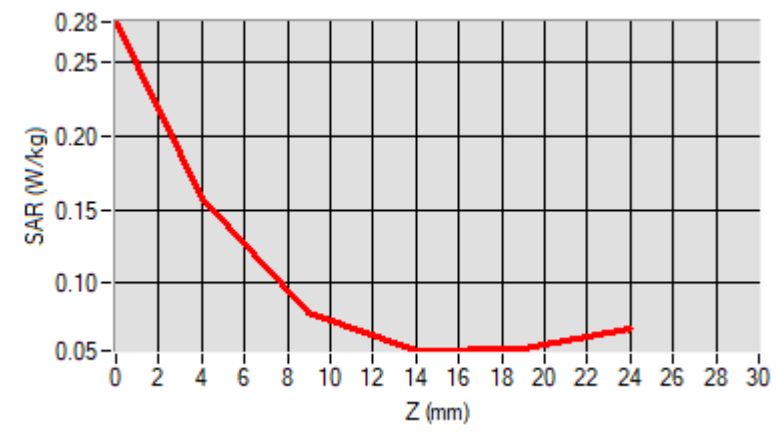

F. 3D Image

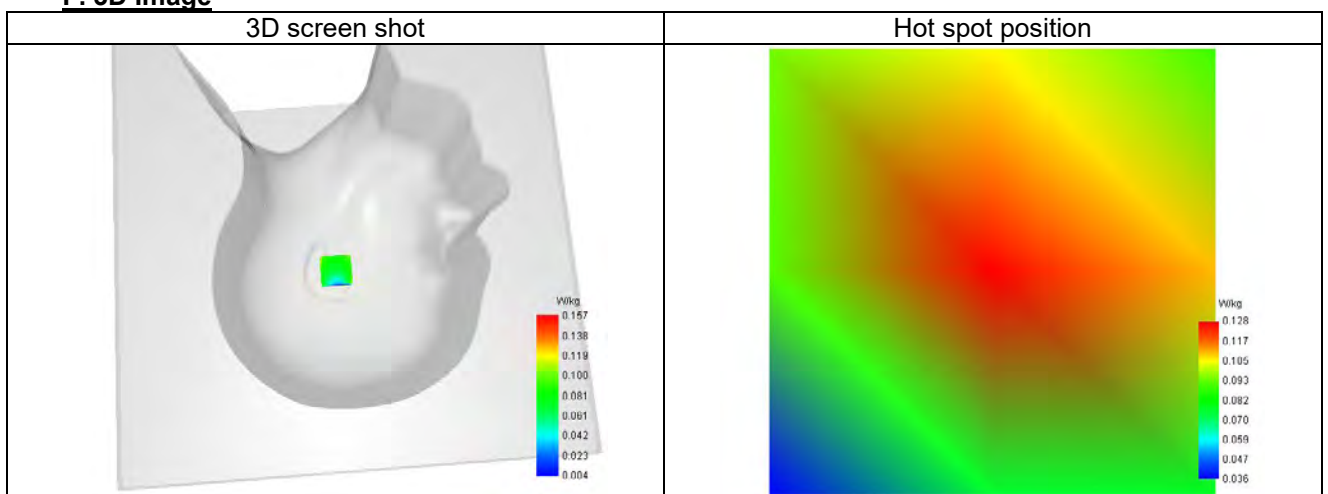

Plot 20


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	23130
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	711
Relative permittivity (real part)	42.383
Relative permittivity (imaginary part)	23.264
Conductivity (S/m)	0.915

C. SAR Surface and Volume

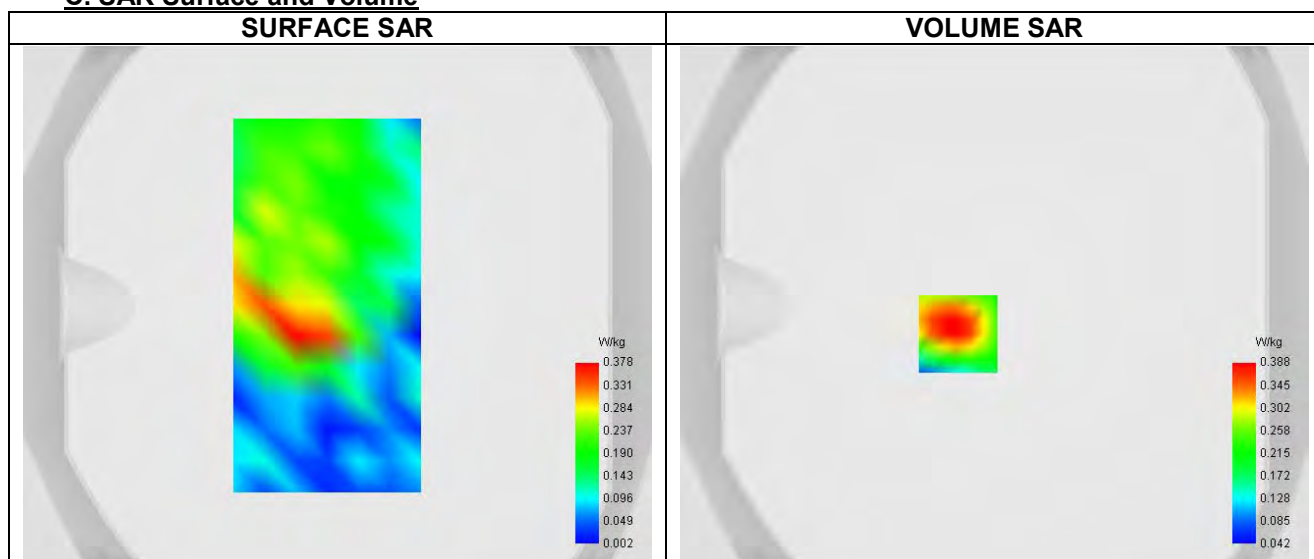


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.250
SAR 1g (W/Kg)	0.386
Variation (%)	-2.460
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.867	0.388	0.236	0.208	0.143

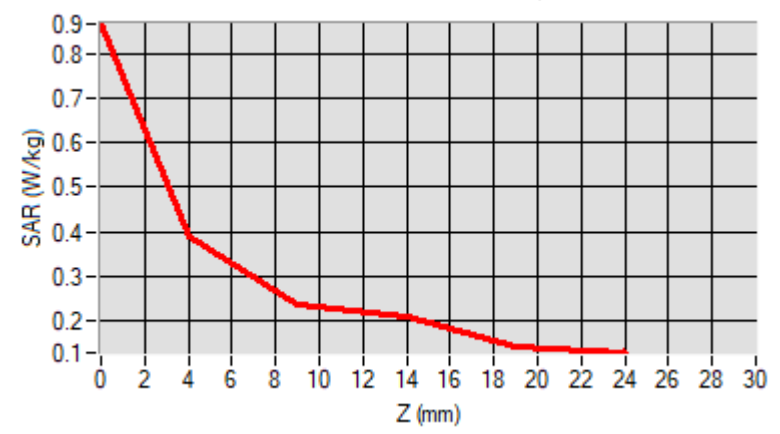

F. 3D Image

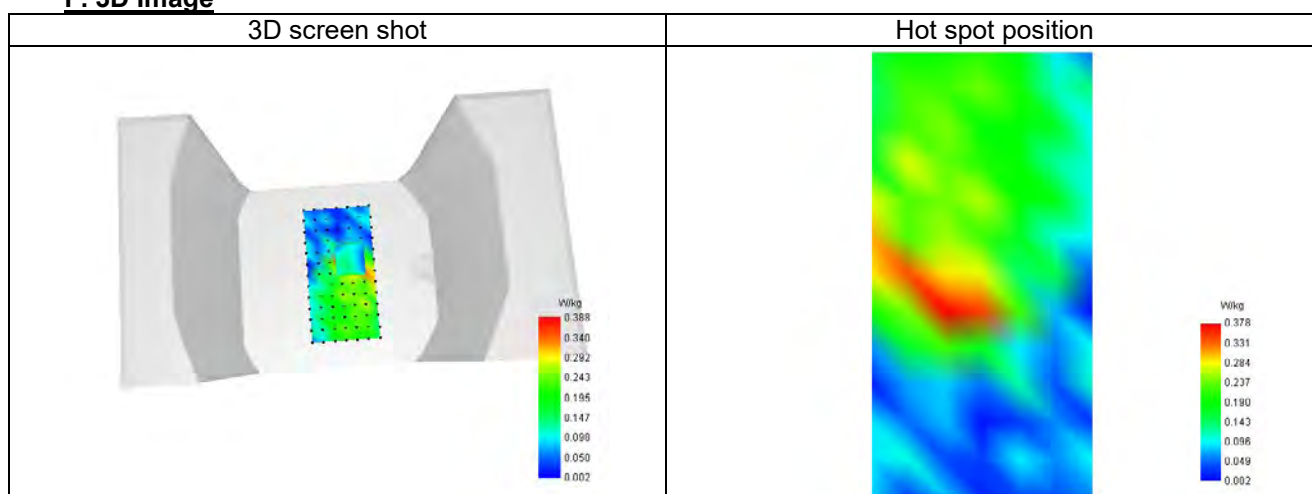

Plot 21


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	0.80
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	LTE band 17
Channels	23800
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	711
Relative permittivity (real part)	42.383
Relative permittivity (imaginary part)	23.152
Conductivity (S/m)	0.915

C. SAR Surface and Volume

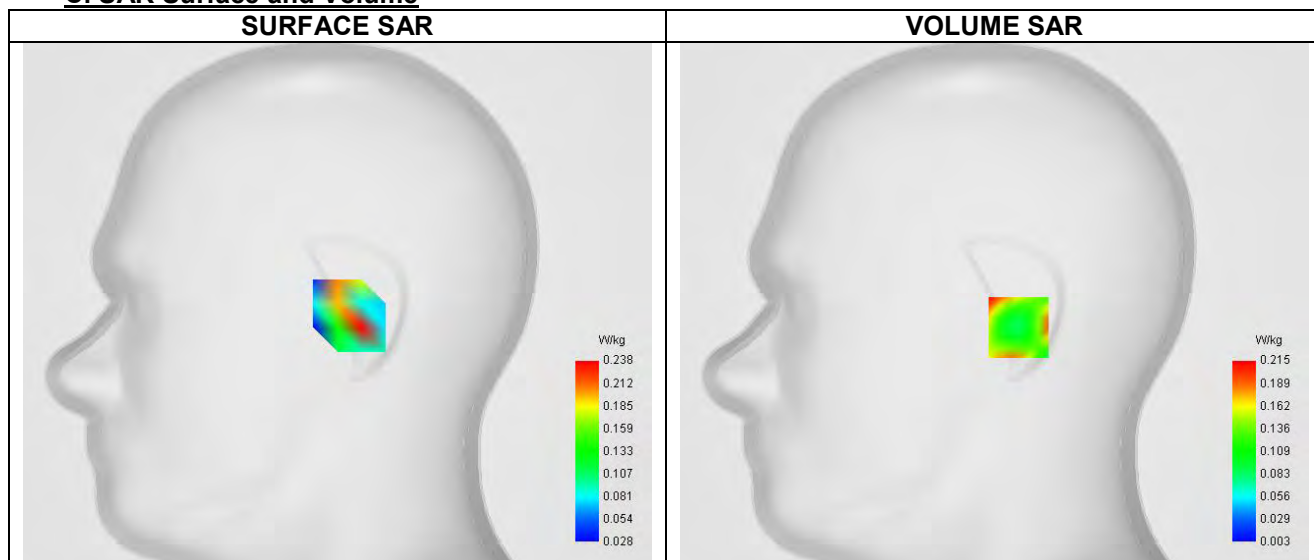


Maximum location: X=12.00, Y=-12.00 ; SAR Peak: 0.55 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.169
Variation (%)	3.460
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.866	0.215	0.033	0.062	0.062

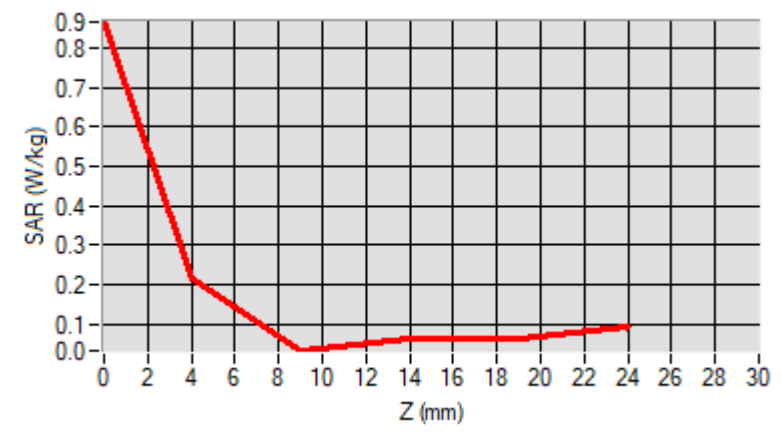

F. 3D Image

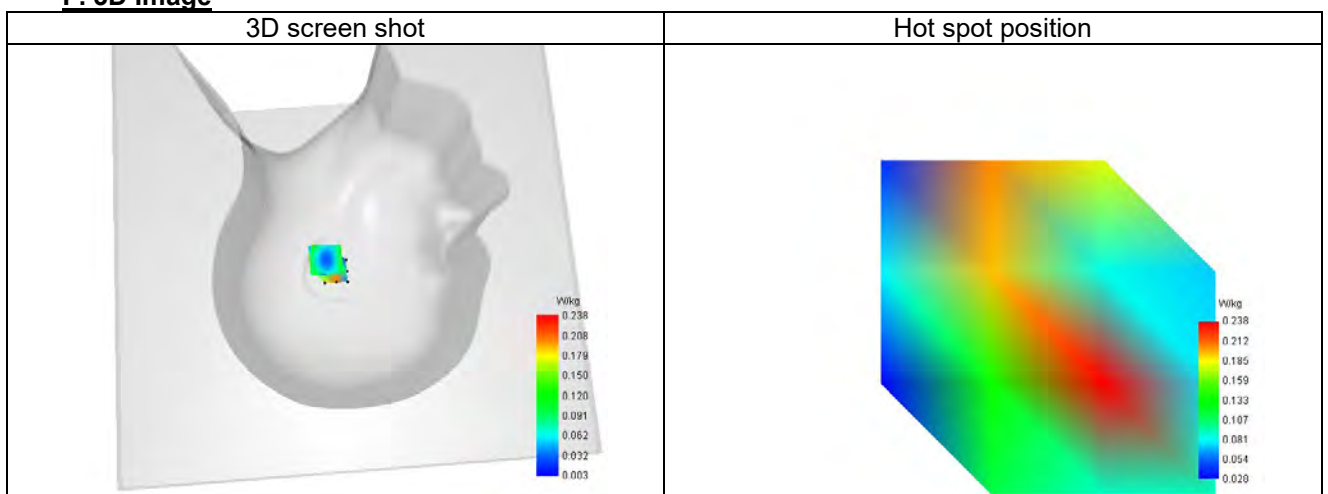

Plot 22


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	0.80
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels	23800
Signal	LTE (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	711
Relative permittivity (real part)	42.383
Relative permittivity (imaginary part)	23.152
Conductivity (S/m)	0.915

C. SAR Surface and Volume

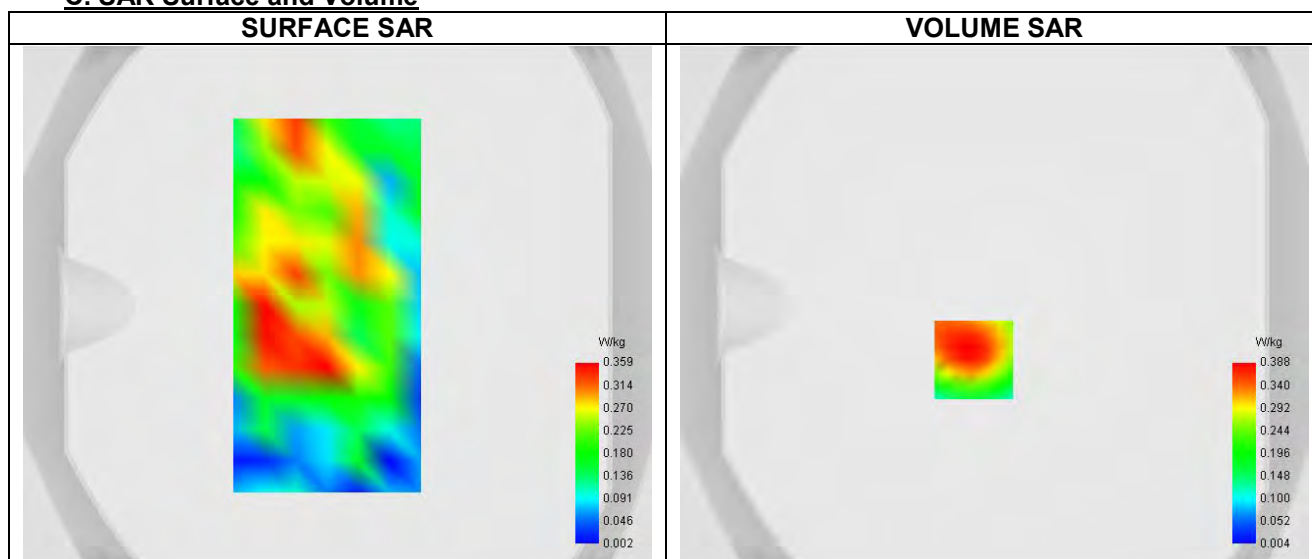


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.241
SAR 1g (W/Kg)	0.381
Variation (%)	-1.520
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.947	0.388	0.198	0.164	0.104

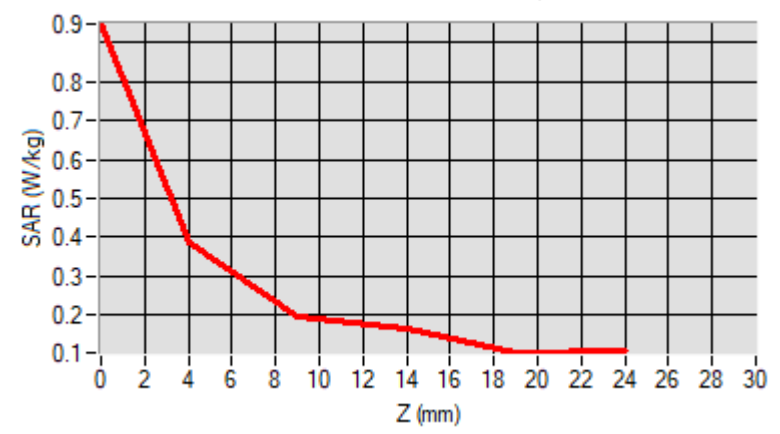

F. 3D Image

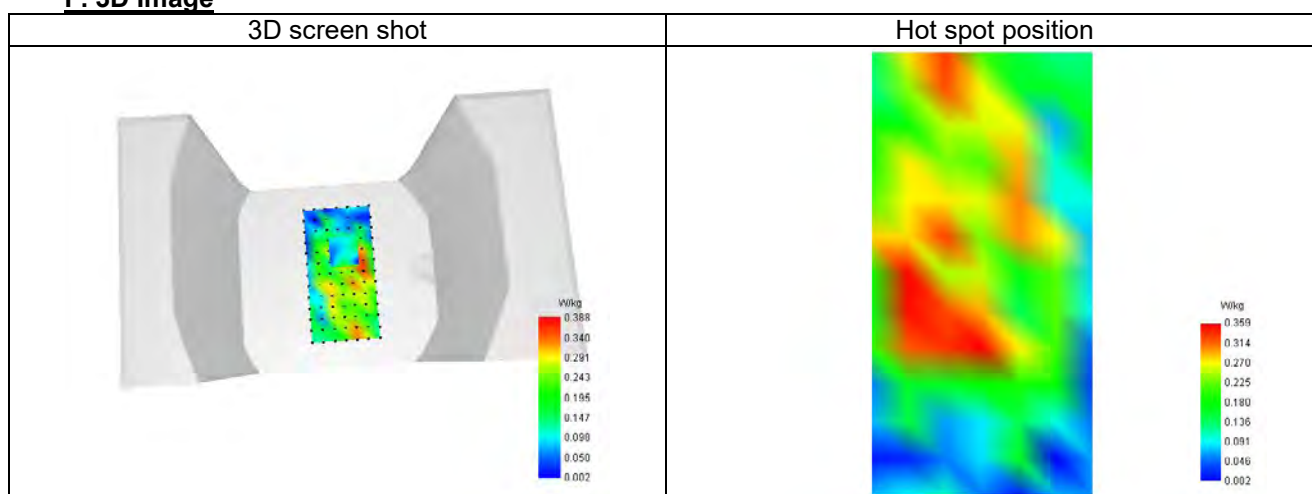

Plot 23


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.11
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Middle (7)
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2437
Relative permittivity (real part)	38.809
Relative permittivity (imaginary part)	13.212
Conductivity (S/m)	1.873

C. SAR Surface and Volume

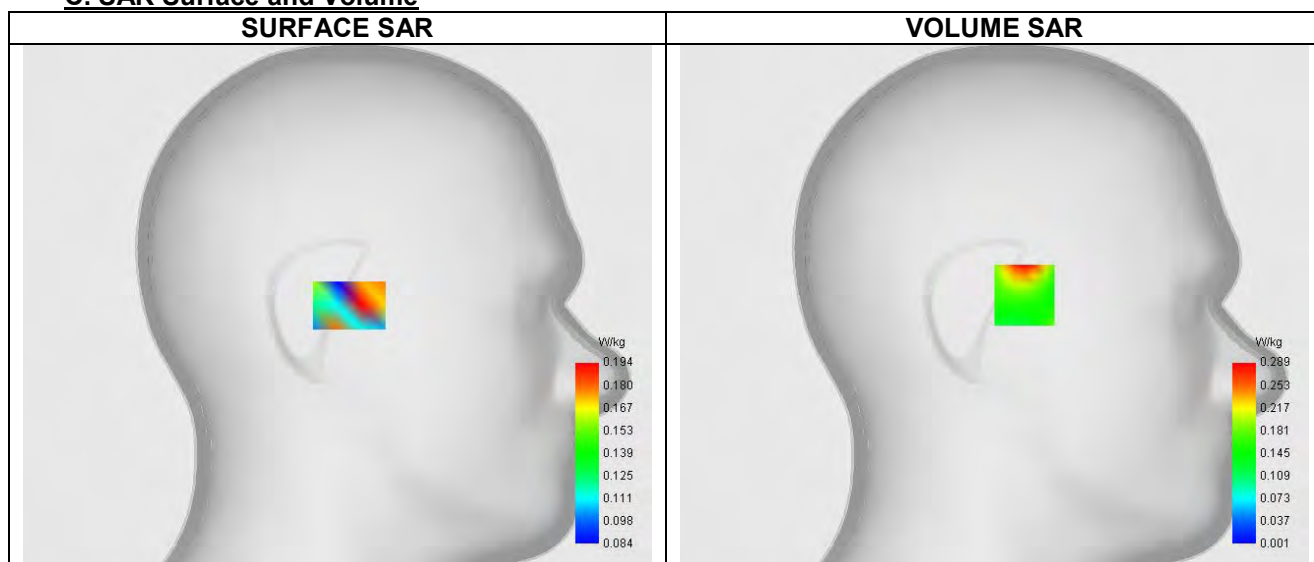


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.247
Variation (%)	-3.800
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.914	0.289	0.012	0.131	0.014

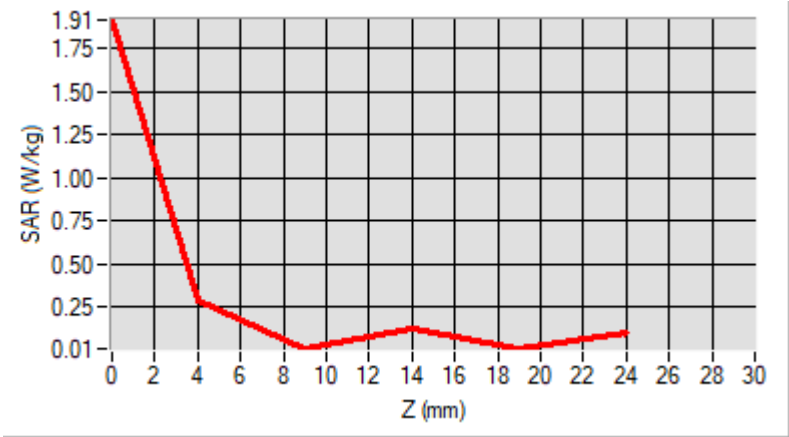

F. 3D Image

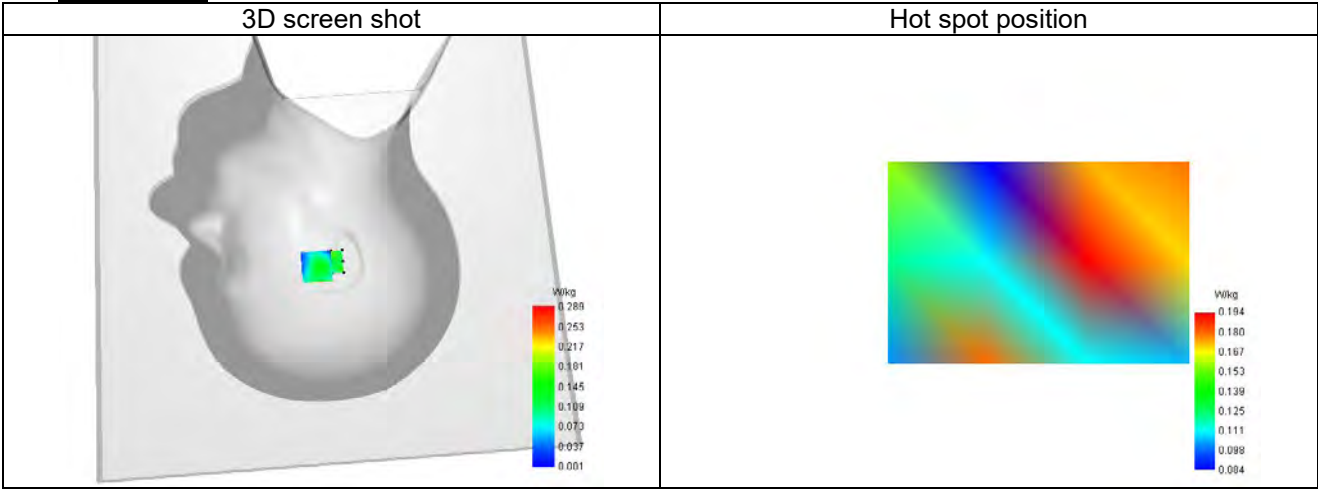

Plot 24


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle (7)
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2437
Relative permittivity (real part)	38.809
Relative permittivity (imaginary part)	13.212
Conductivity (S/m)	1.873

C. SAR Surface and Volume

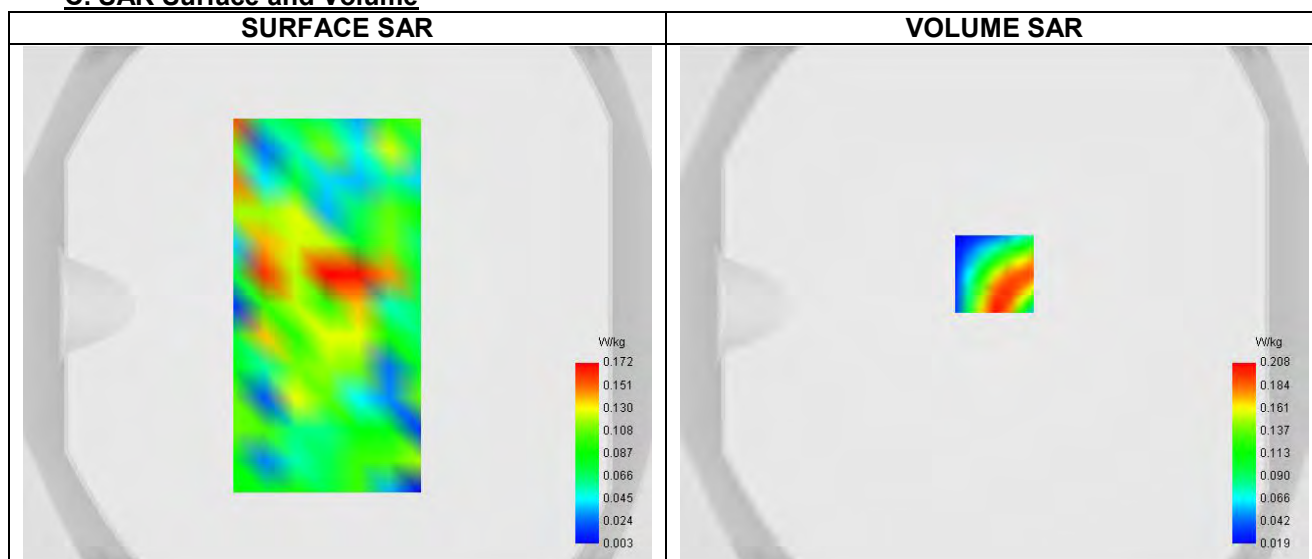


Maximum location: X=0.00, Y=12.00 ; SAR Peak: 0.43 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.202
Variation (%)	-1.730
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.975	0.205	0.027	0.085	0.077

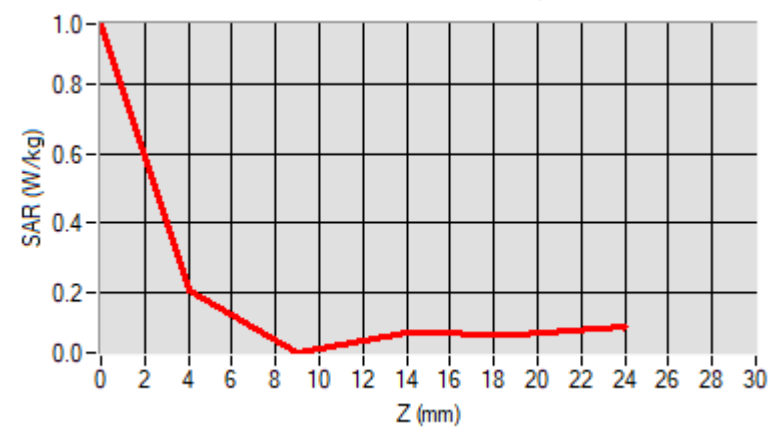

F. 3D Image

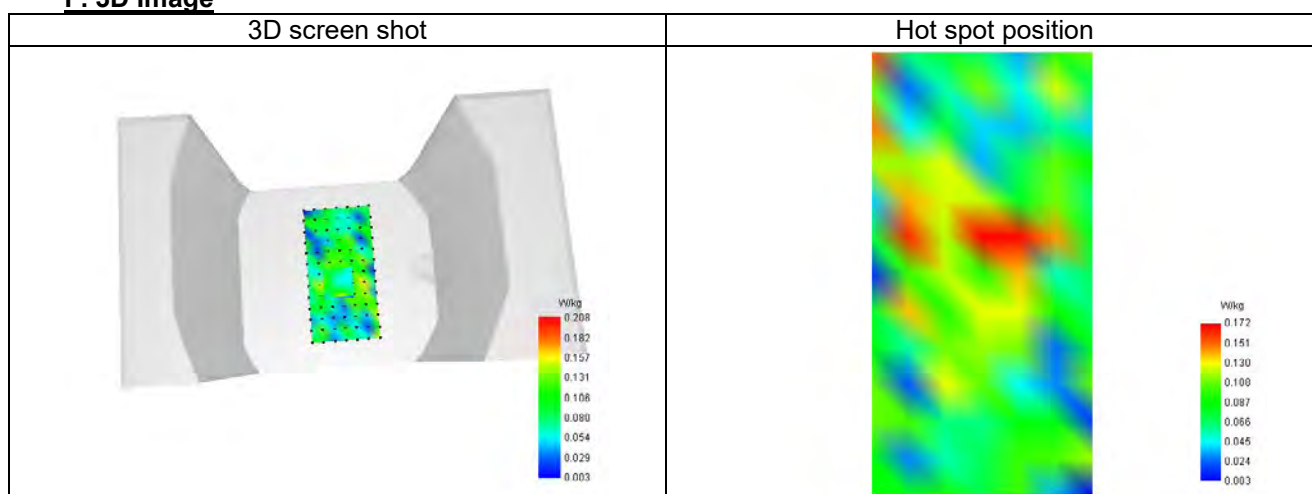

Plot 25


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.18
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x8, dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	5200
Channels	48
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5240
Relative permittivity (real part)	35.333
Relative permittivity (imaginary part)	16.130
Conductivity (S/m)	4.519

C. SAR Surface and Volume

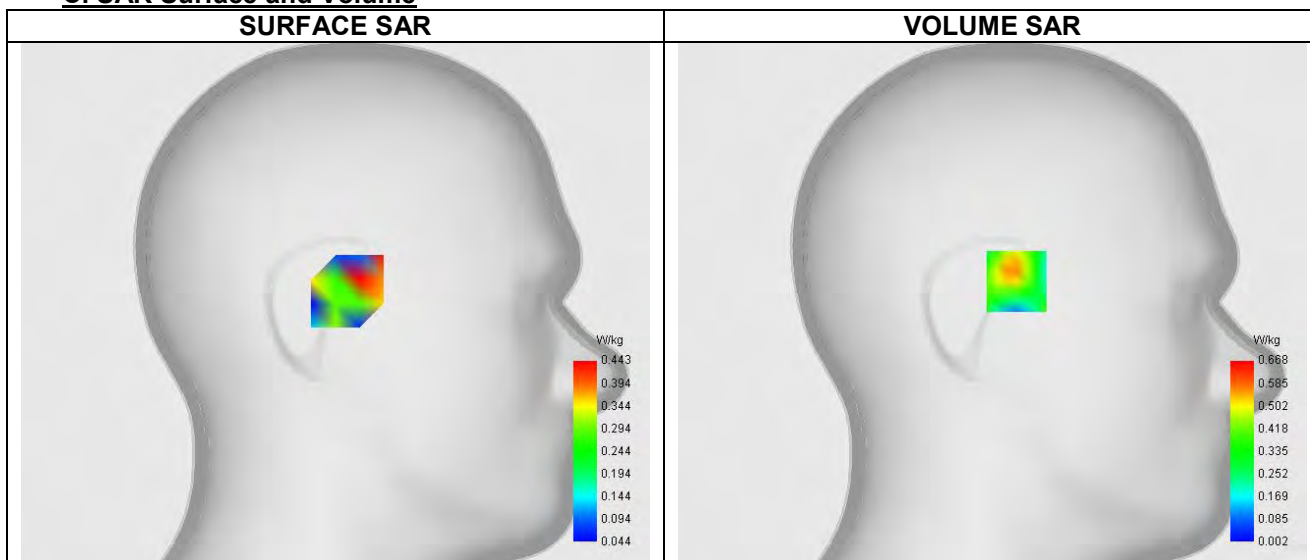


Maximum location: X=-12.00, Y=11.00 ; SAR Peak: 2.65 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.221
SAR 1g (W/Kg)	0.307
Variation (%)	-0.220
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	-1.698	0.563	0.349	0.086	0.409

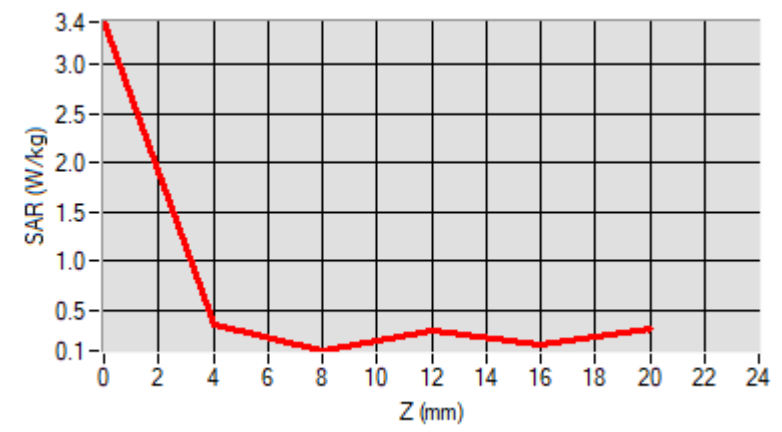

F. 3D Image

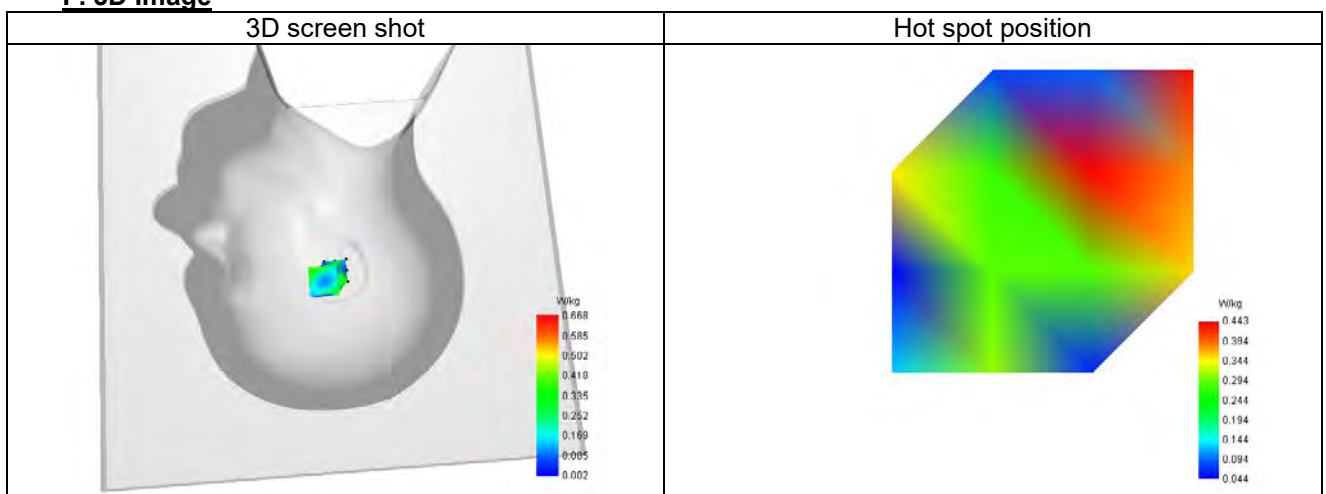

Plot 26


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5200
Channels	48
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5240
Relative permittivity (real part)	35.333
Relative permittivity (imaginary part)	16.119
Conductivity (S/m)	4.519

C. SAR Surface and Volume

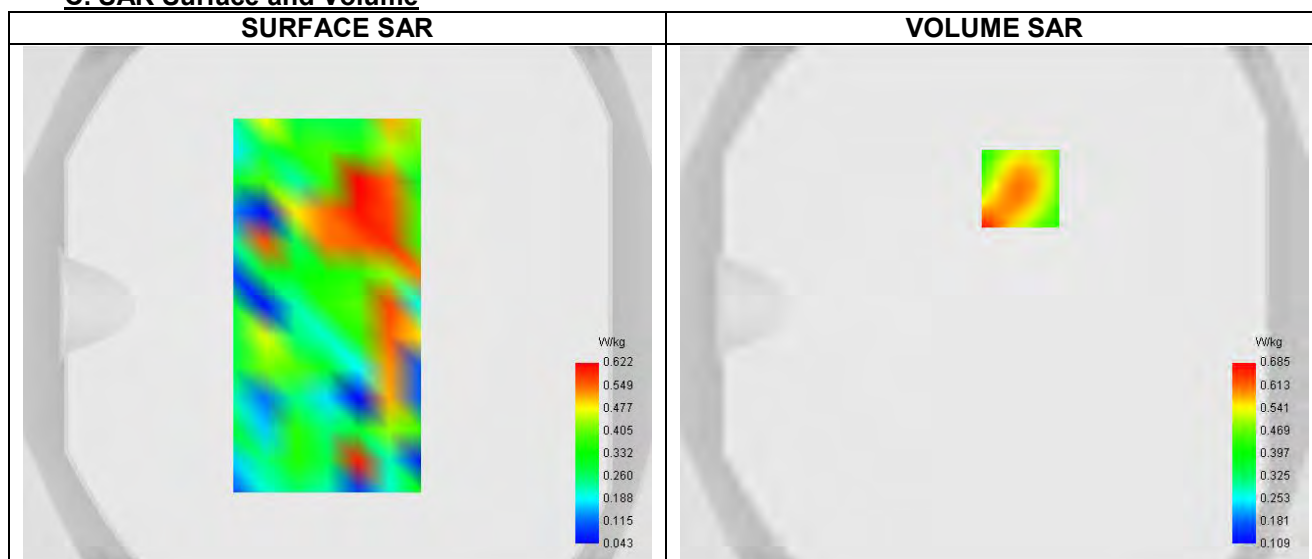


Maximum location: X=10.00, Y=45.00 ; SAR Peak: 0.89 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.297
Variation (%)	-1.060
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	2.829	0.685	0.284	0.308	0.226

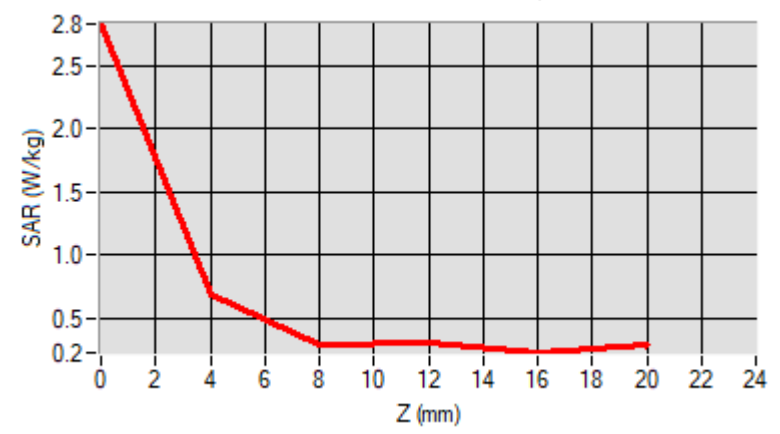

F. 3D Image

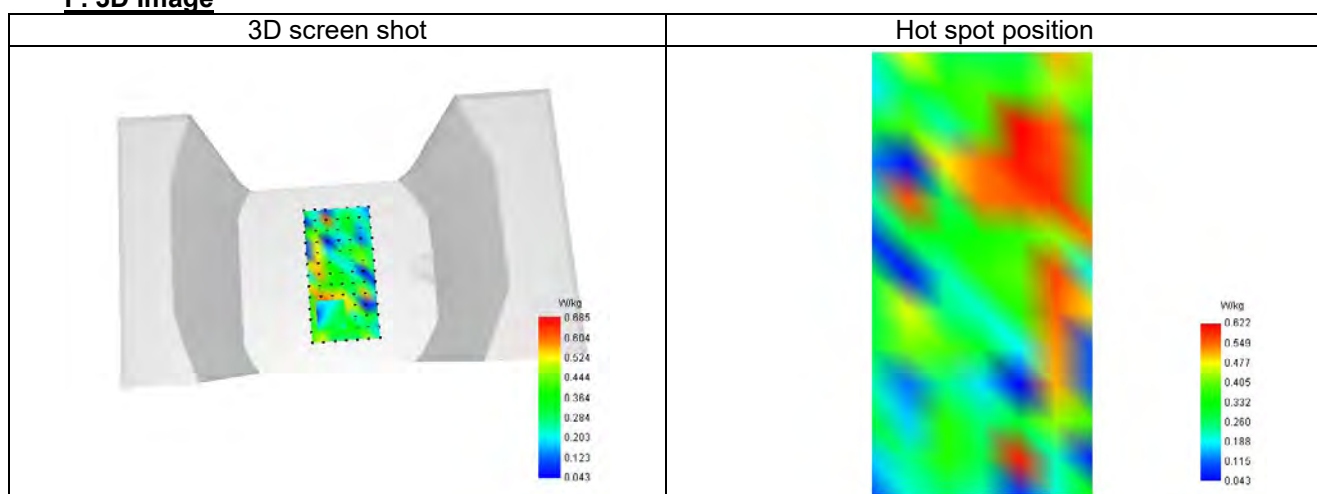

Plot 27


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.15
Area Scan	dx=12mm dy=12mm, Adaptive 1 max
Zoom Scan	7x7x8, dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	5800
Channels	165
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5825
Relative permittivity (real part)	34.349
Relative permittivity (imaginary part)	16.355
Conductivity (S/m)	5.450

C. SAR Surface and Volume

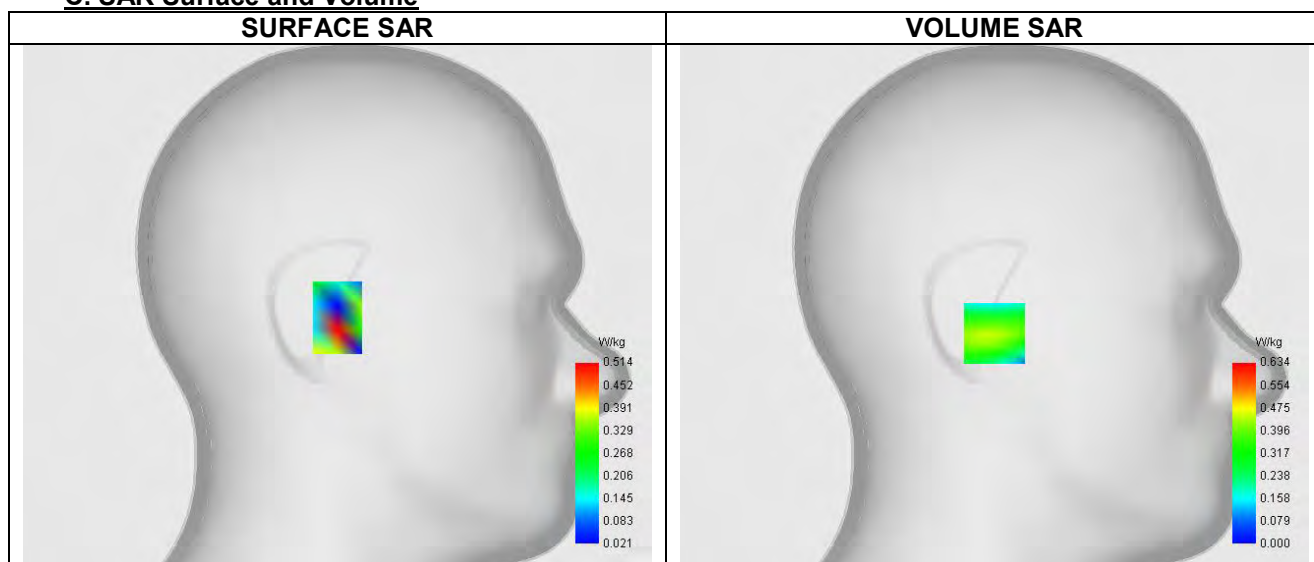


Maximum location: X=0.00, Y=-14.00 ; SAR Peak: 2.35 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.165
SAR 1g (W/Kg)	0.277
Variation (%)	1.910
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	-1.294	0.448	0.428	0.042	0.014

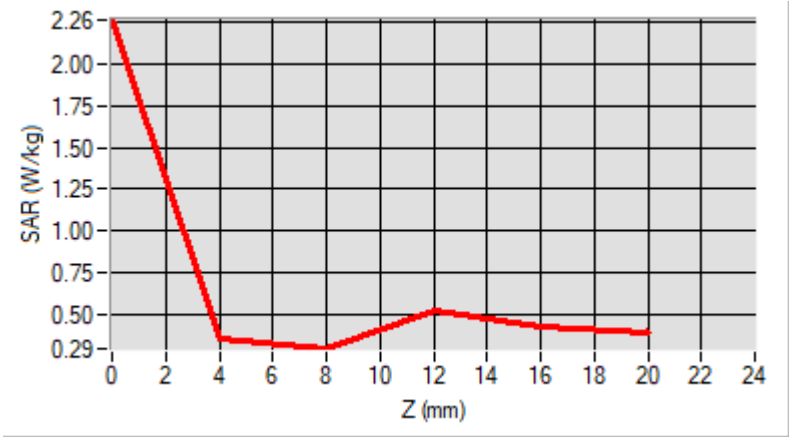

F. 3D Image

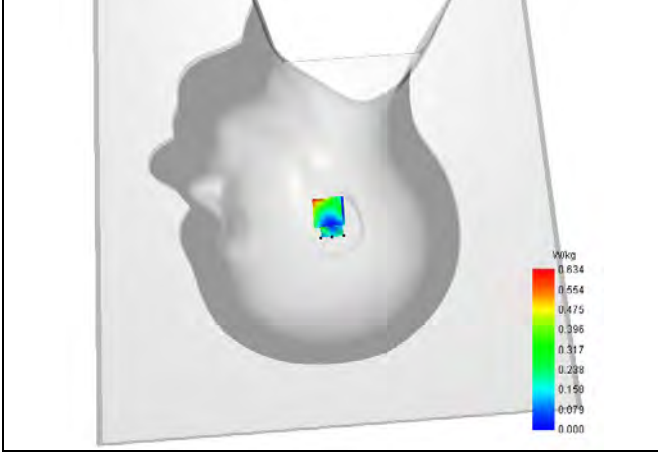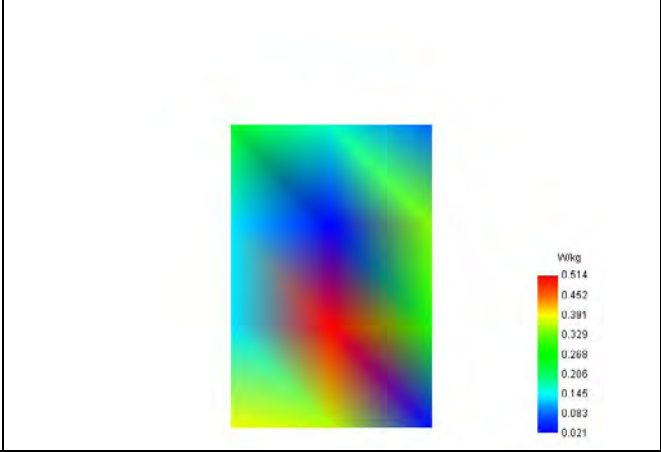3D screen shot	Hot spot position
	

Plot 28


A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5800
Channels	165
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5825
Relative permittivity (real part)	34.349
Relative permittivity (imaginary part)	16.355
Conductivity (S/m)	5.450

C. SAR Surface and Volume

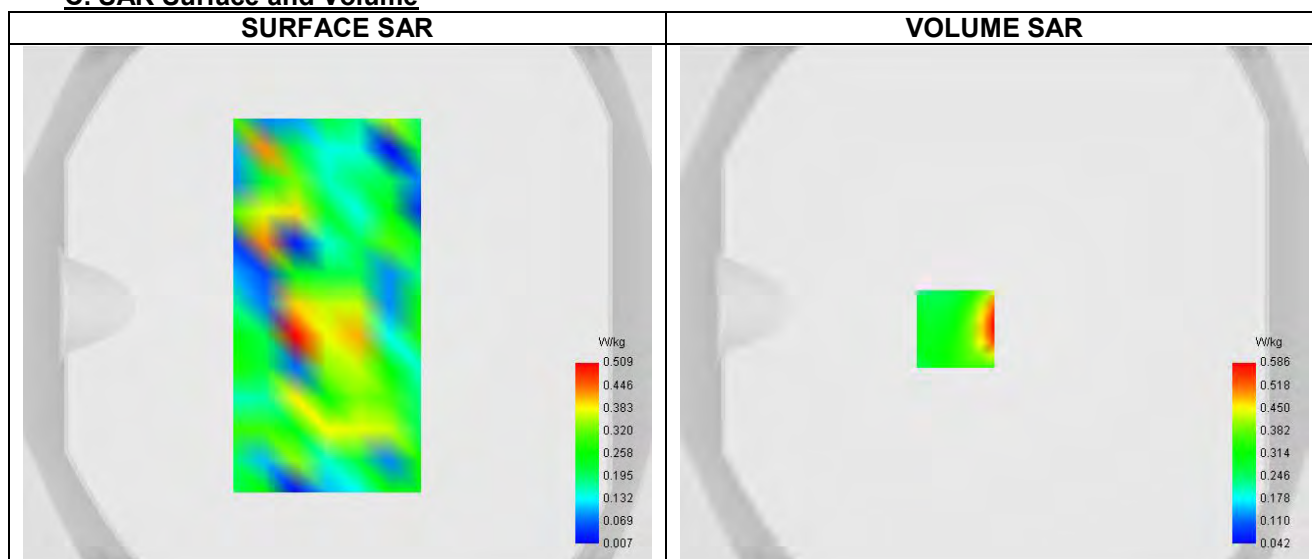

Maximum location: X=-15.00, Y=-9.00 ; SAR Peak: 0.85 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.242
Variation (%)	-1.450
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.645	0.586	0.297	0.204	0.325