




TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr		Report No.: KR24-SPF0027-A Page (1) of (122)	KCTL
1. Client ◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2024-09-11			
2. Use of Report : Class II Permissive Change			
3. Name of Product and Model : WLAN and BT, 2X2 PCIe M.2 1216 adapter card ◦ Model Number : BE201D2W ◦ Manufacturer and Country of Origin : Intel Corporation SAS / FRANCE			
4. Host Product Name : Notebook PC ◦ Host Model Name : NP750QHA ◦ Manufacturer : Samsung Electronics Co., Ltd.			
5. FCC ID : A3LBE201D			
6. Date of Test : 2024-09-23 ~ 2024-09-27			
7. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)			
8. Test Standards : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication			
9. Test Results : Refer to the test result in the test report			
Affirmation	Tested by Name : Mungi Jeong (Signature)		Technical Manager Name : Jongwon Ma (Signature)
			2024-11-04
<p align="center">Eurofins KCTL Co.,Ltd.</p> <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.</p>			

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (2) of (122)	
---	---	---

REPORT REVISION HISTORY

Date	Revision	Page No
2024-10-25	Originally issued	-
2024-11-04	Updated Ch.13 of WLAN 2.4 GHz	8~11

Note: The Report No. KR24-SPF0027 is superseded by the report No. KR24-SPF0027-A

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:



Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

1. Identification when information is provided by the customer: Information marked " # " is provided by the customer. - Disclaimer: This information is provided by the customer and can affect the validity of results.

CONTENTS

1.	General information.....	4
2.	Device information	5
3.	Specific Absorption Rate	14
4.	SAR Measurement Procedures.....	15
5.	SAR Measurement Configurations.....	16
6.	RF Exposure Limits	17
7.	FCC SAR General Measurement Procedures.....	18
8.	RF Average Conducted Output Power.....	21
9.	System Verification	24
10.	SAR Test Results	26
11.	Simultaneous Transmission	30
12.	SAR Measurement Variability.....	38
13.	Measurement Uncertainty.....	39
14.	Test Equipment Information	40
15.	Test System Verification Results	41
16.	Test Results	45
	Appendixes List.....	68
	Appendix A. Calibration certificate	69
	Appendix B. SAR Tissue Specification.....	106
	Appendix C. Power Reduction Verification	107
	Appendix D. #Antenna Location & Distance	115
	Appendix E. EUT Photo	116
	Appendix F. Test Setup Photo.....	117
	End of test report	122

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (4) of (122)	 
---	---	---

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of Eurofins KCTL Co.,Ltd. Wireless lab or testing done by Eurofins KCTL Co.,Ltd. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by Eurofins KCTL Co.,Ltd. Wireless lab.

2. Device information

2.1 Basic description

Product	Name	WLAN and BT, 2X2 PCIe M.2 1216 adapter card
	Model Number	BE201D2W
	Manufacturer	Intel Corporation SAS
Host	Product Name	Notebook PC
	Model Name	NP750QHA
	Derivative Model	NP754QHA, NP750QHZ
	Manufacturer	Samsung Electronics Co., Ltd.
Host Product Serial Number	Radiation	1S7D91ZX800030X
	Conduction	1S7D91ZX800017H
Mode of Operation		WLAN 802.11a,b,g,n,ac,ax,be, Bluetooth
Device Overview		WLAN 2.4 GHz: 2 412.0 MHz ~ 2 472.0 MHz U-NII-1: 5 180.0 MHz ~ 5 240.0 MHz U-NII-2A: 5 260.0 MHz ~ 5 320.0 MHz U-NII-2C: 5 500.0 MHz ~ 5 720.0 MHz U-NII-3: 5 745.0 MHz ~ 5 825.0 MHz U-NII-4: 5 845.0 MHz ~ 5 885.0 MHz Bluetooth: 2 402.0 MHz ~ 2 480.0 MHz
TDWR Information		5.60 GHz ~ 5.65 GHz band (TDWR) is supported by the device.

2.1.1 Differences from Derivative Models

The difference between Main model and Derivative model is as below.


Main model	NP750QHA
Derivative model	NP754QHA, NP750QHZ
Differences	Marketing and logistic difference

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported
		1g SAR (W/kg)
WLAN 2.4 GHz	DTS	1.12
U-NII-1	NII	1.39
U-NII-2A	NII	1.29
U-NII-2C	NII	1.29
U-NII-3	NII	0.75
U-NII-4	NII	0.85
Bluetooth	DSS/DTS	0.60
Simultaneous SAR per KDB 690783 D01v01r03		1.53

2.3 #Antenna information

Antenna Type		PIFA antenna					
Band		WLAN 2.4 GHz / Bluetooth	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-4
Peak gain (dBi)	Main	-1.08	3.50	3.71	3.47	4.68	4.68
	Aux	-1.03	3.59	3.73	3.66	2.73	2.55

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (7) of (122)	 KCTL
---	---	---


2.4 Power Reduction for SAR

This device utilizes a power reduction mechanism for wireless modes and bands for SAR compliance under some conditions when the device is being used in close proximity to the user's hand. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in Tablet use conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

2.5 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.

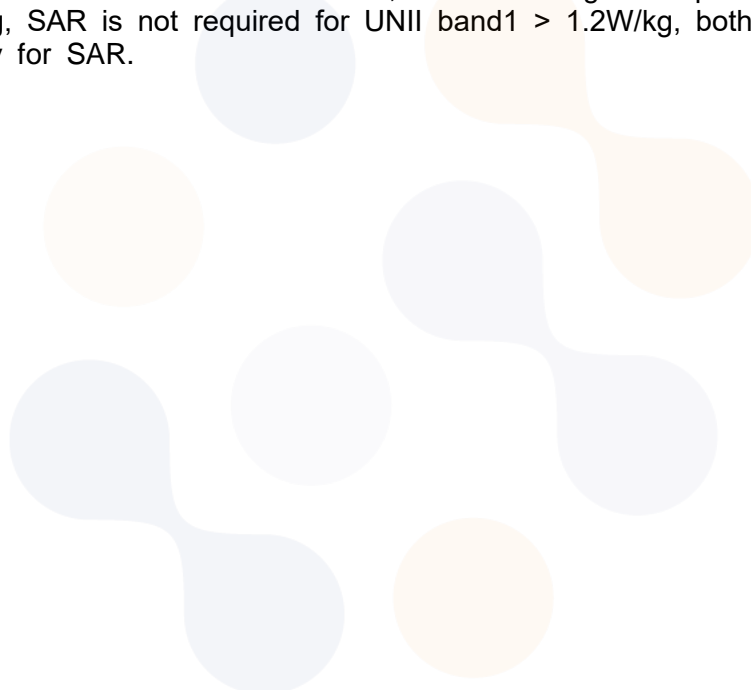



2.5.1 #Maximum WLAN Output Power



2.5.2 #Maximum WLAN Output Power (Notebook Mode)

The Power-Back off of this model supports only the Main/MIMO antenna in Notebook mode.

Band	Ant.	Mode	Channel	Output Power(dBm)			
				Max Power (Normal)		Back-off Power (Grip Sensor)	
				Target	Max. Allowed	Target	Max. Allowed
WLAN 2.4 GHz	SISO (Main)	802.11b	Except Ch.	18.00	19.00	11.00	12.00
			13	13.00	14.00		
		802.11g	Except Ch.	18.00	19.00	11.00	12.00
			12	15.50	16.50		
			13	9.00	10.00		
		802.11n20	Except Ch.	18.00	19.00	11.00	12.00
			1	14.00	15.00		
			2	15.25	16.25		
			3,8,9	17.00	18.00		
			4	17.75	18.75		
			10	16.00	17.00		
			11	14.75	15.75		
			12	15.50	16.50		
			13	9.00	10.00		
		802.11n40	Except Ch.	18.00	19.00	11.00	12.00
			10	14.00	15.00		
			11	13.00	14.00		
		802.11ax SU(20 MHz)	Except Ch.	18.00	19.00	11.00	12.00
			1	14.25	15.25		
			6	16.875	17.875		
			11	14.75	15.75		
			12	15.50	16.50		
			13	9.00	10.00		
		802.11ax SU(40 MHz)	Except Ch.	18.00	19.00	11.00	12.00
			4,9	17.75	18.75		
			10	14.00	15.00		
			11	13.00	14.00		
		802.11be SU(20 MHz)	Except Ch.	18.00	19.00	11.00	12.00
			12	15.50	16.50		
			13	9.00	10.00		
		802.11be SU(40 MHz)	Except Ch.	18.00	19.00	11.00	12.00
			10	14.00	15.00		
			11	13.00	14.00		
	SISO (Aux)	802.11g,n(HT20), 802.11ax/be SU(20 MHz)	Except Ch.	12.00	13.00	Not supported	
			13	9.00	10.00		
		802.11b,n(HT40), 802.11ax/be SU(40 MHz)	ALL	12.00	13.00		

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (9) of (122)	 
---	---	---

Band	Ant.	Mode	Channel	Output Power(dBm)			
				Max Power (Normal)		Back-off Power (Grip Sensor)	
				Target	Max. Allowed	Target	Max. Allowed
WLAN 2.4 GHz	MIMO (Main, Aux)	802.11n20	Except Ch.	12.50	13.50	9.00	10.00
			1	10.50	11.50		
			2	11.00	12.00		
			3,4,8,9	12.00	13.00		
			10	11.50	12.50		
			11	10.50	11.50		
			12	11.00	12.00		
			13	9.00	10.00		
		802.11n40	Except Ch.	12.50	13.50	9.00	10.00
			10	10.50	11.50		
			11	10.00	11.00		
		802.11ax SU(20 MHz)	Except Ch.	12.50	13.50	9.00	10.00
			1	10.50	11.50		
			6	11.50	12.50		
			11	10.00	11.00		
			12	11.00	12.00		
			13	9.00	10.00		
		802.11ax SU(40 MHz)	Except Ch.	12.50	13.50	9.00	10.00
			4,9	12.00	13.00		
			10	10.50	11.50		
			11	10.00	11.00		
		802.11be SU(20 MHz)	Except Ch.	12.50	13.50	9.00	10.00
			12	11.00	12.00		
			13	9.00	10.00		
		802.11be SU(40 MHz)	Except Ch.	12.50	13.50	9.00	10.00
			10	10.50	11.50		
			11	10.00	11.00		
U-NII-1, U-NII-2A	SISO (Main)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	14.00	15.00	9.50	10.50
		802.11ax/be SU(20/40/80/160 MHz)					
	SISO (Aux)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	7.00	8.00	Not supported	
		802.11ax/be SU(20/40/80/160 MHz)					
	MIMO (Main, Aux)	802.11n(HT20/40), ac(VHT20/40/80/160)	ALL	8.00	9.00	5.50	6.50
		802.11ax/be SU(20/40/80/160 MHz)					

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (10) of (122)	 
---	--	---

Band	Ant.	Mode	Channel	Output Power(dBm)			
				Max Power (Normal)		Back-off Power (Grip Sensor)	
				Target	Max. Allowed	Target	Max. Allowed
U-NII-2C	SISO (Main)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	14.00	15.00	10.00	11.00
		802.11ax/be SU(20/40/80/160 MHz)					
	SISO (Aux)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	7.00	8.00	Not supported	
		802.11ax/be SU(20/40/80/160 MHz)					
	MIMO (Main, Aux)	802.11n(HT20/40), ac(VHT20/40/80/160)	ALL	8.00	9.00	6.00	7.00
		802.11ax/be SU(20/40/80/160 MHz)					
U-NII-3, U-NII-4	SISO (Main)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	14.00	15.00	6.50	7.50
		802.11ax/be SU(20/40/80/160 MHz)					
	SISO (Aux)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	7.00	8.00	Not supported	
		802.11ax/be SU(20/40/80/160 MHz)					
	MIMO (Main, Aux)	802.11n(HT20/40), ac(VHT20/40/80/160)	ALL	8.00	9.00	4.00	5.00
		802.11ax/be SU(20/40/80/160 MHz)					

2.5.3 #Maximum WLAN Output Power (Tablet Mode)

Band	Ant.	Mode	Channel	Output Power(dBm)	
				Target	Max. Allowed
WLAN 2.4 GHz	SISO (Main)	802.11b	Except Ch.	18.50	19.50
			13	17.75	18.75
		802.11g,n20, ax/be SU(20 MHz)	Except Ch.	18.50	19.50
			12	15.50	16.50
			13	9.00	10.00
		802.11n40, ax/be SU(40 MHz)	Except Ch.	18.50	19.50
			9	18.00	19.00
			10	14.00	15.00
			11	14.75	15.75
	SISO (Aux)	802.11b	Except Ch.	18.00	19.00
			13	16.75	17.75
		802.11g,n20, ax/be SU(20 MHz)	Except Ch.	18.00	19.00
			12	14.50	15.50
			13	9.00	10.00
		802.11n40, ax/be SU(40 MHz)	Except Ch.	18.00	19.00
			10	13.75	14.75
			11	13.00	14.00
	MIMO (Main, Aux)	802.11n20, ax/be SU(20 MHz)	Except Ch.	15.50	16.50
			12	12.50	13.50
			13	9.00	10.00
		802.11n40, ax/be SU(40) MHz	Except Ch.	15.50	16.50
			10,11	11.00	12.00
U-NII-1, U-NII-2A, U-NII-2C, U-NII-3, U-NII-4	SISO (Main)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	14.00	15.00
		802.11ax/be SU(20/40/80/160 MHz)			
	SISO (Aux)	802.11a, n(HT20/40), ac(VHT20/40/80/160)	ALL	13.00	14.00
		802.11ax/be SU(20/40/80/160 MHz)			
	MIMO (Main, Aux)	802.11n(HT20/40), ac(VHT20/40/80/160)	ALL	11.00	12.00
		802.11ax/be SU(20/40/80/160 MHz)			

2.5.4 #Maximum Bluetooth Output Power

Band	Mode	Channel	Output Power(dBm)	
			Target	Max. Allowed
Bluetooth	BDR(GFSK)	ALL	10.00	11.00
	EDR ($\pi/4$ DQPSK)	ALL	7.75	8.75
	EDR(8DPSK)	ALL		
	LE(GFSK) 1/2 Mbps	ALL	10.00	11.00
	LE(GFSK) 125/500 Kbps	ALL	8.50	9.50

2.6 SAR Test Configurations

2.6.1 #DUT Antenna Locations

The device is a 2-in-1 model that operations as a laptop when folded 90 degrees and as a tablet when folded 360 degrees.

When in tablet mode the overall dimensions of this device are > 20 cm.

A diagram showing the location of the device antennas can be found in Appendix D.

2.6.2 SAR Test Exclusion Considerations (Tablet Mode)

Device's each edge positions consider SAR test exclusion according to Appendix B.4 of KDB 447498 D04 Interim General RF exposure guide.

If each antenna operate to between 0.3 GHz to 6GHz, and Antenna to DUT surface's distance are within 0.5cm to 40cm, then below Formula can use for SAR test exclusion.

$$P_{th}(mW) = ERP_{20cm}(mW) = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

$$P_{th}(mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20 \text{ cm} \\ ERP_{20cm} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20cm}\sqrt{f}} \right)$$

And f is in GHz, d is the separation distance (cm), and ERP_{20cm} is per Formula.

Ant.	Band	Freq. [MHz]	Output Power		ERP [mW]	Separation distances [mm]					SAR Exemption [mW]				
			[dBm]	[mW]		Rear	Left	Right	Top	Bot.	Rear	Left	Right	Top	Bot.
Main	2.4 GHz	2462	19.50	89	42	5	5	327	79	113	3 mW Measure	3 mW Measure	3060 EXEMPT	522 EXEMPT	1032 EXEMPT
	U-NII-2A	5320	15.00	32	45						1 mW Measure	1 mW Measure	3060 EXEMPT	447 EXEMPT	938 EXEMPT
	U-NII-2C	5720			43						1 mW Measure	1 mW Measure	3060 EXEMPT	441 EXEMPT	930 EXEMPT
	U-NII-3	5825			57						1 mW Measure	1 mW Measure	3060 EXEMPT	439 EXEMPT	928 EXEMPT
	U-NII-4	5885			57						1 mW Measure	1 mW Measure	3060 EXEMPT	438 EXEMPT	927 EXEMPT
Aux	2.4 GHz	2462	19.00	79	38	5	327	5	79	113	3 mW Measure	3060 EXEMPT	3 mW Measure	522 EXEMPT	1032 EXEMPT
	U-NII-2A	5320	14.00	25	36						1 mW Measure	3060 EXEMPT	1 mW Measure	447 EXEMPT	938 EXEMPT
	U-NII-2C	5720			36						1 mW Measure	3060 EXEMPT	1 mW Measure	441 EXEMPT	930 EXEMPT
	U-NII-3	5825			29						1 mW Measure	3060 EXEMPT	1 mW Measure	439 EXEMPT	928 EXEMPT
	U-NII-4	5885			28						1 mW Measure	3060 EXEMPT	1 mW Measure	438 EXEMPT	927 EXEMPT
	Bluetooth	2480	11.00	13	6										

Note 1: For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.

Note 2: Output power is the worst of the maximum rated power (including tune-up or manufacturing tolerances) and ERP(E.I.R.P – 2.15 dB).

Note 3: The values listed in "SAR Exemption" are the output power thresholds for which SAR measurements are required.

The value is calculated by KDB 447498 D04 and must be less than the threshold for SAR exemption.

Note 4: Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

Device Type	Ant. / Band		Device Edge for SAR Testing (Front View)					
			Front	Rear	Left Edge	Right Edge	Top	Bottom
Notebook	WLAN & Bluetooth		No	Yes	No	No	No	No
Tablet	Main	WLAN 2.4 GHz	No	Yes	Yes	No	No	No
		U-NII-2A	No	Yes	Yes	No	No	No
		U-NII-2C	No	Yes	Yes	No	No	No
		U-NII-3	No	Yes	Yes	No	No	No
		U-NII-4	No	Yes	Yes	No	No	No
	Aux	WLAN 2.4 GHz	No	Yes	No	Yes	No	No
		U-NII-2A	No	Yes	No	Yes	No	No
		U-NII-2C	No	Yes	No	Yes	No	No
		U-NII-3	No	Yes	No	Yes	No	No
		U-NII-4	No	Yes	No	Yes	No	No
		Bluetooth	No	Yes	No	Yes	No	No

2.7 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D04 Interim General RF Exposure Guidance v01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 616217 D04 SAR for laptop and tablets v01r02
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)
- November 2019 TCB Workshop Notes (Hall Effect and Gravity Sensor Guidance)
- April 2022 TCB Workshop Notes (SPLSR)

3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Procedures

4.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5 · Δz _{Zoom} (n-1) mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

5. SAR Measurement Configurations

5.1 Body-supported device

A typical example of a body supported device is a wireless enabled laptop device that among other orientations may be supported on the thighs of a sitting user. To represent this orientation, the device shall be positioned with its base against the flat phantom. Other orientations may be specified by the manufacturer in the user instructions. If the intended use is not specified, the device shall be tested directly against the flat phantom in all usable orientations.

The screen portion of the device shall be in an open position at a 90° angle as seen in Figure 1 (left side), or at an operating angle specified for intended use by the manufacturer in the operating instructions. Where a body supported device has an integral screen required for normal operation, then the screen-side will not need to be tested if the antenna(s) integrated in it ordinarily remain(s) 200 mm from the body. Where a screen mounted antenna is present, the measurement shall be performed with the screen against the flat phantom as shown in Figure 1 (right side), if operating the screen against the body is consistent with the intended use.

Other devices that fall into this category include table type portable computers and credit card transaction authorisation terminals, point-of sale and/or inventory terminals. Where these devices may be torso or limb-supported, the same principles for body-supported devices are applied.

The example in Figure 2) shows a tablet form factor portable computer for which SAR should be separately assessed with

- d) each surface and
- e) the separation distances

positional against the flat phantom that correspond to the intended use as specified by the manufacturer. If the intended use is not specified in the user instructions, the device shall be tested directly the flat phantom in all usable orientations.



Figure 1. Notebook

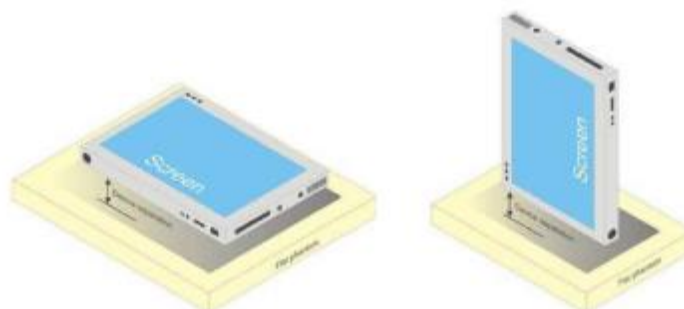


Figure 2. Tablet form factor portable computer

6. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

7. FCC SAR General Measurement Procedures

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

7.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

7.2.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

7.2.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

7.2.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel band width, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.2.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

7.2.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8. RF Average Conducted Output Power

8.1 WLAN Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup



8.1.1 WLAN Average Conducted Output Power

Band	Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)					
				Notebook Mode				Tablet Mode	
				Normal		Grip sensor		Normal	
				Main Ant.	Aux Ant.	Main Ant.	Aux Ant.	Main Ant.	Aux Ant.
WLAN 2.4 GHz	802.11b	2 412.0	1	18.18	12.20	11.16	Not supported	18.72	18.13
		2 437.0	6	18.24	12.13	11.29		18.68	18.06
		2 462.0	11	18.14	12.34	11.15		18.66	18.28
U-NII-1	802.11ac (VHT80)	5 210.0	42	14.00	7.27	9.70		14.00	13.06
U-NII-2A	802.11ac (VHT160)	5 250.0	50	14.05	7.22	9.49		14.05	12.96
U-NII-2C	802.11ac (VHT160)	5 570.0	114	14.52	7.86	10.55		14.52	13.56
U-NII-3	802.11ac (VHT80)	5 775.0	155	14.36	7.57	7.06		14.36	13.21
U-NII-4	802.11ac (VHT160)	5 815.0	163	14.32	7.54	7.05		14.32	13.22

Note: About verification of grip sensor, refer to Appendix C.

8.2 Bluetooth Average Conducted Output Power

Mode	Freq. [MHz]	Channel	Conducted Powers (dBm)
BDR_DH5 (1 Mbps)	2 402.0	0	10.36
	2 441.0	39	10.48
	2 480.0	78	10.58
BDR_2-DH5 (2 Mbps)	2 402.0	0	7.72
	2 441.0	39	7.84
	2 480.0	78	7.93
EDR_3-DH5 (3 Mbps)	2 402.0	0	7.73
	2 441.0	39	7.83
	2 480.0	78	7.93
LE (1 Mbps)	2 402.0	0	10.20
	2 440.0	19	10.31
	2 480.0	39	10.41
LE (2 Mbps)	2 402.0	0	10.09
	2 440.0	19	10.19
	2 480.0	39	10.28
LE (125k)	2 402.0	0	8.81
	2 440.0	19	8.91
	2 480.0	39	8.98
LE (500k)	2 402.0	0	8.75
	2 440.0	19	8.87
	2 480.0	39	8.92


8.3 Bluetooth Duty Factor

Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
BDR(GFSK)	DH5	2.88	3.75	0.768	1.302

8.4 Bluetooth Power Measurement Setup



8.5 Bluetooth Duty Plot

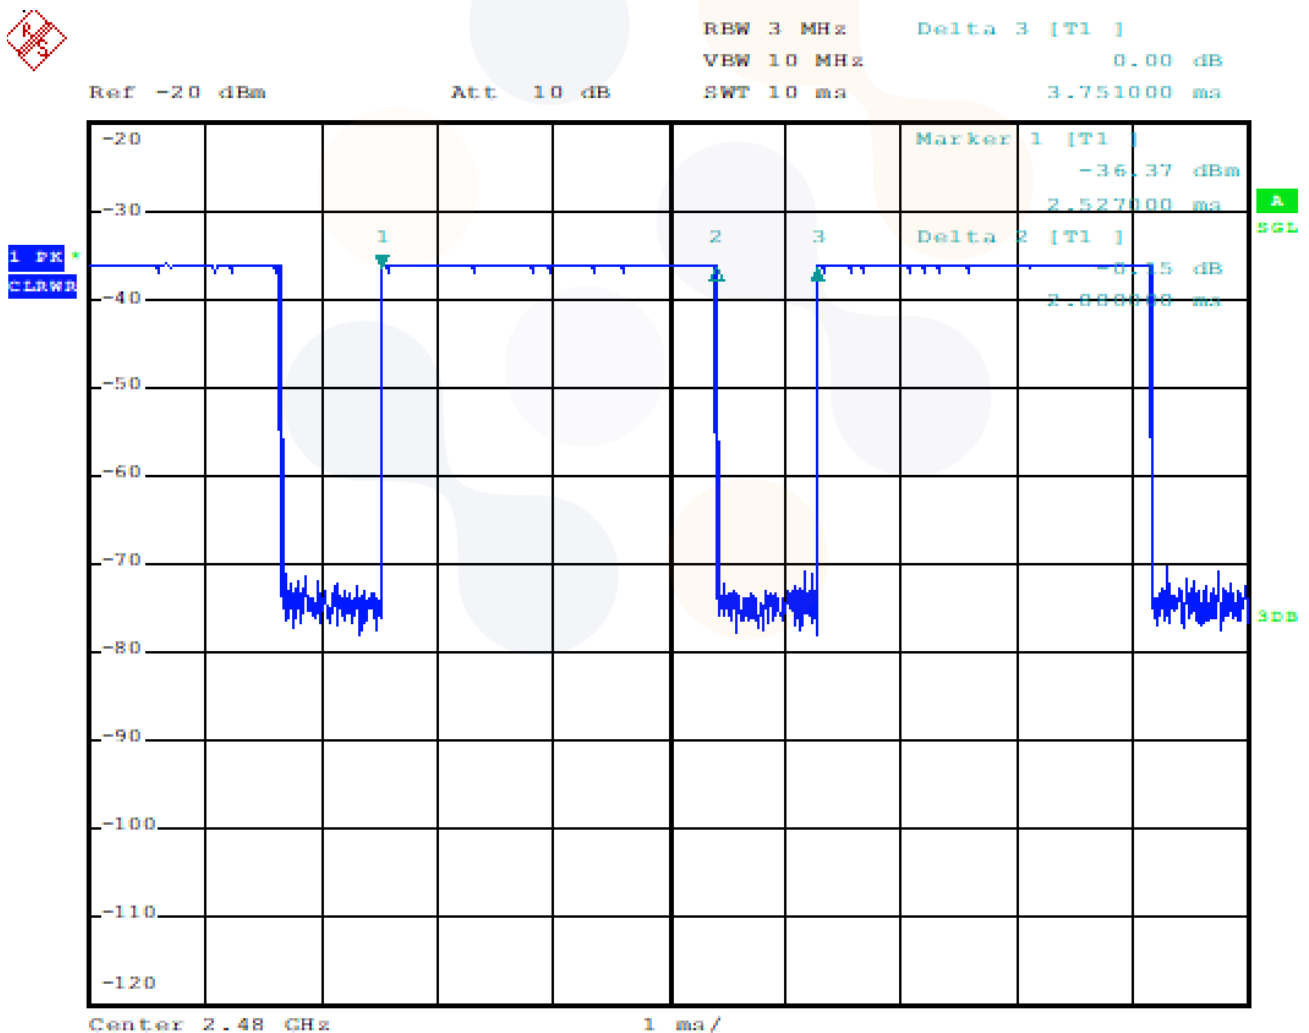

9. System Verification

9.1 Measurement date and environment

Shield room	Date	Environment	
		Temperature (°C)	Humidity (%)
8F - 7	2024-09-26	21.7 ~ 21.9	58.8 ~ 59.3
	2024-09-27	21.5 ~ 21.7	58.4 ~ 60.1

9.2 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ϵ_r) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Date	Recommended Limit / Measured		Temp. (°C)
		Permittivity (ϵ_r)	Conductivity (σ)	
2 450.0	2024-09-26	$39.20 \pm 5 \%$ (37.24~41.16)	$1.80 \pm 5 \%$ (1.71~1.89)	21.53
		37.80	1.77	
5 250.0	2024-09-27	$35.95 \pm 5 \%$ (34.15~37.75)	$4.71 \pm 5 \%$ (4.47~4.95)	21.49
		35.40	4.74	
5 600.0	2024-09-27	$35.50 \pm 5 \%$ (33.73~37.28)	$5.07 \pm 5 \%$ (4.82~5.32)	21.49
		34.60	5.15	
5 800.0	2024-09-27	$35.30 \pm 5 \%$ (33.54~37.07)	$5.27 \pm 5 \%$ (5.01~5.53)	21.49
		34.10	5.38	


<Table 1. Measurement result of Tissue electric parameters>

9.3 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2.

During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

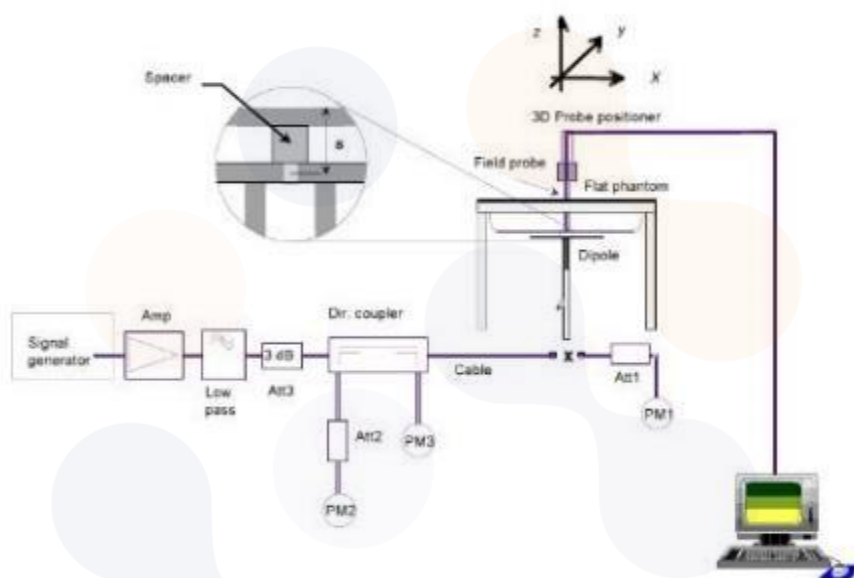

Frequency (Mhz)	Date	Tissue Type	Verification Kit	Probe S/N	Limit/Measured (Normalized to 1 W)
					Recommended Limit 1g (Normalized)
2 450.0	2024-09-26	HSL	D2450V2 SN: 895	EX3DV4 SN: 7840	52.20 ± 10 % (46.98~57.42)
					53.50
5 250.0	2024-09-27	HSL	79.00 ± 10 % (71.10~86.90)		
			76.50		
5 600.0	2024-09-27	HSL	82.40 ± 10 % (74.16~90.64)		
			83.30		
5 800.0	2024-09-27	HSL	78.60 ± 10 % (70.74~86.46)		
			77.80		

<Table 2. System Verification Result>



10. SAR Test Results

10.1 Standalone Body SAR Test Results (Notebook Mode)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11b	Main	Grip Sensor Off									
		Rear	8	2 437.0	18.24	19.00	1.191	1.005	0.644	0.771	
		Grip Sensor On									
		Rear	0	2 437.0	11.29	12.00	1.178	1.005	0.784	0.928	1
	Aux	Rear	0	2 412.0	11.16	12.00	1.213	1.005	0.737	0.898	
		Rear	0	2 462.0	12.34	13.00	1.164	1.005	0.761	0.890	
		Rear	0	2 412.0	12.20	13.00	1.202	1.005	0.930	1.123	2
	Repeated SAR Test										
	Aux	Rear	0	2 412.0	12.20	13.00	1.202	1.005	0.926	1.119	

U-NII-1											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Grip Sensor On									
		Rear	0	5 210.0	9.70	10.50	1.202	1.011	1.140	1.385	3
	Repeated SAR Test										
	Main	Rear	0	5 210.0	9.70	10.50	1.202	1.011	1.140	1.385	

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT160)	Main	Grip Sensor Off									
		Rear	8	5 250.0	14.05	15.00	1.245	1.011	0.434	0.546	
		Grip Sensor On									
		Rear	0	5 250.0	9.49	10.50	1.262	1.011	1.010	1.289	4
	Aux	Rear	0	5 250.0	7.22	8.00	1.197	1.011	0.720	0.871	5
	Repeated SAR Test										
	Main	Rear	0	5 250.0	9.49	10.50	1.262	1.011	0.976	1.245	

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (27) of (122)	 
---	--	---

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT160)	Main	Grip Sensor Off									
		Rear	8	5 570.0	14.52	15.00	1.117	1.011	0.361	0.408	
		Grip Sensor On									
		Rear	0	5 570.0	10.55	11.00	1.109	1.011	1.150	1.289	6
	Aux	Rear	0	5 570.0	7.86	8.00	1.033	1.011	0.650	0.679	7
	Repeated SAR Test										
	Main	Rear	0	5 570.0	10.55	11.00	1.109	1.011	1.150	1.289	

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Grip Sensor Off									
		Rear	8	5 775.0	14.36	15.00	1.159	1.011	0.479	0.561	
		Grip Sensor On									
		Rear	0	5 775.0	7.06	7.50	1.107	1.011	0.673	0.753	8
	Aux	Rear	0	5 775.0	7.57	8.00	1.104	1.011	0.598	0.667	9

U-NII-4											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT160)	Main	Grip Sensor Off									
		Rear	8	5 815.0	14.32	15.00	1.169	1.011	0.533	0.630	
		Grip Sensor On									
		Rear	0	5 815.0	7.05	7.50	1.109	1.011	0.759	0.851	10
	Aux	Rear	0	5 815.0	7.54	8.00	1.112	1.011	0.664	0.746	11

Bluetooth											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
BDR_DH5	Aux	Rear	0	2 480.0	10.58	11.00	1.102	1.302	0.417	0.598	12

10.2 Standalone Body SAR Test Results (Tablet Mode)

WLAN 2.4 GHz											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11b	Main	Rear	0	2 412.0	18.72	19.50	1.197	1.005	0.058	0.070	
		Left	0	2 412.0	18.72	19.50	1.197	1.005	0.606	0.729	13
	Aux	Rear	0	2 462.0	18.28	19.00	1.180	1.005	0.023	0.027	
		Right	0	2 462.0	18.28	19.00	1.180	1.005	0.211	0.250	14

U-NII-2A											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT160)	Main	Rear	0	5 250.0	14.05	15.00	1.245	1.011	0.091	0.115	
		Left	0	5 250.0	14.05	15.00	1.245	1.011	0.728	0.916	15
	Aux	Rear	0	5 250.0	12.96	14.00	1.271	1.011	0.034	0.044	
		Right	0	5 250.0	12.96	14.00	1.271	1.011	0.492	0.632	16

U-NII-2C											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT160)	Main	Rear	0	5 570.0	14.52	15.00	1.117	1.011	0.098	0.111	
		Left	0	5 570.0	14.52	15.00	1.117	1.011	0.451	0.509	17
	Aux	Rear	0	5 570.0	13.56	14.00	1.107	1.011	0.018	0.020	
		Right	0	5 570.0	13.56	14.00	1.107	1.011	0.295	0.330	18

U-NII-3											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Main	Rear	0	5 775.0	14.36	15.00	1.159	1.011	0.052	0.061	
		Left	0	5 775.0	14.36	15.00	1.159	1.011	0.421	0.493	19
	Aux	Rear	0	5 775.0	13.21	14.00	1.199	1.011	0.039	0.047	
		Right	0	5 775.0	13.21	14.00	1.199	1.011	0.445	0.539	20

U-NII-4											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
802.11ac (VHT160)	Main	Rear	0	5 815.0	14.32	15.00	1.169	1.011	0.065	0.077	
		Left	0	5 815.0	14.32	15.00	1.169	1.011	0.662	0.782	21
	Aux	Rear	0	5 815.0	13.22	14.00	1.197	1.011	0.046	0.056	
		Right	0	5 815.0	13.22	14.00	1.197	1.011	0.544	0.658	22

This test report shall not be reproduced, except in full, without the written approval

Bluetooth											
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Reported 1 g SAR (W/kg)	Plot No.
BDR_DH5	Aux	Rear	0	2 480.0	10.58	11.00	1.102	1.302	0.001	0.001	
		Right	0	2 480.0	10.58	11.00	1.102	1.302	0.036	0.052	23

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D04v01.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.
5. When the maximum reported 1g averaged SAR is $\leq 0.8\text{ W/kg}$, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was $\leq 1.20\text{ W/kg}$ for 1g evaluations or all test channels were measured.
6. WLAN & Bluetooth transmission was verified using a spectrum analyzer.

11. Simultaneous Transmission

11.1 #Simultaneous Transmission Configurations

No.	Scenario	Operation
1	WLAN 2.4 GHz Main + WLAN 2.4 GHz Aux	Yes
2	WLAN 2.4 GHz Main + Bluetooth Aux	Yes
3	WLAN 2.4 GHz Aux + Bluetooth Aux	No
4	WLAN 2.4 GHz Main + WLAN 2.4 GHz Aux + Bluetooth Aux	No
5	WLAN 5 GHz Main + WLAN 5 GHz Aux	Yes
6	WLAN 5 GHz Main + Bluetooth Aux	Yes
7	WLAN 5 GHz Aux + Bluetooth Aux	Yes
8	WLAN 5 GHz Main + WLAN 5 GHz Aux + Bluetooth Aux	Yes
9	WLAN 6 GHz Main + WLAN 6 GHz Aux	Yes
10	WLAN 6 GHz Main + Bluetooth Aux	Yes
11	WLAN 6 GHz Aux + Bluetooth Aux	Yes
12	WLAN 6 GHz Main + WLAN 6 GHz Aux + Bluetooth Aux	Yes
13	WLAN 2.4 GHz Main + WLAN 5 GHz Aux + Bluetooth Aux (RSDB scenario)	No
14	WLAN 5 GHz Main + WLAN 2.4 GHz Aux + Bluetooth Aux (RSDB scenario)	No
15	WLAN 2.4/5 GHz Main + WLAN 6 GHz Aux + Bluetooth Aux (RSDB scenario)	No
16	WLAN 6 GHz Main + WLAN 2.4/5 GHz Aux + Bluetooth Aux (RSDB scenario)	No

Notes:

- It does not transmit simultaneously the Bluetooth and WLAN 2.4 GHz.
- It is to use the Bluetooth and WLAN same antenna path.

11.2 Estimated SAR (Tablet Mode)

When standalone SAR is not required to be measured, SAR must also be estimated to determine simultaneous transmission SAR test exclusion.

Ant.	Band	Freq. [MHz]	Output Power			Separation distances [mm]					Estimated 1g SAR Value (W/kg)				
			dBm	mW	ERP [mW]	Rear	Left	Right	Top	Bottom	Rear	Left	Right	Top	Bottom
Main	2.4 GHz	2462	19.50	89	42	5	5	327	79	113	Measure	Measure	0.012	0.068	0.034
	U-NII-2A	5320	15.00	32	45						Measure	Measure	0.006	0.040	0.019
	U-NII-2C	5720			43						Measure	Measure	0.006	0.039	0.018
	U-NII-3	5825			57						Measure	Measure	0.007	0.052	0.025
	U-NII-4	5885			57						Measure	Measure	0.007	0.052	0.025
Aux	2.4 GHz	2462	19.00	79	38	5	327	5	79	113	Measure	0.010	Measure	0.061	0.031
	U-NII-2A	5320	14.00	25	36						Measure	0.005	Measure	0.032	0.015
	U-NII-2C	5720			36						Measure	0.005	Measure	0.033	0.015
	U-NII-3	5825			29						Measure	0.004	Measure	0.026	0.013
	U-NII-4	5885			28						Measure	0.004	Measure	0.026	0.012
	Bluetooth	2480	11.00	13	6						Measure	0.002	Measure	0.010	0.005

Notes:

- For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.
- Output power is the worst of the maximum rated power (including tune-up or manufacturing tolerances) and ERP(E.I.R.P – 2.15 dB).
- Estimated SAR values were calculated as $SAR_{est} = 0.4 * P_{ant} / P_{th} [W/kg]$ according to the April, 2022 TCB workshop. (P_{th} is Section 2.6.2 Value, P_{ant} is Maximum Output power.)
- Formulas round separation distance to nearest mm and power to nearest mW before calculating estimated SAR or determining if SAR is excluded.

11.3 Simultaneous Transmission Analysis

Exposure Condition /Position		WLAN						Bluetooth Aux			
		2.4 GHz Main	2.4 GHz Aux	5 GHz Main	5 GHz Aux	*6 GHz Main	*6 GHz Aux				
		[①]	[②]	[③]	[④]	[⑤]	[⑥]		[⑦]		
Body (Notebook)	Rear	0.928	1.123	1.385	0.871	1.391	0.922	0.598			
Body (Tablet)	Rear	0.070	0.027	0.115	0.056	0.177	0.050	0.001			
	Left	0.729	0.010	0.916	0.005	1.053	-	0.002			
	Right	0.012	0.250	0.007	0.658	-	0.288	0.052			
	Top	0.068	0.061	0.052	0.033	-	-	0.010			
	Bottom	0.034	0.031	0.025	0.015	-	-	0.005			
Summation											
Exposure Condition /Position		[①+②]	[①+⑦]	[③+④]	[③+⑦]	[④+⑦]	[③+④+⑦]	[⑤+⑥]	[⑤+⑦]	[⑥+⑦]	[⑤+⑥+⑦]
Body (Notebook)	Rear	2.051	1.526	2.256	1.983	1.469	2.854	2.313	1.989	1.520	2.911
Body (Tablet)	Rear	0.097	0.071	0.171	0.116	0.057	0.172	0.227	0.178	0.051	0.228
	Left	0.739	0.731	0.921	0.918	0.007	0.923	-	-	-	-
	Right	0.262	0.064	0.665	0.059	0.710	0.717	-	-	-	-
	Top	0.129	0.078	0.085	0.062	0.043	0.095	-	-	-	-
	Bottom	0.065	0.039	0.040	0.030	0.020	0.045	-	-	-	-

Notes:

- Simultaneous transmission SAR test exclusion considerations
Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D04.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.
- Yellow entries was verified in section 11.4 by the SPLSR.
- *For WLAN 6GHz value, refer to the Report No. "KR24-SPF0028".

11.4 SAR to Peak Location Separation Ratio Analysis

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where SAR₁ and SAR₂ are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04, ≤ 0.10 (10g) the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

11.4.1 Maximum Simultaneous Transmission Analysis

11.4.1.1 Maximum Worst case Analysis


Exposure Condition /Position		WLAN 2.4 GHz		WLAN 5 GHz		WLAN 6 GHz		Bluetooth Aux	Worst Summation		SPLSR Result
		Main	Aux	Main	Aux	Main	Aux		Sum	[W/kg]	
		[①]	[②]	[③]	[④]	[⑤]	[⑥]		[⑦]		
Body (Notebook)	Rear	0.928	1.123	-	-	-	-	-	[①+②]	2.051	0.01
		-	-	1.385	0.871	-	-	-	[③+④]	2.256	0.01
		-	-	1.385	-	-	-	0.598	[③+⑦]	1.983	0.01
		-	-	1.385	0.871	-	-	0.598	[③+④+⑦]	2.854	0.02
		-	-	-	-	1.391	0.922	-	[⑤+⑥]	2.313	0.01
		-	-	-	-	1.391	-	0.598	[⑤+⑦]	1.989	0.01
		-	-	-	-	1.391	0.922	0.598	[⑤+⑥+⑦]	2.911	0.02

11.4.1.2 SPLSR Analysis


WLAN 2.4 GHz Main	WLAN 2.4 GHz Aux	WLAN 5 GHz Main	WLAN 5 GHz Aux	WLAN 6 GHz Main	WLAN 6 GHz Aux	Bluetooth
[①]	[②]	[③]	[④]	[⑤]	[⑥]	[⑦]

SPLSR – Rear Position							
Scenario No.	No.1	No.5	No.6	No.8	No.9	No.10	No.12
Scenario	[①]+[②]	[③]+[④]	[③]+[⑦]	[③]+[④]+[⑦]	[⑤]+[⑥]	[⑤]+[⑦]	[⑤]+[⑥]+[⑦]
Rear	2.051	2.256	1.983	2.854	2.313	1.989	2.911
Volume scan	Not Required						


Scenario No.		Scenario		Position		SUM	
1		[①]+[②]		Rear		2.051	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
329.34	0.01	①	WLAN 2.4 GHz Main	0.928	-0.01950	-0.16400	-0.17700
		②	WLAN 2.4 GHz Aux	1.123	-0.02490	0.16530	-0.17700

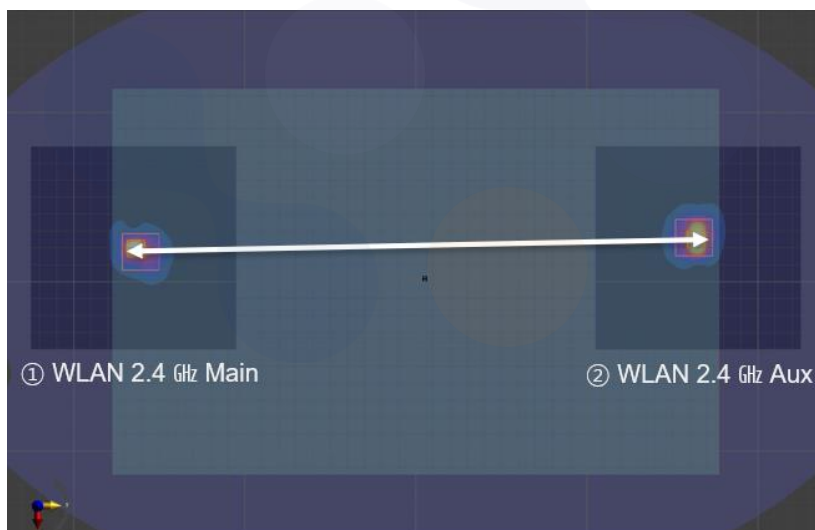


Scenario No.		Scenario		Position		SUM	
5		[③]+[④]		Rear		2.256	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
334.42	0.01	③	WLAN 5 GHz Main	1.385	-0.01950	-0.16630	-0.17700
		④	WLAN 5 GHz Aux	0.871	-0.02850	0.16800	-0.17700

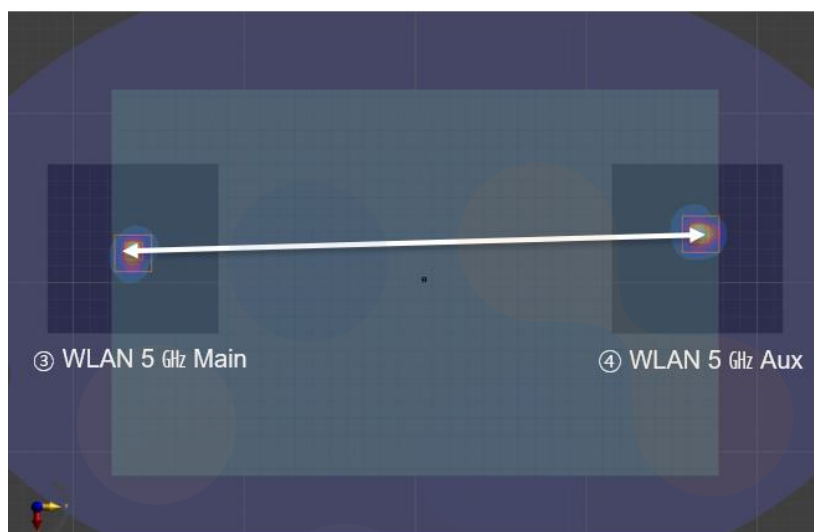


Scenario No.		Scenario		Position		SUM	
6		[③]+[⑦]		Rear		1.983	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
331.37	0.01	③	WLAN 5 GHz Main	1.385	-0.01950	-0.16630	-0.17700
		⑦	Bluetooth	0.598	-0.02630	0.16500	-0.17700

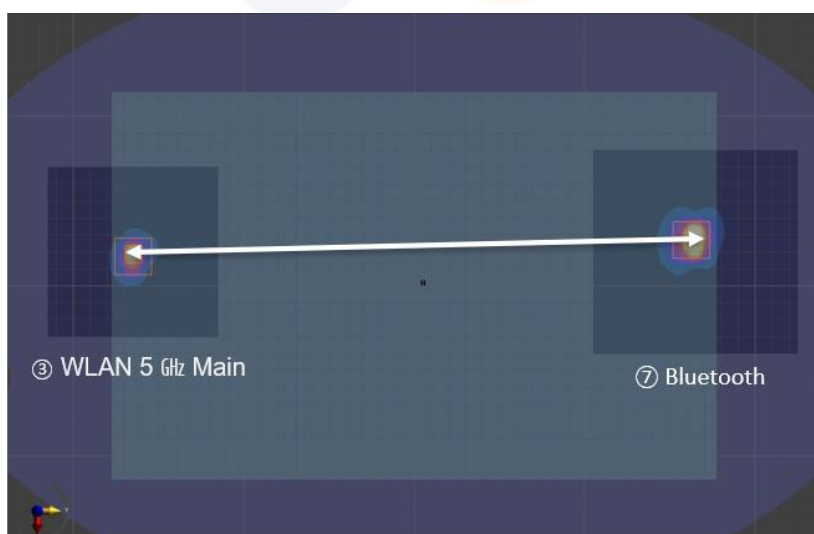

Scenario No.		Scenario		Position		SUM	
8		[③]+[④]+[⑦]		Rear		2.854	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
331.37	0.02	③	WLAN 5 GHz Main	1.385	-0.01950	-0.16630	-0.17700
		④⑦	WLAN 5 GHz Aux + Bluetooth	1.469	-0.02630	0.16500	-0.17700

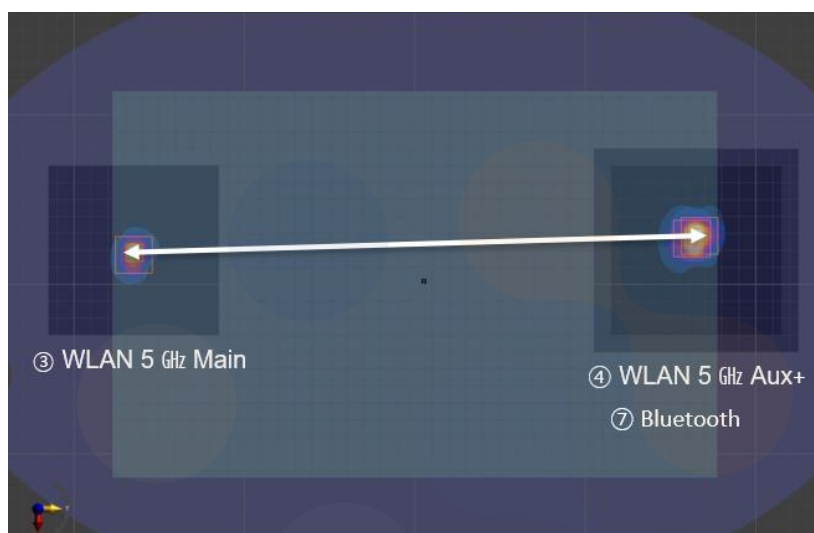

Scenario No.		Scenario		Position		SUM	
9		[⑤]+[⑥]		Rear		2.313	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
332.43	0.01	⑤	WLAN 6 GHz Main	1.391	-0.01940	-0.16530	-0.17700
		⑥	WLAN 6 GHz Aux	0.922	-0.02860	0.16700	-0.17700

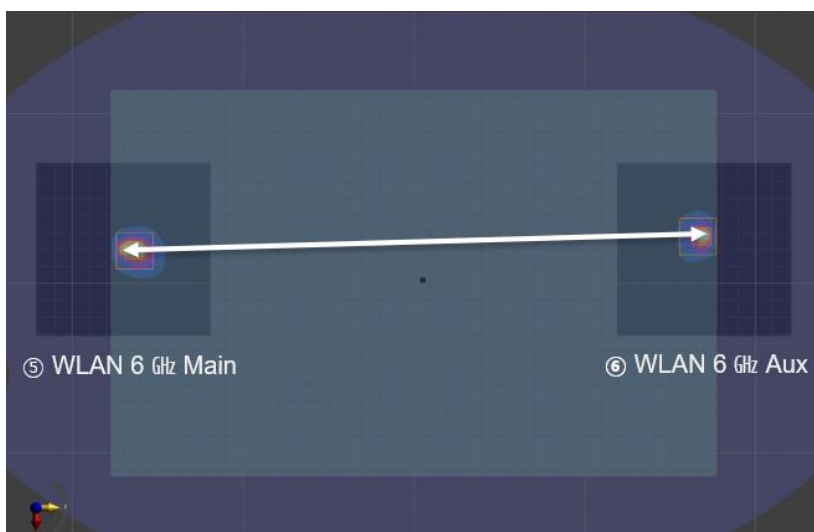

Scenario No.		Scenario		Position		SUM	
10		[⑤]+[⑦]		Rear		1.989	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
330.37	0.01	⑤	WLAN 6 GHz Main	1.391	-0.01940	-0.16530	-0.17700
		⑦	Bluetooth	0.598	-0.02630	0.16500	-0.17700



Scenario No.		Scenario		Position		SUM	
12		[⑤]+[⑥]+[⑦]		Rear		2.911	
Distance [mm]	SPLSR ≤ 0.04 Limit	Numbering	Mode	SAR W/kg	Coordinates		
					X	Y	Z
330.37	0.02	⑤	WLAN 6 GHz Main	1.391	-0.01940	-0.16530	-0.17700
		⑥⑦	WLAN 6 GHz Aux + Bluetooth	1.520	-0.02630	0.16500	-0.17700



12. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:


- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Notebook Mode								
Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
WLAN 2.4 GHz	802.11b	Aux	2 412.0	Rear	0	0.930	0.926	1.00
U-NII-1	802.11ac (VHT80)	Main	5 210.0	Rear	0	1.140	1.140	1.00
U-NII-2A	802.11ac (VHT160)	Main	5 250.0	Rear	0	1.010	0.976	1.03
U-NII-2C	802.11ac (VHT160)	Main	5 570.0	Rear	0	1.150	1.150	1.00

13. Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR24-SPF0027-A Page (40) of (122)	
---	--	---

14. Test Equipment Information

Test Platform	SPEAG DASY8 System			
Version	DASY8: 16.4.0.5005			
Location	Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 7	-	-
DASY8 Robot	TX2-60L	F/22/0040787/A/001	-	-
Phantom	2mm Oval Phantom ELI5	1173	-	-
Mounting Device	Laptop Holder	-	-	-
DAE	DAE4	1758	2024-08-15	2025-08-15
Probe	EX3DV4	7840	2024-08-20	2025-08-20
MICROWAVE GENERATOR	SMP02	100295	2023-12-18	2024-12-18
Dual Power Meter	E4419B	GB43312301	2024-02-13	2025-02-13
Power Sensor	8481H	3318A19379	2024-02-13	2025-02-13
	8481H	3318A19377	2024-02-13	2025-02-13
Attenuator	PE7005-10	2228-7	2023-12-11	2024-12-11
	PE7005-10	2228-8	2023-12-11	2024-12-11
	PE7005-10	2228-9	2023-12-11	2024-12-11
Directional Coupler	772D	MY46151145	2023-11-01	2024-11-01
Power Amplifier	AMP2027ADB	10005	2024-04-26	2025-04-26
Low Pass Filter	PE8725	2144	2023-12-11	2024-12-11
	PE87FL1016	2213	2023-12-11	2024-12-11
Dipole Validation Kits	D2450V2	895	2023-09-26	2025-09-26
	D5GHzV2	1134	2024-01-17	2026-01-17
ENA Series Network Analyzer	E5071B	MY42403524	2024-02-13	2025-02-13
Dielectric Assessment Kit	DAK-3.5	1078	2024-06-10	2025-06-10
Digital Thermometer	DTM3000	3939	2024-02-15	2025-02-15
Humidity/Temp	PC-5400TRH	PC-5400TRH-3	2023-11-06	2024-11-06
MXA SIGNAL ANALYZER	N9020A	MY520900024	2023-11-01	2024-11-01

15. Test System Verification Results

Eurofins KCTL Co.,Ltd.

Measurement Report for D2450V2 - SN895, FRONT, D2450, UID 0 -, (2450.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2450V2 - SN895, Speag	10.0 x 10.0 x 290.0	895	Validation Dipole

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	D2450	CW, 0--	2450.000	6.81	1.77	37.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000, 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	5.43	5.35
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	2.78	2.78
Graded Grid	No	Yes	psSAR10g [W/kg]	2.51	2.53
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		0.02
Detection			Peak SAR [W/kg]		10.5
Scan Method	Measured	Measured			

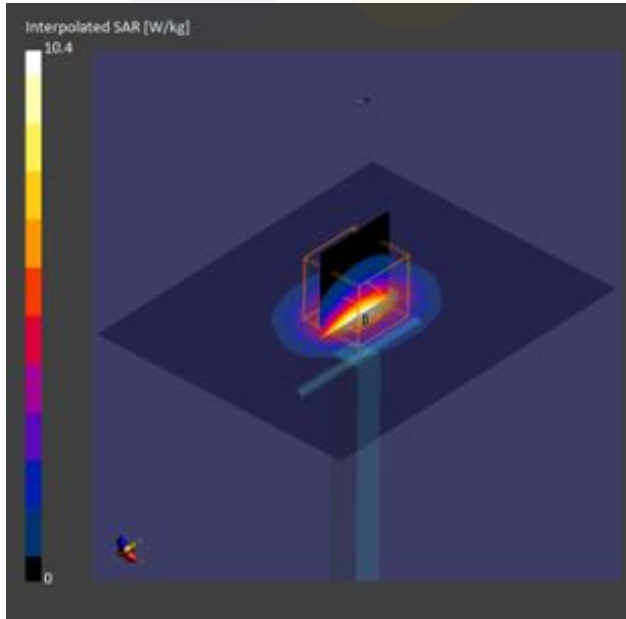

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2 - SN1134, FRONT, Custom Band, UID 0 -, (5250.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 - SN1134, Speag	10.0 x 10.0 x 300.0	1134	Validation Dipole

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	Custom Band	CW, 0--	5250.000	5.5	4.74	35.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	24.0 x 24.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	7.27	7.65
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	2.44	2.58
Graded Grid	No	Yes	psSAR10g [W/kg]	2.11	2.23
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.02
Scan Method	Measured	Measured	Peak SAR [W/kg]		33.0

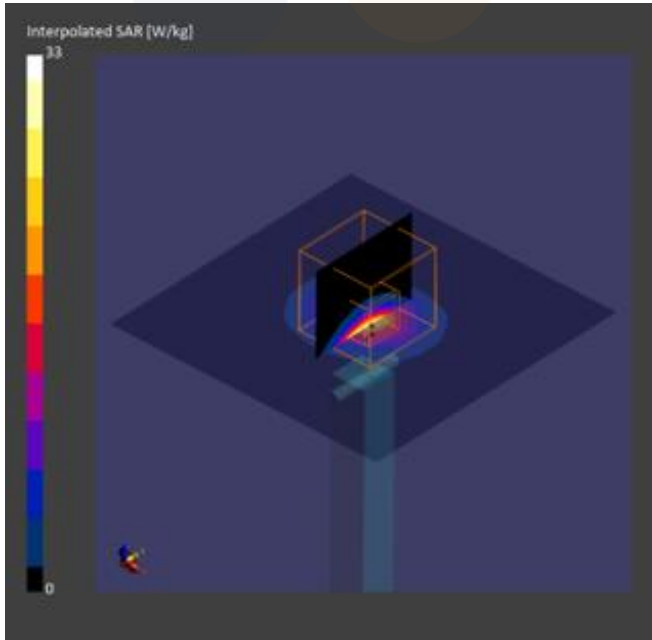

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2 - SN1134, FRONT, D5GHz, UID 0 -, (5600.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 - SN1134, Speag	10.0 x 10.0 x 300.0	1134	Validation Dipole

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	D5GHz	CW, 0--	5600.000	5.08	5.15	34.6

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	24.0 x 24.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	8.00	8.33
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	2.64	2.82
Graded Grid	No	Yes	psSAR10g [W/kg]	2.29	2.43
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.04
Scan Method	Measured	Measured	Peak SAR [W/kg]		36.2

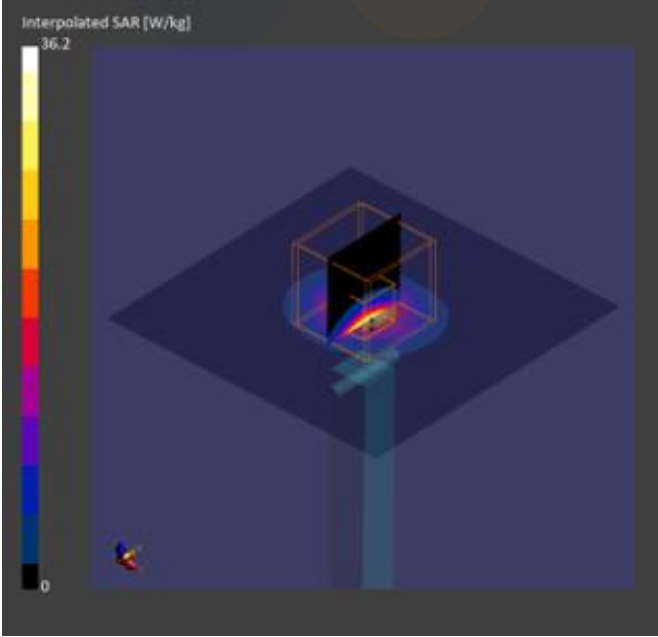

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2 - SN1134, FRONT, D5GHz, UID 0 -, (5800.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2 - SN1134, Speag	10.0 x 10.0 x 300.0	1134	Validation Dipole

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	D5GHz	CW, 0--	5800.000	5.07	5.38	34.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	24.0 x 24.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	7.58	7.78
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	2.48	2.63
Graded Grid	No	Yes	psSAR10g [W/kg]	2.14	2.27
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.05
Scan Method	Measured	Measured	Peak SAR [W/kg]		33.8

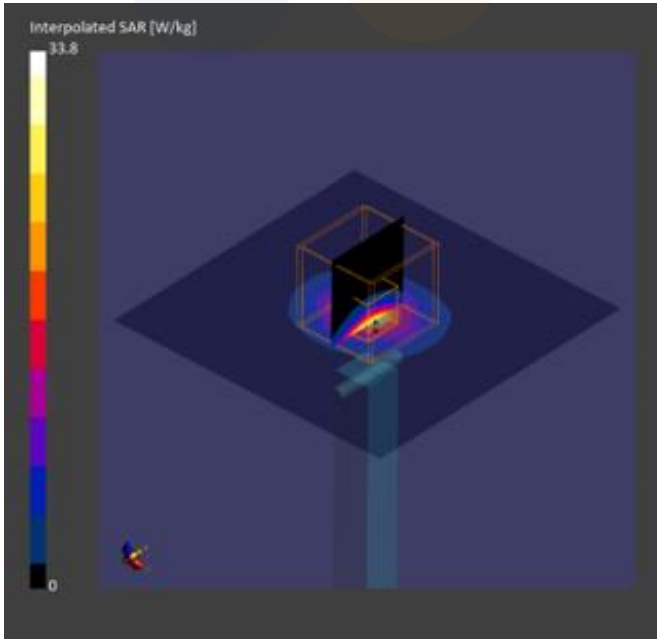

16. Test Results

1)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, D2450, UID 0 -, Channel 6 (2437.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	D2450	CW, 0--	2437.000, 6	6.81	1.76	37.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000, 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5	psSAR1g [W/kg]	0.729	0.784
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.303	0.320
Graded Grid	No	Yes	psSAR10g [W/kg]	0.266	0.280
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.00
Detection			Peak SAR [W/kg]		1.76
Scan Method	Measured	Measured			

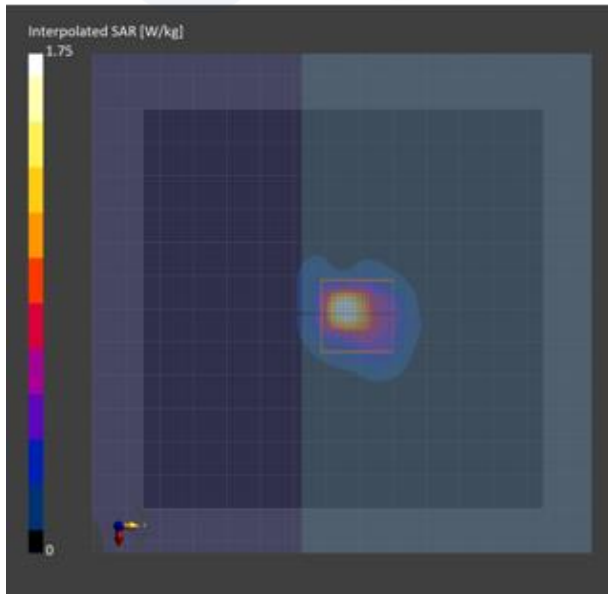

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/6(220705)

KP24-06247


2)
Eurofins KCTL Co.,Ltd.
Measurement Report for NP750QHA, BACK, D2450, UID 0 -, Channel 1 (2412.000MHz)

Device under Test Properties			
Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Aux Antenna

Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	D2450	CW, 0--	2412.000, 1	6.81	1.73	37.8

Hardware Setup			
Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup		Measurement Results			
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	4.8 x 4.8 x 1.5	psSAR1g [W/kg]	0.775	0.930
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.361	0.367
Graded Grid	No	Yes	psSAR10g [W/kg]	0.320	0.322
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.01
Scan Method	Measured	Measured	Peak SAR [W/kg]		2.59

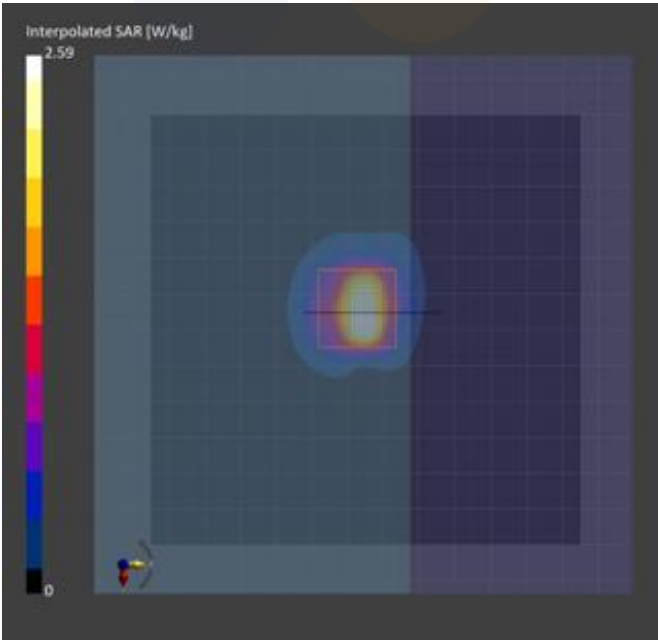

3)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 42 (5210.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5210.000, 42	5.5	4.70	35.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	1.07	1.14
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.321	0.321
Graded Grid	No	Yes	psSAR10g [W/kg]	0.273	0.273
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.09
Scan Method	Measured	Measured	Peak SAR [W/kg]		5.53

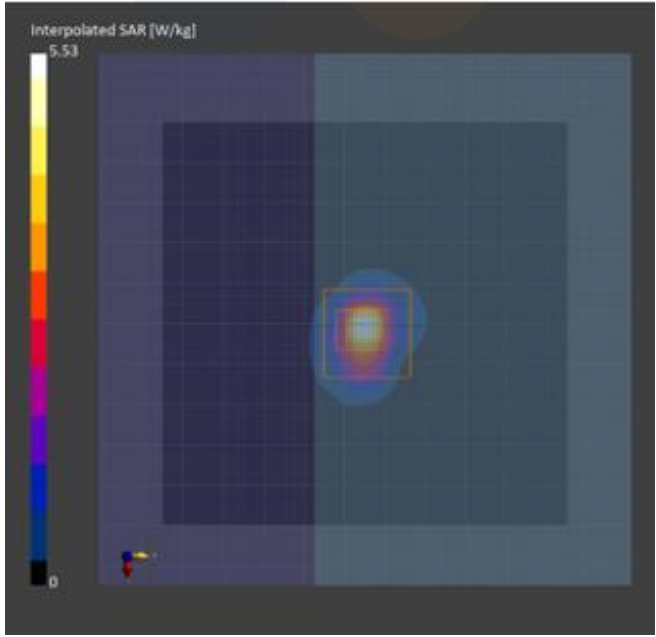

4)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 50 (5250.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5250.000, 50	5.5	4.74	35.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.956	1.01
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.301	0.294
Graded Grid	No	Yes	psSAR10g [W/kg]	0.258	0.252
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.04
Scan Method	Measured	Measured	Peak SAR [W/kg]		5.01

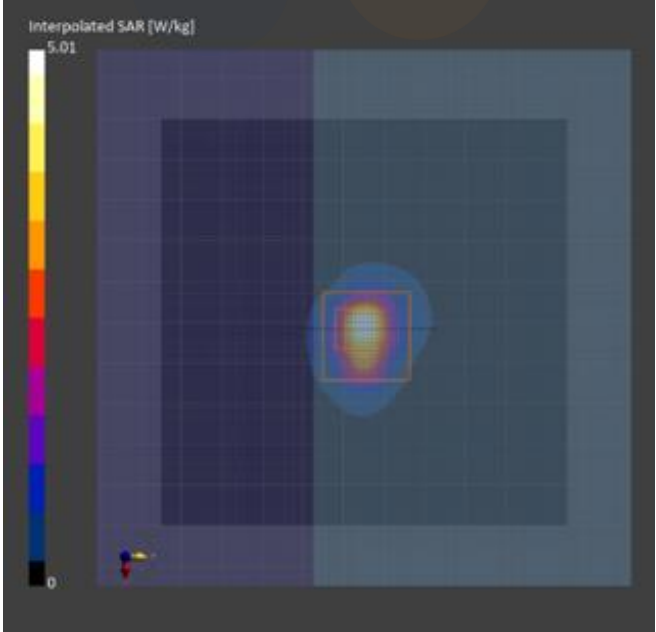

5)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 50 (5250.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5250.000, 50	5.5	4.74	35.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	0.525	0.720
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.170	0.197
Graded Grid	No	Yes	psSAR10g [W/kg]	0.146	0.168
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.00
Scan Method	Measured	Measured	Peak SAR [W/kg]		3.73

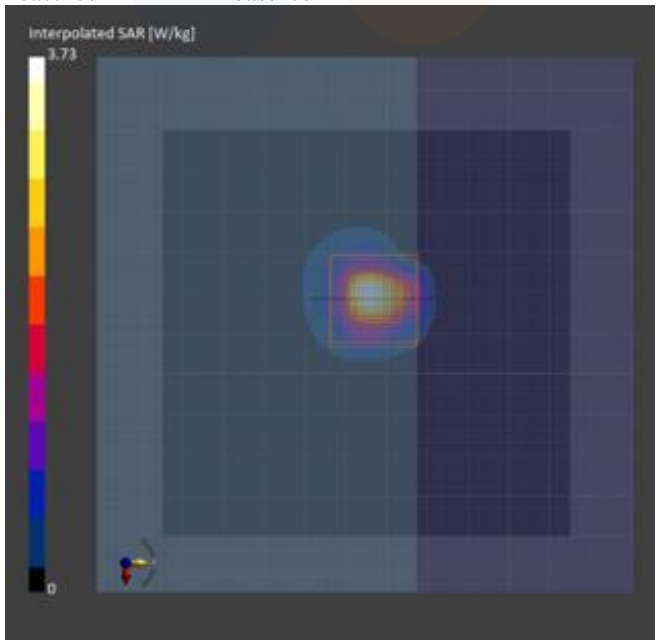

6)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 114 (5570.000MHz)


Device under Test Properties			
Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Main Antenna

Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5570.000, 114	5.08	5.11	34.7

Hardware Setup			
Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup	Measurement Results	
	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results		
	Area Scan	Zoom Scan
Date	2024-09-27	2024-09-27
psSAR1g [W/kg]	1.09	1.15
psSAR8g [W/kg]	0.381	0.392
psSAR10g [W/kg]	0.329	0.341
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.04
Peak SAR [W/kg]		5.81

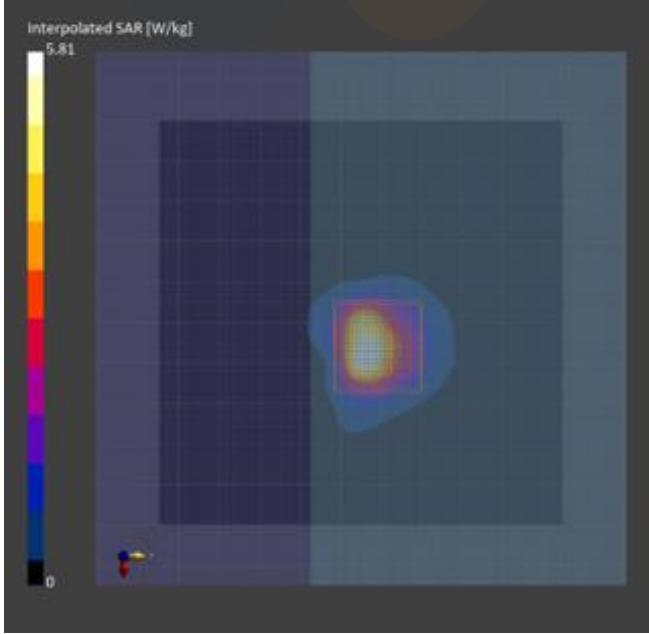

7)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 114 (5570.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5570.000, 114	5.08	5.11	34.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.541	0.650
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.169	0.179
Graded Grid	No	Yes	psSAR10g [W/kg]	0.144	0.152
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.02
Scan Method	Measured	Measured	Peak SAR [W/kg]		3.84

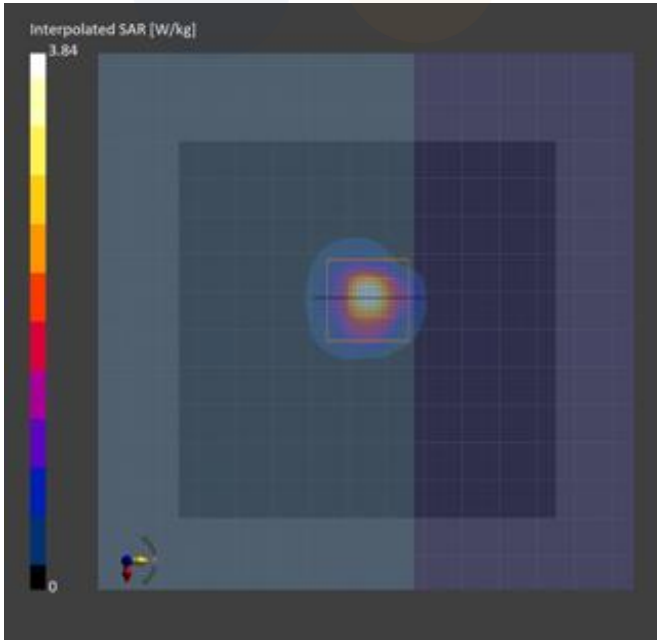

8)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 155 (5775.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5775.000, 155	5.07	5.31	34.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	0.682	0.673
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.206	0.205
Graded Grid	No	Yes	psSAR10g [W/kg]	0.176	0.178
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.09
Scan Method	Measured	Measured	Peak SAR [W/kg]		3.77

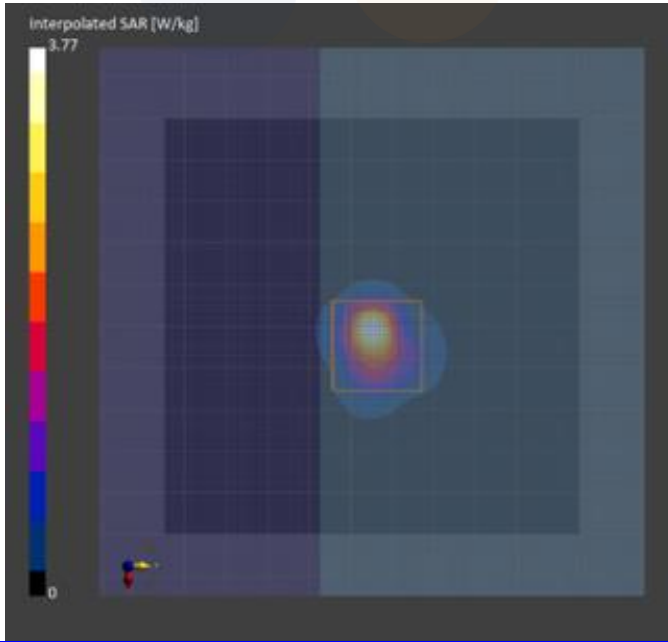

9)
Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 155 (5775.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5775.000, 155	5.07	5.31	34.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.517	0.598
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.160	0.174
Graded Grid	No	Yes	psSAR10g [W/kg]	0.137	0.149
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.12
Scan Method	Measured	Measured	Peak SAR [W/kg]		3.69

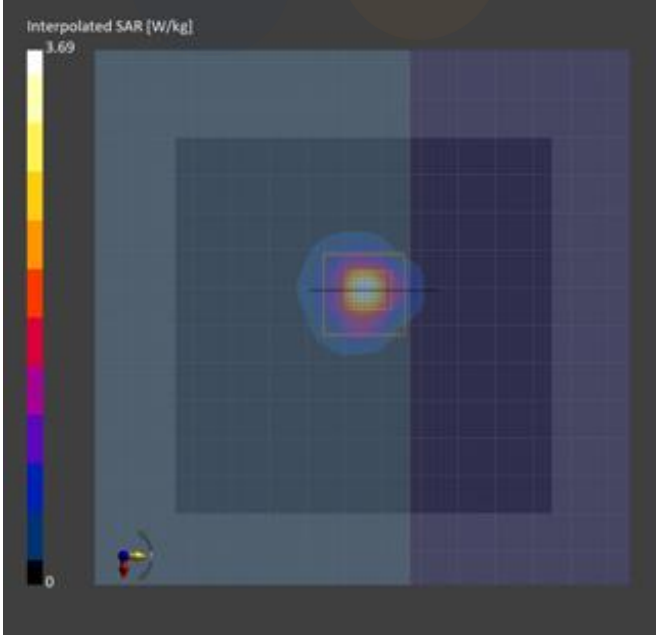

10)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 163 (5815.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Main Antenna

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5815.000, 163	5.07	5.42	34.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-27	2024-09-27
psSAR1g [W/kg]	0.729	0.759
psSAR8g [W/kg]	0.211	0.217
psSAR10g [W/kg]	0.180	0.188
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.09
Peak SAR [W/kg]		4.40

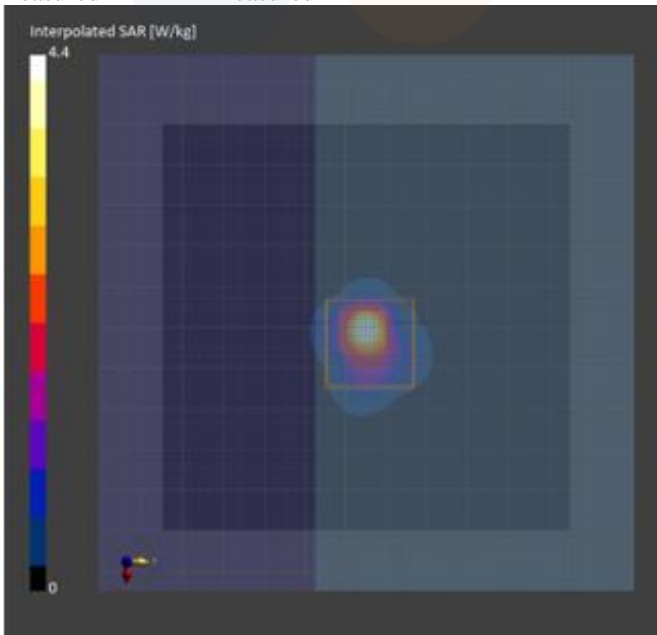

11)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, Custom Band, UID 0 -, Channel 163 (5815.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	Custom Band	CW, 0--	5815.000, 163	5.07	5.42	34.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.570	0.664
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.176	0.192
Graded Grid	No	Yes	psSAR10g [W/kg]	0.151	0.165
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.09
Scan Method	Measured	Measured	Peak SAR [W/kg]		4.13

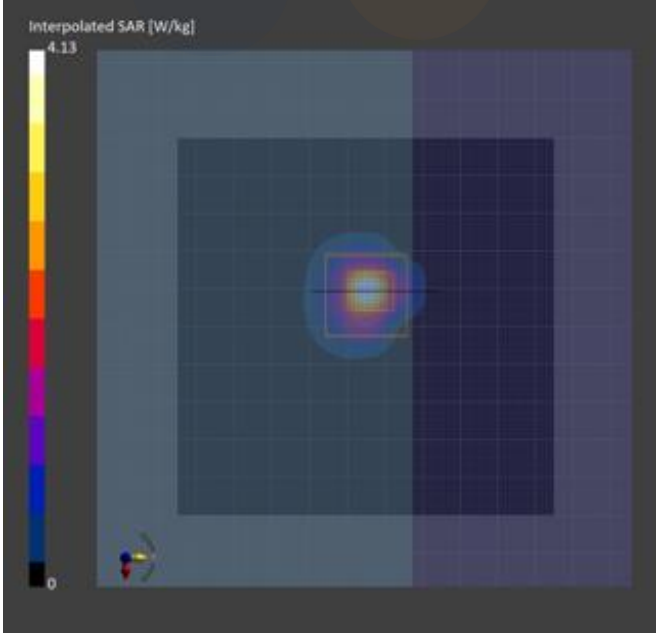

12)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, BACK, ISM 2.4 GHz Band, UID 10032 CAA, Channel 78 (2480.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	355.0 x 228.0 x 10.0	1S7D91ZX800030X	Laptop + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.000, 78	6.81	1.79	37.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5	psSAR1g [W/kg]	0.350	0.417
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.162	0.168
Graded Grid	No	Yes	psSAR10g [W/kg]	0.143	0.147
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.01
Scan Method	Measured	Measured	Peak SAR [W/kg]		1.16

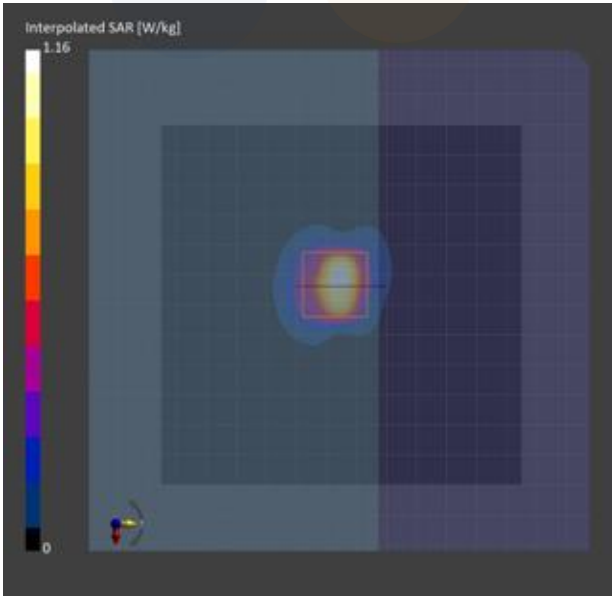

13)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE LEFT, D2450, UID 0 -, Channel 1 (2412.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE LEFT, 0.00	D2450	CW, 0--	2412.000, 1	6.81	1.73	37.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	4.6 x 4.6 x 1.5	psSAR1g [W/kg]	0.569	0.606
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.231	0.231
Graded Grid	No	Yes	psSAR10g [W/kg]	0.204	0.203
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.04
Scan Method	Measured	Measured	Peak SAR [W/kg]		1.96

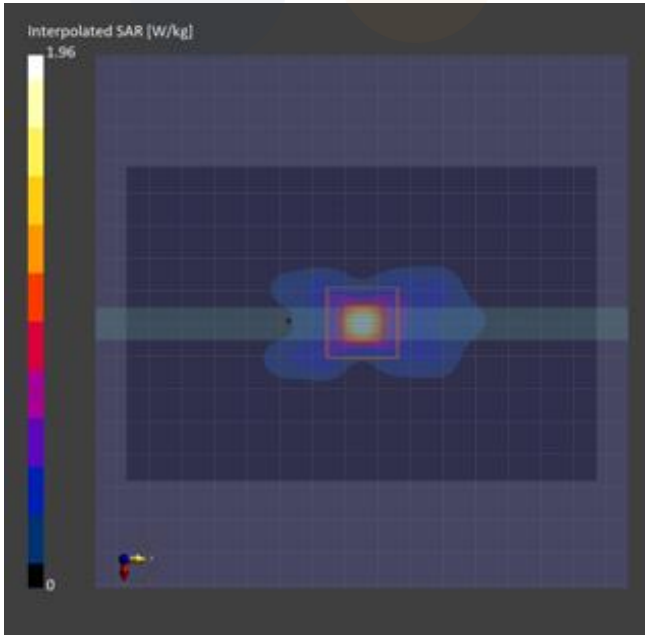

14)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE RIGHT, D2450, UID 0 -, Channel 11 (2462.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 0.00	D2450	CW, 0--	2462.000, 11	6.81	1.78	37.8

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	4.6 x 4.6 x 1.5	psSAR1g [W/kg]	0.195	0.211
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.081	0.078
Graded Grid	No	Yes	psSAR10g [W/kg]	0.071	0.068
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		0.04
Scan Method	Measured	Measured	Peak SAR [W/kg]		0.722

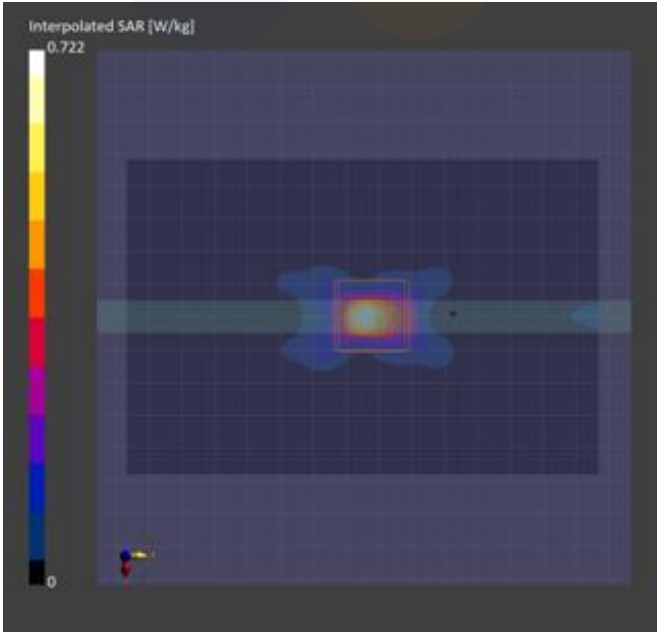

15)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE LEFT, Custom Band, UID 0 -, Channel 50 (5250.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE LEFT, 0.00	Custom Band	CW, 0--	5250.000, 50	5.5	4.74	35.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	0.697	0.728
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.210	0.205
Graded Grid	No	Yes	psSAR10g [W/kg]	0.178	0.172
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		0.01
Detection			Peak SAR [W/kg]		3.52
Scan Method	Measured	Measured			

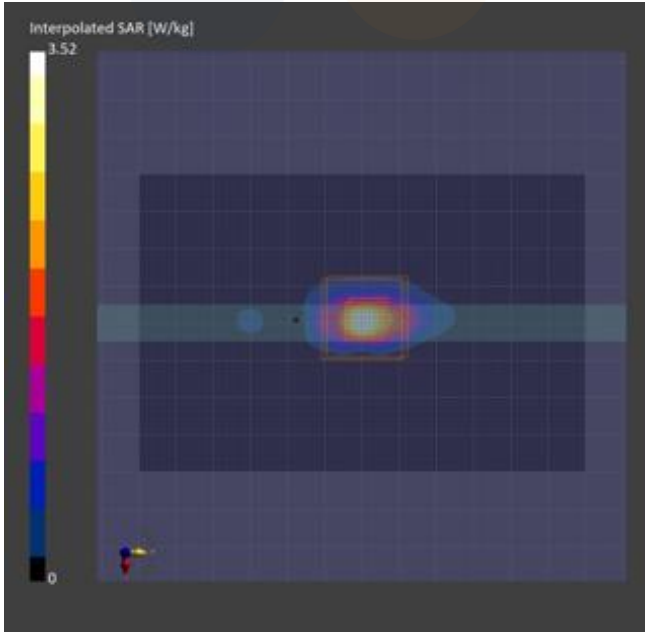

16)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE RIGHT, Custom Band, UID 0 -, Channel 50 (5250.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 0.00	Custom Band	CW, 0--	5250.000, 50	5.5	4.74	35.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	2.9 x 2.9 x 1.2	psSAR1g [W/kg]	0.465	0.492
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.133	0.129
Graded Grid	No	Yes	psSAR10g [W/kg]	0.113	0.108
Grading Ratio	N/A	1.2	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.08
Detection			Peak SAR [W/kg]		2.69
Scan Method	Measured	Measured			

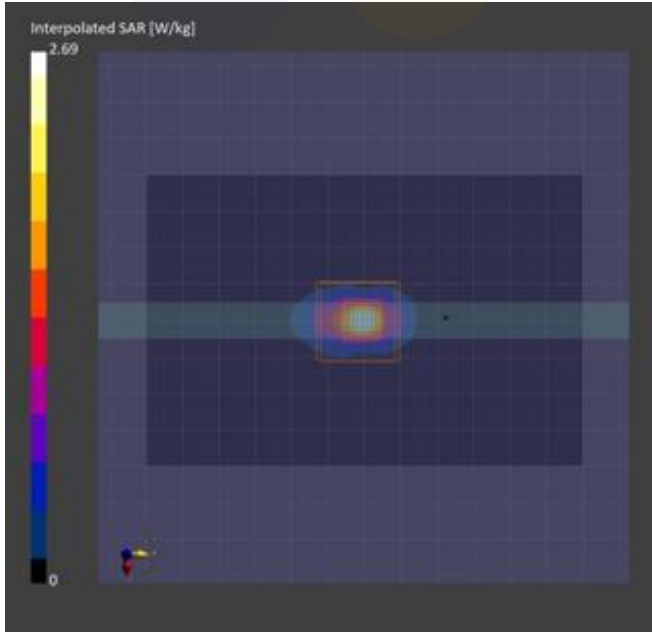

17)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE LEFT, Custom Band, UID 0 -, Channel 114 (5570.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE LEFT, 0.00	Custom Band	CW, 0--	5570.000, 114	5.08	5.11	34.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.9 x 3.9 x 1.4	psSAR1g [W/kg]	0.435	0.451
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.131	0.129
Graded Grid	No	Yes	psSAR10g [W/kg]	0.111	0.109
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.13
Scan Method	Measured	Measured	Peak SAR [W/kg]		2.48

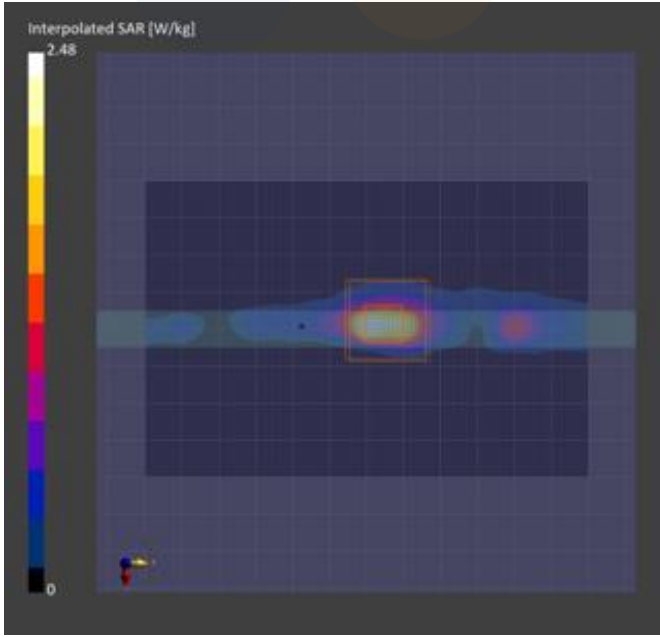

18)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE RIGHT, Custom Band, UID 0 -, Channel 114 (5570.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 0.00	Custom Band	CW, 0--	5570.000, 114	5.08	5.11	34.7

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.295	0.295
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.085	0.077
Graded Grid	No	Yes	psSAR10g [W/kg]	0.072	0.065
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.11
Scan Method	Measured	Measured	Peak SAR [W/kg]		1.63

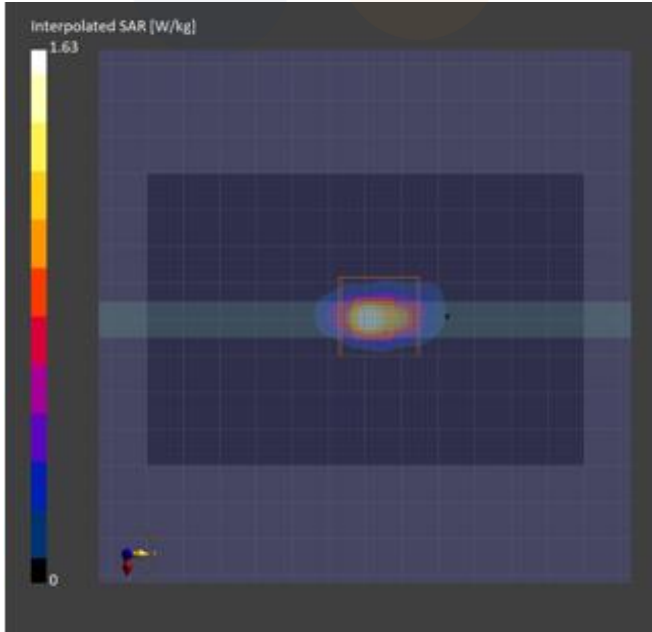

19)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE LEFT, Custom Band, UID 0 -, Channel 155 (5775.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE LEFT, 0.00	Custom Band	CW, 0--	5775.000, 155	5.07	5.31	34.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	0.433	0.421
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.131	0.119
Graded Grid	No	Yes	psSAR10g [W/kg]	0.112	0.101
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.13
Detection			Peak SAR [W/kg]		2.24
Scan Method	Measured	Measured			

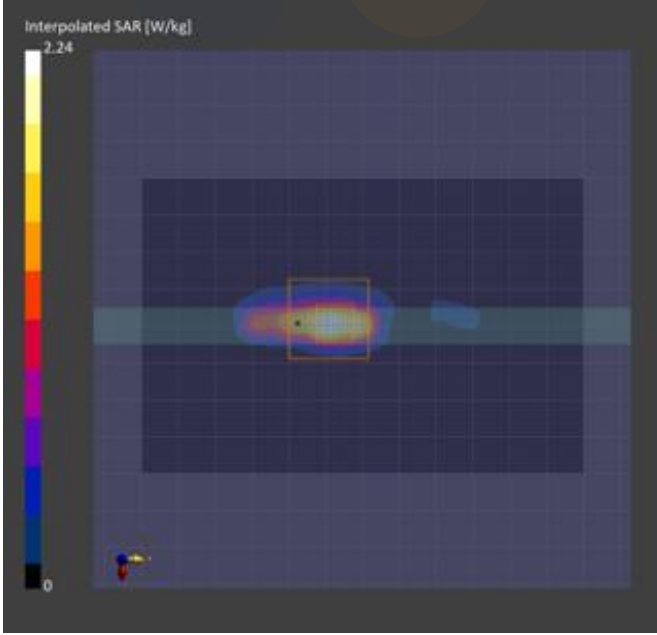

20)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE RIGHT, Custom Band, UID 0 -, Channel 155 (5775.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 0.00	Custom Band	CW, 0--	5775.000, 155	5.07	5.31	34.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.412	0.445
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.120	0.113
Graded Grid	No	Yes	psSAR10g [W/kg]	0.101	0.094
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		0.07
Detection			Peak SAR [W/kg]		2.53
Scan Method	Measured	Measured			

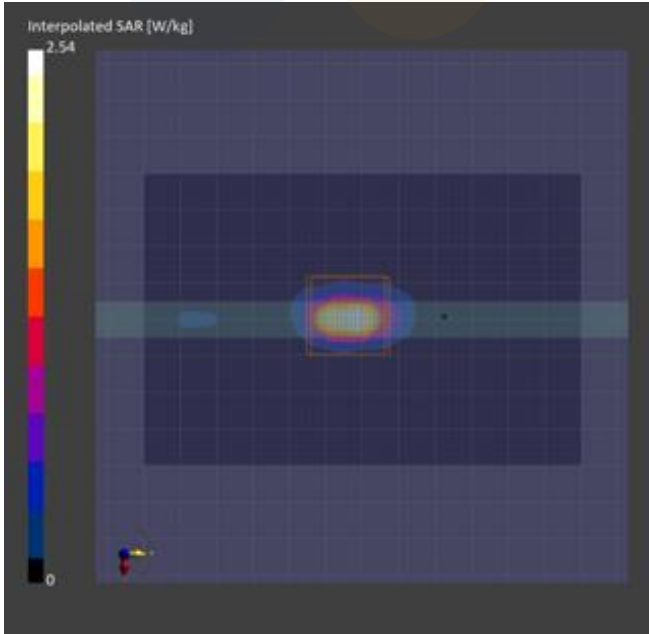

21)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE LEFT, Custom Band, UID 0 -, Channel 163 (5815.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Main Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE LEFT, 0.00	Custom Band	CW, 0--	5815.000, 163	5.07	5.42	34.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.6 x 3.6 x 1.4	psSAR1g [W/kg]	0.652	0.662
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.198	0.186
Graded Grid	No	Yes	psSAR10g [W/kg]	0.169	0.156
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		0.11
Detection			Peak SAR [W/kg]		3.50
Scan Method	Measured	Measured			

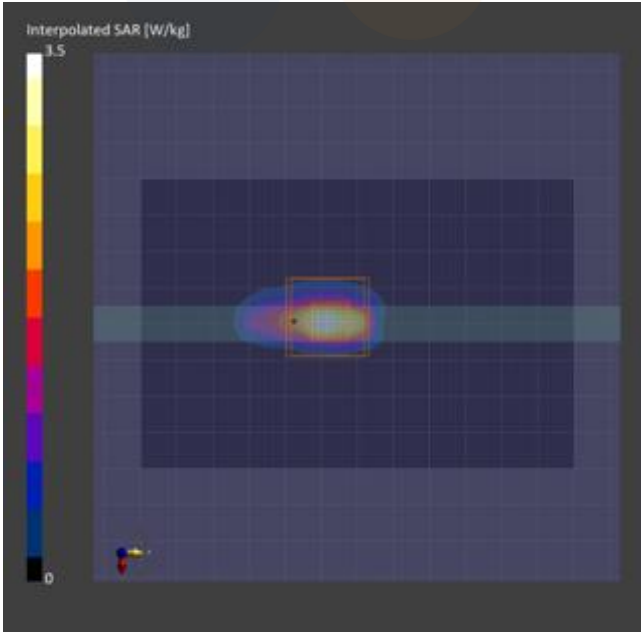

22)

Eurofins KCTL Co.,Ltd.

Measurement Report for NP750QHA, EDGE RIGHT, Custom Band, UID 0 -, Channel 163 (5815.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Aux Antenna

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 0.00	Custom Band	CW, 0--	5815.000, 163	5.07	5.42	34.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-27	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	22.0 x 22.0 x 22.0	Date	2024-09-27	2024-09-27
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4	psSAR1g [W/kg]	0.515	0.544
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.151	0.142
Graded Grid	No	Yes	psSAR10g [W/kg]	0.128	0.118
Grading Ratio	N/A	1.4	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface	VMS + 6p	VMS + 6p	Power Drift [dB]		0.01
Detection			Peak SAR [W/kg]		3.06
Scan Method	Measured	Measured			

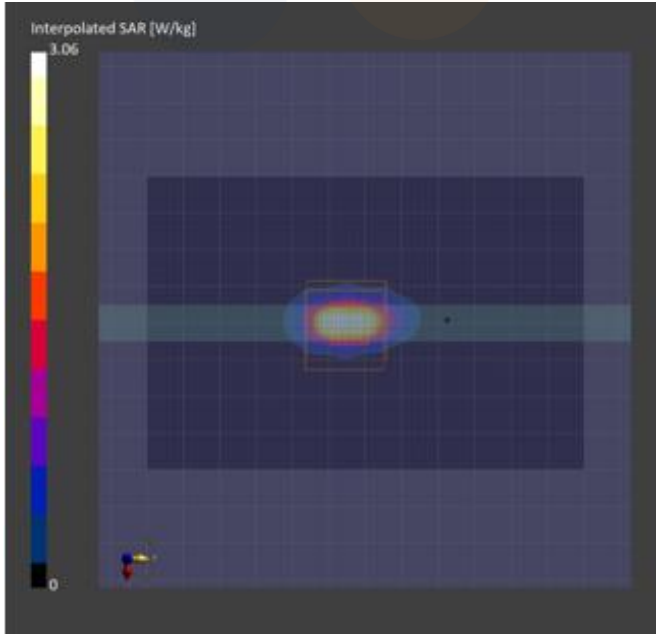


23)
Eurofins KCTL Co.,Ltd.
Measurement Report for NP750QHA, EDGE RIGHT, ISM 2.4 GHz Band, UID 10032 CAA, Channel 78
(2480.000MHz)

Device under Test Properties			
Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
NP750QHA, SAMSUNG	228.0 x 355.0 x 10.0	1S7D91ZX800030X	Tablet + Aux Antenna

Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE RIGHT, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.000, 78	6.81	1.79	37.8

Hardware Setup			
Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 - 1173	HBBL-600-10000 , 2024-09-26	EX3DV4 - SN7840, 2024-08-20	DAE4 Sn1758, 2024-08-15

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-09-26	2024-09-26
Grid Steps [mm]	12.0 x 12.0	4.6 x 4.6 x 1.5	psSAR1g [W/kg]	0.036	0.036
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.016	0.011
Graded Grid	No	Yes	psSAR10g [W/kg]	0.014	0.01
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.08
Scan Method	Measured	Measured	Peak SAR [W/kg]		0.133

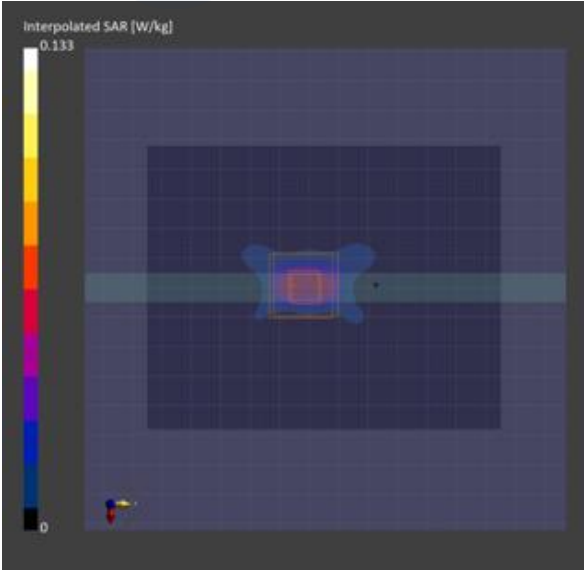

Appendixes List

Appendix A	A.1 Probe Calibration certificate (EX3DV4_7840) A.2 Dipole Calibration certificate (D2450V2_895) A.3 Dipole Calibration certificate (D5GHzV2_1134) A.4 Justification for Extended SAR Dipole Calibrations
Appendix B	SAR Tissue Specification
Appendix C	Power Reduction Verification
Appendix D	#Antenna Location & Distance
Appendix E	EUT Photo
Appendix F	Test Setup Photo