



TEST REPORT

Report No. : **CTC2024281902**

FCC ID..... : **2BFQX-OPS-G5UPGRADE**

Applicant : **Moka Technology(Guangdong) Co., Ltd.**

Address..... : No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China

Manufacturer..... : Moka Technology(Guangdong) Co., Ltd.

Address..... : No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China

Product Name : **Android EDLA Upgrade Module**

Trade Mark : Touchview Interactive

Model/Type reference..... : TV-G5UPGRADE

Listed Model(s) : /

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Test Report Form No : CTC-TR-059_A1

Master TRF..... : Dated 2024-09-20

Date of receipt of test sample..... : Nov. 27, 2024

Date of testing..... : Nov. 27, 2024 ~ Jan. 12, 2025

Date of issue..... : Jan. 13, 2025

Result..... : **PASS**

Compiled by:

(Printed name+signature)

Jim Jiang

Jim Jiang

Supervised by:

(Printed name+signature)

Eric Zhang

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents****Page**

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	12
3.1. CONDUCTED EMISSION.....	12
3.2. RADIATED EMISSION.....	15
3.3. BAND EDGE EMISSIONS (RADIATED)	29
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	42
3.5. 20dB BANDWIDTH.....	49
3.6. CHANNEL SEPARATION.....	54
3.7. NUMBER OF HOPPING CHANNEL.....	56
3.8. DWELL TIME	58
3.9. PEAK OUTPUT POWER	63
3.10. DUTY CYCLE	65
3.11. ANTENNA REQUIREMENT.....	69



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 3](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2024281902	Jan. 13, 2025	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	ISED		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Jim Jiang
Hopping Channel Separation	15.247(a)(1)	RSS-247 5.1 (b)	Pass	Jim Jiang
Dwell Time	15.247(a)(iii)	RSS-247 5.1 (d)	Pass	Jim Jiang
Peak Output Power	15.247(b)(1)	RSS-247 5.4 (b)	Pass	Jim Jiang
Number of Hopping Frequency	15.247(a)(iii)	RSS-247 5.1 (d)	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Spurious Emission	15.247(d) &15.209	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang
20dB Bandwidth	15.247(a)	RSS-247 5.1 (b)	Pass	Jim Jiang
Occupied Bandwidth	/	RSS-Gen 6.7	Pass	Jim Jiang

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
20dB Emission Bandwidth	$\pm 0.0196\%$	(1)
Carrier Frequency Separation	$\pm 1.9\%$	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.028\%$	(1)
Max Peak Conducted Output Power	± 0.743 dB	(1)
Band-edge Spurious Emission	± 1.328 dB	(1)
Conducted RF Spurious Emission	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Moka Technology(Guangdong) Co., Ltd.
Address:	No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China
Manufacturer:	Moka Technology(Guangdong) Co., Ltd.
Address:	No. 1, Qiaoguang Road, Chenjiang Street, Zhongkai New and High-tech Industries Development Zone, 516029 Huizhou Guangdong, P.R. China

2.2. General Description of EUT

Product Name:	Android EDLA Upgrade Module
Trade Mark:	Touchview Interactive
Model/Type reference:	TV-G5UPGRADE
Listed Model(s):	/
Model Difference:	/
Sample ID:	CTC241127-007-S001
Power Supply:	Input: 12~19Vdc/3A
Hardware Version:	/
Software Version:	/
Bluetooth 5.2 / BR+EDR	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	79
Channel Separation:	1MHz
Antenna 1 Type:	External Antenna
Antenna 1 Gain:	3.04dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	MP246QDR	Lenovo
Power Supply	FJ-GN636S1203000S	/	FUJIA
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
Test Software Information			
Name	Version	/	/
SecureCRTPortable	7.1.1	/	/

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The engineering test program was provided and enabled to make EUT continuous transmit.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
2	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
3	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
4	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2024
5	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2024
6	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 21, 2025
2	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2025
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2025
4	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2025
5	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2025
6	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2025
7	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 21, 2025
8	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 21, 2025
9	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2025
10	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 21, 2025
11	RF Control Unit	Tonscend	JS0806-2	/	Aug. 21, 2025

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 24, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2025
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2025
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2025
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



7	Test Software	FARA	EZ-EMC	FA-03A2	/
---	---------------	------	--------	---------	---

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2025
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

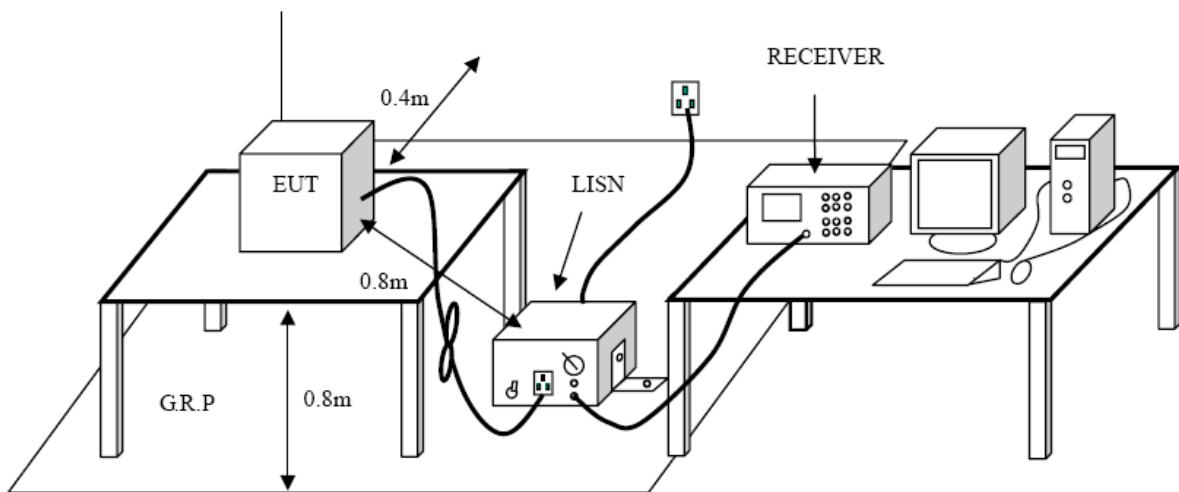

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported.

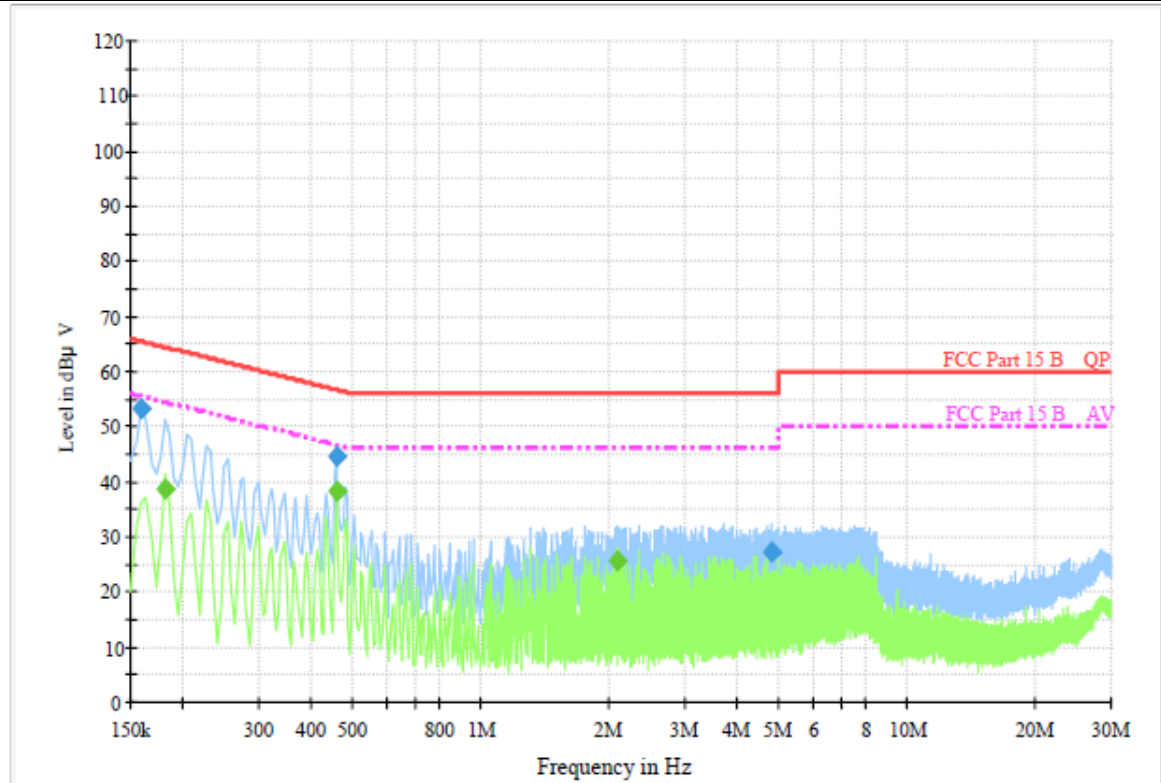**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.159000	53.4	1000.00	9.000	On	L1	9.5	12.1	65.5	
0.456000	44.7	1000.00	9.000	On	L1	9.5	12.1	56.8	
4.789500	27.4	1000.00	9.000	On	L1	9.5	28.6	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.181500	38.5	1000.00	9.000	On	L1	9.5	15.9	54.4	
0.456000	38.4	1000.00	9.000	On	L1	9.5	8.4	46.8	
2.076000	25.7	1000.00	9.000	On	L1	9.5	20.3	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported.

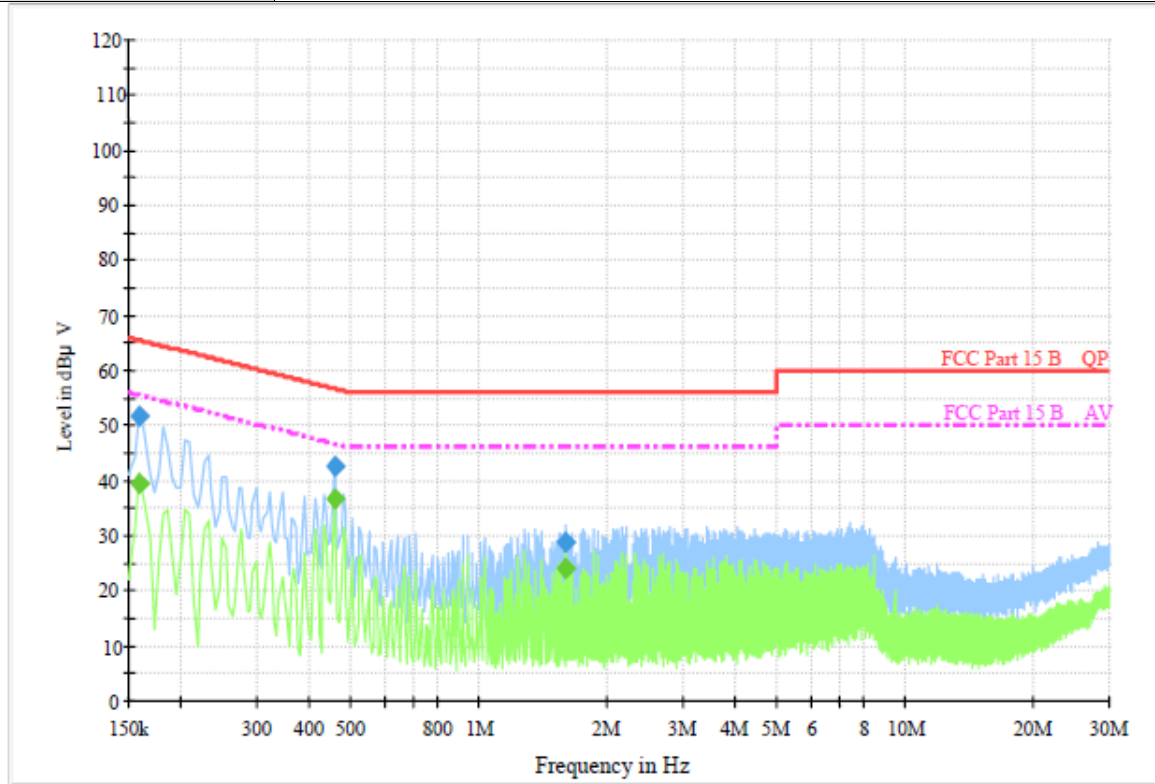

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.159000	51.8	1000.00	9.000	On	N	9.5	13.7	65.5	
0.456000	42.8	1000.00	9.000	On	N	9.4	14.0	56.8	
1.599000	29.0	1000.00	9.000	On	N	9.4	27.0	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.159000	39.3	1000.00	9.000	On	N	9.5	16.2	55.5	
0.456000	36.8	1000.00	9.000	On	N	9.4	10.0	46.8	
1.599000	24.3	1000.00	9.000	On	N	9.4	21.7	46.0	

Emission Level = Read Level + Correct Factor

3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBμV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBμV/m)=20log Emission Level (μV/m).


Test Configuration

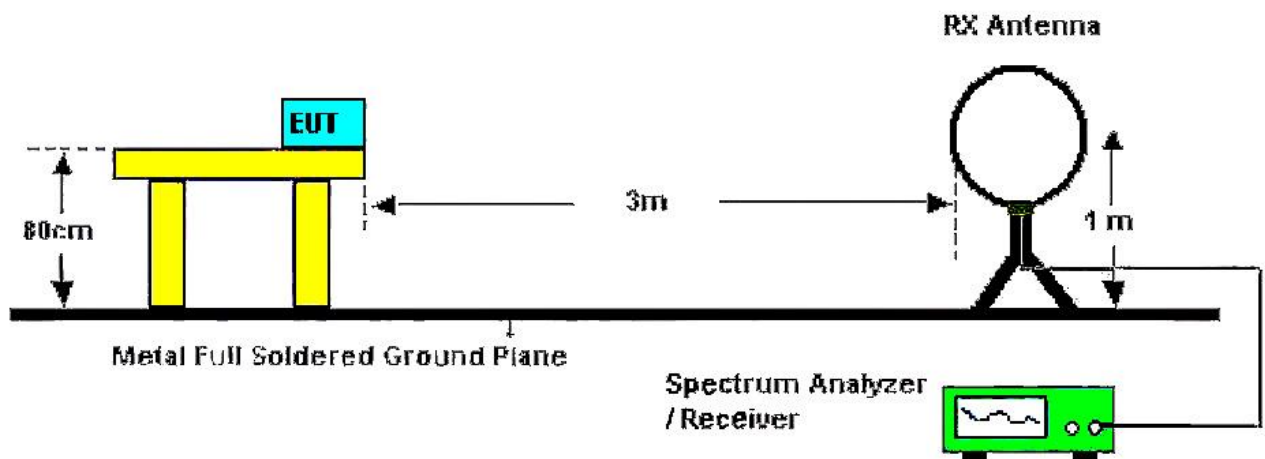

Below 30MHz Test Setup

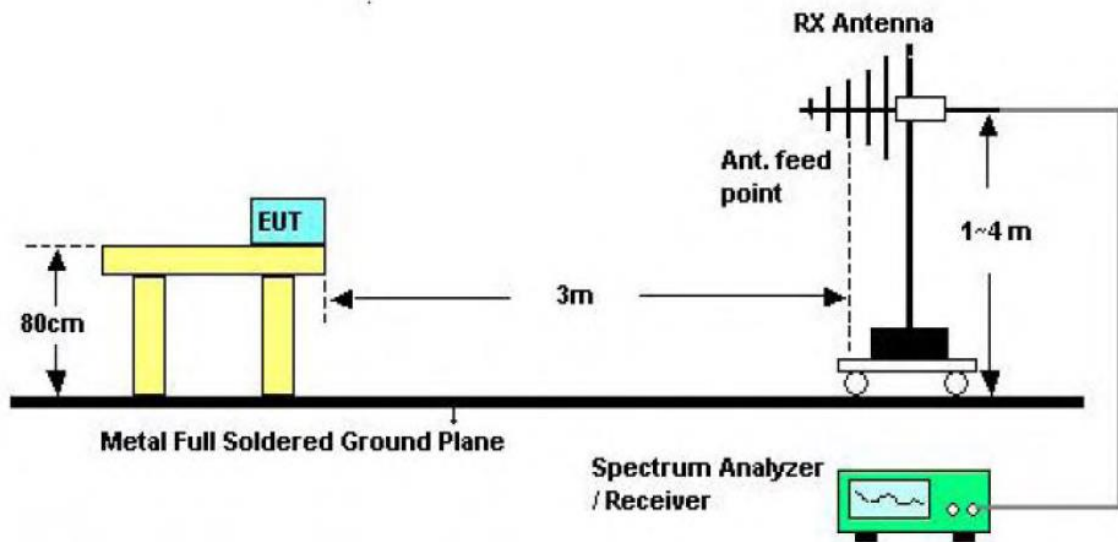

30-1000MHz Test Setup

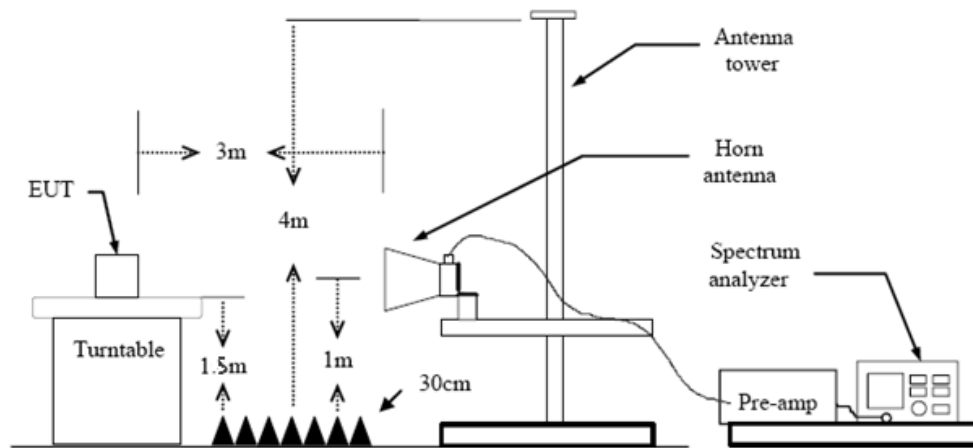

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold



If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz


From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

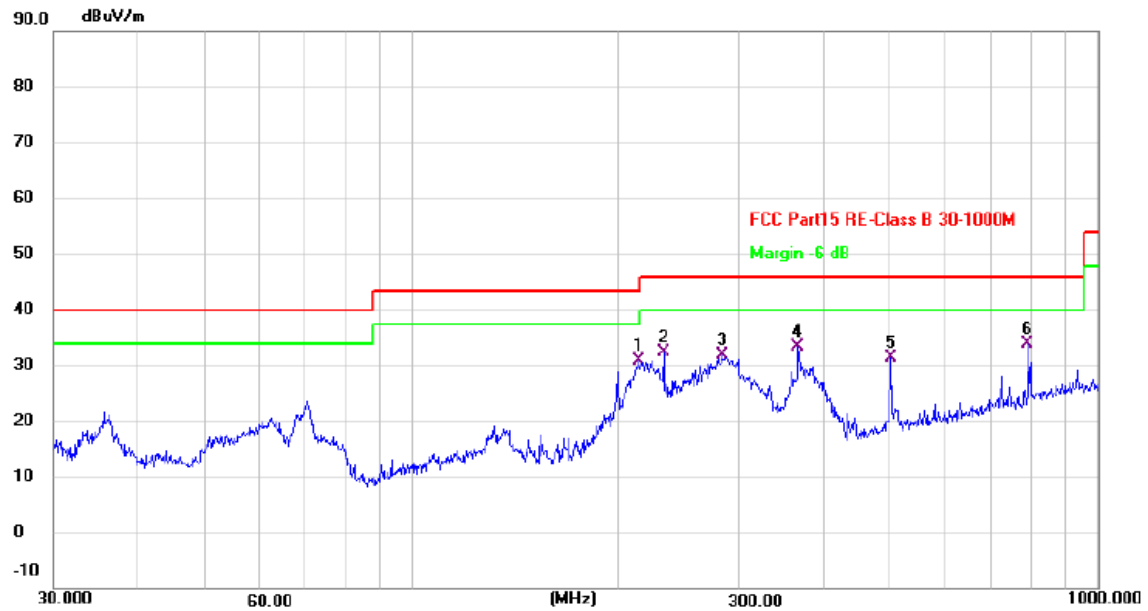


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	214.5141	47.80	-17.02	30.78	43.50	-12.72	QP
2	233.3486	48.25	-15.98	32.27	46.00	-13.73	QP
3	283.2332	46.16	-14.37	31.79	46.00	-14.21	QP
4	365.5389	45.42	-12.09	33.33	46.00	-12.67	QP
5	500.3009	40.19	-8.88	31.31	46.00	-14.69	QP
6 *	792.7006	36.72	-2.94	33.78	46.00	-12.22	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

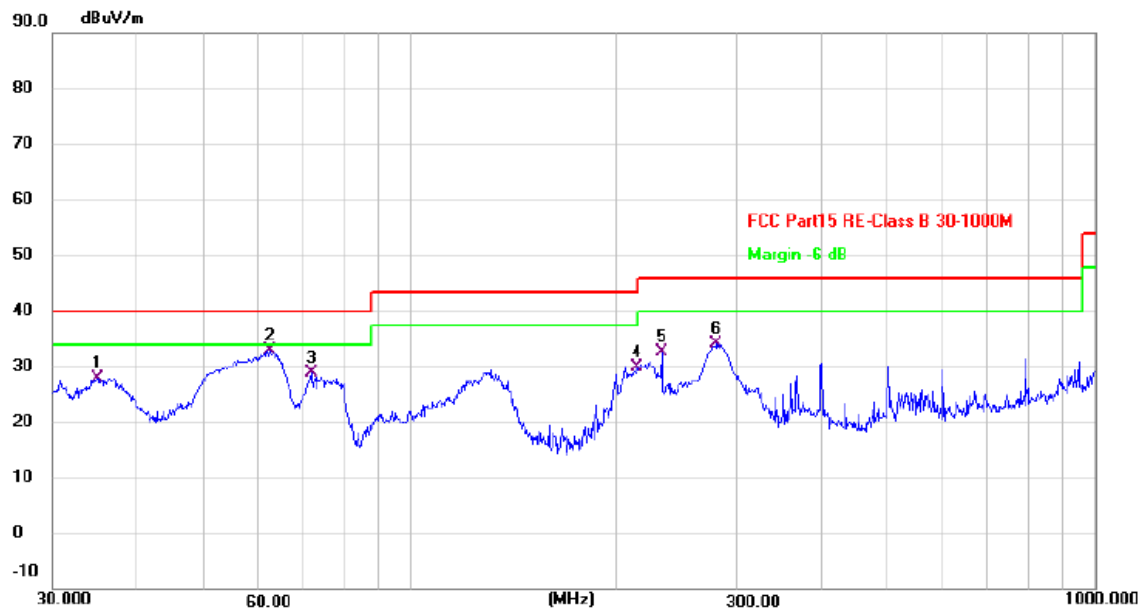

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.9127	42.00	-14.02	27.98	40.00	-12.02	QP
2 *	62.3766	48.67	-15.85	32.82	40.00	-7.18	QP
3	71.7061	45.99	-17.14	28.85	40.00	-11.15	QP
4	215.0791	46.83	-17.00	29.83	43.50	-13.67	QP
5	232.9397	48.55	-16.00	32.55	46.00	-13.45	QP
6	280.2694	48.54	-14.47	34.07	46.00	-11.93	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Above 1GHz

Ant. Pol.	Horizontal																																																														
Test Mode:	TX GFSK Mode 2402MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>2966.167</td><td>42.28</td><td>-2.19</td><td>40.09</td><td>74.00</td><td>-33.91</td><td>peak</td></tr><tr><td>2</td><td>3914.000</td><td>41.46</td><td>0.21</td><td>41.67</td><td>74.00</td><td>-32.33</td><td>peak</td></tr><tr><td>3</td><td>5179.083</td><td>40.48</td><td>2.82</td><td>43.30</td><td>74.00</td><td>-30.70</td><td>peak</td></tr><tr><td>4</td><td>7685.750</td><td>38.89</td><td>10.22</td><td>49.11</td><td>74.00</td><td>-24.89</td><td>peak</td></tr><tr><td>5</td><td>9189.750</td><td>39.06</td><td>12.33</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>peak</td></tr><tr><td>6 *</td><td>11982.333</td><td>37.94</td><td>15.42</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	42.28	-2.19	40.09	74.00	-33.91	peak	2	3914.000	41.46	0.21	41.67	74.00	-32.33	peak	3	5179.083	40.48	2.82	43.30	74.00	-30.70	peak	4	7685.750	38.89	10.22	49.11	74.00	-24.89	peak	5	9189.750	39.06	12.33	51.39	74.00	-22.61	peak	6 *	11982.333	37.94	15.42	53.36	74.00	-20.64	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	42.28	-2.19	40.09	74.00	-33.91	peak																																																								
2	3914.000	41.46	0.21	41.67	74.00	-32.33	peak																																																								
3	5179.083	40.48	2.82	43.30	74.00	-30.70	peak																																																								
4	7685.750	38.89	10.22	49.11	74.00	-24.89	peak																																																								
5	9189.750	39.06	12.33	51.39	74.00	-22.61	peak																																																								
6 *	11982.333	37.94	15.42	53.36	74.00	-20.64	peak																																																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																																																															

Ant. Pol.	Vertical																																																														
Test Mode:	TX GFSK Mode 2402MHz																																																														
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>2966.167</td><td>42.51</td><td>-2.19</td><td>40.32</td><td>74.00</td><td>-33.68</td><td>peak</td></tr><tr><td>2</td><td>4317.417</td><td>41.88</td><td>0.96</td><td>42.84</td><td>74.00</td><td>-31.16</td><td>peak</td></tr><tr><td>3</td><td>6342.333</td><td>38.42</td><td>6.83</td><td>45.25</td><td>74.00</td><td>-28.75</td><td>peak</td></tr><tr><td>4</td><td>7274.500</td><td>39.10</td><td>10.05</td><td>49.15</td><td>74.00</td><td>-24.85</td><td>peak</td></tr><tr><td>5</td><td>9131.000</td><td>38.51</td><td>12.14</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>peak</td></tr><tr><td>6 *</td><td>11645.500</td><td>38.42</td><td>15.12</td><td>53.54</td><td>74.00</td><td>-20.46</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	2966.167	42.51	-2.19	40.32	74.00	-33.68	peak	2	4317.417	41.88	0.96	42.84	74.00	-31.16	peak	3	6342.333	38.42	6.83	45.25	74.00	-28.75	peak	4	7274.500	39.10	10.05	49.15	74.00	-24.85	peak	5	9131.000	38.51	12.14	50.65	74.00	-23.35	peak	6 *	11645.500	38.42	15.12	53.54	74.00	-20.46	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	2966.167	42.51	-2.19	40.32	74.00	-33.68	peak																																																								
2	4317.417	41.88	0.96	42.84	74.00	-31.16	peak																																																								
3	6342.333	38.42	6.83	45.25	74.00	-28.75	peak																																																								
4	7274.500	39.10	10.05	49.15	74.00	-24.85	peak																																																								
5	9131.000	38.51	12.14	50.65	74.00	-23.35	peak																																																								
6 *	11645.500	38.42	15.12	53.54	74.00	-20.46	peak																																																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																																																															



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.45	-2.19	40.26	74.00	-33.74	peak
2	4348.750	41.51	1.03	42.54	74.00	-31.46	peak
3	5974.167	38.30	5.56	43.86	74.00	-30.14	peak
4	7207.917	38.12	10.02	48.14	74.00	-25.86	peak
5	8766.750	39.86	11.34	51.20	74.00	-22.80	peak
6 *	11625.917	38.56	15.12	53.68	74.00	-20.32	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.65	-2.19	40.46	74.00	-33.54	peak
2	4787.417	41.58	1.96	43.54	74.00	-30.46	peak
3	6416.750	38.49	7.11	45.60	74.00	-28.40	peak
4	8179.250	40.80	10.41	51.21	74.00	-22.79	peak
5	9863.417	38.61	13.01	51.62	74.00	-22.38	peak
6 *	12628.583	37.48	16.15	53.63	74.00	-20.37	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.51	-2.19	40.32	74.00	-33.68	peak
2	5069.417	41.57	2.47	44.04	74.00	-29.96	peak
3	6397.167	38.94	7.05	45.99	74.00	-28.01	peak
4	7842.417	40.13	10.51	50.64	74.00	-23.36	peak
5	9706.750	38.78	12.78	51.56	74.00	-22.44	peak
6 *	12135.083	37.99	15.63	53.62	74.00	-20.38	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.35	-2.19	41.16	74.00	-32.84	peak
2	4697.333	40.75	1.78	42.53	74.00	-31.47	peak
3	6326.667	39.12	6.77	45.89	74.00	-28.11	peak
4	7583.917	38.62	10.07	48.69	74.00	-25.31	peak
5	9095.750	38.40	12.01	50.41	74.00	-23.59	peak
6 *	11802.167	38.58	15.09	53.67	74.00	-20.33	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	43.02	-2.19	40.83	74.00	-33.17	peak
2	4356.583	41.98	1.04	43.02	74.00	-30.98	peak
3	5782.250	40.33	4.85	45.18	74.00	-28.82	peak
4	7983.417	39.55	10.83	50.38	74.00	-23.62	peak
5	10043.583	37.68	13.27	50.95	74.00	-23.05	peak
6 *	12315.250	37.77	15.58	53.35	74.00	-20.65	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.12	-2.19	39.93	74.00	-34.07	peak
2	4360.500	42.96	1.05	44.01	74.00	-29.99	peak
3	5982.000	39.07	5.58	44.65	74.00	-29.35	peak
4	7196.167	39.19	10.00	49.19	74.00	-24.81	peak
5	9604.917	38.92	12.60	51.52	74.00	-22.48	peak
6 *	11923.583	37.96	15.31	53.27	74.00	-20.73	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.55	-2.19	40.36	74.00	-33.64	peak
2	4384.000	41.11	1.09	42.20	74.00	-31.80	peak
3	6467.667	38.84	7.24	46.08	74.00	-27.92	peak
4	8163.583	39.99	10.44	50.43	74.00	-23.57	peak
5	9941.750	38.32	13.11	51.43	74.00	-22.57	peak
6 *	11911.833	38.39	15.30	53.69	74.00	-20.31	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	41.04	-2.19	38.85	74.00	-35.15	peak
2	4458.417	40.90	1.27	42.17	74.00	-31.83	peak
3	6459.833	37.89	7.22	45.11	74.00	-28.89	peak
4	7513.417	38.99	10.09	49.08	74.00	-24.92	peak
5	10317.750	38.97	13.76	52.73	74.00	-21.27	peak
6 *	12221.250	37.90	15.70	53.60	74.00	-20.40	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	41.68	-2.19	39.49	74.00	-34.51	peak
2	4622.917	40.43	1.65	42.08	74.00	-31.92	peak
3	5696.083	39.61	4.50	44.11	74.00	-29.89	peak
4	7176.583	38.46	9.89	48.35	74.00	-25.65	peak
5	9272.000	38.73	12.43	51.16	74.00	-22.84	peak
6 *	11708.167	38.41	15.10	53.51	74.00	-20.49	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	41.27	-2.19	39.08	74.00	-34.92	peak
2	4442.750	41.66	1.23	42.89	74.00	-31.11	peak
3	5688.250	40.26	4.47	44.73	74.00	-29.27	peak
4	7200.083	39.17	10.02	49.19	74.00	-24.81	peak
5	9334.667	39.13	12.48	51.61	74.00	-22.39	peak
6 *	12154.667	37.67	15.66	53.33	74.00	-20.67	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.53	-2.19	40.34	74.00	-33.66	peak
2	4282.167	40.98	0.89	41.87	74.00	-32.13	peak
3	5915.417	38.81	5.34	44.15	74.00	-29.85	peak
4	7184.417	38.84	9.93	48.77	74.00	-25.23	peak
5	9369.917	39.48	12.52	52.00	74.00	-22.00	peak
6 *	11704.250	38.43	15.11	53.54	74.00	-20.46	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.00	-2.19	39.81	74.00	-34.19	peak
2	4286.083	40.55	0.90	41.45	74.00	-32.55	peak
3	5578.583	39.77	4.04	43.81	74.00	-30.19	peak
4	7200.083	39.46	10.02	49.48	74.00	-24.52	peak
5	9236.750	39.16	12.40	51.56	74.00	-22.44	peak
6 *	11543.667	38.35	15.03	53.38	74.00	-20.62	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	46.20	-2.19	44.01	74.00	-29.99	peak
2	4360.500	41.36	1.05	42.41	74.00	-31.59	peak
3	5570.750	39.91	4.01	43.92	74.00	-30.08	peak
4	7196.167	38.98	10.00	48.98	74.00	-25.02	peak
5	9256.333	38.65	12.42	51.07	74.00	-22.93	peak
6 *	12001.917	38.07	15.45	53.52	74.00	-20.48	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.30	-2.19	40.11	74.00	-33.89	peak
2	4352.667	41.05	1.03	42.08	74.00	-31.92	peak
3	5954.583	38.74	5.49	44.23	74.00	-29.77	peak
4	7959.917	39.14	10.78	49.92	74.00	-24.08	peak
5	9585.333	39.32	12.60	51.92	74.00	-22.08	peak
6 *	12158.583	37.79	15.66	53.45	74.00	-20.55	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	44.67	-2.19	42.48	74.00	-31.52	peak
2	4434.917	40.49	1.22	41.71	74.00	-32.29	peak
3	5993.750	38.74	5.63	44.37	74.00	-29.63	peak
4	7564.333	38.48	10.08	48.56	74.00	-25.44	peak
5	8896.000	40.19	11.55	51.74	74.00	-22.26	peak
6 *	11974.500	38.26	15.41	53.67	74.00	-20.33	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2966.167	42.28	-2.19	40.09	74.00	-33.91	peak
2	3706.417	41.70	-0.52	41.18	74.00	-32.82	peak
3	5633.417	41.14	4.25	45.39	74.00	-28.61	peak
4	7180.500	39.16	9.91	49.07	74.00	-24.93	peak
5	9628.417	38.28	12.65	50.93	74.00	-23.07	peak
6 *	11629.833	38.32	15.13	53.45	74.00	-20.55	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

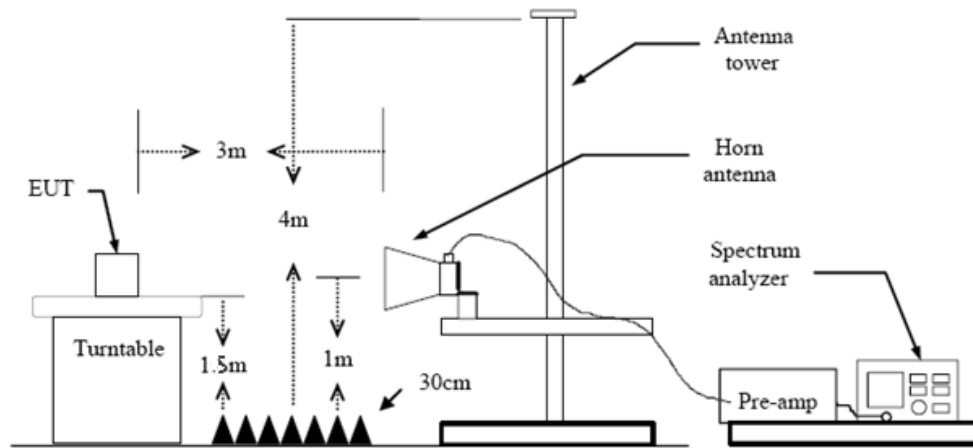


Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

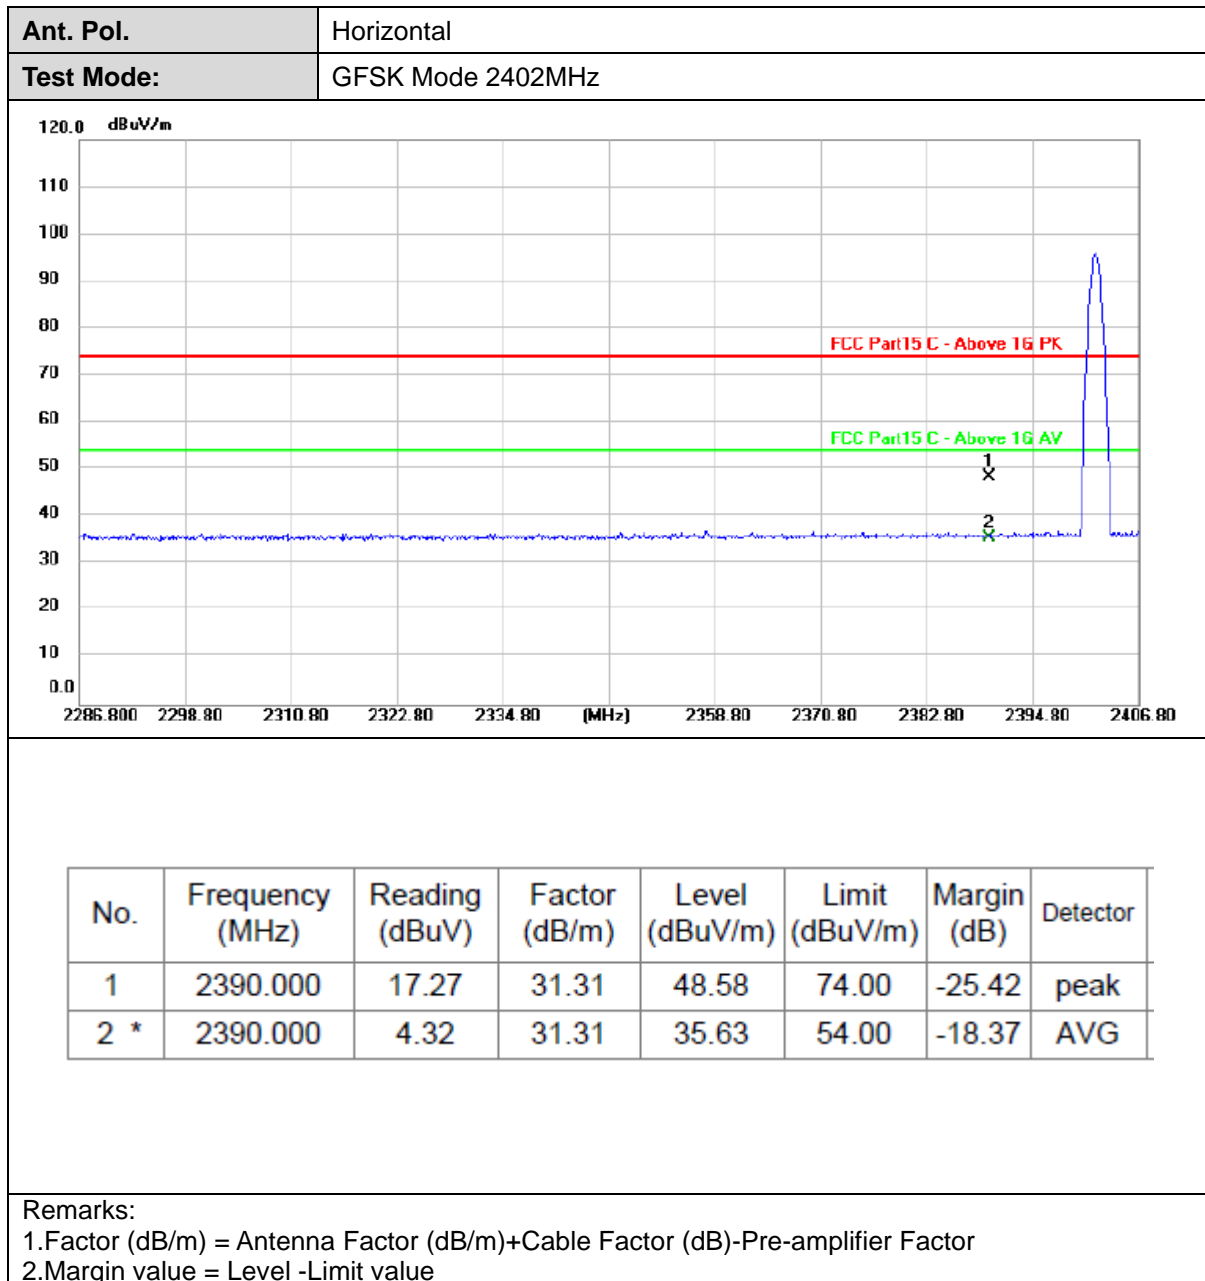
**Test Result**

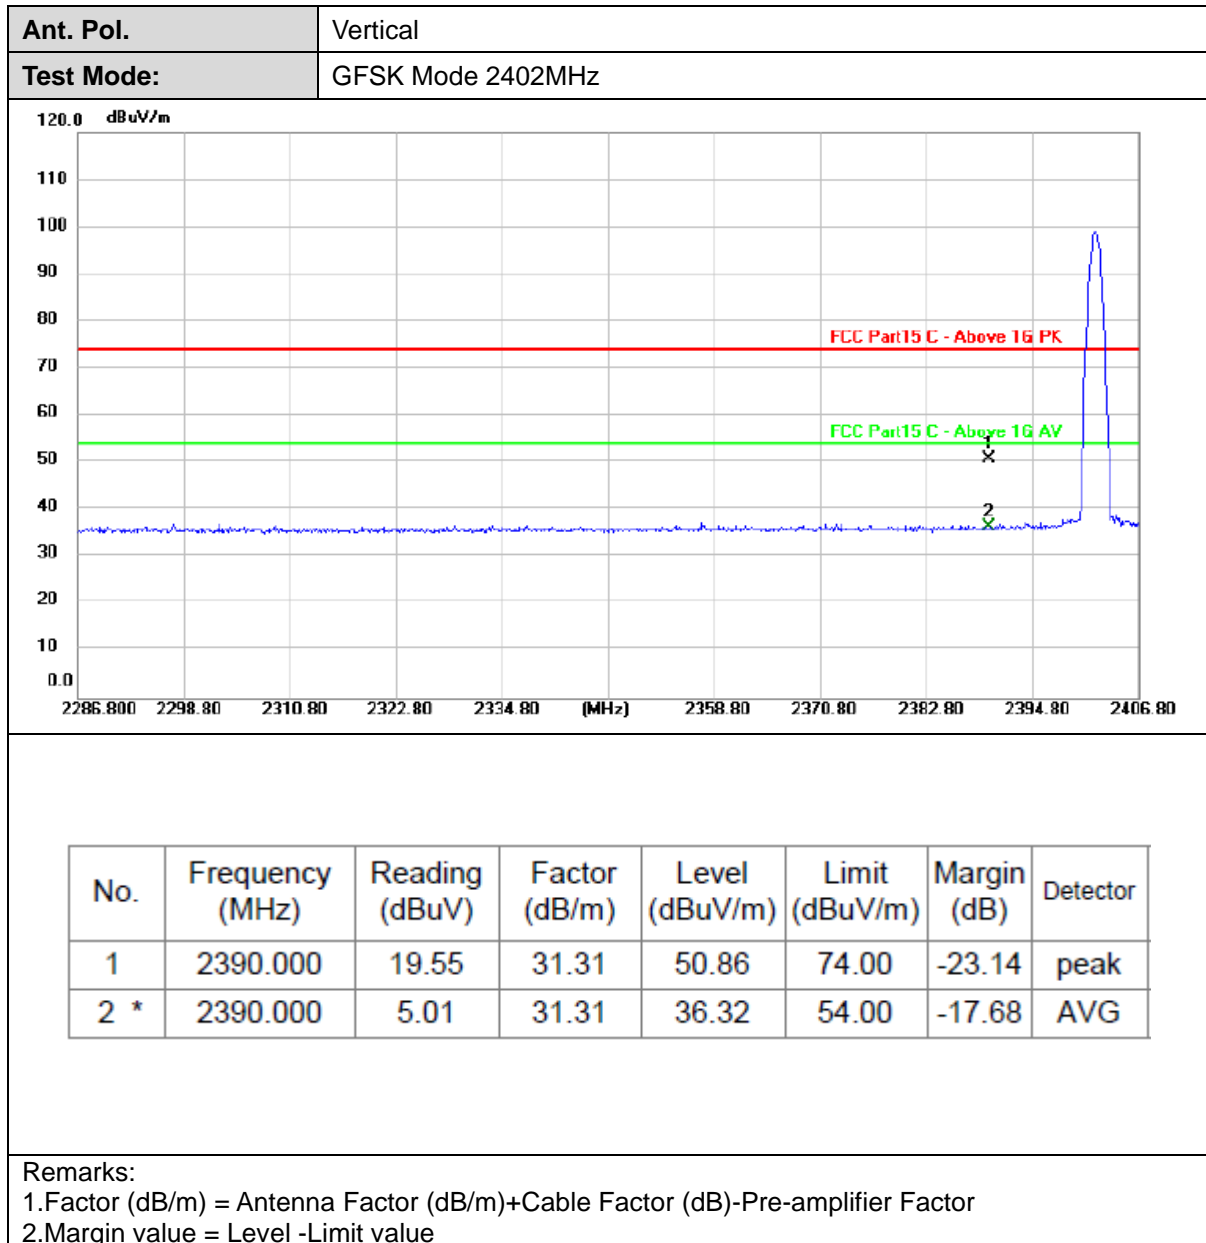


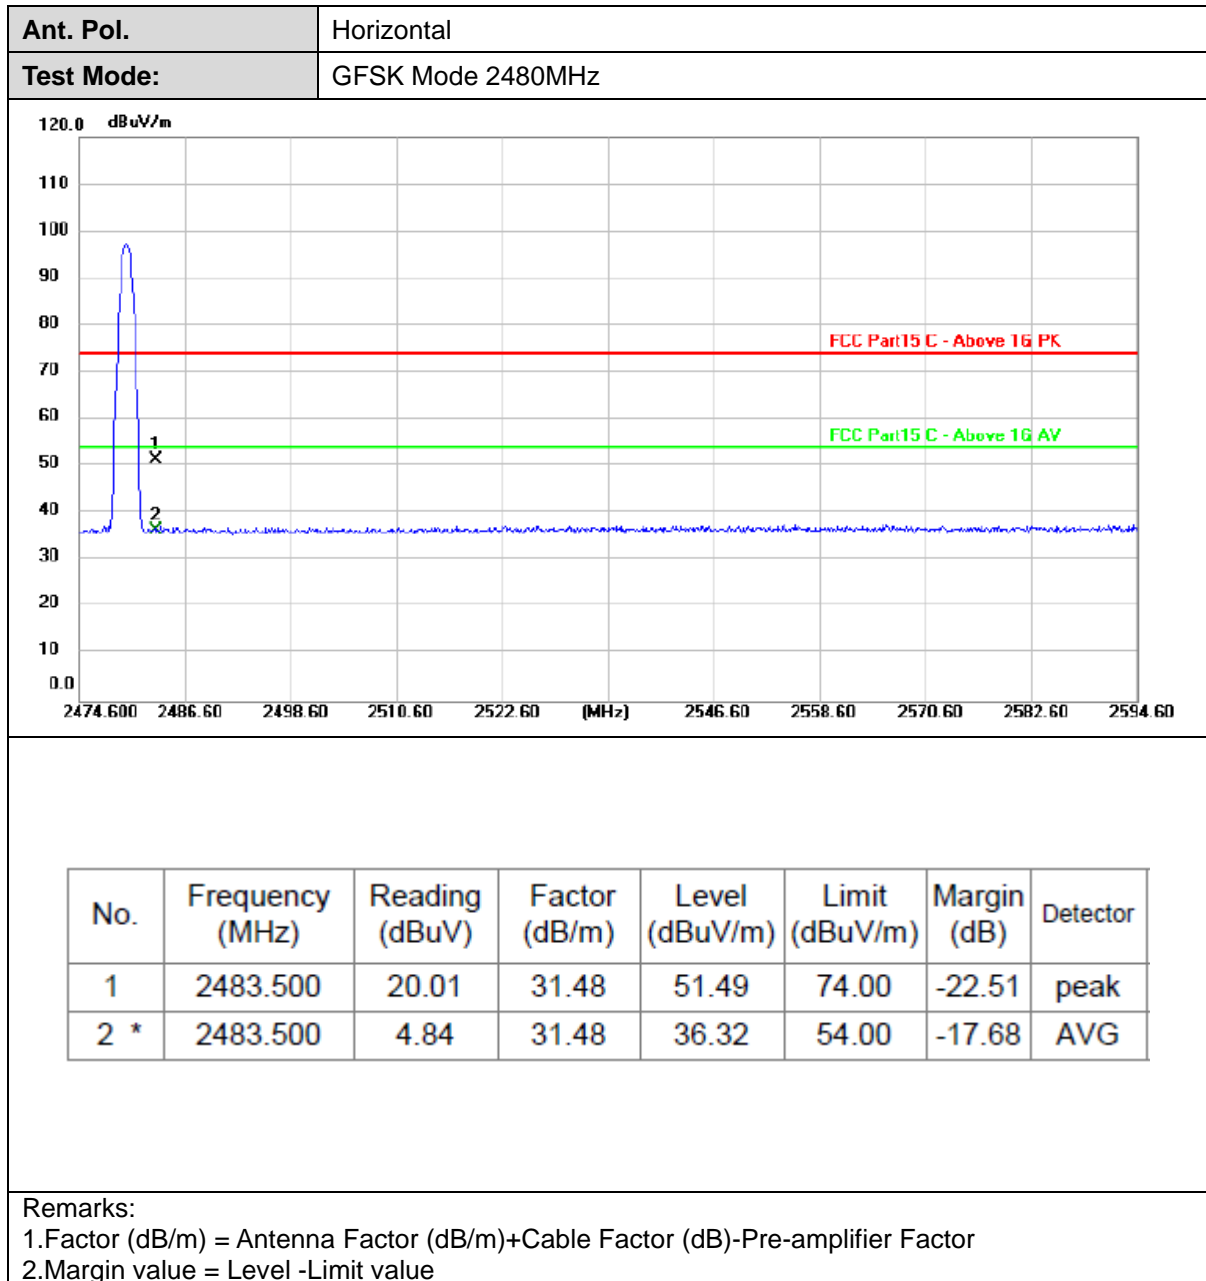


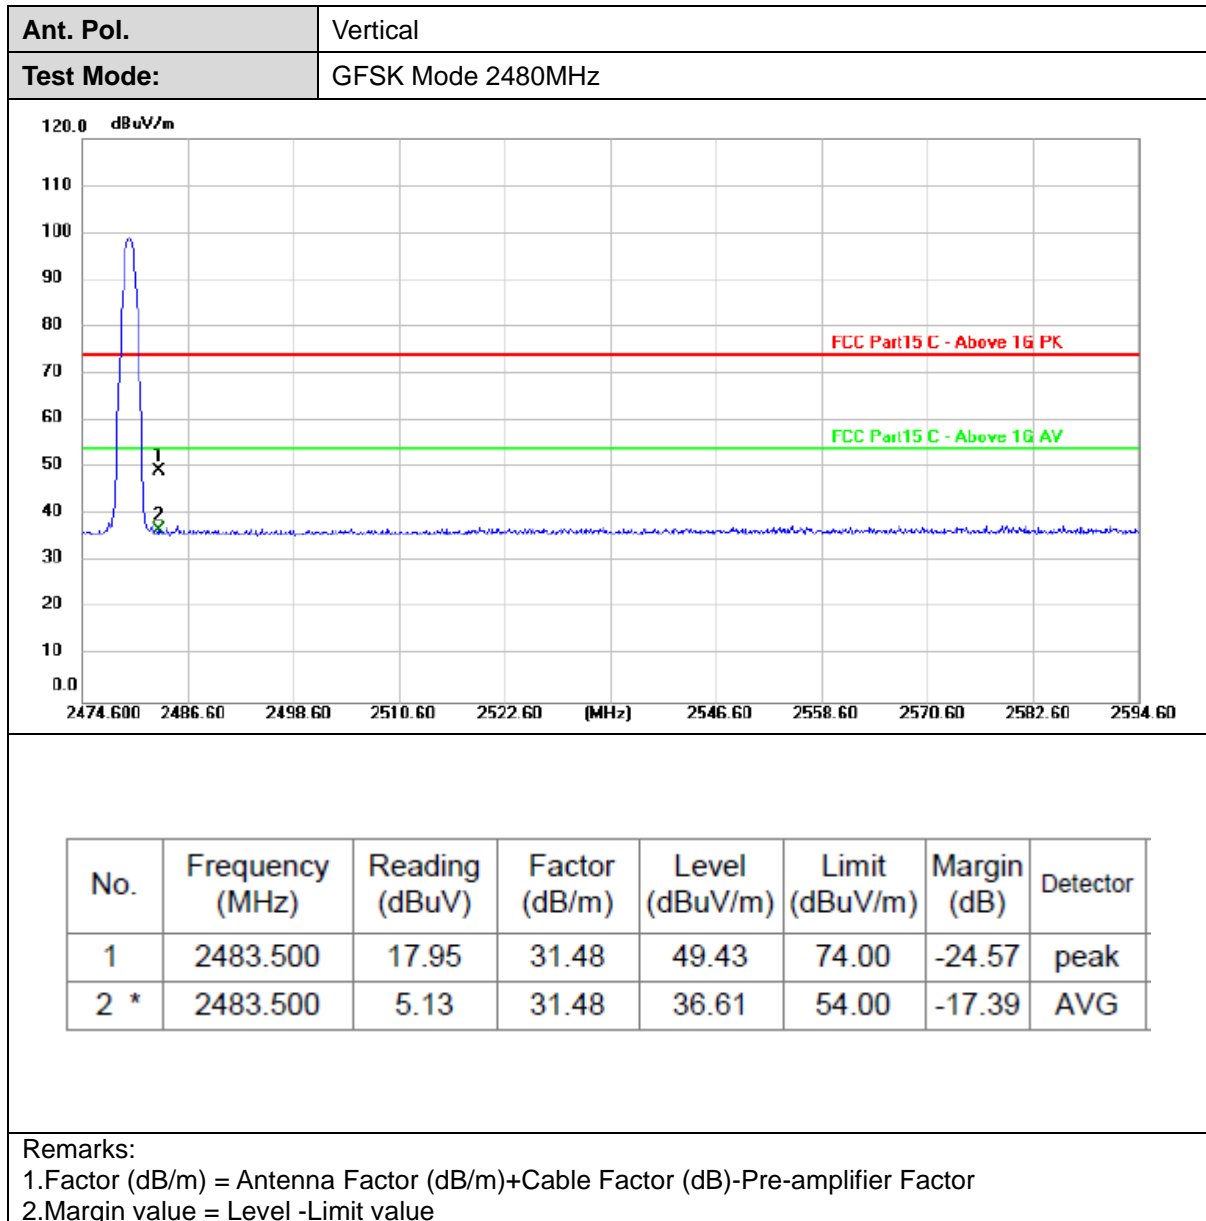


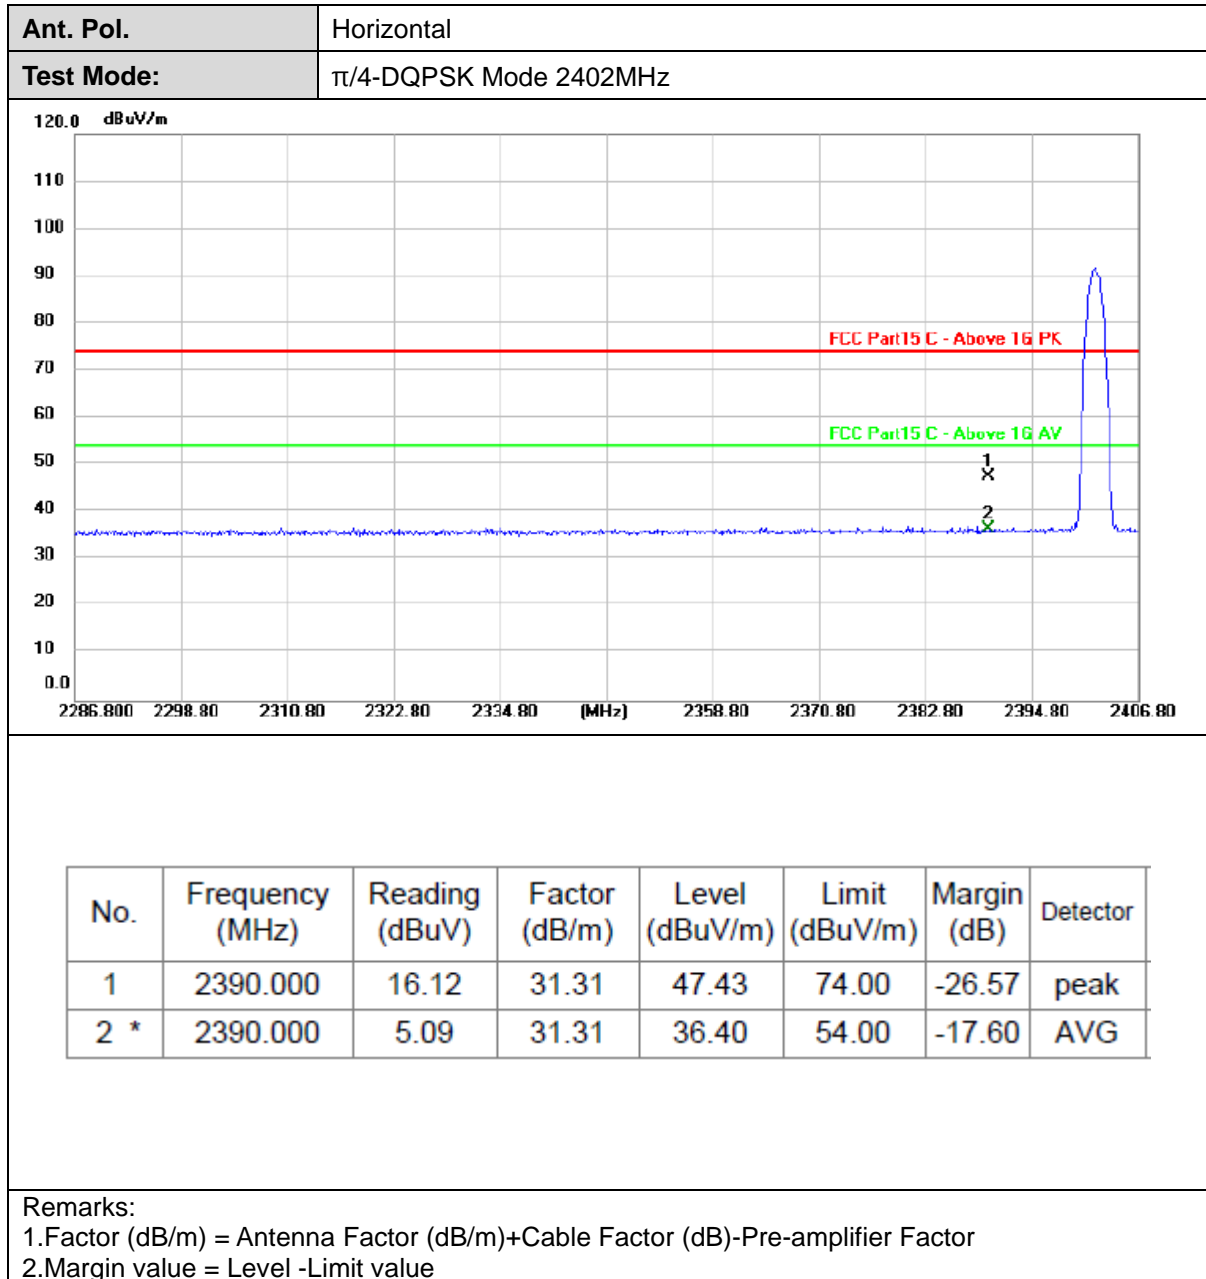


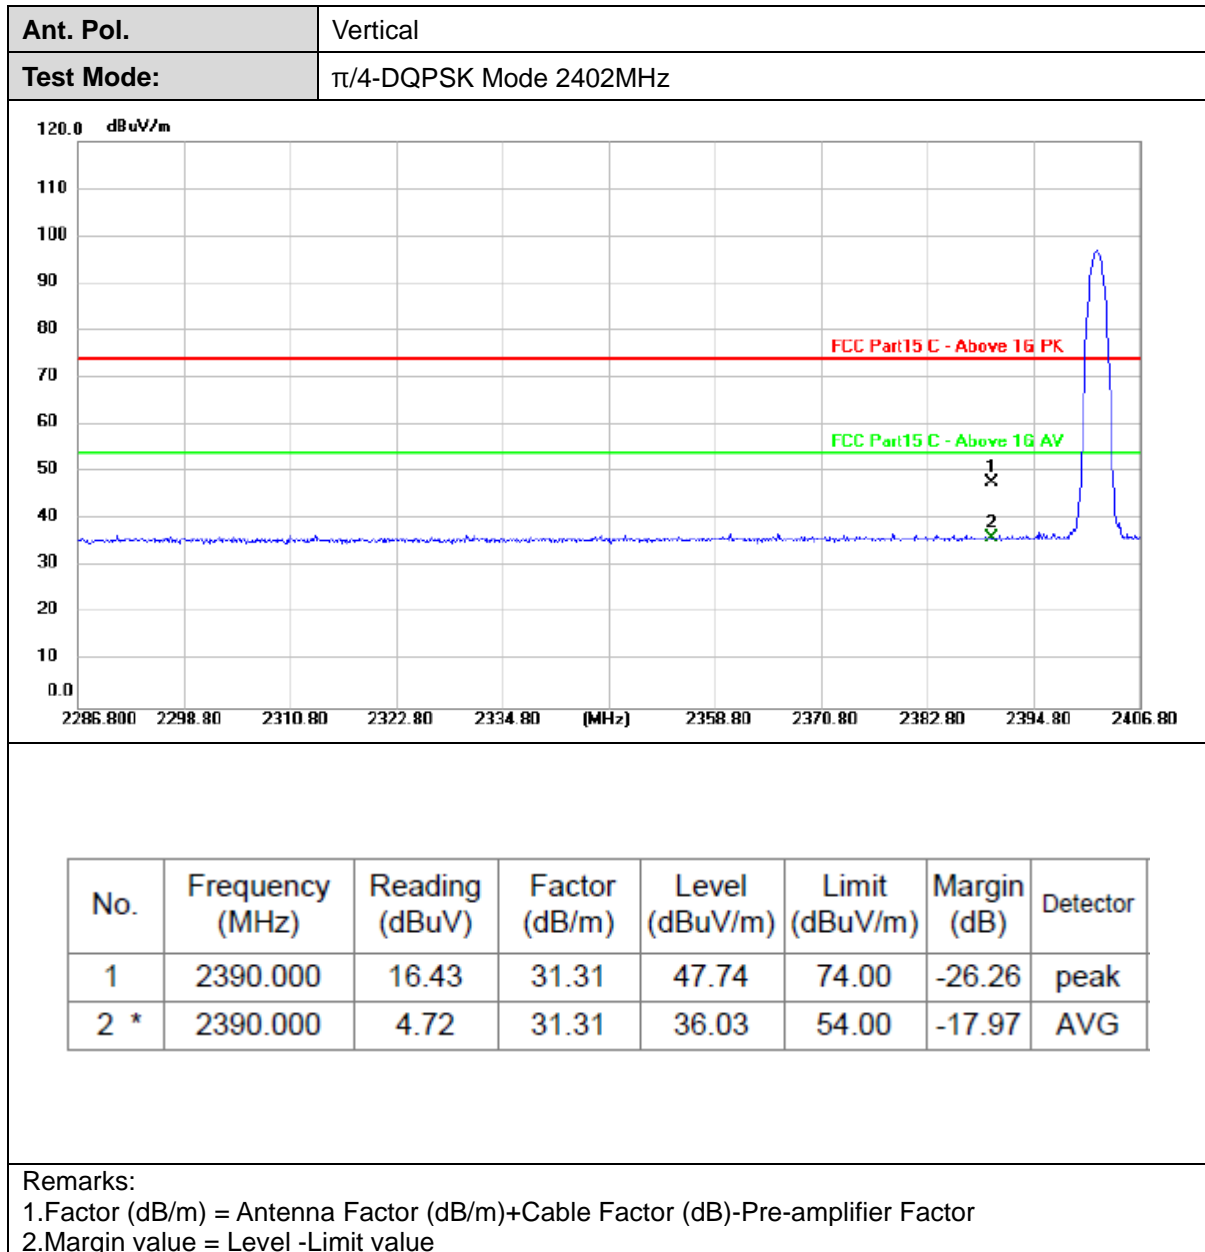


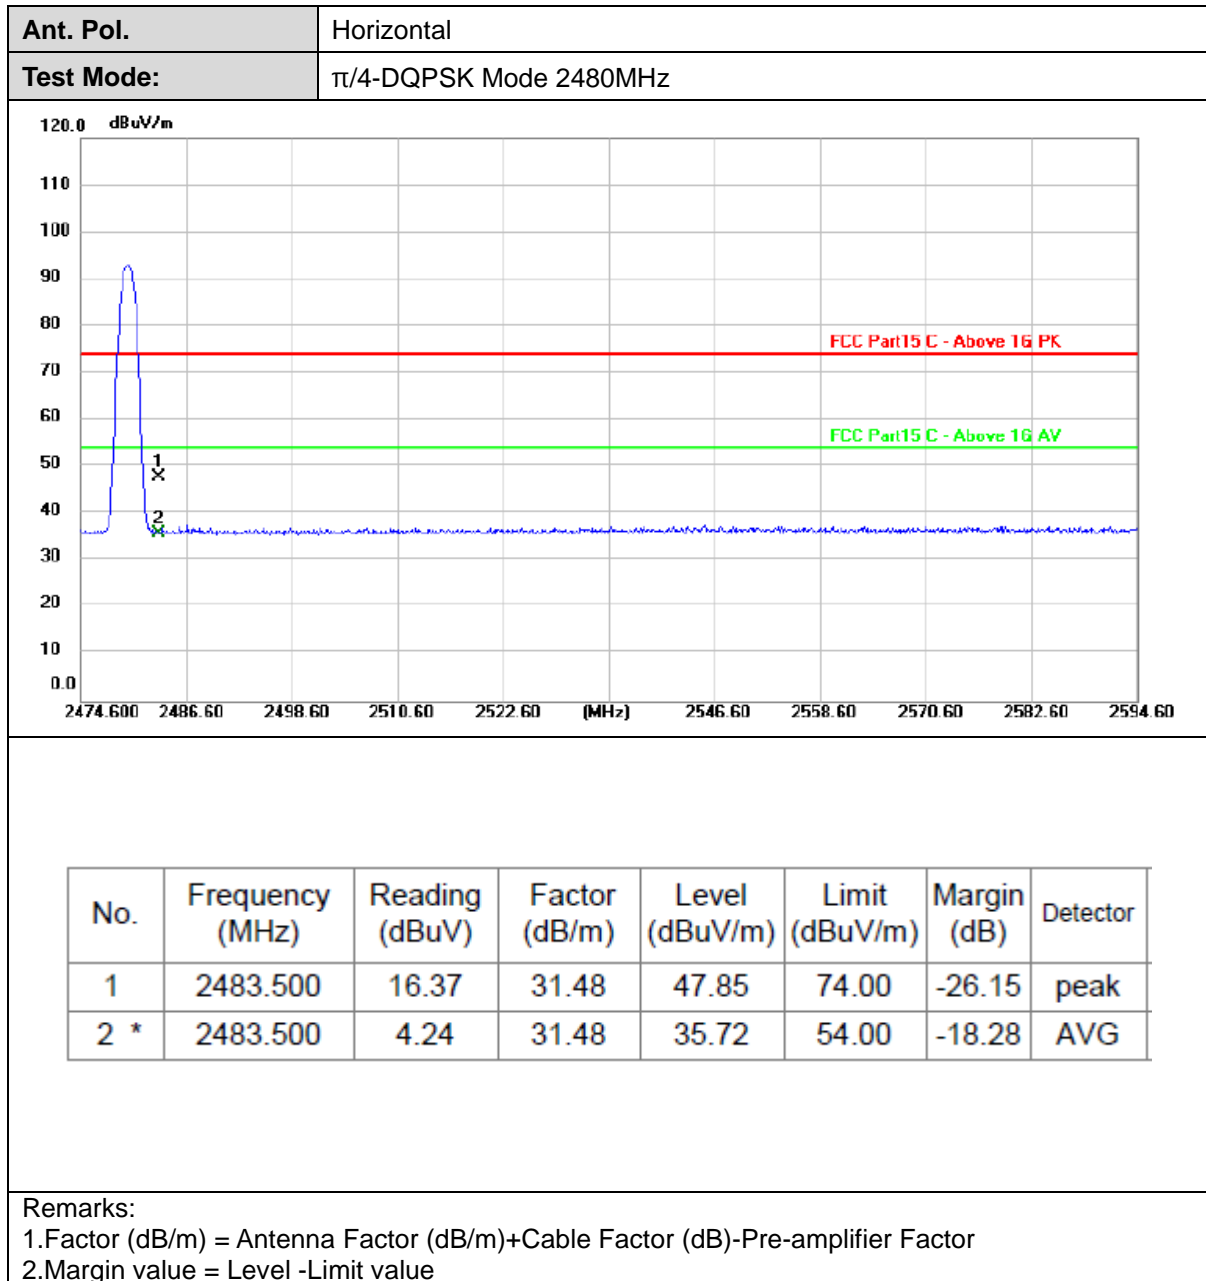


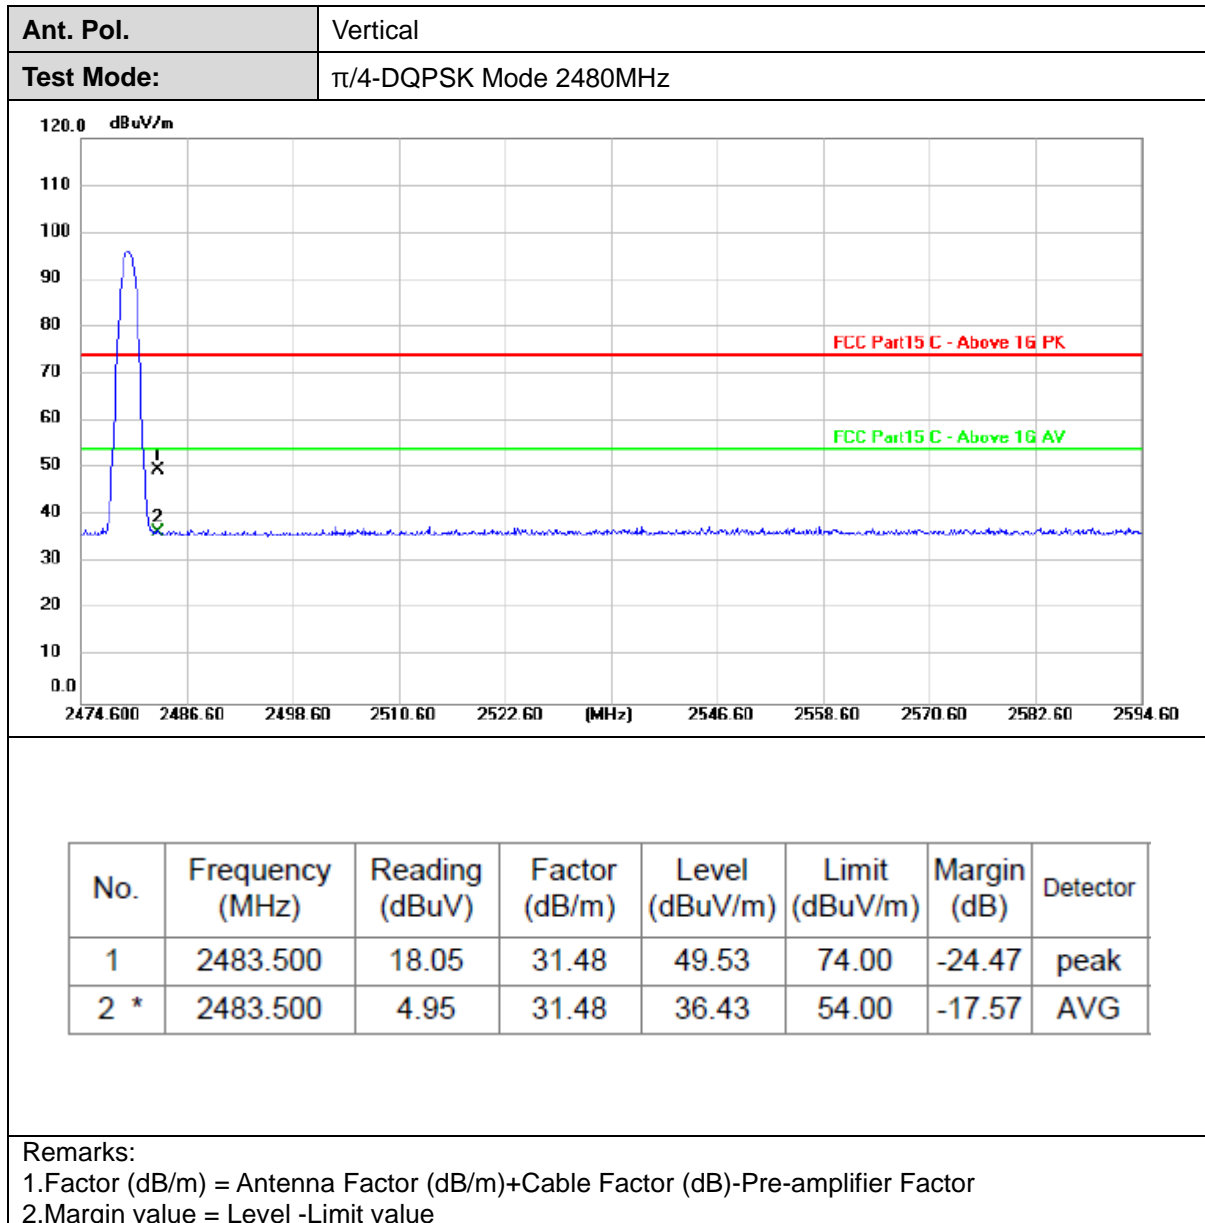

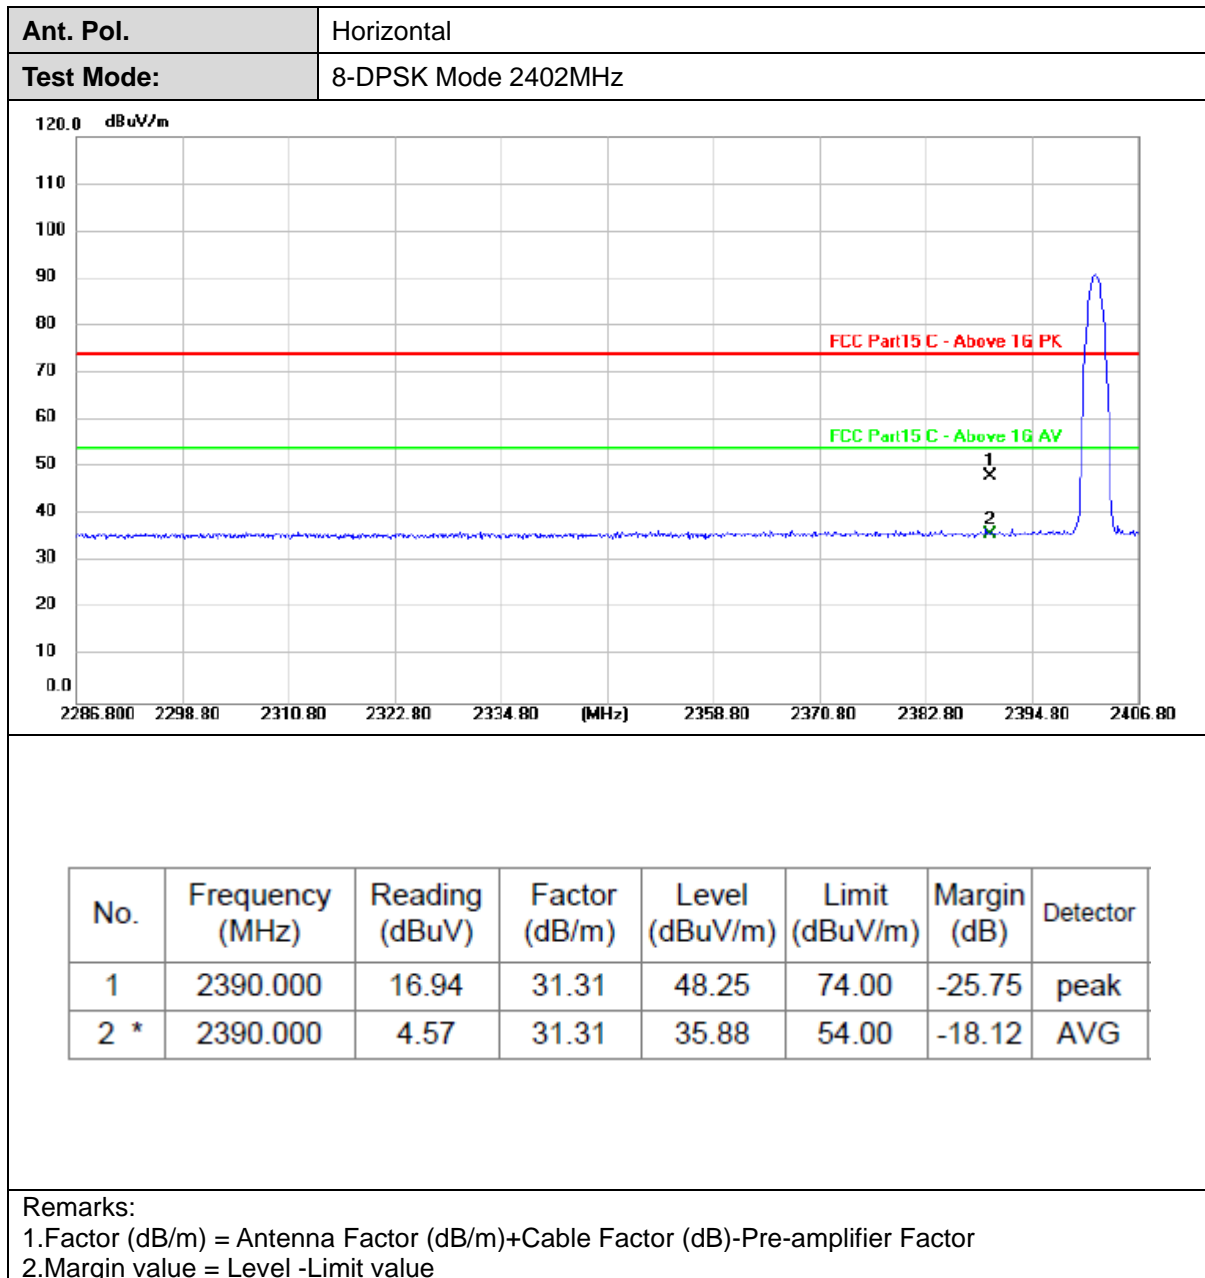

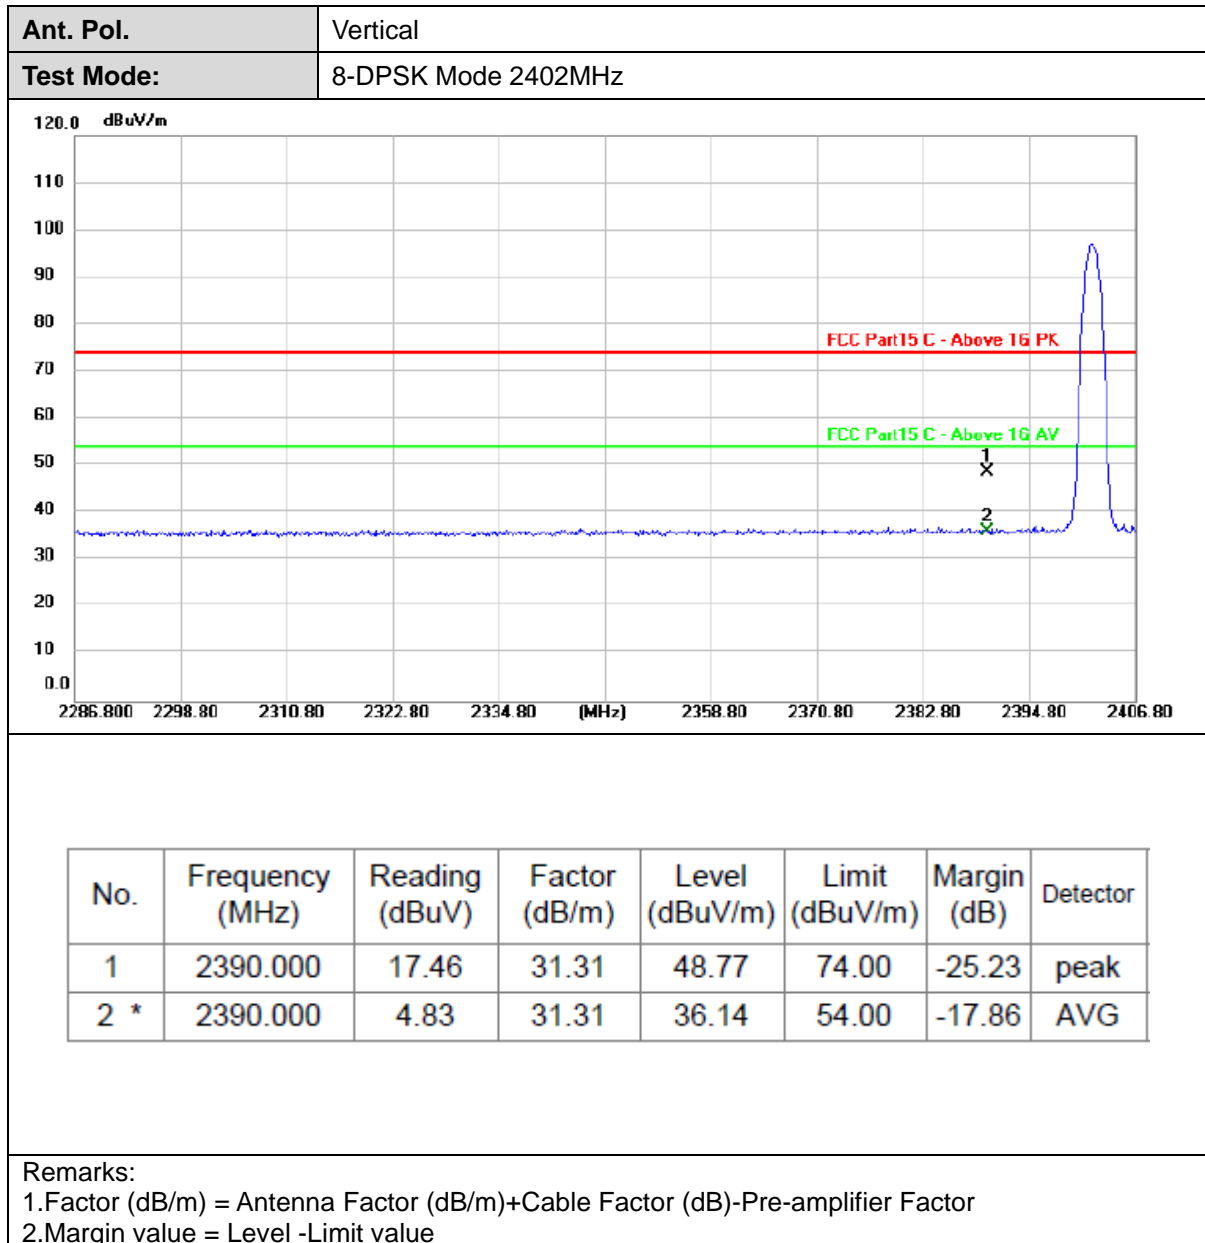

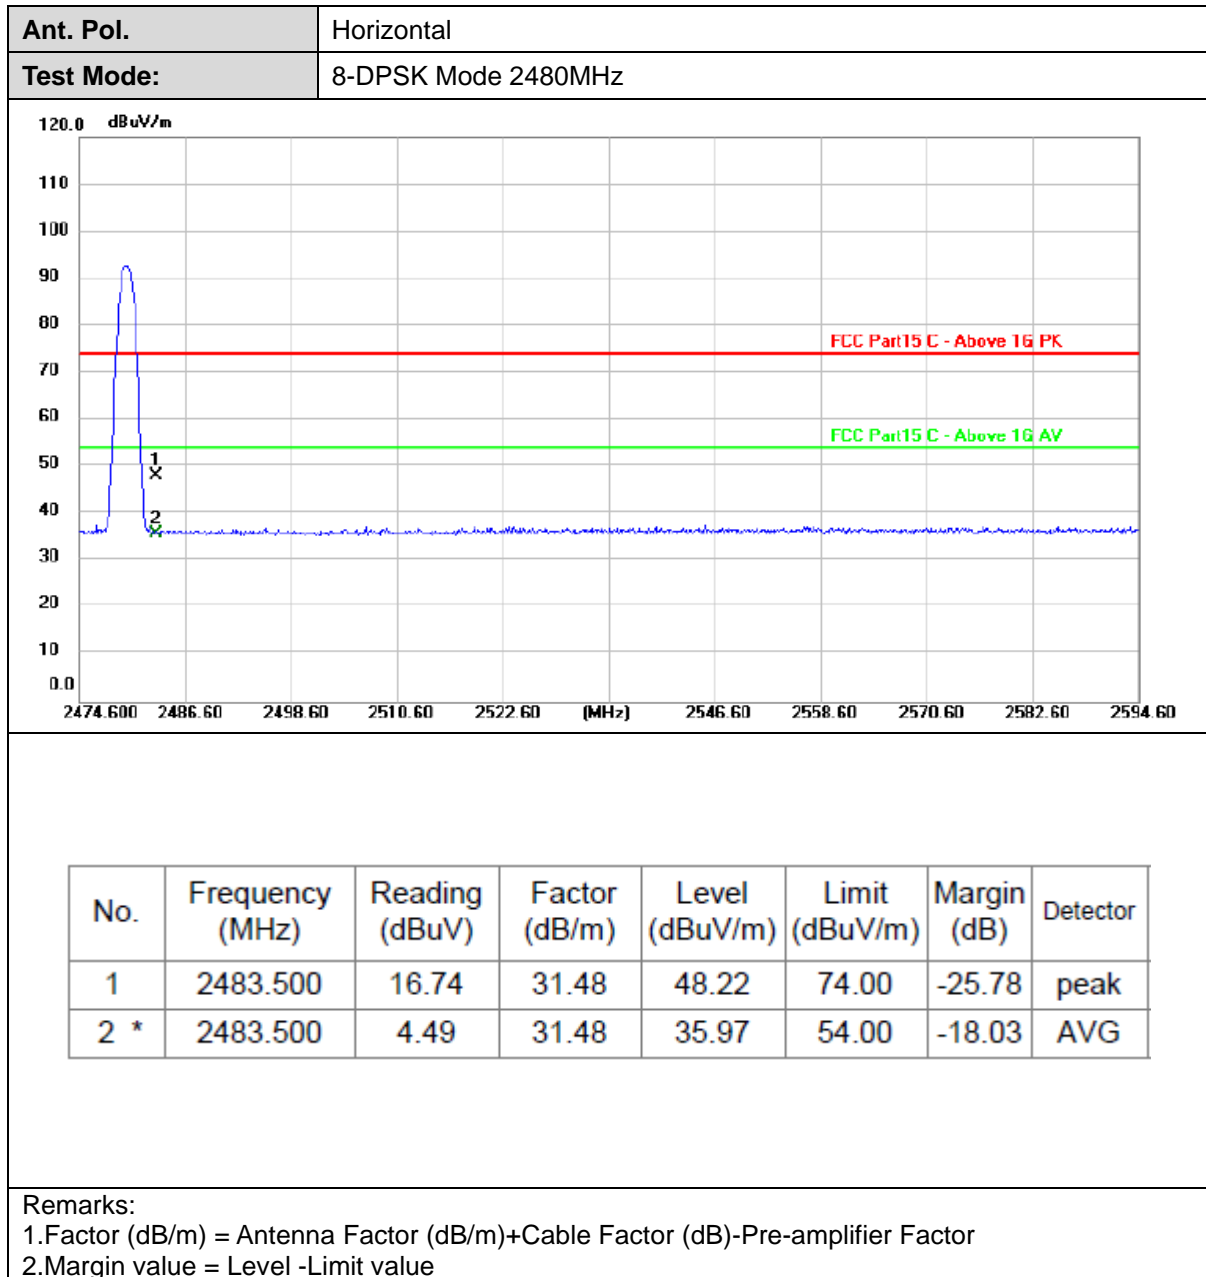

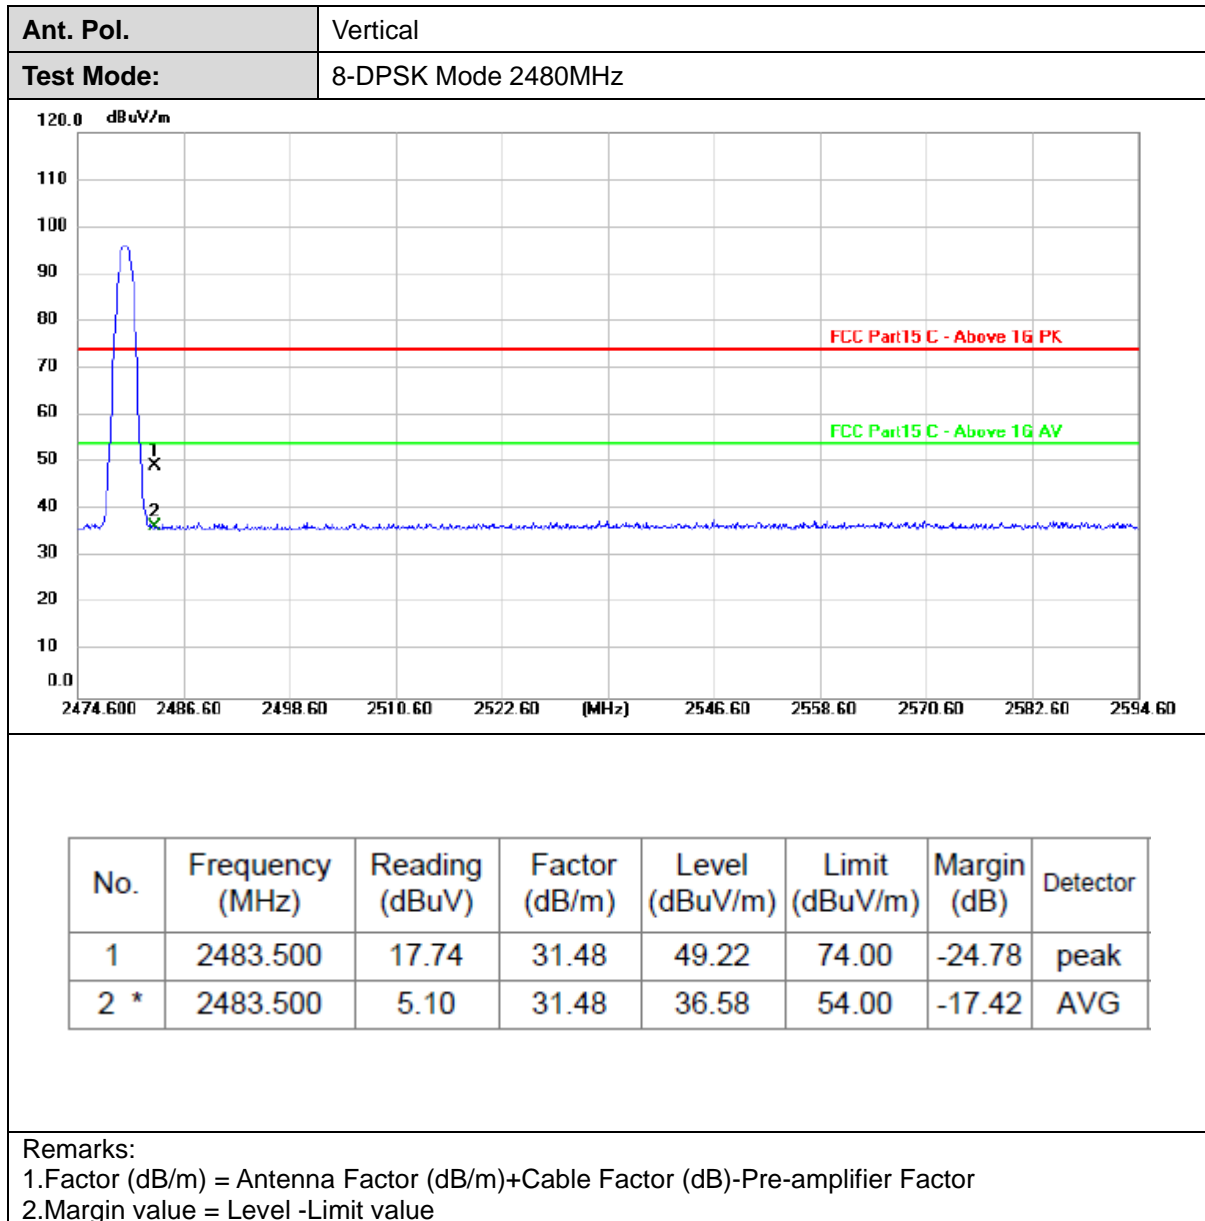


3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Non-Hopping


Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-53.736	-18.54	-35.196	PASS
			24129.2	-46.405	-18.54	-27.865	PASS
		39	24127.9	-46.835	-18.45	-28.385	PASS
		78	2483.50	-60.758	-18.35	-42.408	PASS
			24661.7	-46.025	-18.35	-27.675	PASS
$\pi/4$ DQPSK	2-DH5	0	2400.00	-53.988	-20.22	-33.768	PASS
			24116.7	-47.225	-20.22	-27.005	PASS
		39	24668.5	-46.227	-19.94	-26.287	PASS
		78	2483.50	-59.964	-19.84	-40.124	PASS
			24157.9	-46.749	-19.84	-26.909	PASS
8DPSK	3-DH5	0	2400.00	-51.315	-20.31	-31.005	PASS
			23708.4	-47.138	-20.31	-26.828	PASS
		39	24297.1	-46.407	-20.02	-26.387	PASS
		78	2483.50	-58.857	-19.94	-38.917	PASS
			24371.4	-45.955	-19.94	-26.015	PASS

Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
GFSK	DH5	Hopping	2400.00	-54.536	-16.20	-38.336	PASS	
			2483.50	-60.554	-16.08	-44.474	PASS	
π/4DQPSK	2-DH5		2400.00	-55.180	-15.68	-39.500	PASS	
			2483.50	-60.159	-15.17	-44.989	PASS	
8DPSK	3-DH5		2400.00	-53.864	-15.79	-38.074	PASS	
			2483.50	-59.637	-15.21	-44.427	PASS	



Test Graphs

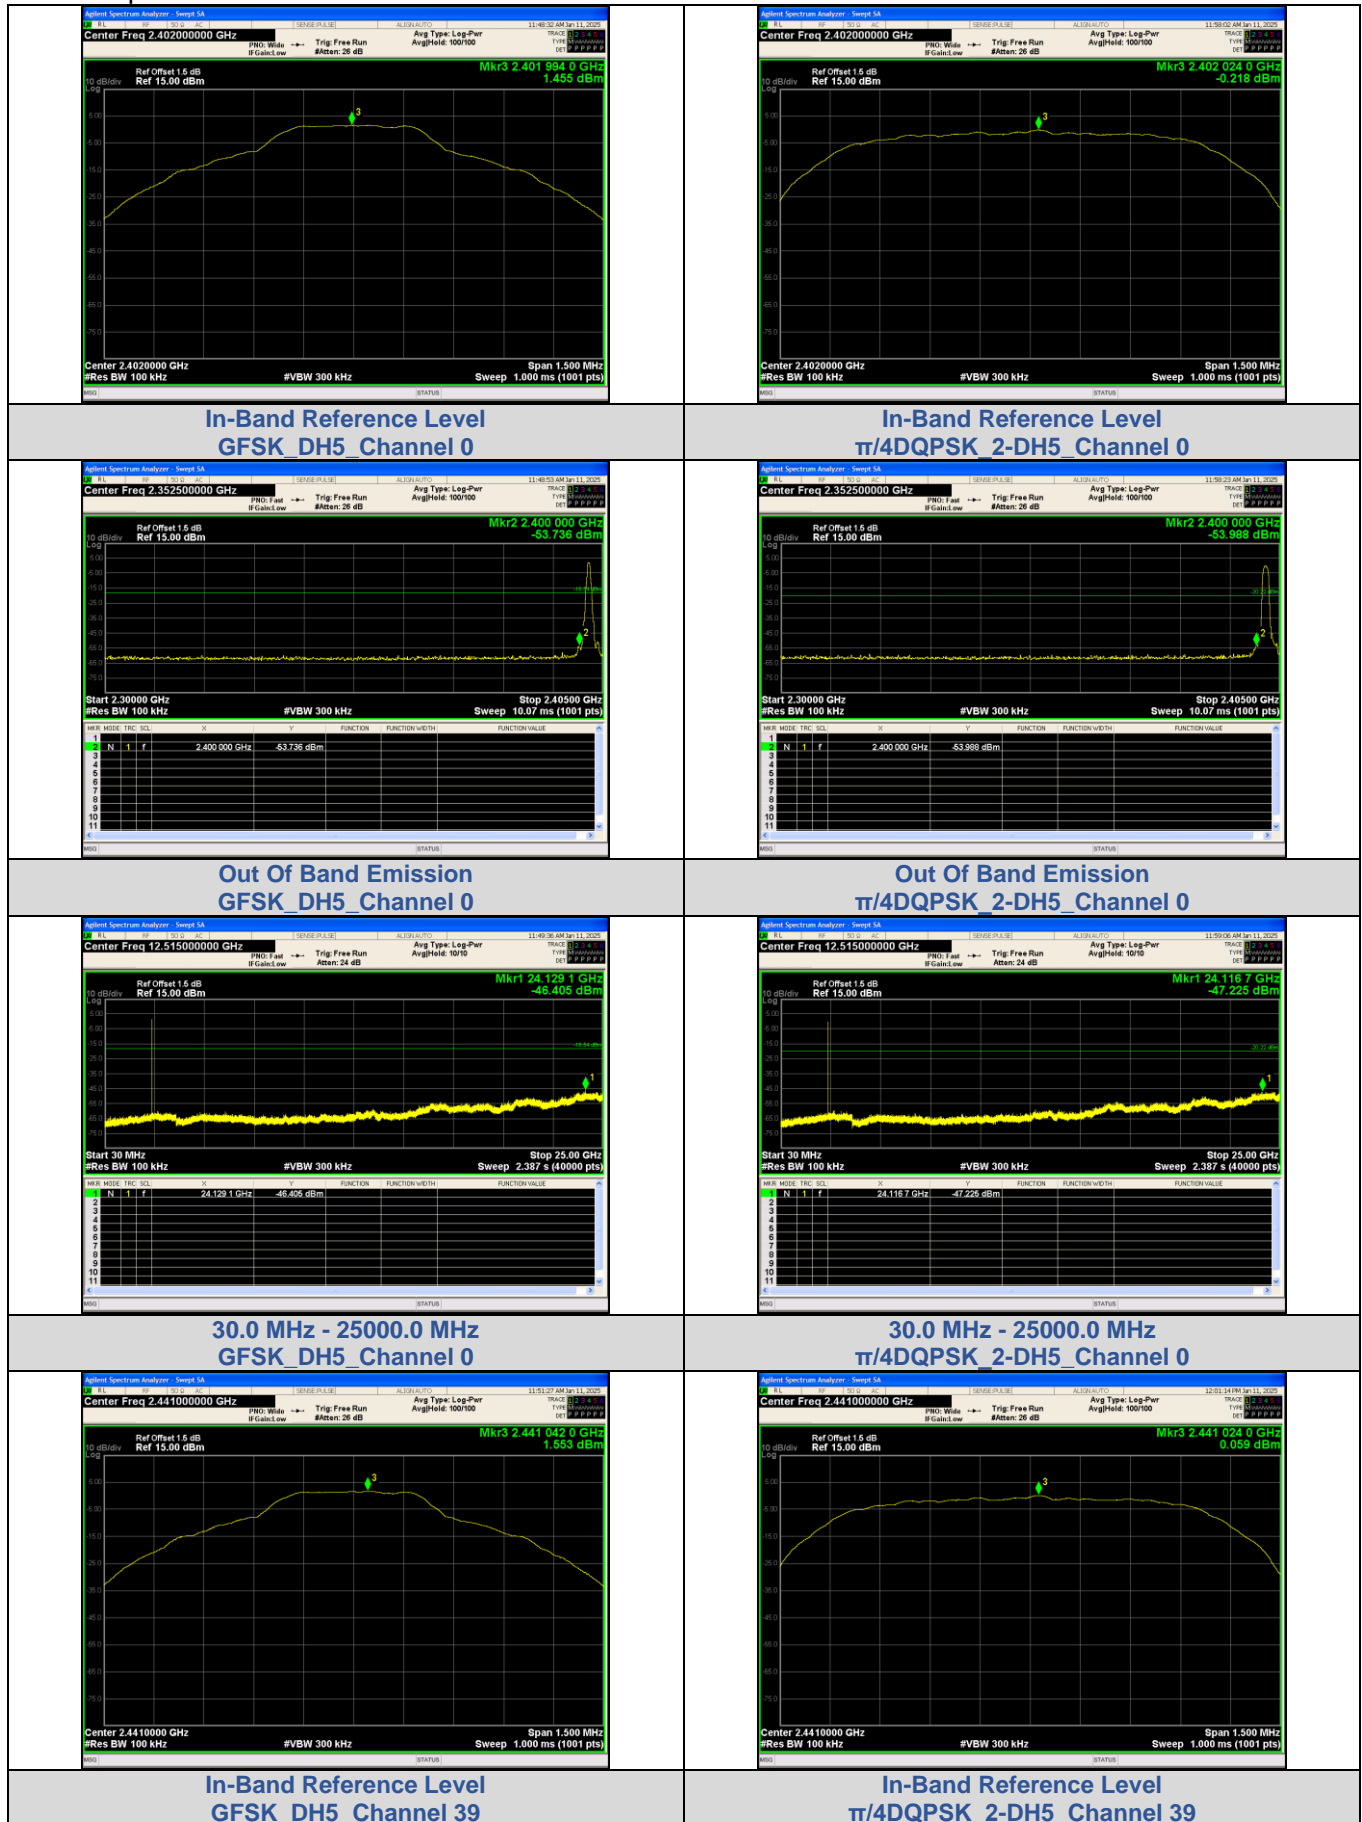


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

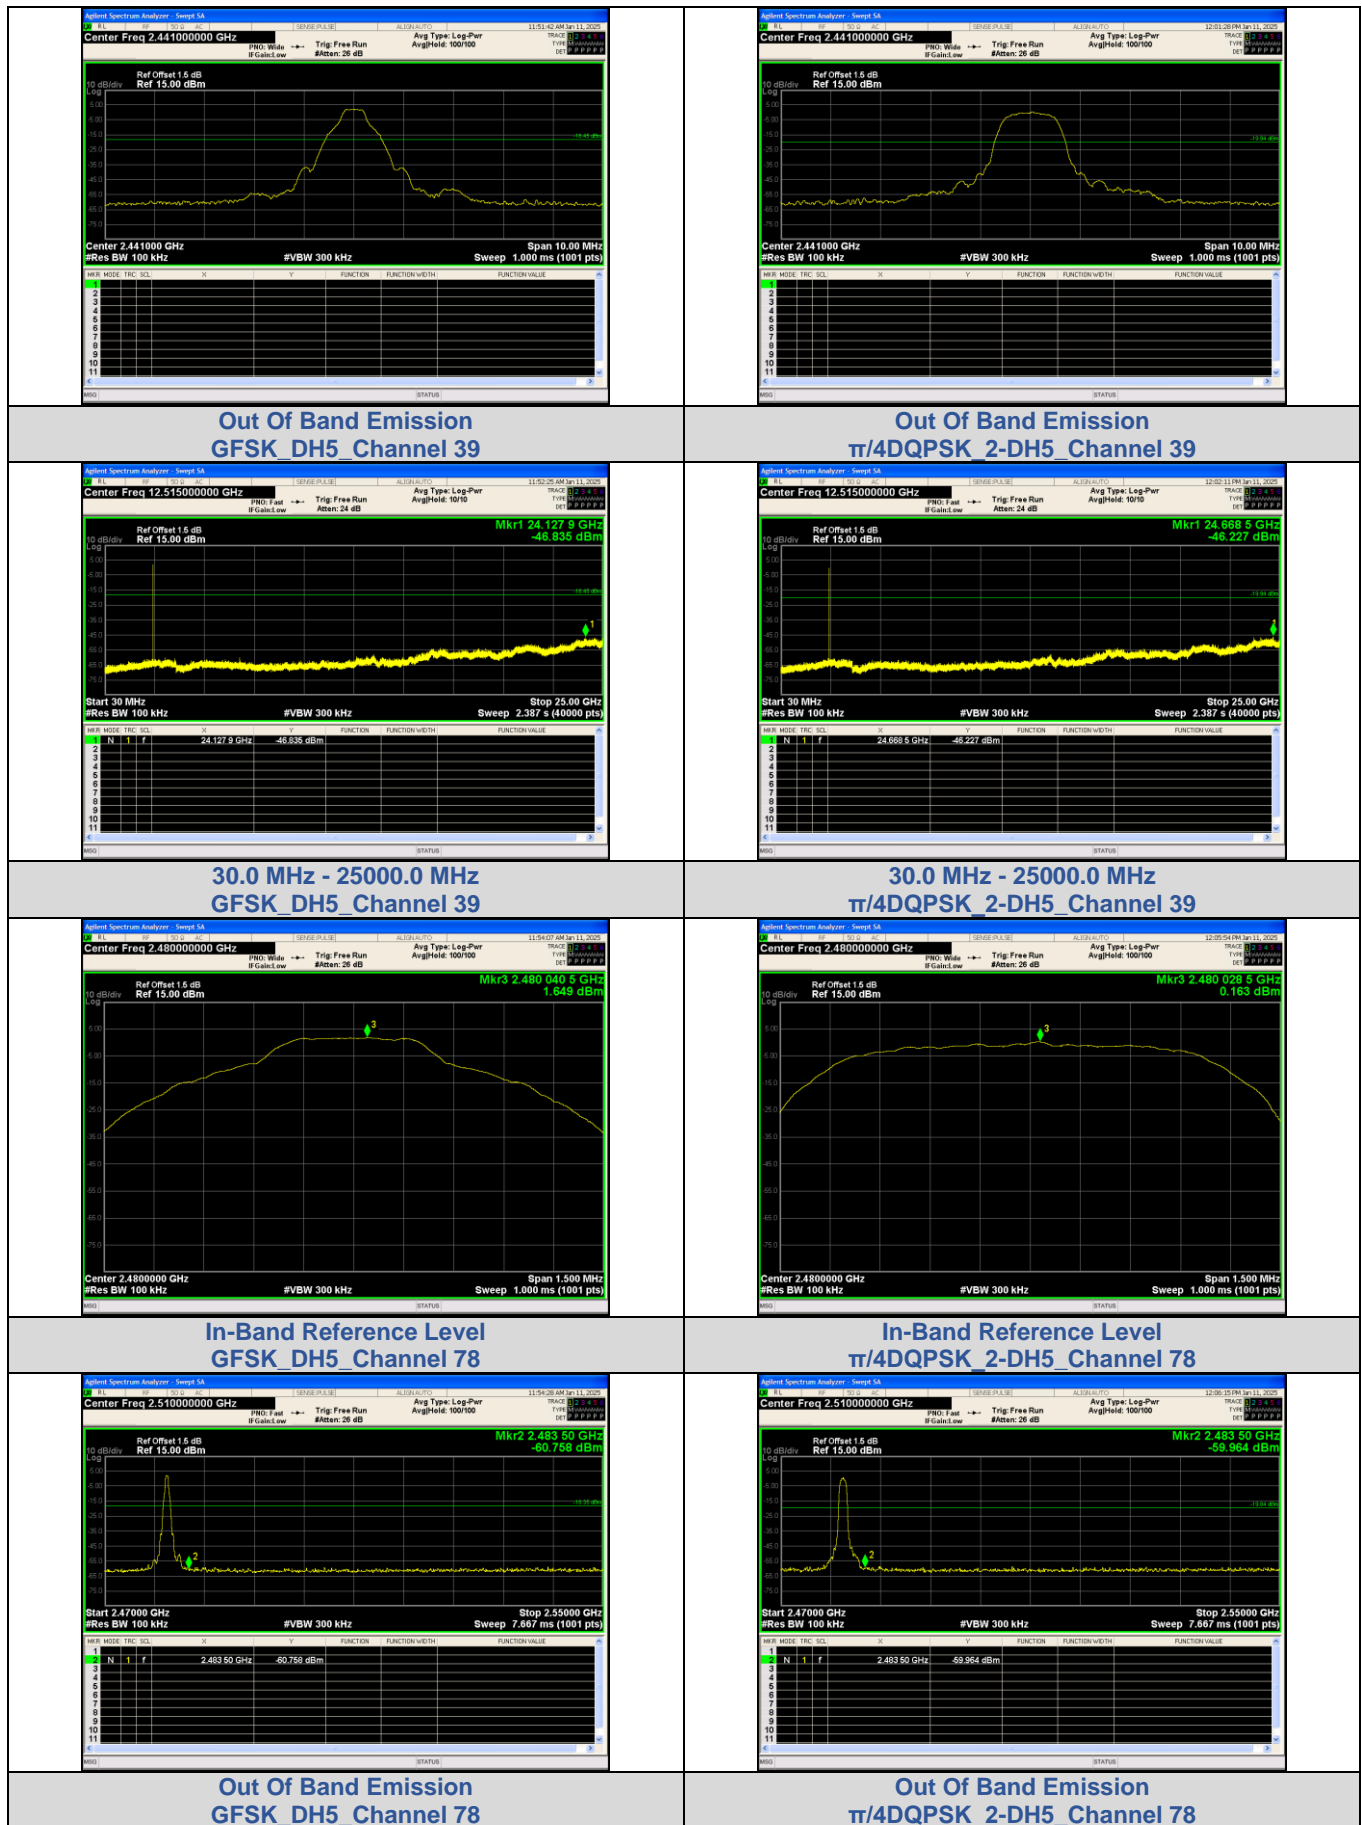


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

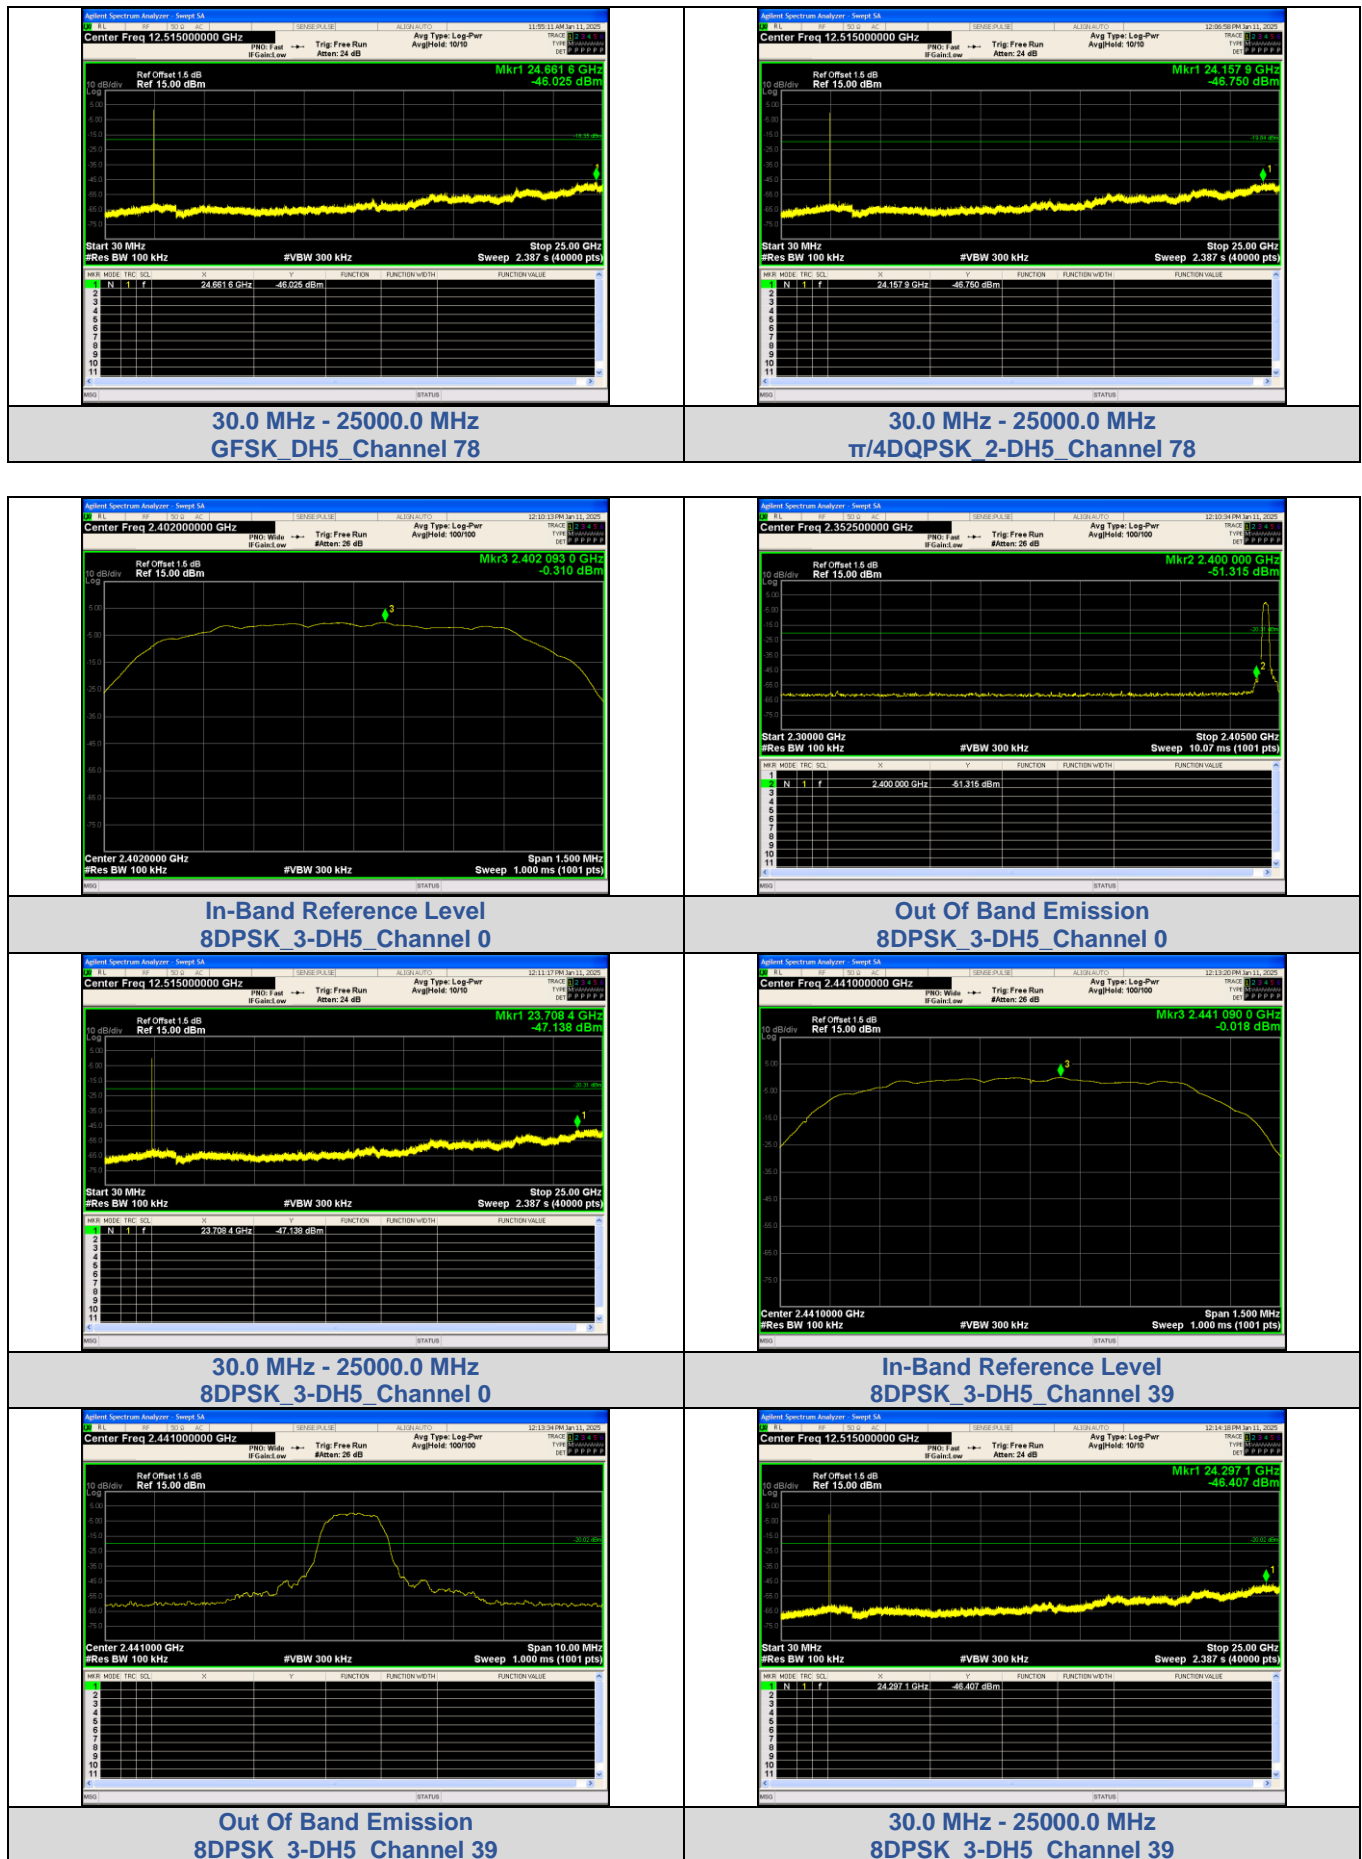



CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

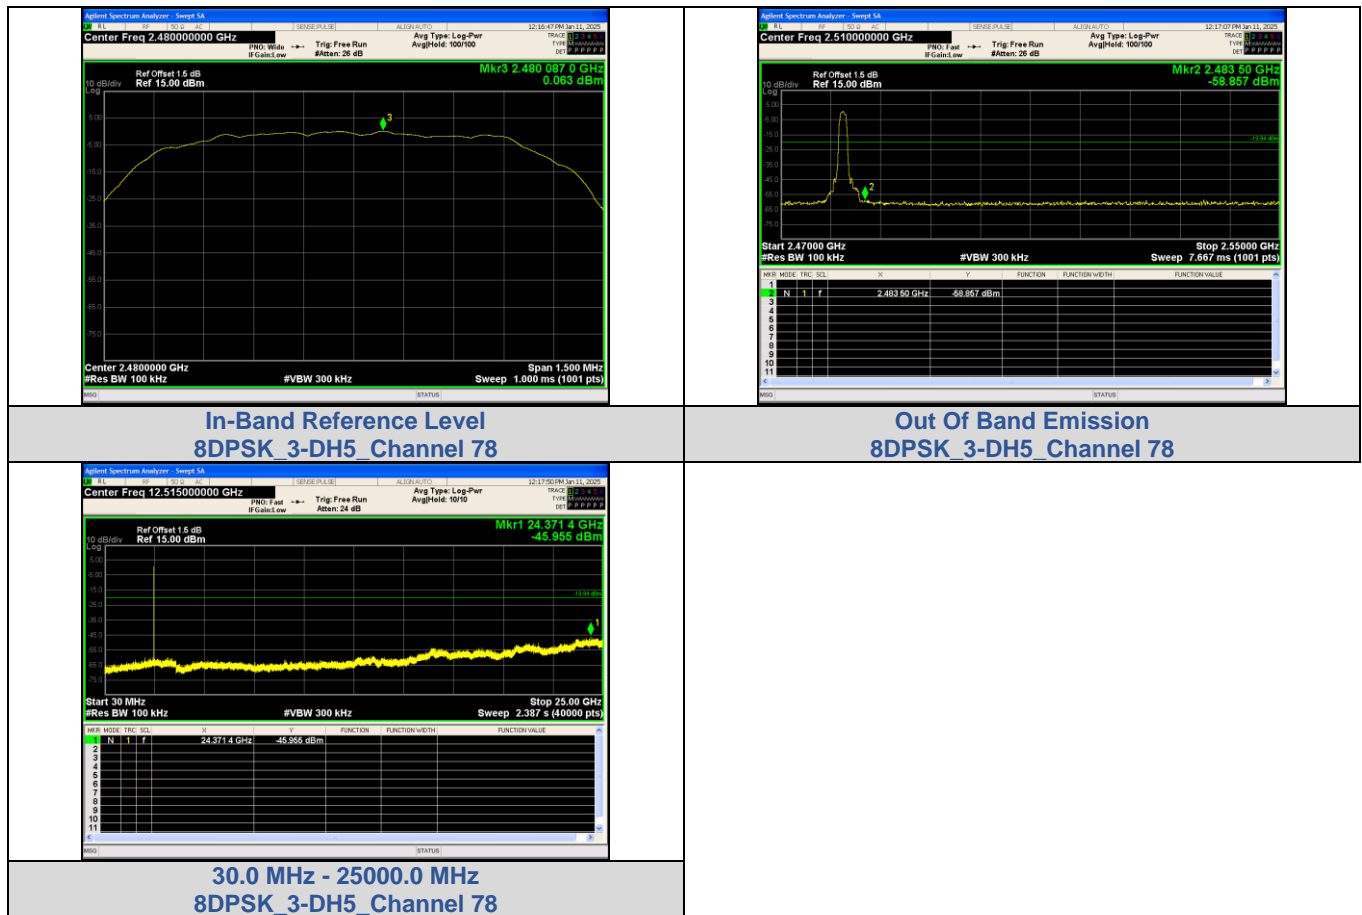

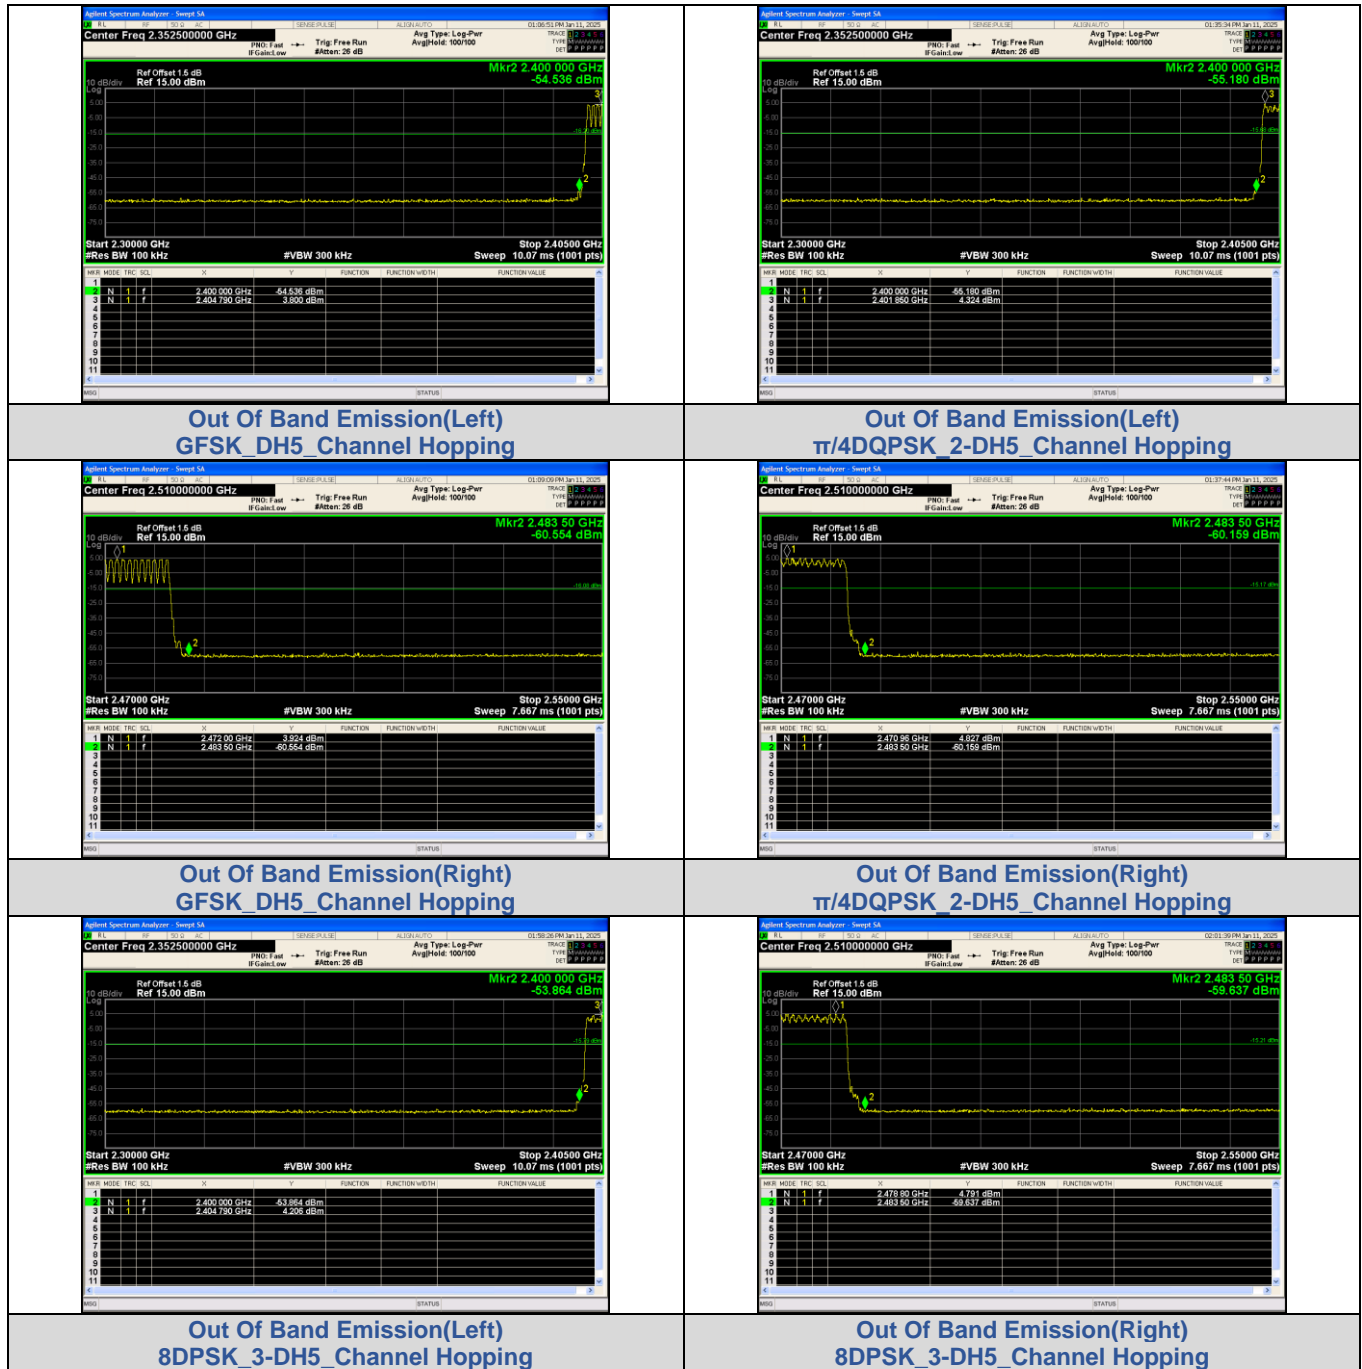




3.5. 20dB Bandwidth

Limit

N/A

Test Configuration

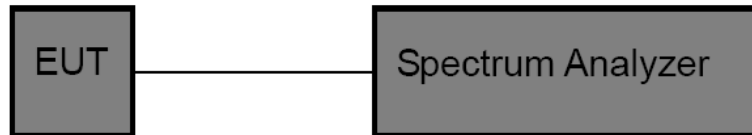

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode


Please refer to the clause 2.4.

Test Result

Modulation	Channel	99% Bandwidth (MHz)	20 dB Bandwidth (MHz)	20dB Bandwidth *2/3 (MHz)
GFSK	0	0.88151	0.9593	0.640
	39	0.88163	0.9605	0.640
	78	0.88285	0.9592	0.639
$\pi/4$ DQPSK	0	1.1910	1.364	0.909
	39	1.1904	1.364	0.909
	78	1.1907	1.363	0.909
8DPSK	0	1.1957	1.346	0.897
	39	1.1958	1.345	0.897
	78	1.1957	1.347	0.898



99% Bandwidth:

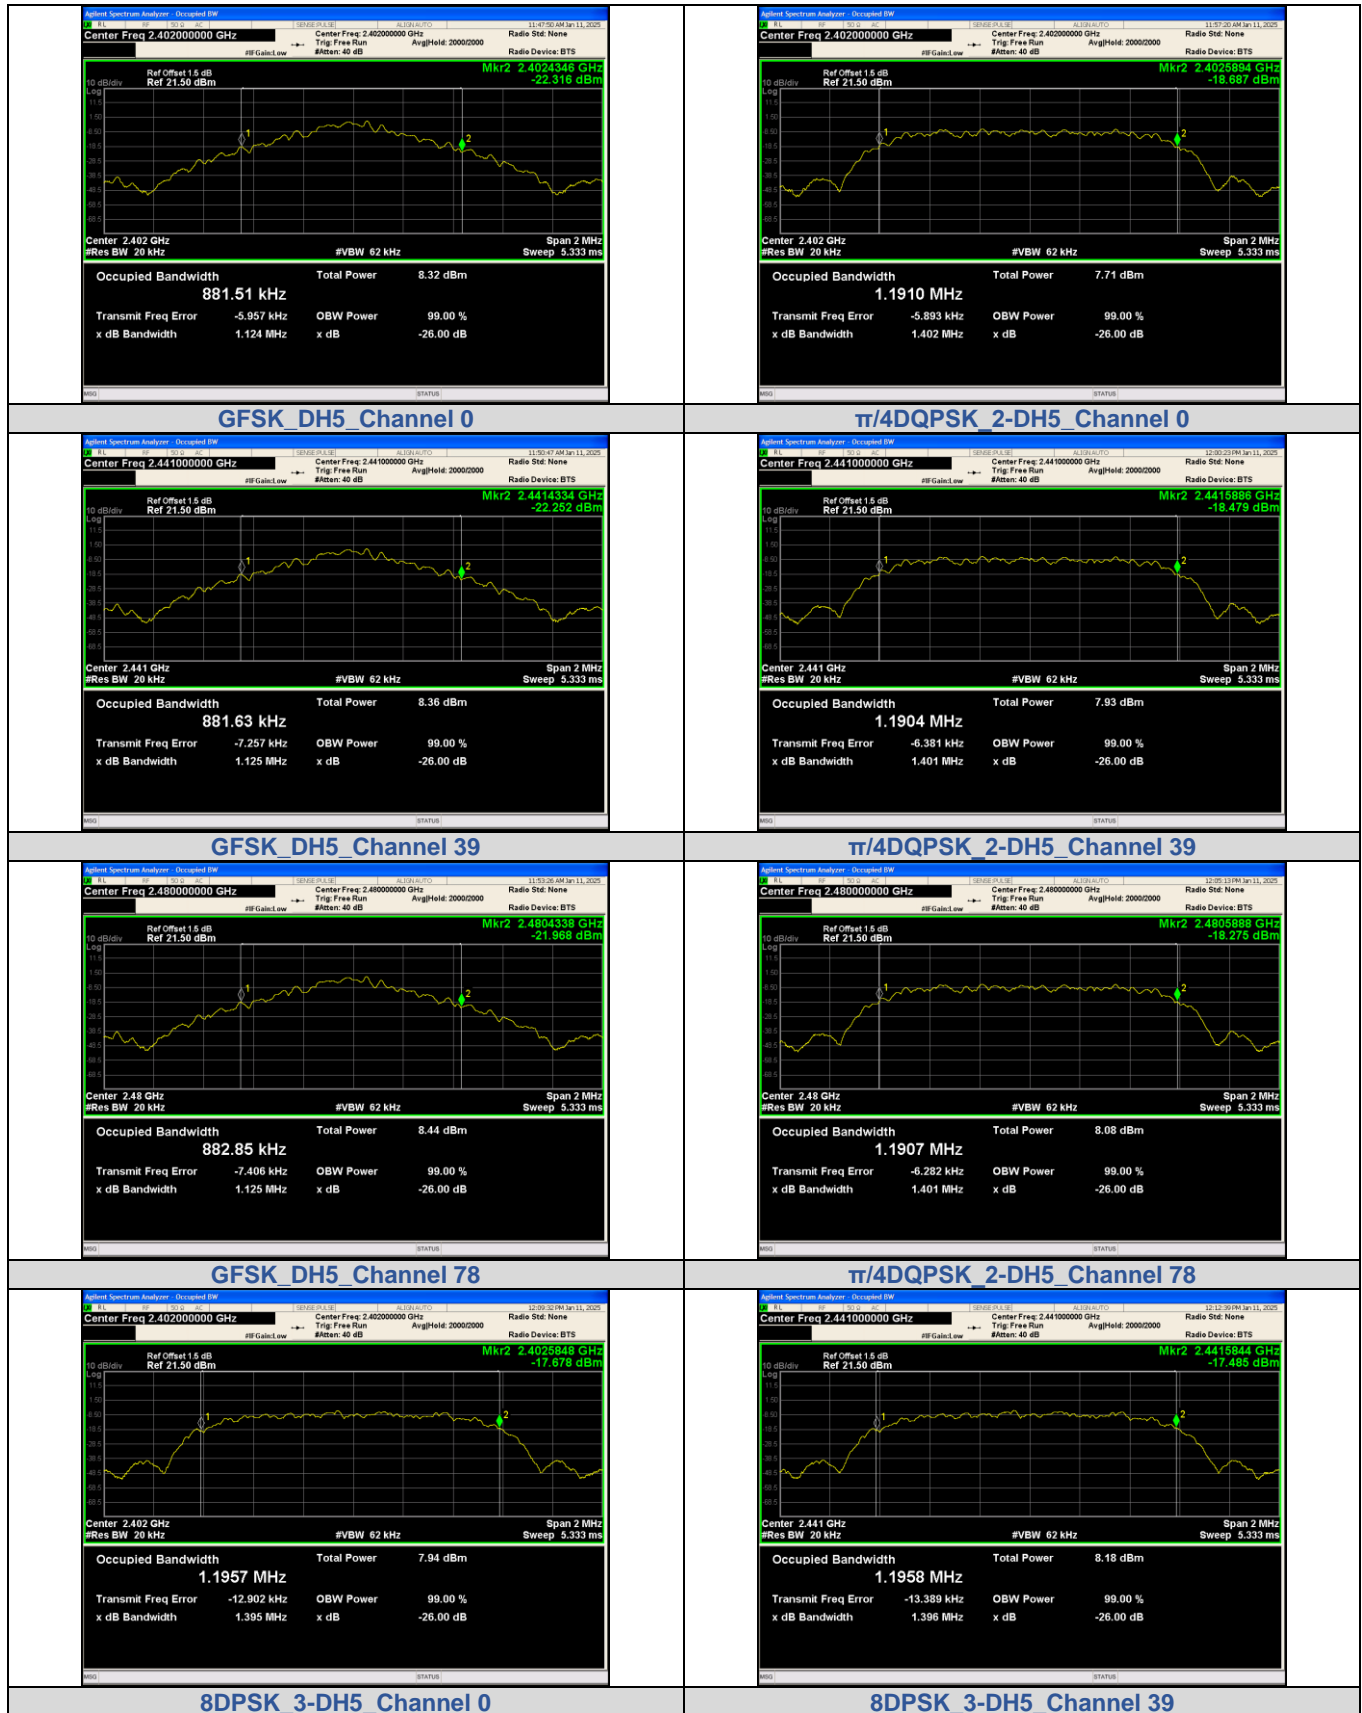


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


TRF No: CTC-TR-059_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

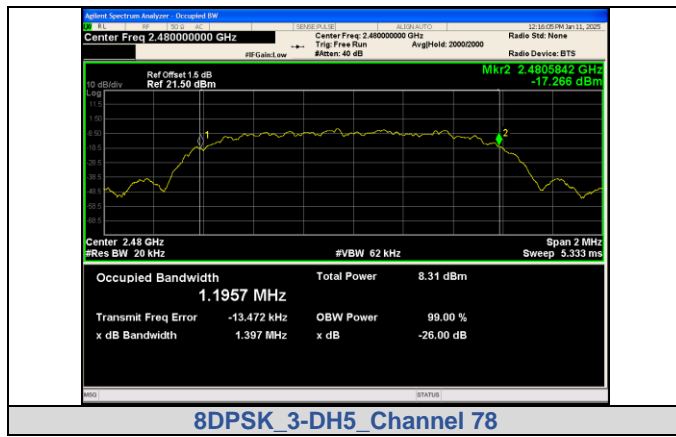



20dB Bandwidth:

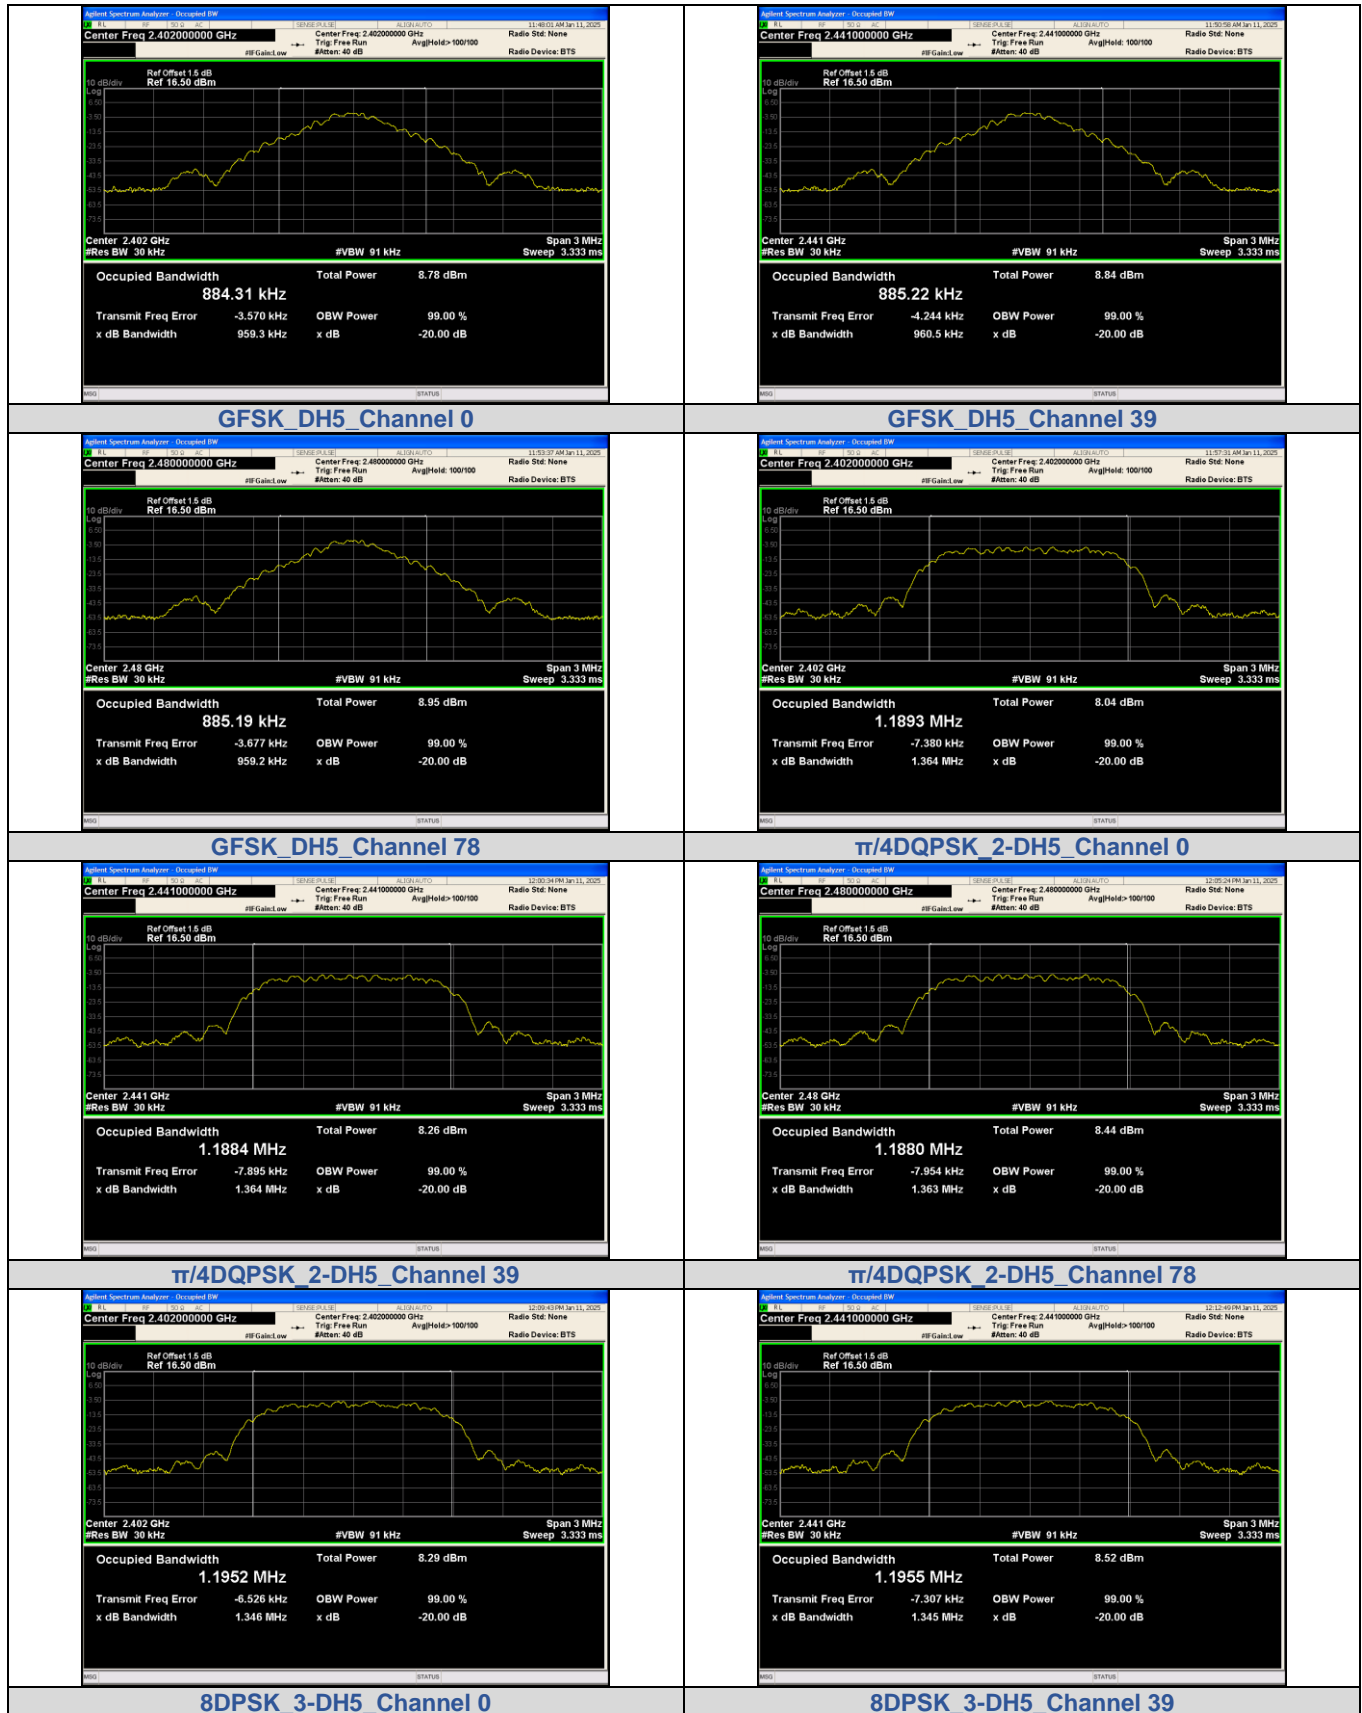

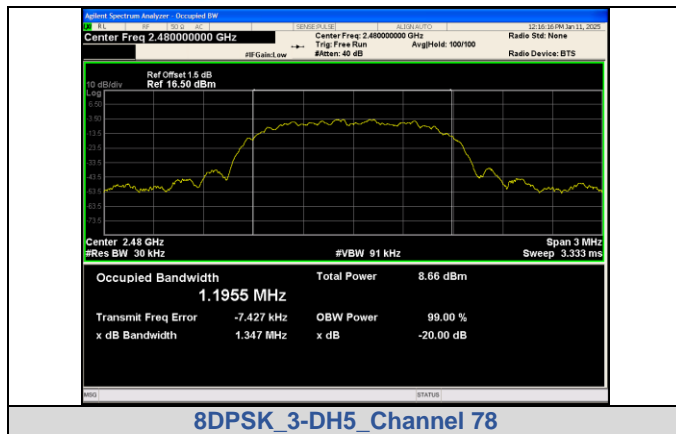




3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1) / RSS-247 5.1 b

Test Item	Limit	Frequency Range (MHz)
Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration

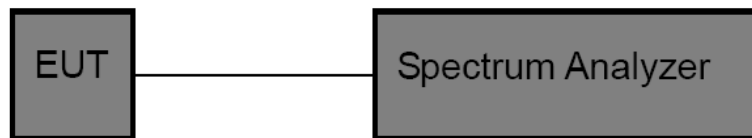

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Carrier Frequencies Separation (MHz)	Limit (MHz)	Verdict
GFSK	Hop_2441	0.9940	>0.640	Pass
$\pi/4$ -DQPSK	Hop_2441	0.9982	>0.909	Pass
8-DPSK	Hop_2441	1.0189	>0.897	Pass



Test Graphs

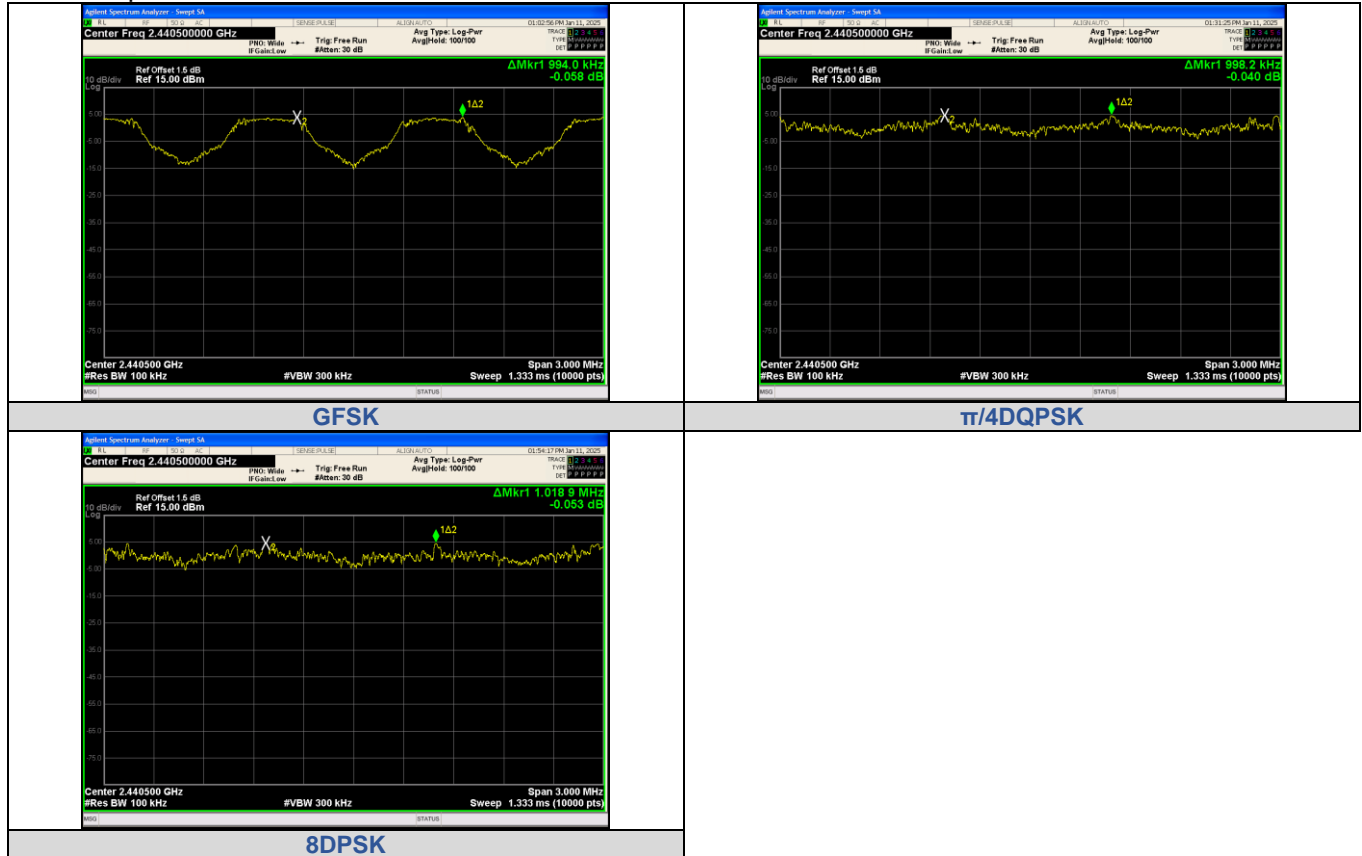

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 5.1 d

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Number of Hopping Channel	≥ 15

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW \geq RBW, Sweep time= Auto.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Number of Hopping Channel	Limit	Verdict
GFSK	79	≥ 15	Pass
$\pi/4$ -DQPSK	79	≥ 15	Pass
8-DPSK	79	≥ 15	Pass



Test Graphs

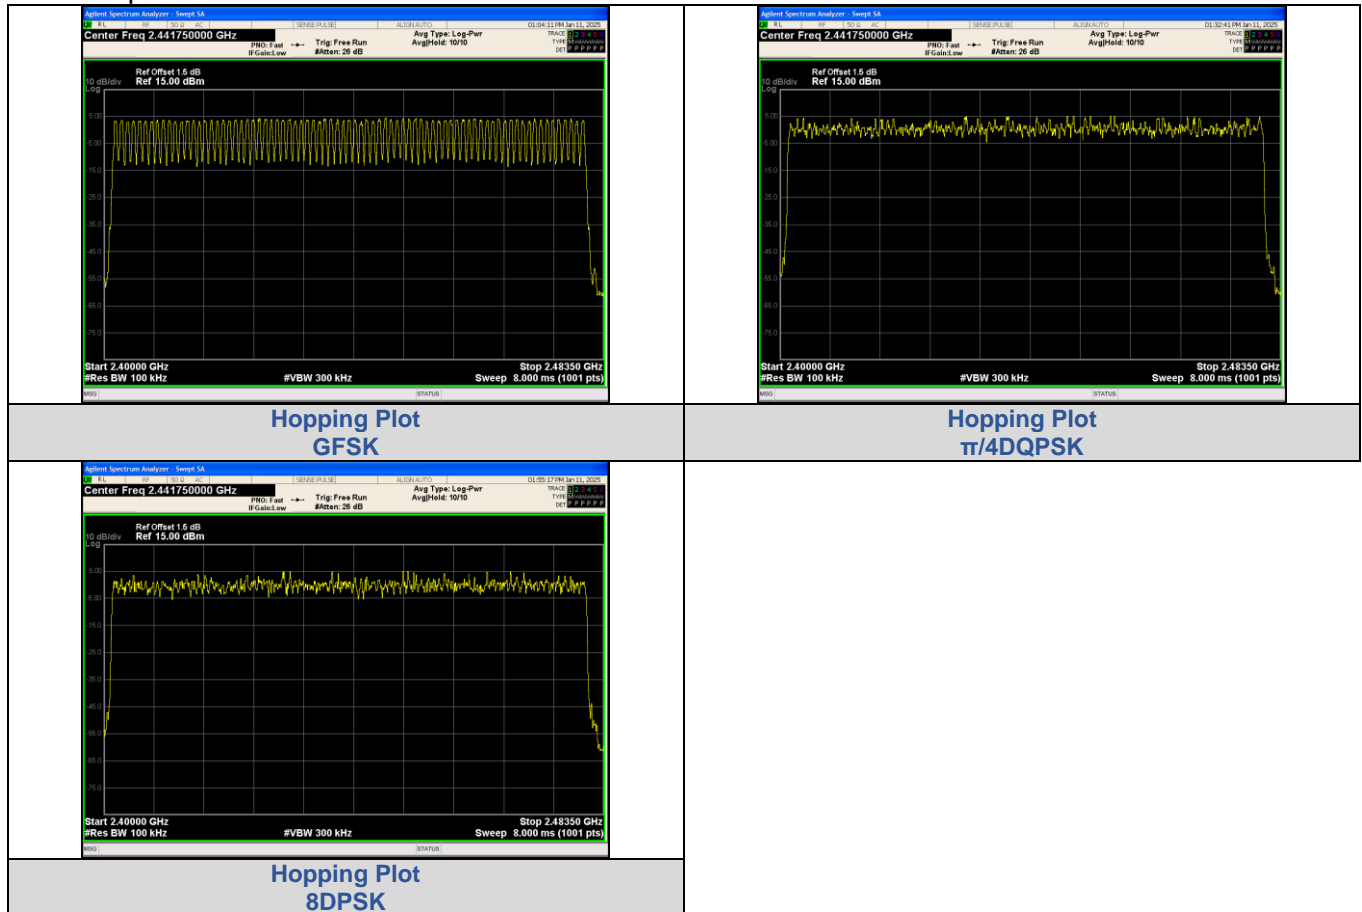

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing
Society : yz.cnca.cn




3.8. Dwell Time

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii) / RSS-247 5.1 d

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration

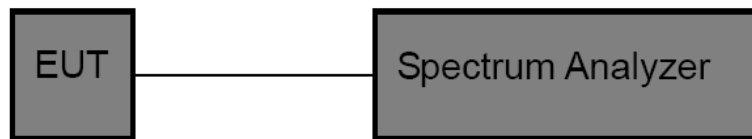

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW \geq RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Modulation	Packet	Channel	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	CH39 (2441MHz)	0.376	101	37.98	< 400	PASS
	DH3		1.640	42	68.88		PASS
	DH5		2.888	32	92.42		PASS
$\pi/4$ DQPSK	2-DH1		0.392	100	39.20		PASS
	2-DH3		1.640	50	82.00		PASS
	2-DH5		2.888	40	115.52		PASS
8DPSK	3-DH1		0.384	100	38.40		PASS
	3-DH3		1.640	48	78.72		PASS
	3-DH5		2.888	33	95.30		PASS

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



Test Graphs

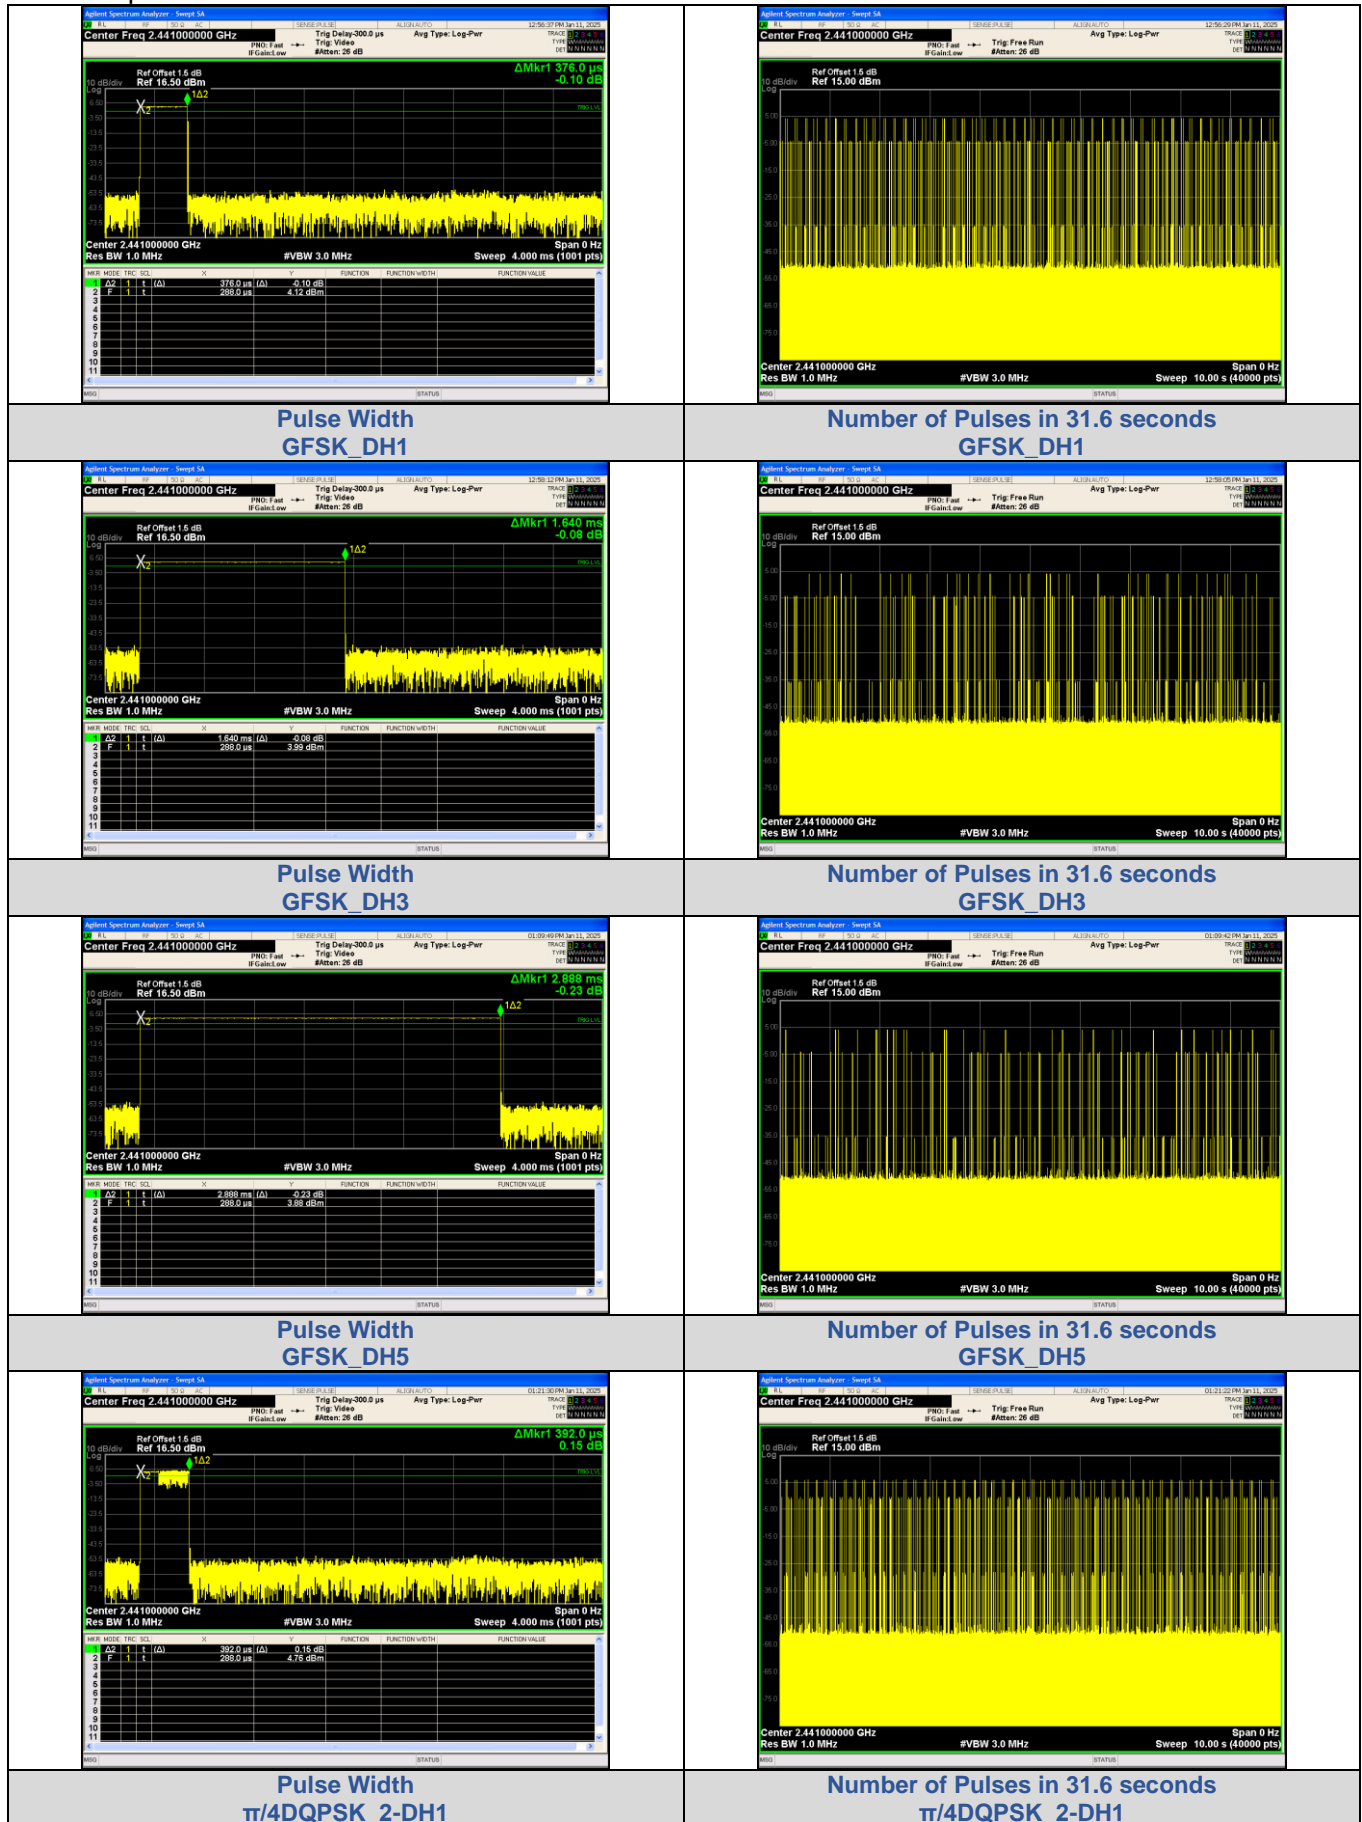


CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

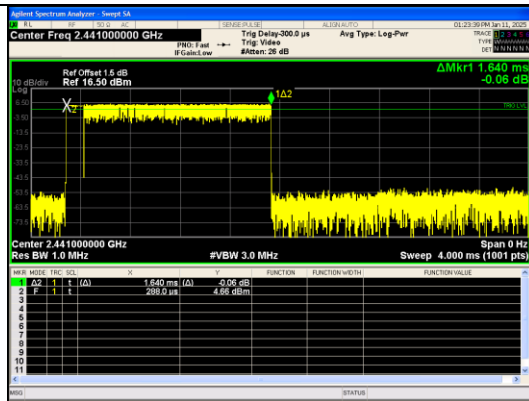


Pulse Width
 $\pi/4$ DQPSK 2-DH3

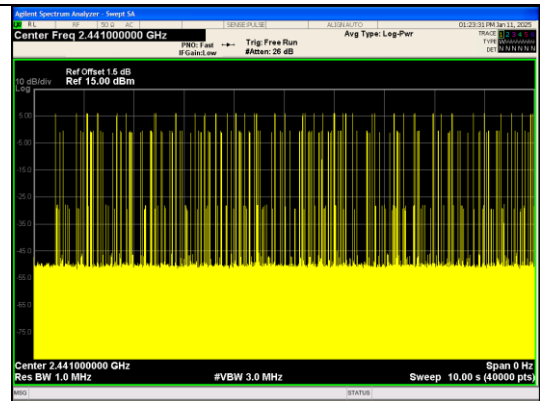


Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK 2-DH3

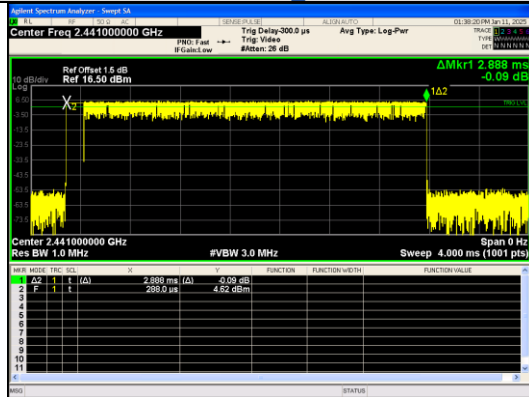


Pulse Width
 $\pi/4$ DQPSK 2-DH5

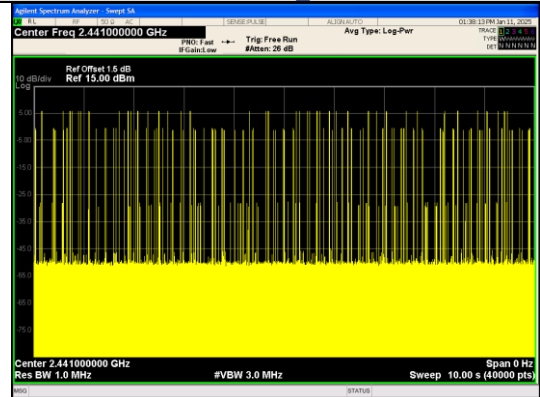


Number of Pulses in 31.6 seconds
 $\pi/4$ DQPSK 2-DH5

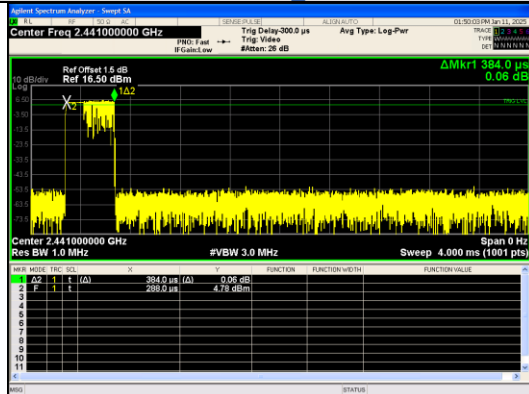


Pulse Width
8DPSK 3-DH1

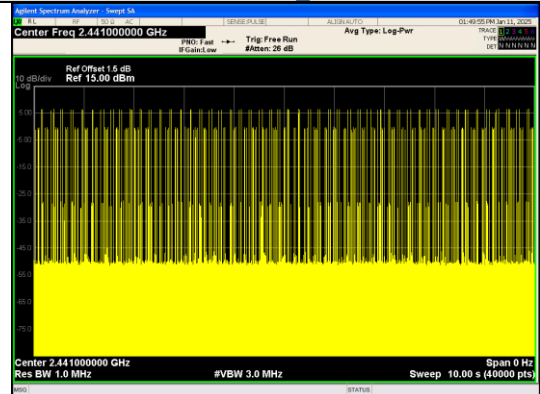


Number of Pulses in 31.6 seconds
8DPSK 3-DH1

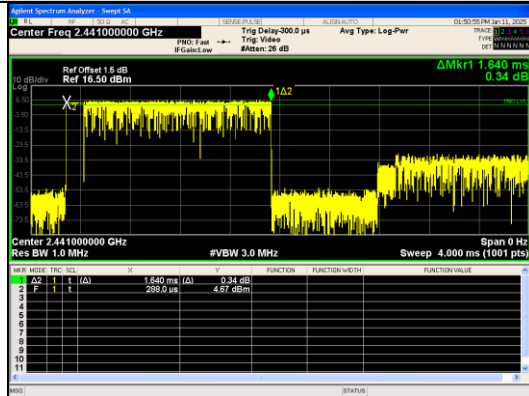

Pulse Width
8DPSK 3-DH3

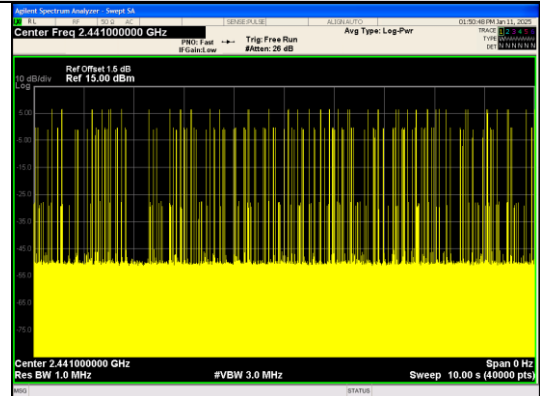

Number of Pulses in 31.6 seconds
8DPSK 3-DH3

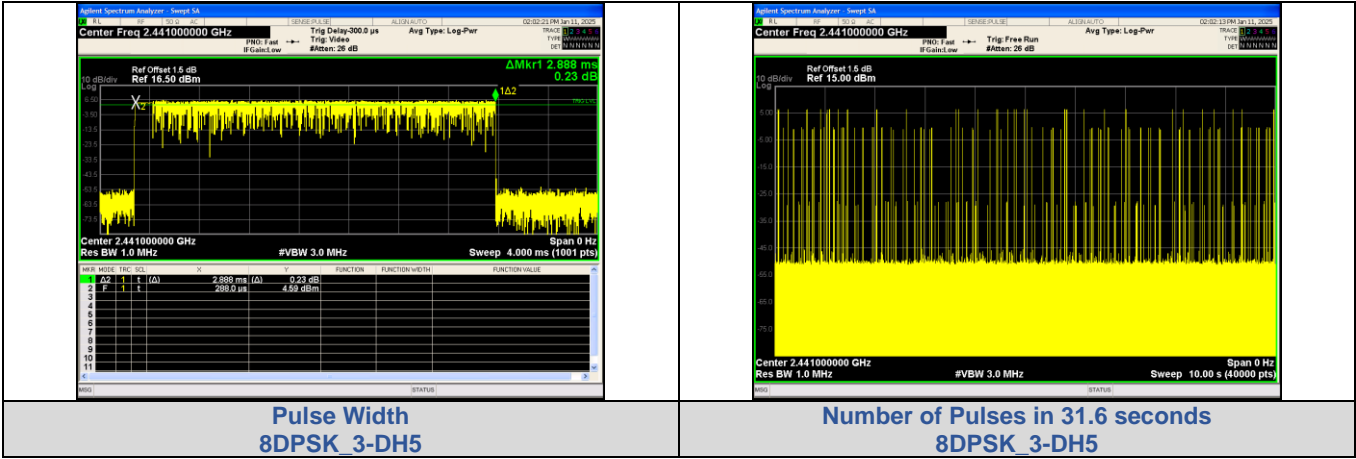




3.9. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part 15.247 (b)(1)	Maximum Conducted Output Power	Hopping Channels ≥ 75 , Power $< 1\text{W}$ (30dBm); Others $< 125\text{mW}$ (21dBm)	2400~2483.5
ISED RSS-247 5.4 d	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration

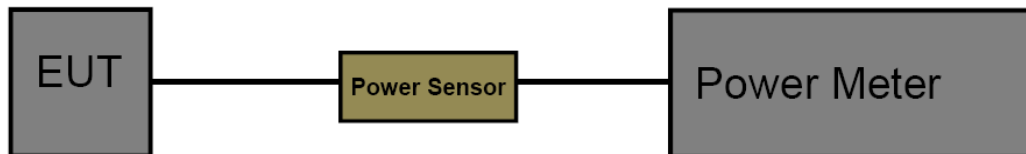

Test Procedure

1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
Record the measurement data.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Modulation	Channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	0	2.163	≤30	PASS
	39	2.243		PASS
	78	2.325		PASS
π/4DQPSK	0	4.138		PASS
	39	4.353		PASS
	78	4.499		PASS
8DPSK	0	4.709		PASS
	39	5.006		PASS
	78	5.055		PASS

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn




3.10. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz.
Set the RBW to 10MHz.
Set the VBW to 10MHz.
Detector: Peak.
Sweep time: Auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.


Test Result

Modulation	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
GFSK	0	20.050	20.050	100	/	0.01
	39	20.050	20.050	100	/	0.01
	78	20.050	20.050	100	/	0.01
$\pi/4$ DQPSK	0	20.050	20.050	100	/	0.01
	39	20.050	20.050	100	/	0.01
	78	20.050	20.050	100	/	0.01
8DPSK	0	20.050	20.050	100	/	0.01
	39	20.050	20.050	100	/	0.01
	78	20.050	20.050	100	/	0.01


Note: Duty Cycle > 98%, Final Setting for VBW = 10Hz.




Test Graphs

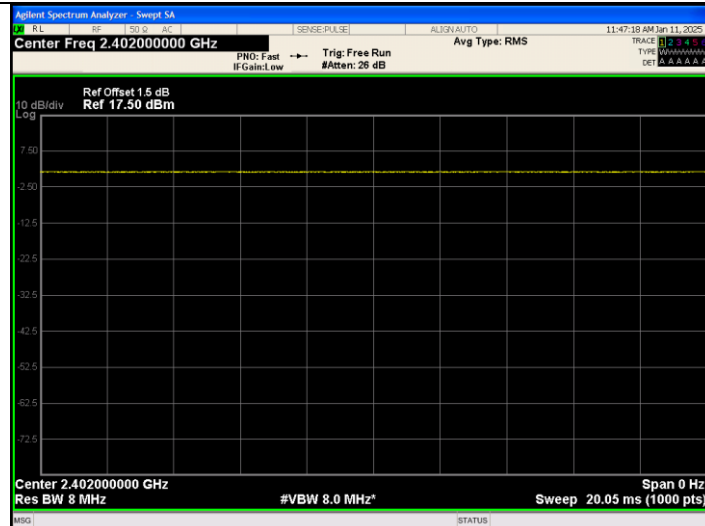

GFSK(DH5)_Channel 0

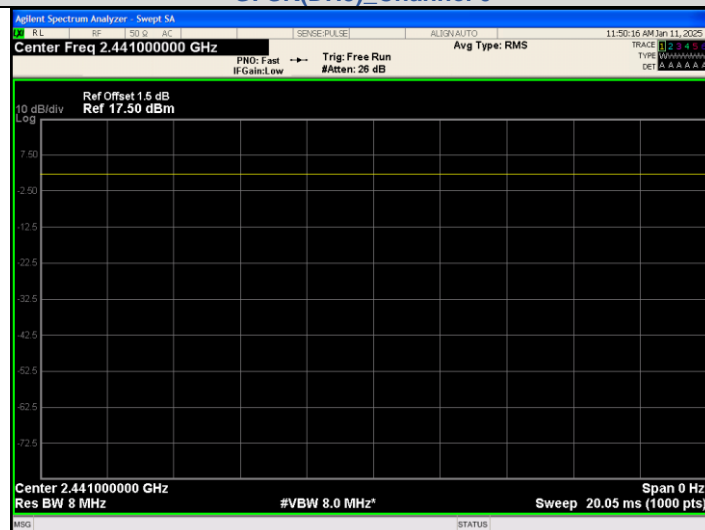

GFSK(DH5)_Channel 39

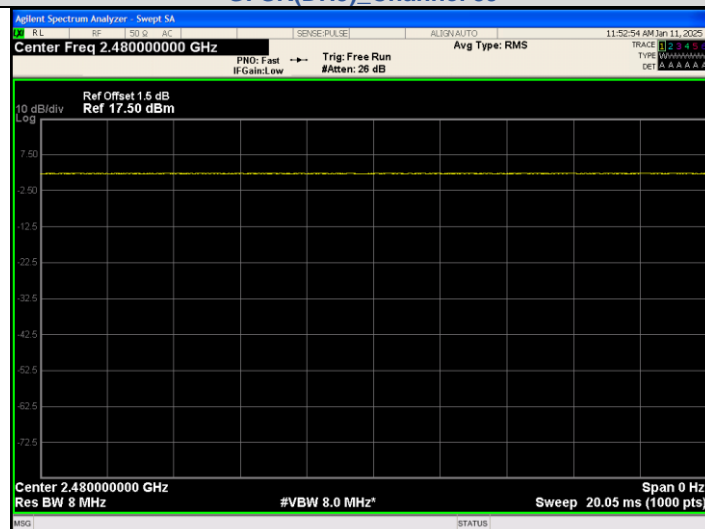



GFSK(DH5)_Channel 78

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

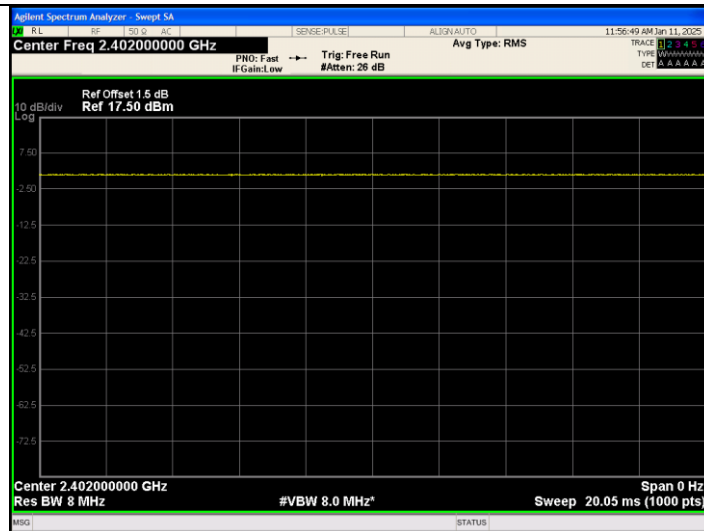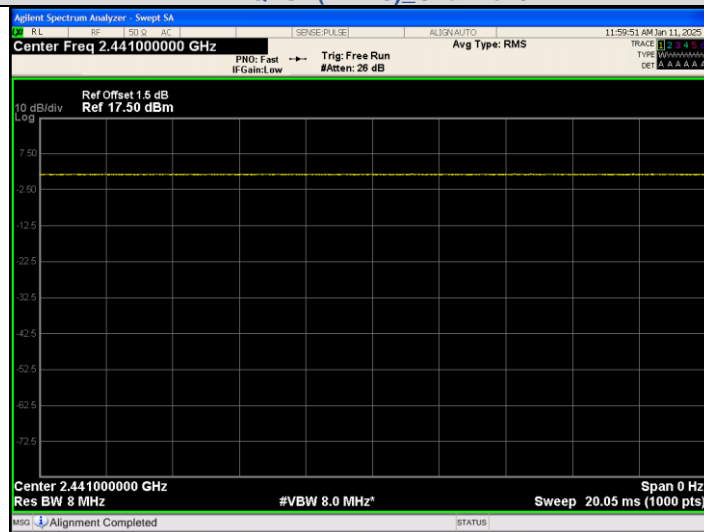
 $\pi/4$ DQPSK(2-DH5) Channel 0 $\pi/4$ DQPSK(2-DH5) Channel 39 $\pi/4$ DQPSK(2-DH5) Channel 78

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-059_A1


For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

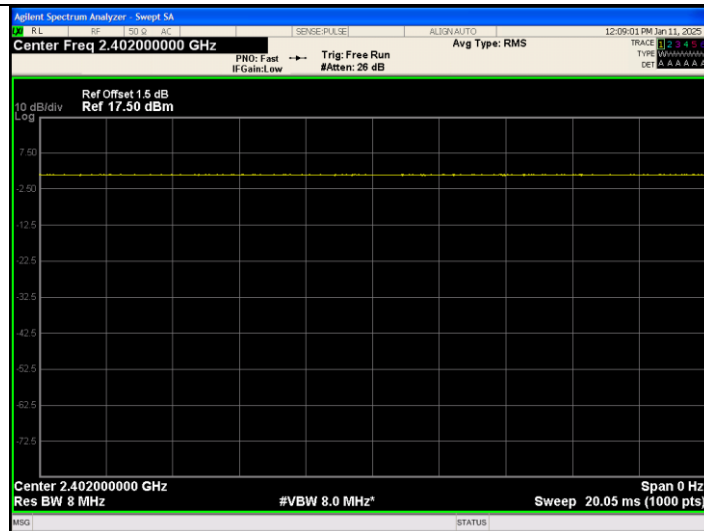

8DPSK(3-DH5) Channel 0

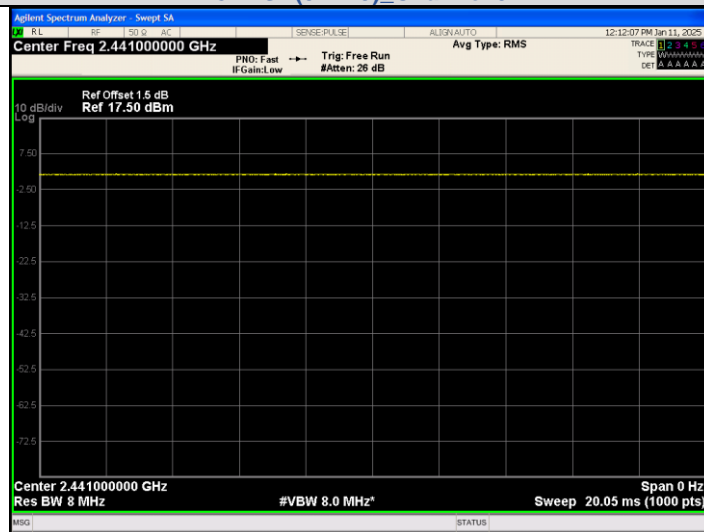

8DPSK(3-DH5) Channel 39

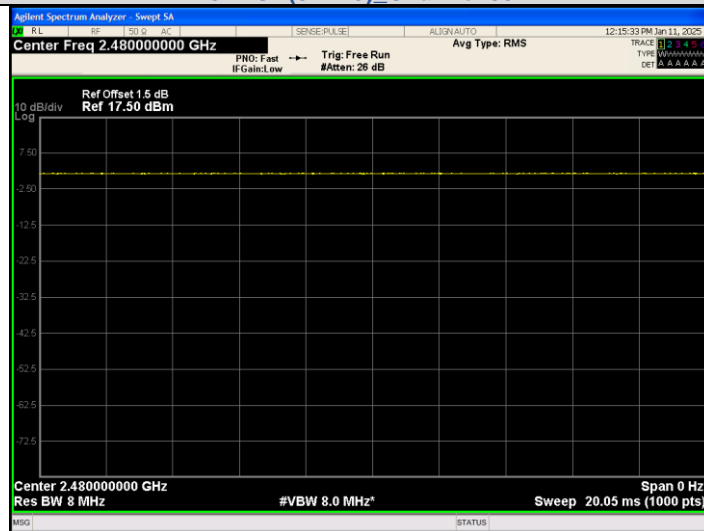

8DPSK(3-DH5) Channel 78

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



3.11. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END OF REPORT*****